


Appendix-B Field Strength of Spurious Radiation-LTE

Project Information			
Mode:	LTE Cat1 bis	Band:	2
Bandwidth	20MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

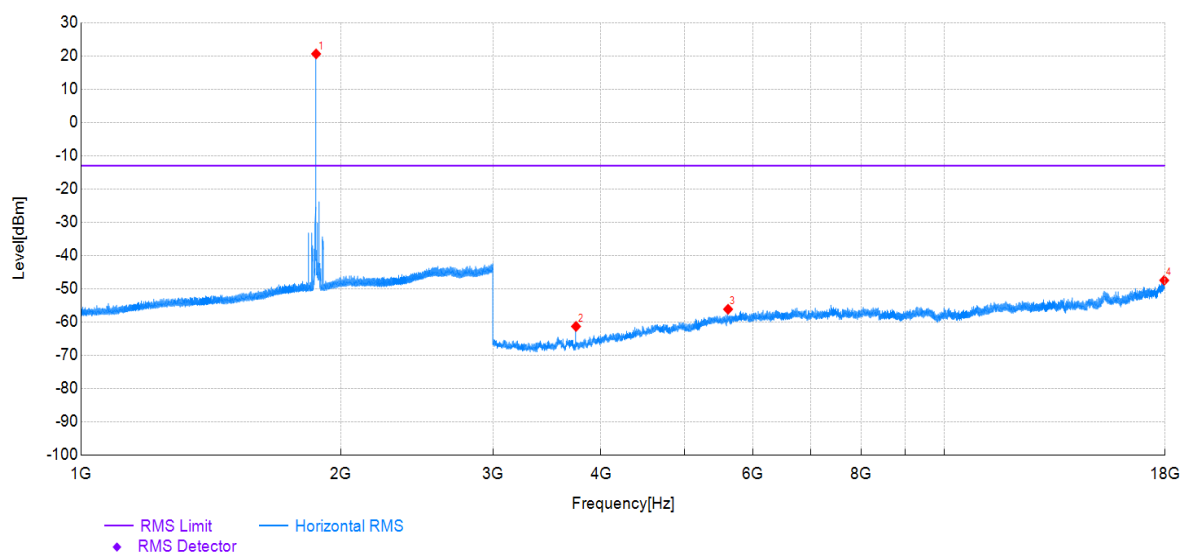


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	1871.20	115.37	-94.77	20.60	-	-	RMS	Horizontal	NA
2	3742.00	44.24	-105.58	-61.34	-13.00	48.34	RMS	Horizontal	PASS
3	5613.00	43.37	-99.54	-56.17	-13.00	43.17	RMS	Horizontal	PASS
4	17962.00	31.03	-78.51	-47.48	-13.00	34.48	RMS	Horizontal	PASS

Project Information

Mode:	LTE Cat1 bis	Band:	2
Bandwidth	20MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

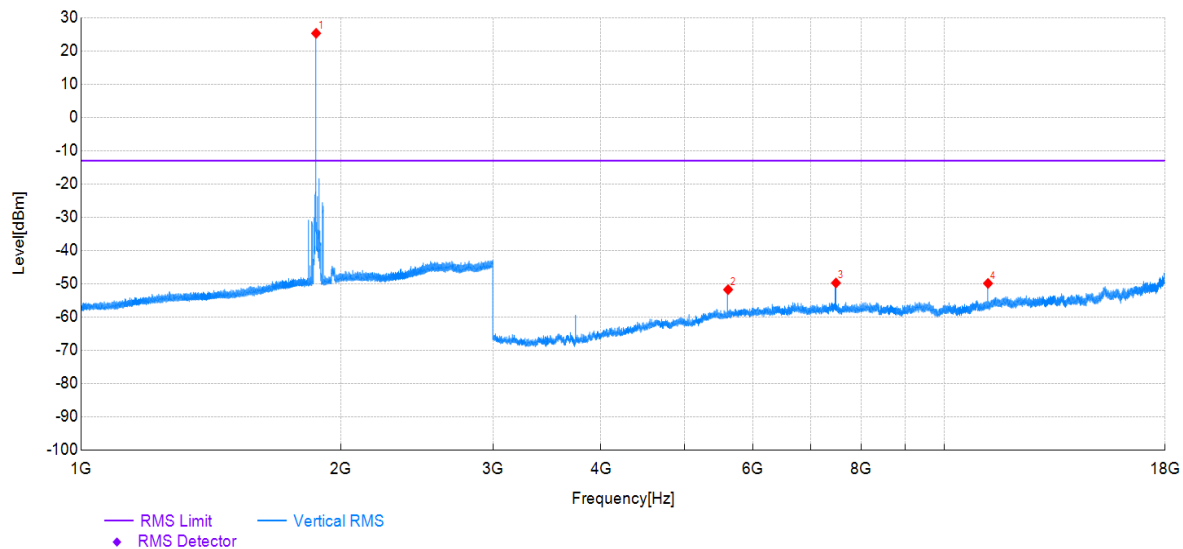


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	1871.13	120.05	-94.77	25.28	-	-	RMS	Vertical	NA
2	5613.50	47.77	-99.54	-51.77	-13.00	38.77	RMS	Vertical	PASS
3	7484.50	45.21	-94.99	-49.78	-13.00	36.78	RMS	Vertical	PASS
4	11226.50	40.02	-89.92	-49.90	-13.00	36.90	RMS	Vertical	PASS

Project Information

Mode:	LTE Cat1 bis	Band:	4
Bandwidth	20MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

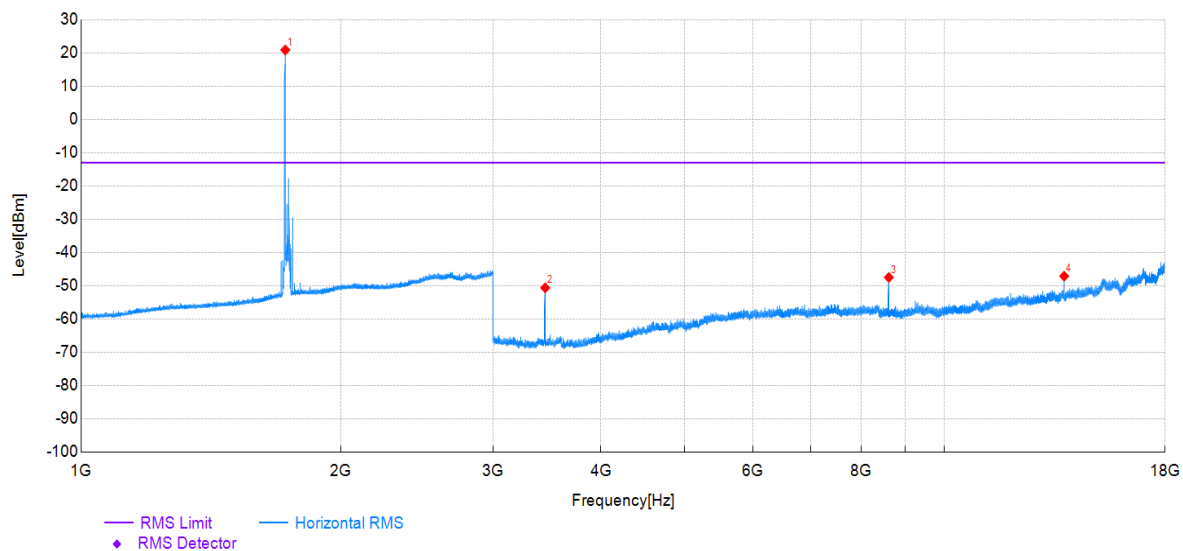


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	1723.60	116.07	-95.21	20.86	-	-	RMS	Horizontal	NA
2	3447.00	57.53	-108.17	-50.64	-13.00	37.64	RMS	Horizontal	PASS
3	8618.00	46.47	-93.98	-47.51	-13.00	34.51	RMS	Horizontal	PASS
4	13755.00	39.61	-86.74	-47.13	-13.00	34.13	RMS	Horizontal	PASS

Project Information

Mode:	LTE Cat1 bis	Band:	4
Bandwidth	20MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

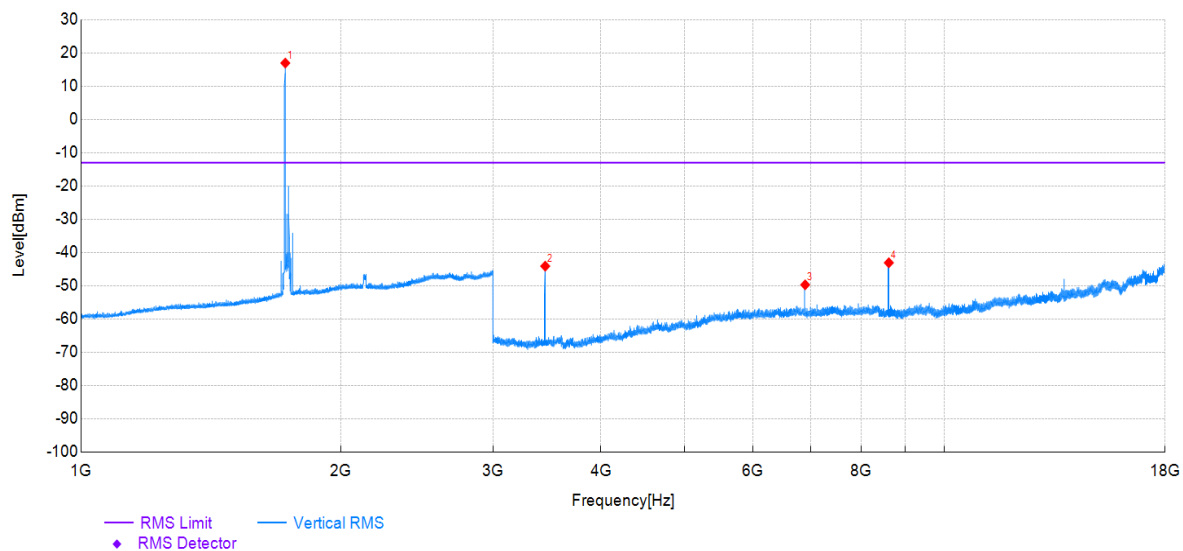


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	1723.60	112.15	-95.21	16.94	-	-	RMS	Vertical	NA
2	3447.00	64.05	-108.17	-44.12	-13.00	31.12	RMS	Vertical	PASS
3	6894.50	47.07	-96.79	-49.72	-13.00	36.72	RMS	Vertical	PASS
4	8617.50	50.86	-93.97	-43.11	-13.00	30.11	RMS	Vertical	PASS

Project Information

Mode:	LTE Cat1 bis	Band:	5
Bandwidth	10MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

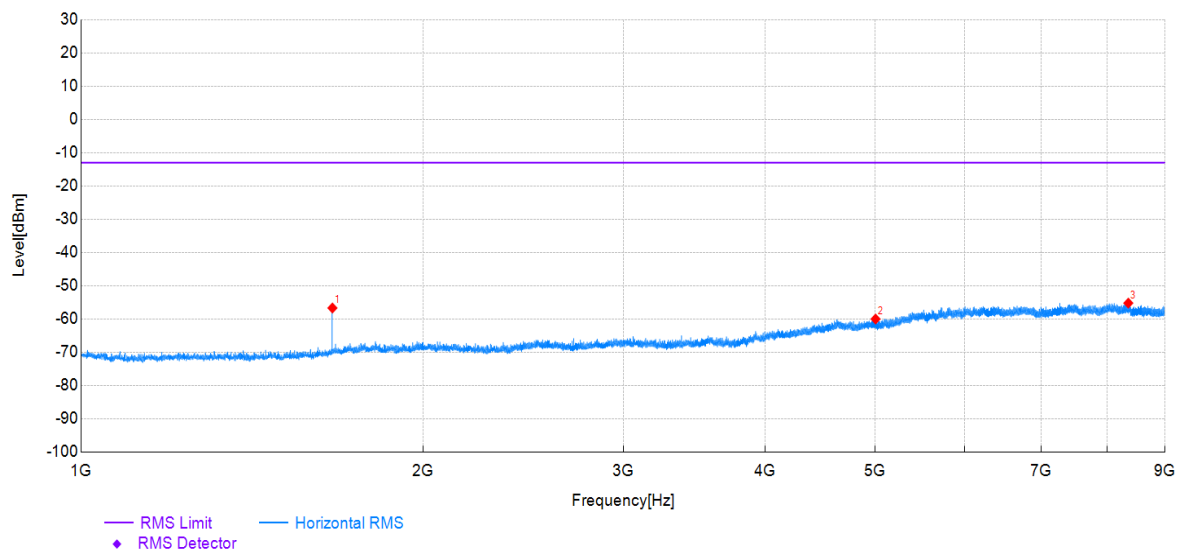


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	1664.27	57.43	-114.13	-56.70	-13.00	43.70	RMS	Horizontal	PASS
2	5004.80	41.71	-101.73	-60.02	-13.00	47.02	RMS	Horizontal	PASS
3	8354.40	38.81	-94.04	-55.23	-13.00	42.23	RMS	Horizontal	PASS

Project Information			
Mode:	LTE Cat1 bis	Band:	5
Bandwidth	10MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

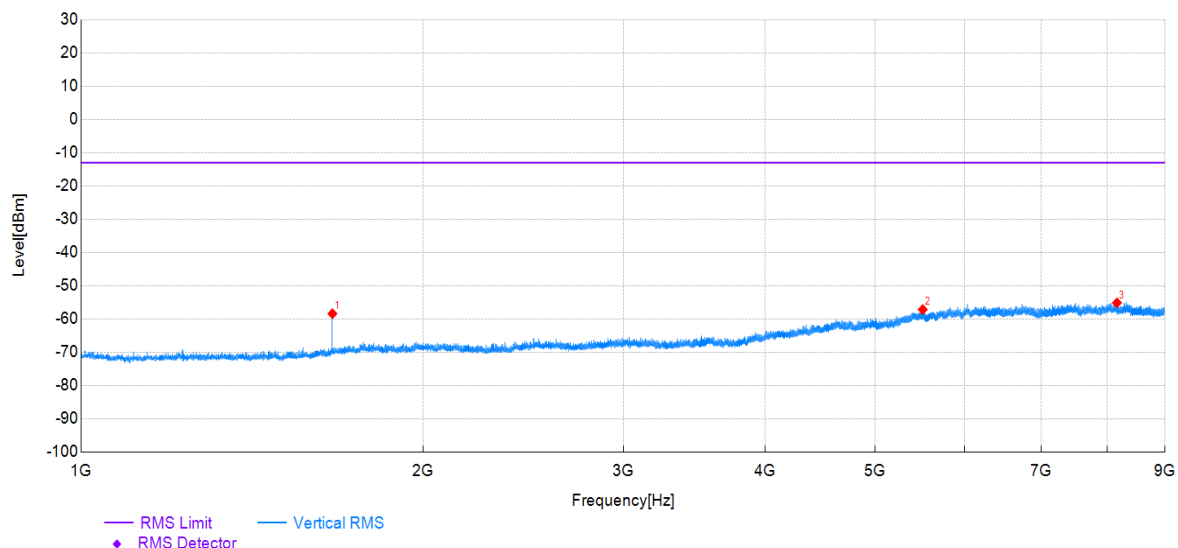


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	1664.27	55.74	-114.13	-58.39	-13.00	45.39	RMS	Vertical	PASS
2	5506.67	42.85	-100.01	-57.16	-13.00	44.16	RMS	Vertical	PASS
3	8164.27	39.43	-94.58	-55.15	-13.00	42.15	RMS	Vertical	PASS

Project Information

Mode:	LTE Cat1 bis	Band:	7
Bandwidth	20MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

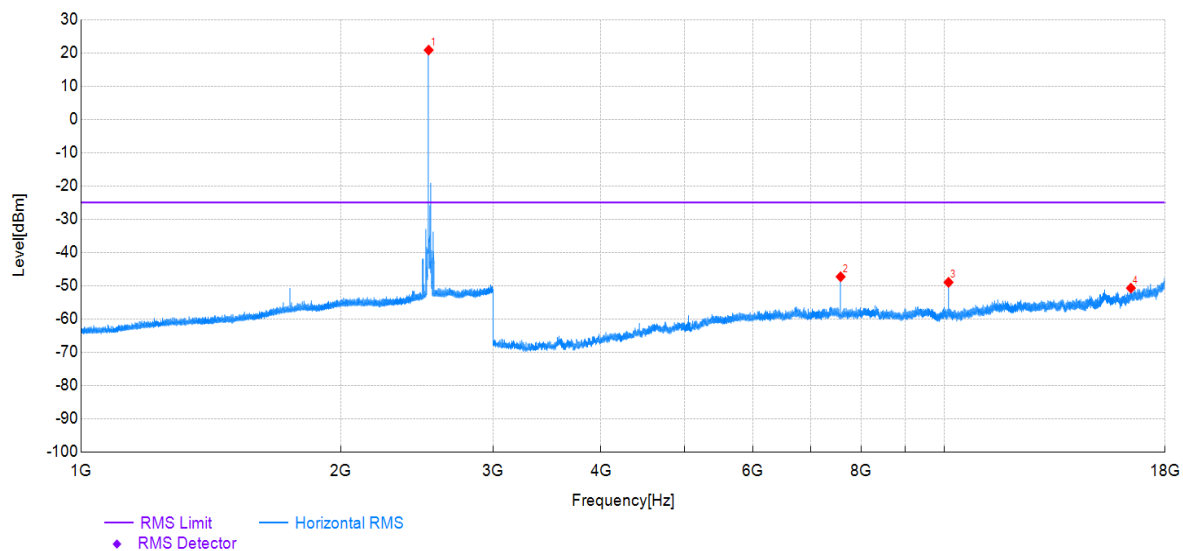


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	2526.20	113.19	-92.36	20.83	-	-	RMS	Horizontal	NA
2	7578.00	48.24	-95.54	-47.30	-25.00	22.30	RMS	Horizontal	PASS
3	10104.50	42.56	-91.53	-48.97	-25.00	23.97	RMS	Horizontal	PASS
4	16433.50	31.97	-82.69	-50.72	-25.00	25.72	RMS	Horizontal	PASS

Project Information

Mode:	LTE Cat1 bis	Band:	7
Bandwidth	20MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

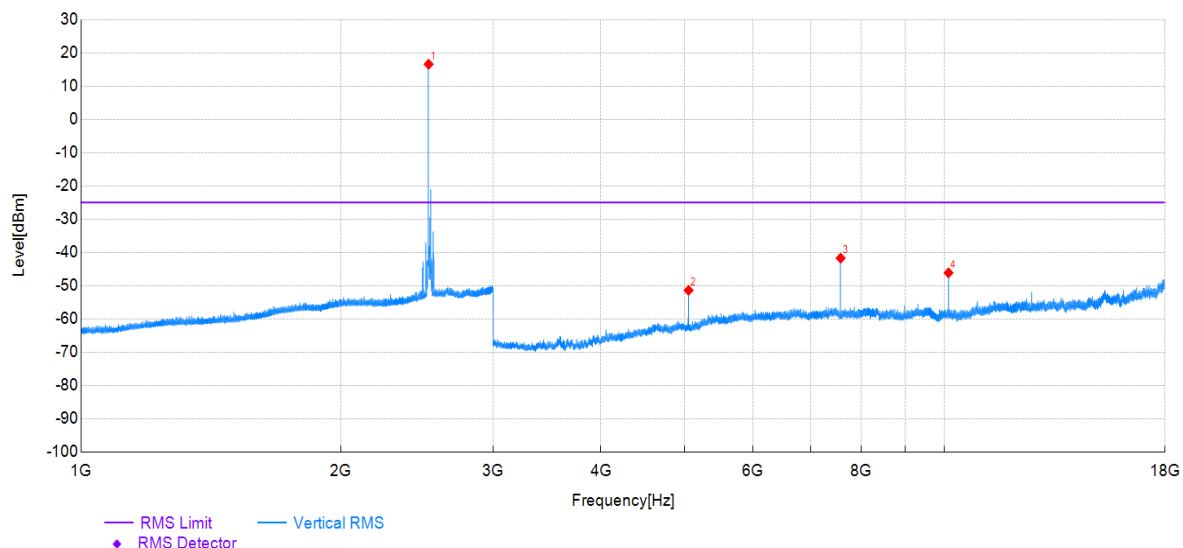


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	2526.10	108.95	-92.36	16.59	-	-	RMS	Vertical	NA
2	5052.00	50.14	-101.53	-51.39	-25.00	26.39	RMS	Vertical	PASS
3	7578.50	53.84	-95.54	-41.70	-25.00	16.70	RMS	Vertical	PASS
4	10104.50	45.40	-91.53	-46.13	-25.00	21.13	RMS	Vertical	PASS

Project Information

Mode:	LTE Cat1 bis	Band:	66
Bandwidth	20MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

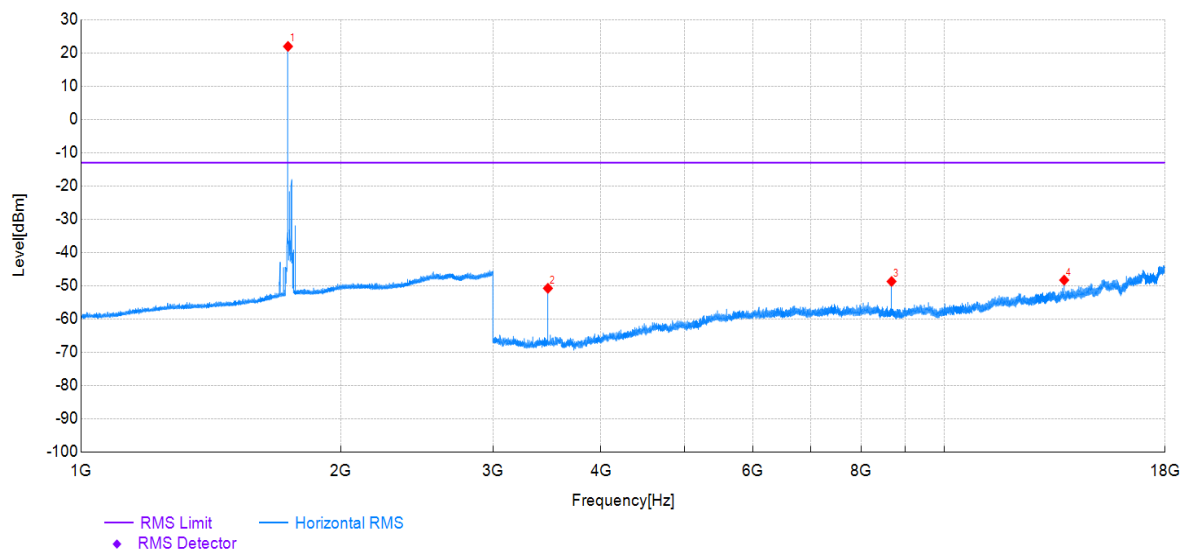


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	1736.00	117.05	-95.11	21.94	-	-	RMS	Horizontal	NA
2	3472.00	57.26	-108.04	-50.78	-13.00	37.78	RMS	Horizontal	PASS
3	8680.50	45.21	-93.93	-48.72	-13.00	35.72	RMS	Horizontal	PASS
4	13755.00	38.42	-86.74	-48.32	-13.00	35.32	RMS	Horizontal	PASS

Project Information

Mode:	LTE Cat1 bis	Band:	66
Bandwidth	20MHz	Channel	mid
SN:	D1Y26DJ51000015	Engineer:	Oushuyan
Remark:			

Test Graph

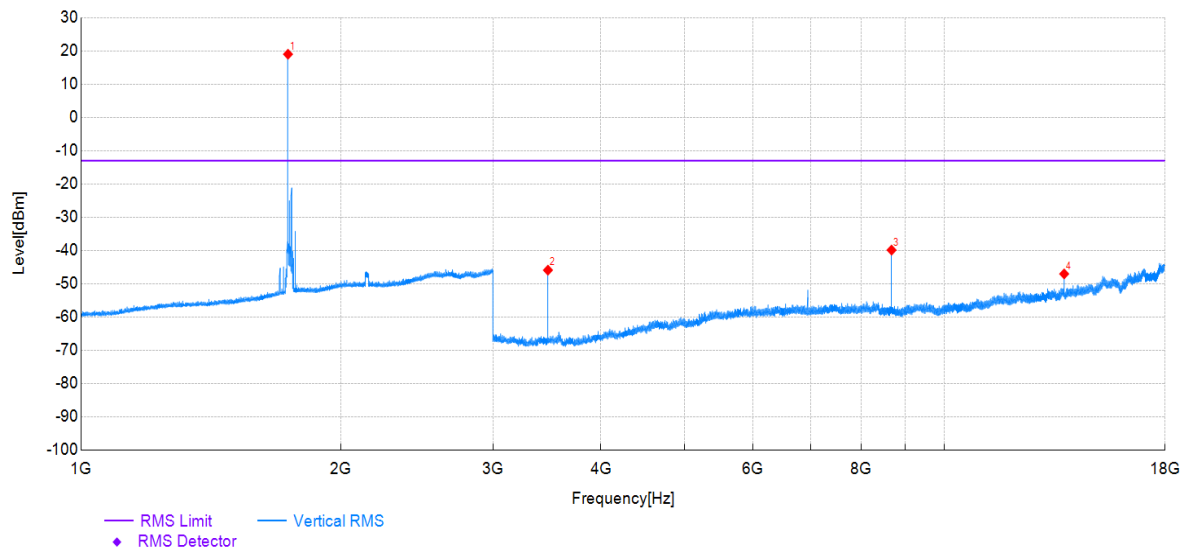

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBm]	Limit [dBm]	Margin [dB]	Trace	Polarity	Verdict
1	1736.00	114.11	-95.11	19.00	-	-	RMS	Vertical	NA
2	3472.00	62.12	-108.04	-45.92	-13.00	32.92	RMS	Vertical	PASS
3	8680.50	54.04	-93.93	-39.89	-13.00	26.89	RMS	Vertical	PASS
4	13755.00	39.70	-86.74	-47.04	-13.00	34.04	RMS	Vertical	PASS

~The End~