





BLE 500K-Ant1-2440-0~Reference-PASS

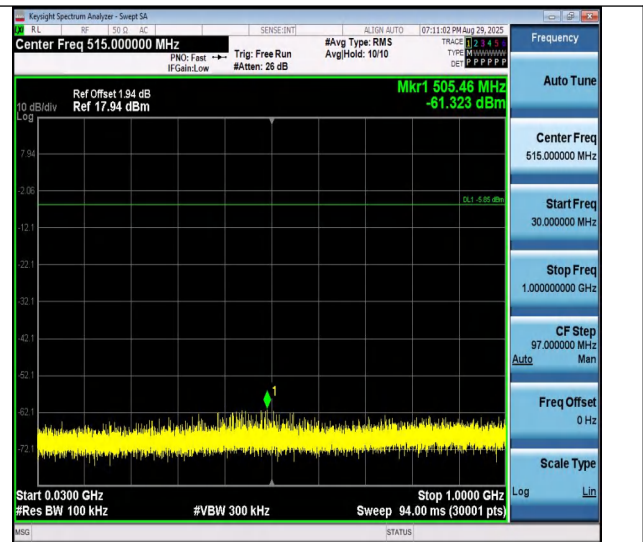


BLE 500K-Ant1-2440-30~1000-PASS

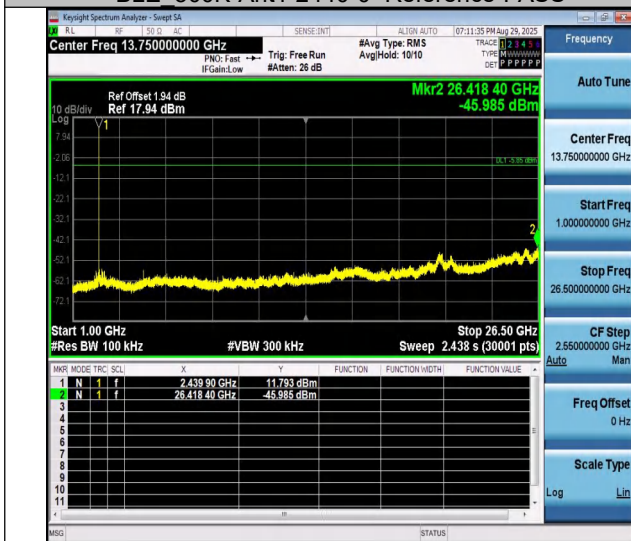


BLE 500K-Ant1-2440-1000~26500-PASS



BLE 500K-Ant1-2480-0~Reference-PASS

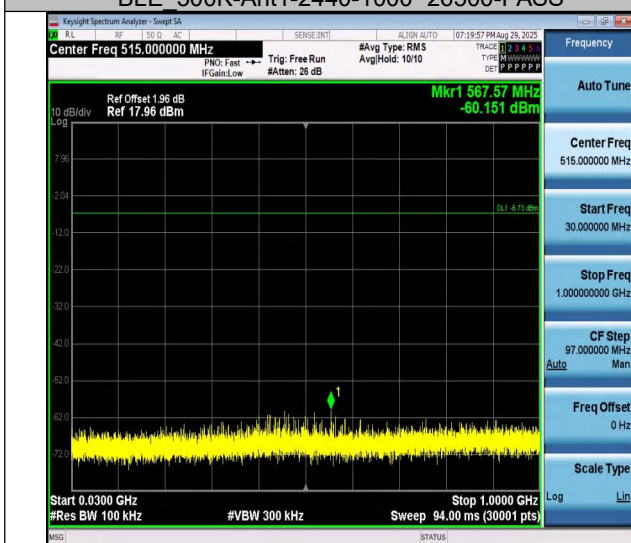

BLE 500K-Ant1-2480-30~1000-PASS

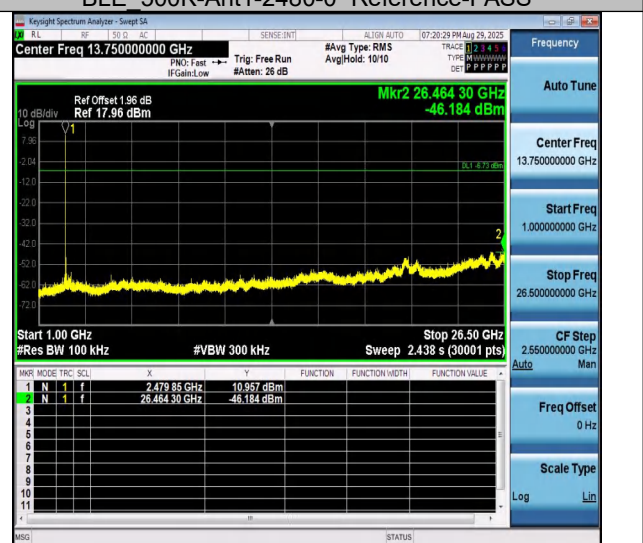


BLE 500K-Ant1-2480-1000~26500-PASS

Duty Cycle Test Result


TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.42	0.62	67.74	1.69
BLE_1M	Ant1	2440	0.42	0.62	67.74	1.69
BLE_1M	Ant1	2480	0.43	0.62	69.35	1.59
BLE_2M	Ant1	2402	0.24	0.62	38.71	4.12
BLE_2M	Ant1	2440	0.24	0.62	38.71	4.12
BLE_2M	Ant1	2480	0.24	0.62	38.71	4.12
BLE_125K	Ant1	2402	3.14	3.76	83.51	0.78
BLE_125K	Ant1	2440	3.14	3.76	83.51	0.78
BLE_125K	Ant1	2480	3.14	3.76	83.51	0.78
BLE_500K	Ant1	2402	1.11	1.88	59.04	2.29
BLE_500K	Ant1	2440	1.11	1.88	59.04	2.29
BLE_500K	Ant1	2480	1.11	1.88	59.04	2.29

Test Graphs




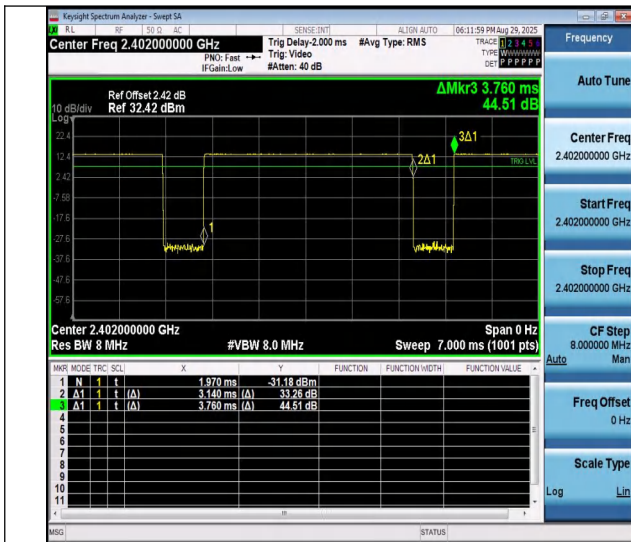


NTNV-BLE 125K-Ant1-2402

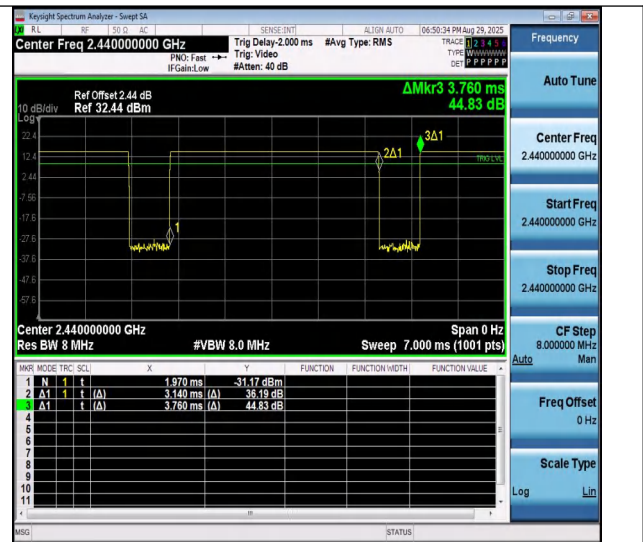


NTNV-BLE 125K-Ant1-2440

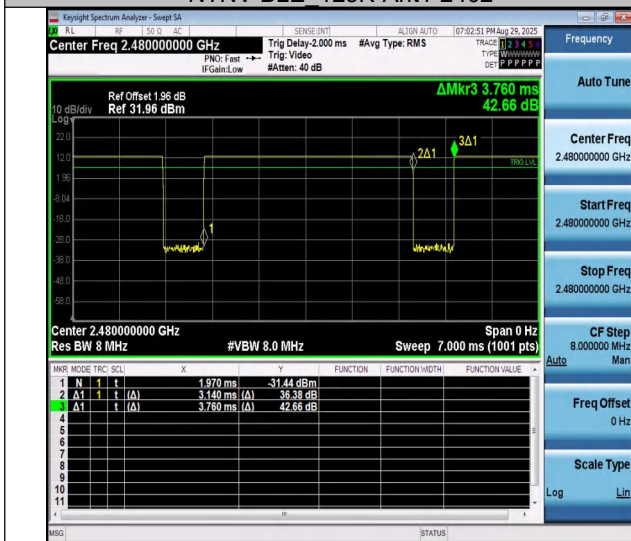


NTNV-BLE 125K-Ant1-2480

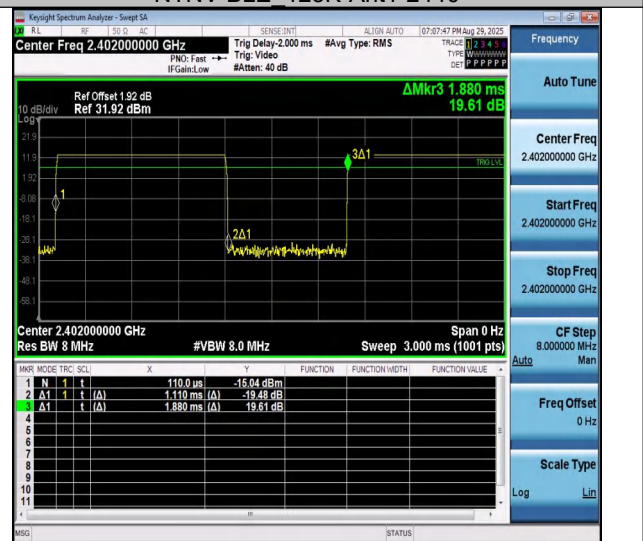

NTNV-BLE 500K-Ant1-2402

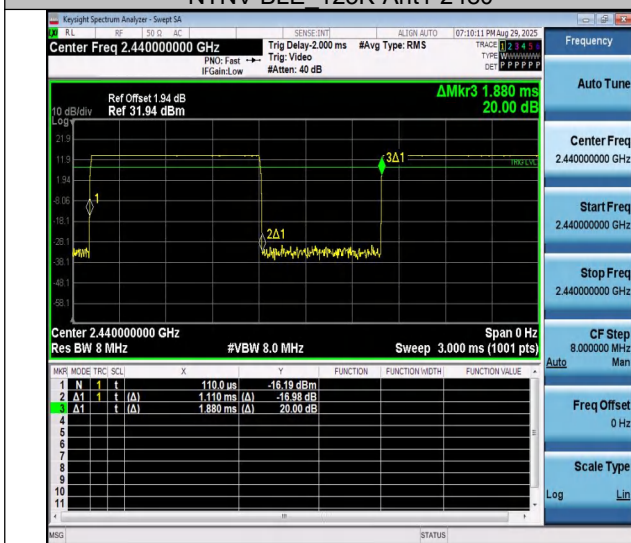

NTNV-BLE 500K-Ant1-2440

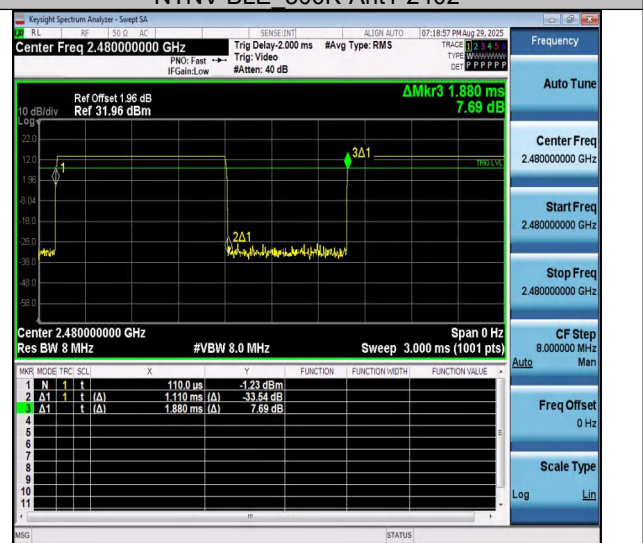


NTNV-BLE 500K-Ant1-2480

Radiated Spurious Emissions

Test Result Below 1GHz

Project Information			
Mode:	BLE	Band:	-
Bandwidth	1M	Channel	Mid
SN:	E1N25CL0Q000121	Engineer:	Ou shuyan
Remark:	Power setting14		

Test Graph

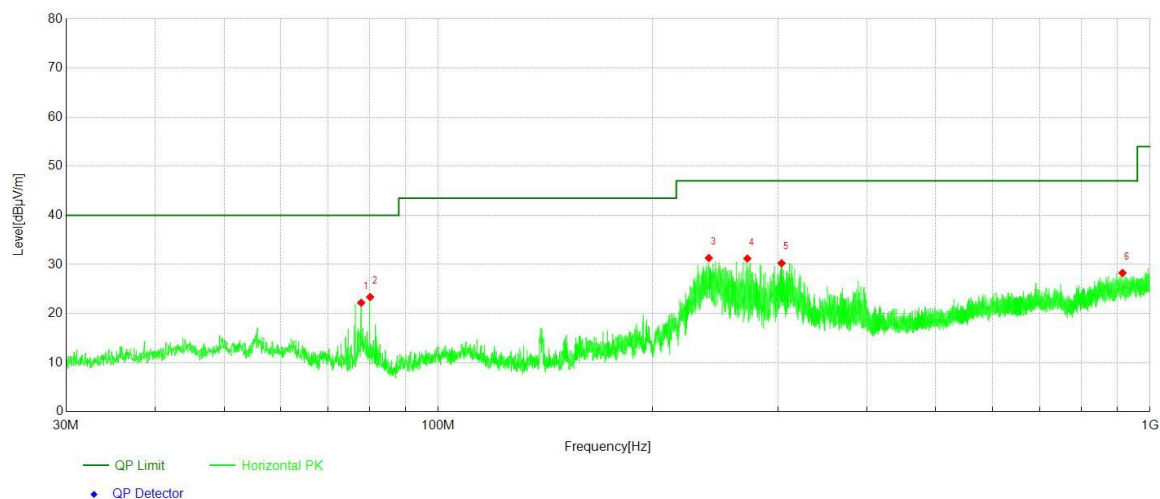


Data List								
NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	77.92	49.50	-27.31	22.19	40.00	17.81	Horizontal	PASS
2	80.20	50.39	-27.04	23.35	40.00	16.65	Horizontal	PASS
3	239.96	53.64	-22.33	31.31	47.00	15.69	Horizontal	PASS
4	271.77	52.56	-21.36	31.20	47.00	15.80	Horizontal	PASS
5	303.59	50.39	-20.15	30.24	47.00	16.76	Horizontal	PASS
6	914.69	36.88	-8.62	28.26	47.00	18.74	Horizontal	PASS

Project Information

Mode:	BLE	Band:	-
Bandwidth	1M	Channel	Mid
SN:	E1N25CL0Q000121	Engineer:	Ou shuyan
Remark:	Power setting14		

Test Graph

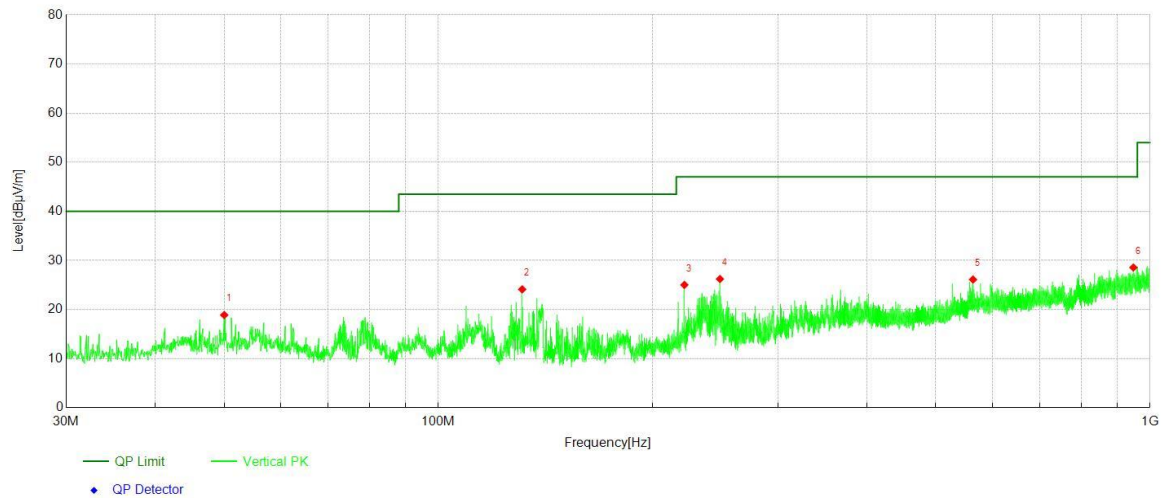


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	50.03	41.08	-22.20	18.88	40.00	21.12	Vertical	PASS
2	131.17	49.90	-25.80	24.10	43.50	19.40	Vertical	PASS
3	221.67	48.46	-23.45	25.01	47.00	21.99	Vertical	PASS
4	248.74	47.95	-21.74	26.21	47.00	20.79	Vertical	PASS
5	564.03	40.15	-14.05	26.10	47.00	20.90	Vertical	PASS
6	947.57	36.59	-8.03	28.56	47.00	18.44	Vertical	PASS

Test Result Above 1GHz


Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 13		

Test Graph

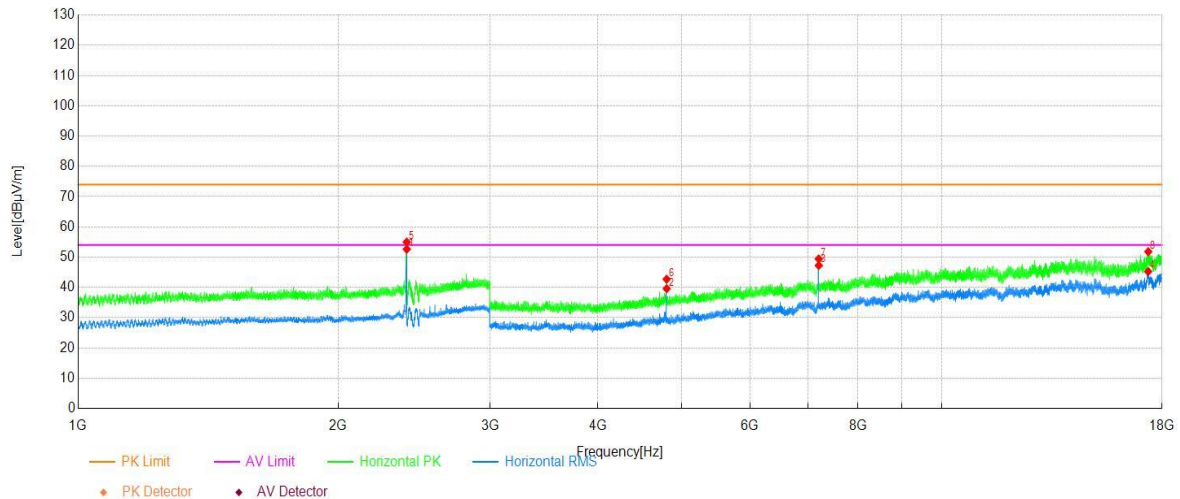


Data List								
NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2402.20	50.42	2.22	52.64	-	-	Horizontal	NA
2	4804.00	47.15	-7.58	39.57	54.00	14.43	Horizontal	PASS
3	7206.50	48.63	-1.37	47.26	54.00	6.74	Horizontal	PASS
4	17344.00	32.68	12.58	45.26	54.00	8.74	Horizontal	PASS
5	2401.80	52.78	2.22	55.00	-	-	Horizontal	NA
6	4803.50	50.30	-7.58	42.72	74.00	31.28	Horizontal	PASS
7	7205.00	50.78	-1.36	49.42	74.00	24.58	Horizontal	PASS
8	17350.00	38.95	12.86	51.81	74.00	22.19	Horizontal	PASS

Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 13		

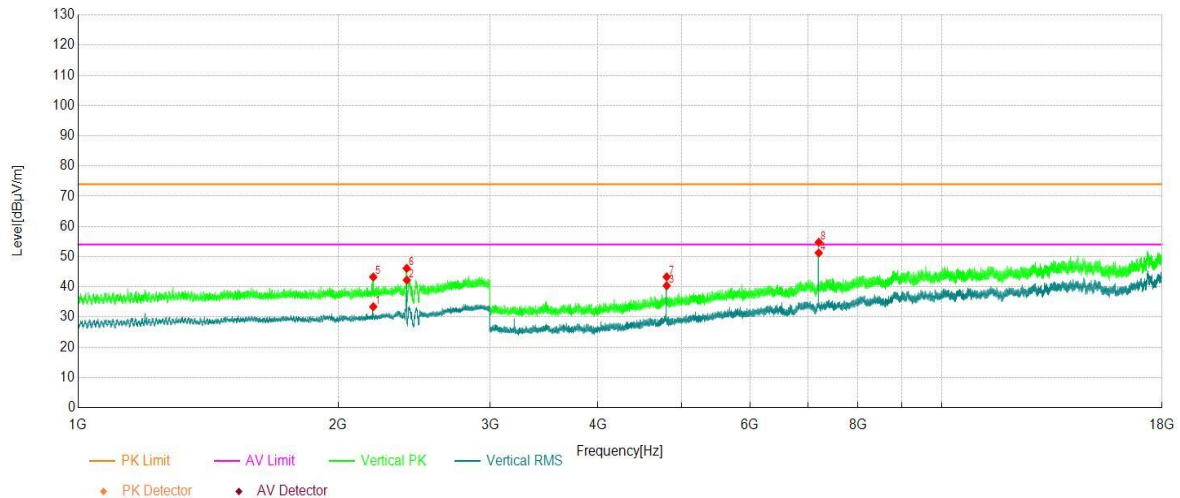Test Graph


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2196.80	32.23	1.18	33.41	54.00	20.59	Vertical	PASS
2	2402.20	40.02	2.22	42.24	-	-	Vertical	NA
3	4804.50	47.95	-7.59	40.36	54.00	13.64	Vertical	PASS
4	7206.00	52.60	-1.37	51.23	54.00	2.77	Vertical	PASS
5	2196.80	42.07	1.18	43.25	74.00	30.75	Vertical	PASS
6	2401.80	43.91	2.22	46.13	-	-	Vertical	NA
7	4804.00	50.89	-7.58	43.31	74.00	30.69	Vertical	PASS
8	7207.00	56.12	-1.37	54.75	74.00	19.25	Vertical	PASS

Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	Mid
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		

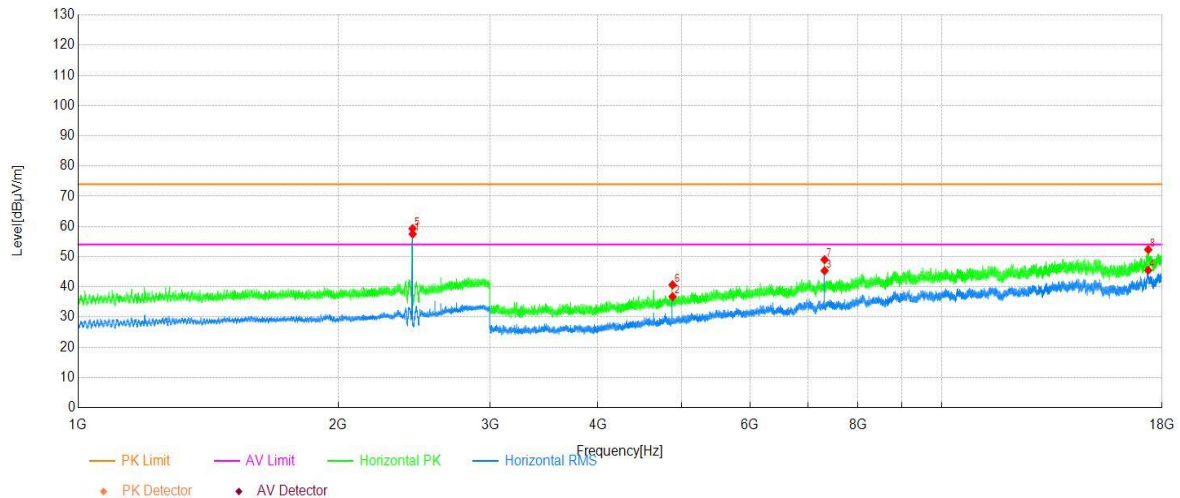Test Graph**Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2440.20	55.19	2.29	57.48	-	-	Horizontal	NA
2	4880.50	44.81	-8.05	36.76	54.00	17.24	Horizontal	PASS
3	7321.00	46.67	-1.34	45.33	54.00	8.67	Horizontal	PASS
4	17349.00	32.68	12.82	45.50	54.00	8.50	Horizontal	PASS
5	2439.60	56.99	2.29	59.28	-	-	Horizontal	NA
6	4880.00	48.71	-8.05	40.66	74.00	33.34	Horizontal	PASS
7	7319.00	50.33	-1.33	49.00	74.00	25.00	Horizontal	PASS
8	17348.50	39.52	12.79	52.31	74.00	21.69	Horizontal	PASS

Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	Mid
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		

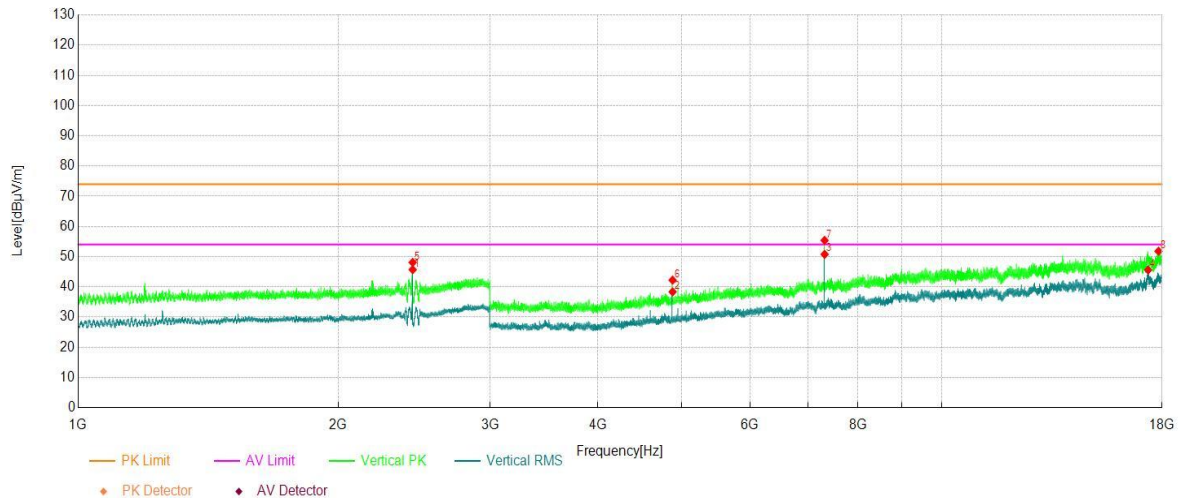Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2440.20	43.40	2.29	45.69	-	-	Vertical	NA
2	4880.50	46.39	-8.05	38.34	54.00	15.66	Vertical	PASS
3	7320.00	53.10	-1.33	51.77	54.00	2.23	Vertical	PASS
4	17345.50	32.93	12.66	45.59	54.00	8.41	Vertical	PASS
5	2439.80	45.80	2.29	48.09	-	-	Vertical	NA
6	4880.00	50.28	-8.05	42.23	74.00	31.77	Vertical	PASS
7	7319.00	56.71	-1.33	55.38	74.00	18.62	Vertical	PASS
8	17832.50	39.24	12.55	51.79	74.00	22.21	Vertical	PASS


Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		

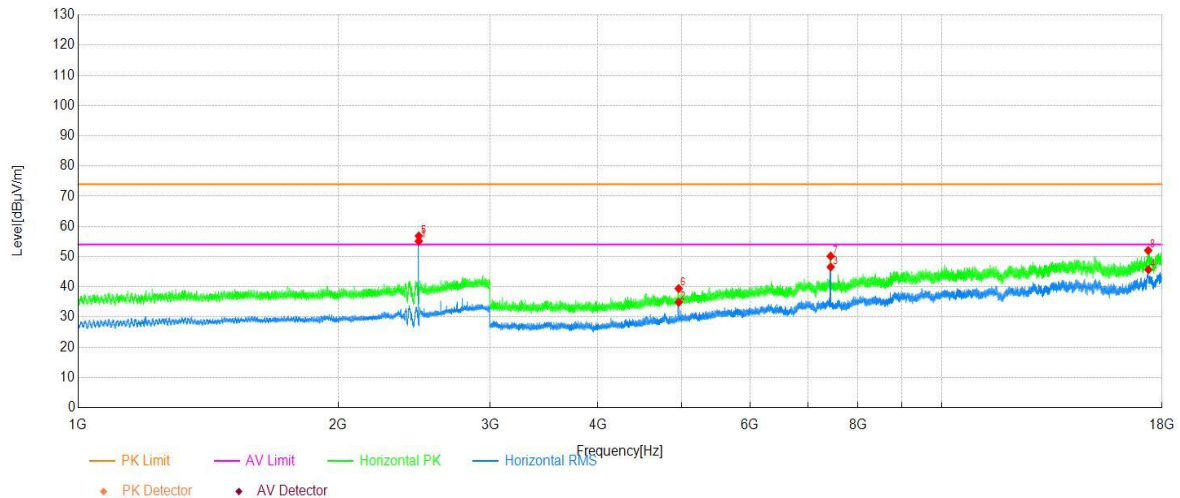Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2480.20	52.77	2.37	55.14	-	-	Horizontal	NA
2	4960.50	42.46	-7.55	34.91	54.00	19.09	Horizontal	PASS
3	7439.50	48.21	-1.64	46.57	54.00	7.43	Horizontal	PASS
4	17359.00	33.18	12.51	45.69	54.00	8.31	Horizontal	PASS
5	2480.20	54.46	2.37	56.83	-	-	Horizontal	NA
6	4959.50	46.99	-7.55	39.44	74.00	34.56	Horizontal	PASS
7	7439.00	51.78	-1.63	50.15	74.00	23.85	Horizontal	PASS
8	17346.50	39.34	12.70	52.04	74.00	21.96	Horizontal	PASS

Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		


Test Graph

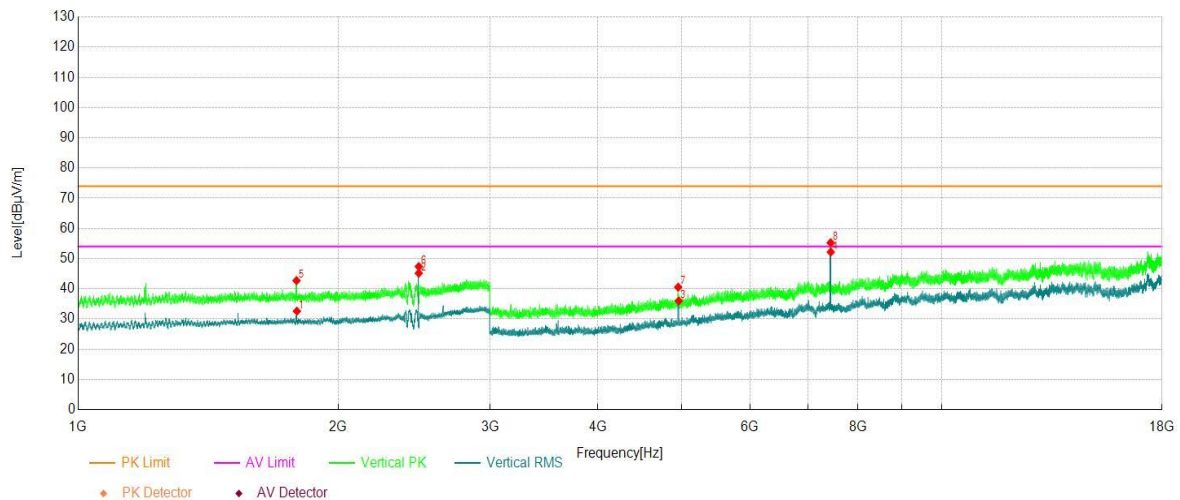

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	1792.00	31.85	0.76	32.61	54.00	21.39	Vertical	PASS
2	2480.20	42.81	2.37	45.18	-	-	Vertical	NA
3	4960.50	43.54	-7.55	35.99	54.00	18.01	Vertical	PASS
4	7440.50	53.85	-1.65	52.20	54.00	1.80	Vertical	PASS
5	1790.00	41.98	0.76	42.74	74.00	31.26	Vertical	PASS
6	2480.20	45.02	2.37	47.39	-	-	Vertical	NA
7	4953.50	48.09	-7.54	40.55	74.00	33.45	Vertical	PASS
8	7439.00	56.89	-1.63	55.26	74.00	18.74	Vertical	PASS


Project Information			
Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

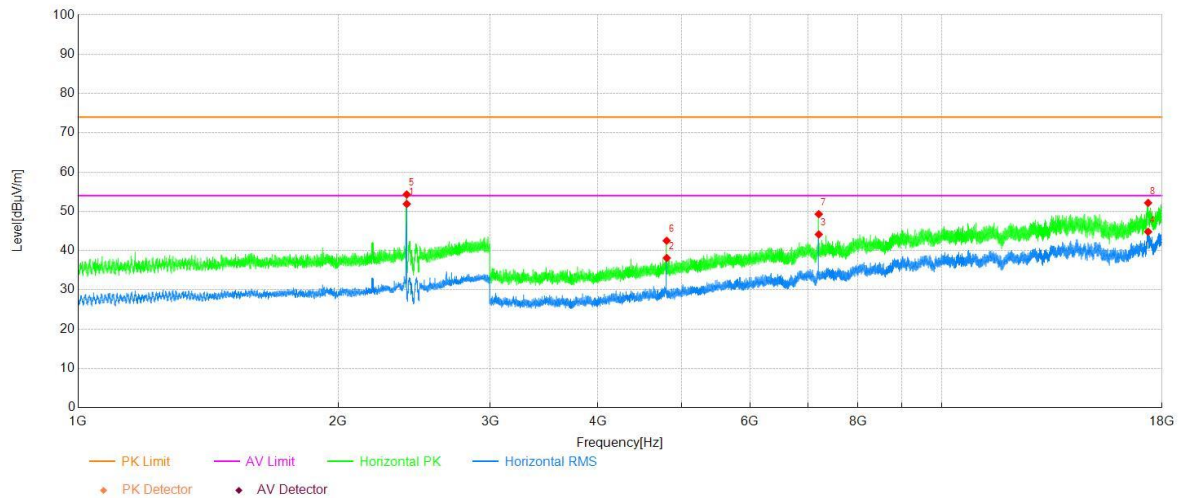Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2402.20	49.65	2.22	51.87	-	-	Horizontal	NA
2	4805.00	45.71	-7.60	38.11	54.00	15.89	Horizontal	PASS
3	7207.00	45.50	-1.37	44.13	54.00	9.87	Horizontal	PASS
4	17344.50	32.20	12.60	44.80	54.00	9.20	Horizontal	PASS
5	2401.80	52.07	2.22	54.29	-	-	Horizontal	NA
6	4803.50	50.09	-7.58	42.51	74.00	31.49	Horizontal	PASS
7	7206.50	50.65	-1.37	49.28	74.00	24.72	Horizontal	PASS
8	17344.00	39.56	12.58	52.14	74.00	21.86	Horizontal	PASS

Project Information			
Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

Test Graph

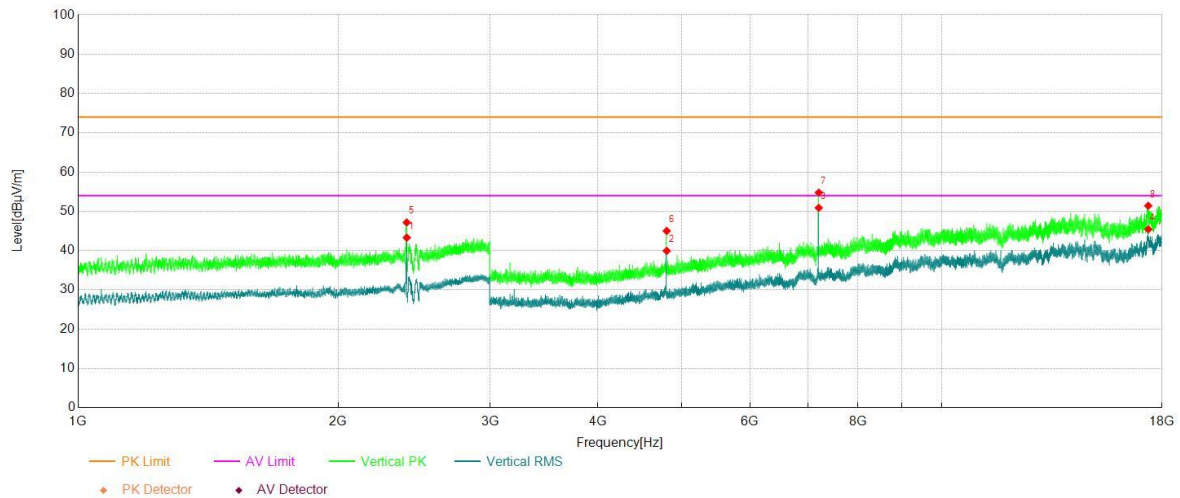


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2402.20	41.07	2.22	43.29	-	-	Vertical	NA
2	4804.50	47.52	-7.59	39.93	54.00	14.07	Vertical	PASS
3	7206.00	52.26	-1.37	50.89	54.00	3.11	Vertical	PASS
4	17355.00	32.76	12.67	45.43	54.00	8.57	Vertical	PASS
5	2401.80	44.95	2.22	47.17	-	-	Vertical	NA
6	4804.50	52.60	-7.59	45.01	74.00	28.99	Vertical	PASS
7	7207.00	56.13	-1.37	54.76	74.00	19.24	Vertical	PASS
8	17349.00	38.59	12.82	51.41	74.00	22.59	Vertical	PASS

Project Information

Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	Mid
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

Test Graph

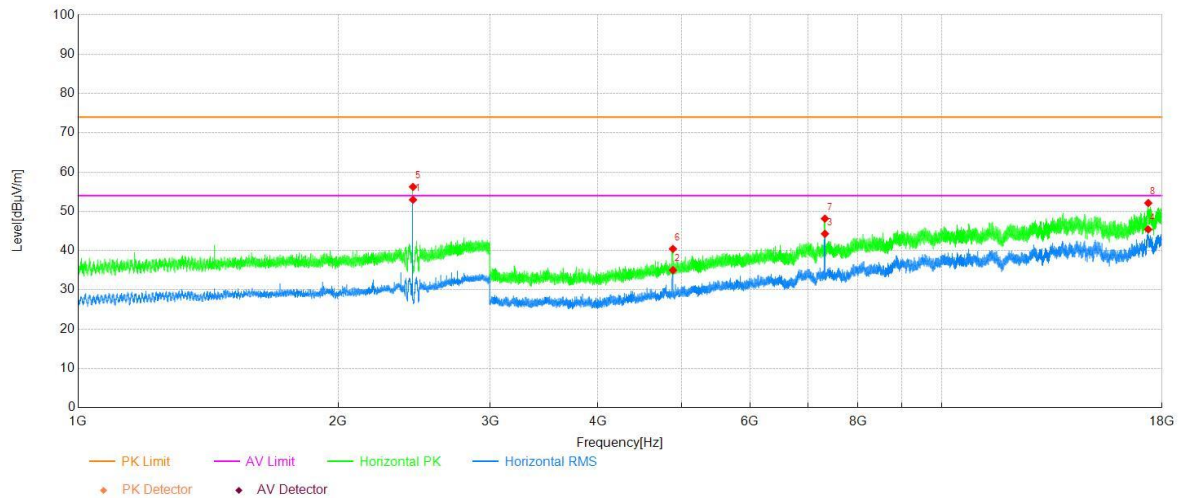


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2442.40	50.64	2.30	52.94	-	-	Horizontal	NA
2	4884.50	43.04	-8.03	35.01	54.00	18.99	Horizontal	PASS
3	7327.00	45.67	-1.39	44.28	54.00	9.72	Horizontal	PASS
4	17348.50	32.60	12.79	45.39	54.00	8.61	Horizontal	PASS
5	2442.20	53.92	2.30	56.22	-	-	Horizontal	NA
6	4884.50	48.46	-8.03	40.43	74.00	33.57	Horizontal	PASS
7	7325.00	49.50	-1.37	48.13	74.00	25.87	Horizontal	PASS
8	17351.50	39.30	12.80	52.10	74.00	21.90	Horizontal	PASS

Project Information

Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	Mid
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		


Test Graph

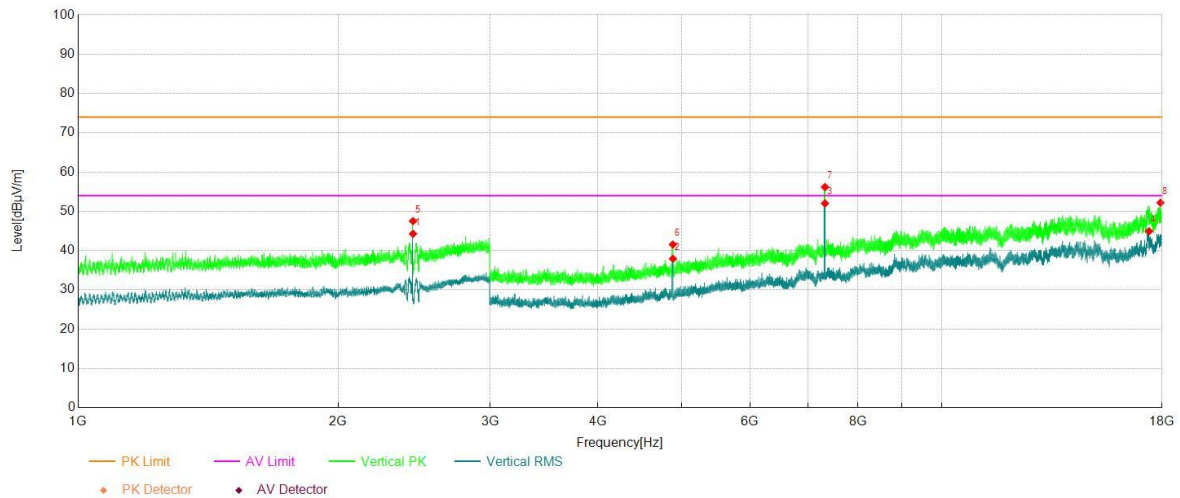

Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2442.40	41.98	2.30	44.28	-	-	Vertical	NA
2	4884.50	45.95	-8.03	37.92	54.00	16.08	Vertical	PASS
3	7327.00	53.42	-1.39	52.03	54.00	1.97	Vertical	PASS
4	17386.00	33.48	11.45	44.93	54.00	9.07	Vertical	PASS
5	2442.40	45.21	2.30	47.51	-	-	Vertical	NA
6	4883.50	49.58	-8.04	41.54	74.00	32.46	Vertical	PASS
7	7326.50	57.56	-1.38	56.18	74.00	17.82	Vertical	PASS
8	17925.50	40.00	12.18	52.18	74.00	21.82	Vertical	PASS

Project Information			
Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

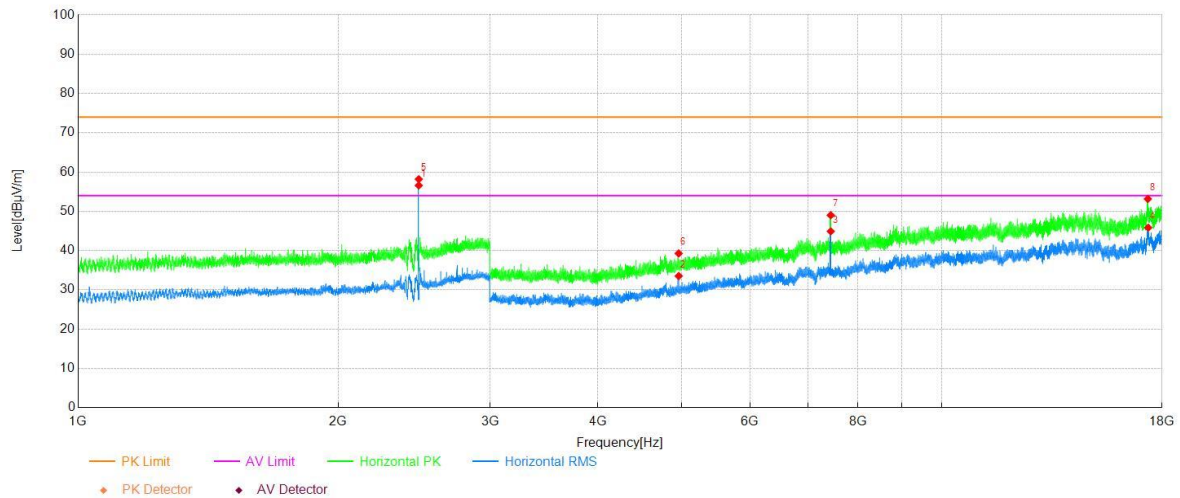Test Graph


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2480.20	54.22	2.37	56.59	-	-	Horizontal	NA
2	4960.50	41.08	-7.55	33.53	54.00	20.47	Horizontal	PASS
3	7441.00	46.55	-1.65	44.90	54.00	9.10	Horizontal	PASS
4	17349.50	33.00	12.84	45.84	54.00	8.16	Horizontal	PASS
5	2480.20	55.81	2.37	58.18	-	-	Horizontal	NA
6	4960.00	46.83	-7.55	39.28	74.00	34.72	Horizontal	PASS
7	7440.50	50.66	-1.65	49.01	74.00	24.99	Horizontal	PASS
8	17331.50	41.15	12.01	53.16	74.00	20.84	Horizontal	PASS

Project Information			
Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

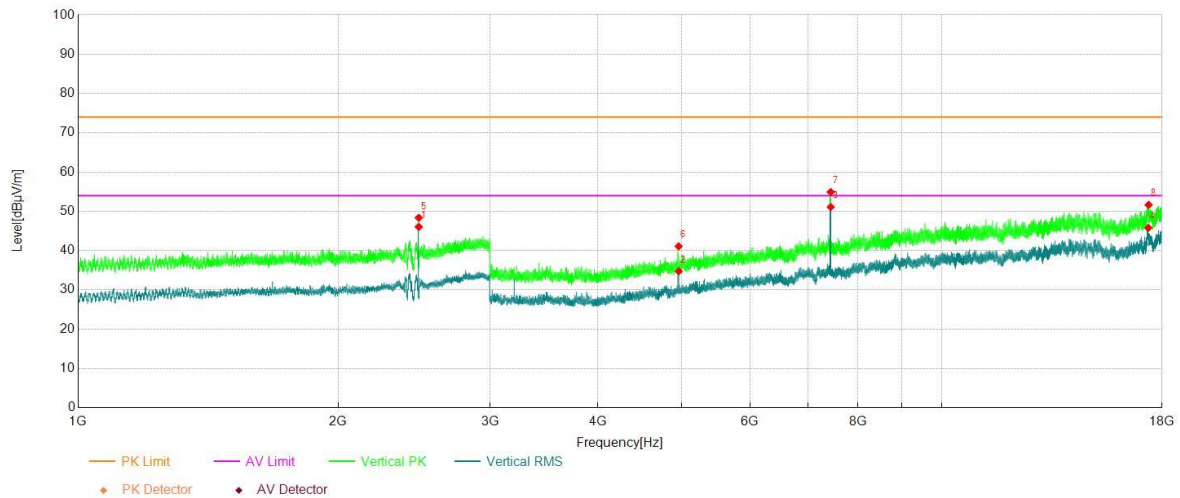Test Graph


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2480.20	43.67	2.37	46.04	-	-	Vertical	NA
2	4960.00	42.30	-7.55	34.75	54.00	19.25	Vertical	PASS
3	7441.00	52.75	-1.65	51.10	54.00	2.90	Vertical	PASS
4	17354.50	33.13	12.68	45.81	54.00	8.19	Vertical	PASS
5	2480.20	45.99	2.37	48.36	-	-	Vertical	NA
6	4959.50	48.64	-7.55	41.09	74.00	32.91	Vertical	PASS
7	7441.00	56.56	-1.65	54.91	74.00	19.09	Vertical	PASS
8	17368.00	39.49	12.16	51.65	74.00	22.35	Vertical	PASS

Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

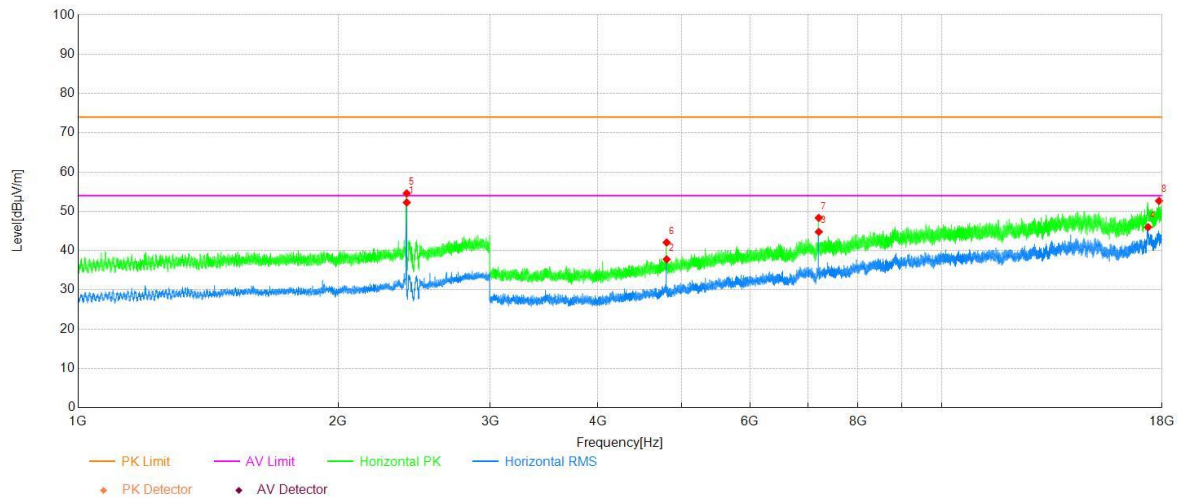Test Graph


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2402.20	50.02	2.22	52.24	-	-	Horizontal	NA
2	4804.00	45.35	-7.58	37.77	54.00	16.23	Horizontal	PASS
3	7207.00	46.14	-1.37	44.77	54.00	9.23	Horizontal	PASS
4	17347.00	33.25	12.73	45.98	54.00	8.02	Horizontal	PASS
5	2401.80	52.35	2.22	54.57	-	-	Horizontal	NA
6	4803.50	49.65	-7.58	42.07	74.00	31.93	Horizontal	PASS
7	7206.50	49.69	-1.37	48.32	74.00	25.68	Horizontal	PASS
8	17858.00	39.94	12.71	52.65	74.00	21.35	Horizontal	PASS

Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

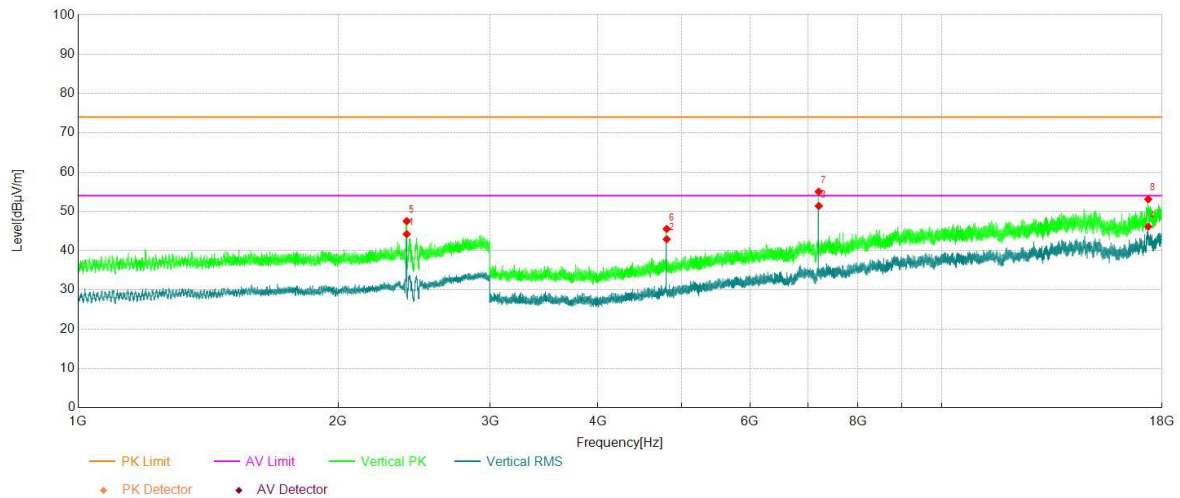Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2402.20	41.97	2.22	44.19	-	-	Vertical	NA
2	4804.50	50.48	-7.59	42.89	54.00	11.11	Vertical	PASS
3	7207.00	52.73	-1.37	51.36	54.00	2.64	Vertical	PASS
4	17352.50	33.35	12.76	46.11	54.00	7.89	Vertical	PASS
5	2401.80	45.27	2.22	47.49	-	-	Vertical	NA
6	4804.00	53.09	-7.58	45.51	74.00	28.49	Vertical	PASS
7	7206.50	56.36	-1.37	54.99	74.00	19.01	Vertical	PASS
8	17350.00	40.23	12.86	53.09	74.00	20.91	Vertical	PASS


Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	Mid
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

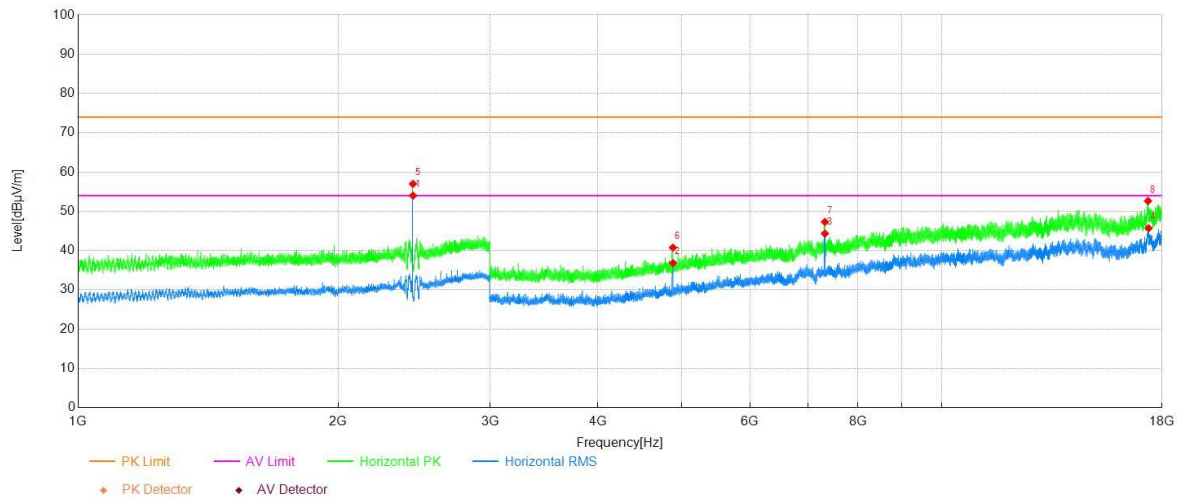Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2442.40	51.70	2.30	54.00	-	-	Horizontal	NA
2	4885.00	44.86	-8.03	36.83	54.00	17.17	Horizontal	PASS
3	7325.50	45.69	-1.37	44.32	54.00	9.68	Horizontal	PASS
4	17366.00	33.45	12.24	45.69	54.00	8.31	Horizontal	PASS
5	2442.20	54.68	2.30	56.98	-	-	Horizontal	NA
6	4884.50	48.79	-8.03	40.76	74.00	33.24	Horizontal	PASS
7	7325.50	48.67	-1.37	47.30	74.00	26.70	Horizontal	PASS
8	17340.00	40.23	12.40	52.63	74.00	21.37	Horizontal	PASS


Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	Mid
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

Test Graph

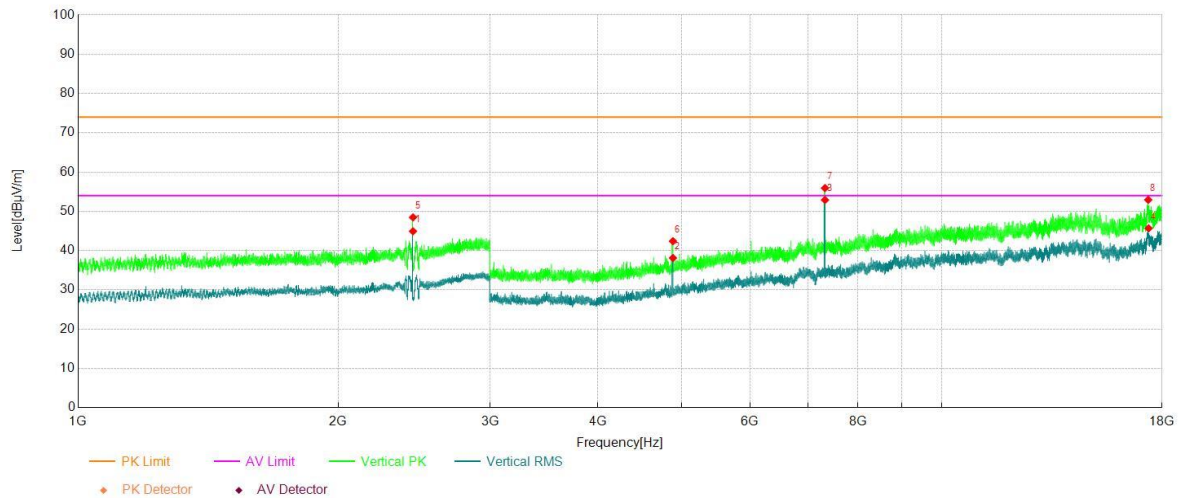


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2442.20	42.62	2.30	44.92	-	-	Vertical	NA
2	4885.00	46.14	-8.03	38.11	54.00	15.89	Vertical	PASS
3	7327.00	54.28	-1.39	52.89	54.00	1.11	Vertical	PASS
4	17365.00	33.39	12.28	45.67	54.00	8.33	Vertical	PASS
5	2442.40	46.15	2.30	48.45	-	-	Vertical	NA
6	4884.50	50.43	-8.03	42.40	74.00	31.60	Vertical	PASS
7	7327.00	57.31	-1.39	55.92	74.00	18.08	Vertical	PASS
8	17349.00	40.11	12.82	52.93	74.00	21.07	Vertical	PASS

Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

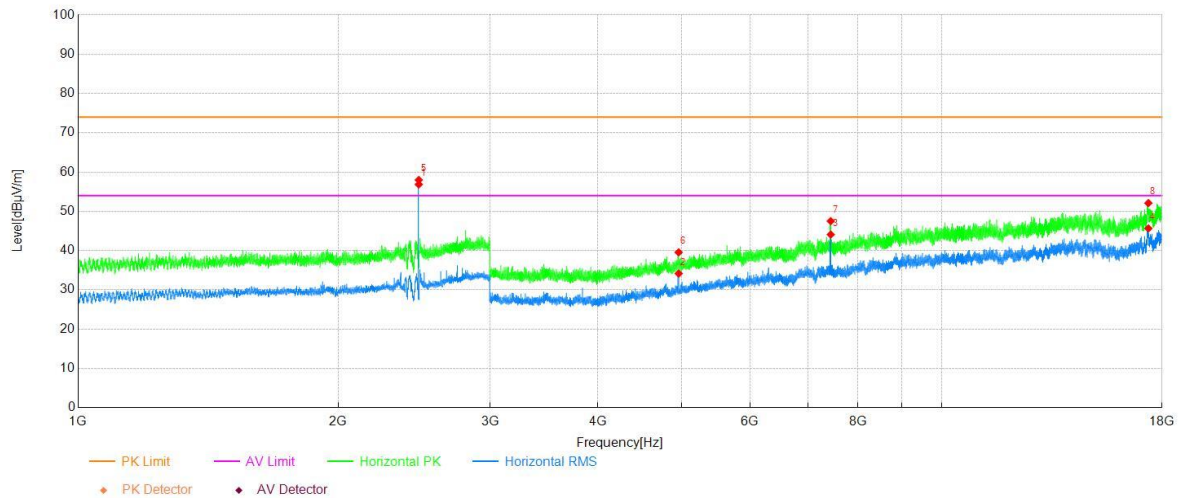Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2480.40	54.48	2.37	56.85	-	-	Horizontal	NA
2	4960.50	41.71	-7.55	34.16	54.00	19.84	Horizontal	PASS
3	7441.00	45.74	-1.65	44.09	54.00	9.91	Horizontal	PASS
4	17356.00	33.02	12.63	45.65	54.00	8.35	Horizontal	PASS
5	2480.20	55.61	2.37	57.98	-	-	Horizontal	NA
6	4960.00	47.10	-7.55	39.55	74.00	34.45	Horizontal	PASS
7	7440.00	49.15	-1.64	47.51	74.00	26.49	Horizontal	PASS
8	17355.50	39.44	12.65	52.09	74.00	21.91	Horizontal	PASS

Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

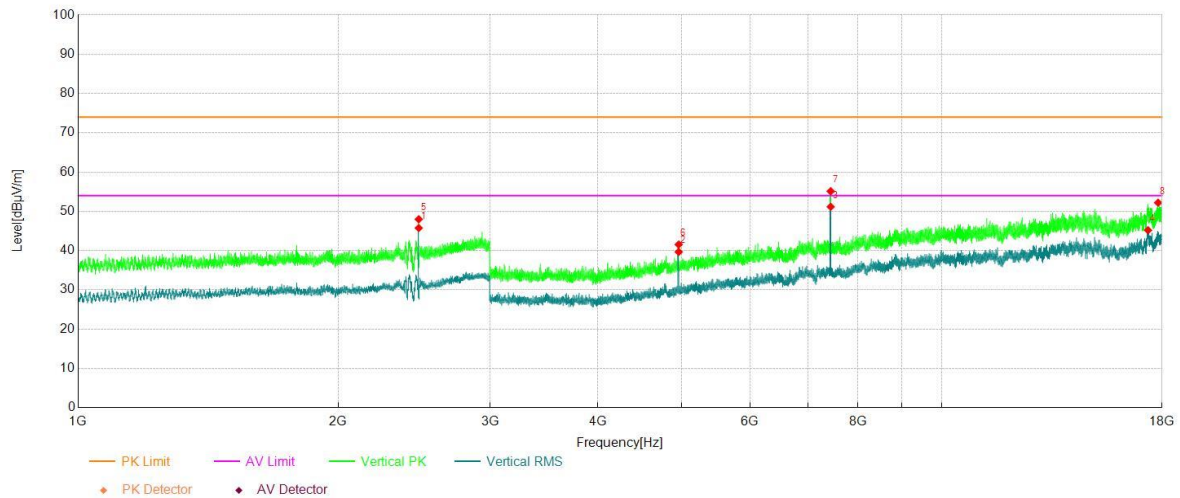Test Graph**Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2480.20	43.38	2.37	45.75	-	-	Vertical	NA
2	4960.50	47.21	-7.55	39.66	54.00	14.34	Vertical	PASS
3	7440.00	52.80	-1.64	51.16	54.00	2.84	Vertical	PASS
4	17339.00	32.83	12.36	45.19	54.00	8.81	Vertical	PASS
5	2480.00	45.61	2.37	47.98	-	-	Vertical	NA
6	4960.00	49.10	-7.55	41.55	74.00	32.45	Vertical	PASS
7	7439.00	56.75	-1.63	55.12	74.00	18.88	Vertical	PASS
8	17812.50	39.93	12.26	52.19	74.00	21.81	Vertical	PASS

Radiated Band Edge

Test Result


Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		

Test Graph

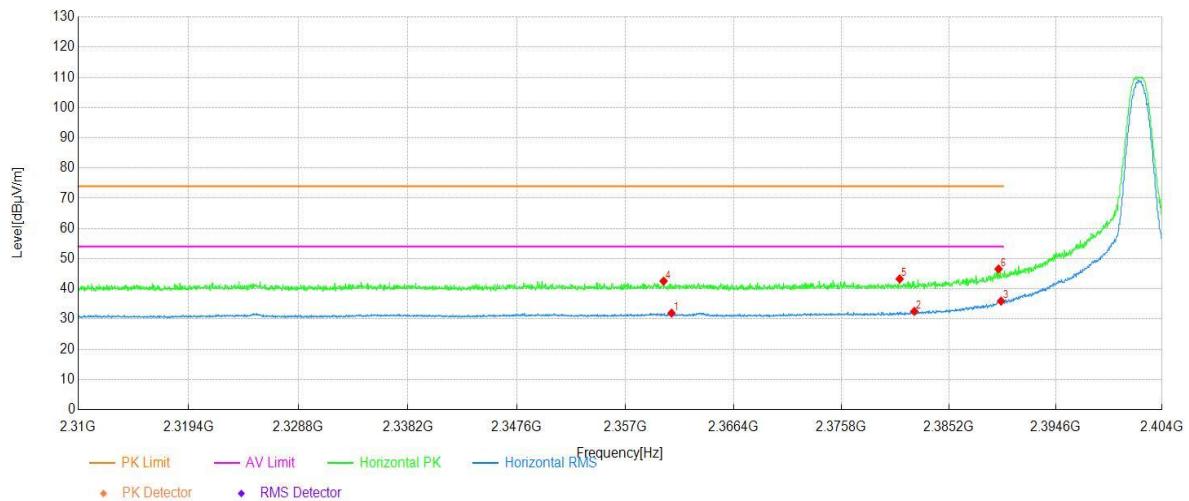


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2361.00	30.52	1.44	31.96	54.00	22.04	Horizontal	PASS
2	2382.18	31.13	1.43	32.56	54.00	21.44	Horizontal	PASS
3	2389.80	34.52	1.43	35.95	54.00	18.05	Horizontal	PASS
4	2360.31	41.12	1.44	42.56	74.00	31.44	Horizontal	PASS
5	2380.90	41.85	1.43	43.28	74.00	30.72	Horizontal	PASS
6	2389.58	45.13	1.43	46.56	74.00	27.44	Horizontal	PASS

Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		

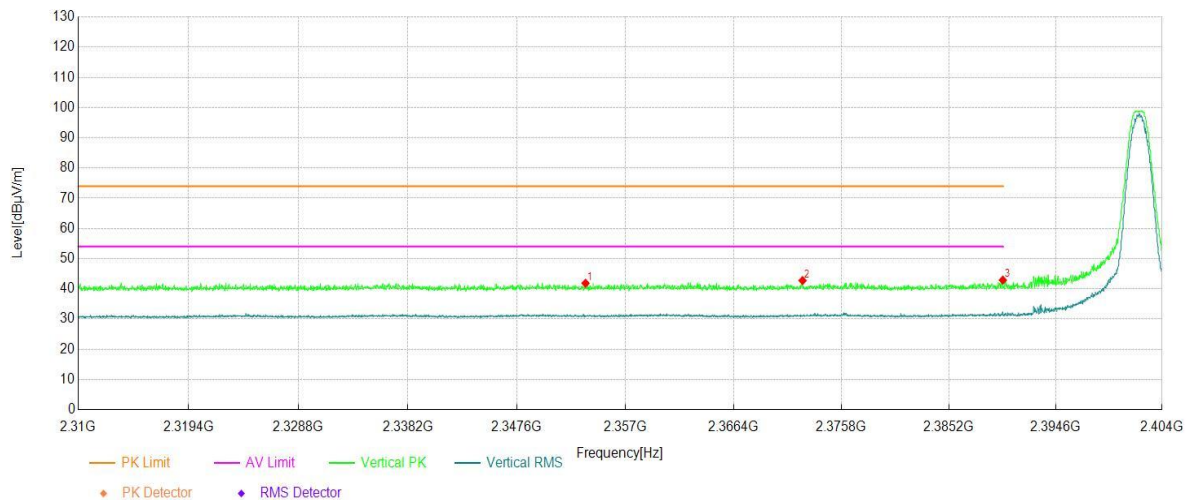Test Graph


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2353.54	40.40	1.45	41.85	74.00	32.15	Vertical	PASS
2	2372.41	41.30	1.43	42.73	74.00	31.27	Vertical	PASS
3	2389.96	41.46	1.43	42.89	74.00	31.11	Vertical	PASS

Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		

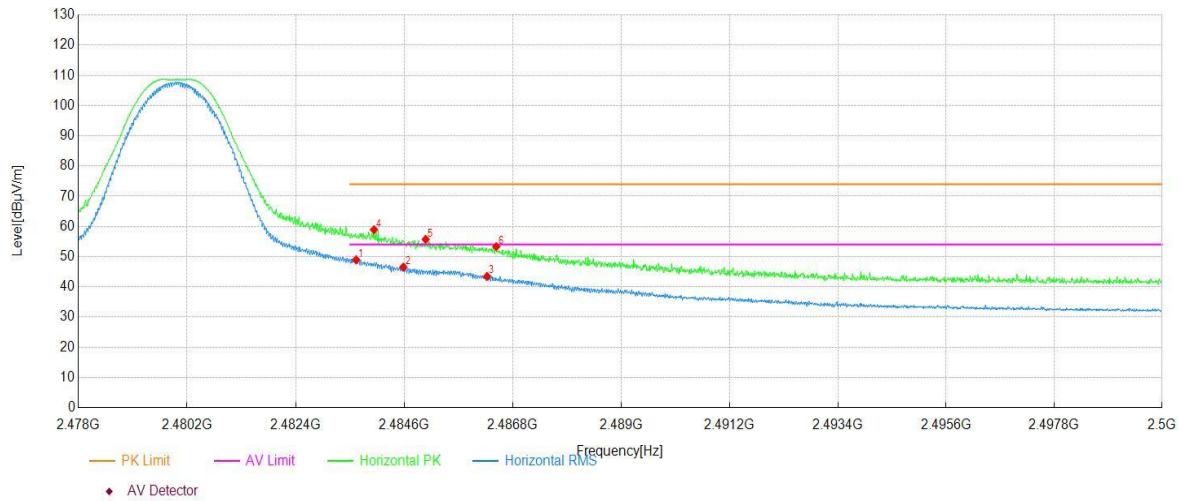Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.62	47.09	1.86	48.95	54.00	5.05	Horizontal	PASS
2	2484.58	44.66	1.87	46.53	54.00	7.47	Horizontal	PASS
3	2486.28	41.57	1.89	43.46	54.00	10.54	Horizontal	PASS
4	2483.99	57.03	1.87	58.90	74.00	15.10	Horizontal	PASS
5	2485.03	53.84	1.87	55.71	74.00	18.29	Horizontal	PASS
6	2486.46	51.41	1.89	53.30	74.00	20.70	Horizontal	PASS


Project Information			
Mode:	BLE_1M	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		

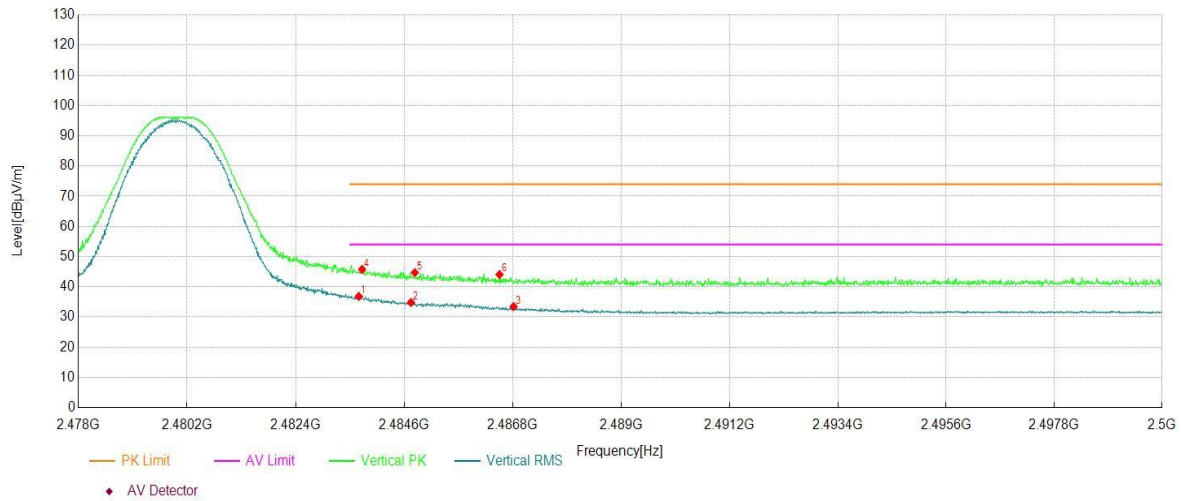Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.68	34.98	1.86	36.84	54.00	17.16	Vertical	PASS
2	2484.74	32.94	1.87	34.81	54.00	19.19	Vertical	PASS
3	2486.82	31.57	1.90	33.47	54.00	20.53	Vertical	PASS
4	2483.74	43.92	1.86	45.78	74.00	28.22	Vertical	PASS
5	2484.81	42.83	1.87	44.70	74.00	29.30	Vertical	PASS
6	2486.53	42.20	1.89	44.09	74.00	29.91	Vertical	PASS


Project Information			
Mode:	BLE_2M	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

Test Graph

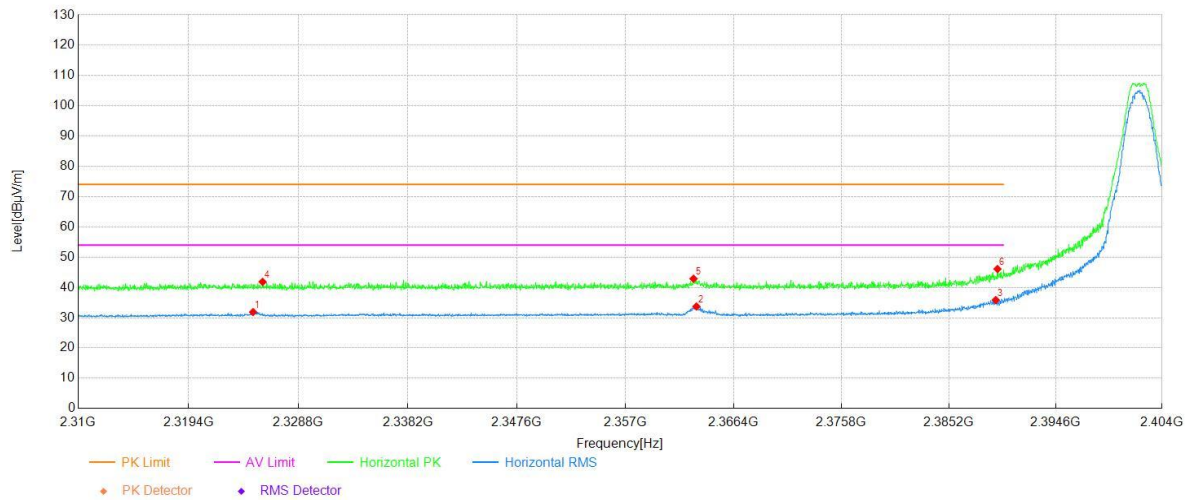

Data List								
NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2324.92	30.63	1.23	31.86	54.00	22.14	Horizontal	PASS
2	2363.16	32.24	1.45	33.69	54.00	20.31	Horizontal	PASS
3	2389.33	34.40	1.43	35.83	54.00	18.17	Horizontal	PASS
4	2325.73	40.60	1.24	41.84	74.00	32.16	Horizontal	PASS
5	2362.91	41.43	1.45	42.88	74.00	31.12	Horizontal	PASS
6	2389.49	44.65	1.43	46.08	74.00	27.92	Horizontal	PASS

Project Information			
Mode:	BLE_2M	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

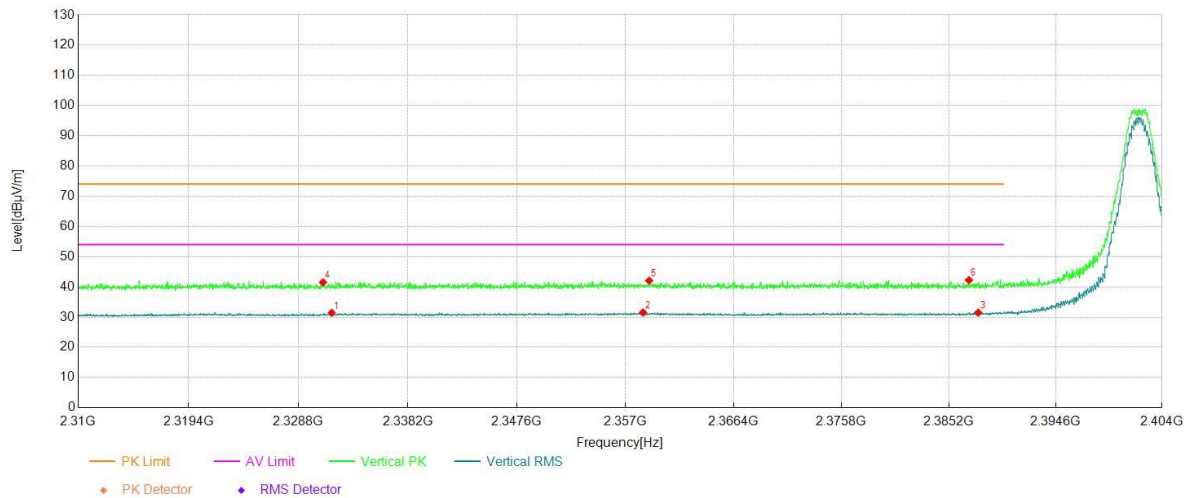
Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2331.66	30.10	1.29	31.39	54.00	22.61	Vertical	PASS
2	2358.52	30.06	1.45	31.51	54.00	22.49	Vertical	PASS
3	2387.80	30.05	1.43	31.48	54.00	22.52	Vertical	PASS
4	2330.91	40.19	1.29	41.48	74.00	32.52	Vertical	PASS
5	2359.05	40.59	1.45	42.04	74.00	31.96	Vertical	PASS
6	2386.98	40.82	1.42	42.24	74.00	31.76	Vertical	PASS

Project Information

Mode:	BLE_2M	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		


Test Graph

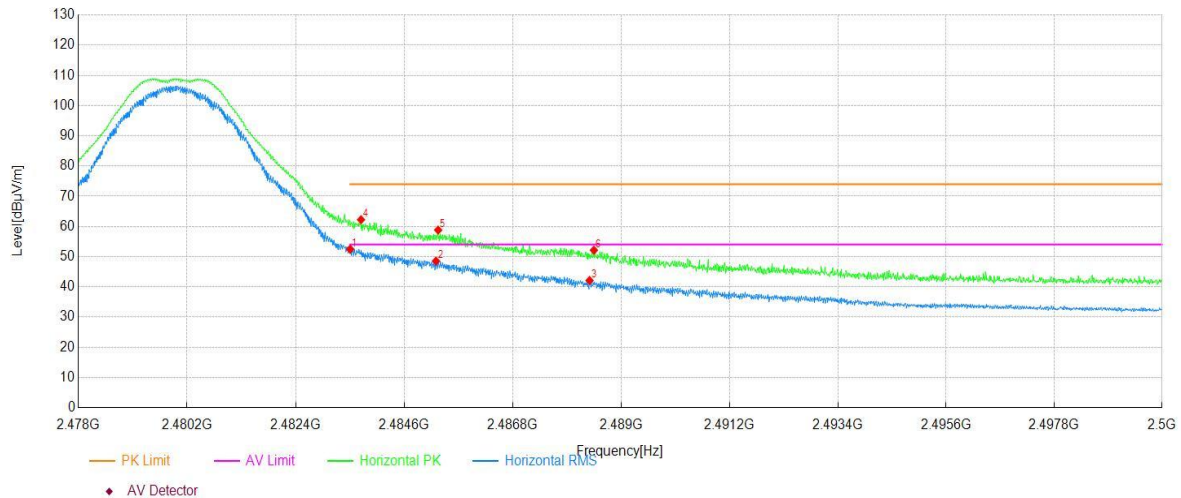

Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.50	50.63	1.85	52.48	54.00	1.52	Horizontal	PASS
2	2485.24	46.64	1.88	48.52	54.00	5.48	Horizontal	PASS
3	2488.36	40.20	1.91	42.11	54.00	11.89	Horizontal	PASS
4	2483.72	60.37	1.86	62.23	74.00	11.77	Horizontal	PASS
5	2485.29	56.92	1.88	58.80	74.00	15.20	Horizontal	PASS
6	2488.44	50.23	1.91	52.14	74.00	21.86	Horizontal	PASS

Project Information			
Mode:	BLE 2M	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Ou shuyan
Remark:	Power setting 14		

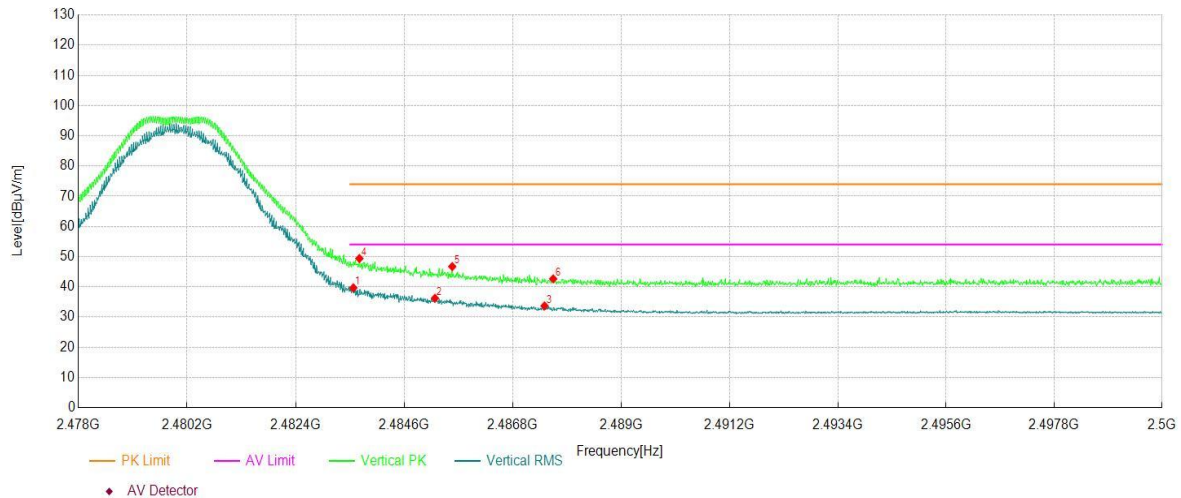Test Graph


Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.57	37.82	1.85	39.67	54.00	14.33	Vertical	PASS
2	2485.22	34.33	1.88	36.21	54.00	17.79	Vertical	PASS
3	2487.44	31.78	1.90	33.68	54.00	20.32	Vertical	PASS
4	2483.69	47.52	1.86	49.38	74.00	24.62	Vertical	PASS
5	2485.57	44.84	1.88	46.72	74.00	27.28	Vertical	PASS
6	2487.62	40.76	1.90	42.66	74.00	31.34	Vertical	PASS

Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

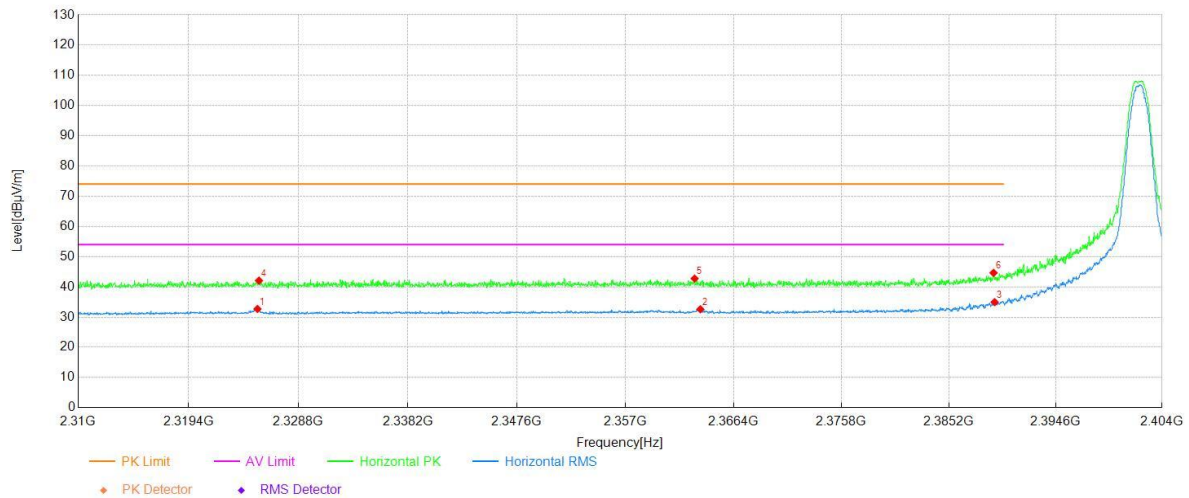Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2325.30	31.44	1.24	32.68	54.00	21.32	Horizontal	PASS
2	2363.50	31.13	1.44	32.57	54.00	21.43	Horizontal	PASS
3	2389.24	33.50	1.43	34.93	54.00	19.07	Horizontal	PASS
4	2325.42	40.82	1.24	42.06	74.00	31.94	Horizontal	PASS
5	2363.00	41.30	1.45	42.75	74.00	31.25	Horizontal	PASS
6	2389.14	43.20	1.43	44.63	74.00	29.37	Horizontal	PASS


Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

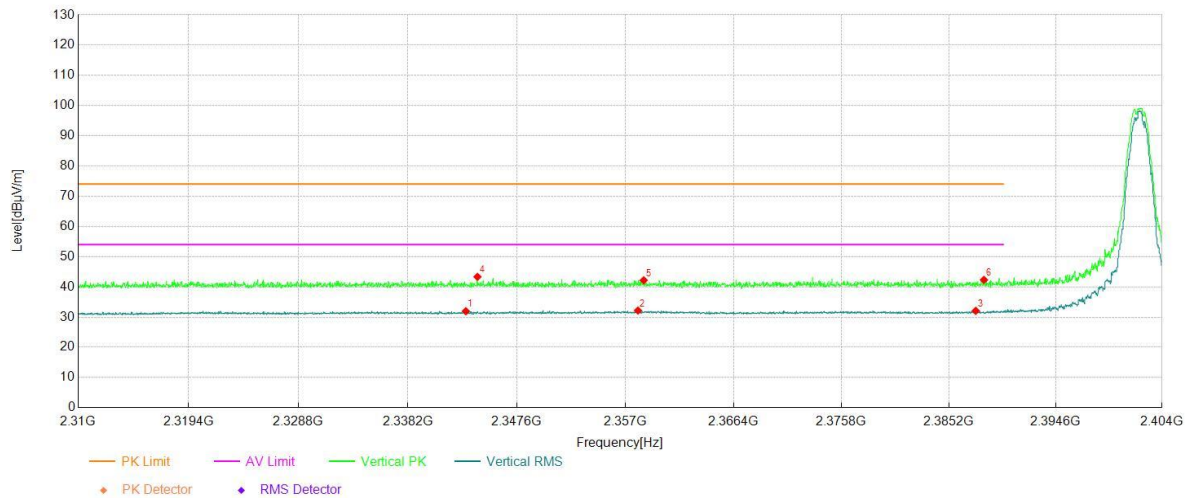Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2343.19	30.54	1.39	31.93	54.00	22.07	Vertical	PASS
2	2358.08	30.70	1.45	32.15	54.00	21.85	Vertical	PASS
3	2387.58	30.63	1.43	32.06	54.00	21.94	Vertical	PASS
4	2344.20	41.92	1.40	43.32	74.00	30.68	Vertical	PASS
5	2358.58	40.73	1.45	42.18	74.00	31.82	Vertical	PASS
6	2388.30	40.87	1.43	42.30	74.00	31.70	Vertical	PASS


Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

Test Graph

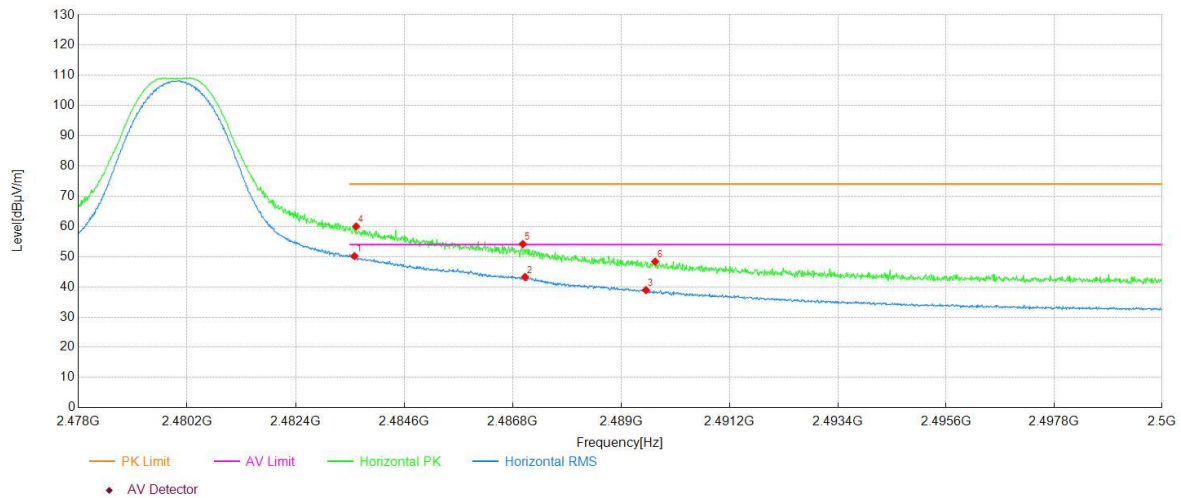

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.59	48.31	1.85	50.16	54.00	3.84	Horizontal	PASS
2	2487.05	41.36	1.90	43.26	54.00	10.74	Horizontal	PASS
3	2489.50	37.01	1.92	38.93	54.00	15.07	Horizontal	PASS
4	2483.62	58.13	1.86	59.99	74.00	14.01	Horizontal	PASS
5	2487.00	52.26	1.90	54.16	74.00	19.84	Horizontal	PASS
6	2489.69	46.43	1.92	48.35	74.00	25.65	Horizontal	PASS

Project Information			
Mode:	BLE_S2	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

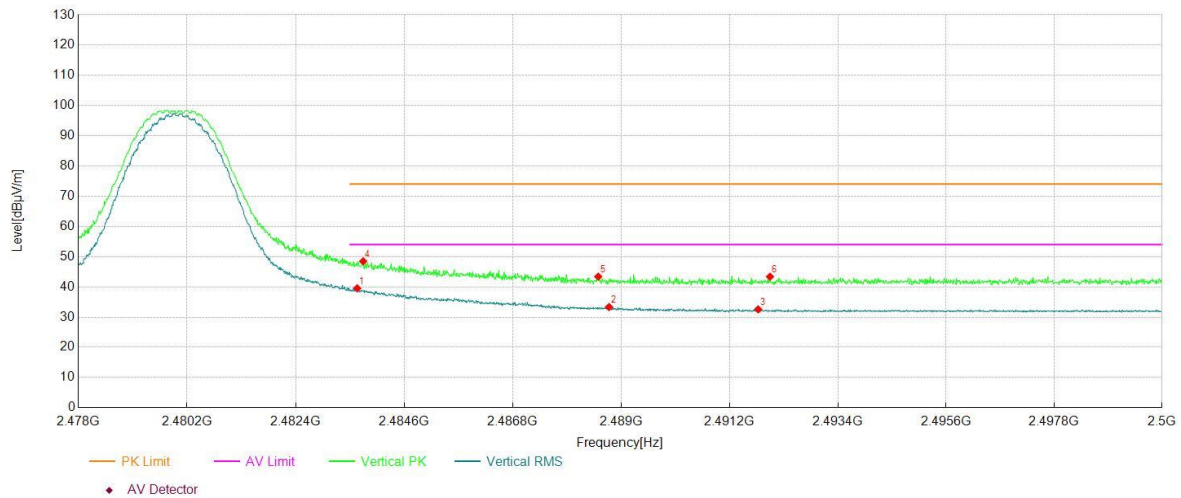
Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.65	37.66	1.86	39.52	54.00	14.48	Vertical	PASS
2	2488.75	31.39	1.92	33.31	54.00	20.69	Vertical	PASS
3	2491.78	30.59	1.95	32.54	54.00	21.46	Vertical	PASS
4	2483.77	46.59	1.87	48.46	74.00	25.54	Vertical	PASS
5	2488.53	41.48	1.91	43.39	74.00	30.61	Vertical	PASS
6	2492.02	41.40	1.95	43.35	74.00	30.65	Vertical	PASS

Project Information

Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

Test Graph

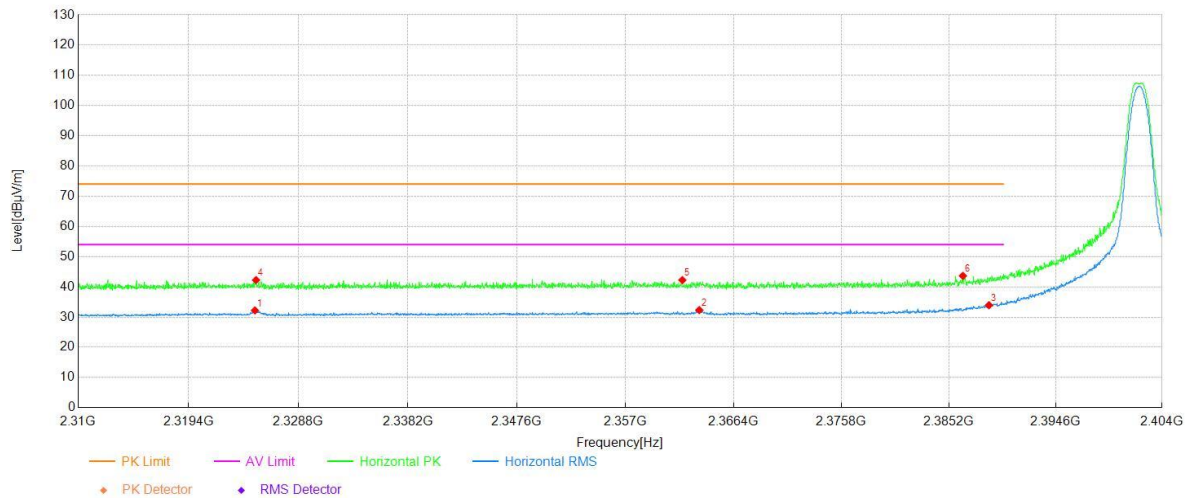


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2325.08	30.95	1.24	32.19	54.00	21.81	Horizontal	PASS
2	2363.41	30.86	1.45	32.31	54.00	21.69	Horizontal	PASS
3	2388.74	32.49	1.43	33.92	54.00	20.08	Horizontal	PASS
4	2325.17	41.00	1.24	42.24	74.00	31.76	Horizontal	PASS
5	2361.94	40.79	1.44	42.23	74.00	31.77	Horizontal	PASS
6	2386.45	42.20	1.43	43.63	74.00	30.37	Horizontal	PASS

Project Information

Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	Low
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 13		

Test Graph

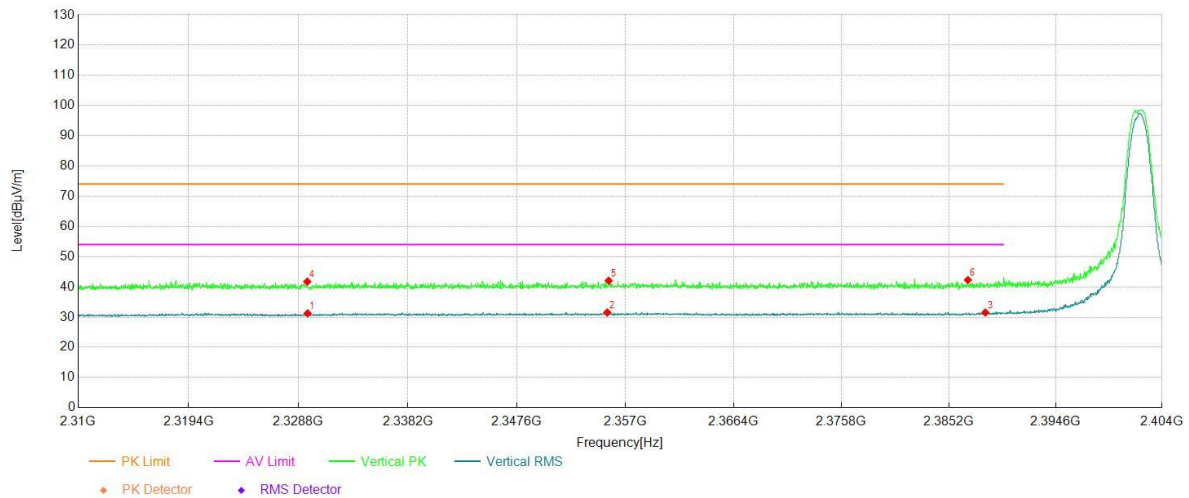


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2329.59	29.95	1.27	31.22	54.00	22.78	Vertical	PASS
2	2355.42	30.05	1.45	31.50	54.00	22.50	Vertical	PASS
3	2388.42	30.07	1.43	31.50	54.00	22.50	Vertical	PASS
4	2329.56	40.45	1.27	41.72	74.00	32.28	Vertical	PASS
5	2355.54	40.59	1.45	42.04	74.00	31.96	Vertical	PASS
6	2386.89	40.85	1.42	42.27	74.00	31.73	Vertical	PASS


Project Information			
Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

Test Graph

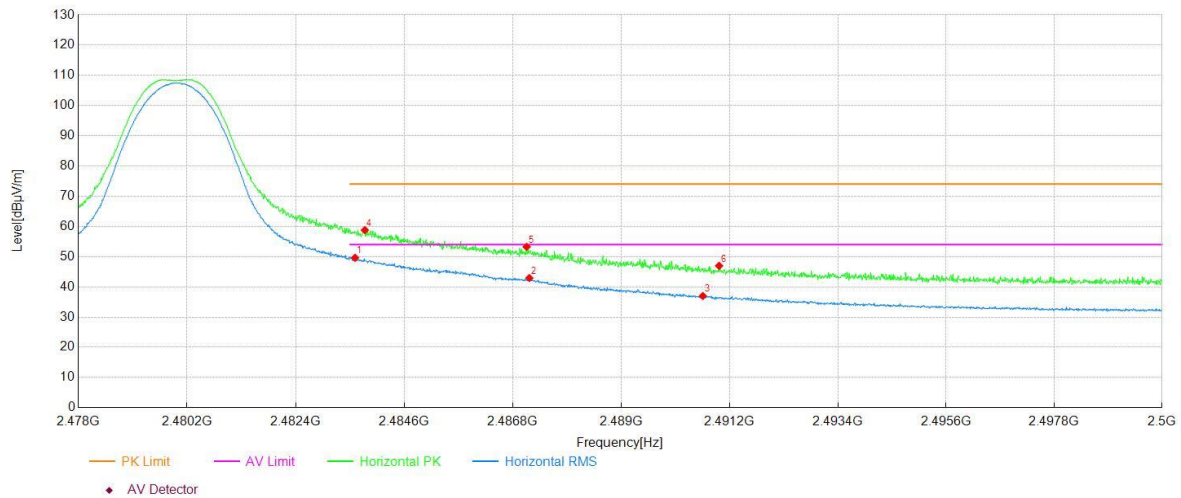

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.60	47.76	1.86	49.62	54.00	4.38	Horizontal	PASS
2	2487.13	41.03	1.90	42.93	54.00	11.07	Horizontal	PASS
3	2490.66	35.05	1.93	36.98	54.00	17.02	Horizontal	PASS
4	2483.80	56.91	1.87	58.78	74.00	15.22	Horizontal	PASS
5	2487.08	51.35	1.90	53.25	74.00	20.75	Horizontal	PASS
6	2490.99	45.03	1.93	46.96	74.00	27.04	Horizontal	PASS

Project Information			
Mode:	BLE_S8	Band:	-
Bandwidth	-	Channel	High
SN:	E1N25GL0Q000099	Engineer:	Tian Shuo
Remark:	Power setting 14		

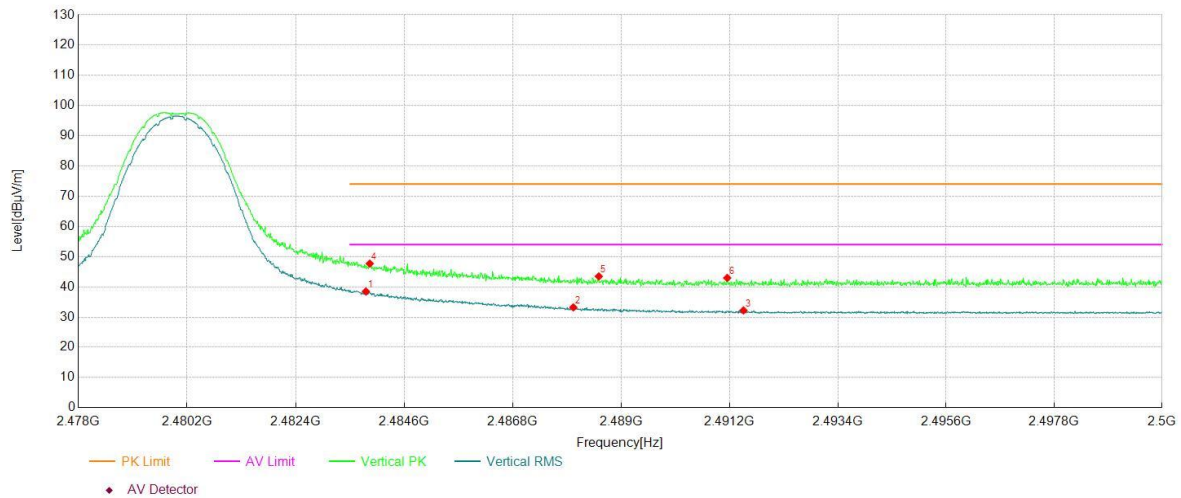Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2483.82	36.61	1.87	38.48	54.00	15.52	Vertical	PASS
2	2488.03	31.31	1.90	33.21	54.00	20.79	Vertical	PASS
3	2491.48	30.24	1.95	32.19	54.00	21.81	Vertical	PASS
4	2483.90	45.82	1.87	47.69	74.00	26.31	Vertical	PASS
5	2488.54	41.54	1.91	43.45	74.00	30.55	Vertical	PASS
6	2491.15	41.03	1.93	42.96	74.00	31.04	Vertical	PASS

~The End~