



Appendix B. Test Result of Occupied Bandwidth & DTS Bandwidth

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limit (MHz)	
				99% Occupied Bandwidth	DTS Bandwidth
GFSK (1Mbps)	2402	1.03	0.68	-	≥ 0.5
	2440	1.03	0.68	-	≥ 0.5
	2480	1.03	0.68	-	≥ 0.5
GFSK (2Mbps)	2402	2.01	1.15	-	≥ 0.5
	2440	2.01	1.15	-	≥ 0.5
	2480	2.01	1.15	-	≥ 0.5

For 99% Occupied Bandwidth:

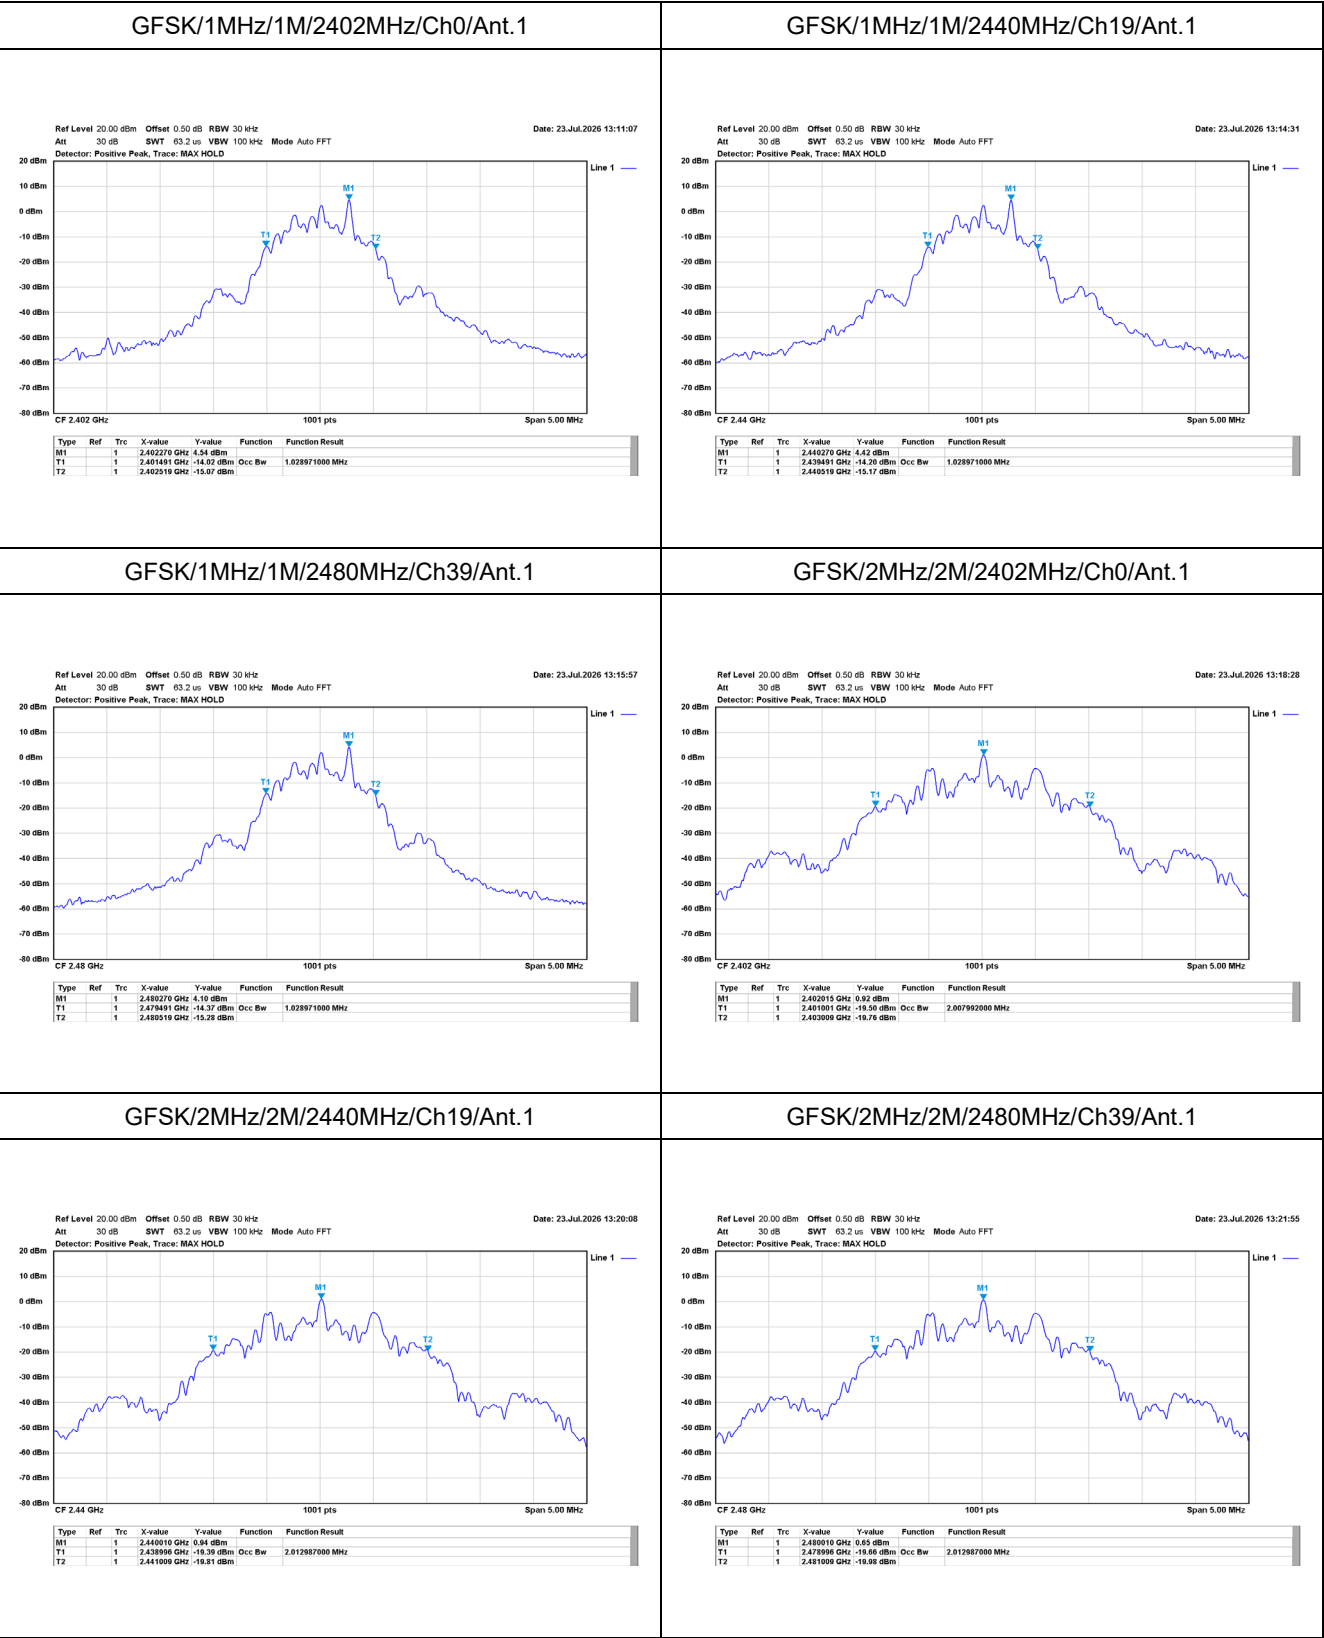

For DTS Bandwidth:

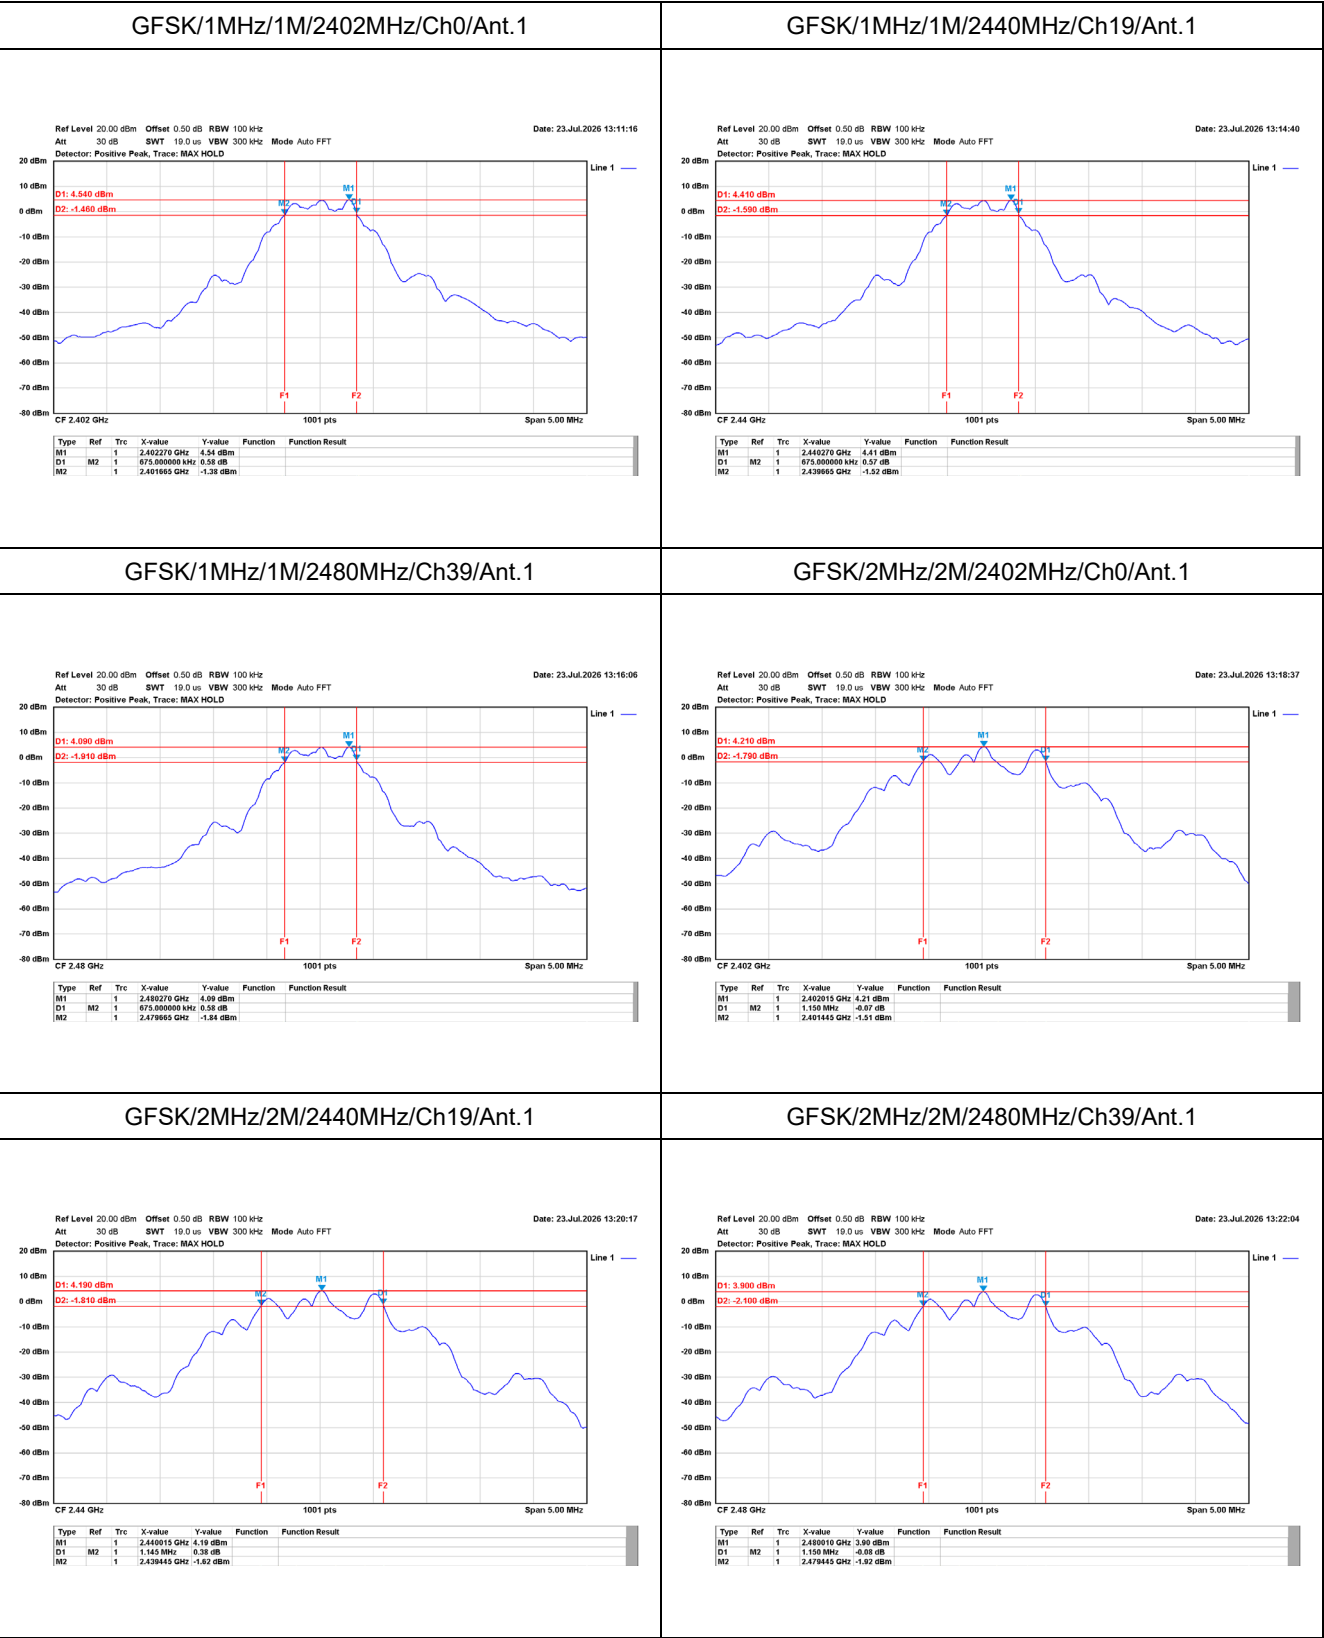


Appendix C. Test Result of Maximum Peak Conducted Output Power


Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
GFSK (1Mbps)	2402	5.12	30.00	Pass
	2440	4.64	30.00	Pass
	2480	3.38	30.00	Pass
GFSK (2Mbps)	2402	5.21	30.00	Pass
	2440	4.64	30.00	Pass
	2480	3.38	30.00	Pass


Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK (1Mbps)	2402	3.50	8.00	Pass
	2440	3.36	8.00	Pass
	2480	3.04	8.00	Pass
GFSK (2Mbps)	2402	-14.39	8.00	Pass
	2440	-14.52	8.00	Pass
	2480	-14.82	8.00	Pass

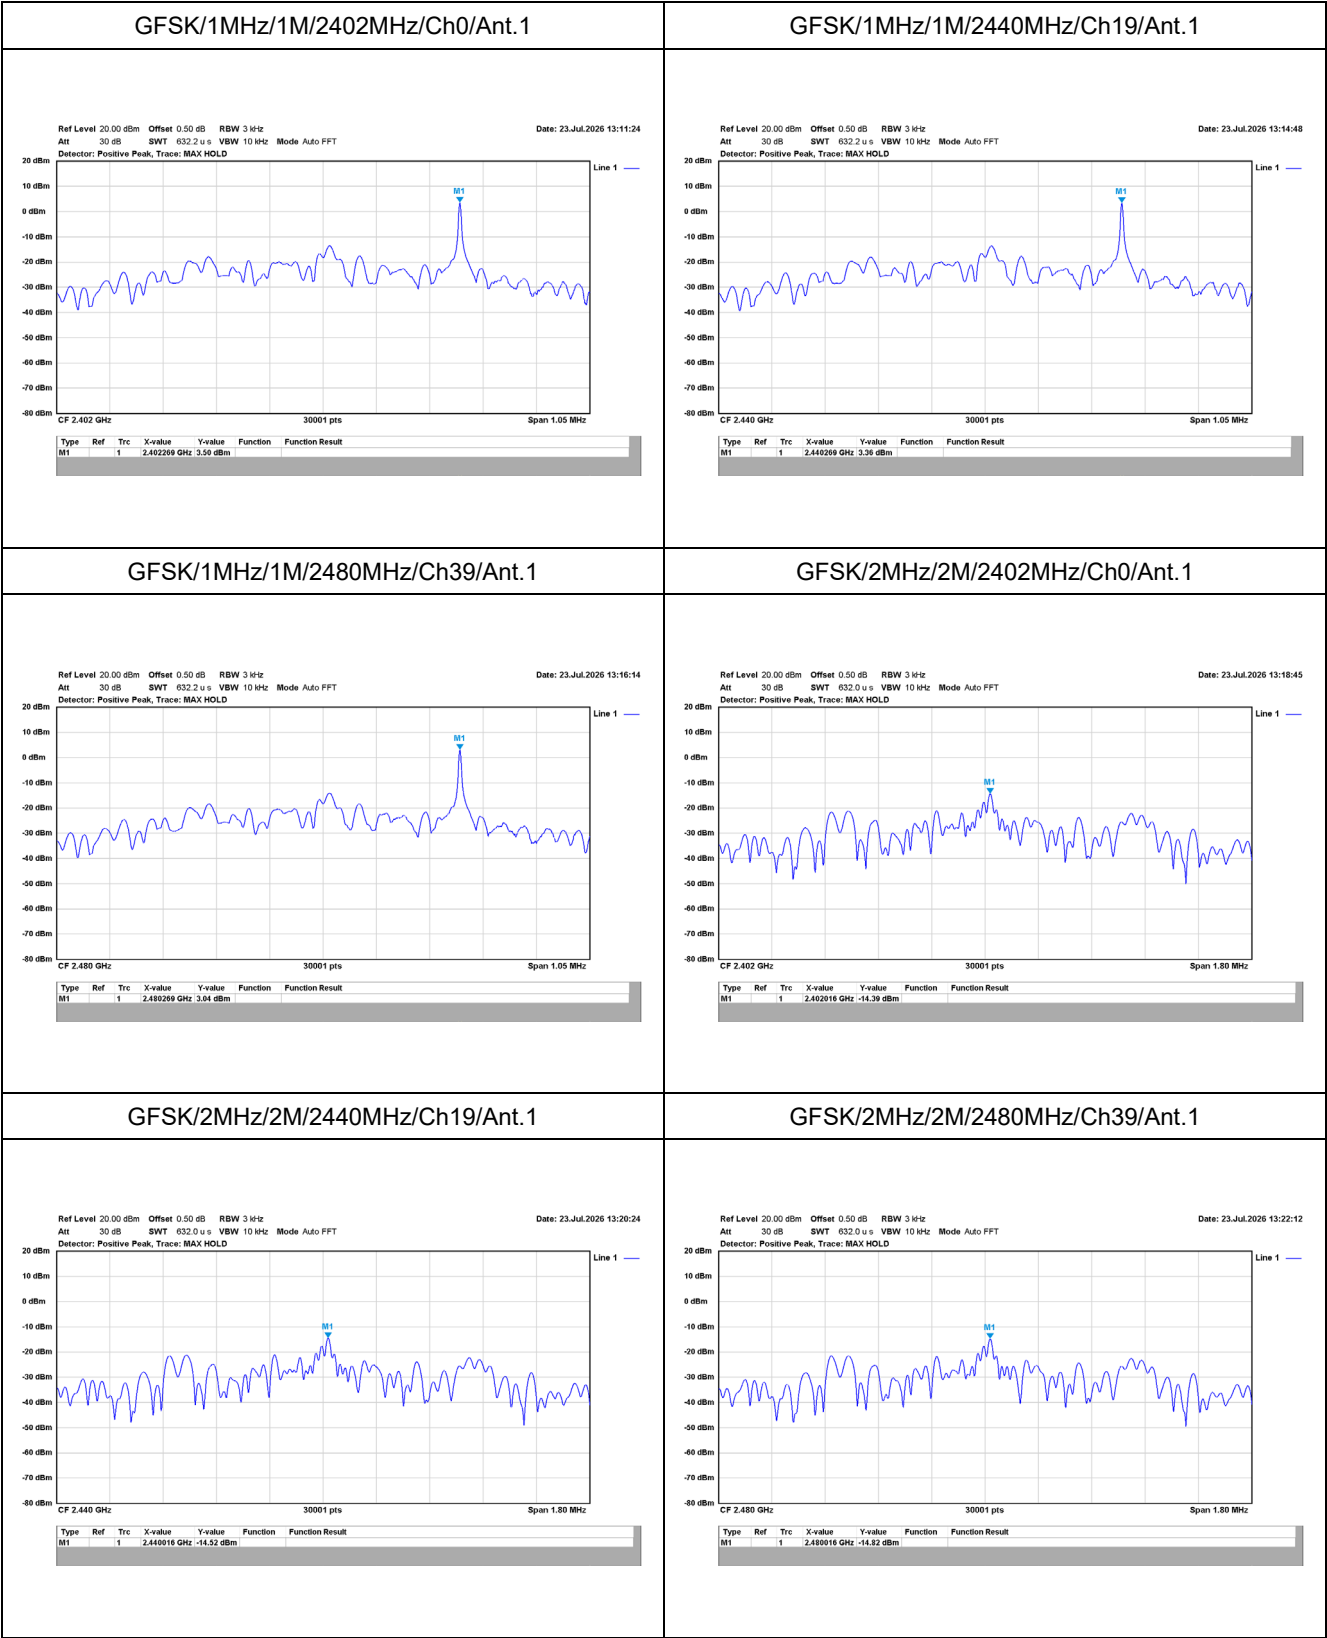

Appendix E. Test Result of Antenna Port Conducted Emission

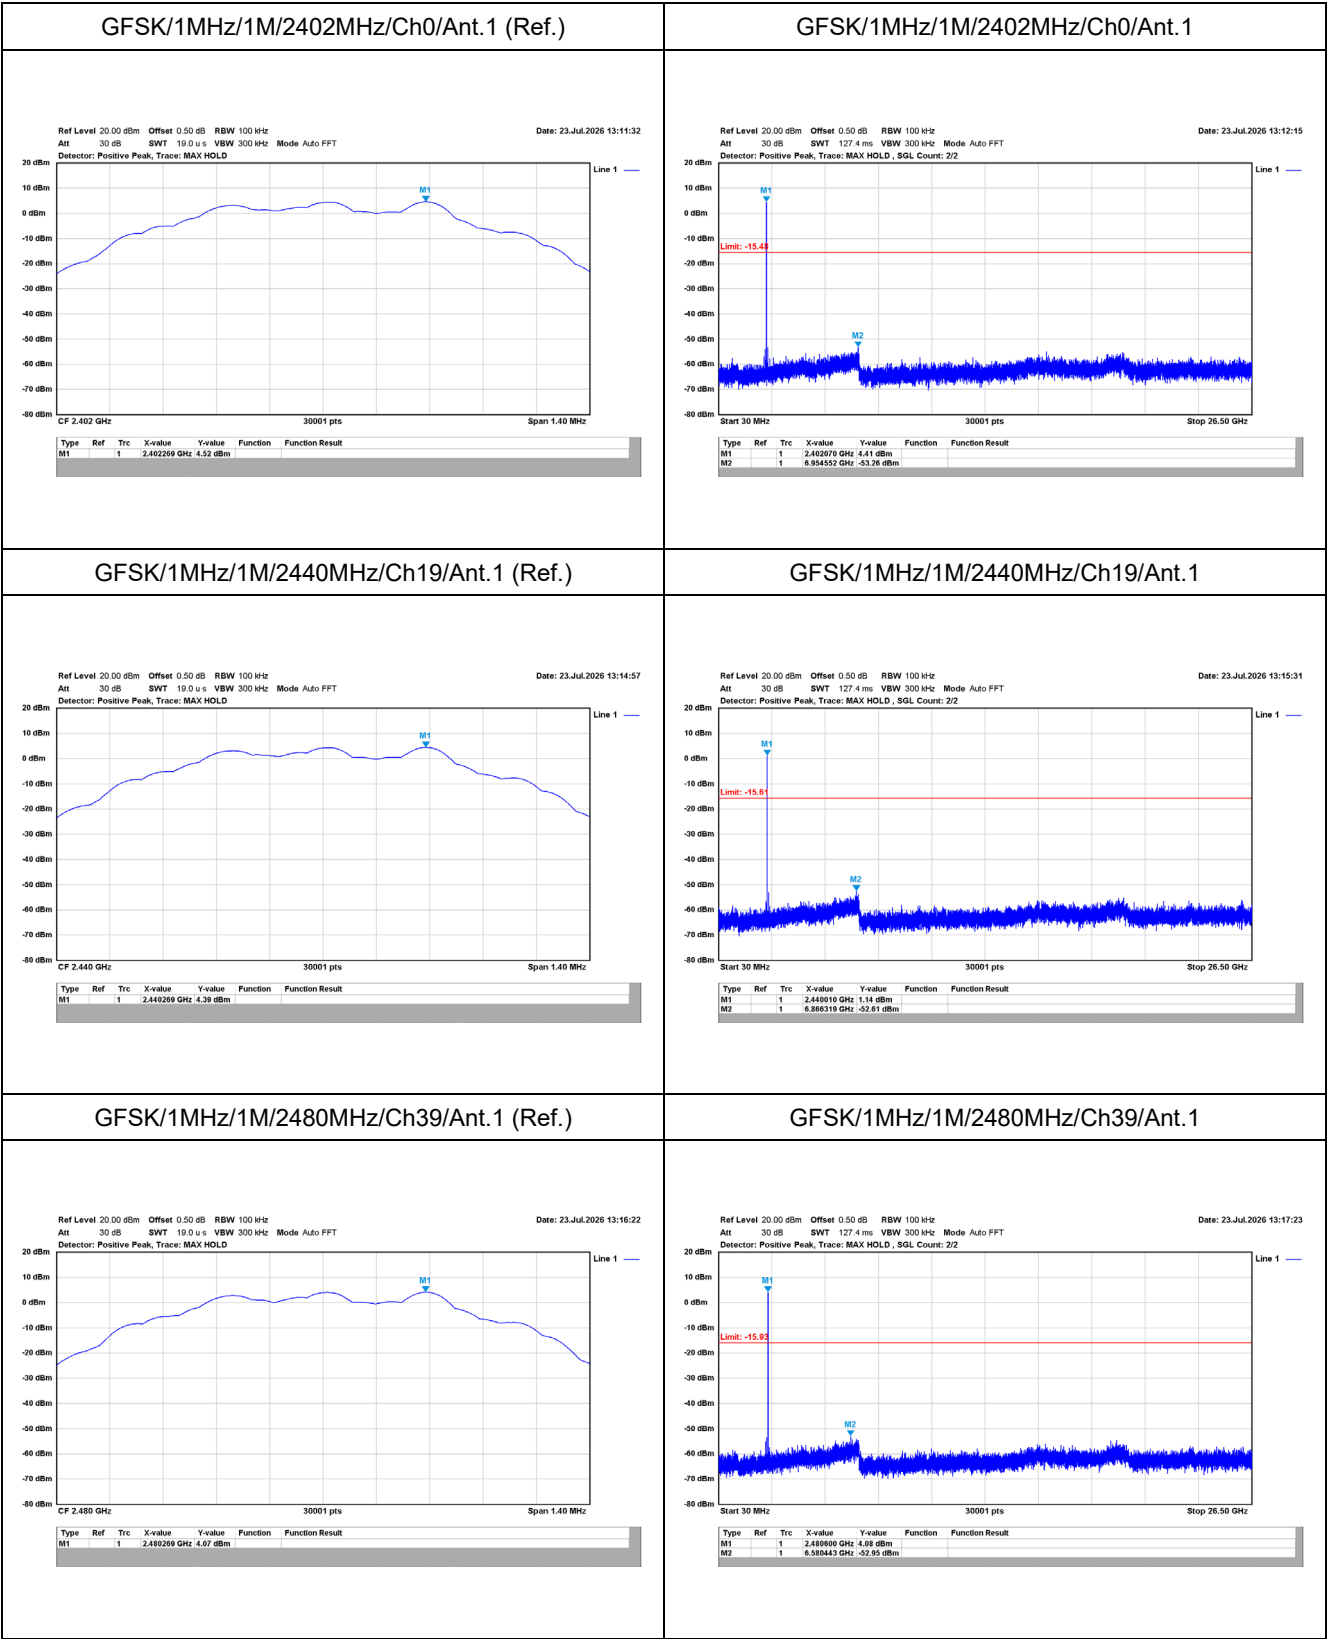

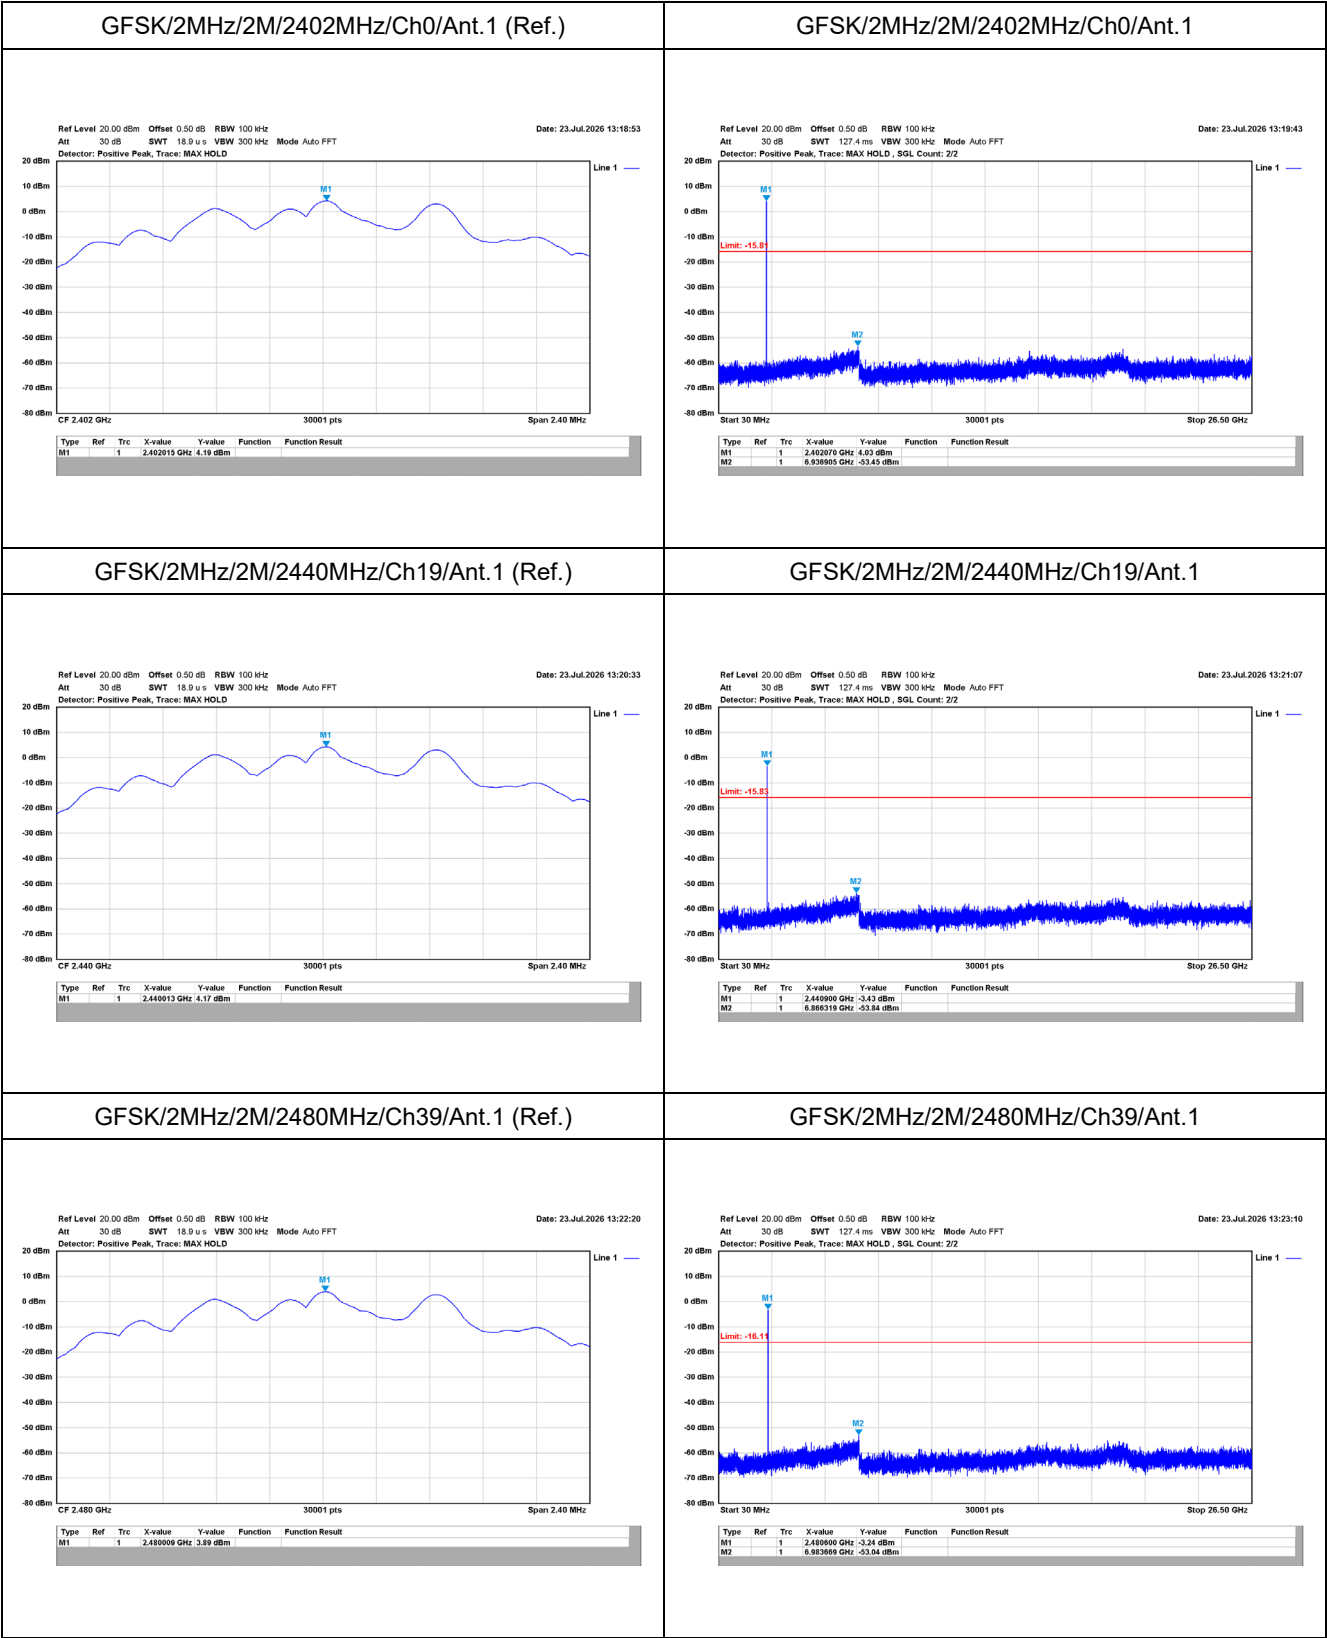




Appendix F. Test Result of Radiated Emission

TX_2.4G Wireless 1M_2402MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_2.4G Wireless 1M_2402MHz
Test by :Bob Chiu

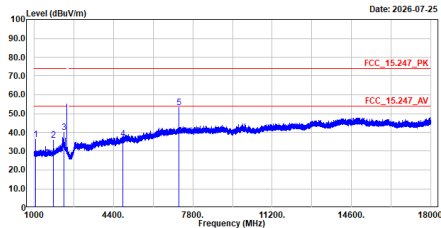


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1848.344	36.41	74.00	-37.59	61.24	-24.83	Peak
2	1806.438	35.73	74.00	-38.27	59.14	-23.41	Peak
3	2273.938	48.01	74.00	-33.99	61.66	-21.65	Peak
4	4804.000	36.77	74.00	-37.23	49.88	-13.11	Peak
5	7206.000	53.26	74.00	-20.74	59.88	-6.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2402MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_2.4G Wireless 2M_2402MHz
Test by :Bob Chiu

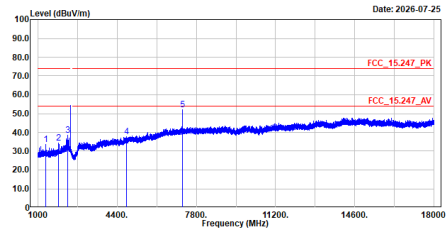


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1332.031	33.47	74.00	-40.53	57.29	-23.82	Peak
2	1890.375	34.32	74.00	-39.68	57.52	-23.20	Peak
3	2273.406	38.64	74.00	-35.36	60.30	-21.66	Peak
4	4804.000	37.61	74.00	-36.37	59.74	-13.11	Peak
5	7206.000	52.20	74.00	-21.80	58.82	-6.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2402MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_2.4G Wireless 1M_2402MHz
Test by :Bob Chiu

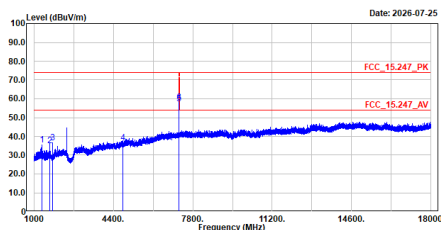


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1331.500	35.54	74.00	-38.46	59.35	-23.81	Peak
2	1658.219	34.95	74.00	-39.05	58.63	-23.68	Peak
3	1796.344	36.50	74.00	-37.50	60.00	-23.50	Peak
4	4804.000	36.42	74.00	-37.58	49.53	-13.11	Peak
5	7206.000	57.47	71.45	-13.98	64.09	-6.62	Average
6	7206.000	57.95	72.14	-14.19	64.57	-6.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2402MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_2.4G Wireless 2M_2402MHz
Test by :Bob Chiu

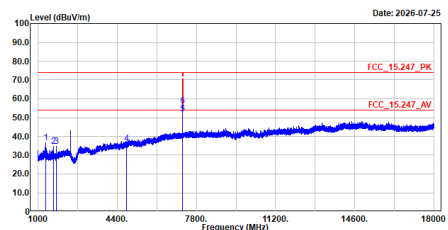


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1329.375	36.71	74.00	-37.29	60.51	-23.80	Peak
2	1659.813	34.63	74.00	-39.37	58.33	-23.70	Peak
3	1799.000	34.73	74.00	-39.27	58.20	-23.47	Peak
4	4804.000	36.06	74.00	-37.94	49.17	-13.11	Peak
5	7206.000	51.94	70.63	-18.69	58.56	-6.62	Average
6	7206.000	56.38	72.17	-15.79	63.00	-6.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2440MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_2.4G Wireless 1M_2440MHz
Test by :Bob Chiu

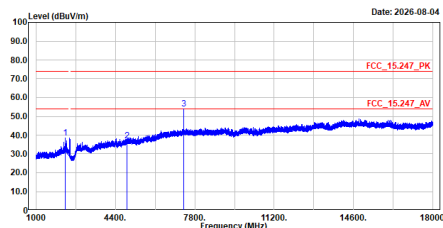


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dB		dBuV	dB/m	
1	2247.375	38.46	74.00	-35.54	60.14	-21.68	Peak
2	4880.000	37.11	74.00	-36.89	50.01	-12.90	Peak
3	7320.000	53.02	74.00	-20.18	60.32	-6.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2440MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_2.4G Wireless 2M_2440MHz
Test by :Bob Chiu

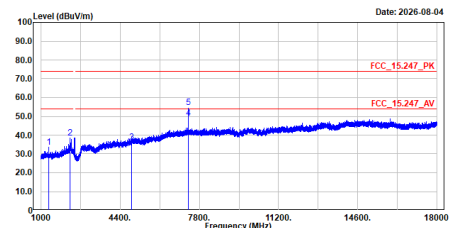


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dB		dBuV	dB/m	
1	1332.031	33.46	74.00	-40.54	57.28	-23.82	Peak
2	2247.375	38.53	74.00	-35.47	60.21	-21.68	Peak
3	4880.000	36.15	74.00	-37.85	49.05	-12.90	Peak
4	7320.000	49.15	54.00	-4.85	55.65	-6.50	Average
5	7320.000	54.85	74.00	-19.15	61.35	-6.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2440MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_2.4G Wireless 1M_2440MHz
Test by :Bob Chiu

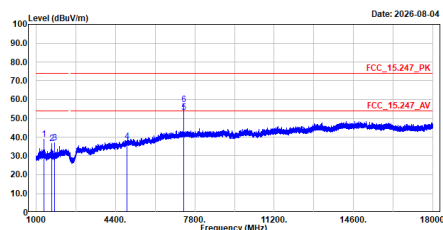


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dB		dBuV	dB/m	
1	1330.438	38.78	74.00	-35.22	62.58	-23.80	Peak
2	1662.469	36.67	74.00	-37.33	60.39	-23.72	Peak
3	1793.688	36.86	74.00	-37.14	60.38	-23.52	Peak
4	4880.000	37.86	74.00	-36.14	50.76	-12.90	Peak
5	7320.000	53.33	54.00	-0.67	59.83	-6.50	Average
6	7320.000	57.47	74.00	-16.53	63.97	-6.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2440MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_2.4G Wireless 2M_2440MHz
Test by :Bob Chiu

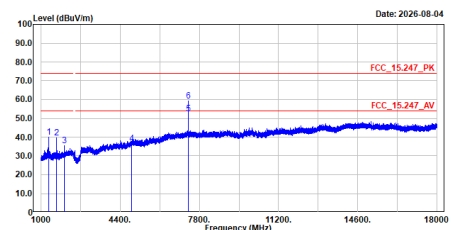


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dB		dBuV	dB/m	
1	1329.906	39.89	74.00	-34.11	63.69	-23.80	Peak
2	1656.625	39.53	74.00	-34.47	63.20	-23.67	Peak
3	1997.156	35.46	74.00	-38.54	57.89	-22.43	Peak
4	4880.000	36.79	74.00	-37.21	49.69	-12.90	Peak
5	7320.000	52.61	54.00	-1.39	59.11	-6.50	Average
6	7320.000	59.19	74.00	-14.81	65.69	-6.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2480MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_2.4G Wireless 1M_2480MHz
Test by :Bob Chiu

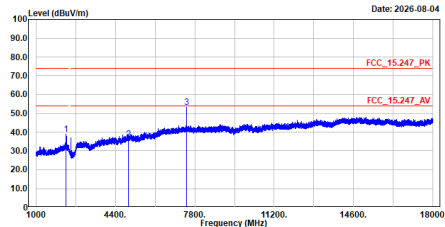


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	2287.750	38.93	74.00	-35.07	60.52	-21.59	Peak
2	4960.000	36.39	74.00	-37.61	48.75	-12.36	Peak
3	7440.000	53.34	74.00	-20.66	59.94	-6.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2480MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_2.4G Wireless 2M_2480MHz
Test by :Bob Chiu

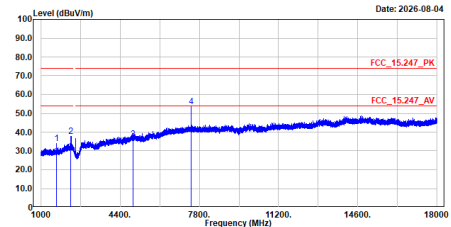


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	1658.750	33.92	74.00	-40.08	57.61	-23.69	Peak
2	2287.219	37.79	74.00	-36.21	59.38	-21.59	Peak
3	4960.000	36.39	74.00	-37.61	48.75	-12.36	Peak
4	7440.000	53.74	74.00	-20.26	60.34	-6.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2480MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_2.4G Wireless 1M_2480MHz
Test by :Bob Chiu

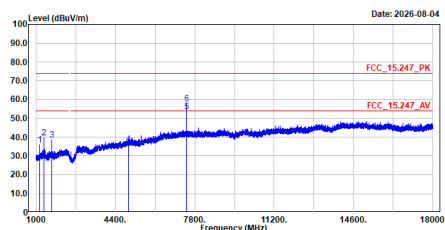


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	1146.625	35.70	74.00	-38.30	59.91	-24.21	Peak
2	1332.563	39.53	74.00	-34.47	63.36	-23.83	Peak
3	1663.000	38.58	74.00	-35.42	62.31	-23.73	Peak
4	4960.000	36.33	74.00	-37.67	48.69	-12.36	Peak
5	7440.000	53.46	74.00	-20.54	60.06	-6.60	Average
6	7440.000	57.82	74.00	-16.18	64.42	-6.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2480MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_2.4G Wireless 2M_2480MHz
Test by :Bob Chiu

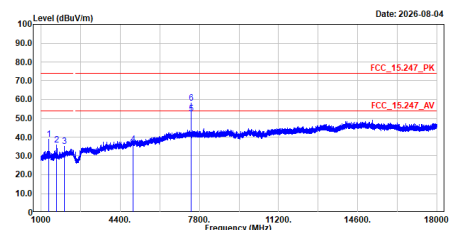


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
				dB	dBuV	dB/m	
1	1328.844	38.86	74.00	-35.14	62.66	-23.80	Peak
2	1661.406	35.72	74.00	-38.28	59.43	-23.71	Peak
3	1991.313	35.07	74.00	-38.93	57.50	-22.43	Peak
4	4960.000	36.21	74.00	-37.79	48.57	-12.36	Peak
5	7440.000	52.64	74.00	-21.36	59.24	-6.60	Average
6	7440.000	58.12	74.00	-15.88	64.72	-6.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2440MHz_H

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_2.4G Wireless 2M_2440MHz
Test by :Bob Chiu

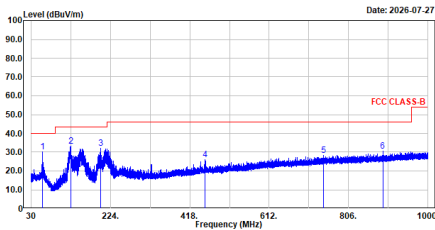


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	56.918	30.19	40.00	-9.81	40.64	-10.45	QP
2	126.636	33.35	43.50	-10.15	46.14	-12.79	QP
3	199.417	32.12	43.50	-11.38	46.21	-14.09	QP
4	455.000	25.95	46.00	-20.05	32.74	-6.79	QP
5	744.860	28.29	46.00	-17.71	30.06	-1.77	QP
6	890.117	30.39	46.00	-15.61	31.02	-0.63	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_2.4G Wireless 2M_2440MHz_V

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_2.4G Wireless 2M_2440MHz
Test by :Bob Chiu

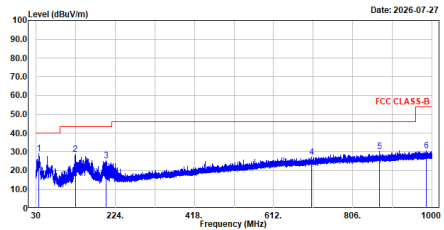


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	36.063	29.08	40.00	-10.92	39.93	-10.85	QP
2	126.121	28.57	43.50	-14.93	41.41	-12.84	QP
3	201.296	25.34	43.50	-18.16	39.44	-14.10	QP
4	705.696	27.19	46.00	-18.81	29.85	-2.66	QP
5	872.233	30.26	46.00	-15.74	31.07	-0.81	QP
6	987.148	30.46	54.00	-23.54	29.79	0.67	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_2.4G Wireless 1M_2402MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_2.4G Wireless 1M_2402MHz
Test by :Bob Chiu

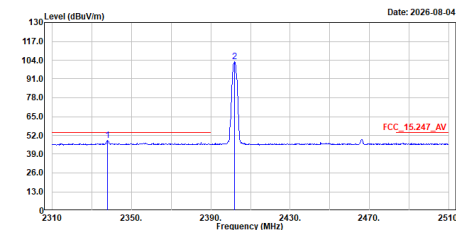


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2337.800	48.69	54.00	-5.31	19.24	29.45	Average
2	2402.000	102.79	-----	-----	73.58	29.21	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2402MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_2.4G Wireless 1M_2402MHz
Test by :Bob Chiu

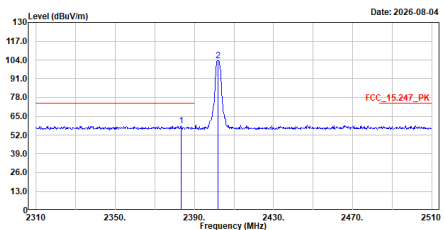


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2383.200	58.24	74.00	-15.76	28.87	29.37	Peak
2	2401.800	103.46	-----	-----	74.25	29.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2402MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_2.4G Wireless 2M_2402MHz
Test by :Bob Chiu

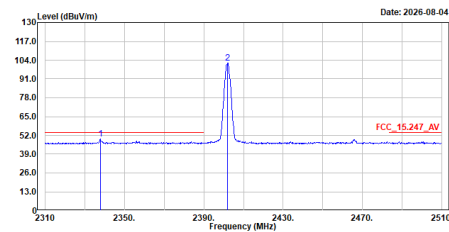


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2337.800	49.43	54.00	-4.57	19.98	29.45	Average
2	2402.000	101.96	54.00	72.75	29.21		Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2402MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_2.4G Wireless 2M_2402MHz
Test by :Bob Chiu

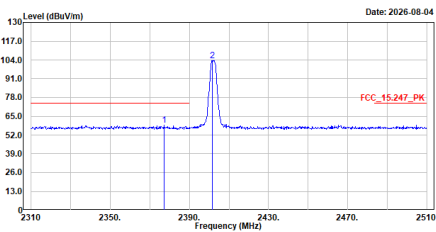


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2377.400	58.93	74.00	-15.07	29.53	29.40	Peak
2	2401.600	103.36	74.00	74.15	29.21		Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2402MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_2.4G Wireless 1M_2402MHz
Test by :Bob Chiu

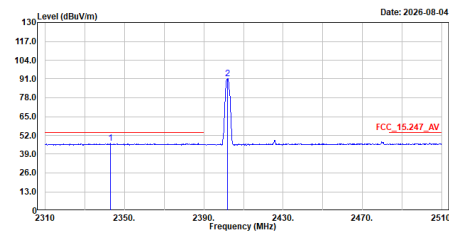


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2343.000	46.39	54.00	-7.61	16.94	29.45	Average
2	2402.000	91.45	54.00	62.24	29.21		Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2402MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_2.4G Wireless 1M_2402MHz
Test by :Bob Chiu

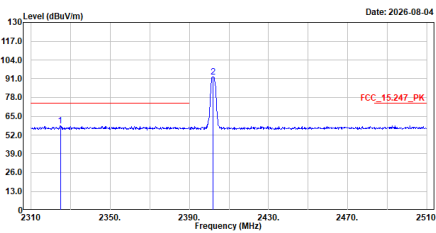


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2324.800	58.24	74.00	-15.76	28.92	29.32	Peak
2	2401.800	92.14	74.00	62.93	29.21		Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2402MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_2.4G Wireless 2M_2402MHz
Test by :Bob Chiu

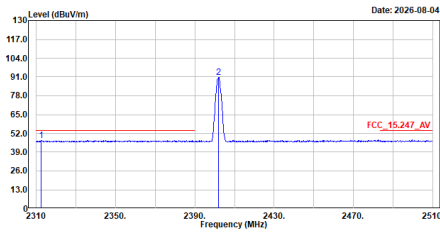


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2312.600	47.16	54.00	-6.84	17.90	29.26	Average
2	2402.000	90.63	-----	-----	61.42	29.21	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2402MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_2.4G Wireless 2M_2402MHz
Test by :Bob Chiu

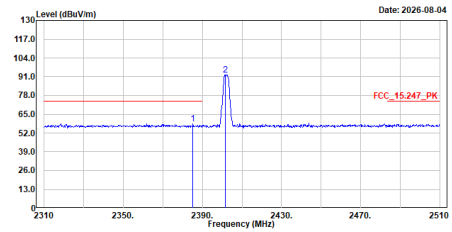


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2385.200	58.42	74.00	-15.58	29.07	29.35	Peak
2	2401.600	92.17	-----	-----	62.96	29.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2480MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_2.4G Wireless 1M_2480MHz
Test by :Bob Chiu

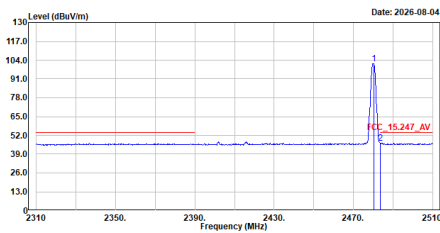


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.200	101.65	-----	-----	72.41	29.24	Average
2	2483.600	46.65	54.00	-7.35	17.41	29.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2480MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_2.4G Wireless 1M_2480MHz
Test by :Bob Chiu

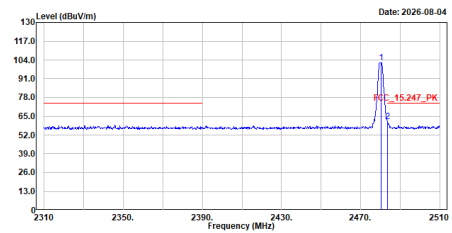


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.400	102.28	-----	-----	73.04	29.24	Peak
2	2483.600	61.41	74.00	-12.59	32.17	29.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2480MHz_H_Average

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_2.4G Wireless 2M_2480MHz
Test by :Bob Chiu

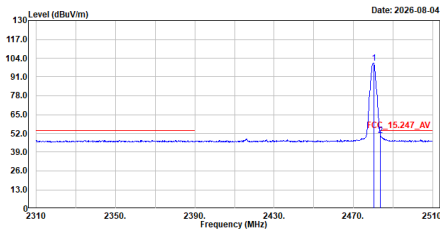


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	100.72	-----	-----	71.48	29.24	Average
2	2483.600	50.36	54.00	-3.64	21.12	29.24	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2480MHz_H_Peak

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_2.4G Wireless 2M_2480MHz
Test by :Bob Chiu

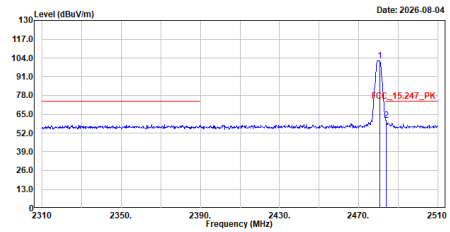


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	102.19	-----	-----	72.95	29.24	Peak
2	2483.800	60.96	74.00	-13.04	31.72	29.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2480MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_2.4G Wireless 1M_2480MHz
Test by :Bob Chiu

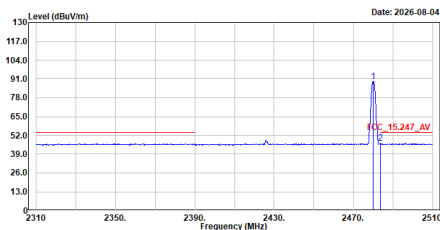


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	89.09	-----	-----	59.85	29.24	Average
2	2483.600	46.49	54.00	-7.51	17.25	29.24	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 1M_2480MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_2.4G Wireless 1M_2480MHz
Test by :Bob Chiu

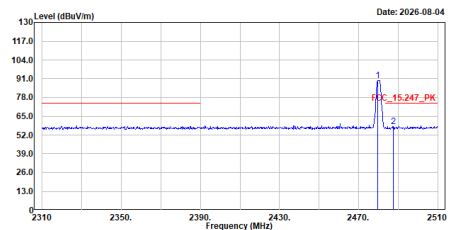


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2479.800	89.78	-----	-----	60.54	29.24	Peak
2	2487.400	57.97	74.00	-16.03	28.73	29.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2480MHz_V_Average

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_2.4G Wireless 2M_2480MHz
Test by :Bob Chiu

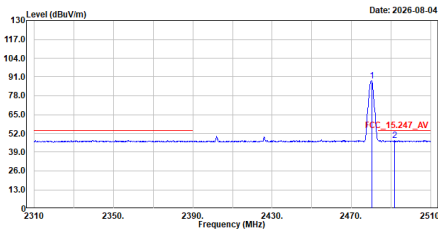


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.200	88.26	54.00	-6.76	59.02	29.24	Average
2	2491.800	47.24	54.00	-6.76	17.99	29.25	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_2.4G Wireless 2M_2480MHz_V_Peak

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_2.4G Wireless 2M_2480MHz
Test by :Bob Chiu

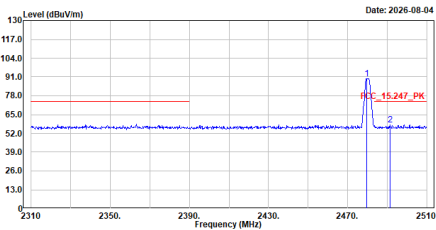

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2479.600	89.75	54.00	-16.05	60.51	29.24	Peak
2	2491.400	57.95	54.00	-16.05	28.70	29.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Worst-Case Emissions Above 18 GHz

