


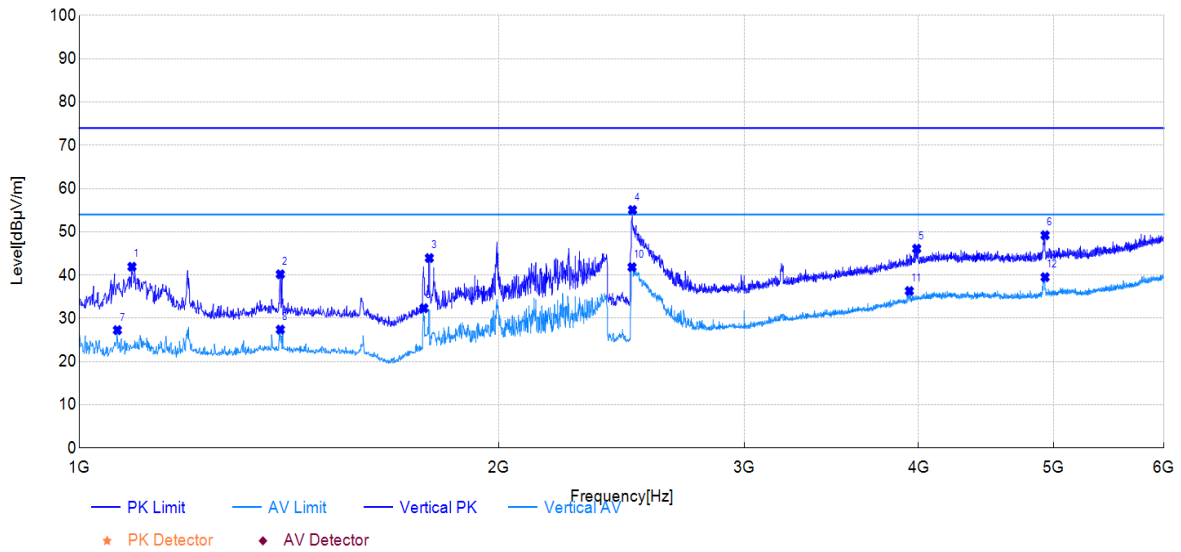


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1091.00	64.76	41.92	-22.84	74.00	32.08	150	67	PK	Vertical	PASS
2	1394.00	61.54	40.18	-21.36	74.00	33.82	150	86	PK	Vertical	PASS
3	1783.00	62.99	43.94	-19.05	74.00	30.06	150	86	PK	Vertical	PASS
4	2494.00	71.18	55.05	-16.13	74.00	18.95	150	89	PK	Vertical	PASS
5	3988.00	54.45	46.10	-8.35	74.00	27.90	150	116	PK	Vertical	PASS
6	4930.00	56.21	49.21	-7.00	74.00	24.79	150	301	PK	Vertical	PASS
7	1065.00	50.19	27.26	-22.93	54.00	26.74	150	48	AV	Vertical	PASS
8	1394.00	48.75	27.39	-21.36	54.00	26.61	150	86	AV	Vertical	PASS
9	1767.00	51.51	32.34	-19.17	54.00	21.66	150	126	AV	Vertical	PASS
10	2492.00	57.95	41.82	-16.13	54.00	12.18	150	60	AV	Vertical	PASS
11	3940.00	44.95	36.32	-8.63	54.00	17.68	150	149	AV	Vertical	PASS
12	4930.00	46.51	39.51	-7.00	54.00	14.49	150	304	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT20	Test Date:	2025-09-11
Test Channel:	01	Test Engineer:	Stone Zhang

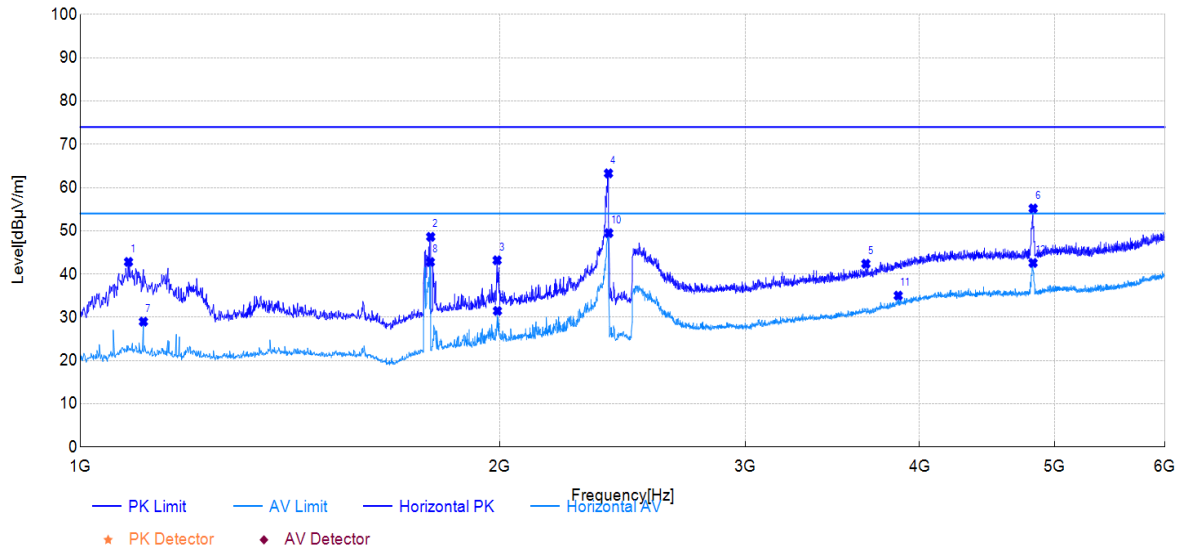

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1083.00	66.72	42.81	-23.91	74.00	31.19	150	155	PK	Horizontal	PASS
2	1784.00	68.23	48.61	-19.62	74.00	25.39	150	0	PK	Horizontal	PASS
3	1991.00	61.43	43.19	-18.24	74.00	30.81	150	87	PK	Horizontal	PASS
4	2393.00	79.62	63.28	-16.34	74.00	10.72	150	140	PK	Horizontal	PASS
5	3661.00	53.60	42.37	-11.23	74.00	31.63	150	49	PK	Horizontal	PASS
6	4826.00	61.88	55.17	-6.71	74.00	18.83	150	27	PK	Horizontal	PASS
7	1110.00	52.79	28.99	-23.80	54.00	25.01	150	155	AV	Horizontal	PASS
8	1783.00	62.40	42.78	-19.62	54.00	11.22	150	0	AV	Horizontal	PASS
9	1992.00	49.71	31.48	-18.23	54.00	22.52	150	174	AV	Horizontal	PASS
10	2394.00	65.80	49.47	-16.33	54.00	4.53	150	140	AV	Horizontal	PASS
11	3862.00	44.62	35.01	-9.61	54.00	18.99	150	234	AV	Horizontal	PASS
12	4825.00	49.28	42.57	-6.71	54.00	11.43	150	27	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

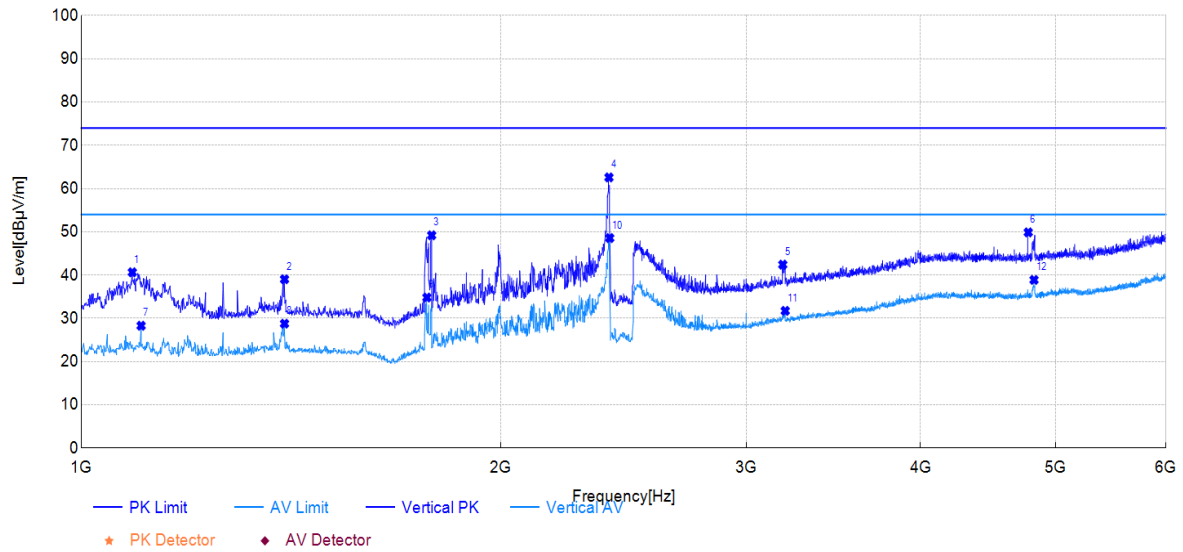


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1088.00	63.49	40.64	-22.85	74.00	33.36	150	55	PK	Vertical	PASS
2	1399.00	60.36	39.03	-21.33	74.00	34.97	150	80	PK	Vertical	PASS
3	1784.00	68.23	49.19	-19.04	74.00	24.81	150	76	PK	Vertical	PASS
4	2391.00	79.08	62.58	-16.50	74.00	11.42	150	275	PK	Vertical	PASS
5	3186.00	55.66	42.41	-13.25	74.00	31.59	150	106	PK	Vertical	PASS
6	4779.00	57.23	49.87	-7.36	74.00	24.13	150	268	PK	Vertical	PASS
7	1104.00	51.06	28.28	-22.78	54.00	25.72	150	194	AV	Vertical	PASS
8	1399.00	50.09	28.76	-21.33	54.00	25.24	150	80	AV	Vertical	PASS
9	1770.00	53.97	34.81	-19.16	54.00	19.19	150	162	AV	Vertical	PASS
10	2394.00	65.05	48.56	-16.49	54.00	5.44	150	275	AV	Vertical	PASS
11	3199.00	44.88	31.72	-13.16	54.00	22.28	150	106	AV	Vertical	PASS
12	4825.00	46.15	38.88	-7.27	54.00	15.12	150	120	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT20	Test Date:	2025-09-11
Test Channel:	06	Test Engineer:	Stone Zhang

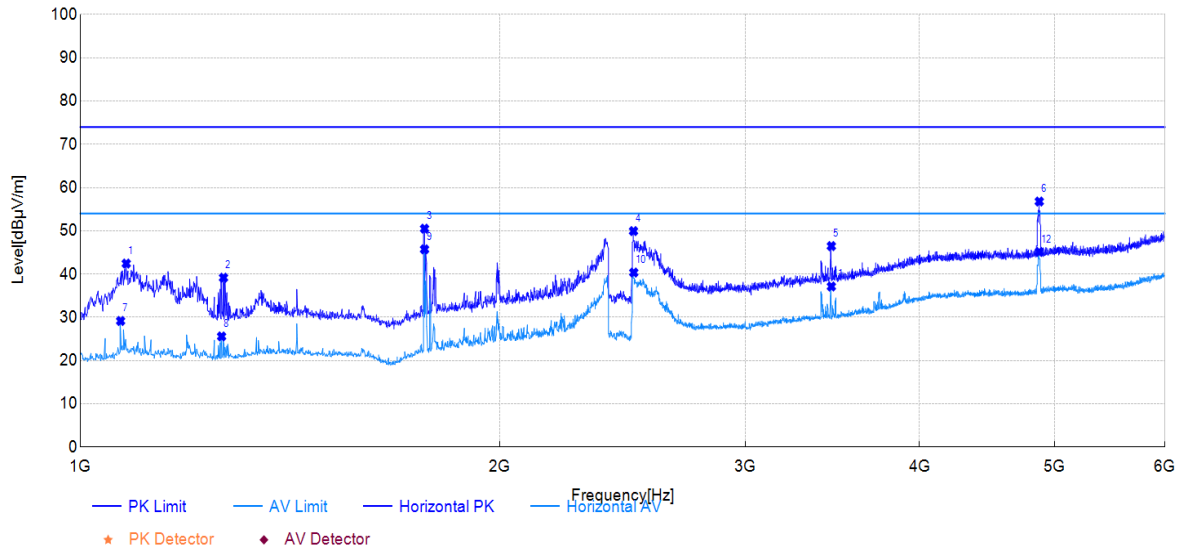

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1079.00	66.36	42.43	-23.93	74.00	31.57	150	154	PK	Horizontal	PASS
2	1267.00	62.22	39.15	-23.07	74.00	34.85	150	68	PK	Horizontal	PASS
3	1766.00	70.27	50.50	-19.77	74.00	23.50	150	315	PK	Horizontal	PASS
4	2494.00	65.77	49.94	-15.83	74.00	24.06	150	147	PK	Horizontal	PASS
5	3458.00	59.01	46.47	-12.54	74.00	27.53	150	79	PK	Horizontal	PASS
6	4875.00	63.35	56.78	-6.57	74.00	17.22	150	27	PK	Horizontal	PASS
7	1069.00	53.12	29.15	-23.97	54.00	24.85	150	124	AV	Horizontal	PASS
8	1263.00	48.68	25.58	-23.10	54.00	28.42	150	68	AV	Horizontal	PASS
9	1766.00	65.49	45.72	-19.77	54.00	8.28	150	312	AV	Horizontal	PASS
10	2495.00	56.17	40.35	-15.82	54.00	13.65	150	147	AV	Horizontal	PASS
11	3458.00	49.67	37.13	-12.54	54.00	16.87	150	79	AV	Horizontal	PASS
12	4875.00	51.69	45.12	-6.57	54.00	8.88	150	27	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

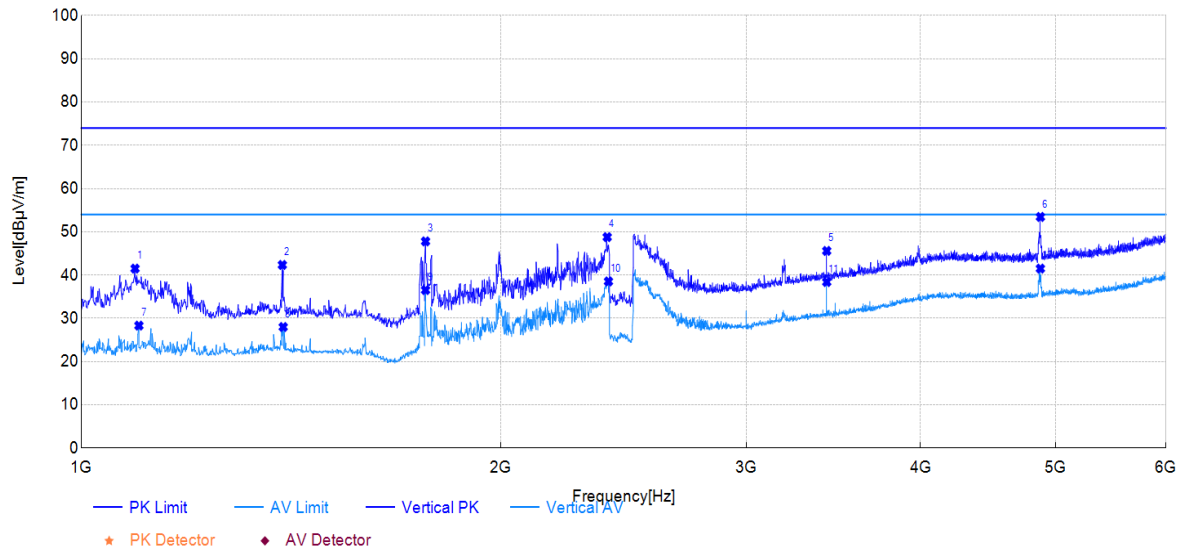


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1093.00	64.33	41.50	-22.83	74.00	32.50	150	63	PK	Vertical	PASS
2	1394.00	63.70	42.34	-21.36	74.00	31.66	150	94	PK	Vertical	PASS
3	1766.00	66.98	47.79	-19.19	74.00	26.21	150	359	PK	Vertical	PASS
4	2384.00	65.31	48.78	-16.53	74.00	25.22	150	75	PK	Vertical	PASS
5	3426.00	57.55	45.58	-11.97	74.00	28.42	150	1	PK	Vertical	PASS
6	4876.00	60.61	53.44	-7.17	74.00	20.56	150	124	PK	Vertical	PASS
7	1100.00	51.11	28.31	-22.80	54.00	25.69	150	72	AV	Vertical	PASS
8	1396.00	49.35	27.99	-21.36	54.00	26.01	150	86	AV	Vertical	PASS
9	1766.00	55.72	36.53	-19.19	54.00	17.47	150	359	AV	Vertical	PASS
10	2389.00	55.03	38.53	-16.50	54.00	15.47	150	75	AV	Vertical	PASS
11	3426.00	50.36	38.39	-11.97	54.00	15.61	150	1	AV	Vertical	PASS
12	4876.00	48.67	41.50	-7.17	54.00	12.50	150	120	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT20	Test Date:	2025-09-11
Test Channel:	11	Test Engineer:	Stone Zhang

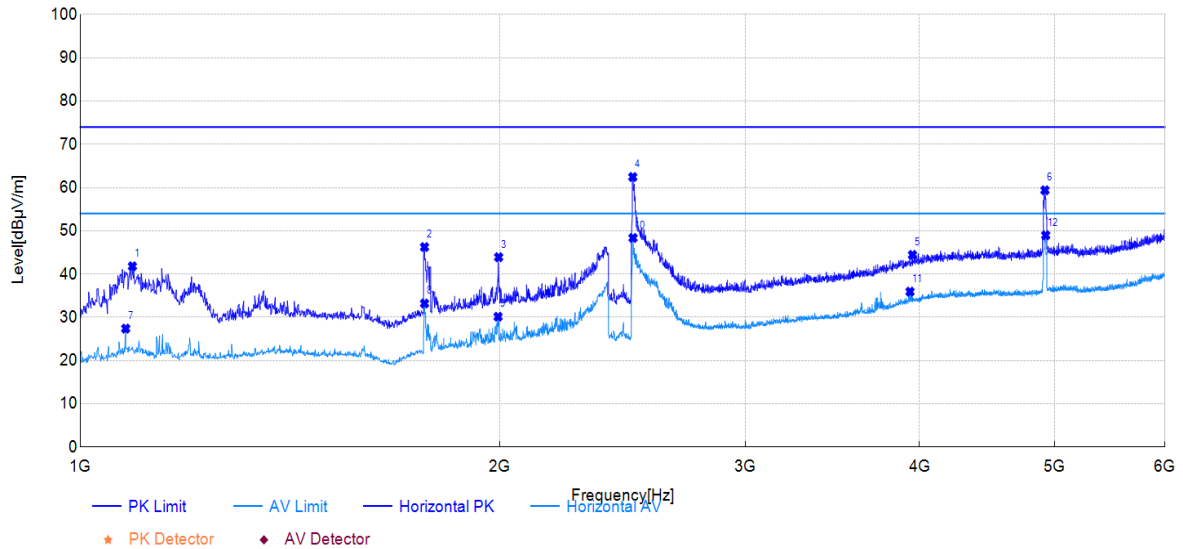

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1090.00	65.69	41.80	-23.89	74.00	32.20	150	155	PK	Horizontal	PASS
2	1766.00	66.02	46.25	-19.77	74.00	27.75	150	192	PK	Horizontal	PASS
3	1996.00	62.09	43.90	-18.19	74.00	30.10	150	91	PK	Horizontal	PASS
4	2491.00	78.29	62.45	-15.84	74.00	11.55	150	147	PK	Horizontal	PASS
5	3954.00	53.33	44.43	-8.90	74.00	29.57	150	298	PK	Horizontal	PASS
6	4921.00	65.78	59.38	-6.40	74.00	14.62	150	50	PK	Horizontal	PASS
7	1078.00	51.32	27.39	-23.93	54.00	26.61	150	185	AV	Horizontal	PASS
8	1766.00	52.97	33.20	-19.77	54.00	20.80	150	94	AV	Horizontal	PASS
9	1994.00	48.35	30.13	-18.22	54.00	23.87	150	94	AV	Horizontal	PASS
10	2492.00	64.19	48.35	-15.84	54.00	5.65	150	147	AV	Horizontal	PASS
11	3938.00	44.93	35.93	-9.00	54.00	18.07	150	136	AV	Horizontal	PASS
12	4927.00	55.33	48.96	-6.37	54.00	5.04	150	46	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

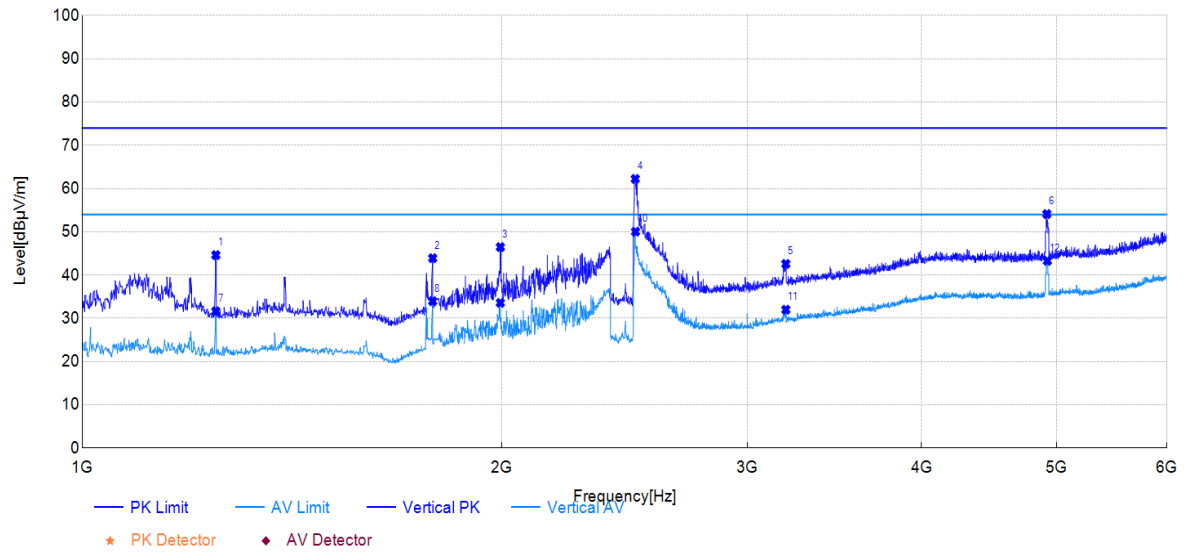


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1247.00	66.85	44.62	-22.23	74.00	29.38	150	82	PK	Vertical	PASS
2	1784.00	62.94	43.90	-19.04	74.00	30.10	150	263	PK	Vertical	PASS
3	1995.00	64.27	46.47	-17.80	74.00	27.53	150	77	PK	Vertical	PASS
4	2493.00	78.37	62.24	-16.13	74.00	11.76	150	255	PK	Vertical	PASS
5	3197.00	55.76	42.58	-13.18	74.00	31.42	150	109	PK	Vertical	PASS
6	4920.00	61.15	54.11	-7.04	74.00	19.89	150	127	PK	Vertical	PASS
7	1247.00	53.85	31.62	-22.23	54.00	22.38	150	82	AV	Vertical	PASS
8	1784.00	52.99	33.95	-19.04	54.00	20.05	150	263	AV	Vertical	PASS
9	1995.00	51.37	33.57	-17.80	54.00	20.43	150	270	AV	Vertical	PASS
10	2494.00	66.16	50.03	-16.13	54.00	3.97	150	278	AV	Vertical	PASS
11	3197.00	45.17	31.99	-13.18	54.00	22.01	150	109	AV	Vertical	PASS
12	4924.00	50.32	43.29	-7.03	54.00	10.71	150	123	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT40	Test Date:	2025-09-11
Test Channel:	3	Test Engineer:	Stone Zhang

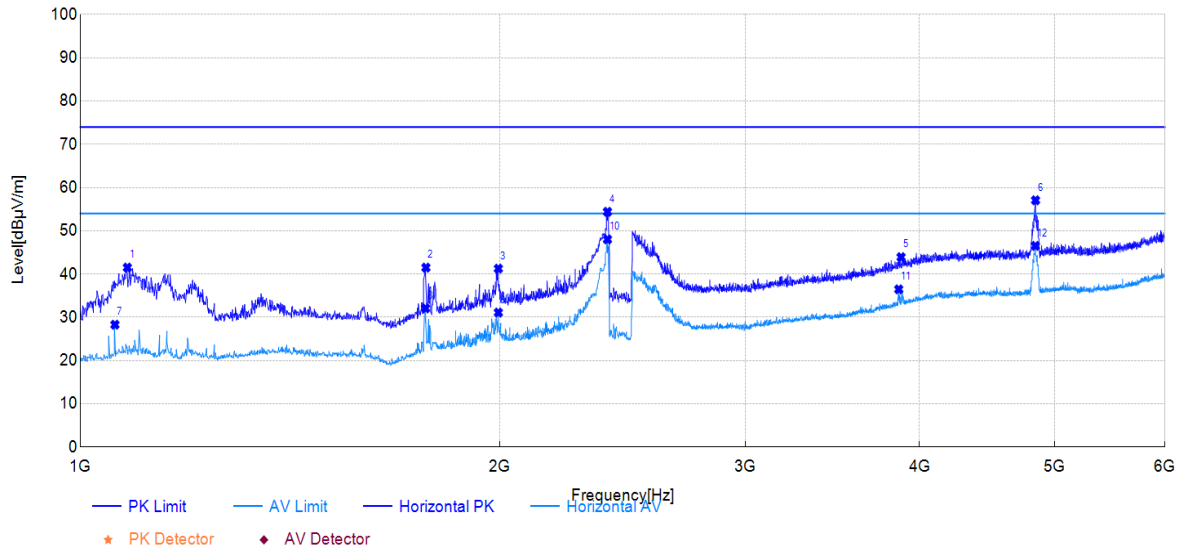

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1081.00	65.42	41.50	-23.92	74.00	32.50	150	154	PK	Horizontal	PASS
2	1770.00	61.23	41.49	-19.74	74.00	32.51	150	20	PK	Horizontal	PASS
3	1995.00	59.46	41.26	-18.20	74.00	32.74	150	284	PK	Horizontal	PASS
4	2389.00	70.76	54.40	-16.36	74.00	19.60	150	173	PK	Horizontal	PASS
5	3880.00	53.35	43.91	-9.44	74.00	30.09	150	177	PK	Horizontal	PASS
6	4845.00	63.72	57.06	-6.66	74.00	16.94	150	23	PK	Horizontal	PASS
7	1059.00	52.30	28.29	-24.01	54.00	25.71	150	73	AV	Horizontal	PASS
8	1769.00	51.83	32.08	-19.75	54.00	21.92	150	32	AV	Horizontal	PASS
9	1995.00	49.30	31.10	-18.20	54.00	22.90	150	140	AV	Horizontal	PASS
10	2389.00	64.38	48.02	-16.36	54.00	5.98	150	177	AV	Horizontal	PASS
11	3865.00	46.06	36.47	-9.59	54.00	17.53	150	87	AV	Horizontal	PASS
12	4844.00	53.19	46.52	-6.67	54.00	7.48	150	35	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

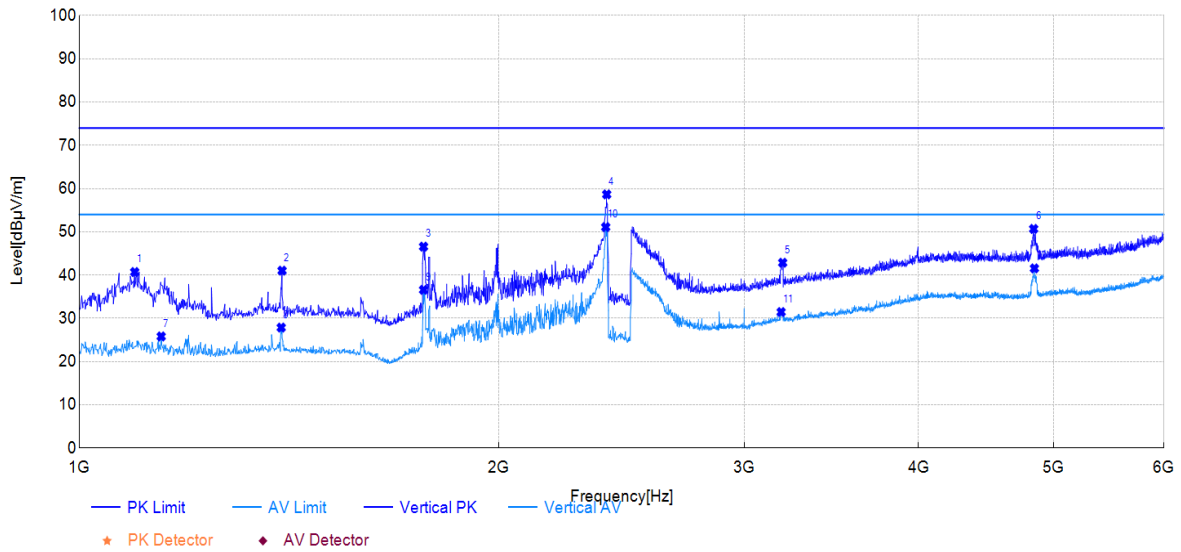


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1096.00	63.52	40.70	-22.82	74.00	33.30	150	63	PK	Vertical	PASS
2	1398.00	62.36	41.02	-21.34	74.00	32.98	150	92	PK	Vertical	PASS
3	1766.00	65.76	46.57	-19.19	74.00	27.43	150	226	PK	Vertical	PASS
4	2390.00	75.15	58.65	-16.50	74.00	15.35	150	89	PK	Vertical	PASS
5	3196.00	56.03	42.85	-13.18	74.00	31.15	150	107	PK	Vertical	PASS
6	4838.00	57.92	50.67	-7.25	74.00	23.33	150	121	PK	Vertical	PASS
7	1145.00	48.46	25.81	-22.65	54.00	28.19	150	73	AV	Vertical	PASS
8	1396.00	49.22	27.86	-21.36	54.00	26.14	150	80	AV	Vertical	PASS
9	1766.00	55.77	36.58	-19.19	54.00	17.42	150	118	AV	Vertical	PASS
10	2386.00	67.60	51.09	-16.51	54.00	2.91	150	77	AV	Vertical	PASS
11	3188.00	44.68	31.45	-13.23	54.00	22.55	150	110	AV	Vertical	PASS
12	4844.00	48.78	41.54	-7.24	54.00	12.46	150	125	AV	Vertical	PASS

Note: (1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT40	Test Date:	2025-09-11
Test Channel:	6	Test Engineer:	Stone Zhang

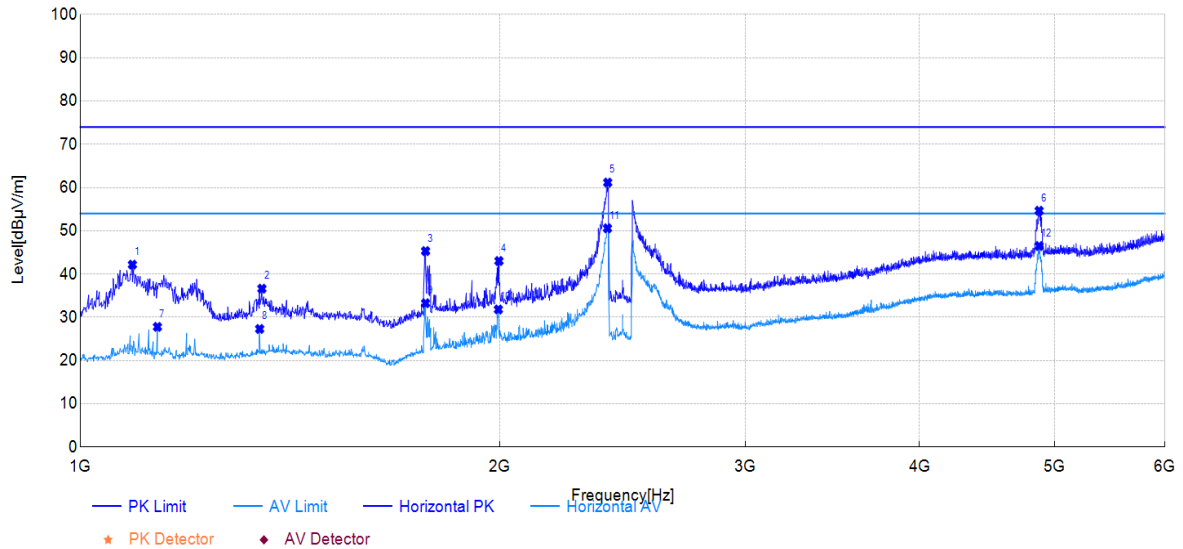

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1090.00	66.07	42.18	-23.89	74.00	31.82	150	46	PK	Horizontal	PASS
2	1350.00	59.16	36.62	-22.54	74.00	37.38	150	153	PK	Horizontal	PASS
3	1769.00	65.07	45.32	-19.75	74.00	28.68	150	220	PK	Horizontal	PASS
4	1997.00	61.21	43.02	-18.19	74.00	30.98	150	176	PK	Horizontal	PASS
5	2390.00	77.51	61.16	-16.35	74.00	12.84	150	176	PK	Horizontal	PASS
6	4874.00	61.22	54.64	-6.58	74.00	19.36	150	50	PK	Horizontal	PASS
7	1136.00	51.49	27.79	-23.70	54.00	26.21	150	146	AV	Horizontal	PASS
8	1345.00	49.88	27.31	-22.57	54.00	26.69	150	149	AV	Horizontal	PASS
9	1769.00	53.01	33.26	-19.75	54.00	20.74	150	224	AV	Horizontal	PASS
10	1995.00	50.01	31.81	-18.20	54.00	22.19	150	139	AV	Horizontal	PASS
11	2389.00	66.94	50.58	-16.36	54.00	3.42	150	176	AV	Horizontal	PASS
12	4874.00	53.07	46.49	-6.58	54.00	7.51	150	50	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

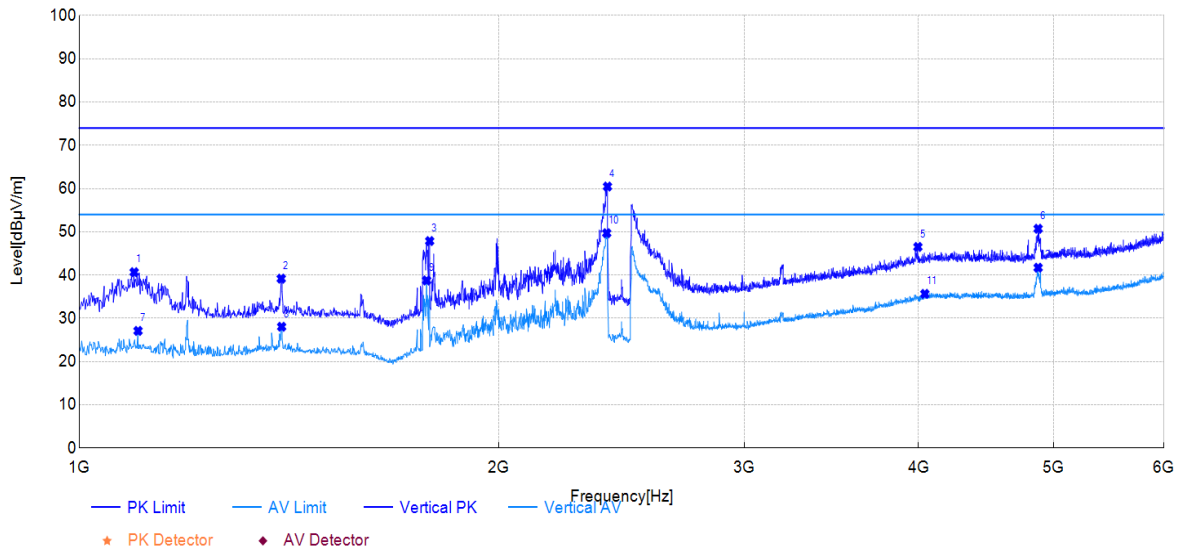


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1095.00	63.48	40.66	-22.82	74.00	33.34	150	60	PK	Vertical	PASS
2	1396.00	60.53	39.17	-21.36	74.00	34.83	150	74	PK	Vertical	PASS
3	1784.00	66.91	47.87	-19.04	74.00	26.13	150	360	PK	Vertical	PASS
4	2393.00	76.96	60.47	-16.49	74.00	13.53	150	275	PK	Vertical	PASS
5	3996.00	54.81	46.51	-8.30	74.00	27.49	150	104	PK	Vertical	PASS
6	4874.00	57.89	50.71	-7.18	74.00	23.29	150	310	PK	Vertical	PASS
7	1102.00	49.88	27.09	-22.79	54.00	26.91	150	185	AV	Vertical	PASS
8	1397.00	49.40	28.05	-21.35	54.00	25.95	150	89	AV	Vertical	PASS
9	1775.00	57.87	38.76	-19.11	54.00	15.24	150	165	AV	Vertical	PASS
10	2390.00	66.19	49.69	-16.50	54.00	4.31	150	71	AV	Vertical	PASS
11	4042.00	43.78	35.65	-8.13	54.00	18.35	150	108	AV	Vertical	PASS
12	4874.00	48.88	41.70	-7.18	54.00	12.30	150	303	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT40	Test Date:	2025-09-11
Test Channel:	9	Test Engineer:	Stone Zhang

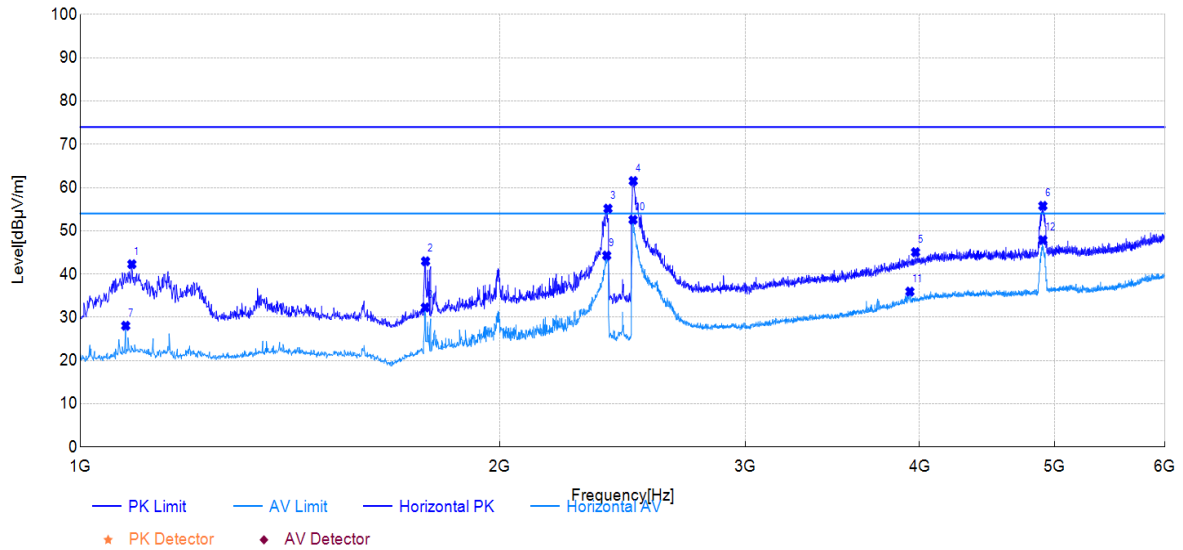

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1089.00	66.17	42.28	-23.89	74.00	31.72	150	150	PK	Horizontal	PASS
2	1769.00	62.71	42.96	-19.75	74.00	31.04	150	332	PK	Horizontal	PASS
3	2391.00	71.49	55.14	-16.35	74.00	18.86	150	183	PK	Horizontal	PASS
4	2493.00	77.36	61.52	-15.84	74.00	12.48	150	164	PK	Horizontal	PASS
5	3974.00	53.80	45.05	-8.75	74.00	28.95	150	210	PK	Horizontal	PASS
6	4904.00	62.25	55.77	-6.48	74.00	18.23	150	57	PK	Horizontal	PASS
7	1078.00	51.97	28.04	-23.93	54.00	25.96	150	180	AV	Horizontal	PASS
8	1768.00	52.02	32.27	-19.75	54.00	21.73	150	332	AV	Horizontal	PASS
9	2386.00	60.65	44.28	-16.37	54.00	9.72	150	168	AV	Horizontal	PASS
10	2492.00	68.39	52.55	-15.84	54.00	1.45	150	146	AV	Horizontal	PASS
11	3937.00	44.95	35.94	-9.01	54.00	18.06	150	134	AV	Horizontal	PASS
12	4904.00	54.33	47.85	-6.48	54.00	6.15	150	20	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

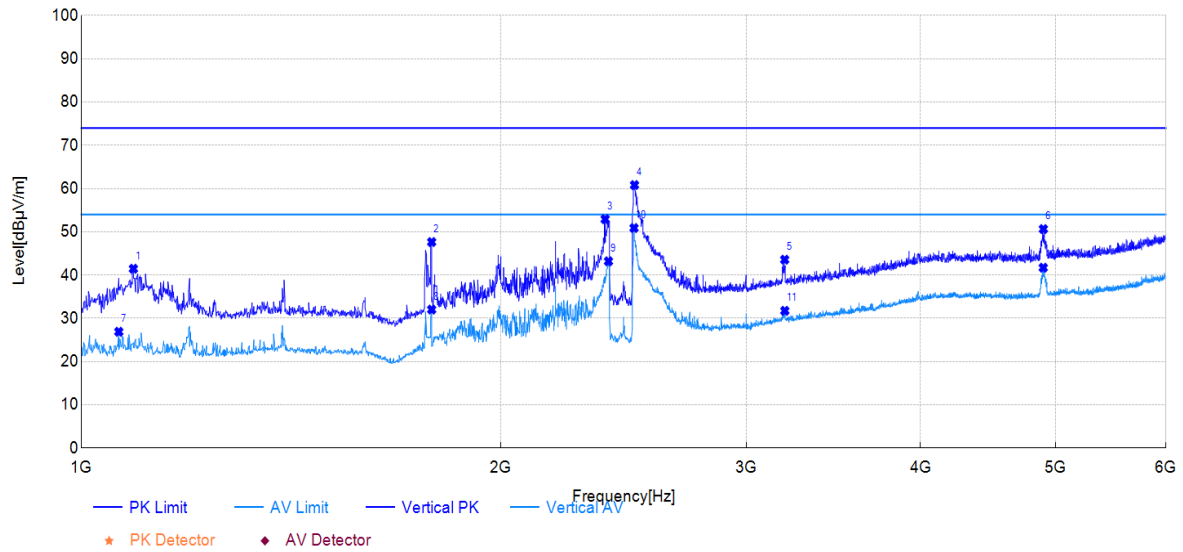

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1090.00	64.30	41.46	-22.84	74.00	32.54	150	57	PK	Vertical	PASS
2	1784.00	66.68	47.64	-19.04	74.00	26.36	150	359	PK	Vertical	PASS
3	2376.00	69.47	52.92	-16.55	74.00	21.08	150	80	PK	Vertical	PASS
4	2494.00	76.95	60.82	-16.13	74.00	13.18	150	278	PK	Vertical	PASS
5	3196.00	56.74	43.56	-13.18	74.00	30.44	150	109	PK	Vertical	PASS
6	4900.00	57.76	50.64	-7.12	74.00	23.36	150	126	PK	Vertical	PASS
7	1064.00	49.82	26.89	-22.93	54.00	27.11	150	278	AV	Vertical	PASS
8	1784.00	51.06	32.02	-19.04	54.00	21.98	150	359	AV	Vertical	PASS
9	2389.00	59.69	43.19	-16.50	54.00	10.81	150	75	AV	Vertical	PASS
10	2492.00	67.01	50.88	-16.13	54.00	3.12	150	288	AV	Vertical	PASS
11	3197.00	44.91	31.73	-13.18	54.00	22.27	150	109	AV	Vertical	PASS
12	4899.00	48.82	41.70	-7.12	54.00	12.30	150	126	AV	Vertical	PASS

Note: (1) Level=Reading+Factor

(2) Margin=Limit-Level

6GHz-18GHz


Test Mode:	802.11b	Test Date:	2025-09-11
Test Channel:	01	Test Engineer:	Stone Zhang

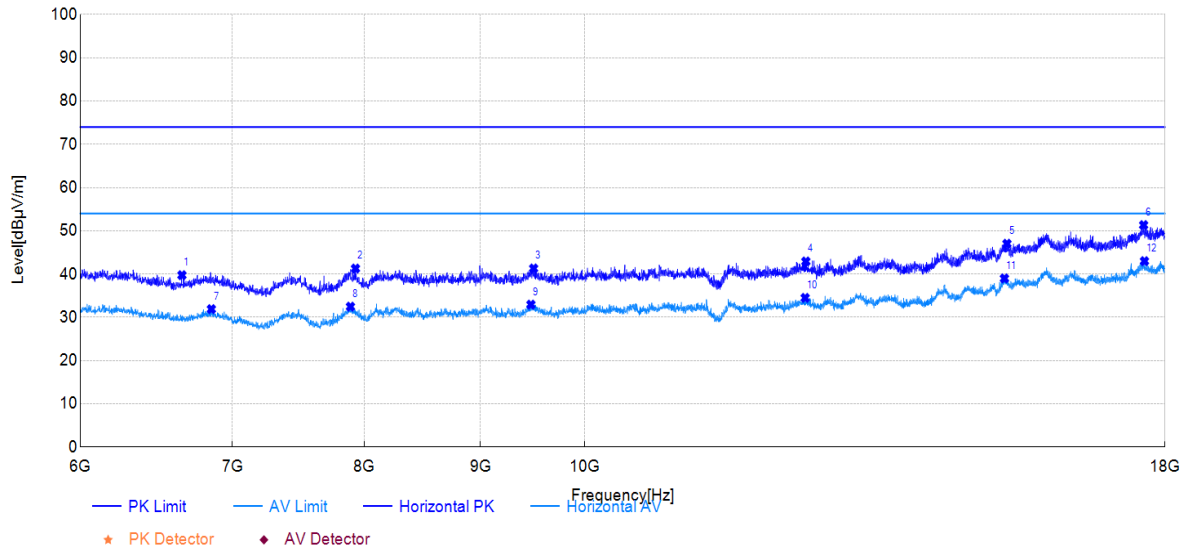

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6651.00	45.50	39.74	-5.76	74.00	34.26	150	274	PK	Horizontal	PASS
2	7929.00	42.39	41.27	-1.12	74.00	32.73	150	252	PK	Horizontal	PASS
3	9496.50	41.28	41.30	0.02	74.00	32.70	150	121	PK	Horizontal	PASS
4	12511.50	40.48	42.91	2.43	74.00	31.09	150	0	PK	Horizontal	PASS
5	15337.50	39.88	47.02	7.14	74.00	26.98	150	84	PK	Horizontal	PASS
6	17614.50	37.44	51.33	13.89	74.00	22.67	150	235	PK	Horizontal	PASS
7	6852.00	36.53	31.89	-4.64	54.00	22.11	150	349	AV	Horizontal	PASS
8	7888.50	33.66	32.46	-1.20	54.00	21.54	150	223	AV	Horizontal	PASS
9	9471.00	33.11	32.93	-0.18	54.00	21.07	150	0	AV	Horizontal	PASS
10	12502.50	32.05	34.49	2.44	54.00	19.51	150	267	AV	Horizontal	PASS
11	15298.50	31.72	38.99	7.27	54.00	15.01	150	279	AV	Horizontal	PASS
12	17629.50	29.19	42.99	13.80	54.00	11.01	150	0	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

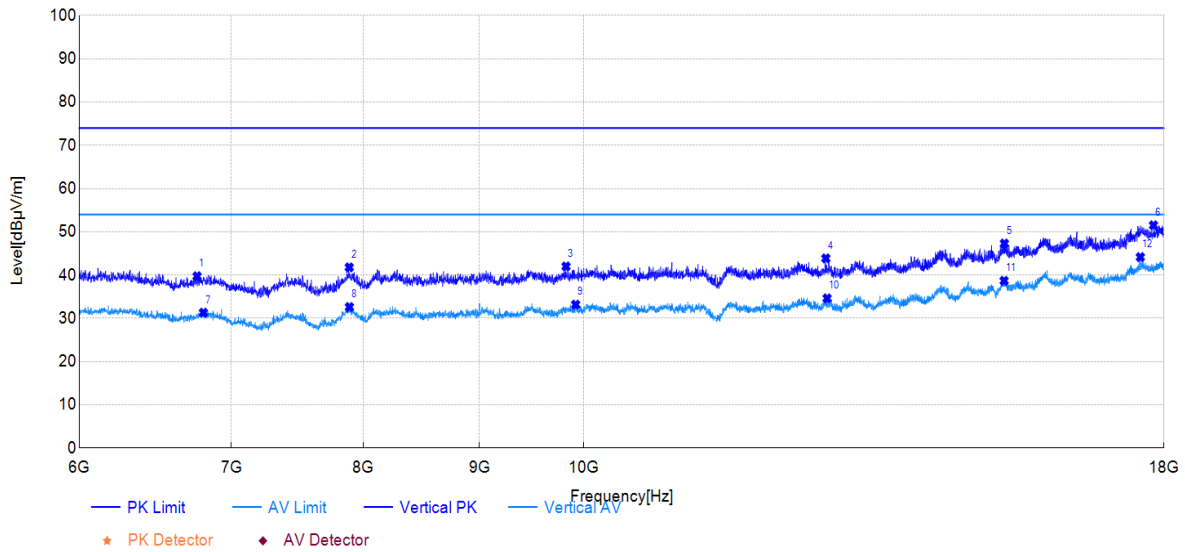


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6760.50	44.84	39.73	-5.11	74.00	34.27	150	8	PK	Vertical	PASS
2	7887.00	43.02	41.78	-1.24	74.00	32.22	150	0	PK	Vertical	PASS
3	9823.50	41.95	42.00	0.05	74.00	32.00	150	304	PK	Vertical	PASS
4	12780.00	42.07	43.86	1.79	74.00	30.14	150	142	PK	Vertical	PASS
5	15313.50	40.28	47.30	7.02	74.00	26.70	150	73	PK	Vertical	PASS
6	17809.50	37.00	51.51	14.51	74.00	22.49	150	252	PK	Vertical	PASS
7	6804.00	36.07	31.30	-4.77	54.00	22.70	150	288	AV	Vertical	PASS
8	7888.50	33.81	32.61	-1.20	54.00	21.39	150	317	AV	Vertical	PASS
9	9919.50	33.09	33.16	0.07	54.00	20.84	150	233	AV	Vertical	PASS
10	12796.50	32.75	34.62	1.87	54.00	19.38	150	353	AV	Vertical	PASS
11	15309.00	31.63	38.68	7.05	54.00	15.32	150	208	AV	Vertical	PASS
12	17574.00	29.90	44.15	14.25	54.00	9.85	150	342	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11b	Test Date:	2025-09-11
Test Channel:	06	Test Engineer:	Stone Zhang

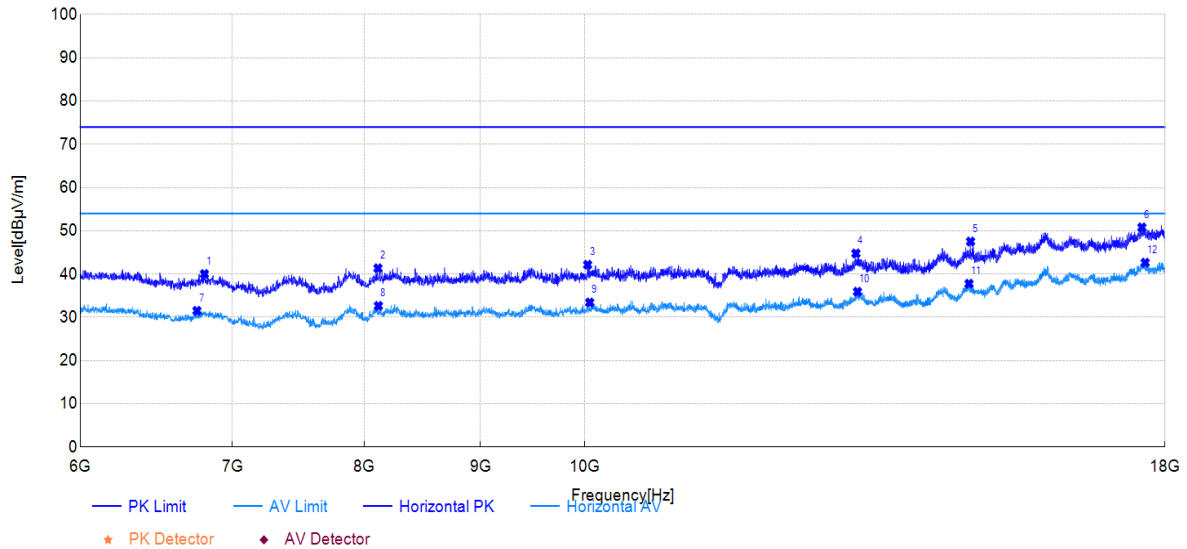

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6804.00	44.89	40.01	-4.88	74.00	33.99	150	0	PK	Horizontal	PASS
2	8112.00	42.41	41.34	-1.07	74.00	32.66	150	301	PK	Horizontal	PASS
3	10030.50	42.18	42.15	-0.03	74.00	31.85	150	104	PK	Horizontal	PASS
4	13162.50	41.52	44.76	3.24	74.00	29.24	150	3	PK	Horizontal	PASS
5	14782.50	42.08	47.52	5.44	74.00	26.48	150	243	PK	Horizontal	PASS
6	17584.50	36.95	50.79	13.84	74.00	23.21	150	119	PK	Horizontal	PASS
7	6753.00	36.83	31.50	-5.33	54.00	22.50	150	104	AV	Horizontal	PASS
8	8115.00	33.72	32.64	-1.08	54.00	21.36	150	0	AV	Horizontal	PASS
9	10051.50	33.46	33.42	-0.04	54.00	20.58	150	309	AV	Horizontal	PASS
10	13183.50	32.55	35.91	3.36	54.00	18.09	150	321	AV	Horizontal	PASS
11	14760.00	32.35	37.77	5.42	54.00	16.23	150	243	AV	Horizontal	PASS
12	17643.00	28.92	42.63	13.71	54.00	11.37	150	24	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

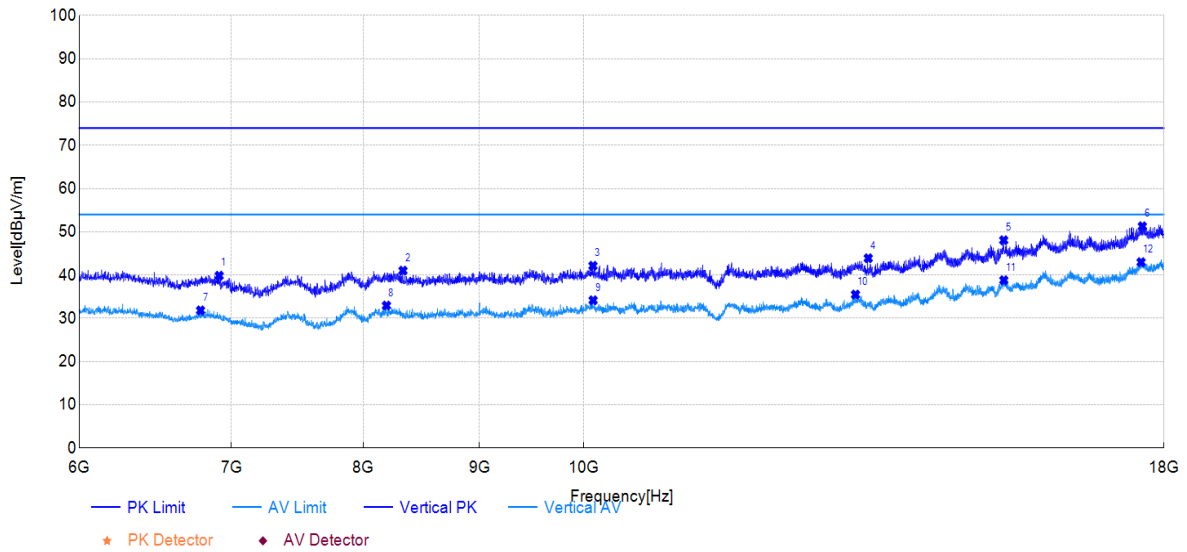


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6913.50	44.25	39.85	-4.40	74.00	34.15	150	106	PK	Vertical	PASS
2	8328.00	42.14	41.02	-1.12	74.00	32.98	150	310	PK	Vertical	PASS
3	10095.00	41.72	42.14	0.42	74.00	31.86	150	48	PK	Vertical	PASS
4	13341.00	41.68	43.89	2.21	74.00	30.11	150	160	PK	Vertical	PASS
5	15303.00	40.98	48.05	7.07	74.00	25.95	150	196	PK	Vertical	PASS
6	17610.00	36.84	51.28	14.44	74.00	22.72	150	360	PK	Vertical	PASS
7	6784.50	36.74	31.83	-4.91	54.00	22.17	150	221	AV	Vertical	PASS
8	8190.00	34.36	32.94	-1.42	54.00	21.06	150	217	AV	Vertical	PASS
9	10096.50	33.75	34.16	0.41	54.00	19.84	150	360	AV	Vertical	PASS
10	13170.00	32.68	35.49	2.81	54.00	18.51	150	152	AV	Vertical	PASS
11	15304.50	31.74	38.80	7.06	54.00	15.20	150	278	AV	Vertical	PASS
12	17587.50	28.59	42.97	14.38	54.00	11.03	150	3	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11b	Test Date:	2025-09-11
Test Channel:	11	Test Engineer:	Stone Zhang

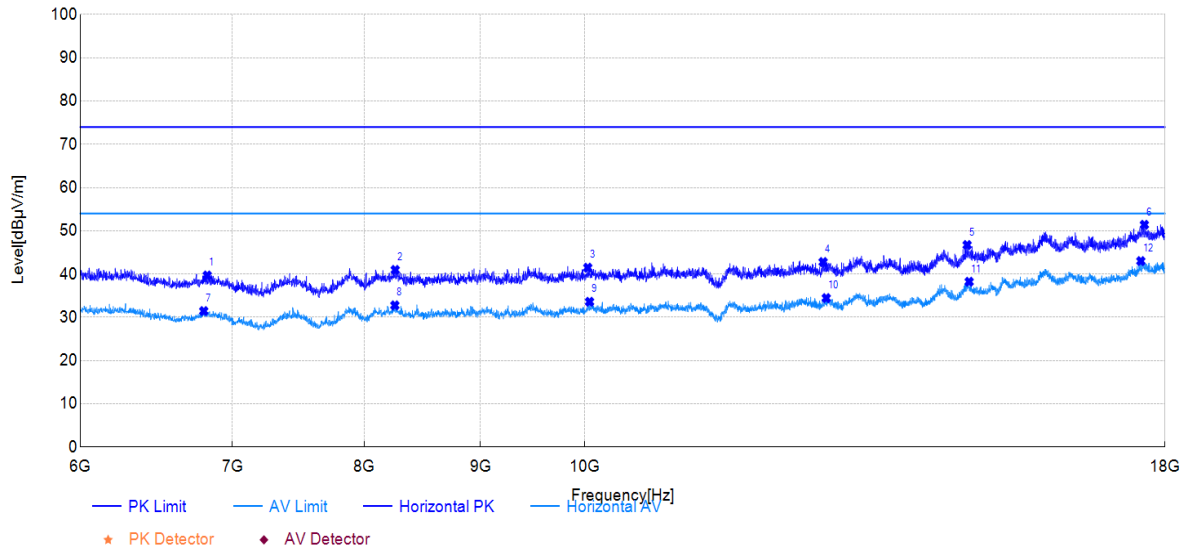

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6823.50	44.46	39.67	-4.79	74.00	34.33	150	77	PK	Horizontal	PASS
2	8254.50	42.27	40.96	-1.31	74.00	33.04	150	28	PK	Horizontal	PASS
3	10032.00	41.50	41.47	-0.03	74.00	32.53	150	329	PK	Horizontal	PASS
4	12732.00	41.11	42.78	1.67	74.00	31.22	150	1	PK	Horizontal	PASS
5	14731.50	41.32	46.72	5.40	74.00	27.28	150	0	PK	Horizontal	PASS
6	17628.00	37.59	51.40	13.81	74.00	22.60	150	360	PK	Horizontal	PASS
7	6799.50	36.35	31.44	-4.91	54.00	22.56	150	110	AV	Horizontal	PASS
8	8251.50	34.07	32.76	-1.31	54.00	21.24	150	69	AV	Horizontal	PASS
9	10050.00	33.63	33.59	-0.04	54.00	20.41	150	329	AV	Horizontal	PASS
10	12772.50	32.52	34.44	1.92	54.00	19.56	150	1	AV	Horizontal	PASS
11	14761.50	32.80	38.22	5.42	54.00	15.78	150	213	AV	Horizontal	PASS
12	17565.00	29.35	43.00	13.65	54.00	11.00	150	324	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

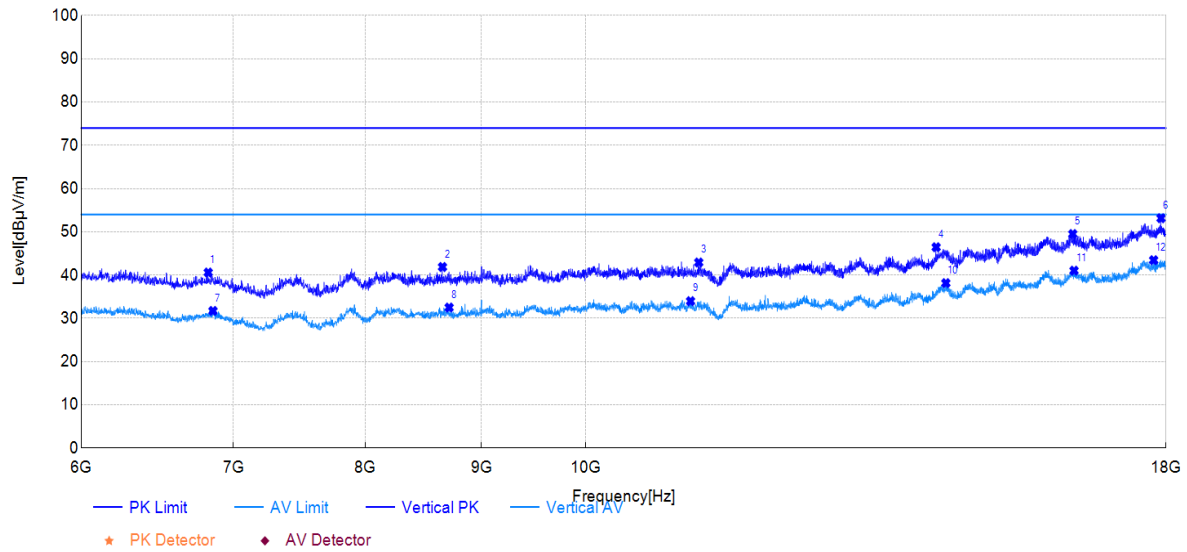


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6823.50	45.27	40.59	-4.68	74.00	33.41	150	29	PK	Vertical	PASS
2	8650.50	43.07	41.87	-1.20	74.00	32.13	150	141	PK	Vertical	PASS
3	11214.00	41.90	42.91	1.01	74.00	31.09	150	162	PK	Vertical	PASS
4	14262.00	41.51	46.44	4.93	74.00	27.56	150	125	PK	Vertical	PASS
5	16378.50	39.87	49.50	9.63	74.00	24.50	150	284	PK	Vertical	PASS
6	17910.00	38.21	53.14	14.93	74.00	20.86	150	211	PK	Vertical	PASS
7	6856.50	36.24	31.71	-4.53	54.00	22.29	150	292	AV	Vertical	PASS
8	8709.00	33.60	32.49	-1.11	54.00	21.51	150	51	AV	Vertical	PASS
9	11121.00	33.11	33.97	0.86	54.00	20.03	150	137	AV	Vertical	PASS
10	14403.00	32.56	38.14	5.58	54.00	15.86	150	22	AV	Vertical	PASS
11	16399.50	31.30	41.02	9.72	54.00	12.98	150	125	AV	Vertical	PASS
12	17776.50	29.11	43.44	14.33	54.00	10.56	150	230	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11g	Test Date:	2025-09-11
Test Channel:	01	Test Engineer:	Stone Zhang

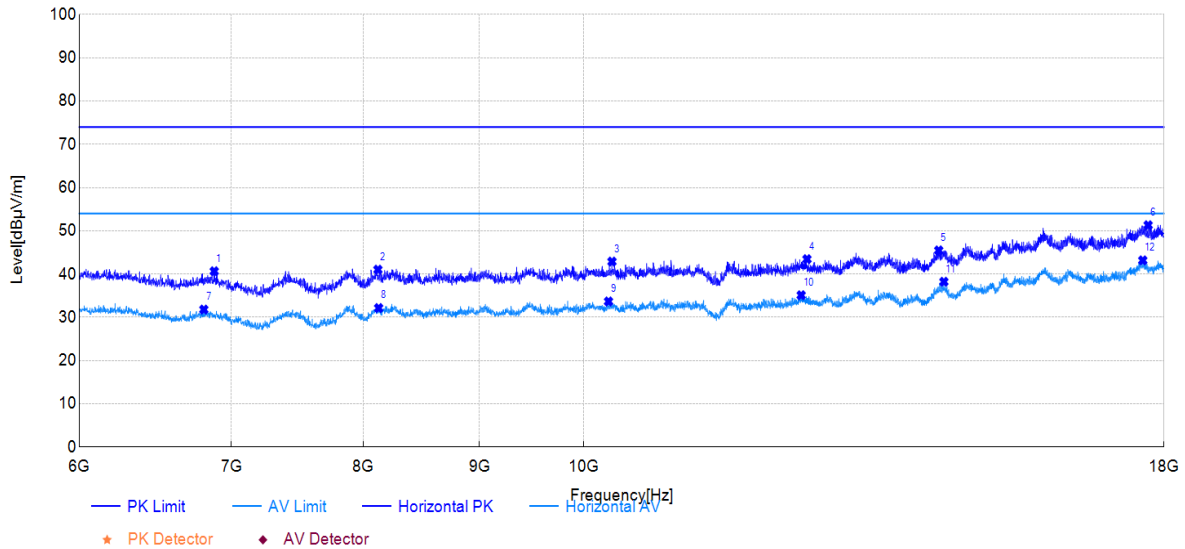

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6879.00	45.15	40.65	-4.50	74.00	33.35	150	94	PK	Horizontal	PASS
2	8119.50	42.13	41.02	-1.11	74.00	32.98	150	10	PK	Horizontal	PASS
3	10291.50	42.84	42.88	0.04	74.00	31.12	150	106	PK	Horizontal	PASS
4	12538.50	41.07	43.44	2.37	74.00	30.56	150	321	PK	Horizontal	PASS
5	14328.00	40.61	45.47	4.86	74.00	28.53	150	360	PK	Horizontal	PASS
6	17713.50	37.86	51.30	13.44	74.00	22.70	150	247	PK	Horizontal	PASS
7	6807.00	36.66	31.79	-4.87	54.00	22.21	150	330	AV	Horizontal	PASS
8	8125.50	33.27	32.14	-1.13	54.00	21.86	150	223	AV	Horizontal	PASS
9	10255.50	33.65	33.66	0.01	54.00	20.34	150	56	AV	Horizontal	PASS
10	12465.00	32.72	35.11	2.39	54.00	18.89	150	130	AV	Horizontal	PASS
11	14403.00	33.07	38.22	5.15	54.00	15.78	150	258	AV	Horizontal	PASS
12	17617.50	29.29	43.16	13.87	54.00	10.84	150	247	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

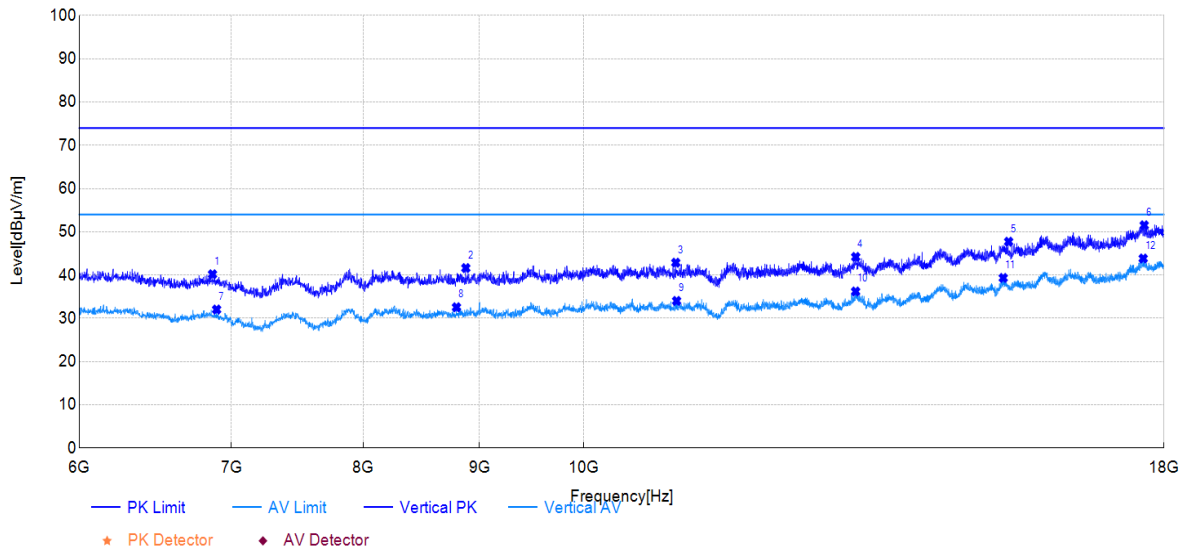


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6867.00	44.67	40.18	-4.49	74.00	33.82	150	225	PK	Vertical	PASS
2	8875.50	42.77	41.62	-1.15	74.00	32.38	150	242	PK	Vertical	PASS
3	10978.50	41.52	42.86	1.34	74.00	31.14	150	132	PK	Vertical	PASS
4	13173.00	41.36	44.19	2.83	74.00	29.81	150	189	PK	Vertical	PASS
5	15379.50	41.03	47.71	6.68	74.00	26.29	150	97	PK	Vertical	PASS
6	17643.00	37.27	51.51	14.24	74.00	22.49	150	136	PK	Vertical	PASS
7	6895.50	36.38	32.03	-4.35	54.00	21.97	150	129	AV	Vertical	PASS
8	8791.50	33.60	32.55	-1.05	54.00	21.45	150	66	AV	Vertical	PASS
9	10987.50	32.65	34.02	1.37	54.00	19.98	150	230	AV	Vertical	PASS
10	13171.50	33.38	36.20	2.82	54.00	17.80	150	35	AV	Vertical	PASS
11	15295.50	32.31	39.33	7.02	54.00	14.67	150	70	AV	Vertical	PASS
12	17625.00	29.48	43.83	14.35	54.00	10.17	150	97	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11g	Test Date:	2025-09-11
Test Channel:	06	Test Engineer:	Stone Zhang

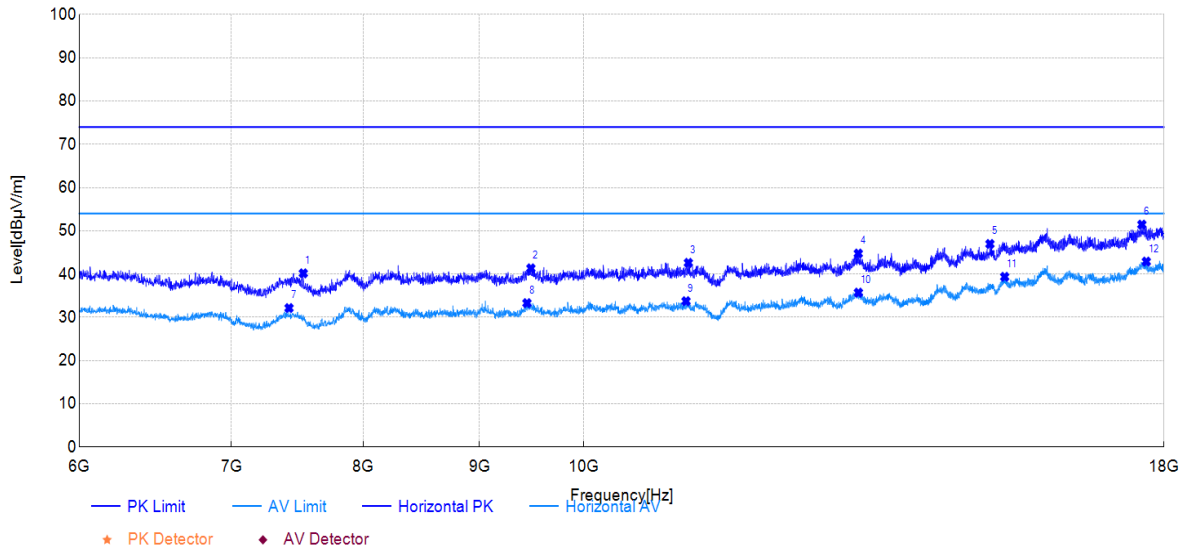

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7528.50	43.10	40.17	-2.93	74.00	33.83	150	99	PK	Horizontal	PASS
2	9480.00	41.42	41.32	-0.10	74.00	32.68	150	241	PK	Horizontal	PASS
3	11119.50	41.91	42.59	0.68	74.00	31.41	150	146	PK	Horizontal	PASS
4	13207.50	41.36	44.75	3.39	74.00	29.25	150	290	PK	Horizontal	PASS
5	15091.50	41.19	46.96	5.77	74.00	27.04	150	325	PK	Horizontal	PASS
6	17601.00	37.47	51.44	13.97	74.00	22.56	150	37	PK	Horizontal	PASS
7	7420.50	34.93	32.14	-2.79	54.00	21.86	150	108	AV	Horizontal	PASS
8	9442.50	33.68	33.28	-0.40	54.00	20.72	150	340	AV	Horizontal	PASS
9	11092.50	33.02	33.73	0.71	54.00	20.27	150	248	AV	Horizontal	PASS
10	13209.00	32.32	35.70	3.38	54.00	18.30	150	306	AV	Horizontal	PASS
11	15318.00	32.15	39.36	7.21	54.00	14.64	150	302	AV	Horizontal	PASS
12	17680.50	29.39	42.88	13.49	54.00	11.12	150	325	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

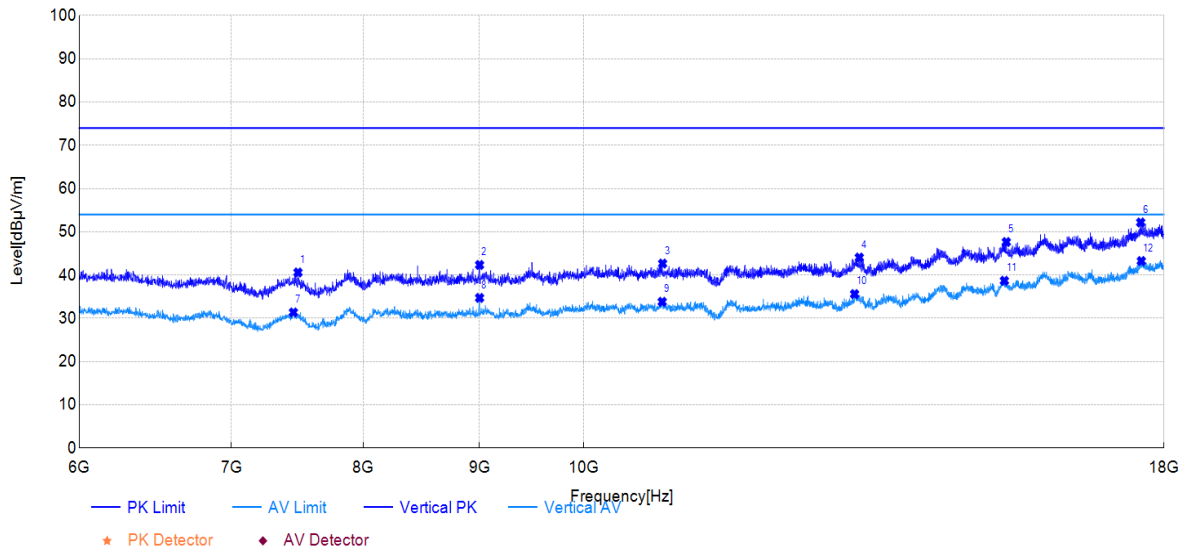


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7488.00	43.58	40.60	-2.98	74.00	33.40	150	82	PK	Vertical	PASS
2	9000.00	43.12	42.34	-0.78	74.00	31.66	150	82	PK	Vertical	PASS
3	10833.00	41.80	42.66	0.86	74.00	31.34	150	186	PK	Vertical	PASS
4	13221.00	41.26	44.05	2.79	74.00	29.95	150	32	PK	Vertical	PASS
5	15343.50	40.78	47.64	6.86	74.00	26.36	150	252	PK	Vertical	PASS
6	17580.00	37.86	52.17	14.31	74.00	21.83	150	8	PK	Vertical	PASS
7	7453.50	34.25	31.36	-2.89	54.00	22.64	150	359	AV	Vertical	PASS
8	9000.00	35.50	34.72	-0.78	54.00	19.28	150	82	AV	Vertical	PASS
9	10828.50	32.97	33.81	0.84	54.00	20.19	150	206	AV	Vertical	PASS
10	13158.00	32.86	35.60	2.74	54.00	18.40	150	280	AV	Vertical	PASS
11	15313.50	31.66	38.68	7.02	54.00	15.32	150	148	AV	Vertical	PASS
12	17592.00	28.83	43.25	14.42	54.00	10.75	150	355	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11g	Test Date:	2025-09-11
Test Channel:	11	Test Engineer:	Stone Zhang

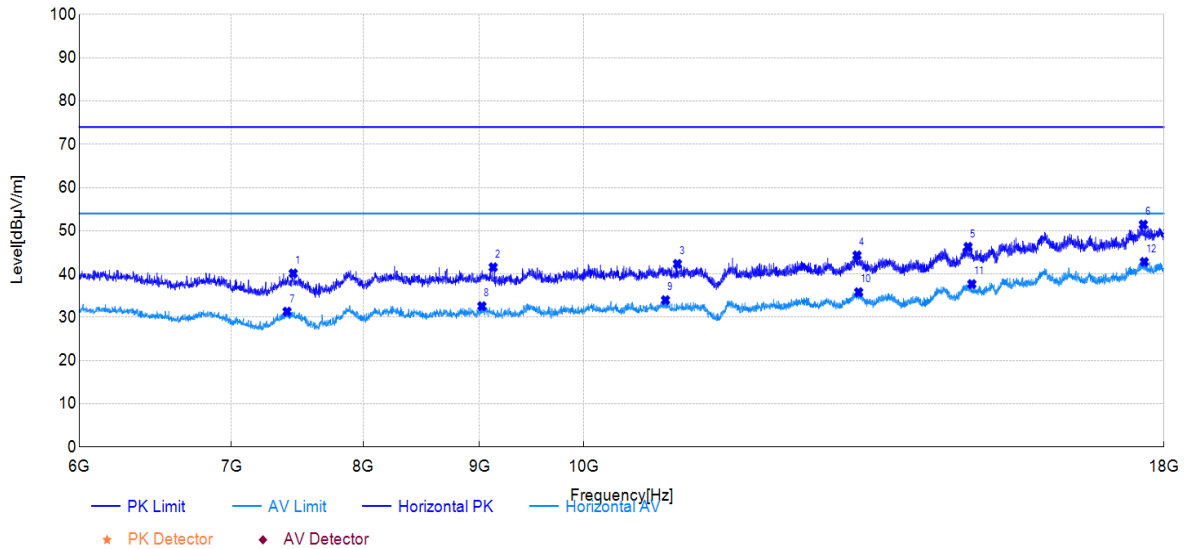

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7452.00	43.02	40.14	-2.88	74.00	33.86	150	30	PK	Horizontal	PASS
2	9124.50	42.45	41.57	-0.88	74.00	32.43	150	93	PK	Horizontal	PASS
3	10996.50	41.04	42.34	1.30	74.00	31.66	150	54	PK	Horizontal	PASS
4	13191.00	40.92	44.32	3.40	74.00	29.68	150	352	PK	Horizontal	PASS
5	14760.00	40.87	46.29	5.42	74.00	27.71	150	281	PK	Horizontal	PASS
6	17626.50	37.62	51.44	13.82	74.00	22.56	150	174	PK	Horizontal	PASS
7	7405.50	34.06	31.31	-2.75	54.00	22.69	150	340	AV	Horizontal	PASS
8	9021.00	33.35	32.57	-0.78	54.00	21.43	150	50	AV	Horizontal	PASS
9	10864.50	33.15	33.97	0.82	54.00	20.03	150	7	AV	Horizontal	PASS
10	13212.00	32.45	35.80	3.35	54.00	18.20	150	90	AV	Horizontal	PASS
11	14817.00	32.33	37.68	5.35	54.00	16.32	150	205	AV	Horizontal	PASS
12	17644.50	29.10	42.81	13.71	54.00	11.19	150	241	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

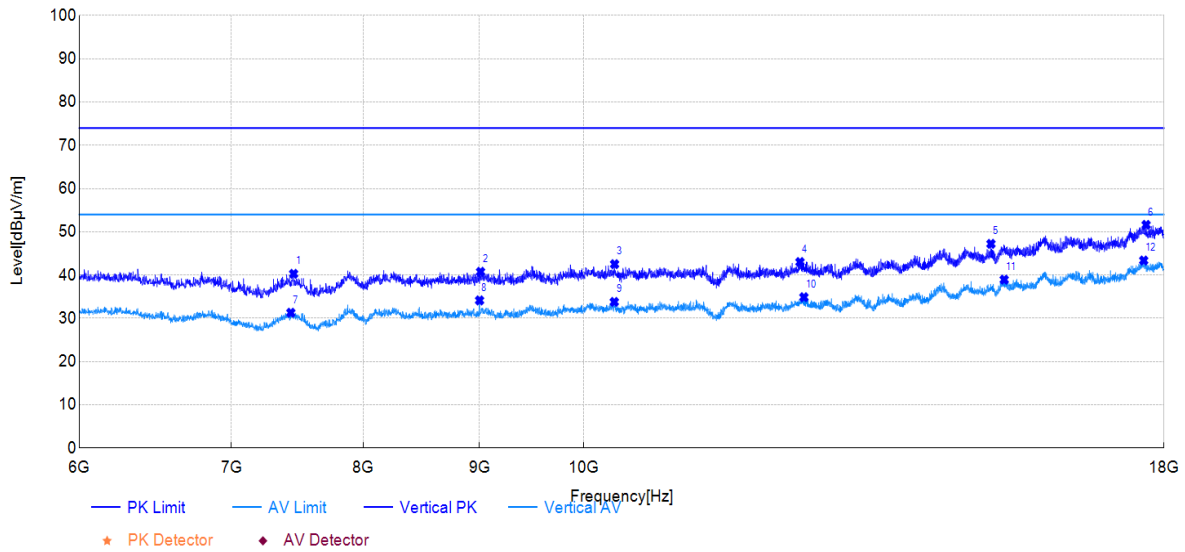


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7455.00	43.18	40.29	-2.89	74.00	33.71	150	219	PK	Vertical	PASS
2	9009.00	41.53	40.75	-0.78	74.00	33.25	150	167	PK	Vertical	PASS
3	10318.50	42.07	42.52	0.45	74.00	31.48	150	360	PK	Vertical	PASS
4	12450.00	40.55	43.01	2.46	74.00	30.99	150	227	PK	Vertical	PASS
5	15106.50	41.42	47.22	5.80	74.00	26.78	150	15	PK	Vertical	PASS
6	17677.50	37.56	51.61	14.05	74.00	22.39	150	360	PK	Vertical	PASS
7	7434.00	34.12	31.29	-2.83	54.00	22.71	150	27	AV	Vertical	PASS
8	9000.00	34.92	34.14	-0.78	54.00	19.86	150	117	AV	Vertical	PASS
9	10315.50	33.34	33.79	0.45	54.00	20.21	150	164	AV	Vertical	PASS
10	12499.50	32.33	34.88	2.55	54.00	19.12	150	354	AV	Vertical	PASS
11	15310.50	31.90	38.94	7.04	54.00	15.06	150	18	AV	Vertical	PASS
12	17634.00	29.07	43.37	14.30	54.00	10.63	150	236	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT20	Test Date:	2025-09-11
Test Channel:	01	Test Engineer:	Stone Zhang

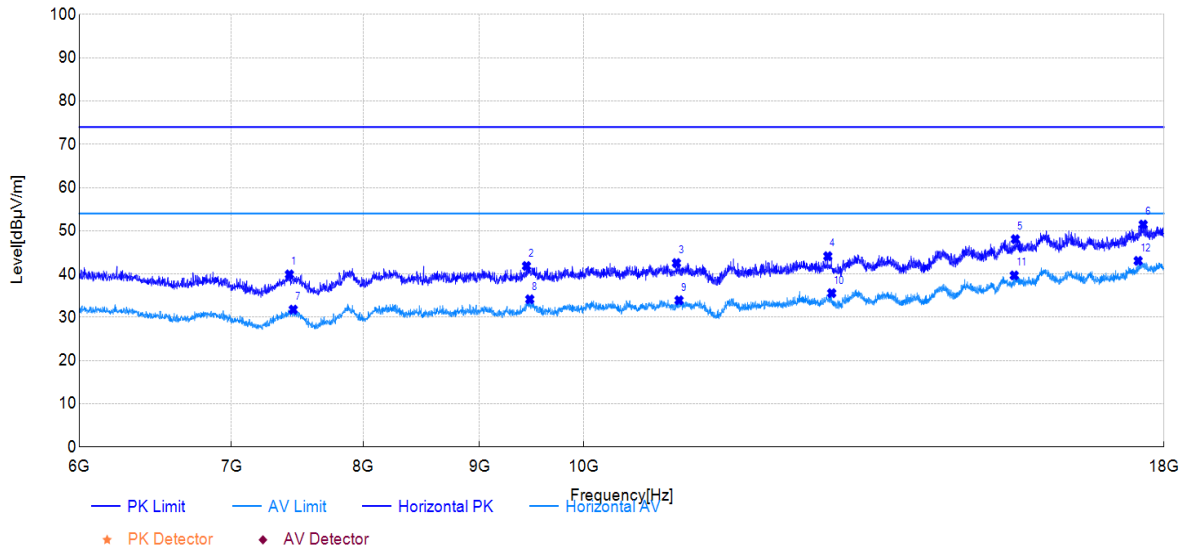

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7423.50	42.71	39.91	-2.80	74.00	34.09	150	78	PK	Horizontal	PASS
2	9438.00	42.29	41.86	-0.43	74.00	32.14	150	145	PK	Horizontal	PASS
3	10986.00	41.28	42.54	1.26	74.00	31.46	150	149	PK	Horizontal	PASS
4	12805.50	42.06	44.13	2.07	74.00	29.87	150	331	PK	Horizontal	PASS
5	15484.50	40.59	48.06	7.47	74.00	25.94	150	128	PK	Horizontal	PASS
6	17625.00	37.62	51.45	13.83	74.00	22.55	150	61	PK	Horizontal	PASS
7	7452.00	34.66	31.78	-2.88	54.00	22.22	150	198	AV	Horizontal	PASS
8	9469.50	34.35	34.16	-0.19	54.00	19.84	150	0	AV	Horizontal	PASS
9	11014.50	32.71	33.93	1.22	54.00	20.07	150	91	AV	Horizontal	PASS
10	12856.50	33.72	35.58	1.86	54.00	18.42	150	295	AV	Horizontal	PASS
11	15466.50	32.33	39.68	7.35	54.00	14.32	150	29	AV	Horizontal	PASS
12	17535.00	29.68	43.05	13.37	54.00	10.95	150	0	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

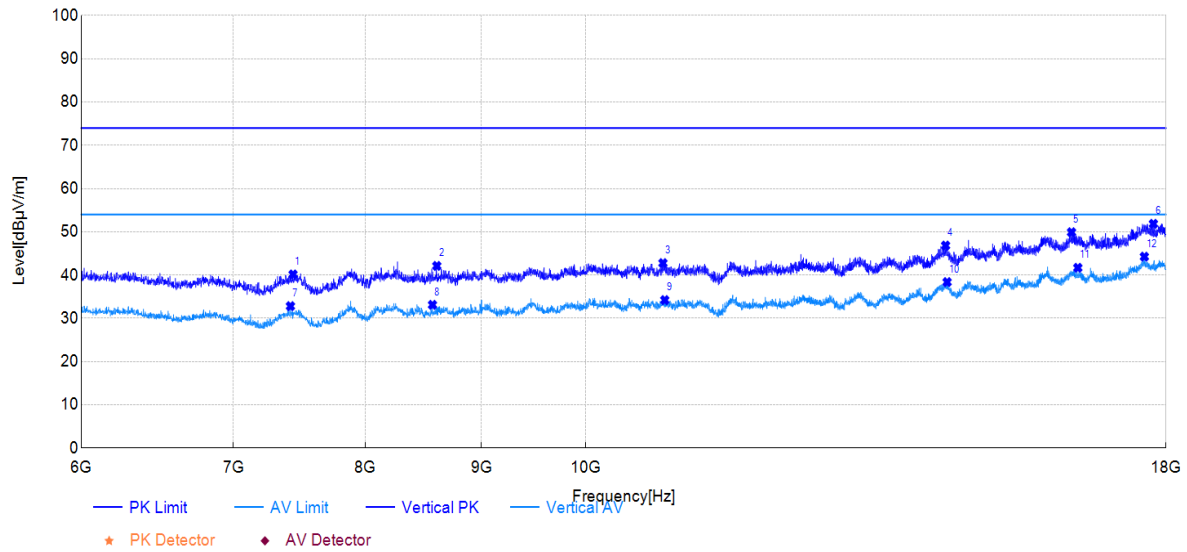


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7435.50	42.98	40.15	-2.83	74.00	33.85	150	256	PK	Vertical	PASS
2	8601.00	43.39	42.11	-1.28	74.00	31.89	150	221	PK	Vertical	PASS
3	10815.00	41.97	42.76	0.79	74.00	31.24	150	205	PK	Vertical	PASS
4	14398.50	41.21	46.82	5.61	74.00	27.18	150	88	PK	Vertical	PASS
5	16357.50	40.36	49.90	9.54	74.00	24.10	150	11	PK	Vertical	PASS
6	17772.00	37.55	51.85	14.30	74.00	22.15	150	205	PK	Vertical	PASS
7	7416.00	35.59	32.81	-2.78	54.00	21.19	150	172	AV	Vertical	PASS
8	8563.50	34.51	33.11	-1.40	54.00	20.89	150	360	AV	Vertical	PASS
9	10834.50	33.35	34.21	0.86	54.00	19.79	150	49	AV	Vertical	PASS
10	14421.00	32.96	38.37	5.41	54.00	15.63	150	335	AV	Vertical	PASS
11	16462.50	32.20	41.68	9.48	54.00	12.32	150	113	AV	Vertical	PASS
12	17610.00	29.81	44.25	14.44	54.00	9.75	150	344	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT20	Test Date:	2025-09-11
Test Channel:	06	Test Engineer:	Stone Zhang

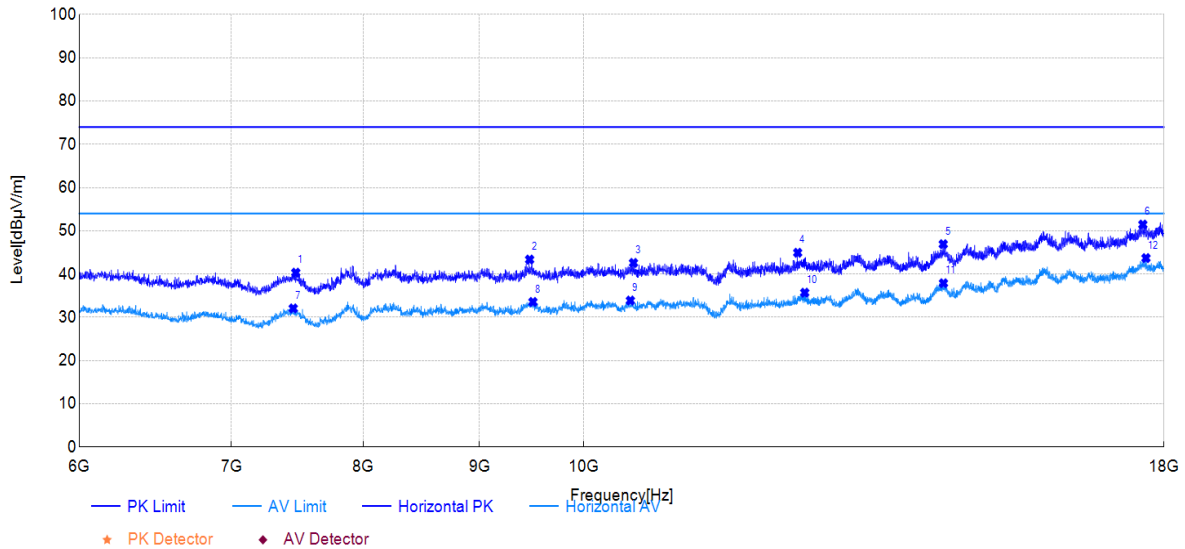

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7471.50	43.26	40.32	-2.94	74.00	33.68	150	90	PK	Horizontal	PASS
2	9468.00	43.55	43.35	-0.20	74.00	30.65	150	130	PK	Horizontal	PASS
3	10518.00	41.73	42.58	0.85	74.00	31.42	150	114	PK	Horizontal	PASS
4	12421.50	42.61	44.93	2.32	74.00	29.07	150	139	PK	Horizontal	PASS
5	14394.00	41.77	46.91	5.14	74.00	27.09	150	122	PK	Horizontal	PASS
6	17619.00	37.59	51.45	13.86	74.00	22.55	150	155	PK	Horizontal	PASS
7	7452.00	34.93	32.05	-2.88	54.00	21.95	150	90	AV	Horizontal	PASS
8	9499.50	33.50	33.55	0.05	54.00	20.45	150	340	AV	Horizontal	PASS
9	10485.00	33.11	33.88	0.77	54.00	20.12	150	332	AV	Horizontal	PASS
10	12510.00	33.26	35.69	2.43	54.00	18.31	150	42	AV	Horizontal	PASS
11	14397.00	32.73	37.88	5.15	54.00	16.12	150	5	AV	Horizontal	PASS
12	17674.50	30.17	43.69	13.52	54.00	10.31	150	360	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

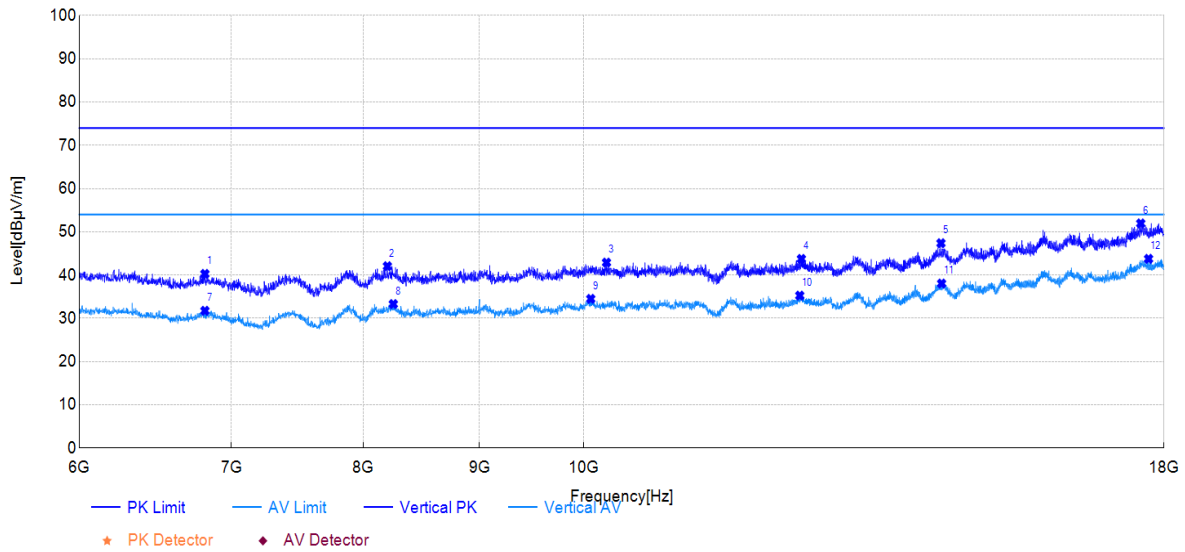


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6814.50	44.99	40.27	-4.72	74.00	33.73	150	212	PK	Vertical	PASS
2	8197.50	43.50	42.05	-1.45	74.00	31.95	150	359	PK	Vertical	PASS
3	10234.50	42.50	42.89	0.39	74.00	31.11	150	225	PK	Vertical	PASS
4	12468.00	41.24	43.73	2.49	74.00	30.27	150	75	PK	Vertical	PASS
5	14361.00	41.87	47.36	5.49	74.00	26.64	150	344	PK	Vertical	PASS
6	17581.50	37.61	51.94	14.33	74.00	22.06	150	113	PK	Vertical	PASS
7	6814.50	36.46	31.74	-4.72	54.00	22.26	150	325	AV	Vertical	PASS
8	8247.00	34.61	33.29	-1.32	54.00	20.71	150	167	AV	Vertical	PASS
9	10072.50	34.07	34.50	0.43	54.00	19.50	150	12	AV	Vertical	PASS
10	12447.00	32.79	35.25	2.46	54.00	18.75	150	333	AV	Vertical	PASS
11	14370.00	32.52	38.04	5.52	54.00	15.96	150	130	AV	Vertical	PASS
12	17721.00	29.72	43.75	14.03	54.00	10.25	150	280	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT20	Test Date:	2025-09-11
Test Channel:	11	Test Engineer:	Stone Zhang

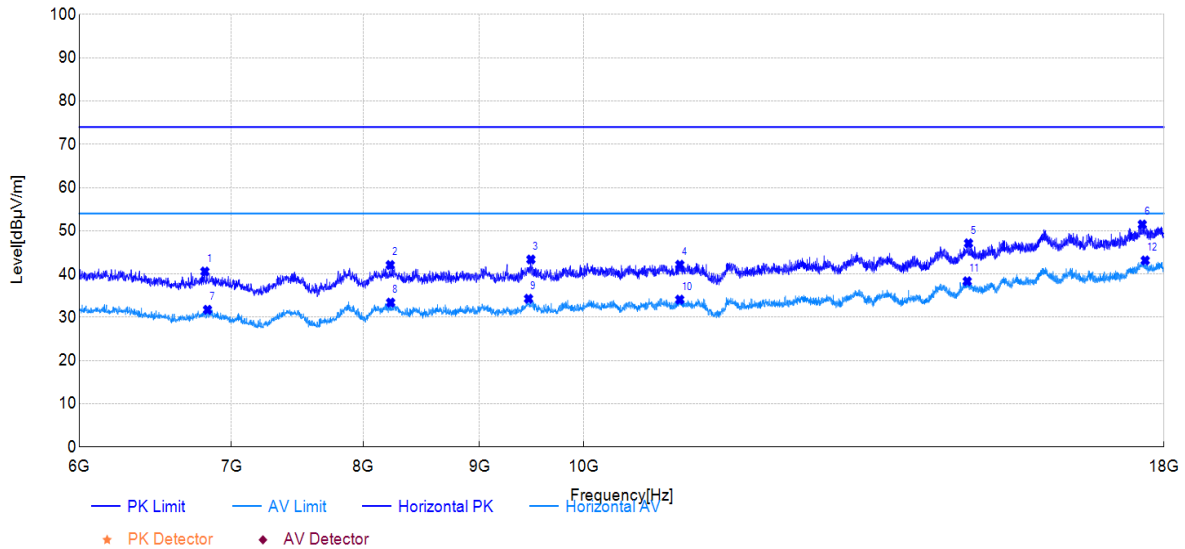

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6814.50	45.41	40.58	-4.83	74.00	33.42	150	0	PK	Horizontal	PASS
2	8221.50	43.48	42.08	-1.40	74.00	31.92	150	180	PK	Horizontal	PASS
3	9480.00	43.47	43.37	-0.10	74.00	30.63	150	171	PK	Horizontal	PASS
4	11023.50	40.99	42.15	1.16	74.00	31.85	150	203	PK	Horizontal	PASS
5	14767.50	41.68	47.11	5.43	74.00	26.89	150	80	PK	Horizontal	PASS
6	17608.50	37.53	51.46	13.93	74.00	22.54	150	116	PK	Horizontal	PASS
7	6832.50	36.48	31.74	-4.74	54.00	22.26	150	218	AV	Horizontal	PASS
8	8224.50	34.79	33.40	-1.39	54.00	20.60	150	226	AV	Horizontal	PASS
9	9457.50	34.57	34.29	-0.28	54.00	19.71	150	242	AV	Horizontal	PASS
10	11022.00	32.92	34.08	1.16	54.00	19.92	150	191	AV	Horizontal	PASS
11	14748.00	32.91	38.33	5.42	54.00	15.67	150	226	AV	Horizontal	PASS
12	17661.00	29.54	43.14	13.60	54.00	10.86	150	234	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

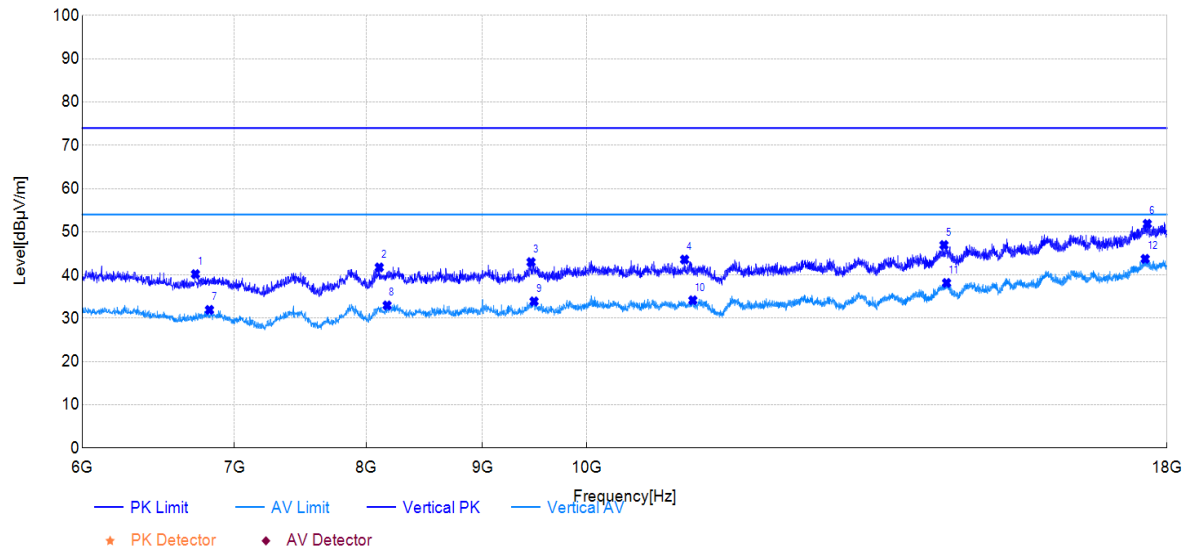


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6729.00	45.59	40.21	-5.38	74.00	33.79	150	206	PK	Vertical	PASS
2	8106.00	42.81	41.77	-1.04	74.00	32.23	150	328	PK	Vertical	PASS
3	9453.00	43.31	42.99	-0.32	74.00	31.01	150	360	PK	Vertical	PASS
4	11043.00	42.44	43.59	1.15	74.00	30.41	150	242	PK	Vertical	PASS
5	14361.00	41.45	46.94	5.49	74.00	27.06	150	347	PK	Vertical	PASS
6	17644.50	37.60	51.84	14.24	74.00	22.16	150	261	PK	Vertical	PASS
7	6825.00	36.62	31.94	-4.68	54.00	22.06	150	42	AV	Vertical	PASS
8	8170.50	34.31	32.98	-1.33	54.00	21.02	150	54	AV	Vertical	PASS
9	9481.50	34.01	33.92	-0.09	54.00	20.08	150	226	AV	Vertical	PASS
10	11136.00	33.29	34.16	0.87	54.00	19.84	150	360	AV	Vertical	PASS
11	14398.50	32.56	38.17	5.61	54.00	15.83	150	289	AV	Vertical	PASS
12	17607.00	29.28	43.74	14.46	54.00	10.26	150	296	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT40	Test Date:	2025-09-11
Test Channel:	3	Test Engineer:	Stone Zhang

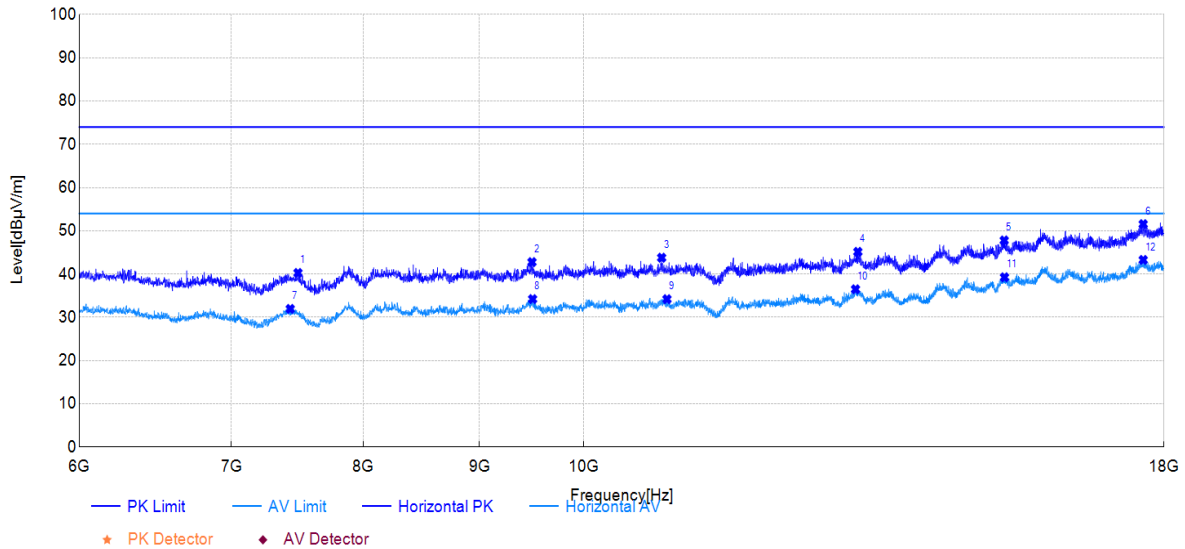

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7488.00	43.24	40.26	-2.98	74.00	33.74	150	161	PK	Horizontal	PASS
2	9490.50	42.78	42.76	-0.02	74.00	31.24	150	198	PK	Horizontal	PASS
3	10822.50	43.13	43.78	0.65	74.00	30.22	150	198	PK	Horizontal	PASS
4	13201.50	41.70	45.14	3.44	74.00	28.86	150	66	PK	Horizontal	PASS
5	15310.50	40.53	47.78	7.25	74.00	26.22	150	210	PK	Horizontal	PASS
6	17625.00	37.72	51.55	13.83	74.00	22.45	150	331	PK	Horizontal	PASS
7	7429.50	34.75	31.94	-2.81	54.00	22.06	150	194	AV	Horizontal	PASS
8	9496.50	34.19	34.21	0.02	54.00	19.79	150	230	AV	Horizontal	PASS
9	10881.00	33.31	34.19	0.88	54.00	19.81	150	13	AV	Horizontal	PASS
10	13170.00	33.20	36.48	3.28	54.00	17.52	150	26	AV	Horizontal	PASS
11	15315.00	32.02	39.25	7.23	54.00	14.75	150	0	AV	Horizontal	PASS
12	17625.00	29.44	43.27	13.83	54.00	10.73	150	331	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

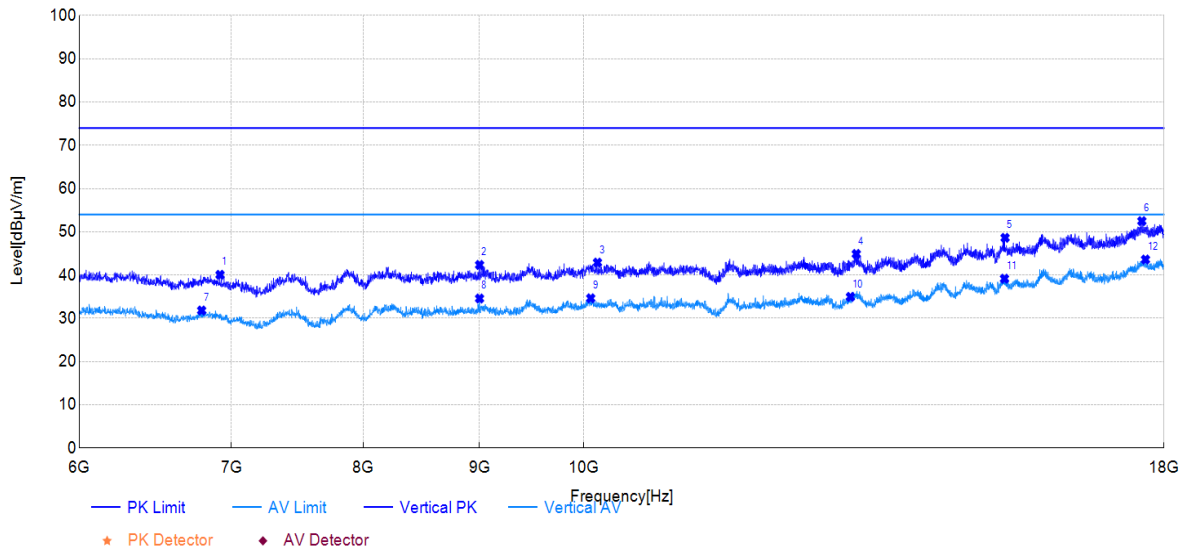


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6919.50	44.49	40.06	-4.43	74.00	33.94	150	87	PK	Vertical	PASS
2	9000.00	43.12	42.34	-0.78	74.00	31.66	150	118	PK	Vertical	PASS
3	10141.50	42.49	42.88	0.39	74.00	31.12	150	255	PK	Vertical	PASS
4	13180.50	42.02	44.88	2.86	74.00	29.12	150	194	PK	Vertical	PASS
5	15324.00	41.64	48.61	6.97	74.00	25.39	150	251	PK	Vertical	PASS
6	17601.00	37.99	52.48	14.49	74.00	21.52	150	281	PK	Vertical	PASS
7	6792.00	36.67	31.81	-4.86	54.00	22.19	150	29	AV	Vertical	PASS
8	9000.00	35.36	34.58	-0.78	54.00	19.42	150	118	AV	Vertical	PASS
9	10072.50	34.20	34.63	0.43	54.00	19.37	150	332	AV	Vertical	PASS
10	13102.50	32.51	34.96	2.45	54.00	19.04	150	56	AV	Vertical	PASS
11	15315.00	32.15	39.16	7.01	54.00	14.84	150	136	AV	Vertical	PASS
12	17665.50	29.47	43.59	14.12	54.00	10.41	150	258	AV	Vertical	PASS

Note: (1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT40	Test Date:	2025-09-11
Test Channel:	6	Test Engineer:	Stone Zhang

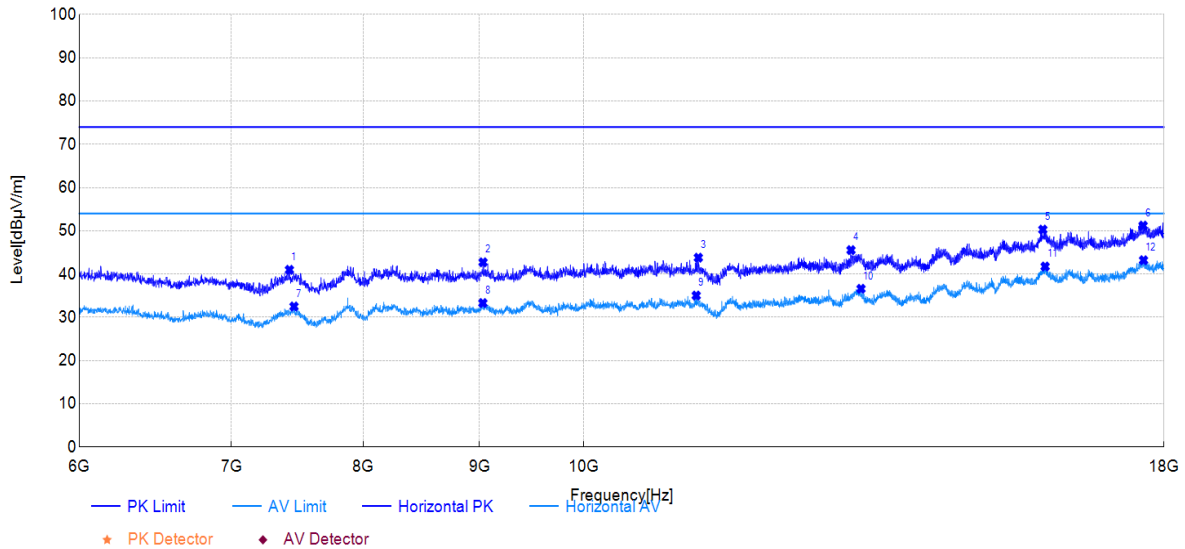

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1		43.78	40.98	-2.80	74.00	33.02	150	15	PK	Horizontal	PASS
2	9031.50	43.49	42.72	-0.77	74.00	31.28	150	42	PK	Horizontal	PASS
3	11232.00	43.00	43.79	0.79	74.00	30.21	150	62	PK	Horizontal	PASS
4	13110.00	42.59	45.53	2.94	74.00	28.47	150	76	PK	Horizontal	PASS
5	15921.00	40.50	50.28	9.78	74.00	23.72	150	1	PK	Horizontal	PASS
6	17623.50	37.37	51.20	13.83	74.00	22.80	150	284	PK	Horizontal	PASS
7	7458.00	35.40	32.50	-2.90	54.00	21.50	150	27	AV	Horizontal	PASS
8	9030.00	34.06	33.29	-0.77	54.00	20.71	150	292	AV	Horizontal	PASS
9	11208.00	34.26	35.03	0.77	54.00	18.97	150	210	AV	Horizontal	PASS
10	13243.50	33.50	36.59	3.09	54.00	17.41	150	0	AV	Horizontal	PASS
11	15958.50	31.96	41.74	9.78	54.00	12.26	150	255	AV	Horizontal	PASS
12	17631.00	29.41	43.20	13.79	54.00	10.80	150	314	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

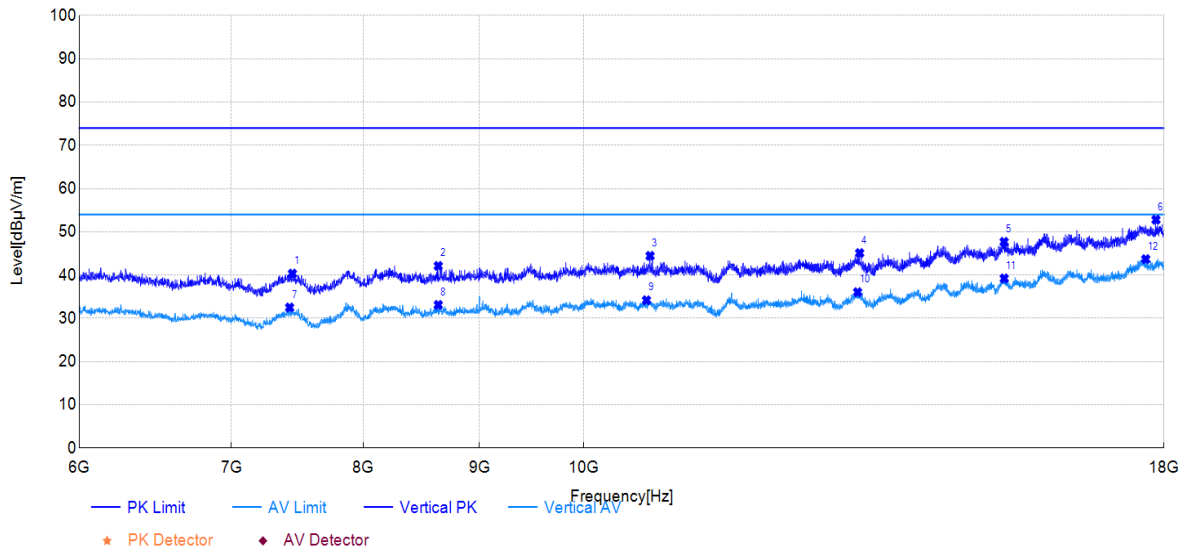


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7446.00	43.19	40.33	-2.86	74.00	33.67	150	301	PK	Vertical	PASS
2	8631.00	43.34	42.11	-1.23	74.00	31.89	150	273	PK	Vertical	PASS
3	10696.50	43.73	44.43	0.70	74.00	29.57	150	354	PK	Vertical	PASS
4	13225.50	42.33	45.08	2.75	74.00	28.92	150	246	PK	Vertical	PASS
5	15309.00	40.63	47.68	7.05	74.00	26.32	150	204	PK	Vertical	PASS
6	17854.50	38.04	52.79	14.75	74.00	21.21	150	354	PK	Vertical	PASS
7	7425.00	35.30	32.50	-2.80	54.00	21.50	150	360	AV	Vertical	PASS
8	8631.00	34.33	33.10	-1.23	54.00	20.90	150	273	AV	Vertical	PASS
9	10657.50	33.35	34.17	0.82	54.00	19.83	150	107	AV	Vertical	PASS
10	13198.50	33.08	36.04	2.96	54.00	17.96	150	61	AV	Vertical	PASS
11	15310.50	32.18	39.22	7.04	54.00	14.78	150	158	AV	Vertical	PASS
12	17670.00	29.59	43.68	14.09	54.00	10.32	150	11	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11n-HT40	Test Date:	2025-09-11
Test Channel:	9	Test Engineer:	Stone Zhang

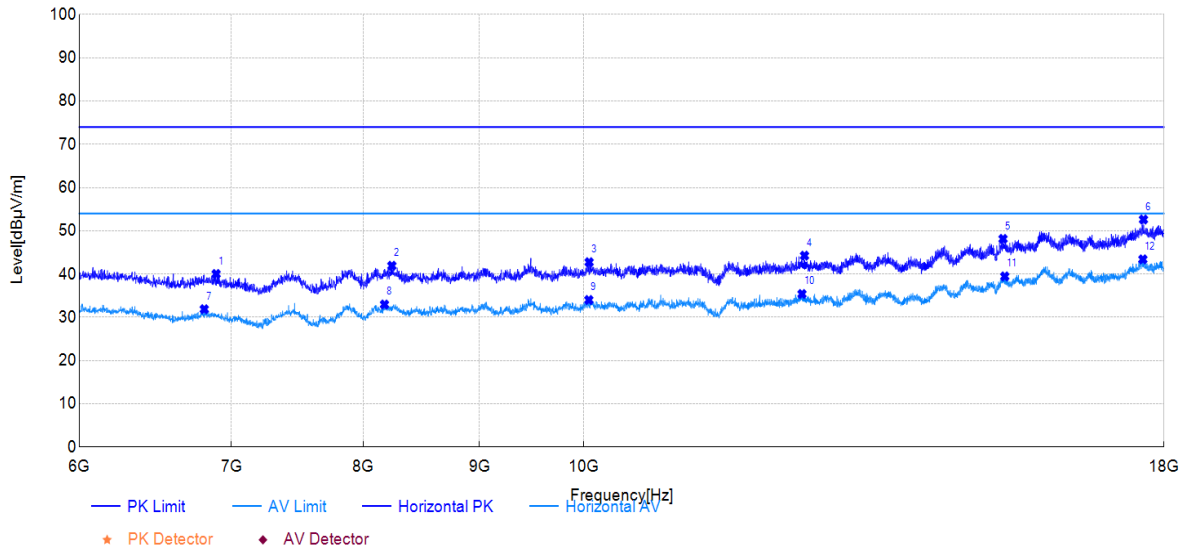

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6892.50	44.45	40.02	-4.43	74.00	33.98	150	75	PK	Horizontal	PASS
2	8235.00	43.27	41.92	-1.35	74.00	32.08	150	132	PK	Horizontal	PASS
3	10056.00	42.77	42.74	-0.03	74.00	31.26	150	327	PK	Horizontal	PASS
4	12507.00	41.81	44.25	2.44	74.00	29.75	150	177	PK	Horizontal	PASS
5	15292.50	40.97	48.13	7.16	74.00	25.87	150	344	PK	Horizontal	PASS
6	17629.50	38.81	52.61	13.80	74.00	21.39	150	1	PK	Horizontal	PASS
7	6810.00	36.73	31.87	-4.86	54.00	22.13	150	158	AV	Horizontal	PASS
8	8173.50	34.31	32.96	-1.35	54.00	21.04	150	170	AV	Horizontal	PASS
9	10053.00	34.05	34.01	-0.04	54.00	19.99	150	116	AV	Horizontal	PASS
10	12475.50	32.98	35.39	2.41	54.00	18.61	150	128	AV	Horizontal	PASS
11	15319.50	32.25	39.46	7.21	54.00	14.54	150	0	AV	Horizontal	PASS
12	17619.00	29.54	43.40	13.86	54.00	10.60	150	335	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

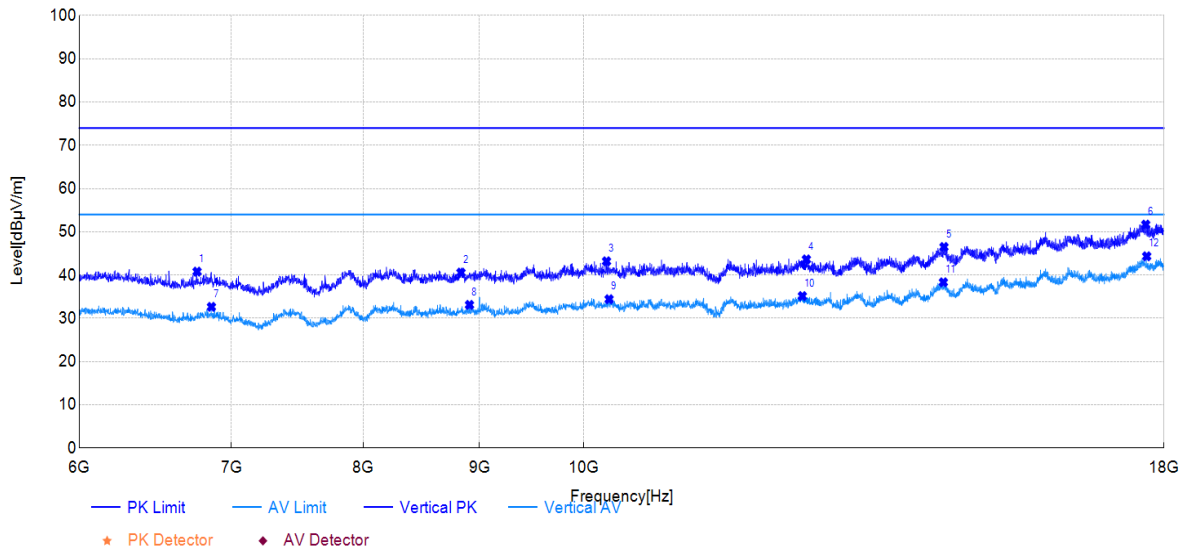

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6760.50	45.90	40.79	-5.11	74.00	33.21	150	344	PK	Vertical	PASS
2	8832.00	41.65	40.56	-1.09	74.00	33.44	150	299	PK	Vertical	PASS
3	10234.50	42.79	43.18	0.39	74.00	30.82	150	53	PK	Vertical	PASS
4	12531.00	41.16	43.62	2.46	74.00	30.38	150	303	PK	Vertical	PASS
5	14404.50	40.93	46.50	5.57	74.00	27.50	150	360	PK	Vertical	PASS
6	17670.00	37.58	51.67	14.09	74.00	22.33	150	280	PK	Vertical	PASS
7	6859.50	37.16	32.65	-4.51	54.00	21.35	150	360	AV	Vertical	PASS
8	8908.50	34.25	33.10	-1.15	54.00	20.90	150	294	AV	Vertical	PASS
9	10261.50	34.00	34.41	0.41	54.00	19.59	150	15	AV	Vertical	PASS
10	12480.00	32.62	35.14	2.52	54.00	18.86	150	336	AV	Vertical	PASS
11	14395.50	32.74	38.33	5.59	54.00	15.67	150	4	AV	Vertical	PASS
12	17688.00	30.36	44.34	13.98	54.00	9.66	150	203	AV	Vertical	PASS

Note:(1) Level=Reading+Factor


(2) Margin=Limit-Level

Co-location test results:

According to MPE report, WLAN and GSM850 transmit simultaneously mode.

30MHz – 1GHz Test Data

EUT:	GPS Tracker	Polarity:	Horizontal
Model:	GL601CAU	Test Date:	2025-11-28
Mode:	Transmit by WLAN and GSM850	Voltage:	DC 3.7V
Environment:	Temp: 24.8°C; Humi:45%	Engineer:	Stone Zhang

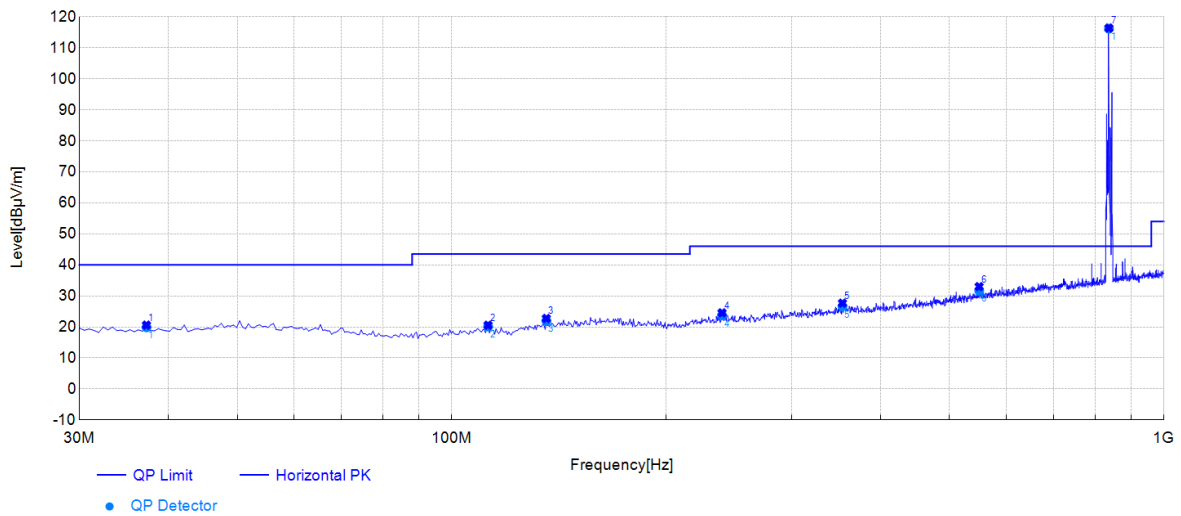


Final Data List										
NO.	Frequency [MHz]	Factor [dB/m]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pol	Verdict
1	37.28	13.02	6.87	19.89	40.00	20.11	150	312	Horizontal	PASS
2	112.49	13.19	6.95	20.14	43.50	23.36	150	130	Horizontal	PASS
3	135.78	14.50	7.46	21.96	43.50	21.54	150	342	Horizontal	PASS
4	239.62	15.42	8.34	23.76	46.00	22.24	150	203	Horizontal	PASS
5	353.66	18.40	8.23	26.63	46.00	19.37	150	29	Horizontal	PASS
6	550.18	22.20	9.48	31.68	46.00	14.32	150	22	Horizontal	PASS
7	836.96	26.48	88.8	116.24	/	/	150	357	Horizontal	PASS

Note:

- (1) Level=Reading + Factor
- (2) Margin=Limit-Level
- (3) The Mark 7 is fundamental.
- (4) The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	GPS Tracker	Polarity:	Vertical
Model:	GL601CAU	Test Date:	2025-11-28
Mode:	Transmit by WLAN and GSM850	Voltage:	DC 3.7V
Environment:	Temp: 24.8°C; Humi:45%	Engineer:	Stone Zhang

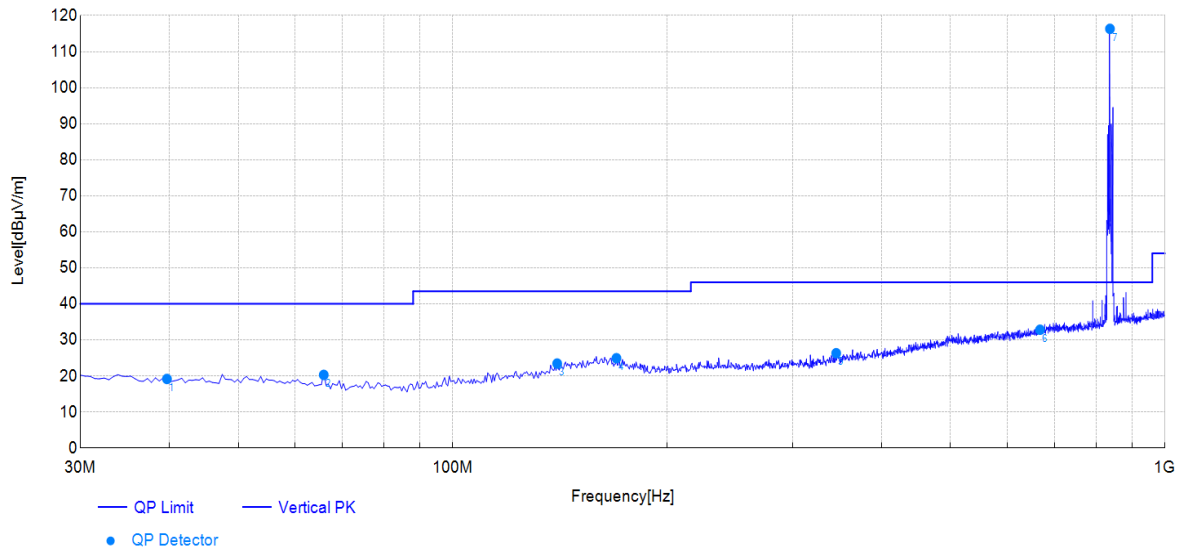

Final Data List										
NO.	Frequency [MHz]	Factor [dB/m]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pol	Verdict
1	39.70	13.00	6.18	19.18	40.00	20.82	150	209	Vertical	PASS
2	65.91	11.96	8.35	20.31	40.00	19.69	150	141	Vertical	PASS
3	140.15	16.44	7.02	23.46	43.50	20.04	150	360	Vertical	PASS
4	169.75	17.59	7.35	24.94	43.50	18.56	150	328	Vertical	PASS
5	345.41	17.79	8.53	26.32	46.00	19.68	150	359	Vertical	PASS
6	667.61	24.37	8.46	32.83	46.00	13.17	150	82	Vertical	PASS
7	836.96	27.29	89.05	116.34	/	/	150	0	Vertical	PASS

Note:

(1) Level=Reading + Factor


(2) Margin=Limit-Level

(3) The Mark 7 is fundamental.

(4) The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

1GHz-6GHz


Test Mode:	Transmit by WLAN and GSM850	Test Date:	2025-11-28
Test Mode:	802.11b-2412MHz+GSM850-190	Test Engineer:	Stone Zhang

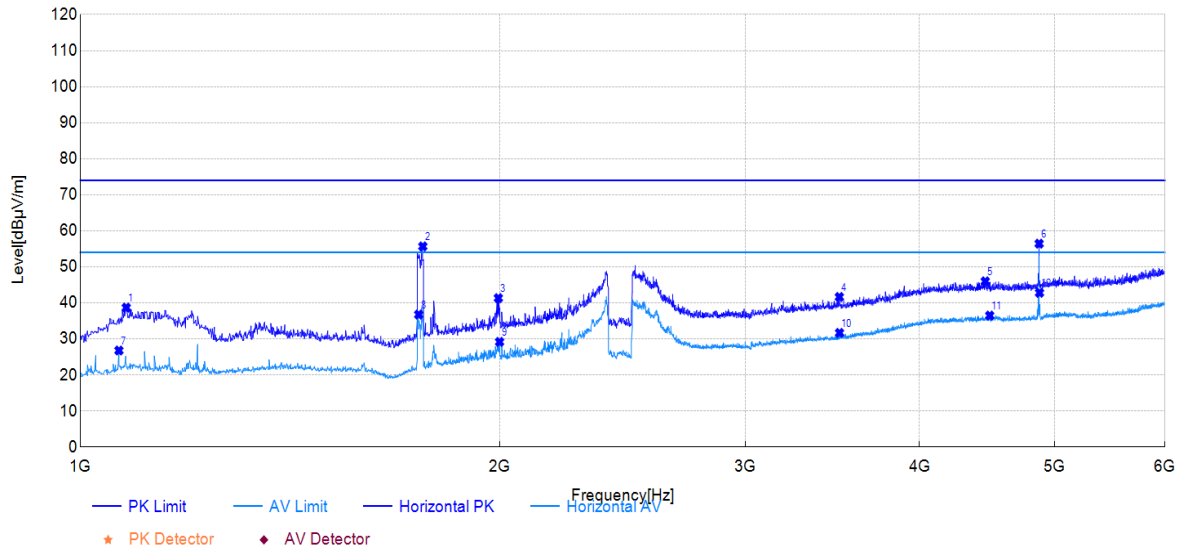

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1079.00	62.62	38.69	-23.93	74.00	35.31	150	151	PK	Horizontal	PASS
2	1761.00	75.48	55.67	-19.81	74.00	18.33	150	72	PK	Horizontal	PASS
3	1995.00	59.53	41.33	-18.20	74.00	32.67	150	136	PK	Horizontal	PASS
4	3504.00	53.98	41.64	-12.34	74.00	32.36	150	79	PK	Horizontal	PASS
5	4459.00	53.35	45.98	-7.37	74.00	28.02	150	136	PK	Horizontal	PASS
6	4874.00	63.02	56.44	-6.58	74.00	17.56	150	26	PK	Horizontal	PASS
7	1066.00	50.78	26.79	-23.99	54.00	27.21	150	125	AV	Horizontal	PASS
8	1749.00	56.68	36.76	-19.92	54.00	17.24	150	259	AV	Horizontal	PASS
9	1999.00	47.35	29.18	-18.17	54.00	24.82	150	148	AV	Horizontal	PASS
10	3505.00	44.00	31.68	-12.32	54.00	22.32	150	49	AV	Horizontal	PASS
11	4492.00	43.78	36.48	-7.30	54.00	17.52	150	0	AV	Horizontal	PASS
12	4877.00	49.37	42.80	-6.57	54.00	11.20	150	42	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

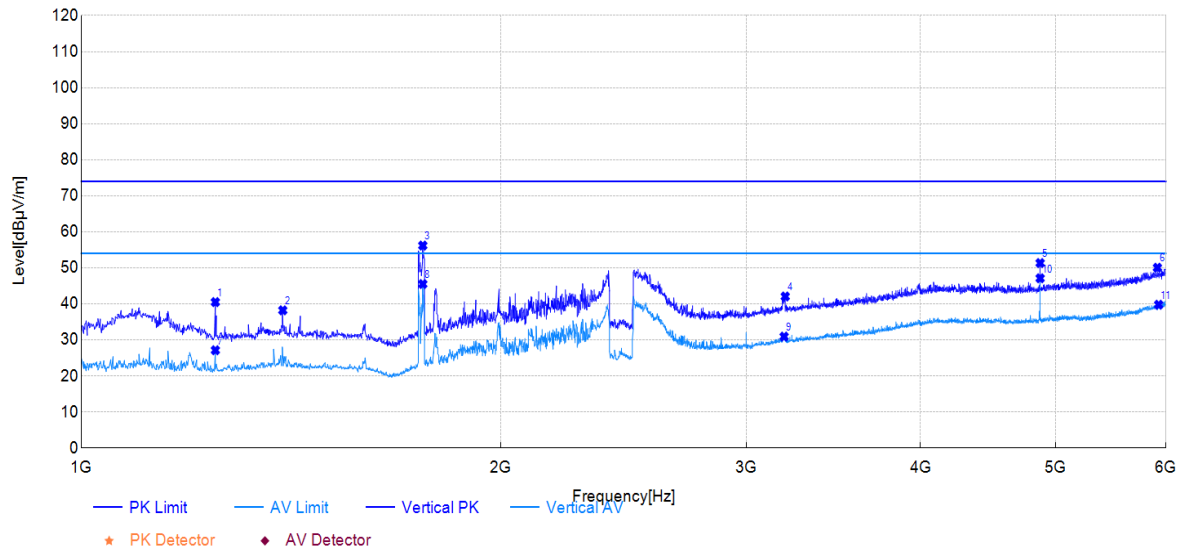

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1248.00	62.73	40.50	-22.23	74.00	33.50	150	59	PK	Vertical	PASS
2	1395.00	59.58	38.22	-21.36	74.00	35.78	150	116	PK	Vertical	PASS
3	1758.00	75.44	56.19	-19.25	74.00	17.81	150	304	PK	Vertical	PASS
4	3199.00	55.22	42.06	-13.16	74.00	31.94	150	107	PK	Vertical	PASS
5	4874.00	58.52	51.34	-7.18	74.00	22.66	150	119	PK	Vertical	PASS
6	5916.00	55.17	50.04	-5.13	74.00	23.96	150	258	PK	Vertical	PASS
7	1248.00	49.37	27.14	-22.23	54.00	26.86	150	59	AV	Vertical	PASS
8	1758.00	64.76	45.51	-19.25	54.00	8.49	150	304	AV	Vertical	PASS
9	3193.00	44.13	30.92	-13.21	54.00	23.08	150	107	AV	Vertical	PASS
10	4874.00	54.29	47.11	-7.18	54.00	6.89	150	123	AV	Vertical	PASS
11	5928.00	44.88	39.77	-5.11	54.00	14.23	150	48	AV	Vertical	PASS
12	1248.00	62.73	40.50	-22.23	74.00	33.50	150	59	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

6GHz-18GHz


Test Mode:	Transmit by WLAN and GSM850	Test Date:	2025-11-28
Test Mode:	802.11b-2412MHz+GSM850-190	Test Engineer:	Stone Zhang

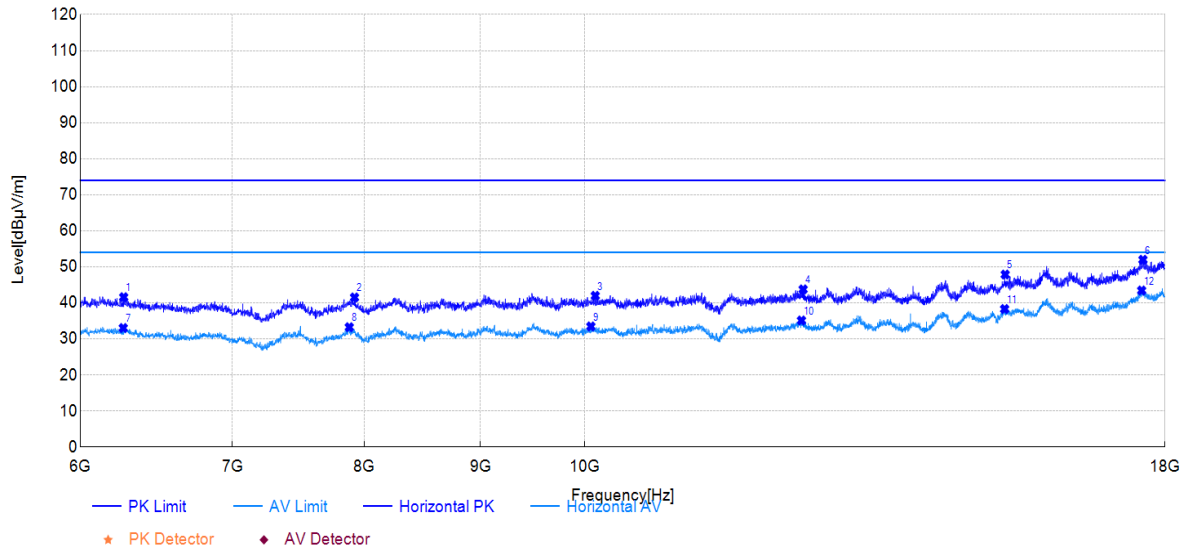

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6270.00	45.73	41.58	-4.15	74.00	32.42	150	174	PK	Horizontal	PASS
2	7921.50	42.73	41.51	-1.22	74.00	32.49	150	29	PK	Horizontal	PASS
3	10108.50	41.93	41.97	0.04	74.00	32.03	150	38	PK	Horizontal	PASS
4	12477.00	41.44	43.75	2.31	74.00	30.25	150	282	PK	Horizontal	PASS
5	15310.50	40.62	47.86	7.24	74.00	26.14	150	135	PK	Horizontal	PASS
6	17602.50	37.90	51.97	14.07	74.00	22.03	150	143	PK	Horizontal	PASS
7	6267.00	37.20	33.03	-4.17	54.00	20.97	150	239	AV	Horizontal	PASS
8	7879.50	34.75	33.25	-1.50	54.00	20.75	150	232	AV	Horizontal	PASS
9	10063.50	33.37	33.47	0.10	54.00	20.53	150	99	AV	Horizontal	PASS
10	12456.00	32.82	35.11	2.29	54.00	18.89	150	306	AV	Horizontal	PASS
11	15301.50	31.03	38.29	7.26	54.00	15.71	150	5	AV	Horizontal	PASS
12	17580.00	29.54	43.44	13.90	54.00	10.56	150	298	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

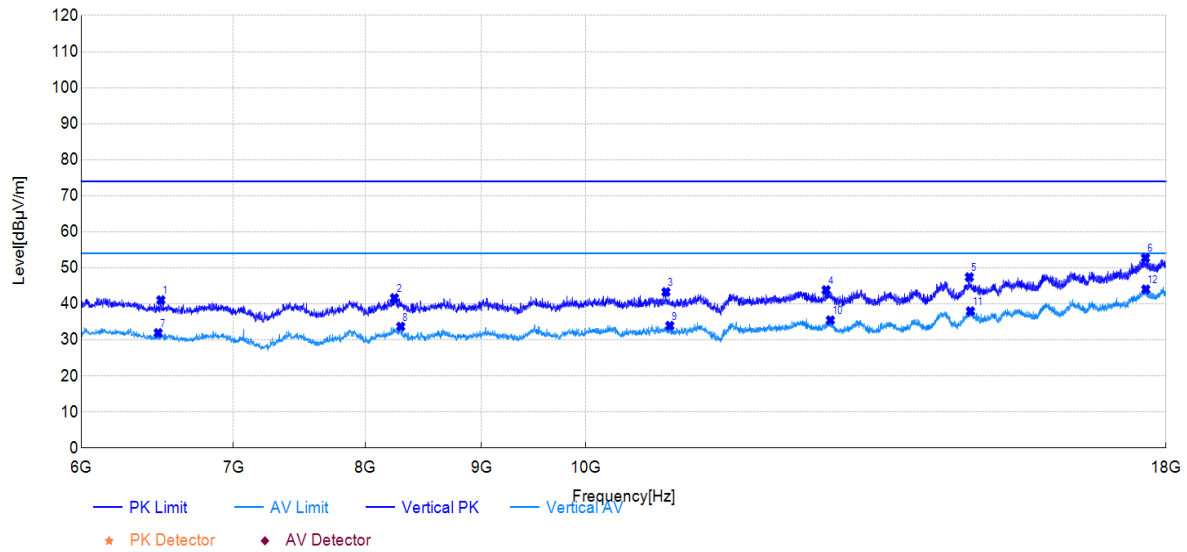

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6504.00	46.34	41.04	-5.30	74.00	32.96	150	23	PK	Vertical	PASS
2	8239.50	43.06	41.62	-1.44	74.00	32.38	150	358	PK	Vertical	PASS
3	10848.00	42.53	43.28	0.75	74.00	30.72	150	100	PK	Vertical	PASS
4	12757.50	41.97	43.84	1.87	74.00	30.16	150	124	PK	Vertical	PASS
5	14749.50	41.85	47.42	5.57	74.00	26.58	150	19	PK	Vertical	PASS
6	17629.50	38.24	52.74	14.50	74.00	21.26	150	302	PK	Vertical	PASS
7	6486.00	37.20	31.93	-5.27	54.00	22.07	150	221	AV	Vertical	PASS
8	8292.00	34.98	33.70	-1.28	54.00	20.30	150	69	AV	Vertical	PASS
9	10890.00	33.01	33.93	0.92	54.00	20.07	150	97	AV	Vertical	PASS
10	12813.00	33.48	35.47	1.99	54.00	18.53	150	360	AV	Vertical	PASS
11	14766.00	32.39	37.96	5.57	54.00	16.04	150	360	AV	Vertical	PASS
12	17635.50	29.56	44.03	14.47	54.00	9.97	150	128	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510MHz.

² Above 38.6

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	240 - 285	9.0 - 9.2
2.1735 - 2.1905	322 - 335.4	9.3 - 9.5
3.020 - 3.026	399.9 - 410	10.6 - 12.7
4.125 - 4.128	608 - 614	13.25 - 13.4
4.17725 - 4.17775	960 - 1427	14.47 - 14.5
4.20725 - 4.20775	1435 - 1626.5	15.35 - 16.2
5.677 - 5.683	1645.5 - 1646.5	17.7 - 21.4
6.215 - 6.218	1660 - 1710	22.01 - 23.12
6.26775 - 6.26825	1718.8 -1722.2	23.6 - 24.0
6.31175 - 6.31225	2200 - 2300	31.2 - 31.8
8.291 - 8.294	2310 -2390	36.43 - 36.5
8.362 - 8.366	2655 - 2900	Above 38.6
8.37625 - 8.38675	3260 - 3267	--
8.41425 - 8.41475	3332 -3339	
12.29 - 12.293	334.5 - 3358	
12.51975 - 12.52025	3500 - 4400	
12.57675 - 12.57725	4500 - 5150	
13.36 -13.41	5350 - 5460	
16.42 - 16.423	7250 - 7750	
16.69475 - 16.69525	8025 - 8500	
16.80425 - 16.80475	--	
25.5 - 25.67		
37.5 - 38.25		
73 - 74.6		
74.8 - 75.2		
108 - 138		
156.52475 - 156.525225		
156.7 - 156.9		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen

must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be $\geq 2 \times \text{span} / \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.


7.7.4. Test Setup

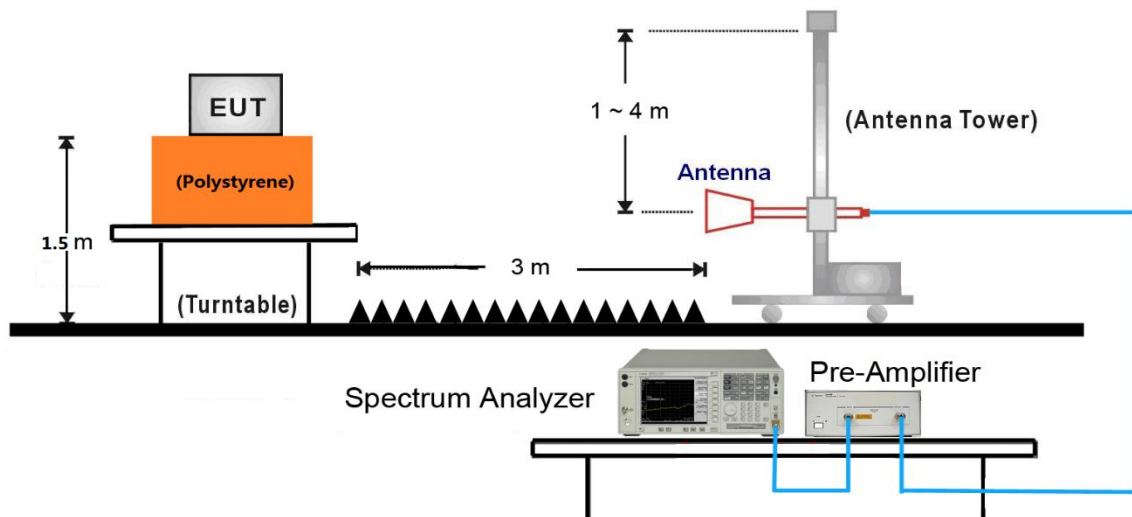

Note: This item was performed with the WIFI antenna connected.

7.7.5. Test Result

Project Information			
EUT:	GPS Tracker	Model:	GL601CAU
Test Date:	2025-09-10	Voltage:	DC 3.7V
Environment:	Temp: 22.6°C; Humi:55%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11b at Channel 2412MHz		

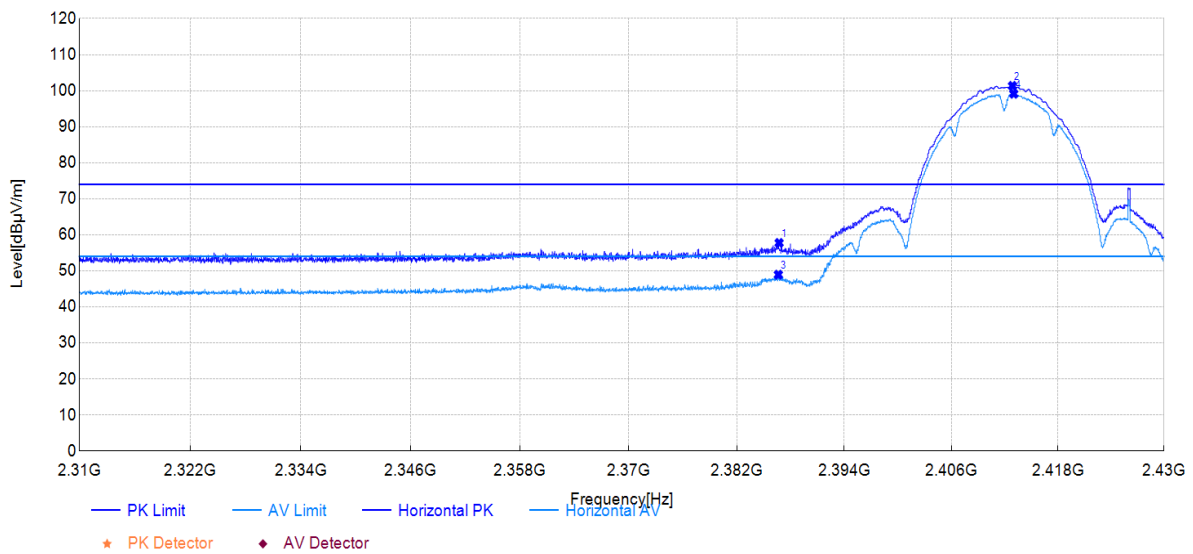


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2386.73	22.26	57.75	35.49	74.00	16.25	150	172	PK	Horizontal	PASS
2	2412.87	65.75	101.34	35.59	/	/	150	145	PK	Horizontal	PASS
3	2386.64	13.45	48.94	35.49	54.00	5.06	150	180	AV	Horizontal	PASS
4	2413.02	63.55	99.14	35.59	/	/	150	145	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

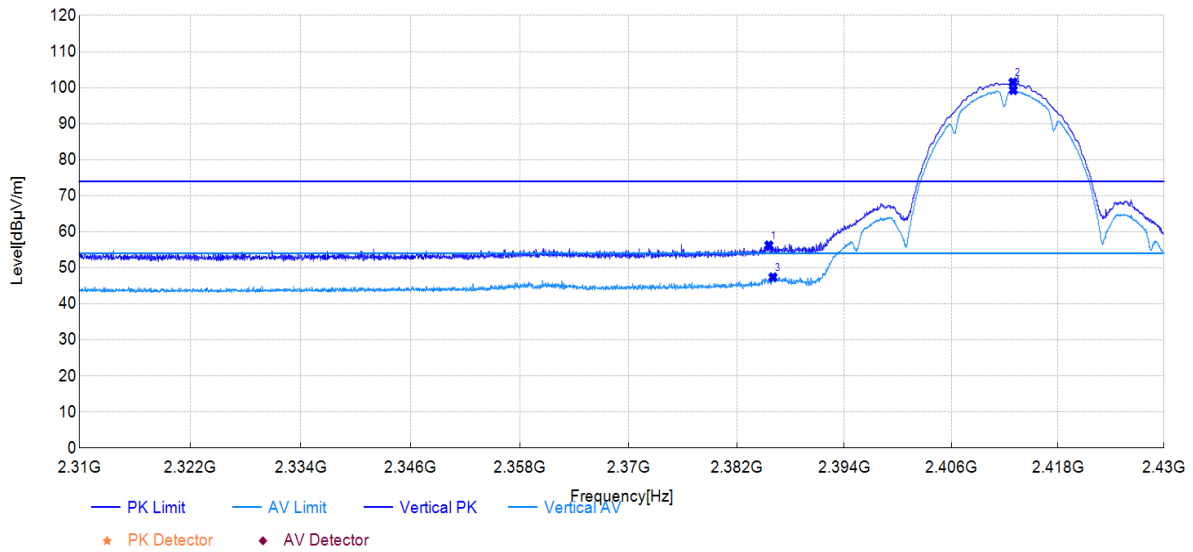


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2385.59	20.89	56.25	35.36	74.00	17.75	150	71	PK	Vertical	PASS
2	2412.93	66.06	101.47	35.41	/	/	150	74	PK	Vertical	PASS
3	2386.04	12.03	47.39	35.36	54.00	6.61	150	67	AV	Vertical	PASS
4	2412.96	63.91	99.32	35.41	/	/	150	74	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	GPS Tracker	Model:	GL601CAU
Test Date:	2025-09-10	Voltage:	DC 3.7V
Environment:	Temp: 22.6°C; Humi:55%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11b at Channel 2462MHz		

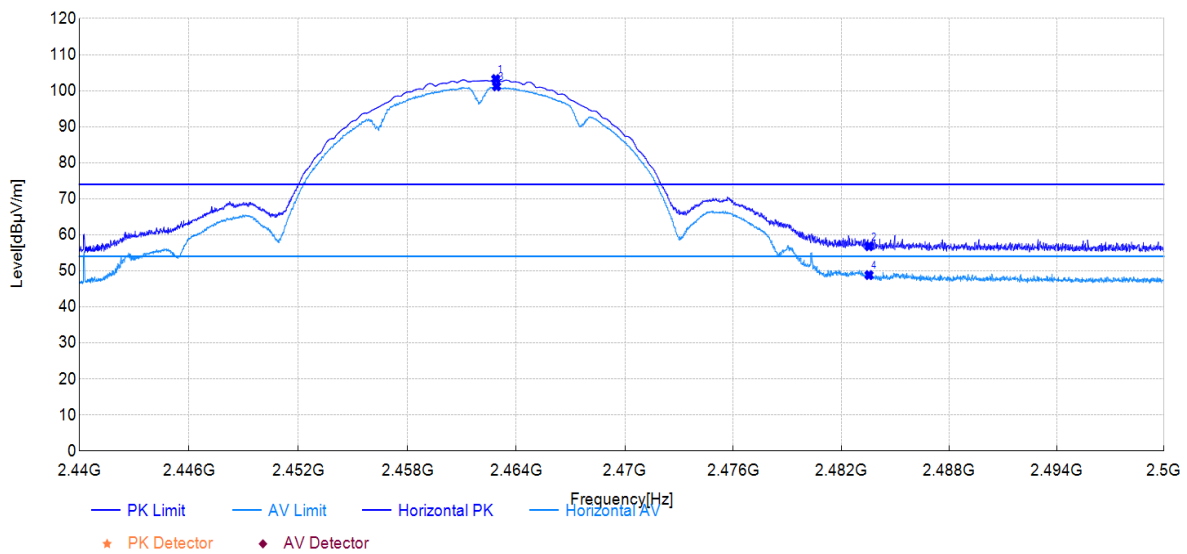


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2462.87	67.14	103.23	36.09	/	/	150	146	PK	Horizontal	PASS
2	2483.54	20.53	56.82	36.29	74.00	17.18	150	142	PK	Horizontal	PASS
3	2462.91	65.11	101.20	36.09	/	/	150	149	AV	Horizontal	PASS
4	2483.54	12.54	48.83	36.29	54.00	5.17	150	178	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

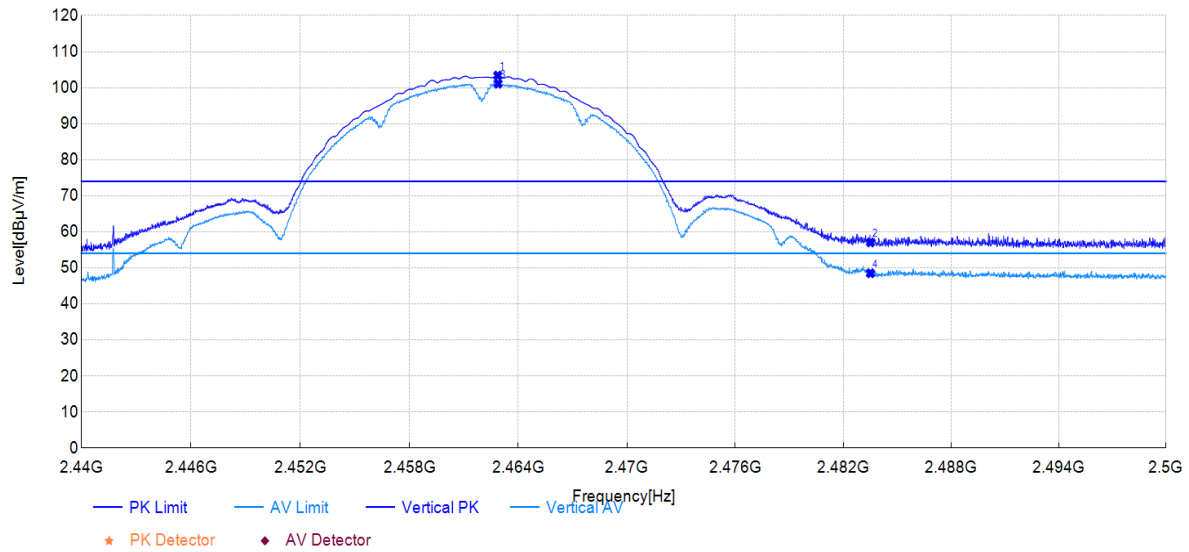


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2462.87	67.51	103.35	35.84	/	/	150	72	PK	Vertical	PASS
2	2483.51	21.05	57.06	36.01	74.00	16.94	150	79	PK	Vertical	PASS
3	2462.88	65.27	101.11	35.84	/	/	150	72	AV	Vertical	PASS
4	2483.51	12.48	48.49	36.01	54.00	5.51	150	82	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	GPS Tracker	Model:	GL601CAU
Test Date:	2025-09-10	Voltage:	DC 3.7V
Environment:	Temp: 22.6°C; Humi:55%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11g at Channel 2412MHz		

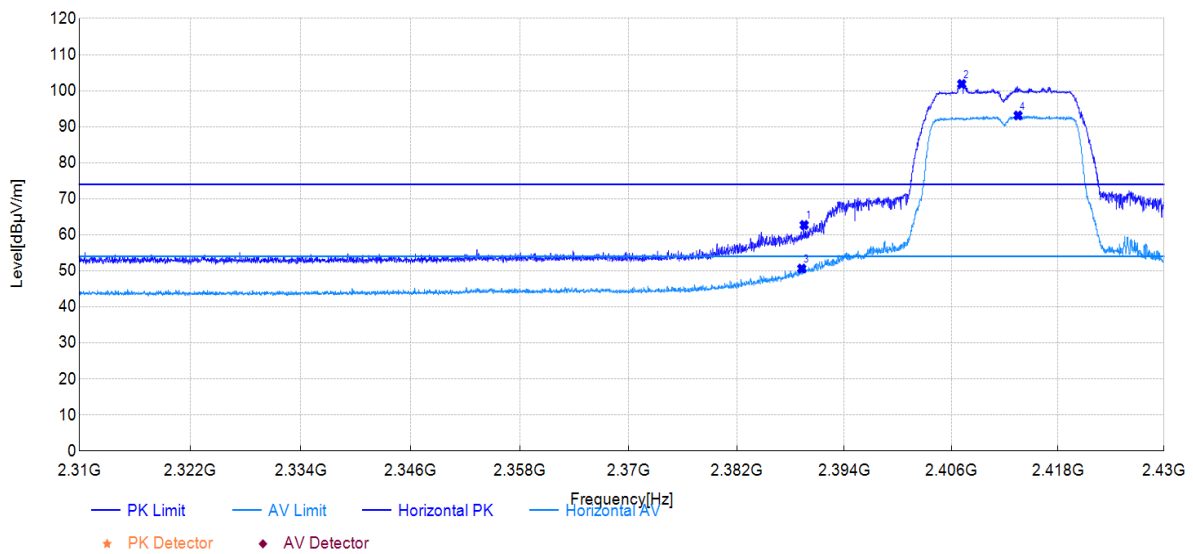


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2389.52	27.24	62.72	35.48	74.00	11.28	150	134	PK	Horizontal	PASS
2	2407.16	66.32	101.85	35.53	/	/	150	144	PK	Horizontal	PASS
3	2389.25	15.15	50.63	35.48	54.00	3.37	150	179	AV	Horizontal	PASS
4	2413.50	57.53	93.12	35.59	/	/	150	144	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

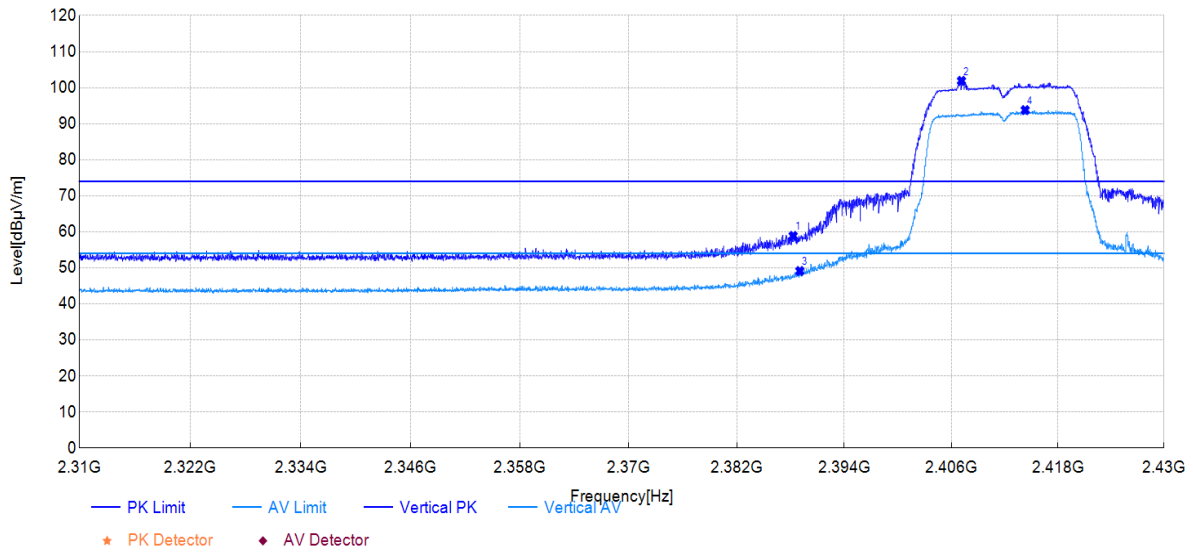


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2388.29	23.52	58.87	35.35	74.00	15.13	150	81	PK	Vertical	PASS
2	2407.13	66.54	101.90	35.36	/	/	150	74	PK	Vertical	PASS
3	2389.04	13.79	49.13	35.34	54.00	4.87	150	68	AV	Vertical	PASS
4	2414.31	58.36	93.78	35.42	/	/	150	78	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	GPS Tracker	Model:	GL601CAU
Test Date:	2025-09-10	Voltage:	DC 3.7V
Environment:	Temp: 22.6°C; Humi:55%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11g at Channel 2462MHz		

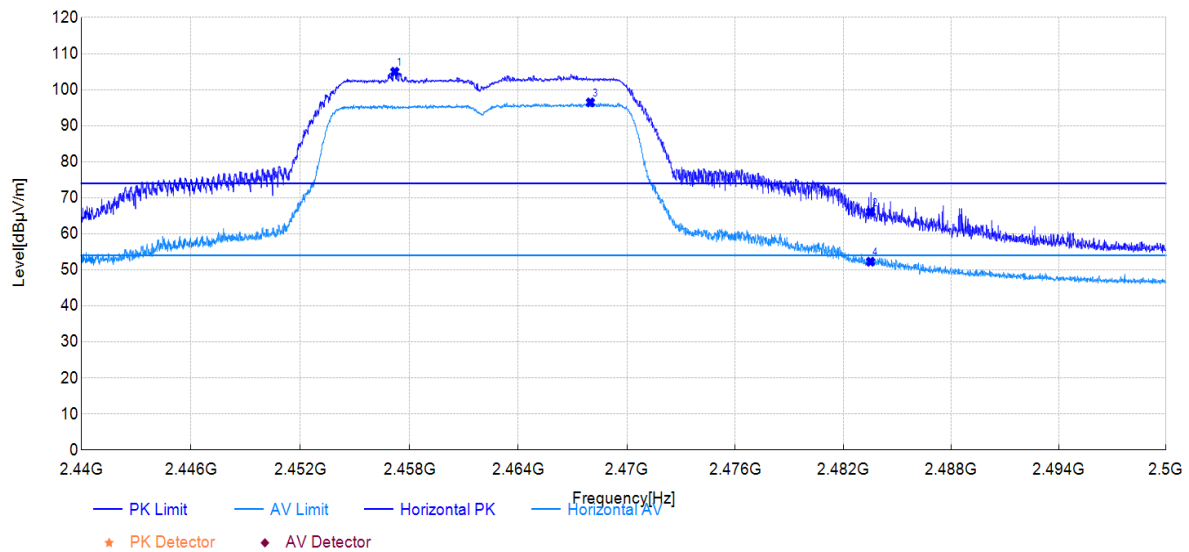


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2457.19	68.94	104.97	36.03	/	/	150	174	PK	Horizontal	PASS
2	2483.51	29.76	66.05	36.29	74.00	7.95	150	55	PK	Horizontal	PASS
3	2467.98	60.33	96.47	36.14	/	/	150	146	AV	Horizontal	PASS
4	2483.51	15.97	52.26	36.29	54.00	1.74	150	146	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

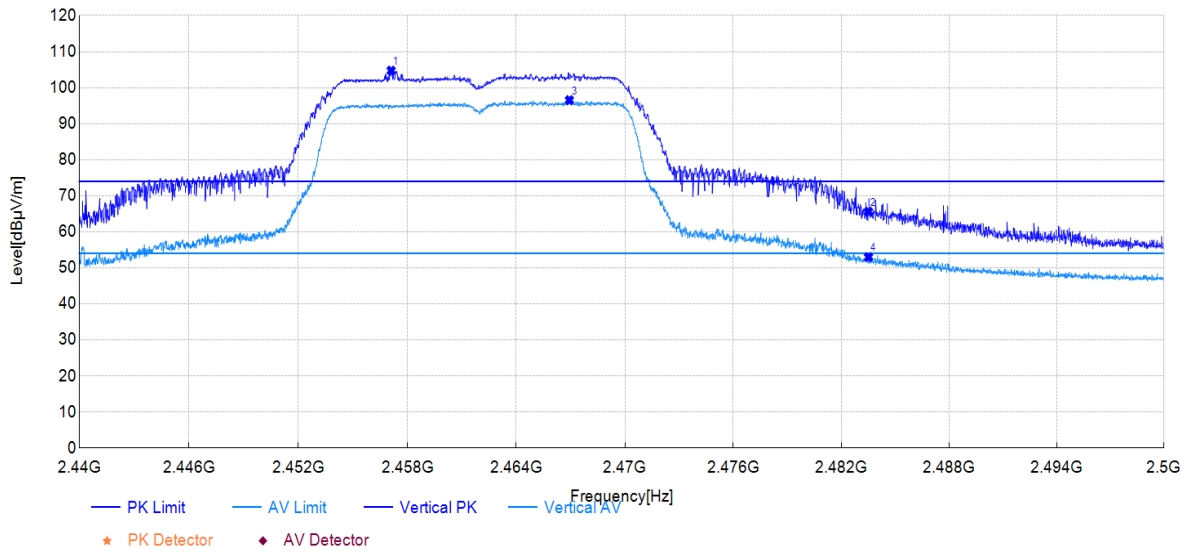


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2457.10	68.95	104.74	35.79	/	/	150	72	PK	Vertical	PASS
2	2483.51	29.58	65.59	36.01	74.00	8.41	150	75	PK	Vertical	PASS
3	2466.93	60.66	96.54	35.88	/	/	150	72	AV	Vertical	PASS
4	2483.51	16.97	52.98	36.01	54.00	1.02	150	75	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	GPS Tracker	Model:	GL601CAU
Test Date:	2025-09-10	Voltage:	DC 3.7V
Environment:	Temp: 22.6°C; Humi:55%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11n-HT20 at Channel 2412MHz		

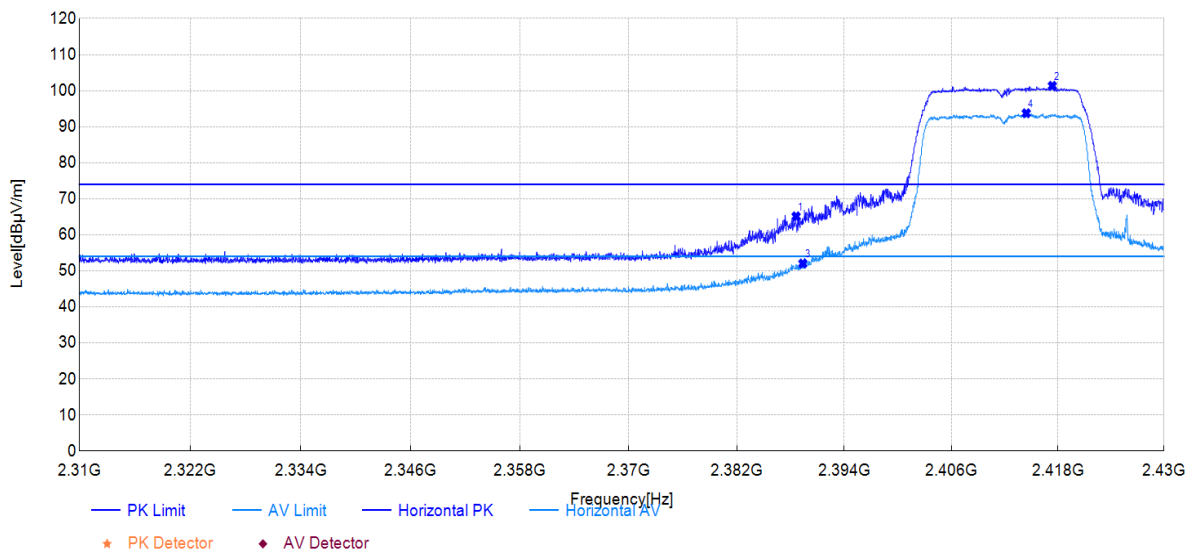


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2388.62	29.63	65.11	35.48	74.00	8.89	150	177	PK	Horizontal	PASS
2	2417.37	65.71	101.34	35.63	/	/	150	144	PK	Horizontal	PASS
3	2389.37	16.54	52.02	35.48	54.00	1.98	150	173	AV	Horizontal	PASS
4	2414.43	58.13	93.73	35.60	/	/	150	144	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

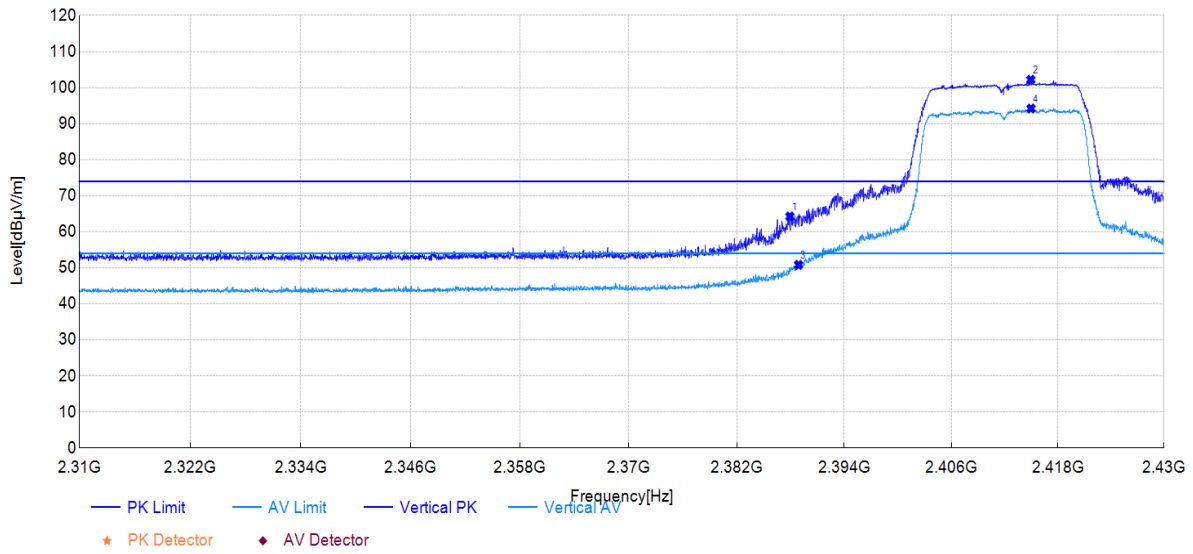

Suspected Data List


NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2387.93	28.90	64.25	35.35	74.00	9.75	150	72	PK	Vertical	PASS
2	2414.94	66.78	102.20	35.42	/	/	150	79	PK	Vertical	PASS
3	2388.89	15.49	50.83	35.34	54.00	3.17	150	72	AV	Vertical	PASS
4	2414.97	58.79	94.21	35.42	/	/	150	79	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	GPS Tracker	Model:	GL601CAU
Test Date:	2025-09-10	Voltage:	DC 3.7V
Environment:	Temp: 22.6°C; Humi:55%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11n-HT20 at Channel 2462MHz		

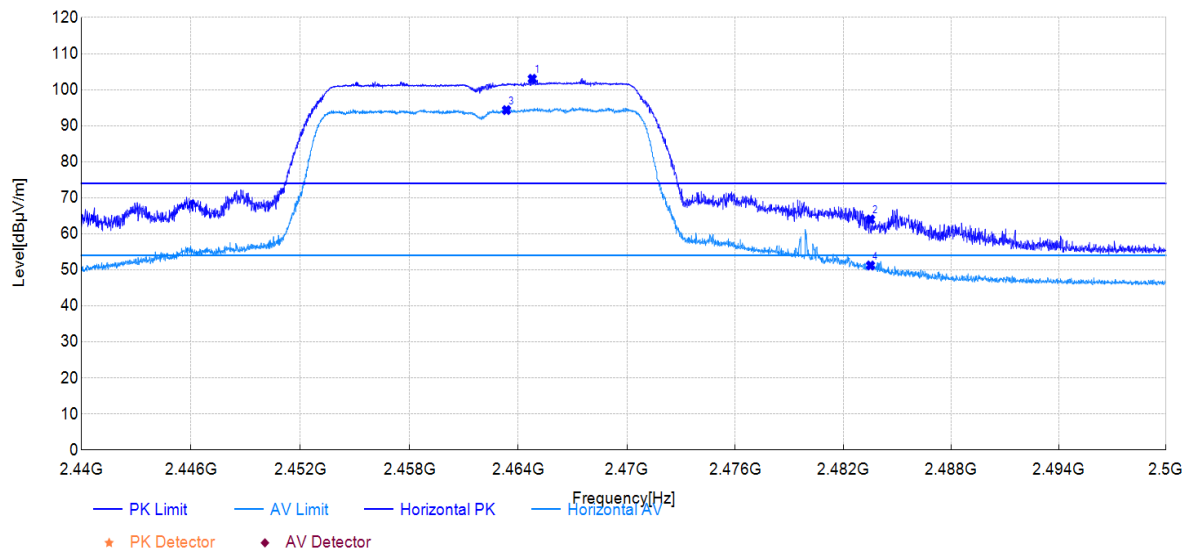


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2464.77	66.91	103.02	36.11	/	/	150	149	PK	Horizontal	PASS
2	2483.51	27.70	63.99	36.29	74.00	10.01	150	146	PK	Horizontal	PASS
3	2463.35	58.25	94.34	36.09	/	/	150	146	AV	Horizontal	PASS
4	2483.51	14.92	51.21	36.29	54.00	2.79	150	146	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

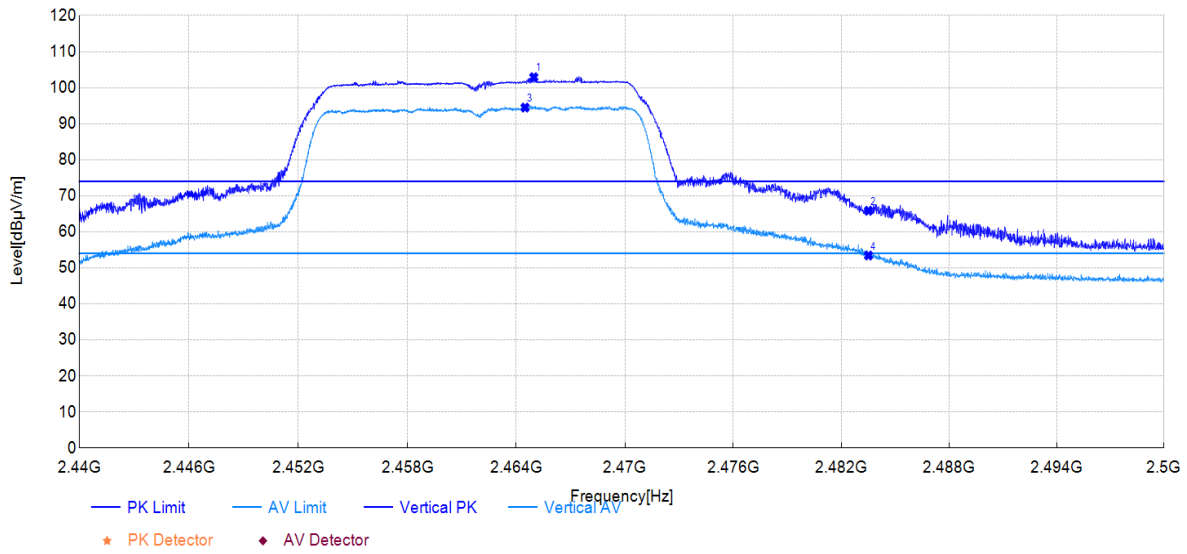


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2464.97	67.05	102.90	35.85	/	/	150	72	PK	Vertical	PASS
2	2483.51	29.84	65.85	36.01	74.00	8.15	150	263	PK	Vertical	PASS
3	2464.49	58.63	94.48	35.85	/	/	150	80	AV	Vertical	PASS
4	2483.51	17.42	53.43	36.01	54.00	0.57	150	263	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	GPS Tracker	Model:	GL601CAU
Test Date:	2025-09-10	Voltage:	DC 3.7V
Environment:	Temp: 22.6°C; Humi:55%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11n-HT20 at Channel 2422MHz		

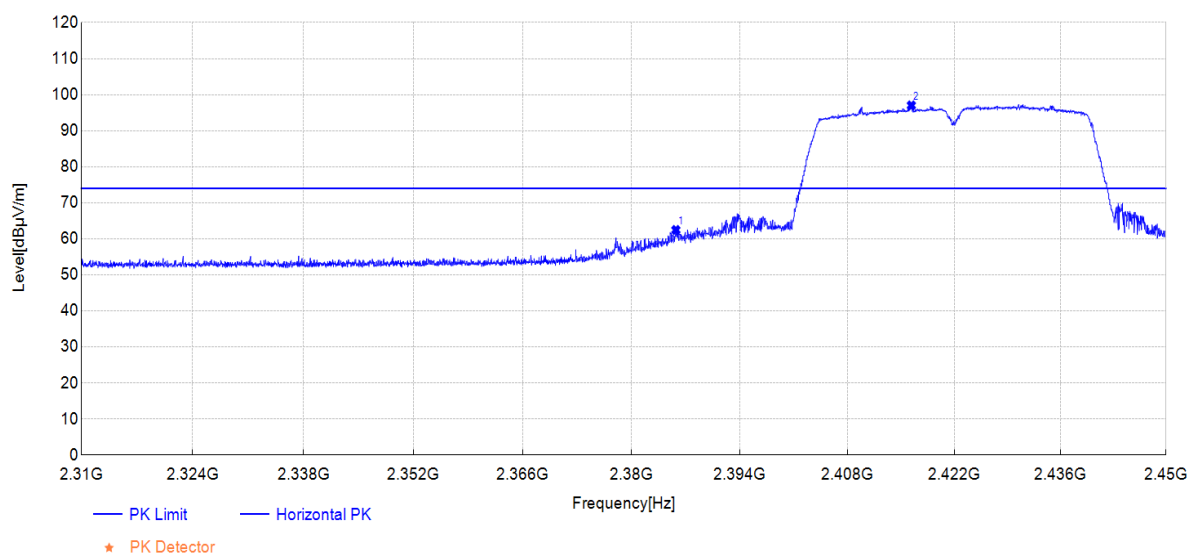


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2385.72	26.95	62.45	35.50	74.00	11.55	150	39	PK	Horizontal	PASS
2	2416.39	61.40	97.02	35.62	/	/	150	142	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

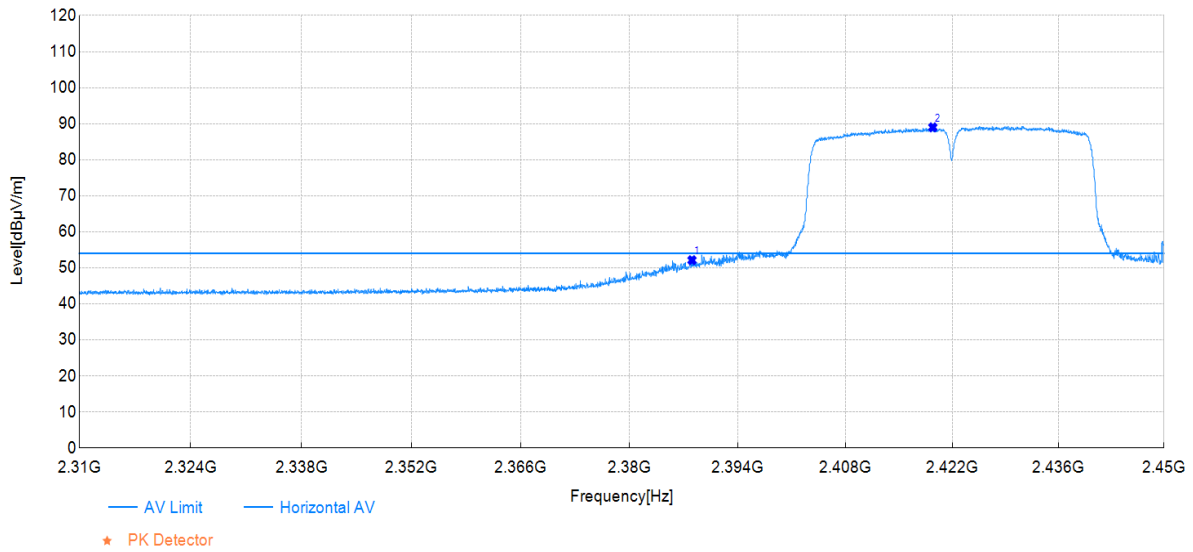


1	2388.07	16.63	52.12	35.49	54.00	1.88	150	124	AV	Horizontal	PASS
2	2419.47	53.33	88.99	35.66	/	/	150	147	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

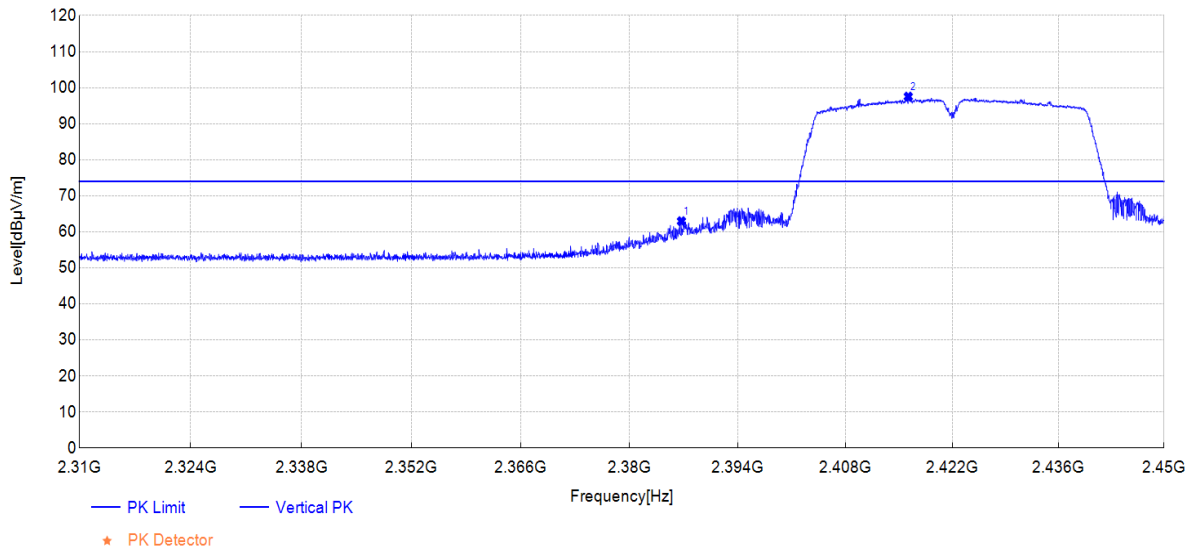


Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2386.70	27.60	62.95	35.35	74.00	11.05	150	76	PK	Vertical	PASS
2	2416.25	62.09	97.53	35.44	/	/	150	76	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

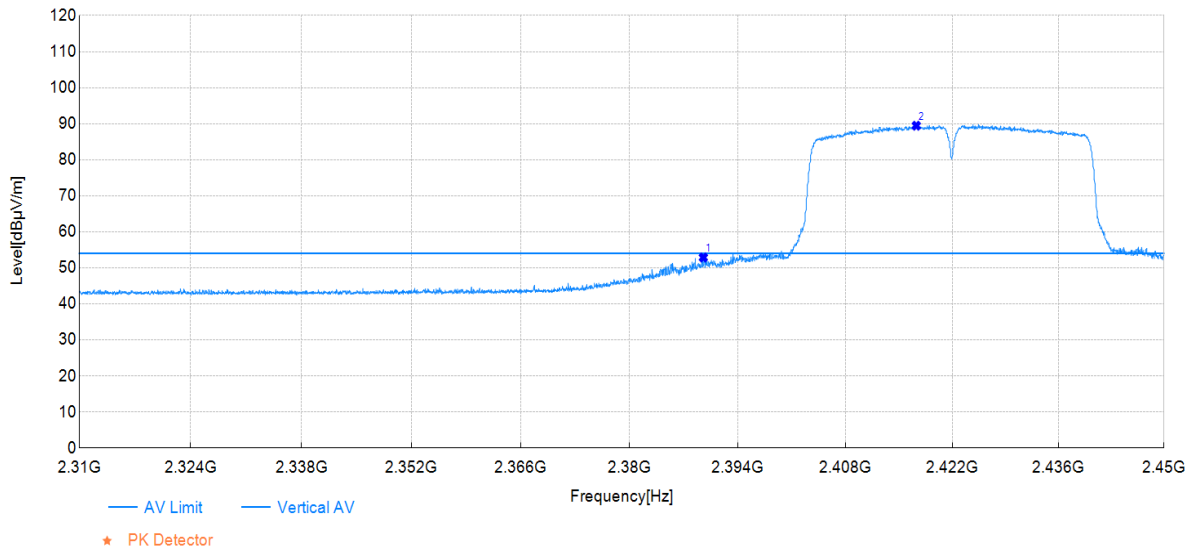


1	2389.54	17.53	52.87	35.34	54.00	1.13	150	83	AV	Vertical	PASS
2	2417.30	54.00	89.45	35.45	/	/	150	78	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

Project Information			
EUT:	GPS Tracker	Model:	GL601CAU
Test Date:	2025-09-10	Voltage:	DC 3.7V
Environment:	Temp: 22.6°C; Humi:55%	Engineer:	Stone Zhang
Remark:	Transmit by 802.11n-HT40 at Channel 2452MHz		

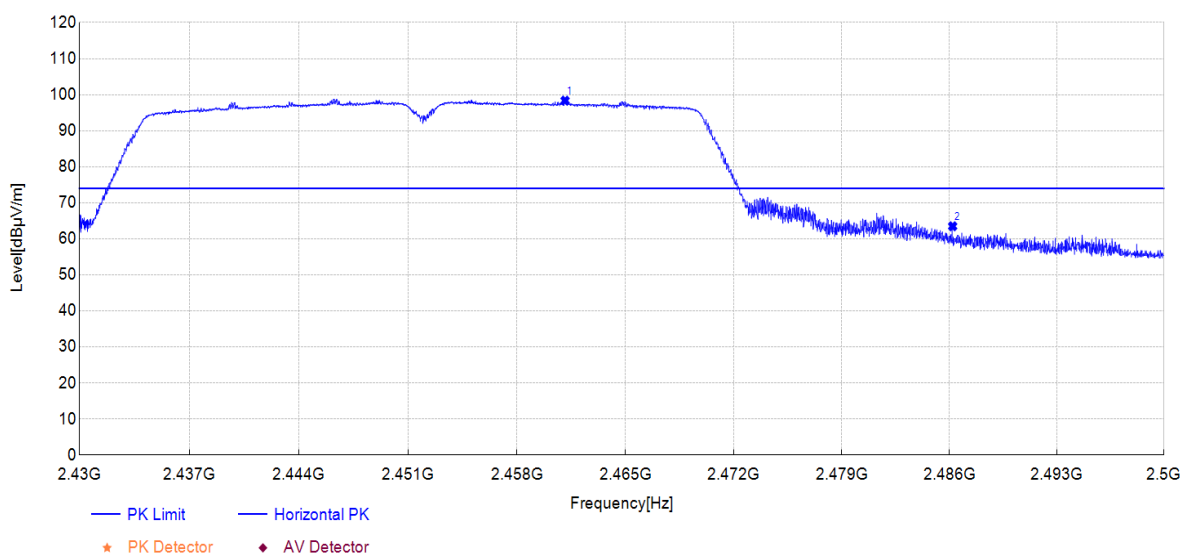


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2461.11	62.28	98.35	36.07	/	/	150	146	PK	Horizontal	PASS
2	2486.21	27.15	63.48	36.33	74.00	10.52	150	146	PK	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

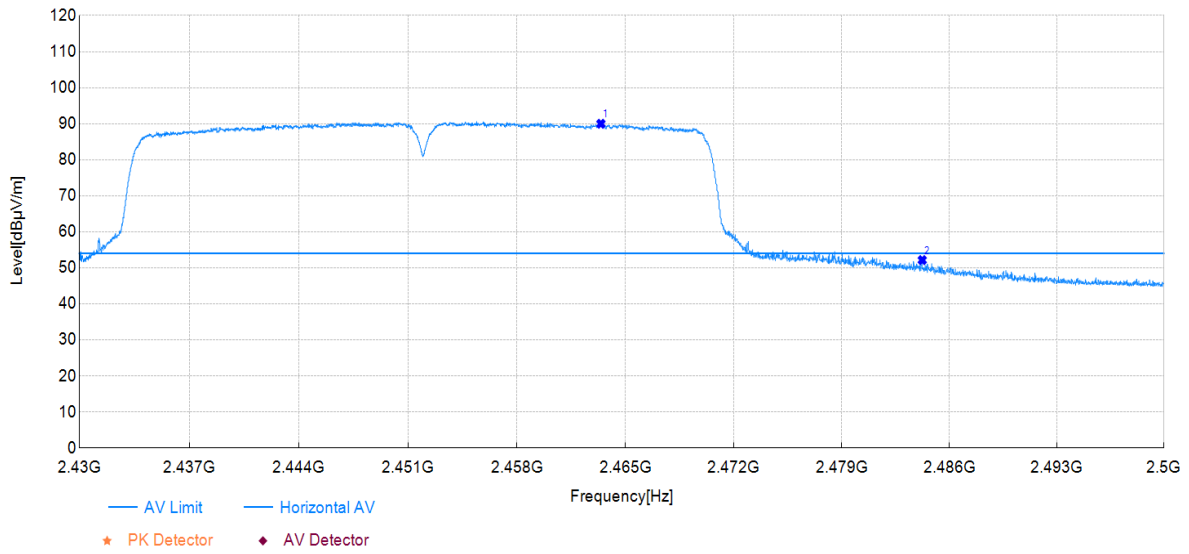


1	2463.42	53.89	89.98	36.09	/	/	150	146	AV	Horizontal	PASS
2	2484.23	15.85	52.15	36.30	54.00	1.85	150	146	AV	Horizontal	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

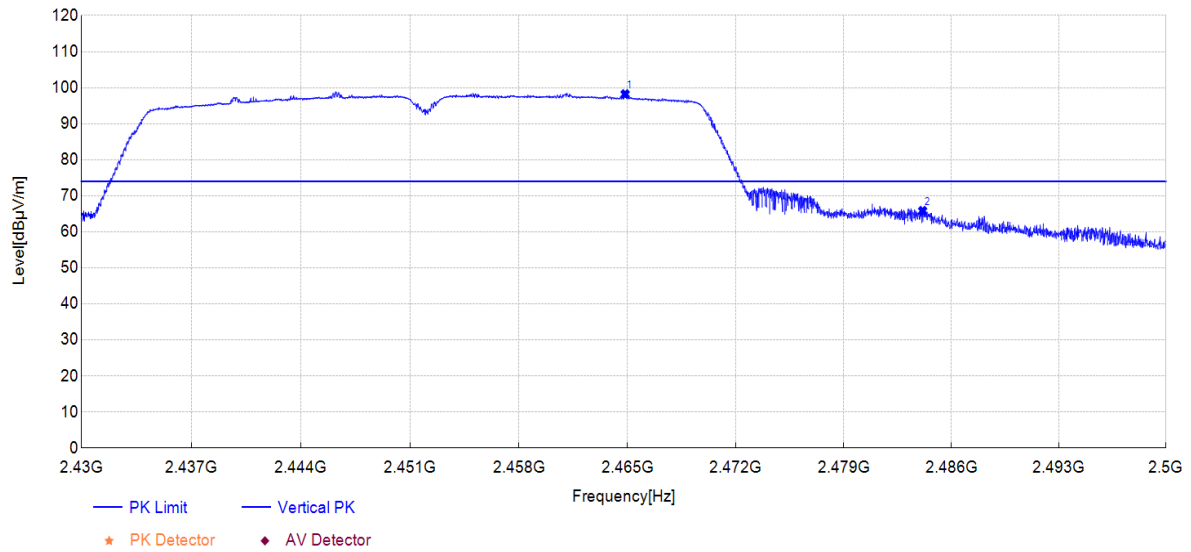


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	2464.85	62.35	98.20	35.85	/	/	150	76	PK	Vertical	PASS
2	2484.12	29.79	65.81	36.02	74.00	8.19	150	272	PK	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

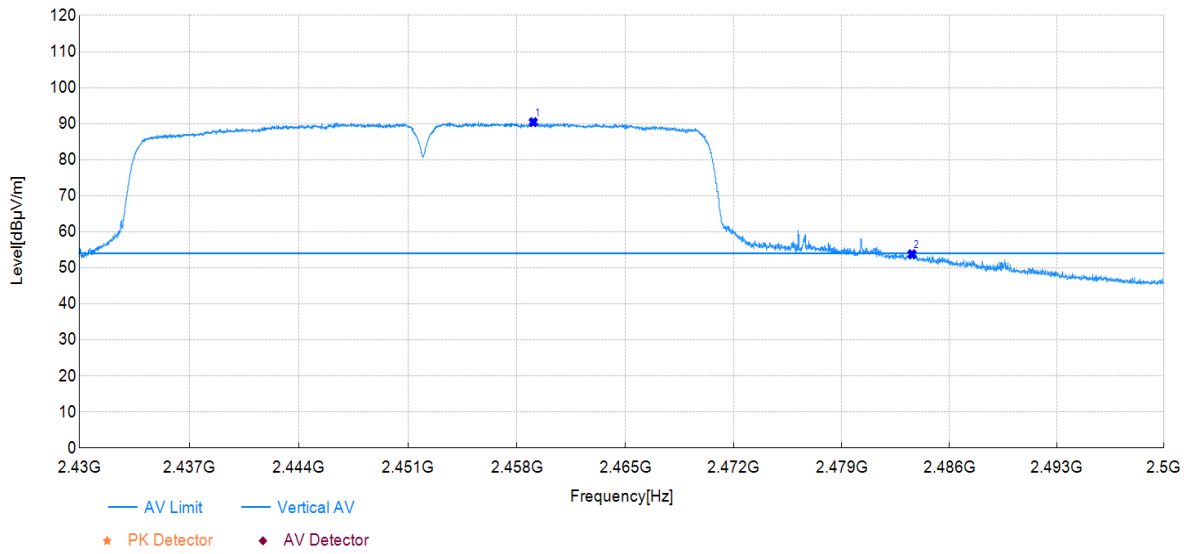

1	2459.06	54.63	90.44	35.81	/	/	150	75	AV	Vertical	PASS
2	2483.56	17.77	53.79	36.02	54.00	0.21	150	261	AV	Vertical	PASS

Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

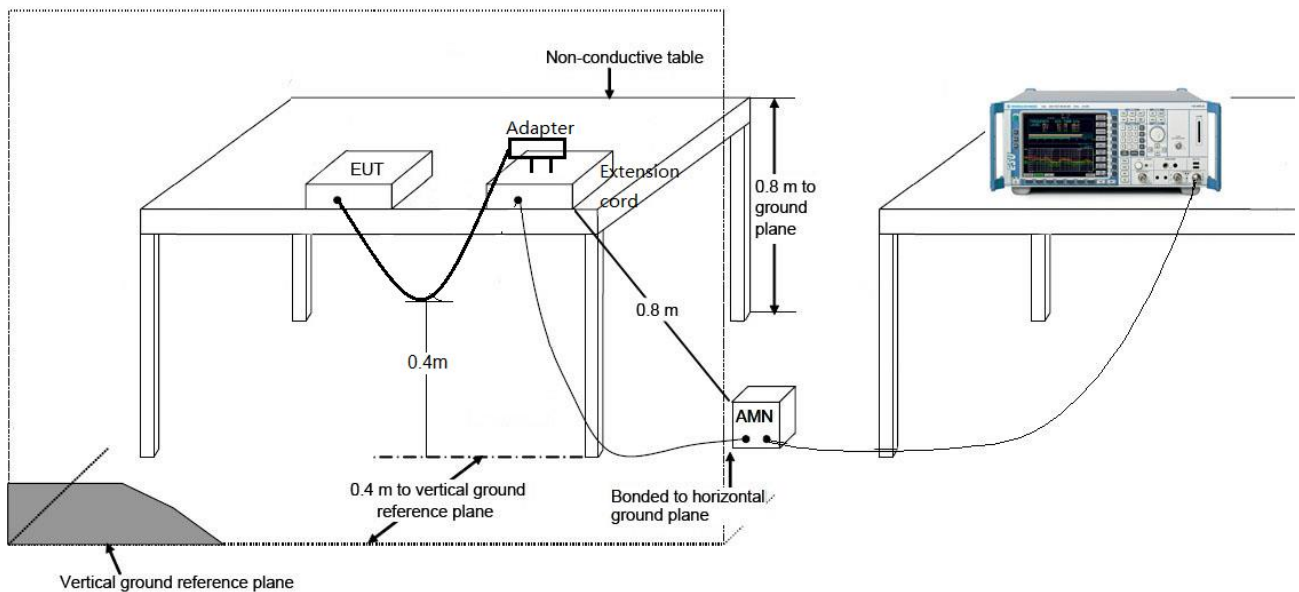

7.8.3. Test Result

The EUT is DC 3.7V supply, this item only for the EUT is designed to be connected to the public utility (AC) power line. Not applicable.

8. Conclusion

The data collected relate only the item(s) tested and show that the **GPS Tracker (Model: GL601CAU)** is compliance with Part 15C of the FCC Rules.

Statement

1. This report is invalid for the following states: without the special inspection and testing stamp or the official stamp of our institution; without the signature of the report authorized officer; if the report is altered.
2. It is forbidden to copy partial contents of the report except in full without the approval of our institution.
3. The client shall provide the test sample(s) and commission information and be responsible for their authenticity.
4. The report content is only applicable to the tested sample(s) this time.
5. If there are any objections to the report content, please submit them to our company in writing within 15 days from the date of receiving the report.
6. If the reports include both Chinese and English versions, when there are any inconsistencies caused by language, the Chinese version shall prevail.
7. This report is issued by the following laboratory premises:

No.8 Ningyun Rd., Xinwu District Wuxi, Jiangsu 214000 China

——This page is blank below this line ——