


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5500MHz

21/11/2025

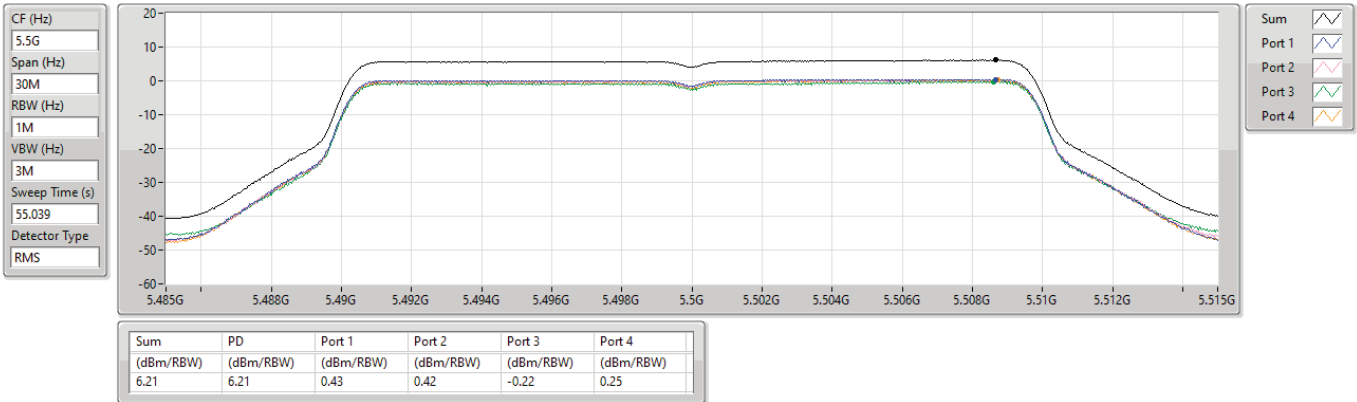


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5580MHz

21/11/2025

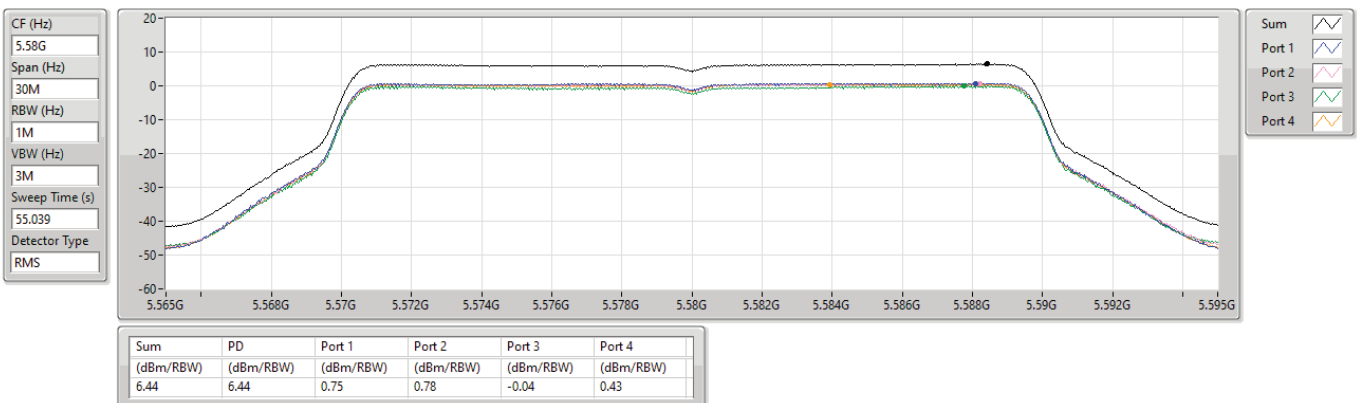


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5700MHz

21/11/2025

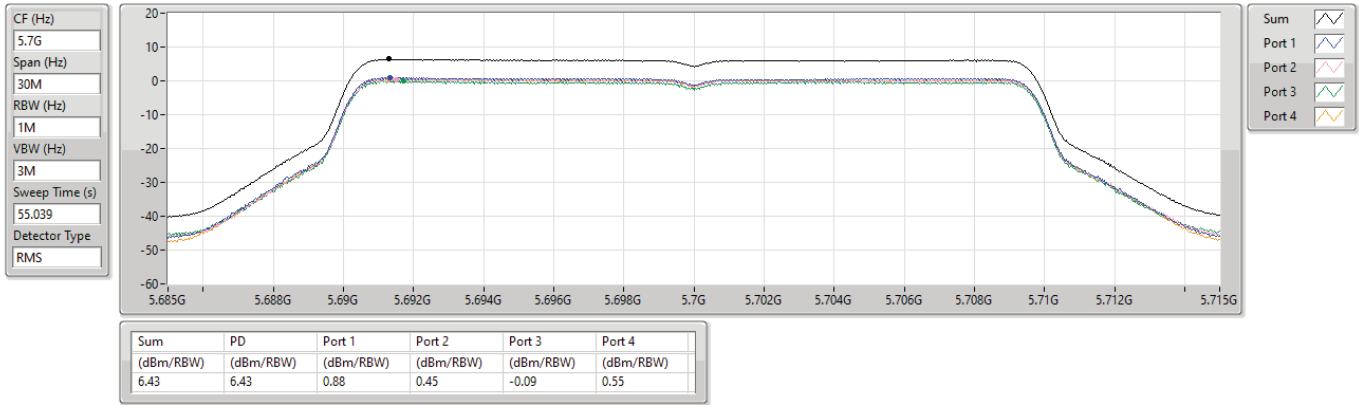


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

21/11/2025

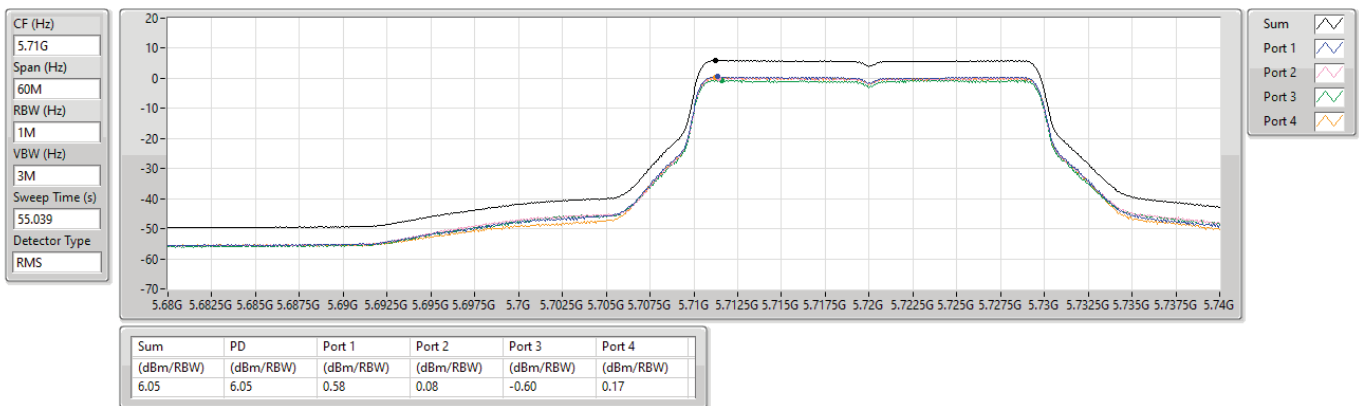


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

21/11/2025

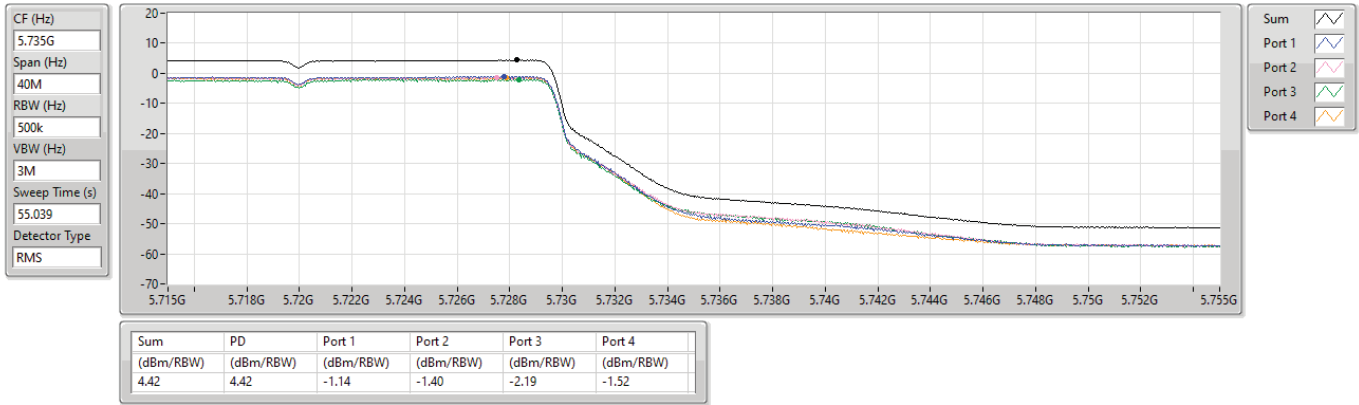


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5745MHz

21/11/2025

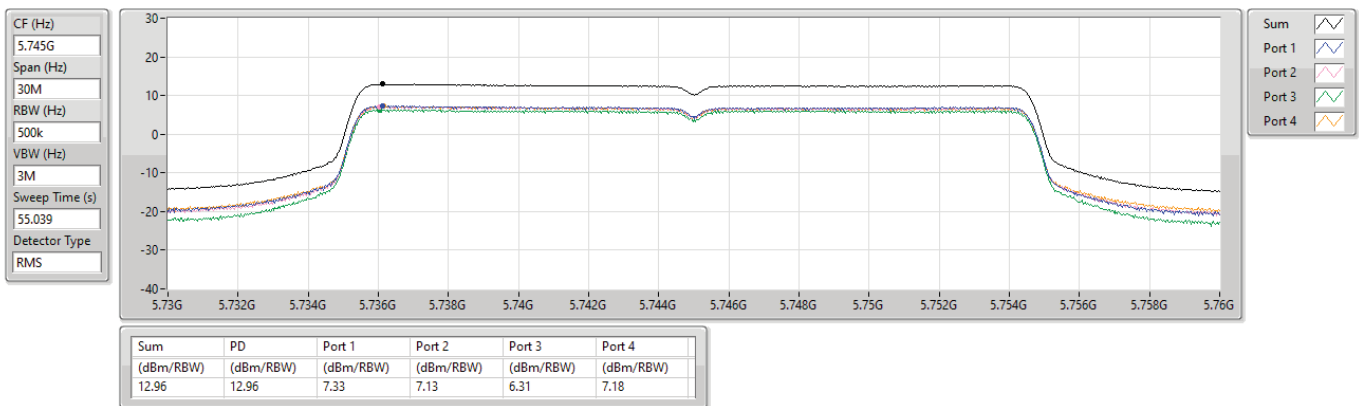


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5785MHz

21/11/2025

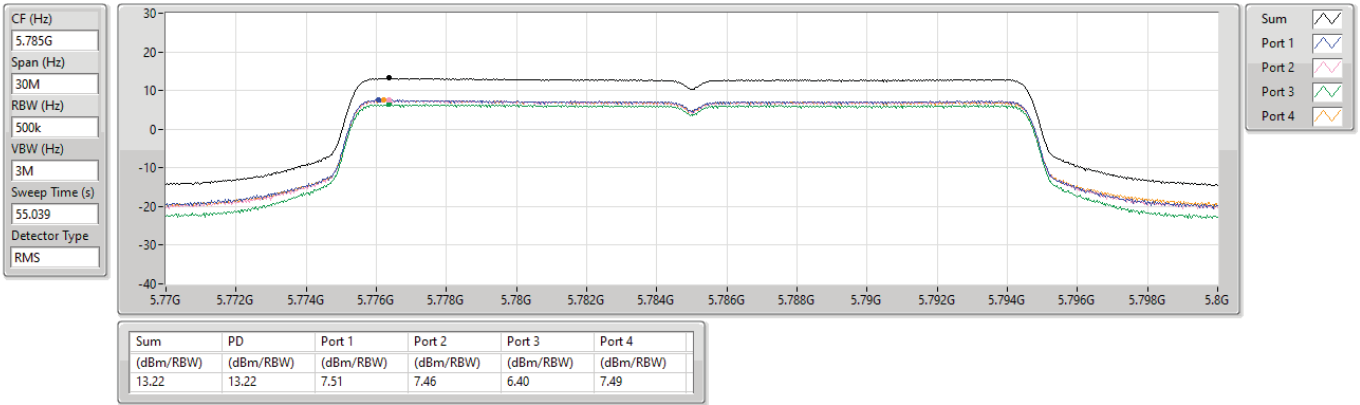


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5825MHz

21/11/2025

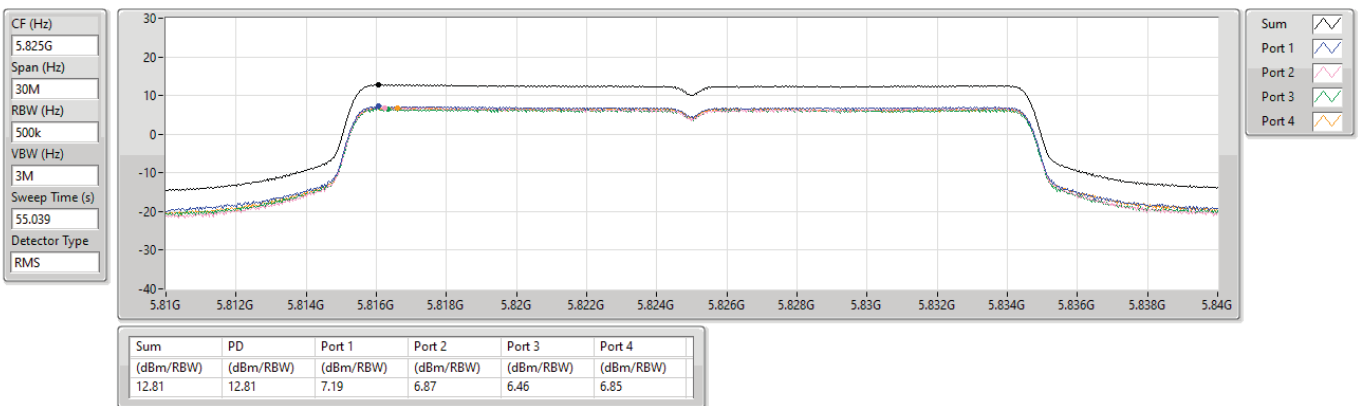

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5510MHz

21/11/2025

CF (Hz)
5.51G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
55.039

Detector Type
RMS

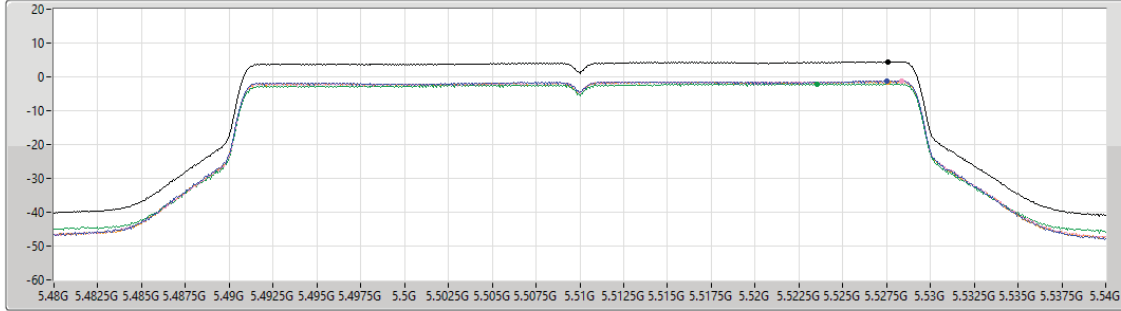

Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.51	4.51	-1.22	-1.19	-2.07	-1.42

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5550MHz

21/11/2025

CF (Hz)
5.55G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
55.039

Detector Type
RMS

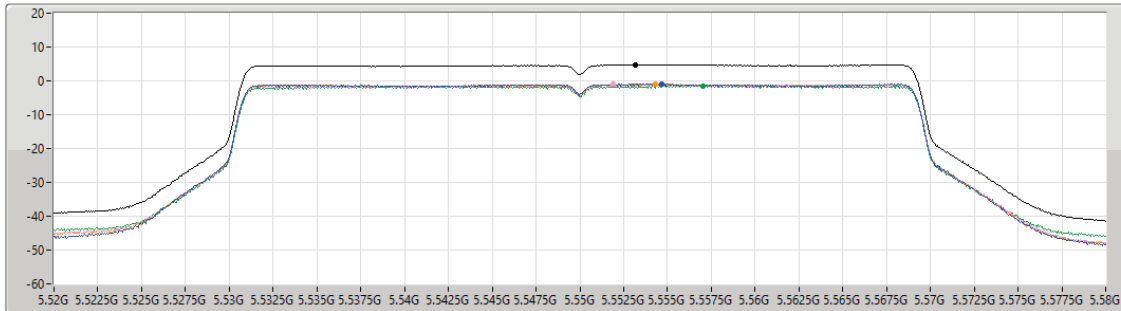

Sum 

Port 1 

Port 2 

Port 3 

Port 4 


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.77	4.77	-1.00	-1.09	-1.54	-1.00

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5670MHz

21/11/2025

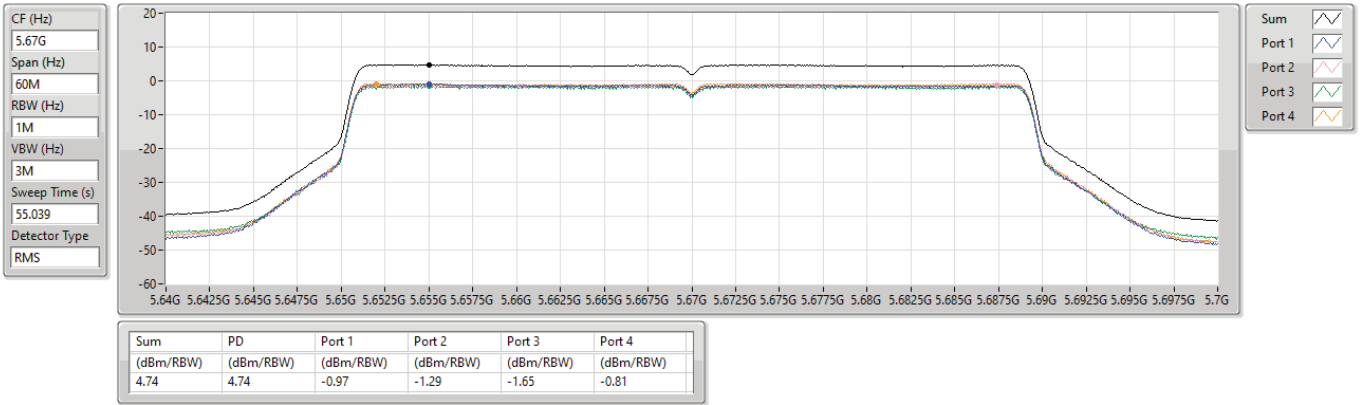


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.47-5.725GHz

21/11/2025

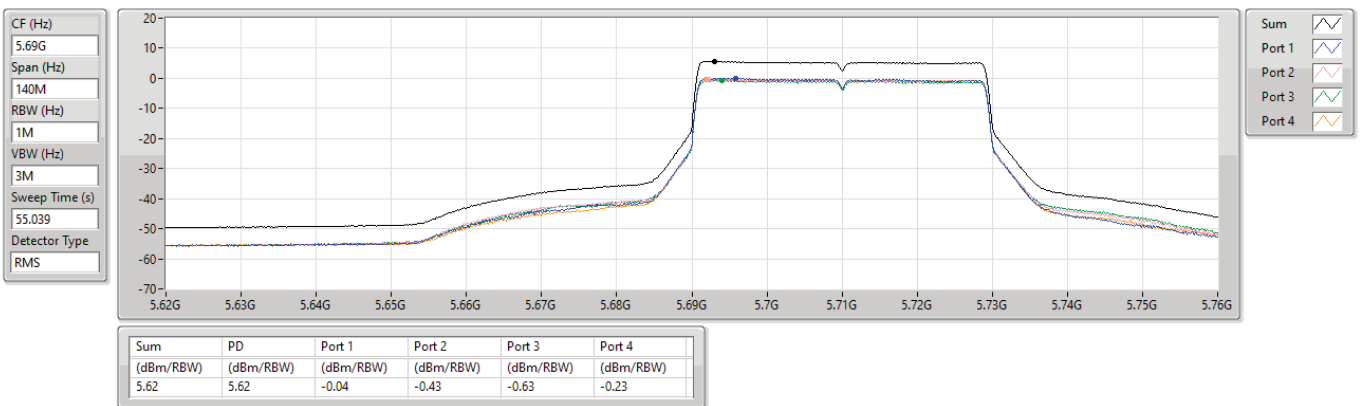


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.725-5.85GHz

21/11/2025

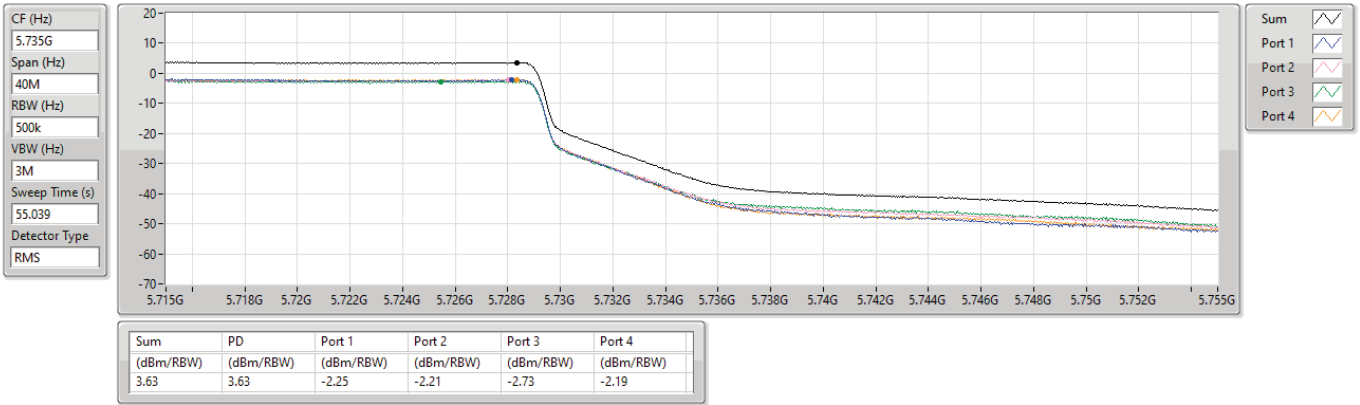


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5755MHz

21/11/2025

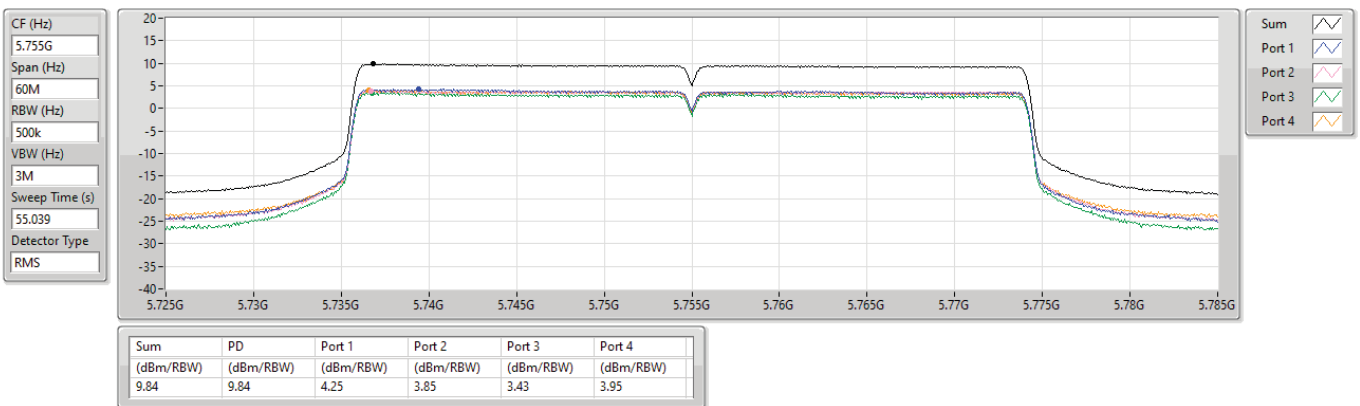

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5795MHz

21/11/2025

CF (Hz)
5.795G


Span (Hz)
60M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
55.039

Detector Type
RMS

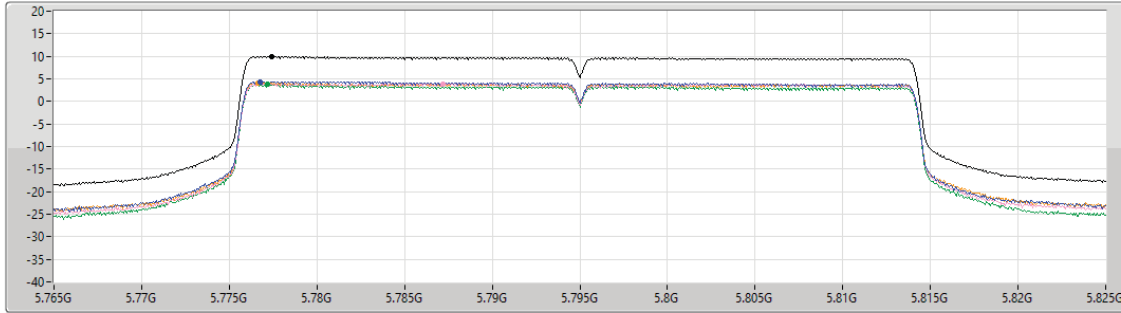

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.99	9.99	4.35	3.86	3.73	4.07

Sum

Port 1

Port 2

Port 3

Port 4

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5530MHz

21/11/2025

CF (Hz)
5.53G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
55.217

Detector Type
RMS

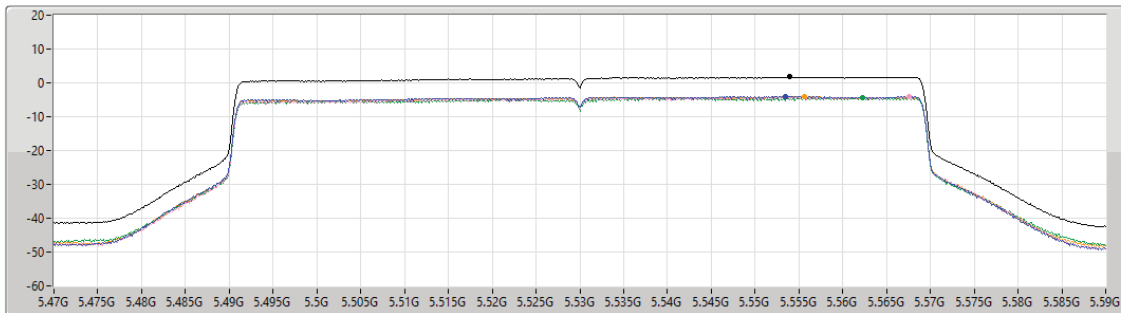

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.73	1.73	-4.07	-4.21	-4.52	-4.02

Sum

Port 1

Port 2

Port 3


Port 4

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5610MHz

21/11/2025

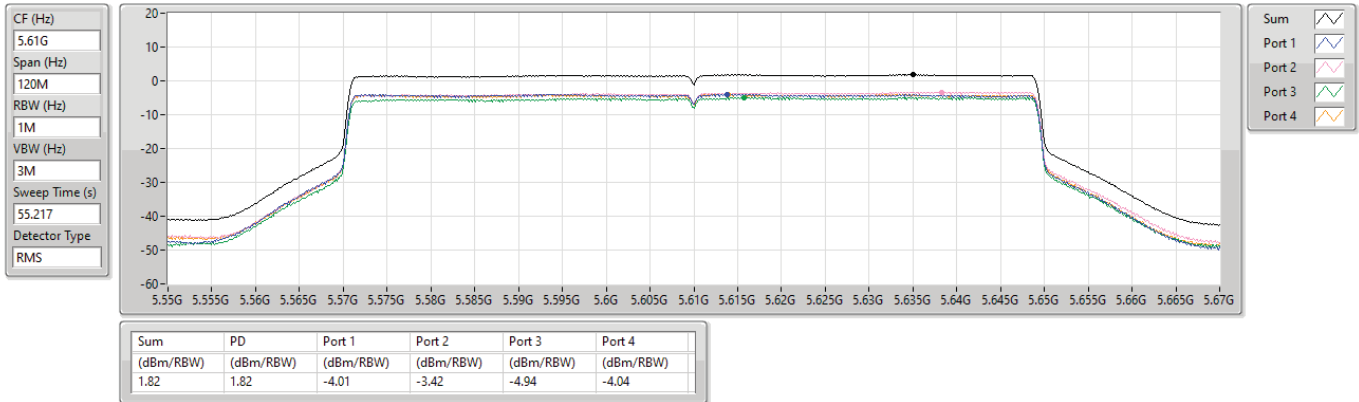


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.47-5.725GHz

21/11/2025

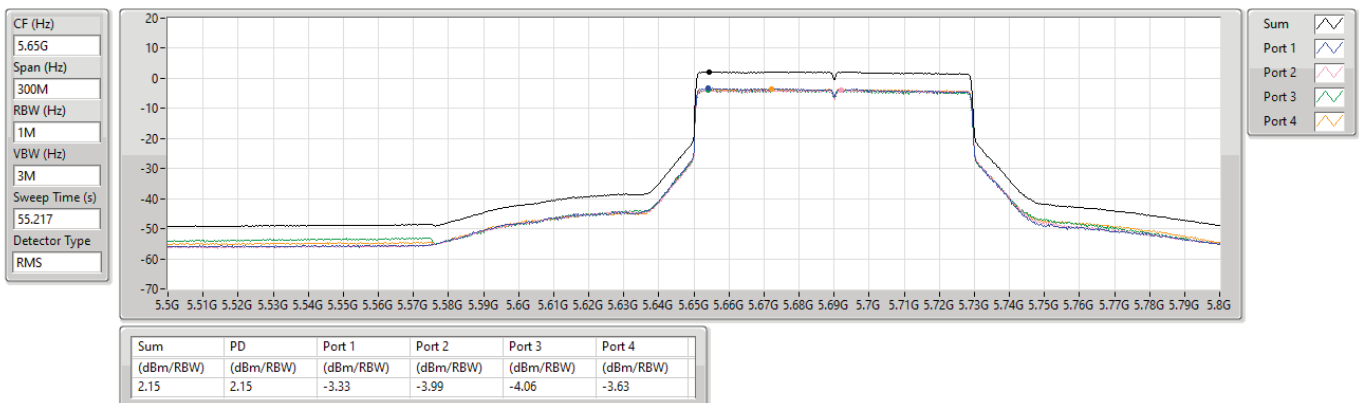


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.725-5.85GHz

21/11/2025

CF (Hz)
5.735G
Span (Hz)
40M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
55.217
Detector Type
RMS

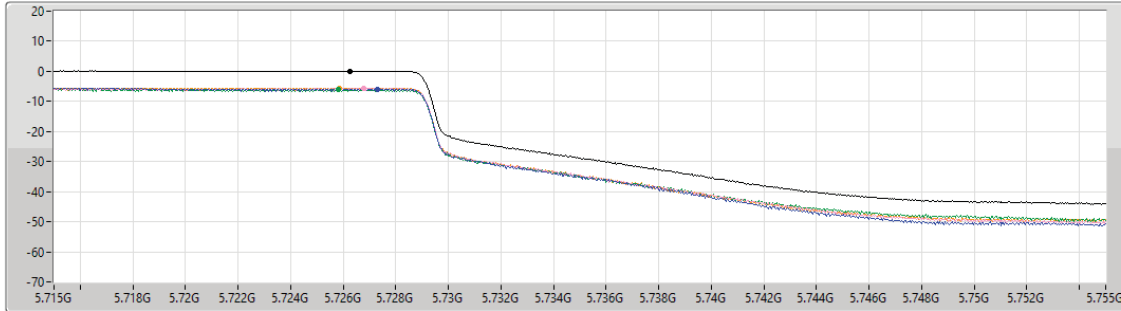

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.08	0.08	-5.99	-5.75	-6.14	-5.64

Sum
Port 1
Port 2
Port 3
Port 4


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5775MHz

21/11/2025

CF (Hz)
5.775G
Span (Hz)
120M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
55.217
Detector Type
RMS

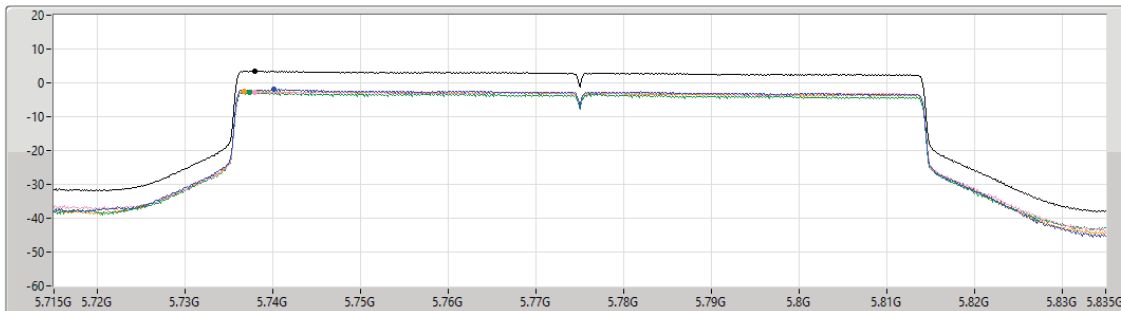

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.45	3.45	-1.99	-2.71	-2.87	-2.44

Sum
Port 1
Port 2
Port 3
Port 4


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5570MHz

21/11/2025

CF (Hz)
5.57G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
55.036
Detector Type
RMS

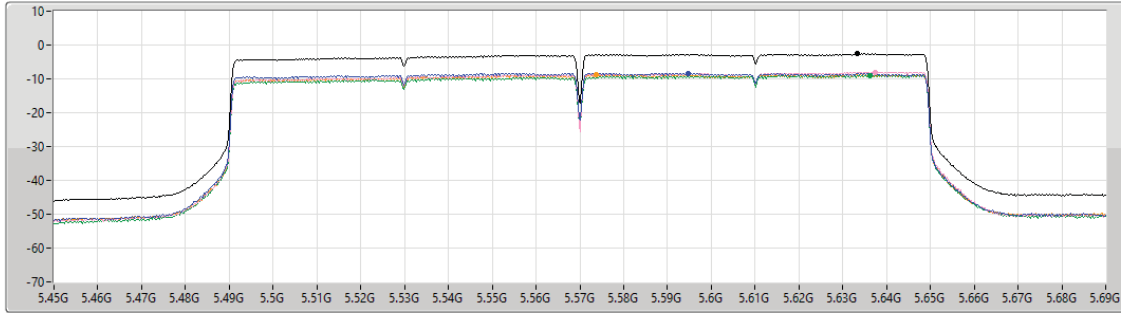

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.60	-2.60	-8.35	-8.01	-8.96	-8.78



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 2	Pass	PK	55.22M	36.87	40.00	-3.13	Vertical

Mode 2

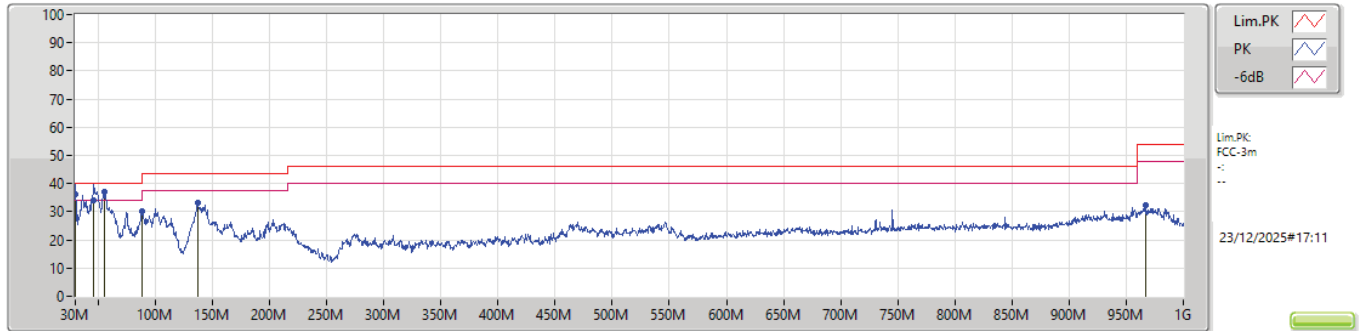

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
QP	30M	36.19	40.00	-3.81	-35.11	3	Vertical	23	2.00	-	71.30	18.16	0.14	53.41		
QP	46.01M	33.92	40.00	-6.08	-33.68	3	Vertical	131	1.00	-	67.60	19.91	0.25	53.84		
PK	55.22M	36.87	40.00	-3.13	-33.85	3	Vertical	105	1.00	"Worst"	70.72	19.76	0.42	54.03		
PK	88.69M	30.03	43.50	-13.47	-39.27	3	Vertical	84	1.00	-	69.30	13.71	0.77	53.75		
PK	137.19M	33.37	43.50	-10.13	-34.04	3	Vertical	291	1.00	-	67.41	18.49	1.44	53.97		
PK	967.51M	32.12	54.00	-21.88	-17.37	3	Vertical	155	1.00	-	49.49	29.79	4.54	51.70		

Mode 2

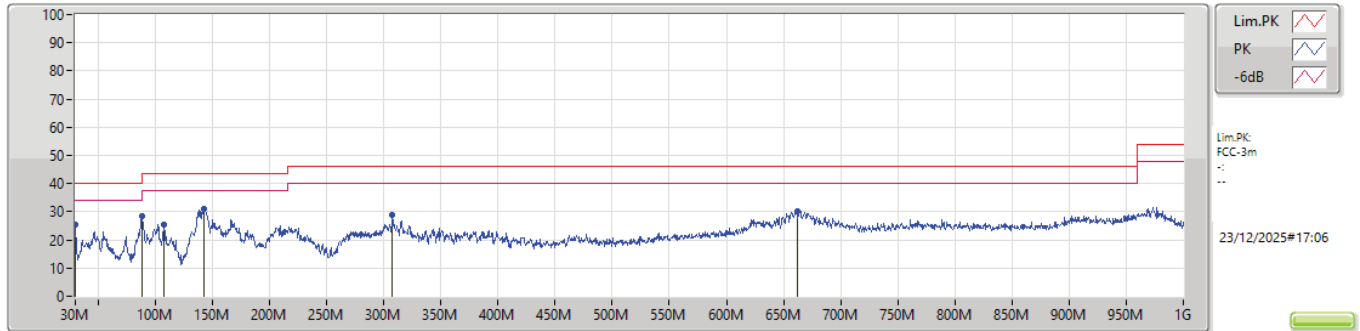

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	30M	25.38	40.00	-14.62	-35.11	3	Horizontal	87	1.00	-	60.49	18.16	0.14	53.41		
PK	88.2M	28.34	43.50	-15.16	-39.32	3	Horizontal	113	1.00	-	67.66	13.67	0.77	53.76		
PK	107.6M	25.40	43.50	-18.10	-36.66	3	Horizontal	171	2.00	-	62.06	15.96	1.04	53.66		
PK	142.52M	30.88	43.50	-12.62	-33.40	3	Horizontal	276	1.00	"Worst"	64.28	19.10	1.46	53.96		
PK	307.42M	28.80	46.00	-17.20	-31.80	3	Horizontal	56	2.00	-	60.60	19.73	2.18	53.71		
PK	661.96M	30.35	46.00	-15.65	-22.70	3	Horizontal	63	2.00	-	53.05	26.44	3.64	52.78		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1.(6Mbps)_4TX	Pass	PK	17.48394G	68.19	68.20	-0.01	3	Horizontal	50	3.00	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

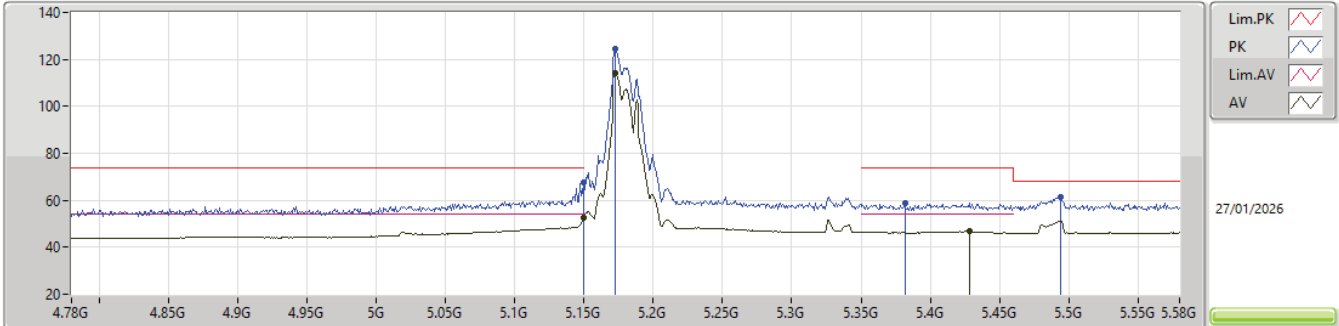


EUT_Y_4TX
Setting 19.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	67.35	74.00	-6.65	56.30	3	Vertical	11	1.72	-	33.60	7.58	30.13			
AV	5.1496G	52.45	54.00	-1.55	41.40	3	Vertical	11	1.72	-	33.60	7.58	30.13			
PK	5.1728G	124.28	Inf	-Inf	113.19	3	Vertical	11	1.72	-	33.65	7.58	30.14			
AV	5.1728G	114.22	Inf	-Inf	103.13	3	Vertical	11	1.72	-	33.65	7.58	30.14			
PK	5.3816G	58.81	74.00	-15.19	47.43	3	Vertical	11	1.72	-	33.90	7.73	30.25			
AV	5.428G	46.86	54.00	-7.14	35.47	3	Vertical	11	1.72	-	33.90	7.76	30.27			
PK	5.4944G	61.48	68.20	-6.72	50.00	3	Vertical	11	1.72	-	33.99	7.80	30.31			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

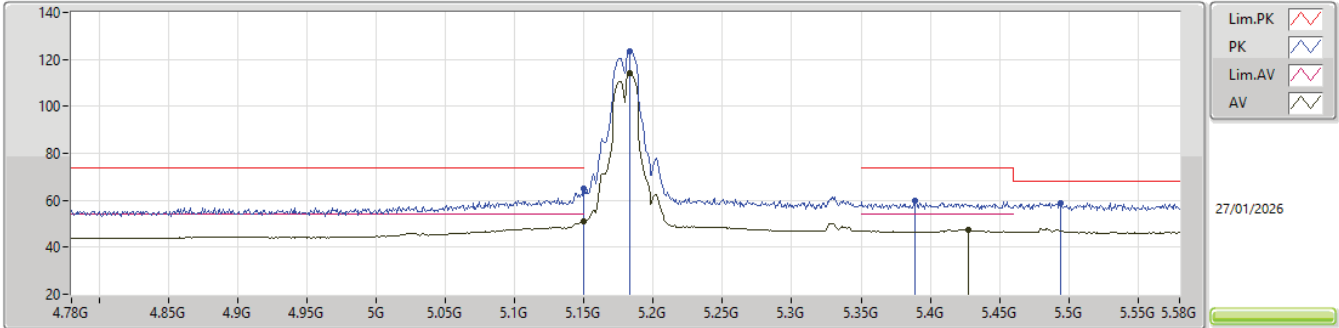


EUT_Y_4TX
Setting 19.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	65.23	74.00	-8.77	54.18	3	Horizontal	357	1.80	-	33.60	7.58	30.13			
AV	5.1496G	50.89	54.00	-3.11	39.84	3	Horizontal	357	1.80	-	33.60	7.58	30.13			
PK	5.1832G	123.67	Inf	-Inf	112.56	3	Horizontal	357	1.80	-	33.67	7.59	30.15			
AV	5.1832G	114.05	Inf	-Inf	102.94	3	Horizontal	357	1.80	-	33.67	7.59	30.15			
PK	5.3888G	59.64	74.00	-14.36	48.26	3	Horizontal	357	1.80	-	33.90	7.73	30.25			
AV	5.4272G	47.56	54.00	-6.44	36.17	3	Horizontal	357	1.80	-	33.90	7.76	30.27			
PK	5.4944G	58.97	68.20	-9.23	47.49	3	Horizontal	357	1.80	-	33.99	7.80	30.31			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

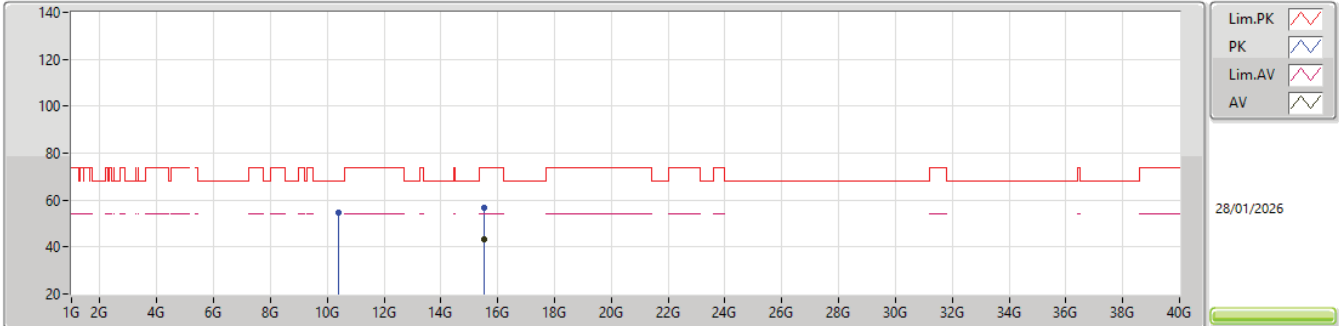


EUT_Y_4TX
Setting 19.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38982G	54.54	68.20	-13.66	70.92	3	Vertical	349	1.83	-	38.32	11.98	66.68			
PK	15.53238G	56.72	74.00	-17.28	68.14	3	Vertical	351	1.80	-	37.97	14.43	63.82			
AV	15.51462G	43.22	54.00	-10.78	54.59	3	Vertical	351	1.80	-	38.04	14.41	63.82			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

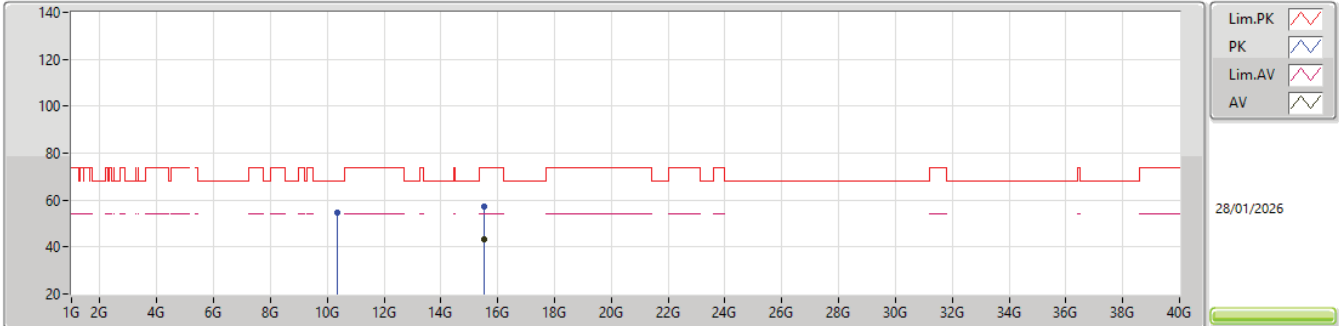


EUT_Y_4TX
Setting 19.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35664G	54.72	68.20	-13.48	71.04	3	Horizontal	21	1.94	-	38.39	11.96	66.67			
PK	15.51918G	57.13	74.00	-16.87	68.52	3	Horizontal	349	1.80	-	38.02	14.41	63.82			
AV	15.51462G	43.23	54.00	-10.77	54.60	3	Horizontal	349	1.80	-	38.04	14.41	63.82			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

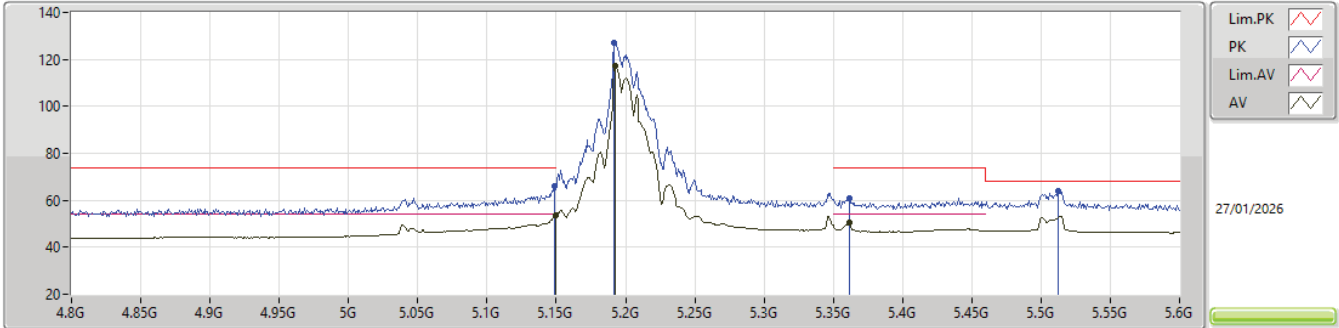


EUT_Y_4TX
Setting 23.5
02-D-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1488G	65.89	74.00	-8.11	54.84	3	Vertical	11	1.80	-	33.60	7.58	30.13					
AV	5.1496G	53.57	54.00	-0.43	42.52	3	Vertical	11	1.80	-	33.60	7.58	30.13					
PK	5.192G	126.86	Inf	-Inf	115.74	3	Vertical	11	1.80	-	33.68	7.59	30.15					
AV	5.1928G	117.21	Inf	-Inf	106.08	3	Vertical	11	1.80	-	33.69	7.59	30.15					
PK	5.3616G	61.02	74.00	-12.98	49.65	3	Vertical	11	1.80	-	33.90	7.71	30.24					
AV	5.3616G	50.26	54.00	-3.74	38.89	3	Vertical	11	1.80	-	33.90	7.71	30.24					
PK	5.5128G	63.98	68.20	-4.22	52.45	3	Vertical	11	1.80	-	34.03	7.81	30.31					

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

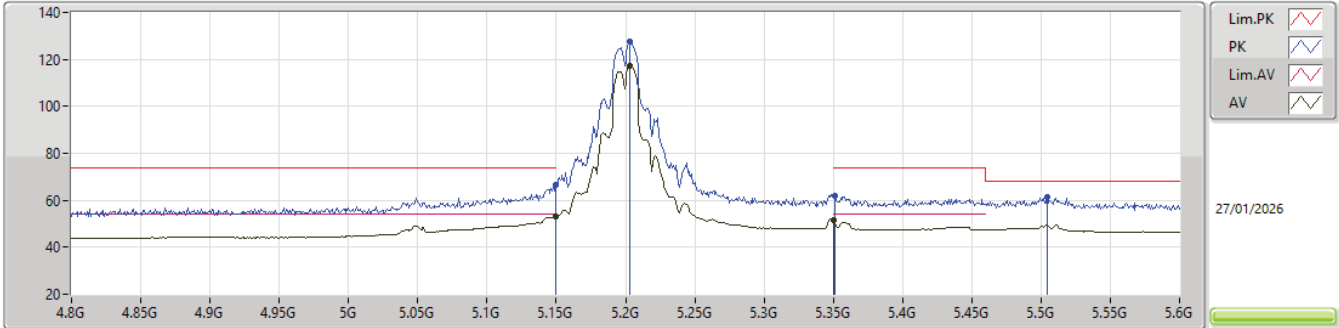


EUT_Y_4TX
Setting 23.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	66.63	74.00	-7.37	55.58	3	Horizontal	357	1.71	-	33.60	7.58	30.13			
AV	5.1496G	52.92	54.00	-1.08	41.87	3	Horizontal	357	1.71	-	33.60	7.58	30.13			
PK	5.2032G	127.45	Inf	-Inf	116.32	3	Horizontal	357	1.71	-	33.70	7.59	30.16			
AV	5.2032G	117.37	Inf	-Inf	106.24	3	Horizontal	357	1.71	-	33.70	7.59	30.16			
PK	5.3512G	62.07	74.00	-11.93	50.70	3	Horizontal	357	1.71	-	33.90	7.70	30.23			
AV	5.3512G	51.67	54.00	-2.33	40.30	3	Horizontal	357	1.71	-	33.90	7.70	30.23			
PK	5.5048G	61.14	68.20	-7.06	49.64	3	Horizontal	357	1.71	-	34.01	7.80	30.31			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

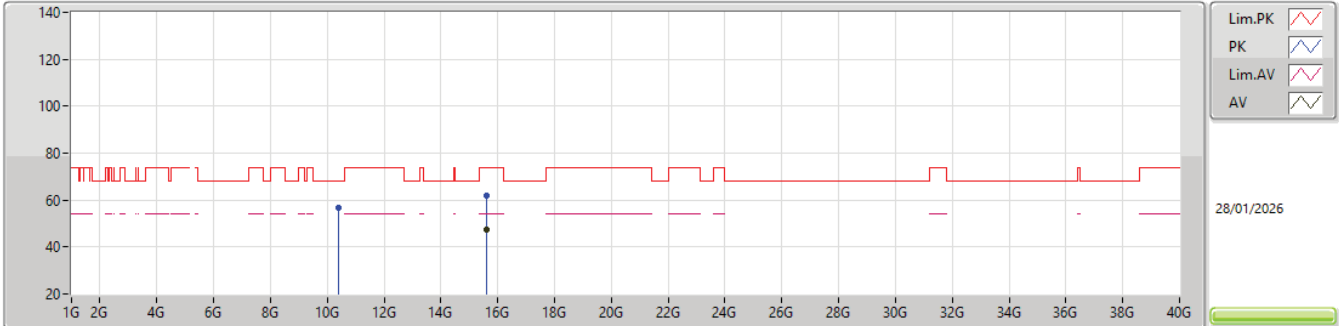


EUT_Y_4TX
Setting 23.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40228G	56.84	68.20	-11.36	73.25	3	Vertical	350	1.78	-	38.30	11.98	66.69			
PK	15.5943G	61.82	74.00	-12.18	73.38	3	Vertical	20	1.79	-	37.81	14.48	63.85			
AV	15.5946G	47.55	54.00	-6.45	59.11	3	Vertical	20	1.79	-	37.81	14.48	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

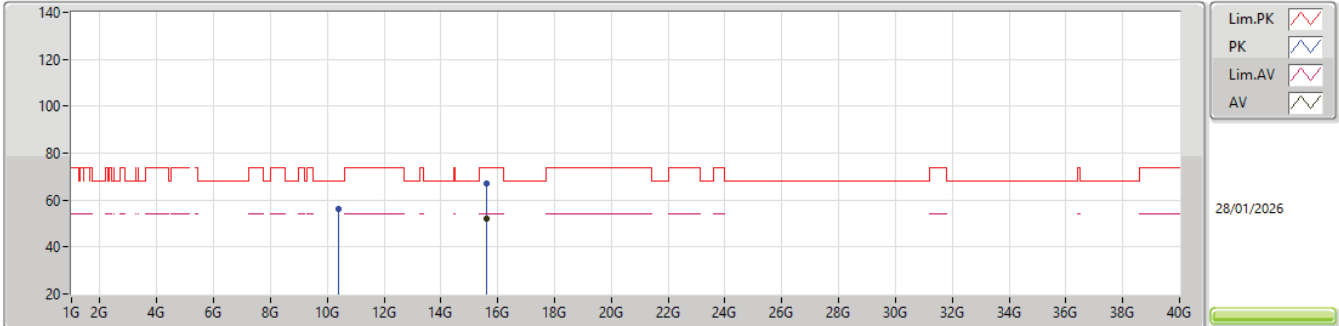


EUT_Y_4TX
Setting 23.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39226G	56.16	68.20	-12.04	72.54	3	Horizontal	22	1.80	-	38.32	11.98	66.68			
PK	15.60264G	66.88	74.00	-7.12	78.45	3	Horizontal	289	1.88	-	37.79	14.49	63.85			
AV	15.6027G	52.15	54.00	-1.85	63.72	3	Horizontal	289	1.88	-	37.79	14.49	63.85			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

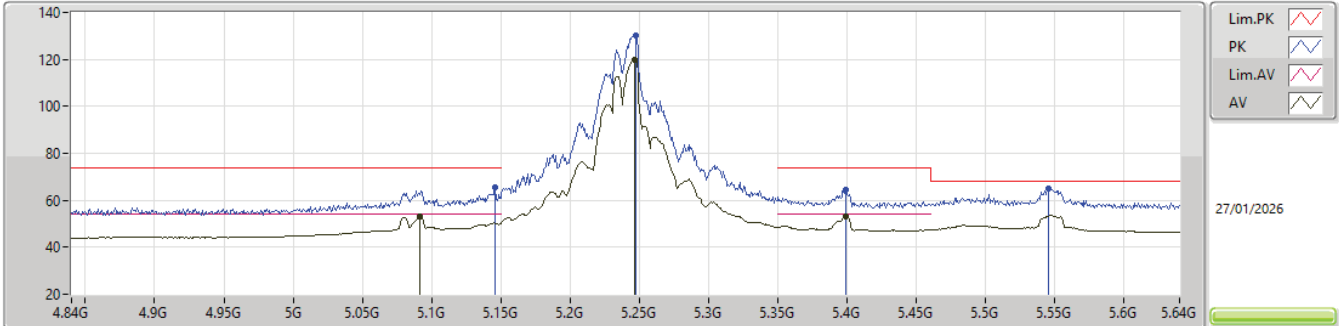


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1456G	65.38	74.00	-8.62	54.34	3	Vertical	356	1.80	-	33.59	7.58	30.13			
AV	5.0912G	53.25	54.00	-0.75	42.30	3	Vertical	356	1.80	-	33.48	7.57	30.10			
PK	5.2472G	130.22	Inf	-Inf	119.07	3	Vertical	356	1.80	-	33.70	7.63	30.18			
AV	5.2464G	120.02	Inf	-Inf	108.88	3	Vertical	356	1.80	-	33.70	7.62	30.18			
PK	5.3992G	64.30	74.00	-9.70	52.92	3	Vertical	356	1.80	-	33.90	7.74	30.26			
AV	5.3992G	53.00	54.00	-1.00	41.62	3	Vertical	356	1.80	-	33.90	7.74	30.26			
PK	5.5456G	65.15	68.20	-3.05	53.52	3	Vertical	356	1.80	-	34.09	7.83	30.29			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

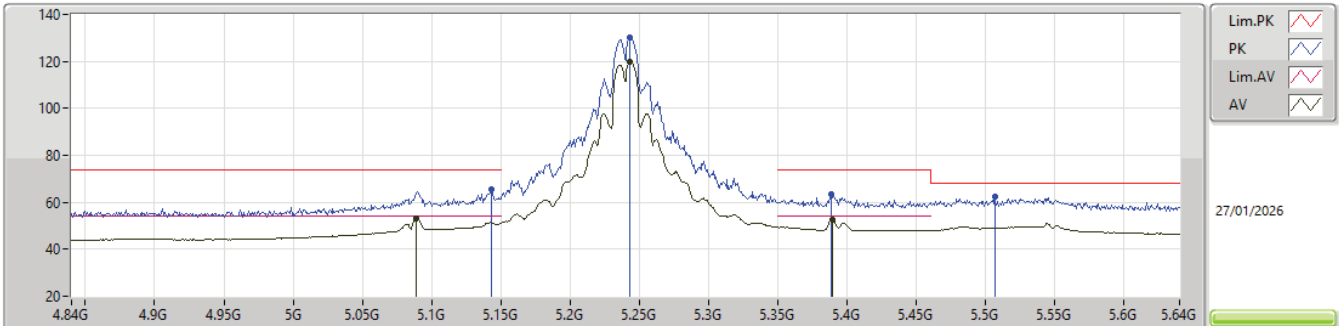


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1432G	65.40	74.00	-8.60	54.35	3	Horizontal	356	1.64	-	33.59	7.58	30.12					
AV	5.0888G	53.20	54.00	-0.80	42.25	3	Horizontal	356	1.64	-	33.48	7.57	30.10					
PK	5.2432G	129.93	Inf	-Inf	118.79	3	Horizontal	356	1.64	-	33.70	7.62	30.18					
AV	5.2432G	120.04	Inf	-Inf	108.90	3	Horizontal	356	1.64	-	33.70	7.62	30.18					
PK	5.3888G	63.56	74.00	-10.44	52.18	3	Horizontal	356	1.64	-	33.90	7.73	30.25					
AV	5.3896G	52.44	54.00	-1.56	41.06	3	Horizontal	356	1.64	-	33.90	7.73	30.25					
PK	5.5064G	62.17	68.20	-6.03	50.67	3	Horizontal	356	1.64	-	34.01	7.80	30.31					

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

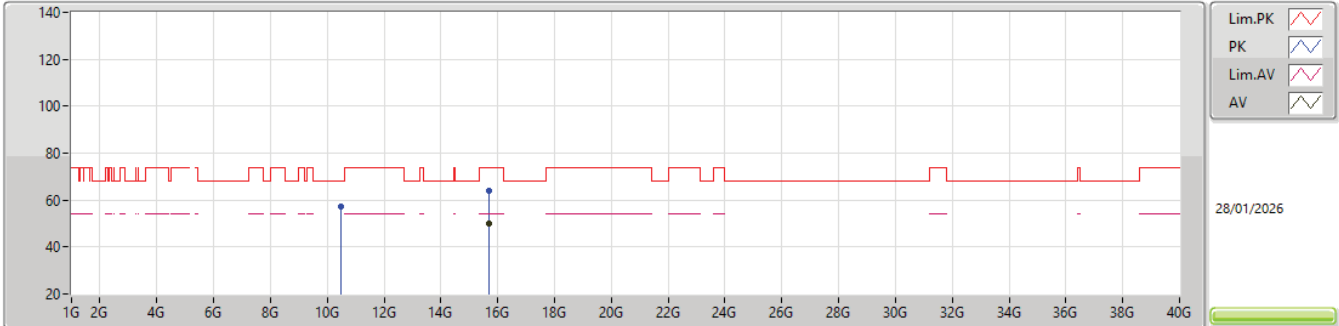


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.474G	57.31	68.20	-10.89	73.76	3	Vertical	342	1.05	-	38.25	12.02	66.72			
PK	15.71454G	63.93	74.00	-10.07	75.67	3	Vertical	21	1.80	-	37.57	14.58	63.89			
AV	15.71412G	49.92	54.00	-4.08	61.66	3	Vertical	21	1.80	-	37.57	14.58	63.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

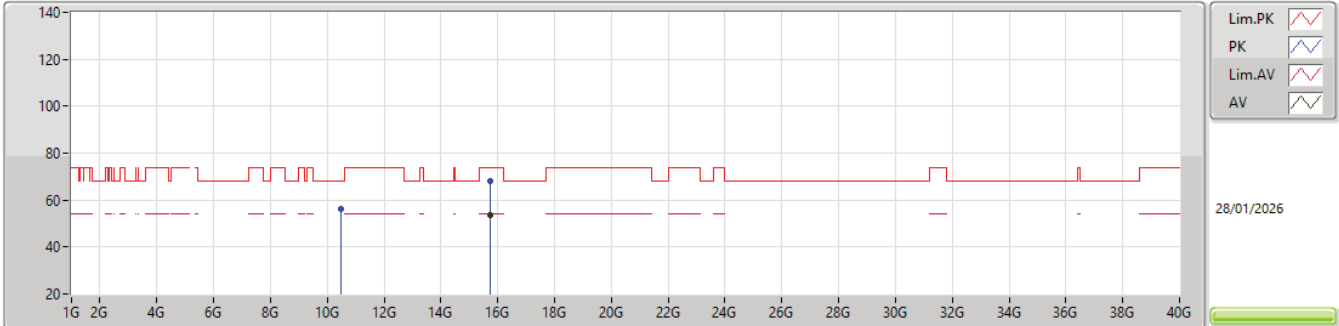


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47748G	56.44	68.20	-11.76	72.89	3	Horizontal	0	1.80	-	38.25	12.02	66.72			
PK	15.72138G	68.13	74.00	-5.87	79.87	3	Horizontal	357	1.91	-	37.56	14.59	63.89			
AV	15.72042G	53.72	54.00	-0.28	65.46	3	Horizontal	357	1.91	-	37.56	14.59	63.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

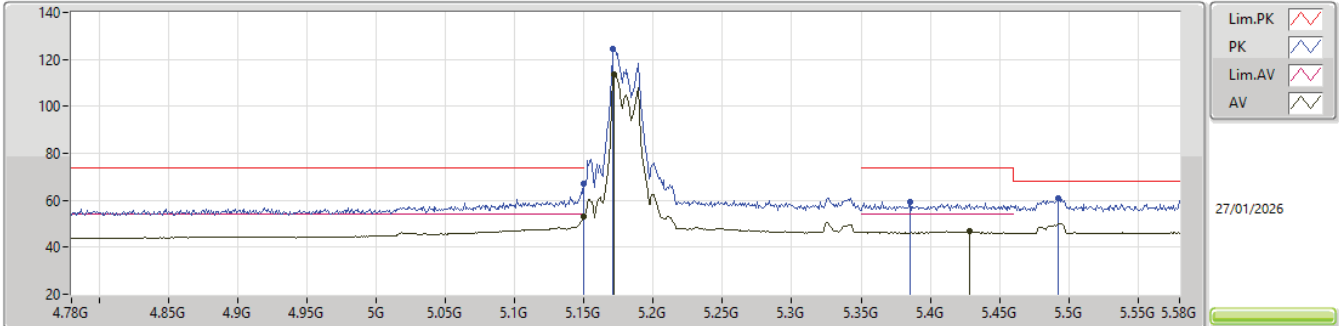


EUT_Y_4TX
Setting 19
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1496G	67.00	74.00	-7.00	55.95	3	Vertical	13	1.72	-	33.60	7.58	30.13				
AV	5.1496G	52.92	54.00	-1.08	41.87	3	Vertical	13	1.72	-	33.60	7.58	30.13				
PK	5.1712G	124.60	Inf	-Inf	113.52	3	Vertical	13	1.72	-	33.64	7.58	30.14				
AV	5.172G	113.64	Inf	-Inf	102.56	3	Vertical	13	1.72	-	33.64	7.58	30.14				
PK	5.3856G	59.30	74.00	-14.70	47.92	3	Vertical	13	1.72	-	33.90	7.73	30.25				
AV	5.4288G	46.80	54.00	-7.20	35.41	3	Vertical	13	1.72	-	33.90	7.76	30.27				
PK	5.4928G	61.10	68.20	-7.10	49.62	3	Vertical	13	1.72	-	33.99	7.80	30.31				

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

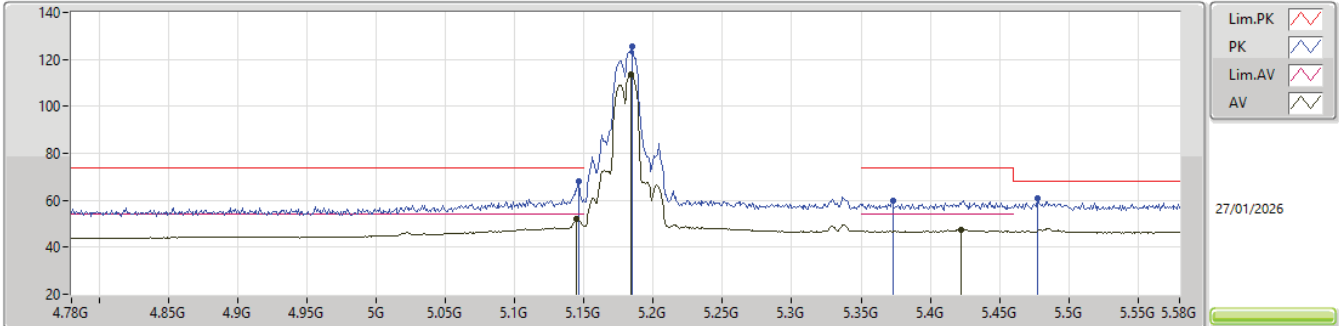


EUT_Y_4TX
Setting 19
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1464G	68.25	74.00	-5.75	57.21	3	Horizontal	351	1.80	-	33.59	7.58	30.13			
AV	5.1448G	51.88	54.00	-2.12	40.84	3	Horizontal	351	1.80	-	33.59	7.58	30.13			
PK	5.1848G	125.33	Inf	-Inf	114.22	3	Horizontal	351	1.80	-	33.67	7.59	30.15			
AV	5.184G	113.51	Inf	-Inf	102.40	3	Horizontal	351	1.80	-	33.67	7.59	30.15			
PK	5.3728G	59.89	74.00	-14.11	48.51	3	Horizontal	351	1.80	-	33.90	7.72	30.24			
AV	5.4224G	47.55	54.00	-6.45	36.17	3	Horizontal	351	1.80	-	33.90	7.75	30.27			
PK	5.4776G	60.96	68.20	-7.24	49.51	3	Horizontal	351	1.80	-	33.96	7.79	30.30			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

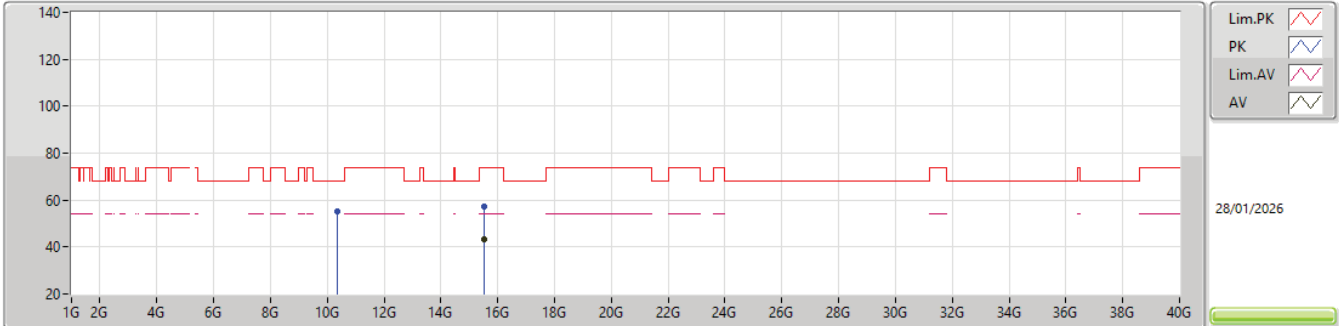


EUT_Y_4TX
Setting 19
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35982G	55.07	68.20	-13.13	71.40	3	Vertical	98	1.49	-	38.38	11.96	66.67			
PK	15.53674G	57.16	74.00	-16.84	68.60	3	Vertical	359	1.19	-	37.95	14.43	63.82			
AV	15.53588G	43.19	54.00	-10.81	54.62	3	Vertical	359	1.19	-	37.96	14.43	63.82			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

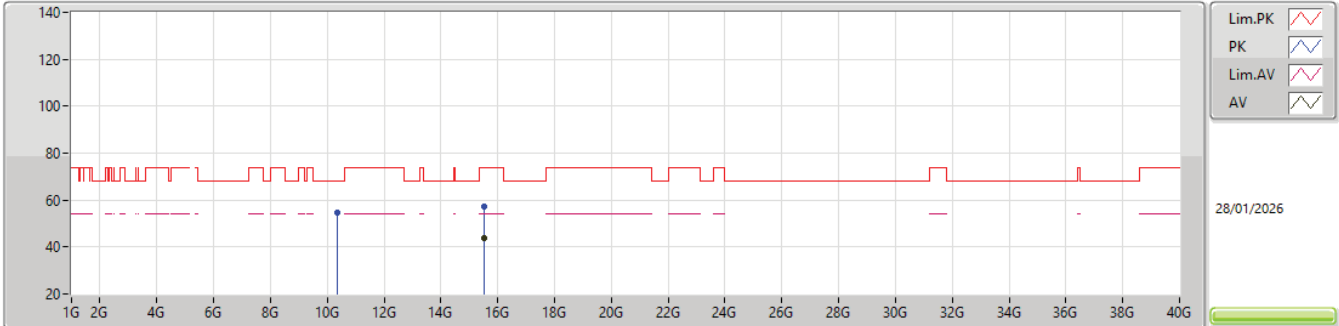


EUT_Y_4TX
Setting 19
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.37233G	54.57	68.20	-13.63	70.92	3	Horizontal	268	1.83	-	38.36	11.97	66.68			
PK	15.52596G	57.23	74.00	-16.77	68.63	3	Horizontal	296	1.80	-	38.00	14.42	63.82			
AV	15.52598G	43.80	54.00	-10.20	55.20	3	Horizontal	296	1.80	-	38.00	14.42	63.82			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

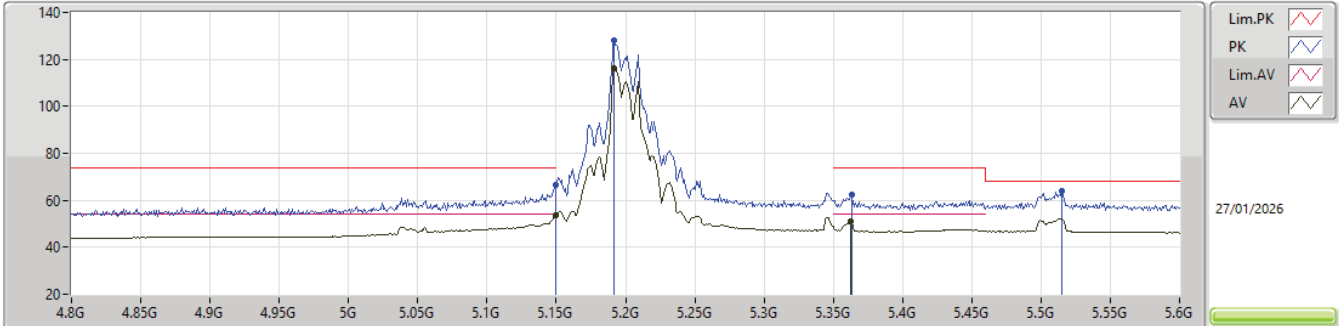


EUT_Y_4TX
Setting 22.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	66.49	74.00	-7.51	55.44	3	Vertical	12	1.80	-	33.60	7.58	30.13			
AV	5.1496G	53.52	54.00	-0.48	42.47	3	Vertical	12	1.80	-	33.60	7.58	30.13			
PK	5.192G	128.00	Inf	-Inf	116.88	3	Vertical	12	1.80	-	33.68	7.59	30.15			
AV	5.192G	116.29	Inf	-Inf	105.17	3	Vertical	12	1.80	-	33.68	7.59	30.15			
PK	5.3632G	62.56	74.00	-11.44	51.19	3	Vertical	12	1.80	-	33.90	7.71	30.24			
AV	5.3624G	51.21	54.00	-2.79	39.84	3	Vertical	12	1.80	-	33.90	7.71	30.24			
PK	5.5152G	63.89	68.20	-4.31	52.35	3	Vertical	12	1.80	-	34.03	7.81	30.30			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

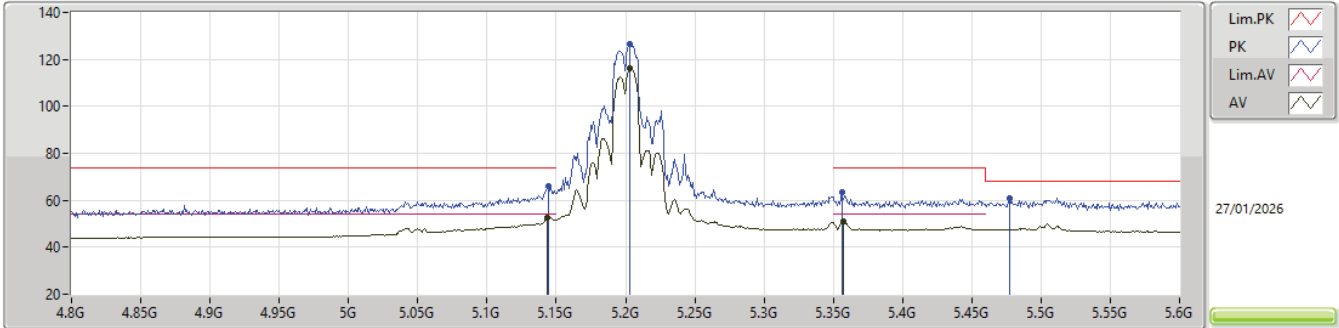


EUT_Y_4TX
Setting 22.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.144G	65.93	74.00	-8.07	54.88	3	Horizontal	352	1.77	-	33.59	7.58	30.12				
AV	5.1432G	52.83	54.00	-1.17	41.78	3	Horizontal	352	1.77	-	33.59	7.58	30.12				
PK	5.2032G	126.63	Inf	-Inf	115.50	3	Horizontal	352	1.77	-	33.70	7.59	30.16				
AV	5.2032G	116.23	Inf	-Inf	105.10	3	Horizontal	352	1.77	-	33.70	7.59	30.16				
PK	5.356G	63.19	74.00	-10.81	51.82	3	Horizontal	352	1.77	-	33.90	7.71	30.24				
AV	5.3576G	51.10	54.00	-2.90	39.73	3	Horizontal	352	1.77	-	33.90	7.71	30.24				
PK	5.4776G	61.09	68.20	-7.11	49.64	3	Horizontal	352	1.77	-	33.96	7.79	30.30				

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

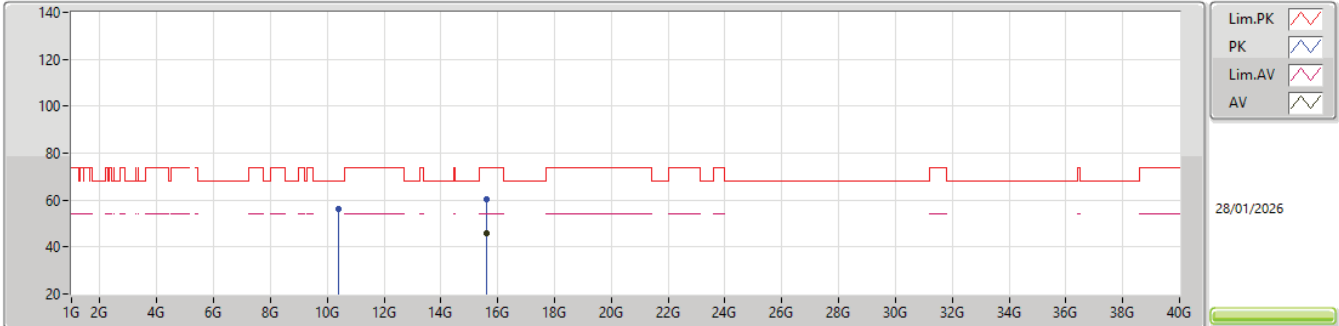


EUT_Y_4TX
Setting 22.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39994G	56.13	68.20	-12.07	72.54	3	Vertical	350	1.88	-	38.30	11.98	66.69			
PK	15.6042G	60.27	74.00	-13.73	71.84	3	Vertical	32	1.75	-	37.79	14.49	63.85			
AV	15.60534G	45.76	54.00	-8.24	57.33	3	Vertical	32	1.75	-	37.79	14.49	63.85			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

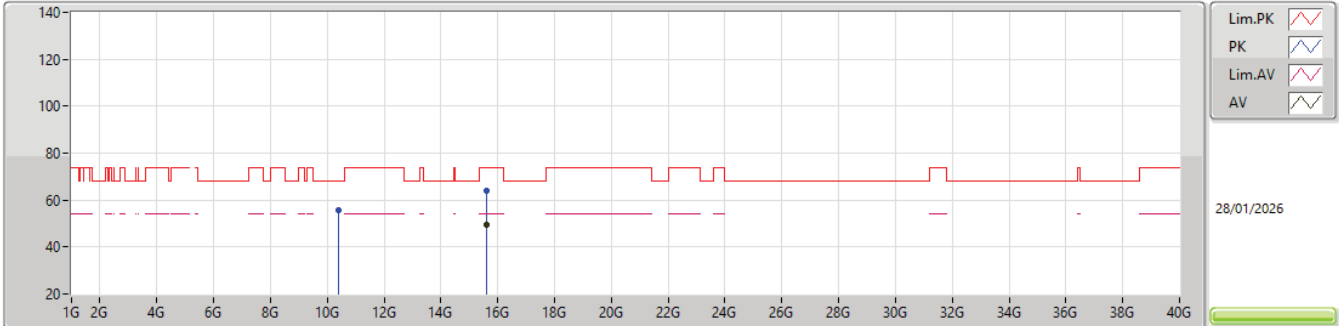


EUT_Y_4TX
Setting 22.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39985G	55.87	68.20	-12.33	72.28	3	Horizontal	0	1.90	-	38.30	11.98	66.69			
PK	15.60282G	64.17	74.00	-9.83	75.74	3	Horizontal	291	1.93	-	37.79	14.49	63.85			
AV	15.60234G	49.42	54.00	-4.58	60.98	3	Horizontal	291	1.93	-	37.80	14.49	63.85			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

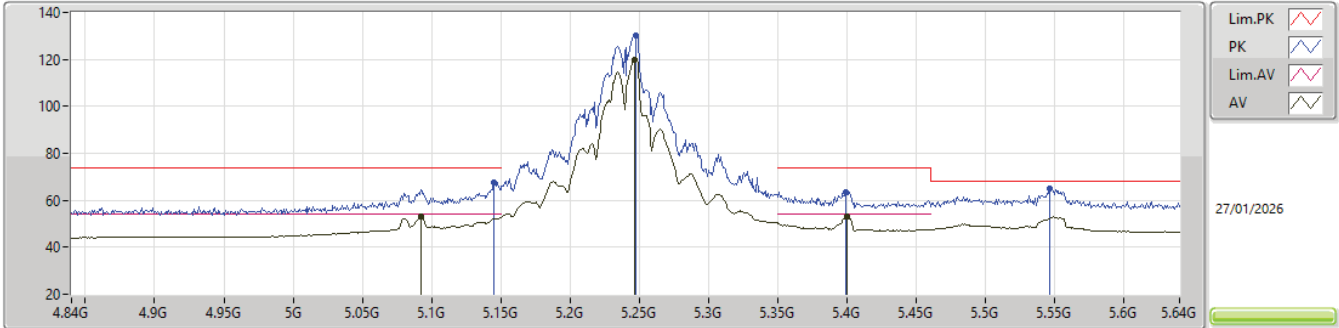


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1448G	67.68	74.00	-6.32	56.64	3	Vertical	354	1.80	-	33.59	7.58	30.13
AV	5.092G	53.03	54.00	-0.97	42.08	3	Vertical	354	1.80	-	33.48	7.57	30.10
PK	5.2472G	130.09	Inf	-Inf	118.94	3	Vertical	354	1.80	-	33.70	7.63	30.18
AV	5.2464G	119.87	Inf	-Inf	108.73	3	Vertical	354	1.80	-	33.70	7.62	30.18
PK	5.3992G	63.38	74.00	-10.62	52.00	3	Vertical	354	1.80	-	33.90	7.74	30.26
AV	5.4G	52.91	54.00	-1.09	41.53	3	Vertical	354	1.80	-	33.90	7.74	30.26
PK	5.5464G	65.22	68.20	-2.98	53.59	3	Vertical	354	1.80	-	34.09	7.83	30.29

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

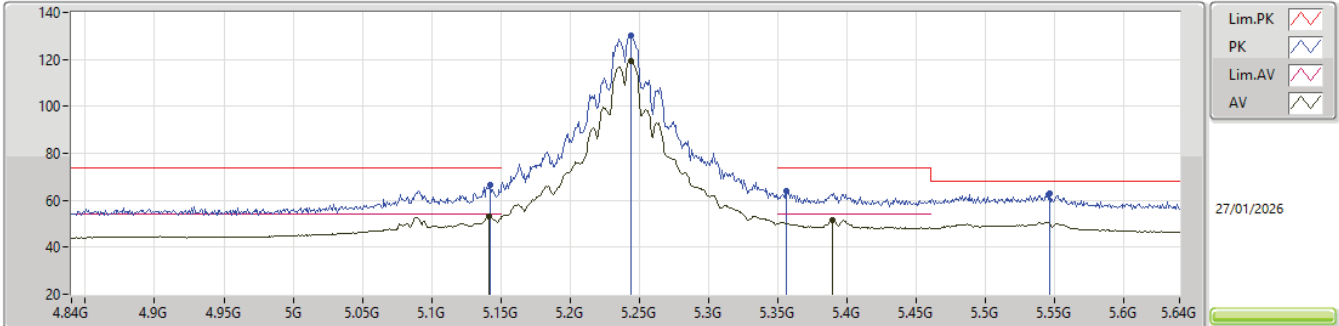


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1424G	66.31	74.00	-7.69	55.27	3	Horizontal	358	1.71	-	33.58	7.58	30.12			
AV	5.1416G	53.21	54.00	-0.79	42.17	3	Horizontal	358	1.71	-	33.58	7.58	30.12			
PK	5.244G	130.15	Inf	-Inf	119.01	3	Horizontal	358	1.71	-	33.70	7.62	30.18			
AV	5.244G	119.43	Inf	-Inf	108.29	3	Horizontal	358	1.71	-	33.70	7.62	30.18			
PK	5.356G	63.94	74.00	-10.06	52.57	3	Horizontal	358	1.71	-	33.90	7.71	30.24			
AV	5.3896G	51.53	54.00	-2.47	40.15	3	Horizontal	358	1.71	-	33.90	7.73	30.25			
PK	5.5464G	62.81	68.20	-5.39	51.18	3	Horizontal	358	1.71	-	34.09	7.83	30.29			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

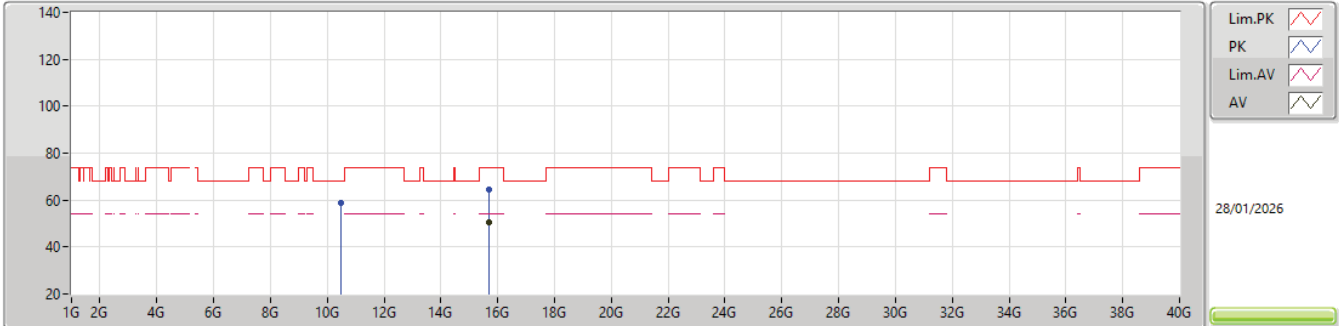


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47352G	58.70	68.20	-9.50	75.15	3	Vertical	348	1.08	-	38.25	12.02	66.72			
PK	15.7134G	64.41	74.00	-9.59	76.15	3	Vertical	21	1.81	-	37.57	14.58	63.89			
AV	15.71388G	50.61	54.00	-3.39	62.35	3	Vertical	21	1.81	-	37.57	14.58	63.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

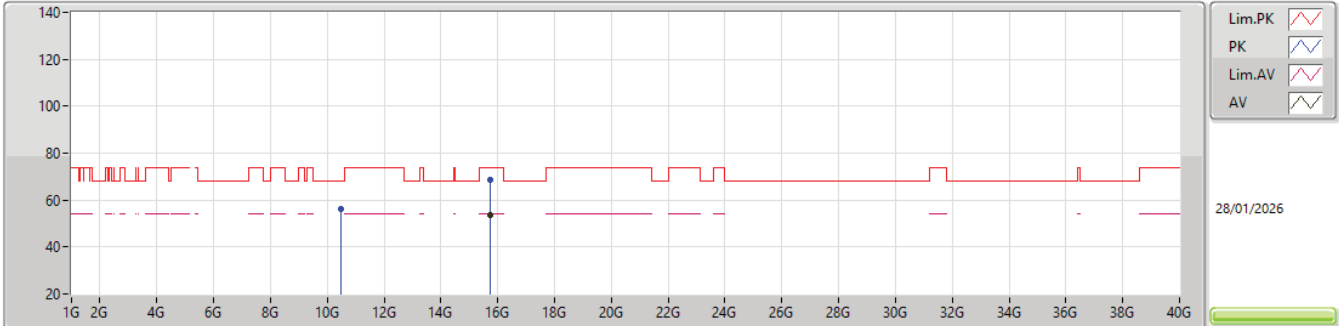


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48426G	56.10	68.20	-12.10	72.53	3	Horizontal	3	2.42	-	38.27	12.02	66.72			
PK	15.72174G	68.51	74.00	-5.49	80.25	3	Horizontal	357	1.92	-	37.56	14.59	63.89			
AV	15.72042G	53.84	54.00	-0.16	65.58	3	Horizontal	357	1.92	-	37.56	14.59	63.89			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

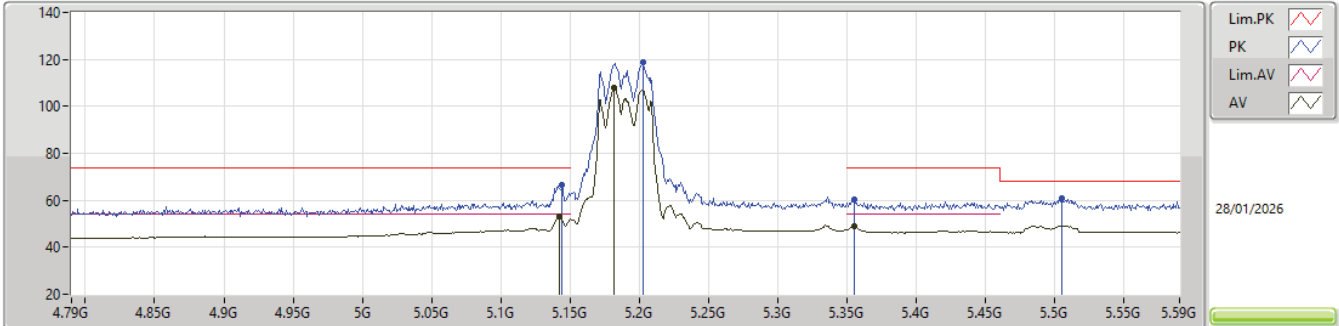


EUT_Y_4TX
Setting 17
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1444G	66.34	74.00	-7.66	55.30	3	Vertical	10	1.74	-	33.59	7.58	30.13				
AV	5.142G	53.04	54.00	-0.96	42.00	3	Vertical	10	1.74	-	33.58	7.58	30.12				
PK	5.2028G	119.02	Inf	-Inf	107.89	3	Vertical	10	1.74	-	33.70	7.59	30.16				
AV	5.182G	107.79	Inf	-Inf	96.68	3	Vertical	10	1.74	-	33.66	7.59	30.14				
PK	5.3548G	60.14	74.00	-13.86	48.76	3	Vertical	10	1.74	-	33.90	7.71	30.23				
AV	5.3548G	48.71	54.00	-5.29	37.33	3	Vertical	10	1.74	-	33.90	7.71	30.23				
PK	5.5052G	60.84	68.20	-7.36	49.34	3	Vertical	10	1.74	-	34.01	7.80	30.31				

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

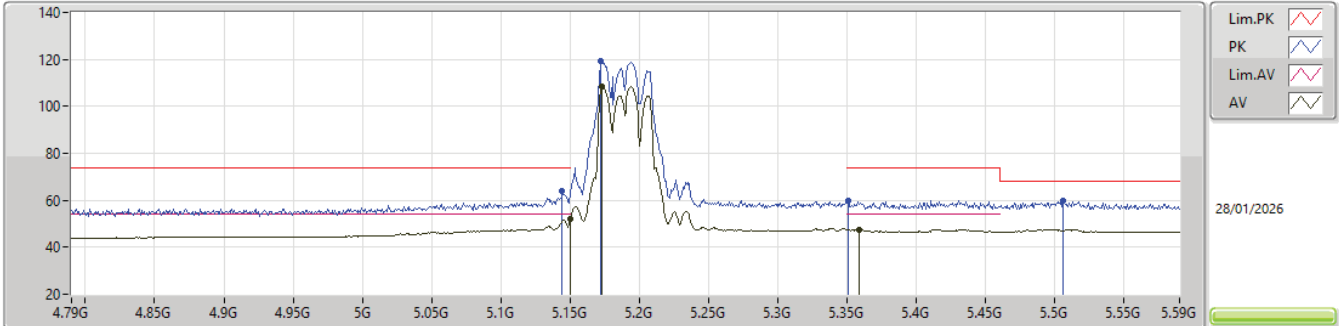


EUT_Y_4TX
Setting 17
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1444G	64.09	74.00	-9.91	53.05	3	Horizontal	353	1.78	-	33.59	7.58	30.13			
AV	5.15G	52.28	54.00	-1.72	41.23	3	Horizontal	353	1.78	-	33.60	7.58	30.13			
PK	5.1724G	119.21	Inf	-Inf	108.13	3	Horizontal	353	1.78	-	33.64	7.58	30.14			
AV	5.1732G	108.36	Inf	-Inf	97.27	3	Horizontal	353	1.78	-	33.65	7.58	30.14			
PK	5.3508G	59.79	74.00	-14.21	48.42	3	Horizontal	353	1.78	-	33.90	7.70	30.23			
AV	5.3588G	47.54	54.00	-6.46	36.17	3	Horizontal	353	1.78	-	33.90	7.71	30.24			
PK	5.506G	59.76	68.20	-8.44	48.26	3	Horizontal	353	1.78	-	34.01	7.80	30.31			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

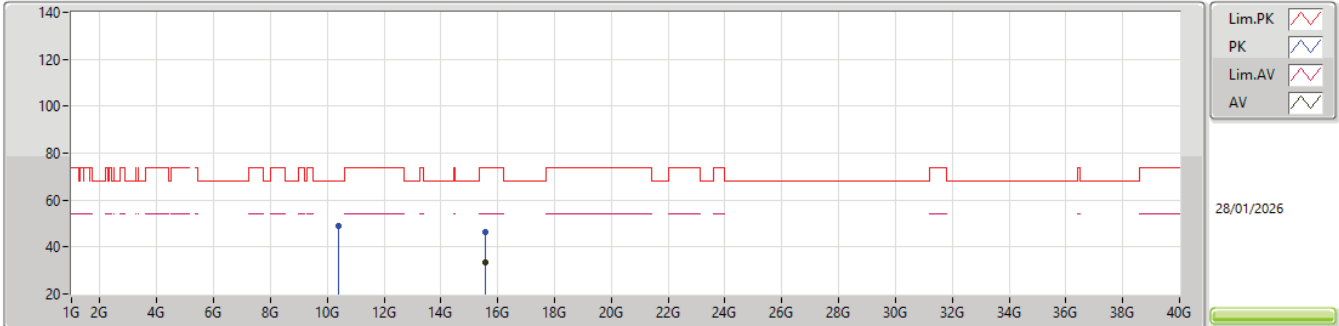


EUT_Y_4TX
Setting 17
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.3799G	48.76	68.20	-19.44	65.13	3	Vertical	0	1.90	-	38.34	11.97	66.68			
PK	15.5639G	46.60	74.00	-27.40	58.11	3	Vertical	103	1.79	-	37.87	14.45	63.83			
AV	15.545G	33.50	54.00	-20.50	44.97	3	Vertical	103	1.79	-	37.92	14.44	63.83			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

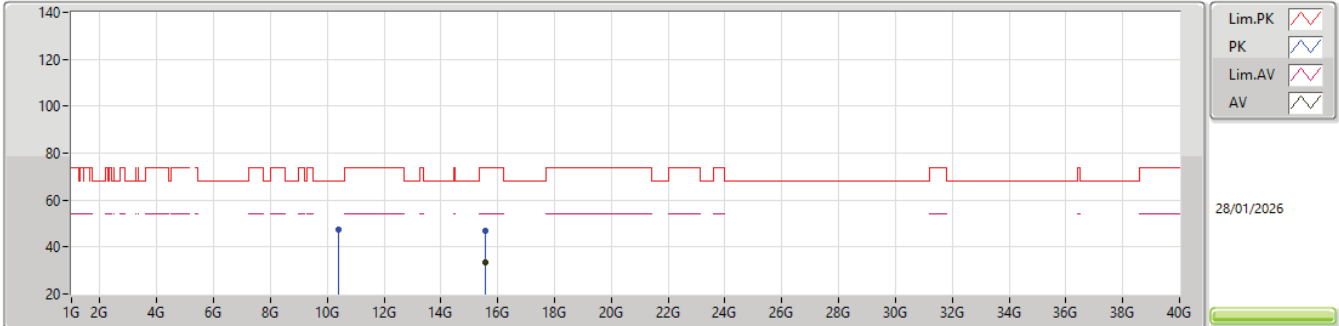


EUT_Y_4TX
Setting 17
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38555G	47.39	68.20	-20.81	63.77	3	Horizontal	80	1.53	-	38.33	11.97	66.68			
PK	15.57275G	47.03	74.00	-26.97	58.56	3	Horizontal	48	1.80	-	37.85	14.46	63.84			
AV	15.56685G	33.52	54.00	-20.48	45.03	3	Horizontal	48	1.80	-	37.87	14.46	63.84			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

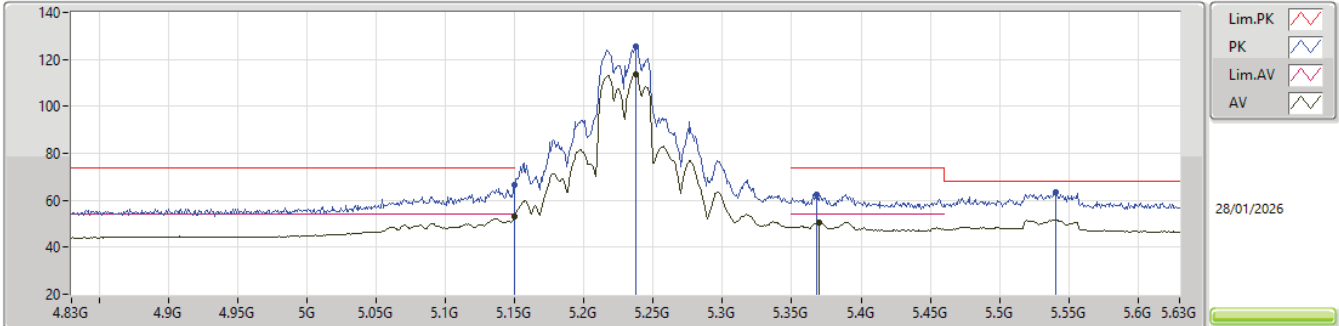


EUT_Y_4TX
Setting 22.5
02-D-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.15G	66.51	74.00	-7.49	55.46	3	Vertical	354	1.80	-	33.60	7.58	30.13					
AV	5.15G	53.02	54.00	-0.98	41.97	3	Vertical	354	1.80	-	33.60	7.58	30.13					
PK	5.2372G	125.37	Inf	-Inf	114.22	3	Vertical	354	1.80	-	33.70	7.62	30.17					
AV	5.2372G	113.87	Inf	-Inf	102.72	3	Vertical	354	1.80	-	33.70	7.62	30.17					
PK	5.3676G	62.47	74.00	-11.53	51.09	3	Vertical	354	1.80	-	33.90	7.72	30.24					
AV	5.37G	50.73	54.00	-3.27	39.35	3	Vertical	354	1.80	-	33.90	7.72	30.24					
PK	5.5404G	63.19	68.20	-5.01	51.59	3	Vertical	354	1.80	-	34.08	7.82	30.30					

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

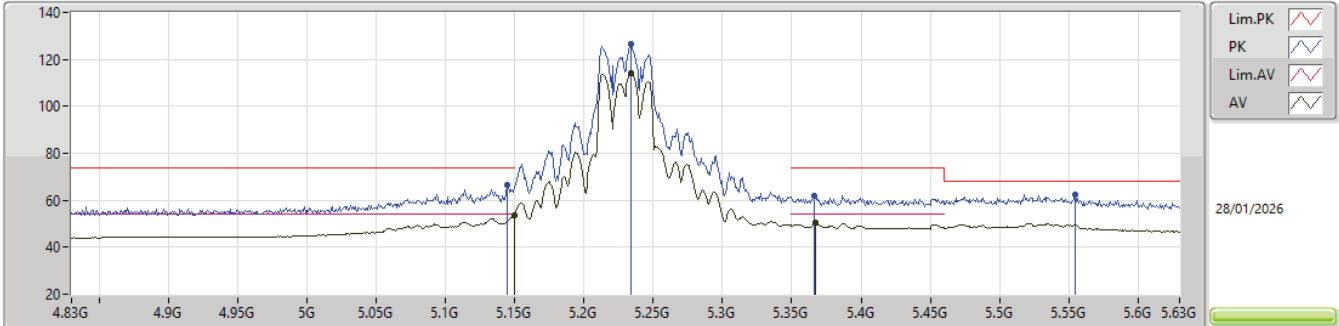


EUT_Y_4TX
Setting 22.5
02-D-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1444G	66.55	74.00	-7.45	55.51	3	Horizontal	351	1.78	-	33.59	7.58	30.13			
AV	5.15G	53.60	54.00	-0.40	42.55	3	Horizontal	351	1.78	-	33.60	7.58	30.13			
PK	5.234G	126.53	Inf	-Inf	115.38	3	Horizontal	351	1.78	-	33.70	7.62	30.17			
AV	5.234G	113.88	Inf	-Inf	102.73	3	Horizontal	351	1.78	-	33.70	7.62	30.17			
PK	5.366G	62.08	74.00	-11.92	50.71	3	Horizontal	351	1.78	-	33.90	7.71	30.24			
AV	5.3668G	50.42	54.00	-3.58	39.04	3	Horizontal	351	1.78	-	33.90	7.72	30.24			
PK	5.5548G	62.49	68.20	-5.71	50.86	3	Horizontal	351	1.78	-	34.09	7.83	30.29			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

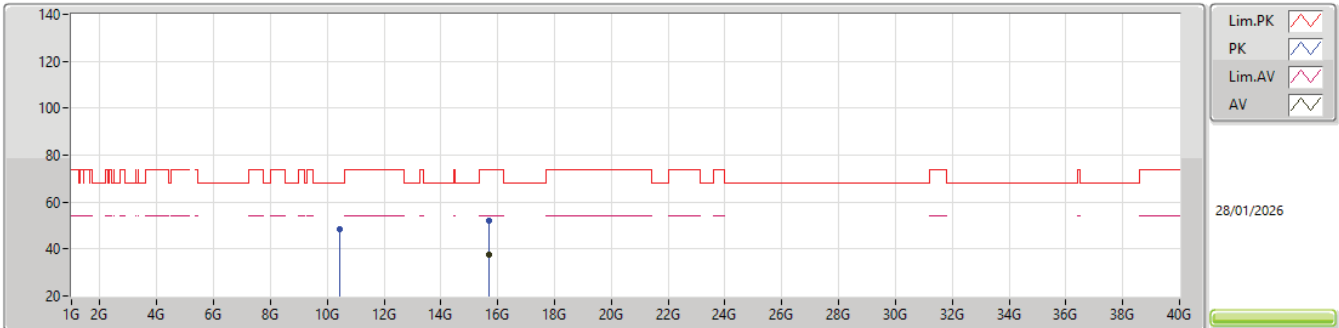


EUT_Y_4TX
Setting 22.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.45295G	48.56	68.20	-19.64	65.05	3	Vertical	319	1.94	-	38.21	12.01	66.71			
PK	15.67505G	52.01	74.00	-21.99	63.69	3	Vertical	38	1.88	-	37.65	14.55	63.88			
AV	15.6759G	37.66	54.00	-16.34	49.34	3	Vertical	38	1.88	-	37.65	14.55	63.88			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

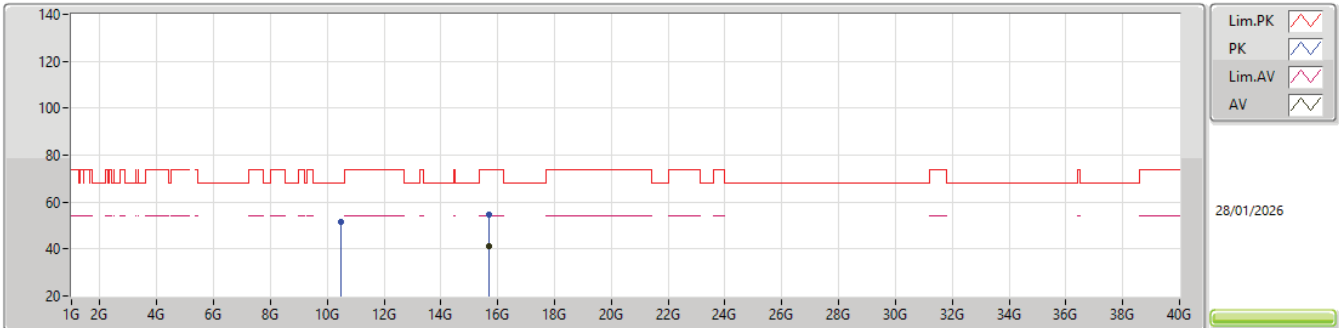


EUT_Y_4TX
Setting 22.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4809G	51.62	68.20	-16.58	68.06	3	Horizontal	176	1.45	-	38.26	12.02	66.72			
PK	15.67935G	54.68	74.00	-19.32	66.37	3	Horizontal	358	2.32	-	37.64	14.55	63.88			
AV	15.67825G	40.98	54.00	-13.02	52.67	3	Horizontal	358	2.32	-	37.64	14.55	63.88			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

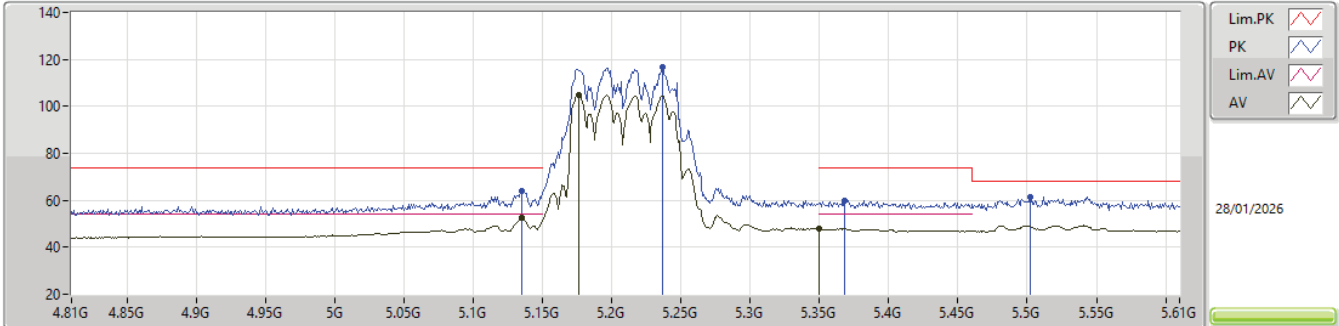


EUT_Y_4TX
Setting 17
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1348G	64.10	74.00	-9.90	53.07	3	Vertical	355	1.73	-	33.57	7.58	30.12
AV	5.1348G	52.40	54.00	-1.60	41.37	3	Vertical	355	1.73	-	33.57	7.58	30.12
AV	5.1764G	104.98	Inf	-Inf	93.88	3	Vertical	355	1.73	-	33.65	7.59	30.14
PK	5.2364G	116.54	Inf	-Inf	105.39	3	Vertical	355	1.73	-	33.70	7.62	30.17
PK	5.3684G	59.86	74.00	-14.14	48.48	3	Vertical	355	1.73	-	33.90	7.72	30.24
AV	5.35G	47.96	54.00	-6.04	36.59	3	Vertical	355	1.73	-	33.90	7.70	30.23
PK	5.502G	61.53	68.20	-6.67	50.04	3	Vertical	355	1.73	-	34.00	7.80	30.31

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

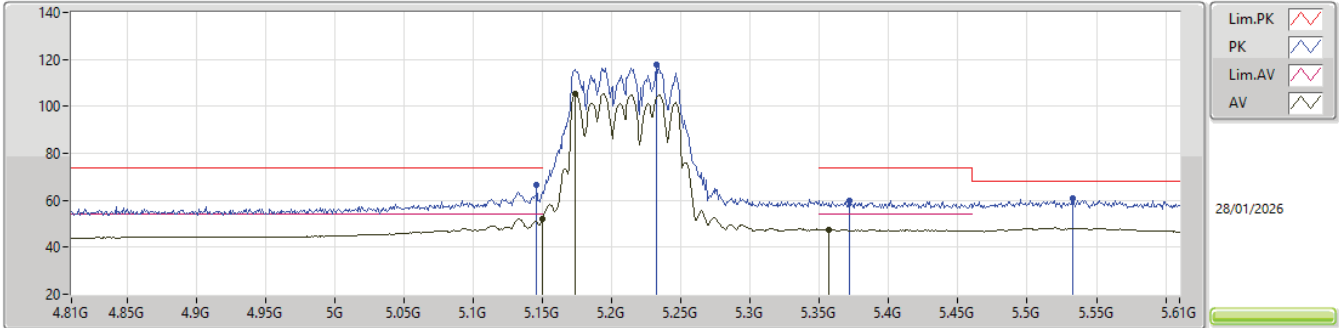


EUT_Y_4TX
Setting 17
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.146G	66.39	74.00	-7.61	55.35	3	Horizontal	353	1.80	-	33.59	7.58	30.13			
AV	5.15G	52.15	54.00	-1.85	41.10	3	Horizontal	353	1.80	-	33.60	7.58	30.13			
AV	5.174G	105.51	Inf	-Inf	94.42	3	Horizontal	353	1.80	-	33.65	7.58	30.14			
PK	5.2324G	117.88	Inf	-Inf	106.74	3	Horizontal	353	1.80	-	33.70	7.61	30.17			
PK	5.3716G	59.98	74.00	-14.02	48.60	3	Horizontal	353	1.80	-	33.90	7.72	30.24			
AV	5.3564G	47.49	54.00	-6.51	36.12	3	Horizontal	353	1.80	-	33.90	7.71	30.24			
PK	5.5332G	60.90	68.20	-7.30	49.31	3	Horizontal	353	1.80	-	34.07	7.82	30.30			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

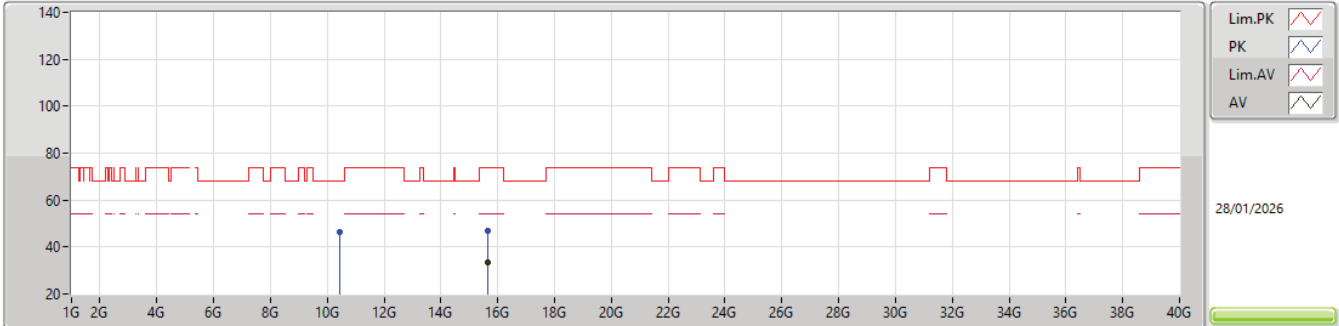


EUT_Y_4TX
Setting 17
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41995G	46.60	68.20	-21.60	63.05	3	Vertical	318	1.49	-	38.26	11.99	66.70			
PK	15.6393G	46.87	74.00	-27.13	58.49	3	Vertical	293	1.95	-	37.72	14.52	63.86			
AV	15.639G	33.27	54.00	-20.73	44.89	3	Vertical	293	1.95	-	37.72	14.52	63.86			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

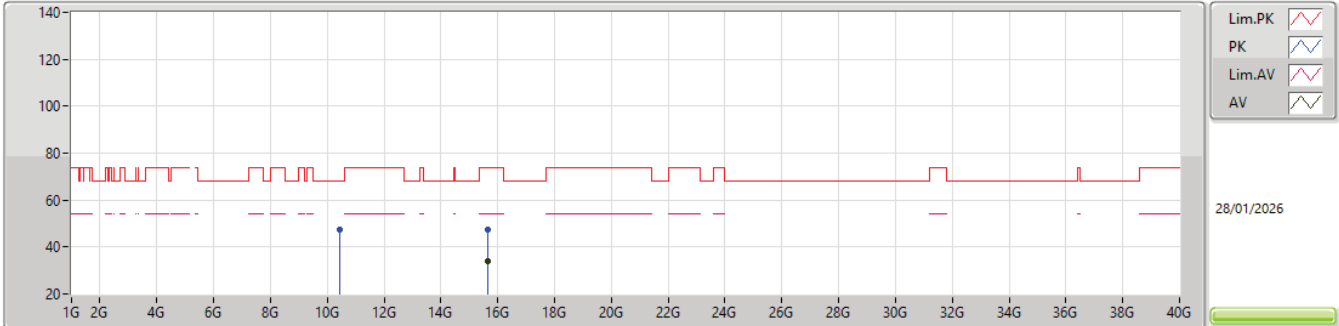


EUT_Y_4TX
Setting 17
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4203G	47.35	68.20	-20.85	63.80	3	Horizontal	240	1.81	-	38.26	11.99	66.70			
PK	15.6438G	47.18	74.00	-26.82	58.81	3	Horizontal	356	1.80	-	37.71	14.52	63.86			
AV	15.6527G	33.92	54.00	-20.08	45.57	3	Horizontal	356	1.80	-	37.69	14.53	63.87			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

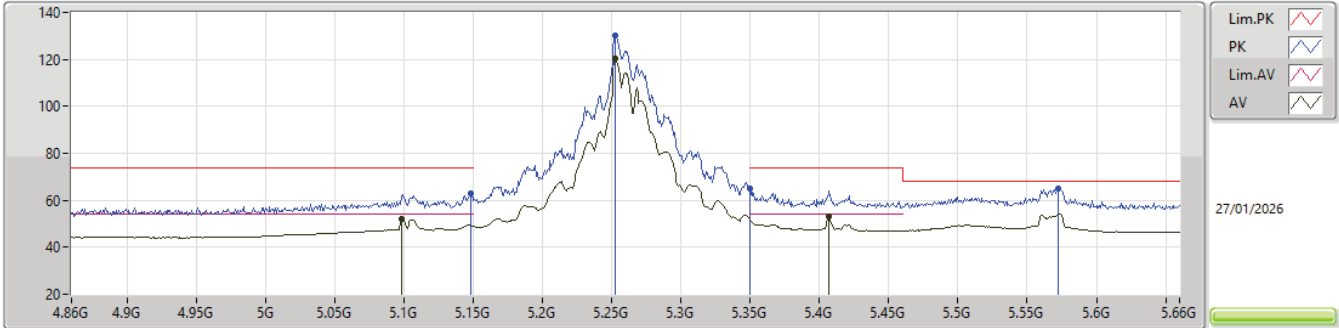


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	63.11	74.00	-10.89	52.06	3	Vertical	12	1.78	-	33.60	7.58	30.13			
AV	5.0984G	52.13	54.00	-1.87	41.16	3	Vertical	12	1.78	-	33.50	7.57	30.10			
PK	5.2528G	130.17	Inf	-Inf	119.01	3	Vertical	12	1.78	-	33.71	7.63	30.18			
AV	5.2528G	120.13	Inf	-Inf	108.97	3	Vertical	12	1.78	-	33.71	7.63	30.18			
PK	5.35G	64.75	74.00	-9.25	53.38	3	Vertical	12	1.78	-	33.90	7.70	30.23			
AV	5.4064G	53.09	54.00	-0.91	41.71	3	Vertical	12	1.78	-	33.90	7.74	30.26			
PK	5.5728G	65.01	68.20	-3.19	53.40	3	Vertical	12	1.78	-	34.05	7.84	30.28			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

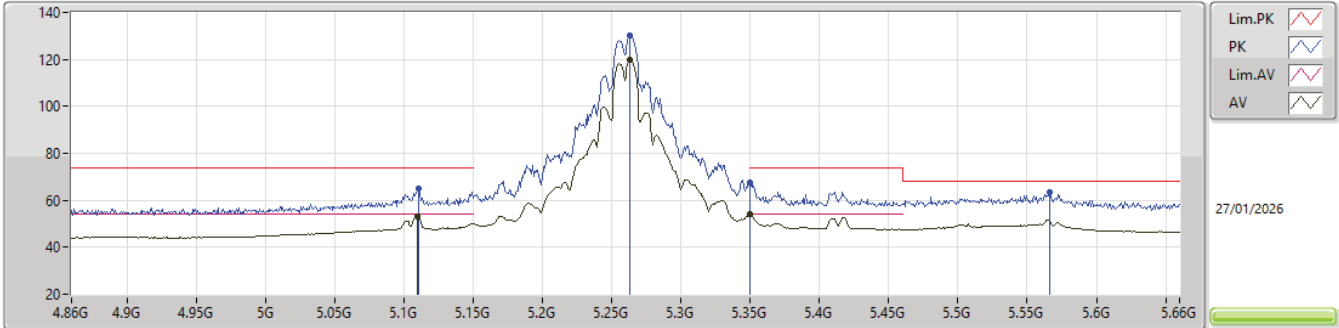


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1104G	64.77	74.00	-9.23	53.79	3	Horizontal	354	1.58	-	33.52	7.57	30.11			
AV	5.1096G	53.21	54.00	-0.79	42.23	3	Horizontal	354	1.58	-	33.52	7.57	30.11			
PK	5.2632G	130.04	Inf	-Inf	118.86	3	Horizontal	354	1.58	-	33.73	7.64	30.19			
AV	5.2632G	119.85	Inf	-Inf	108.67	3	Horizontal	354	1.58	-	33.73	7.64	30.19			
PK	5.35G	67.50	74.00	-6.50	56.13	3	Horizontal	354	1.58	-	33.90	7.70	30.23			
AV	5.35G	53.88	54.00	-0.12	42.51	3	Horizontal	354	1.58	-	33.90	7.70	30.23			
PK	5.5664G	63.69	68.20	-4.51	52.07	3	Horizontal	354	1.58	-	34.07	7.84	30.29			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

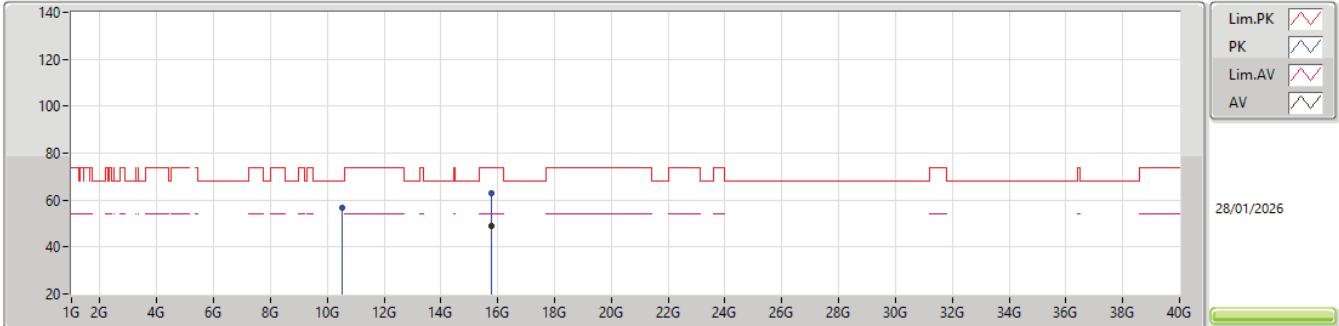


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51754G	56.70	68.20	-11.50	73.07	3	Vertical	3	2.13	-	38.30	12.04	66.71			
PK	15.77394G	62.76	74.00	-11.24	74.59	3	Vertical	21	1.84	-	37.45	14.63	63.91			
AV	15.7734G	48.71	54.00	-5.29	60.54	3	Vertical	21	1.84	-	37.45	14.63	63.91			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

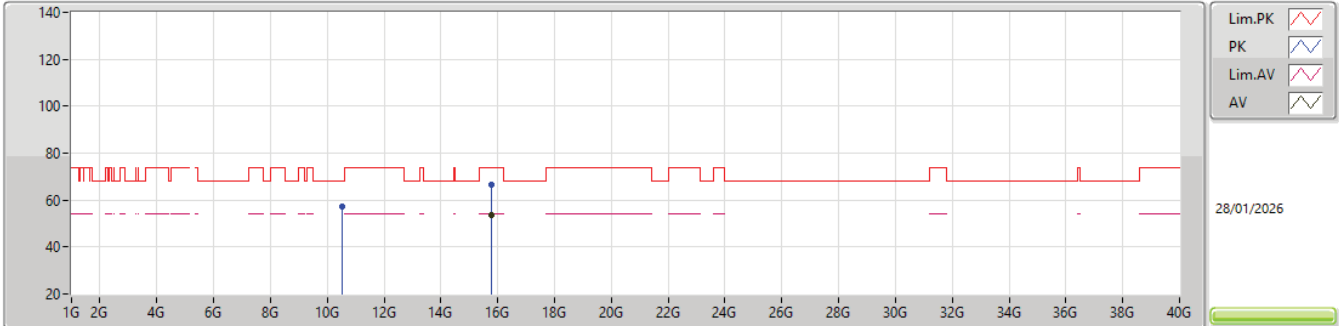


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51658G	57.42	68.20	-10.78	73.79	3	Horizontal	4	1.84	-	38.30	12.04	66.71			
PK	15.78144G	66.73	74.00	-7.27	78.57	3	Horizontal	40	1.82	-	37.44	14.64	63.92			
AV	15.78216G	53.53	54.00	-0.47	65.37	3	Horizontal	40	1.82	-	37.44	14.64	63.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

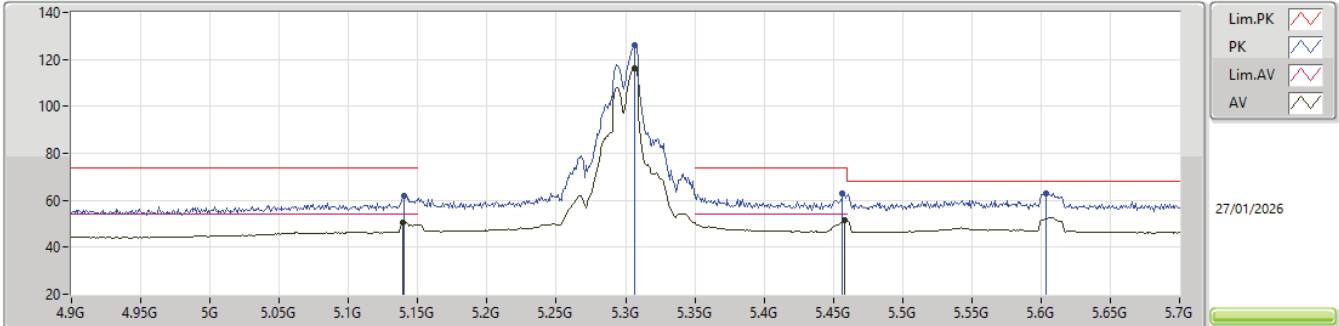


EUT_Y_4TX
Setting 22.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.14G	61.89	74.00	-12.11	50.85	3	Vertical	355	1.67	-	33.58	7.58	30.12			
AV	5.1392G	50.71	54.00	-3.29	39.67	3	Vertical	355	1.67	-	33.58	7.58	30.12			
PK	5.3064G	125.99	Inf	-Inf	114.72	3	Vertical	355	1.67	-	33.81	7.67	30.21			
AV	5.3064G	116.17	Inf	-Inf	104.90	3	Vertical	355	1.67	-	33.81	7.67	30.21			
PK	5.4568G	63.12	74.00	-10.88	51.73	3	Vertical	355	1.67	-	33.91	7.77	30.29			
AV	5.4584G	51.65	54.00	-2.35	40.24	3	Vertical	355	1.67	-	33.92	7.78	30.29			
PK	5.6032G	63.11	68.20	-5.09	51.51	3	Vertical	355	1.67	-	34.00	7.87	30.27			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

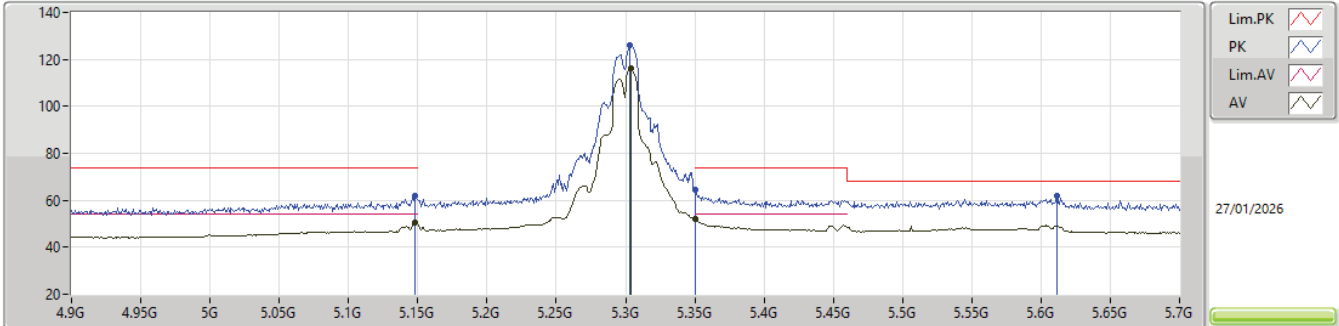


EUT_Y_4TX
Setting 22.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	61.80	74.00	-12.20	50.75	3	Horizontal	358	1.79	-	33.60	7.58	30.13			
AV	5.148G	50.58	54.00	-3.42	39.53	3	Horizontal	358	1.79	-	33.60	7.58	30.13			
PK	5.3032G	125.85	Inf	-Inf	114.58	3	Horizontal	358	1.79	-	33.81	7.67	30.21			
AV	5.304G	115.98	Inf	-Inf	104.71	3	Horizontal	358	1.79	-	33.81	7.67	30.21			
PK	5.3504G	64.29	74.00	-9.71	52.92	3	Horizontal	358	1.79	-	33.90	7.70	30.23			
AV	5.35G	52.18	54.00	-1.82	40.81	3	Horizontal	358	1.79	-	33.90	7.70	30.23			
PK	5.6112G	61.64	68.20	-6.56	50.03	3	Horizontal	358	1.79	-	34.00	7.88	30.27			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

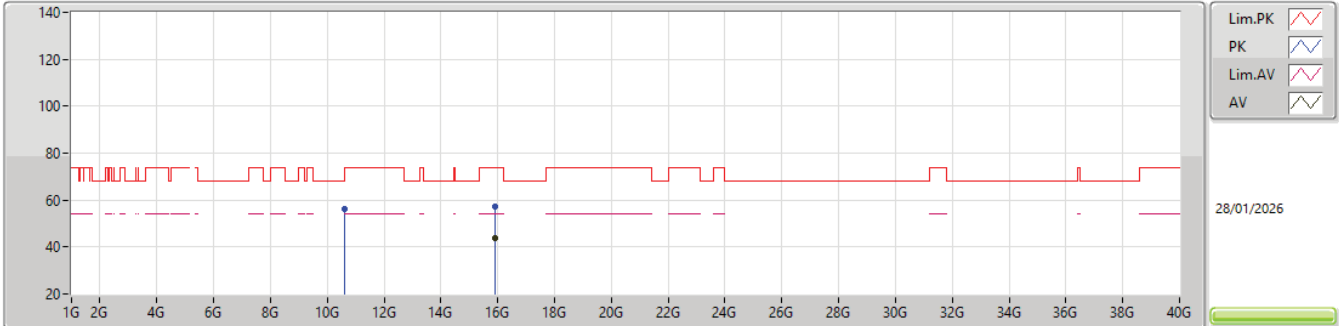


EUT_Y_4TX
Setting 22.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60018G	56.43	74.00	-17.57	72.57	3	Vertical	18	3.00	-	38.40	12.08	66.62			
PK	15.88818G	57.29	74.00	-16.71	68.87	3	Vertical	346	1.80	-	37.65	14.73	63.96			
AV	15.90132G	43.67	54.00	-10.33	55.20	3	Vertical	346	1.80	-	37.69	14.74	63.96			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

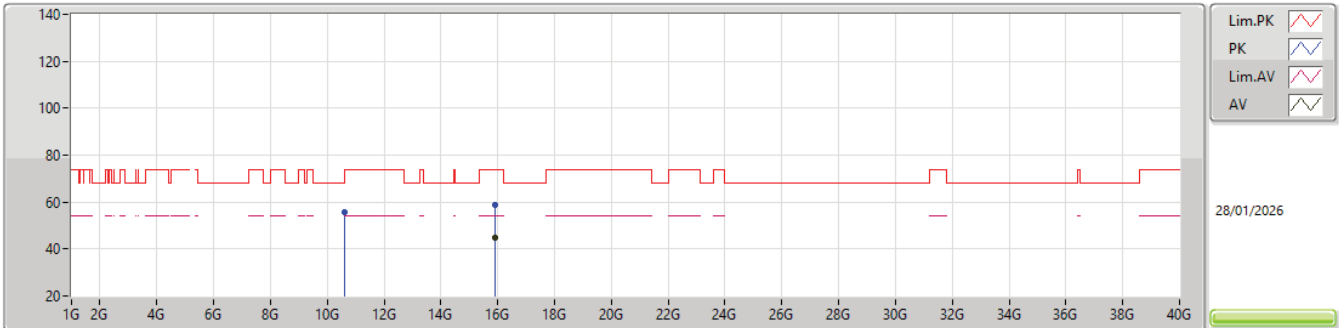


EUT_Y_4TX
Setting 22.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.59808G	55.82	68.20	-12.38	71.96	3	Horizontal	4	3.00	-	38.40	12.08	66.62			
PK	15.90276G	58.56	74.00	-15.44	70.08	3	Horizontal	340	1.94	-	37.69	14.75	63.96			
AV	15.9021G	44.83	54.00	-9.17	56.35	3	Horizontal	340	1.94	-	37.69	14.75	63.96			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

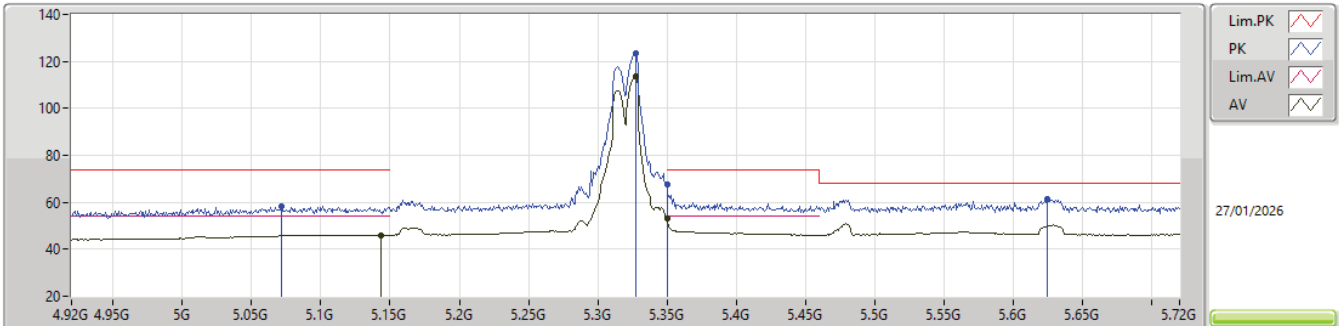


EUT_Y_4TX
Setting 19.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.0712G	58.25	74.00	-15.75	47.34	3	Vertical	354	1.77	-	33.44	7.56	30.09			
AV	5.1432G	46.09	54.00	-7.91	35.04	3	Vertical	354	1.77	-	33.59	7.58	30.12			
PK	5.3272G	123.57	Inf	-Inf	112.25	3	Vertical	354	1.77	-	33.85	7.69	30.22			
AV	5.3272G	113.61	Inf	-Inf	102.29	3	Vertical	354	1.77	-	33.85	7.69	30.22			
PK	5.35G	67.51	74.00	-6.49	56.14	3	Vertical	354	1.77	-	33.90	7.70	30.23			
AV	5.35G	53.36	54.00	-0.64	41.99	3	Vertical	354	1.77	-	33.90	7.70	30.23			
PK	5.6248G	61.63	68.20	-6.57	50.00	3	Vertical	354	1.77	-	34.00	7.90	30.27			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

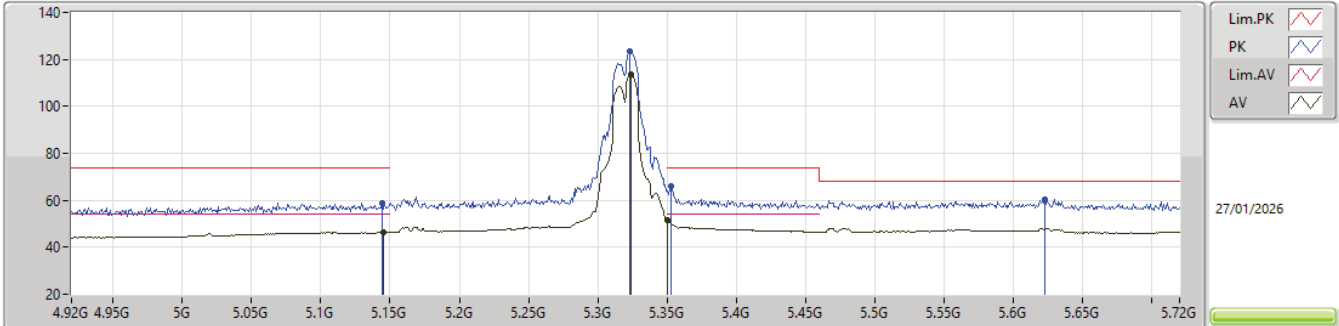


EUT_Y_4TX
Setting 19.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.144G	59.04	74.00	-14.96	47.99	3	Horizontal	358	1.79	-	33.59	7.58	30.12				
AV	5.1456G	46.55	54.00	-7.45	35.51	3	Horizontal	358	1.79	-	33.59	7.58	30.13				
PK	5.3232G	123.48	Inf	-Inf	112.17	3	Horizontal	358	1.79	-	33.85	7.68	30.22				
AV	5.324G	113.47	Inf	-Inf	102.16	3	Horizontal	358	1.79	-	33.85	7.68	30.22				
PK	5.3528G	66.29	74.00	-7.71	54.92	3	Horizontal	358	1.79	-	33.90	7.70	30.23				
AV	5.35G	51.68	54.00	-2.32	40.31	3	Horizontal	358	1.79	-	33.90	7.70	30.23				
PK	5.6224G	60.36	68.20	-7.84	48.73	3	Horizontal	358	1.79	-	34.00	7.90	30.27				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

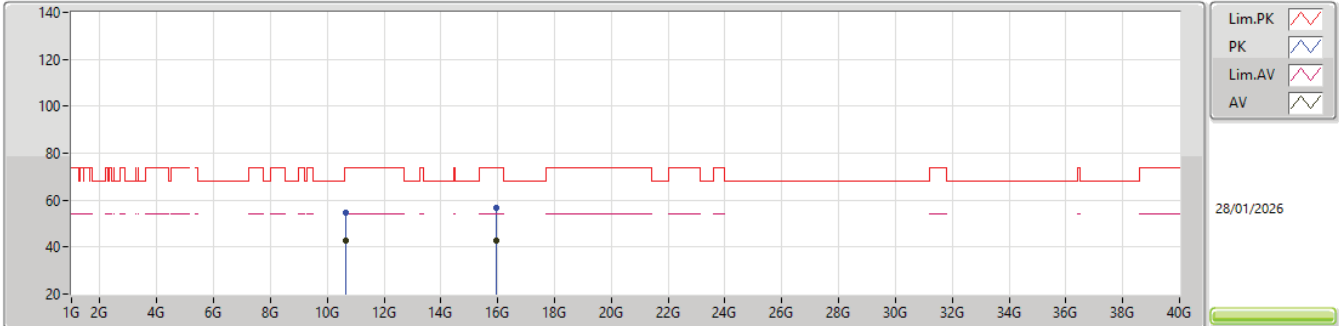


EUT_Y_4TX
Setting 19.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64864G	54.59	74.00	-19.41	70.65	3	Vertical	353	2.59	-	38.40	12.11	66.57			
AV	10.64G	42.62	54.00	-11.38	58.70	3	Vertical	353	2.59	-	38.40	12.10	66.58			
PK	15.93444G	56.77	74.00	-17.23	68.42	3	Vertical	133	3.00	-	37.56	14.77	63.98			
AV	15.93018G	42.64	54.00	-11.36	54.26	3	Vertical	133	3.00	-	37.58	14.77	63.97			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

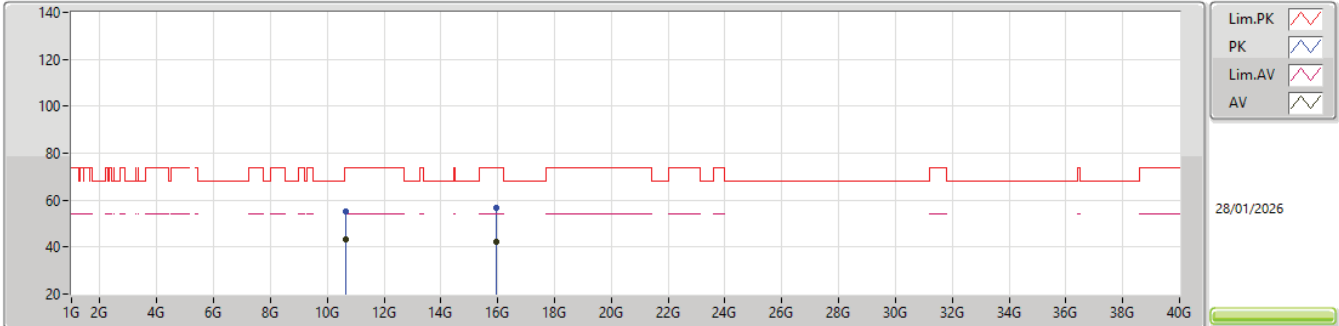


EUT_Y_4TX
Setting 19.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.65008G	55.31	74.00	-18.69	71.37	3	Horizontal	342	2.88	-	38.40	12.11	66.57				
AV	10.64G	43.30	54.00	-10.70	59.38	3	Horizontal	342	2.88	-	38.40	12.10	66.58				
PK	15.94086G	56.63	74.00	-17.37	68.29	3	Horizontal	359	1.06	-	37.54	14.78	63.98				
AV	15.93072G	42.48	54.00	-11.52	54.10	3	Horizontal	359	1.06	-	37.58	14.77	63.97				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

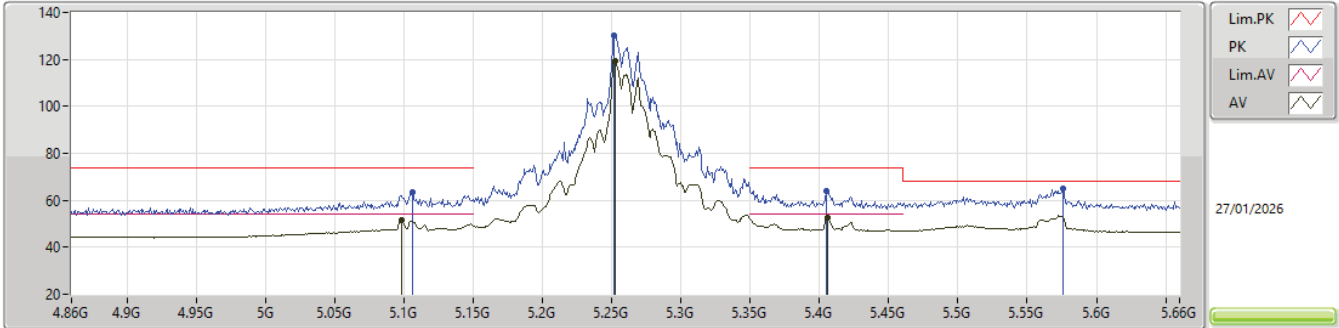


EUT_Y_4TX
Setting 26
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1064G	63.28	74.00	-10.72	52.31	3	Vertical	13	1.88	-	33.51	7.57	30.11			
AV	5.0984G	51.33	54.00	-2.67	40.36	3	Vertical	13	1.88	-	33.50	7.57	30.10			
PK	5.252G	130.06	Inf	-Inf	118.91	3	Vertical	13	1.88	-	33.70	7.63	30.18			
AV	5.2528G	119.10	Inf	-Inf	107.94	3	Vertical	13	1.88	-	33.71	7.63	30.18			
PK	5.4048G	63.94	74.00	-10.06	52.56	3	Vertical	13	1.88	-	33.90	7.74	30.26			
AV	5.4056G	52.78	54.00	-1.22	41.40	3	Vertical	13	1.88	-	33.90	7.74	30.26			
PK	5.576G	64.87	68.20	-3.33	53.25	3	Vertical	13	1.88	-	34.05	7.85	30.28			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

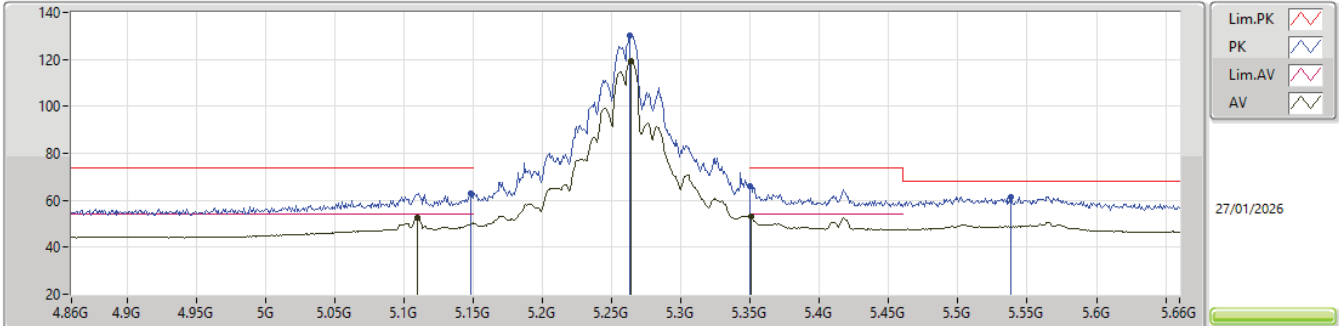


EUT_Y_4TX
Setting 26
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	63.16	74.00	-10.84	52.11	3	Horizontal	352	1.83	-	33.60	7.58	30.13			
AV	5.1096G	52.40	54.00	-1.60	41.42	3	Horizontal	352	1.83	-	33.52	7.57	30.11			
PK	5.2632G	130.20	Inf	-Inf	119.02	3	Horizontal	352	1.83	-	33.73	7.64	30.19			
AV	5.264G	119.26	Inf	-Inf	108.08	3	Horizontal	352	1.83	-	33.73	7.64	30.19			
PK	5.35G	66.18	74.00	-7.82	54.81	3	Horizontal	352	1.83	-	33.90	7.70	30.23			
AV	5.3504G	53.18	54.00	-0.82	41.81	3	Horizontal	352	1.83	-	33.90	7.70	30.23			
PK	5.5384G	61.52	68.20	-6.68	49.92	3	Horizontal	352	1.83	-	34.08	7.82	30.30			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

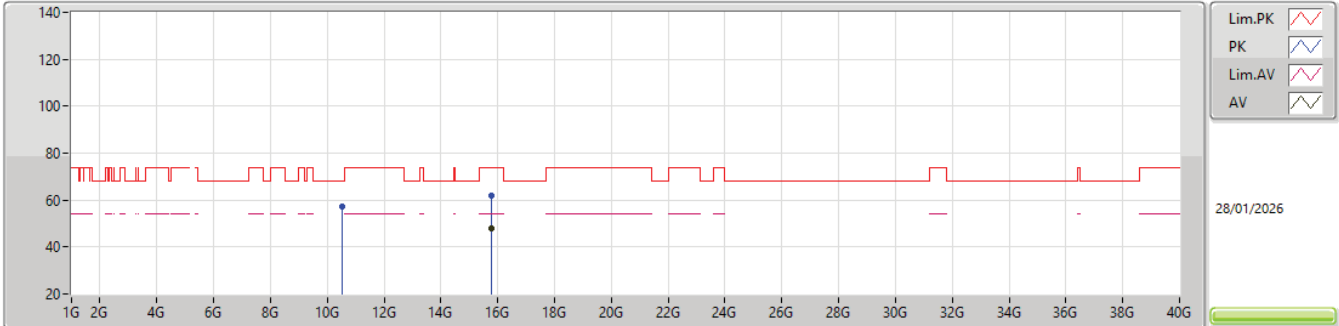


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.51988G	57.19	68.20	-11.01	73.56	3	Vertical	7	2.08	-	38.30	12.04	66.71				
PK	15.77364G	61.93	74.00	-12.07	73.76	3	Vertical	20	1.80	-	37.45	14.63	63.91				
AV	15.77334G	47.73	54.00	-6.27	59.56	3	Vertical	20	1.80	-	37.45	14.63	63.91				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

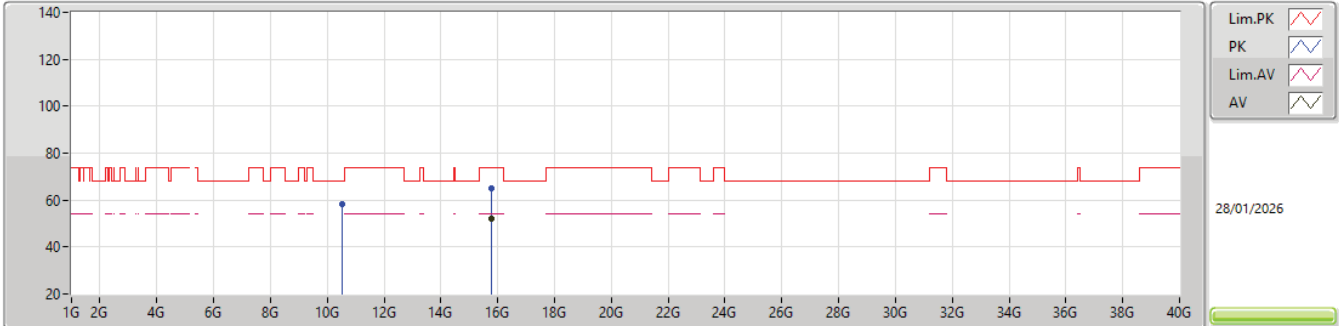


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51778G	58.26	68.20	-9.94	74.63	3	Horizontal	2	1.83	-	38.30	12.04	66.71			
PK	15.78216G	65.01	74.00	-8.99	76.85	3	Horizontal	39	1.80	-	37.44	14.64	63.92			
AV	15.78192G	52.02	54.00	-1.98	63.86	3	Horizontal	39	1.80	-	37.44	14.64	63.92			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

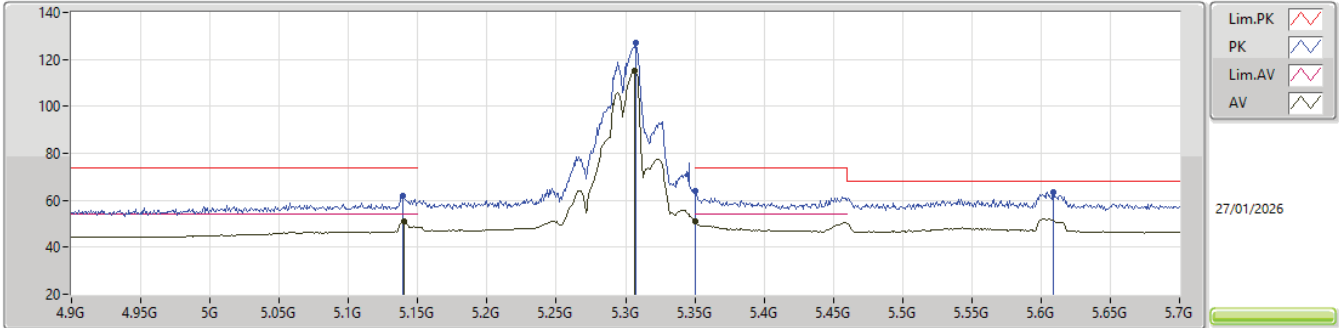


EUT_Y_4TX
Setting 22
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1392G	61.83	74.00	-12.17	50.79	3	Vertical	357	1.75	-	33.58	7.58	30.12
AV	5.14G	51.03	54.00	-2.97	39.99	3	Vertical	357	1.75	-	33.58	7.58	30.12
PK	5.3072G	127.14	Inf	-Inf	115.87	3	Vertical	357	1.75	-	33.81	7.67	30.21
AV	5.3064G	114.98	Inf	-Inf	103.71	3	Vertical	357	1.75	-	33.81	7.67	30.21
PK	5.3504G	63.84	74.00	-10.16	52.47	3	Vertical	357	1.75	-	33.90	7.70	30.23
AV	5.35G	51.04	54.00	-2.96	39.67	3	Vertical	357	1.75	-	33.90	7.70	30.23
PK	5.6088G	63.53	68.20	-4.67	51.92	3	Vertical	357	1.75	-	34.00	7.88	30.27

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

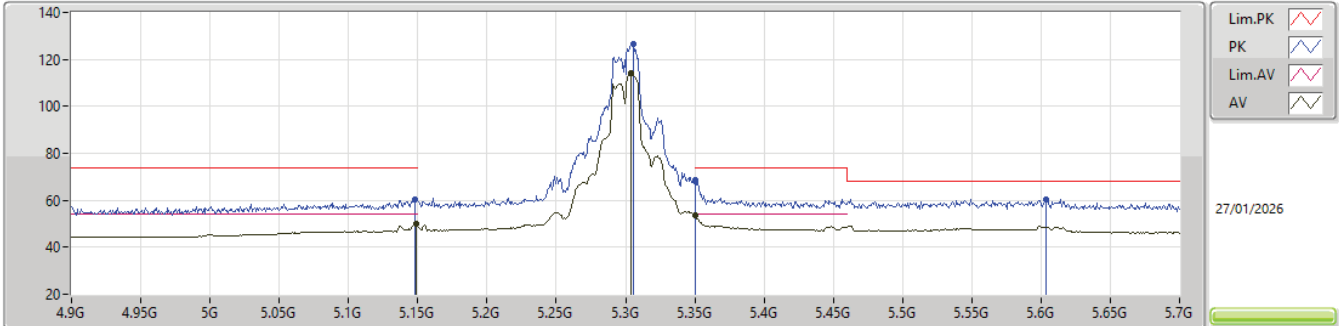


EUT_Y_4TX
Setting 22
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	60.23	74.00	-13.77	49.18	3	Horizontal	360	1.80	-	33.60	7.58	30.13			
AV	5.1488G	49.82	54.00	-4.18	38.77	3	Horizontal	360	1.80	-	33.60	7.58	30.13			
PK	5.3056G	126.67	Inf	-Inf	115.40	3	Horizontal	360	1.80	-	33.81	7.67	30.21			
AV	5.304G	114.38	Inf	-Inf	103.11	3	Horizontal	360	1.80	-	33.81	7.67	30.21			
PK	5.3504G	68.41	74.00	-5.59	57.04	3	Horizontal	360	1.80	-	33.90	7.70	30.23			
AV	5.3504G	53.51	54.00	-0.49	42.14	3	Horizontal	360	1.80	-	33.90	7.70	30.23			
PK	5.604G	60.49	68.20	-7.71	48.89	3	Horizontal	360	1.80	-	34.00	7.87	30.27			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

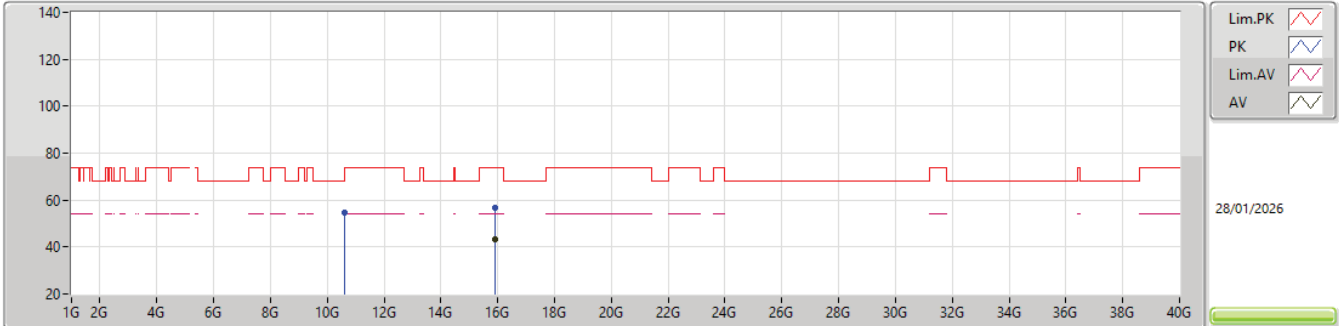


EUT_Y_4TX
Setting 22
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59603G	54.54	68.20	-13.66	70.70	3	Vertical	93	1.55	-	38.39	12.08	66.63			
PK	15.9258G	56.92	74.00	-17.08	68.52	3	Vertical	231	1.80	-	37.60	14.77	63.97			
AV	15.92186G	43.27	54.00	-10.73	54.87	3	Vertical	231	1.80	-	37.61	14.76	63.97			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

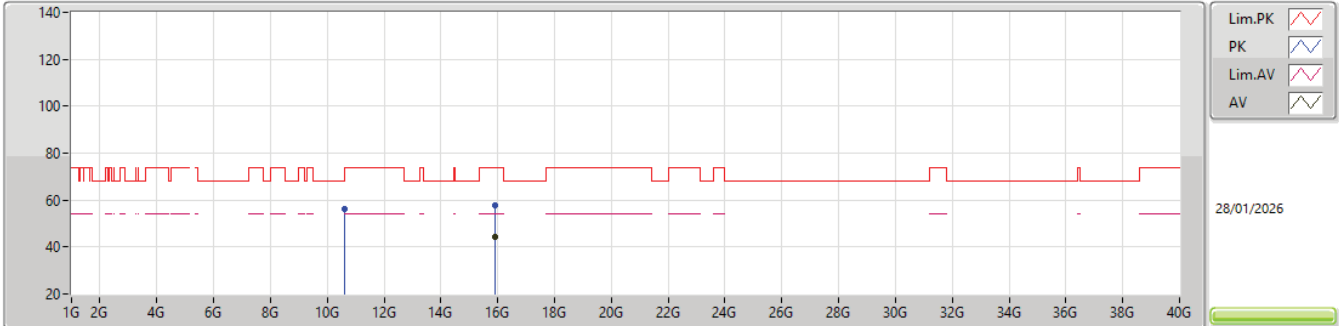


EUT_Y_4TX
Setting 22
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59983G	56.00	68.20	-12.20	72.14	3	Horizontal	6	2.84	-	38.40	12.08	66.62			
PK	15.9072G	57.91	74.00	-16.09	69.45	3	Horizontal	338	1.94	-	37.67	14.75	63.96			
AV	15.8994G	44.43	54.00	-9.57	55.95	3	Horizontal	338	1.94	-	37.70	14.74	63.96			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

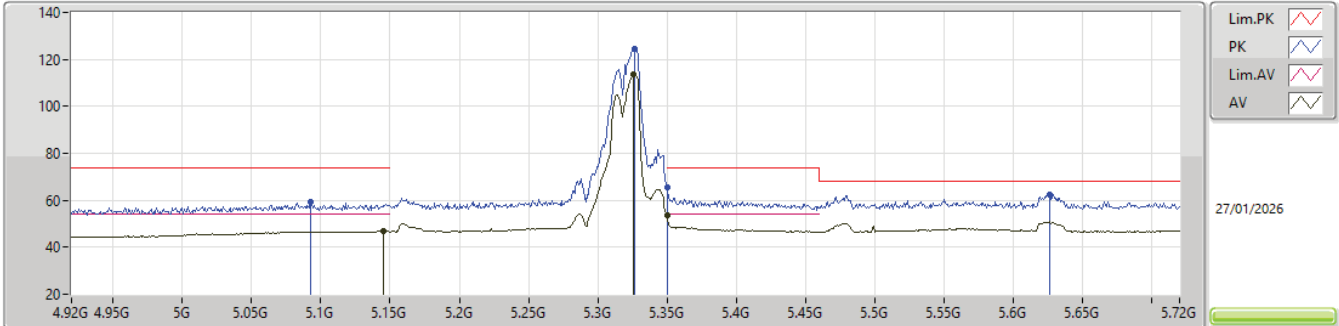


EUT_Y_4TX
Setting 19
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.0928G	59.19	74.00	-14.81	48.23	3	Vertical	357	1.76	-	33.49	7.57	30.10
AV	5.1456G	46.88	54.00	-7.12	35.84	3	Vertical	357	1.76	-	33.59	7.58	30.13
PK	5.3264G	124.52	Inf	-Inf	113.21	3	Vertical	357	1.76	-	33.85	7.68	30.22
AV	5.3256G	113.65	Inf	-Inf	102.34	3	Vertical	357	1.76	-	33.85	7.68	30.22
PK	5.35G	65.67	74.00	-8.33	54.30	3	Vertical	357	1.76	-	33.90	7.70	30.23
AV	5.35G	53.56	54.00	-0.44	42.19	3	Vertical	357	1.76	-	33.90	7.70	30.23
PK	5.6264G	62.45	68.20	-5.75	50.80	3	Vertical	357	1.76	-	34.00	7.91	30.26

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

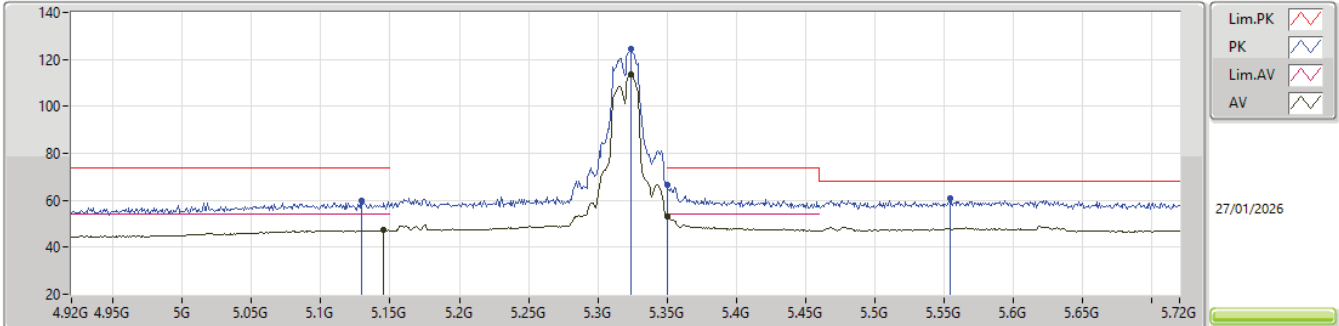


EUT_Y_4TX
Setting 19
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1296G	59.75	74.00	-14.25	48.73	3	Horizontal	358	1.79	-	33.56	7.58	30.12			
AV	5.1456G	47.27	54.00	-6.73	36.23	3	Horizontal	358	1.79	-	33.59	7.58	30.13			
PK	5.324G	124.34	Inf	-Inf	113.03	3	Horizontal	358	1.79	-	33.85	7.68	30.22			
AV	5.324G	113.42	Inf	-Inf	102.11	3	Horizontal	358	1.79	-	33.85	7.68	30.22			
PK	5.35G	66.60	74.00	-7.40	55.23	3	Horizontal	358	1.79	-	33.90	7.70	30.23			
AV	5.35G	53.10	54.00	-0.90	41.73	3	Horizontal	358	1.79	-	33.90	7.70	30.23			
PK	5.5544G	60.73	68.20	-7.47	49.10	3	Horizontal	358	1.79	-	34.09	7.83	30.29			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

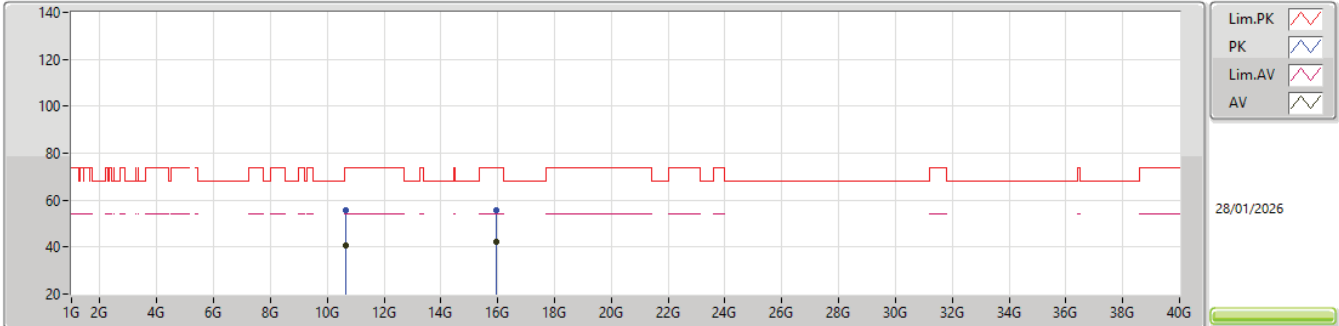


EUT_Y_4TX
Setting 19
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.6445G	55.66	74.00	-18.34	71.72	3	Vertical	233	1.45	-	38.40	12.11	66.57			
AV	10.64593G	40.71	54.00	-13.29	56.77	3	Vertical	233	1.45	-	38.40	12.11	66.57			
PK	15.96G	55.84	74.00	-18.16	67.52	3	Vertical	184	2.02	-	37.50	14.80	63.98			
AV	15.96223G	42.44	54.00	-11.56	54.13	3	Vertical	184	2.02	-	37.50	14.80	63.99			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

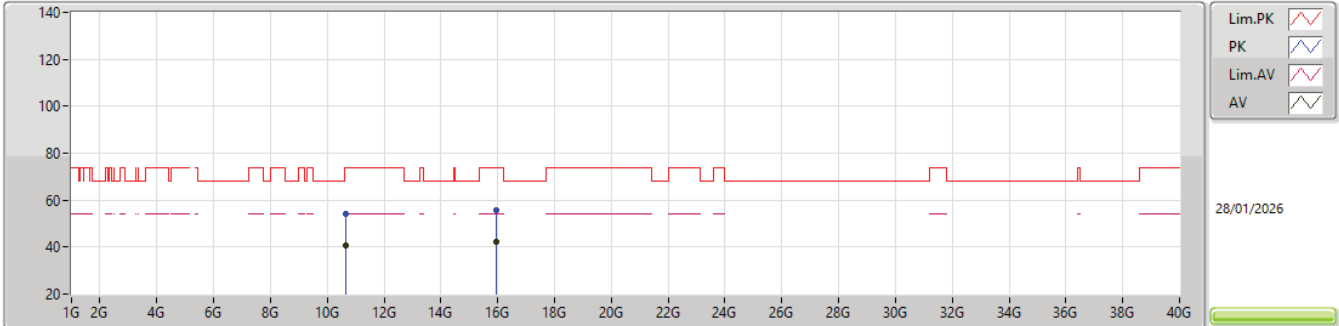


EUT_Y_4TX
Setting 19
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.63566G	54.33	74.00	-19.67	70.41	3	Horizontal	311	1.62	-	38.40	12.10	66.58				
AV	10.63829G	40.64	54.00	-13.36	56.72	3	Horizontal	311	1.62	-	38.40	12.10	66.58				
PK	15.95819G	55.76	74.00	-18.24	67.45	3	Horizontal	27	1.67	-	37.50	14.79	63.98				
AV	15.96472G	42.45	54.00	-11.55	54.14	3	Horizontal	27	1.67	-	37.50	14.80	63.99				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

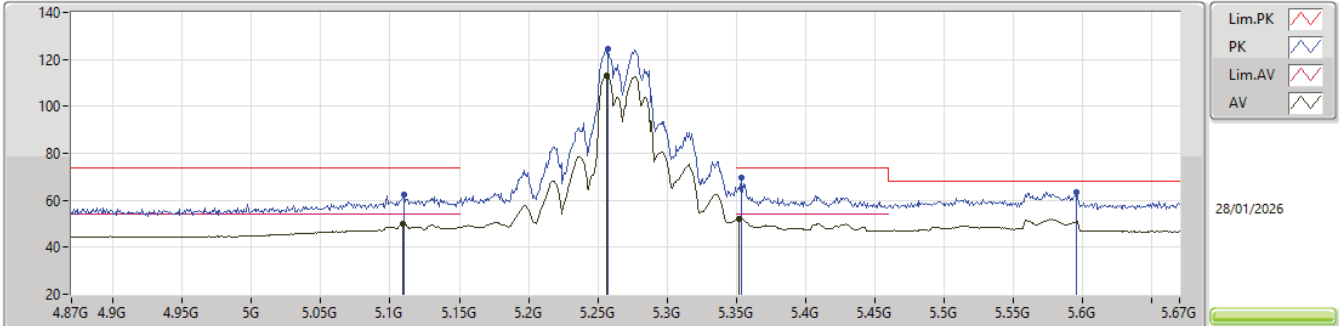


EUT_Y_4TX
Setting 22
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.11G	62.48	74.00	-11.52	51.50	3	Vertical	356	1.69	-	33.52	7.57	30.11
AV	5.1092G	49.77	54.00	-4.23	38.79	3	Vertical	356	1.69	-	33.52	7.57	30.11
PK	5.2572G	124.59	Inf	-Inf	113.43	3	Vertical	356	1.69	-	33.71	7.63	30.18
AV	5.2564G	112.96	Inf	-Inf	101.80	3	Vertical	356	1.69	-	33.71	7.63	30.18
PK	5.354G	69.64	74.00	-4.36	58.26	3	Vertical	356	1.69	-	33.90	7.71	30.23
AV	5.3516G	52.28	54.00	-1.72	40.91	3	Vertical	356	1.69	-	33.90	7.70	30.23
PK	5.5956G	63.39	68.20	-4.81	51.80	3	Vertical	356	1.69	-	34.01	7.86	30.28

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

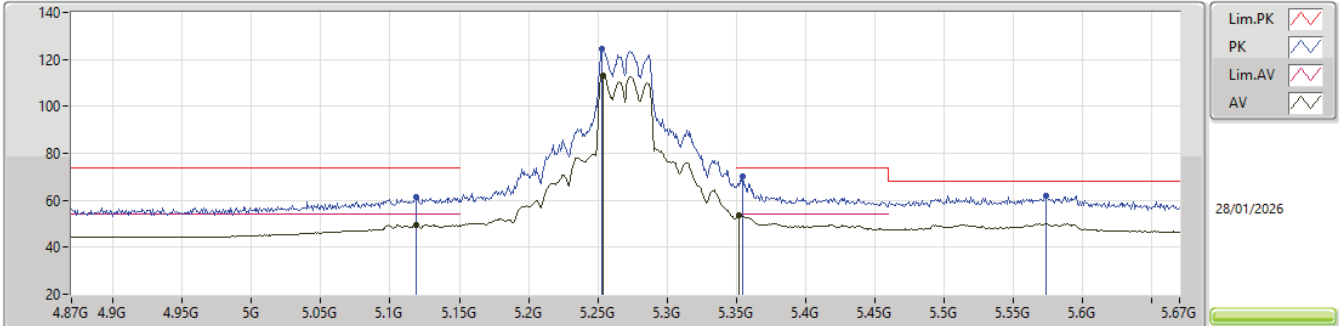


EUT_Y_4TX
Setting 22
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1188G	61.17	74.00	-12.83	50.17	3	Horizontal	357	1.73	-	33.54	7.57	30.11				
AV	5.1188G	49.62	54.00	-4.38	38.62	3	Horizontal	357	1.73	-	33.54	7.57	30.11				
PK	5.2532G	124.57	Inf	-Inf	113.41	3	Horizontal	357	1.73	-	33.71	7.63	30.18				
AV	5.254G	113.09	Inf	-Inf	101.93	3	Horizontal	357	1.73	-	33.71	7.63	30.18				
PK	5.3548G	70.08	74.00	-3.92	58.70	3	Horizontal	357	1.73	-	33.90	7.71	30.23				
AV	5.3516G	53.70	54.00	-0.30	42.33	3	Horizontal	357	1.73	-	33.90	7.70	30.23				
PK	5.574G	62.03	68.20	-6.17	50.42	3	Horizontal	357	1.73	-	34.05	7.84	30.28				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

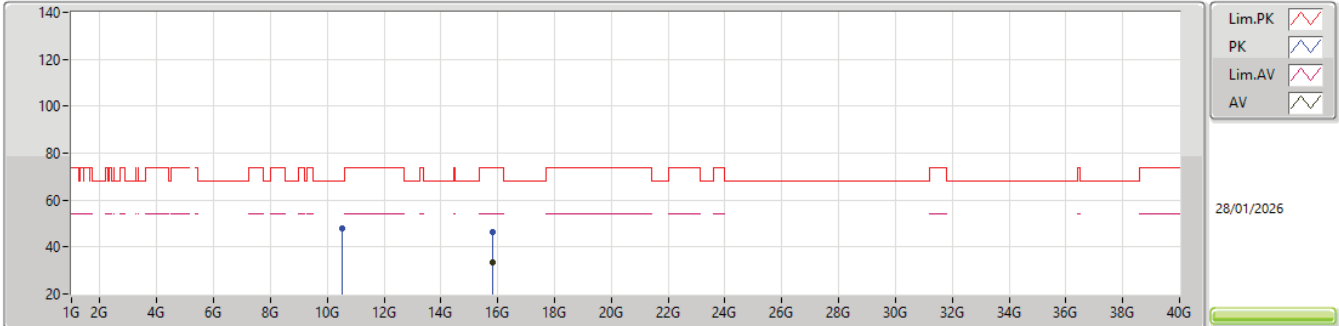


EUT_Y_4TX
Setting 22
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.53495G	47.88	68.20	-20.32	64.22	3	Vertical	295	1.90	-	38.30	12.05	66.69			
PK	15.80755G	46.55	74.00	-27.45	58.40	3	Vertical	239	2.10	-	37.42	14.66	63.93			
AV	15.8201G	33.27	54.00	-20.73	45.09	3	Vertical	239	2.10	-	37.44	14.67	63.93			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

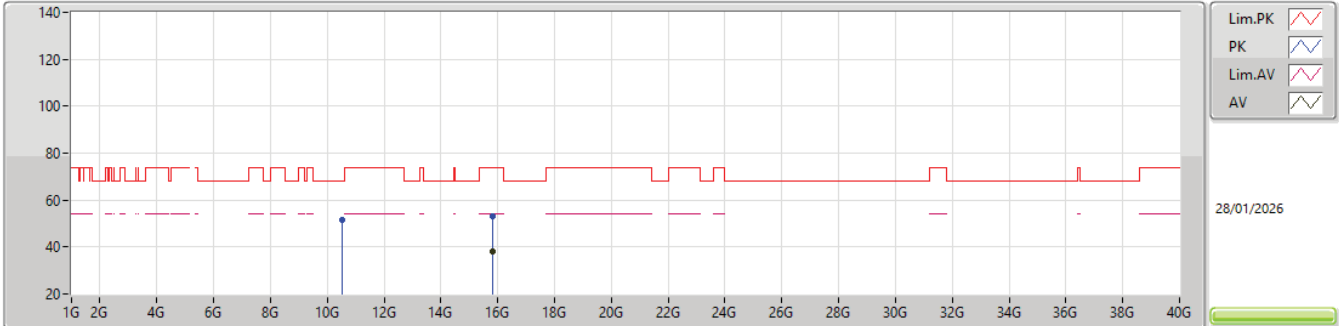


EUT_Y_4TX
Setting 22
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.53635G	51.48	68.20	-16.72	67.82	3	Horizontal	321	1.32	-	38.30	12.05	66.69			
PK	15.8217G	53.26	74.00	-20.74	65.07	3	Horizontal	354	1.84	-	37.44	14.68	63.93			
AV	15.81345G	37.93	54.00	-16.07	49.76	3	Horizontal	354	1.84	-	37.43	14.67	63.93			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

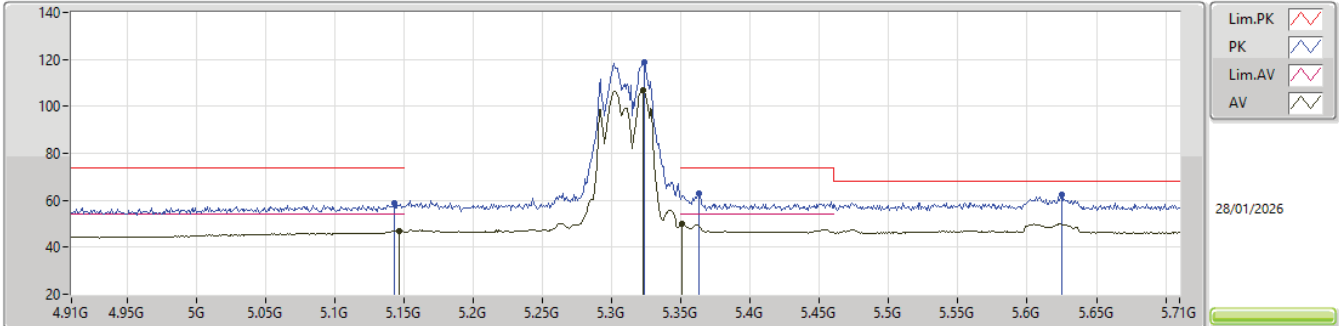


EUT_Y_4TX
Setting 16.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1428G	58.87	74.00	-15.13	47.82	3	Vertical	13	1.82	-	33.59	7.58	30.12
AV	5.1468G	46.98	54.00	-7.02	35.94	3	Vertical	13	1.82	-	33.59	7.58	30.13
PK	5.3236G	118.64	Inf	-Inf	107.33	3	Vertical	13	1.82	-	33.85	7.68	30.22
AV	5.3228G	106.82	Inf	-Inf	95.51	3	Vertical	13	1.82	-	33.85	7.68	30.22
PK	5.3628G	62.97	74.00	-11.03	51.60	3	Vertical	13	1.82	-	33.90	7.71	30.24
AV	5.3508G	49.91	54.00	-4.09	38.54	3	Vertical	13	1.82	-	33.90	7.70	30.23
PK	5.6252G	62.50	68.20	-5.70	50.86	3	Vertical	13	1.82	-	34.00	7.90	30.26

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

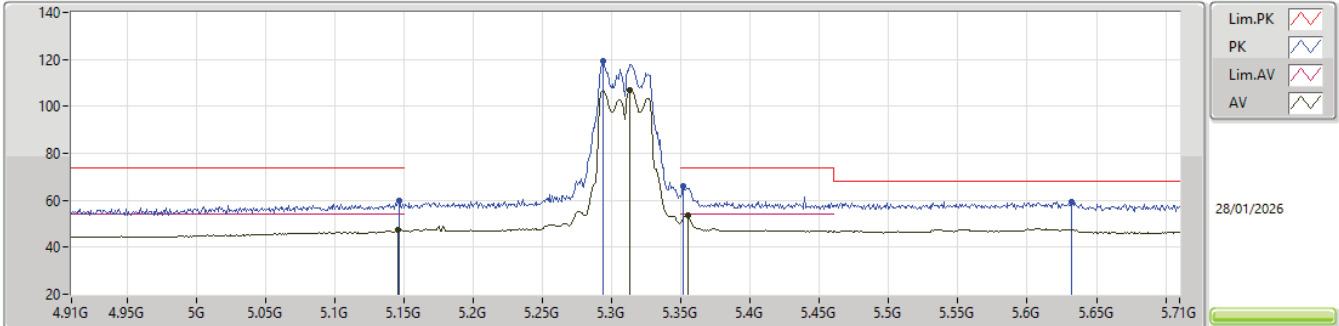


EUT_Y_4TX
Setting 16.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1468G	59.63	74.00	-14.37	48.59	3	Horizontal	358	1.83	-	33.59	7.58	30.13
AV	5.146G	47.58	54.00	-6.42	36.54	3	Horizontal	358	1.83	-	33.59	7.58	30.13
PK	5.294G	119.08	Inf	-Inf	107.83	3	Horizontal	358	1.83	-	33.79	7.66	30.20
AV	5.3132G	107.13	Inf	-Inf	95.84	3	Horizontal	358	1.83	-	33.83	7.67	30.21
PK	5.3516G	65.92	74.00	-8.08	54.55	3	Horizontal	358	1.83	-	33.90	7.70	30.23
AV	5.3548G	53.61	54.00	-0.39	42.23	3	Horizontal	358	1.83	-	33.90	7.71	30.23
PK	5.6324G	59.37	68.20	-8.83	47.71	3	Horizontal	358	1.83	-	34.00	7.92	30.26

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

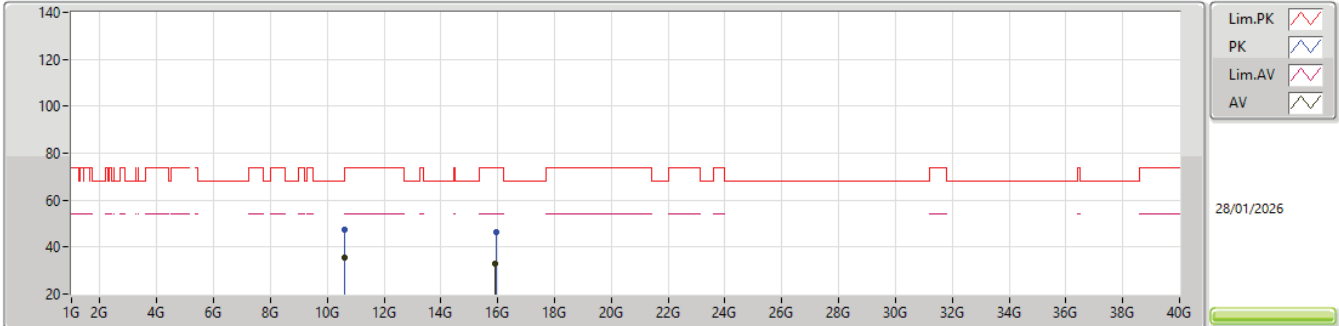


EUT_Y_4TX
Setting 16.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60115G	47.26	74.00	-26.74	63.40	3	Vertical	267	2.08	-	38.40	12.08	66.62			
AV	10.62005G	35.59	54.00	-18.41	51.70	3	Vertical	267	2.08	-	38.40	12.09	66.60			
PK	15.94425G	46.35	74.00	-27.65	58.03	3	Vertical	112	1.32	-	37.52	14.78	63.98			
AV	15.90585G	33.05	54.00	-20.95	44.58	3	Vertical	112	1.32	-	37.68	14.75	63.96			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

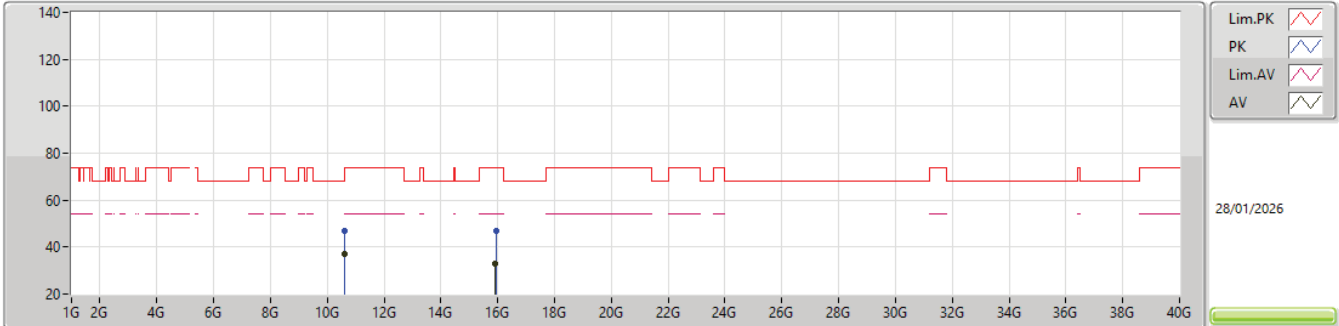


EUT_Y_4TX
Setting 16.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.6203G	46.81	74.00	-27.19	62.92	3	Horizontal	84	1.40	-	38.40	12.09	66.60			
AV	10.62G	37.21	54.00	-16.79	53.32	3	Horizontal	84	1.40	-	38.40	12.09	66.60			
PK	15.9471G	46.73	74.00	-27.27	58.42	3	Horizontal	239	1.43	-	37.51	14.78	63.98			
AV	15.90605G	33.11	54.00	-20.89	44.64	3	Horizontal	239	1.43	-	37.68	14.75	63.96			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

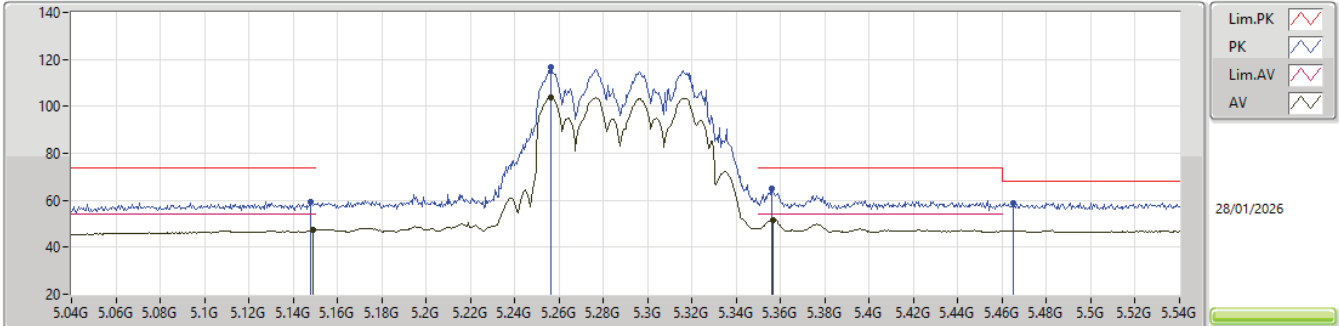


EUT_Y_4TX
Setting 16.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.148G	59.26	74.00	-14.74	48.21	3	Vertical	356	1.64	-	33.60	7.58	30.13			
AV	5.149G	47.43	54.00	-6.57	36.38	3	Vertical	356	1.64	-	33.60	7.58	30.13			
PK	5.2565G	116.81	Inf	-Inf	105.65	3	Vertical	356	1.64	-	33.71	7.63	30.18			
AV	5.2565G	104.05	Inf	-Inf	92.89	3	Vertical	356	1.64	-	33.71	7.63	30.18			
PK	5.356G	64.98	74.00	-9.02	53.61	3	Vertical	356	1.64	-	33.90	7.71	30.24			
AV	5.3565G	51.60	54.00	-2.40	40.23	3	Vertical	356	1.64	-	33.90	7.71	30.24			
PK	5.465G	59.03	68.20	-9.17	47.61	3	Vertical	356	1.64	-	33.93	7.78	30.29			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

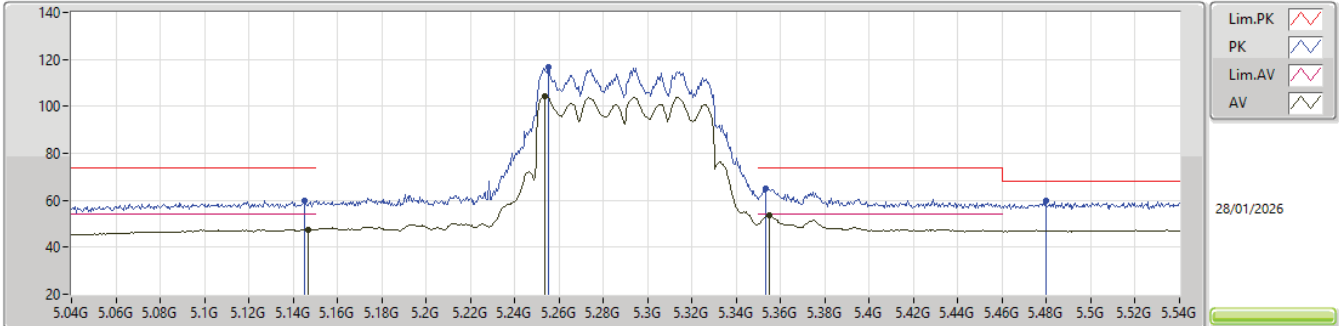


EUT_Y_4TX
Setting 16.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.145G	59.69	74.00	-14.31	48.65	3	Horizontal	358	1.75	-	33.59	7.58	30.13
AV	5.147G	47.66	54.00	-6.34	36.62	3	Horizontal	358	1.75	-	33.59	7.58	30.13
PK	5.255G	116.74	Inf	-Inf	105.58	3	Horizontal	358	1.75	-	33.71	7.63	30.18
AV	5.2535G	104.53	Inf	-Inf	93.37	3	Horizontal	358	1.75	-	33.71	7.63	30.18
PK	5.3535G	65.16	74.00	-8.84	53.78	3	Horizontal	358	1.75	-	33.90	7.71	30.23
AV	5.355G	53.62	54.00	-0.38	42.24	3	Horizontal	358	1.75	-	33.90	7.71	30.23
PK	5.4795G	59.67	68.20	-8.53	48.22	3	Horizontal	358	1.75	-	33.96	7.79	30.30

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

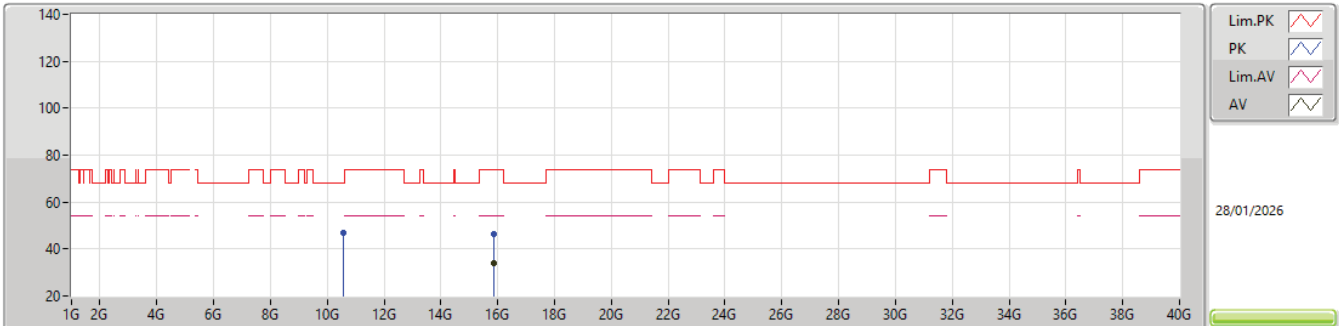


EUT_Y_4TX
Setting 16.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58788G	46.99	68.20	-21.21	63.17	3	Vertical	59	2.05	-	38.38	12.08	66.64			
PK	15.85552G	46.43	74.00	-27.57	58.15	3	Vertical	262	2.07	-	37.52	14.71	63.95			
AV	15.87964G	34.00	54.00	-20.00	45.60	3	Vertical	262	2.07	-	37.62	14.73	63.95			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

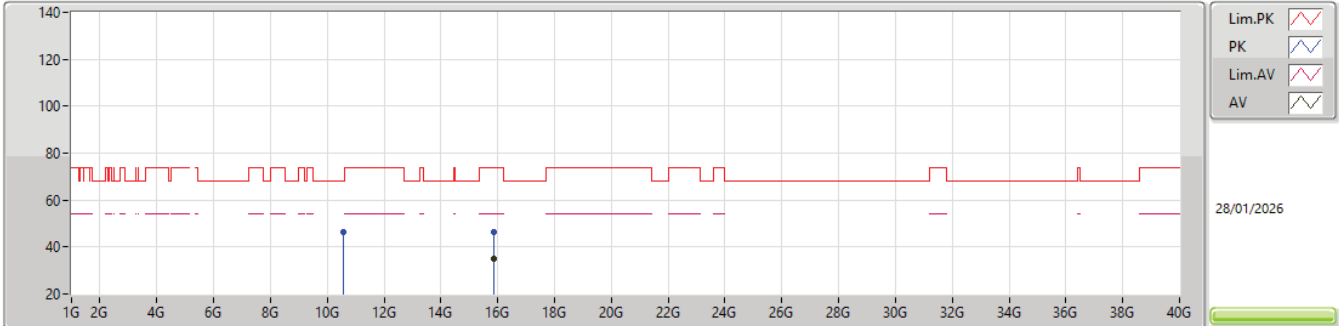


EUT_Y_4TX
Setting 16.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58625G	46.37	68.20	-21.83	62.56	3	Horizontal	286	1.55	-	38.37	12.08	66.64			
PK	15.88448G	46.63	74.00	-27.37	58.22	3	Horizontal	213	2.08	-	37.64	14.73	63.96			
AV	15.87984G	34.83	54.00	-19.17	46.43	3	Horizontal	213	2.08	-	37.62	14.73	63.95			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

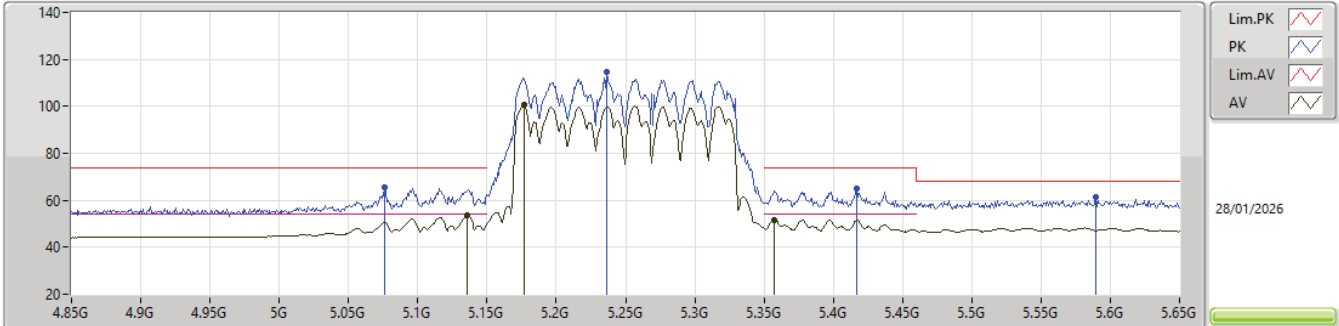


EUT_Y_4TX
Setting 15.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.0764G	65.27	74.00	-8.73	54.34	3	Vertical	354	1.75	-	33.45	7.57	30.09				
AV	5.1356G	53.44	54.00	-0.56	42.41	3	Vertical	354	1.75	-	33.57	7.58	30.12				
PK	5.2364G	114.44	Inf	-Inf	103.29	3	Vertical	354	1.75	-	33.70	7.62	30.17				
AV	5.1764G	100.45	Inf	-Inf	89.35	3	Vertical	354	1.75	-	33.65	7.59	30.14				
PK	5.4172G	65.24	74.00	-8.76	53.86	3	Vertical	354	1.75	-	33.90	7.75	30.27				
AV	5.3572G	51.73	54.00	-2.27	40.36	3	Vertical	354	1.75	-	33.90	7.71	30.24				
PK	5.5892G	61.38	68.20	-6.82	49.79	3	Vertical	354	1.75	-	34.02	7.85	30.28				

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

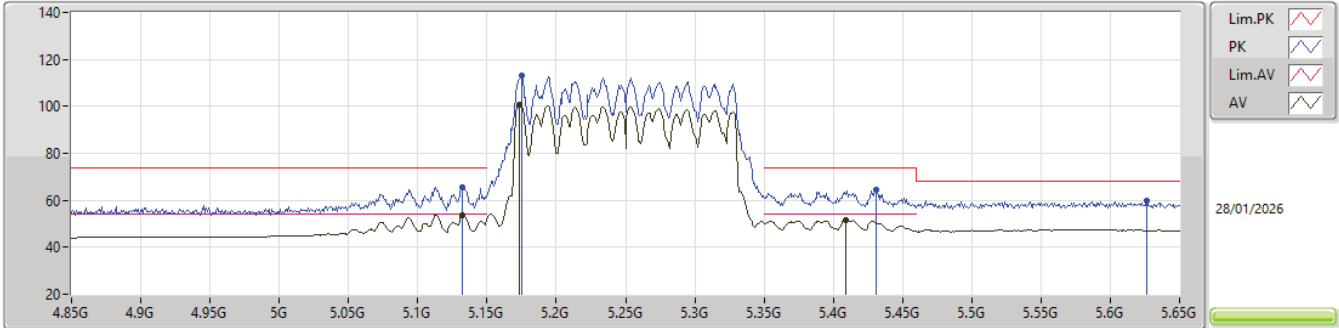


EUT_Y_4TX
Setting 15.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1324G	65.53	74.00	-8.47	54.51	3	Horizontal	349	1.80	-	33.56	7.58	30.12			
AV	5.1324G	53.69	54.00	-0.31	42.67	3	Horizontal	349	1.80	-	33.56	7.58	30.12			
PK	5.1748G	113.20	Inf	-Inf	102.11	3	Horizontal	349	1.80	-	33.65	7.58	30.14			
AV	5.1732G	100.53	Inf	-Inf	89.44	3	Horizontal	349	1.80	-	33.65	7.58	30.14			
PK	5.4308G	64.64	74.00	-9.36	53.25	3	Horizontal	349	1.80	-	33.90	7.76	30.27			
AV	5.4092G	51.64	54.00	-2.36	40.25	3	Horizontal	349	1.80	-	33.90	7.75	30.26			
PK	5.626G	59.75	68.20	-8.45	48.10	3	Horizontal	349	1.80	-	34.00	7.91	30.26			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

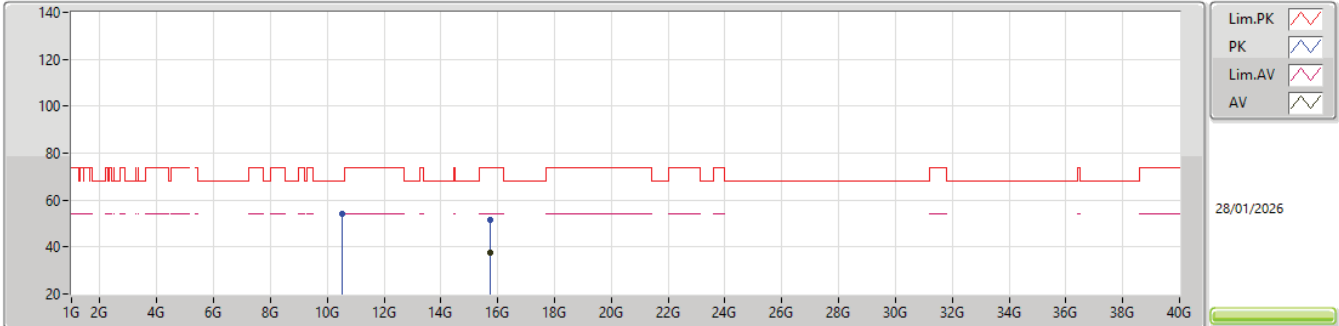


EUT_Y_4TX
Setting 15.5
02-D-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.52064G	54.13	68.20	-14.07	70.50	3	Vertical	192	1.74	-	38.30	12.04	66.71				
PK	15.7452G	51.42	74.00	-22.58	63.20	3	Vertical	158	1.52	-	37.51	14.61	63.90				
AV	15.74836G	37.81	54.00	-16.19	49.60	3	Vertical	158	1.52	-	37.50	14.61	63.90				

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

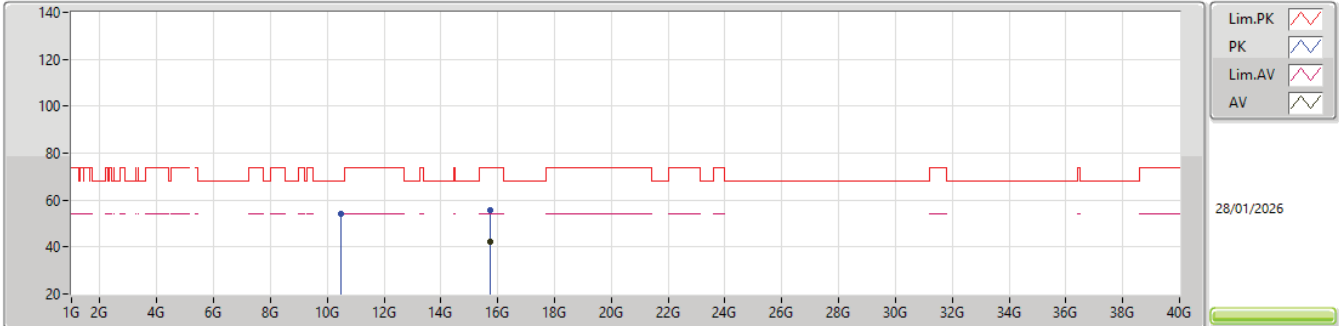


EUT_Y_4TX
Setting 15.5
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4883G	54.26	68.20	-13.94	70.68	3	Horizontal	243	1.82	-	38.28	12.03	66.73			
PK	15.74082G	55.68	74.00	-18.32	67.45	3	Horizontal	126	1.38	-	37.52	14.61	63.90			
AV	15.72066G	42.46	54.00	-11.54	54.20	3	Horizontal	126	1.38	-	37.56	14.59	63.89			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

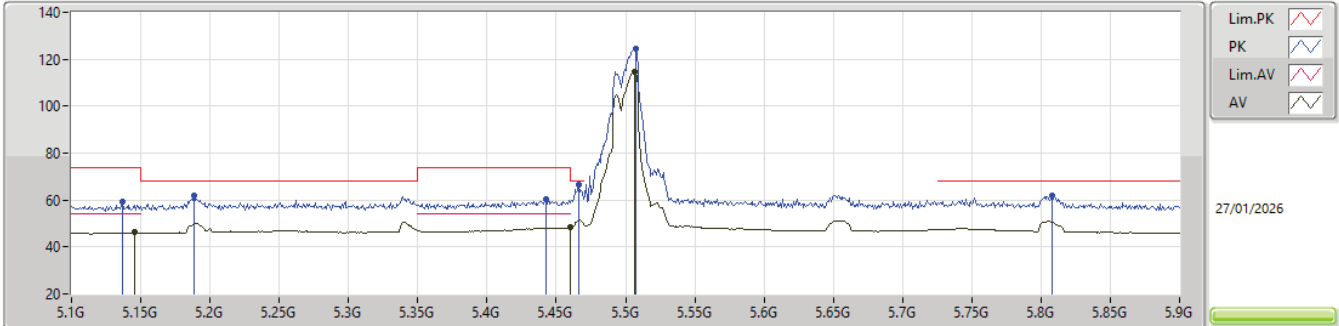


EUT_Y_4TX
Setting 20.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1368G	59.32	74.00	-14.68	48.29	3	Vertical	359	1.80	-	33.57	7.58	30.12
AV	5.1456G	46.17	54.00	-7.83	35.13	3	Vertical	359	1.80	-	33.59	7.58	30.13
PK	5.1888G	61.77	68.20	-6.43	50.65	3	Vertical	359	1.80	-	33.68	7.59	30.15
PK	5.4424G	60.18	74.00	-13.82	48.79	3	Vertical	359	1.80	-	33.90	7.77	30.28
PK	5.4664G	66.46	68.20	-1.74	55.04	3	Vertical	359	1.80	-	33.93	7.78	30.29
AV	5.46G	48.27	54.00	-5.73	36.86	3	Vertical	359	1.80	-	33.92	7.78	30.29
PK	5.5072G	124.74	Inf	-Inf	113.24	3	Vertical	359	1.80	-	34.01	7.80	30.31
AV	5.5064G	114.43	Inf	-Inf	102.93	3	Vertical	359	1.80	-	34.01	7.80	30.31
PK	5.808G	61.66	68.20	-6.54	49.67	3	Vertical	359	1.80	-	33.98	8.21	30.20

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

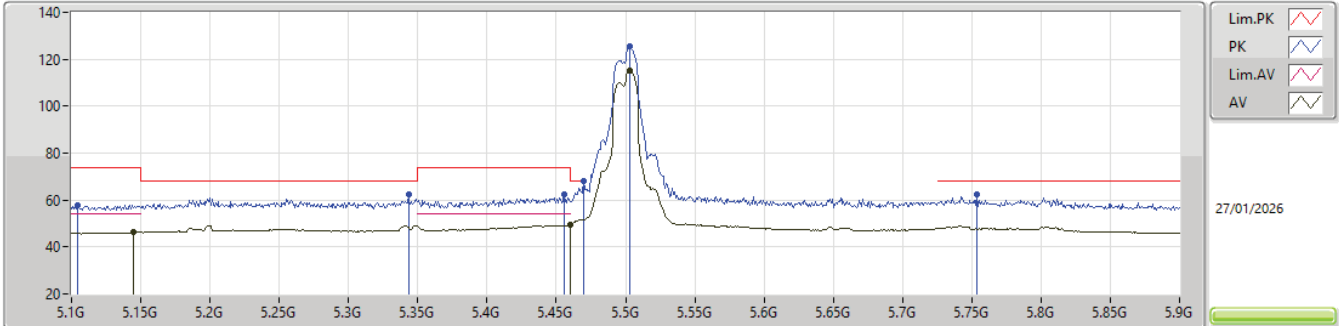


EUT_Y_4TX
Setting 20.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.104G	57.69	74.00	-16.31	46.71	3	Horizontal	358	1.61	-	33.51	7.57	30.10			
AV	5.1448G	46.32	54.00	-7.68	35.28	3	Horizontal	358	1.61	-	33.59	7.58	30.13			
PK	5.3432G	62.36	68.20	-5.84	51.00	3	Horizontal	358	1.61	-	33.89	7.70	30.23			
PK	5.456G	62.37	74.00	-11.63	50.98	3	Horizontal	358	1.61	-	33.91	7.77	30.29			
AV	5.46G	49.38	54.00	-4.62	37.97	3	Horizontal	358	1.61	-	33.92	7.78	30.29			
PK	5.4696G	67.88	68.20	-0.32	56.45	3	Horizontal	358	1.61	-	33.94	7.78	30.29			
PK	5.5032G	125.42	Inf	-Inf	113.92	3	Horizontal	358	1.61	-	34.01	7.80	30.31			
AV	5.5032G	115.14	Inf	-Inf	103.64	3	Horizontal	358	1.61	-	34.01	7.80	30.31			
PK	5.7536G	62.60	68.20	-5.60	50.69	3	Horizontal	358	1.61	-	34.00	8.13	30.22			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

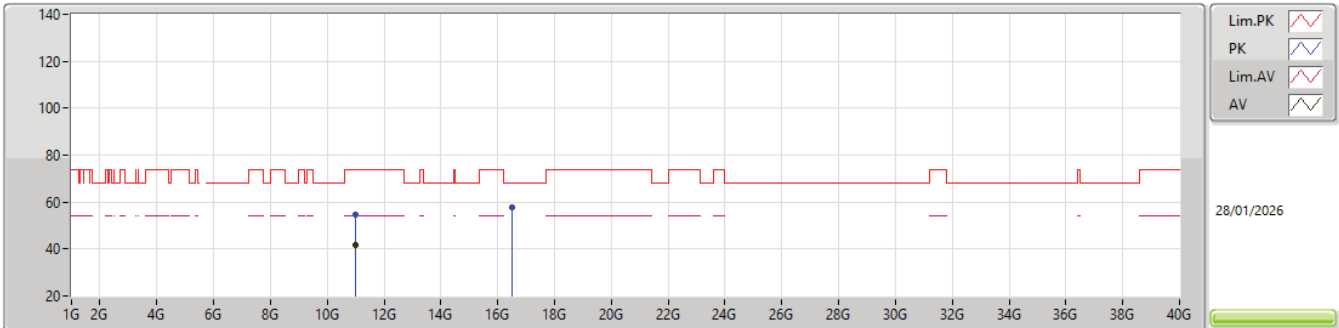


EUT_Y_4TX
Setting 20.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.00945G	54.85	74.00	-19.15	70.33	3	Vertical	0	1.14	-	38.42	12.29	66.19			
AV	10.99988G	41.74	54.00	-12.26	57.25	3	Vertical	0	1.14	-	38.40	12.28	66.19			
PK	16.50216G	57.74	68.20	-10.46	67.74	3	Vertical	214	1.53	-	38.81	14.93	63.74			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

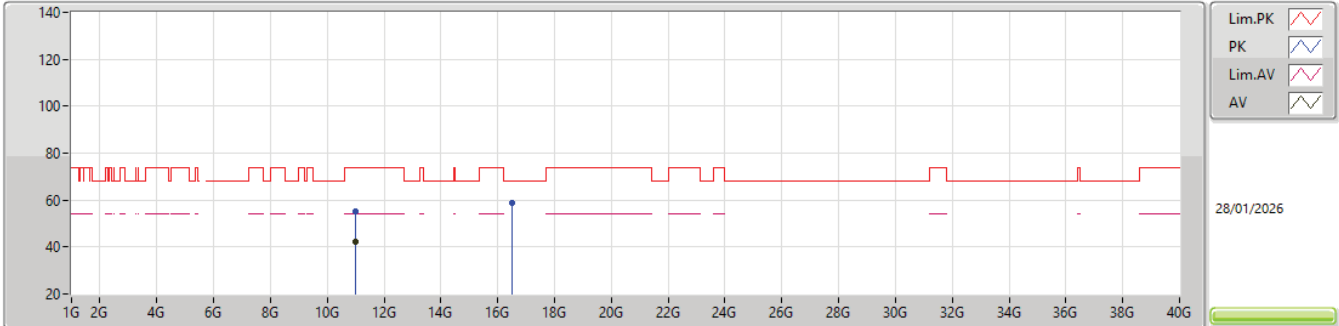


EUT_Y_4TX
Setting 20.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99268G	55.02	74.00	-18.98	70.54	3	Horizontal	343	2.97	-	38.40	12.28	66.20			
AV	11G	42.33	54.00	-11.67	57.83	3	Horizontal	343	2.97	-	38.40	12.29	66.19			
PK	16.49568G	58.72	68.20	-9.48	68.75	3	Horizontal	263	1.80	-	38.78	14.93	63.74			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

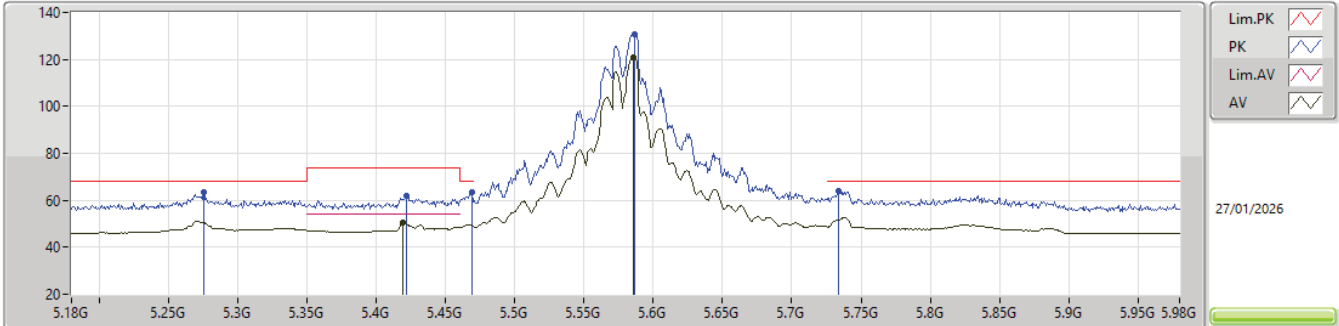


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2752G	63.65	68.20	-4.55	52.44	3	Vertical	358	1.66	-	33.75	7.65	30.19
PK	5.4216G	61.84	74.00	-12.16	50.46	3	Vertical	358	1.66	-	33.90	7.75	30.27
AV	5.4192G	50.63	54.00	-3.37	39.25	3	Vertical	358	1.66	-	33.90	7.75	30.27
PK	5.4688G	63.19	68.20	-5.01	51.76	3	Vertical	358	1.66	-	33.94	7.78	30.29
PK	5.5864G	130.75	Inf	-Inf	119.15	3	Vertical	358	1.66	-	34.03	7.85	30.28
AV	5.5856G	120.98	Inf	-Inf	109.38	3	Vertical	358	1.66	-	34.03	7.85	30.28
PK	5.7336G	64.13	68.20	-4.07	52.27	3	Vertical	358	1.66	-	34.00	8.09	30.23

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

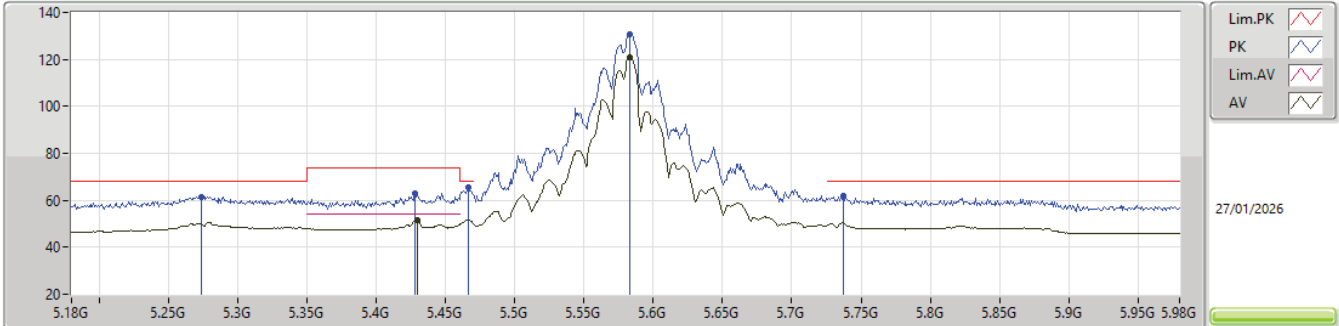


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.2736G	61.62	68.20	-6.58	50.41	3	Horizontal	359	1.68	-	33.75	7.65	30.19				
PK	5.428G	63.01	74.00	-10.99	51.62	3	Horizontal	359	1.68	-	33.90	7.76	30.27				
AV	5.4296G	51.77	54.00	-2.23	40.38	3	Horizontal	359	1.68	-	33.90	7.76	30.27				
PK	5.4664G	65.27	68.20	-2.93	53.85	3	Horizontal	359	1.68	-	33.93	7.78	30.29				
PK	5.5832G	130.80	Inf	-Inf	119.20	3	Horizontal	359	1.68	-	34.03	7.85	30.28				
AV	5.5832G	121.11	Inf	-Inf	109.51	3	Horizontal	359	1.68	-	34.03	7.85	30.28				
PK	5.7376G	62.09	68.20	-6.11	50.21	3	Horizontal	359	1.68	-	34.00	8.10	30.22				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

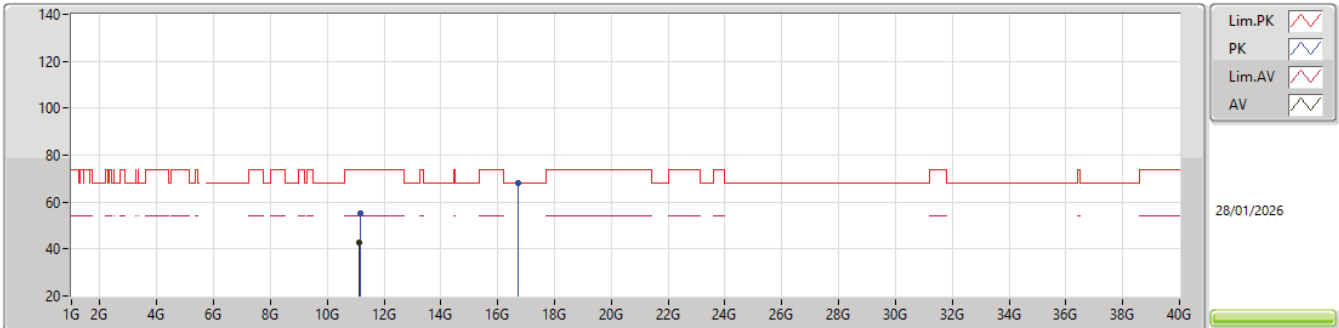


EUT_Y_4TX
Setting 25
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14539G	55.19	74.00	-18.81	70.51	3	Vertical	15	2.02	-	38.51	12.36	66.19			
AV	11.14406G	42.53	54.00	-11.47	57.85	3	Vertical	15	2.02	-	38.51	12.36	66.19			
PK	16.7409G	67.86	68.20	-0.34	76.90	3	Vertical	3	1.79	-	39.98	14.98	64.00			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

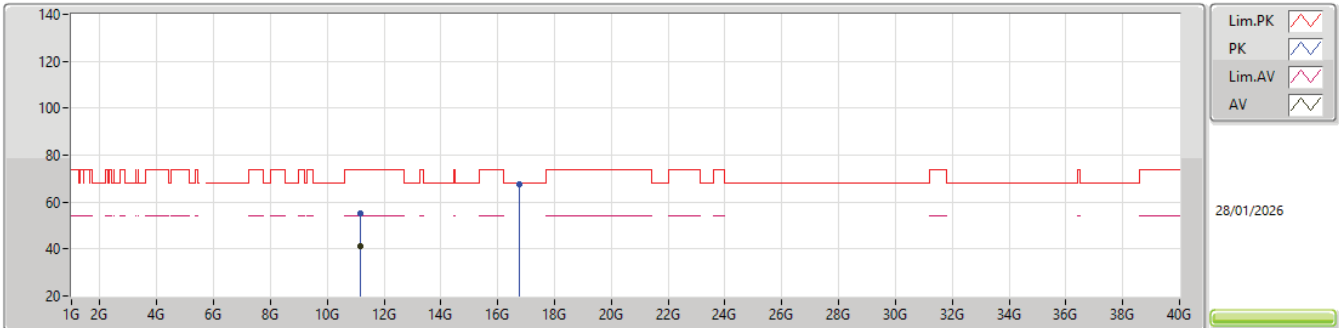


EUT_Y_4TX
Setting 25
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16426G	55.04	74.00	-18.96	70.36	3	Horizontal	359	1.80	-	38.50	12.37	66.19			
AV	11.15358G	41.25	54.00	-12.75	56.58	3	Horizontal	359	1.80	-	38.50	12.36	66.19			
PK	16.74228G	67.34	68.20	-0.86	76.39	3	Horizontal	340	1.40	-	39.98	14.98	64.01			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

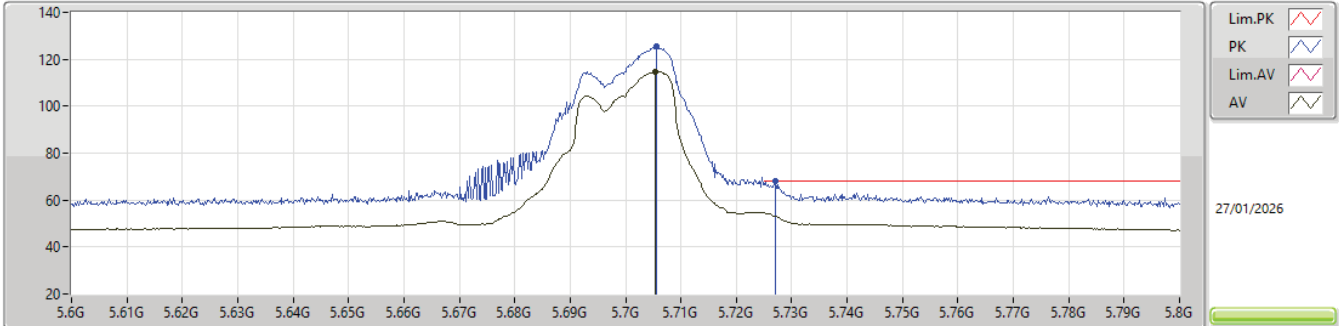


EUT_Y_4TX
Setting 19
02-D-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.7056G	125.49	Inf	-Inf	113.69	3	Vertical	360	1.69	-	34.00	8.04	30.24				
AV	5.7054G	114.67	Inf	-Inf	102.87	3	Vertical	360	1.69	-	34.00	8.04	30.24				
PK	5.727G	67.89	68.20	-0.31	56.04	3	Vertical	360	1.69	-	34.00	8.08	30.23				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

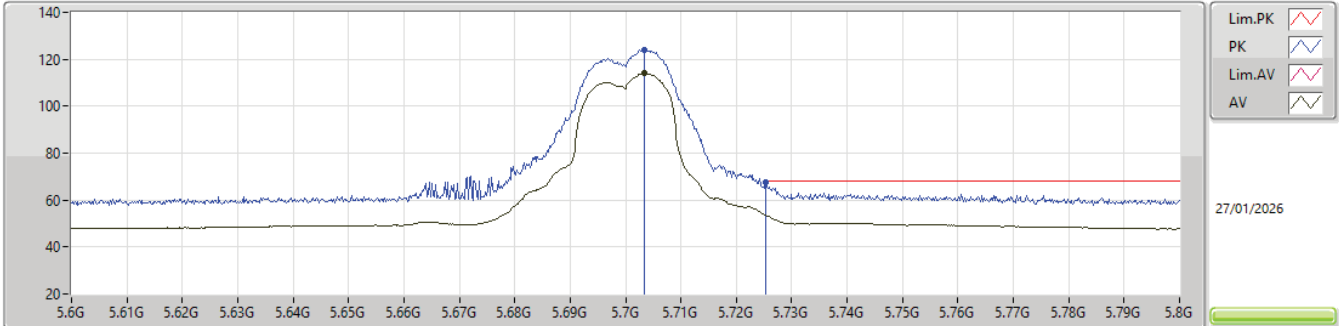


EUT_Y_4TX
Setting 19
02-D-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7034G	123.97	Inf	-Inf	112.17	3	Horizontal	356	1.72	-	34.00	8.04	30.24			
AV	5.7034G	113.91	Inf	-Inf	102.11	3	Horizontal	356	1.72	-	34.00	8.04	30.24			
PK	5.7252G	67.67	68.20	-0.53	55.82	3	Horizontal	356	1.72	-	34.00	8.08	30.23			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

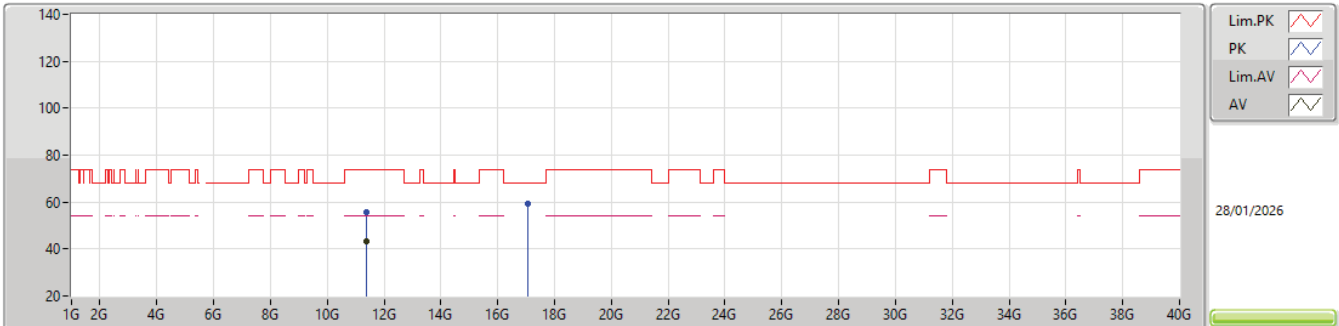


EUT_Y_4TX
Setting 19
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39211G	55.67	74.00	-18.33	70.69	3	Vertical	6	1.95	-	38.70	12.48	66.20			
AV	11.39997G	43.12	54.00	-10.88	58.13	3	Vertical	6	1.95	-	38.70	12.49	66.20			
PK	17.07012G	59.55	68.20	-8.65	67.45	3	Vertical	358	1.80	-	41.34	15.05	64.29			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

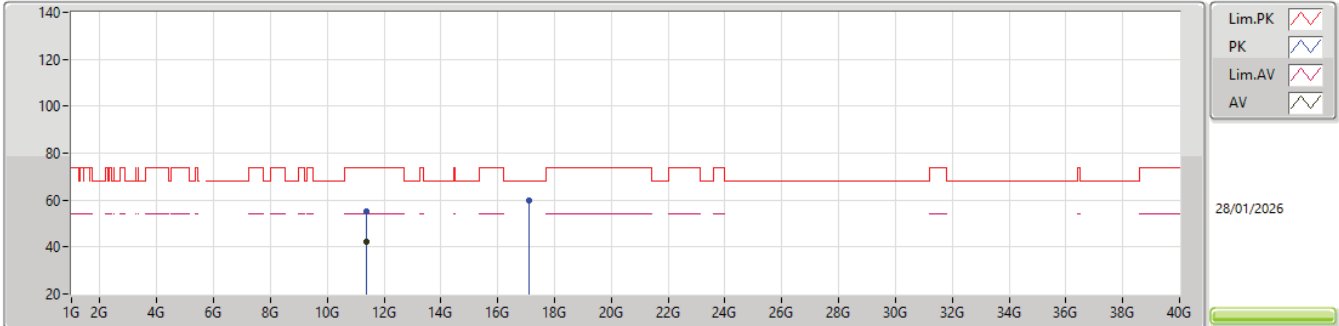


EUT_Y_4TX
Setting 19
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.39358G	55.38	74.00	-18.62	70.40	3	Horizontal	21	1.80	-	38.70	12.48	66.20			
AV	11.39997G	42.18	54.00	-11.82	57.19	3	Horizontal	21	1.80	-	38.70	12.49	66.20			
PK	17.0979G	59.62	68.20	-8.58	67.44	3	Horizontal	359	1.79	-	41.40	15.06	64.28			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

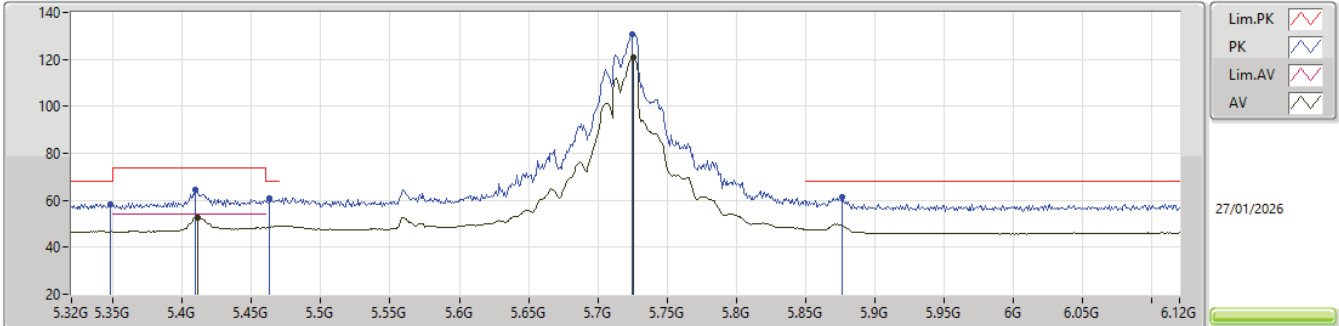


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.348G	58.31	68.20	-9.89	46.94	3	Vertical	360	1.69	-	33.90	7.70	30.23			
PK	5.4096G	64.48	74.00	-9.52	53.09	3	Vertical	360	1.69	-	33.90	7.75	30.26			
AV	5.4112G	52.59	54.00	-1.41	41.20	3	Vertical	360	1.69	-	33.90	7.75	30.26			
PK	5.4632G	61.08	68.20	-7.12	49.66	3	Vertical	360	1.69	-	33.93	7.78	30.29			
PK	5.7248G	130.77	Inf	-Inf	118.92	3	Vertical	360	1.69	-	34.00	8.08	30.23			
AV	5.7256G	120.63	Inf	-Inf	108.78	3	Vertical	360	1.69	-	34.00	8.08	30.23			
PK	5.8768G	61.60	68.20	-6.60	49.58	3	Vertical	360	1.69	-	34.01	8.18	30.17			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

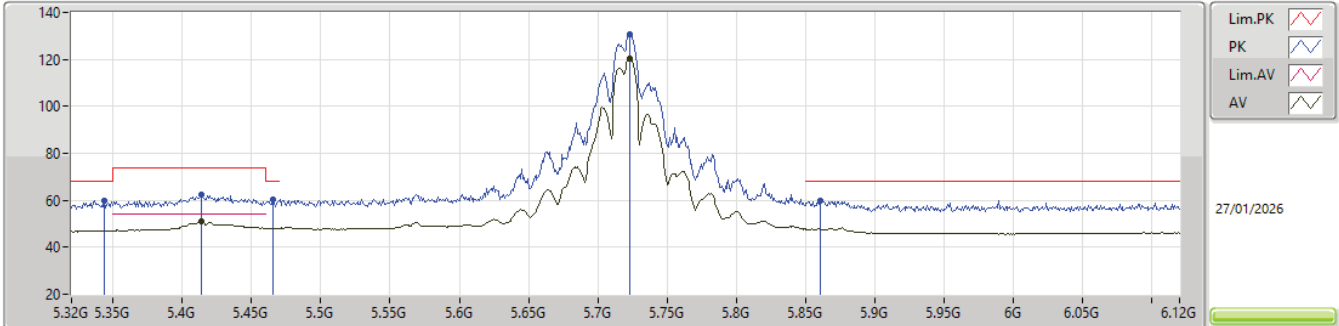


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.344G	59.90	68.20	-8.30	48.54	3	Horizontal	358	1.60	-	33.89	7.70	30.23				
PK	5.4136G	62.20	74.00	-11.80	50.82	3	Horizontal	358	1.60	-	33.90	7.75	30.27				
AV	5.4136G	50.94	54.00	-3.06	39.56	3	Horizontal	358	1.60	-	33.90	7.75	30.27				
PK	5.4656G	60.38	68.20	-7.82	48.96	3	Horizontal	358	1.60	-	33.93	7.78	30.29				
PK	5.7232G	130.88	Inf	-Inf	119.03	3	Horizontal	358	1.60	-	34.00	8.08	30.23				
AV	5.7232G	120.54	Inf	-Inf	108.69	3	Horizontal	358	1.60	-	34.00	8.08	30.23				
PK	5.8608G	59.88	68.20	-8.32	47.94	3	Horizontal	358	1.60	-	33.94	8.18	30.18				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

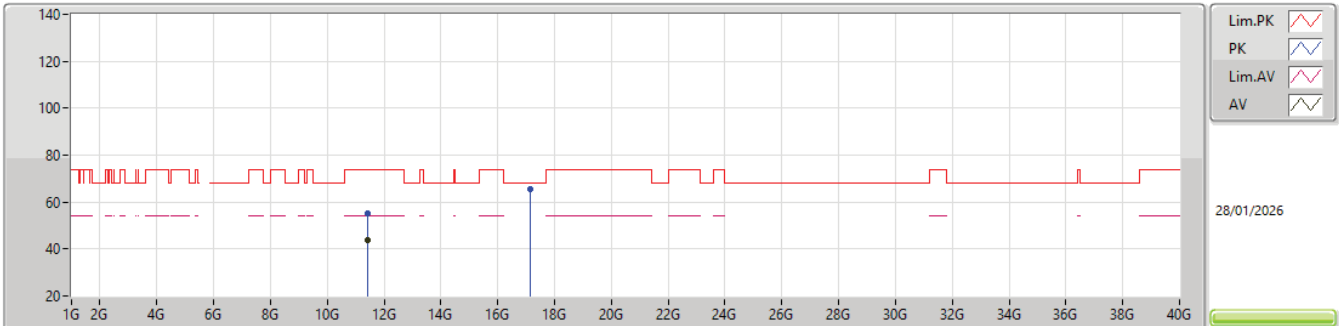


EUT_Y_4TX
Setting 26.5
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.4202G	55.43	74.00	-18.57	70.39	3	Vertical	6	1.93	-	38.74	12.50	66.20				
AV	11.44G	43.57	54.00	-10.43	58.48	3	Vertical	6	1.93	-	38.78	12.51	66.20				
PK	17.15796G	65.34	68.20	-2.86	72.92	3	Vertical	8	1.80	-	41.63	15.07	64.28				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

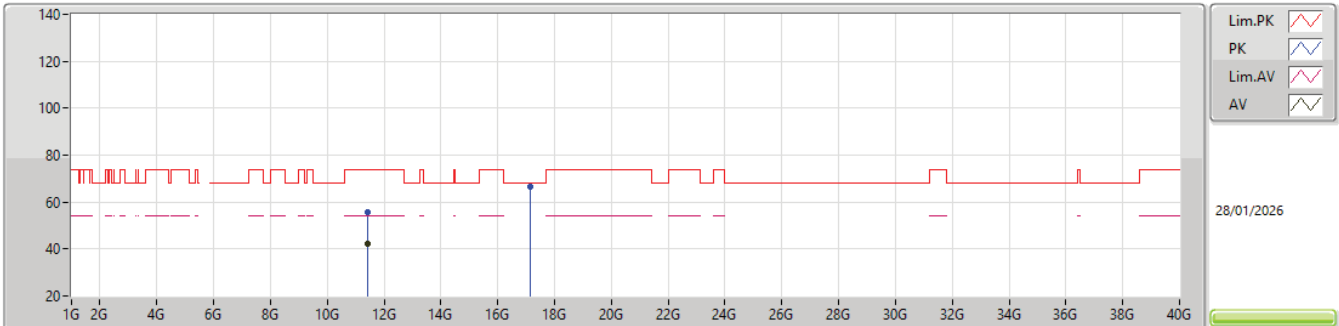


EUT_Y_4TX
Setting 26.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.42743G	55.81	74.00	-18.19	70.76	3	Horizontal	11	1.80	-	38.75	12.50	66.20			
AV	11.44003G	42.49	54.00	-11.51	57.40	3	Horizontal	11	1.80	-	38.78	12.51	66.20			
PK	17.15826G	66.52	68.20	-1.68	74.10	3	Horizontal	321	1.82	-	41.63	15.07	64.28			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

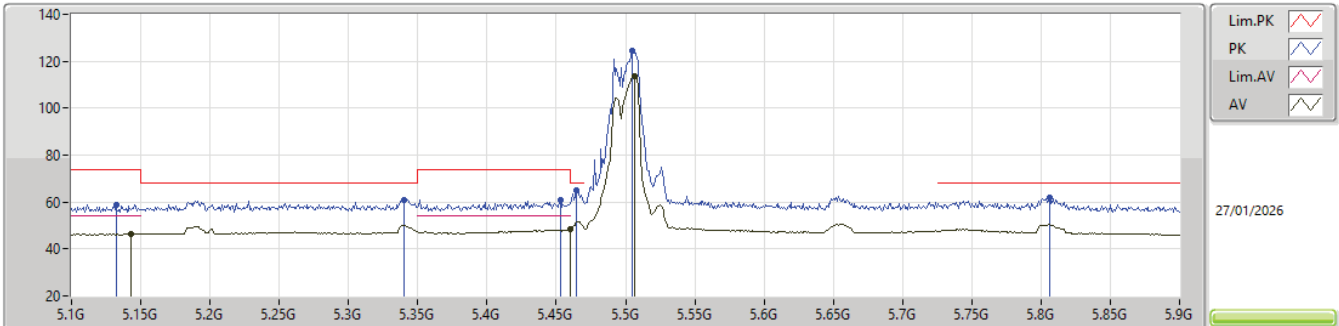


EUT_Y_4TX
Setting 19.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.132G	58.79	74.00	-15.21	47.77	3	Vertical	359	1.78	-	33.56	7.58	30.12			
AV	5.1432G	46.55	54.00	-7.45	35.50	3	Vertical	359	1.78	-	33.59	7.58	30.12			
PK	5.34G	61.07	68.20	-7.13	49.72	3	Vertical	359	1.78	-	33.88	7.70	30.23			
PK	5.4528G	60.97	74.00	-13.03	49.58	3	Vertical	359	1.78	-	33.91	7.77	30.29			
PK	5.4648G	64.79	68.20	-3.41	53.37	3	Vertical	359	1.78	-	33.93	7.78	30.29			
AV	5.46G	48.44	54.00	-5.56	37.03	3	Vertical	359	1.78	-	33.92	7.78	30.29			
PK	5.5048G	124.26	Inf	-Inf	112.76	3	Vertical	359	1.78	-	34.01	7.80	30.31			
AV	5.5064G	113.61	Inf	-Inf	102.11	3	Vertical	359	1.78	-	34.01	7.80	30.31			
PK	5.8064G	62.06	68.20	-6.14	50.06	3	Vertical	359	1.78	-	33.99	8.21	30.20			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

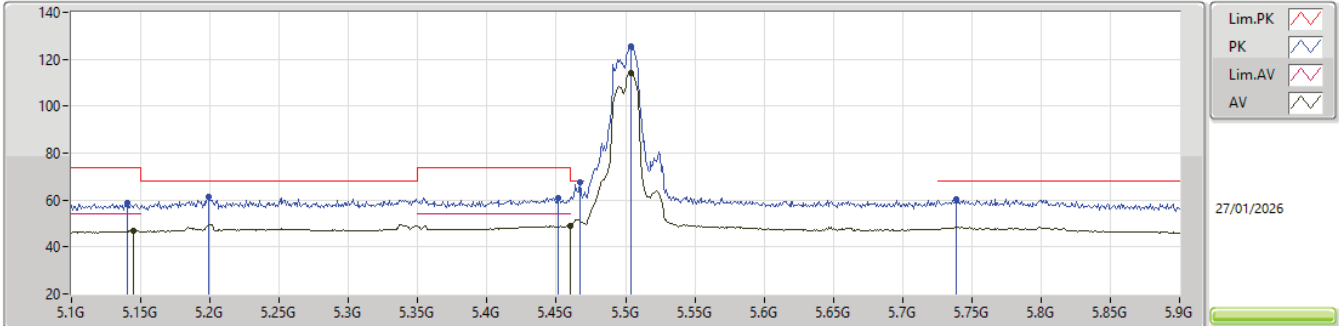


EUT_Y_4TX
Setting 19.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.14G	58.58	74.00	-15.42	47.54	3	Horizontal	359	1.76	-	33.58	7.58	30.12			
AV	5.1448G	46.94	54.00	-7.06	35.90	3	Horizontal	359	1.76	-	33.59	7.58	30.13			
PK	5.1992G	61.28	68.20	-6.92	50.14	3	Horizontal	359	1.76	-	33.70	7.59	30.15			
PK	5.4512G	61.05	74.00	-12.95	49.66	3	Horizontal	359	1.76	-	33.90	7.77	30.28			
PK	5.4672G	67.56	68.20	-0.64	56.14	3	Horizontal	359	1.76	-	33.93	7.78	30.29			
AV	5.46G	49.18	54.00	-4.82	37.77	3	Horizontal	359	1.76	-	33.92	7.78	30.29			
PK	5.504G	125.74	Inf	-Inf	114.24	3	Horizontal	359	1.76	-	34.01	7.80	30.31			
AV	5.504G	114.30	Inf	-Inf	102.80	3	Horizontal	359	1.76	-	34.01	7.80	30.31			
PK	5.7384G	60.28	68.20	-7.92	48.40	3	Horizontal	359	1.76	-	34.00	8.10	30.22			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

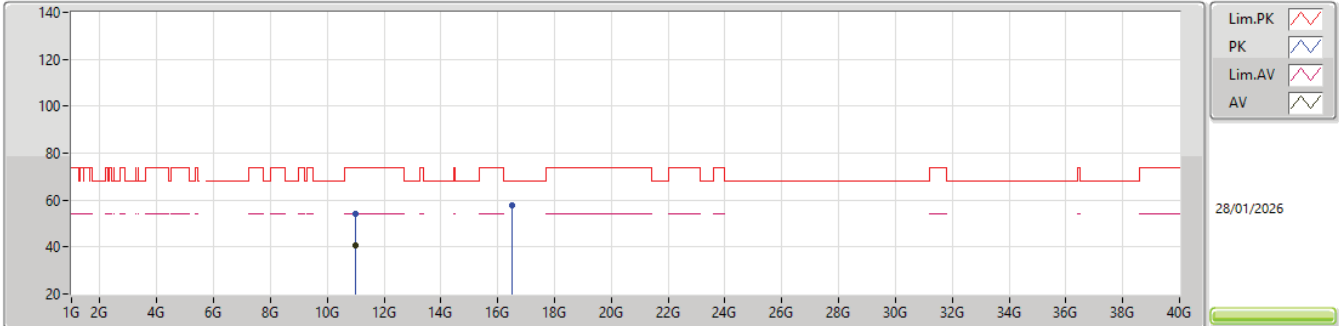


EUT_Y_4TX
Setting 19.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00023G	54.24	74.00	-19.76	69.74	3	Vertical	73	1.65	-	38.40	12.29	66.19			
AV	11.00444G	40.69	54.00	-13.31	56.18	3	Vertical	73	1.65	-	38.41	12.29	66.19			
PK	16.49669G	57.86	68.20	-10.34	67.88	3	Vertical	129	1.57	-	38.79	14.93	63.74			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5500MHz_TX

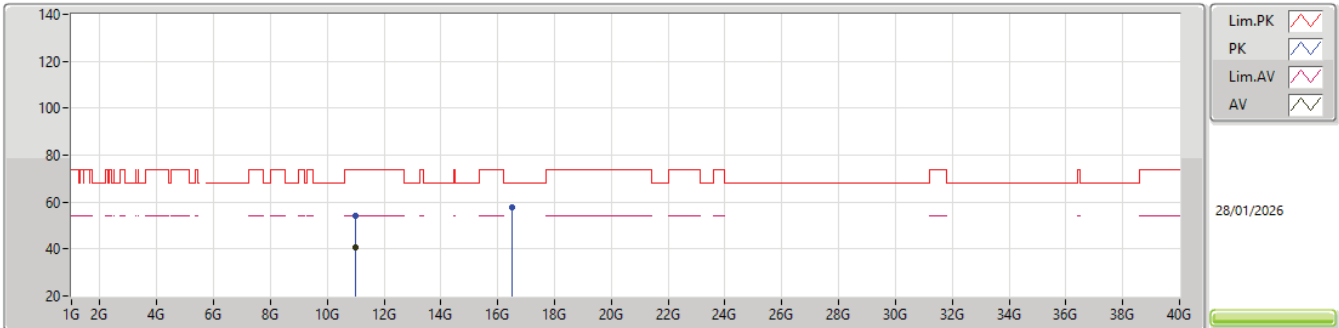


EUT_Y_4TX
Setting 19.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00215G	54.16	74.00	-19.84	69.66	3	Horizontal	237	1.30	-	38.40	12.29	66.19			
AV	11.00003G	40.92	54.00	-13.08	56.42	3	Horizontal	237	1.30	-	38.40	12.29	66.19			
PK	16.49687G	57.83	68.20	-10.37	67.85	3	Horizontal	178	1.55	-	38.79	14.93	63.74			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

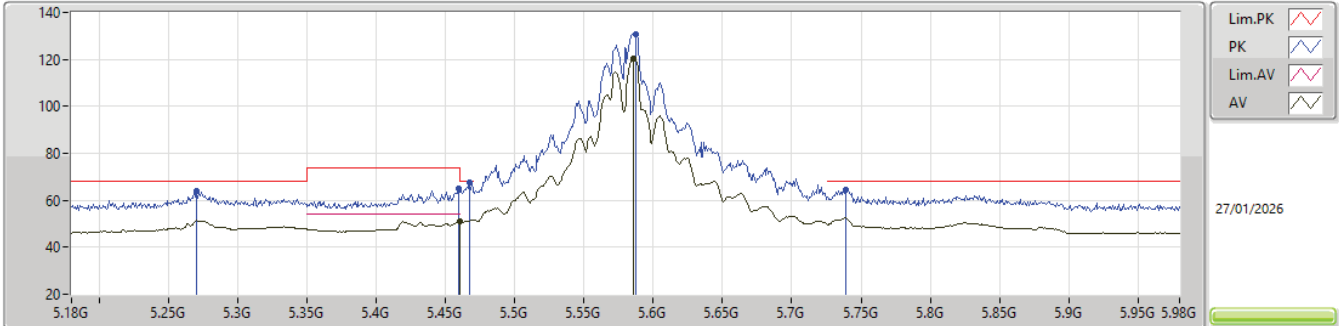


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.2704G	63.90	68.20	-4.30	52.71	3	Vertical	357	1.63	-	33.74	7.64	30.19				
PK	5.4592G	65.23	74.00	-8.77	53.82	3	Vertical	357	1.63	-	33.92	7.78	30.29				
AV	5.46G	51.09	54.00	-2.91	39.68	3	Vertical	357	1.63	-	33.92	7.78	30.29				
PK	5.4672G	67.36	68.20	-0.84	55.94	3	Vertical	357	1.63	-	33.93	7.78	30.29				
PK	5.5872G	130.72	Inf	-Inf	119.12	3	Vertical	357	1.63	-	34.03	7.85	30.28				
AV	5.5856G	120.50	Inf	-Inf	108.90	3	Vertical	357	1.63	-	34.03	7.85	30.28				
PK	5.7392G	64.64	68.20	-3.56	52.76	3	Vertical	357	1.63	-	34.00	8.10	30.22				

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

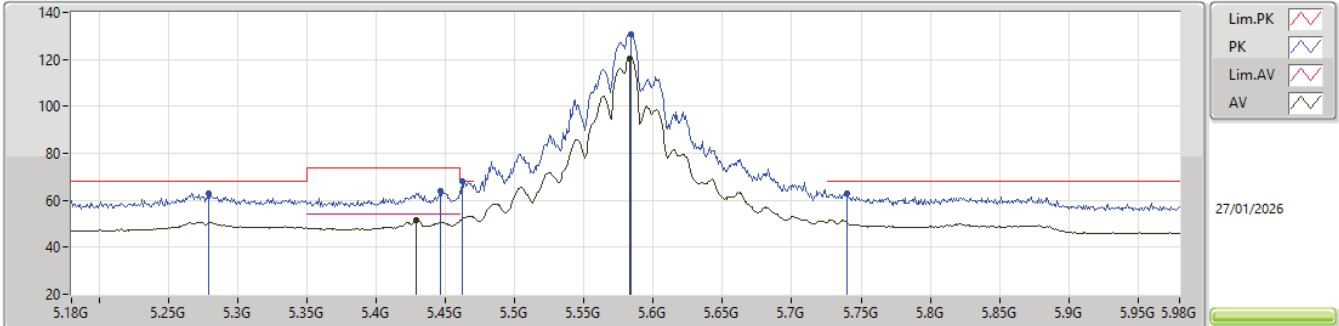


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.2792G	62.88	68.20	-5.32	51.67	3	Horizontal	356	1.69	-	33.76	7.65	30.20					
PK	5.4464G	64.14	74.00	-9.86	52.75	3	Horizontal	356	1.69	-	33.90	7.77	30.28					
AV	5.4288G	51.62	54.00	-2.38	40.23	3	Horizontal	356	1.69	-	33.90	7.76	30.27					
PK	5.4624G	68.04	68.20	-0.16	56.63	3	Horizontal	356	1.69	-	33.92	7.78	30.29					
PK	5.584G	130.85	Inf	-Inf	119.25	3	Horizontal	356	1.69	-	34.03	7.85	30.28					
AV	5.5832G	120.39	Inf	-Inf	108.79	3	Horizontal	356	1.69	-	34.03	7.85	30.28					
PK	5.74G	63.02	68.20	-5.18	51.13	3	Horizontal	356	1.69	-	34.00	8.11	30.22					

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

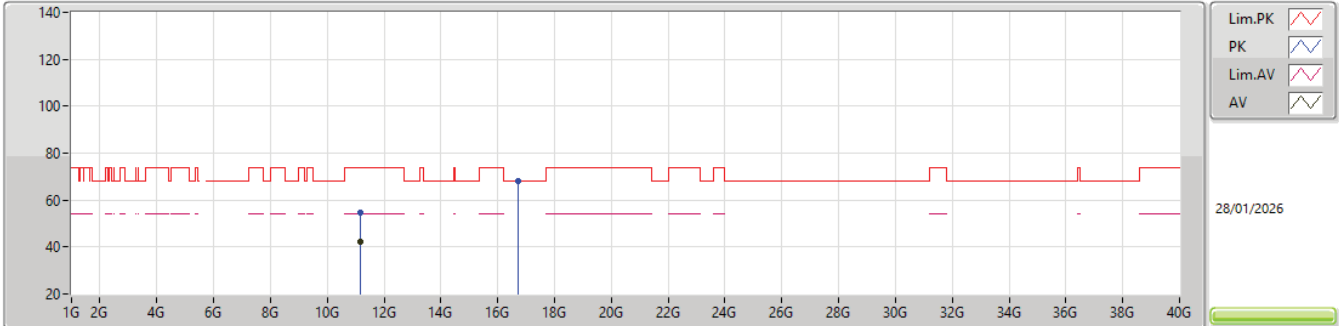


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.15991G	54.78	74.00	-19.22	70.10	3	Vertical	360	2.46	-	38.50	12.37	66.19			
AV	11.16G	42.11	54.00	-11.89	57.43	3	Vertical	360	2.46	-	38.50	12.37	66.19			
PK	16.74096G	68.07	68.20	-0.13	77.12	3	Vertical	3	1.84	-	39.98	14.98	64.01			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5580MHz_TX

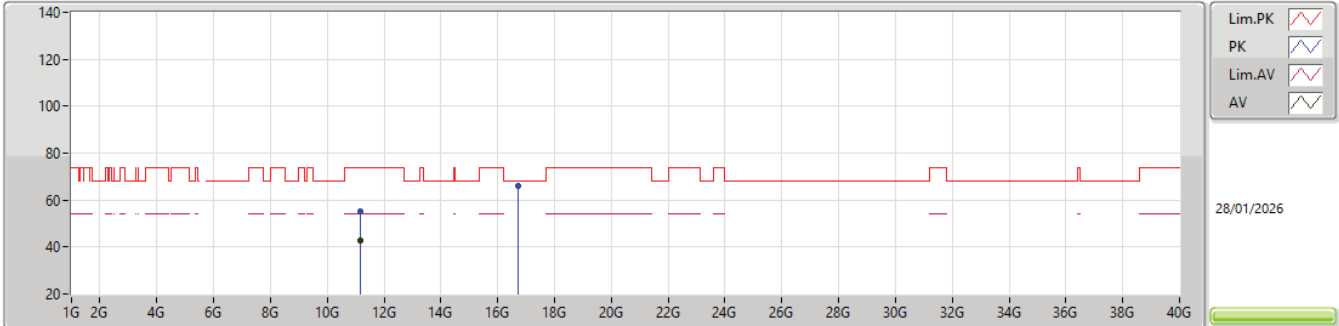


EUT_Y_4TX
Setting 26
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16057G	55.20	74.00	-18.80	70.52	3	Horizontal	336	2.97	-	38.50	12.37	66.19			
AV	11.15988G	42.83	54.00	-11.17	58.15	3	Horizontal	336	2.97	-	38.50	12.37	66.19			
PK	16.73592G	66.25	68.20	-1.95	75.30	3	Horizontal	351	1.82	-	39.97	14.98	64.00			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

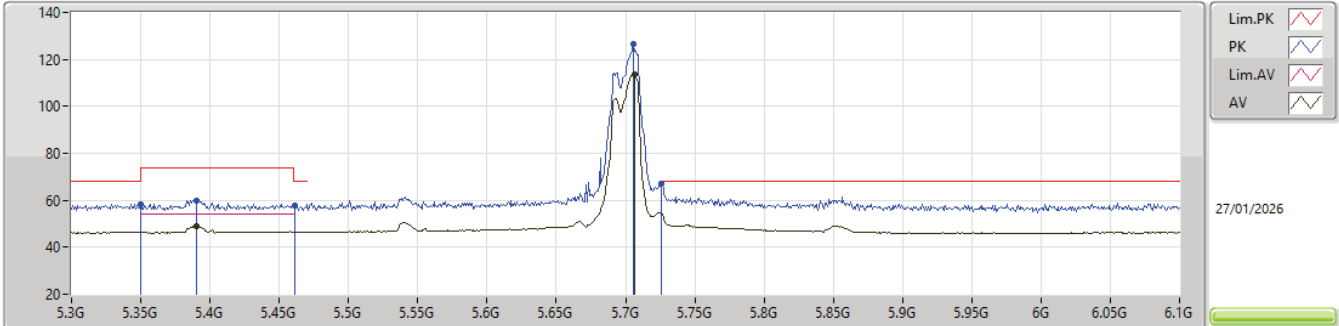


EUT_Y_4TX
Setting 18
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3496G	58.33	68.20	-9.87	46.96	3	Vertical	360	1.69	-	33.90	7.70	30.23			
PK	5.3904G	59.99	74.00	-14.01	48.61	3	Vertical	360	1.69	-	33.90	7.73	30.25			
AV	5.3904G	49.19	54.00	-4.81	37.81	3	Vertical	360	1.69	-	33.90	7.73	30.25			
PK	5.4608G	57.96	68.20	-10.24	46.55	3	Vertical	360	1.69	-	33.92	7.78	30.29			
PK	5.7056G	126.42	Inf	-Inf	114.62	3	Vertical	360	1.69	-	34.00	8.04	30.24			
AV	5.7064G	113.50	Inf	-Inf	101.69	3	Vertical	360	1.69	-	34.00	8.05	30.24			
PK	5.7256G	67.21	68.20	-0.99	55.36	3	Vertical	360	1.69	-	34.00	8.08	30.23			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5700MHz_TX

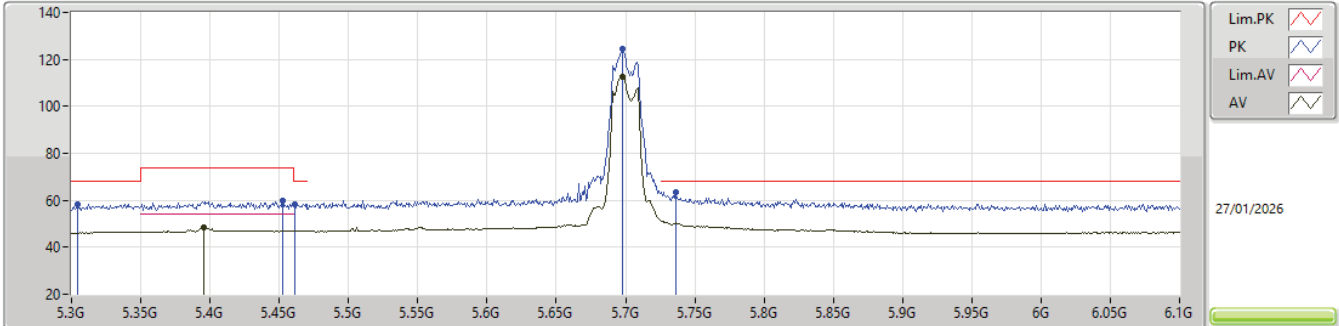EUT_Y_4TX
Setting 18
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.304G	58.49	68.20	-9.71	47.22	3	Horizontal	341	1.67	-	33.81	7.67	30.21			
PK	5.4528G	59.71	74.00	-14.29	48.32	3	Horizontal	341	1.67	-	33.91	7.77	30.29			
AV	5.3952G	48.36	54.00	-5.64	36.98	3	Horizontal	341	1.67	-	33.90	7.74	30.26			
PK	5.4616G	58.38	68.20	-9.82	46.97	3	Horizontal	341	1.67	-	33.92	7.78	30.29			
PK	5.6976G	124.70	Inf	-Inf	112.91	3	Horizontal	341	1.67	-	34.00	8.03	30.24			
AV	5.6976G	112.82	Inf	-Inf	101.03	3	Horizontal	341	1.67	-	34.00	8.03	30.24			
PK	5.736G	63.42	68.20	-4.78	51.55	3	Horizontal	341	1.67	-	34.00	8.10	30.23			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

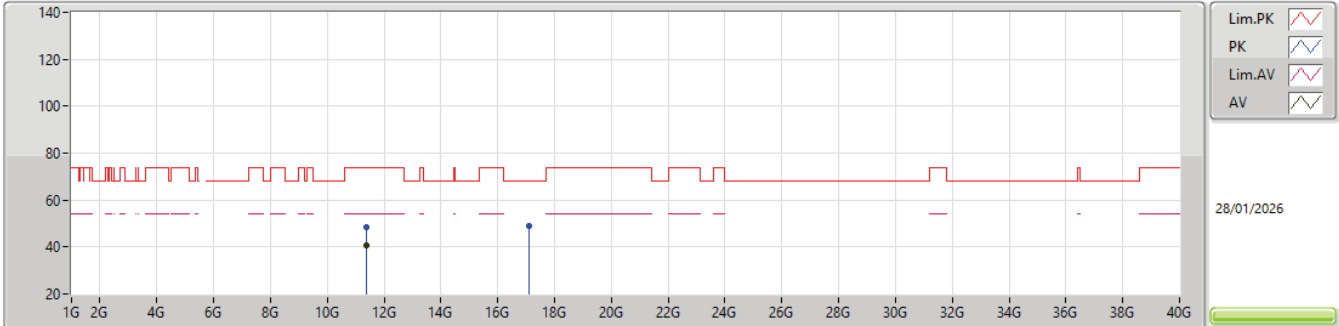


EUT_Y_4TX
Setting 18
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4G	48.65	74.00	-25.35	63.66	3	Vertical	6	1.91	-	38.70	12.49	66.20			
AV	11.40006G	40.82	54.00	-13.18	55.83	3	Vertical	6	1.91	-	38.70	12.49	66.20			
PK	17.09847G	49.07	68.20	-19.13	56.89	3	Vertical	284	2.64	-	41.40	15.06	64.28			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5700MHz_TX

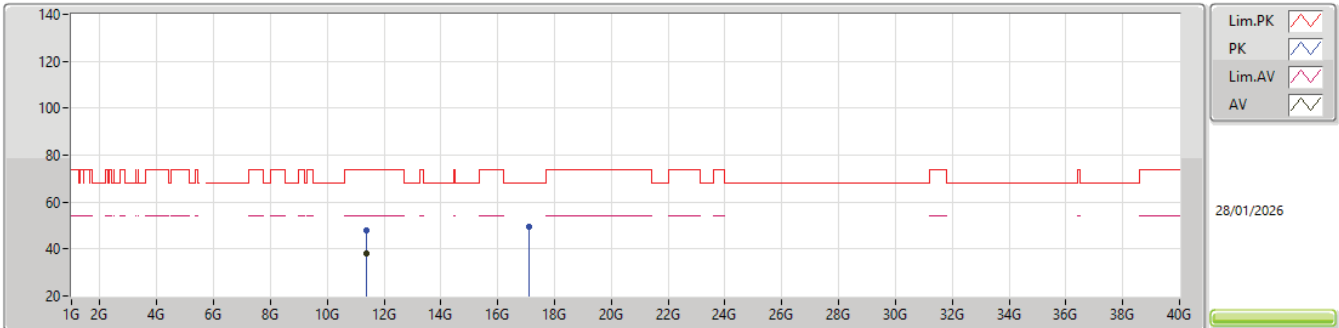


EUT_Y_4TX
Setting 18
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.4G	47.96	74.00	-26.04	62.97	3	Horizontal	356	1.76	-	38.70	12.49	66.20				
AV	11.40003G	38.15	54.00	-15.85	53.16	3	Horizontal	356	1.76	-	38.70	12.49	66.20				
PK	17.10429G	49.42	68.20	-18.78	57.22	3	Horizontal	306	2.00	-	41.42	15.06	64.28				

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

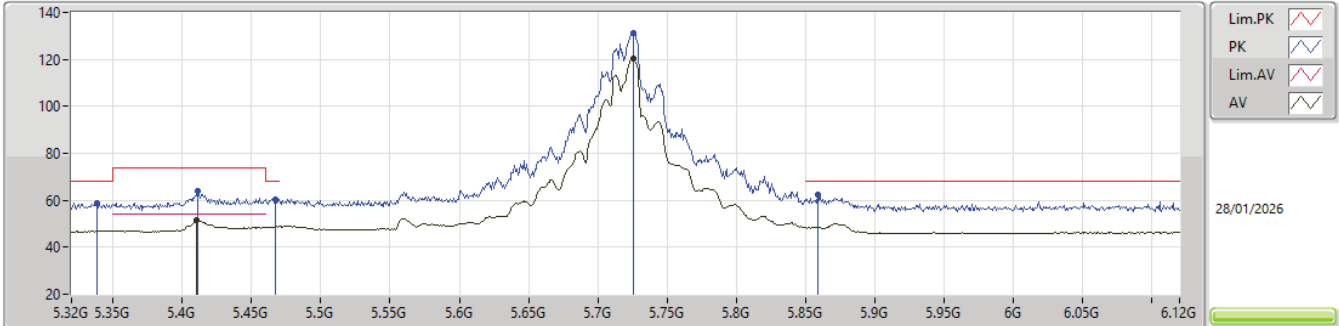


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3384G	58.76	68.20	-9.44	47.42	3	Vertical	0	1.62	-	33.88	7.69	30.23			
PK	5.4112G	64.19	74.00	-9.81	52.80	3	Vertical	0	1.62	-	33.90	7.75	30.26			
AV	5.4104G	51.31	54.00	-2.69	39.92	3	Vertical	0	1.62	-	33.90	7.75	30.26			
PK	5.4672G	60.32	68.20	-7.88	48.90	3	Vertical	0	1.62	-	33.93	7.78	30.29			
PK	5.7256G	131.11	Inf	-Inf	119.26	3	Vertical	0	1.62	-	34.00	8.08	30.23			
AV	5.7256G	120.15	Inf	-Inf	108.30	3	Vertical	0	1.62	-	34.00	8.08	30.23			
PK	5.8592G	62.55	68.20	-5.65	50.61	3	Vertical	0	1.62	-	33.94	8.18	30.18			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

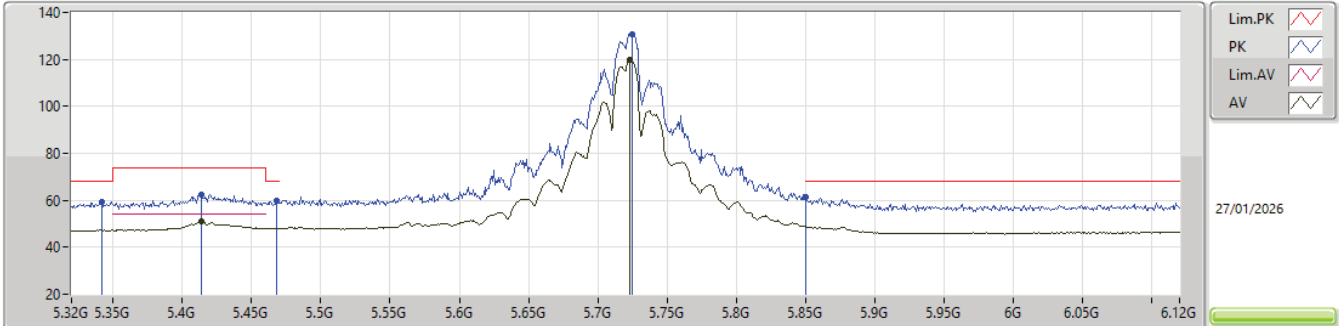


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3416G	59.21	68.20	-8.99	47.86	3	Horizontal	355	1.79	-	33.88	7.70	30.23			
PK	5.4136G	62.62	74.00	-11.38	51.24	3	Horizontal	355	1.79	-	33.90	7.75	30.27			
AV	5.4136G	51.13	54.00	-2.87	39.75	3	Horizontal	355	1.79	-	33.90	7.75	30.27			
PK	5.468G	60.03	68.20	-8.17	48.60	3	Horizontal	355	1.79	-	33.94	7.78	30.29			
PK	5.7248G	130.82	Inf	-Inf	118.97	3	Horizontal	355	1.79	-	34.00	8.08	30.23			
AV	5.7232G	120.06	Inf	-Inf	108.21	3	Horizontal	355	1.79	-	34.00	8.08	30.23			
PK	5.85G	61.38	68.20	-6.82	49.47	3	Horizontal	355	1.79	-	33.90	8.19	30.18			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

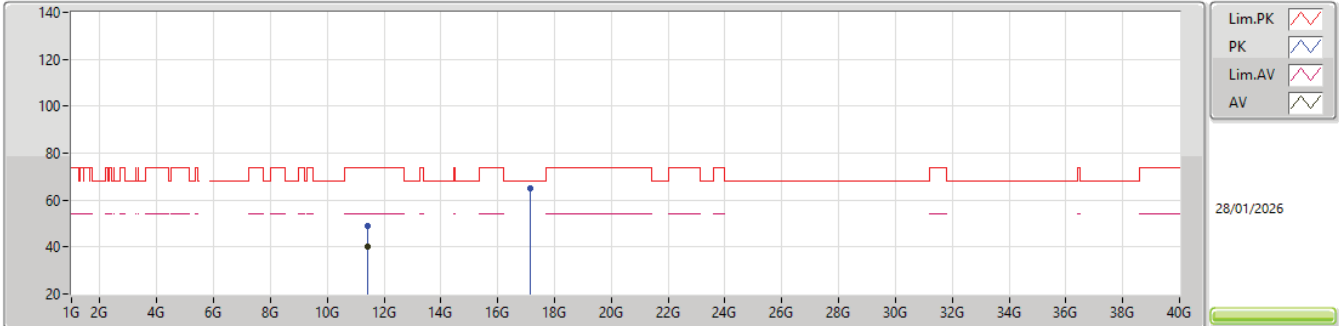


EUT_Y_4TX
Setting 26.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44009G	49.16	74.00	-24.84	64.07	3	Vertical	156	1.55	-	38.78	12.51	66.20			
AV	11.44003G	40.10	54.00	-13.90	55.01	3	Vertical	156	1.55	-	38.78	12.51	66.20			
PK	17.15985G	64.88	68.20	-3.32	72.45	3	Vertical	7	1.82	-	41.64	15.07	64.28			

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

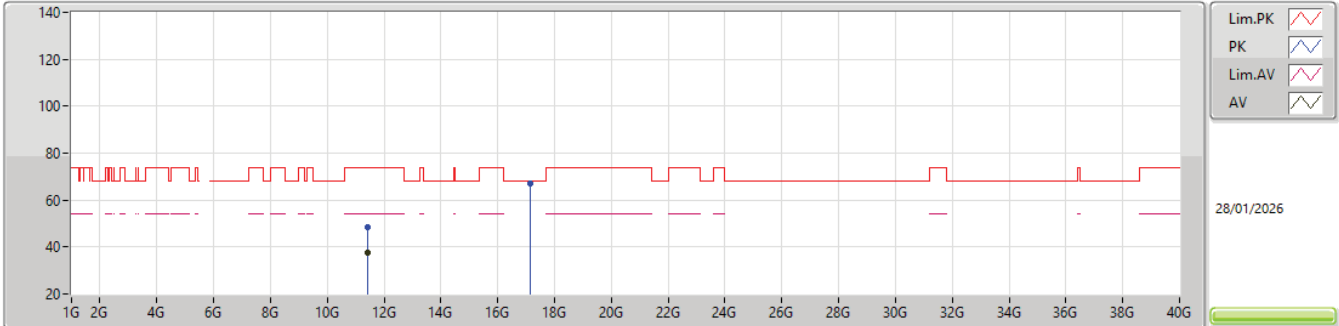


EUT_Y_4TX
Setting 26.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.44024G	48.29	74.00	-25.71	63.20	3	Horizontal	208	1.68	-	38.78	12.51	66.20			
AV	11.43997G	37.77	54.00	-16.23	52.68	3	Horizontal	208	1.68	-	38.78	12.51	66.20			
PK	17.15913G	66.97	68.20	-1.23	74.54	3	Horizontal	321	1.80	-	41.64	15.07	64.28			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

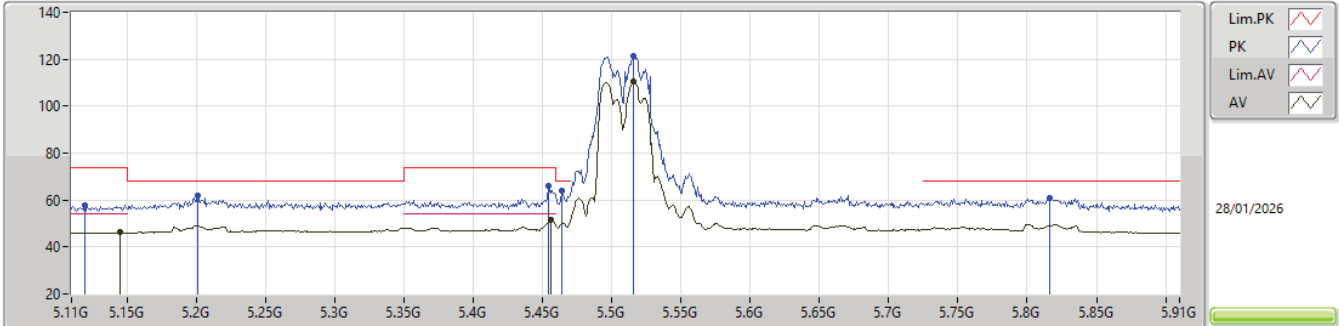


EUT_Y_4TX
Setting 19
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1196G	57.88	74.00	-16.12	46.88	3	Vertical	357	1.69	-	33.54	7.57	30.11
AV	5.1452G	46.27	54.00	-7.73	35.23	3	Vertical	357	1.69	-	33.59	7.58	30.13
PK	5.2012G	61.67	68.20	-6.53	50.53	3	Vertical	357	1.69	-	33.70	7.59	30.15
PK	5.454G	66.28	74.00	-7.72	54.89	3	Vertical	357	1.69	-	33.91	7.77	30.29
AV	5.4564G	51.72	54.00	-2.28	40.33	3	Vertical	357	1.69	-	33.91	7.77	30.29
PK	5.4636G	63.89	68.20	-4.31	52.47	3	Vertical	357	1.69	-	33.93	7.78	30.29
PK	5.5156G	121.41	Inf	-Inf	109.87	3	Vertical	357	1.69	-	34.03	7.81	30.30
AV	5.5156G	110.35	Inf	-Inf	98.81	3	Vertical	357	1.69	-	34.03	7.81	30.30
PK	5.8164G	60.62	68.20	-7.58	48.65	3	Vertical	357	1.69	-	33.97	8.20	30.20

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

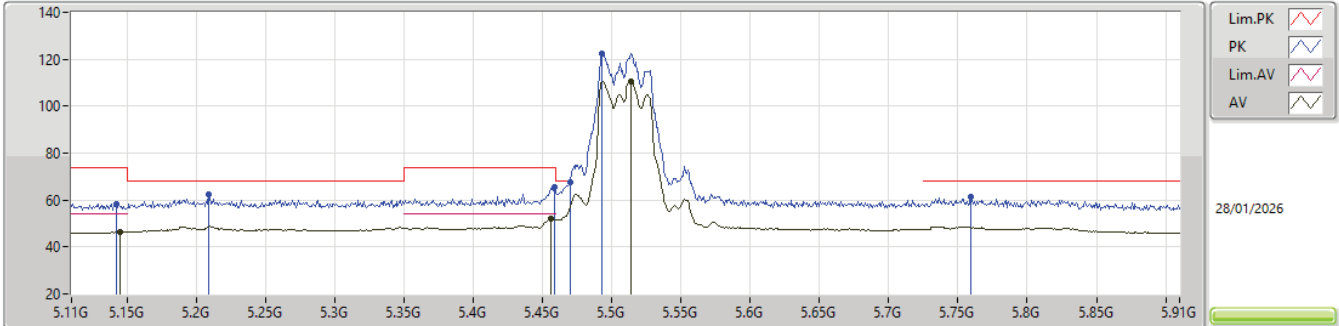


EUT_Y_4TX
Setting 19
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1428G	58.51	74.00	-15.49	47.46	3	Horizontal	360	1.71	-	33.59	7.58	30.12
AV	5.1452G	46.60	54.00	-7.40	35.56	3	Horizontal	360	1.71	-	33.59	7.58	30.13
PK	5.2092G	62.18	68.20	-6.02	51.04	3	Horizontal	360	1.71	-	33.70	7.60	30.16
PK	5.4588G	65.54	74.00	-8.46	54.13	3	Horizontal	360	1.71	-	33.92	7.78	30.29
AV	5.4564G	51.85	54.00	-2.15	40.46	3	Horizontal	360	1.71	-	33.91	7.77	30.29
PK	5.47G	67.75	68.20	-0.45	56.32	3	Horizontal	360	1.71	-	33.94	7.78	30.29
PK	5.4932G	122.66	Inf	-Inf	111.18	3	Horizontal	360	1.71	-	33.99	7.80	30.31
AV	5.514G	110.36	Inf	-Inf	98.82	3	Horizontal	360	1.71	-	34.03	7.81	30.30
PK	5.7596G	61.40	68.20	-6.80	49.48	3	Horizontal	360	1.71	-	34.00	8.14	30.22

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

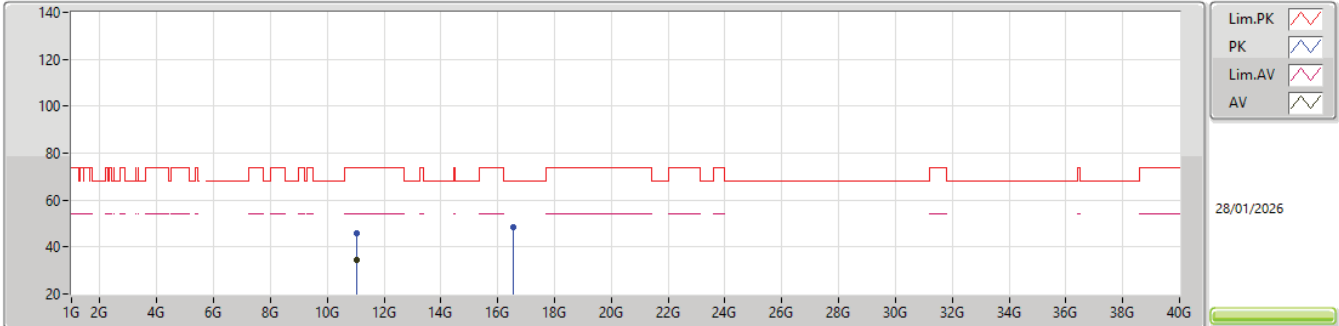


EUT_Y_4TX
Setting 19
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.045G	45.97	74.00	-28.03	61.36	3	Vertical	69	2.02	-	38.49	12.31	66.19			
AV	11.02G	34.70	54.00	-19.30	50.15	3	Vertical	69	2.02	-	38.44	12.30	66.19			
PK	16.5325G	48.43	68.20	-19.77	58.28	3	Vertical	298	1.77	-	38.99	14.94	63.78			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5510MHz_TX

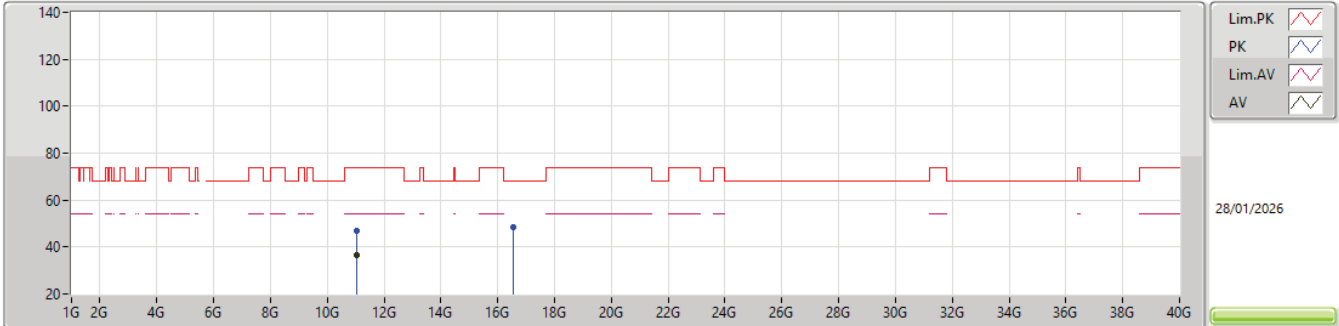


EUT_Y_4TX
Setting 19
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01995G	46.99	74.00	-27.01	62.44	3	Horizontal	277	1.56	-	38.44	12.30	66.19			
AV	11.02G	36.32	54.00	-17.68	51.77	3	Horizontal	277	1.56	-	38.44	12.30	66.19			
PK	16.5275G	48.20	68.20	-20.00	58.06	3	Horizontal	118	1.93	-	38.97	14.94	63.77			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

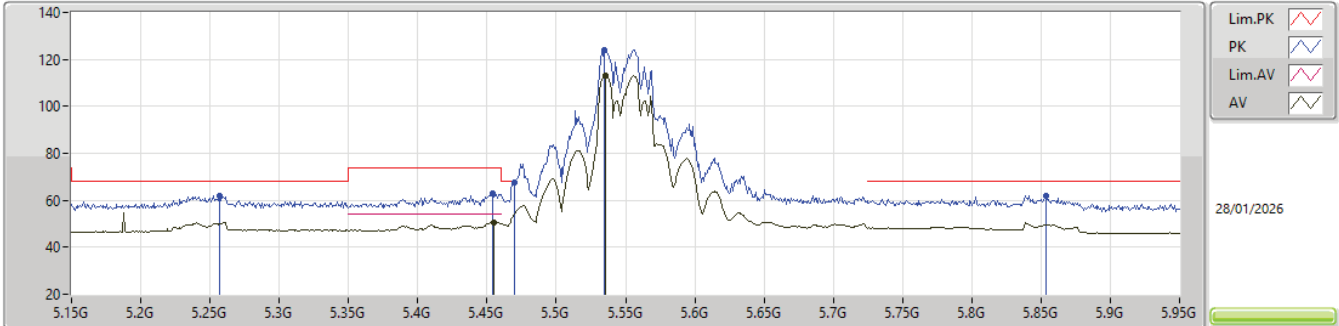


EUT_Y_4TX
Setting 21.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2572G	62.03	68.20	-6.17	50.87	3	Vertical	360	1.76	-	33.71	7.63	30.18			
PK	5.454G	62.91	74.00	-11.09	51.52	3	Vertical	360	1.76	-	33.91	7.77	30.29			
AV	5.4548G	50.73	54.00	-3.27	39.34	3	Vertical	360	1.76	-	33.91	7.77	30.29			
PK	5.47G	67.34	68.20	-0.86	55.91	3	Vertical	360	1.76	-	33.94	7.78	30.29			
PK	5.5348G	124.21	Inf	-Inf	112.62	3	Vertical	360	1.76	-	34.07	7.82	30.30			
AV	5.5356G	113.11	Inf	-Inf	101.52	3	Vertical	360	1.76	-	34.07	7.82	30.30			
PK	5.854G	61.77	68.20	-6.43	49.84	3	Vertical	360	1.76	-	33.92	8.19	30.18			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

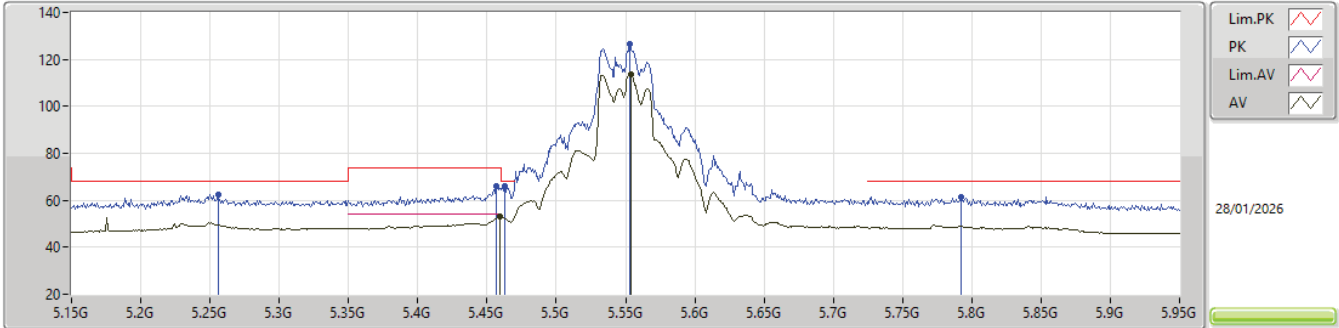


EUT_Y_4TX
Setting 21.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.2556G	62.50	68.20	-5.70	51.34	3	Horizontal	360	1.69	-	33.71	7.63	30.18				
PK	5.4564G	65.96	74.00	-8.04	54.57	3	Horizontal	360	1.69	-	33.91	7.77	30.29				
AV	5.4596G	53.23	54.00	-0.77	41.82	3	Horizontal	360	1.69	-	33.92	7.78	30.29				
PK	5.4628G	65.91	68.20	-2.29	54.49	3	Horizontal	360	1.69	-	33.93	7.78	30.29				
PK	5.5532G	126.58	Inf	-Inf	114.95	3	Horizontal	360	1.69	-	34.09	7.83	30.29				
AV	5.554G	113.47	Inf	-Inf	101.84	3	Horizontal	360	1.69	-	34.09	7.83	30.29				
PK	5.7924G	61.46	68.20	-6.74	49.46	3	Horizontal	360	1.69	-	34.00	8.20	30.20				

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

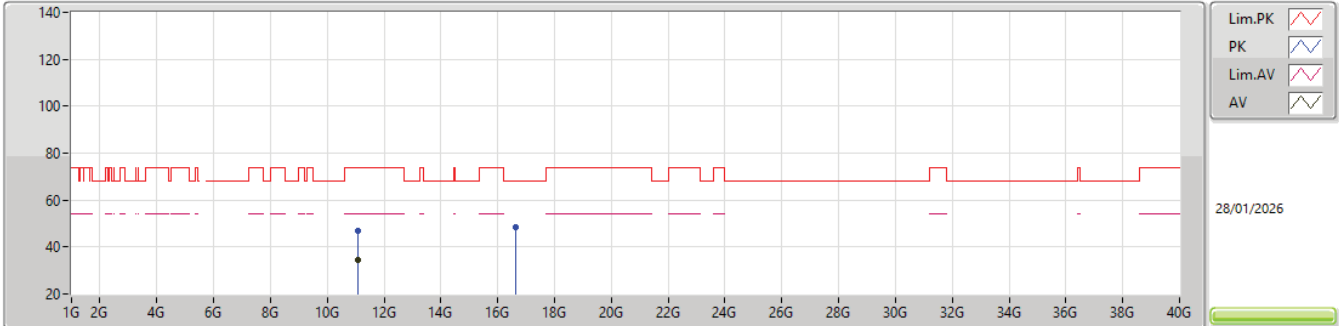


EUT_Y_4TX
Setting 21.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0767G	46.89	74.00	-27.11	62.21	3	Vertical	165	1.49	-	38.55	12.32	66.19			
AV	11.1G	34.73	54.00	-19.27	49.98	3	Vertical	165	1.49	-	38.60	12.34	66.19			
PK	16.6498G	48.22	68.20	-19.98	57.36	3	Vertical	267	1.62	-	39.80	14.96	63.90			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5550MHz_TX

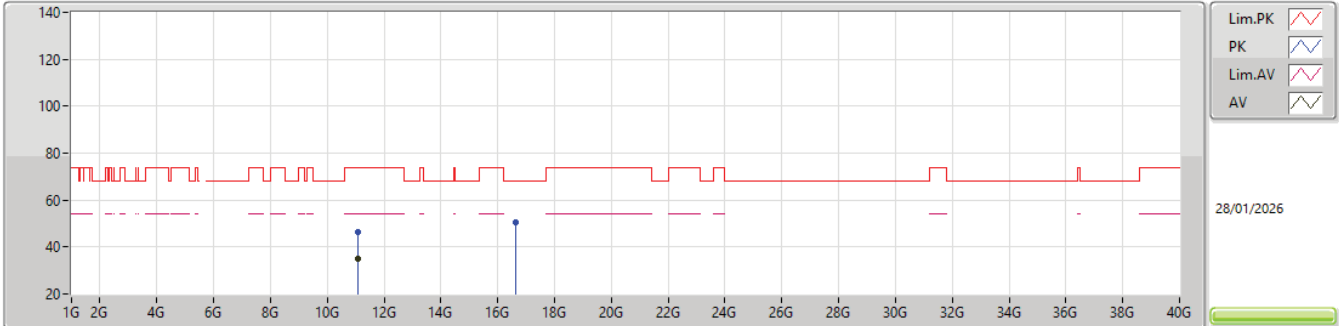


EUT_Y_4TX
Setting 21.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.08155G	46.44	74.00	-27.56	61.74	3	Horizontal	342	1.47	-	38.56	12.33	66.19			
AV	11.1G	35.14	54.00	-18.86	50.39	3	Horizontal	342	1.47	-	38.60	12.34	66.19			
PK	16.6318G	50.69	68.20	-17.51	59.92	3	Horizontal	346	1.79	-	39.69	14.96	63.88			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

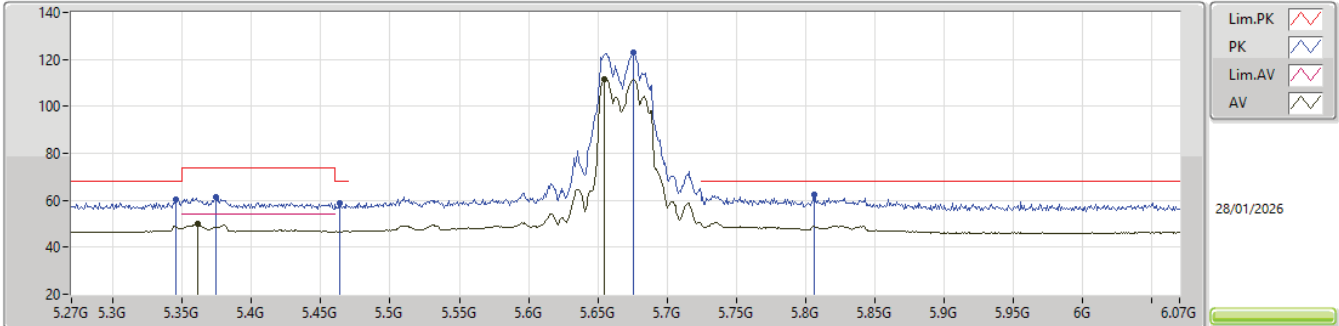


EUT_Y_4TX
Setting 19
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3452G	60.40	68.20	-7.80	49.04	3	Vertical	360	1.63	-	33.89	7.70	30.23			
PK	5.374G	61.41	74.00	-12.59	50.03	3	Vertical	360	1.63	-	33.90	7.72	30.24			
AV	5.3612G	49.79	54.00	-4.21	38.42	3	Vertical	360	1.63	-	33.90	7.71	30.24			
PK	5.4636G	58.79	68.20	-9.41	47.37	3	Vertical	360	1.63	-	33.93	7.78	30.29			
PK	5.6756G	123.09	Inf	-Inf	111.35	3	Vertical	360	1.63	-	34.00	7.99	30.25			
AV	5.6548G	111.64	Inf	-Inf	99.93	3	Vertical	360	1.63	-	34.00	7.96	30.25			
PK	5.806G	62.50	68.20	-5.70	50.50	3	Vertical	360	1.63	-	33.99	8.21	30.20			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

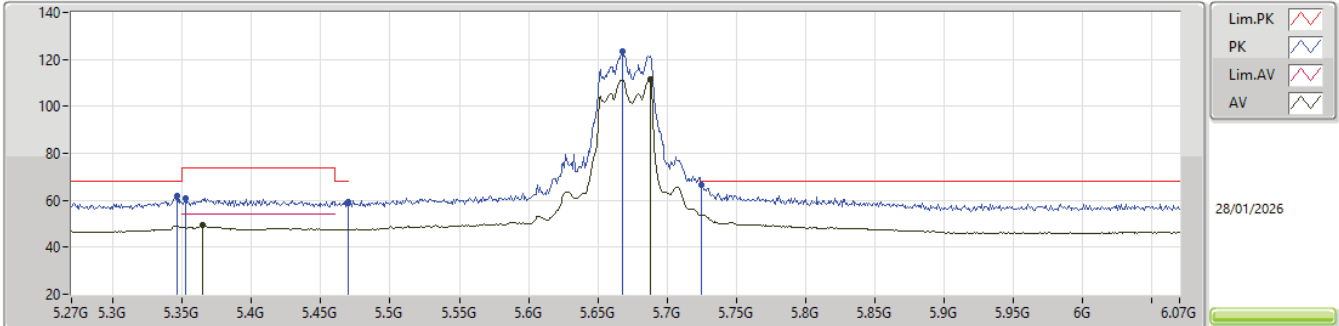


EUT_Y_4TX
Setting 19
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.346G	61.85	68.20	-6.35	50.49	3	Horizontal	341	1.64	-	33.89	7.70	30.23			
PK	5.3524G	60.62	74.00	-13.38	49.25	3	Horizontal	341	1.64	-	33.90	7.70	30.23			
AV	5.3644G	49.26	54.00	-4.74	37.89	3	Horizontal	341	1.64	-	33.90	7.71	30.24			
PK	5.47G	59.33	68.20	-8.87	47.90	3	Horizontal	341	1.64	-	33.94	7.78	30.29			
PK	5.6676G	123.33	Inf	-Inf	111.60	3	Horizontal	341	1.64	-	34.00	7.98	30.25			
AV	5.6876G	111.36	Inf	-Inf	99.59	3	Horizontal	341	1.64	-	34.00	8.01	30.24			
PK	5.7252G	66.41	68.20	-1.79	54.56	3	Horizontal	341	1.64	-	34.00	8.08	30.23			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

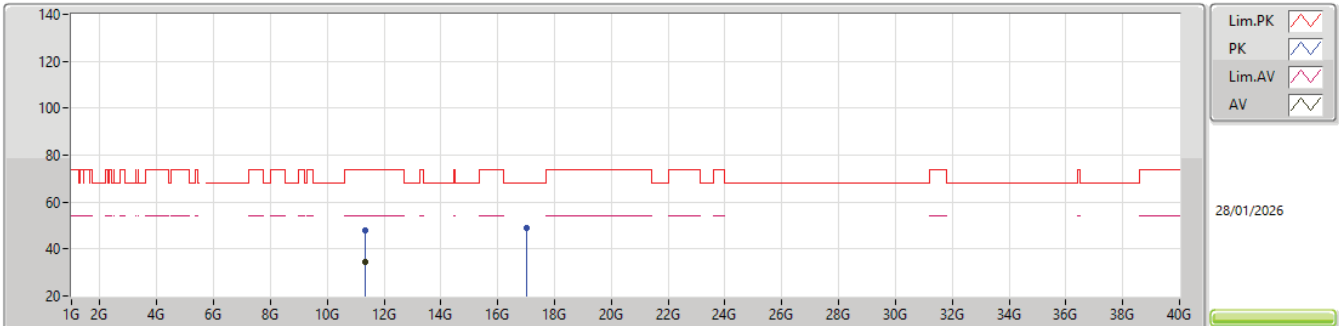


EUT_Y_4TX
Setting 19
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.35375G	47.85	74.00	-26.15	62.89	3	Vertical	235	1.48	-	38.70	12.46	66.20			
AV	11.33995G	34.26	54.00	-19.74	49.32	3	Vertical	235	1.48	-	38.68	12.46	66.20			
PK	17.01435G	48.78	68.20	-19.42	56.80	3	Vertical	92	1.38	-	41.23	15.04	64.29			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5670MHz_TX

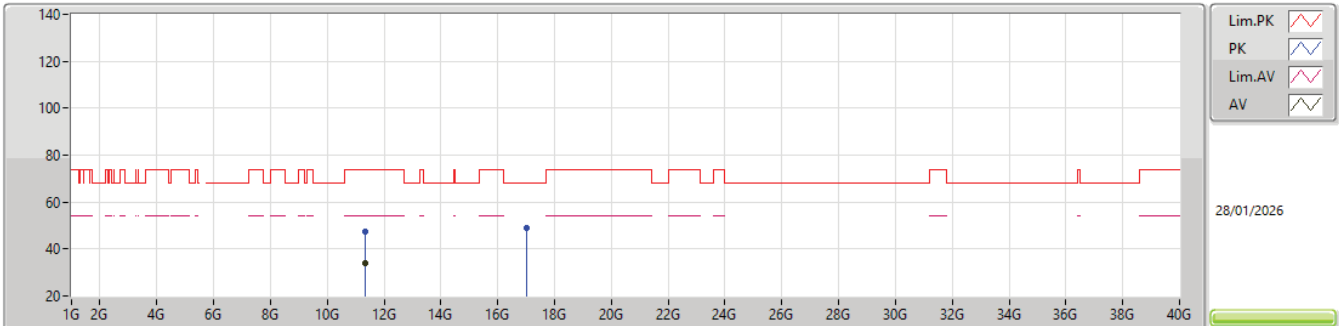


EUT_Y_4TX
Setting 19
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.33571G	47.53	74.00	-26.47	62.61	3	Horizontal	67	1.54	-	38.67	12.45	66.20			
AV	11.34012G	34.16	54.00	-19.84	49.22	3	Horizontal	67	1.54	-	38.68	12.46	66.20			
PK	16.99863G	48.77	68.20	-19.43	56.84	3	Horizontal	147	2.07	-	41.19	15.03	64.29			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

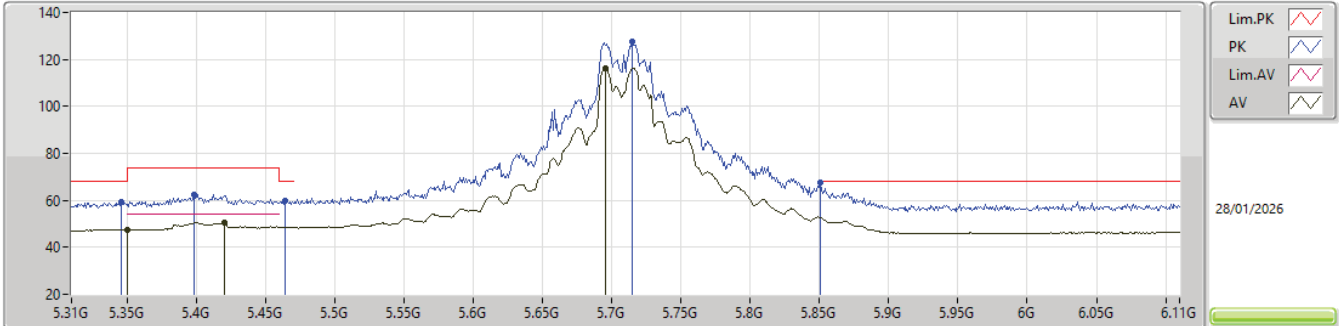


EUT_Y_4TX
Setting 23.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.346G	59.39	68.20	-8.81	48.03	3	Vertical	359	1.61	-	33.89	7.70	30.23
AV	5.35G	47.60	54.00	-6.40	36.23	3	Vertical	359	1.61	-	33.90	7.70	30.23
PK	5.3988G	62.42	74.00	-11.58	51.04	3	Vertical	359	1.61	-	33.90	7.74	30.26
AV	5.4204G	50.64	54.00	-3.36	39.26	3	Vertical	359	1.61	-	33.90	7.75	30.27
PK	5.4644G	59.76	68.20	-8.44	48.34	3	Vertical	359	1.61	-	33.93	7.78	30.29
PK	5.7148G	127.54	Inf	-Inf	115.71	3	Vertical	359	1.61	-	34.00	8.06	30.23
AV	5.6956G	116.33	Inf	-Inf	104.54	3	Vertical	359	1.61	-	34.00	8.03	30.24
PK	5.8508G	67.38	68.20	-0.82	55.47	3	Vertical	359	1.61	-	33.90	8.19	30.18

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

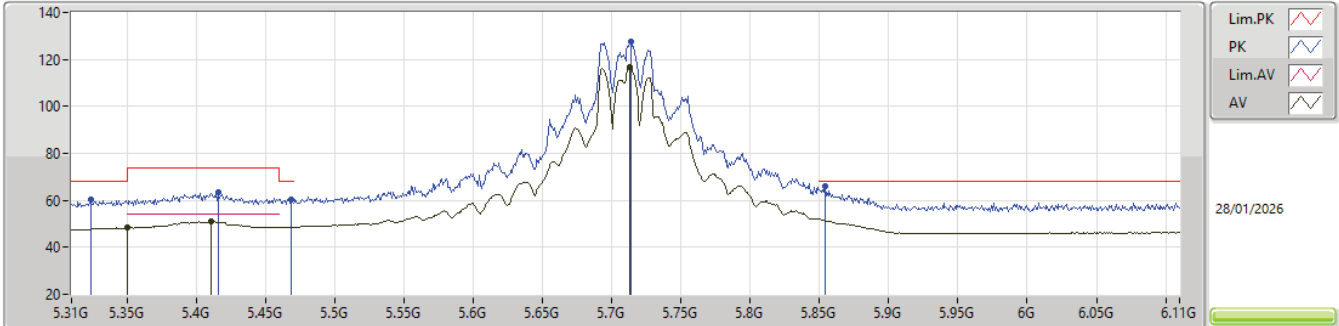


EUT_Y_4TX
Setting 23.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3236G	60.37	68.20	-7.83	49.06	3	Horizontal	356	1.73	-	33.85	7.68	30.22
AV	5.35G	48.25	54.00	-5.75	36.88	3	Horizontal	356	1.73	-	33.90	7.70	30.23
PK	5.4156G	63.64	74.00	-10.36	52.26	3	Horizontal	356	1.73	-	33.90	7.75	30.27
AV	5.4108G	51.12	54.00	-2.88	39.73	3	Horizontal	356	1.73	-	33.90	7.75	30.26
PK	5.4684G	60.40	68.20	-7.80	48.97	3	Horizontal	356	1.73	-	33.94	7.78	30.29
PK	5.714G	127.69	Inf	-Inf	115.86	3	Horizontal	356	1.73	-	34.00	8.06	30.23
AV	5.7132G	116.54	Inf	-Inf	104.71	3	Horizontal	356	1.73	-	34.00	8.06	30.23
PK	5.854G	65.97	68.20	-2.23	54.04	3	Horizontal	356	1.73	-	33.92	8.19	30.18

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

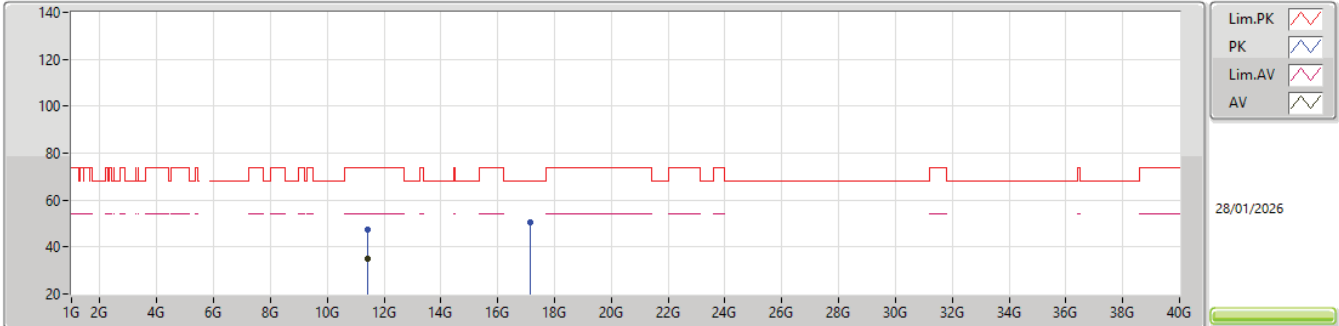


EUT_Y_4TX
Setting 23.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.42114G	47.35	74.00	-26.65	62.31	3	Vertical	90	1.86	-	38.74	12.50	66.20			
AV	11.42009G	35.03	54.00	-18.97	49.99	3	Vertical	90	1.86	-	38.74	12.50	66.20			
PK	17.14233G	50.46	68.20	-17.74	58.11	3	Vertical	322	1.64	-	41.57	15.06	64.28			

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5710MHz Straddle 5.47-5.725GHz_TX

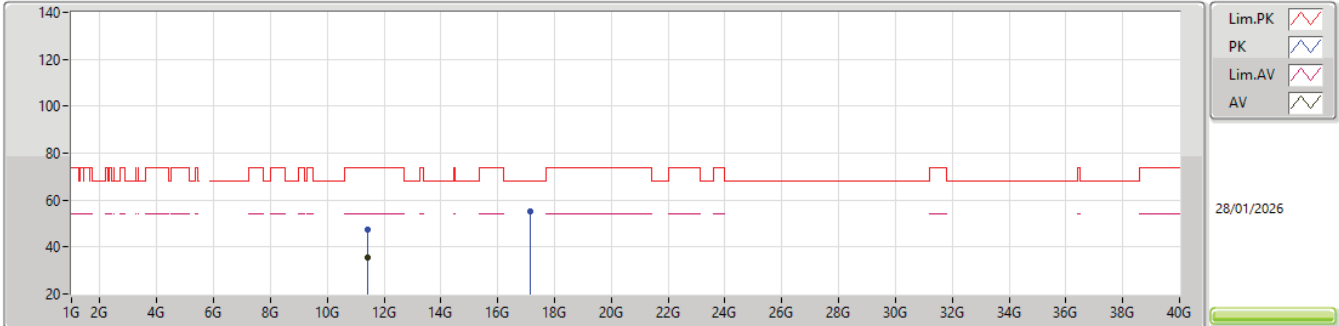


EUT_Y_4TX
Setting 23.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43254G	47.63	74.00	-26.37	62.56	3	Horizontal	21	1.77	-	38.77	12.50	66.20			
AV	11.42006G	35.31	54.00	-18.69	50.27	3	Horizontal	21	1.77	-	38.74	12.50	66.20			
PK	17.13279G	55.08	68.20	-13.12	62.77	3	Horizontal	353	1.80	-	41.53	15.06	64.28			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

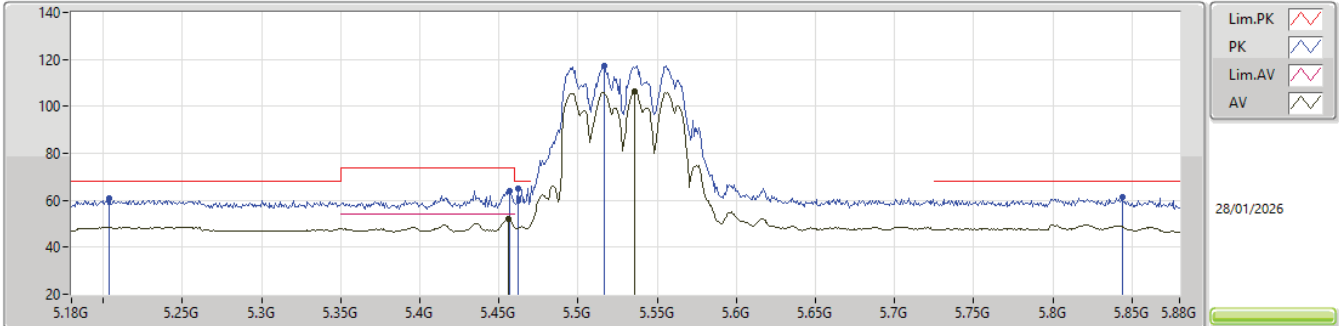


EUT_Y_4TX
Setting 17.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.2038G	60.68	68.20	-7.52	49.55	3	Vertical	357	1.68	-	33.70	7.59	30.16				
PK	5.4565G	63.98	74.00	-10.02	52.59	3	Vertical	357	1.68	-	33.91	7.77	30.29				
AV	5.4558G	52.14	54.00	-1.86	40.75	3	Vertical	357	1.68	-	33.91	7.77	30.29				
PK	5.4621G	65.25	68.20	-2.95	53.84	3	Vertical	357	1.68	-	33.92	7.78	30.29				
PK	5.5167G	117.44	Inf	-Inf	105.90	3	Vertical	357	1.68	-	34.03	7.81	30.30				
AV	5.5356G	106.28	Inf	-Inf	94.69	3	Vertical	357	1.68	-	34.07	7.82	30.30				
PK	5.8436G	61.43	68.20	-6.77	49.52	3	Vertical	357	1.68	-	33.91	8.19	30.19				

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

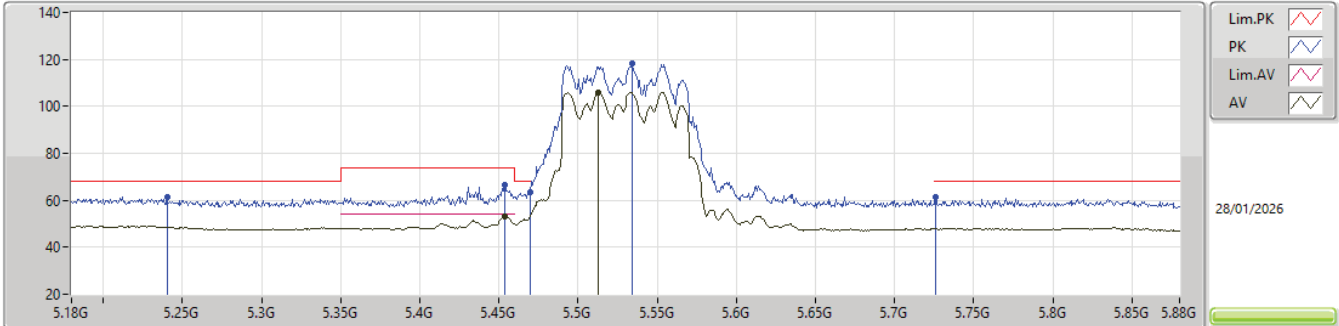


EUT_Y_4TX
Setting 17.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2402G	61.24	68.20	-6.96	50.09	3	Horizontal	359	1.68	-	33.70	7.62	30.17			
PK	5.4537G	66.67	74.00	-7.33	55.28	3	Horizontal	359	1.68	-	33.91	7.77	30.29			
AV	5.4537G	53.03	54.00	-0.97	41.64	3	Horizontal	359	1.68	-	33.91	7.77	30.29			
PK	5.4698G	63.48	68.20	-4.72	52.05	3	Horizontal	359	1.68	-	33.94	7.78	30.29			
PK	5.5342G	118.23	Inf	-Inf	106.64	3	Horizontal	359	1.68	-	34.07	7.82	30.30			
AV	5.5125G	106.03	Inf	-Inf	94.51	3	Horizontal	359	1.68	-	34.02	7.81	30.31			
PK	5.726G	61.43	68.20	-6.77	49.58	3	Horizontal	359	1.68	-	34.00	8.08	30.23			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

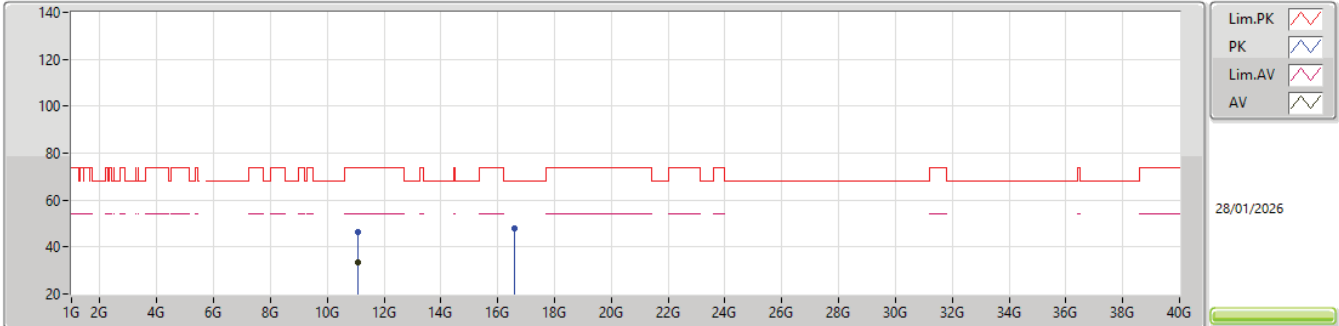


EUT_Y_4TX
Setting 17.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0738G	46.47	74.00	-27.53	61.79	3	Vertical	24	1.75	-	38.55	12.32	66.19			
AV	11.0798G	33.36	54.00	-20.64	48.66	3	Vertical	24	1.75	-	38.56	12.33	66.19			
PK	16.59684G	47.91	68.20	-20.29	57.34	3	Vertical	248	1.46	-	39.47	14.95	63.85			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5530MHz_TX

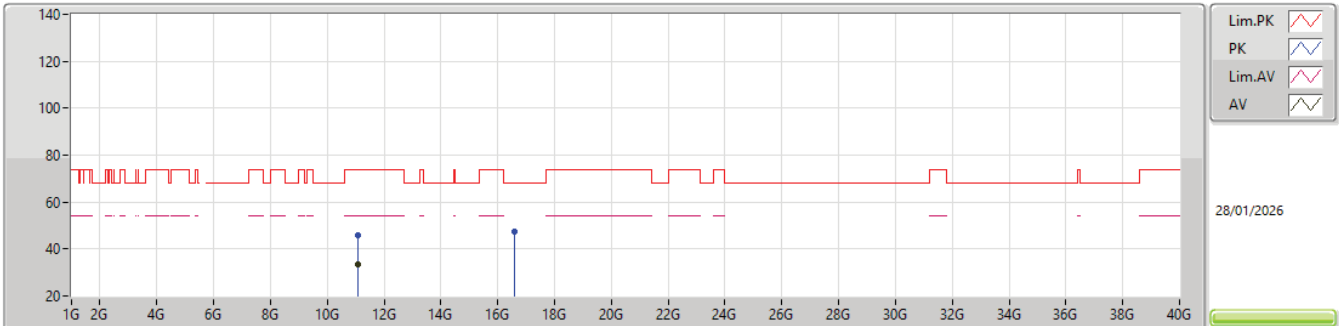


EUT_Y_4TX
Setting 17.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.07928G	45.95	74.00	-28.05	61.25	3	Horizontal	311	1.91	-	38.56	12.33	66.19			
AV	11.07736G	33.45	54.00	-20.55	48.77	3	Horizontal	311	1.91	-	38.55	12.32	66.19			
PK	16.594G	47.33	68.20	-20.87	56.77	3	Horizontal	117	1.75	-	39.45	14.95	63.84			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

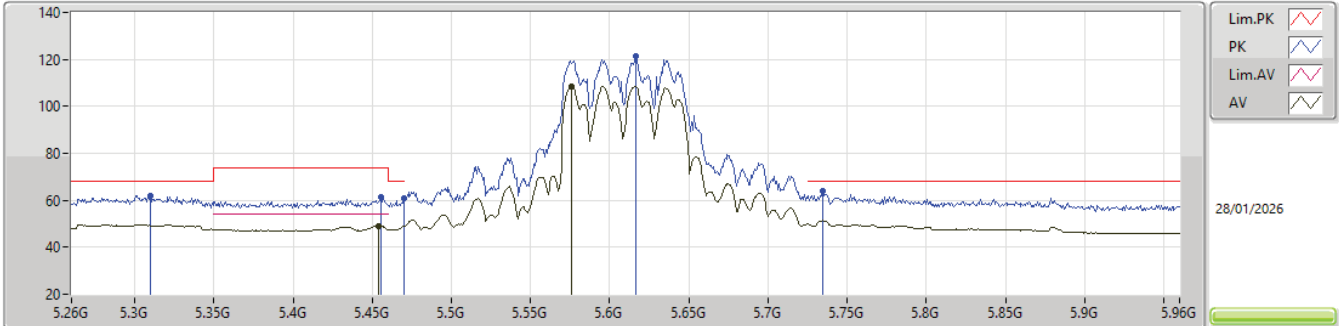


EUT_Y_4TX
Setting 19.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3097G	61.90	68.20	-6.30	50.62	3	Vertical	358	1.64	-	33.82	7.67	30.21				
PK	5.4553G	61.34	74.00	-12.66	49.95	3	Vertical	358	1.64	-	33.91	7.77	30.29				
AV	5.4539G	49.11	54.00	-4.89	37.72	3	Vertical	358	1.64	-	33.91	7.77	30.29				
PK	5.47G	60.82	68.20	-7.38	49.39	3	Vertical	358	1.64	-	33.94	7.78	30.29				
PK	5.6163G	121.14	Inf	-Inf	109.52	3	Vertical	358	1.64	-	34.00	7.89	30.27				
AV	5.5757G	108.57	Inf	-Inf	96.95	3	Vertical	358	1.64	-	34.05	7.85	30.28				
PK	5.7346G	64.08	68.20	-4.12	52.21	3	Vertical	358	1.64	-	34.00	8.10	30.23				

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

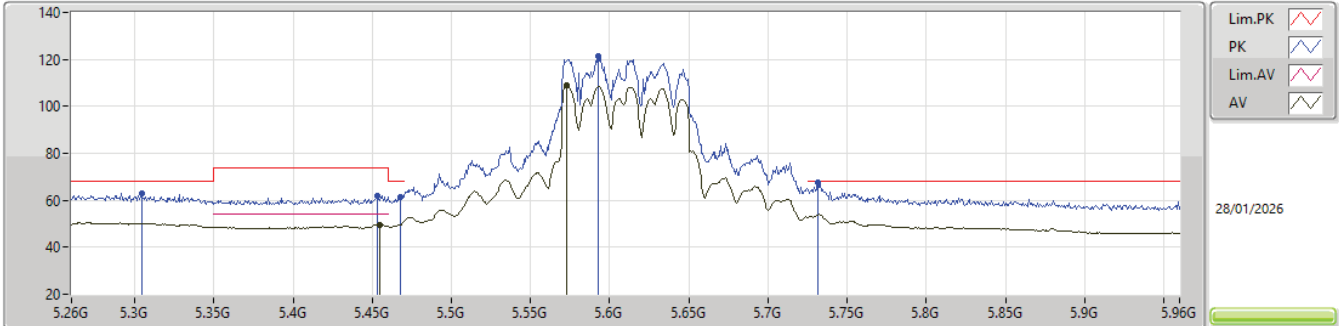


EUT_Y_4TX
Setting 19.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3041G	62.90	68.20	-5.30	51.63	3	Horizontal	358	1.68	-	33.81	7.67	30.21			
PK	5.4532G	61.85	74.00	-12.15	50.46	3	Horizontal	358	1.68	-	33.91	7.77	30.29			
AV	5.4546G	49.62	54.00	-4.38	38.23	3	Horizontal	358	1.68	-	33.91	7.77	30.29			
PK	5.4679G	61.53	68.20	-6.67	50.10	3	Horizontal	358	1.68	-	33.94	7.78	30.29			
PK	5.5925G	121.22	Inf	-Inf	109.62	3	Horizontal	358	1.68	-	34.02	7.86	30.28			
AV	5.5729G	108.90	Inf	-Inf	97.29	3	Horizontal	358	1.68	-	34.05	7.84	30.28			
PK	5.7318G	67.81	68.20	-0.39	55.95	3	Horizontal	358	1.68	-	34.00	8.09	30.23			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

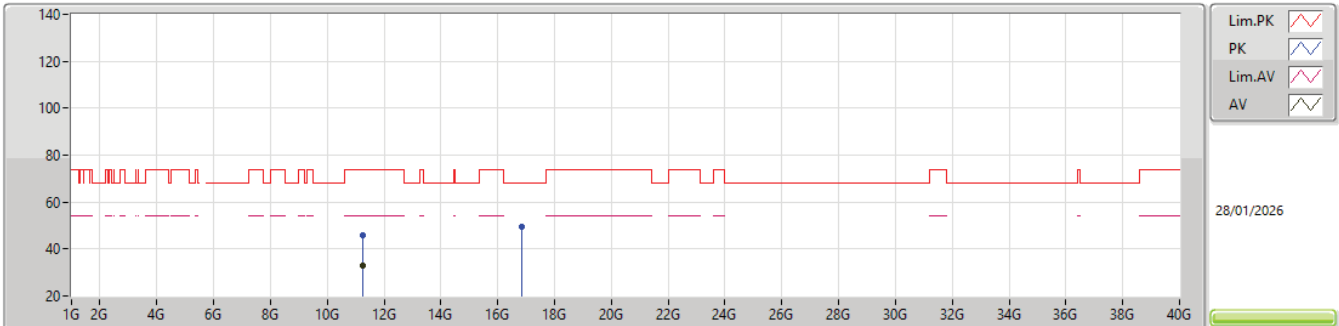


EUT_Y_4TX
Setting 19.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.2372G	45.81	74.00	-28.19	61.10	3	Vertical	22	1.83	-	38.50	12.40	66.19			
AV	11.23988G	32.83	54.00	-21.17	48.11	3	Vertical	22	1.83	-	38.50	12.41	66.19			
PK	16.82752G	49.37	68.20	-18.83	58.11	3	Vertical	22	1.31	-	40.36	15.00	64.10			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5610MHz_TX

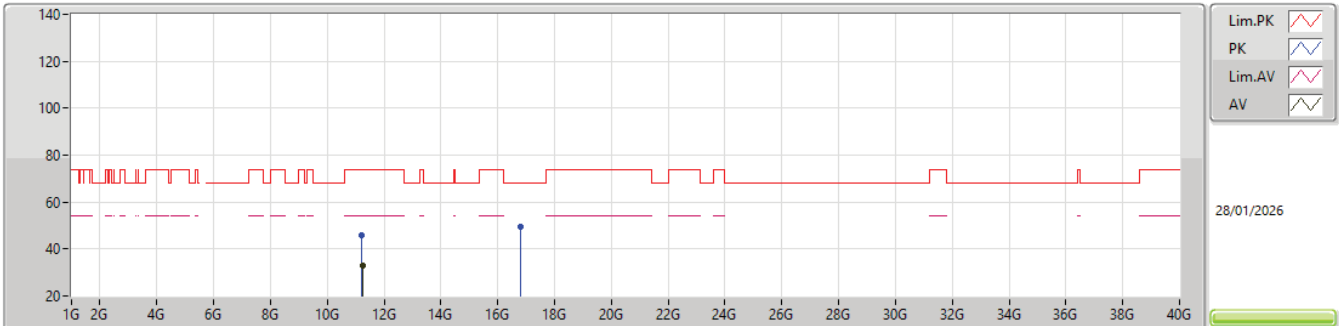


EUT_Y_4TX
Setting 19.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.20944G	45.61	74.00	-28.39	60.91	3	Horizontal	284	2.08	-	38.50	12.39	66.19			
AV	11.23876G	32.83	54.00	-21.17	48.11	3	Horizontal	284	2.08	-	38.50	12.41	66.19			
PK	16.82616G	49.51	68.20	-18.69	58.26	3	Horizontal	57	1.79	-	40.35	15.00	64.10			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

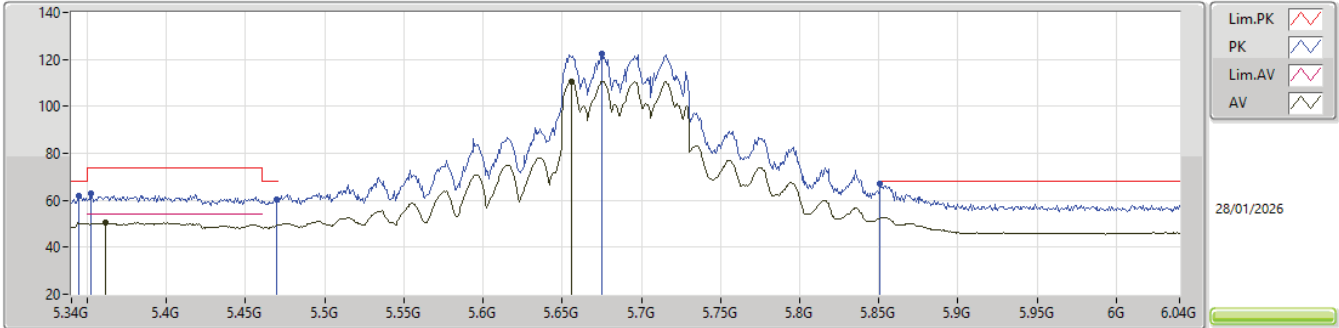


EUT_Y_4TX
Setting 21.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3449G	62.06	68.20	-6.14	50.70	3	Vertical	360	1.71	-	33.89	7.70	30.23			
PK	5.3519G	63.06	74.00	-10.94	51.69	3	Vertical	360	1.71	-	33.90	7.70	30.23			
AV	5.3617G	50.55	54.00	-3.45	39.18	3	Vertical	360	1.71	-	33.90	7.71	30.24			
PK	5.4695G	60.22	68.20	-7.98	48.79	3	Vertical	360	1.71	-	33.94	7.78	30.29			
PK	5.6753G	122.61	Inf	-Inf	110.87	3	Vertical	360	1.71	-	34.00	7.99	30.25			
AV	5.6557G	110.62	Inf	-Inf	98.91	3	Vertical	360	1.71	-	34.00	7.96	30.25			
PK	5.851G	66.91	68.20	-1.29	55.00	3	Vertical	360	1.71	-	33.90	8.19	30.18			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

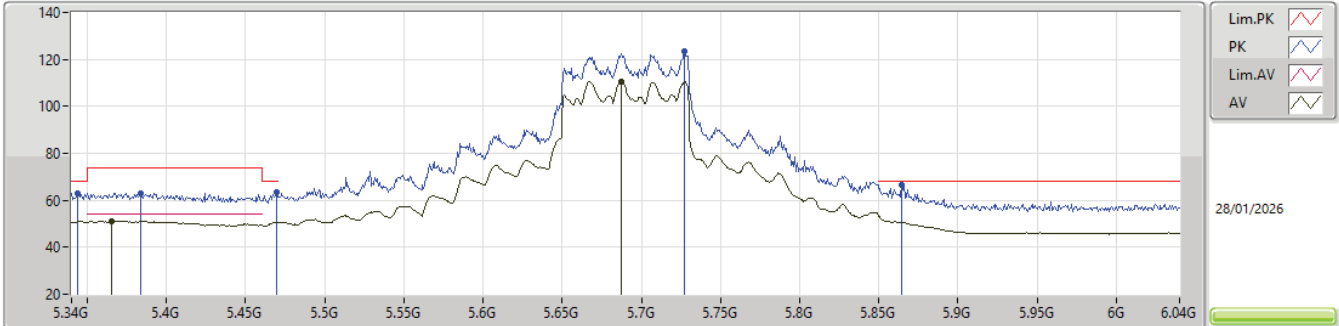


EUT_Y_4TX
Setting 21.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3442G	62.85	68.20	-5.35	51.49	3	Horizontal	342	1.68	-	33.89	7.70	30.23			
PK	5.3834G	63.02	74.00	-10.98	51.64	3	Horizontal	342	1.68	-	33.90	7.73	30.25			
AV	5.3652G	51.24	54.00	-2.76	39.87	3	Horizontal	342	1.68	-	33.90	7.71	30.24			
PK	5.4695G	63.35	68.20	-4.85	51.92	3	Horizontal	342	1.68	-	33.94	7.78	30.29			
PK	5.7271G	123.42	Inf	-Inf	111.57	3	Horizontal	342	1.68	-	34.00	8.08	30.23			
AV	5.6872G	110.61	Inf	-Inf	98.84	3	Horizontal	342	1.68	-	34.00	8.01	30.24			
PK	5.8643G	66.46	68.20	-1.74	54.50	3	Horizontal	342	1.68	-	33.96	8.18	30.18			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

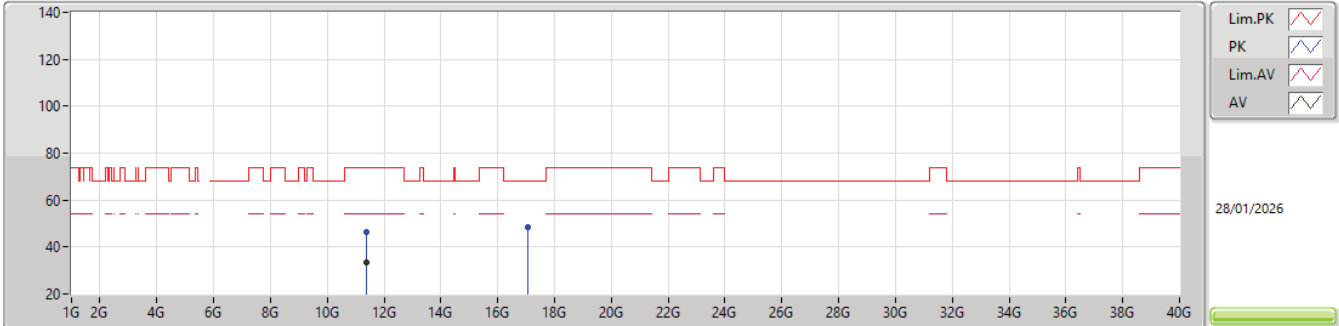


EUT_Y_4TX
Setting 21.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.39004G	46.44	74.00	-27.56	61.46	3	Vertical	324	1.91	-	38.70	12.48	66.20			
AV	11.36828G	33.46	54.00	-20.54	48.49	3	Vertical	324	1.91	-	38.70	12.47	66.20			
PK	17.0638G	48.55	68.20	-19.65	56.46	3	Vertical	256	1.93	-	41.33	15.05	64.29			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5690MHz Straddle 5.47-5.725GHz_TX

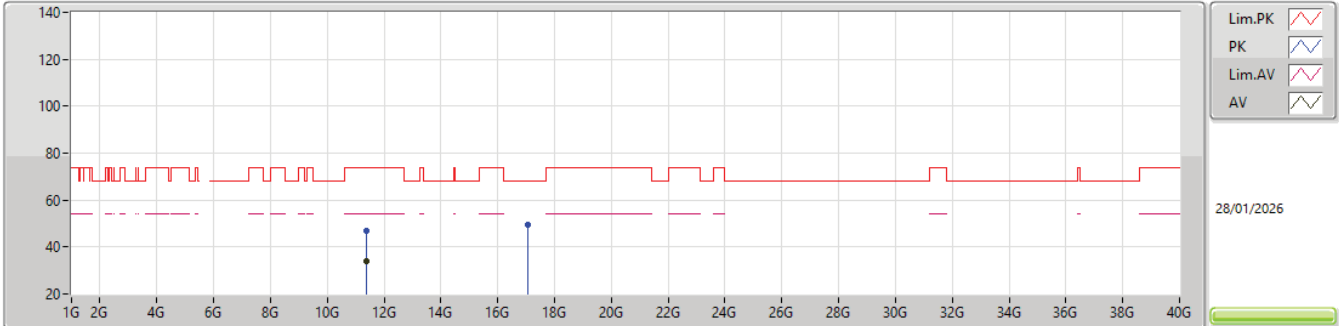


EUT_Y_4TX
Setting 21.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.36684G	46.84	74.00	-27.16	61.87	3	Horizontal	293	1.96	-	38.70	12.47	66.20			
AV	11.37988G	33.95	54.00	-20.05	48.97	3	Horizontal	293	1.96	-	38.70	12.48	66.20			
PK	17.07456G	49.46	68.20	-18.74	57.35	3	Horizontal	345	1.80	-	41.35	15.05	64.29			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

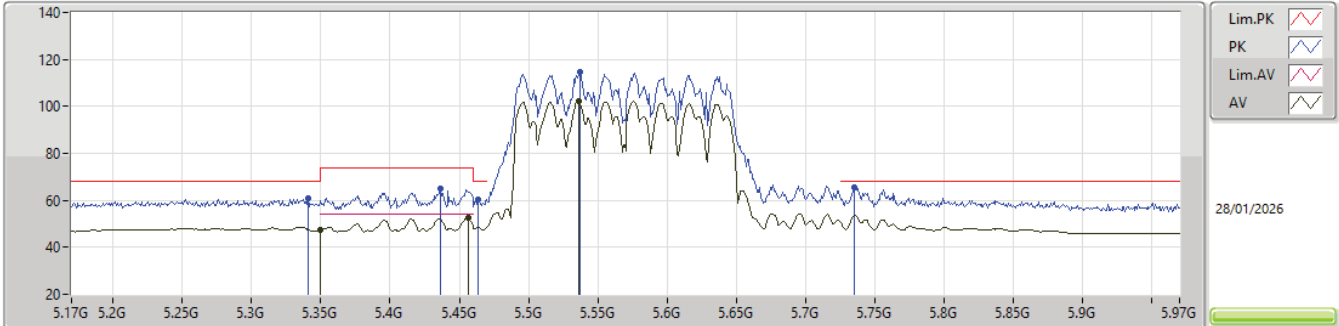


EUT_Y_4TX
Setting 16
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3412G	60.69	68.20	-7.51	49.34	3	Vertical	358	1.69	-	33.88	7.70	30.23			
AV	5.35G	47.46	54.00	-6.54	36.09	3	Vertical	358	1.69	-	33.90	7.70	30.23			
PK	5.4364G	64.81	74.00	-9.19	53.43	3	Vertical	358	1.69	-	33.90	7.76	30.28			
PK	5.4636G	60.57	68.20	-7.63	49.15	3	Vertical	358	1.69	-	33.93	7.78	30.29			
AV	5.4564G	52.52	54.00	-1.48	41.13	3	Vertical	358	1.69	-	33.91	7.77	30.29			
PK	5.5372G	114.75	Inf	-Inf	103.16	3	Vertical	358	1.69	-	34.07	7.82	30.30			
AV	5.5364G	102.20	Inf	-Inf	90.61	3	Vertical	358	1.69	-	34.07	7.82	30.30			
PK	5.7356G	65.56	68.20	-2.64	53.69	3	Vertical	358	1.69	-	34.00	8.10	30.23			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

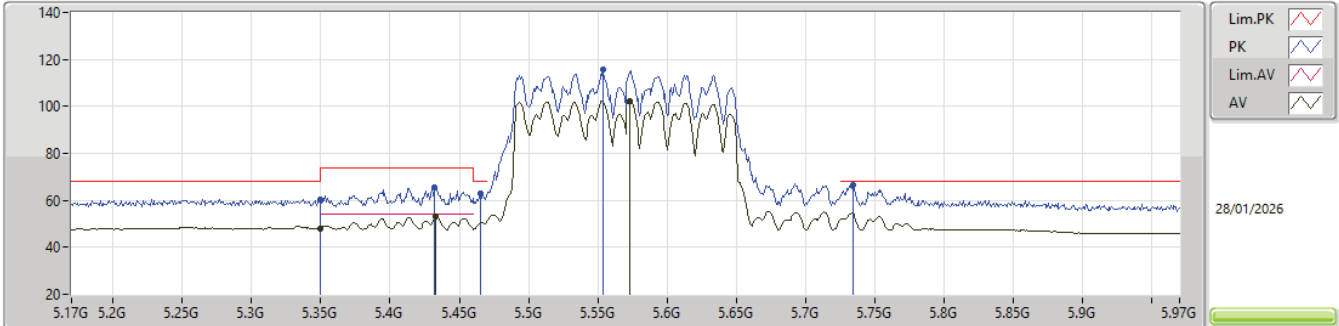


EUT_Y_4TX
Setting 16
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.35G	60.53	68.20	-7.67	49.16	3	Horizontal	358	1.69	-	33.90	7.70	30.23			
AV	5.35G	47.76	54.00	-6.24	36.39	3	Horizontal	358	1.69	-	33.90	7.70	30.23			
PK	5.4316G	65.62	74.00	-8.38	54.23	3	Horizontal	358	1.69	-	33.90	7.76	30.27			
AV	5.4332G	52.96	54.00	-1.04	41.58	3	Horizontal	358	1.69	-	33.90	7.76	30.28			
PK	5.4652G	63.16	68.20	-5.04	51.74	3	Horizontal	358	1.69	-	33.93	7.78	30.29			
PK	5.554G	115.54	Inf	-Inf	103.91	3	Horizontal	358	1.69	-	34.09	7.83	30.29			
AV	5.5732G	102.42	Inf	-Inf	90.81	3	Horizontal	358	1.69	-	34.05	7.84	30.28			
PK	5.734G	66.78	68.20	-1.42	54.92	3	Horizontal	358	1.69	-	34.00	8.09	30.23			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

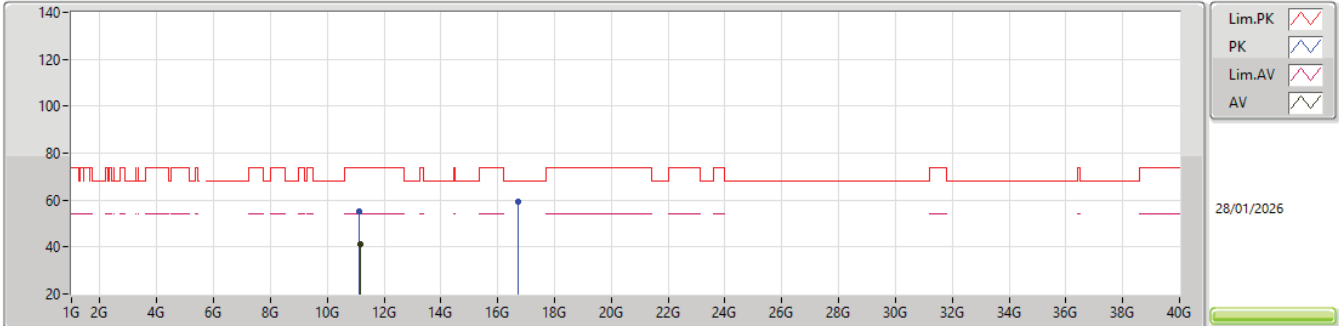


EUT_Y_4TX
Setting 16
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.12302G	55.00	74.00	-19.00	70.29	3	Vertical	126	1.89	-	38.55	12.35	66.19			
AV	11.16922G	41.03	54.00	-12.97	56.35	3	Vertical	126	1.89	-	38.50	12.37	66.19			
PK	16.71534G	59.44	68.20	-8.76	68.51	3	Vertical	231	1.76	-	39.93	14.98	63.98			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5570MHz_TX

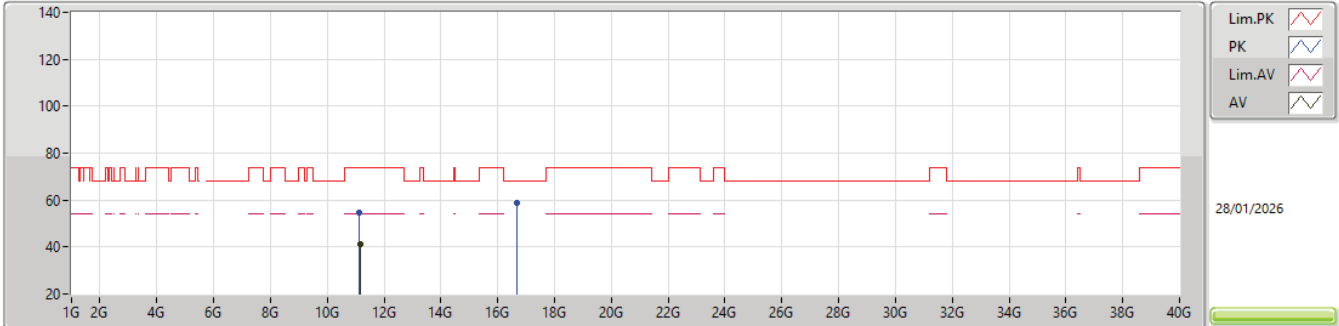


EUT_Y_4TX
Setting 16
02-D-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.14498G	54.43	74.00	-19.57	69.75	3	Horizontal	303	1.80	-	38.51	12.36	66.19			
AV	11.15194G	41.05	54.00	-12.95	56.38	3	Horizontal	303	1.80	-	38.50	12.36	66.19			
PK	16.68204G	59.01	68.20	-9.19	68.12	3	Horizontal	315	1.70	-	39.86	14.97	63.94			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5745MHz_TX

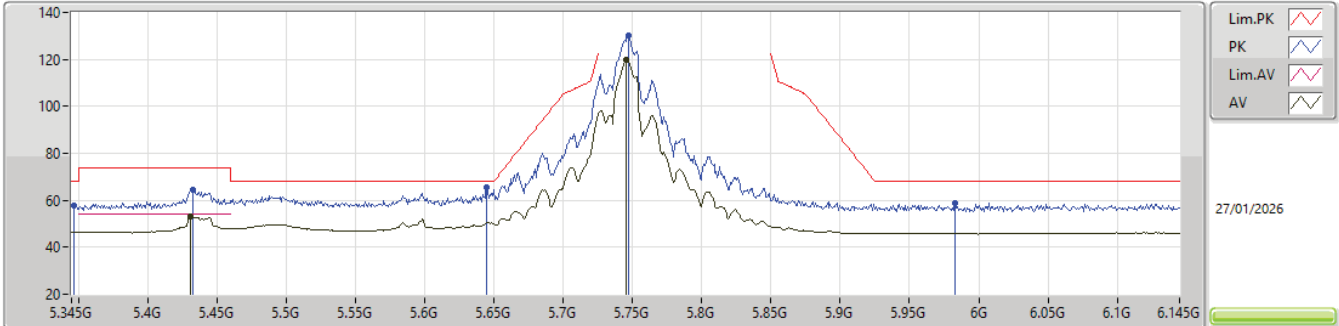


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3466G	57.72	68.20	-10.48	46.36	3	Vertical	341	1.75	-	33.89	7.70	30.23				
PK	5.433G	64.23	74.00	-9.77	52.85	3	Vertical	341	1.75	-	33.90	7.76	30.28				
AV	5.4306G	53.22	54.00	-0.78	41.83	3	Vertical	341	1.75	-	33.90	7.76	30.27				
PK	5.645G	65.50	68.20	-2.70	53.82	3	Vertical	341	1.75	-	34.00	7.94	30.26				
PK	5.7474G	130.19	Inf	-Inf	118.29	3	Vertical	341	1.75	-	34.00	8.12	30.22				
AV	5.7458G	120.04	Inf	-Inf	108.14	3	Vertical	341	1.75	-	34.00	8.12	30.22				
PK	5.9826G	58.75	68.20	-9.45	46.49	3	Vertical	341	1.75	-	34.27	8.13	30.14				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5745MHz_TX

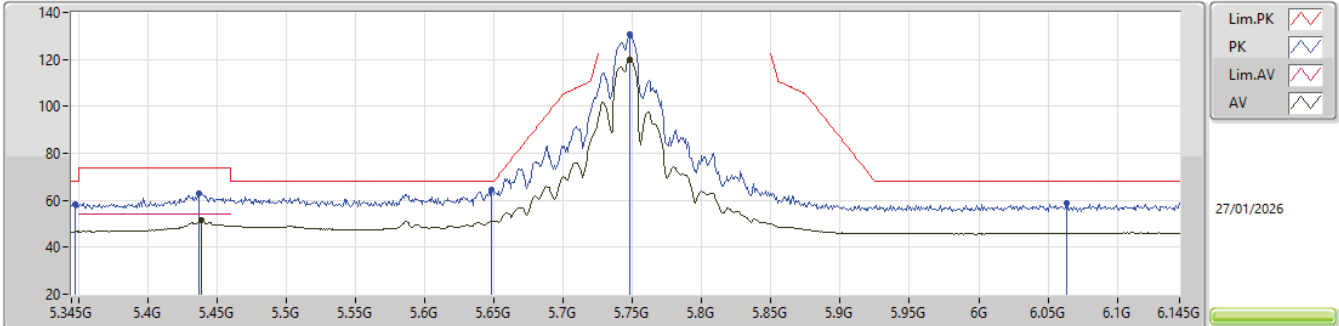


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3474G	58.49	68.20	-9.71	47.13	3	Horizontal	356	1.74	-	33.89	7.70	30.23				
PK	5.437G	62.88	74.00	-11.12	51.50	3	Horizontal	356	1.74	-	33.90	7.76	30.28				
AV	5.4386G	51.55	54.00	-2.45	40.17	3	Horizontal	356	1.74	-	33.90	7.76	30.28				
PK	5.6482G	64.39	68.20	-3.81	52.71	3	Horizontal	356	1.74	-	34.00	7.94	30.26				
PK	5.7482G	130.56	Inf	-Inf	118.66	3	Horizontal	356	1.74	-	34.00	8.12	30.22				
AV	5.7482G	119.77	Inf	-Inf	107.87	3	Horizontal	356	1.74	-	34.00	8.12	30.22				
PK	6.0634G	58.80	68.20	-9.40	46.44	3	Horizontal	356	1.74	-	34.43	8.09	30.16				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX


5745MHz_TX

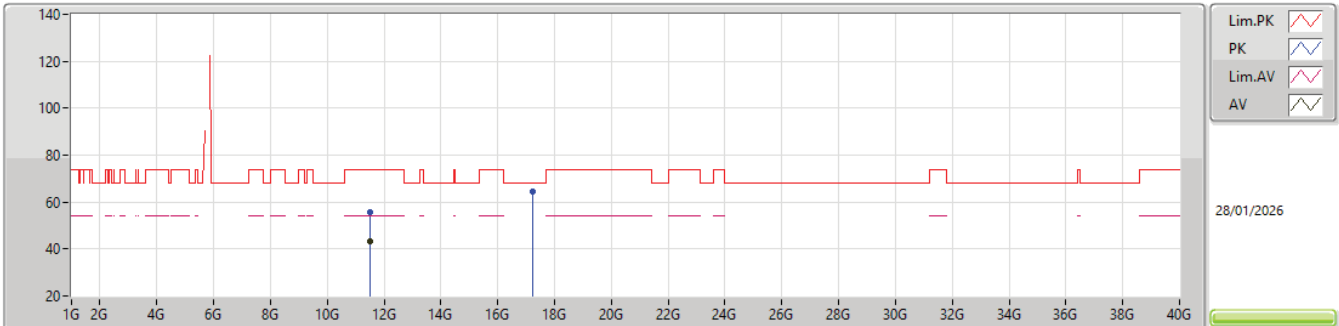EUT_Y_4TX
Setting 26.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50098G	55.89	74.00	-18.11	70.55	3	Vertical	6	1.84	-	39.00	12.54	66.20			
AV	11.49003G	43.22	54.00	-10.78	57.93	3	Vertical	6	1.84	-	38.96	12.53	66.20			
PK	17.23986G	64.60	68.20	-3.60	71.76	3	Vertical	0	1.47	-	42.04	15.08	64.28			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5745MHz_TX

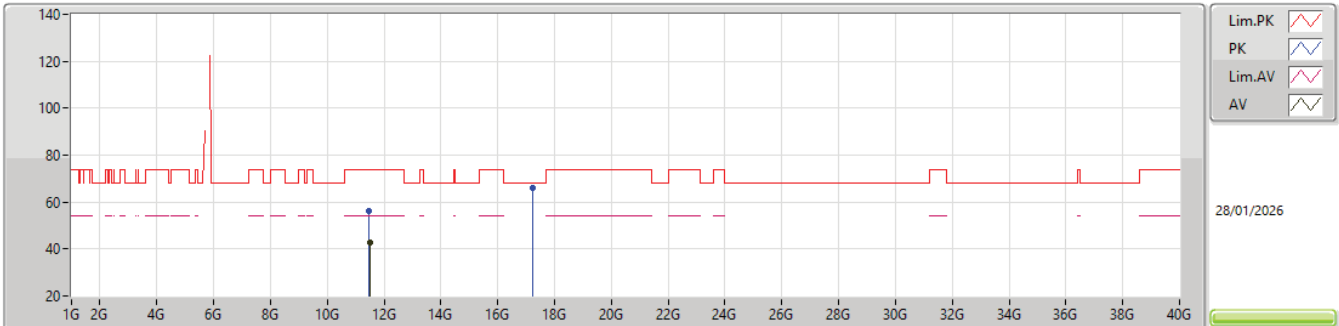


EUT_Y_4TX
Setting 26.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4828G	56.14	74.00	-17.86	70.88	3	Horizontal	41	2.00	-	38.93	12.53	66.20			
AV	11.48997G	42.84	54.00	-11.16	57.55	3	Horizontal	41	2.00	-	38.96	12.53	66.20			
PK	17.2332G	66.22	68.20	-1.98	73.42	3	Horizontal	322	1.77	-	42.00	15.08	64.28			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5785MHz_TX

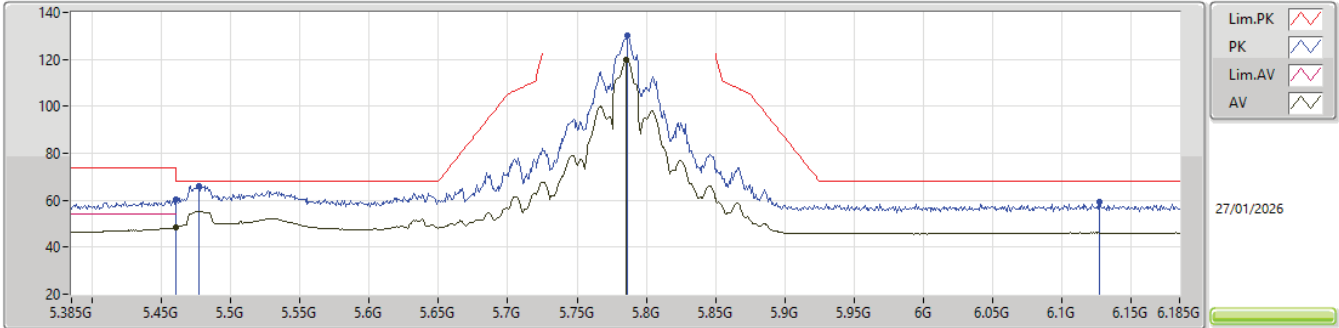


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.46G	60.60	74.00	-13.40	49.19	3	Vertical	343	1.71	-	33.92	7.78	30.29			
AV	5.46G	48.54	54.00	-5.46	37.13	3	Vertical	343	1.71	-	33.92	7.78	30.29			
PK	5.477G	66.02	68.20	-2.18	54.58	3	Vertical	343	1.71	-	33.95	7.79	30.30			
PK	5.7866G	130.27	Inf	-Inf	118.29	3	Vertical	343	1.71	-	34.00	8.19	30.21			
AV	5.7858G	119.95	Inf	-Inf	107.97	3	Vertical	343	1.71	-	34.00	8.19	30.21			
PK	6.1274G	59.20	68.20	-9.00	46.78	3	Vertical	343	1.71	-	34.55	8.05	30.18			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5785MHz_TX

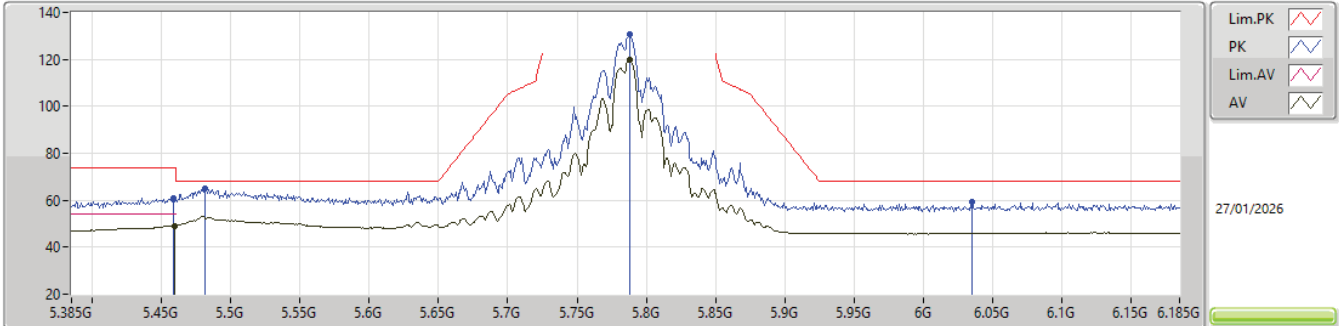


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4586G	60.77	74.00	-13.23	49.36	3	Horizontal	358	1.66	-	33.92	7.78	30.29			
AV	5.4594G	49.03	54.00	-4.97	37.62	3	Horizontal	358	1.66	-	33.92	7.78	30.29			
PK	5.481G	65.18	68.20	-3.02	53.73	3	Horizontal	358	1.66	-	33.96	7.79	30.30			
PK	5.7882G	130.83	Inf	-Inf	118.85	3	Horizontal	358	1.66	-	34.00	8.19	30.21			
AV	5.7882G	119.80	Inf	-Inf	107.82	3	Horizontal	358	1.66	-	34.00	8.19	30.21			
PK	6.0354G	59.15	68.20	-9.05	46.82	3	Horizontal	358	1.66	-	34.37	8.10	30.14			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5785MHz_TX

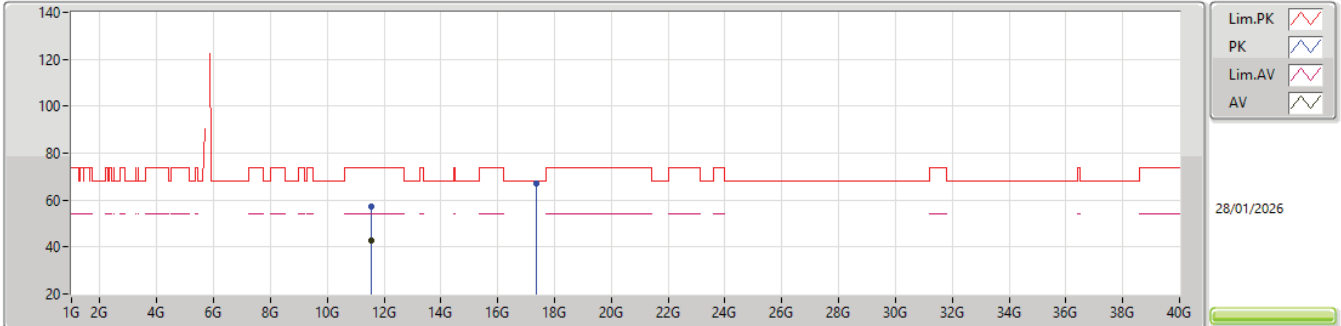


EUT_Y_4TX
Setting 26.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57195G	57.19	74.00	-16.81	71.62	3	Vertical	0	1.74	-	39.14	12.57	66.14			
AV	11.57192G	42.95	54.00	-11.05	57.38	3	Vertical	0	1.74	-	39.14	12.57	66.14			
PK	17.34954G	66.96	68.20	-1.24	73.22	3	Vertical	358	1.83	-	42.90	15.11	64.27			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5785MHz_TX

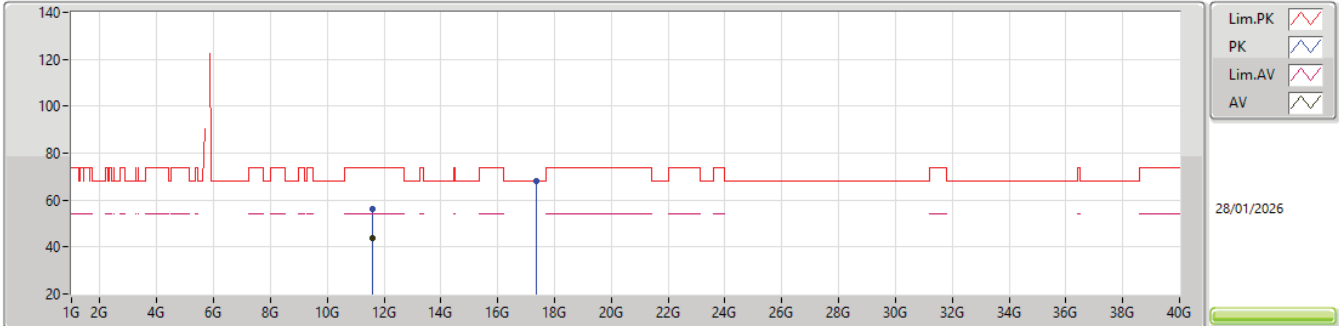


EUT_Y_4TX
Setting 26.5
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.57268G	56.32	74.00	-17.68	70.73	3	Horizontal	41	1.86	-	39.15	12.57	66.13				
AV	11.57264G	43.64	54.00	-10.36	58.05	3	Horizontal	41	1.86	-	39.15	12.57	66.13				
PK	17.35428G	67.89	68.20	-0.31	74.13	3	Horizontal	342	1.71	-	42.92	15.11	64.27				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

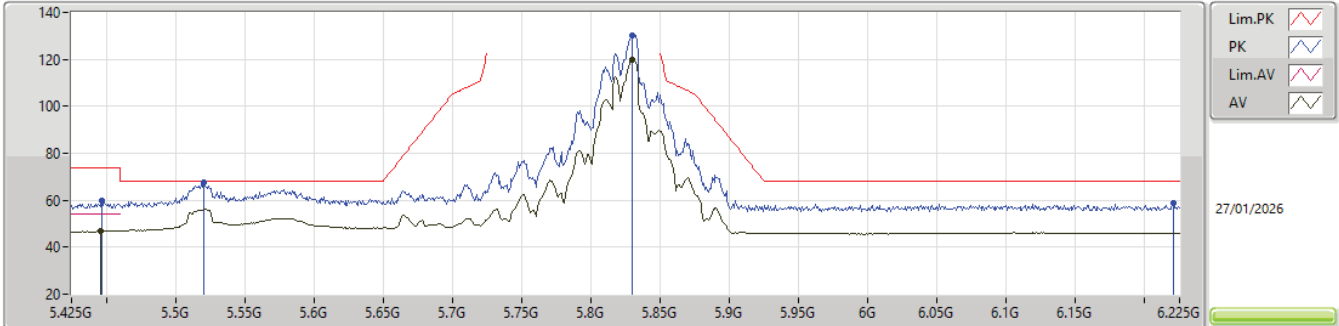


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4466G	59.92	74.00	-14.08	48.53	3	Vertical	2	1.65	-	33.90	7.77	30.28
AV	5.4458G	46.94	54.00	-7.06	35.55	3	Vertical	2	1.65	-	33.90	7.77	30.28
PK	5.5202G	67.44	68.20	-0.76	55.89	3	Vertical	2	1.65	-	34.04	7.81	30.30
PK	5.8298G	130.41	Inf	-Inf	118.46	3	Vertical	2	1.65	-	33.94	8.20	30.19
AV	5.8298G	119.75	Inf	-Inf	107.80	3	Vertical	2	1.65	-	33.94	8.20	30.19
PK	6.221G	58.65	68.20	-9.55	46.22	3	Vertical	2	1.65	-	34.60	8.05	30.22

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

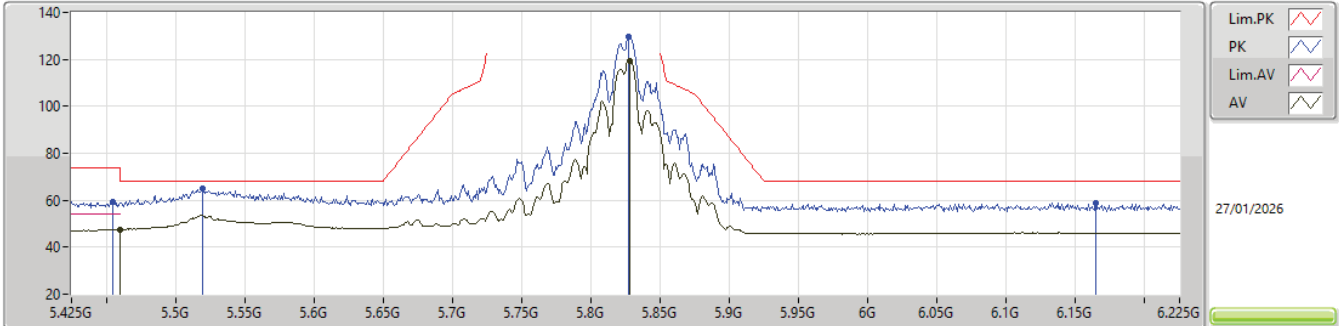


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4546G	59.39	74.00	-14.61	48.00	3	Horizontal	358	1.65	-	33.91	7.77	30.29
AV	5.46G	47.39	54.00	-6.61	35.98	3	Horizontal	358	1.65	-	33.92	7.78	30.29
PK	5.5194G	65.24	68.20	-2.96	53.69	3	Horizontal	358	1.65	-	34.04	7.81	30.30
PK	5.8274G	129.86	Inf	-Inf	117.90	3	Horizontal	358	1.65	-	33.95	8.20	30.19
AV	5.8282G	119.53	Inf	-Inf	107.58	3	Horizontal	358	1.65	-	33.94	8.20	30.19
PK	6.1642G	58.93	68.20	-9.27	46.50	3	Horizontal	358	1.65	-	34.60	8.03	30.20

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

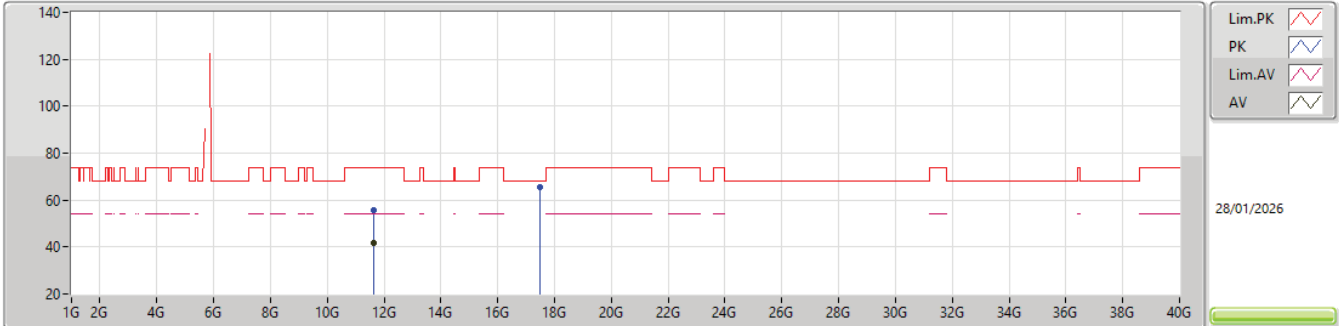


EUT_Y_4TX
Setting 24
02-D-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.6317G	55.44	74.00	-18.56	69.66	3	Vertical	84	1.94	-	39.26	12.60	66.08			
AV	11.63578G	41.84	54.00	-12.16	56.04	3	Vertical	84	1.94	-	39.27	12.61	66.08			
PK	17.48256G	65.60	68.20	-2.60	70.97	3	Vertical	317	1.80	-	43.76	15.13	64.26			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

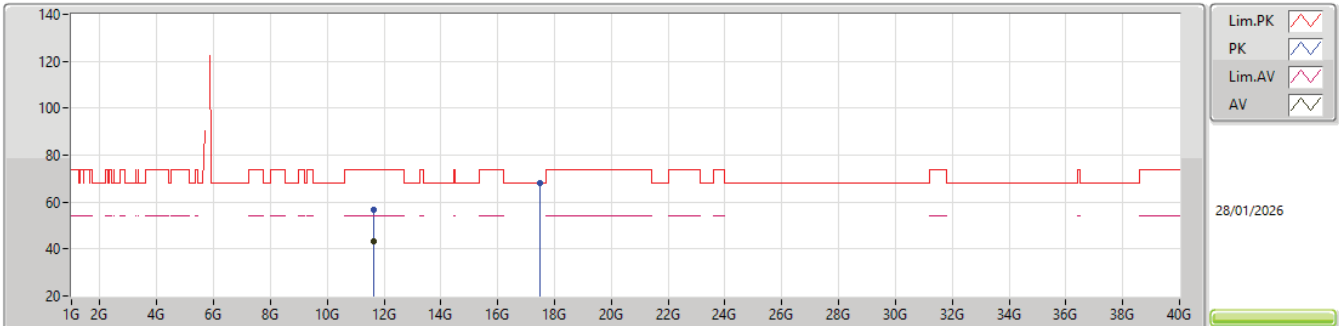


EUT_Y_4TX
Setting 24
02-D-K-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.63917G	56.79	74.00	-17.21	70.97	3	Horizontal	68	1.80	-	39.28	12.61	66.07			
AV	11.65003G	43.03	54.00	-10.97	57.18	3	Horizontal	68	1.80	-	39.30	12.61	66.06			
PK	17.48394G	68.19	68.20	-0.01	73.55	3	Horizontal	50	3.00	-	43.77	15.13	64.26			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5745MHz_TX

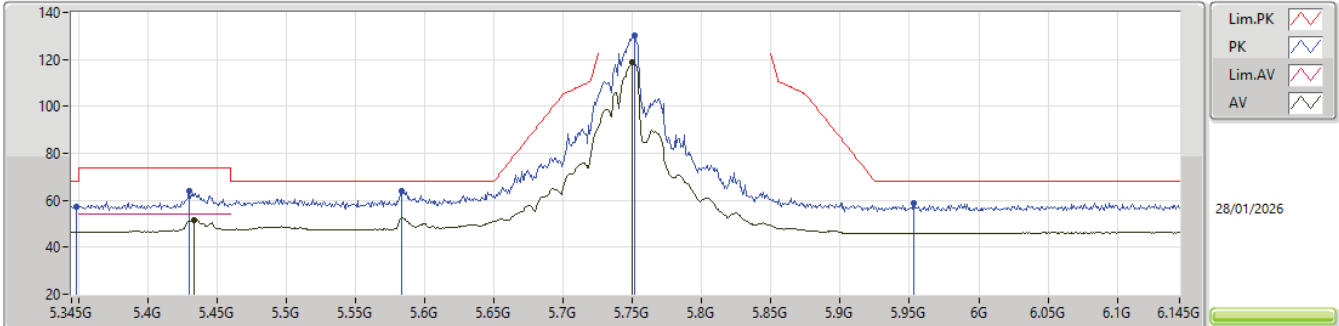


EUT_Y_4TX
Setting 24.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3482G	57.22	68.20	-10.98	45.85	3	Vertical	3	1.79	-	33.90	7.70	30.23				
PK	5.4298G	63.97	74.00	-10.03	52.58	3	Vertical	3	1.79	-	33.90	7.76	30.27				
AV	5.4338G	51.58	54.00	-2.42	40.20	3	Vertical	3	1.79	-	33.90	7.76	30.28				
PK	5.5834G	64.02	68.20	-4.18	52.42	3	Vertical	3	1.79	-	34.03	7.85	30.28				
PK	5.7514G	130.23	Inf	-Inf	118.33	3	Vertical	3	1.79	-	34.00	8.12	30.22				
AV	5.7498G	118.71	Inf	-Inf	106.81	3	Vertical	3	1.79	-	34.00	8.12	30.22				
PK	5.953G	58.77	68.20	-9.43	46.57	3	Vertical	3	1.79	-	34.21	8.14	30.15				

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5745MHz_TX

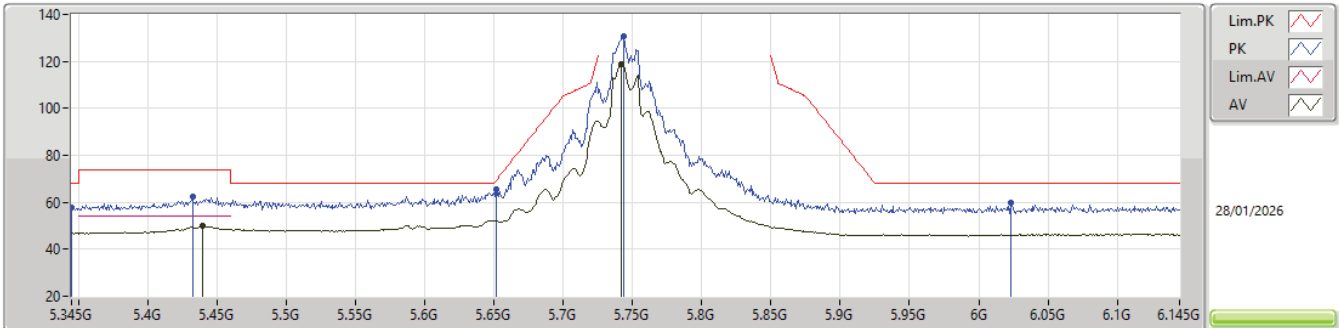


EUT_Y_4TX
Setting 24.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.345G	57.86	68.20	-10.34	46.50	3	Horizontal	341	1.62	-	33.89	7.70	30.23			
PK	5.4322G	62.48	74.00	-11.52	51.09	3	Horizontal	341	1.62	-	33.90	7.76	30.27			
AV	5.4394G	50.23	54.00	-3.77	38.85	3	Horizontal	341	1.62	-	33.90	7.76	30.28			
PK	5.6514G	65.33	69.24	-3.91	53.64	3	Horizontal	341	1.62	-	34.00	7.95	30.26			
PK	5.7434G	130.57	Inf	-Inf	118.68	3	Horizontal	341	1.62	-	34.00	8.11	30.22			
AV	5.7418G	118.89	Inf	-Inf	107.00	3	Horizontal	341	1.62	-	34.00	8.11	30.22			
PK	6.0234G	59.72	68.20	-8.48	47.40	3	Horizontal	341	1.62	-	34.35	8.11	30.14			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5745MHz_TX

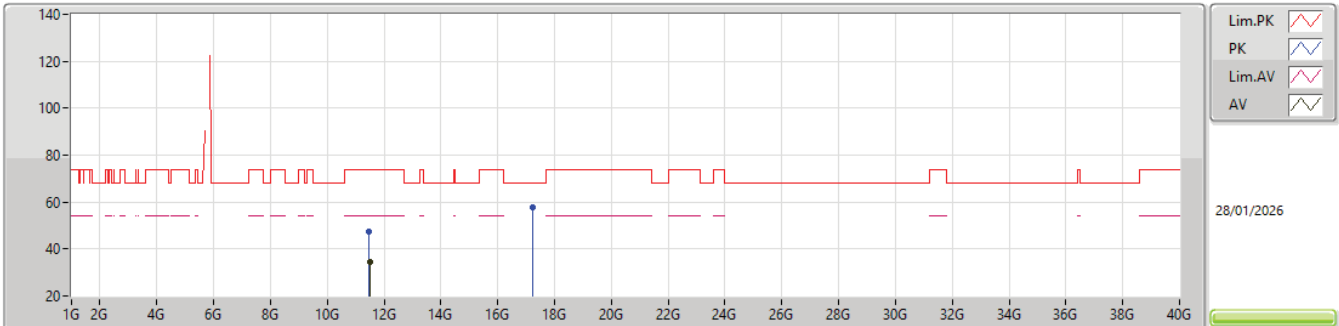EUT_Y_4TX
Setting 24.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4818G	47.54	74.00	-26.46	62.28	3	Vertical	4	1.46	-	38.93	12.53	66.20			
AV	11.48995G	34.72	54.00	-19.28	49.43	3	Vertical	4	1.46	-	38.96	12.53	66.20			
PK	17.2312G	57.54	68.20	-10.66	64.75	3	Vertical	29	1.83	-	41.99	15.08	64.28			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5745MHz_TX

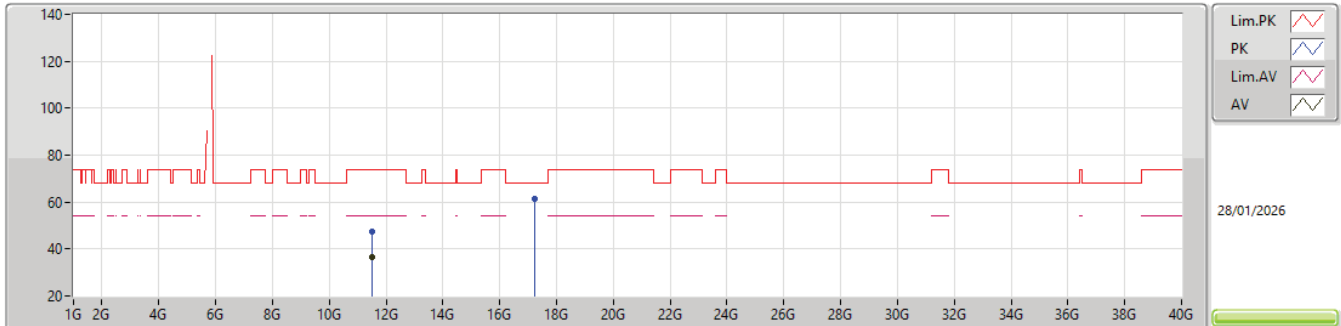


EUT_Y_4TX
Setting 24.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48995G	47.20	74.00	-26.80	61.91	3	Horizontal	286	1.78	-	38.96	12.53	66.20			
AV	11.49005G	36.50	54.00	-17.50	51.21	3	Horizontal	286	1.78	-	38.96	12.53	66.20			
PK	17.2345G	61.27	68.20	-6.93	68.46	3	Horizontal	321	1.80	-	42.01	15.08	64.28			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5785MHz_TX

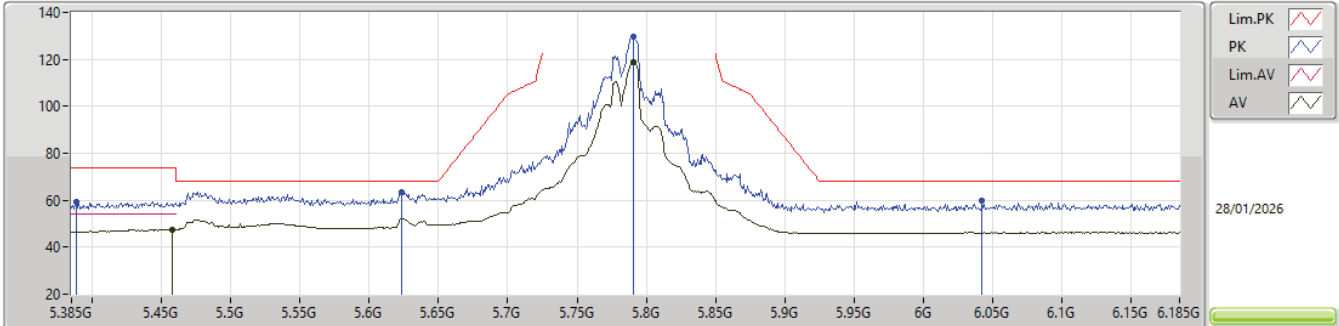


EUT_Y_4TX
Setting 24.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3882G	59.41	74.00	-14.59	48.03	3	Vertical	360	1.73	-	33.90	7.73	30.25
AV	5.4578G	47.59	54.00	-6.41	36.19	3	Vertical	360	1.73	-	33.92	7.77	30.29
PK	5.6234G	63.61	68.20	-4.59	51.98	3	Vertical	360	1.73	-	34.00	7.90	30.27
PK	5.7906G	129.71	Inf	-Inf	117.73	3	Vertical	360	1.73	-	34.00	8.19	30.21
AV	5.7906G	118.71	Inf	-Inf	106.73	3	Vertical	360	1.73	-	34.00	8.19	30.21
PK	6.0426G	59.58	68.20	-8.62	47.24	3	Vertical	360	1.73	-	34.39	8.10	30.15

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5785MHz_TX

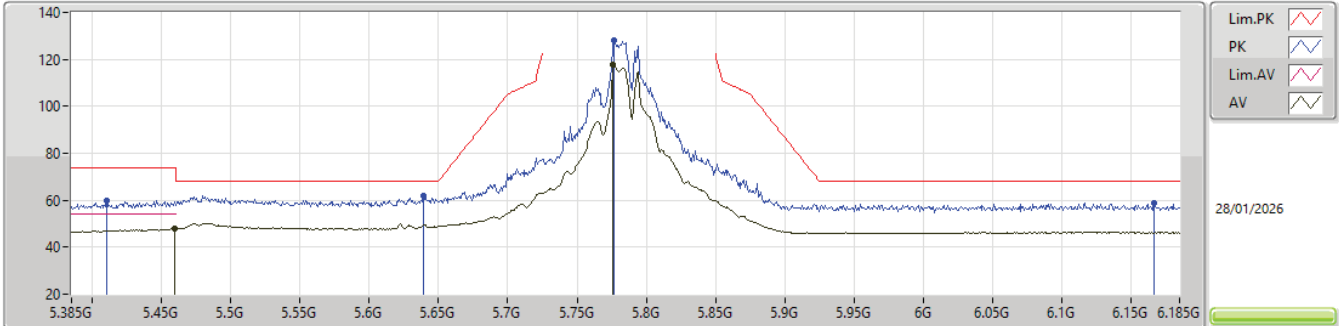


EUT_Y_4TX
Setting 24.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4106G	59.93	74.00	-14.07	48.54	3	Horizontal	332	1.80	-	33.90	7.75	30.26			
AV	5.4594G	47.78	54.00	-6.22	36.37	3	Horizontal	332	1.80	-	33.92	7.78	30.29			
PK	5.6394G	62.15	68.20	-6.05	50.48	3	Horizontal	332	1.80	-	34.00	7.93	30.26			
PK	5.777G	128.25	Inf	-Inf	116.29	3	Horizontal	332	1.80	-	34.00	8.17	30.21			
AV	5.7762G	117.70	Inf	-Inf	105.74	3	Horizontal	332	1.80	-	34.00	8.17	30.21			
PK	6.1666G	58.83	68.20	-9.37	46.40	3	Horizontal	332	1.80	-	34.60	8.03	30.20			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5785MHz_TX

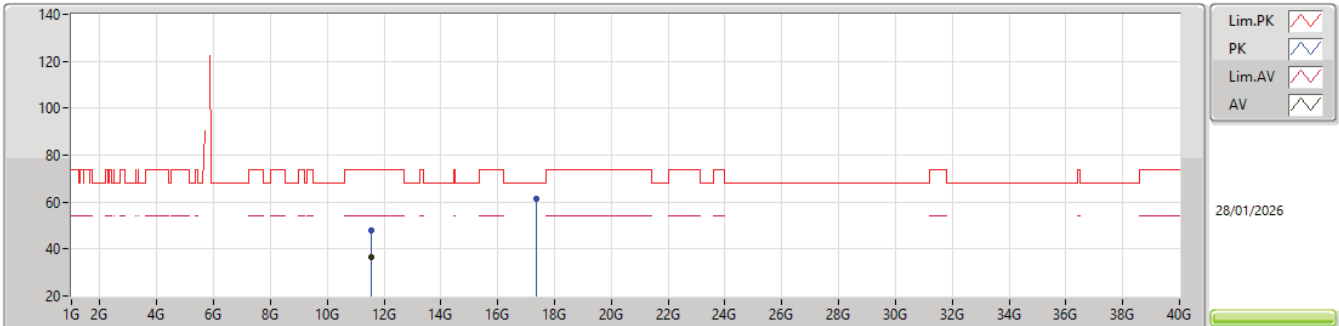


EUT_Y_4TX
Setting 24.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.55505G	48.13	74.00	-25.87	62.60	3	Vertical	219	1.37	-	39.11	12.57	66.15			
AV	11.57005G	36.53	54.00	-17.47	50.96	3	Vertical	219	1.37	-	39.14	12.57	66.14			
PK	17.3421G	61.47	68.20	-6.73	67.79	3	Vertical	29	3.00	-	42.84	15.11	64.27			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5785MHz_TX

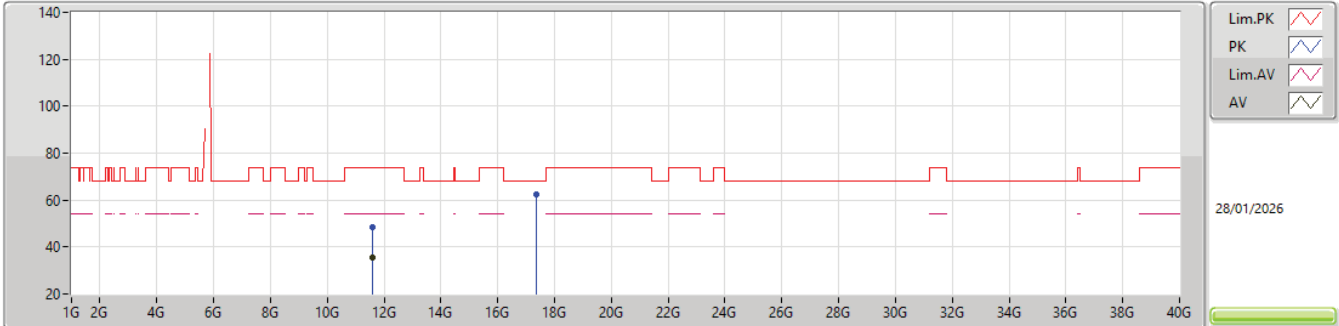


EUT_Y_4TX
Setting 24.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.5735G	48.69	74.00	-25.31	63.10	3	Horizontal	46	1.37	-	39.15	12.57	66.13			
AV	11.5751G	35.50	54.00	-18.50	49.90	3	Horizontal	46	1.37	-	39.15	12.58	66.13			
PK	17.355G	62.60	68.20	-5.60	68.84	3	Horizontal	352	1.64	-	42.92	15.11	64.27			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5825MHz_TX

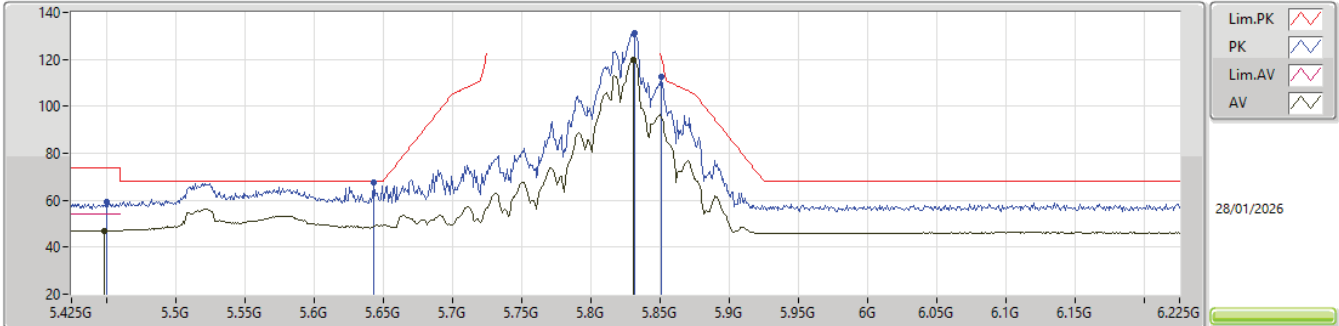


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4506G	59.07	74.00	-14.93	47.68	3	Vertical	2	1.66	-	33.90	7.77	30.28
AV	5.449G	47.12	54.00	-6.88	35.73	3	Vertical	2	1.66	-	33.90	7.77	30.28
PK	5.6434G	67.61	68.20	-0.59	55.93	3	Vertical	2	1.66	-	34.00	7.94	30.26
PK	5.8314G	130.98	Inf	-Inf	119.03	3	Vertical	2	1.66	-	33.94	8.20	30.19
AV	5.8306G	120.01	Inf	-Inf	108.06	3	Vertical	2	1.66	-	33.94	8.20	30.19
PK	5.8506G	112.35	120.83	-8.48	100.44	3	Vertical	2	1.66	-	33.90	8.19	30.18

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5825MHz_TX

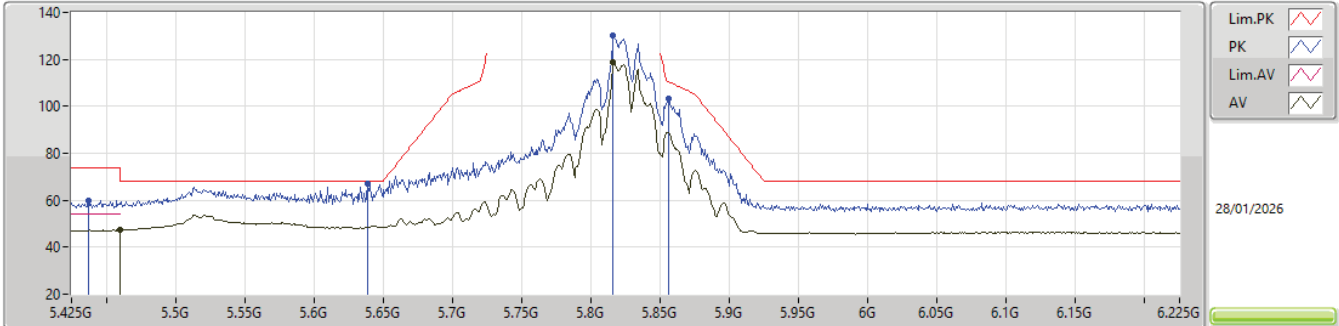


EUT_Y_4TX
Setting 26.5
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.437G	59.60	74.00	-14.40	48.22	3	Horizontal	334	1.80	-	33.90	7.76	30.28			
AV	5.46G	47.56	54.00	-6.44	36.15	3	Horizontal	334	1.80	-	33.92	7.78	30.29			
PK	5.6386G	66.97	68.20	-1.23	55.30	3	Horizontal	334	1.80	-	34.00	7.93	30.26			
PK	5.8162G	130.21	Inf	-Inf	118.24	3	Horizontal	334	1.80	-	33.97	8.20	30.20			
AV	5.8162G	118.91	Inf	-Inf	106.94	3	Horizontal	334	1.80	-	33.97	8.20	30.20			
PK	5.8562G	103.10	110.46	-7.36	91.18	3	Horizontal	334	1.80	-	33.92	8.18	30.18			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5825MHz_TX

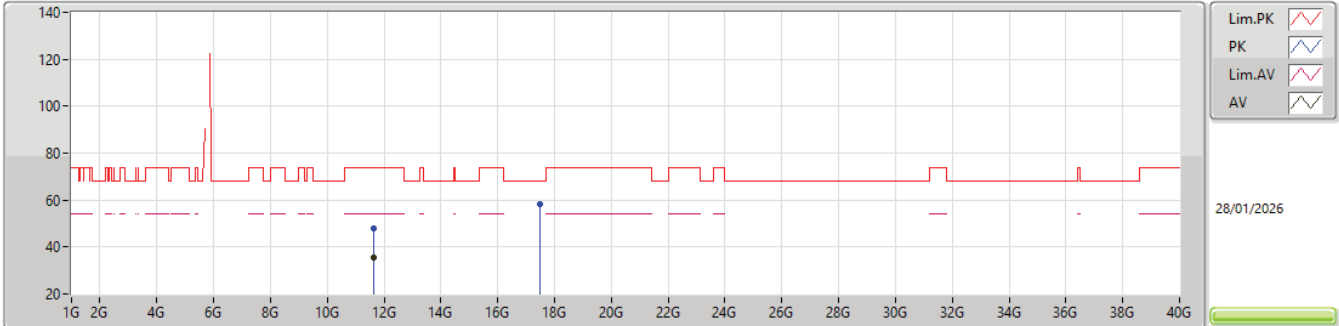


EUT_Y_4TX
Setting 23
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.63945G	47.82	74.00	-26.18	62.00	3	Vertical	82	1.42	-	39.28	12.61	66.07			
AV	11.65G	35.71	54.00	-18.29	49.86	3	Vertical	82	1.42	-	39.30	12.61	66.06			
PK	17.4783G	58.39	68.20	-9.81	63.79	3	Vertical	349	2.92	-	43.73	15.13	64.26			

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5825MHz_TX

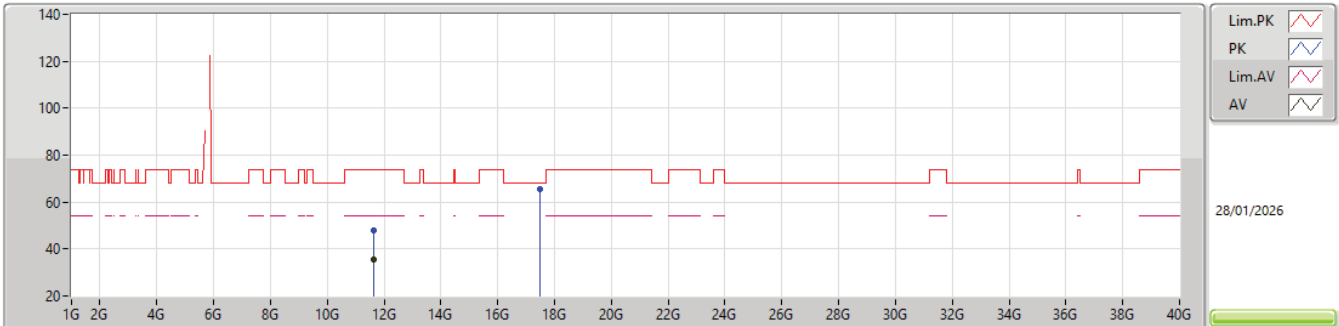


EUT_Y_4TX
Setting 23
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.65585G	47.99	74.00	-26.01	62.12	3	Horizontal	0	1.91	-	39.31	12.62	66.06			
AV	11.64985G	35.77	54.00	-18.23	49.93	3	Horizontal	0	1.91	-	39.30	12.61	66.07			
PK	17.4823G	65.29	68.20	-2.91	70.66	3	Horizontal	46	2.85	-	43.76	15.13	64.26			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5755MHz_TX

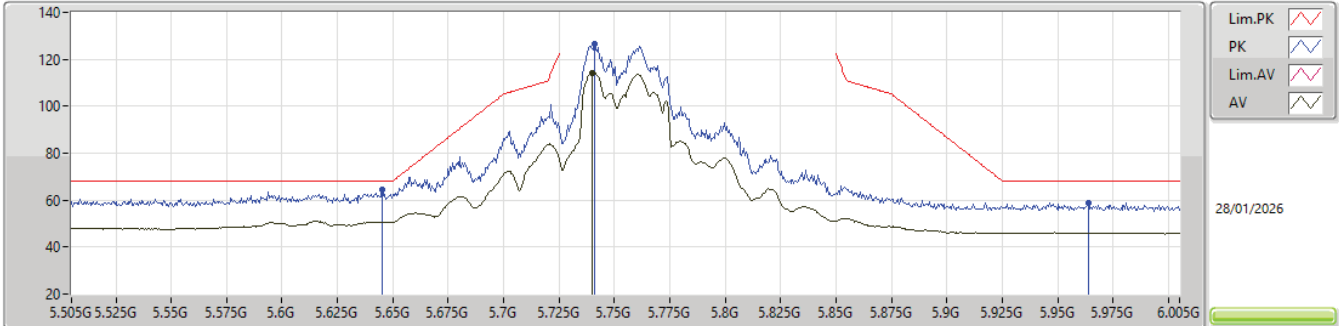


EUT_Y_4TX
Setting 21.5
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.645G	64.65	68.20	-3.55	52.97	3	Vertical	360	1.69	-	34.00	7.94	30.26			
PK	5.741G	126.68	Inf	-Inf	114.79	3	Vertical	360	1.69	-	34.00	8.11	30.22			
AV	5.74G	114.32	Inf	-Inf	102.43	3	Vertical	360	1.69	-	34.00	8.11	30.22			
PK	5.964G	58.90	68.20	-9.30	46.67	3	Vertical	360	1.69	-	34.23	8.14	30.14			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5755MHz_TX

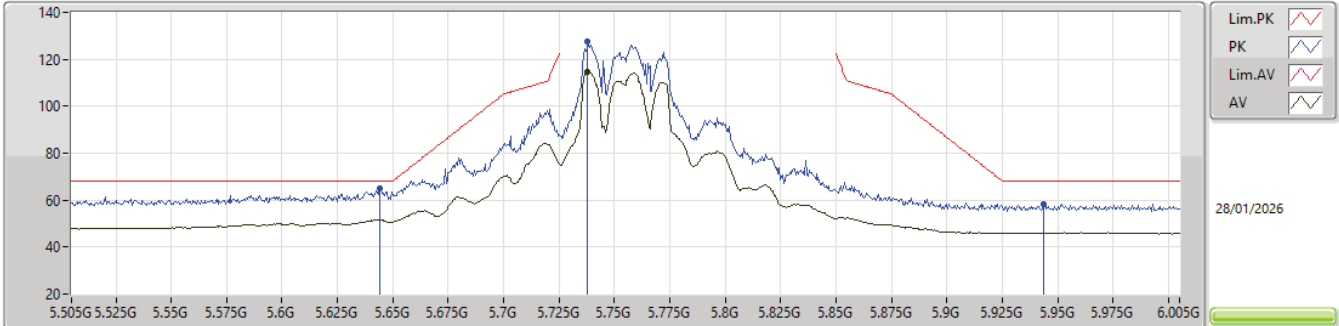


EUT_Y_4TX
Setting 21.5
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.644G	65.21	68.20	-2.99	53.53	3	Horizontal	356	1.72	-	34.00	7.94	30.26			
PK	5.738G	127.34	Inf	-Inf	115.46	3	Horizontal	356	1.72	-	34.00	8.10	30.22			
AV	5.738G	114.65	Inf	-Inf	102.77	3	Horizontal	356	1.72	-	34.00	8.10	30.22			
PK	5.9435G	58.19	68.20	-10.01	46.00	3	Horizontal	356	1.72	-	34.19	8.15	30.15			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5755MHz_TX

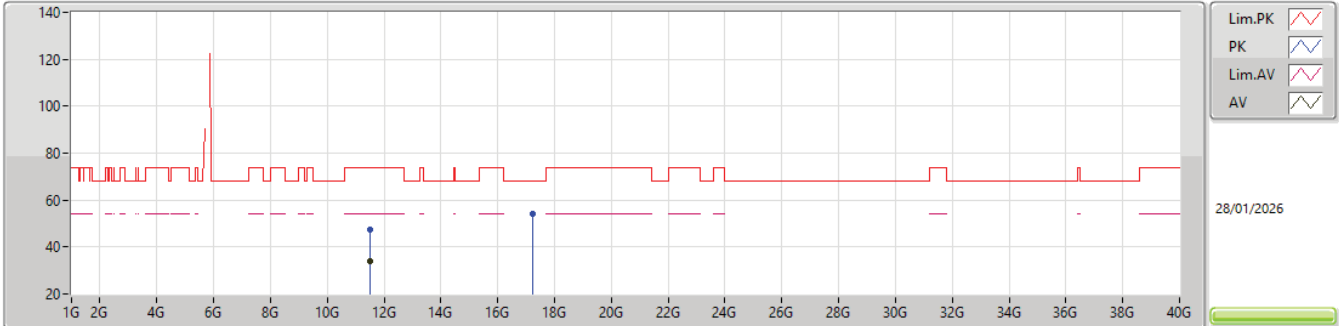


EUT_Y_4TX
Setting 21.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50817G	47.67	74.00	-26.33	62.30	3	Vertical	339	1.71	-	39.02	12.54	66.19			
AV	11.51246G	34.08	54.00	-19.92	48.71	3	Vertical	339	1.71	-	39.02	12.54	66.19			
PK	17.25156G	54.39	68.20	-13.81	61.46	3	Vertical	189	1.48	-	42.11	15.09	64.27			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5755MHz_TX

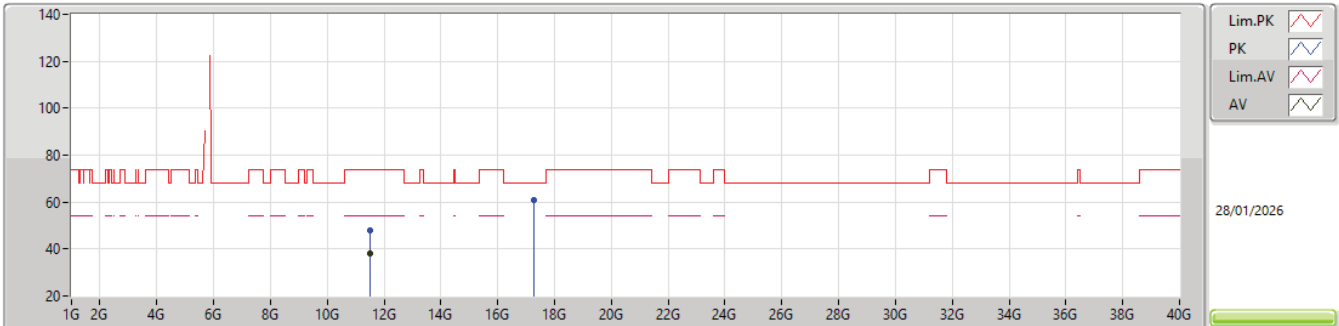


EUT_Y_4TX
Setting 21.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50994G	47.83	74.00	-26.17	62.46	3	Horizontal	149	1.39	-	39.02	12.54	66.19			
AV	11.51G	38.26	54.00	-15.74	52.89	3	Horizontal	149	1.39	-	39.02	12.54	66.19			
PK	17.25765G	60.65	68.20	-7.55	67.67	3	Horizontal	42	1.88	-	42.16	15.09	64.27			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5795MHz_TX

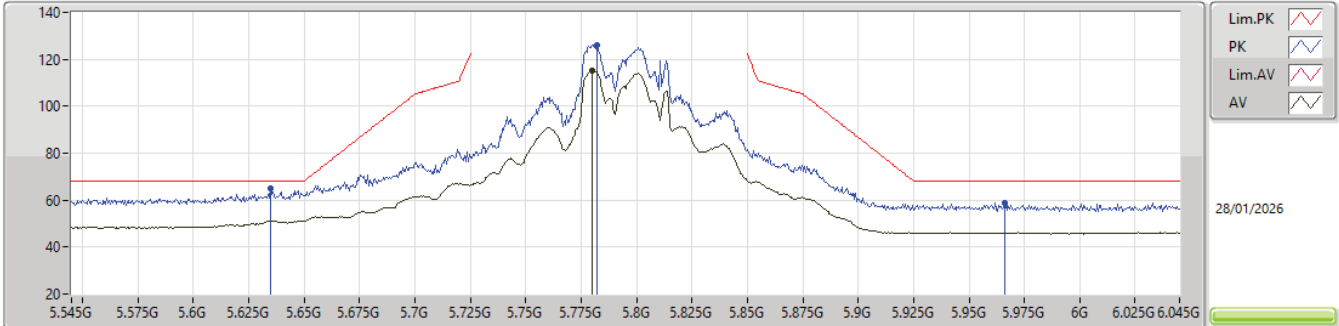


EUT_Y_4TX
Setting 22.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.635G	64.76	68.20	-3.44	53.10	3	Vertical	3	1.67	-	34.00	7.92	30.26			
PK	5.782G	126.09	Inf	-Inf	114.12	3	Vertical	3	1.67	-	34.00	8.18	30.21			
AV	5.78G	115.21	Inf	-Inf	103.24	3	Vertical	3	1.67	-	34.00	8.18	30.21			
PK	5.966G	58.85	68.20	-9.35	46.62	3	Vertical	3	1.67	-	34.23	8.14	30.14			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5795MHz_TX

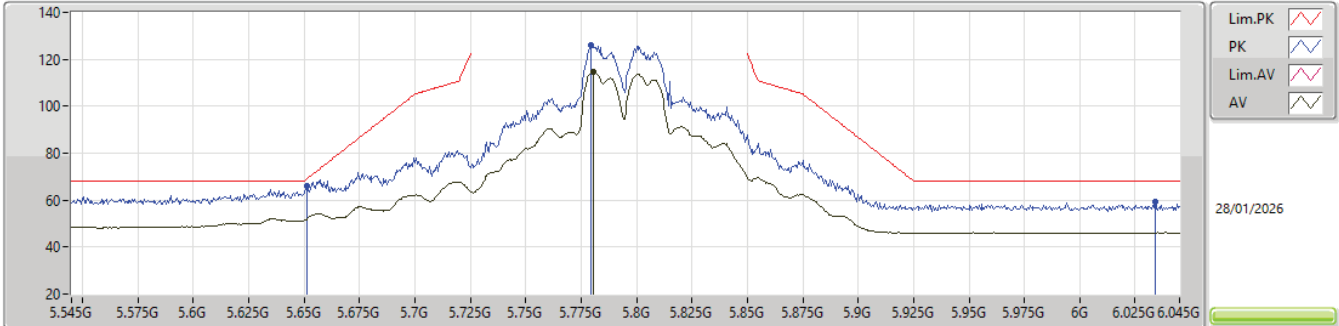


EUT_Y_4TX
Setting 22.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.651G	66.14	68.94	-2.80	54.45	3	Horizontal	357	1.65	-	34.00	7.95	30.26			
PK	5.7795G	126.01	Inf	-Inf	114.05	3	Horizontal	357	1.65	-	34.00	8.17	30.21			
AV	5.7805G	114.80	Inf	-Inf	102.83	3	Horizontal	357	1.65	-	34.00	8.18	30.21			
PK	6.034G	59.38	68.20	-8.82	47.05	3	Horizontal	357	1.65	-	34.37	8.10	30.14			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5795MHz_TX

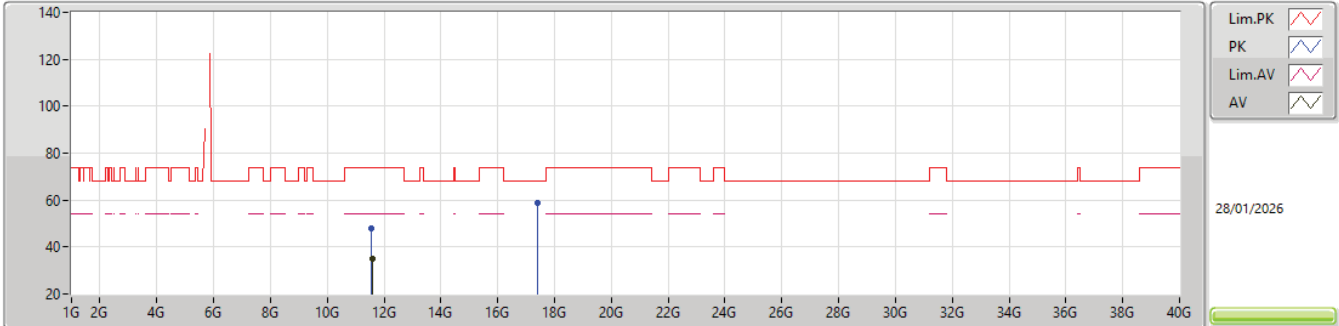


EUT_Y_4TX
Setting 22.5
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.56875G	47.85	74.00	-26.15	62.28	3	Vertical	337	1.33	-	39.14	12.57	66.14			
AV	11.59045G	35.15	54.00	-18.85	49.51	3	Vertical	337	1.33	-	39.18	12.58	66.12			
PK	17.3912G	58.58	68.20	-9.62	64.67	3	Vertical	358	1.56	-	43.06	15.12	64.27			

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5795MHz_TX

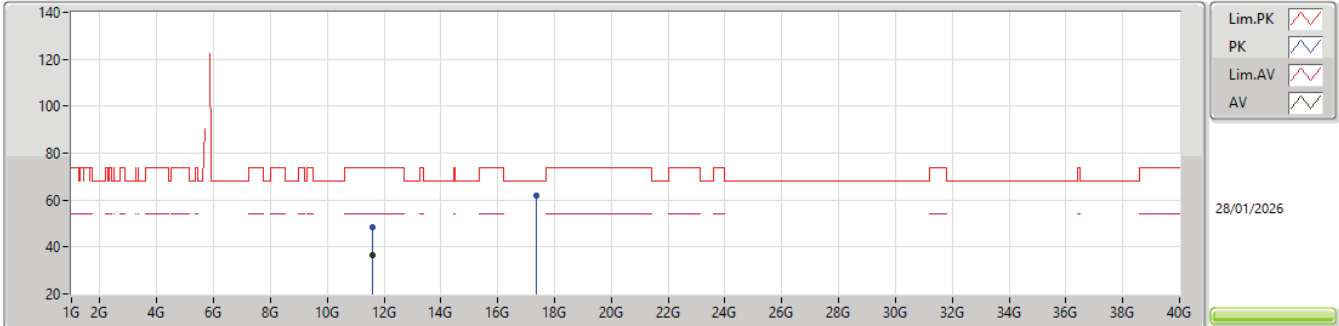


EUT_Y_4TX
Setting 22.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.60434G	48.21	74.00	-25.79	62.52	3	Horizontal	314	1.72	-	39.21	12.59	66.11			
AV	11.58997G	36.32	54.00	-17.68	50.68	3	Horizontal	314	1.72	-	39.18	12.58	66.12			
PK	17.37543G	61.74	68.20	-6.46	67.90	3	Horizontal	61	1.80	-	43.00	15.11	64.27			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX


5775MHz_TX

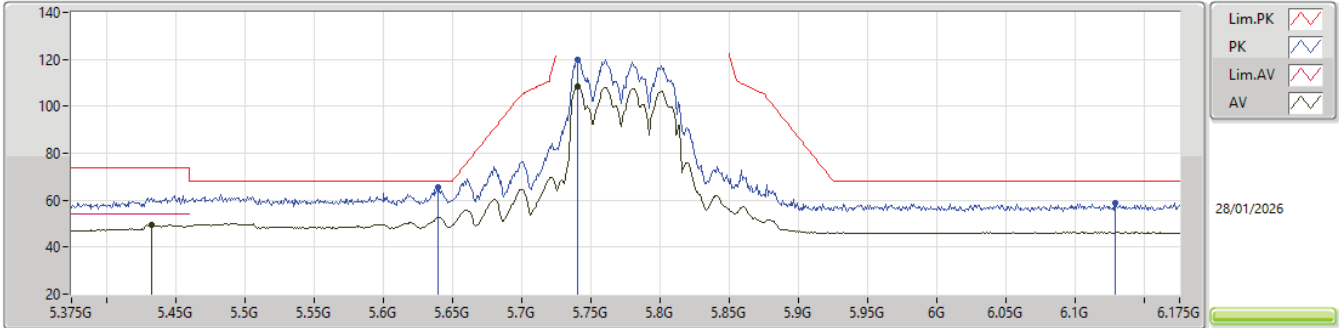EUT_Y_4TX
Setting 19.5
02-D-B-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
AV	5.4326G	49.36	54.00	-4.64	37.97	3	Vertical	360	1.77	-	33.90	7.76	30.27			
PK	5.6398G	65.30	68.20	-2.90	53.63	3	Vertical	360	1.77	-	34.00	7.93	30.26			
PK	5.7406G	119.85	Inf	-Inf	107.96	3	Vertical	360	1.77	-	34.00	8.11	30.22			
AV	5.7406G	108.70	Inf	-Inf	96.81	3	Vertical	360	1.77	-	34.00	8.11	30.22			
PK	6.1286G	58.73	68.20	-9.47	46.30	3	Vertical	360	1.77	-	34.56	8.05	30.18			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5775MHz_TX

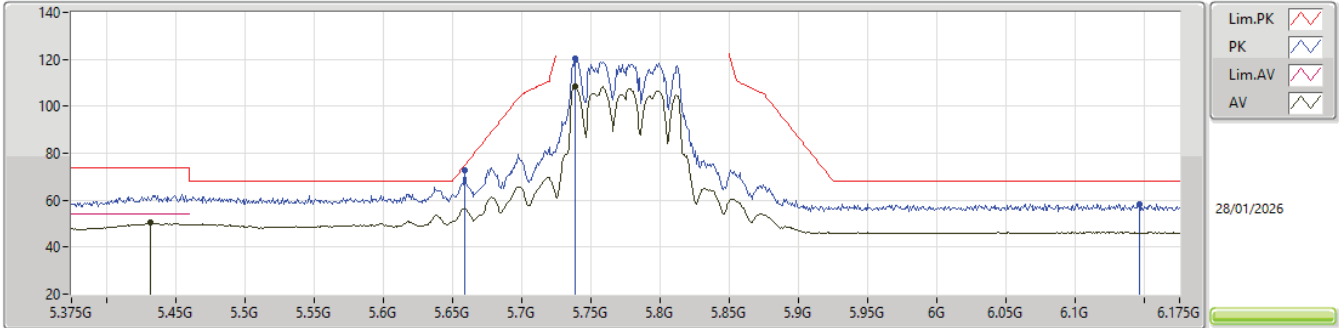


EUT_Y_4TX
Setting 19.5
02-D-B-5-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
AV	5.4318G	50.36	54.00	-3.64	38.97	3	Horizontal	355	1.73	-	33.90	7.76	30.27			
PK	5.659G	72.56	74.86	-2.30	60.85	3	Horizontal	355	1.73	-	34.00	7.96	30.25			
PK	5.7382G	120.27	Inf	-Inf	108.39	3	Horizontal	355	1.73	-	34.00	8.10	30.22			
AV	5.739G	108.62	Inf	-Inf	96.74	3	Horizontal	355	1.73	-	34.00	8.10	30.22			
PK	6.1462G	58.45	68.20	-9.75	46.01	3	Horizontal	355	1.73	-	34.59	8.04	30.19			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5775MHz_TX

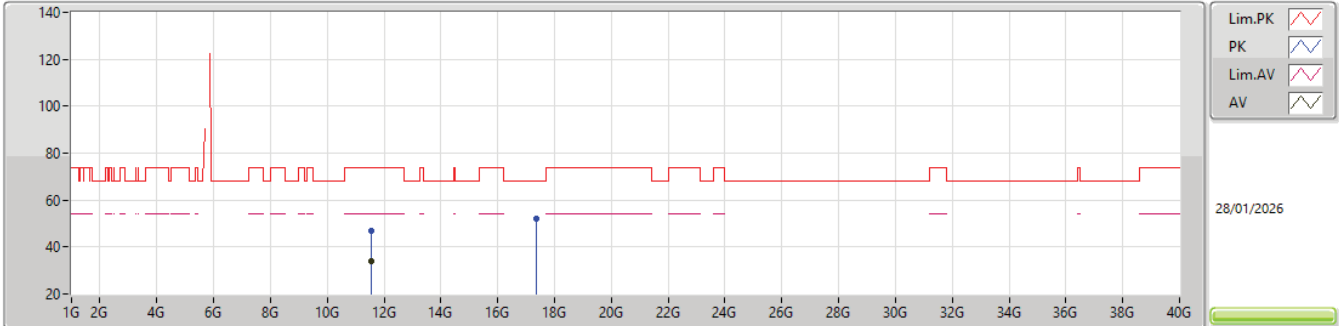


EUT_Y_4TX
Setting 19.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55204G	46.96	74.00	-27.04	61.45	3	Vertical	140	1.85	-	39.10	12.56	66.15			
AV	11.55776G	34.04	54.00	-19.96	48.50	3	Vertical	140	1.85	-	39.12	12.57	66.15			
PK	17.34004G	51.94	68.20	-16.26	58.29	3	Vertical	266	1.79	-	42.82	15.10	64.27			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5775MHz_TX

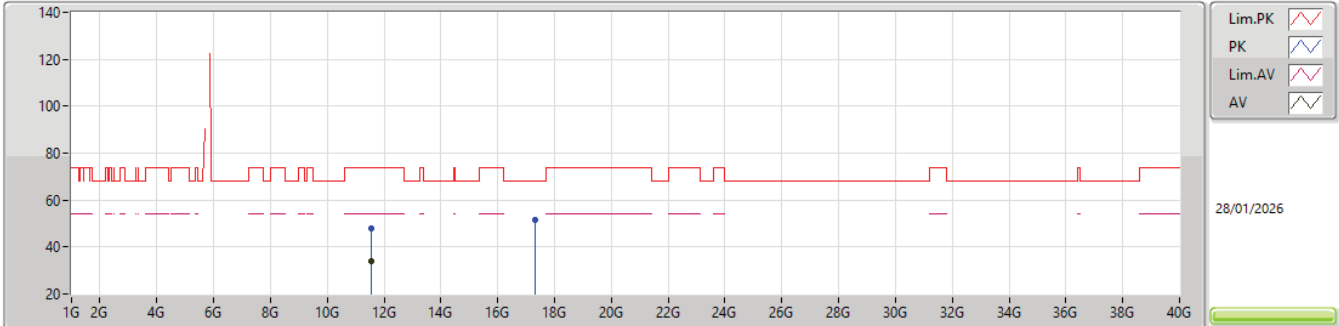EUT_Y_4TX
Setting 19.5
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.53184G	47.78	74.00	-26.22	62.34	3	Horizontal	39	1.99	-	39.06	12.55	66.17			
AV	11.55204G	34.06	54.00	-19.94	48.55	3	Horizontal	39	1.99	-	39.10	12.56	66.15			
PK	17.33824G	51.75	68.20	-16.45	58.11	3	Horizontal	298	1.95	-	42.81	15.10	64.27			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	AV	5.3605G	53.96	54.00	-0.04	3	Vertical	354	1.57	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

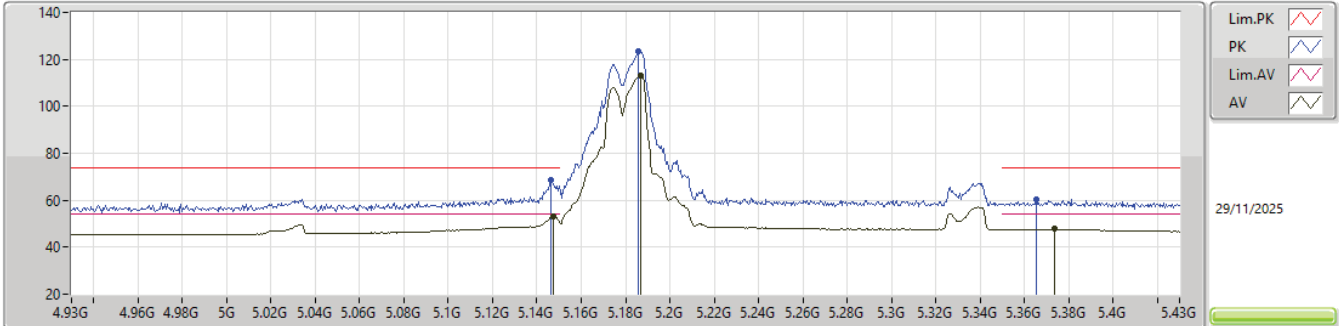


EUT_Y_4TX
Setting 19.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1465G	68.61	74.00	-5.39	62.63	3	Vertical	356	1.69	-	33.90	7.01	34.93			
AV	5.1475G	53.24	54.00	-0.76	47.26	3	Vertical	356	1.69	-	33.90	7.01	34.93			
PK	5.1855G	123.35	Inf	-Inf	117.18	3	Vertical	356	1.69	-	34.04	7.05	34.92			
AV	5.187G	113.35	Inf	-Inf	107.17	3	Vertical	356	1.69	-	34.05	7.05	34.92			
PK	5.3655G	60.39	74.00	-13.61	53.54	3	Vertical	356	1.69	-	34.56	7.18	34.89			
AV	5.3735G	47.71	54.00	-6.29	40.83	3	Vertical	356	1.69	-	34.59	7.18	34.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

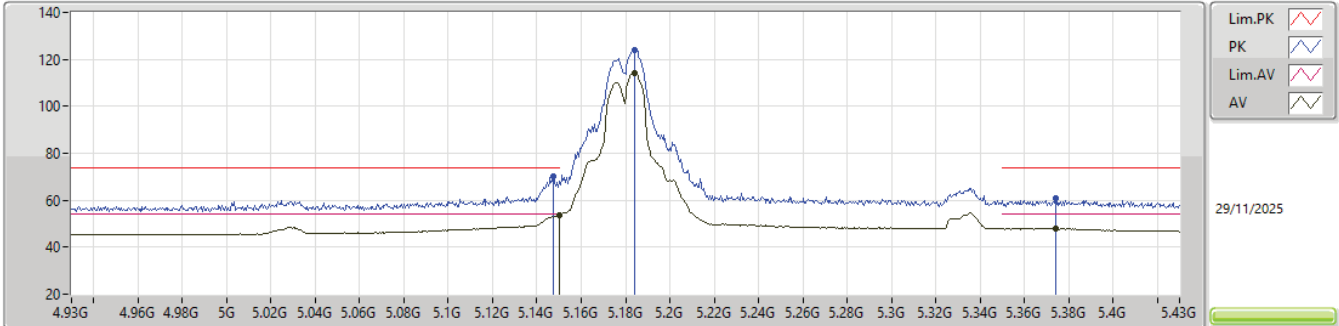


EUT_Y_4TX
Setting 19.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1475G	70.15	74.00	-3.85	64.17	3	Horizontal	358	1.72	-	33.90	7.01	34.93			
AV	5.15G	53.52	54.00	-0.48	47.54	3	Horizontal	358	1.72	-	33.90	7.01	34.93			
PK	5.184G	123.76	Inf	-Inf	117.60	3	Horizontal	358	1.72	-	34.04	7.04	34.92			
AV	5.184G	114.02	Inf	-Inf	107.86	3	Horizontal	358	1.72	-	34.04	7.04	34.92			
PK	5.374G	60.82	74.00	-13.18	53.93	3	Horizontal	358	1.72	-	34.60	7.18	34.89			
AV	5.374G	47.99	54.00	-6.01	41.10	3	Horizontal	358	1.72	-	34.60	7.18	34.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

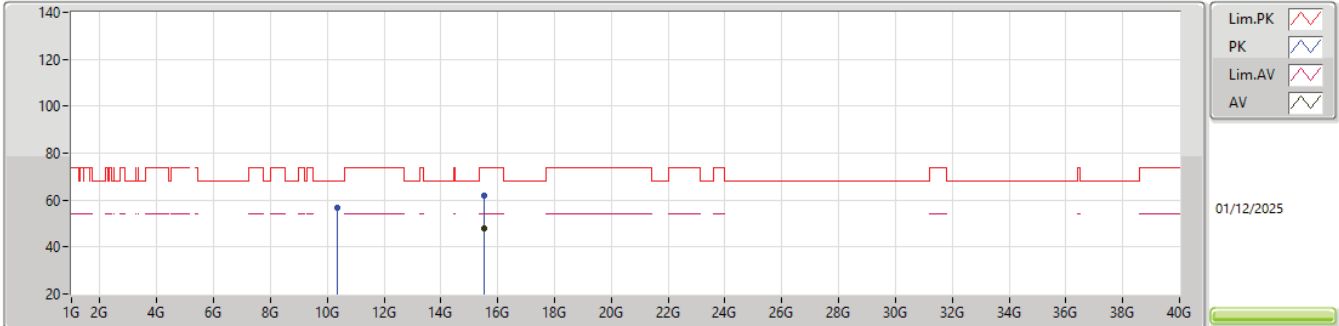


EUT_Y_4TX
Setting 19.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36304G	56.69	68.20	-11.51	43.28	3	Vertical	52	1.80	-	38.05	10.38	35.02			
PK	15.53948G	61.91	74.00	-12.09	46.51	3	Vertical	342	1.75	-	38.34	12.19	35.13			
AV	15.53914G	48.13	54.00	-5.87	32.73	3	Vertical	342	1.75	-	38.34	12.19	35.13			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

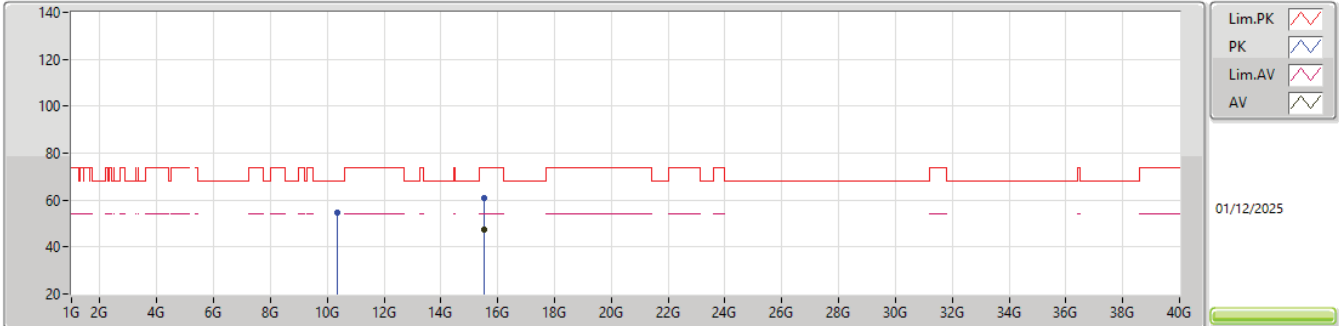


EUT_Y_4TX
Setting 19.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.34698G	54.67	68.20	-13.53	41.24	3	Horizontal	340	2.92	-	38.09	10.37	35.03			
PK	15.53466G	60.78	74.00	-13.22	45.36	3	Horizontal	164	1.82	-	38.36	12.19	35.13			
AV	15.52542G	47.35	54.00	-6.65	31.90	3	Horizontal	164	1.82	-	38.40	12.18	35.13			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

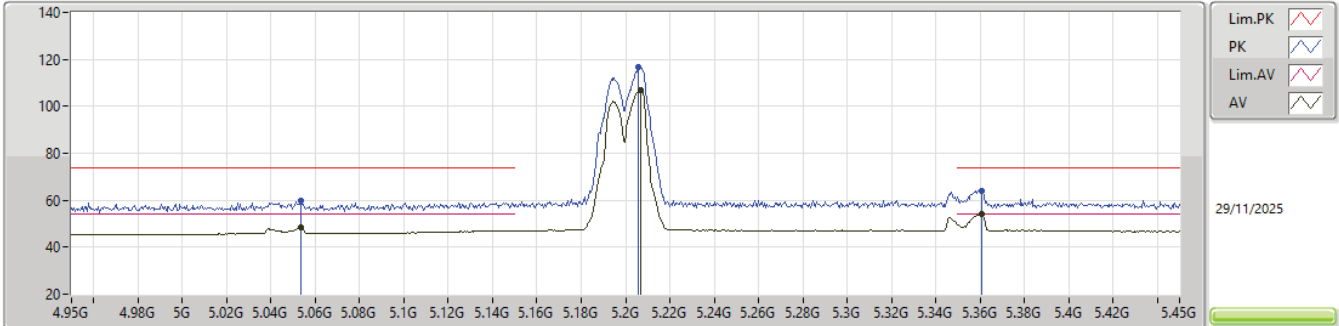


EUT_Y_4TX
Setting 13
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.0535G	59.76	74.00	-14.24	53.98	3	Vertical	354	1.57	-	33.81	6.92	34.95			
AV	5.0535G	48.39	54.00	-5.61	42.61	3	Vertical	354	1.57	-	33.81	6.92	34.95			
PK	5.2055G	116.75	Inf	-Inf	110.51	3	Vertical	354	1.57	-	34.10	7.06	34.92			
AV	5.207G	106.95	Inf	-Inf	100.71	3	Vertical	354	1.57	-	34.10	7.06	34.92			
PK	5.361G	64.18	74.00	-9.82	57.36	3	Vertical	354	1.57	-	34.54	7.17	34.89			
AV	5.3605G	53.96	54.00	-0.04	47.14	3	Vertical	354	1.57	-	34.54	7.17	34.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

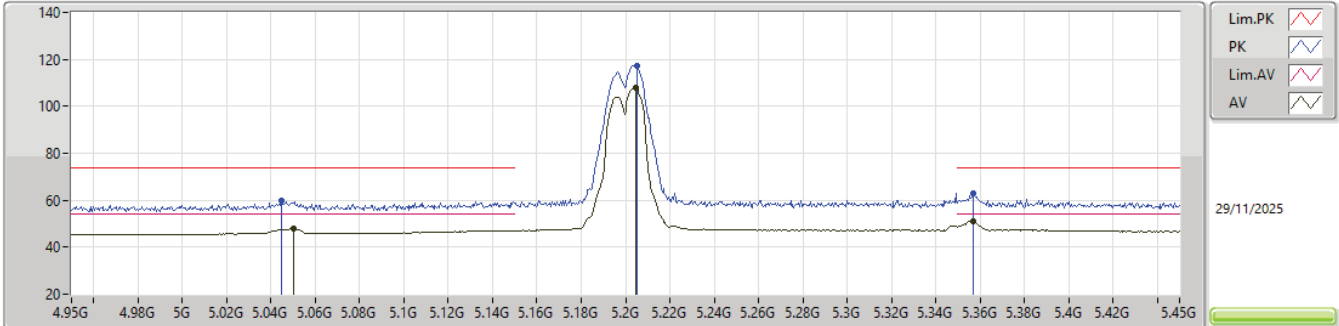


EUT_Y_4TX
Setting 13
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.045G	59.79	74.00	-14.21	54.04	3	Horizontal	356	1.75	-	33.79	6.91	34.95			
AV	5.05G	47.70	54.00	-6.30	41.93	3	Horizontal	356	1.75	-	33.80	6.92	34.95			
PK	5.205G	117.47	Inf	-Inf	111.23	3	Horizontal	356	1.75	-	34.10	7.06	34.92			
AV	5.2045G	107.84	Inf	-Inf	101.60	3	Horizontal	356	1.75	-	34.10	7.06	34.92			
PK	5.357G	62.77	74.00	-11.23	55.96	3	Horizontal	356	1.75	-	34.53	7.17	34.89			
AV	5.357G	51.11	54.00	-2.89	44.30	3	Horizontal	356	1.75	-	34.53	7.17	34.89			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

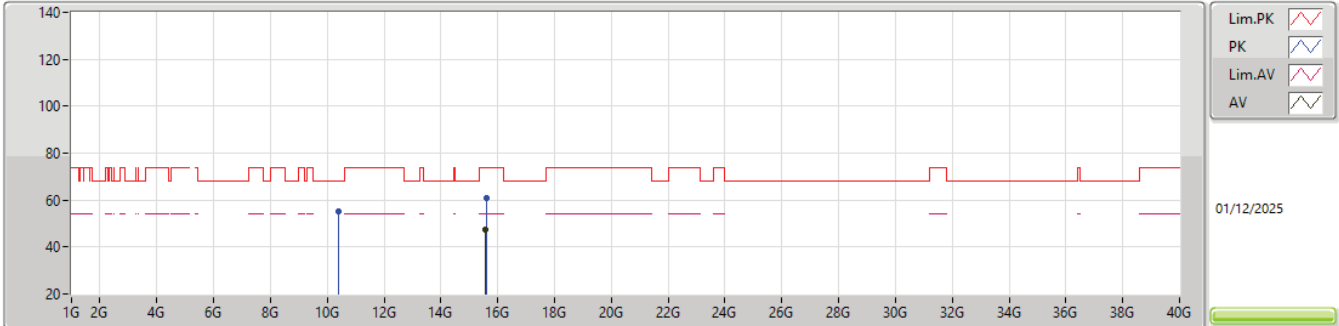


EUT_Y_4TX
Setting 13
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40282G	55.15	68.20	-13.05	41.84	3	Vertical	165	1.80	-	37.90	10.39	34.98			
PK	15.58824G	60.92	74.00	-13.08	45.69	3	Vertical	314	2.21	-	38.15	12.21	35.13			
AV	15.58722G	47.22	54.00	-6.78	31.99	3	Vertical	314	2.21	-	38.15	12.21	35.13			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

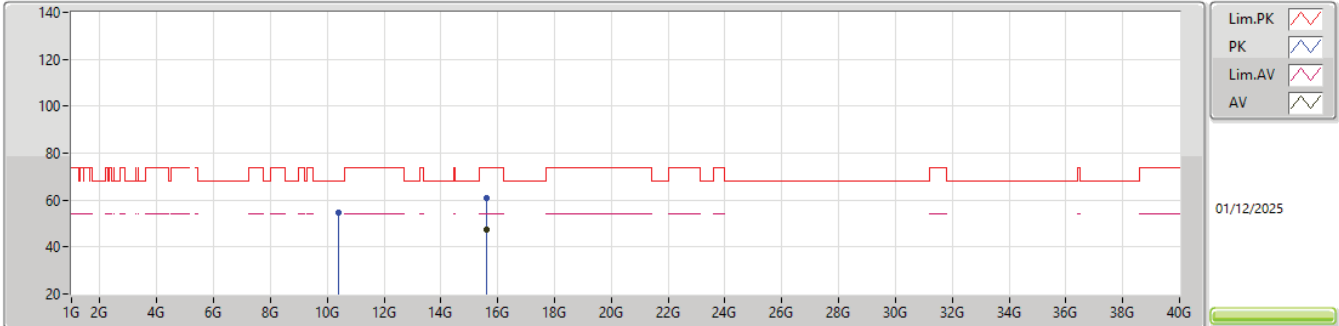


EUT_Y_4TX
Setting 13
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39448G	54.86	68.20	-13.34	41.54	3	Horizontal	224	2.94	-	37.92	10.39	34.99			
PK	15.59364G	60.80	74.00	-13.20	45.58	3	Horizontal	4	1.85	-	38.13	12.22	35.13			
AV	15.58944G	47.24	54.00	-6.76	32.02	3	Horizontal	4	1.85	-	38.14	12.21	35.13			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

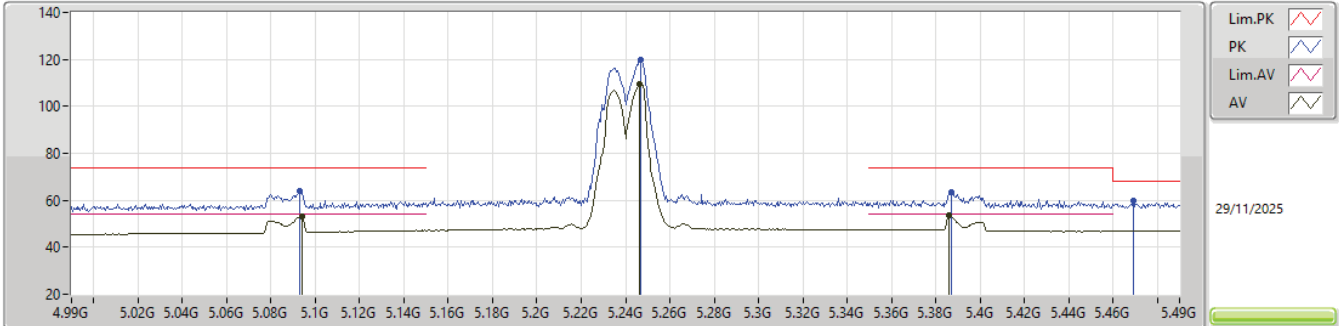


EUT_Y_4TX
Setting 17
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.093G	63.78	74.00	-10.22	57.87	3	Vertical	354	1.80	-	33.89	6.96	34.94			
AV	5.094G	53.08	54.00	-0.92	47.17	3	Vertical	354	1.80	-	33.89	6.96	34.94			
PK	5.247G	119.97	Inf	-Inf	113.69	3	Vertical	354	1.80	-	34.10	7.09	34.91			
AV	5.2465G	109.68	Inf	-Inf	103.40	3	Vertical	354	1.80	-	34.10	7.09	34.91			
PK	5.387G	63.29	74.00	-10.71	56.33	3	Vertical	354	1.80	-	34.65	7.19	34.88			
AV	5.386G	53.59	54.00	-0.41	46.64	3	Vertical	354	1.80	-	34.64	7.19	34.88			
PK	5.469G	59.74	68.20	-8.46	52.76	3	Vertical	354	1.80	-	34.60	7.25	34.87			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

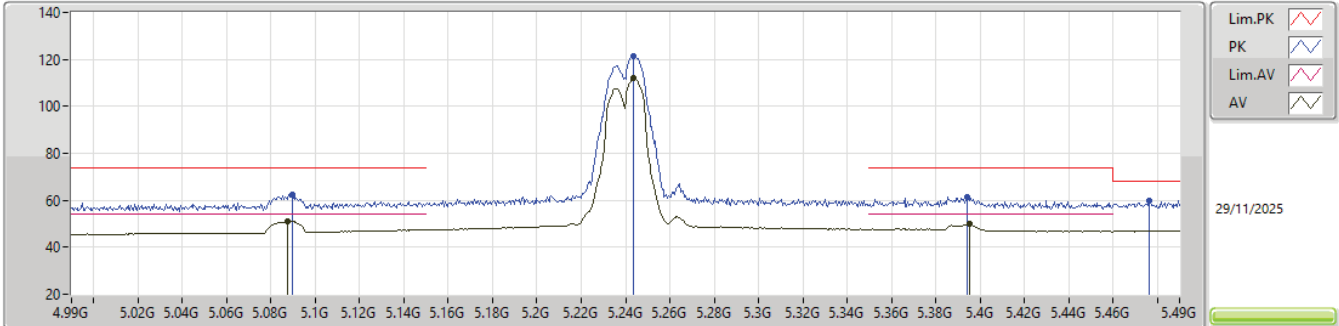


EUT_Y_4TX
Setting 17
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.0895G	62.57	74.00	-11.43	56.67	3	Horizontal	358	1.76	-	33.88	6.96	34.94				
AV	5.0875G	51.10	54.00	-2.90	45.22	3	Horizontal	358	1.76	-	33.87	6.95	34.94				
PK	5.2435G	121.44	Inf	-Inf	115.16	3	Horizontal	358	1.76	-	34.10	7.09	34.91				
AV	5.2435G	111.83	Inf	-Inf	105.55	3	Horizontal	358	1.76	-	34.10	7.09	34.91				
PK	5.394G	61.31	74.00	-12.69	54.31	3	Horizontal	358	1.76	-	34.68	7.20	34.88				
AV	5.3955G	49.76	54.00	-4.24	42.76	3	Horizontal	358	1.76	-	34.68	7.20	34.88				
PK	5.4765G	59.83	68.20	-8.37	52.83	3	Horizontal	358	1.76	-	34.60	7.26	34.86				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

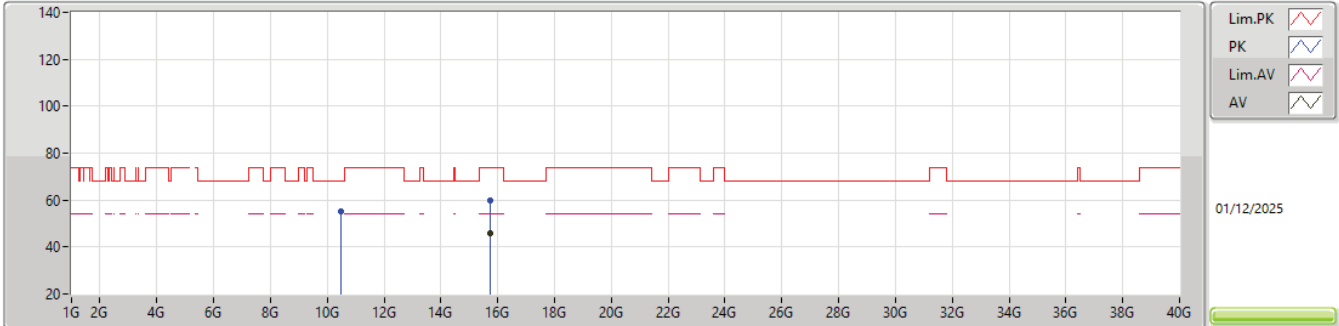


EUT_Y_4TX
Setting 17
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48261G	55.04	68.20	-13.16	41.50	3	Vertical	168	1.80	-	38.03	10.42	34.91			
PK	15.72456G	59.96	74.00	-14.04	45.12	3	Vertical	97	2.76	-	37.70	12.27	35.13			
AV	15.73338G	45.80	54.00	-8.20	30.98	3	Vertical	97	2.76	-	37.67	12.28	35.13			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

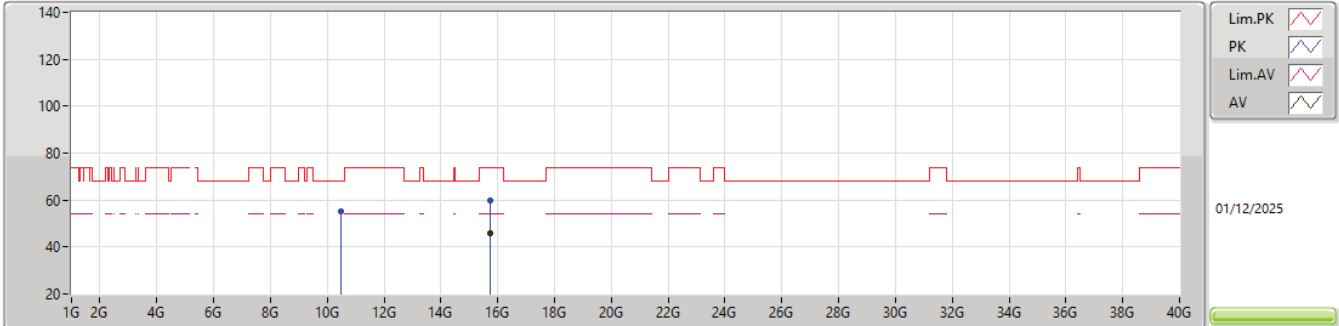


EUT_Y_4TX
Setting 17
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48024G	55.16	68.20	-13.04	41.64	3	Horizontal	157	1.80	-	38.02	10.42	34.92			
PK	15.73158G	59.58	74.00	-14.42	44.76	3	Horizontal	330	1.22	-	37.67	12.28	35.13			
AV	15.73365G	45.98	54.00	-8.02	31.16	3	Horizontal	330	1.22	-	37.67	12.28	35.13			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

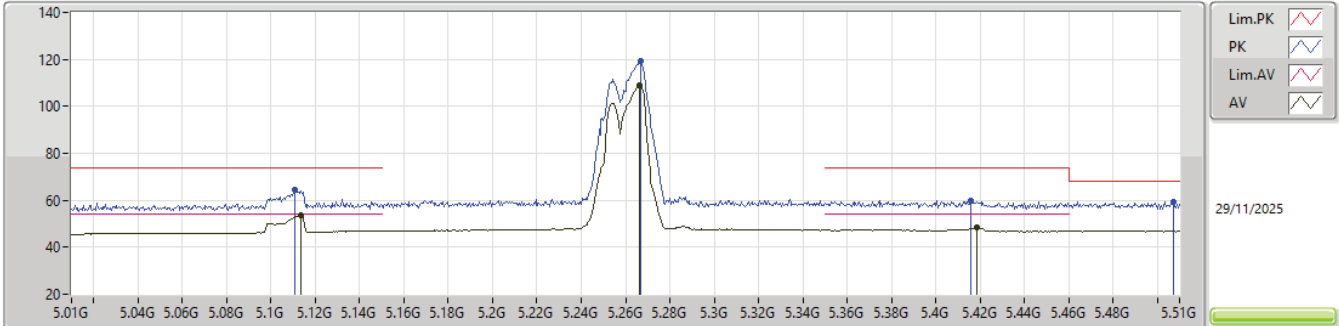


EUT_Y_4TX
Setting 17
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.111G	64.25	74.00	-9.75	58.31	3	Vertical	358	1.58	-	33.90	6.98	34.94			
AV	5.1135G	53.59	54.00	-0.41	47.65	3	Vertical	358	1.58	-	33.90	6.98	34.94			
PK	5.267G	119.07	Inf	-Inf	112.67	3	Vertical	358	1.58	-	34.20	7.11	34.91			
AV	5.2665G	108.77	Inf	-Inf	102.37	3	Vertical	358	1.58	-	34.20	7.11	34.91			
PK	5.416G	59.92	74.00	-14.08	52.92	3	Vertical	358	1.58	-	34.67	7.21	34.88			
AV	5.4185G	48.33	54.00	-5.67	41.34	3	Vertical	358	1.58	-	34.66	7.21	34.88			
PK	5.5075G	59.51	68.20	-8.69	52.50	3	Vertical	358	1.58	-	34.59	7.28	34.86			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

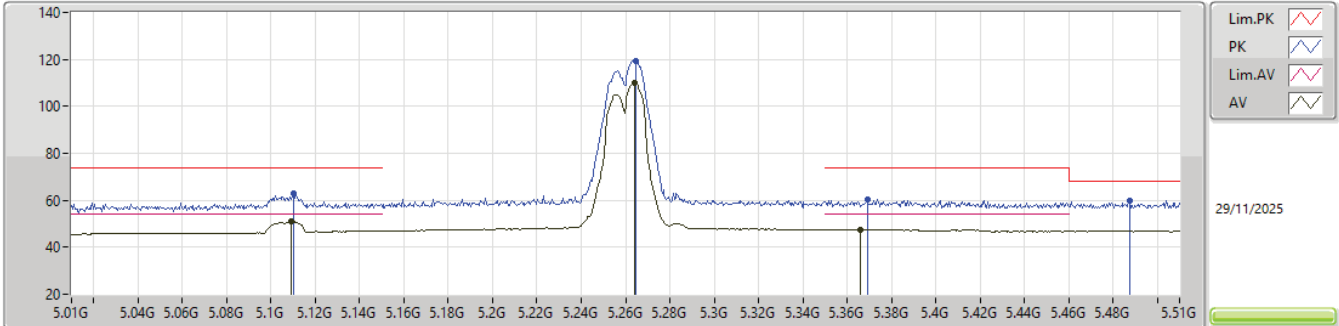


EUT_Y_4TX
Setting 17
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.11G	62.68	74.00	-11.32	56.75	3	Horizontal	358	1.78	-	33.90	6.97	34.94			
AV	5.109G	50.99	54.00	-3.01	45.06	3	Horizontal	358	1.78	-	33.90	6.97	34.94			
PK	5.2645G	119.39	Inf	-Inf	113.00	3	Horizontal	358	1.78	-	34.19	7.11	34.91			
AV	5.264G	109.89	Inf	-Inf	103.52	3	Horizontal	358	1.78	-	34.18	7.10	34.91			
PK	5.369G	60.34	74.00	-13.66	53.47	3	Horizontal	358	1.78	-	34.58	7.18	34.89			
AV	5.366G	47.63	54.00	-6.37	40.78	3	Horizontal	358	1.78	-	34.56	7.18	34.89			
PK	5.4875G	59.90	68.20	-8.30	52.89	3	Horizontal	358	1.78	-	34.60	7.27	34.86			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

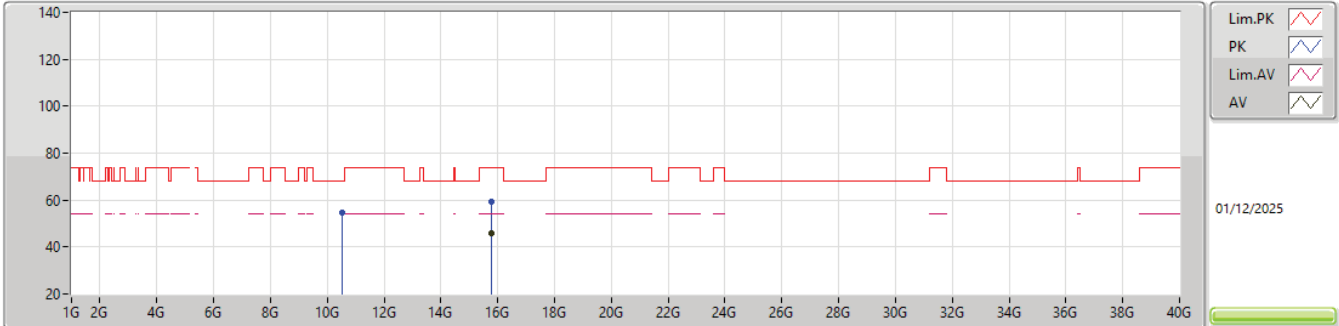


EUT_Y_4TX
Setting 17
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.52453G	54.88	68.20	-13.32	41.20	3	Vertical	106	1.48	-	38.15	10.43	34.90			
PK	15.76659G	59.44	74.00	-14.56	44.72	3	Vertical	217	1.10	-	37.57	12.29	35.14			
AV	15.77355G	45.84	54.00	-8.16	31.13	3	Vertical	217	1.10	-	37.55	12.30	35.14			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

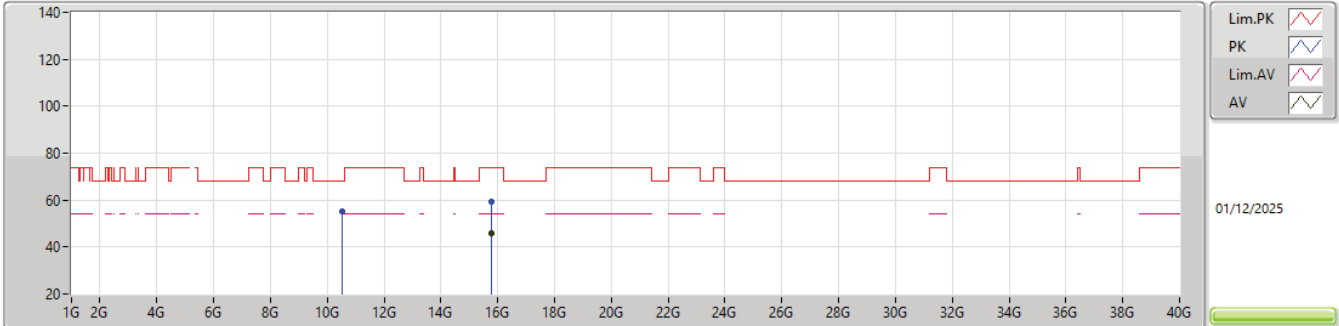


EUT_Y_4TX
Setting 17
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.52024G	54.93	68.20	-13.27	41.26	3	Horizontal	163	1.82	-	38.14	10.43	34.90			
PK	15.77763G	59.26	74.00	-14.74	44.56	3	Horizontal	348	2.51	-	37.54	12.30	35.14			
AV	15.76527G	46.04	54.00	-7.96	31.32	3	Horizontal	348	2.51	-	37.57	12.29	35.14			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

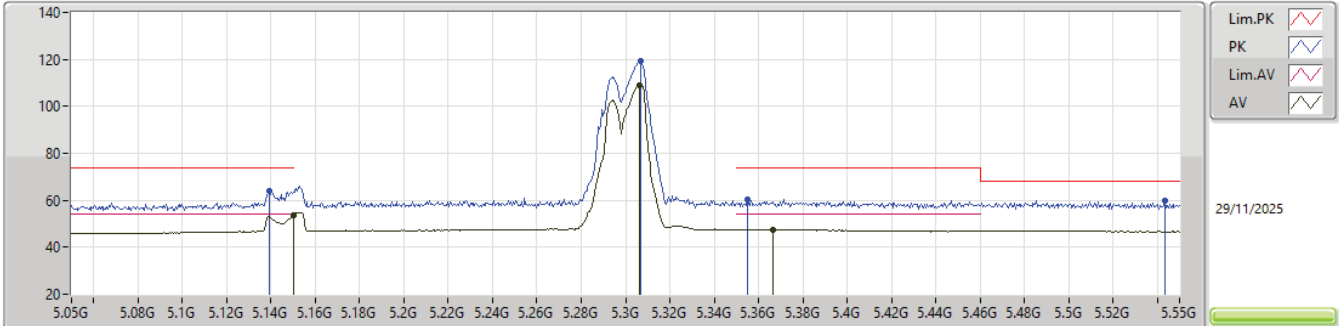


EUT_Y_4TX
Setting 15
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.139G	63.87	74.00	-10.13	57.90	3	Vertical	357	1.61	-	33.90	7.00	34.93			
AV	5.15G	53.53	54.00	-0.47	47.55	3	Vertical	357	1.61	-	33.90	7.01	34.93			
PK	5.307G	119.52	Inf	-Inf	112.88	3	Vertical	357	1.61	-	34.41	7.13	34.90			
AV	5.3065G	109.15	Inf	-Inf	102.51	3	Vertical	357	1.61	-	34.41	7.13	34.90			
PK	5.355G	60.45	74.00	-13.55	53.65	3	Vertical	357	1.61	-	34.52	7.17	34.89			
AV	5.3665G	47.61	54.00	-6.39	40.75	3	Vertical	357	1.61	-	34.57	7.18	34.89			
PK	5.5435G	59.59	68.20	-8.61	52.64	3	Vertical	357	1.61	-	34.51	7.31	34.87			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

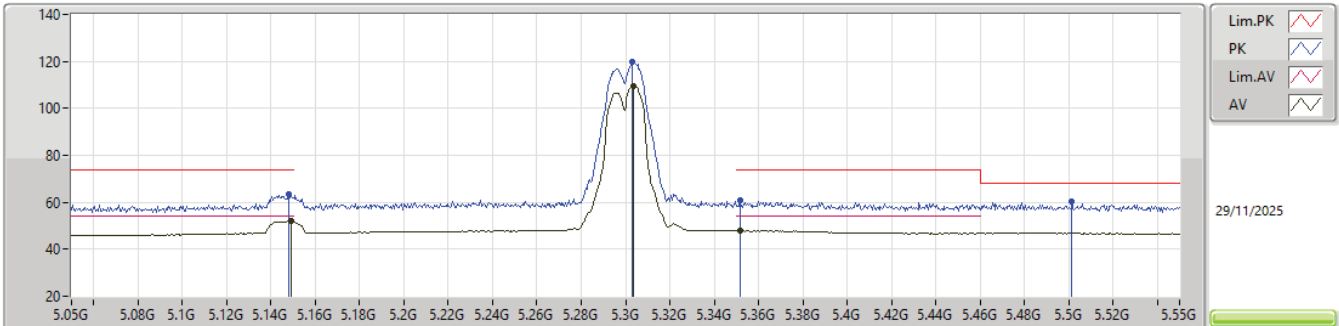


EUT_Y_4TX
Setting 15
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.148G	63.54	74.00	-10.46	57.56	3	Horizontal	358	1.59	-	33.90	7.01	34.93				
AV	5.149G	51.96	54.00	-2.04	45.98	3	Horizontal	358	1.59	-	33.90	7.01	34.93				
PK	5.303G	119.60	Inf	-Inf	112.96	3	Horizontal	358	1.59	-	34.41	7.13	34.90				
AV	5.3035G	109.60	Inf	-Inf	102.96	3	Horizontal	358	1.59	-	34.41	7.13	34.90				
PK	5.3515G	60.71	74.00	-13.29	53.92	3	Horizontal	358	1.59	-	34.51	7.17	34.89				
AV	5.3515G	47.86	54.00	-6.14	41.07	3	Horizontal	358	1.59	-	34.51	7.17	34.89				
PK	5.5015G	60.28	68.20	-7.92	53.26	3	Horizontal	358	1.59	-	34.60	7.28	34.86				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

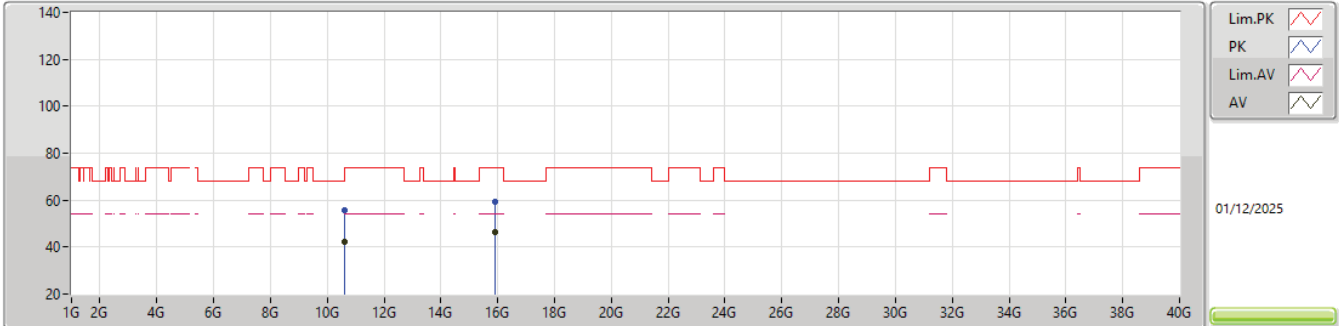


EUT_Y_4TX
Setting 15
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.59595G	55.94	68.20	-12.26	42.21	3	Vertical	132	2.24	-	38.20	10.45	34.92			
AV	10.6G	42.05	54.00	-11.95	28.31	3	Vertical	132	2.24	-	38.20	10.46	34.92			
PK	15.90678G	59.41	74.00	-14.59	44.42	3	Vertical	151	1.23	-	37.77	12.36	35.14			
AV	15.91344G	46.27	54.00	-7.73	31.30	3	Vertical	151	1.23	-	37.75	12.36	35.14			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

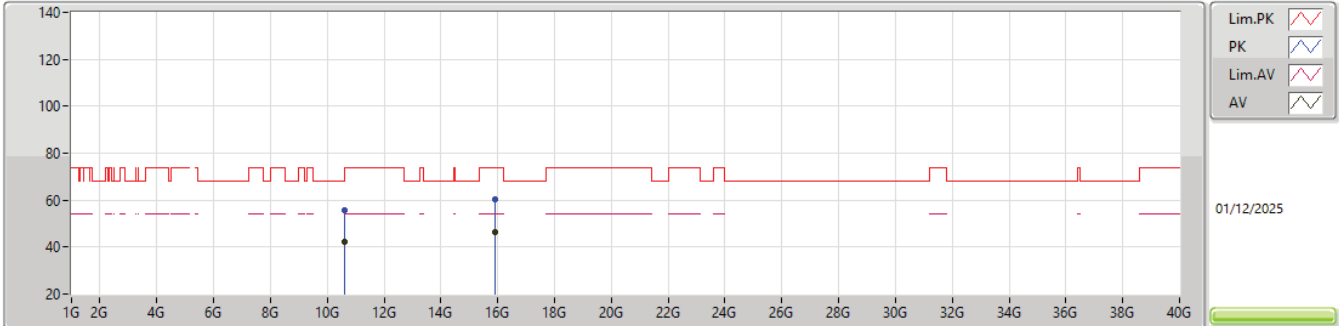


EUT_Y_4TX
Setting 15
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59601G	55.45	68.20	-12.75	41.72	3	Horizontal	140	1.54	-	38.20	10.45	34.92			
AV	10.6G	42.01	54.00	-11.99	28.27	3	Horizontal	140	1.54	-	38.20	10.46	34.92			
PK	15.9072G	60.45	74.00	-13.55	45.46	3	Horizontal	358	1.95	-	37.77	12.36	35.14			
AV	15.91356G	46.25	54.00	-7.75	31.28	3	Horizontal	358	1.95	-	37.75	12.36	35.14			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

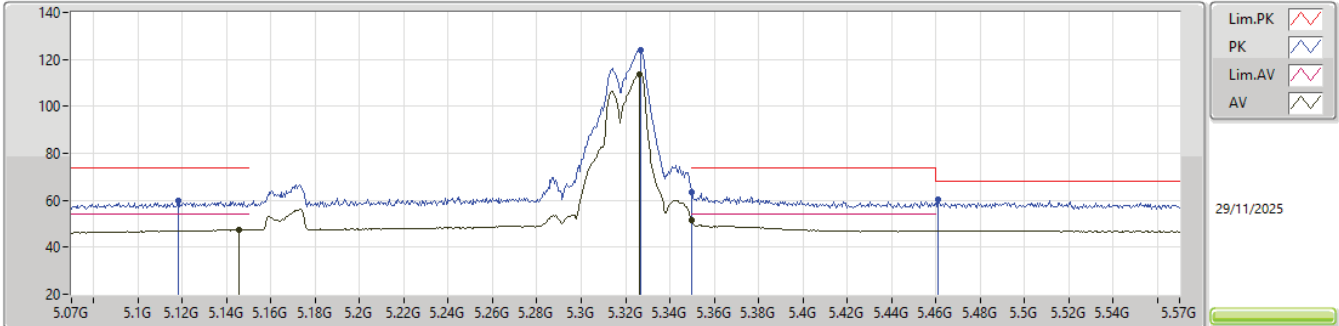


EUT_Y_4TX
Setting 20
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.118G	59.60	74.00	-14.40	53.66	3	Vertical	358	1.58	-	33.90	6.98	34.94			
AV	5.1455G	47.40	54.00	-6.60	41.42	3	Vertical	358	1.58	-	33.90	7.01	34.93			
PK	5.327G	124.04	Inf	-Inf	117.33	3	Vertical	358	1.58	-	34.45	7.15	34.89			
AV	5.3265G	113.71	Inf	-Inf	107.00	3	Vertical	358	1.58	-	34.45	7.15	34.89			
PK	5.35G	63.24	74.00	-10.76	56.46	3	Vertical	358	1.58	-	34.50	7.17	34.89			
AV	5.35G	51.56	54.00	-2.44	44.78	3	Vertical	358	1.58	-	34.50	7.17	34.89			
PK	5.461G	60.09	68.20	-8.11	53.11	3	Vertical	358	1.58	-	34.60	7.25	34.87			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

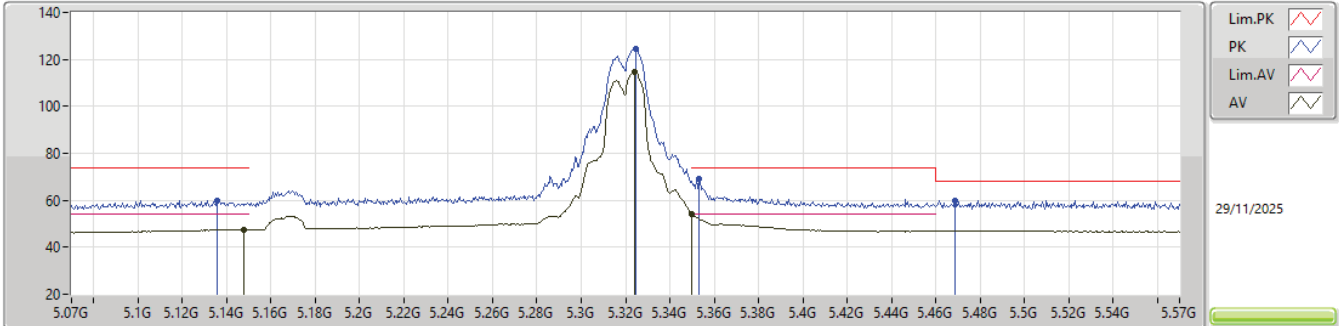


EUT_Y_4TX
Setting 20
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1355G	59.78	74.00	-14.22	53.81	3	Horizontal	357	1.62	-	33.90	7.00	34.93			
AV	5.1475G	47.46	54.00	-6.54	41.48	3	Horizontal	357	1.62	-	33.90	7.01	34.93			
PK	5.3245G	124.44	Inf	-Inf	117.74	3	Horizontal	357	1.62	-	34.45	7.15	34.90			
AV	5.324G	114.63	Inf	-Inf	107.93	3	Horizontal	357	1.62	-	34.45	7.15	34.90			
PK	5.353G	69.39	74.00	-4.61	62.60	3	Horizontal	357	1.62	-	34.51	7.17	34.89			
AV	5.35G	53.94	54.00	-0.06	47.16	3	Horizontal	357	1.62	-	34.50	7.17	34.89			
PK	5.4685G	59.91	68.20	-8.29	52.93	3	Horizontal	357	1.62	-	34.60	7.25	34.87			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

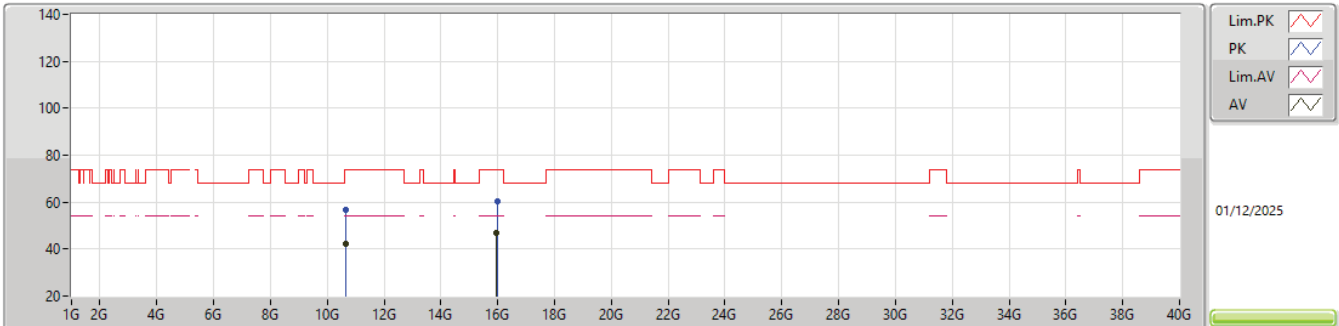


EUT_Y_4TX
Setting 20
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.63388G	56.50	74.00	-17.50	42.75	3	Vertical	168	1.80	-	38.20	10.47	34.92				
AV	10.64G	42.24	54.00	-11.76	28.50	3	Vertical	168	1.80	-	38.20	10.47	34.93				
PK	15.97323G	60.48	74.00	-13.52	45.72	3	Vertical	210	2.34	-	37.51	12.39	35.14				
AV	15.97107G	47.11	54.00	-6.89	32.34	3	Vertical	210	2.34	-	37.52	12.39	35.14				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

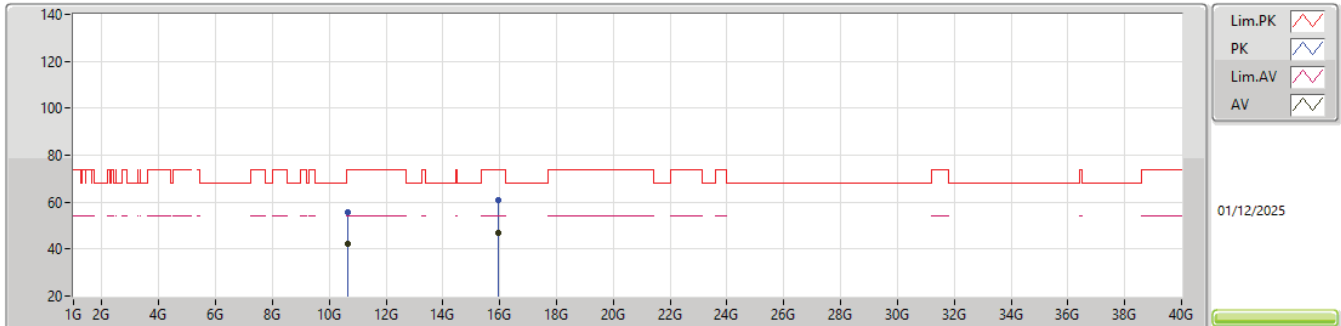


EUT_Y_4TX
Setting 20
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64189G	55.74	74.00	-18.26	42.00	3	Horizontal	162	1.80	-	38.20	10.47	34.93			
AV	10.64003G	42.19	54.00	-11.81	28.45	3	Horizontal	162	1.80	-	38.20	10.47	34.93			
PK	15.94872G	61.00	74.00	-13.00	46.15	3	Horizontal	89	2.54	-	37.61	12.38	35.14			
AV	15.96231G	46.93	54.00	-7.07	32.14	3	Horizontal	89	2.54	-	37.55	12.38	35.14			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

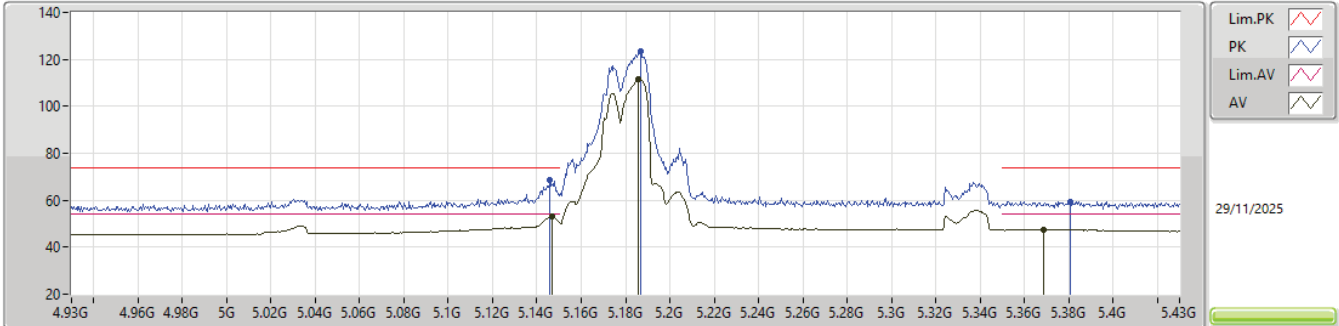


EUT_Y_4TX
Setting 18.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.146G	68.71	74.00	-5.29	62.73	3	Vertical	358	1.69	-	33.90	7.01	34.93			
AV	5.147G	53.11	54.00	-0.89	47.13	3	Vertical	358	1.69	-	33.90	7.01	34.93			
PK	5.187G	123.64	Inf	-Inf	117.46	3	Vertical	358	1.69	-	34.05	7.05	34.92			
AV	5.186G	111.61	Inf	-Inf	105.44	3	Vertical	358	1.69	-	34.04	7.05	34.92			
PK	5.3805G	59.48	74.00	-14.52	52.55	3	Vertical	358	1.69	-	34.62	7.19	34.88			
AV	5.3685G	47.60	54.00	-6.40	40.74	3	Vertical	358	1.69	-	34.57	7.18	34.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

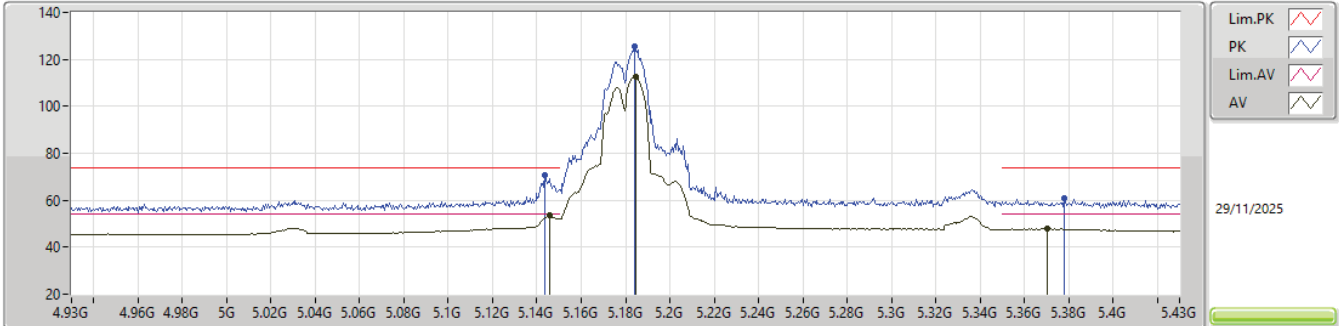


EUT_Y_4TX
Setting 18.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1435G	70.77	74.00	-3.23	64.79	3	Horizontal	356	1.80	-	33.90	7.01	34.93			
AV	5.146G	53.55	54.00	-0.45	47.57	3	Horizontal	356	1.80	-	33.90	7.01	34.93			
PK	5.184G	125.42	Inf	-Inf	119.26	3	Horizontal	356	1.80	-	34.04	7.04	34.92			
AV	5.1845G	112.56	Inf	-Inf	106.39	3	Horizontal	356	1.80	-	34.04	7.05	34.92			
PK	5.378G	60.84	74.00	-13.16	53.93	3	Horizontal	356	1.80	-	34.61	7.18	34.88			
AV	5.3705G	47.81	54.00	-6.19	40.94	3	Horizontal	356	1.80	-	34.58	7.18	34.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

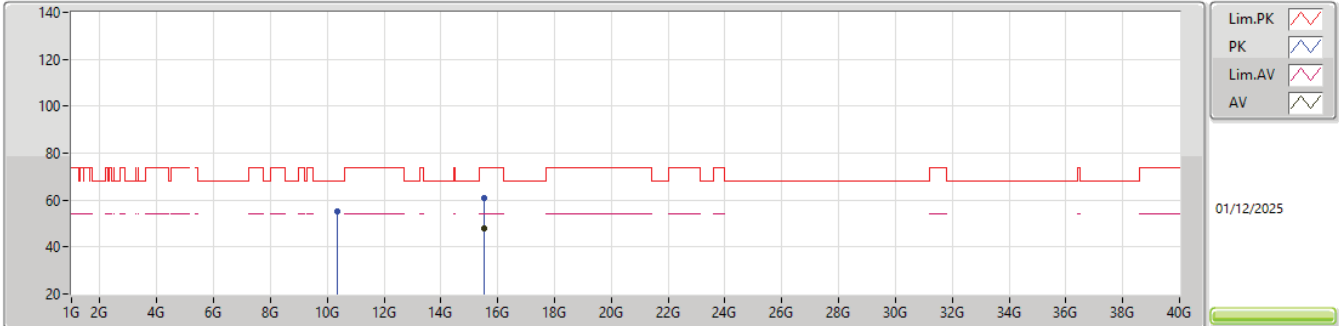


EUT_Y_4TX
Setting 18.5
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.35469G	55.13	68.20	-13.07	41.69	3	Vertical	167	1.82	-	38.08	10.38	35.02				
PK	15.52956G	60.74	74.00	-13.26	45.30	3	Vertical	316	1.32	-	38.38	12.19	35.13				
AV	15.52626G	47.90	54.00	-6.10	32.46	3	Vertical	316	1.32	-	38.39	12.18	35.13				

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5180MHz_TX

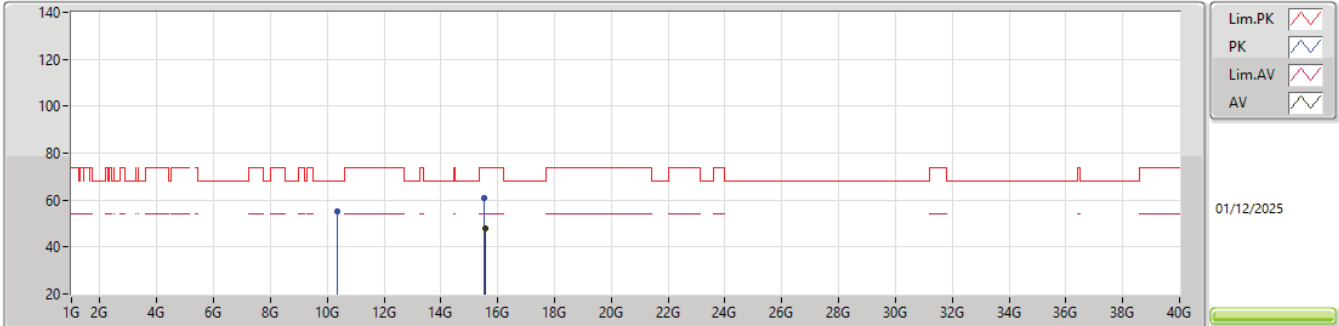


EUT_Y_4TX
Setting 18.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36246G	55.01	68.20	-13.19	41.60	3	Horizontal	164	1.83	-	38.05	10.38	35.02			
PK	15.52788G	60.73	74.00	-13.27	45.28	3	Horizontal	81	1.36	-	38.39	12.19	35.13			
AV	15.55437G	48.05	54.00	-5.95	32.70	3	Horizontal	81	1.36	-	38.28	12.20	35.13			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

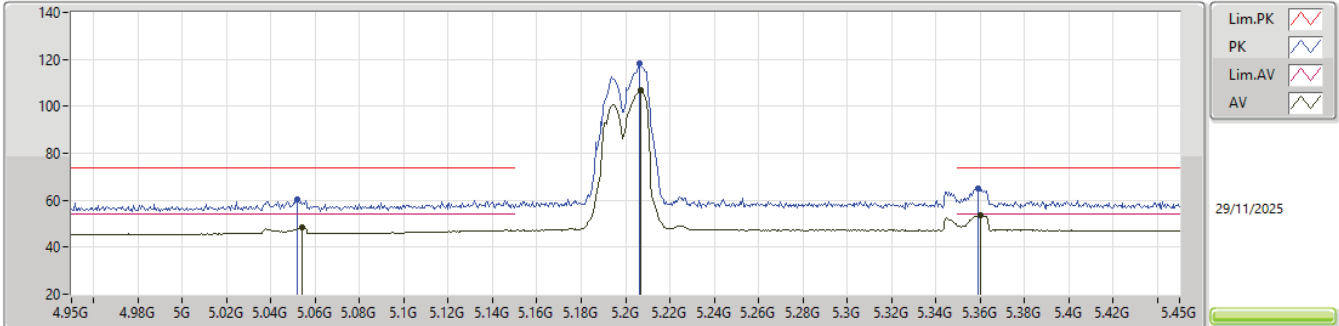


EUT_Y_4TX
Setting 13
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.052G	60.16	74.00	-13.84	54.39	3	Vertical	355	1.56	-	33.80	6.92	34.95			
AV	5.054G	48.31	54.00	-5.69	42.53	3	Vertical	355	1.56	-	33.81	6.92	34.95			
PK	5.2065G	118.23	Inf	-Inf	111.99	3	Vertical	355	1.56	-	34.10	7.06	34.92			
AV	5.207G	106.76	Inf	-Inf	100.52	3	Vertical	355	1.56	-	34.10	7.06	34.92			
PK	5.359G	65.01	74.00	-8.99	58.19	3	Vertical	355	1.56	-	34.54	7.17	34.89			
AV	5.36G	53.58	54.00	-0.42	46.76	3	Vertical	355	1.56	-	34.54	7.17	34.89			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

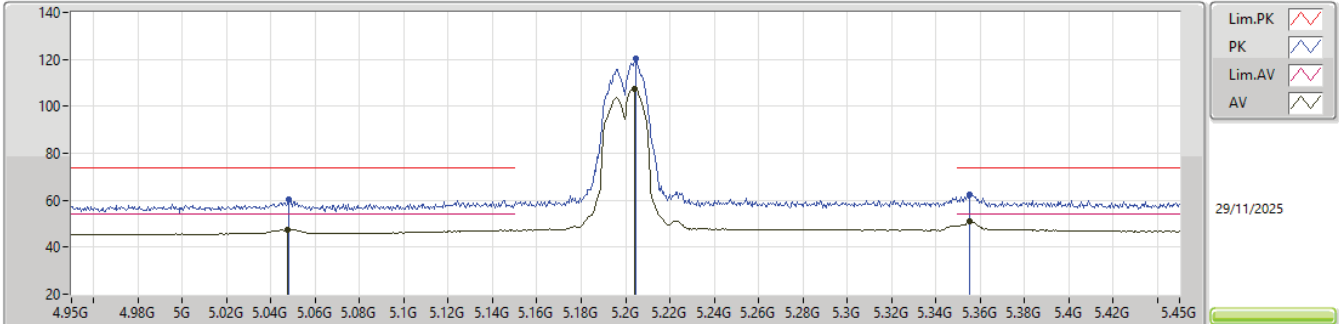


EUT Y_4TX
Setting 13
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.048G	60.09	74.00	-13.91	54.32	3	Horizontal	357	1.76	-	33.80	6.92	34.95
AV	5.0475G	47.45	54.00	-6.55	41.69	3	Horizontal	357	1.76	-	33.79	6.92	34.95
PK	5.2045G	120.12	Inf	-Inf	113.88	3	Horizontal	357	1.76	-	34.10	7.06	34.92
AV	5.204G	107.54	Inf	-Inf	101.30	3	Horizontal	357	1.76	-	34.10	7.06	34.92
PK	5.355G	62.36	74.00	-11.64	55.56	3	Horizontal	357	1.76	-	34.52	7.17	34.89
AV	5.355G	50.91	54.00	-3.09	44.11	3	Horizontal	357	1.76	-	34.52	7.17	34.89

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

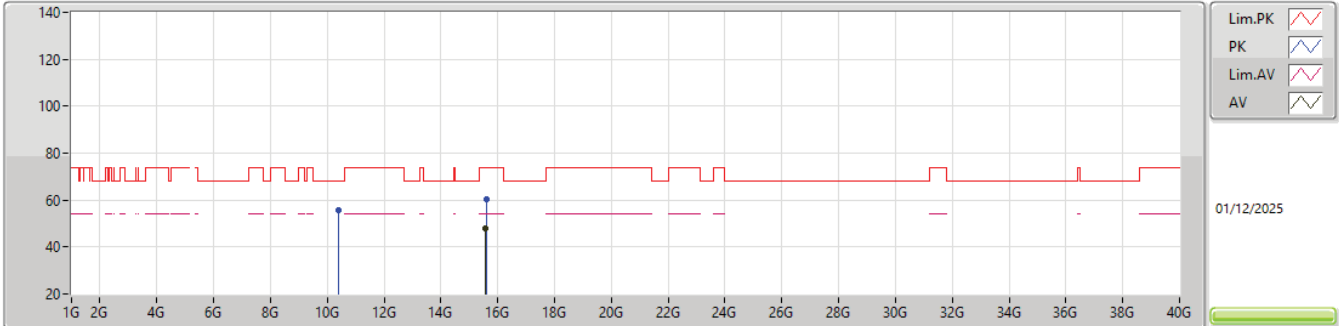


EUT_Y_4TX
Setting 13
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39943G	55.53	68.20	-12.67	42.23	3	Vertical	189	2.17	-	37.90	10.39	34.99			
PK	15.59811G	60.38	74.00	-13.62	45.18	3	Vertical	70	1.82	-	38.11	12.22	35.13			
AV	15.58653G	48.08	54.00	-5.92	32.85	3	Vertical	70	1.82	-	38.15	12.21	35.13			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5200MHz_TX

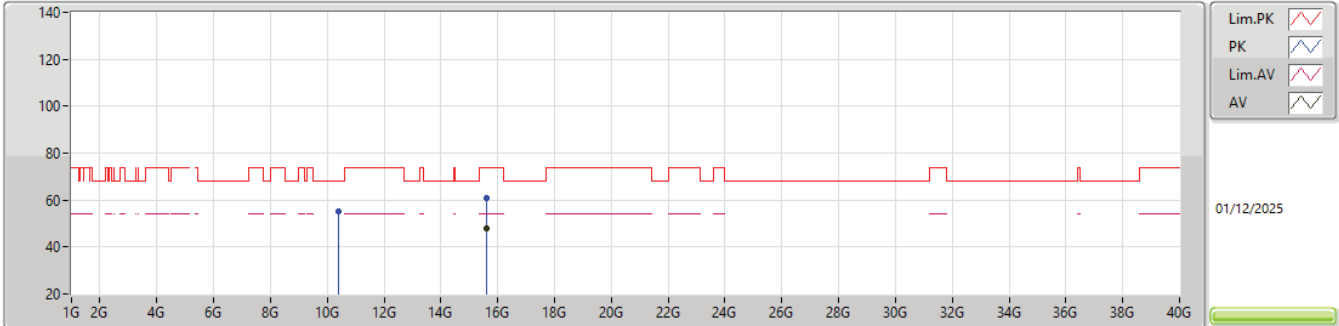


EUT_Y_4TX
Setting 13
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39931G	54.96	68.20	-13.24	41.66	3	Horizontal	202	1.58	-	37.90	10.39	34.99			
PK	15.61407G	60.61	74.00	-13.39	45.50	3	Horizontal	337	2.69	-	38.02	12.22	35.13			
AV	15.58986G	48.04	54.00	-5.96	32.82	3	Horizontal	337	2.69	-	38.14	12.21	35.13			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

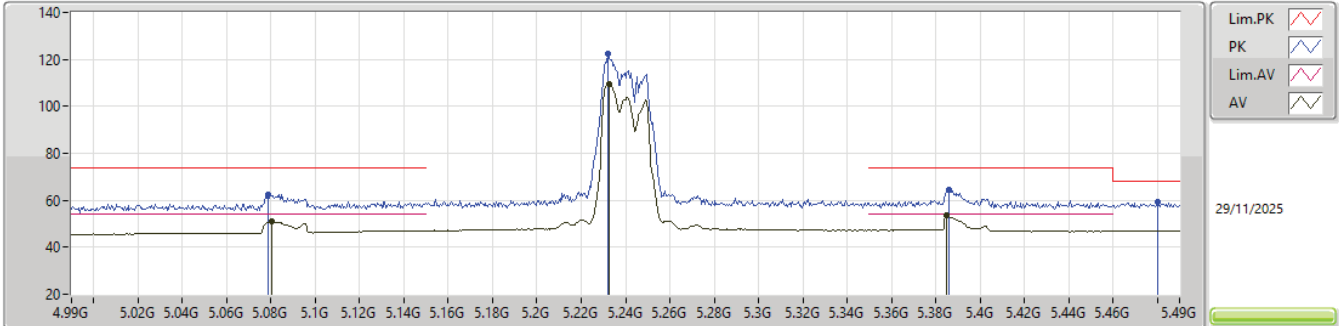


EUT_Y_4TX
Setting 17
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.0785G	62.57	74.00	-11.43	56.71	3	Vertical	16	1.80	-	33.86	6.94	34.94
AV	5.0805G	51.01	54.00	-2.99	45.14	3	Vertical	16	1.80	-	33.86	6.95	34.94
PK	5.232G	122.32	Inf	-Inf	116.05	3	Vertical	16	1.80	-	34.10	7.08	34.91
AV	5.2325G	109.49	Inf	-Inf	103.22	3	Vertical	16	1.80	-	34.10	7.08	34.91
PK	5.386G	64.72	74.00	-9.28	57.77	3	Vertical	16	1.80	-	34.64	7.19	34.88
AV	5.385G	53.58	54.00	-0.42	46.63	3	Vertical	16	1.80	-	34.64	7.19	34.88
PK	5.48G	59.24	68.20	-8.96	52.24	3	Vertical	16	1.80	-	34.60	7.26	34.86

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

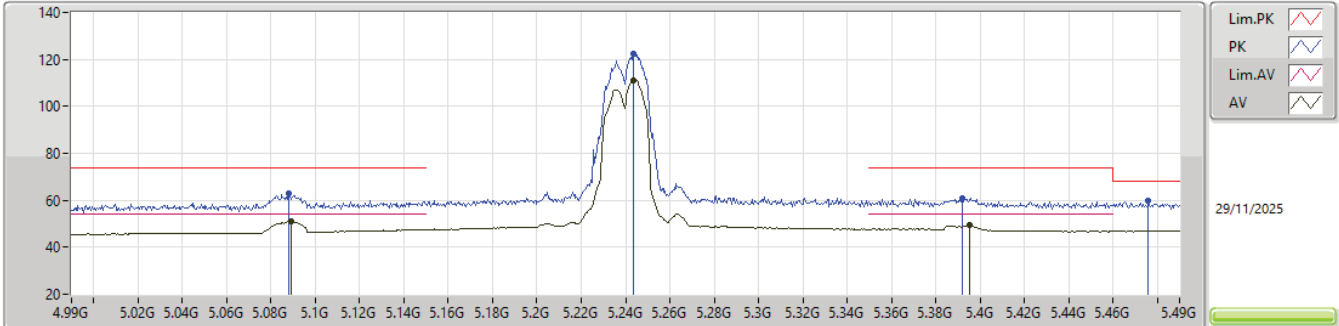


EUT_Y_4TX
Setting 17
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.088G	62.70	74.00	-11.30	56.81	3	Horizontal	357	1.77	-	33.88	6.95	34.94				
AV	5.089G	50.93	54.00	-3.07	45.04	3	Horizontal	357	1.77	-	33.88	6.95	34.94				
PK	5.2435G	122.37	Inf	-Inf	116.09	3	Horizontal	357	1.77	-	34.10	7.09	34.91				
AV	5.2435G	111.23	Inf	-Inf	104.95	3	Horizontal	357	1.77	-	34.10	7.09	34.91				
PK	5.392G	60.68	74.00	-13.32	53.70	3	Horizontal	357	1.77	-	34.67	7.19	34.88				
AV	5.395G	49.30	54.00	-4.70	42.30	3	Horizontal	357	1.77	-	34.68	7.20	34.88				
PK	5.476G	59.60	68.20	-8.60	52.60	3	Horizontal	357	1.77	-	34.60	7.26	34.86				

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

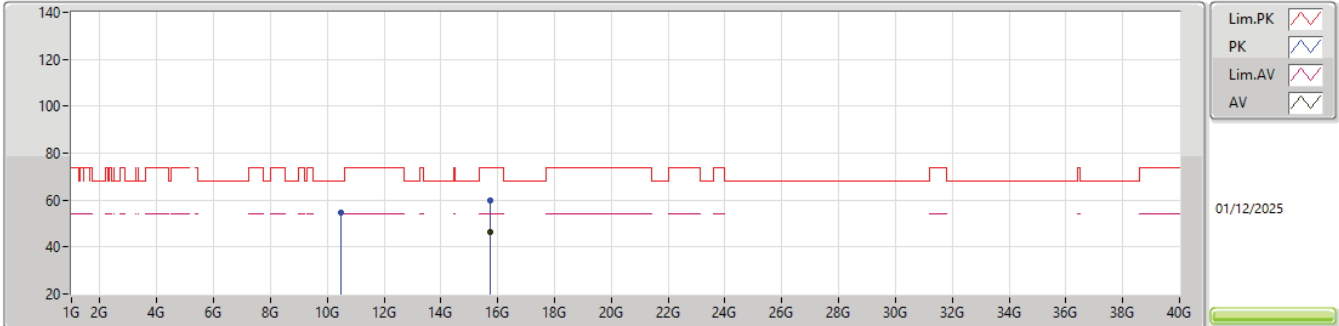


EUT_Y_4TX
Setting 17
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.49092G	54.44	68.20	-13.76	40.87	3	Vertical	202	1.58	-	38.06	10.42	34.91			
PK	15.72729G	59.71	74.00	-14.29	44.87	3	Vertical	139	1.14	-	37.69	12.28	35.13			
AV	15.73452G	46.45	54.00	-7.55	31.64	3	Vertical	139	1.14	-	37.66	12.28	35.13			

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5240MHz_TX

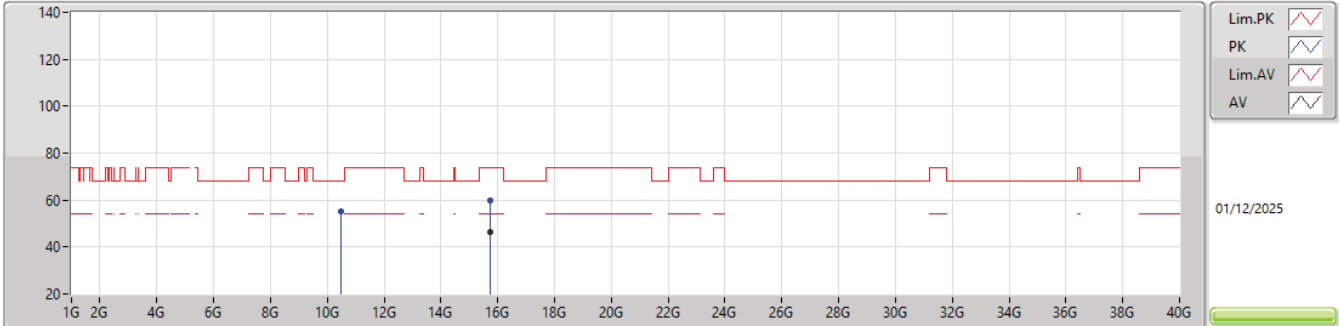


EUT_Y_4TX
Setting 17
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.46593G	55.01	68.20	-13.19	41.57	3	Horizontal	200	1.58	-	37.96	10.41	34.93			
PK	15.73401G	59.99	74.00	-14.01	45.18	3	Horizontal	82	1.80	-	37.66	12.28	35.13			
AV	15.735G	46.37	54.00	-7.63	31.56	3	Horizontal	82	1.80	-	37.66	12.28	35.13			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

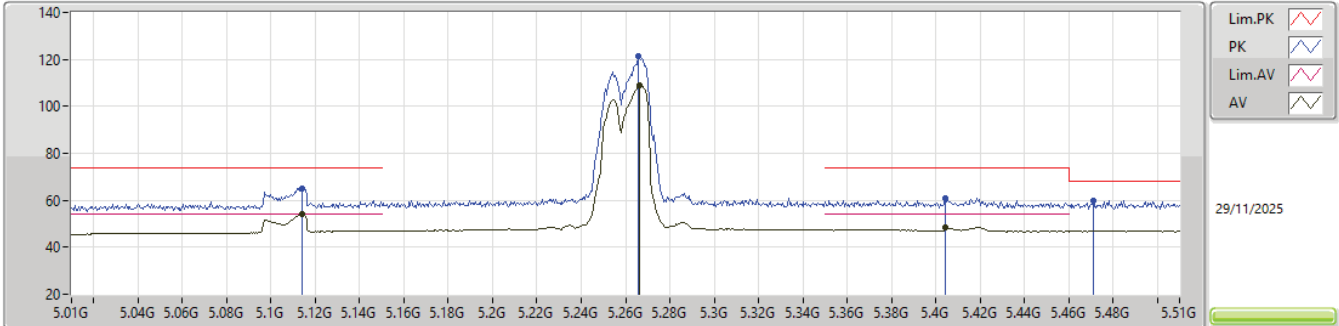


EUT_Y_4TX
Setting 16
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.114G	65.19	74.00	-8.81	59.25	3	Vertical	357	1.64	-	33.90	6.98	34.94				
AV	5.114G	53.89	54.00	-0.11	47.95	3	Vertical	357	1.64	-	33.90	6.98	34.94				
PK	5.2655G	121.14	Inf	-Inf	114.75	3	Vertical	357	1.64	-	34.19	7.11	34.91				
AV	5.2665G	109.17	Inf	-Inf	102.77	3	Vertical	357	1.64	-	34.20	7.11	34.91				
PK	5.4045G	61.02	74.00	-12.98	54.01	3	Vertical	357	1.64	-	34.69	7.20	34.88				
AV	5.4045G	48.48	54.00	-5.52	41.47	3	Vertical	357	1.64	-	34.69	7.20	34.88				
PK	5.471G	59.91	68.20	-8.29	52.93	3	Vertical	357	1.64	-	34.60	7.25	34.87				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

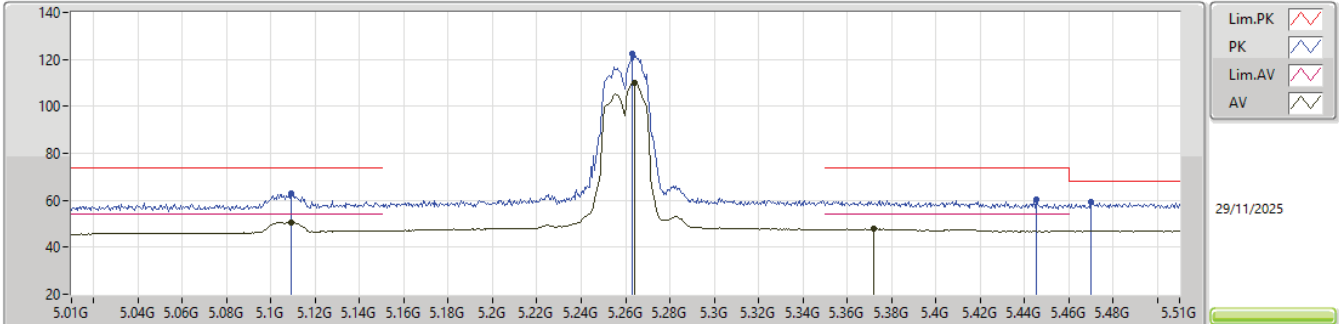


EUT_Y_4TX
Setting 16
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.109G	62.72	74.00	-11.28	56.79	3	Horizontal	360	1.80	-	33.90	6.97	34.94			
AV	5.109G	50.72	54.00	-3.28	44.79	3	Horizontal	360	1.80	-	33.90	6.97	34.94			
PK	5.263G	122.32	Inf	-Inf	115.95	3	Horizontal	360	1.80	-	34.18	7.10	34.91			
AV	5.264G	109.99	Inf	-Inf	103.62	3	Horizontal	360	1.80	-	34.18	7.10	34.91			
PK	5.4455G	60.28	74.00	-13.72	53.31	3	Horizontal	360	1.80	-	34.61	7.23	34.87			
AV	5.372G	47.76	54.00	-6.24	40.88	3	Horizontal	360	1.80	-	34.59	7.18	34.89			
PK	5.47G	59.35	68.20	-8.85	52.37	3	Horizontal	360	1.80	-	34.60	7.25	34.87			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

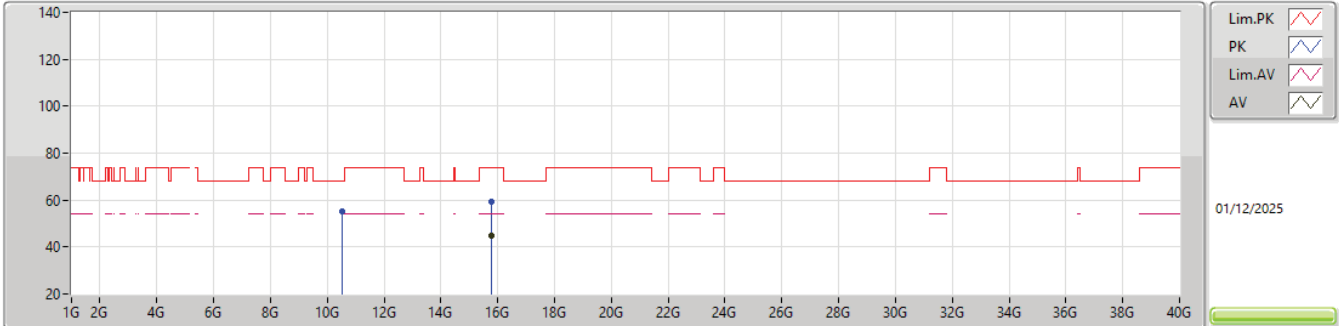


EUT_Y_4TX
Setting 16
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.52138G	54.98	68.20	-13.22	41.31	3	Vertical	335	1.22	-	38.14	10.43	34.90			
PK	15.78621G	59.10	74.00	-14.90	44.41	3	Vertical	60	2.02	-	37.53	12.30	35.14			
AV	15.76503G	45.07	54.00	-8.93	30.35	3	Vertical	60	2.02	-	37.57	12.29	35.14			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

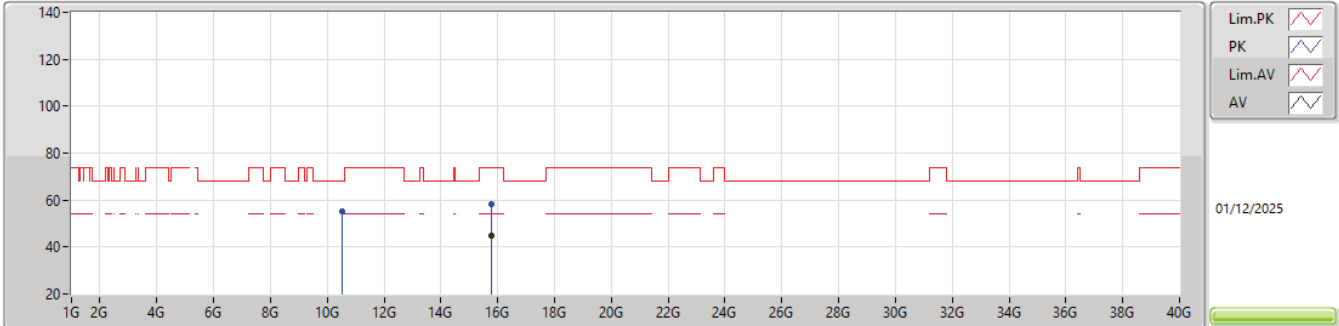


EUT_Y_4TX
Setting 16
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.526G	54.93	68.20	-13.27	41.25	3	Horizontal	257	2.25	-	38.15	10.43	34.90			
PK	15.77328G	58.22	74.00	-15.78	43.51	3	Horizontal	192	1.59	-	37.55	12.30	35.14			
AV	15.76692G	45.04	54.00	-8.96	30.32	3	Horizontal	192	1.59	-	37.57	12.29	35.14			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

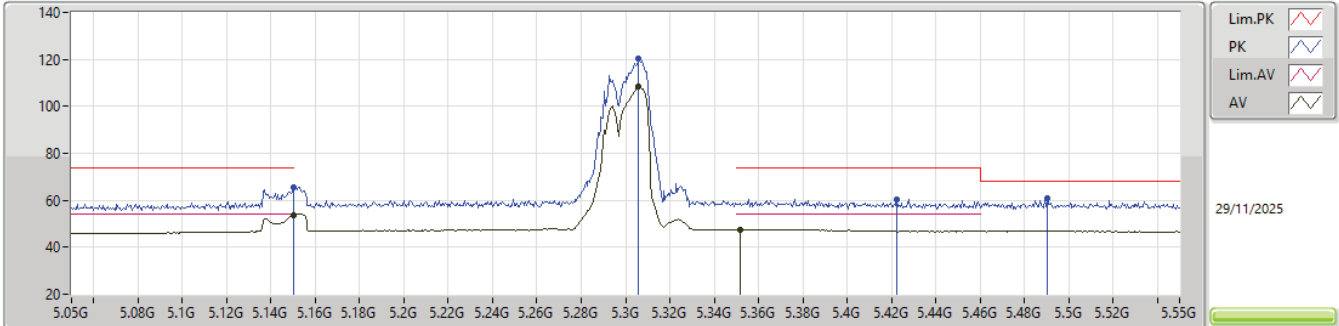


EUT_Y_4TX
Setting 15
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	65.47	74.00	-8.53	59.49	3	Vertical	360	1.58	-	33.90	7.01	34.93			
AV	5.15G	53.61	54.00	-0.39	47.63	3	Vertical	360	1.58	-	33.90	7.01	34.93			
PK	5.306G	120.41	Inf	-Inf	113.77	3	Vertical	360	1.58	-	34.41	7.13	34.90			
AV	5.306G	108.46	Inf	-Inf	101.82	3	Vertical	360	1.58	-	34.41	7.13	34.90			
AV	5.3515G	47.61	54.00	-6.39	40.82	3	Vertical	360	1.58	-	34.51	7.17	34.89			
PK	5.4225G	60.42	74.00	-13.58	53.42	3	Vertical	360	1.58	-	34.66	7.22	34.88			
PK	5.4905G	61.02	68.20	-7.18	54.01	3	Vertical	360	1.58	-	34.60	7.27	34.86			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

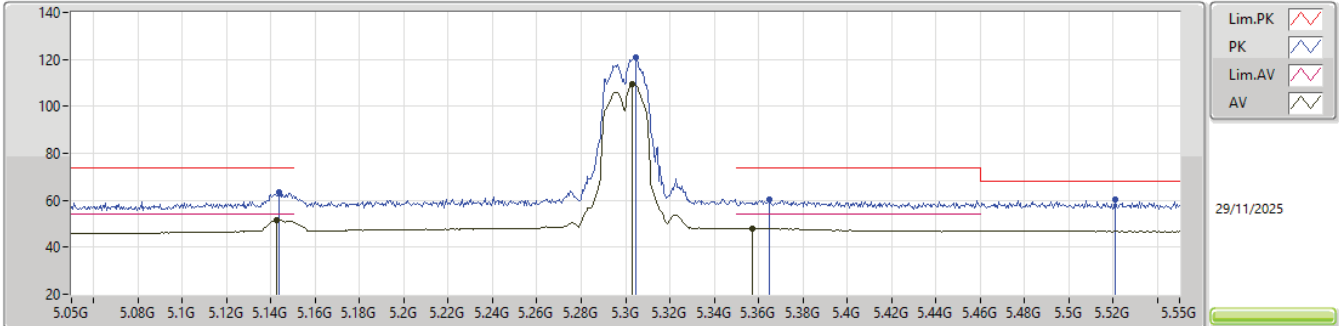


EUT_Y_4TX
Setting 15
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1435G	63.61	74.00	-10.39	57.63	3	Horizontal	360	1.58	-	33.90	7.01	34.93			
AV	5.1425G	51.55	54.00	-2.45	45.57	3	Horizontal	360	1.58	-	33.90	7.01	34.93			
PK	5.3045G	121.04	Inf	-Inf	114.40	3	Horizontal	360	1.58	-	34.41	7.13	34.90			
AV	5.303G	109.34	Inf	-Inf	102.70	3	Horizontal	360	1.58	-	34.41	7.13	34.90			
PK	5.365G	60.26	74.00	-13.74	53.41	3	Horizontal	360	1.58	-	34.56	7.18	34.89			
AV	5.375G	47.95	54.00	-6.05	41.14	3	Horizontal	360	1.58	-	34.53	7.17	34.89			
PK	5.521G	60.30	68.20	-7.90	53.32	3	Horizontal	360	1.58	-	34.56	7.29	34.87			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

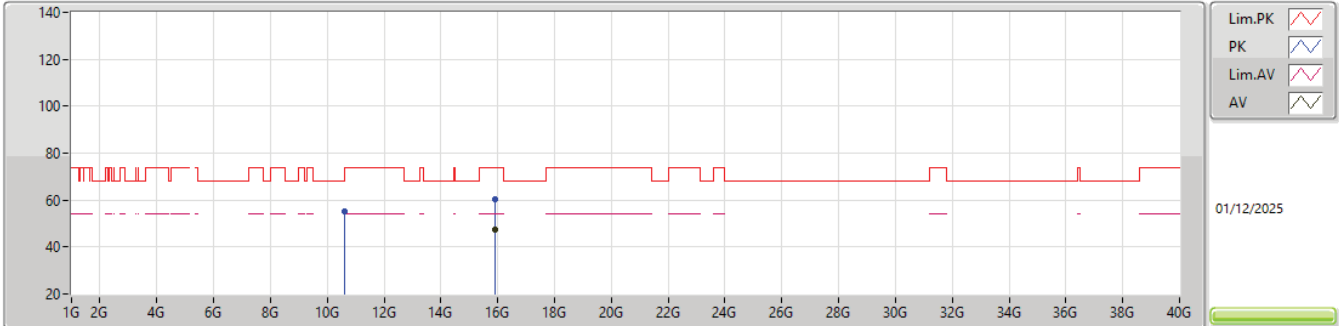


EUT_Y_4TX
Setting 15
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.60414G	55.21	74.00	-18.79	41.47	3	Vertical	202	1.58	-	38.20	10.46	34.92			
PK	15.91077G	60.46	74.00	-13.54	45.48	3	Vertical	360	1.19	-	37.76	12.36	35.14			
AV	15.91143G	47.22	54.00	-6.78	32.25	3	Vertical	360	1.19	-	37.75	12.36	35.14			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

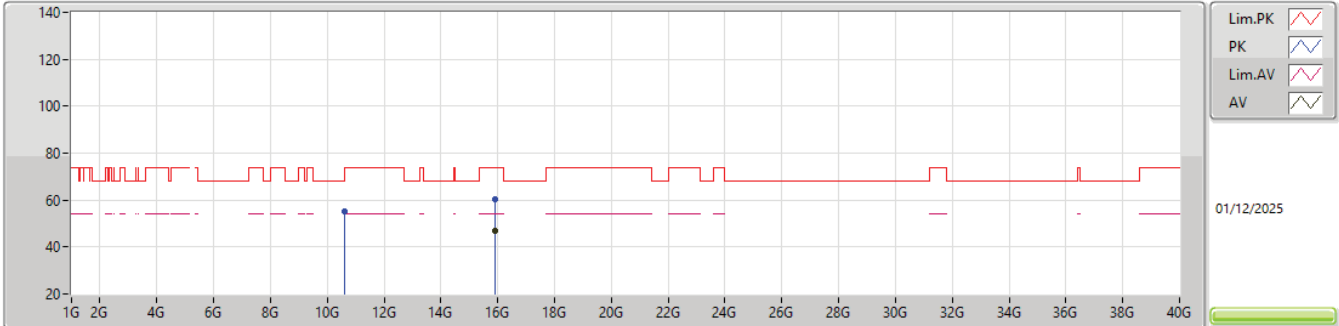


EUT_Y_4TX
Setting 15
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59868G	55.27	68.20	-12.93	41.54	3	Horizontal	217	2.15	-	38.20	10.45	34.92			
PK	15.90711G	60.60	74.00	-13.40	45.61	3	Horizontal	244	1.27	-	37.77	12.36	35.14			
AV	15.91092G	46.99	54.00	-7.01	32.01	3	Horizontal	244	1.27	-	37.76	12.36	35.14			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

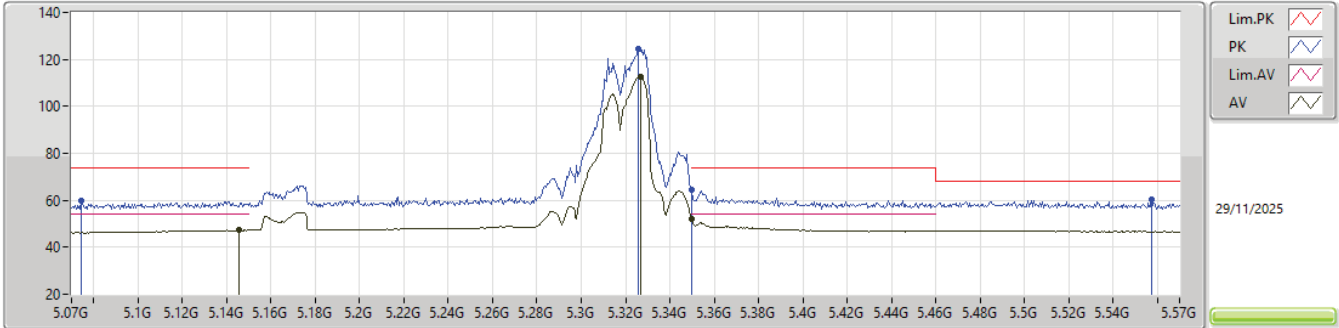


EUT_Y_4TX
Setting 19.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.0745G	59.62	74.00	-14.38	53.78	3	Vertical	358	1.65	-	33.85	6.94	34.95
AV	5.1455G	47.28	54.00	-6.72	41.30	3	Vertical	358	1.65	-	33.90	7.01	34.93
PK	5.3255G	124.74	Inf	-Inf	118.03	3	Vertical	358	1.65	-	34.45	7.15	34.89
AV	5.327G	112.81	Inf	-Inf	106.10	3	Vertical	358	1.65	-	34.45	7.15	34.89
PK	5.35G	64.68	74.00	-9.32	57.90	3	Vertical	358	1.65	-	34.50	7.17	34.89
AV	5.35G	52.10	54.00	-1.90	45.32	3	Vertical	358	1.65	-	34.50	7.17	34.89
PK	5.5575G	60.10	68.20	-8.10	53.19	3	Vertical	358	1.65	-	34.47	7.32	34.88

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

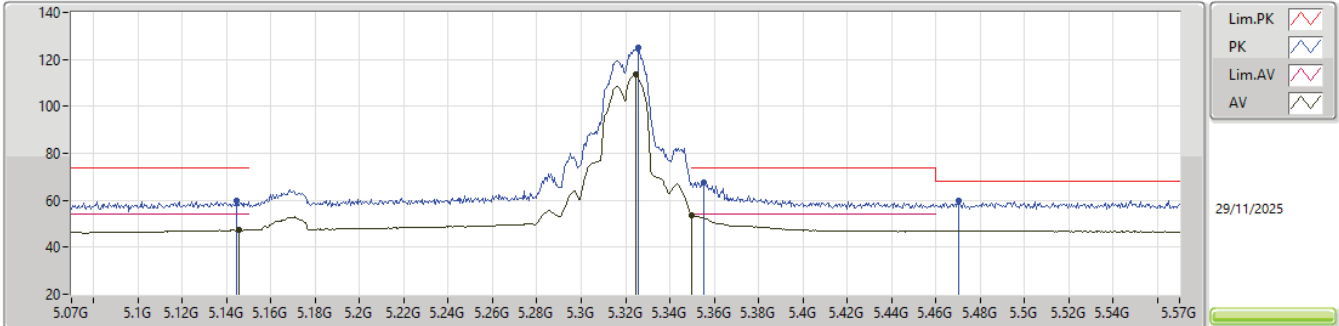


EUT_Y_4TX
Setting 19.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1445G	60.07	74.00	-13.93	54.09	3	Horizontal	357	1.82	-	33.90	7.01	34.93			
AV	5.1455G	47.29	54.00	-6.71	41.31	3	Horizontal	357	1.82	-	33.90	7.01	34.93			
PK	5.3255G	125.08	Inf	-Inf	118.37	3	Horizontal	357	1.82	-	34.45	7.15	34.89			
AV	5.3245G	113.49	Inf	-Inf	106.79	3	Horizontal	357	1.82	-	34.45	7.15	34.90			
PK	5.3555G	67.47	74.00	-6.53	60.67	3	Horizontal	357	1.82	-	34.52	7.17	34.89			
AV	5.35G	53.57	54.00	-0.43	46.79	3	Horizontal	357	1.82	-	34.50	7.17	34.89			
PK	5.4705G	59.81	68.20	-8.39	52.83	3	Horizontal	357	1.82	-	34.60	7.25	34.87			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

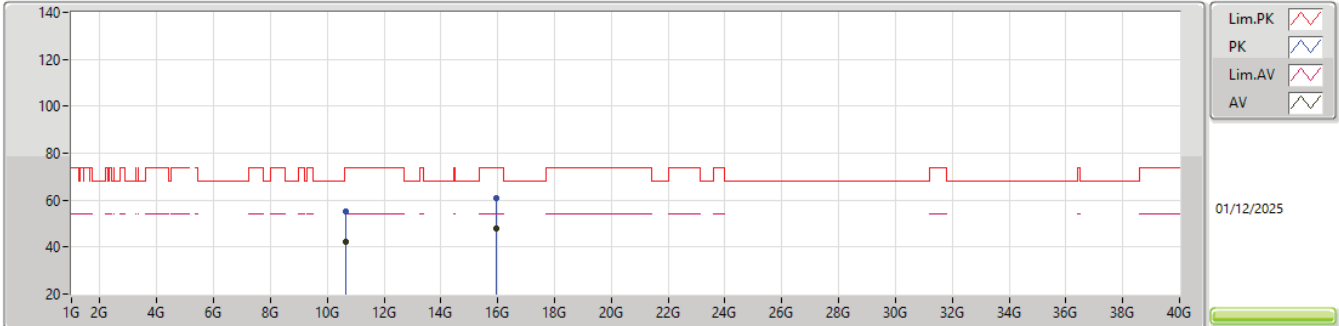


EUT_Y_4TX
Setting 19.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63829G	54.94	74.00	-19.06	41.19	3	Vertical	173	2.46	-	38.20	10.47	34.92			
AV	10.64114G	42.50	54.00	-11.50	28.76	3	Vertical	173	2.46	-	38.20	10.47	34.93			
PK	15.94602G	60.67	74.00	-13.33	45.81	3	Vertical	162	2.51	-	37.62	12.38	35.14			
AV	15.9573G	47.94	54.00	-6.06	33.13	3	Vertical	162	2.51	-	37.57	12.38	35.14			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

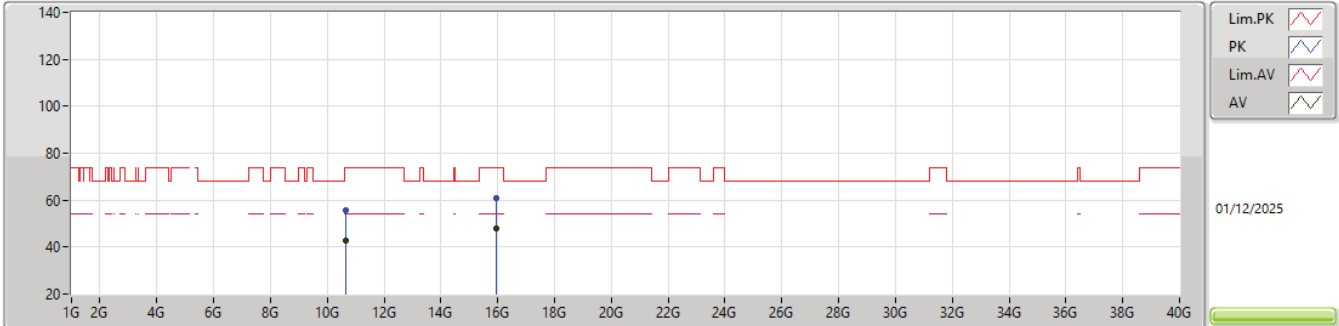


EUT_Y_4TX
Setting 19.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63922G	55.60	74.00	-18.40	41.86	3	Horizontal	102	2.49	-	38.20	10.47	34.93			
AV	10.63988G	42.73	54.00	-11.27	28.99	3	Horizontal	102	2.49	-	38.20	10.47	34.93			
PK	15.95658G	60.94	74.00	-13.06	46.13	3	Horizontal	59	1.63	-	37.57	12.38	35.14			
AV	15.96981G	48.04	54.00	-5.96	33.27	3	Horizontal	59	1.63	-	37.52	12.39	35.14			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

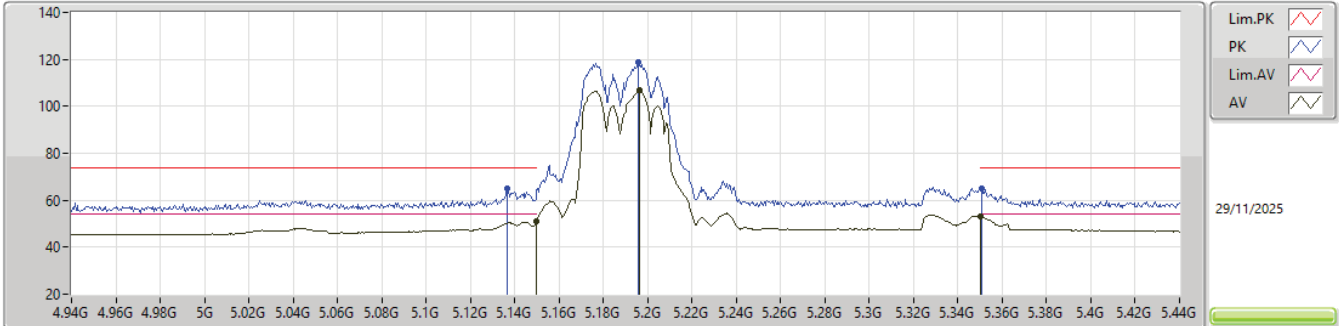


EUT_Y_4TX
Setting 16.5
03-P-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1365G	65.03	74.00	-8.97	59.06	3	Vertical	358	1.66	-	33.90	7.00	34.93			
AV	5.15G	51.01	54.00	-2.99	45.03	3	Vertical	358	1.66	-	33.90	7.01	34.93			
PK	5.1955G	118.89	Inf	-Inf	112.67	3	Vertical	358	1.66	-	34.08	7.06	34.92			
AV	5.1965G	106.88	Inf	-Inf	100.65	3	Vertical	358	1.66	-	34.09	7.06	34.92			
PK	5.351G	65.13	74.00	-8.87	58.35	3	Vertical	358	1.66	-	34.50	7.17	34.89			
AV	5.35G	53.21	54.00	-0.79	46.43	3	Vertical	358	1.66	-	34.50	7.17	34.89			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

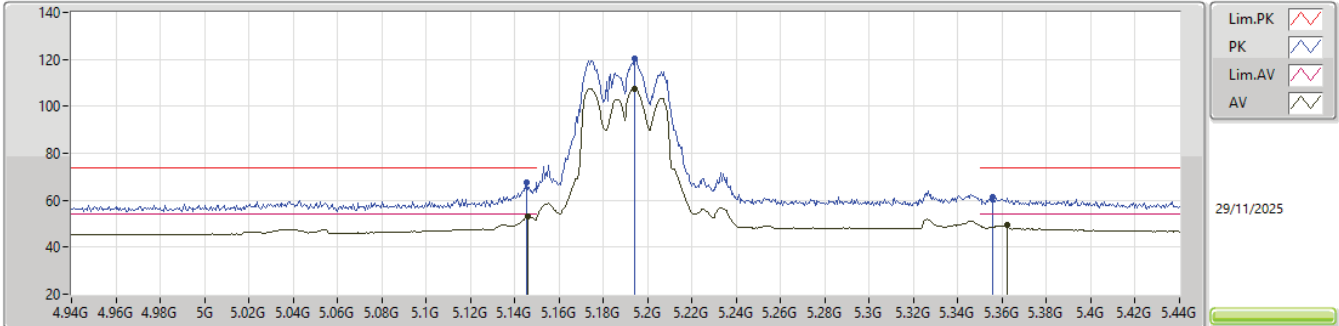


EUT_Y_4TX
Setting 16.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1455G	67.51	74.00	-6.49	61.53	3	Horizontal	356	1.79	-	33.90	7.01	34.93			
AV	5.146G	53.05	54.00	-0.95	47.07	3	Horizontal	356	1.79	-	33.90	7.01	34.93			
PK	5.194G	120.15	Inf	-Inf	113.94	3	Horizontal	356	1.79	-	34.08	7.05	34.92			
AV	5.194G	107.66	Inf	-Inf	101.45	3	Horizontal	356	1.79	-	34.08	7.05	34.92			
PK	5.3555G	61.18	74.00	-12.82	54.38	3	Horizontal	356	1.79	-	34.52	7.17	34.89			
AV	5.3625G	49.67	54.00	-4.33	42.84	3	Horizontal	356	1.79	-	34.55	7.17	34.89			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

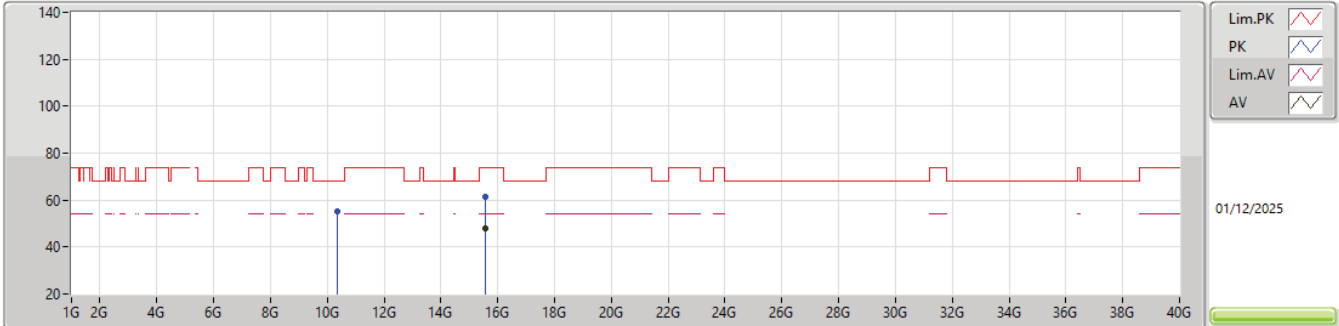


EUT_Y_4TX
Setting 16.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.37508G	55.30	68.20	-12.90	41.93	3	Vertical	132	2.51	-	38.00	10.38	35.01			
PK	15.56946G	61.14	74.00	-12.86	45.85	3	Vertical	195	1.88	-	38.22	12.20	35.13			
AV	15.55839G	48.05	54.00	-5.95	32.71	3	Vertical	195	1.88	-	38.27	12.20	35.13			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5190MHz_TX

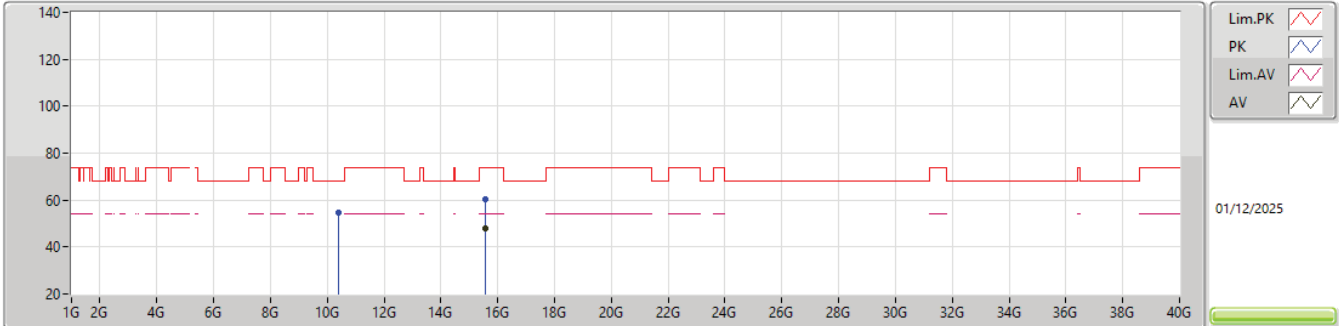


EUT_Y_4TX
Setting 16.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.37805G	54.78	68.20	-13.42	41.41	3	Horizontal	3	1.44	-	37.99	10.38	35.00			
PK	15.58341G	60.59	74.00	-13.41	45.34	3	Horizontal	103	1.13	-	38.17	12.21	35.13			
AV	15.57951G	47.92	54.00	-6.08	32.66	3	Horizontal	103	1.13	-	38.18	12.21	35.13			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

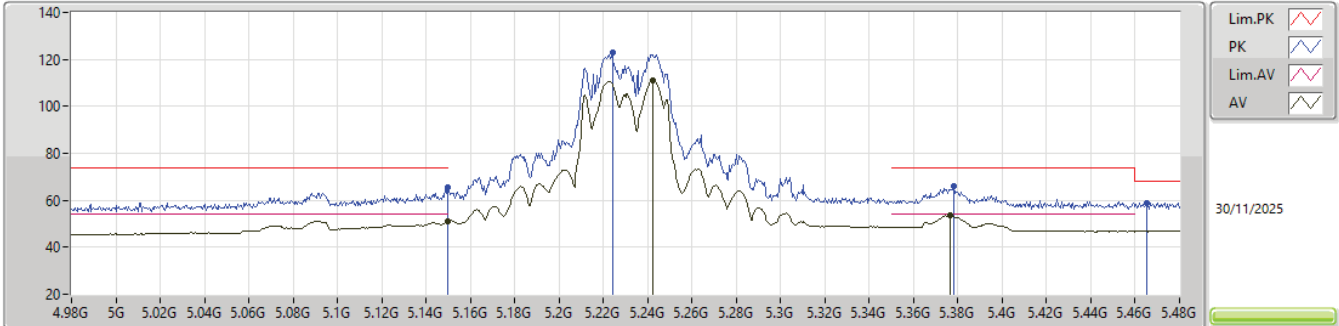


EUT_Y_4TX
Setting 21
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1495G	65.54	74.00	-8.46	59.56	3	Vertical	15	1.79	-	33.90	7.01	34.93			
AV	5.15G	51.17	54.00	-2.83	45.19	3	Vertical	15	1.79	-	33.90	7.01	34.93			
PK	5.224G	122.73	Inf	-Inf	116.47	3	Vertical	15	1.79	-	34.10	7.08	34.92			
AV	5.2425G	111.01	Inf	-Inf	104.73	3	Vertical	15	1.79	-	34.10	7.09	34.91			
PK	5.378G	66.03	74.00	-7.97	59.12	3	Vertical	15	1.79	-	34.61	7.18	34.88			
AV	5.3765G	53.57	54.00	-0.43	46.66	3	Vertical	15	1.79	-	34.61	7.18	34.88			
PK	5.465G	59.02	68.20	-9.18	52.04	3	Vertical	15	1.79	-	34.60	7.25	34.87			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

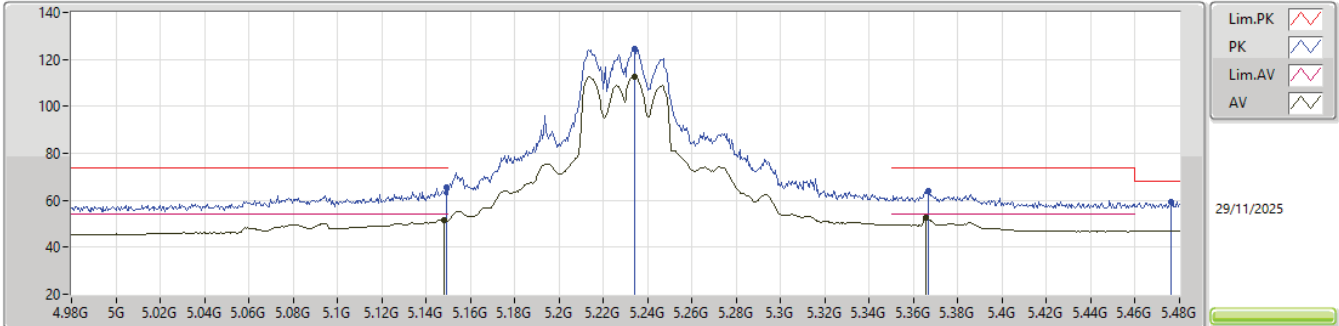


EUT_Y_4TX
Setting 21
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.149G	65.75	74.00	-8.25	59.77	3	Horizontal	356	1.73	-	33.90	7.01	34.93			
AV	5.148G	51.56	54.00	-2.44	45.58	3	Horizontal	356	1.73	-	33.90	7.01	34.93			
PK	5.234G	124.29	Inf	-Inf	118.02	3	Horizontal	356	1.73	-	34.10	7.08	34.91			
AV	5.234G	112.71	Inf	-Inf	106.44	3	Horizontal	356	1.73	-	34.10	7.08	34.91			
PK	5.3665G	63.83	74.00	-10.17	56.97	3	Horizontal	356	1.73	-	34.57	7.18	34.89			
AV	5.3655G	52.46	54.00	-1.54	45.61	3	Horizontal	356	1.73	-	34.56	7.18	34.89			
PK	5.476G	59.54	68.20	-8.66	52.54	3	Horizontal	356	1.73	-	34.60	7.26	34.86			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

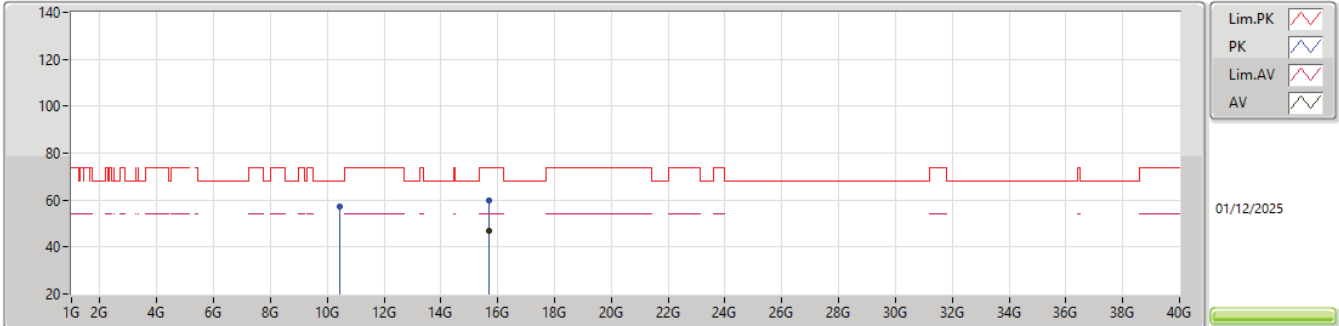


EUT_Y_4TX
Setting 21
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.45559G	57.40	68.20	-10.80	44.01	3	Vertical	315	2.92	-	37.92	10.41	34.94			
PK	15.69342G	59.73	74.00	-14.27	44.80	3	Vertical	3	1.02	-	37.80	12.26	35.13			
AV	15.67824G	46.75	54.00	-7.25	31.83	3	Vertical	3	1.02	-	37.80	12.25	35.13			

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5230MHz_TX

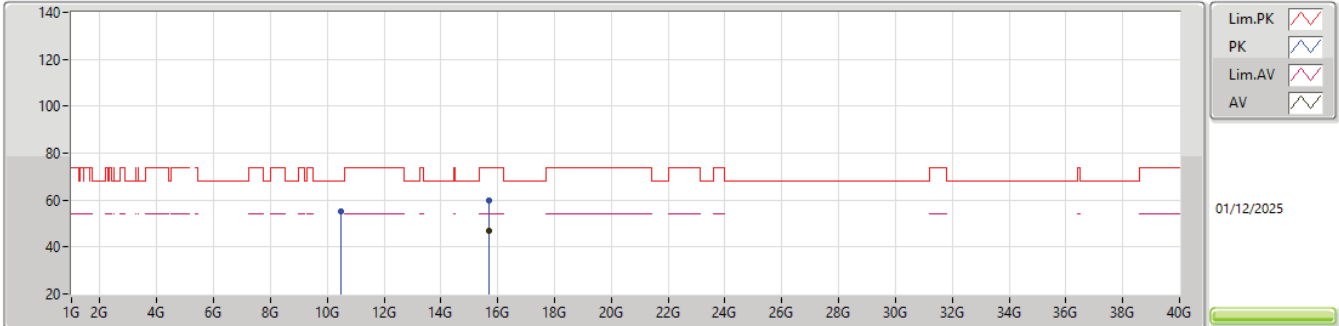


EUT_Y_4TX
Setting 21
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47251G	55.01	68.20	-13.19	41.53	3	Horizontal	209	1.73	-	37.99	10.41	34.92			
PK	15.67647G	59.83	74.00	-14.17	44.91	3	Horizontal	119	2.30	-	37.80	12.25	35.13			
AV	15.67803G	46.73	54.00	-7.27	31.81	3	Horizontal	119	2.30	-	37.80	12.25	35.13			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

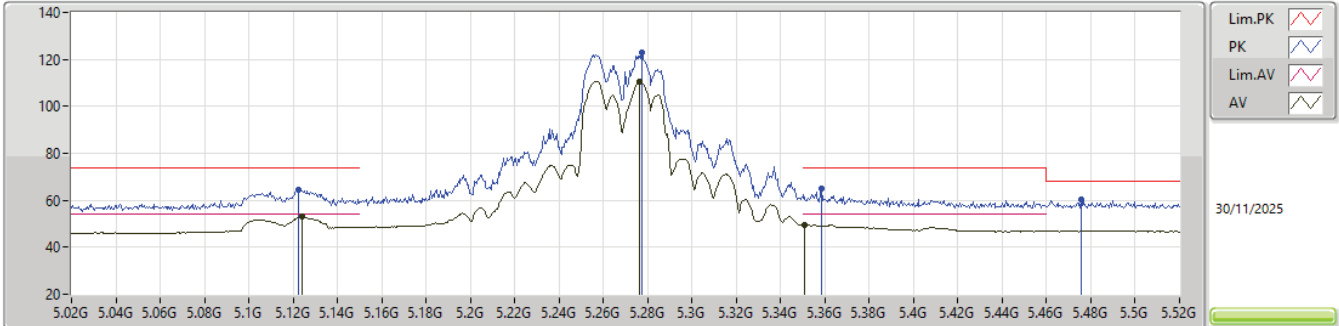


EUT_Y_4TX
Setting 20.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1225G	64.64	74.00	-9.36	58.69	3	Vertical	356	1.66	-	33.90	6.99	34.94			
AV	5.124G	52.94	54.00	-1.06	46.99	3	Vertical	356	1.66	-	33.90	6.99	34.94			
PK	5.2775G	123.15	Inf	-Inf	116.67	3	Vertical	356	1.66	-	34.27	7.11	34.90			
AV	5.2765G	110.57	Inf	-Inf	104.10	3	Vertical	356	1.66	-	34.26	7.11	34.90			
PK	5.3585G	65.06	74.00	-8.94	58.25	3	Vertical	356	1.66	-	34.53	7.17	34.89			
AV	5.351G	49.61	54.00	-4.39	42.83	3	Vertical	356	1.66	-	34.50	7.17	34.89			
PK	5.4755G	60.19	68.20	-8.01	53.19	3	Vertical	356	1.66	-	34.60	7.26	34.86			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

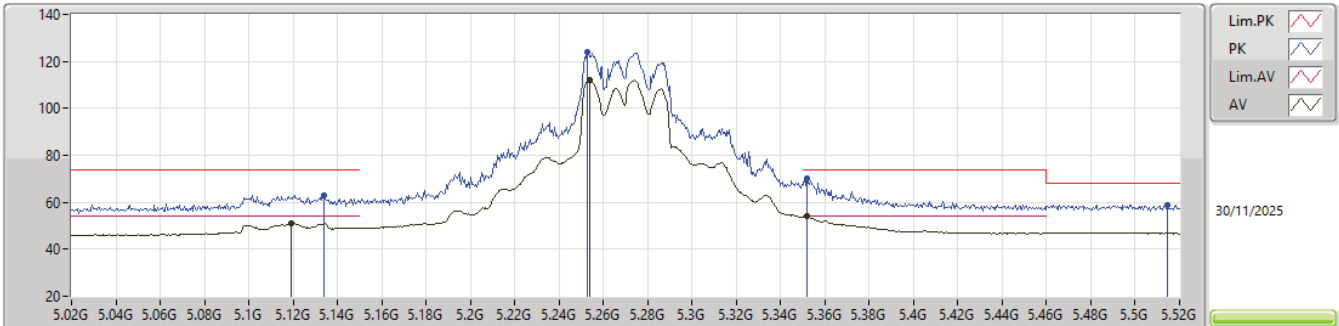


EUT_Y_4TX
Setting 20.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.134G	63.02	74.00	-10.98	57.05	3	Horizontal	357	1.66	-	33.90	7.00	34.93				
AV	5.119G	50.99	54.00	-3.01	45.05	3	Horizontal	357	1.66	-	33.90	6.98	34.94				
PK	5.2525G	123.79	Inf	-Inf	117.48	3	Horizontal	357	1.66	-	34.12	7.10	34.91				
AV	5.254G	111.90	Inf	-Inf	105.59	3	Horizontal	357	1.66	-	34.12	7.10	34.91				
PK	5.352G	69.95	74.00	-4.05	63.16	3	Horizontal	357	1.66	-	34.51	7.17	34.89				
AV	5.352G	53.95	54.00	-0.05	47.16	3	Horizontal	357	1.66	-	34.51	7.17	34.89				
PK	5.5145G	58.84	68.20	-9.36	51.84	3	Horizontal	357	1.66	-	34.57	7.29	34.86				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

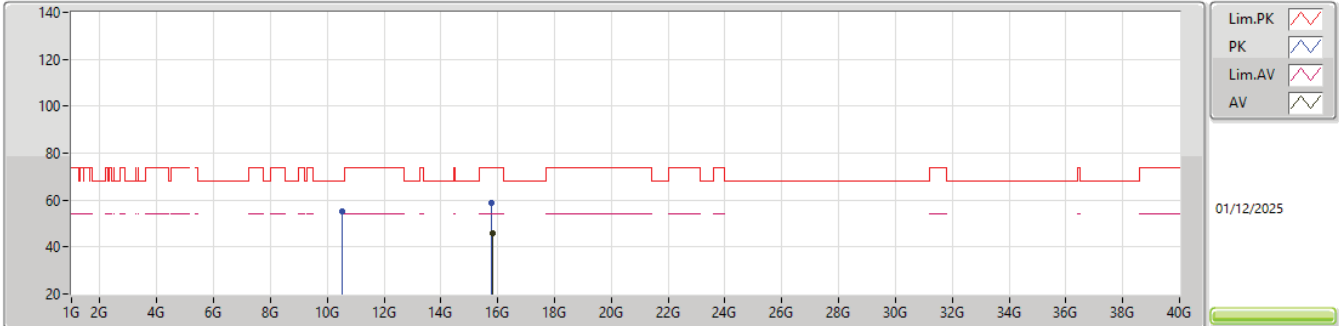


EUT_Y_4TX
Setting 20.5
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.54147G	55.12	68.20	-13.08	41.41	3	Vertical	298	3.00	-	38.18	10.44	34.91				
PK	15.79596G	58.96	74.00	-15.04	44.28	3	Vertical	319	2.52	-	37.51	12.31	35.14				
AV	15.81492G	45.93	54.00	-8.07	31.19	3	Vertical	319	2.52	-	37.56	12.32	35.14				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5270MHz_TX

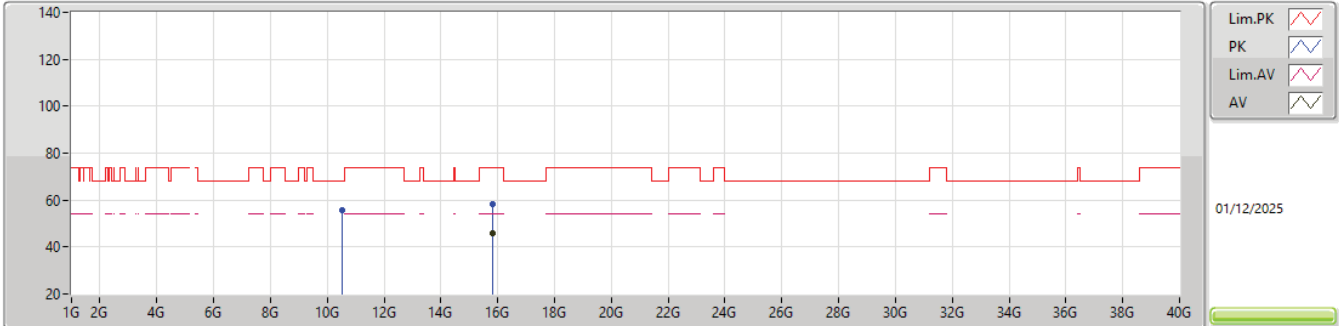


EUT_Y_4TX
Setting 20.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.54558G	55.61	68.20	-12.59	41.89	3	Horizontal	140	2.20	-	38.19	10.44	34.91			
PK	15.81933G	58.46	74.00	-15.54	43.70	3	Horizontal	351	2.03	-	37.58	12.32	35.14			
AV	15.81612G	45.88	54.00	-8.12	31.14	3	Horizontal	351	2.03	-	37.56	12.32	35.14			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

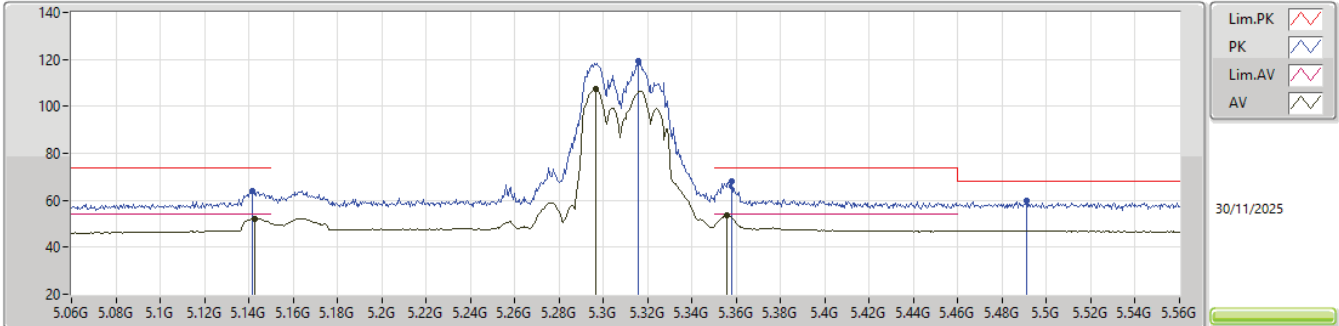


EUT_Y_4TX
Setting 16.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1415G	63.91	74.00	-10.09	57.94	3	Vertical	358	1.60	-	33.90	7.00	34.93
AV	5.1425G	52.23	54.00	-1.77	46.25	3	Vertical	358	1.60	-	33.90	7.01	34.93
PK	5.316G	119.07	Inf	-Inf	112.40	3	Vertical	358	1.60	-	34.43	7.14	34.90
AV	5.2965G	107.28	Inf	-Inf	100.67	3	Vertical	358	1.60	-	34.38	7.13	34.90
PK	5.358G	67.88	74.00	-6.12	61.07	3	Vertical	358	1.60	-	34.53	7.17	34.89
AV	5.356G	53.84	54.00	-0.16	47.04	3	Vertical	358	1.60	-	34.52	7.17	34.89
PK	5.491G	59.88	68.20	-8.32	52.87	3	Vertical	358	1.60	-	34.60	7.27	34.86

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

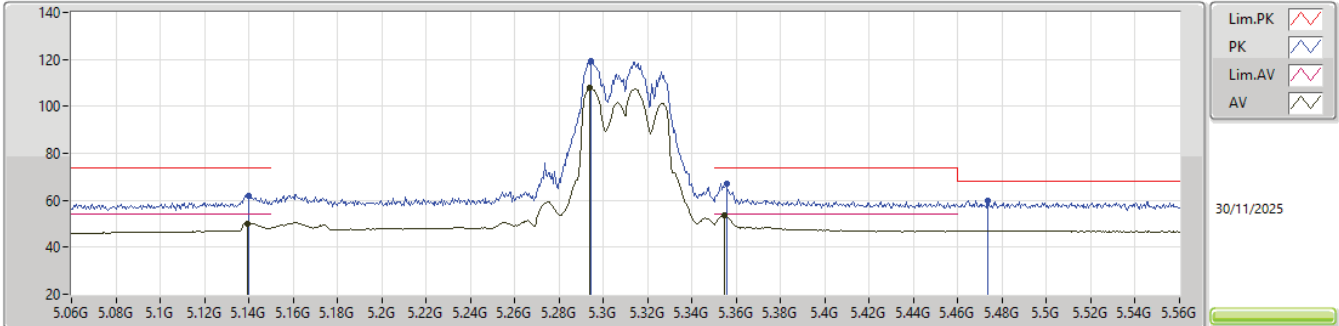


EUT_Y_4TX
Setting 16.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.14G	61.98	74.00	-12.02	56.01	3	Horizontal	356	1.91	-	33.90	7.00	34.93
AV	5.1395G	50.22	54.00	-3.78	44.25	3	Horizontal	356	1.91	-	33.90	7.00	34.93
PK	5.2945G	119.20	Inf	-Inf	112.60	3	Horizontal	356	1.91	-	34.37	7.13	34.90
AV	5.294G	107.97	Inf	-Inf	101.38	3	Horizontal	356	1.91	-	34.36	7.13	34.90
PK	5.3555G	67.09	74.00	-6.91	60.29	3	Horizontal	356	1.91	-	34.52	7.17	34.89
AV	5.3545G	53.83	54.00	-0.17	47.03	3	Horizontal	356	1.91	-	34.52	7.17	34.89
PK	5.4735G	60.00	68.20	-8.20	53.01	3	Horizontal	356	1.91	-	34.60	7.26	34.87

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

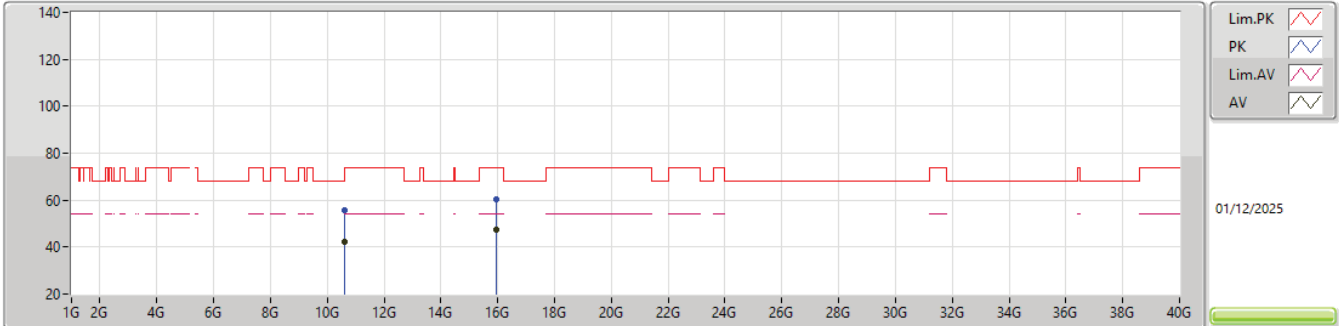


EUT_Y_4TX
Setting 16.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.61961G	55.60	74.00	-18.40	41.86	3	Vertical	71	2.06	-	38.20	10.46	34.92			
AV	10.62054G	42.45	54.00	-11.55	28.71	3	Vertical	71	2.06	-	38.20	10.46	34.92			
PK	15.93543G	60.54	74.00	-13.46	45.65	3	Vertical	186	2.96	-	37.66	12.37	35.14			
AV	15.94005G	47.59	54.00	-6.41	32.72	3	Vertical	186	2.96	-	37.64	12.37	35.14			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

5310MHz_TX

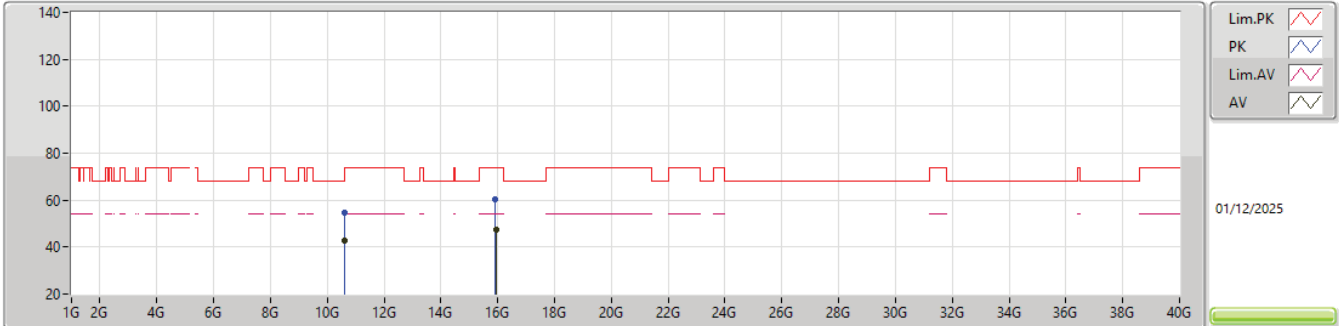


EUT_Y_4TX
Setting 16.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60644G	54.91	74.00	-19.09	41.17	3	Horizontal	334	1.88	-	38.20	10.46	34.92			
AV	10.62012G	42.52	54.00	-11.48	28.78	3	Horizontal	334	1.88	-	38.20	10.46	34.92			
PK	15.92424G	60.18	74.00	-13.82	45.25	3	Horizontal	35	1.56	-	37.70	12.37	35.14			
AV	15.94092G	47.61	54.00	-6.39	32.74	3	Horizontal	35	1.56	-	37.64	12.37	35.14			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

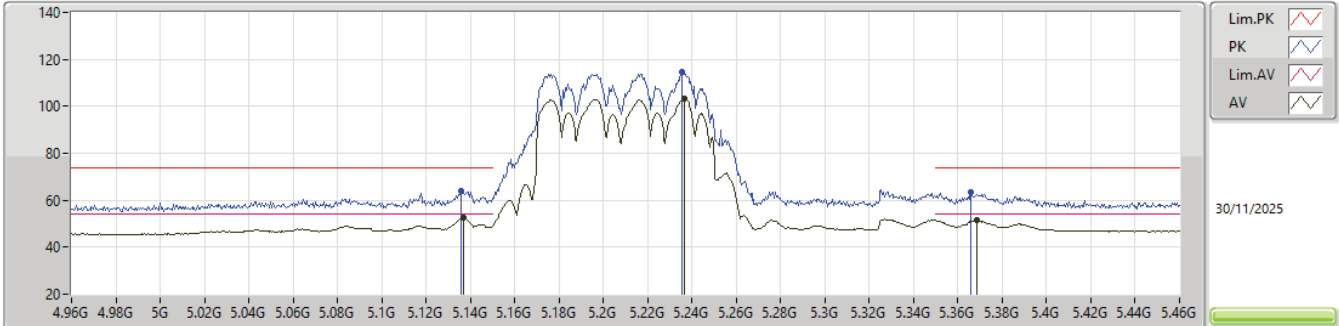


EUT_Y_4TX
Setting 15.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.136G	63.90	74.00	-10.10	57.93	3	Vertical	358	1.64	-	33.90	7.00	34.93			
AV	5.137G	52.37	54.00	-1.63	46.40	3	Vertical	358	1.64	-	33.90	7.00	34.93			
PK	5.2355G	114.91	Inf	-Inf	108.64	3	Vertical	358	1.64	-	34.10	7.08	34.91			
AV	5.2365G	103.11	Inf	-Inf	96.83	3	Vertical	358	1.64	-	34.10	7.09	34.91			
PK	5.366G	63.41	74.00	-10.59	56.56	3	Vertical	358	1.64	-	34.56	7.18	34.89			
AV	5.3685G	51.49	54.00	-2.51	44.63	3	Vertical	358	1.64	-	34.57	7.18	34.89			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

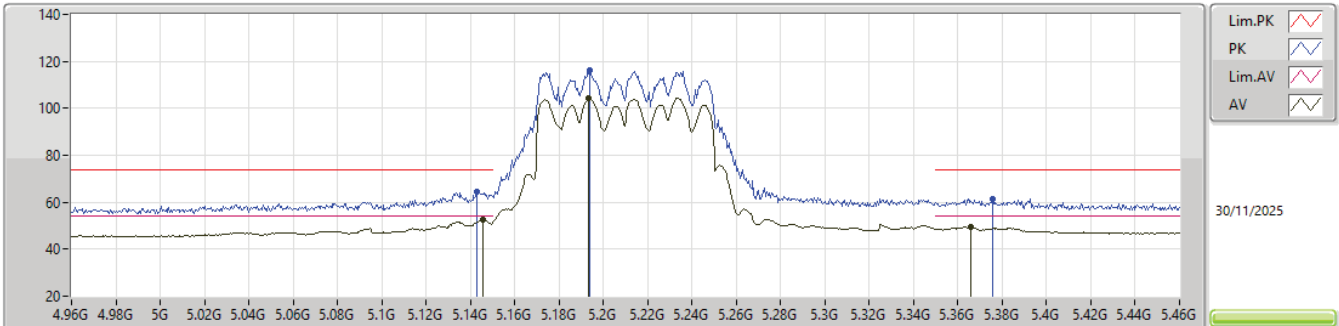


EUT_Y_4TX
Setting 15.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.143G	64.42	74.00	-9.58	58.44	3	Horizontal	358	1.60	-	33.90	7.01	34.93			
AV	5.1455G	52.75	54.00	-1.25	46.77	3	Horizontal	358	1.60	-	33.90	7.01	34.93			
PK	5.194G	116.28	Inf	-Inf	110.07	3	Horizontal	358	1.60	-	34.08	7.05	34.92			
AV	5.1935G	104.21	Inf	-Inf	98.01	3	Horizontal	358	1.60	-	34.07	7.05	34.92			
PK	5.3755G	61.28	74.00	-12.72	54.38	3	Horizontal	358	1.60	-	34.60	7.18	34.88			
AV	5.366G	49.69	54.00	-4.31	42.84	3	Horizontal	358	1.60	-	34.56	7.18	34.89			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

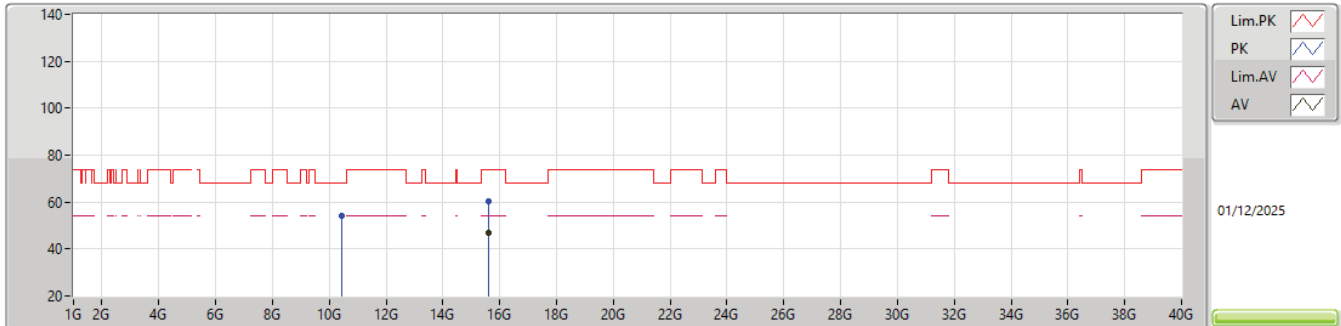


EUT_Y_4TX
Setting 15.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.43056G	54.37	68.20	-13.83	41.03	3	Vertical	108	1.61	-	37.90	10.40	34.96			
PK	15.62955G	60.25	74.00	-13.75	45.23	3	Vertical	204	2.83	-	37.92	12.23	35.13			
AV	15.61545G	46.81	54.00	-7.19	31.70	3	Vertical	204	2.83	-	38.01	12.23	35.13			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5210MHz_TX

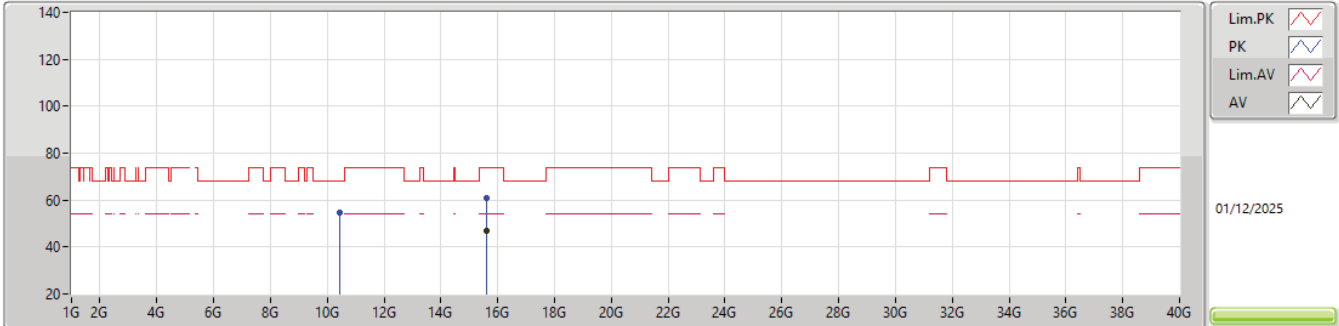


EUT_Y_4TX
Setting 15.5
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.43077G	54.73	68.20	-13.47	41.39	3	Horizontal	148	1.37	-	37.90	10.40	34.96			
PK	15.62367G	60.85	74.00	-13.15	45.79	3	Horizontal	153	1.35	-	37.96	12.23	35.13			
AV	15.61512G	46.78	54.00	-7.22	31.68	3	Horizontal	153	1.35	-	38.01	12.22	35.13			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

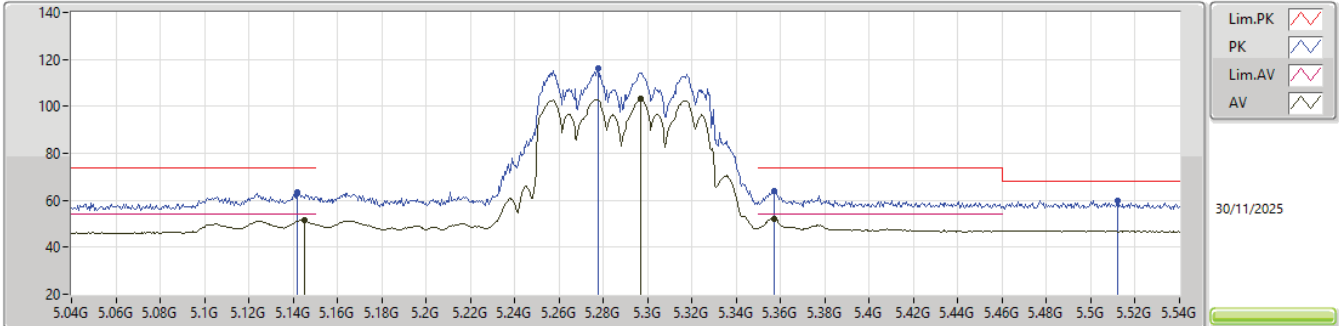


EUT_Y_4TX
Setting 15.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.142G	63.42	74.00	-10.58	57.45	3	Vertical	358	1.80	-	33.90	7.00	34.93
AV	5.145G	51.41	54.00	-2.59	45.43	3	Vertical	358	1.80	-	33.90	7.01	34.93
PK	5.2775G	116.33	Inf	-Inf	109.85	3	Vertical	358	1.80	-	34.27	7.11	34.90
AV	5.297G	103.04	Inf	-Inf	96.43	3	Vertical	358	1.80	-	34.38	7.13	34.90
PK	5.357G	63.88	74.00	-10.12	57.07	3	Vertical	358	1.80	-	34.53	7.17	34.89
AV	5.357G	52.27	54.00	-1.73	45.46	3	Vertical	358	1.80	-	34.53	7.17	34.89
PK	5.512G	59.71	68.20	-8.49	52.71	3	Vertical	358	1.80	-	34.58	7.28	34.86

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

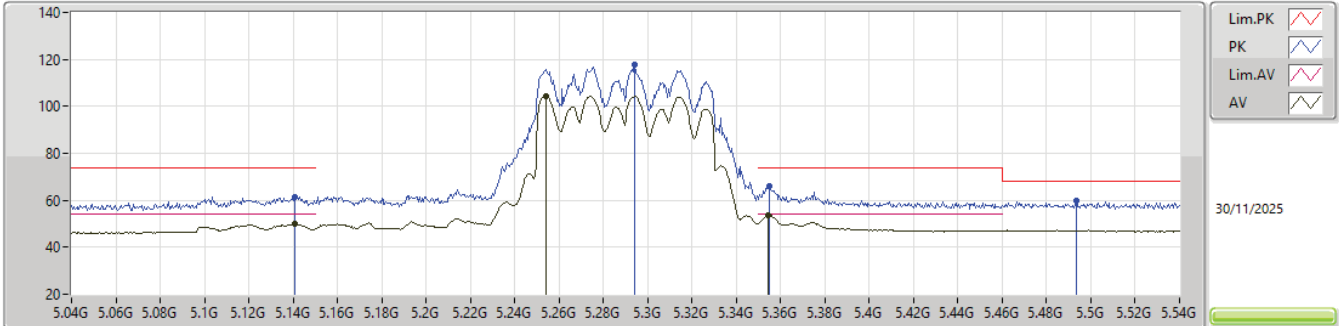


EUT_Y_4TX
Setting 15.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.141G	61.52	74.00	-12.48	55.55	3	Horizontal	357	1.80	-	33.90	7.00	34.93			
AV	5.141G	49.80	54.00	-4.20	43.83	3	Horizontal	357	1.80	-	33.90	7.00	34.93			
PK	5.294G	117.95	Inf	-Inf	111.36	3	Horizontal	357	1.80	-	34.36	7.13	34.90			
AV	5.254G	104.30	Inf	-Inf	97.99	3	Horizontal	357	1.80	-	34.12	7.10	34.91			
PK	5.355G	65.88	74.00	-8.12	59.08	3	Horizontal	357	1.80	-	34.52	7.17	34.89			
AV	5.3545G	53.62	54.00	-0.38	46.82	3	Horizontal	357	1.80	-	34.52	7.17	34.89			
PK	5.4935G	59.68	68.20	-8.52	52.67	3	Horizontal	357	1.80	-	34.60	7.27	34.86			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

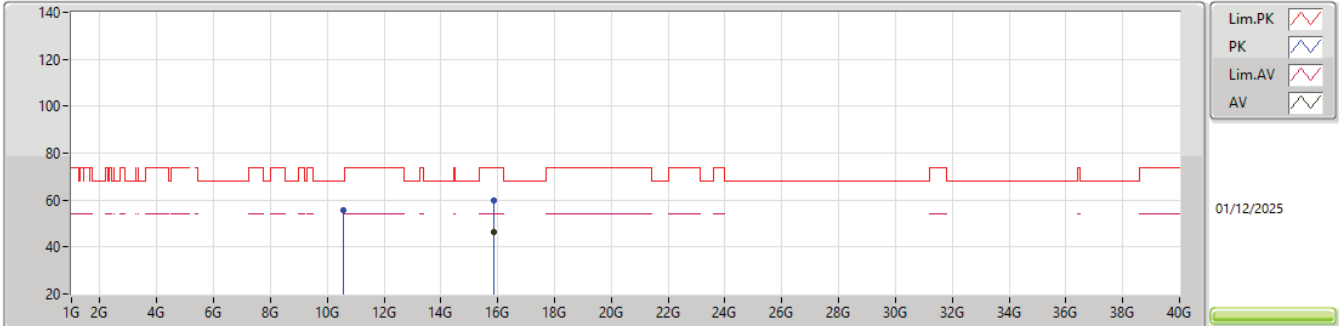


EUT_Y_4TX
Setting 15.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57913G	55.91	68.20	-12.29	42.17	3	Vertical	279	2.37	-	38.20	10.45	34.91			
PK	15.88152G	59.70	74.00	-14.30	44.73	3	Vertical	359	1.63	-	37.76	12.35	35.14			
AV	15.88446G	46.14	54.00	-7.86	31.16	3	Vertical	359	1.63	-	37.77	12.35	35.14			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5290MHz_TX

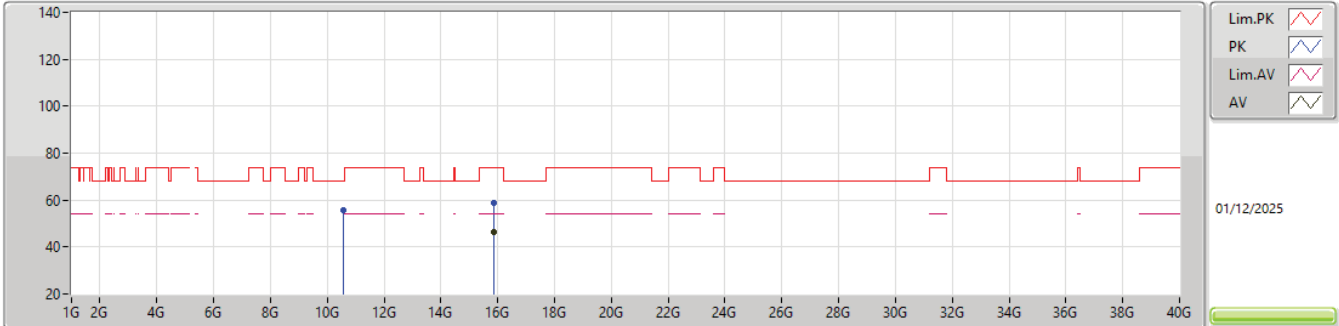


EUT_Y_4TX
Setting 15.5
03-E-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57634G	55.92	68.20	-12.28	42.18	3	Horizontal	167	1.58	-	38.20	10.45	34.91			
PK	15.88239G	59.04	74.00	-14.96	44.07	3	Horizontal	358	2.66	-	37.76	12.35	35.14			
AV	15.88491G	46.15	54.00	-7.85	31.17	3	Horizontal	358	2.66	-	37.77	12.35	35.14			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

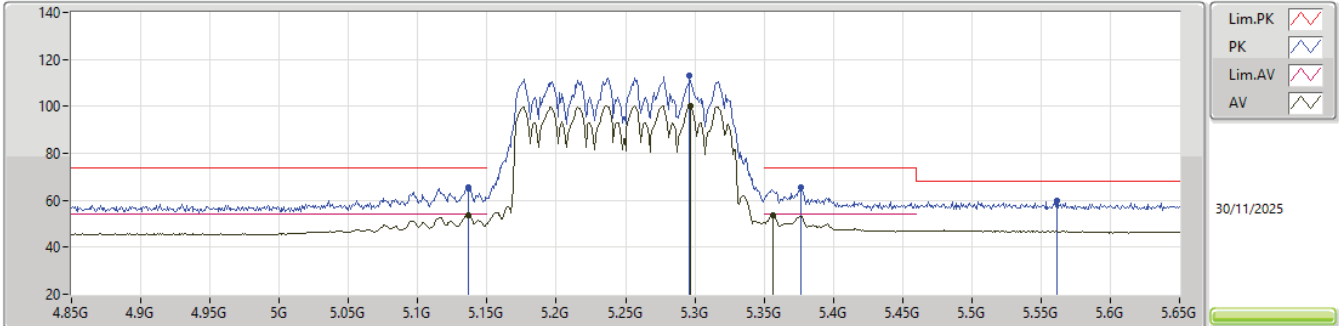


EUT_Y_4TX
Setting 15.5
03-P-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1364G	65.39	74.00	-8.61	59.42	3	Vertical	358	1.55	-	33.90	7.00	34.93			
AV	5.1364G	53.73	54.00	-0.27	47.76	3	Vertical	358	1.55	-	33.90	7.00	34.93			
PK	5.2964G	112.92	Inf	-Inf	106.31	3	Vertical	358	1.55	-	34.38	7.13	34.90			
AV	5.2972G	100.31	Inf	-Inf	93.70	3	Vertical	358	1.55	-	34.38	7.13	34.90			
PK	5.3764G	65.73	74.00	-8.27	58.82	3	Vertical	358	1.55	-	34.61	7.18	34.88			
AV	5.3564G	53.54	54.00	-0.46	46.73	3	Vertical	358	1.55	-	34.53	7.17	34.89			
PK	5.5612G	59.66	68.20	-8.54	52.76	3	Vertical	358	1.55	-	34.46	7.32	34.88			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

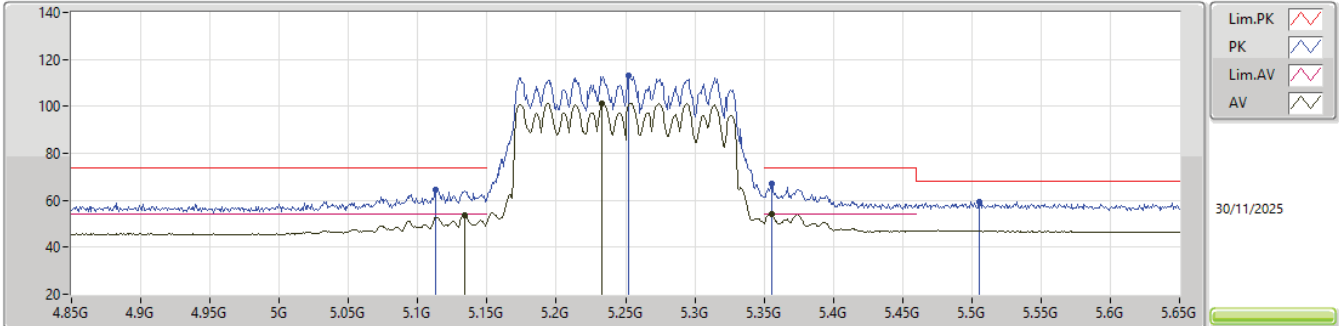


EUT_Y_4TX
Setting 15.5
03-P-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1132G	64.64	74.00	-9.36	58.70	3	Horizontal	358	1.74	-	33.90	6.98	34.94				
AV	5.134G	53.54	54.00	-0.46	47.57	3	Horizontal	358	1.74	-	33.90	7.00	34.93				
PK	5.2524G	112.85	Inf	-Inf	106.55	3	Horizontal	358	1.74	-	34.11	7.10	34.91				
AV	5.2332G	101.28	Inf	-Inf	95.01	3	Horizontal	358	1.74	-	34.10	7.08	34.91				
PK	5.3556G	66.85	74.00	-7.15	60.05	3	Horizontal	358	1.74	-	34.52	7.17	34.89				
AV	5.3556G	53.91	54.00	-0.09	47.11	3	Horizontal	358	1.74	-	34.52	7.17	34.89				
PK	5.5052G	59.43	68.20	-8.77	52.42	3	Horizontal	358	1.74	-	34.59	7.28	34.86				

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

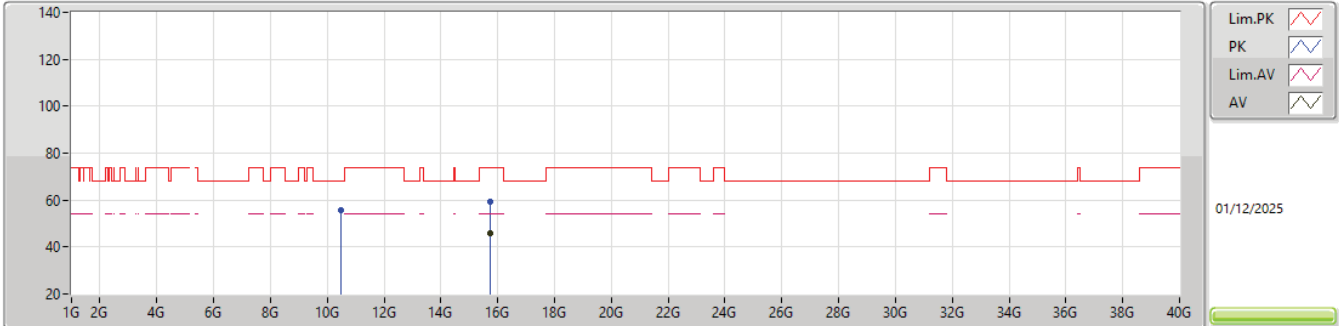


EUT_Y_4TX
Setting 15.5
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.49829G	55.57	68.20	-12.63	41.96	3	Vertical	167	1.58	-	38.09	10.42	34.90			
PK	15.75399G	59.08	74.00	-14.92	44.34	3	Vertical	274	1.87	-	37.59	12.29	35.14			
AV	15.73755G	45.81	54.00	-8.19	31.01	3	Vertical	274	1.87	-	37.65	12.28	35.13			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

5250MHz Straddle 5.25-5.35GHz_TX

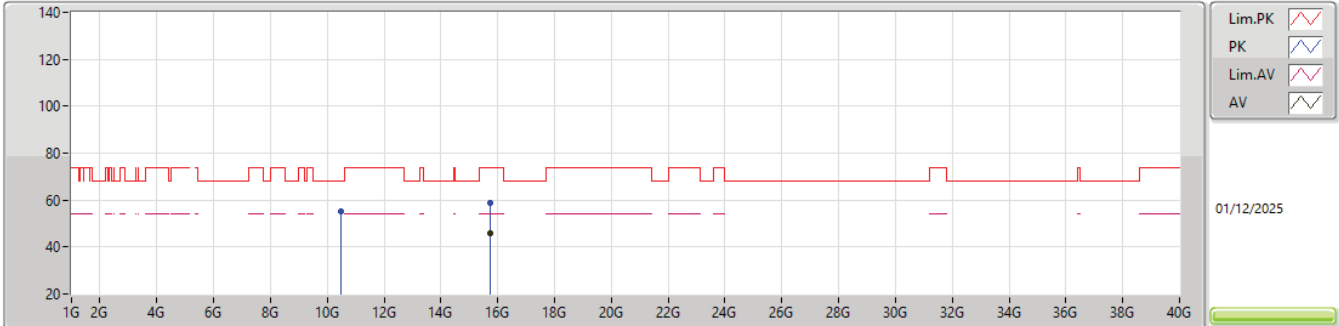

EUT_Y_4TX
Setting 15.5
03-E-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.49901G	55.21	68.20	-12.99	41.59	3	Horizontal	167	1.58	-	38.10	10.42	34.90			
PK	15.74835G	59.05	74.00	-14.95	44.28	3	Horizontal	70	2.12	-	37.61	12.29	35.13			
AV	15.74271G	46.00	54.00	-8.00	31.22	3	Horizontal	70	2.12	-	37.63	12.28	35.13			




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1.(MCS0)_4TX	Pass	AV	5.4579G	53.98	54.00	-0.02	3	Horizontal	170	1.80	-

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

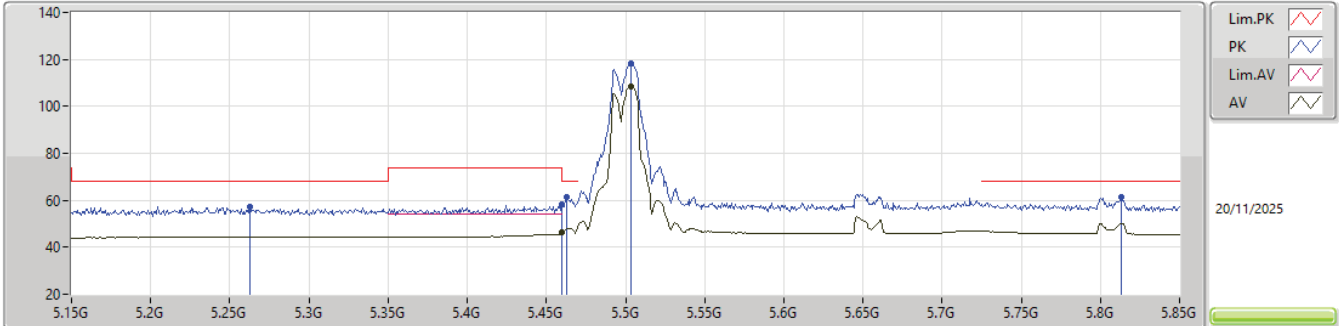


EUT_Y_4TX
Setting 18
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.2627G	57.11	68.20	-11.09	45.93	3	Vertical	176	1.72	-	33.73	7.64	30.19				
PK	5.4594G	58.04	74.00	-15.96	46.63	3	Vertical	176	1.72	-	33.92	7.78	30.29				
AV	5.46G	46.13	54.00	-7.87	34.72	3	Vertical	176	1.72	-	33.92	7.78	30.29				
PK	5.4629G	61.30	68.20	-6.90	49.88	3	Vertical	176	1.72	-	33.93	7.78	30.29				
PK	5.5035G	118.07	Inf	-Inf	106.57	3	Vertical	176	1.72	-	34.01	7.80	30.31				
AV	5.5035G	108.48	Inf	-Inf	96.98	3	Vertical	176	1.72	-	34.01	7.80	30.31				
PK	5.8129G	61.22	68.20	-6.98	49.25	3	Vertical	176	1.72	-	33.97	8.20	30.20				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

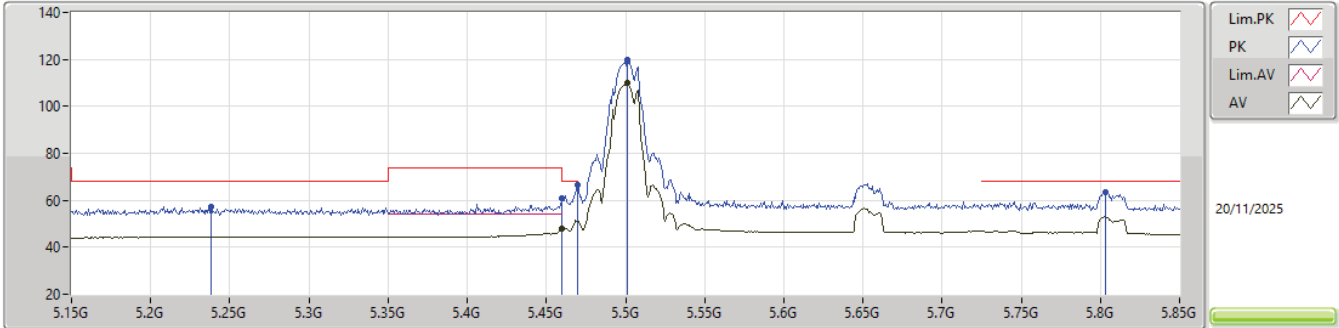


EUT_Y_4TX
Setting 18
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.2382G	57.22	68.20	-10.98	46.07	3	Horizontal	167	1.95	-	33.70	7.62	30.17				
PK	5.46G	61.09	74.00	-12.91	49.68	3	Horizontal	167	1.95	-	33.92	7.78	30.29				
AV	5.46G	47.68	54.00	-6.32	36.27	3	Horizontal	167	1.95	-	33.92	7.78	30.29				
PK	5.4699G	66.79	68.20	-1.41	55.36	3	Horizontal	167	1.95	-	33.94	7.78	30.29				
PK	5.5014G	119.68	Inf	-Inf	108.19	3	Horizontal	167	1.95	-	34.00	7.80	30.31				
AV	5.5014G	109.89	Inf	-Inf	98.40	3	Horizontal	167	1.95	-	34.00	7.80	30.31				
PK	5.8031G	63.42	68.20	-4.78	51.42	3	Horizontal	167	1.95	-	33.99	8.21	30.20				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

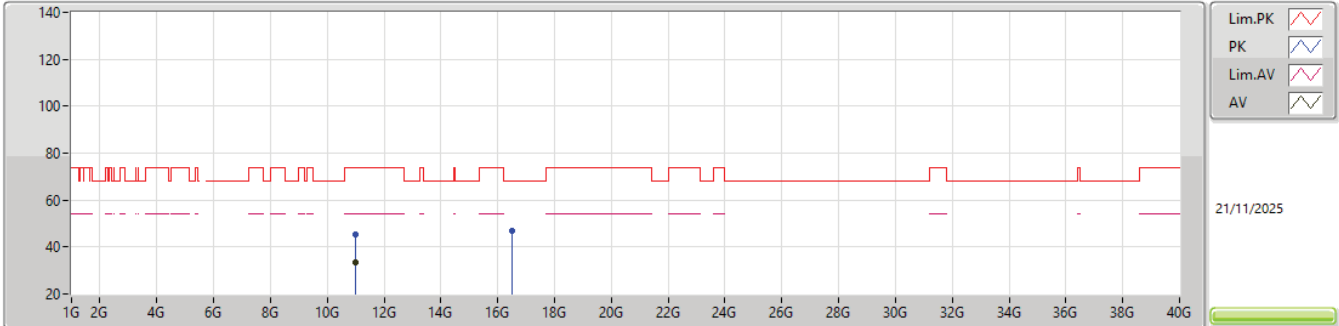


EUT_Y_4TX
Setting 18
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.01255G	45.16	74.00	-28.84	60.63	3	Vertical	325	1.96	-	38.43	12.29	66.19				
AV	10.99985G	33.28	54.00	-20.72	48.79	3	Vertical	325	1.96	-	38.40	12.28	66.19				
PK	16.51265G	47.00	68.20	-21.20	56.93	3	Vertical	282	1.06	-	38.88	14.94	63.75				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

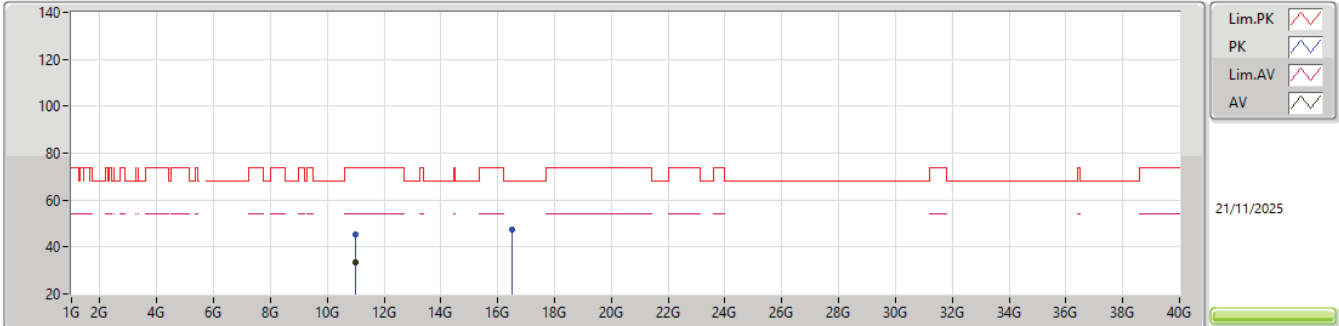


EUT_Y_4TX
Setting 18
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.00045G	45.54	74.00	-28.46	61.04	3	Horizontal	360	2.10	-	38.40	12.29	66.19			
AV	11G	33.20	54.00	-20.80	48.70	3	Horizontal	360	2.10	-	38.40	12.29	66.19			
PK	16.49485G	47.65	68.20	-20.55	57.68	3	Horizontal	213	1.36	-	38.78	14.93	63.74			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

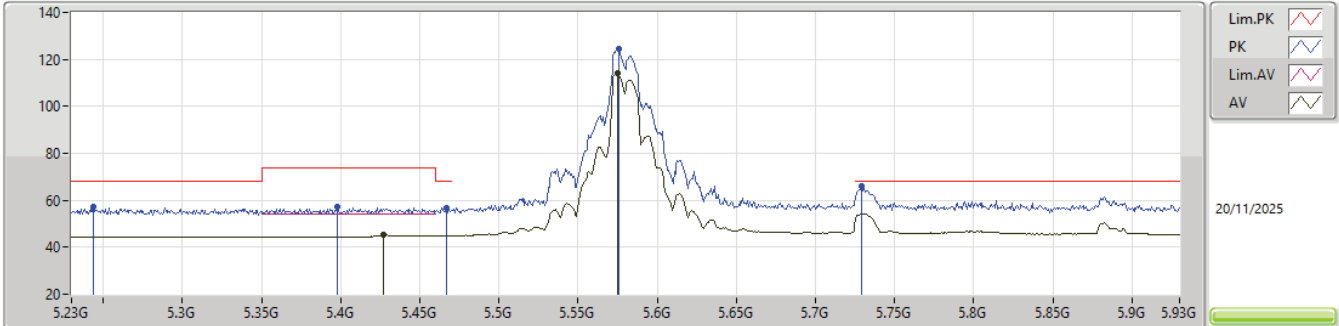


EUT_Y_4TX
Setting 22
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.244G	57.22	68.20	-10.98	46.08	3	Vertical	155	2.00	-	33.70	7.62	30.18			
PK	5.398G	57.18	74.00	-16.82	45.80	3	Vertical	155	2.00	-	33.90	7.74	30.26			
AV	5.4274G	45.28	54.00	-8.72	33.89	3	Vertical	155	2.00	-	33.90	7.76	30.27			
PK	5.4666G	56.91	68.20	-11.29	45.49	3	Vertical	155	2.00	-	33.93	7.78	30.29			
PK	5.5758G	124.44	Inf	-Inf	112.82	3	Vertical	155	2.00	-	34.05	7.85	30.28			
AV	5.5751G	114.08	Inf	-Inf	102.46	3	Vertical	155	2.00	-	34.05	7.85	30.28			
PK	5.7291G	66.20	68.20	-2.00	54.34	3	Vertical	155	2.00	-	34.00	8.09	30.23			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

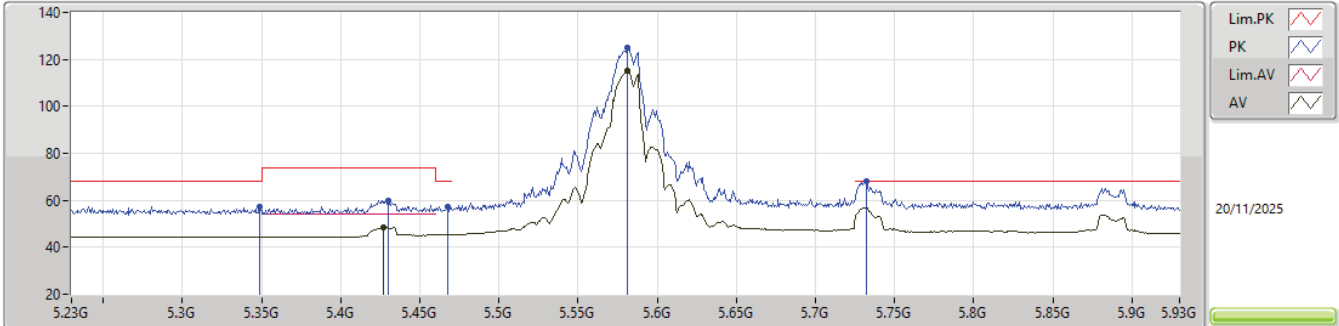


EUT_Y_4TX
Setting 22
02-D-G-5-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.349G	57.36	68.20	-10.84	45.99	3	Horizontal	171	1.91	-	33.90	7.70	30.23			
PK	5.4302G	59.88	74.00	-14.12	48.49	3	Horizontal	171	1.91	-	33.90	7.76	30.27			
AV	5.4274G	48.48	54.00	-5.52	37.09	3	Horizontal	171	1.91	-	33.90	7.76	30.27			
PK	5.4688G	57.41	68.20	-10.79	45.98	3	Horizontal	171	1.91	-	33.94	7.78	30.29			
PK	5.5814G	125.19	Inf	-Inf	113.58	3	Horizontal	171	1.91	-	34.04	7.85	30.28			
AV	5.5814G	115.29	Inf	-Inf	103.68	3	Horizontal	171	1.91	-	34.04	7.85	30.28			
PK	5.7319G	67.85	68.20	-0.35	55.99	3	Horizontal	171	1.91	-	34.00	8.09	30.23			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

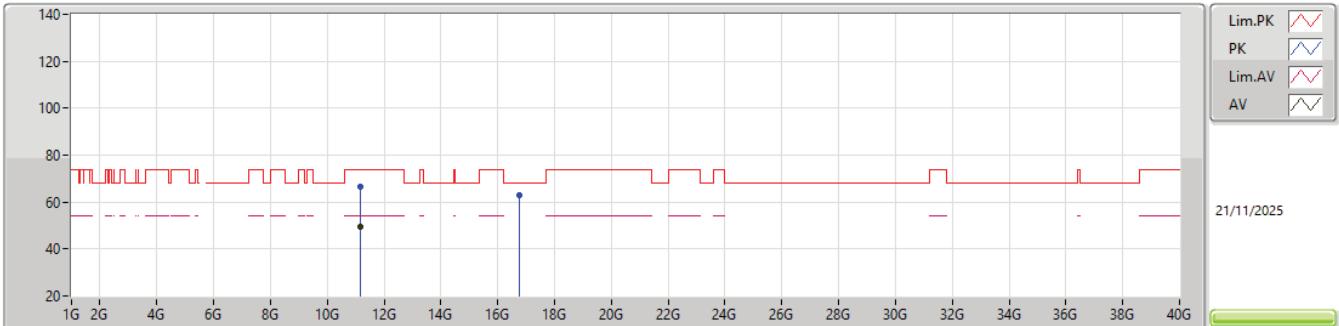


EUT_Y_4TX
Setting 22
02-D-G-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.1699G	66.41	74.00	-7.59	81.73	3	Vertical	159	1.88	-	38.50	12.37	66.19			
AV	11.1701G	49.25	54.00	-4.75	64.57	3	Vertical	159	1.88	-	38.50	12.37	66.19			
PK	16.74165G	63.18	68.20	-5.02	72.23	3	Vertical	197	1.80	-	39.98	14.98	64.01			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

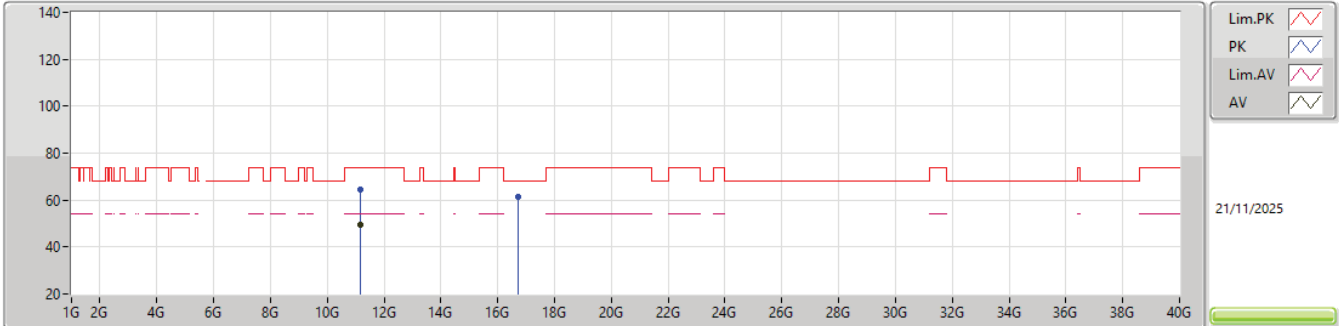

EUT_Y_4TX
Setting 22
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16485G	64.48	74.00	-9.52	79.80	3	Horizontal	217	1.80	-	38.50	12.37	66.19			
AV	11.1657G	49.41	54.00	-4.59	64.73	3	Horizontal	217	1.80	-	38.50	12.37	66.19			
PK	16.7339G	61.27	68.20	-6.93	70.32	3	Horizontal	48	2.20	-	39.97	14.98	64.00			