



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



## MEASUREMENT REPORT FCC Part 22, 24, & 27 LTE

**Applicant Name:**

LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**

8/9-8/17/2016

**Test Site/Location:**

PCTEST Lab., Columbia, MD, USA

**Test Report Serial No.:**

0Y1608121354.ZNF

**FCC ID :****ZNFH910****APPLICANT:****LG ELECTRONICS MOBILECOMM U.S.A****Application Type:**

Class II Permissive Change

**FCC Classification:**

PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):**

§2; §22; §24; §27

**Test Procedure(s):**

ANSI/TIA-603-D-2010, KDB 971168 D01 v02r02

**EUT Type:**

Portable Handset

**Model(s):**

LG-H910, LGH910, H910, LG-H915, LGH915, H915

**Test Device Serial No.:**

*identical prototype* [S/N: 09296, 09312, 09346]

**Class II Permissive Change:**

Please see FCC change document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
Randy Ortanez  
President




|                                             |                                                                                     |                                                                                         |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFH910                      |  | <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1608121354.ZNF | <b>Test Dates:</b><br>8/9-8/17/2016                                                 | <b>EUT Type:</b><br>Portable Handset                                                    |                                                                                       | Page 1 of 38                           |

# T A B L E O F C O N T E N T S


|                                                          |    |
|----------------------------------------------------------|----|
| FCC PART 22, 24, & 27 MEASUREMENT REPORT .....           | 3  |
| 1.0 INTRODUCTION .....                                   | 5  |
| 1.1 Scope.....                                           | 5  |
| 1.2 Testing Facility .....                               | 5  |
| 2.0 PRODUCT INFORMATION.....                             | 6  |
| 2.1 Equipment Description .....                          | 6  |
| 2.2 Device Capabilities .....                            | 6  |
| 2.3 Test Configuration.....                              | 6  |
| 2.4 EMI Suppression Device(s)/Modifications.....         | 6  |
| 3.0 DESCRIPTION OF TESTS .....                           | 7  |
| 3.1 Measurement Procedure.....                           | 7  |
| 3.1 Block C Frequency Range .....                        | 7  |
| 3.2 Block A Frequency Range .....                        | 7  |
| 3.3 Cellular - Base Frequency Blocks .....               | 7  |
| 3.4 Cellular - Mobile Frequency Blocks.....              | 8  |
| 3.5 PCS - Base Frequency Blocks.....                     | 8  |
| 3.6 PCS - Mobile Frequency Blocks .....                  | 8  |
| 3.7 AWS - Base Frequency Blocks.....                     | 8  |
| 3.8 AWS - Mobile Frequency Blocks.....                   | 9  |
| 3.9 WCS – Mobile/Base Frequency Blocks.....              | 9  |
| 3.10 BRS/EBS Frequency Block.....                        | 9  |
| 3.11 Radiated Power and Radiated Spurious Emissions..... | 10 |
| 4.0 MEASUREMENT UNCERTAINTY .....                        | 11 |
| 5.0 TEST EQUIPMENT CALIBRATION DATA .....                | 12 |
| 6.0 SAMPLE CALCULATIONS .....                            | 13 |
| 7.0 TEST RESULTS.....                                    | 14 |
| 7.1 Summary.....                                         | 14 |
| 7.2 Radiated Power (ERP/EIRP) .....                      | 15 |
| 7.3 Radiated Spurious Emissions Measurements.....        | 26 |
| 8.0 CONCLUSION.....                                      | 38 |

|                                             |                                                                                     |                                                                                         |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFH910                      |  | <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1608121354.ZNF | <b>Test Dates:</b><br>8/9-8/17/2016                                                 | <b>EUT Type:</b><br>Portable Handset                                                    |                                                                                       | Page 2 of 38                           |



## MEASUREMENT REPORT

### FCC Part 22, 24, & 27





#### §2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A  
**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
 Englewood Cliffs, NJ 07632, United States  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** §2; §22; §24; §27  
**BASE MODEL:** LG-H910  
**FCC ID:** ZNFH910  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**FREQUENCY TOLERANCE:**  $\pm 0.00025\%$  (2.5 ppm)  
**Test Device Serial No.:** 09296, 09312, 09346 ☐ Production ☒ Pre-Production ☐ Engineering  
**DATE(S) OF TEST:** 8/9-8/17/2016  
**TEST REPORT S/N:** 0Y1608121354.ZNF

#### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.




- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 3 of 38                    |



# MEASUREMENT REPORT

## FCC Part 22, 24, & 27



| Mode           | FCC Rule Part | Tx Frequency (MHz) | ERP            |                  | Modulation |
|----------------|---------------|--------------------|----------------|------------------|------------|
|                |               |                    | Max. Power (W) | Max. Power (dBm) |            |
| LTE Band 12    | 27            | 699.7 - 715.3      | 0.096          | 19.81            | QPSK       |
| LTE Band 12    | 27            | 699.7 - 715.3      | 0.079          | 18.95            | 16QAM      |
| LTE Band 12    | 27            | 700.5 - 714.5      | 0.093          | 19.68            | QPSK       |
| LTE Band 12    | 27            | 700.5 - 714.5      | 0.076          | 18.78            | 16QAM      |
| LTE Band 12/17 | 27            | 701.5 - 713.5      | 0.093          | 19.70            | QPSK       |
| LTE Band 12/17 | 27            | 701.5 - 713.5      | 0.078          | 18.93            | 16QAM      |
| LTE Band 12/17 | 27            | 704 - 711          | 0.094          | 19.73            | QPSK       |
| LTE Band 12/17 | 27            | 704 - 711          | 0.075          | 18.78            | 16QAM      |
| LTE Band 5     | 22H           | 824.7 - 848.3      | 0.087          | 19.39            | QPSK       |
| LTE Band 5     | 22H           | 824.7 - 848.3      | 0.068          | 18.32            | 16QAM      |
| LTE Band 5     | 22H           | 825.5 - 847.5      | 0.077          | 18.87            | QPSK       |
| LTE Band 5     | 22H           | 825.5 - 847.5      | 0.068          | 18.30            | 16QAM      |
| LTE Band 5     | 22H           | 826.5 - 846.5      | 0.078          | 18.90            | QPSK       |
| LTE Band 5     | 22H           | 826.5 - 846.5      | 0.054          | 17.32            | 16QAM      |
| LTE Band 5     | 22H           | 829 - 844          | 0.064          | 18.08            | QPSK       |
| LTE Band 5     | 22H           | 829 - 844          | 0.070          | 18.44            | 16QAM      |
| LTE Band 4     | 27            | 1710.7 - 1754.3    | 0.352          | 25.47            | QPSK       |
| LTE Band 4     | 27            | 1710.7 - 1754.3    | 0.287          | 24.57            | 16QAM      |
| LTE Band 4     | 27            | 1711.5 - 1753.5    | 0.385          | 25.86            | QPSK       |
| LTE Band 4     | 27            | 1711.5 - 1753.5    | 0.312          | 24.94            | 16QAM      |
| LTE Band 4/66  | 27            | 1712.5 - 1777.5    | 0.337          | 25.28            | QPSK       |
| LTE Band 4/66  | 27            | 1712.5 - 1777.5    | 0.302          | 24.80            | 16QAM      |
| LTE Band 4/66  | 27            | 1715 - 1775        | 0.312          | 24.95            | QPSK       |
| LTE Band 4/66  | 27            | 1715 - 1775        | 0.321          | 25.07            | 16QAM      |
| LTE Band 4/66  | 27            | 1717.5 - 1772.5    | 0.320          | 25.05            | QPSK       |
| LTE Band 4/66  | 27            | 1717.5 - 1772.5    | 0.270          | 24.32            | 16QAM      |
| LTE Band 4/66  | 27            | 1720 - 1770        | 0.319          | 25.03            | QPSK       |
| LTE Band 4/66  | 27            | 1720 - 1770        | 0.269          | 24.30            | 16QAM      |
| LTE Band 2     | 24E           | 1850.7 - 1909.3    | 0.257          | 24.10            | QPSK       |
| LTE Band 2     | 24E           | 1850.7 - 1909.3    | 0.200          | 23.01            | 16QAM      |
| LTE Band 2     | 24E           | 1851.5 - 1908.5    | 0.255          | 24.07            | QPSK       |
| LTE Band 2     | 24E           | 1851.5 - 1908.5    | 0.204          | 23.09            | 16QAM      |
| LTE Band 2     | 24E           | 1852.5 - 1907.5    | 0.260          | 24.15            | QPSK       |
| LTE Band 2     | 24E           | 1852.5 - 1907.5    | 0.217          | 23.37            | 16QAM      |
| LTE Band 2     | 24E           | 1855 - 1905        | 0.176          | 22.45            | QPSK       |
| LTE Band 2     | 24E           | 1855 - 1905        | 0.141          | 21.48            | 16QAM      |
| LTE Band 2     | 24E           | 1857.5 - 1902.5    | 0.182          | 22.59            | QPSK       |
| LTE Band 2     | 24E           | 1857.5 - 1902.5    | 0.150          | 21.76            | 16QAM      |
| LTE Band 2     | 24E           | 1860 - 1900        | 0.190          | 22.78            | QPSK       |
| LTE Band 2     | 24E           | 1860 - 1900        | 0.155          | 21.90            | 16QAM      |
| LTE Band 30    | 27            | 2307.5 - 2312.5    | 0.113          | 20.51            | QPSK       |
| LTE Band 30    | 27            | 2307.5 - 2312.5    | 0.091          | 19.61            | 16QAM      |
| LTE Band 30    | 27            | 2310               | 0.066          | 18.20            | QPSK       |
| LTE Band 30    | 27            | 2310               | 0.051          | 17.10            | 16QAM      |
| LTE Band 7     | 27            | 2502.5 - 2567.5    | 0.072          | 18.58            | QPSK       |
| LTE Band 7     | 27            | 2502.5 - 2567.5    | 0.061          | 17.82            | 16QAM      |
| LTE Band 7     | 27            | 2505 - 2565        | 0.058          | 17.62            | QPSK       |
| LTE Band 7     | 27            | 2505 - 2565        | 0.047          | 16.73            | 16QAM      |
| LTE Band 7     | 27            | 2507.5 - 2562.5    | 0.057          | 17.54            | QPSK       |
| LTE Band 7     | 27            | 2507.5 - 2562.5    | 0.048          | 16.82            | 16QAM      |
| LTE Band 7     | 27            | 2510 - 2560        | 0.072          | 18.57            | QPSK       |
| LTE Band 7     | 27            | 2510 - 2560        | 0.059          | 17.69            | 16QAM      |

### EUT Overview

#### Note:

- 1) Class 2 Permissive Change test samples were used for ERP/EIRP measurements. It has been determined that radiated powers were not changed for the ZNFH910. Differences in radiated powers from the original certification ERP/EIRP that are reported herein are within expected measurement tolerance.

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 4 of 38                    |

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

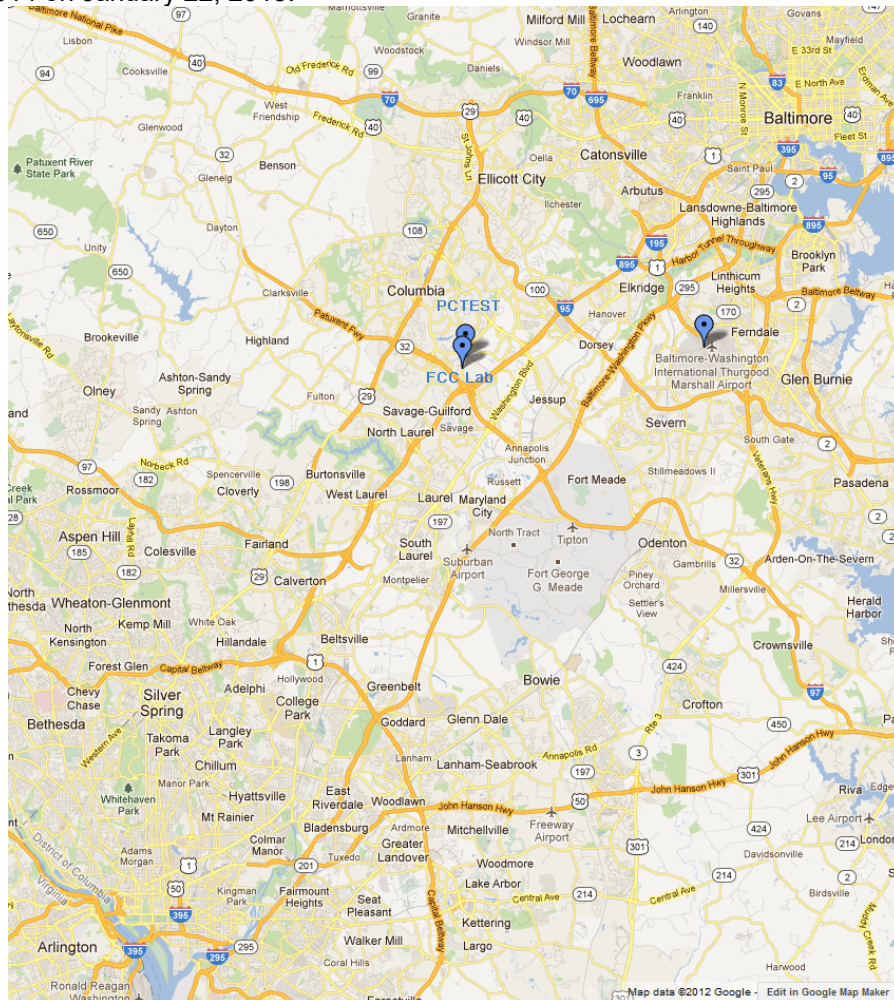


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 5 of 38                    |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFH910**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n/ac WLAN, 802.11a/n/ac UNII, MIMO, Bluetooth (1x, EDR, LE), NFC

LTE Band 12 (698 - 716 MHz) overlaps the entire frequency range of LTE Band 17 (704 - 716 MHz). Therefore, test data provided in this report covers Band 17 as well as Band 12.

LTE Band 66 (1710 - 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz). Therefore, test data provided in this report covers Band 66 as well as Band 4.

This device also employs an antenna switching diversity (ASDiv) mechanism that allows for radiated transmission from one of two antennas at a time for LTE Band 5, 12 and 17. Both antennas cannot transmit simultaneously so dual transmission conditions were not investigated. The two antennas share the same conducted circuitry so only one set of conducted measurements is included. The main transmit antenna data is labeled as "Antenna 1" and the Secondary Antenna data is labeled as "Antenna 2" in the radiated section of this report.

In addition, in order to optimize antenna performance, the tuner for this device was set to simulate a "free space" condition in which the transmit antenna is matched to the medium into which it is transmitting and, thus, all power is at its maximum level.

### 2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFH910 was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v02r02. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 6 of 38                    |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-D-2010) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v02r02) were used in the measurement of the **LG Portable Handset FCC ID: ZNFH910**.

### 3.1 Block C Frequency Range

#### §27.5(b)(3)

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

### 3.2 Block A Frequency Range


#### §27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;  
Block B: 704-710 MHz and 734-740 MHz; and  
Block C: 710-716 MHz and 740-746 MHz.

### 3.3 Cellular - Base Frequency Blocks

#### §22.905

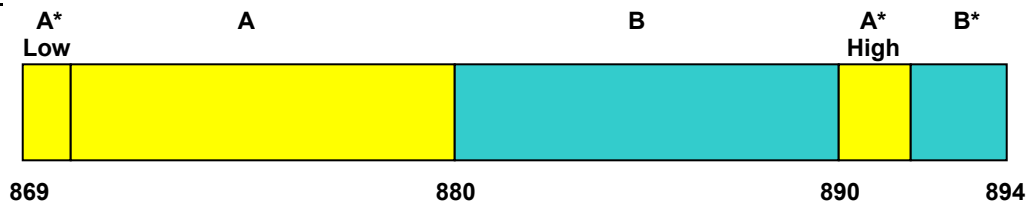

**BLOCK 1:** 869 – 880 MHz (A\* Low + A)

**BLOCK 2:** 880 – 890 MHz (B)


**BLOCK 3:** 890 – 891.5 MHz (A\* High)

**BLOCK 4:** 891.5 – 894 MHz (B\*)

|                                      |                                               |                                                                             |    |                                 |
|--------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------|----|---------------------------------|
| FCC ID: ZNFH910                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | LG | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                  | EUT Type:<br>Portable Handset                                               |    | Page 7 of 38                    |

### 3.4 Cellular - Mobile Frequency Blocks

§22.905

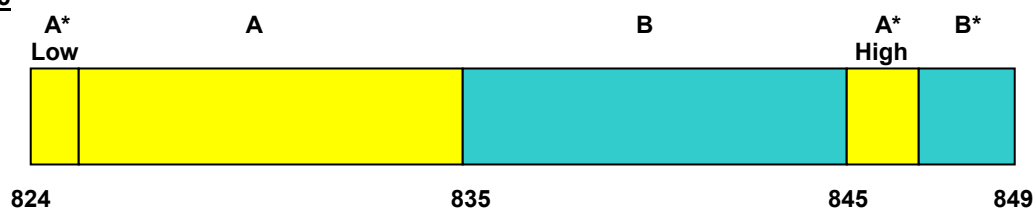

BLOCK 1: 824 – 835 MHz (A\* Low + A)


BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A\* High)

BLOCK 4: 846.5 – 849 MHz (B\*)

### 3.5 PCS - Base Frequency Blocks

§24.229

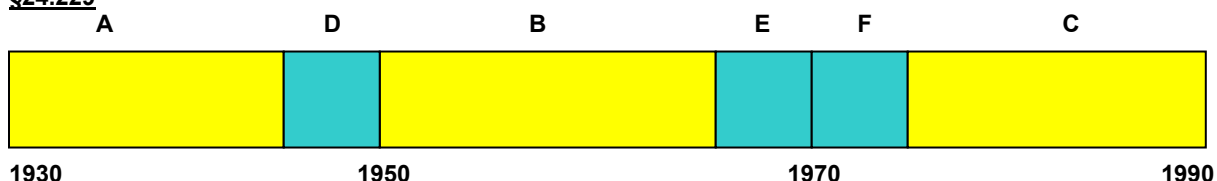

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 3: 1950 – 1965 MHz (B)


BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 6: 1975 – 1990 MHz (C)

### 3.6 PCS - Mobile Frequency Blocks

§24.229

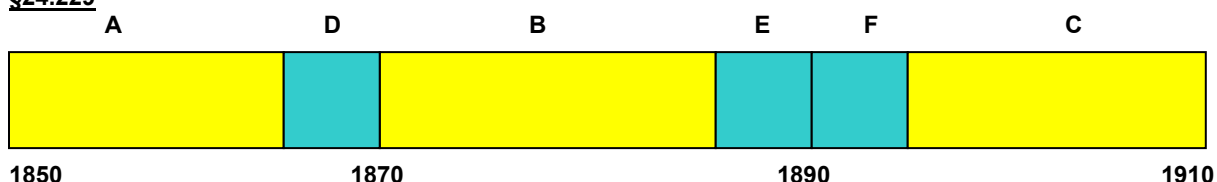

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 3: 1870 – 1885 MHz (B)


BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 6: 1895 – 1910 MHz (C)

### 3.7 AWS - Base Frequency Blocks

§27.5(h)

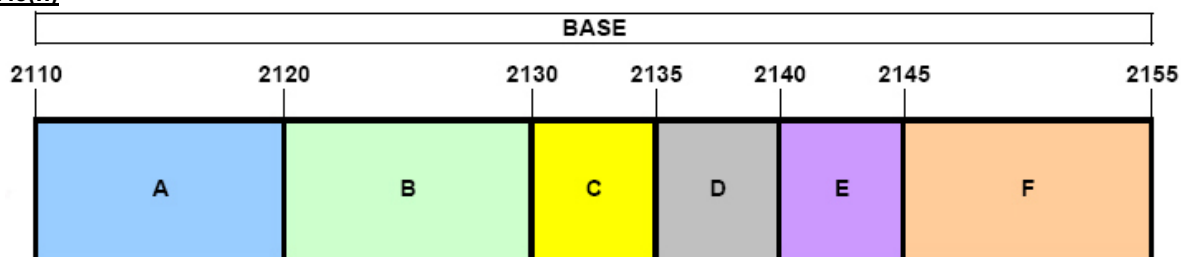

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 2: 2120 – 2130 MHz (B)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 4: 2135 – 2140 MHz (D)


BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 6: 2145 – 2155 MHz (F)

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 8 of 38                    |

### 3.8 AWS - Mobile Frequency Blocks

§27.5(h)

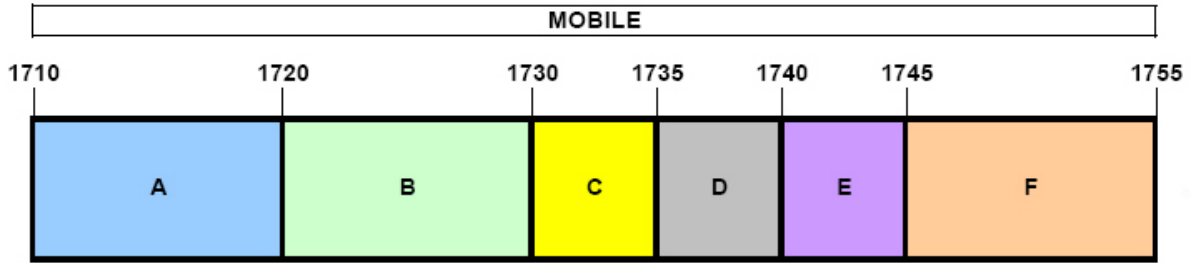

BLOCK 1: 1710 – 1720 MHz (A)  
BLOCK 2: 1720 – 1730 MHz (B)  
BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 4: 1735 – 1740 MHz (D)  
BLOCK 5: 1740 – 1745 MHz (E)  
BLOCK 6: 1745 – 1755 MHz (F)

### 3.9 WCS – Mobile/Base Frequency Blocks

§27.5(a)

The following frequencies are available for WCS in the 2305-2320 MHz and 2345-2360 MHz bands:

BLOCK 1: 2305-2310 and 2350-2355 MHz (A)


BLOCK 2: 2310-2315 and 2355-236 MHz (B)

BLOCK 3: 2315-2320 MHz (C)

BLOCK 4: 2345-2350 MHz (D)

### 3.10 BRS/EBS Frequency Block

§27.5

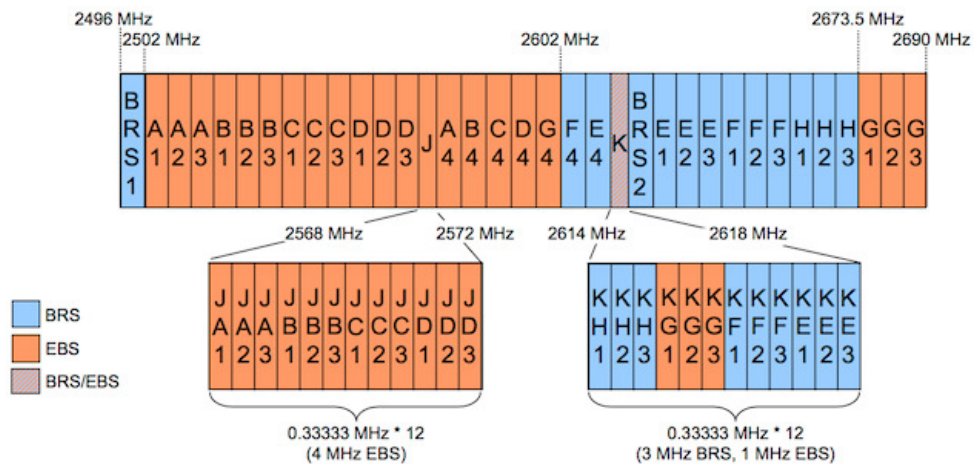

|                                      |                                               |                                                                             |           |                                 |
|--------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------------|-----------|---------------------------------|
| FCC ID: ZNFH910                      | <b>PCTEST</b><br>ENGINEERING LABORATORY, INC. | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) | <b>LG</b> | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                  | EUT Type:<br>Portable Handset                                               |           | Page 9 of 38                    |

### 3.11 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(b.10) §27.50(c.10) §27.50(d.4) §27.53(a.4) §27.53(f) §27.53(g) §27.53(h)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v02r02.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$ . For Band 7, the calculated  $P_d$  levels are compared to the absolute spurious emission limit of -25dBm which is equivalent to the required minimum attenuation of  $55 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$ . For Band 30, the calculated  $P_d$  levels are compared to the absolute spurious emission limit of -40dBm which is equivalent to the required minimum attenuation of  $70 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$ .

|                                      |                                                                                                                                                                             |                               |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |                               |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                                                                                                                | EUT Type:<br>Portable Handset |                                                                                       | Page 10 of 38                   |

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                     | Expanded Uncertainty ( $\pm$ dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13                             |
| Radiated Disturbance (<1GHz)     | 4.98                             |
| Radiated Disturbance (>1GHz)     | 5.07                             |
| Radiated Disturbance (>18GHz)    | 5.09                             |

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 11 of 38                   |

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

| Manufacturer    | Model    | Description                            | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------|----------|----------------------------------------|------------|--------------|------------|---------------|
| -               | RE1      | Radiated Emissions Cable Set (UHF/EHF) | 7/11/2016  | Annual       | 7/11/2017  | RE1           |
| Agilent         | E5515C   | Wireless Communications Test Set       | 1/29/2016  | Biennial     | 1/29/2018  | GB46310798    |
| Agilent         | N9038A   | MXE EMI Receiver                       | 4/21/2016  | Annual       | 4/21/2017  | MY51210133    |
| Agilent         | N9030A   | PXA Signal Analyzer (26.5GHz)          | 7/20/2016  | Annual       | 7/20/2017  | MY49432391    |
| Agilent         | N9030A   | PXA Signal Analyzer (44GHz)            | 3/1/2016   | Annual       | 3/1/2017   | MY52350166    |
| Com-Power       | AL-130   | 9kHz - 30MHz Loop Antenna              | 7/30/2015  | Biennial     | 7/30/2017  | 121034        |
| Emco            | 3115     | Horn Antenna (1-18GHz)                 | 3/10/2016  | Biennial     | 3/10/2018  | 9704-5182     |
| ETS Lindgren    | 3117     | 1-18 GHz DRG Horn (Medium)             | 4/26/2016  | Biennial     | 4/26/2018  | 125518        |
| PCTEST          | -        | EMC Switch System                      | 7/11/2016  | Annual       | 7/11/2017  | NM1           |
| PCTEST          | -        | EMC Switch System                      | 7/6/2016   | Annual       | 7/6/2017   | NM2           |
| Rhode & Schwarz | TS-PR18  | Pre-Amplifier                          | 7/6/2016   | Annual       | 7/6/2017   | 101622        |
| Rohde & Schwarz | CMU200   | Base Station Simulator                 | 3/29/2016  | Annual       | 3/29/2017  | 836371/0079   |
| Rohde & Schwarz | CMW500   | Radio Communication Tester             | 10/13/2015 | Annual       | 10/13/2016 | 100976        |
| Rohde & Schwarz | TS-PR18  | 1-18 GHz Pre-Amplifier                 | 7/11/2016  | Annual       | 7/11/2017  | 100071        |
| Rohde & Schwarz | ESU26    | EMI Test Receiver (26.5GHz)            | 5/16/2016  | Annual       | 5/16/2017  | 100342        |
| Rohde & Schwarz | ESU40    | EMI Test Receiver (40GHz)              | 7/15/2016  | Annual       | 7/15/2017  | 100348        |
| Rohde & Schwarz | FSW67    | Signal / Spectrum Analyzer             | 7/27/2016  | Annual       | 7/27/2017  | 103200        |
| Schwarzbeck     | UHA 9105 | Dipole Antenna (400 - 1GHz) Rx         | 3/30/2016  | Biennial     | 3/30/2018  | 9105-2404     |
| Sunol           | JB5      | Bi-Log Antenna (30M - 5GHz)            | 3/14/2016  | Biennial     | 3/14/2018  | A051107       |

**Table 5-1. Test Equipment**

|                                      |                                                                                                                                                                             |                               |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |                               |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                                                                                                                | EUT Type:<br>Portable Handset | Page 12 of 38                                                                         |                                 |

## 6.0 SAMPLE CALCULATIONS

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 13 of 38                   |

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFH910  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): LTE

| FCC Part Section(s)                                         | Test Description                               | Test Limit                                                                                                                                  | Test Condition | Result | Reference   |
|-------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------|-------------|
| 22.913(a.2)                                                 | Effective Radiated Power (Band 5)              | < 7 Watts max. ERP                                                                                                                          | RADIATED       | PASS   | Section 7.2 |
| 27.50(b.10)<br>27.50(c.10)                                  | Effective Radiated Power (Band 12 13)          | < 3 Watts max. ERP                                                                                                                          |                | PASS   | Section 7.2 |
| 24.232(c)<br>27.50(h.2)                                     | Equivalent Isotropic Radiated Power (Band 2 7) | < 2 Watts max. EIRP                                                                                                                         |                | PASS   | Section 7.2 |
| 27.50(d.4)                                                  | Equivalent Isotropic Radiated Power (Band 4)   | < 1 Watts max. EIRP                                                                                                                         |                | PASS   | Section 7.2 |
| 27.50(a.3)                                                  | Equivalent Isotropic Radiated Power (Band 30)  | < 0.25 Watts max. EIRP                                                                                                                      |                | PASS   | Section 7.2 |
| 2.1053 22.917(a)<br>24.238(a) 27.53(c)<br>27.53(g) 27.53(h) | Undesirable Emissions                          | > 43 + 10log <sub>10</sub> (P[Watts]) for all out-of-band emissions                                                                         |                | PASS   | Section 7.3 |
| 27.53(f)                                                    | Undesirable Emissions (Band 13)                | < -70 dBW/MHz (for wideband signals)<br>< -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 – 1610 MHz |                | PASS   | Section 7.3 |
| 27.53(a)                                                    | Undesirable Emissions (Band 30)                | > 70 + 10log <sub>10</sub> (P[Watts])                                                                                                       |                | PASS   | Section 7.3 |
| 27.53(m)                                                    | Undesirable Emissions                          | > 43 + 10log <sub>10</sub> (P[Watts]) at channel edges<br>> 55 + 10log <sub>10</sub> (P[Watts]) at 5.5MHz away and beyond channel edges     |                | PASS   | Section 7.3 |

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               | Page 14 of 38                                                                         |                                 |

## 7.2 Radiated Power (ERP/EIRP)

§22.913(a.2) §24.232(c.2) §27.50(h.2) §27.50(b.10) §27.50(c.10) §27.50(d.4) §27.50(a.3)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.2.1

ANSI/TIA-603-D-2010 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize


|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 15 of 38                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

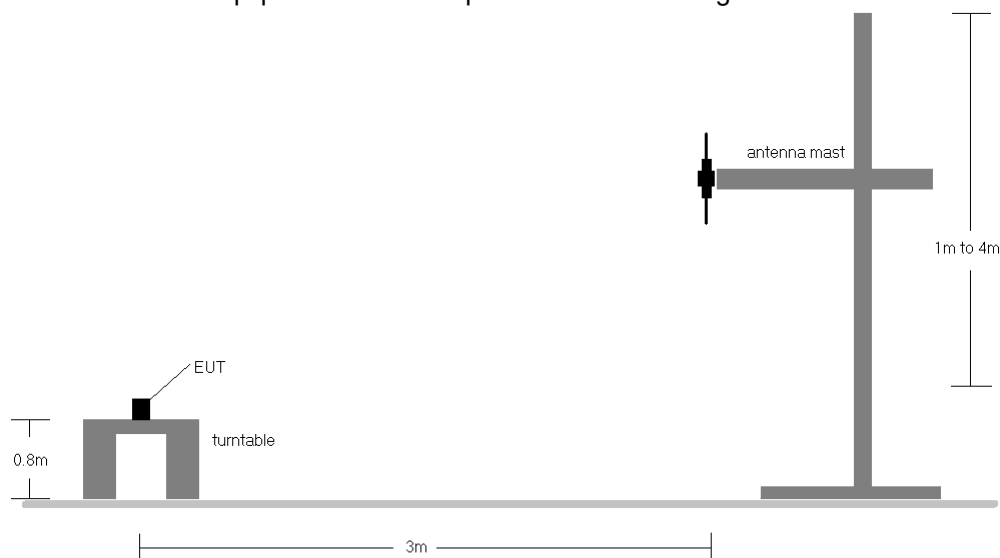

**Figure 7-1. Radiated Test Setup <1GHz**

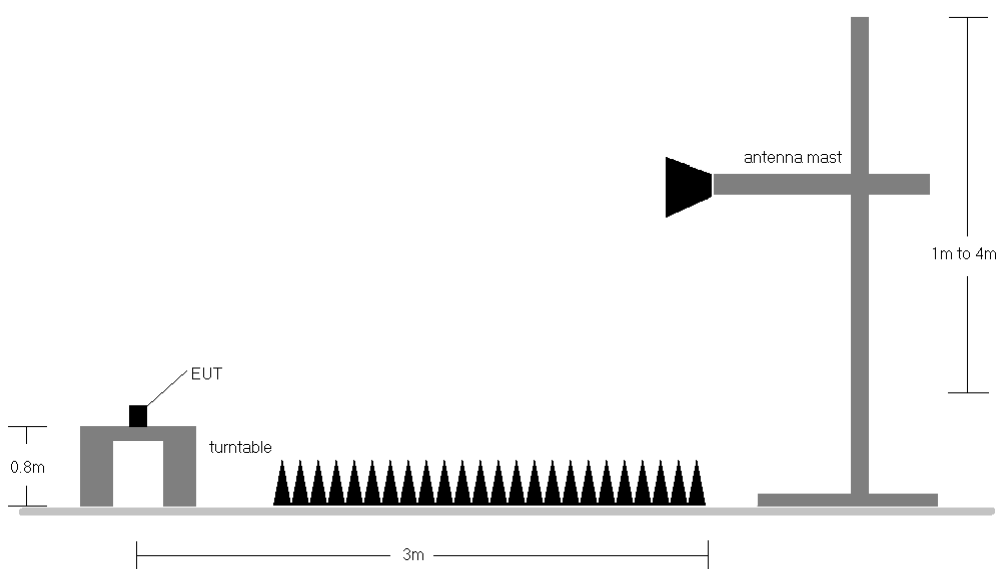

**Figure 7-2. Radiated Test Setup >1GHz**

## Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 16 of 38                   |

## 7.2.1 Antenna-1 Radiated Power (ERP/EIRP)

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBd] | ERP [dBm] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|-----------|-----------------|-------------|
| 699.70          | 1.4                     | QPSK   | H               | 271                 | 194                        | 1 / 0          | 17.50                  | 2.31            | 19.81     | 34.77           | -14.96      |
| 707.50          | 1.4                     | QPSK   | H               | 271                 | 194                        | 3 / 2          | 17.40                  | 2.31            | 19.71     | 34.77           | -15.06      |
| 715.30          | 1.4                     | QPSK   | H               | 271                 | 19                         | 1 / 0          | 16.39                  | 2.52            | 18.91     | 34.77           | -15.86      |
| 699.70          | 1.4                     | 16-QAM | H               | 271                 | 194                        | 1 / 5          | 16.64                  | 2.31            | 18.95     | 34.77           | -15.82      |
| 707.50          | 1.4                     | 16-QAM | H               | 271                 | 194                        | 1 / 0          | 16.44                  | 2.31            | 18.75     | 34.77           | -16.02      |
| 715.30          | 1.4                     | 16-QAM | H               | 271                 | 19                         | 1 / 0          | 15.36                  | 2.52            | 17.88     | 34.77           | -16.89      |
| 700.50          | 3                       | QPSK   | H               | 270                 | 190                        | 1 / 14         | 17.48                  | 2.12            | 19.60     | 34.77           | -15.17      |
| 707.50          | 3                       | QPSK   | H               | 270                 | 190                        | 1 / 0          | 17.37                  | 2.31            | 19.68     | 34.77           | -15.09      |
| 714.50          | 3                       | QPSK   | H               | 270                 | 190                        | 1 / 0          | 16.72                  | 2.50            | 19.22     | 34.77           | -15.55      |
| 700.50          | 3                       | 16-QAM | H               | 270                 | 190                        | 1 / 14         | 16.57                  | 2.12            | 18.69     | 34.77           | -16.08      |
| 707.50          | 3                       | 16-QAM | H               | 270                 | 190                        | 1 / 0          | 16.47                  | 2.31            | 18.78     | 34.77           | -15.99      |
| 714.50          | 3                       | 16-QAM | H               | 270                 | 190                        | 1 / 0          | 15.81                  | 2.50            | 18.31     | 34.77           | -16.46      |

Table 7-2. ERP Data (Band 12)

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBd] | ERP [dBm] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|-----------|-----------------|-------------|
| 701.50          | 5                       | QPSK   | H               | 261                 | 189                        | 1 / 0          | 17.55                  | 2.15            | 19.70     | 34.77           | -15.07      |
| 707.50          | 5                       | QPSK   | H               | 261                 | 189                        | 1 / 0          | 17.38                  | 2.31            | 19.69     | 34.77           | -15.08      |
| 713.50          | 5                       | QPSK   | H               | 261                 | 189                        | 1 / 0          | 17.09                  | 2.48            | 19.57     | 34.77           | -15.21      |
| 701.50          | 5                       | 16-QAM | H               | 261                 | 189                        | 1 / 0          | 16.56                  | 2.15            | 18.71     | 34.77           | -16.06      |
| 707.50          | 5                       | 16-QAM | H               | 261                 | 189                        | 1 / 0          | 16.62                  | 2.31            | 18.93     | 34.77           | -15.84      |
| 713.50          | 5                       | 16-QAM | H               | 261                 | 189                        | 1 / 0          | 16.12                  | 2.48            | 18.60     | 34.77           | -16.18      |
| 704.00          | 10                      | QPSK   | H               | 276                 | 189                        | 1 / 0          | 17.51                  | 2.22            | 19.73     | 34.77           | -15.05      |
| 707.50          | 10                      | QPSK   | H               | 276                 | 189                        | 1 / 0          | 17.31                  | 2.31            | 19.62     | 34.77           | -15.15      |
| 711.00          | 10                      | QPSK   | H               | 276                 | 189                        | 1 / 0          | 17.17                  | 2.41            | 19.58     | 34.77           | -15.19      |
| 704.00          | 10                      | 16-QAM | H               | 276                 | 189                        | 1 / 0          | 16.56                  | 2.22            | 18.78     | 34.77           | -16.00      |
| 707.50          | 10                      | 16-QAM | H               | 276                 | 189                        | 1 / 0          | 16.34                  | 2.31            | 18.65     | 34.77           | -16.12      |
| 711.00          | 10                      | 16-QAM | H               | 276                 | 189                        | 1 / 0          | 16.25                  | 2.41            | 18.66     | 34.77           | -16.11      |
| 699.70          | 1.4                     | QPSK   | V               | 152                 | 182                        | 1 / 74         | 17.12                  | 2.31            | 19.43     | 34.77           | -15.34      |

Table 7-3. ERP Data (Band 12/17)

|                                      |                                                                                                                                                                                                                                                                   |                               |  |  |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|--|--|---------------------------------|
| FCC ID: ZNFH910                      |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b>  |                               |  |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                                                                                                                                                                                                      | EUT Type:<br>Portable Handset |  |  | Page 17 of 38                   |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBd] | ERP [dBm] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|-----------|-----------------|-------------|
| 824.70          | 1.4                     | QPSK   | H               | 210                 | 223                        | 1 / 0          | 13.72                  | 5.01            | 18.73     | 38.45           | -19.72      |
| 836.50          | 1.4                     | QPSK   | H               | 210                 | 223                        | 3 / 2          | 13.99                  | 5.16            | 19.15     | 38.45           | -19.30      |
| 848.30          | 1.4                     | QPSK   | H               | 210                 | 223                        | 1 / 0          | 14.09                  | 5.30            | 19.39     | 38.45           | -19.06      |
| 824.70          | 1.4                     | 16-QAM | H               | 210                 | 223                        | 1 / 5          | 13.31                  | 5.01            | 18.32     | 38.45           | -20.13      |
| 836.50          | 1.4                     | 16-QAM | H               | 210                 | 223                        | 1 / 0          | 12.95                  | 5.16            | 18.11     | 38.45           | -20.34      |
| 848.30          | 1.4                     | 16-QAM | H               | 210                 | 223                        | 1 / 0          | 12.97                  | 5.30            | 18.27     | 38.45           | -20.18      |
| 825.50          | 3                       | QPSK   | H               | 214                 | 209                        | 1 / 0          | 13.41                  | 5.02            | 18.43     | 38.45           | -20.02      |
| 836.50          | 3                       | QPSK   | H               | 214                 | 209                        | 1 / 14         | 13.71                  | 5.16            | 18.87     | 38.45           | -19.58      |
| 847.50          | 3                       | QPSK   | H               | 214                 | 209                        | 1 / 0          | 12.96                  | 5.29            | 18.25     | 38.45           | -20.20      |
| 825.50          | 3                       | 16-QAM | H               | 214                 | 209                        | 1 / 14         | 11.83                  | 5.02            | 16.85     | 38.45           | -21.60      |
| 836.50          | 3                       | 16-QAM | H               | 214                 | 209                        | 1 / 0          | 13.14                  | 5.16            | 18.30     | 38.45           | -20.15      |
| 847.50          | 3                       | 16-QAM | H               | 214                 | 209                        | 1 / 0          | 11.89                  | 5.29            | 17.19     | 38.45           | -21.27      |
| 826.50          | 5                       | QPSK   | H               | 206                 | 216                        | 1 / 0          | 13.87                  | 5.03            | 18.90     | 38.45           | -19.55      |
| 836.50          | 5                       | QPSK   | H               | 206                 | 216                        | 1 / 24         | 13.00                  | 5.16            | 18.15     | 38.45           | -20.30      |
| 846.50          | 5                       | QPSK   | H               | 206                 | 216                        | 1 / 0          | 13.09                  | 5.28            | 18.37     | 38.45           | -20.08      |
| 826.50          | 5                       | 16-QAM | H               | 206                 | 216                        | 1 / 0          | 12.27                  | 5.03            | 17.31     | 38.45           | -21.14      |
| 836.50          | 5                       | 16-QAM | H               | 206                 | 216                        | 1 / 24         | 12.16                  | 5.16            | 17.32     | 38.45           | -21.13      |
| 846.50          | 5                       | 16-QAM | H               | 206                 | 216                        | 1 / 0          | 11.74                  | 5.28            | 17.02     | 38.45           | -21.43      |
| 829.00          | 10                      | QPSK   | H               | 359                 | 127                        | 1 / 49         | 12.95                  | 5.06            | 18.01     | 38.45           | -20.44      |
| 836.50          | 10                      | QPSK   | H               | 195                 | 127                        | 1 / 49         | 12.92                  | 5.16            | 18.08     | 38.45           | -20.37      |
| 844.00          | 10                      | QPSK   | H               | 195                 | 124                        | 1 / 49         | 12.28                  | 5.25            | 17.53     | 38.45           | -20.92      |
| 829.00          | 10                      | 16-QAM | H               | 359                 | 127                        | 1 / 0          | 13.38                  | 5.06            | 18.44     | 38.45           | -20.01      |
| 836.50          | 10                      | 16-QAM | H               | 195                 | 127                        | 1 / 49         | 11.90                  | 5.16            | 17.06     | 38.45           | -21.39      |
| 844.00          | 10                      | 16-QAM | H               | 195                 | 124                        | 1 / 49         | 11.24                  | 5.25            | 16.49     | 38.45           | -21.96      |
| 848.30          | 1.4                     | QPSK   | V               | 131                 | 165                        | 1 / 0          | 11.47                  | 5.30            | 16.77     | 38.45           | -21.68      |

**Table 7-4. ERP Data (Band 5)**

|                                             |                                                                                                                                                                                                                                                                   |                                      |  |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--|----------------------------------------|
| FCC ID: ZNFH910                             |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b>  |                                      |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1608121354.ZNF | <b>Test Dates:</b><br>8/9-8/17/2016                                                                                                                                                                                                                               | <b>EUT Type:</b><br>Portable Handset |  | Page 18 of 38                          |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|------------|------------------|-------------|
| 1710.70         | 1.4                     | QPSK   | H               | 117                 | 134                        | 1 / 5          | 15.81                  | 9.66            | 25.47      | 30.00            | -4.53       |
| 1732.50         | 1.4                     | QPSK   | H               | 117                 | 138                        | 1 / 5          | 15.00                  | 9.61            | 24.61      | 30.00            | -5.39       |
| 1754.30         | 1.4                     | QPSK   | H               | 112                 | 287                        | 1 / 0          | 15.02                  | 9.57            | 24.59      | 30.00            | -5.41       |
| 1710.70         | 1.4                     | 16-QAM | H               | 117                 | 134                        | 1 / 5          | 14.92                  | 9.66            | 24.57      | 30.00            | -5.43       |
| 1732.50         | 1.4                     | 16-QAM | H               | 117                 | 138                        | 1 / 0          | 14.13                  | 9.61            | 23.74      | 30.00            | -6.26       |
| 1754.30         | 1.4                     | 16-QAM | H               | 112                 | 287                        | 1 / 0          | 14.35                  | 9.57            | 23.93      | 30.00            | -6.07       |
| 1711.50         | 3                       | QPSK   | H               | 108                 | 354                        | 1 / 0          | 16.20                  | 9.65            | 25.86      | 30.00            | -4.14       |
| 1732.50         | 3                       | QPSK   | H               | 110                 | 360                        | 1 / 0          | 15.02                  | 9.61            | 24.64      | 30.00            | -5.36       |
| 1753.50         | 3                       | QPSK   | H               | 115                 | 288                        | 1 / 0          | 14.71                  | 9.57            | 24.29      | 30.00            | -5.71       |
| 1711.50         | 3                       | 16-QAM | H               | 108                 | 354                        | 1 / 14         | 15.29                  | 9.65            | 24.94      | 30.00            | -5.06       |
| 1732.50         | 3                       | 16-QAM | H               | 110                 | 360                        | 1 / 14         | 13.76                  | 9.61            | 23.38      | 30.00            | -6.62       |
| 1753.50         | 3                       | 16-QAM | H               | 115                 | 288                        | 1 / 14         | 14.07                  | 9.57            | 23.65      | 30.00            | -6.35       |
| 1711.50         | 3                       | QPSK   | V               | 112                 | 183                        | 1 / 0          | 14.11                  | 9.65            | 23.76      | 30.00            | -6.24       |

**Table 7-5. EIRP Data (Band 4)**

|                                             |                                                                                                                                                                             |                                      |                                                                                       |                                        |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: ZNFH910                             |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |                                      |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1608121354.ZNF | <b>Test Dates:</b><br>8/9-8/17/2016                                                                                                                                         | <b>EUT Type:</b><br>Portable Handset | Page 19 of 38                                                                         |                                        |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|------------|------------------|-------------|
| 1712.50         | 5                       | QPSK   | H               | 116                 | 134                        | 1 / 0          | 15.62                  | 9.65            | 25.28      | 30.00            | -4.72       |
| 1732.50         | 5                       | QPSK   | H               | 117                 | 138                        | 1 / 0          | 15.62                  | 9.61            | 25.23      | 30.00            | -4.77       |
| 1752.50         | 5                       | QPSK   | H               | 109                 | 289                        | 1 / 0          | 14.35                  | 9.57            | 23.92      | 30.00            | -6.08       |
| 1712.50         | 5                       | 16-QAM | H               | 116                 | 134                        | 1 / 0          | 15.15                  | 9.65            | 24.80      | 30.00            | -5.20       |
| 1732.50         | 5                       | 16-QAM | H               | 117                 | 138                        | 1 / 0          | 14.89                  | 9.61            | 24.50      | 30.00            | -5.50       |
| 1752.50         | 5                       | 16-QAM | H               | 109                 | 289                        | 1 / 24         | 14.35                  | 9.57            | 23.92      | 30.00            | -6.08       |
| 1715.00         | 10                      | QPSK   | H               | 118                 | 360                        | 1 / 0          | 15.30                  | 9.65            | 24.95      | 30.00            | -5.05       |
| 1732.50         | 10                      | QPSK   | H               | 164                 | 13                         | 1 / 49         | 15.25                  | 9.61            | 24.86      | 30.00            | -5.14       |
| 1750.00         | 10                      | QPSK   | H               | 163                 | 360                        | 1 / 0          | 15.09                  | 9.58            | 24.67      | 30.00            | -5.33       |
| 1715.00         | 10                      | 16-QAM | H               | 118                 | 360                        | 1 / 49         | 15.42                  | 9.65            | 25.07      | 30.00            | -4.93       |
| 1732.50         | 10                      | 16-QAM | H               | 164                 | 13                         | 1 / 49         | 14.08                  | 9.61            | 23.70      | 30.00            | -6.30       |
| 1750.00         | 10                      | 16-QAM | H               | 163                 | 360                        | 1 / 49         | 14.53                  | 9.58            | 24.11      | 30.00            | -5.89       |
| 1717.50         | 15                      | QPSK   | H               | 119                 | 197                        | 1 / 74         | 15.40                  | 9.64            | 25.05      | 30.00            | -4.95       |
| 1732.50         | 15                      | QPSK   | H               | 120                 | 196                        | 1 / 0          | 15.19                  | 9.61            | 24.81      | 30.00            | -5.19       |
| 1747.50         | 15                      | QPSK   | H               | 173                 | 193                        | 1 / 74         | 15.26                  | 9.58            | 24.84      | 30.00            | -5.16       |
| 1717.50         | 15                      | 16-QAM | H               | 119                 | 197                        | 1 / 74         | 14.55                  | 9.64            | 24.19      | 30.00            | -5.81       |
| 1732.50         | 15                      | 16-QAM | H               | 120                 | 196                        | 1 / 0          | 13.65                  | 9.61            | 23.27      | 30.00            | -6.73       |
| 1747.50         | 15                      | 16-QAM | H               | 173                 | 193                        | 1 / 74         | 14.74                  | 9.58            | 24.32      | 30.00            | -5.68       |
| 1720.00         | 20                      | QPSK   | H               | 118                 | 9                          | 1 / 0          | 15.39                  | 9.64            | 25.03      | 30.00            | -4.97       |
| 1732.50         | 20                      | QPSK   | H               | 168                 | 360                        | 1 / 0          | 15.07                  | 9.61            | 24.68      | 30.00            | -5.32       |
| 1745.00         | 20                      | QPSK   | H               | 100                 | 357                        | 1 / 99         | 15.28                  | 9.59            | 24.87      | 30.00            | -5.13       |
| 1720.00         | 20                      | 16-QAM | H               | 118                 | 9                          | 1 / 0          | 14.66                  | 9.64            | 24.30      | 30.00            | -5.70       |
| 1732.50         | 20                      | 16-QAM | H               | 168                 | 360                        | 1 / 0          | 14.28                  | 9.61            | 23.90      | 30.00            | -6.10       |
| 1745.00         | 20                      | 16-QAM | H               | 100                 | 357                        | 1 / 99         | 14.49                  | 9.59            | 24.08      | 30.00            | -5.92       |

**Table 7-6. EIRP Data (Band 4/66)**

|                                             |                                                                                                                                                                             |                                      |                                                                                       |                                        |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: ZNFH910                             |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |                                      |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1608121354.ZNF | <b>Test Dates:</b><br>8/9-8/17/2016                                                                                                                                         | <b>EUT Type:</b><br>Portable Handset |                                                                                       | Page 20 of 38                          |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|------------|------------------|-------------|
| 1850.70         | 1.4                     | QPSK   | H               | 110                 | 93                         | 1 / 5          | 13.77                  | 9.35            | 23.12      | 33.01            | -9.89       |
| 1880.00         | 1.4                     | QPSK   | H               | 110                 | 93                         | 3 / 2          | 14.83                  | 9.27            | 24.10      | 33.01            | -8.91       |
| 1909.30         | 1.4                     | QPSK   | H               | 110                 | 94                         | 1 / 5          | 14.17                  | 9.25            | 23.42      | 33.01            | -9.59       |
| 1850.70         | 1.4                     | 16-QAM | H               | 110                 | 93                         | 1 / 5          | 12.86                  | 9.35            | 22.21      | 33.01            | -10.80      |
| 1880.00         | 1.4                     | 16-QAM | H               | 110                 | 93                         | 1 / 0          | 13.74                  | 9.27            | 23.01      | 33.01            | -10.00      |
| 1909.30         | 1.4                     | 16-QAM | H               | 110                 | 94                         | 1 / 5          | 13.31                  | 9.25            | 22.56      | 33.01            | -10.45      |
| 1851.50         | 3                       | QPSK   | H               | 110                 | 84                         | 1 / 14         | 13.91                  | 9.35            | 23.26      | 33.01            | -9.75       |
| 1880.00         | 3                       | QPSK   | H               | 110                 | 80                         | 1 / 0          | 14.80                  | 9.27            | 24.07      | 33.01            | -8.94       |
| 1908.50         | 3                       | QPSK   | H               | 110                 | 51                         | 1 / 0          | 14.11                  | 9.25            | 23.36      | 33.01            | -9.65       |
| 1851.50         | 3                       | 16-QAM | H               | 110                 | 84                         | 1 / 14         | 13.05                  | 9.35            | 22.40      | 33.01            | -10.61      |
| 1880.00         | 3                       | 16-QAM | H               | 110                 | 80                         | 1 / 0          | 13.82                  | 9.27            | 23.09      | 33.01            | -9.92       |
| 1908.50         | 3                       | 16-QAM | H               | 110                 | 51                         | 1 / 14         | 13.23                  | 9.25            | 22.48      | 33.01            | -10.53      |
| 1852.50         | 5                       | QPSK   | H               | 110                 | 90                         | 1 / 24         | 14.17                  | 9.34            | 23.51      | 33.01            | -9.50       |
| 1880.00         | 5                       | QPSK   | H               | 110                 | 93                         | 1 / 0          | 14.88                  | 9.27            | 24.15      | 33.01            | -8.86       |
| 1907.50         | 5                       | QPSK   | H               | 110                 | 89                         | 1 / 0          | 14.22                  | 9.24            | 23.46      | 33.01            | -9.55       |
| 1852.50         | 5                       | 16-QAM | H               | 110                 | 90                         | 1 / 24         | 13.28                  | 9.34            | 22.62      | 33.01            | -10.39      |
| 1880.00         | 5                       | 16-QAM | H               | 110                 | 93                         | 1 / 0          | 14.10                  | 9.27            | 23.37      | 33.01            | -9.64       |
| 1907.50         | 5                       | 16-QAM | H               | 110                 | 89                         | 1 / 0          | 13.38                  | 9.24            | 22.62      | 33.01            | -10.39      |
| 1855.00         | 10                      | QPSK   | H               | 110                 | 58                         | 1 / 0          | 12.26                  | 9.34            | 21.60      | 33.01            | -11.41      |
| 1880.00         | 10                      | QPSK   | H               | 110                 | 54                         | 1 / 0          | 13.18                  | 9.27            | 22.45      | 33.01            | -10.56      |
| 1905.00         | 10                      | QPSK   | H               | 110                 | 50                         | 1 / 49         | 12.94                  | 9.24            | 22.18      | 33.01            | -10.83      |
| 1855.00         | 10                      | 16-QAM | H               | 110                 | 58                         | 1 / 0          | 11.31                  | 9.34            | 20.65      | 33.01            | -12.36      |
| 1880.00         | 10                      | 16-QAM | H               | 110                 | 54                         | 1 / 0          | 12.21                  | 9.27            | 21.48      | 33.01            | -11.53      |
| 1905.00         | 10                      | 16-QAM | H               | 110                 | 50                         | 1 / 49         | 11.95                  | 9.24            | 21.19      | 33.01            | -11.82      |
| 1857.50         | 15                      | QPSK   | H               | 110                 | 194                        | 1 / 0          | 12.99                  | 9.33            | 22.32      | 33.01            | -10.69      |
| 1880.00         | 15                      | QPSK   | H               | 110                 | 198                        | 1 / 0          | 13.32                  | 9.27            | 22.59      | 33.01            | -10.42      |
| 1902.50         | 15                      | QPSK   | H               | 110                 | 190                        | 1 / 0          | 13.03                  | 9.23            | 22.26      | 33.01            | -10.75      |
| 1857.50         | 15                      | 16-QAM | H               | 110                 | 194                        | 1 / 0          | 11.85                  | 9.33            | 21.18      | 33.01            | -11.83      |
| 1880.00         | 15                      | 16-QAM | H               | 110                 | 198                        | 1 / 0          | 12.49                  | 9.27            | 21.76      | 33.01            | -11.25      |
| 1902.50         | 15                      | 16-QAM | H               | 110                 | 190                        | 1 / 0          | 11.93                  | 9.23            | 21.16      | 33.01            | -11.85      |
| 1860.00         | 20                      | QPSK   | H               | 110                 | 198                        | 1 / 99         | 13.11                  | 9.32            | 22.43      | 33.01            | -10.58      |
| 1880.00         | 20                      | QPSK   | H               | 110                 | 199                        | 1 / 0          | 13.47                  | 9.27            | 22.74      | 33.01            | -10.27      |
| 1900.00         | 20                      | QPSK   | H               | 145                 | 195                        | 1 / 0          | 13.56                  | 9.22            | 22.78      | 33.01            | -10.23      |
| 1860.00         | 20                      | 16-QAM | H               | 110                 | 198                        | 1 / 99         | 12.30                  | 9.32            | 21.62      | 33.01            | -11.39      |
| 1880.00         | 20                      | 16-QAM | H               | 110                 | 199                        | 1 / 0          | 12.55                  | 9.27            | 21.82      | 33.01            | -11.19      |
| 1900.00         | 20                      | 16-QAM | H               | 145                 | 195                        | 1 / 0          | 12.68                  | 9.22            | 21.90      | 33.01            | -11.11      |
| 1880.00         | 5                       | QPSK   | V               | 110                 | 255                        | 1 / 0          | 12.74                  | 9.27            | 22.01      | 33.01            | -11.00      |

**Table 7-7. EIRP Data (Band 2)**

|                                      |                                                                                                                                                                                                                                                                   |                               |  |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|--|---------------------------------|
| FCC ID: ZNFH910                      |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b>  |                               |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                                                                                                                                                                                                      | EUT Type:<br>Portable Handset |  | Page 21 of 38                   |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|------------|------------------|-------------|
| 2307.50         | 5                       | QPSK   | H               | 115                 | 9                          | 1 / 24         | 11.13                  | 9.09            | 20.22      | 23.98            | -3.76       |
| 2310.00         | 5                       | QPSK   | H               | 112                 | 10                         | 1 / 0          | 11.21                  | 9.09            | 20.30      | 23.98            | -3.68       |
| 2312.50         | 5                       | QPSK   | H               | 114                 | 10                         | 1 / 0          | 11.43                  | 9.08            | 20.51      | 23.98            | -3.47       |
| 2307.50         | 5                       | 16-QAM | H               | 115                 | 9                          | 1 / 0          | 10.44                  | 9.09            | 19.53      | 23.98            | -4.45       |
| 2310.00         | 5                       | 16-QAM | H               | 112                 | 10                         | 1 / 0          | 10.38                  | 9.09            | 19.47      | 23.98            | -4.51       |
| 2312.50         | 5                       | 16-QAM | H               | 114                 | 10                         | 1 / 0          | 10.53                  | 9.08            | 19.61      | 23.98            | -4.37       |
| 2310.00         | 10                      | QPSK   | H               | 110                 | 10                         | 1 / 49         | 10.71                  | 9.09            | 19.80      | 23.98            | -4.18       |
| 2310.00         | 10                      | 16-QAM | H               | 110                 | 10                         | 1 / 49         | 9.89                   | 9.09            | 18.98      | 23.98            | -5.00       |
| 2312.50         | 5                       | QPSK   | V               | 129                 | 103                        | 1 / 0          | 8.37                   | 9.09            | 17.46      | 23.98            | -6.52       |

**Table 7-8. EIRP Data (Band 30)**

|                                             |                                                                                     |                                                                                         |                                                                                       |                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| <b>FCC ID:</b> ZNFH910                      |  | <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1608121354.ZNF | <b>Test Dates:</b><br>8/9-8/17/2016                                                 | <b>EUT Type:</b><br>Portable Handset                                                    | Page 22 of 38                                                                         |                                        |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBi] | EIRP [dBm] | EIRP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|------------|------------------|-------------|
| 2502.50         | 5                       | QPSK   | H               | 229                 | 154                        | 1 / 0          | 8.81                   | 8.59            | 17.40      | 33.01            | -15.61      |
| 2535.00         | 5                       | QPSK   | H               | 229                 | 154                        | 1 / 0          | 10.01                  | 8.57            | 18.58      | 33.01            | -14.43      |
| 2567.50         | 5                       | QPSK   | H               | 229                 | 154                        | 1 / 0          | 9.14                   | 8.55            | 17.69      | 33.01            | -15.32      |
| 2502.50         | 5                       | 16-QAM | H               | 229                 | 154                        | 1 / 24         | 8.01                   | 8.59            | 16.60      | 33.01            | -16.41      |
| 2535.00         | 5                       | 16-QAM | H               | 229                 | 154                        | 1 / 24         | 9.25                   | 8.57            | 17.82      | 33.01            | -15.19      |
| 2567.50         | 5                       | 16-QAM | H               | 229                 | 154                        | 1 / 0          | 8.32                   | 8.55            | 16.87      | 33.01            | -16.14      |
| 2505.00         | 10                      | QPSK   | H               | 236                 | 342                        | 1 / 49         | 8.82                   | 8.59            | 17.41      | 33.01            | -15.60      |
| 2535.00         | 10                      | QPSK   | H               | 236                 | 342                        | 1 / 0          | 9.02                   | 8.57            | 17.59      | 33.01            | -15.42      |
| 2565.00         | 10                      | QPSK   | H               | 236                 | 342                        | 1 / 0          | 9.07                   | 8.55            | 17.62      | 33.01            | -15.39      |
| 2505.00         | 10                      | 16-QAM | H               | 236                 | 342                        | 1 / 49         | 7.89                   | 8.59            | 16.48      | 33.01            | -16.53      |
| 2535.00         | 10                      | 16-QAM | H               | 236                 | 342                        | 1 / 0          | 8.13                   | 8.57            | 16.70      | 33.01            | -16.31      |
| 2565.00         | 10                      | 16-QAM | H               | 236                 | 342                        | 1 / 0          | 8.18                   | 8.55            | 16.73      | 33.01            | -16.28      |
| 2507.50         | 15                      | QPSK   | H               | 242                 | 143                        | 1 / 0          | 8.95                   | 8.59            | 17.54      | 33.01            | -15.47      |
| 2535.00         | 15                      | QPSK   | H               | 242                 | 143                        | 1 / 74         | 8.15                   | 8.57            | 16.72      | 33.01            | -16.29      |
| 2562.50         | 15                      | QPSK   | H               | 242                 | 143                        | 1 / 74         | 7.81                   | 8.55            | 16.36      | 33.01            | -16.65      |
| 2507.50         | 15                      | 16-QAM | H               | 242                 | 143                        | 1 / 0          | 8.23                   | 8.59            | 16.82      | 33.01            | -16.19      |
| 2535.00         | 15                      | 16-QAM | H               | 242                 | 143                        | 1 / 74         | 7.18                   | 8.57            | 15.75      | 33.01            | -17.26      |
| 2562.50         | 15                      | 16-QAM | H               | 242                 | 143                        | 1 / 74         | 6.92                   | 8.55            | 15.47      | 33.01            | -17.54      |
| 2510.00         | 20                      | QPSK   | H               | 243                 | 147                        | 1 / 0          | 8.15                   | 8.59            | 16.74      | 33.01            | -16.27      |
| 2535.00         | 20                      | QPSK   | H               | 243                 | 147                        | 1 / 99         | 9.77                   | 8.57            | 18.34      | 33.01            | -14.67      |
| 2560.00         | 20                      | QPSK   | H               | 243                 | 147                        | 1 / 0          | 10.01                  | 8.56            | 18.57      | 33.01            | -14.44      |
| 2510.00         | 20                      | 16-QAM | H               | 243                 | 147                        | 1 / 99         | 7.27                   | 8.59            | 15.86      | 33.01            | -17.15      |
| 2535.00         | 20                      | 16-QAM | H               | 243                 | 147                        | 1 / 99         | 8.81                   | 8.57            | 17.38      | 33.01            | -15.63      |
| 2560.00         | 20                      | 16-QAM | H               | 243                 | 147                        | 1 / 0          | 9.13                   | 8.56            | 17.69      | 33.01            | -15.32      |
| 2535.00         | 5                       | QPSK   | V               | 100                 | 252                        | 1 / 0          | 7.76                   | 8.57            | 16.33      | 33.01            | -16.68      |

**Table 7-9. EIRP Data (Band 7)**

|                                             |                                                                                                                                                                             |                                      |                                                                                       |                                        |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: ZNFH910                             |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |                                      |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1608121354.ZNF | <b>Test Dates:</b><br>8/9-8/17/2016                                                                                                                                         | <b>EUT Type:</b><br>Portable Handset |                                                                                       | Page 23 of 38                          |

## 7.2.2 Antenna-2 Radiated Power (ERP/EIRP)

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBd] | ERP [dBm] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|-----------|-----------------|-------------|
| 699.70          | 1.4                     | QPSK   | H               | 135                 | 264                        | 1 / 5          | 8.04                   | 2.31            | 10.35     | 34.77           | -24.42      |
| 707.50          | 1.4                     | QPSK   | H               | 142                 | 258                        | 1 / 5          | 8.07                   | 2.31            | 10.38     | 34.77           | -24.39      |
| 715.30          | 1.4                     | QPSK   | H               | 145                 | 253                        | 1 / 0          | 7.59                   | 2.52            | 10.11     | 34.77           | -24.66      |
| 699.70          | 1.4                     | 16-QAM | H               | 135                 | 264                        | 1 / 5          | 6.95                   | 2.31            | 9.26      | 34.77           | -25.51      |
| 707.50          | 1.4                     | 16-QAM | H               | 142                 | 258                        | 1 / 5          | 6.87                   | 2.31            | 9.18      | 34.77           | -25.59      |
| 715.30          | 1.4                     | 16-QAM | H               | 145                 | 253                        | 1 / 0          | 6.58                   | 2.52            | 9.10      | 34.77           | -25.67      |
| 700.50          | 3                       | QPSK   | H               | 134                 | 259                        | 1 / 14         | 8.64                   | 2.12            | 10.76     | 34.77           | -24.01      |
| 707.50          | 3                       | QPSK   | H               | 139                 | 260                        | 1 / 14         | 8.43                   | 2.31            | 10.74     | 34.77           | -24.03      |
| 714.50          | 3                       | QPSK   | H               | 145                 | 253                        | 1 / 0          | 8.08                   | 2.50            | 10.58     | 34.77           | -24.19      |
| 700.50          | 3                       | 16-QAM | H               | 134                 | 259                        | 1 / 14         | 7.56                   | 2.12            | 9.68      | 34.77           | -25.09      |
| 707.50          | 3                       | 16-QAM | H               | 139                 | 260                        | 1 / 14         | 7.51                   | 2.31            | 9.82      | 34.77           | -24.95      |
| 714.50          | 3                       | 16-QAM | H               | 145                 | 253                        | 1 / 0          | 7.19                   | 2.50            | 9.69      | 34.77           | -25.08      |

Table 7-10. ERP Data (Band 12)

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBd] | ERP [dBm] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|-----------|-----------------|-------------|
| 701.50          | 5                       | QPSK   | H               | 135                 | 257                        | 1 / 0          | 9.41                   | 2.15            | 11.56     | 34.77           | -23.21      |
| 707.50          | 5                       | QPSK   | H               | 140                 | 268                        | 1 / 24         | 9.71                   | 2.31            | 12.02     | 34.77           | -22.75      |
| 713.50          | 5                       | QPSK   | H               | 140                 | 241                        | 1 / 0          | 9.25                   | 2.48            | 11.73     | 34.77           | -23.05      |
| 701.50          | 5                       | 16-QAM | H               | 135                 | 257                        | 1 / 0          | 8.59                   | 2.15            | 10.74     | 34.77           | -24.03      |
| 707.50          | 5                       | 16-QAM | H               | 140                 | 268                        | 1 / 24         | 8.59                   | 2.31            | 10.90     | 34.77           | -23.87      |
| 713.50          | 5                       | 16-QAM | H               | 140                 | 241                        | 1 / 0          | 8.12                   | 2.48            | 10.60     | 34.77           | -24.18      |
| 704.00          | 10                      | QPSK   | H               | 132                 | 265                        | 1 / 0          | 9.69                   | 2.22            | 11.91     | 34.77           | -22.87      |
| 707.50          | 10                      | QPSK   | H               | 140                 | 260                        | 1 / 0          | 9.90                   | 2.31            | 12.21     | 34.77           | -22.56      |
| 711.00          | 10                      | QPSK   | H               | 138                 | 252                        | 1 / 0          | 9.96                   | 2.41            | 12.37     | 34.77           | -22.40      |
| 704.00          | 10                      | 16-QAM | H               | 132                 | 265                        | 1 / 0          | 8.33                   | 2.22            | 10.55     | 34.77           | -24.23      |
| 707.50          | 10                      | 16-QAM | H               | 140                 | 260                        | 1 / 0          | 8.62                   | 2.31            | 10.93     | 34.77           | -23.84      |
| 711.00          | 10                      | 16-QAM | H               | 138                 | 252                        | 1 / 0          | 8.70                   | 2.41            | 11.11     | 34.77           | -23.66      |
| 711.00          | 10                      | QPSK   | V               | 145                 | 135                        | 1 / 0          | 9.32                   | 2.41            | 11.73     | 34.77           | -23.04      |

Table 7-11. ERP Data (Band 12)

|                                      |                                                                                                                                                                                   |                               |  |  |                                                                                       |                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|--|--|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT</b><br><b>(CLASS II PERMISSIVE CHANGE)</b> |                               |  |  |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                                                                                                                      | EUT Type:<br>Portable Handset |  |  |                                                                                       | Page 24 of 38                   |

| Frequency [MHz] | Channel Bandwidth [MHz] | Mod.   | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | RB Size/Offset | Substitute Level [dBm] | Ant. Gain [dBd] | ERP [dBm] | ERP Limit [dBm] | Margin [dB] |
|-----------------|-------------------------|--------|-----------------|---------------------|----------------------------|----------------|------------------------|-----------------|-----------|-----------------|-------------|
| 824.70          | 1.4                     | QPSK   | H               | 218                 | 74                         | 1 / 5          | 8.25                   | 5.01            | 13.26     | 38.45           | -25.19      |
| 836.50          | 1.4                     | QPSK   | H               | 216                 | 80                         | 1 / 0          | 8.93                   | 5.16            | 14.09     | 38.45           | -24.36      |
| 848.30          | 1.4                     | QPSK   | H               | 194                 | 79                         | 1 / 5          | 10.19                  | 5.30            | 15.49     | 38.45           | -22.96      |
| 824.70          | 1.4                     | 16-QAM | H               | 218                 | 74                         | 1 / 5          | 7.37                   | 5.01            | 12.38     | 38.45           | -26.07      |
| 836.50          | 1.4                     | 16-QAM | H               | 216                 | 80                         | 1 / 5          | 7.86                   | 5.16            | 13.02     | 38.45           | -25.43      |
| 848.30          | 1.4                     | 16-QAM | H               | 194                 | 79                         | 1 / 0          | 8.96                   | 5.30            | 14.26     | 38.45           | -24.19      |
| 825.50          | 3                       | QPSK   | H               | 222                 | 70                         | 1 / 14         | 8.73                   | 5.02            | 13.75     | 38.45           | -24.70      |
| 836.50          | 3                       | QPSK   | H               | 206                 | 78                         | 1 / 14         | 9.33                   | 5.16            | 14.49     | 38.45           | -23.96      |
| 847.50          | 3                       | QPSK   | H               | 200                 | 75                         | 1 / 14         | 10.23                  | 5.29            | 15.52     | 38.45           | -22.93      |
| 825.50          | 3                       | 16-QAM | H               | 222                 | 70                         | 1 / 14         | 7.76                   | 5.02            | 12.78     | 38.45           | -25.67      |
| 836.50          | 3                       | 16-QAM | H               | 206                 | 78                         | 1 / 14         | 8.32                   | 5.16            | 13.48     | 38.45           | -24.97      |
| 847.50          | 3                       | 16-QAM | H               | 200                 | 75                         | 1 / 0          | 9.24                   | 5.29            | 14.53     | 38.45           | -23.92      |
| 826.50          | 5                       | QPSK   | H               | 221                 | 72                         | 1 / 24         | 8.89                   | 5.03            | 13.92     | 38.45           | -24.53      |
| 836.50          | 5                       | QPSK   | H               | 225                 | 67                         | 1 / 0          | 8.86                   | 5.16            | 14.02     | 38.45           | -24.43      |
| 846.50          | 5                       | QPSK   | H               | 201                 | 83                         | 1 / 24         | 10.14                  | 5.28            | 15.42     | 38.45           | -23.03      |
| 826.50          | 5                       | 16-QAM | H               | 221                 | 72                         | 1 / 24         | 7.96                   | 5.03            | 12.99     | 38.45           | -25.46      |
| 836.50          | 5                       | 16-QAM | H               | 225                 | 67                         | 1 / 0          | 7.97                   | 5.16            | 13.13     | 38.45           | -25.32      |
| 846.50          | 5                       | 16-QAM | H               | 201                 | 83                         | 1 / 24         | 9.37                   | 5.28            | 14.65     | 38.45           | -23.80      |
| 829.00          | 10                      | QPSK   | H               | 216                 | 75                         | 1 / 49         | 8.80                   | 5.06            | 13.86     | 38.45           | -24.59      |
| 836.50          | 10                      | QPSK   | H               | 224                 | 75                         | 1 / 0          | 9.36                   | 5.16            | 14.52     | 38.45           | -23.93      |
| 844.00          | 10                      | QPSK   | H               | 200                 | 78                         | 1 / 49         | 10.44                  | 5.25            | 15.69     | 38.45           | -22.76      |
| 829.00          | 10                      | 16-QAM | H               | 216                 | 75                         | 1 / 0          | 8.45                   | 5.06            | 13.51     | 38.45           | -24.94      |
| 836.50          | 10                      | 16-QAM | H               | 224                 | 75                         | 1 / 49         | 7.71                   | 5.16            | 12.87     | 38.45           | -25.58      |
| 844.00          | 10                      | 16-QAM | H               | 200                 | 78                         | 1 / 49         | 9.28                   | 5.25            | 14.53     | 38.45           | -23.92      |
| 844.00          | 10                      | QPSK   | V               | 121                 | 77                         | 1 / 0          | 7.04                   | 5.25            | 12.29     | 38.45           | -26.16      |

**Table 7-12. ERP Data (Band 5)**

|                                             |                                                                                                                                                                             |                                      |                                                                                       |                                        |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| FCC ID: ZNFH910                             |  <b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |                                      |  | <b>Reviewed by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>0Y1608121354.ZNF | <b>Test Dates:</b><br>8/9-8/17/2016                                                                                                                                         | <b>EUT Type:</b><br>Portable Handset |                                                                                       | Page 25 of 38                          |

### 7.3 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(c) §27.53(f) §27.53(g) §27.53(h) §27.53(m) §27.53(a.4)

#### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA-603-D-2010 – Section 2.2.12


#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 26 of 38                   |

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

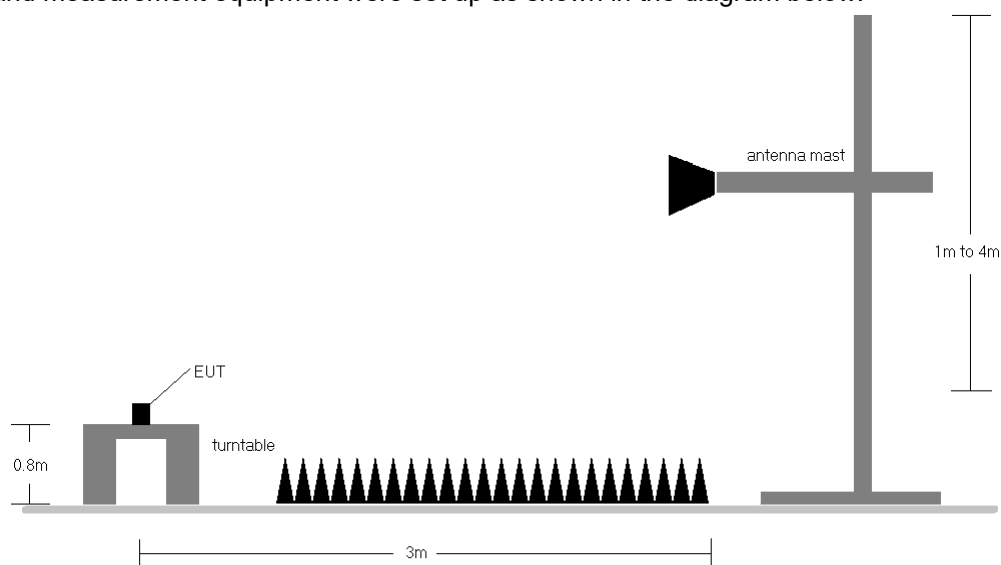

**Figure 7-3. Test Instrument & Measurement Setup**

## Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 27 of 38                   |

### 7.3.1 Antenna-1 Radiated Spurious Emissions Measurements

OPERATING FREQUENCY: 704.00 MHz  
 CHANNEL: 23060  
 MEASURED OUTPUT POWER: 19.73 dBm = 0.094 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) = 32.73$  dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 1408.00         | H               | -                   | -                          | -62.69                           | 5.57                          | -57.12                        | 76.8  |
| 2112.00         | H               | 162                 | 212                        | -52.11                           | 6.65                          | -45.46                        | 65.2  |

Table 7-13. Radiated Spurious Data (Band 12/17 – Low Channel)

OPERATING FREQUENCY: 707.50 MHz  
 CHANNEL: 23095  
 MEASURED OUTPUT POWER: 19.62 dBm = 0.092 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) = 32.62$  dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 1415.00         | H               | -                   | -                          | -63.75                           | 5.69                          | -58.06                        | 77.7  |
| 2122.50         | H               | 129                 | 273                        | -51.18                           | 6.75                          | -44.43                        | 64.1  |

Table 7-14. Radiated Spurious Data (Band 12/17 – Mid Channel)

OPERATING FREQUENCY: 711.00 MHz  
 CHANNEL: 23130  
 MEASURED OUTPUT POWER: 19.58 dBm = 0.091 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  32.58 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 1422.00         | H               | -                   | -                          | -62.64                           | 5.82                          | -56.83                        | 76.4  |
| 2133.00         | H               | 122                 | 215                        | -53.21                           | 6.84                          | -46.37                        | 65.9  |

Table 7-15. Radiated Spurious Data (Band 12/17 – High Channel)

OPERATING FREQUENCY: 824.70 MHz  
 CHANNEL: 20407  
 MEASURED OUTPUT POWER: 21.22 dBm = 0.132 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 1.4 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  34.22 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 1649.40         | H               | -                   | -                          | -63.28                           | 6.70                          | -56.58                        | 77.8  |
| 2474.10         | H               | 196                 | 102                        | -59.07                           | 7.52                          | -51.55                        | 72.8  |

Table 7-16. Radiated Spurious Data (Band 5 – Low Channel)

OPERATING FREQUENCY: 836.50 MHz  
 CHANNEL: 20525  
 MEASURED OUTPUT POWER: 22.02 dBm = 0.159 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 1.4 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.02 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 1673.00         | H               | 110                 | 200                        | -61.46                           | 6.70                          | -54.76                        | 76.8  |
| 2509.50         | H               | 117                 | 80                         | -54.19                           | 7.63                          | -46.57                        | 68.6  |

**Table 7-17. Radiated Spurious Data (Band 5 – Mid Channel)**

OPERATING FREQUENCY: 848.30 MHz  
 CHANNEL: 20643  
 MEASURED OUTPUT POWER: 20.69 dBm = 0.117 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 1.4 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  33.69 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 1696.60         | H               | 109                 | 207                        | -59.51                           | 6.70                          | -52.81                        | 73.5  |
| 2544.90         | H               | 110                 | 274                        | -59.69                           | 7.60                          | -52.09                        | 72.8  |

**Table 7-18. Radiated Spurious Data (Band 5 – High Channel)**

OPERATING FREQUENCY: 1717.50 MHz  
 CHANNEL: 20025  
 MEASURED OUTPUT POWER: 22.24 dBm = 0.168 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 15.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.24 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 3435.00         | H               | -                   | -                          | -57.70                           | 9.88                          | -47.83                        | 70.1  |
| 5152.50         | H               | -                   | -                          | -51.13                           | 10.75                         | -40.38                        | 62.6  |

Table 7-19. Radiated Spurious Data (Band 4/66 – Low Channel)

OPERATING FREQUENCY: 1732.50 MHz  
 CHANNEL: 20175  
 MEASURED OUTPUT POWER: 22.43 dBm = 0.175 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 15.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.43 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 3465.00         | H               | 116                 | 314                        | -52.02                           | 9.91                          | -42.11                        | 64.5  |
| 5197.50         | H               | 145                 | 111                        | -44.46                           | 10.75                         | -33.71                        | 56.1  |

Table 7-20. Radiated Spurious Data (Band 4/66 – Mid Channel)

OPERATING FREQUENCY: 1747.50 MHz  
 CHANNEL: 20325  
 MEASURED OUTPUT POWER: 21.19 dBm = 0.132 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 15.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  34.19 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 3495.00         | H               | 113                 | 316                        | -53.25                           | 9.94                          | -43.31                        | 64.5  |
| 5242.50         | H               | 181                 | 118                        | -51.44                           | 10.72                         | -40.72                        | 61.9  |

**Table 7-21. Radiated Spurious Data (Band 4/66 – High Channel)**

OPERATING FREQUENCY: 1852.50 MHz  
 CHANNEL: 18625  
 MEASURED OUTPUT POWER: 23.51 dBm = 0.225 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  36.51 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 3705.00         | H               | 198                 | 62                         | -52.84                           | 9.52                          | -43.32                        | 66.8  |
| 5557.50         | H               | 112                 | 137                        | -52.52                           | 11.03                         | -41.49                        | 65.0  |

**Table 7-22. Radiated Spurious Data (Band 2 – Low Channel)**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 18900  
 MEASURED OUTPUT POWER: 24.15 dBm = 0.260 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  37.15 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 3760.00         | H               | 115                 | 7                          | -52.76                           | 9.39                          | -43.38                        | 67.5  |
| 5640.00         | H               | 123                 | 127                        | -53.44                           | 11.22                         | -42.22                        | 66.4  |

Table 7-23. Radiated Spurious Data (Band 2 – Mid Channel)

OPERATING FREQUENCY: 1907.50 MHz  
 CHANNEL: 19175  
 MEASURED OUTPUT POWER: 23.46 dBm = 0.222 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  36.46 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 3815.00         | H               | 197                 | 77                         | -52.24                           | 9.32                          | -42.92                        | 66.4  |
| 5722.50         | H               | 110                 | 149                        | -55.64                           | 11.35                         | -44.29                        | 67.8  |

Table 7-24. Radiated Spurious Data (Band 2 – High Channel)

OPERATING FREQUENCY: 2307.50 MHz  
 CHANNEL: 27685  
 MEASURED OUTPUT POWER: 20.22 dBm = 0.105 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $70 + 10 \log_{10} (W) =$  60.22 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 4615.00         | H               | 129                 | 42                         | -65.55                           | 10.98                         | -54.57                        | 74.8  |
| 6922.50         | H               | 128                 | 3                          | -56.50                           | 11.75                         | -44.75                        | 65.0  |
| 9230.00         | H               | -                   | -                          | -59.45                           | 11.51                         | -47.94                        | 68.2  |

**Table 7-25. Radiated Spurious Data (Band 30 – Low Channel)**

OPERATING FREQUENCY: 2310.00 MHz  
 CHANNEL: 27710  
 MEASURED OUTPUT POWER: 20.30 dBm = 0.107 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $70 + 10 \log_{10} (W) =$  60.30 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 4620.00         | H               | 113                 | 9                          | -65.41                           | 10.98                         | -54.43                        | 74.7  |
| 6930.00         | H               | 142                 | 351                        | -56.53                           | 11.76                         | -44.77                        | 65.1  |
| 9240.00         | H               | -                   | -                          | -59.90                           | 11.52                         | -48.39                        | 68.7  |

**Table 7-26. Radiated Spurious Data (Band 30 – Mid Channel)**

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 34 of 38                   |

OPERATING FREQUENCY: 2312.50 MHz  
 CHANNEL: 27735  
 MEASURED OUTPUT POWER: 20.51 dBm = 0.113 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $70 + 10 \log_{10}(W) =$  60.51 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 4625.00         | H               | 133                 | 48                         | -66.63                           | 10.97                         | -55.66                        | 76.2  |
| 6937.50         | H               | 131                 | 17                         | -57.37                           | 11.77                         | -45.60                        | 66.1  |
| 9250.00         | H               | -                   | -                          | -59.93                           | 11.52                         | -48.41                        | 68.9  |

**Table 7-27. Radiated Spurious Data (Band 30 – High Channel)**

OPERATING FREQUENCY: 2502.50 MHz  
 CHANNEL: 20775  
 MEASURED OUTPUT POWER: 17.40 dBm = 0.055 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W) =$  42.40 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 5005.00         | H               | 234                 | 154                        | -62.03                           | 10.15                         | -51.88                        | 69.3  |
| 7507.50         | H               | 141                 | 39                         | -48.17                           | 12.03                         | -36.15                        | 53.6  |
| 10010.00        | H               | 141                 | 53                         | -60.69                           | 13.00                         | -47.69                        | 65.1  |
| 12512.50        | H               | -                   | -                          | -58.45                           | 13.25                         | -45.21                        | 62.6  |

**Table 7-28. Radiated Spurious Data (Band 7 – Low Channel)**

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 35 of 38                   |

OPERATING FREQUENCY: 2535.00 MHz  
 CHANNEL: 21100  
 MEASURED OUTPUT POWER: 18.58 dBm = 0.072 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W)$  43.58 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 5070.00         | H               | 230                 | 160                        | -57.10                           | 10.28                         | -46.82                        | 65.4  |
| 7605.00         | H               | 140                 | 42                         | -48.96                           | 12.15                         | -36.81                        | 55.4  |
| 10140.00        | H               | -                   | -                          | -59.33                           | 12.99                         | -46.33                        | 64.9  |

**Table 7-29. Radiated Spurious Data (Band 7 – Mid Channel)**

OPERATING FREQUENCY: 2567.50 MHz  
 CHANNEL: 21425  
 MEASURED OUTPUT POWER: 17.69 dBm = 0.059 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $55 + 10 \log_{10}(W)$  42.69 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBi] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 5135.00         | H               | 272                 | 158                        | -53.88                           | 10.36                         | -43.52                        | 61.2  |
| 7702.50         | H               | 146                 | 234                        | -49.25                           | 12.20                         | -37.05                        | 54.7  |
| 10270.00        | H               | -                   | -                          | -61.21                           | 13.10                         | -48.10                        | 65.8  |

**Table 7-30. Radiated Spurious Data (Band 7 – High Channel)**

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 36 of 38                   |

### 7.3.2 Antenna-2 Radiated Spurious Emissions Measurements

OPERATING FREQUENCY: 707.50 MHz  
 CHANNEL: 23095  
 MEASURED OUTPUT POWER: 12.21 dBm = 0.017 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  25.21 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 1415.00         | H               | -                   | -                          | -64.18                           | 5.69                          | -58.49                        | 70.7  |
| 2122.50         | H               | -                   | -                          | -63.57                           | 6.75                          | -56.82                        | 69.0  |

Table 7-31. Radiated Spurious Data (Band 12/17 – Mid Channel)

OPERATING FREQUENCY: 836.50 MHz  
 CHANNEL: 26365  
 MEASURED OUTPUT POWER: 14.52 dBm = 0.028 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 10.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  27.52 dBc

| Frequency [MHz] | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Level at Antenna Terminals [dBm] | Substitute Antenna Gain [dBd] | Spurious Emission Level [dBm] | [dBc] |
|-----------------|-----------------|---------------------|----------------------------|----------------------------------|-------------------------------|-------------------------------|-------|
| 1673.00         | H               | -                   | -                          | -66.14                           | 6.70                          | -59.44                        | 74.0  |
| 2509.50         | H               | -                   | -                          | -63.38                           | 7.63                          | -55.76                        | 70.3  |

Table 7-32. Radiated Spurious Data (Band 5 – Mid Channel)

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFH910** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

|                                      |                                                                                     |                                                                             |                                                                                       |                                 |
|--------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|
| FCC ID: ZNFH910                      |  | FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Reviewed by:<br>Quality Manager |
| Test Report S/N:<br>0Y1608121354.ZNF | Test Dates:<br>8/9-8/17/2016                                                        | EUT Type:<br>Portable Handset                                               |                                                                                       | Page 38 of 38                   |