


測試頻道: IEEE 802.11a / 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/13
 環境濕度: 70%

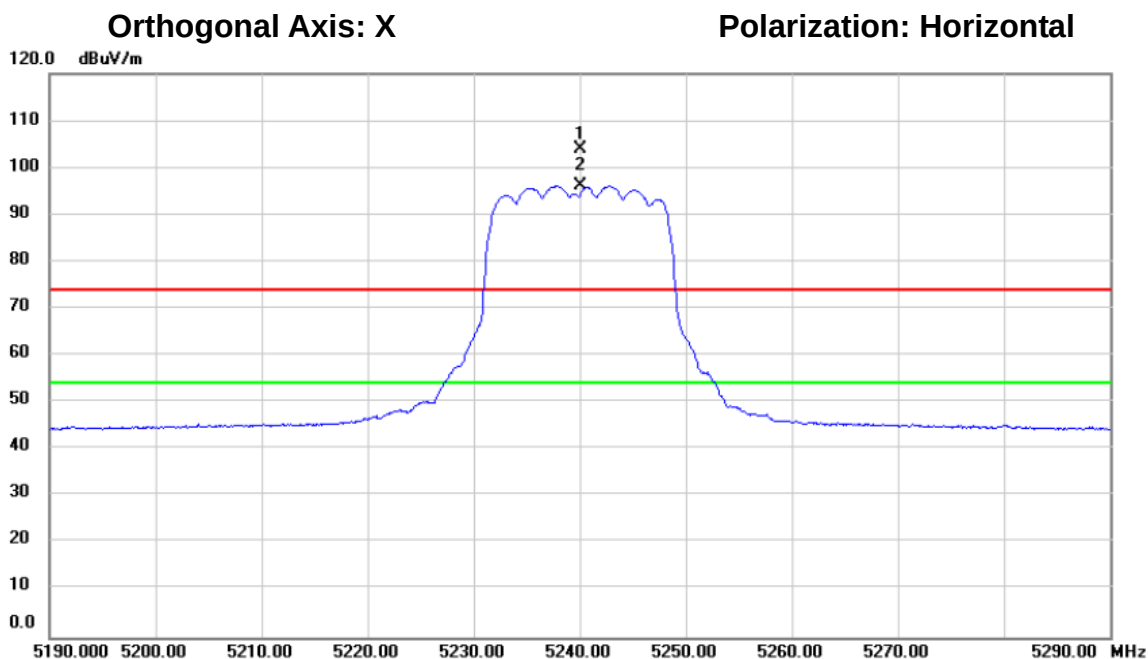

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5240.000	66.42	37.64	104.06	74.00	30.06	peak		主頻訊號不予判斷
2	*	5240.000	58.52	37.64	96.16	54.00	42.16	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5240 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/13
 環境濕度: 70%

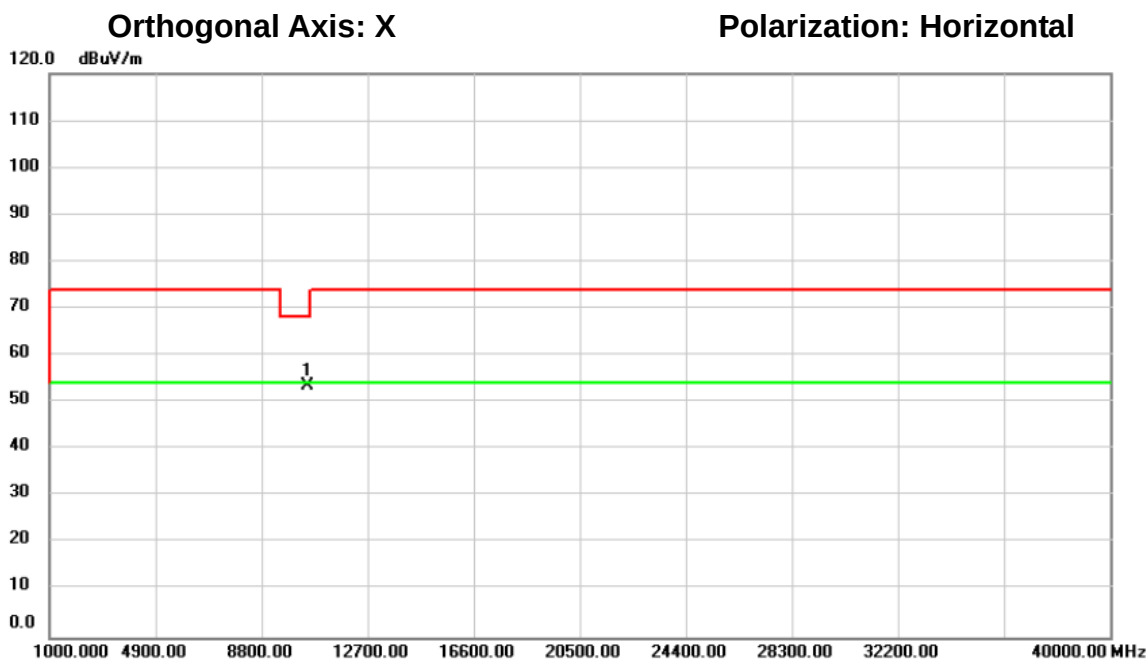

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.00	51.68	1.96	53.64	68.20	-14.56	peak		

測試頻道: IEEE 802.11n (20 MHz) /
5180 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/13


環境濕度: 70%

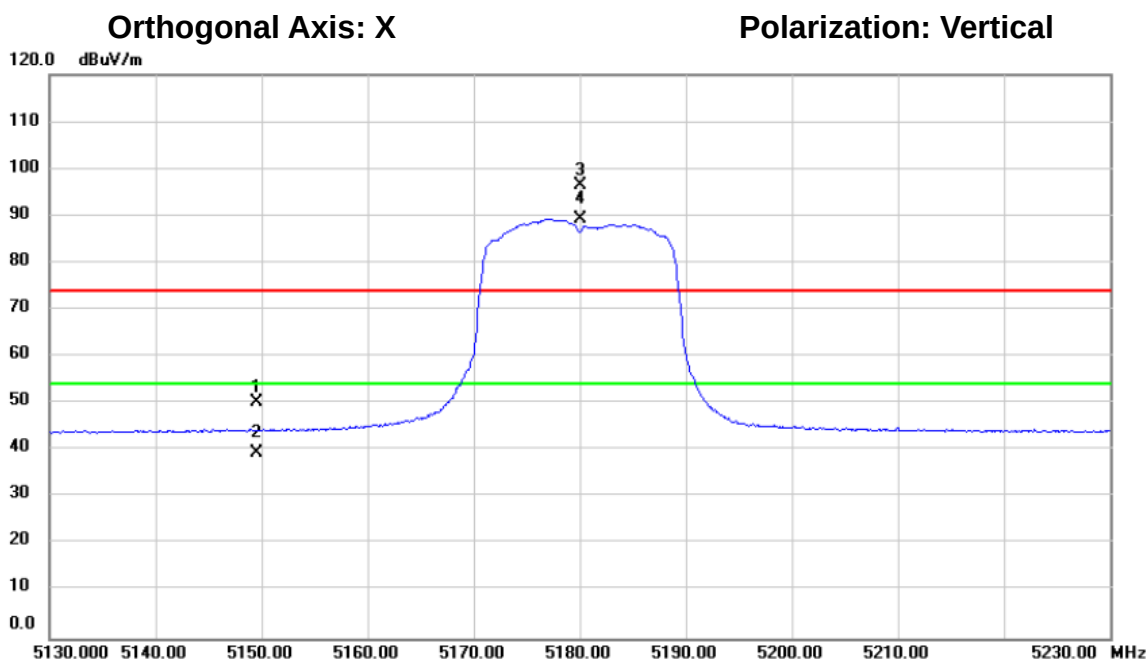

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5149.540	12.78	37.54	50.32	74.00	-23.68	peak			
2		5149.540	1.95	37.54	39.49	54.00	-14.51	AVG			
3	X	5180.000	59.01	37.58	96.59	74.00	22.59	peak			主頻訊號不予判斷
4	*	5180.000	51.67	37.58	89.25	54.00	35.25	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5180 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 106/08/13
環境濕度: 70%

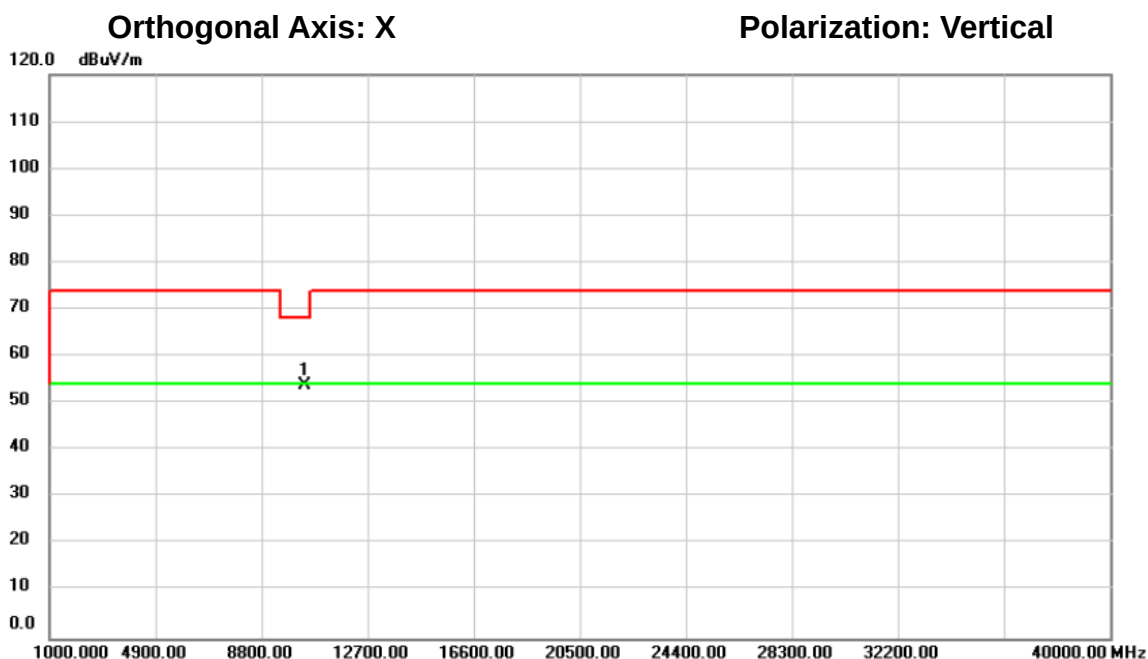

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.00	51.81	1.92	53.73	68.20	-14.47	peak		

測試頻道: IEEE 802.11n (20 MHz) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C

環境濕度: 70%

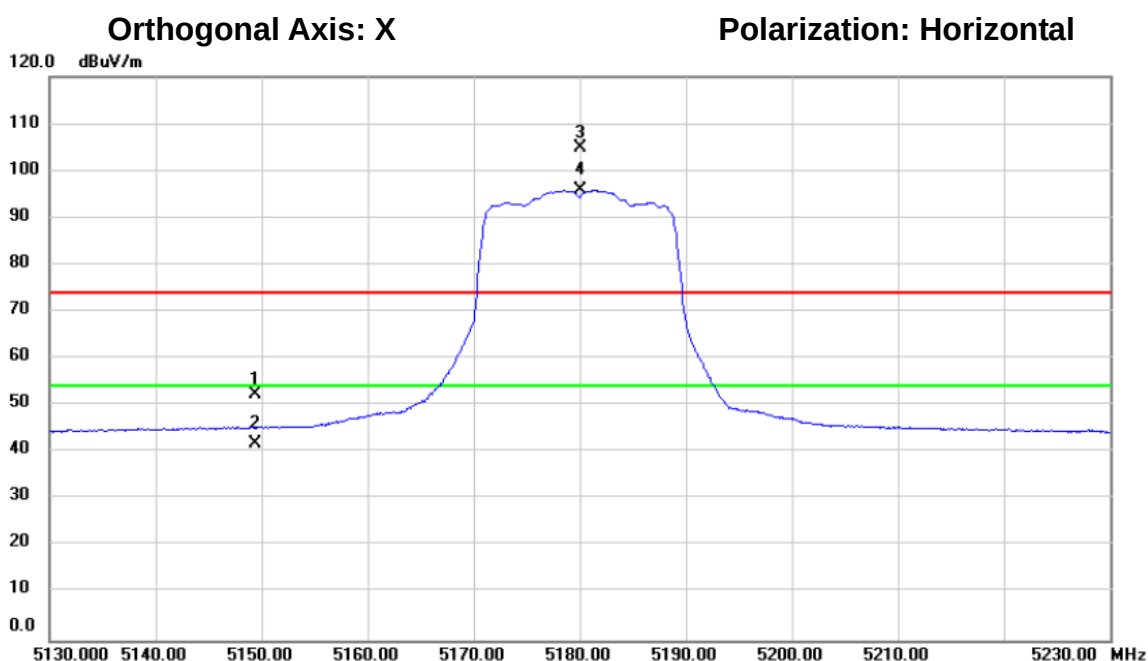

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.360	14.73	37.54	52.27	74.00	-21.73	peak		
2		5149.360	4.35	37.54	41.89	54.00	-12.11	AVG		
3	X	5180.000	67.23	37.58	104.81	74.00	30.81	peak		主頻訊號不予判斷
4	*	5180.000	58.20	37.58	95.78	54.00	41.78	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C

環境濕度: 70%

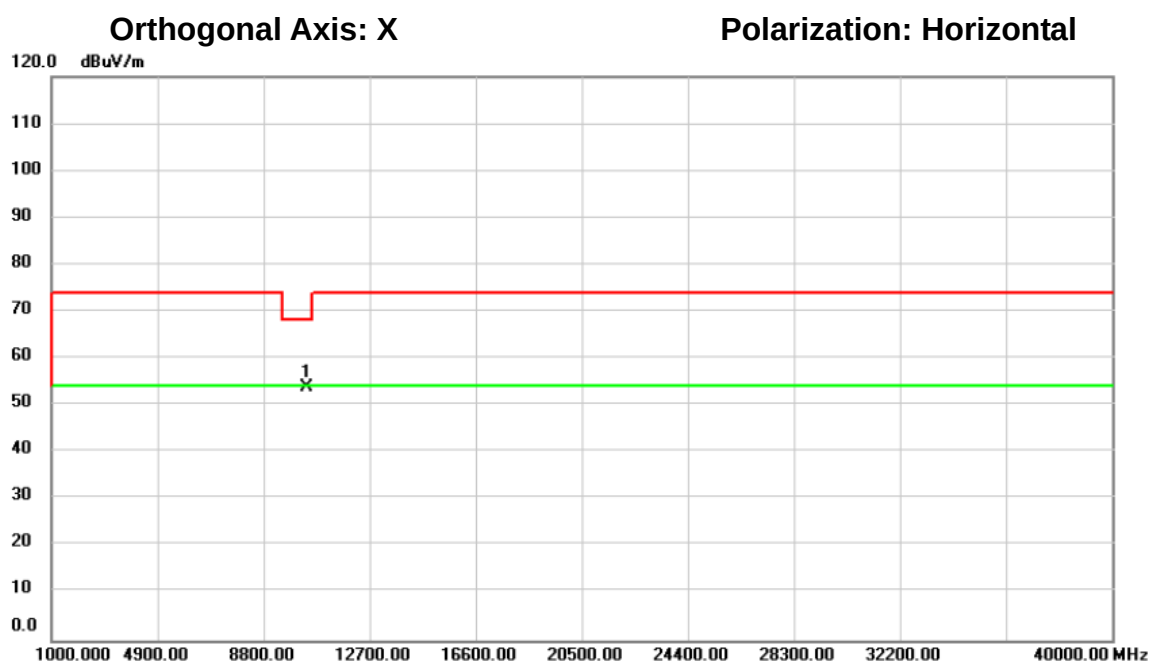

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.00	52.07	1.92	53.99	68.20	-14.21	peak		

測試頻道: IEEE 802.11n (20 MHz) / 5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/13

環境濕度: 70%

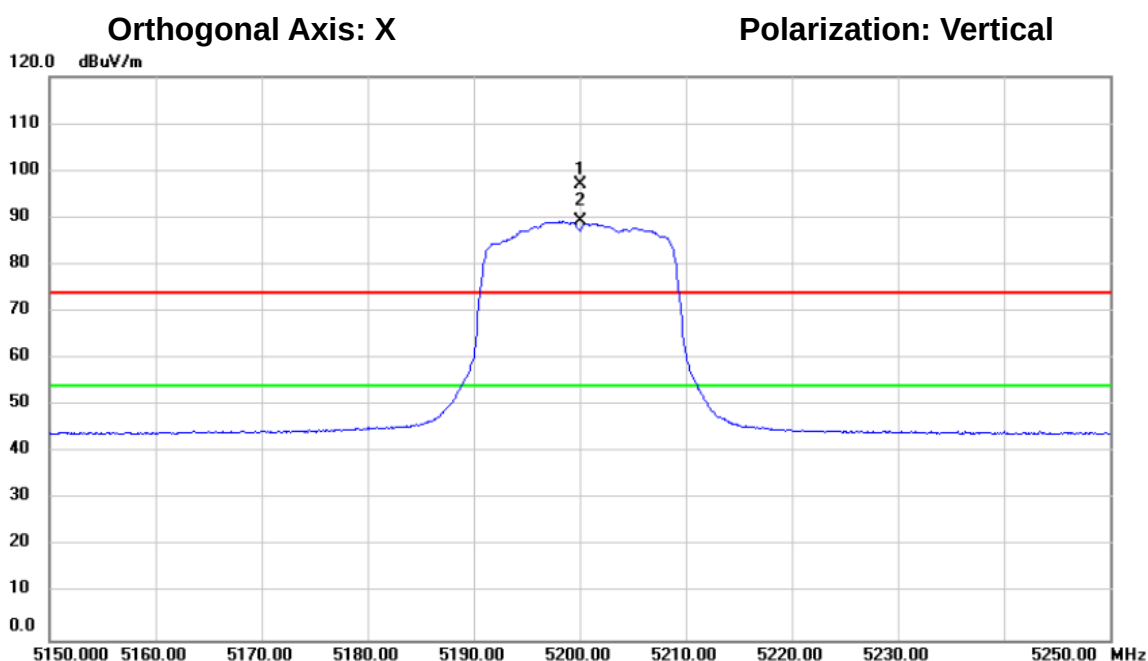

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	X	5200.000	59.55	37.60	97.15	74.00	23.15	peak			主頻訊號不予判斷
2	*	5200.000	51.54	37.60	89.14	54.00	35.14	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/13

環境濕度: 70%

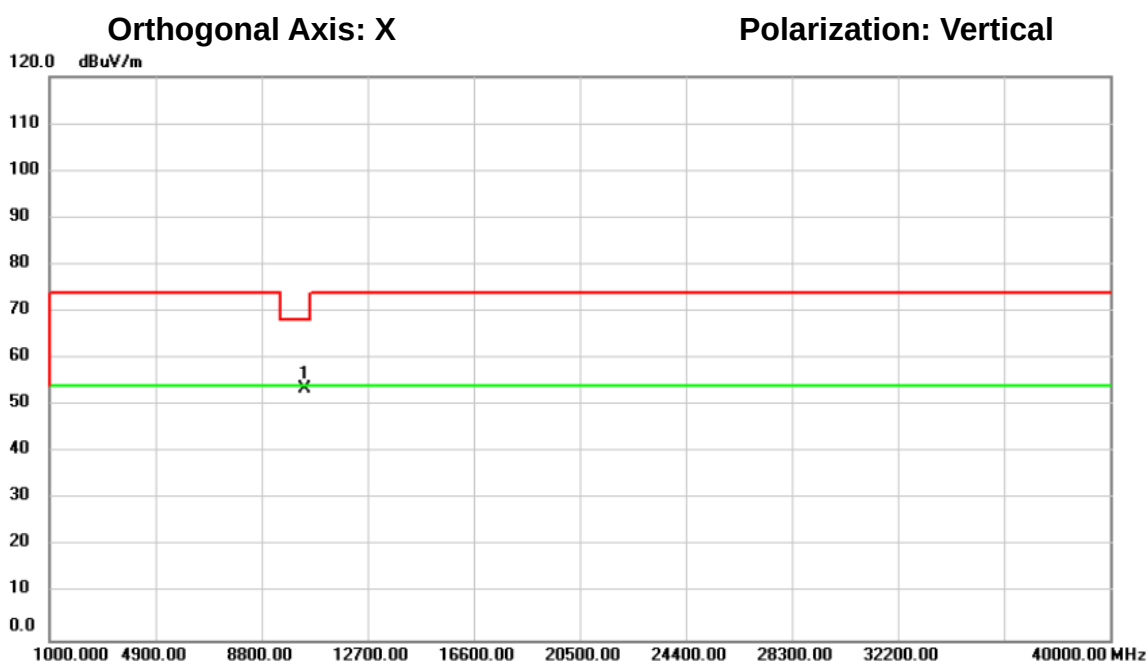

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10400.00	51.74	1.95	53.69	68.20	-14.51			peak

測試頻道: IEEE 802.11n (20 MHz) / 5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C

環境濕度: 70%

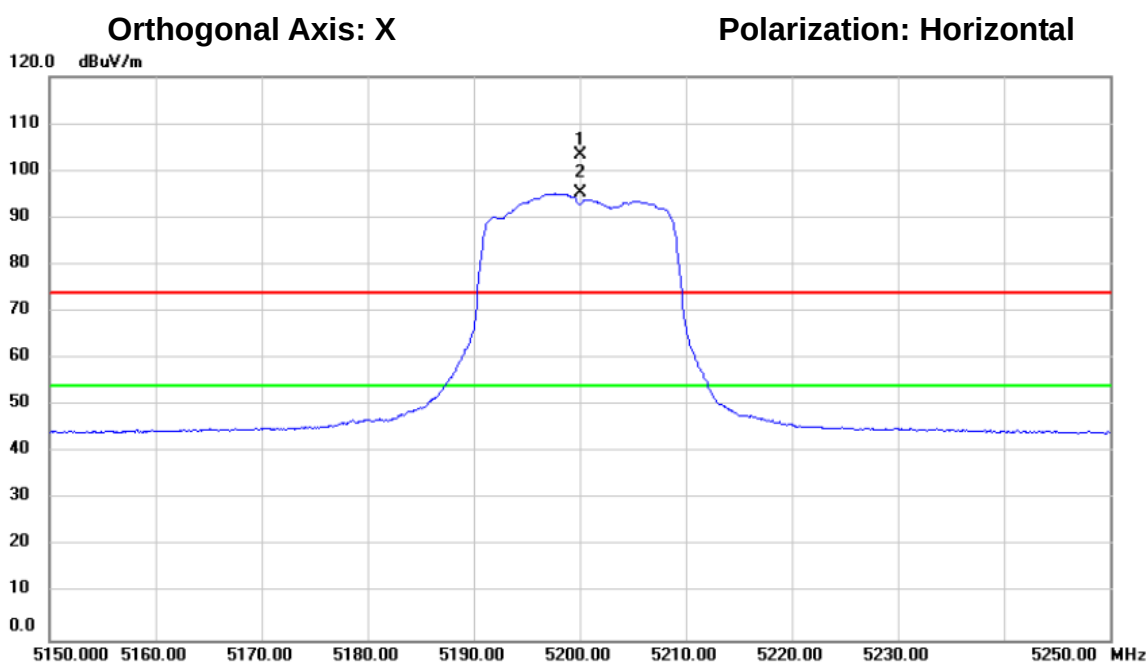

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5200.000	65.61	37.60	103.21	74.00	29.21	peak		主頻訊號不予判斷
2	*	5200.000	57.53	37.60	95.13	54.00	41.13	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5200 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/13

環境濕度: 70%

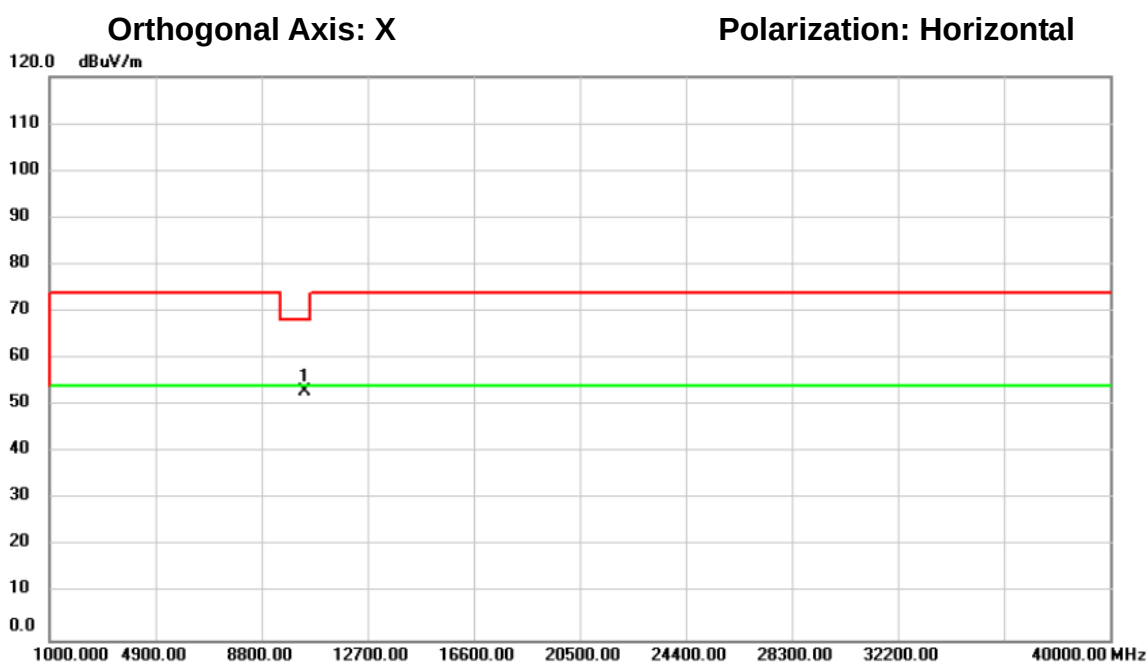

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10400.00	50.95	1.95	52.90	68.20	-15.30	peak		

測試頻道: IEEE 802.11n (20 MHz) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/13

環境濕度: 70%

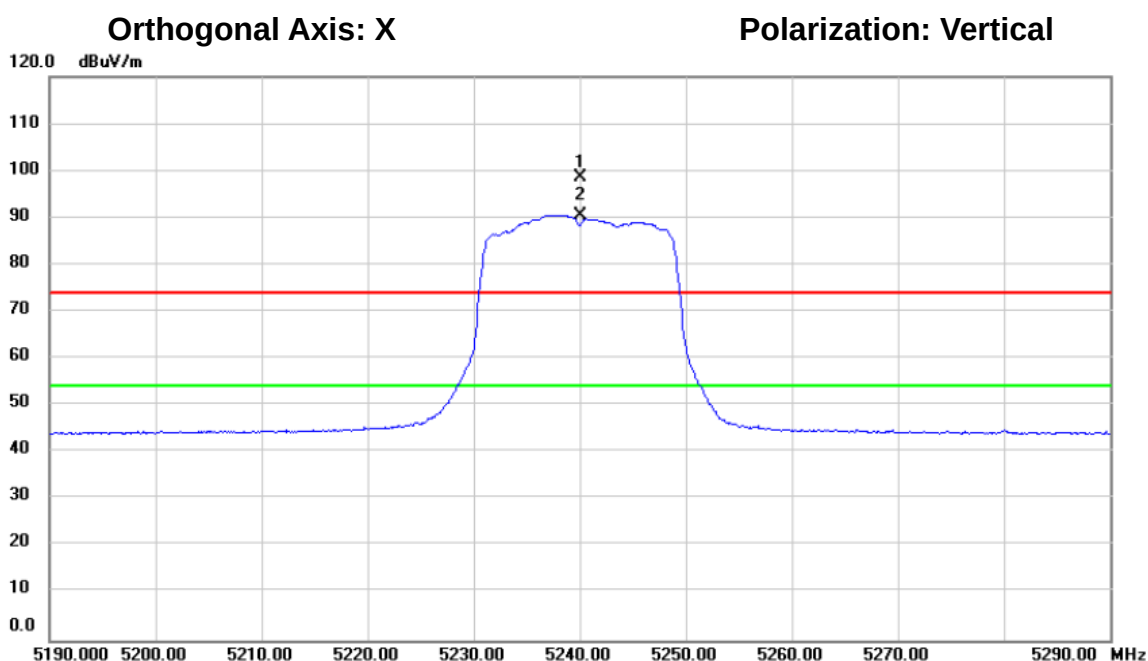

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5240.000	60.81	37.64	98.45	74.00	24.45	peak		主頻訊號不予判斷
2	*	5240.000	52.89	37.64	90.53	54.00	36.53	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/13

環境濕度: 70%

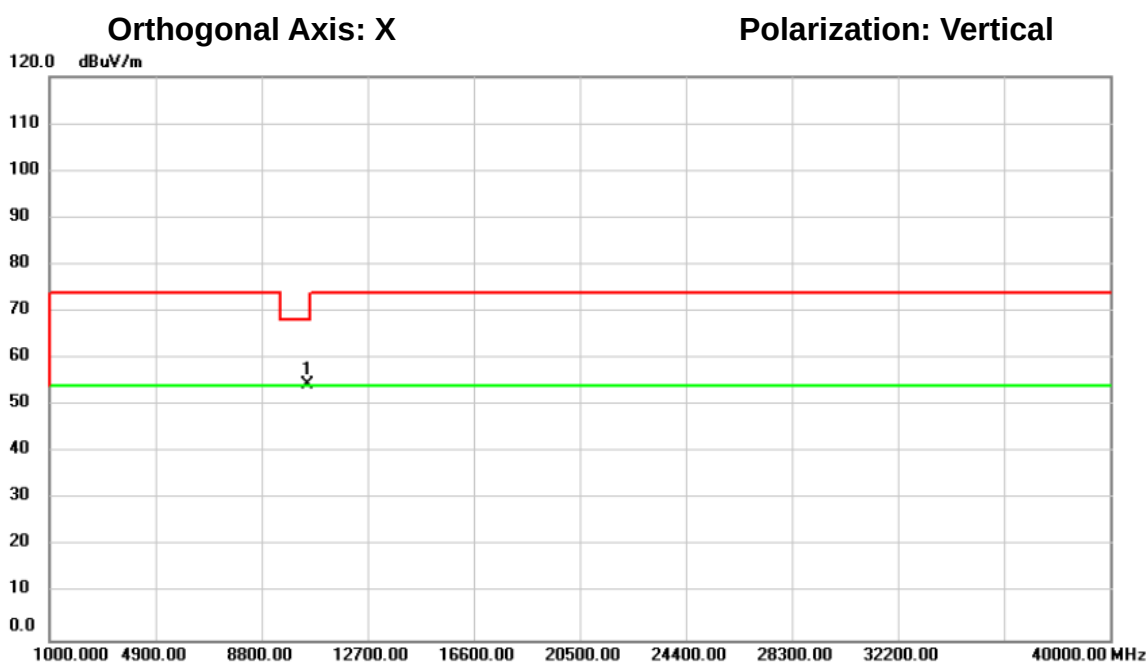

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.00	52.59	1.96	54.55	68.20	-13.65	peak		

測試頻道: IEEE 802.11n (20 MHz) / 5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C

環境濕度: 70%

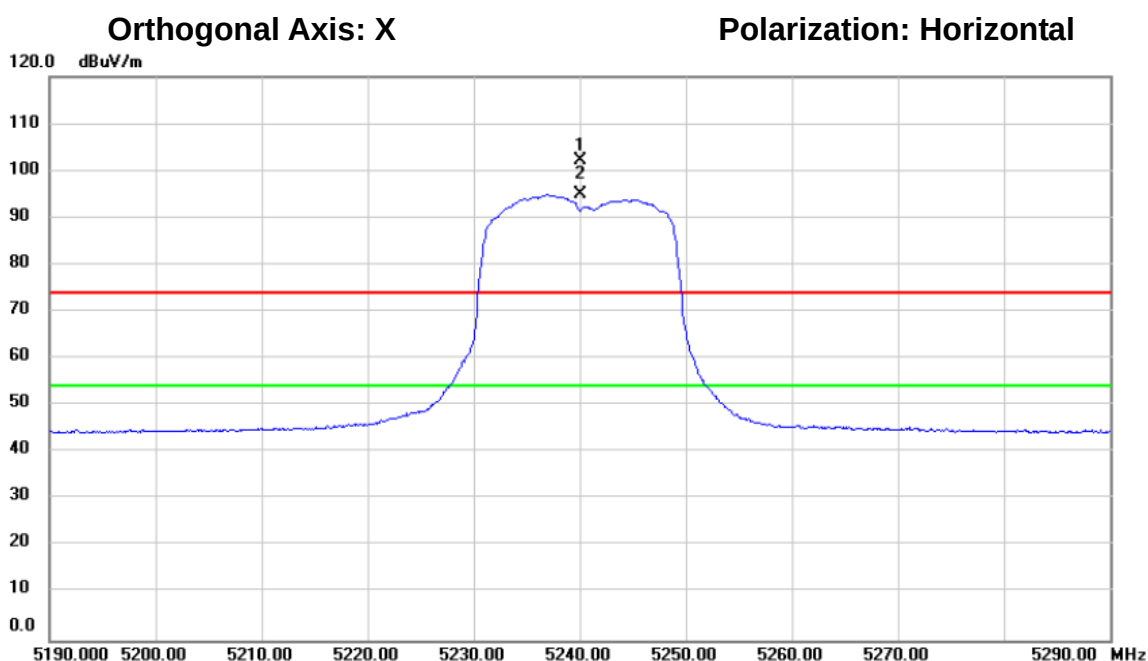

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5240.000	64.64	37.64	102.28	74.00	28.28	peak		主頻訊號不予判斷
2	*	5240.000	57.21	37.64	94.85	54.00	40.85	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C

環境濕度: 70%

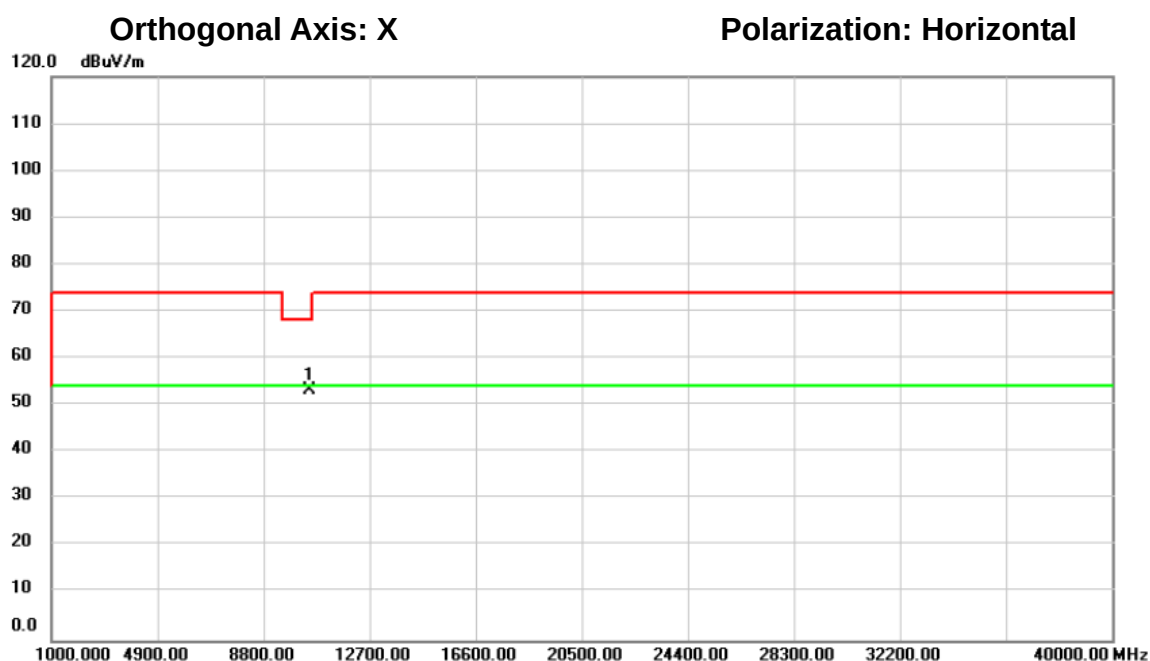

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.00	51.40	1.96	53.36	68.20	-14.84			peak

測試頻道: IEEE 802.11n (40 MHz) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/13

環境濕度: 70%

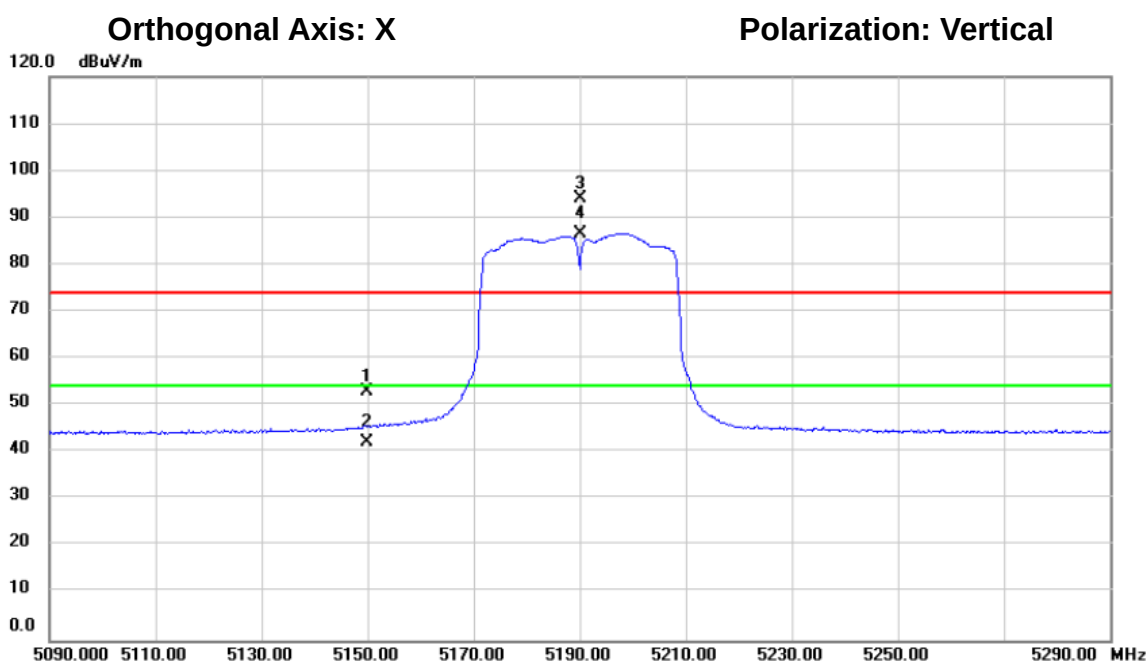

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5149.940	15.27	37.54	52.81	74.00	-21.19	peak			
2		5149.940	4.58	37.54	42.12	54.00	-11.88	AVG			
3	X	5190.000	56.54	37.58	94.12	74.00	20.12	peak			主頻訊號不予判斷
4	*	5190.000	49.06	37.58	86.64	54.00	32.64	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (40 MHz) /
5190 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/13

環境濕度: 70%

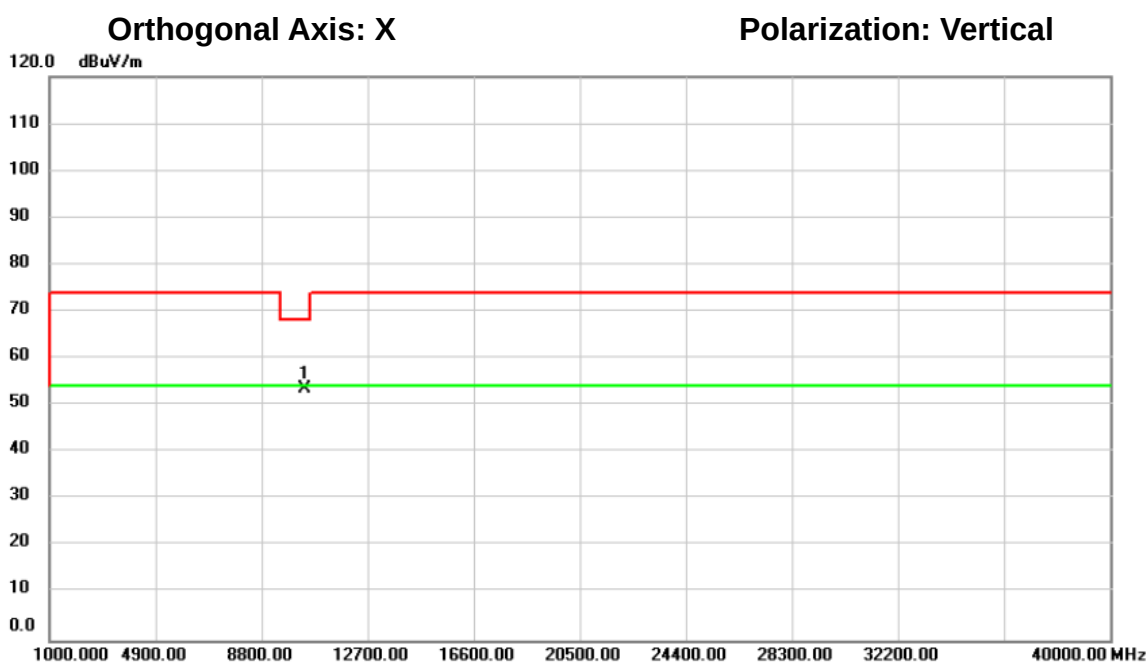

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10380.00	51.56	1.94	53.50	68.20	-14.70	peak		

測試頻道: IEEE 802.11n (40 MHz) / 5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C

環境濕度: 70%

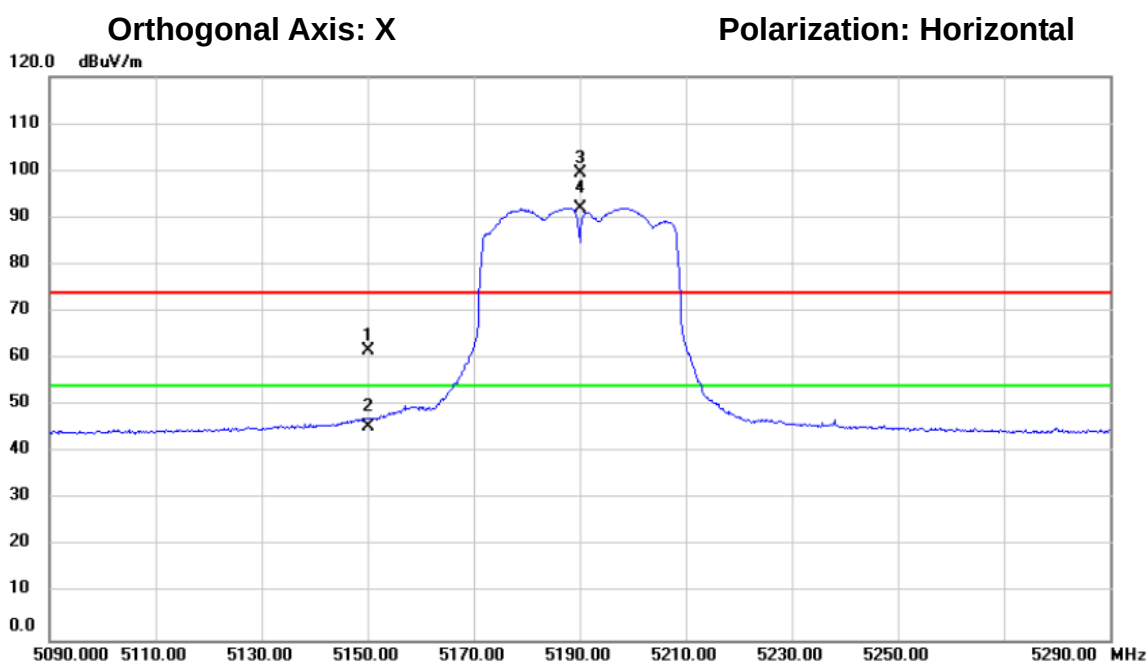

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5150.000	24.15	37.54	61.69	74.00	-12.31	peak			
2		5150.000	7.91	37.54	45.45	54.00	-8.55	AVG			
3	X	5190.000	61.96	37.58	99.54	74.00	25.54	peak			主頻訊號不予判斷
4	*	5190.000	54.49	37.58	92.07	54.00	38.07	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (40 MHz) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C

環境濕度: 70%

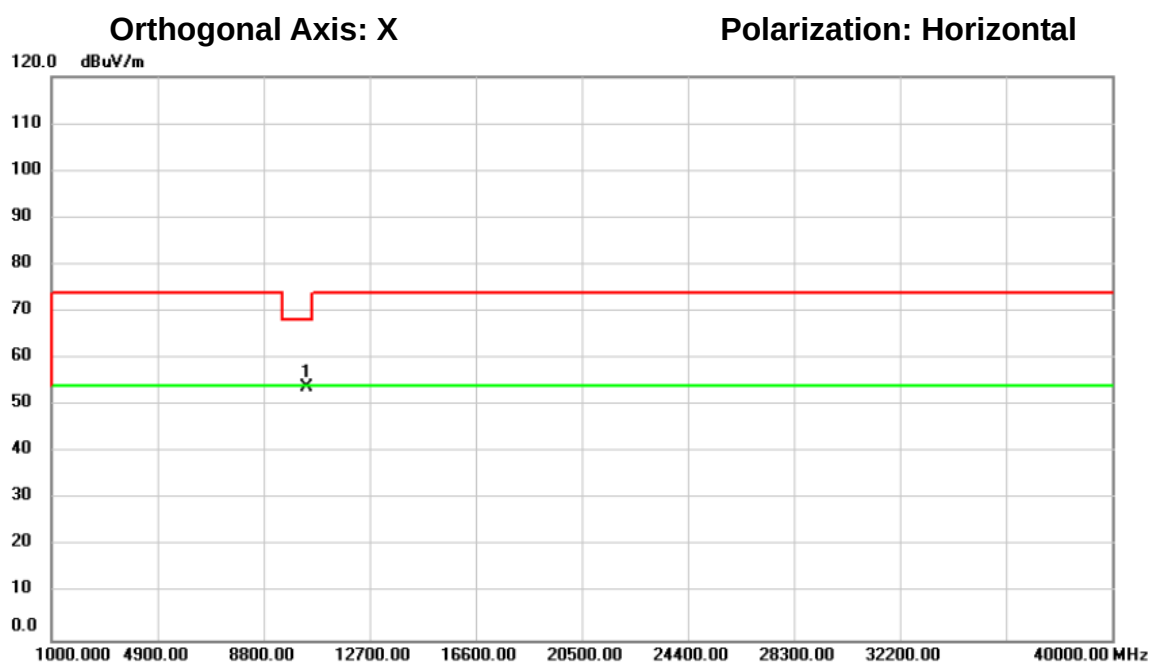

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10380.00	51.94	1.94	53.88	68.20	-14.32			peak

測試頻道: IEEE 802.11n (40 MHz) / 5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C

環境濕度: 70%

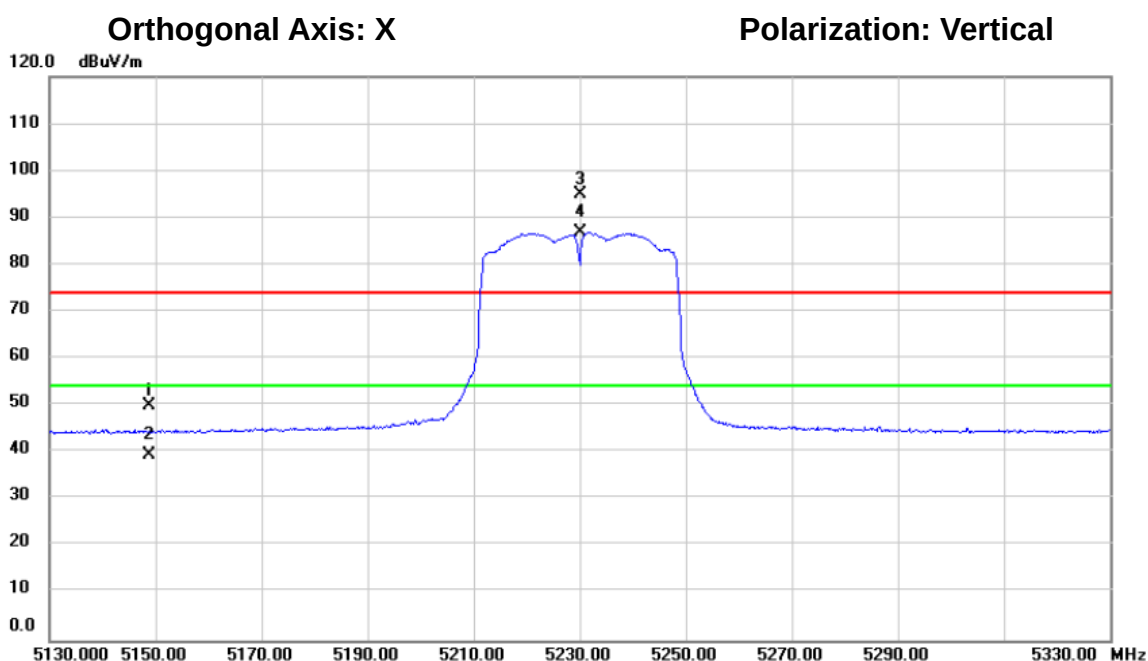

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5148.700	12.42	37.54	49.96	74.00	-24.04	peak			
2		5148.700	1.92	37.54	39.46	54.00	-14.54	AVG			
3	X	5230.000	57.24	37.63	94.87	74.00	20.87	peak			主頻訊號不予判斷
4	*	5230.000	49.21	37.63	86.84	54.00	32.84	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (40 MHz) /
5230 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/13

環境濕度: 70%

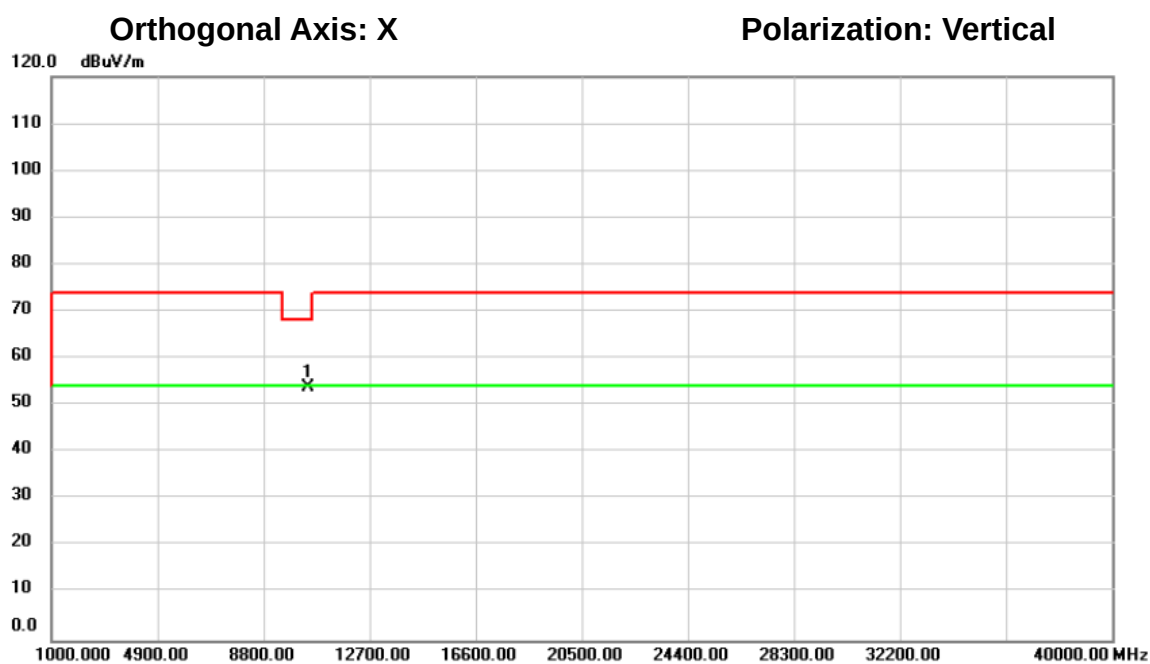

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10460.00	51.81	1.96	53.77	68.20	-14.43	peak		

測試頻道: IEEE 802.11n (40 MHz) / 5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C

環境濕度: 70%

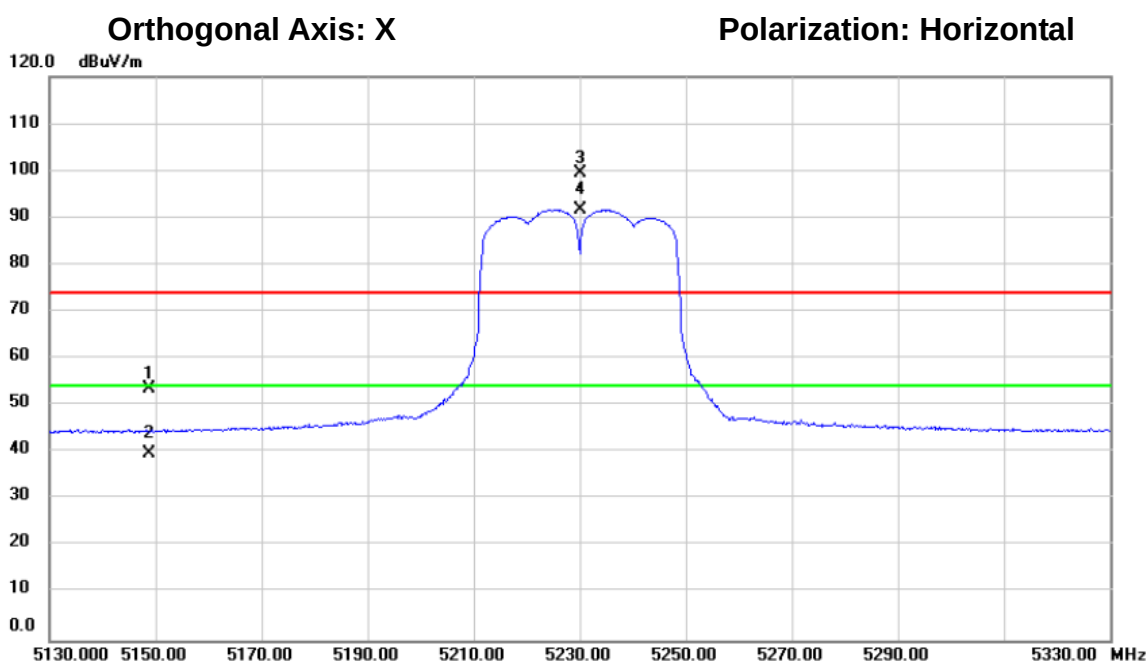

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5148.920	16.11	37.54	53.65	74.00	-20.35	peak			
2		5148.920	2.23	37.54	39.77	54.00	-14.23	AVG			
3	X	5230.000	61.72	37.63	99.35	74.00	25.35	peak			主頻訊號不予判斷
4	*	5230.000	54.04	37.63	91.67	54.00	37.67	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (40 MHz) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/13

環境溫度: 23 °C


環境濕度: 70%

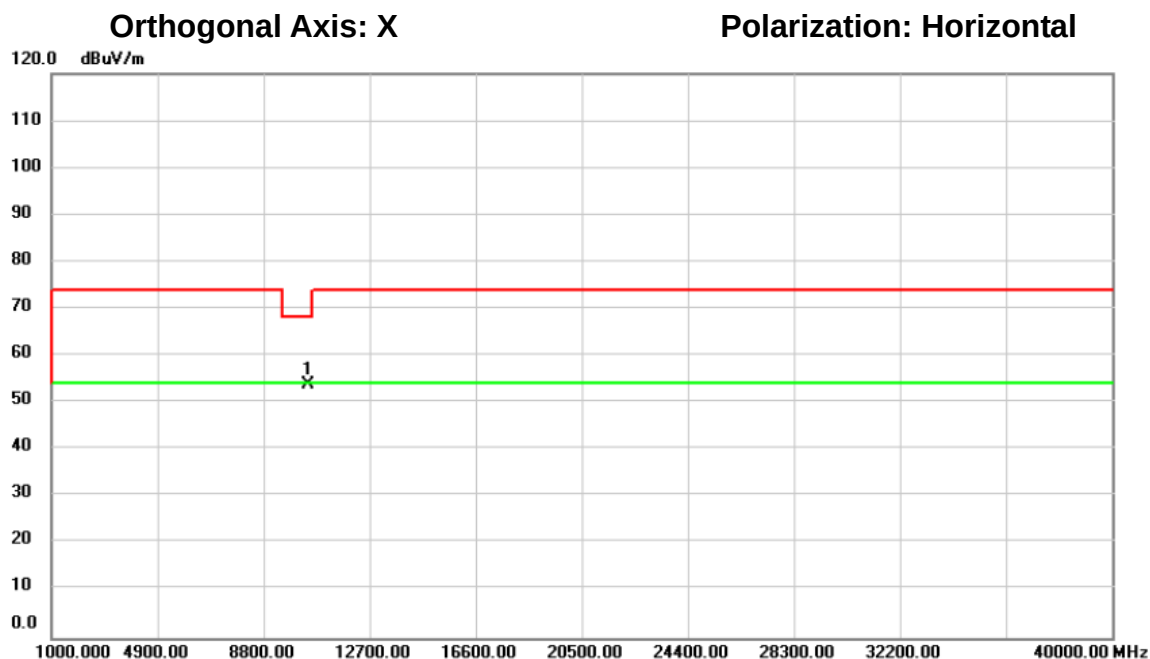

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10460.00	52.01	1.96	53.97	68.20	-14.23	peak		

測試頻道: IEEE 802.11a / 5260 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C


測試模式: 發射
視頻頻寬: 1000 kHz / 10Hz
測試距離: 3 米
測試日期: 106/08/26
環境濕度: 70%

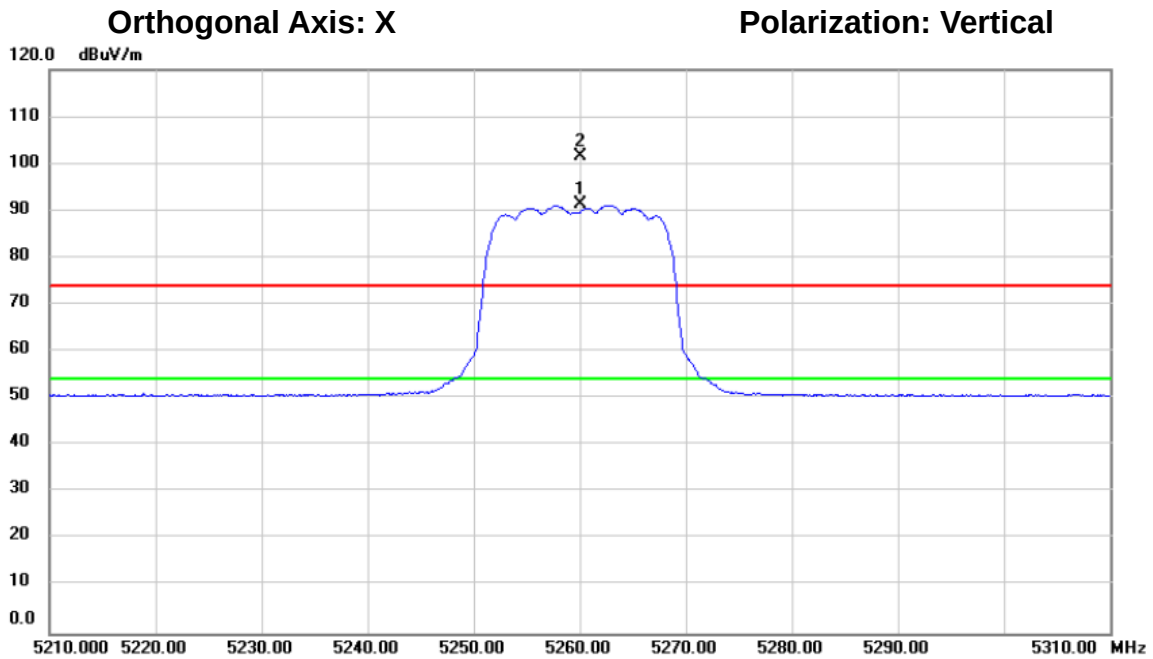

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5260.000	53.62	37.66	91.28	74.00	17.28	peak		主頻訊號不予判斷
2	*	5260.000	63.79	37.66	101.45	74.00	27.45	peak		主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5260 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 106/08/26
環境濕度: 70%

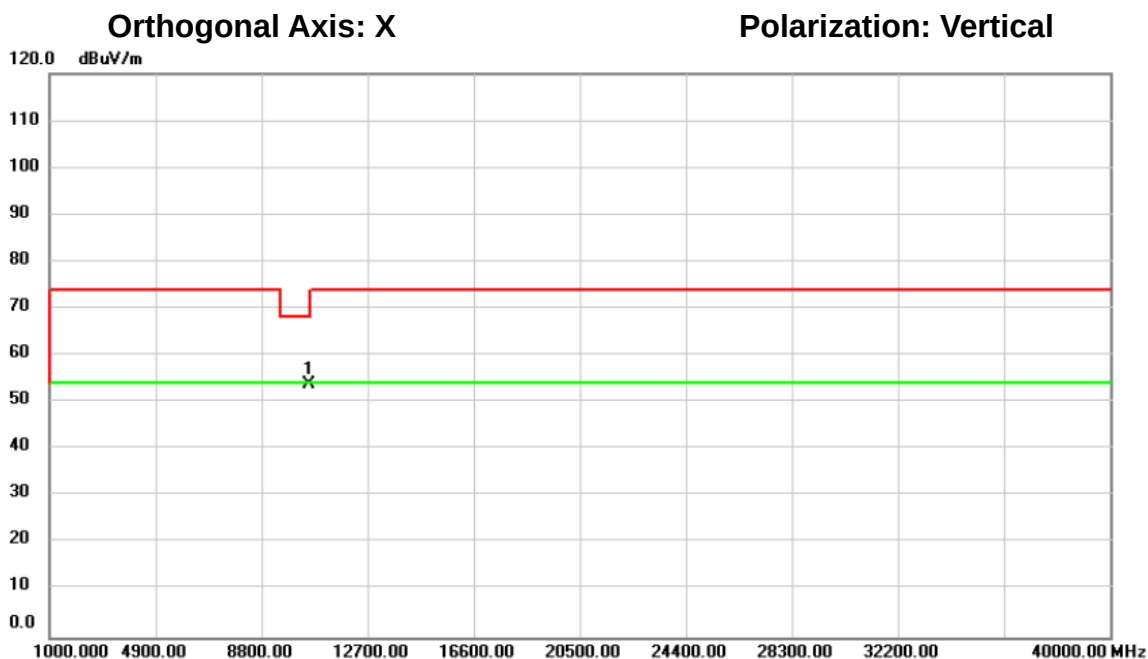

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10520.00	51.88	2.00	53.88	68.20	-14.32	peak		

測試頻道: IEEE 802.11a / 5260 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

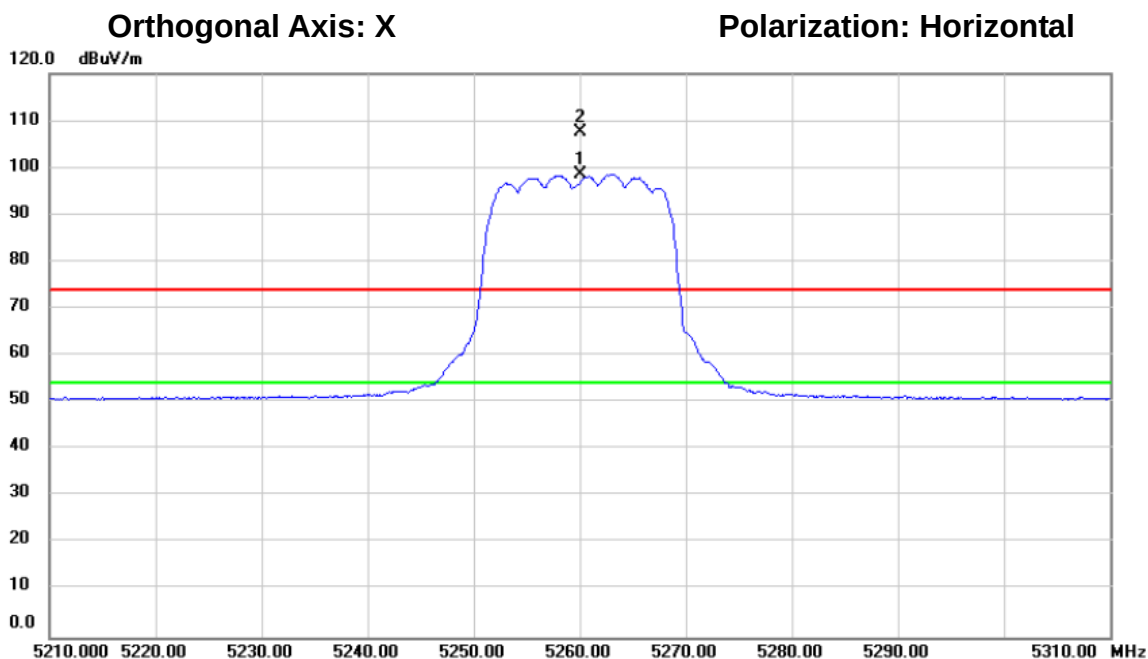

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5260.000	60.98	37.66	98.64	74.00	24.64	peak		主頻訊號不予判斷
2	*	5260.000	70.04	37.66	107.70	74.00	33.70	peak		主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5260 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 106/08/26
環境濕度: 70%

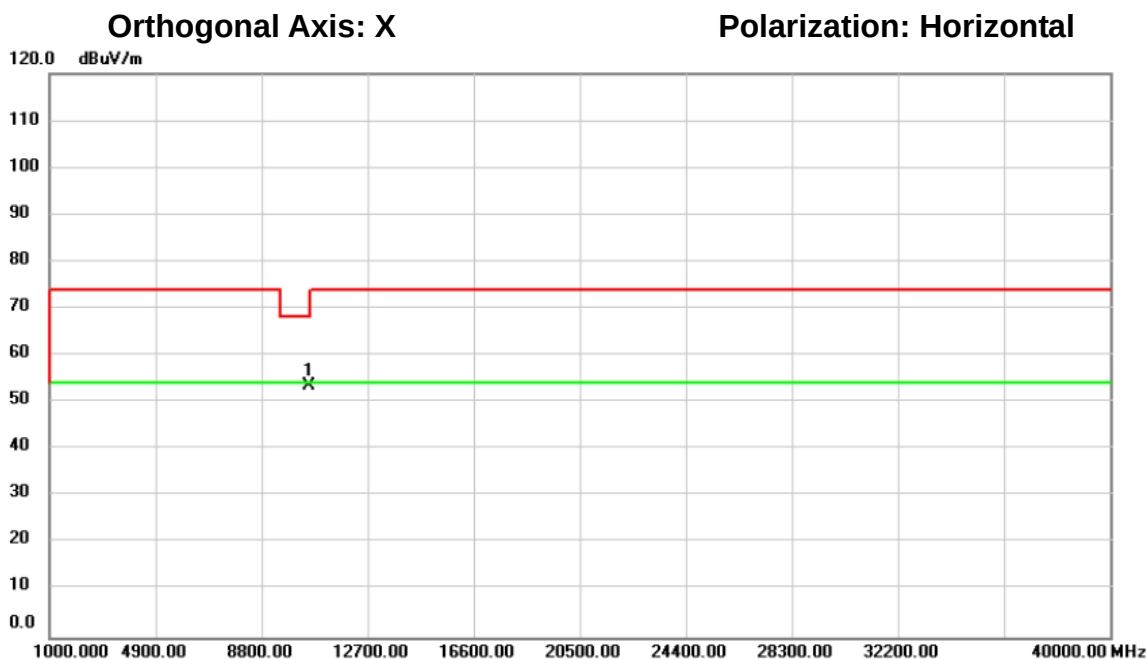

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10520.00	51.60	2.00	53.60	68.20	-14.60	peak		

測試頻道: IEEE 802.11a / 5300 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

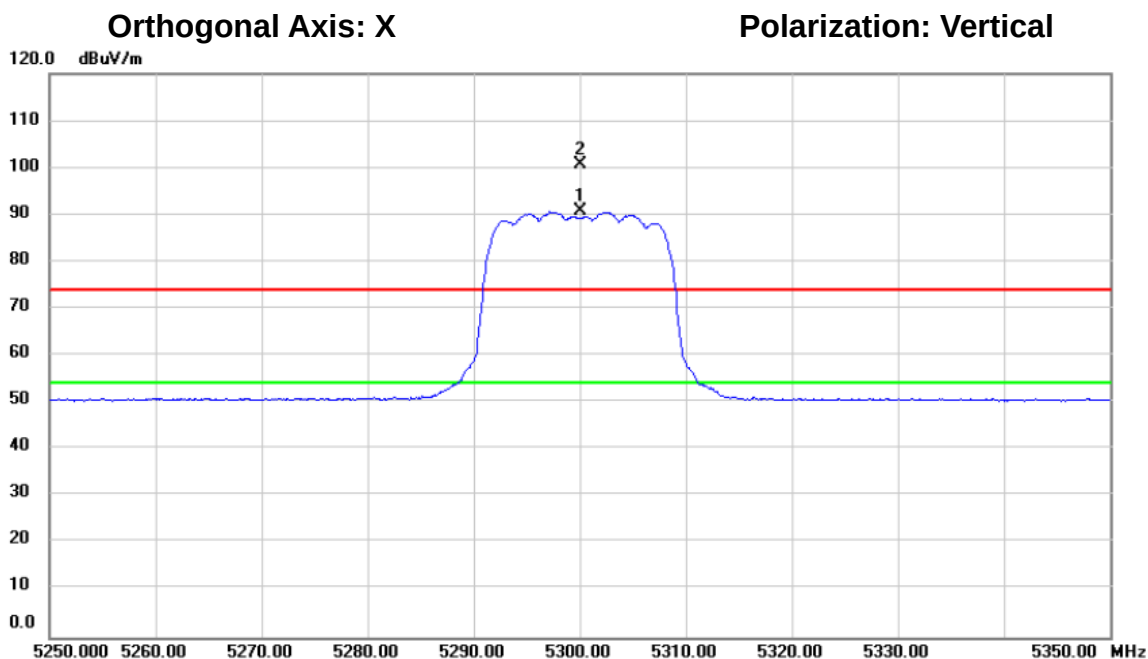

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5300.000	52.91	37.70	90.61	74.00	16.61	peak		主頻訊號不予判斷
2	*	5300.000	62.83	37.70	100.53	74.00	26.53	peak		主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5300 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

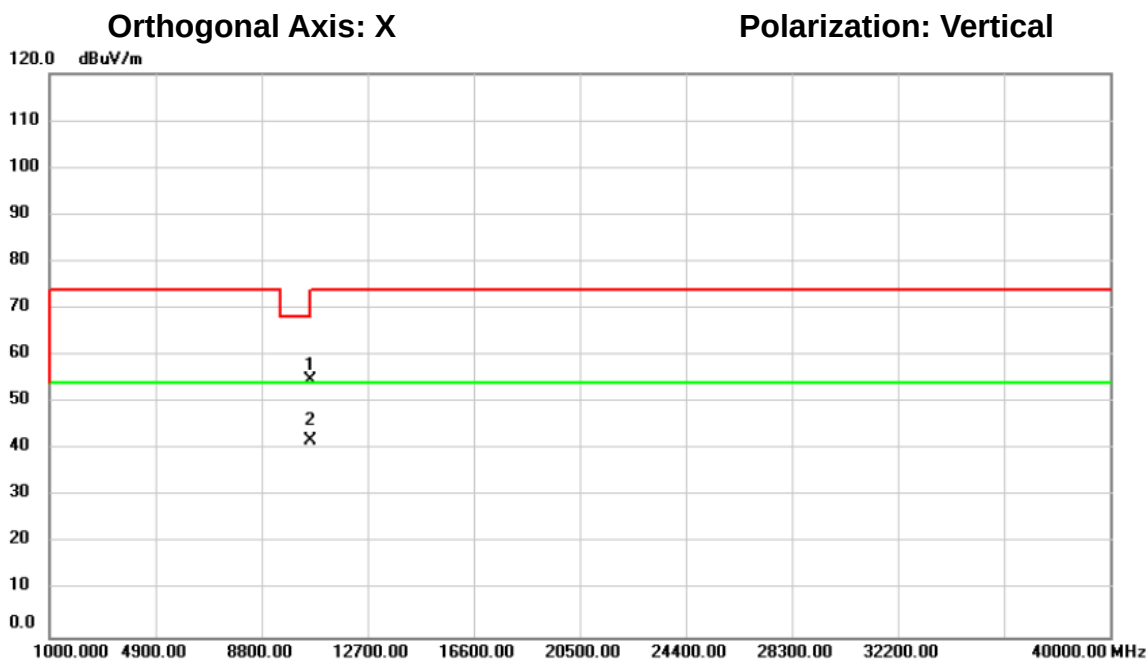

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		10600.10	52.70	2.14	54.84	74.00	-19.16	peak		
2	*	10600.10	39.76	2.14	41.90	54.00	-12.10	AVG		

測試頻道: IEEE 802.11a / 5300 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

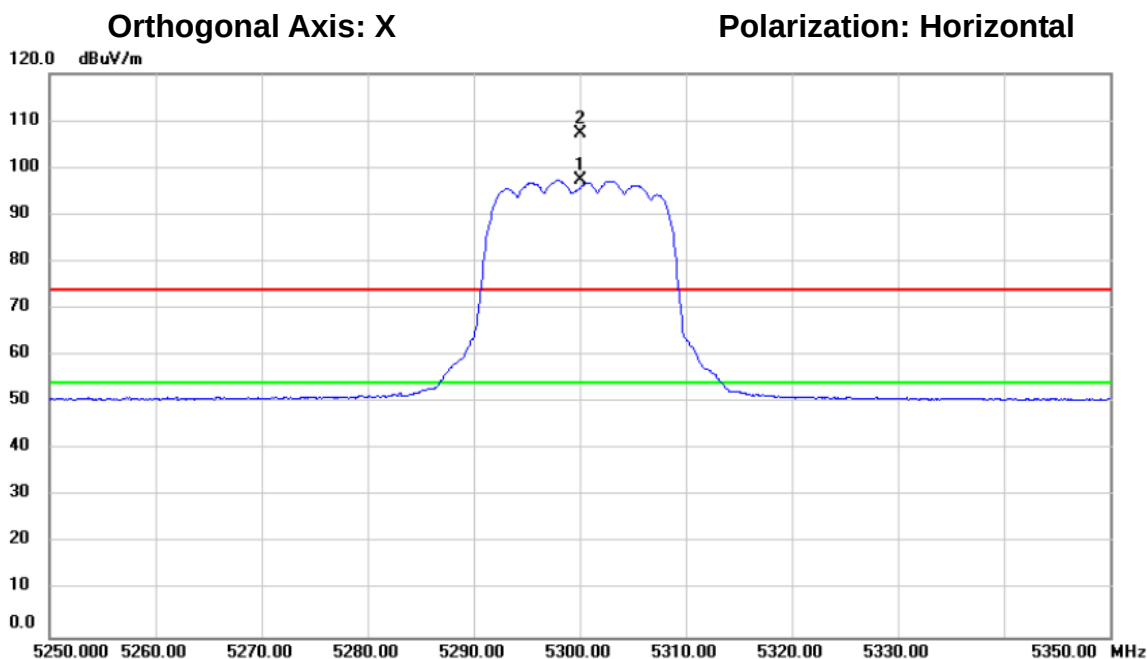

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5300.000	59.71	37.70	97.41	74.00	23.41	peak		主頻訊號不予判斷
2	*	5300.000	69.44	37.70	107.14	74.00	33.14	peak		主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5300 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

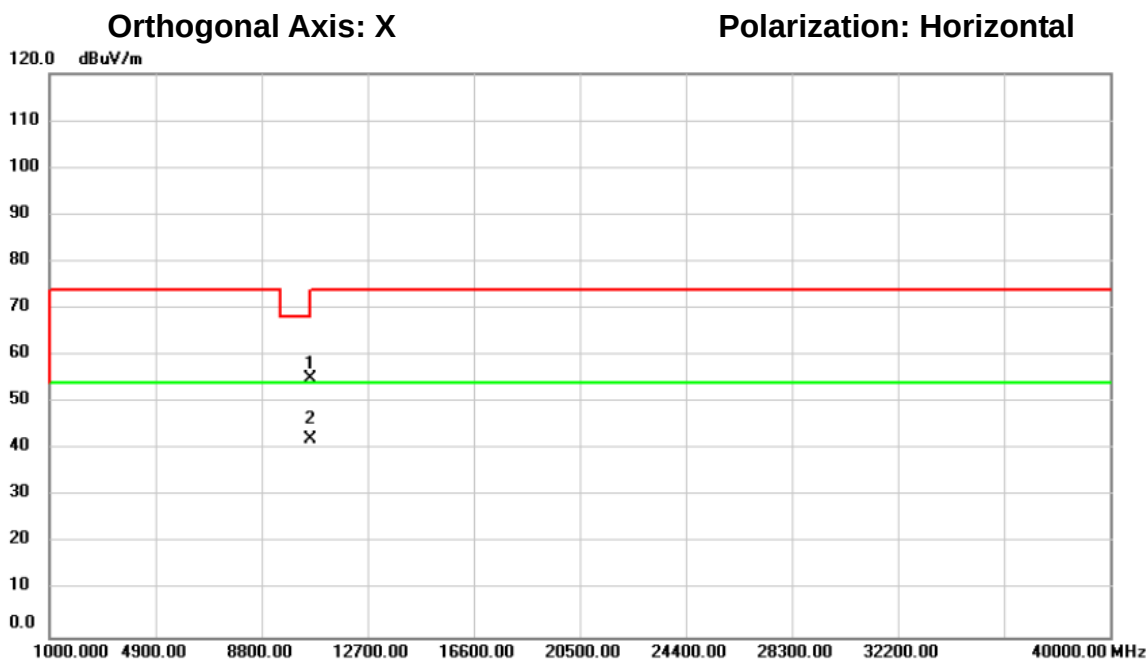

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		10600.10	52.83	2.14	54.97	74.00	-19.03	peak		
2	*	10600.10	40.03	2.14	42.17	54.00	-11.83	AVG		

測試頻道: IEEE 802.11a / 5320 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 106/08/26
環境濕度: 70%

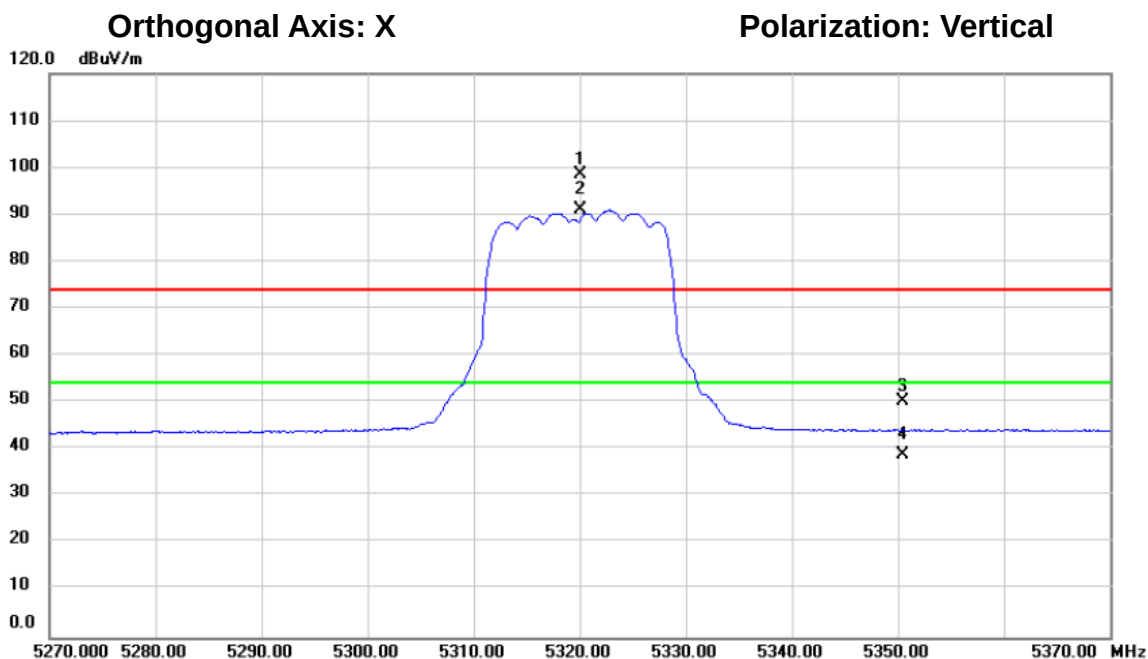

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5320.000	60.73	37.72	98.45	74.00	24.45	peak		主頻訊號不予判斷
2	*	5320.000	53.22	37.72	90.94	54.00	36.94	AVG		主頻訊號不予判斷
3		5350.480	12.36	37.76	50.12	74.00	-23.88	peak		
4		5350.480	1.10	37.76	38.86	54.00	-15.14	AVG		

測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

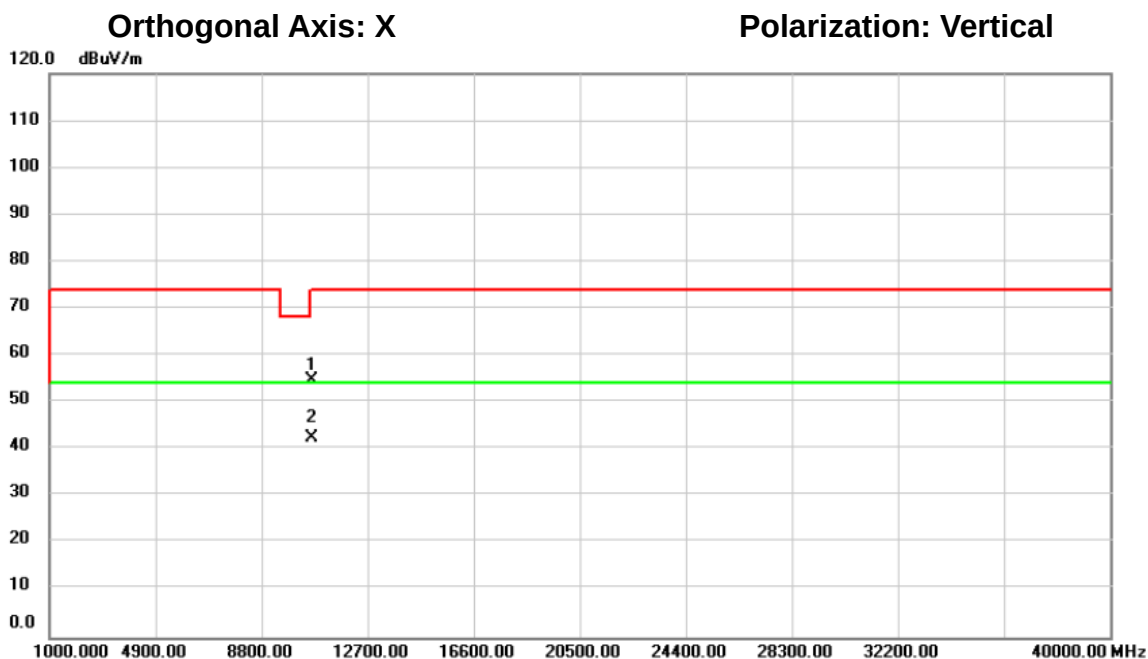

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10640.00	52.47	2.22	54.69	74.00	-19.31			peak
2	*	10640.00	40.23	2.22	42.45	54.00	-11.55			AVG

測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

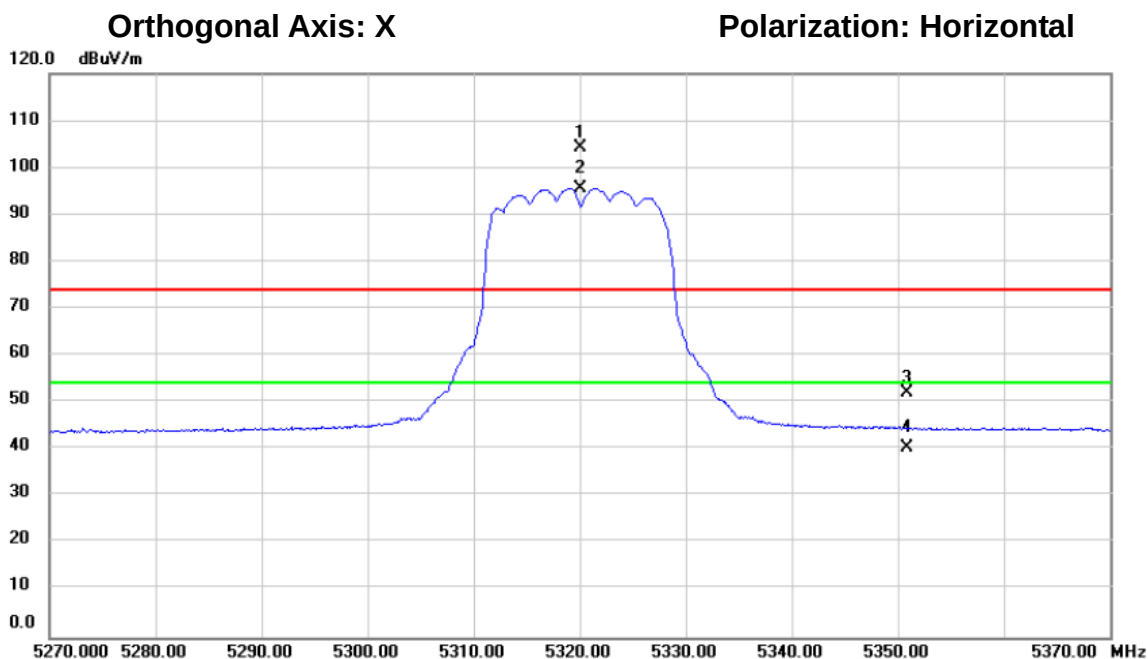

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5320.000	66.45	37.72	104.17	74.00	30.17	peak		主頻訊號不予判斷
2	*	5320.000	57.95	37.72	95.67	54.00	41.67	AVG		主頻訊號不予判斷
3		5350.920	14.24	37.76	52.00	74.00	-22.00	peak		
4		5350.920	2.71	37.76	40.47	54.00	-13.53	AVG		

測試頻道: IEEE 802.11a / 5320 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

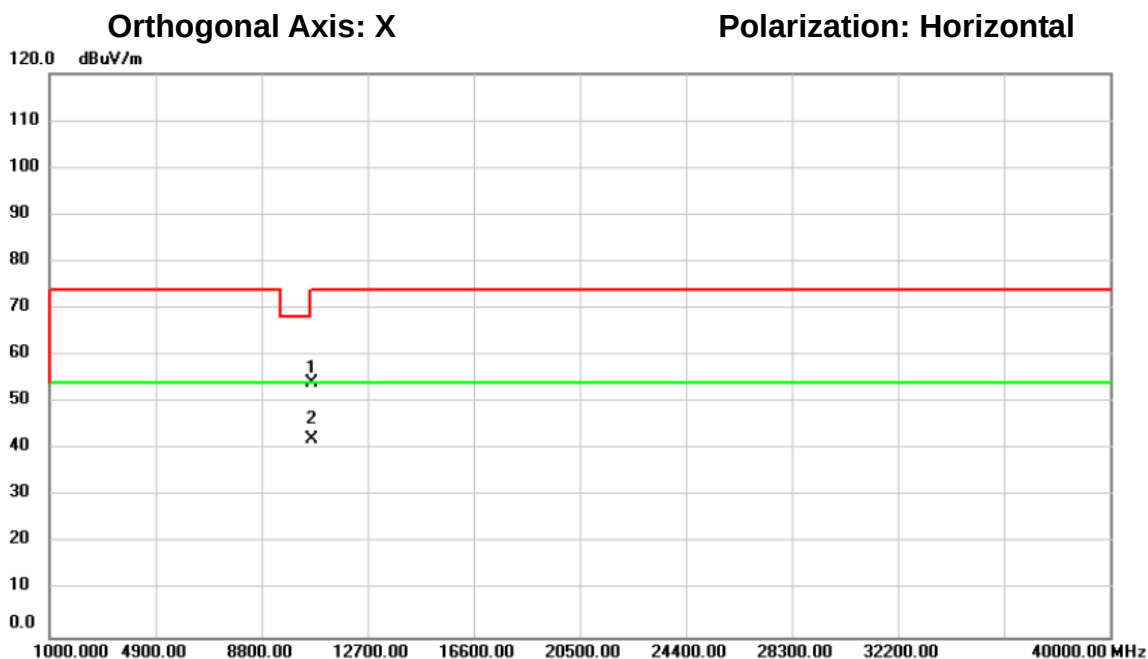

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10640.00	51.81	2.22	54.03	74.00	-19.97			peak
2	*	10640.00	40.05	2.22	42.27	54.00	-11.73			AVG

測試頻道: IEEE 802.11n (20 MHz) / 5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

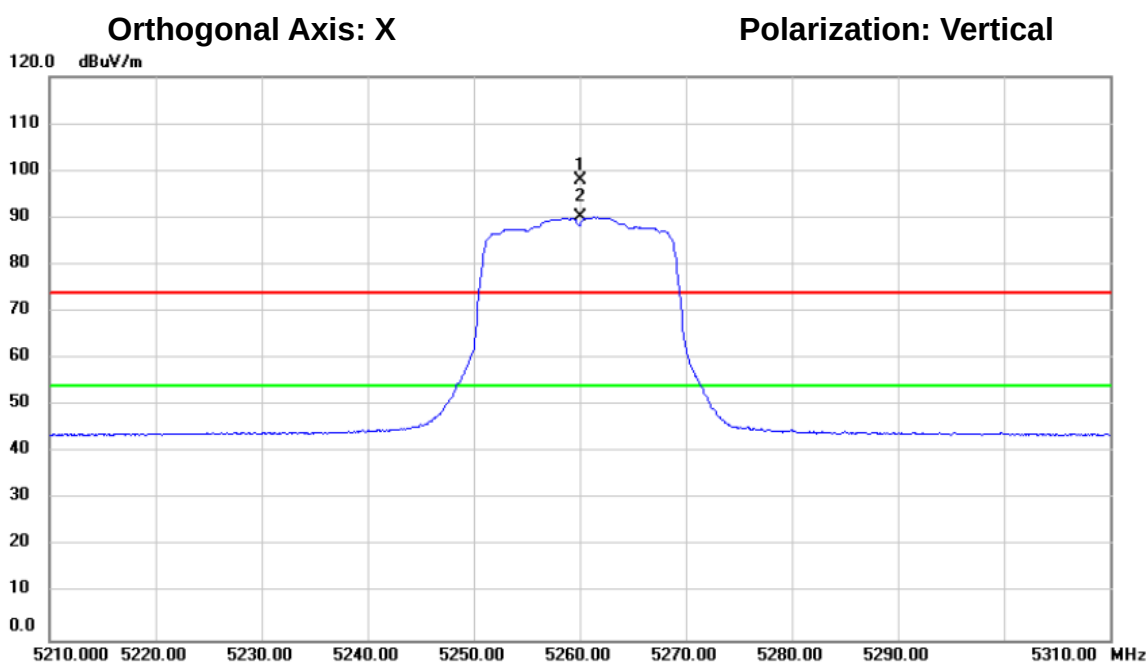

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5260.000	60.26	37.66	97.92	74.00	23.92	peak		主頻訊號不予判斷
2	*	5260.000	52.42	37.66	90.08	54.00	36.08	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

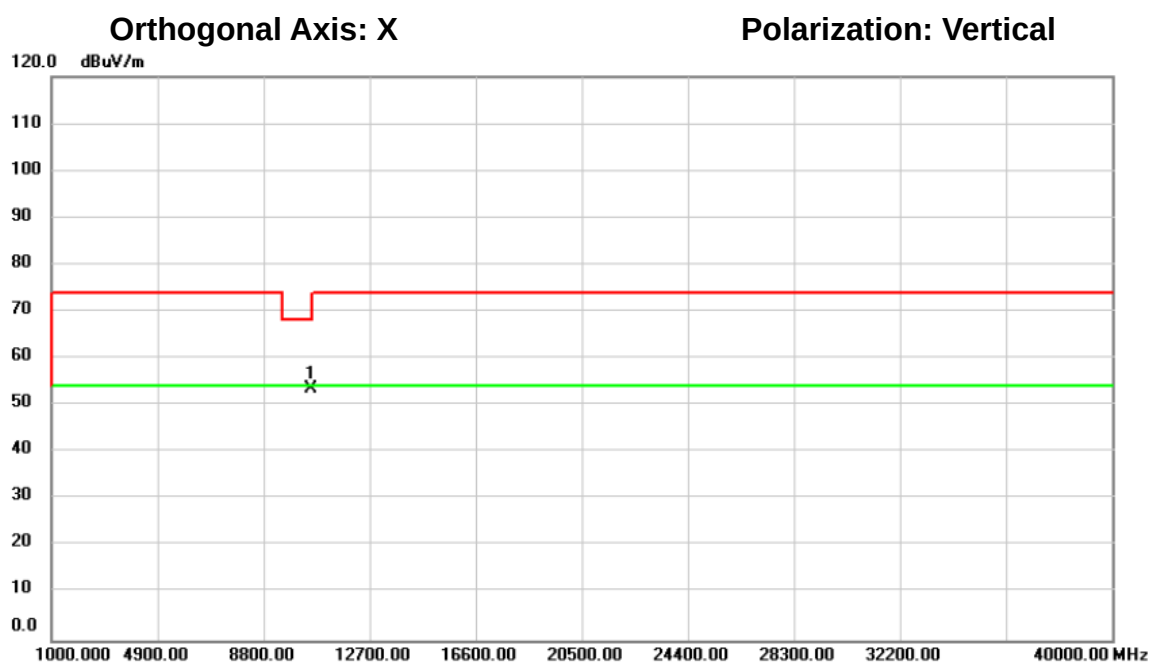

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10520.00	51.56	2.00	53.56	68.20	-14.64			peak

測試頻道: IEEE 802.11n (20 MHz) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

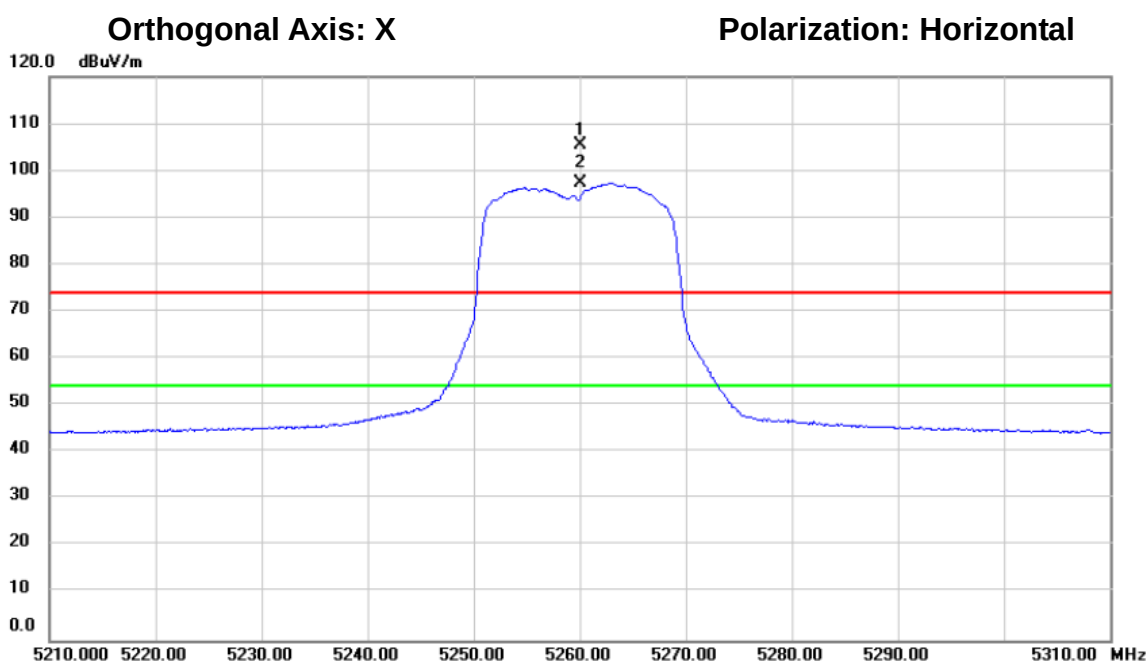

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5260.000	67.87	37.66	105.53	74.00	31.53	peak		主頻訊號不予判斷
2	*	5260.000	59.62	37.66	97.28	54.00	43.28	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

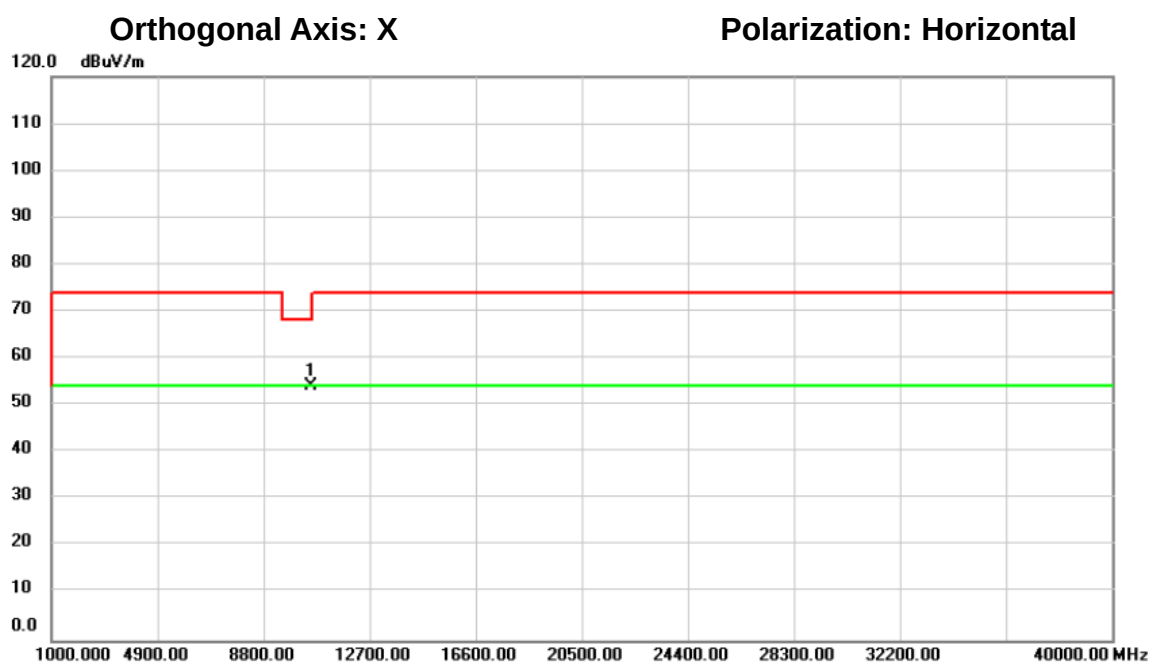

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10520.00	52.18	2.00	54.18	68.20	-14.02			peak

測試頻道: IEEE 802.11n (20 MHz) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

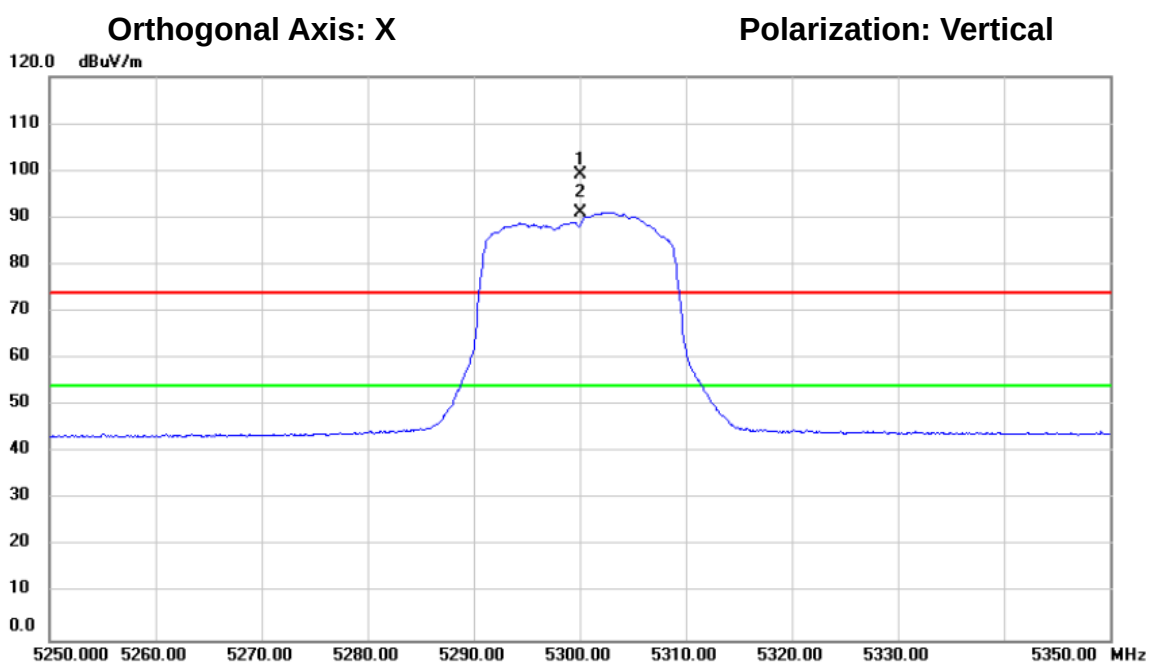

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5300.000	61.43	37.70	99.13	74.00	25.13	peak		主頻訊號不予判斷
2	*	5300.000	53.45	37.70	91.15	54.00	37.15	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) / 5300 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

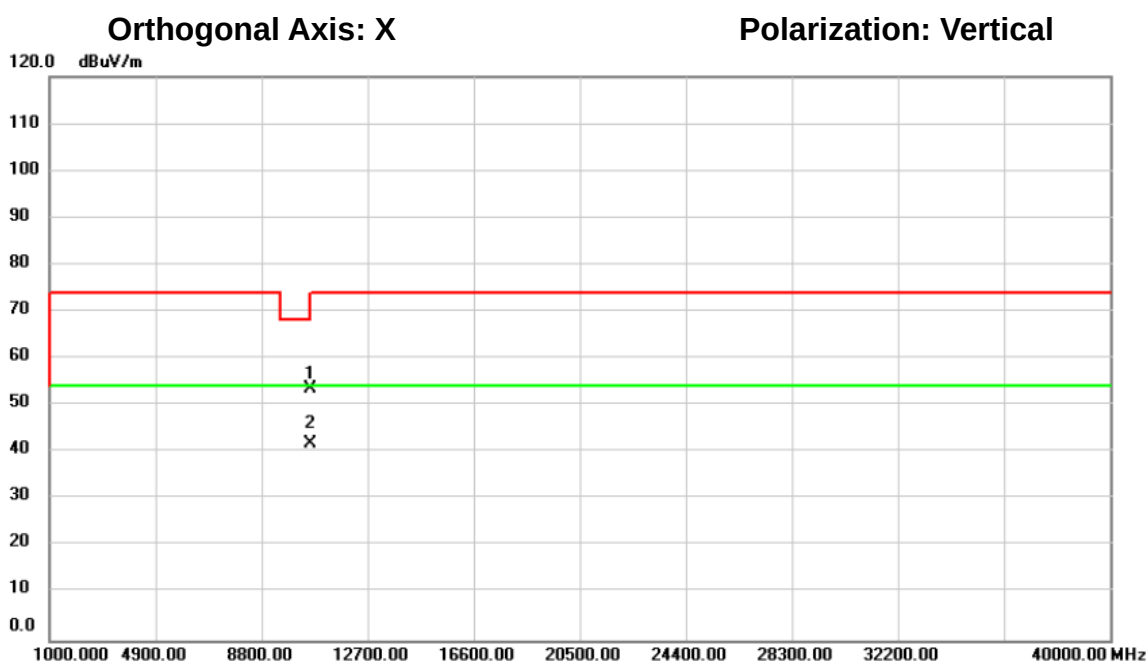

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10600.10	51.40	2.14	53.54	74.00	-20.46			peak
2	*	10600.10	39.83	2.14	41.97	54.00	-12.03			AVG

測試頻道: IEEE 802.11n (20 MHz) / 5300 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

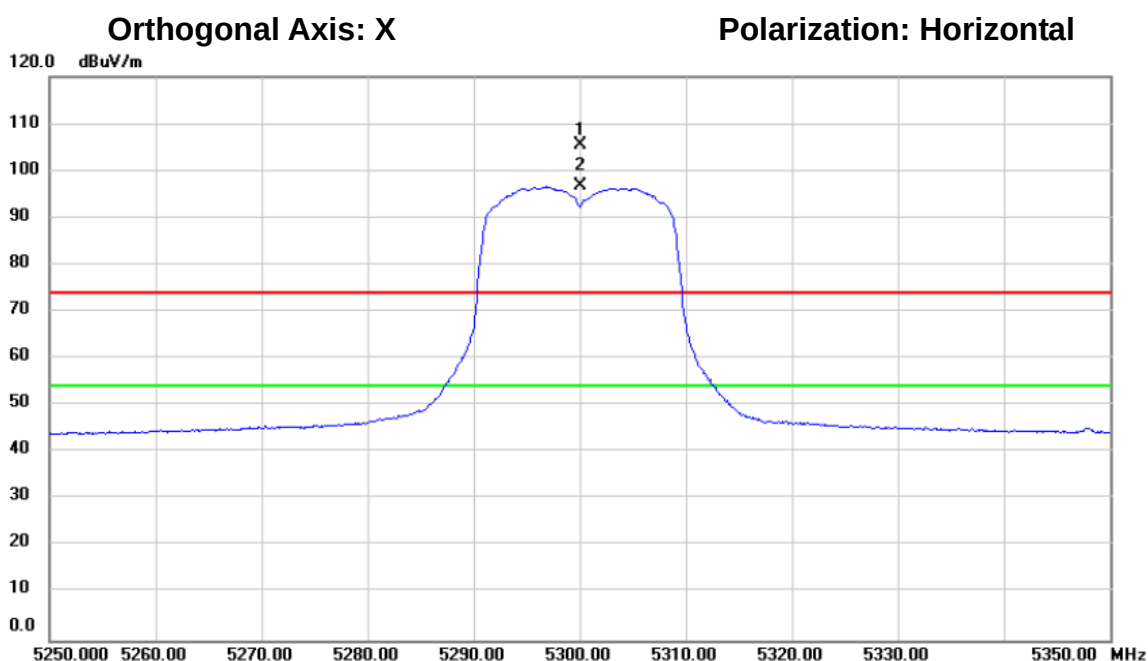

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5300.000	67.77	37.70	105.47	74.00	31.47	peak		主頻訊號不予判斷
2	*	5300.000	58.92	37.70	96.62	54.00	42.62	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) / 5300 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

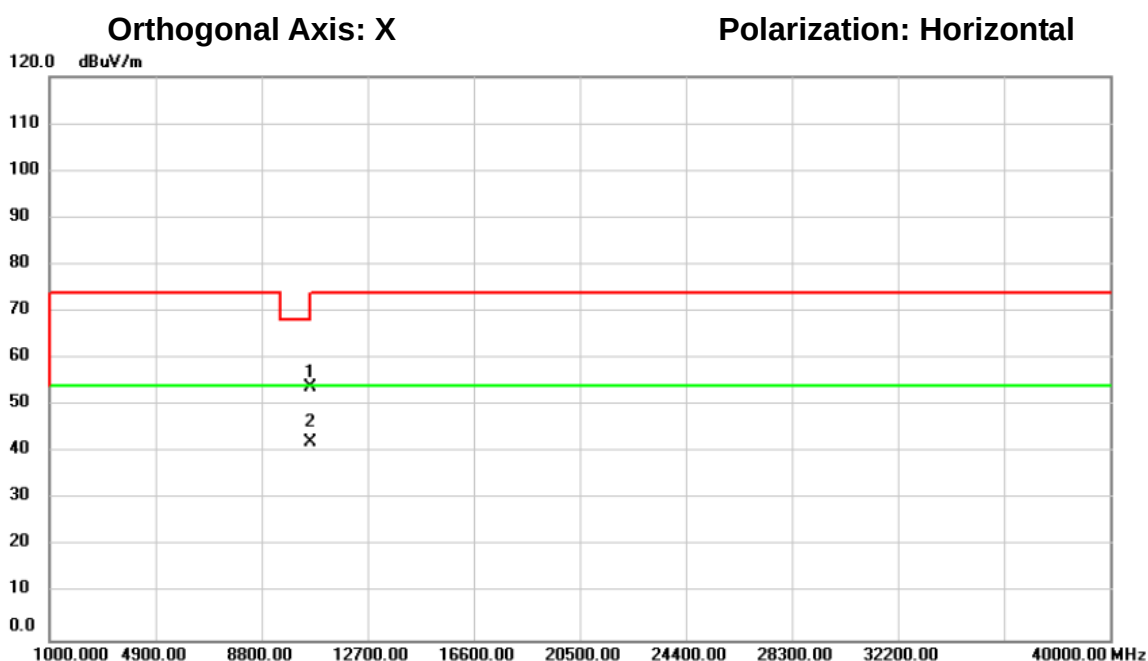

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10600.10	51.59	2.14	53.73	74.00	-20.27			peak
2	*	10600.10	39.94	2.14	42.08	54.00	-11.92			AVG

測試頻道: IEEE 802.11n (20 MHz) /
5320 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

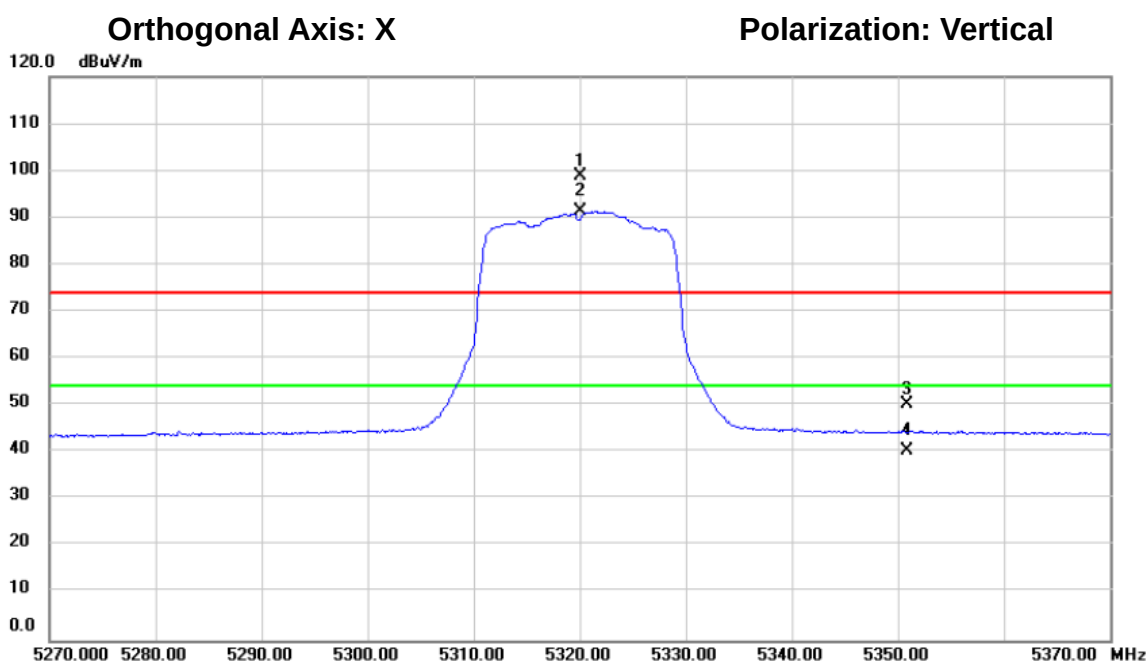

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	X	5320.000	61.18	37.72	98.90	74.00	24.90	peak			主頻訊號不予判斷
2	*	5320.000	53.59	37.72	91.31	54.00	37.31	AVG			主頻訊號不予判斷
3		5350.920	12.40	37.76	50.16	74.00	-23.84	peak			
4		5350.920	2.51	37.76	40.27	54.00	-13.73	AVG			

測試頻道: IEEE 802.11n (20 MHz) / 5320 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

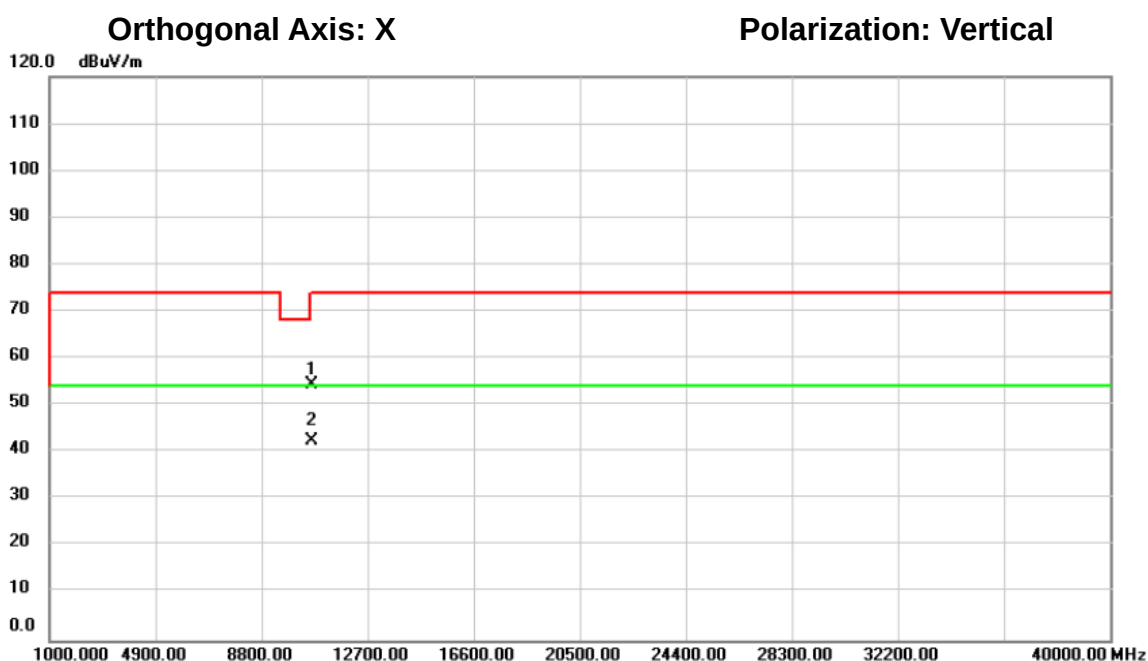

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		10640.00	52.28	2.22	54.50	74.00	-19.50	peak			
2	*	10640.00	40.12	2.22	42.34	54.00	-11.66	AVG			

測試頻道: IEEE 802.11n (20 MHz) / 5320 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

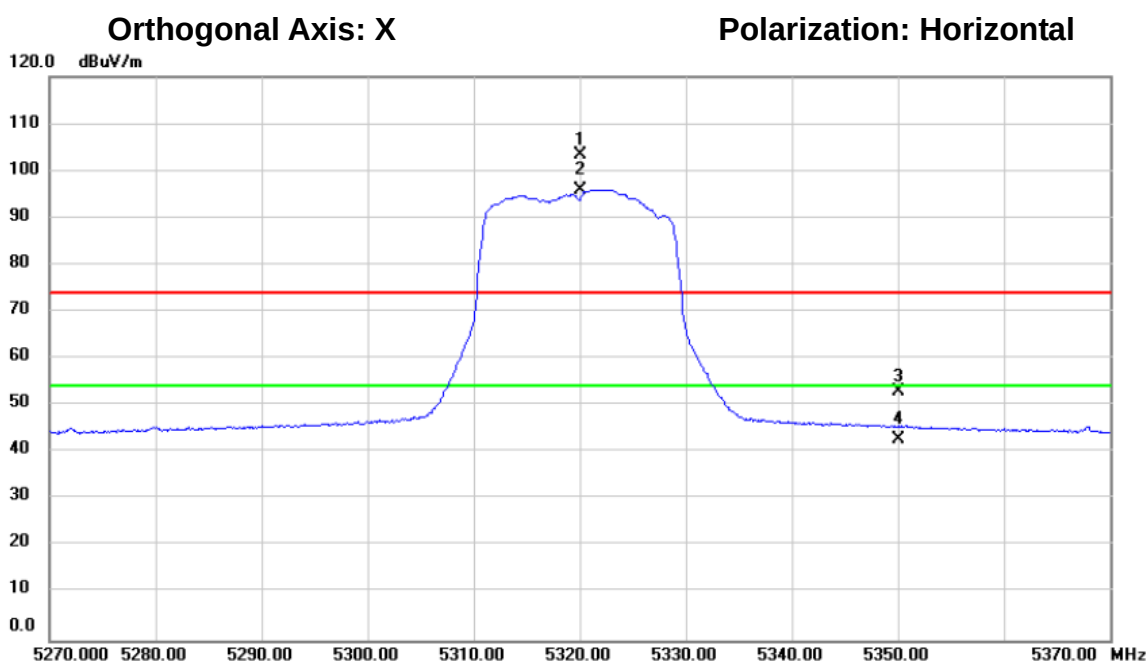

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	X	5320.000	65.74	37.72	103.46	74.00	29.46	peak			主頻訊號不予判斷
2	*	5320.000	58.22	37.72	95.94	54.00	41.94	AVG			主頻訊號不予判斷
3		5350.000	15.23	37.76	52.99	74.00	-21.01	peak			
4		5350.000	4.95	37.76	42.71	54.00	-11.29	AVG			

測試頻道: IEEE 802.11n (20 MHz) /
5320 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

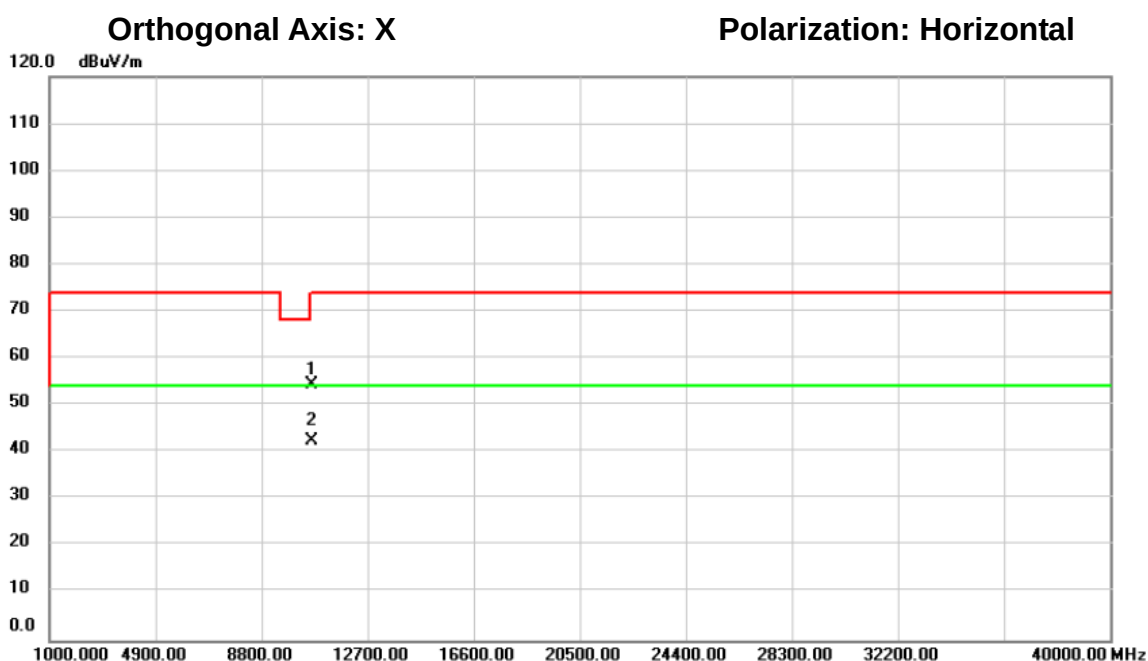

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10640.00	52.29	2.22	54.51	74.00	-19.49			peak
2	*	10640.00	40.10	2.22	42.32	54.00	-11.68			AVG

測試頻道: IEEE 802.11n (40 MHz) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

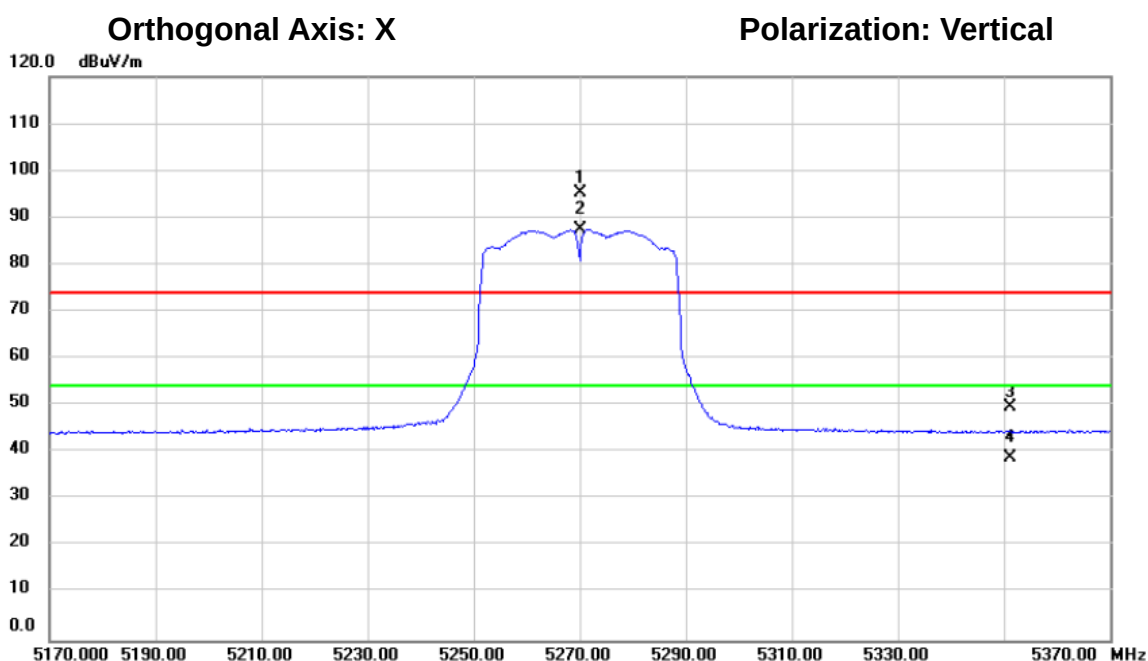

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	X	5270.000	57.57	37.67	95.24	74.00	21.24	peak			主頻訊號不予判斷
2	*	5270.000	49.78	37.67	87.45	54.00	33.45	AVG			主頻訊號不予判斷
3		5351.080	11.76	37.76	49.52	74.00	-24.48	peak			
4		5351.080	1.24	37.76	39.00	54.00	-15.00	AVG			

測試頻道: IEEE 802.11n (40 MHz) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

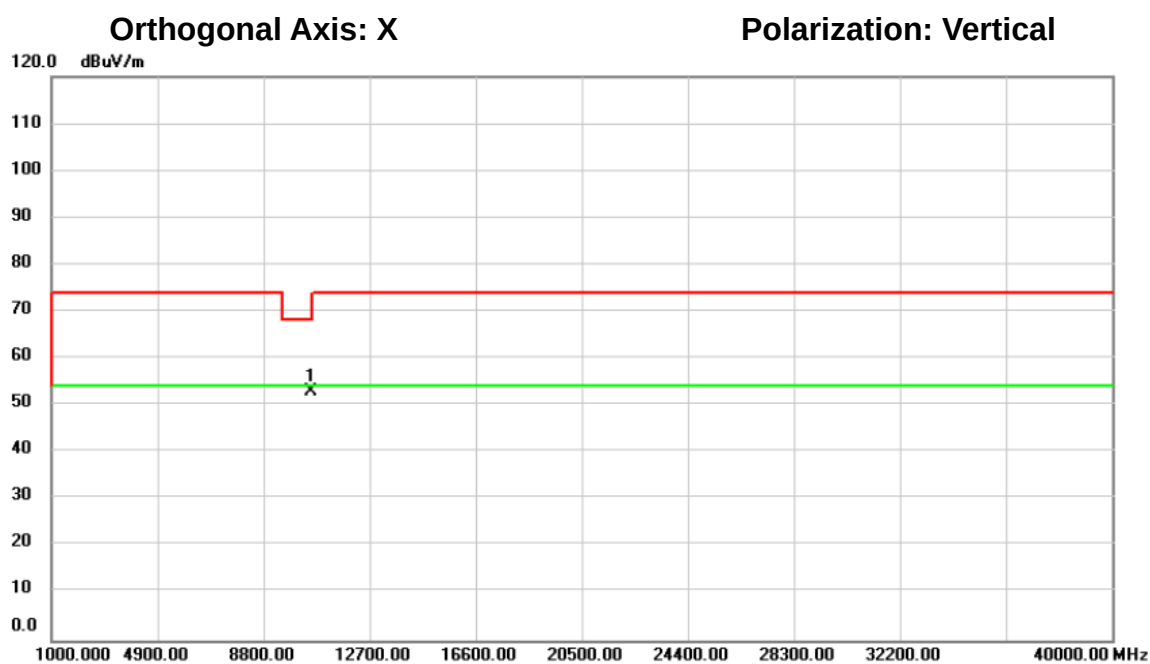

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10540.00	50.98	2.04	53.02	68.20	-15.18			peak

測試頻道: IEEE 802.11n (40 MHz) /
5270 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C


環境濕度: 70%

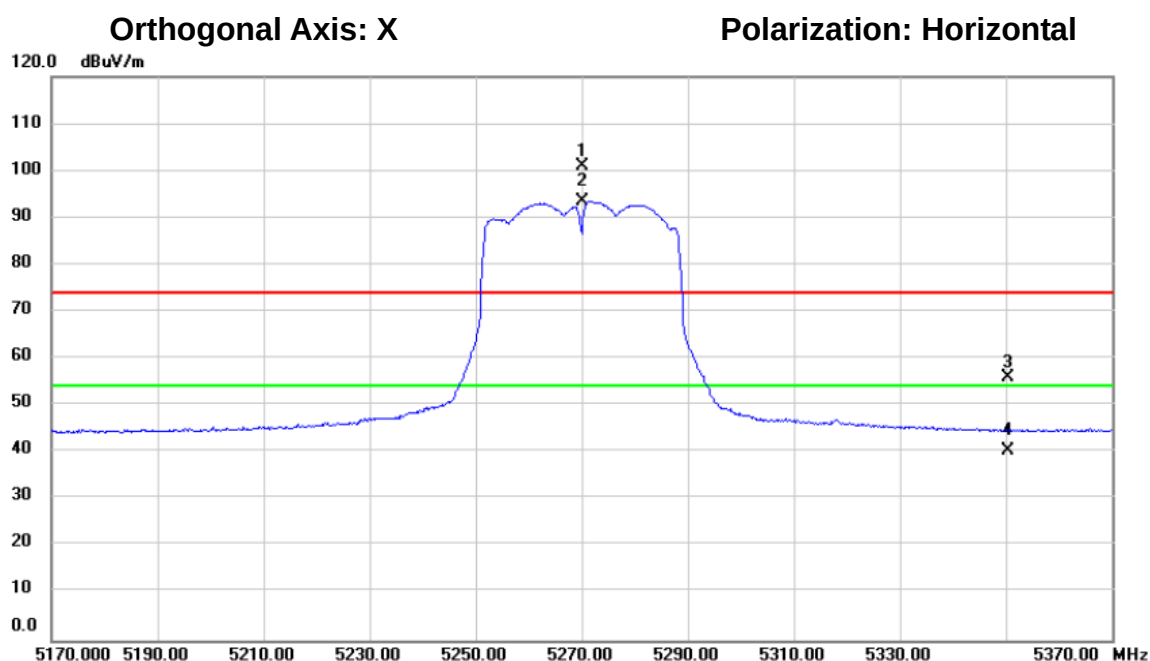

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	X	5270.000	63.15	37.67	100.82	74.00	26.82	peak			主頻訊號不予判斷
2	*	5270.000	55.77	37.67	93.44	54.00	39.44	AVG			主頻訊號不予判斷
3		5350.420	18.23	37.76	55.99	74.00	-18.01	peak			
4		5350.420	2.56	37.76	40.32	54.00	-13.68	AVG			

測試頻道: IEEE 802.11n (40 MHz) /
5270 MHz MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 106/08/26
環境濕度: 70%

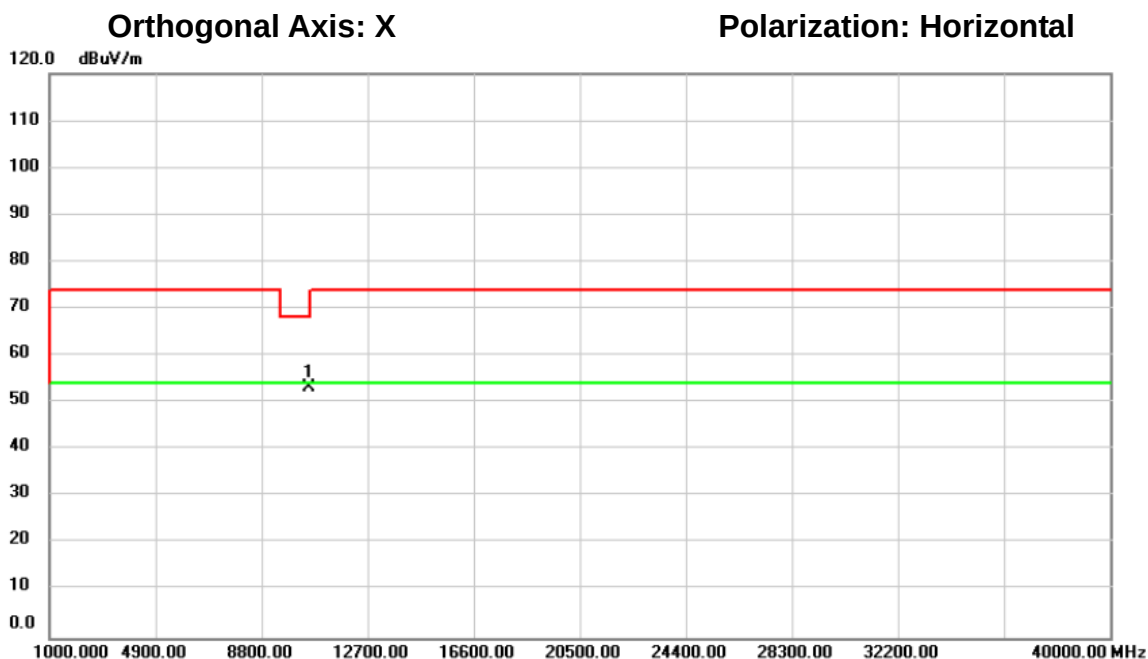

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10540.00	51.15	2.04	53.19	68.20	-15.01	peak		

測試頻道: IEEE 802.11n (40 MHz) /
5310 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

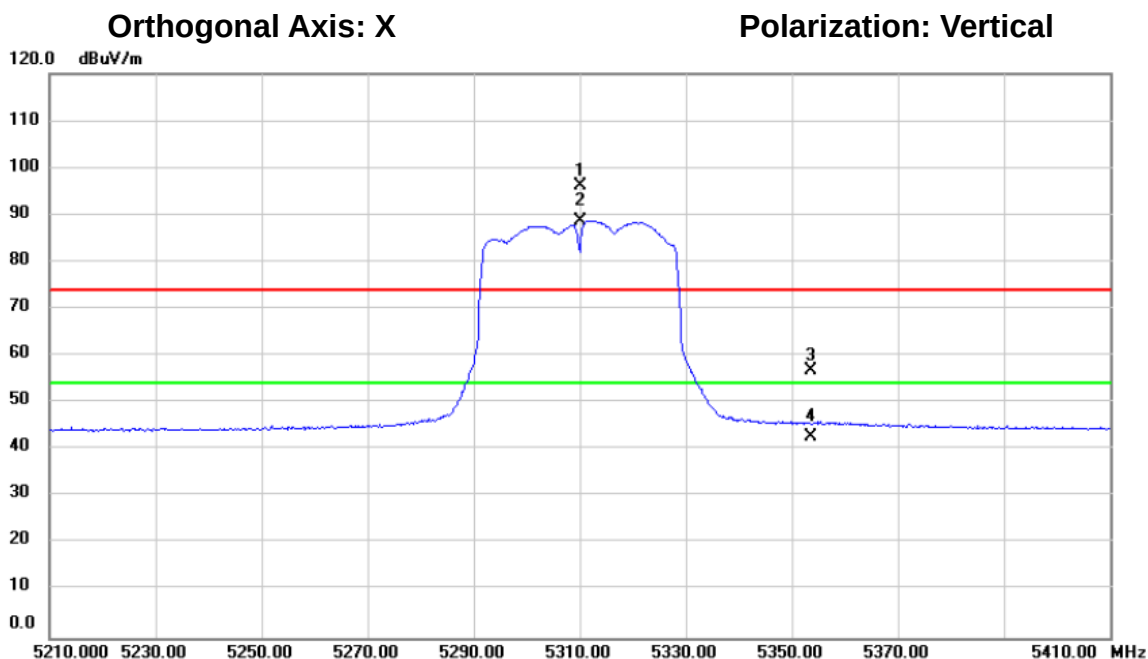

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5310.000	58.39	37.72	96.11	74.00	22.11	peak		主頻訊號不予判斷
2	*	5310.000	51.07	37.72	88.79	54.00	34.79	AVG		主頻訊號不予判斷
3		5353.540	19.00	37.76	56.76	74.00	-17.24	peak		
4		5353.540	5.04	37.76	42.80	54.00	-11.20	AVG		

測試頻道: IEEE 802.11n (40 MHz) /
5310 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

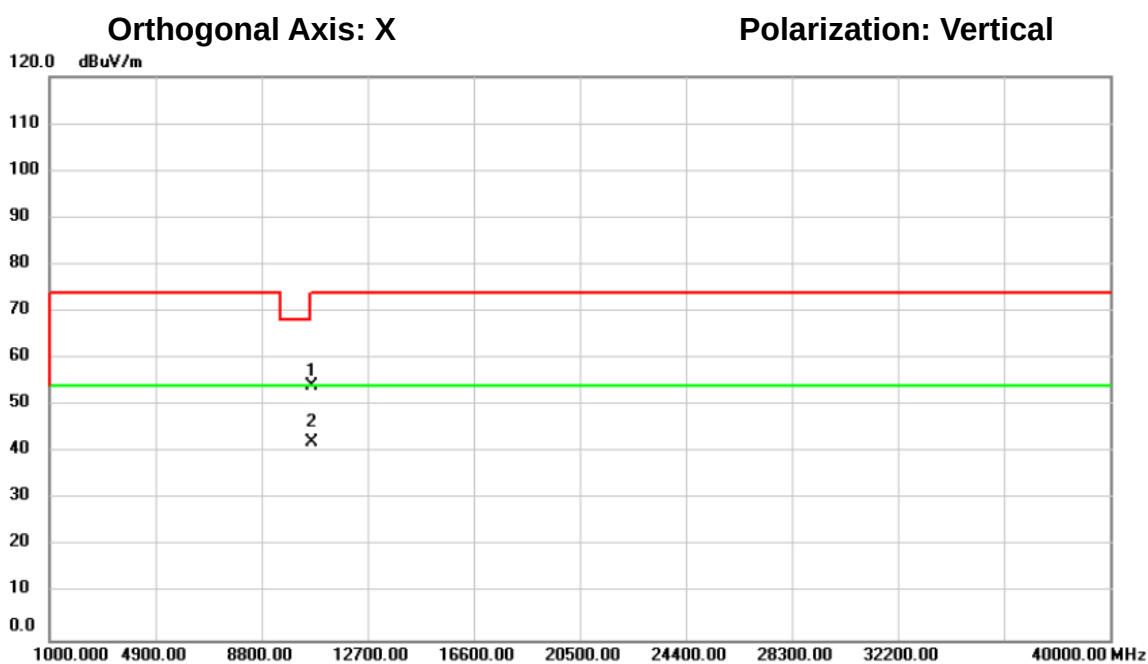

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10620.00	51.98	2.18	54.16	74.00	-19.84			peak
2	*	10620.00	39.90	2.18	42.08	54.00	-11.92			AVG

測試頻道: IEEE 802.11n (40 MHz) /
5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C


環境濕度: 70%

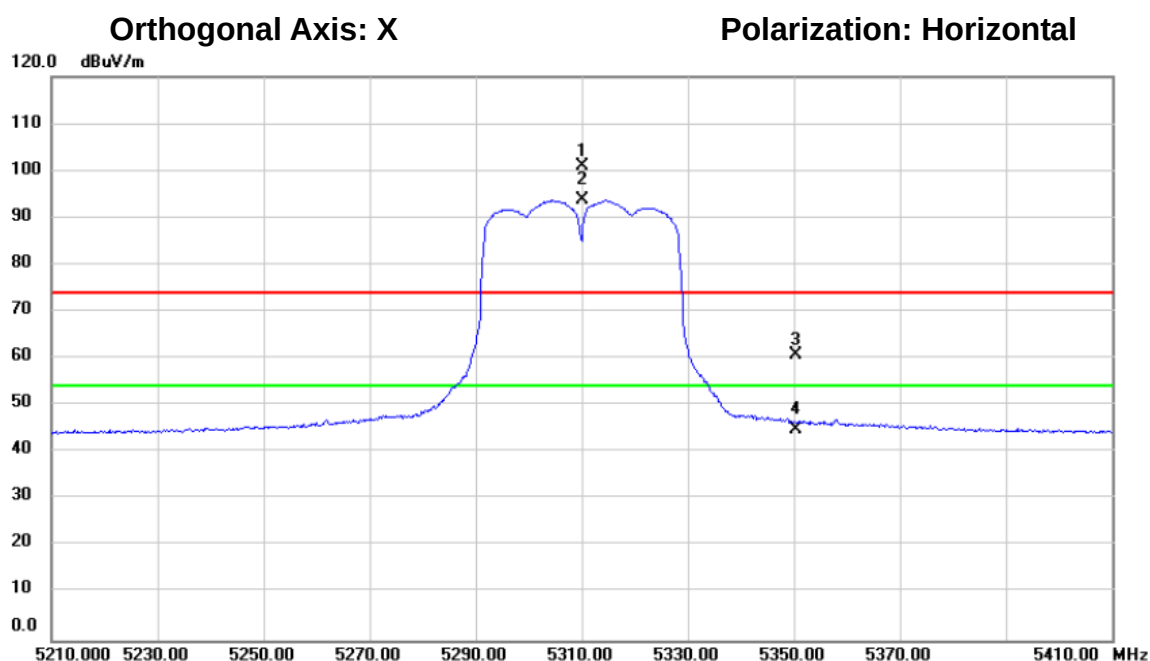

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5310.000	63.29	37.72	101.01	74.00	27.01	peak		主頻訊號不予判斷
2	*	5310.000	55.92	37.72	93.64	54.00	39.64	AVG		主頻訊號不予判斷
3		5350.360	22.87	37.76	60.63	74.00	-13.37	peak		
4		5350.360	6.98	37.76	44.74	54.00	-9.26	AVG		

測試頻道: IEEE 802.11n (40 MHz) /
5310 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 106/08/26
環境濕度: 70%

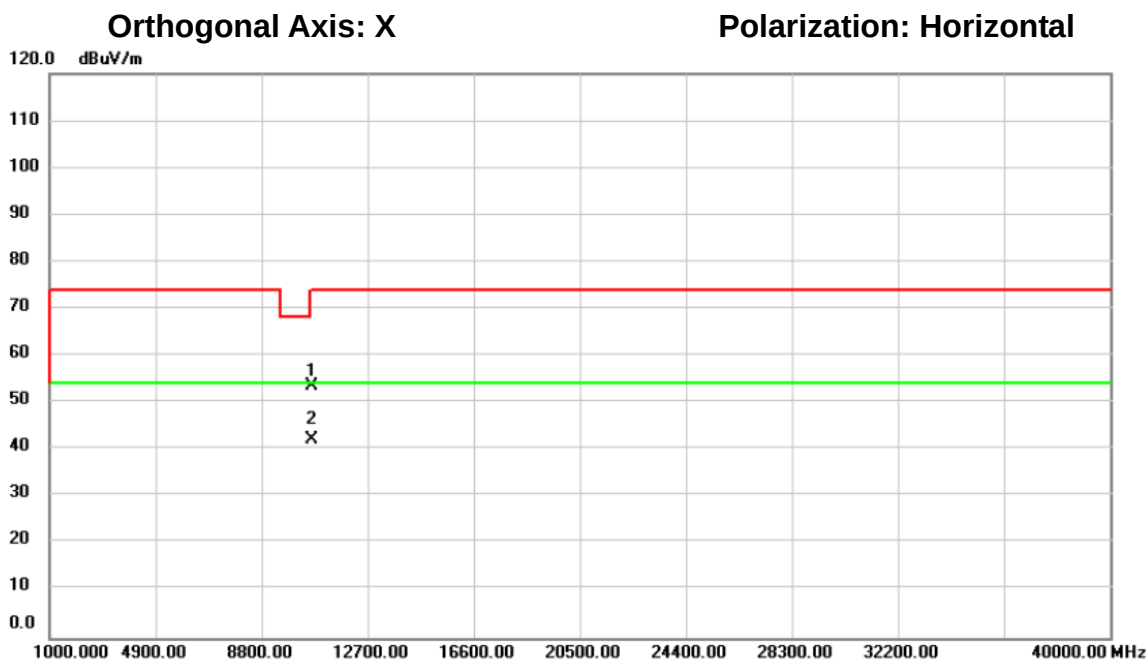

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		10620.00	51.30	2.18	53.48	74.00	-20.52	peak		
2	*	10620.00	40.05	2.18	42.23	54.00	-11.77	AVG		

測試頻道: IEEE 802.11a / 5500 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

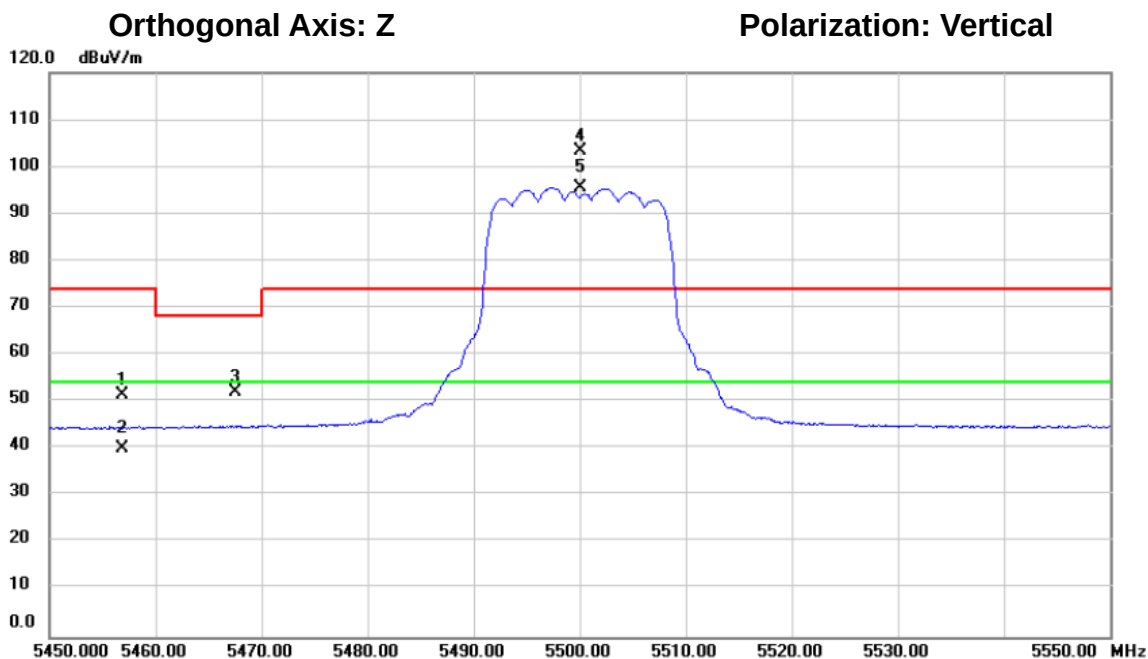


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5456.810	13.72	37.87	51.59	74.00	-22.41			peak
2		5456.810	2.24	37.87	40.11	54.00	-13.89			AVG
3		5467.490	14.16	37.88	52.04	68.20	-16.16			peak
4	X	5500.000	65.30	37.92	103.22	74.00	29.22			peak
5	*	5500.000	57.65	37.92	95.57	54.00	41.57			AVG

主頻訊號不予判斷
 主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5500 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

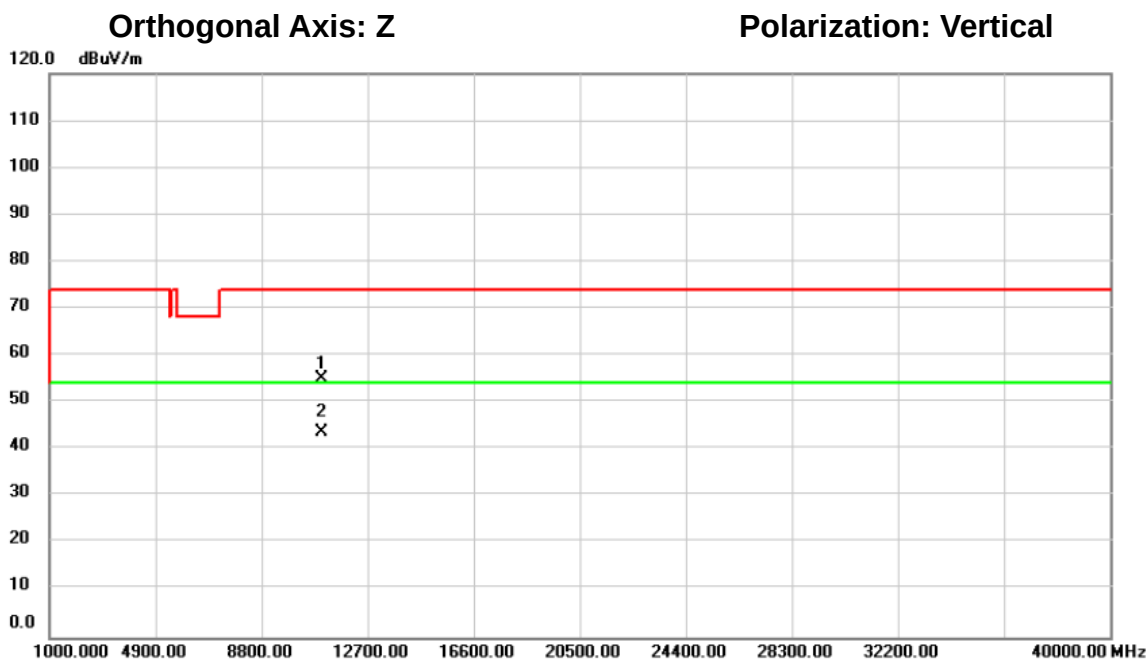

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11000.00	52.10	2.85	54.95	74.00	-19.05	peak		
2	*	11000.00	40.71	2.85	43.56	54.00	-10.44	AVG		

測試頻道: IEEE 802.11a / 5500 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

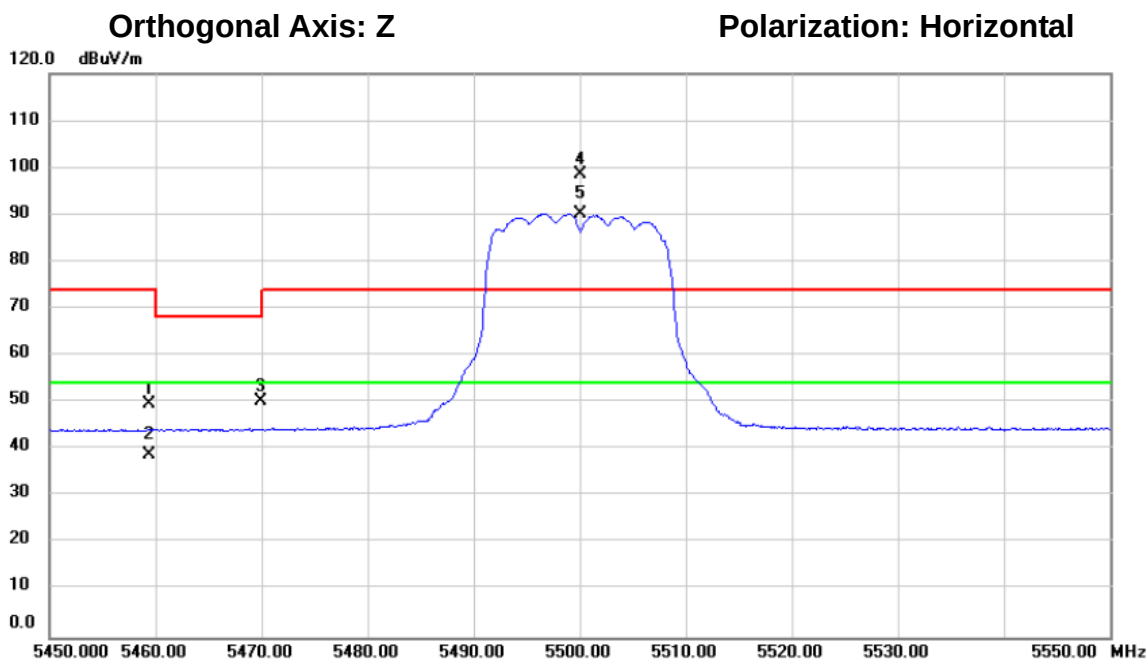

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5459.410	11.88	37.88	49.76	74.00	-24.24	peak		
2		5459.410	1.03	37.88	38.91	54.00	-15.09	AVG		
3		5469.990	12.25	37.89	50.14	68.20	-18.06	peak		
4	X	5500.000	60.61	37.92	98.53	74.00	24.53	peak		主頻訊號不予判斷
5	*	5500.000	52.30	37.92	90.22	54.00	36.22	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5500 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

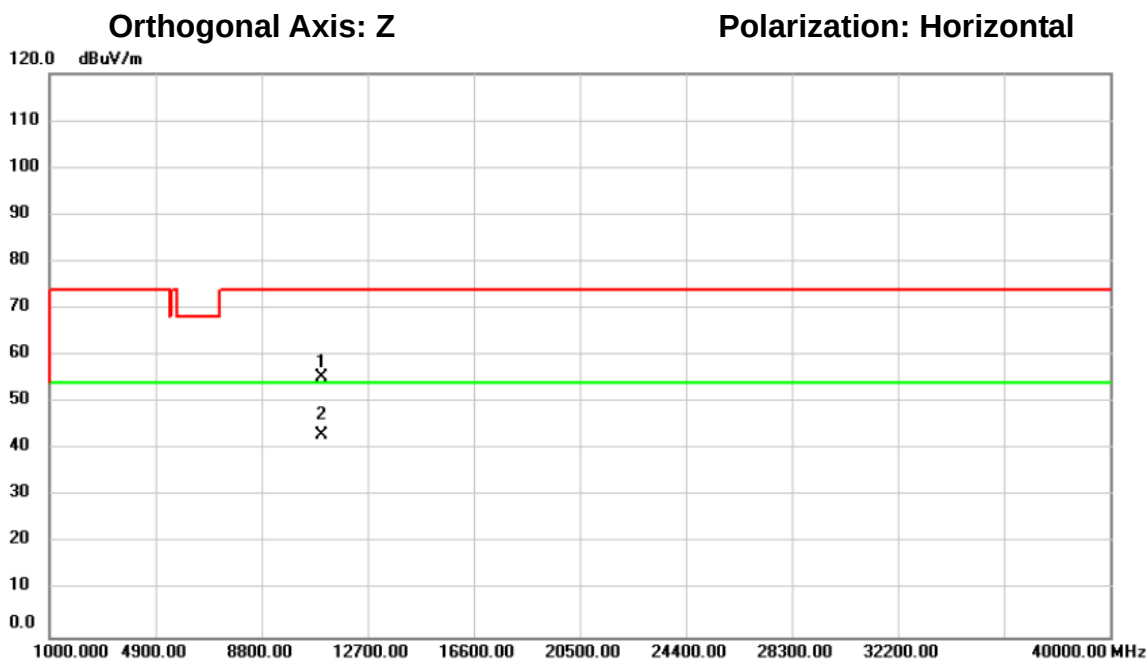

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		11000.00	52.36	2.85	55.21	74.00	-18.79	peak		
2	*	11000.00	40.34	2.85	43.19	54.00	-10.81	AVG		

測試頻道: IEEE 802.11a / 5580 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

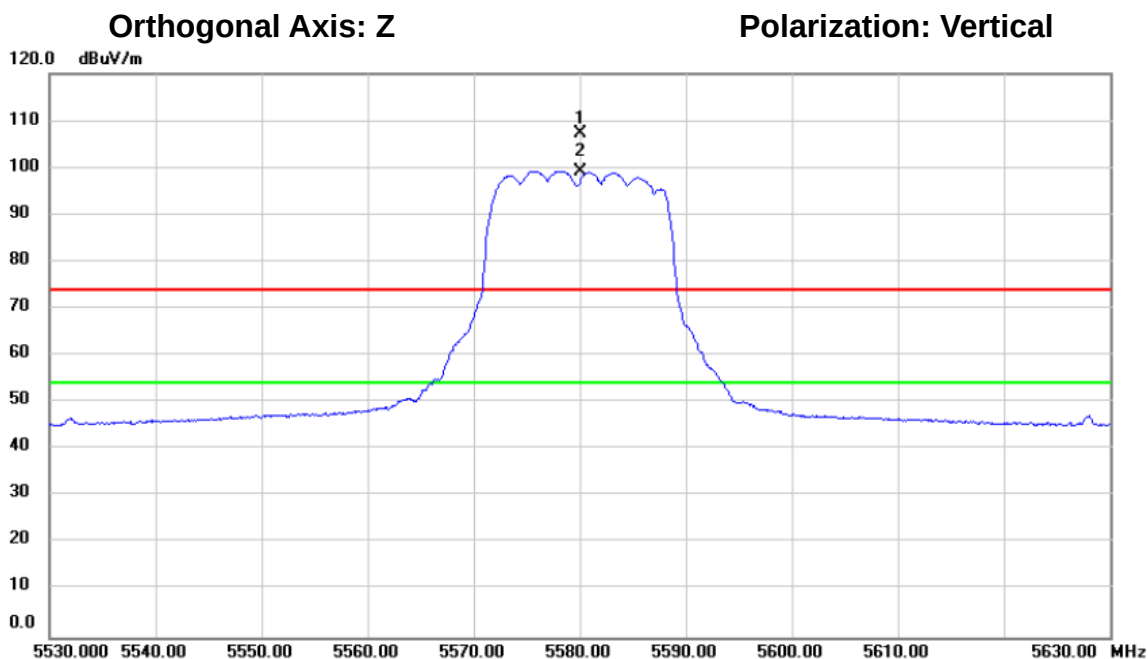

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5580.000	69.20	38.14	107.34	74.00	33.34	peak		主頻訊號不予判斷
2	*	5580.000	61.16	38.14	99.30	54.00	45.30	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5580 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

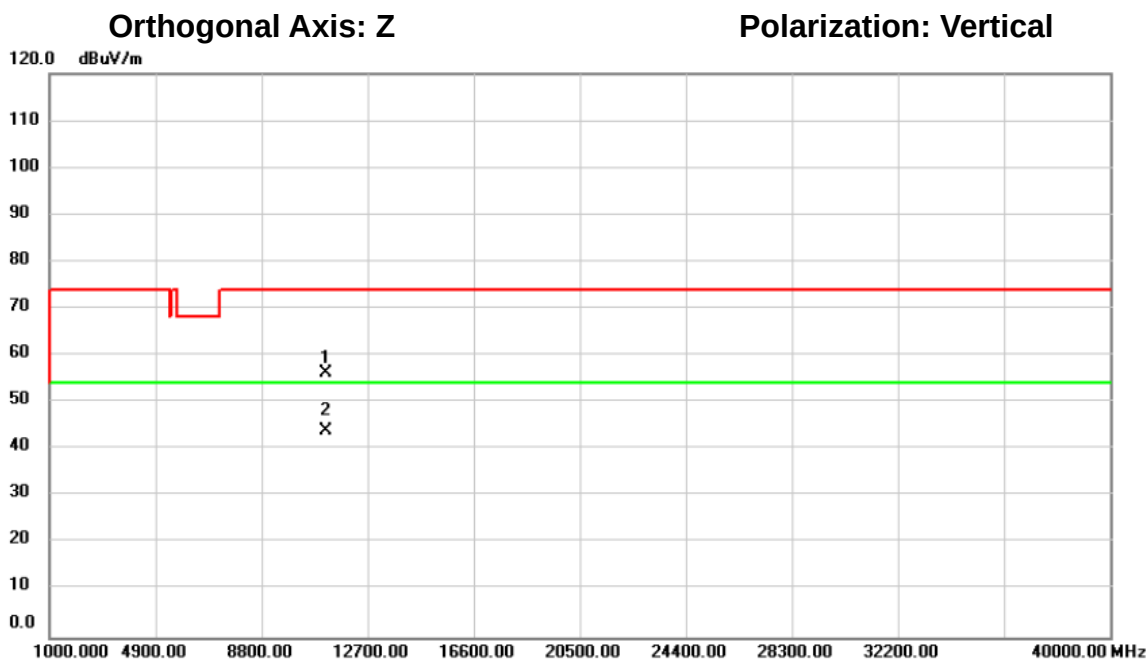

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11160.00	53.28	3.04	56.32	74.00	-17.68	peak			
2	*	11160.00	40.81	3.04	43.85	54.00	-10.15	AVG			

測試頻道: IEEE 802.11a / 5580 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

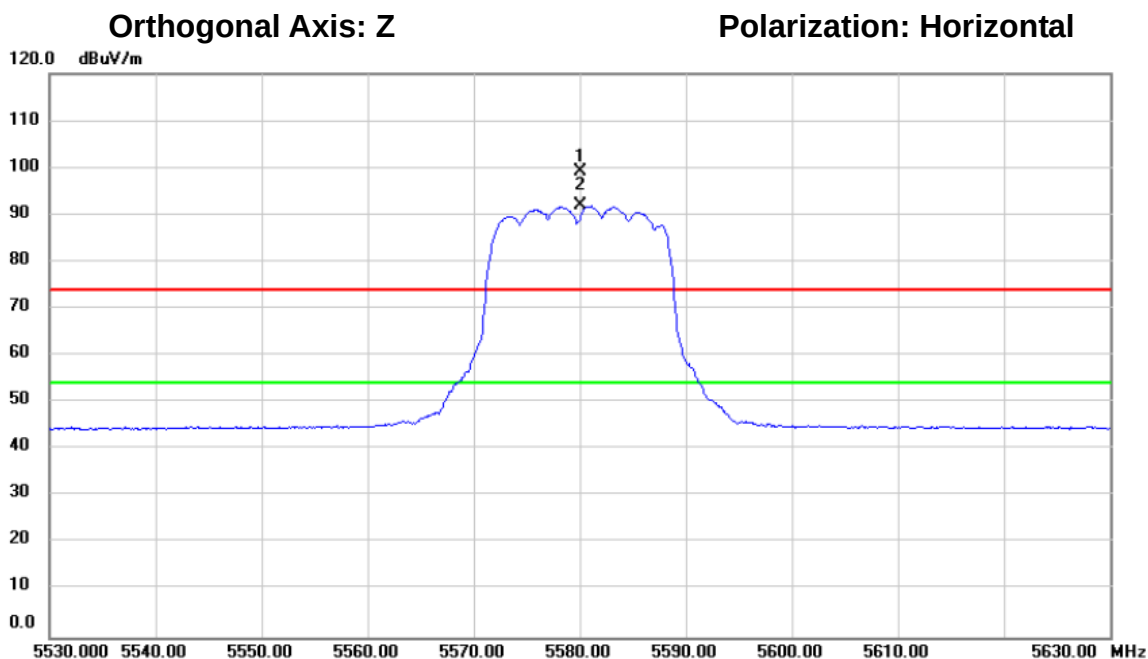

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5580.000	61.03	38.14	99.17	74.00	25.17	peak		主頻訊號不予判斷
2	*	5580.000	53.69	38.14	91.83	54.00	37.83	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5580 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

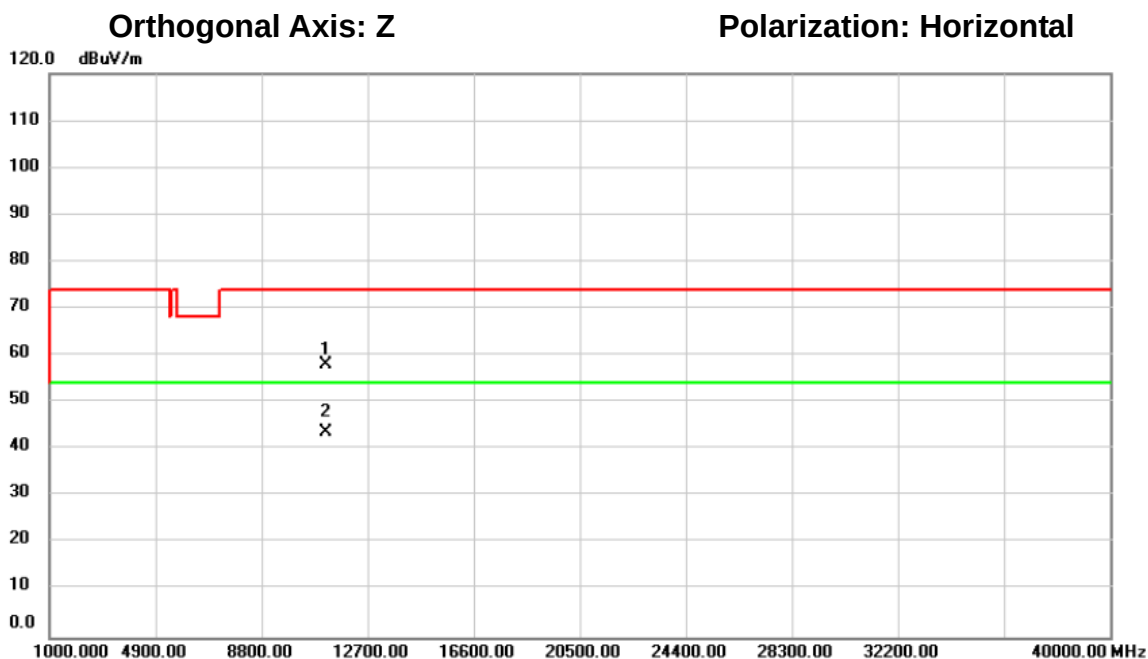

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		11160.00	55.04	3.04	58.08	74.00	-15.92	peak		
2	*	11160.00	40.72	3.04	43.76	54.00	-10.24	AVG		

測試頻道: IEEE 802.11a / 5700 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

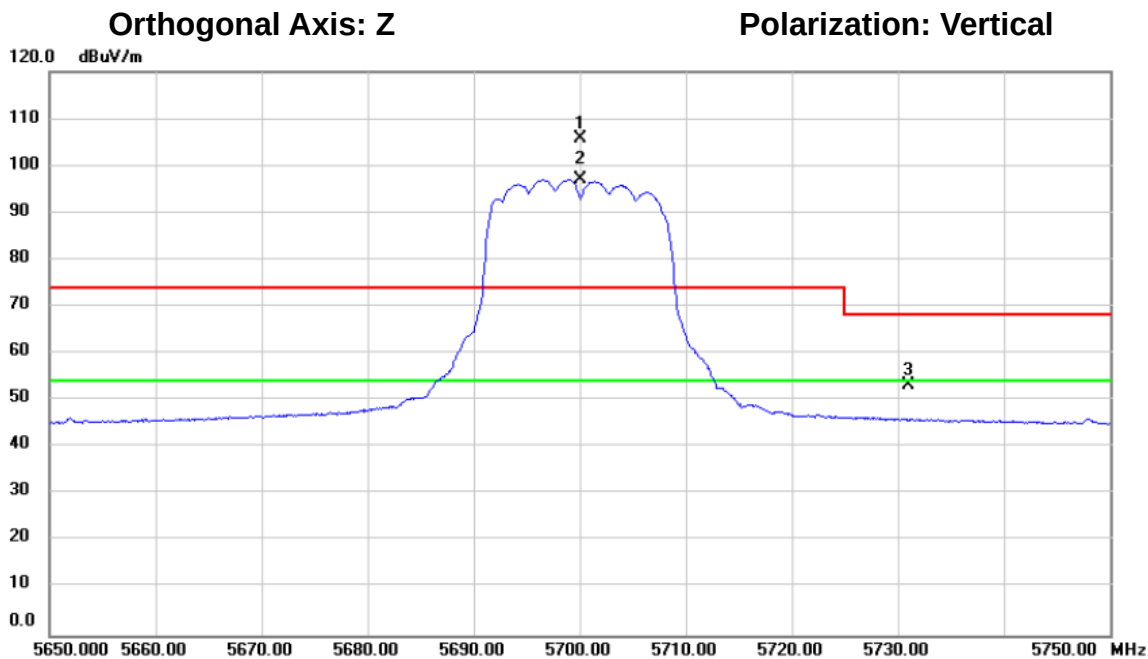

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5700.000	67.27	38.46	105.73	74.00	31.73	peak		主頻訊號不予判斷
2	*	5700.000	58.54	38.46	97.00	54.00	43.00	AVG		主頻訊號不予判斷
3		5731.020	14.71	38.55	53.26	68.20	-14.94	peak		

測試頻道: IEEE 802.11a / 5700 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

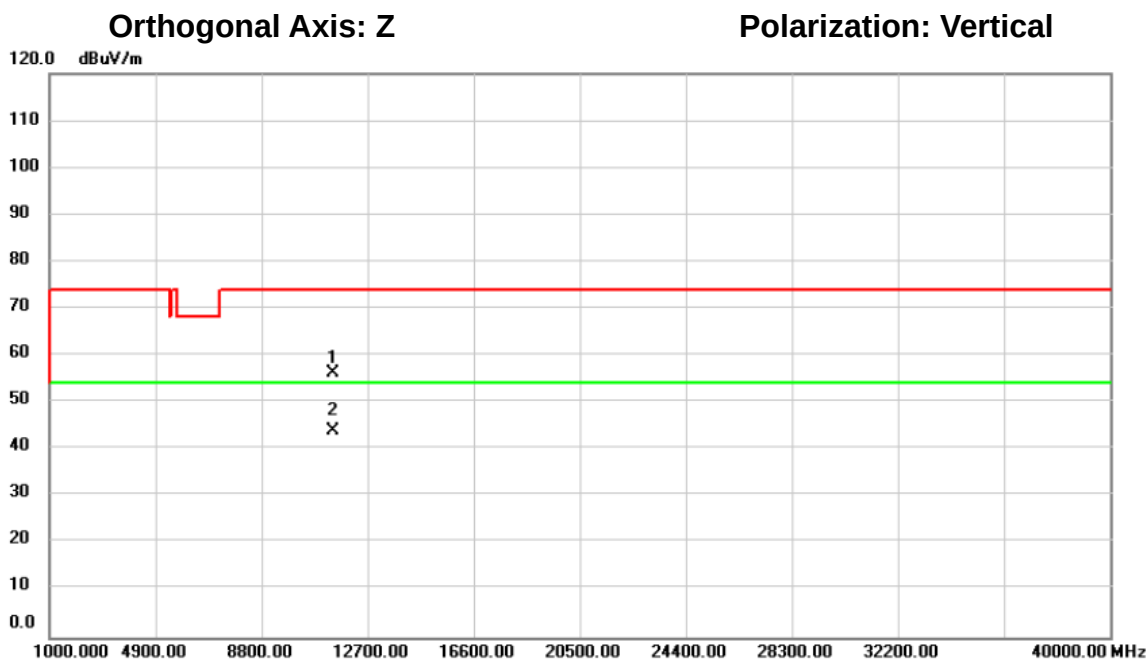

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11400.00	52.86	3.30	56.16	74.00	-17.84	peak			
2	*	11400.00	40.51	3.30	43.81	54.00	-10.19	AVG			

測試頻道: IEEE 802.11a / 5700 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 106/08/26
環境濕度: 70%

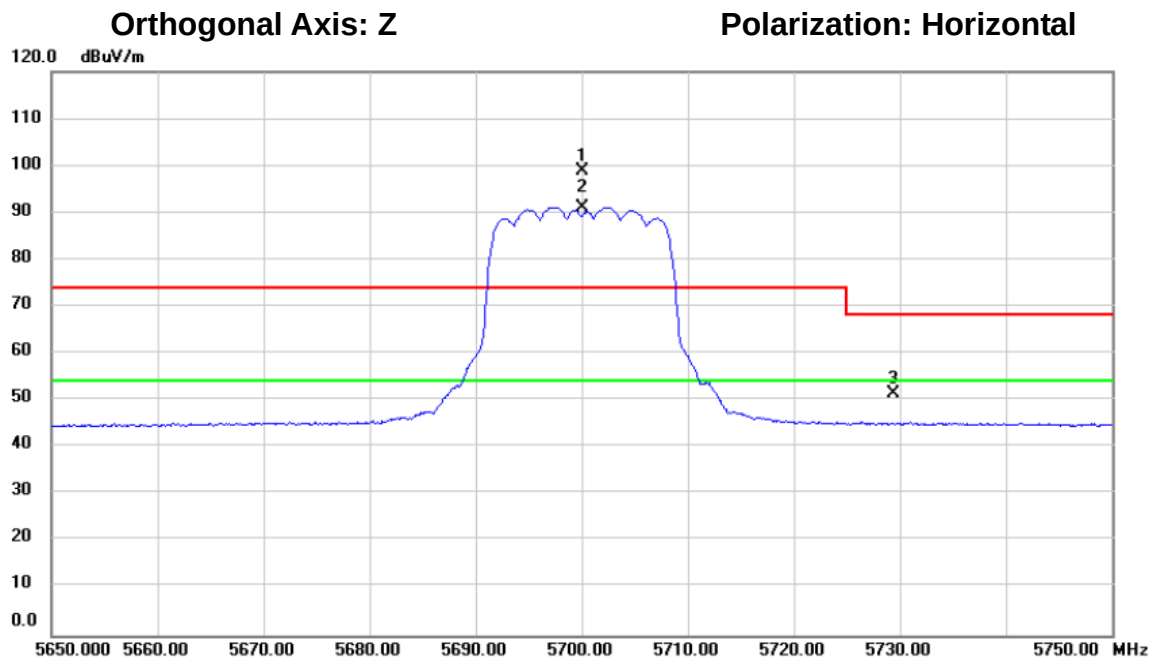

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5700.000	60.54	38.46	99.00	74.00	25.00	peak		主頻訊號不予判斷
2	*	5700.000	52.71	38.46	91.17	54.00	37.17	AVG		主頻訊號不予判斷
3		5729.450	12.82	38.55	51.37	68.20	-16.83	peak		

測試頻道: IEEE 802.11a / 5700 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

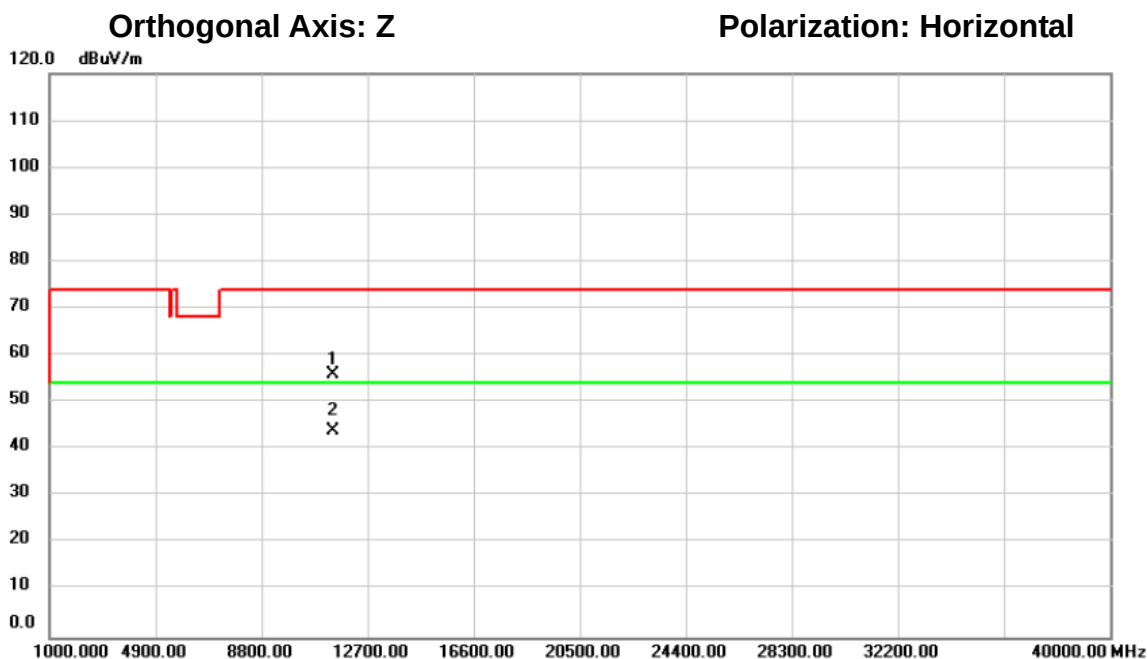

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		11400.00	52.68	3.30	55.98	74.00	-18.02	peak		
2	*	11400.00	40.64	3.30	43.94	54.00	-10.06	AVG		

測試頻道: IEEE 802.11n (20 MHz) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

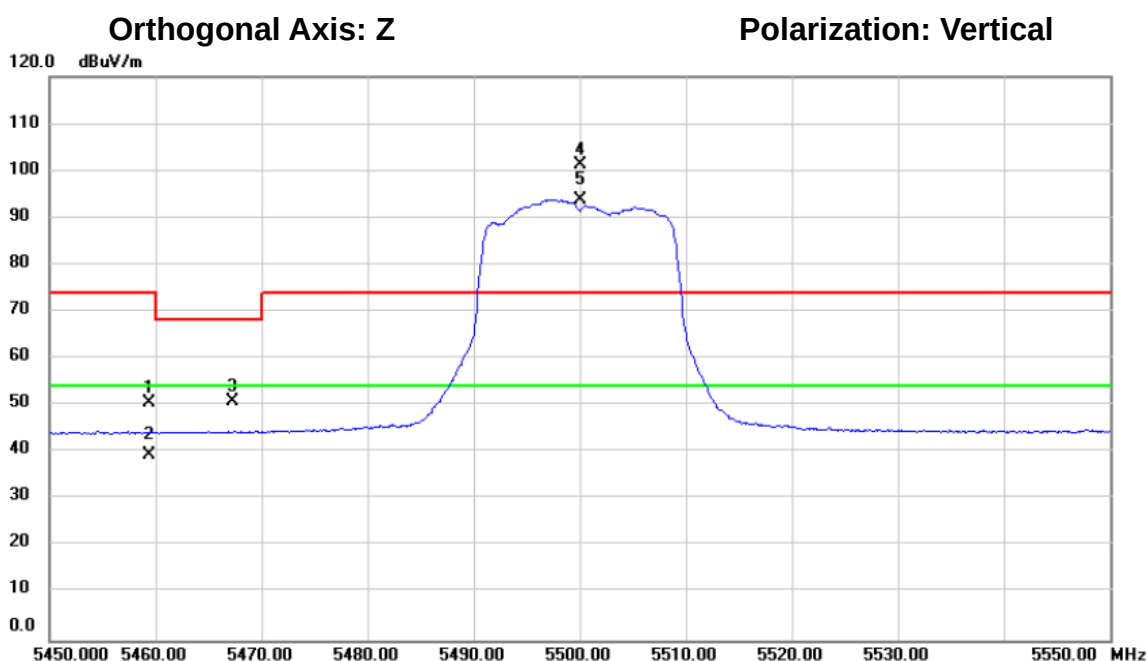

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5459.340	12.71	37.88	50.59	74.00	-23.41	peak			
2		5459.340	1.57	37.88	39.45	54.00	-14.55	AVG			
3		5467.270	13.09	37.88	50.97	68.20	-17.23	peak			
4	X	5500.000	63.38	37.92	101.30	74.00	27.30	peak			主頻訊號不予判斷
5	*	5500.000	55.80	37.92	93.72	54.00	39.72	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) / 5500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

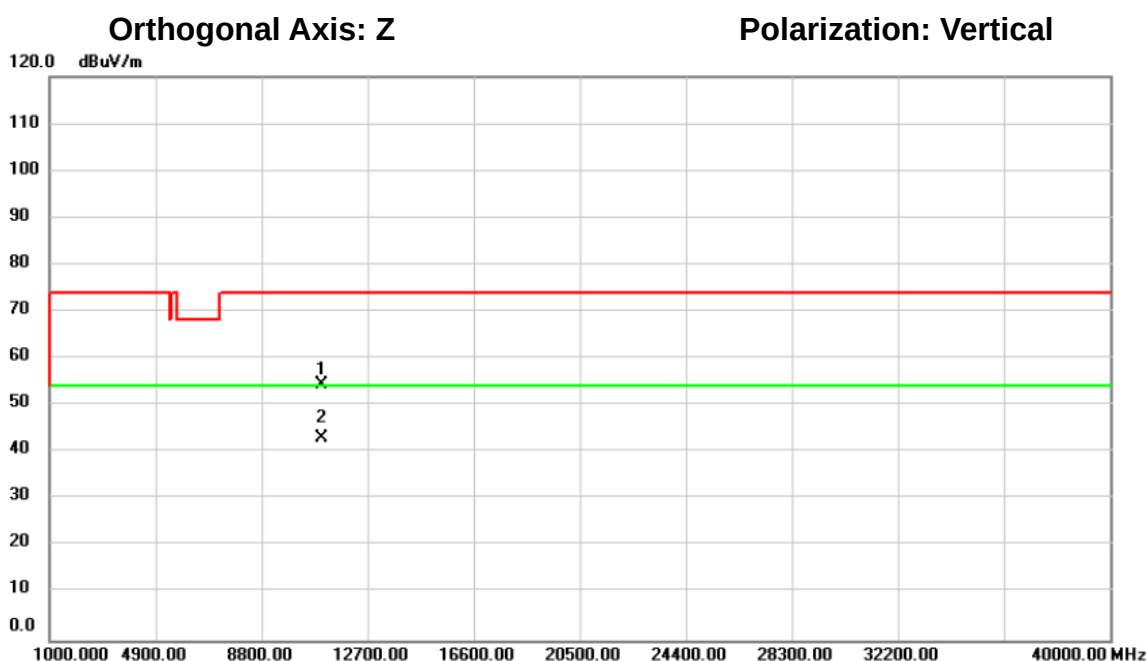

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11000.00	51.58	2.85	54.43	74.00	-19.57			peak
2	*	11000.00	40.14	2.85	42.99	54.00	-11.01			AVG

測試頻道: IEEE 802.11n (20 MHz) / 5500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

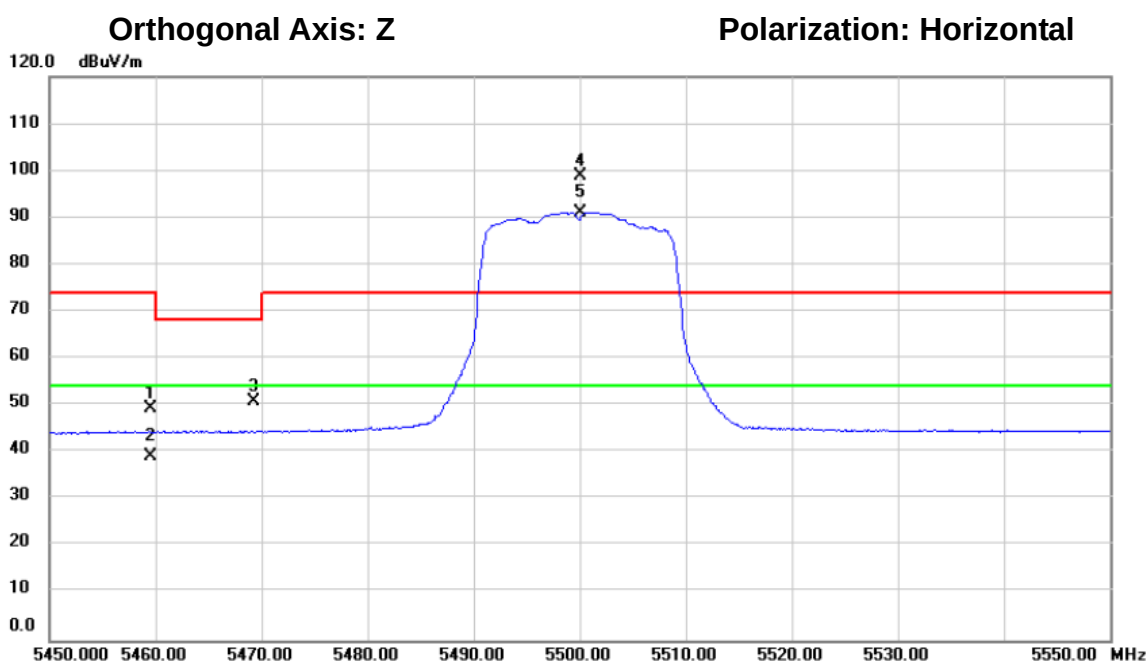

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5459.530	11.53	37.88	49.41	74.00	-24.59	peak			
2		5459.530	1.30	37.88	39.18	54.00	-14.82	AVG			
3		5469.270	13.00	37.89	50.89	68.20	-17.31	peak			
4	X	5500.000	60.96	37.92	98.88	74.00	24.88	peak			主頻訊號不予判斷
5	*	5500.000	53.20	37.92	91.12	54.00	37.12	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

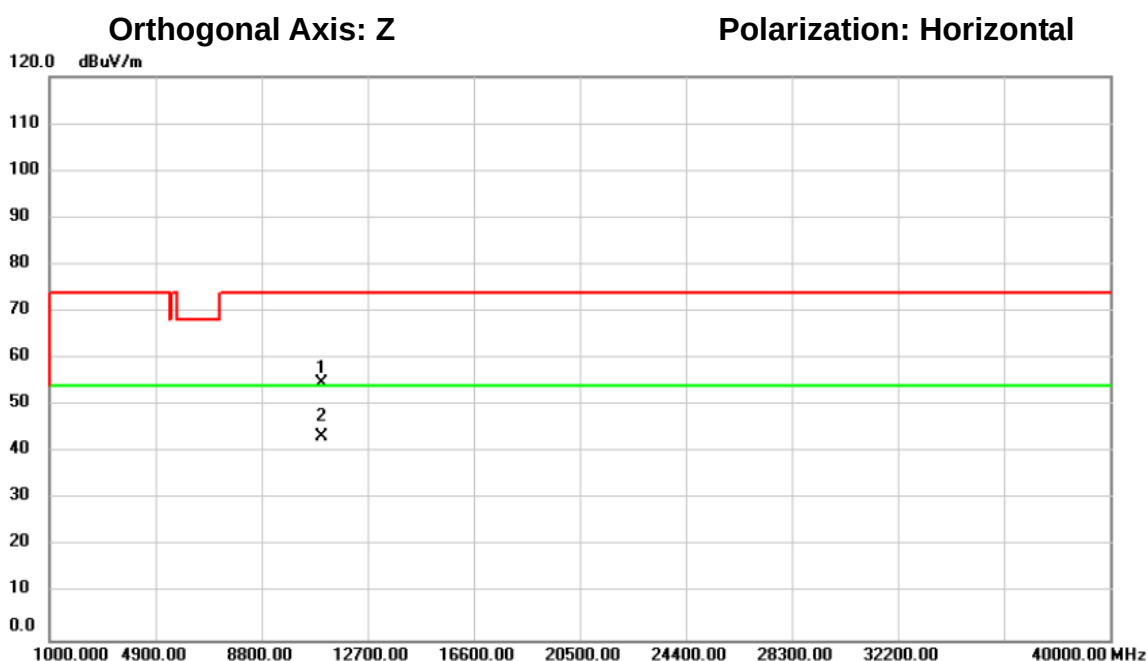

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11000.00	51.96	2.85	54.81	74.00	-19.19	peak		
2	*	11000.00	40.41	2.85	43.26	54.00	-10.74	AVG		

測試頻道: IEEE 802.11n (20 MHz) / 5580 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

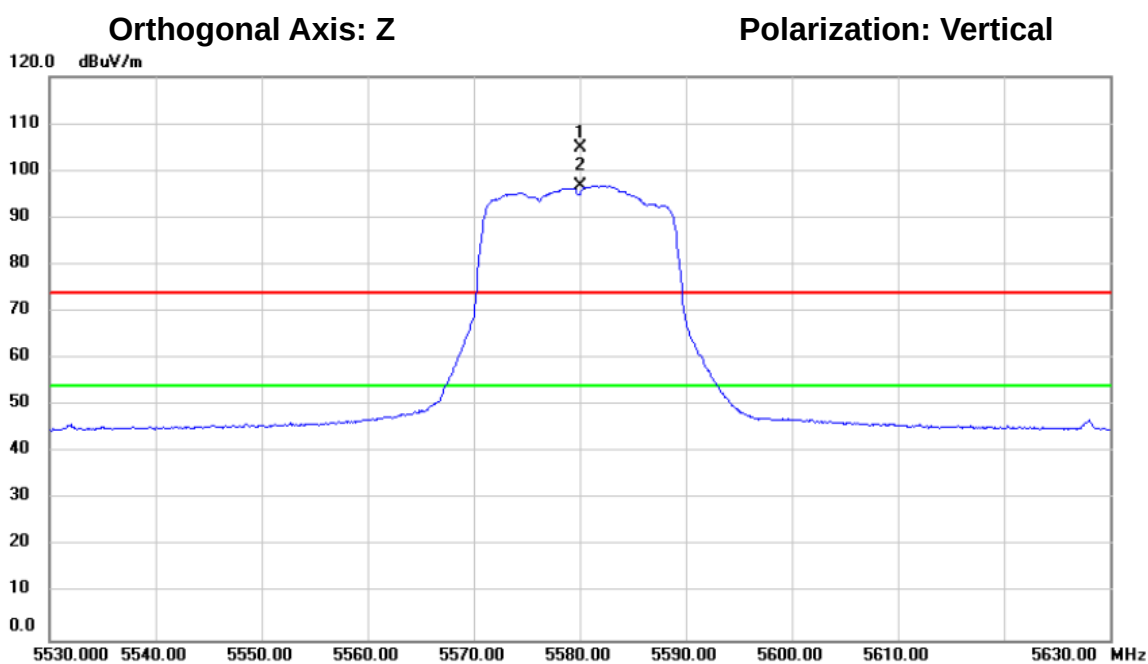

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5580.000	66.59	38.14	104.73	74.00	30.73	peak		主頻訊號不予判斷
2	*	5580.000	58.66	38.14	96.80	54.00	42.80	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) / 5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

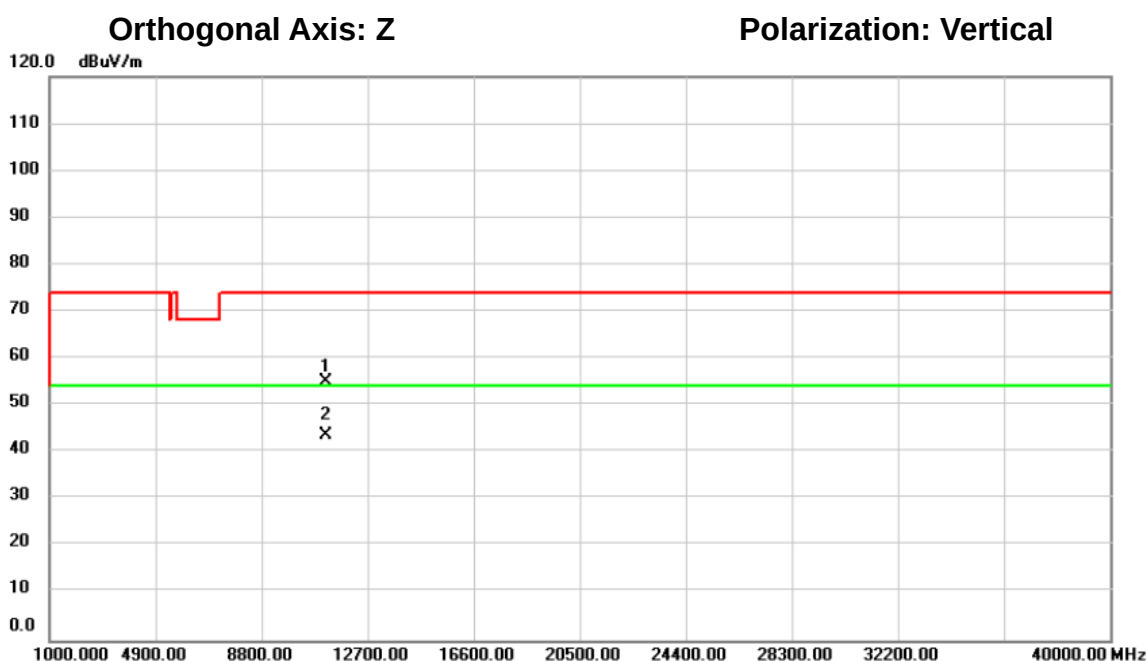

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11160.00	51.95	3.04	54.99	74.00	-19.01	peak		
2	*	11160.00	40.72	3.04	43.76	54.00	-10.24	AVG		

測試頻道: IEEE 802.11n (20 MHz) / 5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

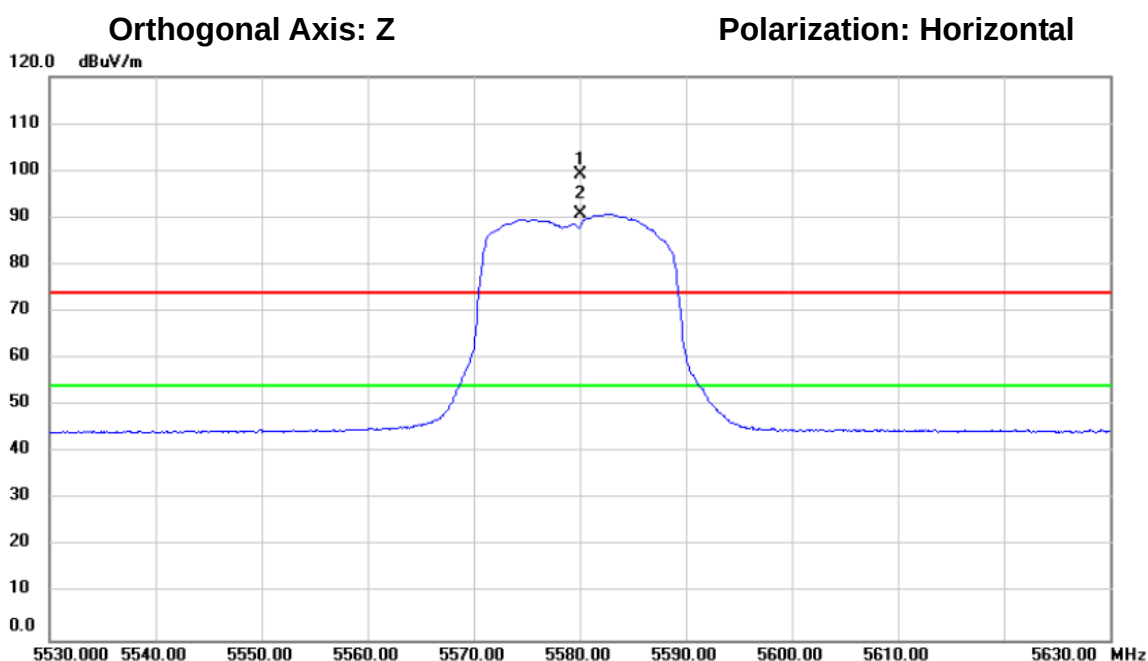

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5580.000	60.95	38.14	99.09	74.00	25.09	peak		主頻訊號不予判斷
2	*	5580.000	52.64	38.14	90.78	54.00	36.78	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) / 5580 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

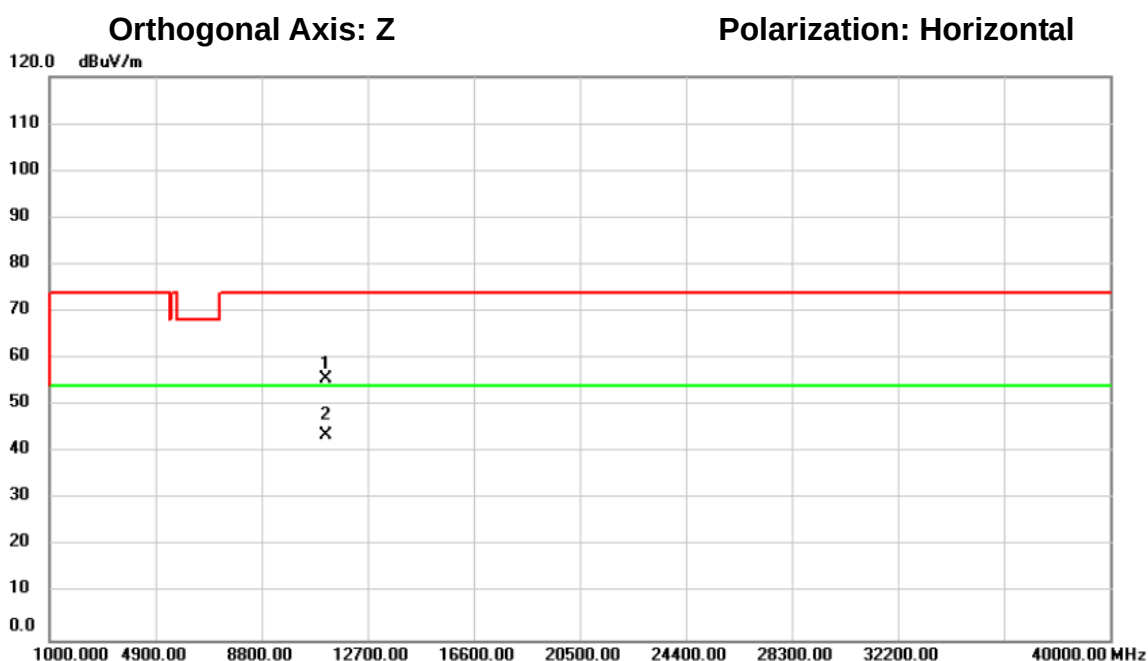

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11160.00	52.70	3.04	55.74	74.00	-18.26	peak		
2	*	11160.00	40.64	3.04	43.68	54.00	-10.32	AVG		

測試頻道: IEEE 802.11n (20 MHz) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

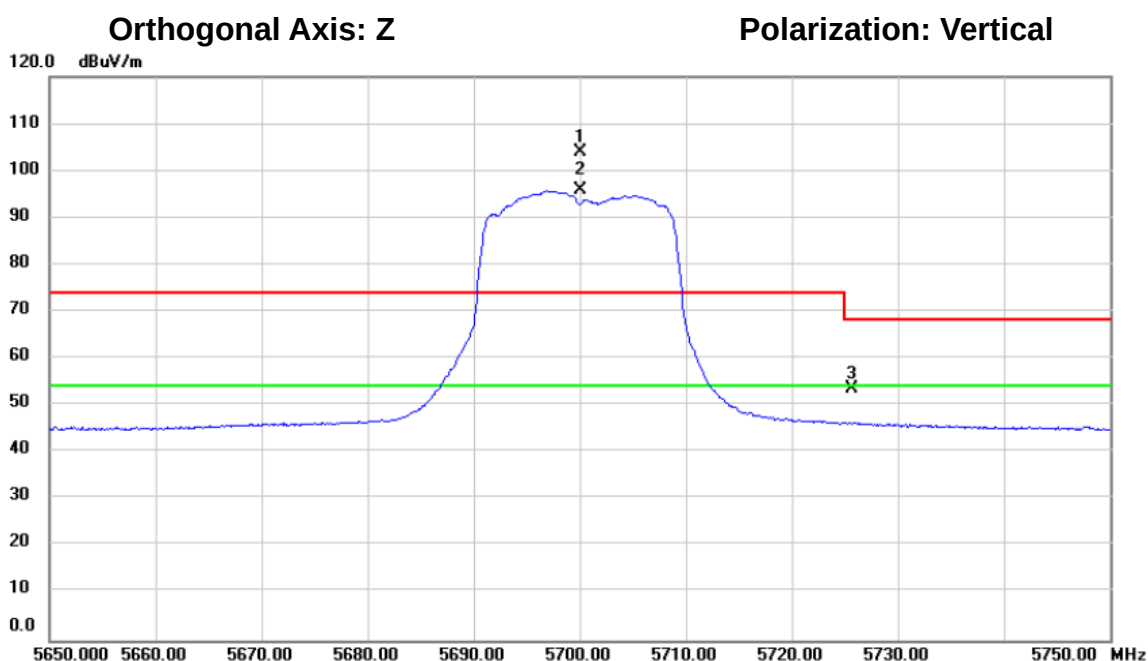

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	5700.000	65.41	38.46	103.87	74.00	29.87	peak		主頻訊號不予判斷
2	*	5700.000	57.25	38.46	95.71	54.00	41.71	AVG		主頻訊號不予判斷
3		5725.725	15.00	38.53	53.53	68.20	-14.67	peak		

測試頻道: IEEE 802.11n (20 MHz) / 5700 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

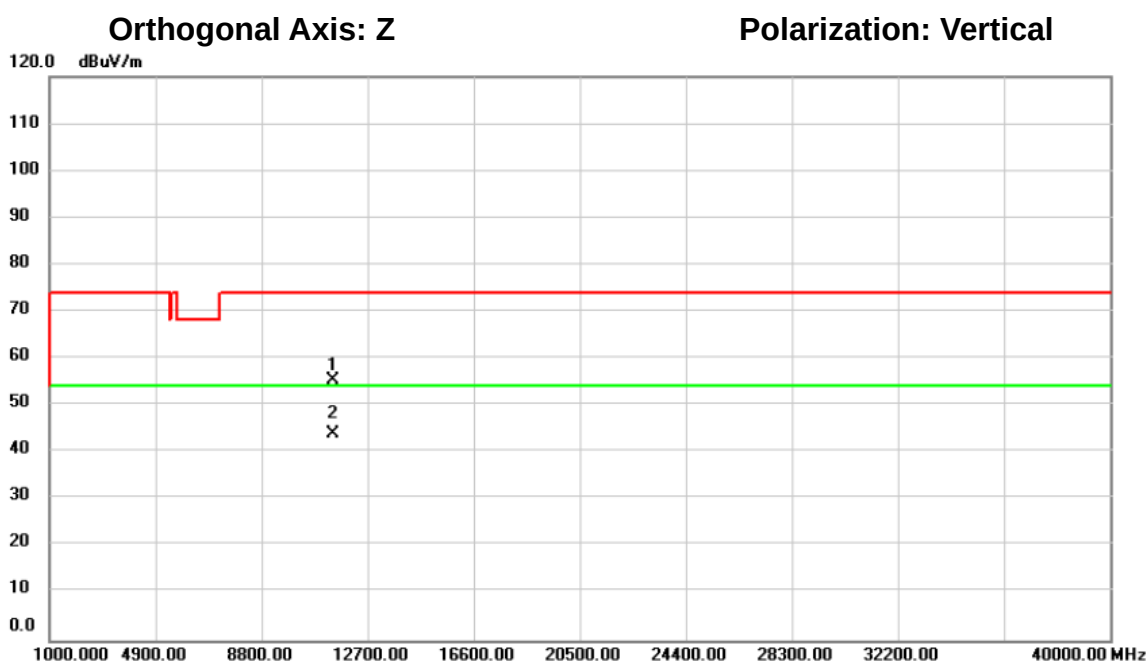

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11400.00	51.92	3.30	55.22	74.00	-18.78	peak			
2	*	11400.00	40.60	3.30	43.90	54.00	-10.10	AVG			

測試頻道: IEEE 802.11n (20 MHz) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

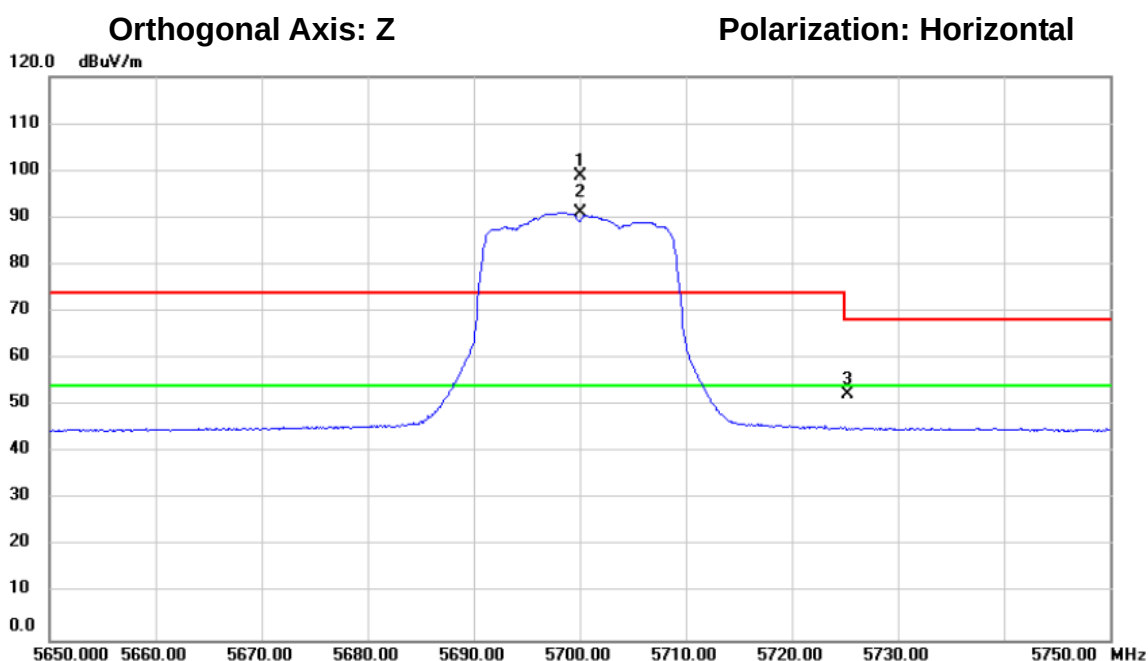

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5700.000	60.31	38.46	98.77	74.00	24.77	peak		主頻訊號不予判斷
2	*	5700.000	52.58	38.46	91.04	54.00	37.04	AVG		主頻訊號不予判斷
3		5725.275	13.68	38.53	52.21	68.20	-15.99	peak		

測試頻道: IEEE 802.11n (20 MHz) / 5700 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

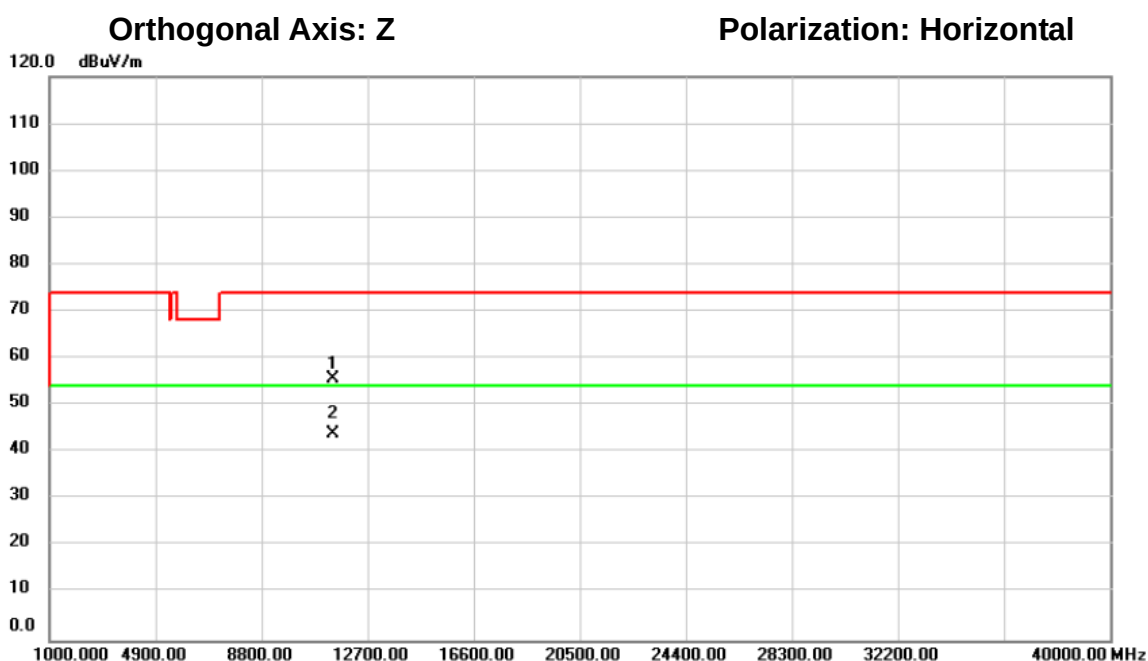

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11400.00	52.39	3.30	55.69	74.00	-18.31			peak
2	*	11400.00	40.55	3.30	43.85	54.00	-10.15			AVG

測試頻道: IEEE 802.11n (40 MHz) /
5510 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

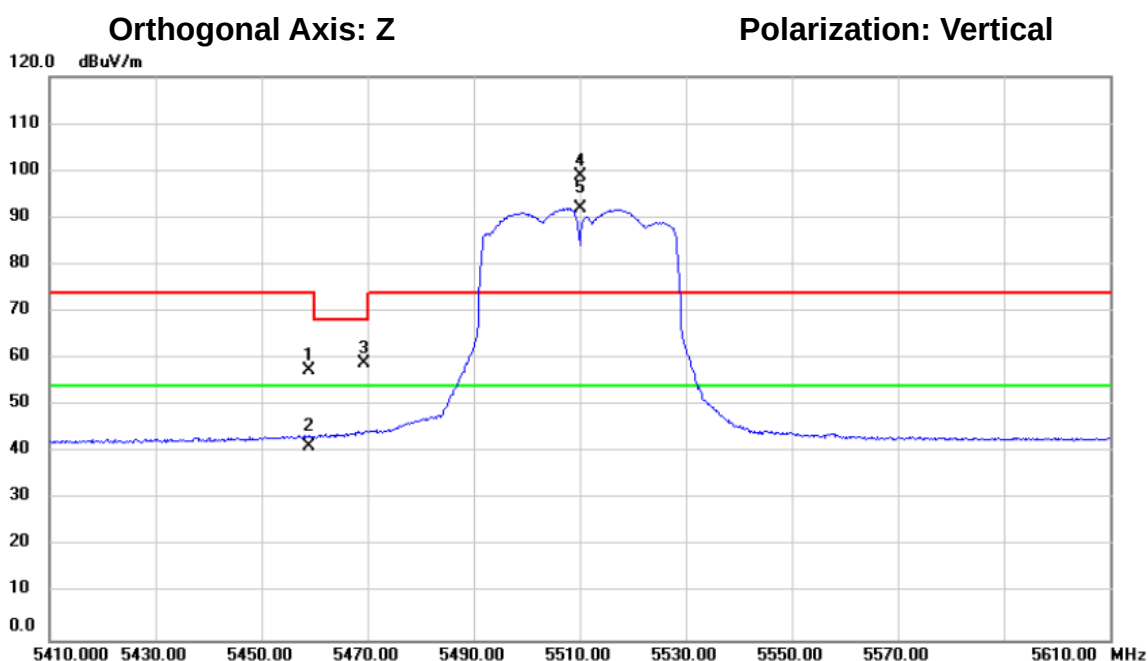

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5459.000	19.64	37.88	57.52	74.00	-16.48	peak			
2		5459.000	3.36	37.88	41.24	54.00	-12.76	AVG			
3		5469.370	21.02	37.89	58.91	68.20	-9.29	peak			
4	X	5510.000	60.96	37.95	98.91	74.00	24.91	peak			主頻訊號不予判斷
5	*	5510.000	53.96	37.95	91.91	54.00	37.91	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (40 MHz) / 5510 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26

環境濕度: 70%

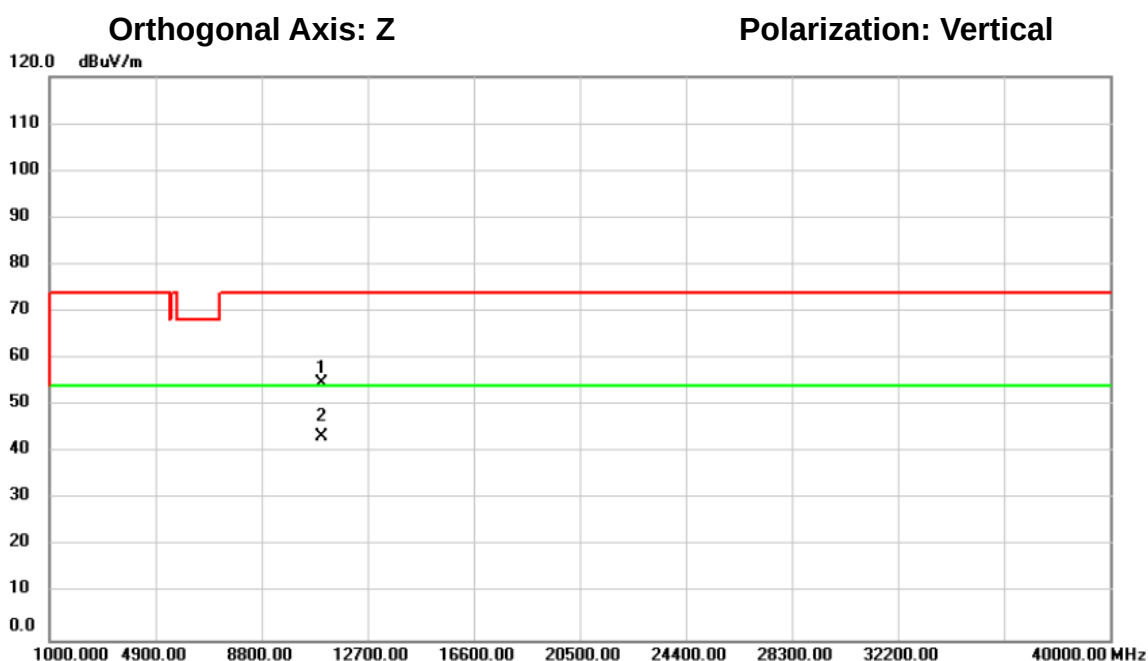

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11020.00	51.78	2.87	54.65	74.00	-19.35			peak
2	*	11020.00	40.40	2.87	43.27	54.00	-10.73			AVG

測試頻道: IEEE 802.11n (40 MHz) / 5510 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C


環境濕度: 70%

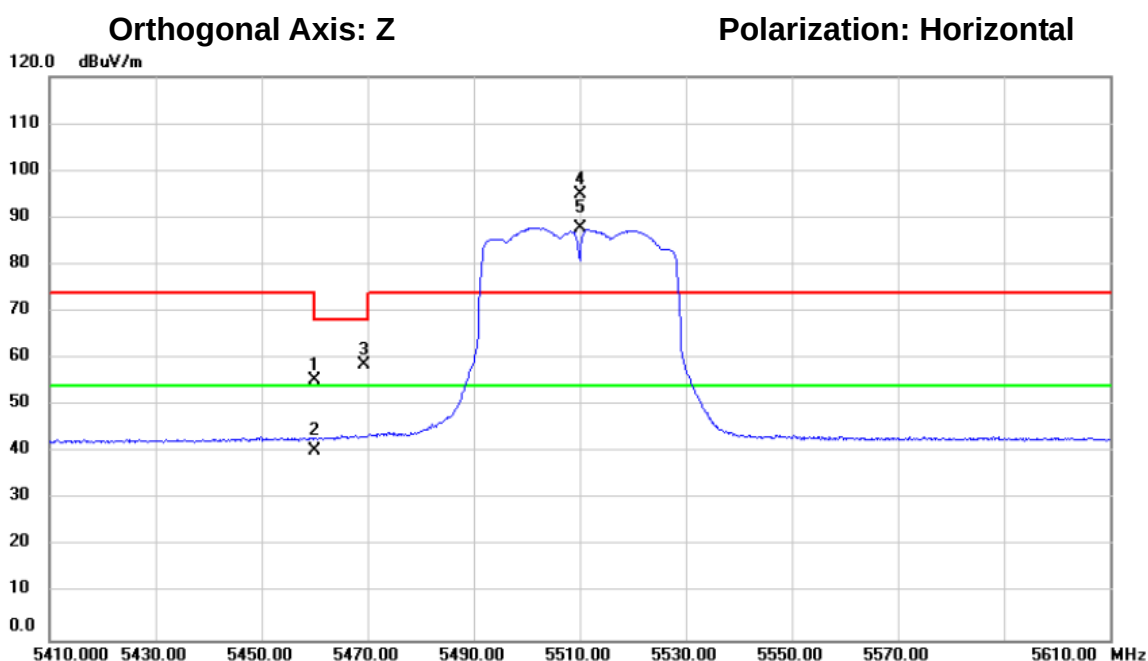

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5460.000	17.40	37.88	55.28	68.20	-12.92	peak			
2		5460.000	2.41	37.88	40.29	54.00	-13.71	AVG			
3		5469.450	20.69	37.89	58.58	68.20	-9.62	peak			
4	X	5510.000	56.96	37.95	94.91	74.00	20.91	peak			主頻訊號不予判斷
5	*	5510.000	49.89	37.95	87.84	54.00	33.84	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (40 MHz) /
 5510 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

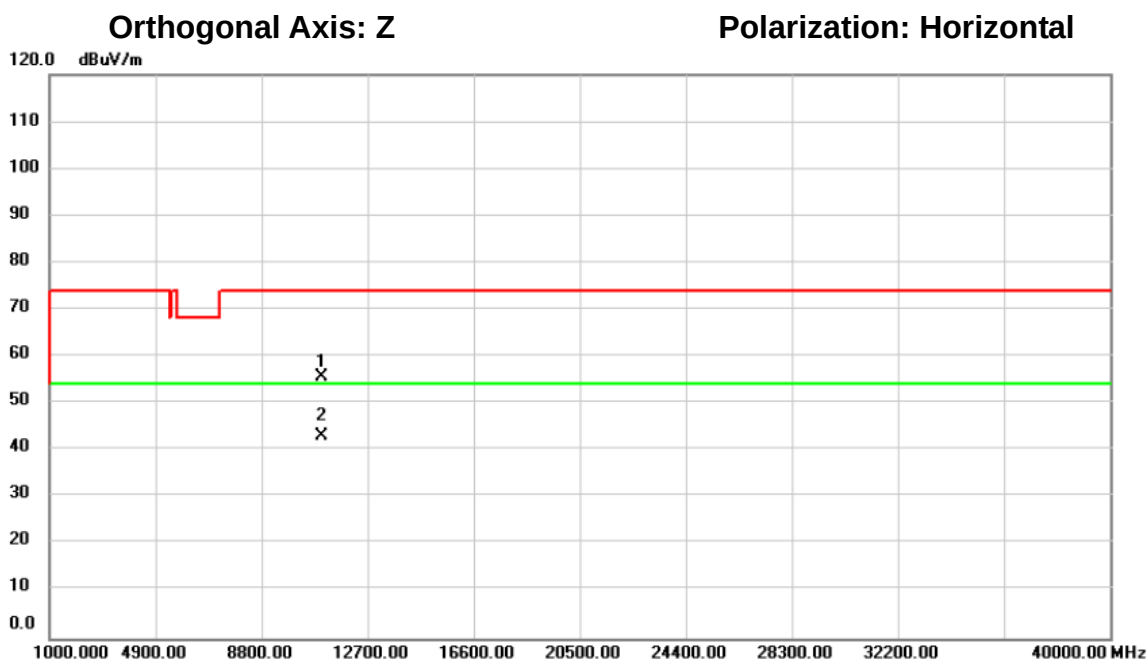

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11020.00	52.83	2.87	55.70	74.00	-18.30	peak			
2	*	11020.00	40.20	2.87	43.07	54.00	-10.93	AVG			

測試頻道: IEEE 802.11n (40 MHz) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/26


環境濕度: 70%

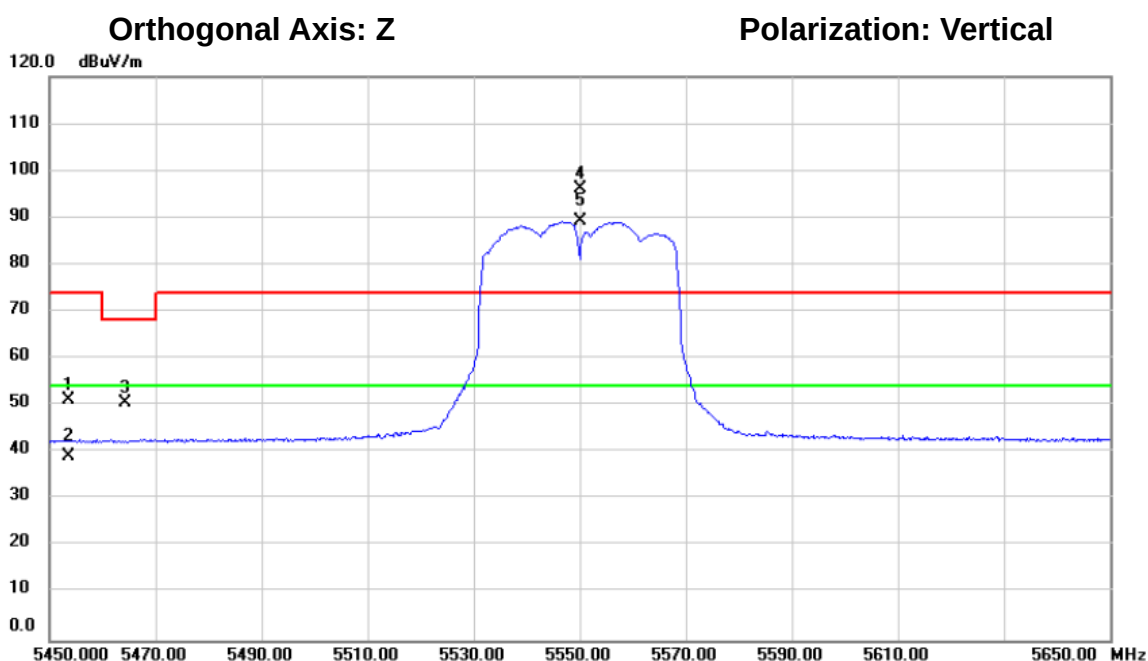

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5453.480	13.19	37.87	51.06	74.00	-22.94	peak			
2		5453.480	1.23	37.87	39.10	54.00	-14.90	AVG			
3		5464.340	12.74	37.88	50.62	68.20	-17.58	peak			
4	X	5550.000	58.08	38.06	96.14	74.00	22.14	peak			主頻訊號不予判斷
5	*	5550.000	51.12	38.06	89.18	54.00	35.18	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (40 MHz) /
 5550 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23 °C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/26
 環境濕度: 70%

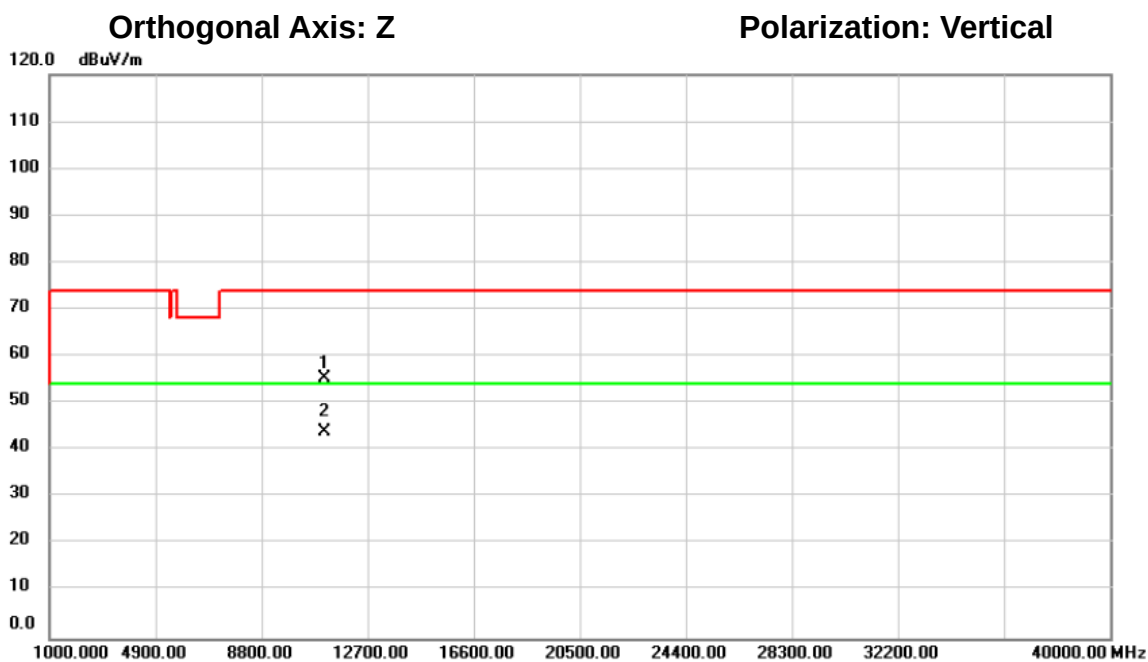

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11100.00	52.48	2.97	55.45	74.00	-18.55	peak			
2	*	11100.00	40.99	2.97	43.96	54.00	-10.04	AVG			

測試頻道: IEEE 802.11n (40 MHz) / 5550 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

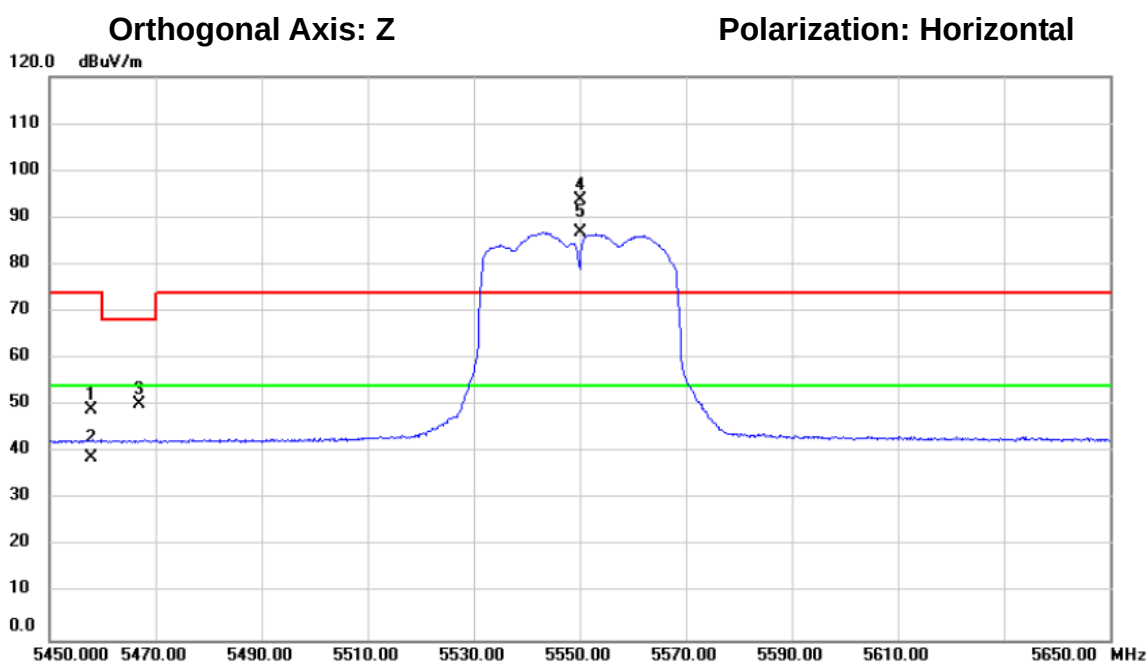

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5457.990	11.12	37.87	48.99	74.00	-25.01	peak			
2		5457.990	0.94	37.87	38.81	54.00	-15.19	AVG			
3		5467.020	12.29	37.88	50.17	68.20	-18.03	peak			
4	X	5550.000	55.65	38.06	93.71	74.00	19.71	peak			主頻訊號不予判斷
5	*	5550.000	48.71	38.06	86.77	54.00	32.77	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (40 MHz) / 5550 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/26

環境溫度: 23 °C

環境濕度: 70%

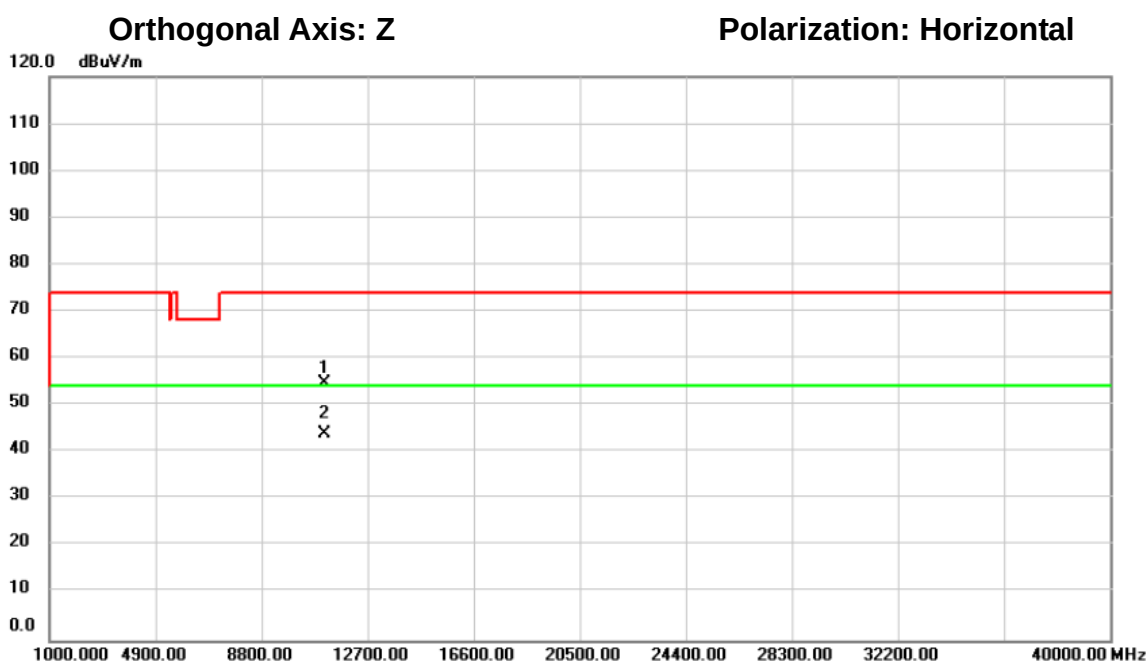

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11100.00	51.74	2.97	54.71	74.00	-19.29	peak		
2	*	11100.00	41.01	2.97	43.98	54.00	-10.02	AVG		

測試頻道: IEEE 802.11n (40 MHz) /
5670 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/16

環境濕度: 70%

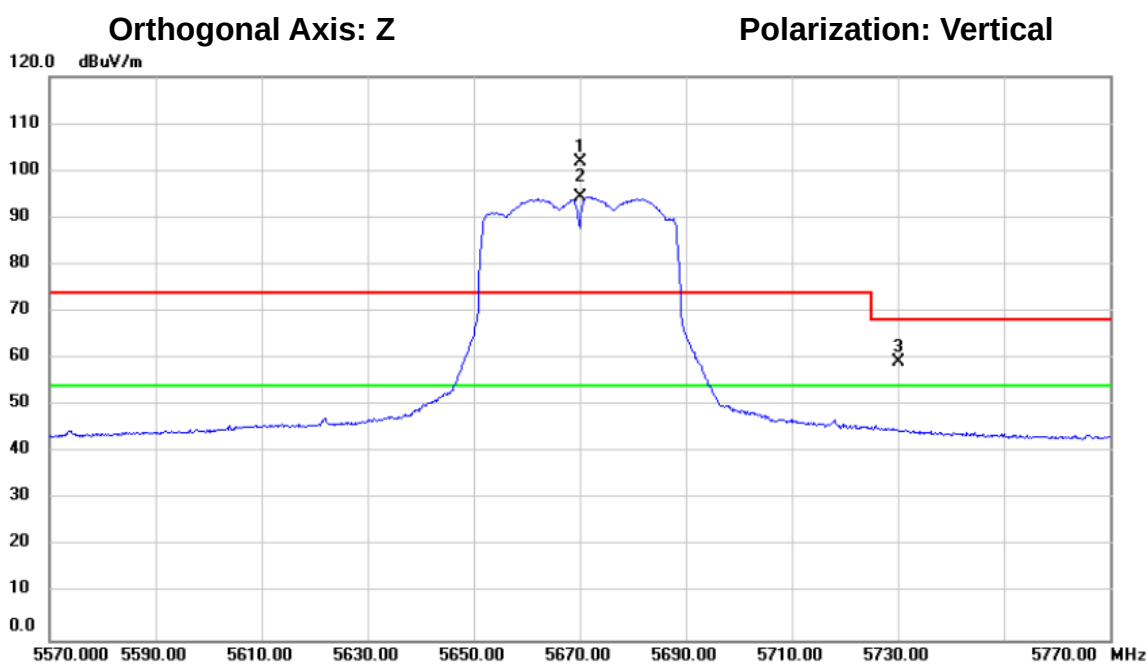

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	X	5670.000	63.37	38.38	101.75	74.00	27.75	peak		主頻訊號不予判斷
2	*	5670.000	56.08	38.38	94.46	54.00	40.46	AVG		主頻訊號不予判斷
3		5730.085	20.61	38.55	59.16	68.20	-9.04	peak		

測試頻道: IEEE 802.11n (40 MHz) / 5670 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23 °C

環境濕度: 70%

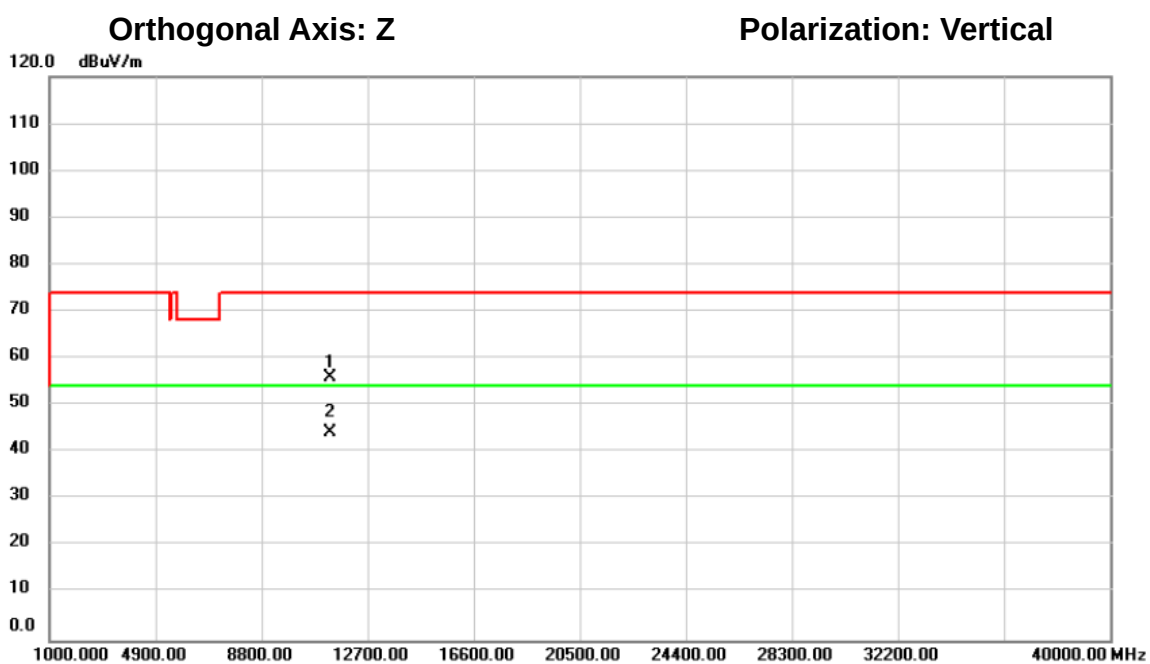

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11340.00	52.65	3.23	55.88	74.00	-18.12	peak		
2	*	11340.00	41.14	3.23	44.37	54.00	-9.63	AVG		

測試頻道: IEEE 802.11n (40 MHz) /
5670 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/16

環境濕度: 70%

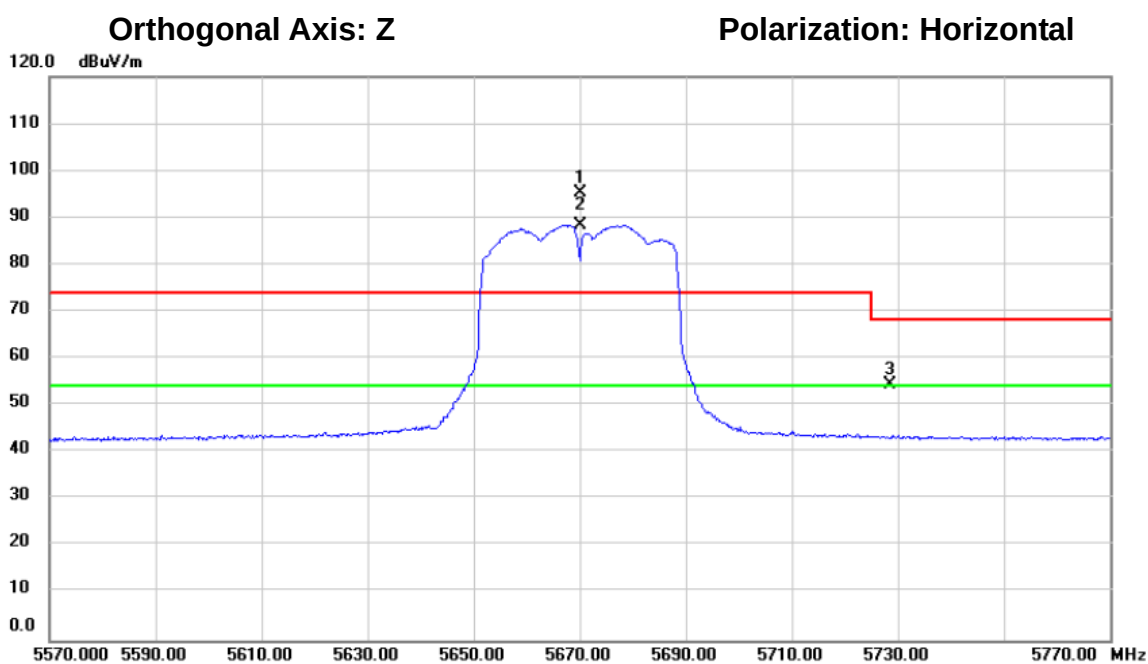

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	X	5670.000	56.87	38.38	95.25	74.00	21.25	peak			主頻訊號不予判斷
2	*	5670.000	49.92	38.38	88.30	54.00	34.30	AVG			主頻訊號不予判斷
3		5728.465	15.90	38.55	54.45	68.20	-13.75	peak			

測試頻道: IEEE 802.11n (40 MHz) / 5670 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23 °C


環境濕度: 70%

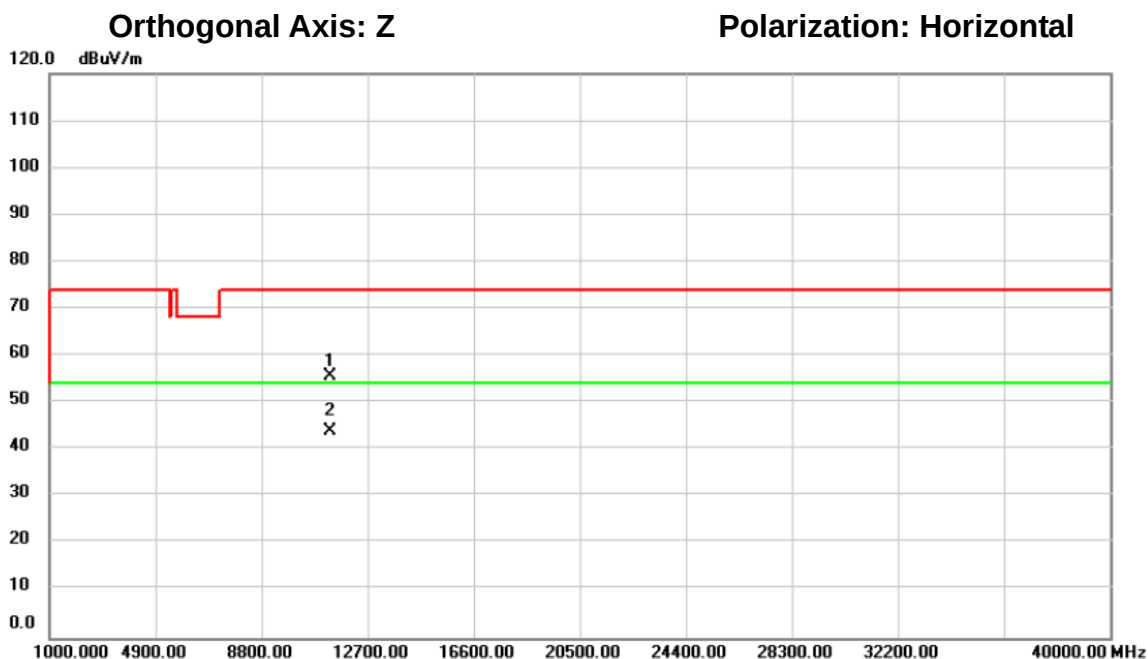

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11340.00	52.34	3.23	55.57	74.00	-18.43	peak		
2	*	11340.00	40.82	3.23	44.05	54.00	-9.95	AVG		

測試頻道: IEEE 802.11a / 5745 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 106/08/16
環境濕度: 70%

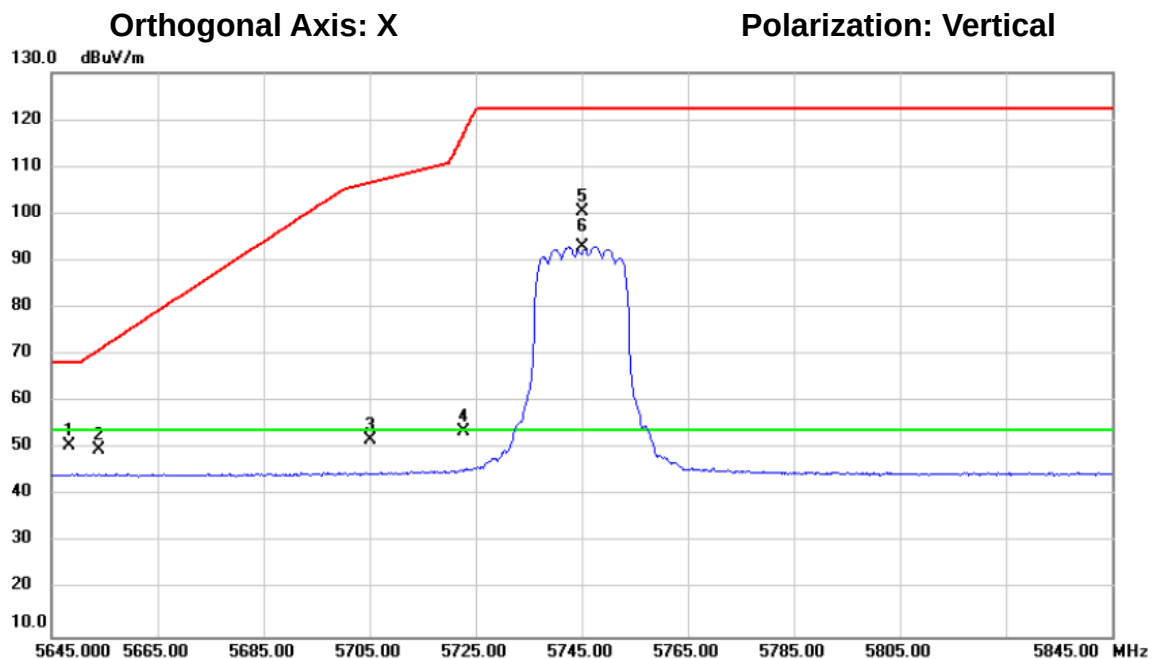

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5648.375	12.26	38.33	50.59	68.20	-17.61	peak			
2		5654.050	11.48	38.34	49.82	71.21	-21.39	peak			
3		5705.180	13.26	38.48	51.74	106.65	-54.91	peak			
4		5722.730	15.25	38.53	53.78	117.03	-63.25	peak			
5		5745.000	61.89	38.58	100.47	122.20	-21.73	peak			主頻訊號不予判斷
6	*	5745.000	54.45	38.58	93.03	54.00	39.03	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

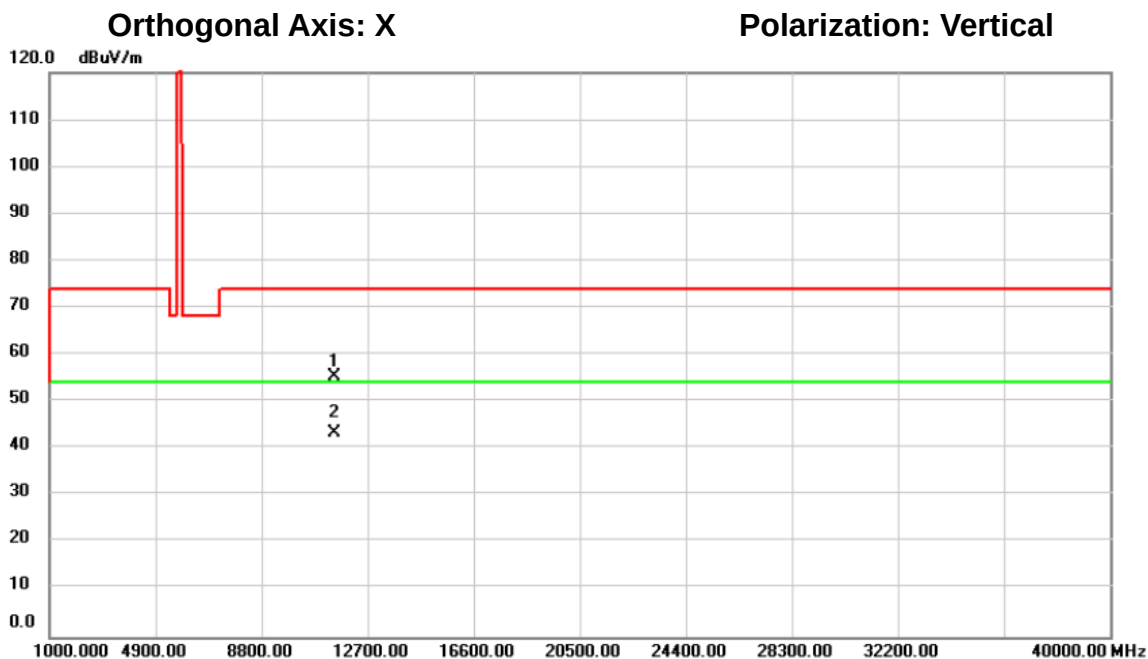

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11490.00	51.91	3.40	55.31	74.00	-18.69	peak		
2	*	11490.00	39.98	3.40	43.38	54.00	-10.62	AVG		

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

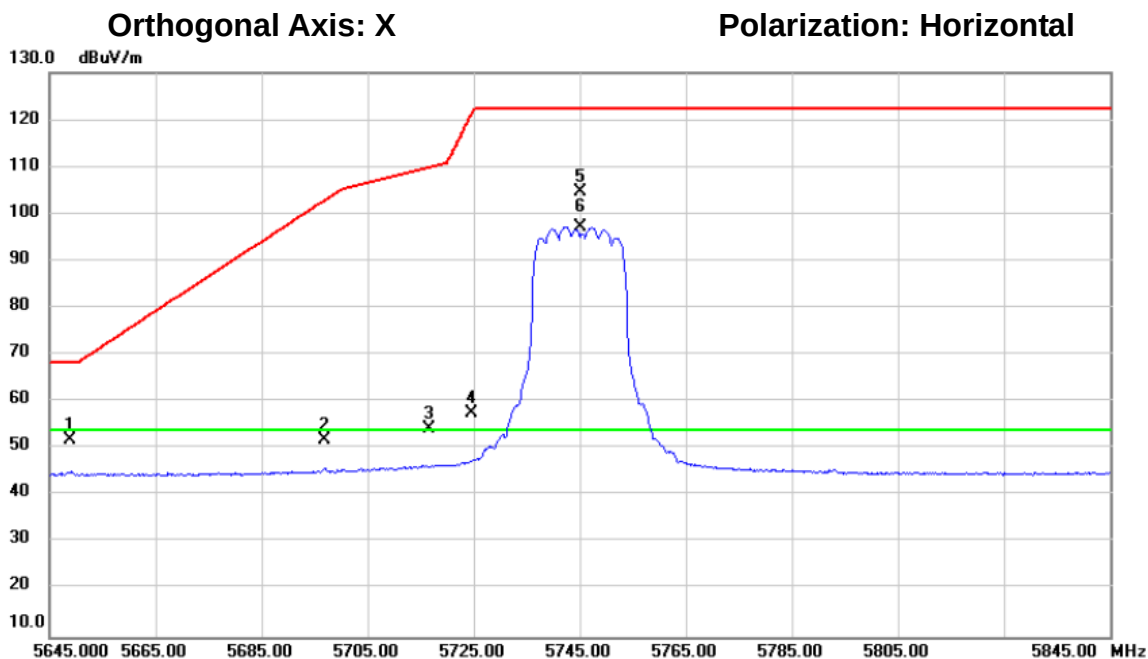

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5648.955	13.67	38.33	52.00	68.20	-16.20	peak		
2		5696.800	13.44	38.45	51.89	102.84	-50.95	peak		
3		5716.640	15.82	38.51	54.33	109.86	-55.53	peak		
4		5724.650	19.12	38.53	57.65	121.40	-63.75	peak		
5		5745.000	66.17	38.58	104.75	122.20	-17.45	peak		主頻訊號不予判斷
6	*	5745.000	58.66	38.58	97.24	54.00	43.24	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

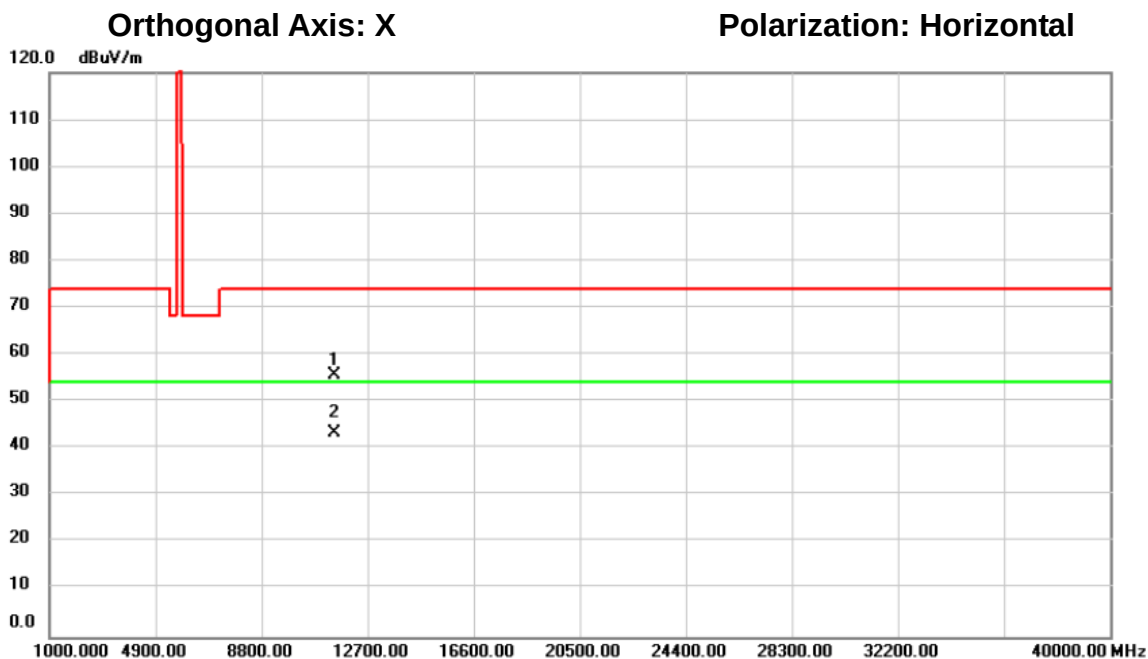

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11490.00	52.23	3.40	55.63	74.00	-18.37			peak
2	*	11490.00	39.90	3.40	43.30	54.00	-10.70			AVG

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

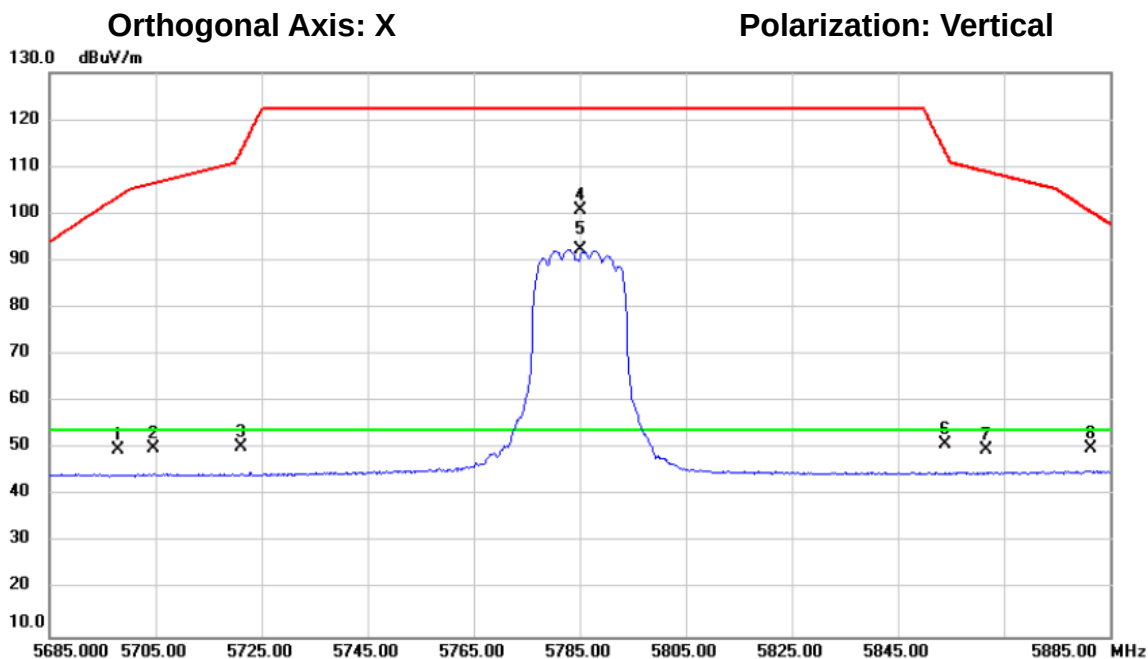

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5697.975	11.28	38.46	49.74	103.71	-53.97	peak		
2		5704.620	11.64	38.48	50.12	106.50	-56.38	peak		
3		5721.060	11.87	38.52	50.39	113.22	-62.83	peak		
4		5785.000	61.98	38.70	100.68	122.20	-21.52	peak		主頻訊號不予判斷
5	*	5785.000	53.72	38.70	92.42	54.00	38.42	AVG		主頻訊號不予判斷
6		5854.025	11.95	38.89	50.84	113.02	-62.18	peak		
7		5861.780	10.97	38.91	49.88	108.90	-59.02	peak		
8		5881.400	11.09	38.96	50.05	100.45	-50.40	peak		

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

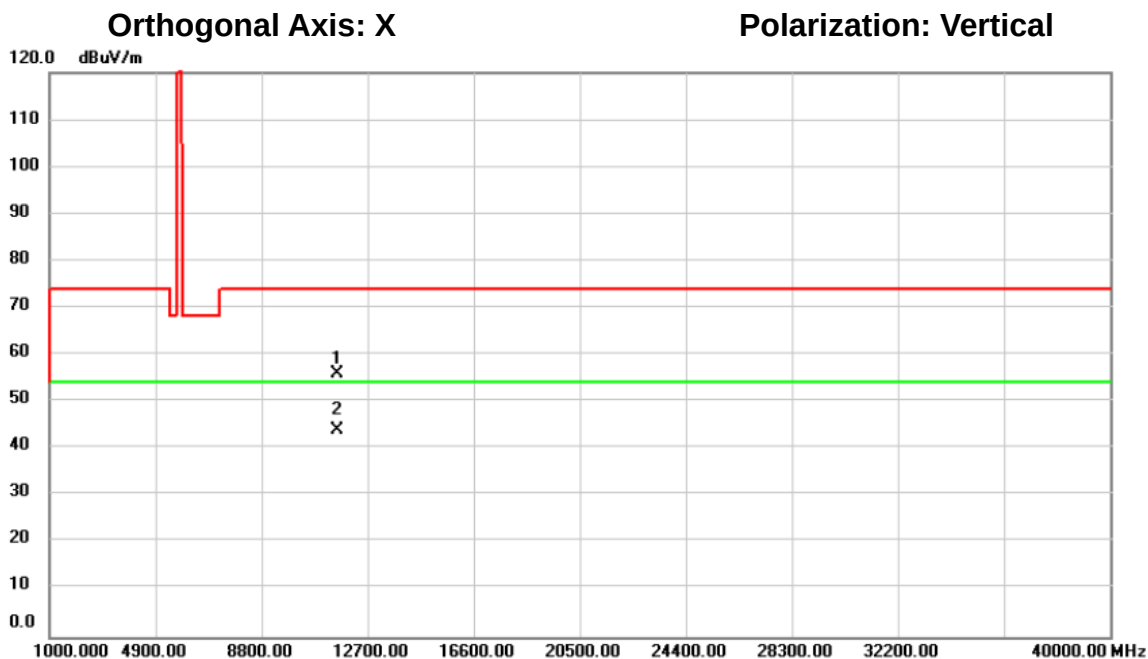

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		11570.00	52.76	3.28	56.04	74.00	-17.96	peak		
2	*	11570.00	40.76	3.28	44.04	54.00	-9.96	AVG		

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

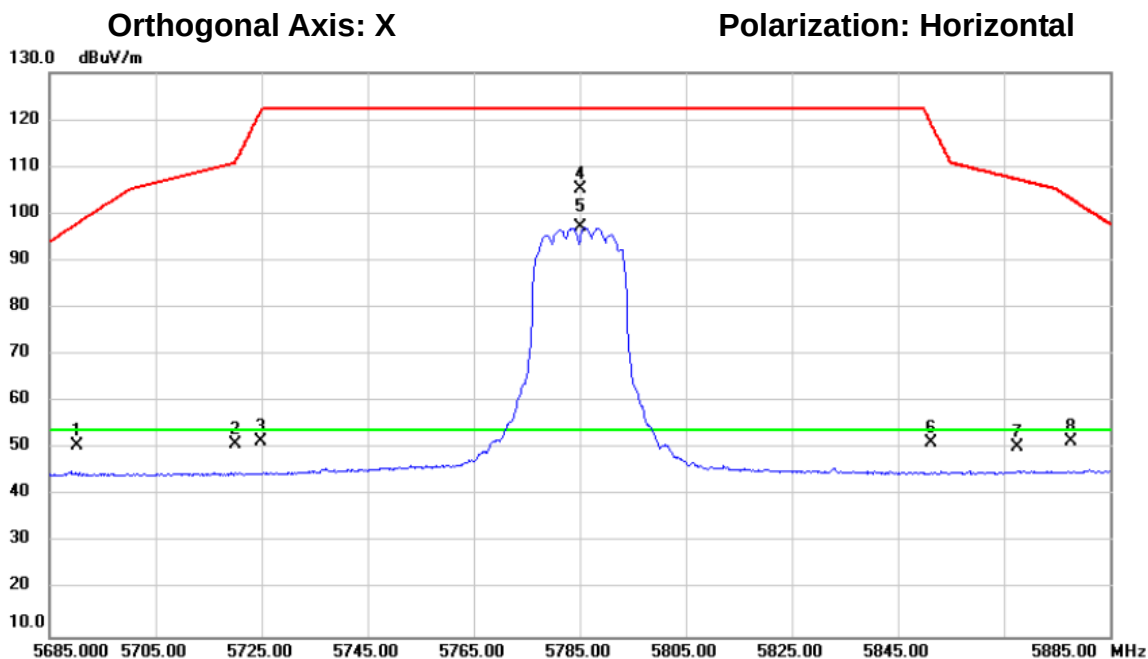

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5690.205	12.24	38.43	50.67	97.98	-47.31	peak			
2		5719.980	12.29	38.52	50.81	110.79	-59.98	peak			
3		5724.975	13.14	38.53	51.67	122.14	-70.47	peak			
4		5785.000	66.48	38.70	105.18	122.20	-17.02	peak			主頻訊號不予判斷
5	*	5785.000	58.38	38.70	97.08	54.00	43.08	AVG			主頻訊號不予判斷
6		5851.235	12.34	38.87	51.21	119.38	-68.17	peak			
7		5867.460	11.51	38.92	50.43	107.31	-56.88	peak			
8		5877.690	12.50	38.94	51.44	103.20	-51.76	peak			

測試頻道: IEEE 802.11a / 5785 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

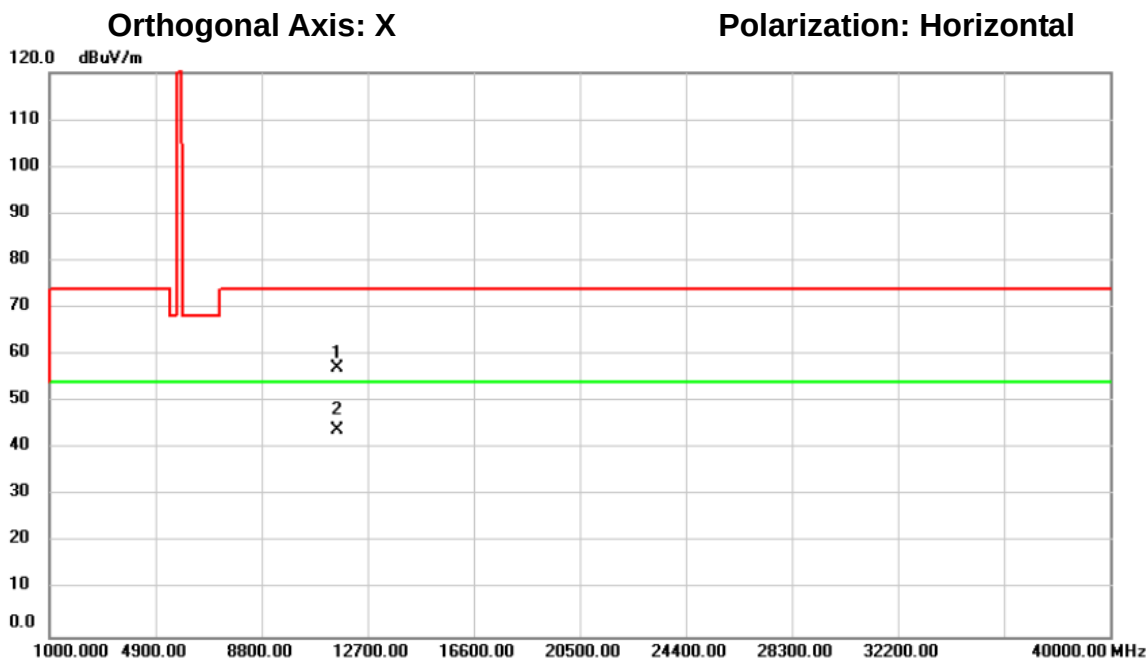

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11570.00	53.84	3.28	57.12	74.00	-16.88			peak
2	*	11570.00	40.61	3.28	43.89	54.00	-10.11			AVG

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

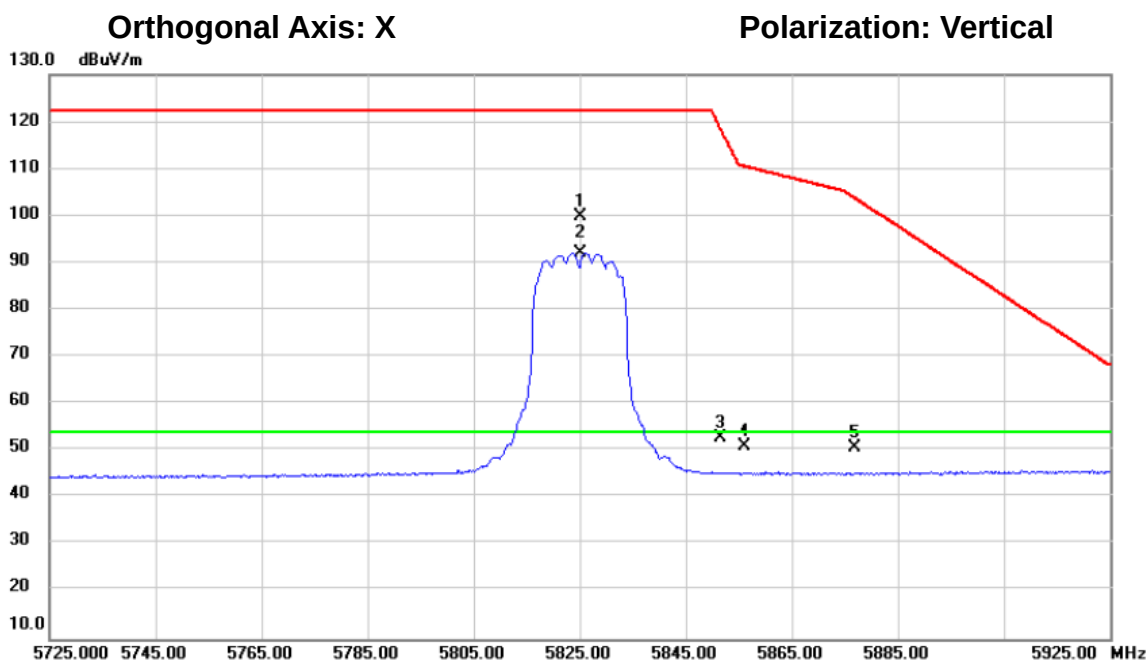

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		5825.000	60.99	38.80	99.79	122.20	-22.41	peak		主頻訊號不予判斷
2	*	5825.000	53.24	38.80	92.04	54.00	38.04	AVG		主頻訊號不予判斷
3		5851.510	13.78	38.87	52.65	118.76	-66.11	peak		
4		5856.140	12.01	38.89	50.90	110.48	-59.58	peak		
5		5876.810	11.65	38.94	50.59	103.86	-53.27	peak		

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

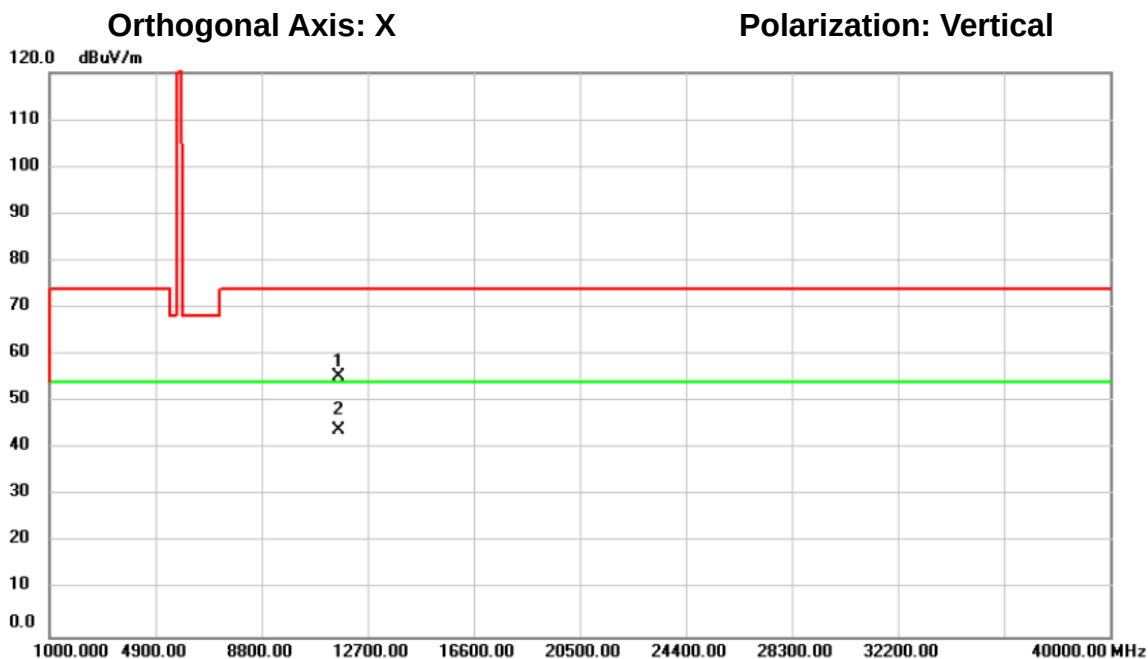

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		11650.00	52.18	3.13	55.31	74.00	-18.69	peak		
2	*	11650.00	40.84	3.13	43.97	54.00	-10.03	AVG		

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

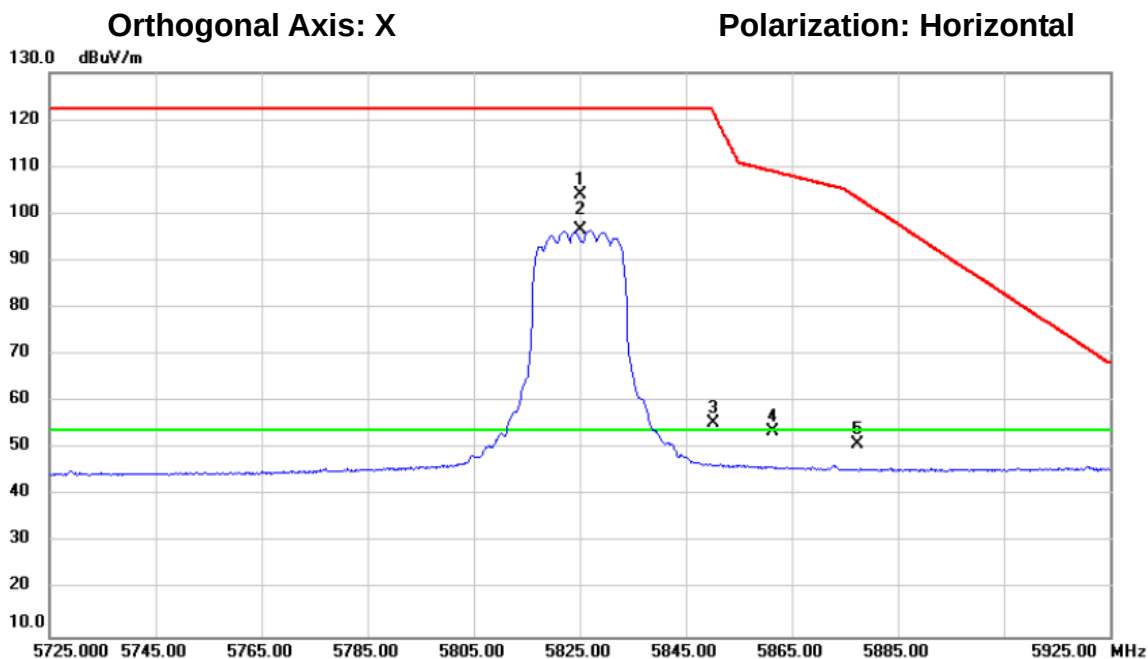

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		5825.000	65.16	38.80	103.96	122.20	-18.24	peak		主頻訊號不予判斷
2	*	5825.000	57.66	38.80	96.46	54.00	42.46	AVG		主頻訊號不予判斷
3		5850.270	16.55	38.87	55.42	121.58	-66.16	peak		
4		5861.520	14.87	38.90	53.77	108.97	-55.20	peak		
5		5877.450	12.07	38.94	51.01	103.38	-52.37	peak		

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 106/08/16
 環境濕度: 70%

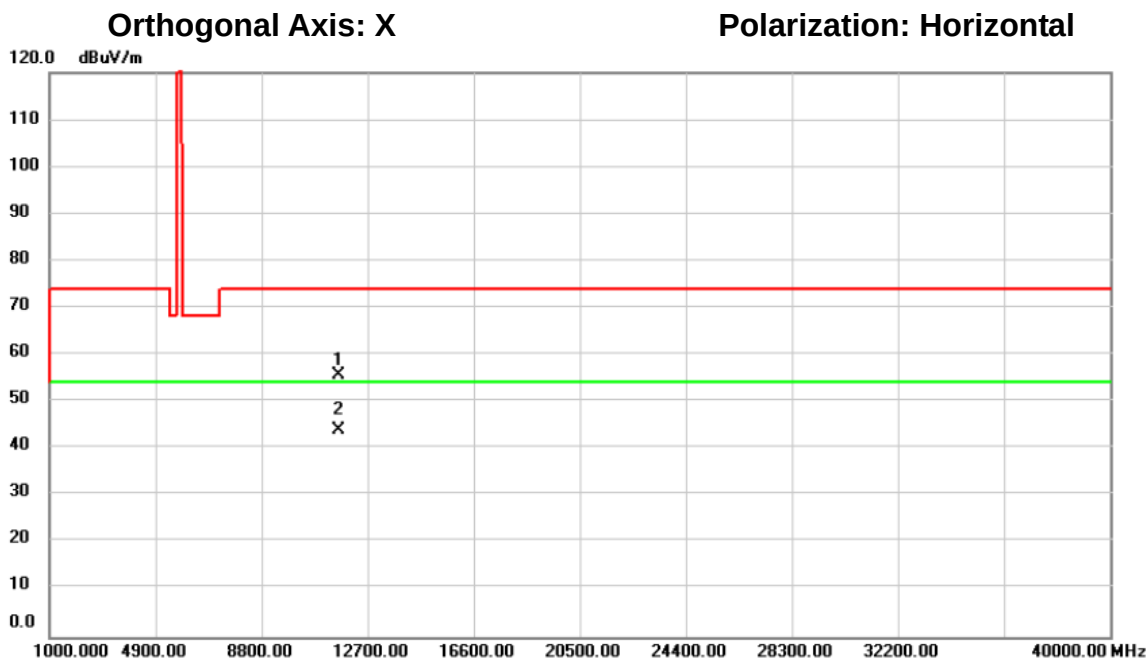

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11650.00	52.67	3.13	55.80	74.00	-18.20			peak
2	*	11650.00	40.88	3.13	44.01	54.00	-9.99			AVG

測試頻道: IEEE 802.11n (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

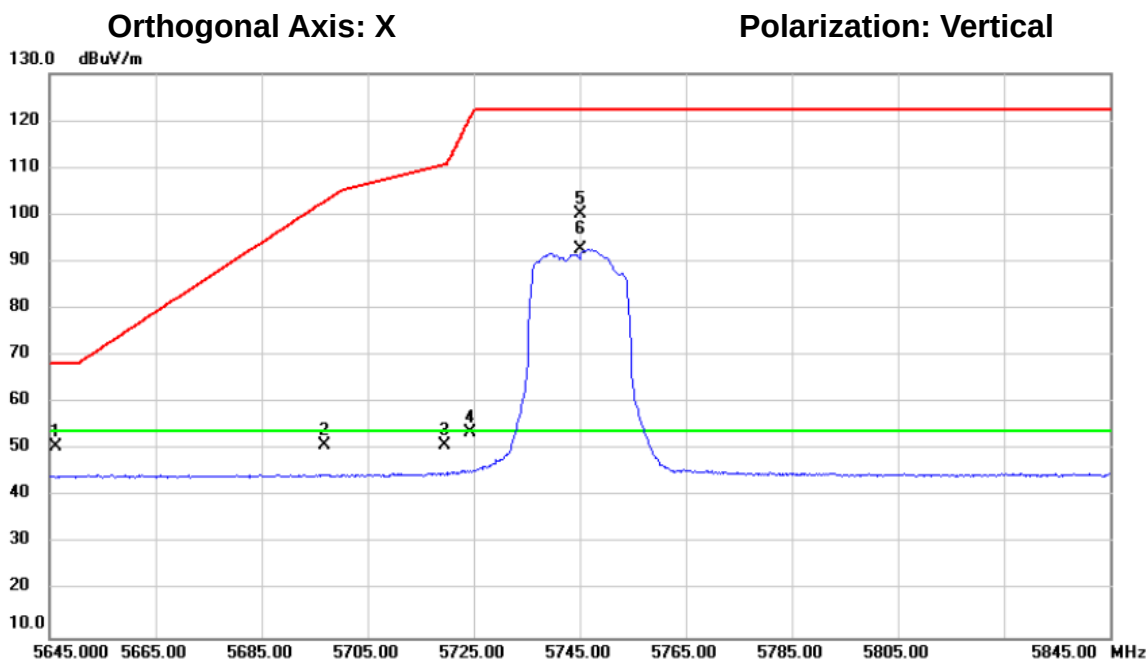

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5646.250	12.31	38.31	50.62	68.20	-17.58	peak			
2		5696.900	12.62	38.46	51.08	102.92	-51.84	peak			
3		5719.640	12.52	38.52	51.04	110.70	-59.66	peak			
4		5724.370	15.22	38.53	53.75	120.76	-67.01	peak			
5		5745.000	61.54	38.58	100.12	122.20	-22.08	peak			主頻訊號不予判斷
6	*	5745.000	53.97	38.58	92.55	54.00	38.55	AVG			主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

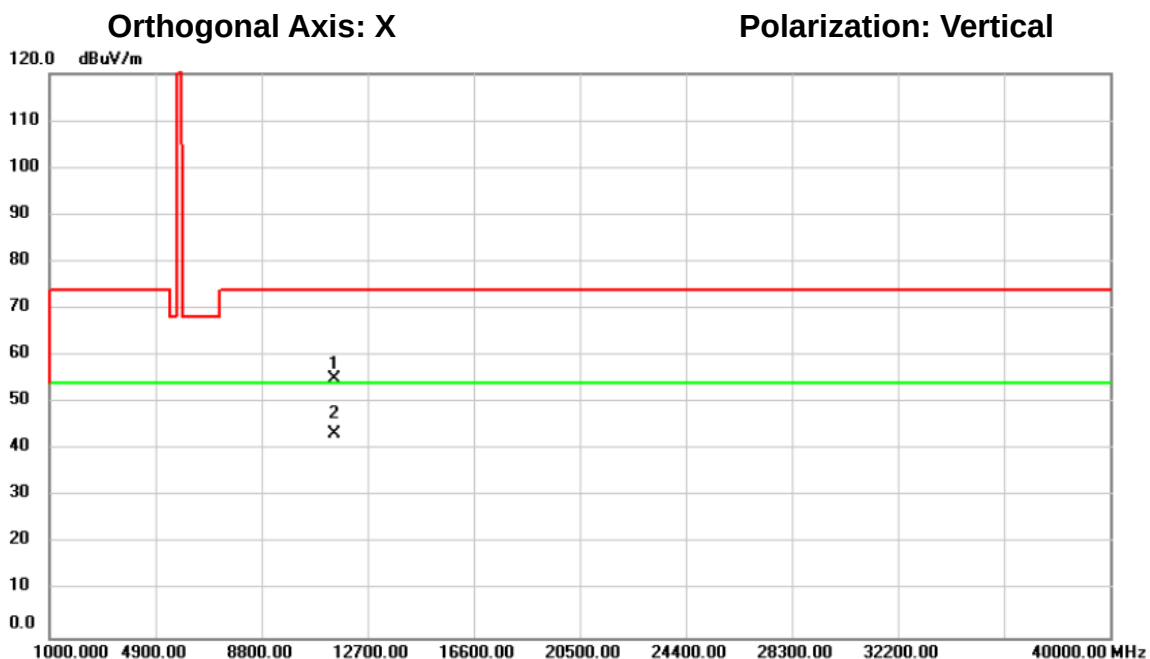

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11490.00	51.57	3.40	54.97	74.00	-19.03	peak		
2	*	11490.00	39.99	3.40	43.39	54.00	-10.61	AVG		

測試頻道: IEEE 802.11n (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

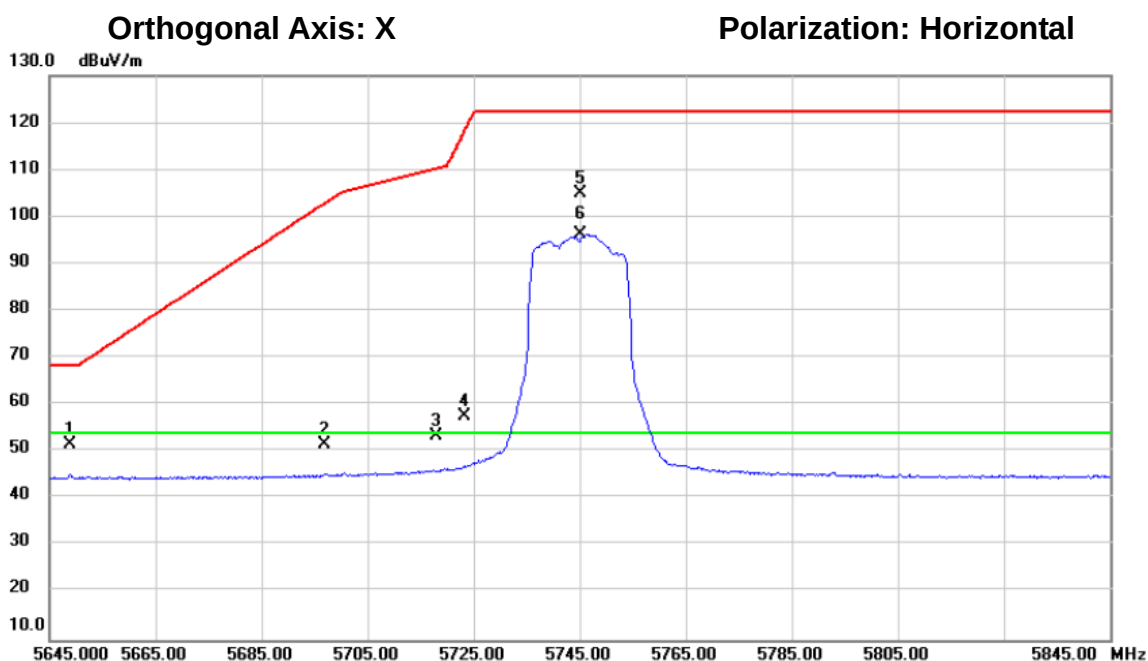

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5648.865	13.23	38.33	51.56	68.20	-16.64	peak		
2		5696.900	13.21	38.46	51.67	102.92	-51.25	peak		
3		5717.900	14.97	38.51	53.48	110.21	-56.73	peak		
4		5723.145	18.90	38.53	57.43	117.97	-60.54	peak		
5		5745.000	66.38	38.58	104.96	122.20	-17.24	peak		主頻訊號不予判斷
6	*	5745.000	57.60	38.58	96.18	54.00	42.18	AVG		主頻訊號不予判斷

測試頻道: IEEE 802.11n (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

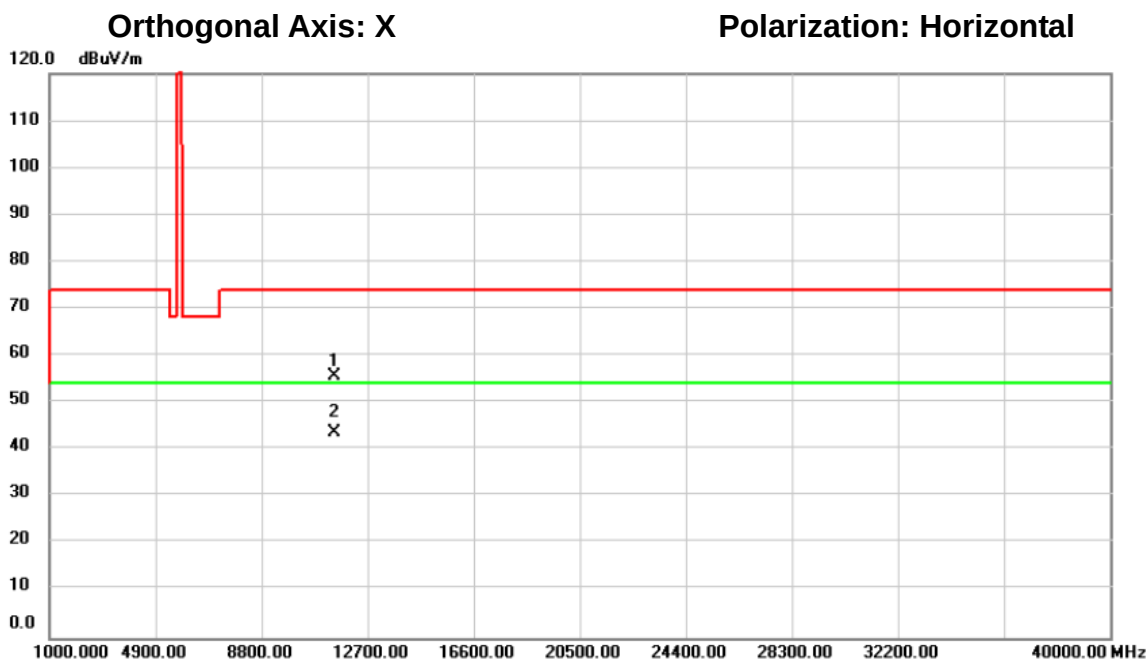

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11490.00	52.39	3.40	55.79	74.00	-18.21			peak
2	*	11490.00	40.15	3.40	43.55	54.00	-10.45			AVG

測試頻道: IEEE 802.11n (20 MHz) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

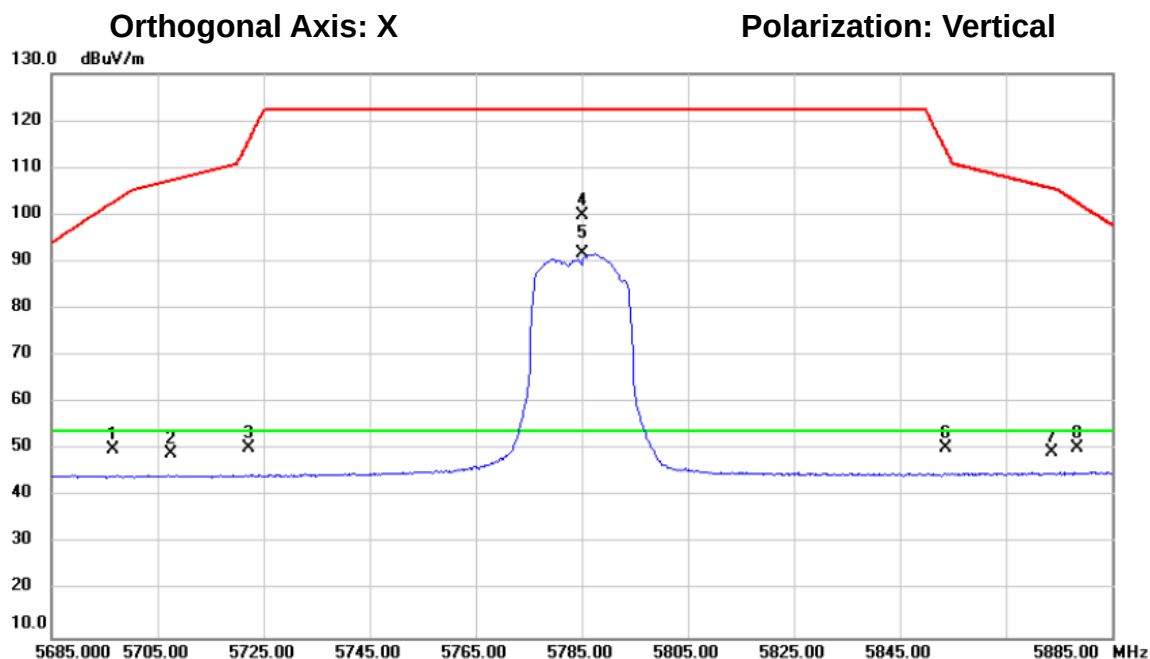

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5696.475	11.57	38.45	50.02	102.60	-52.58	peak		
2		5707.660	10.80	38.48	49.28	107.35	-58.07	peak		
3		5722.250	11.85	38.53	50.38	115.93	-65.55	peak		
4		5785.000	61.11	38.70	99.81	122.20	-22.39	peak		主頻訊號不予判斷
5	*	5785.000	52.91	38.70	91.61	54.00	37.61	AVG		主頻訊號不予判斷
6		5853.710	11.51	38.89	50.40	113.74	-63.34	peak		
7		5873.640	10.53	38.94	49.47	105.58	-56.11	peak		
8		5878.470	11.39	38.95	50.34	102.62	-52.28	peak		

測試頻道: IEEE 802.11n (20 MHz) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 106/08/16

環境濕度: 70%

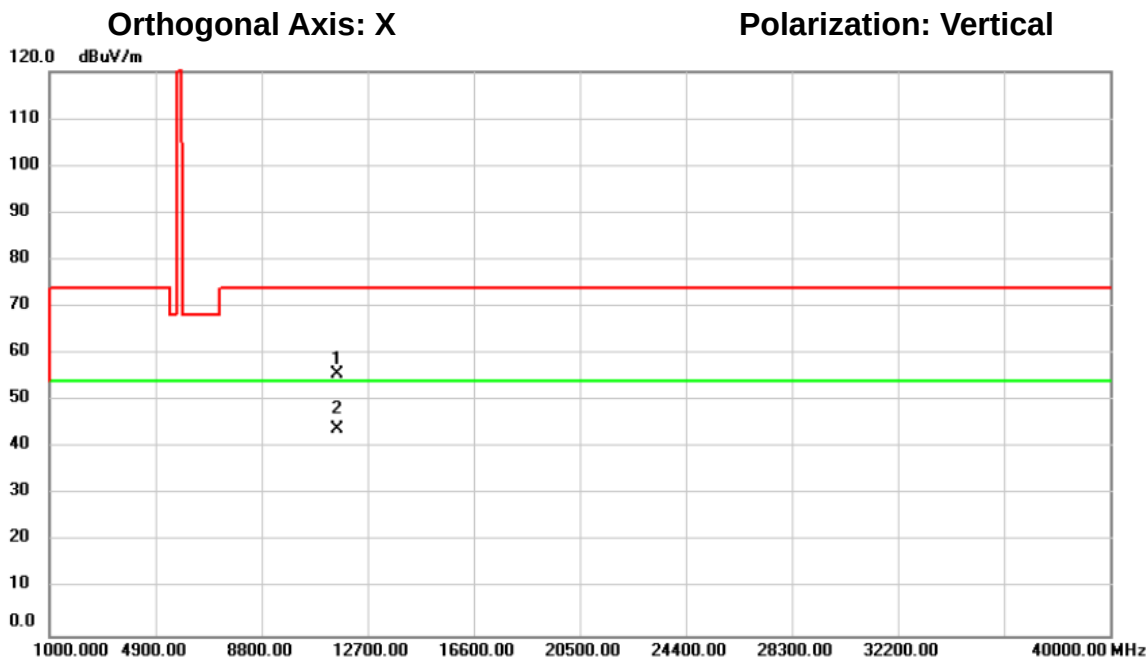

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11570.00	52.49	3.28	55.77	74.00	-18.23	peak		
2	*	11570.00	40.67	3.28	43.95	54.00	-10.05	AVG		

測試頻道: IEEE 802.11n (20 MHz) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

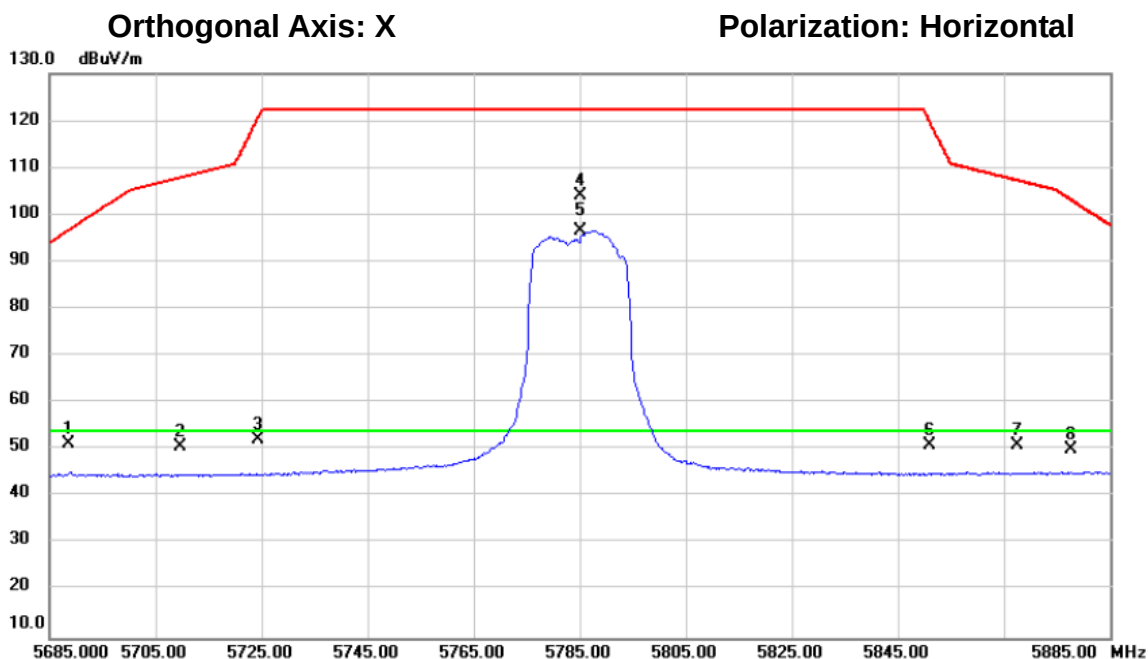

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5688.510	12.80	38.43	51.23	96.73	-45.50	peak			
2		5709.560	12.07	38.49	50.56	107.88	-57.32	peak			
3		5724.325	13.58	38.53	52.11	120.66	-68.55	peak			
4		5785.000	65.50	38.70	104.20	122.20	-18.00	peak			主頻訊號不予判斷
5	*	5785.000	57.95	38.70	96.65	54.00	42.65	AVG			主頻訊號不予判斷
6		5851.020	12.00	38.87	50.87	119.87	-69.00	peak			
7		5867.440	11.90	38.92	50.82	107.31	-56.49	peak			
8		5877.750	11.17	38.94	50.11	103.16	-53.05	peak			

測試頻道: IEEE 802.11n (20 MHz) / 5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

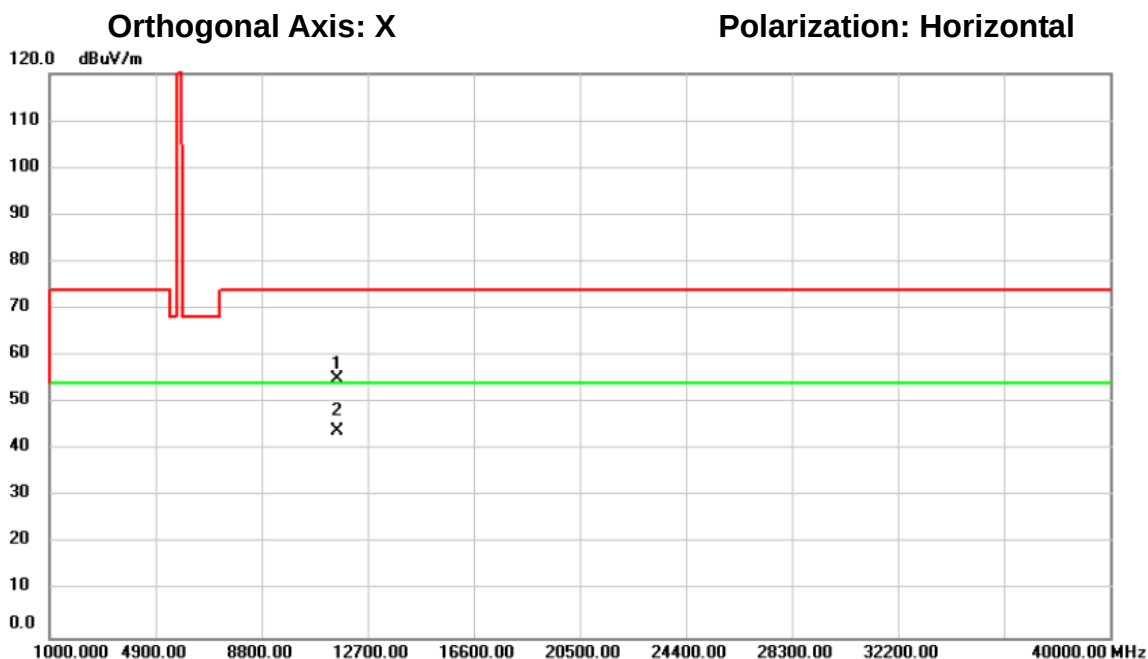

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11570.00	51.87	3.28	55.15	74.00	-18.85	peak		
2	*	11570.00	40.59	3.28	43.87	54.00	-10.13	AVG		

測試頻道: IEEE 802.11n (20 MHz) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

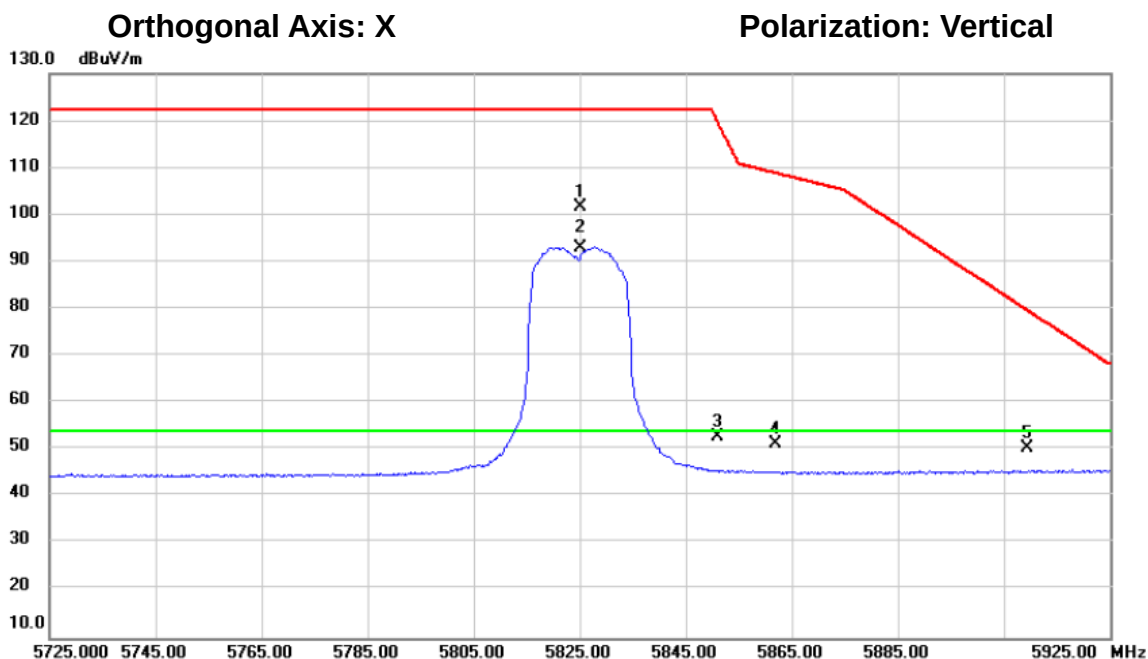

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		5825.000	62.78	38.80	101.58	122.20	-20.62	peak		主頻訊號不予判斷
2	*	5825.000	54.30	38.80	93.10	54.00	39.10	AVG		主頻訊號不予判斷
3		5850.965	14.02	38.87	52.89	120.00	-67.11	peak		
4		5861.800	12.29	38.91	51.20	108.89	-57.69	peak		
5		5909.450	11.43	39.04	50.47	79.67	-29.20	peak		

測試頻道: IEEE 802.11n (20 MHz) / 5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

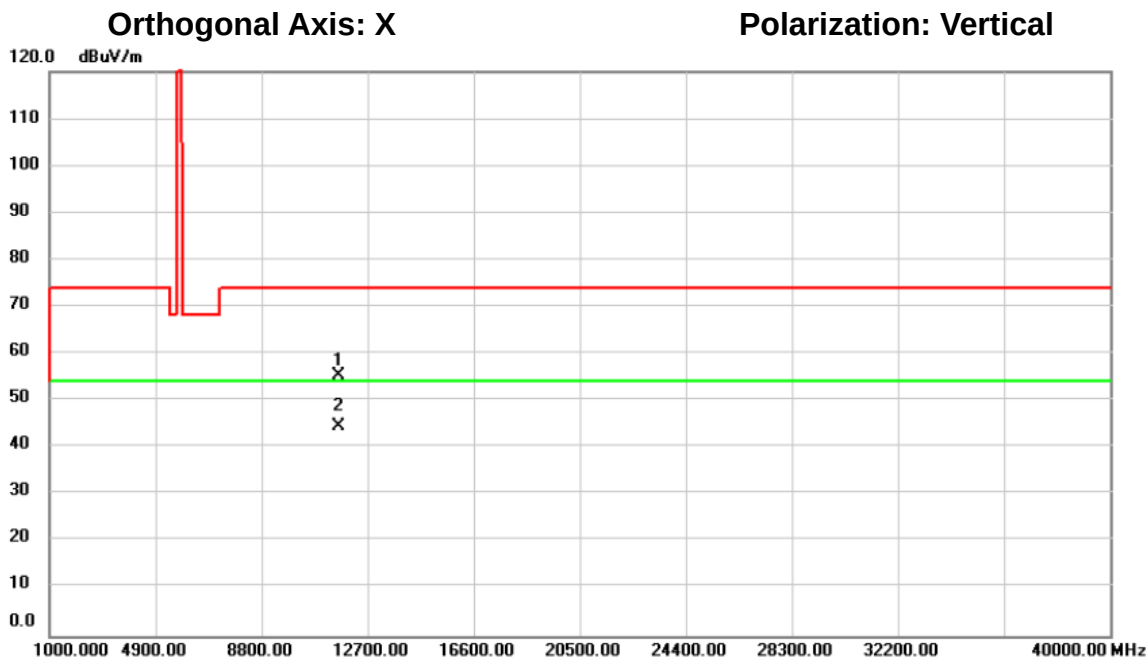

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		11650.00	52.29	3.13	55.42	74.00	-18.58	peak		
2	*	11650.00	41.40	3.13	44.53	54.00	-9.47	AVG		

測試頻道: IEEE 802.11n (20 MHz) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

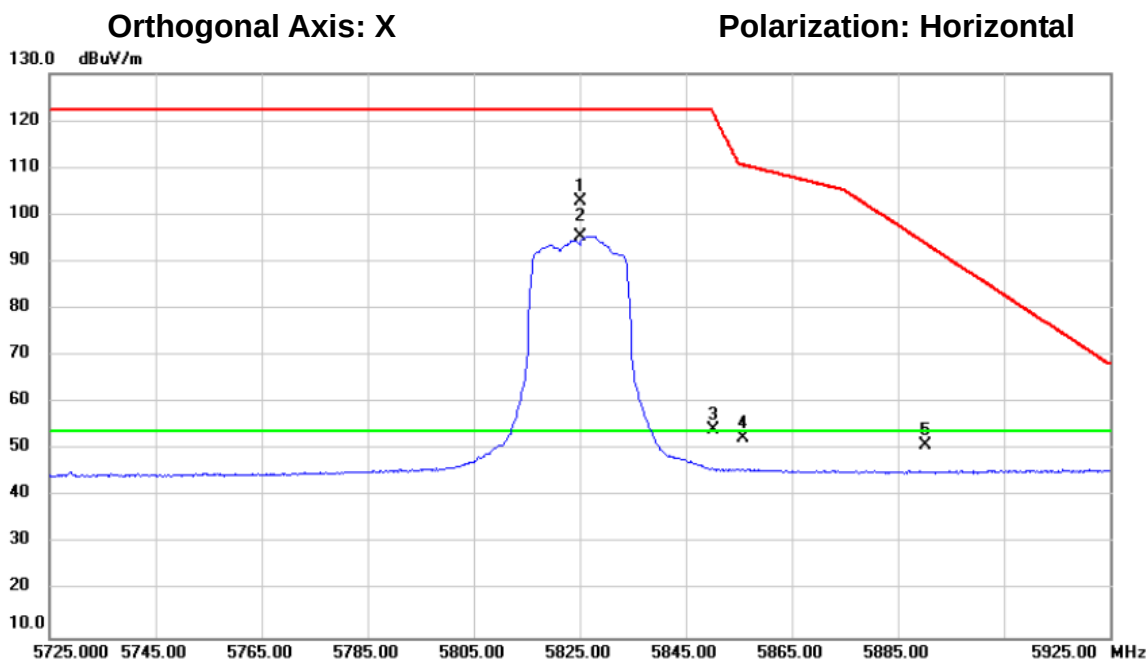

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5825.000	64.04	38.80	102.84	122.20	-19.36	peak		主頻訊號不予判斷
2	*	5825.000	56.51	38.80	95.31	54.00	41.31	AVG		主頻訊號不予判斷
3		5850.285	15.50	38.87	54.37	121.55	-67.18	peak		
4		5855.920	13.45	38.89	52.34	110.54	-58.20	peak		
5		5890.250	12.00	38.98	50.98	93.88	-42.90	peak		

測試頻道: IEEE 802.11n (20 MHz) / 5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

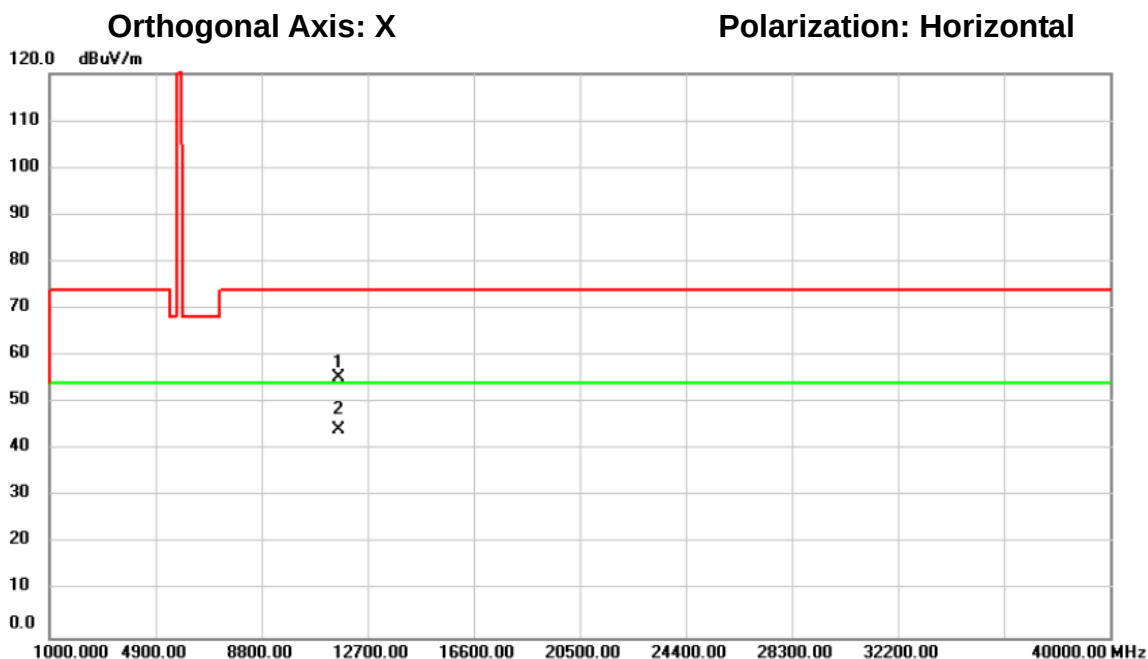

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		11650.00	52.25	3.13	55.38	74.00	-18.62	peak		
2	*	11650.00	41.15	3.13	44.28	54.00	-9.72	AVG		

測試頻道: IEEE 802.11n (40 MHz) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

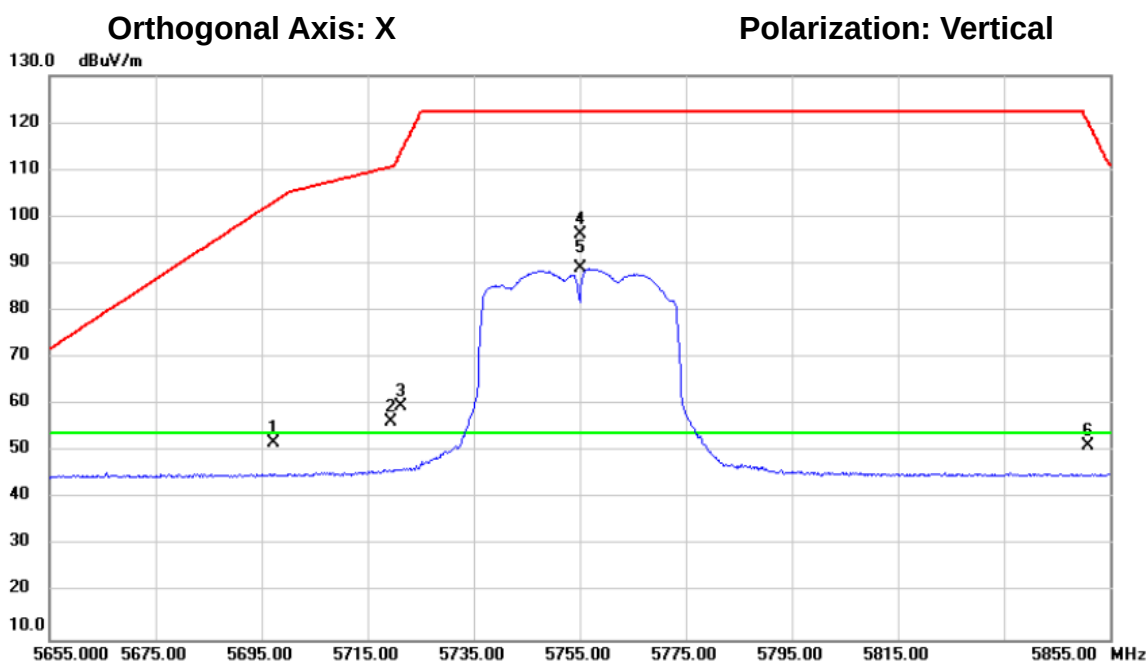

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5697.390	13.52	38.46	51.98	103.28	-51.30	peak		
2		5719.360	17.88	38.52	56.40	110.62	-54.22	peak		
3		5721.140	21.13	38.52	59.65	113.40	-53.75	peak		
4		5755.000	57.52	38.62	96.14	122.20	-26.06	peak		主頻訊號不予判斷
5	*	5755.000	50.29	38.62	88.91	54.00	34.91	AVG		主頻訊號不予判斷
6		5850.875	12.28	38.87	51.15	120.20	-69.05	peak		

測試頻道: IEEE 802.11n (40 MHz) / 5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 106/08/16

環境溫度: 23°C

環境濕度: 70%

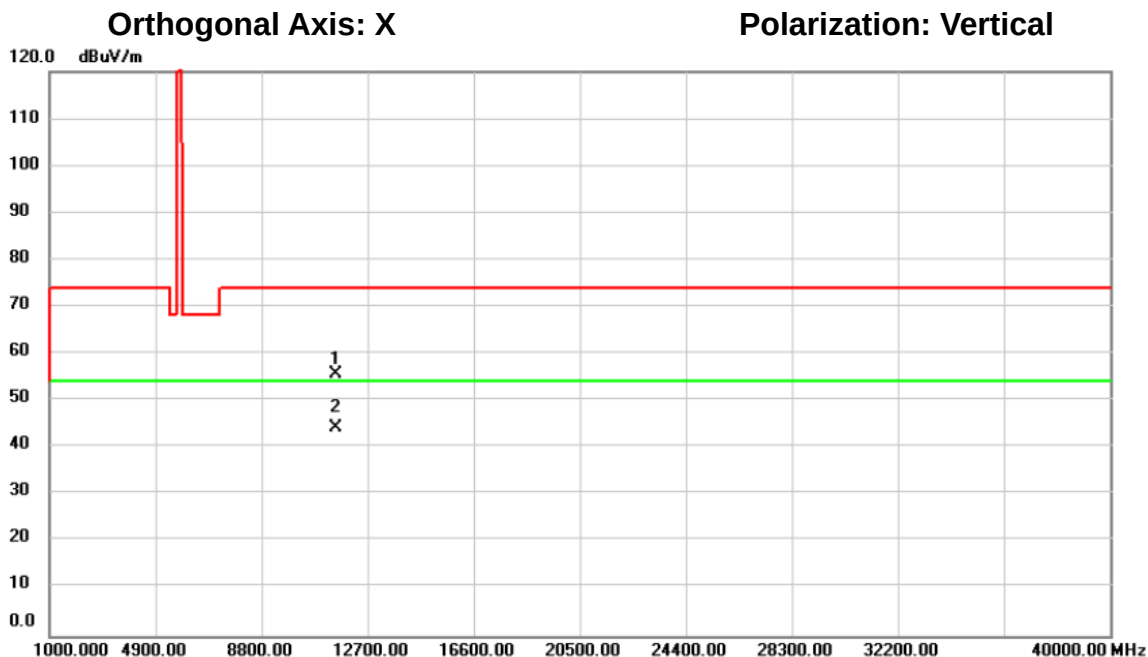

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11510.00	52.24	3.40	55.64	74.00	-18.36	peak		
2	*	11510.00	40.80	3.40	44.20	54.00	-9.80	AVG		