










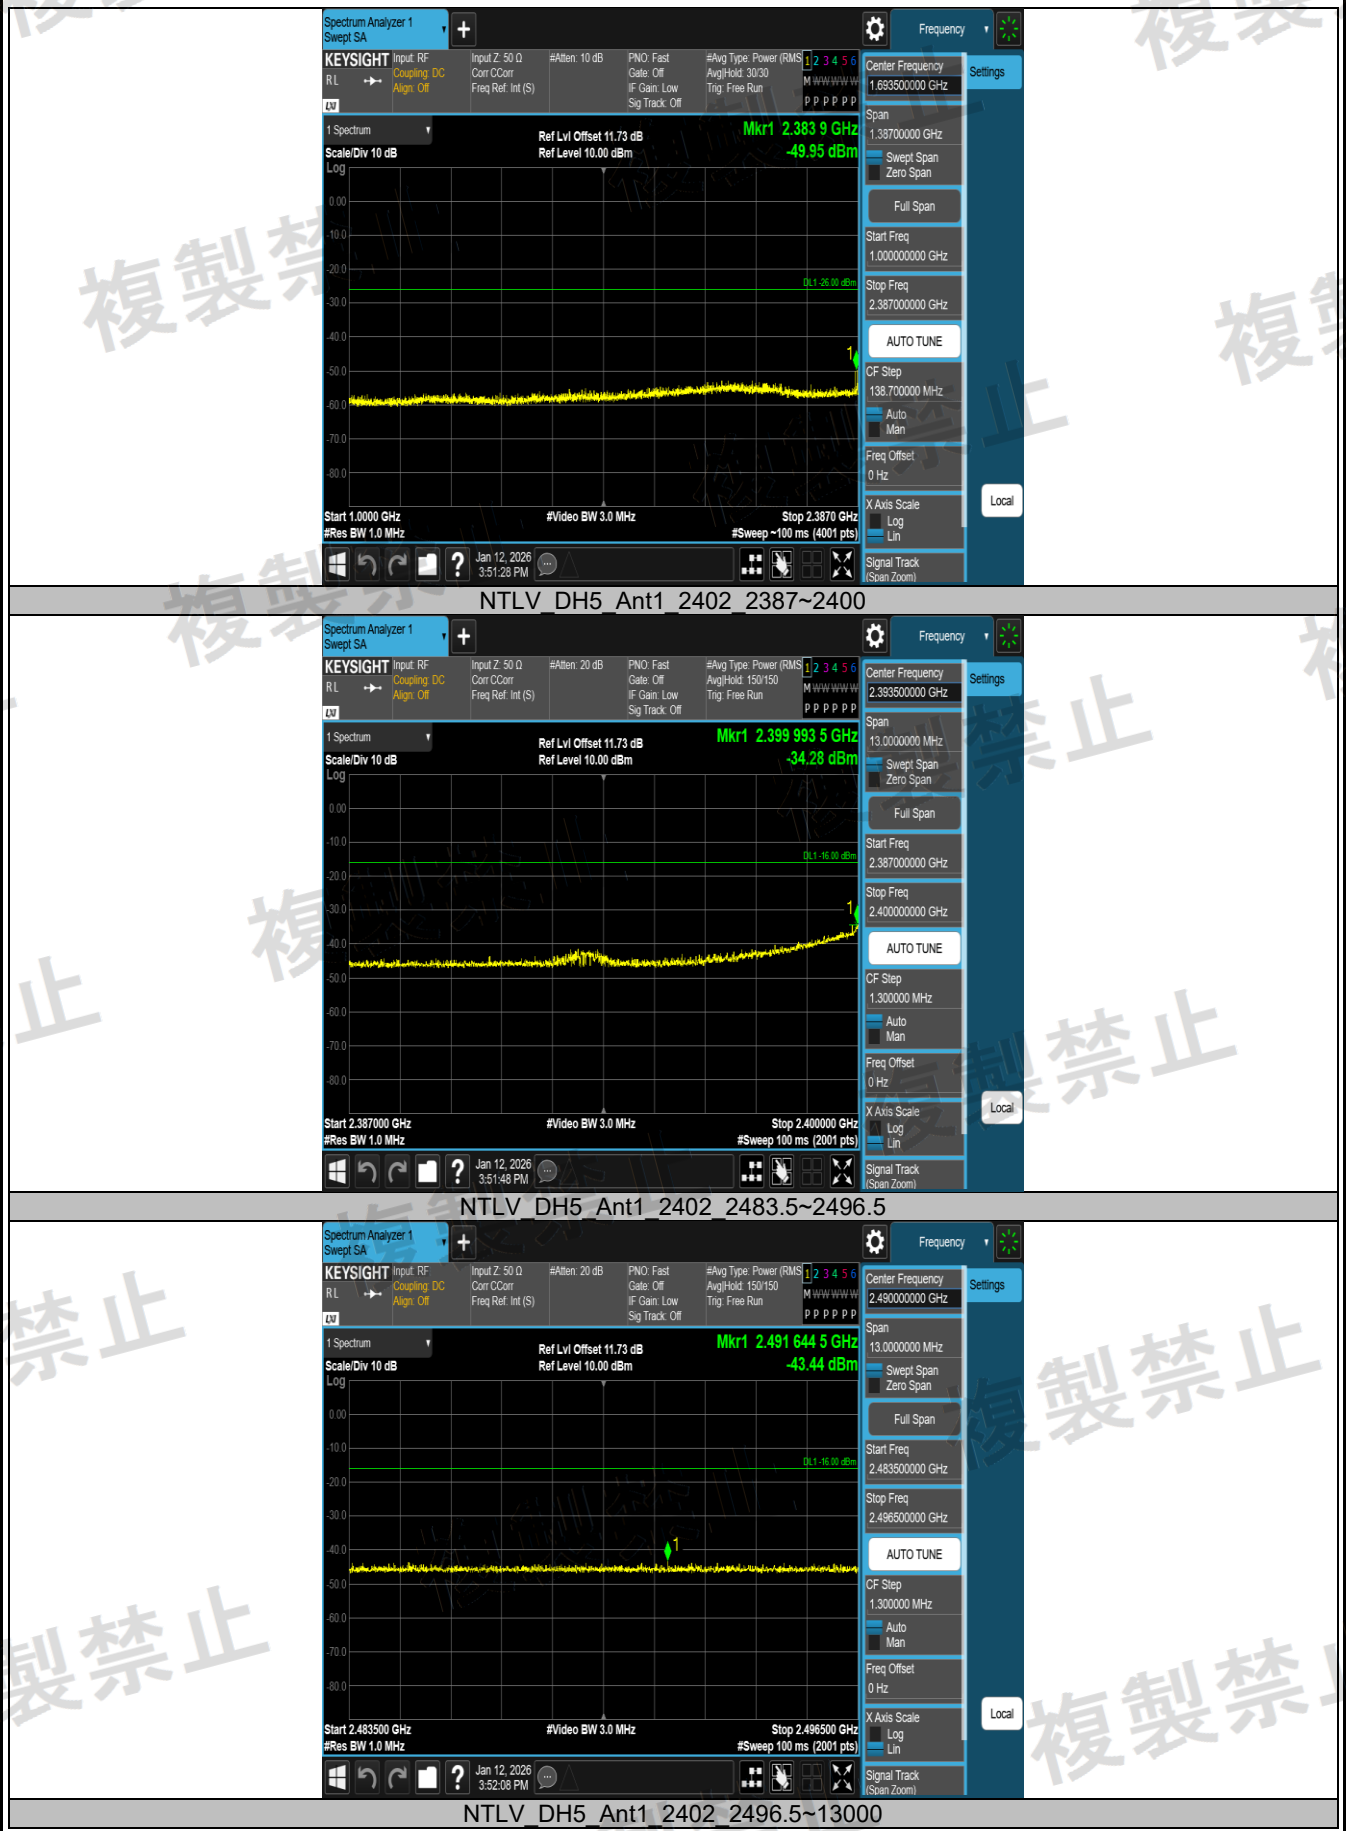


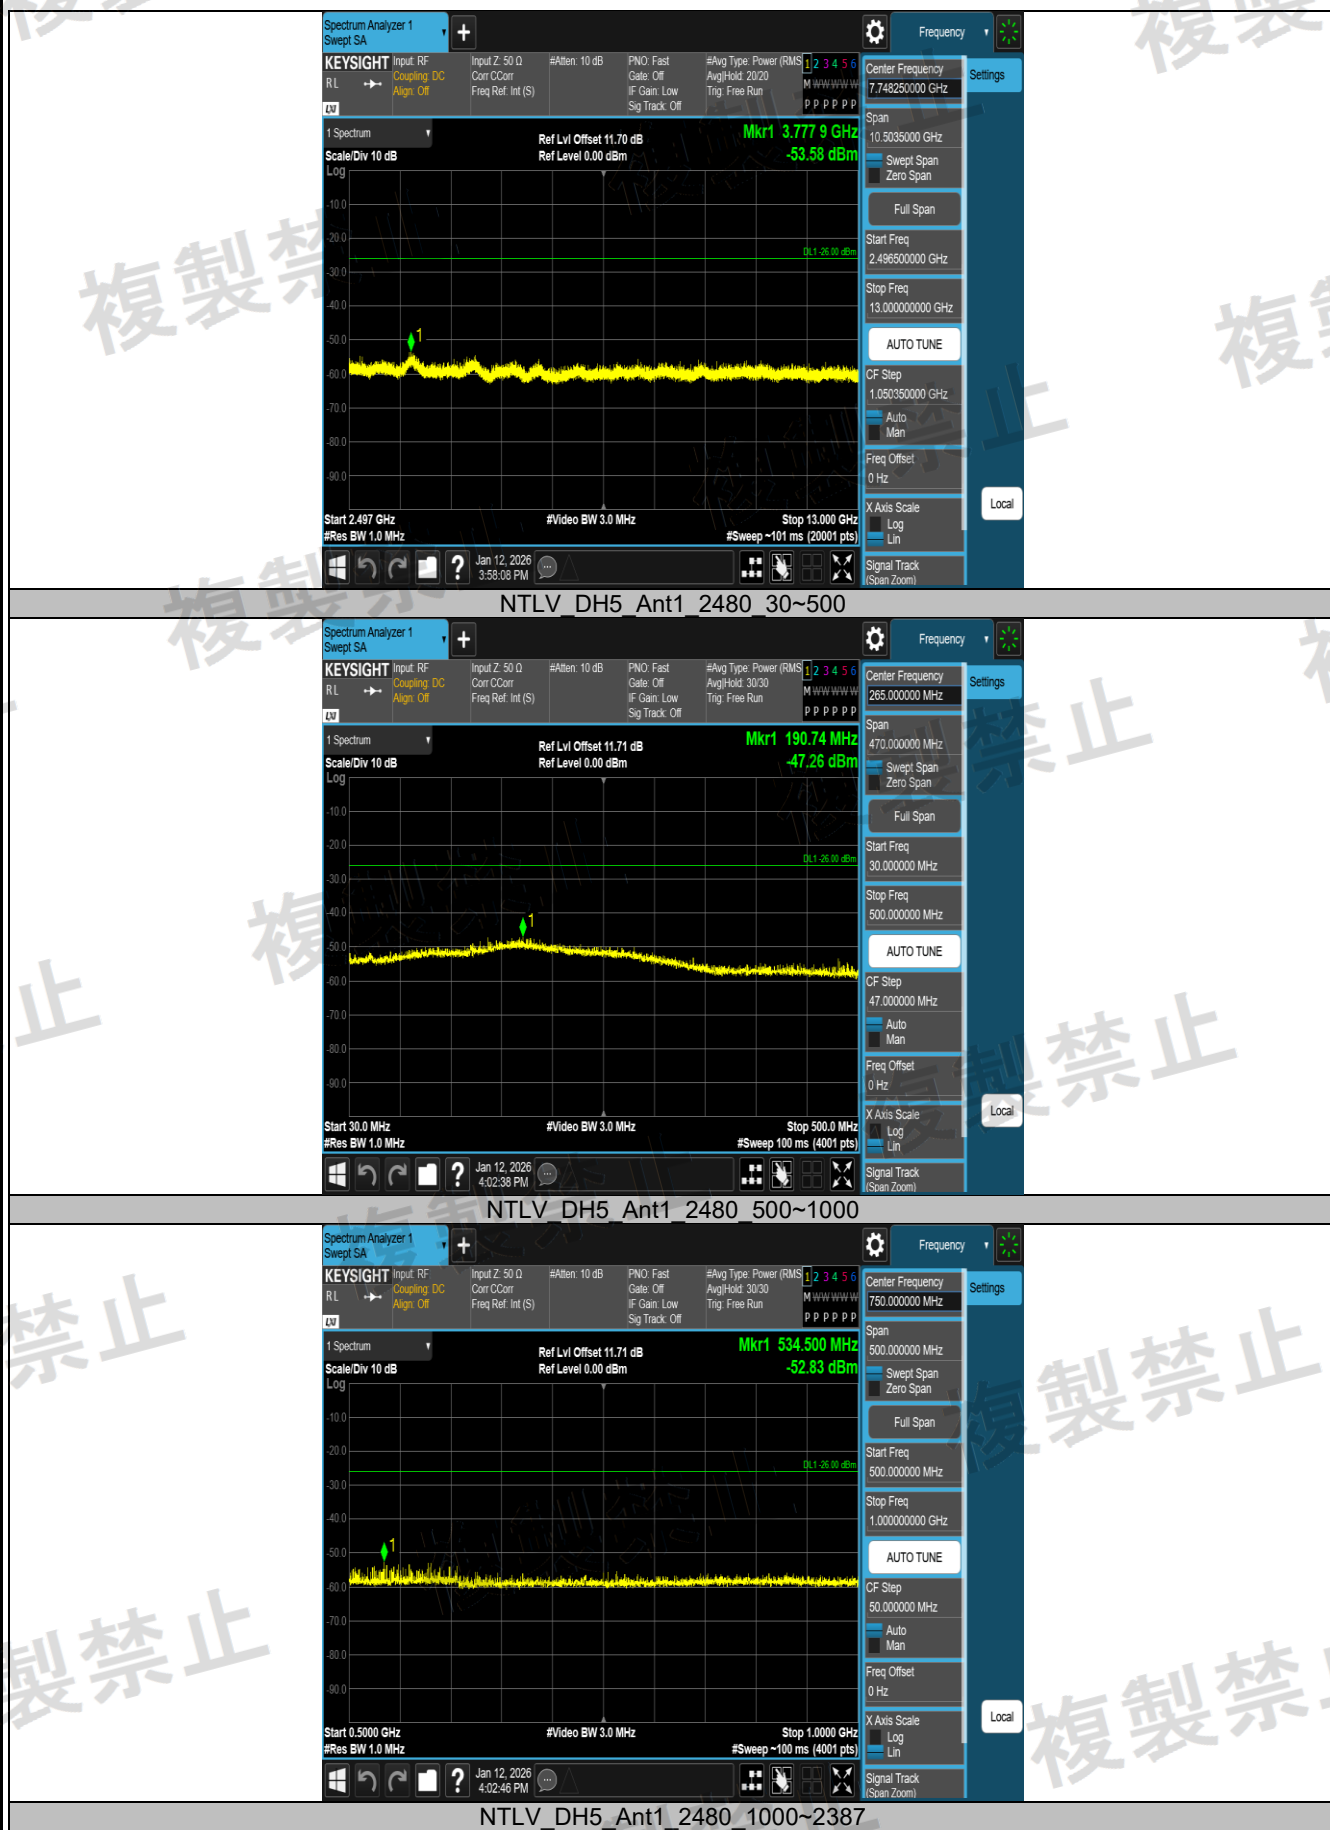


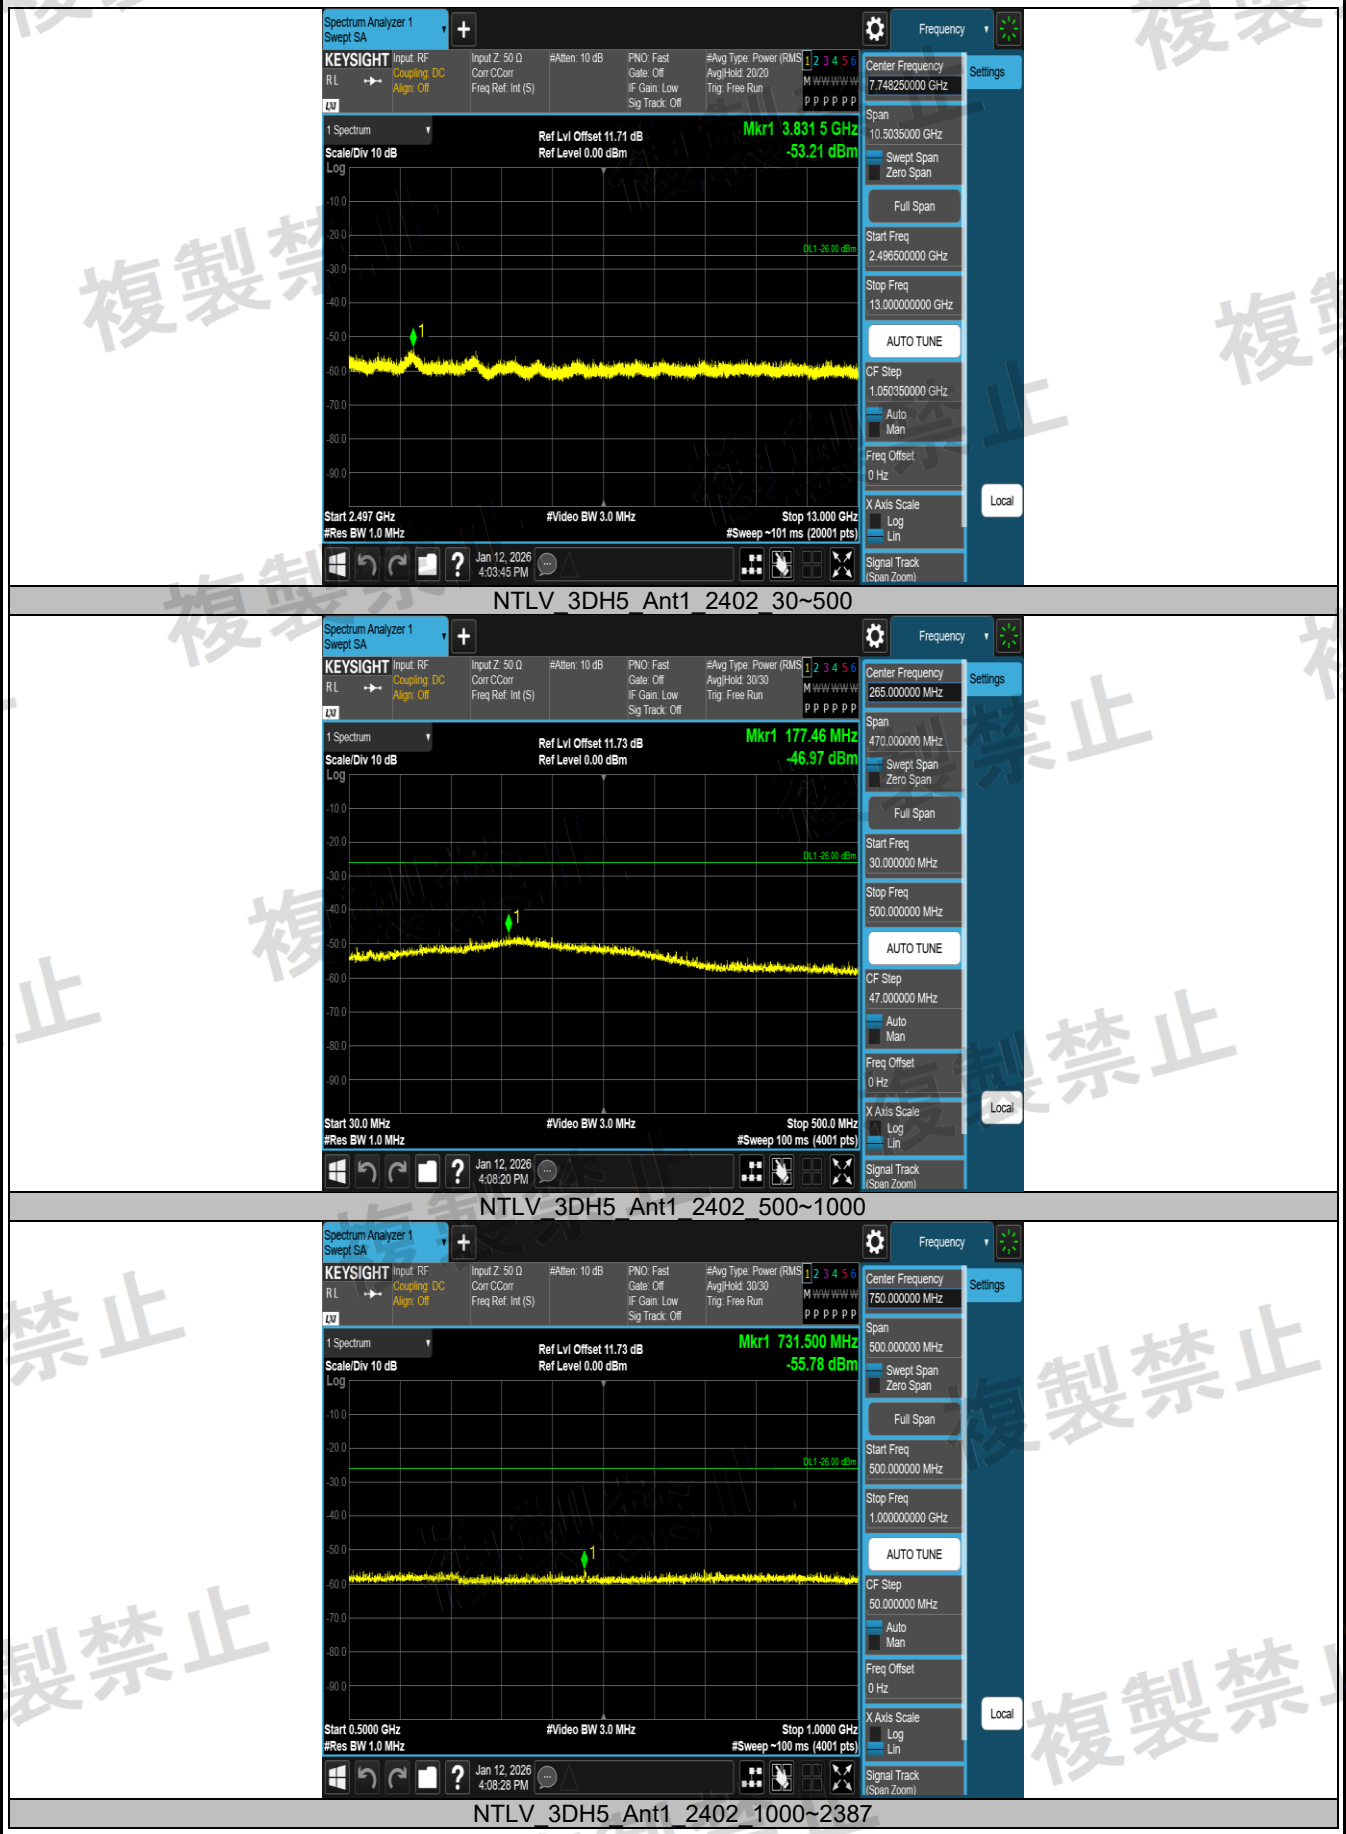







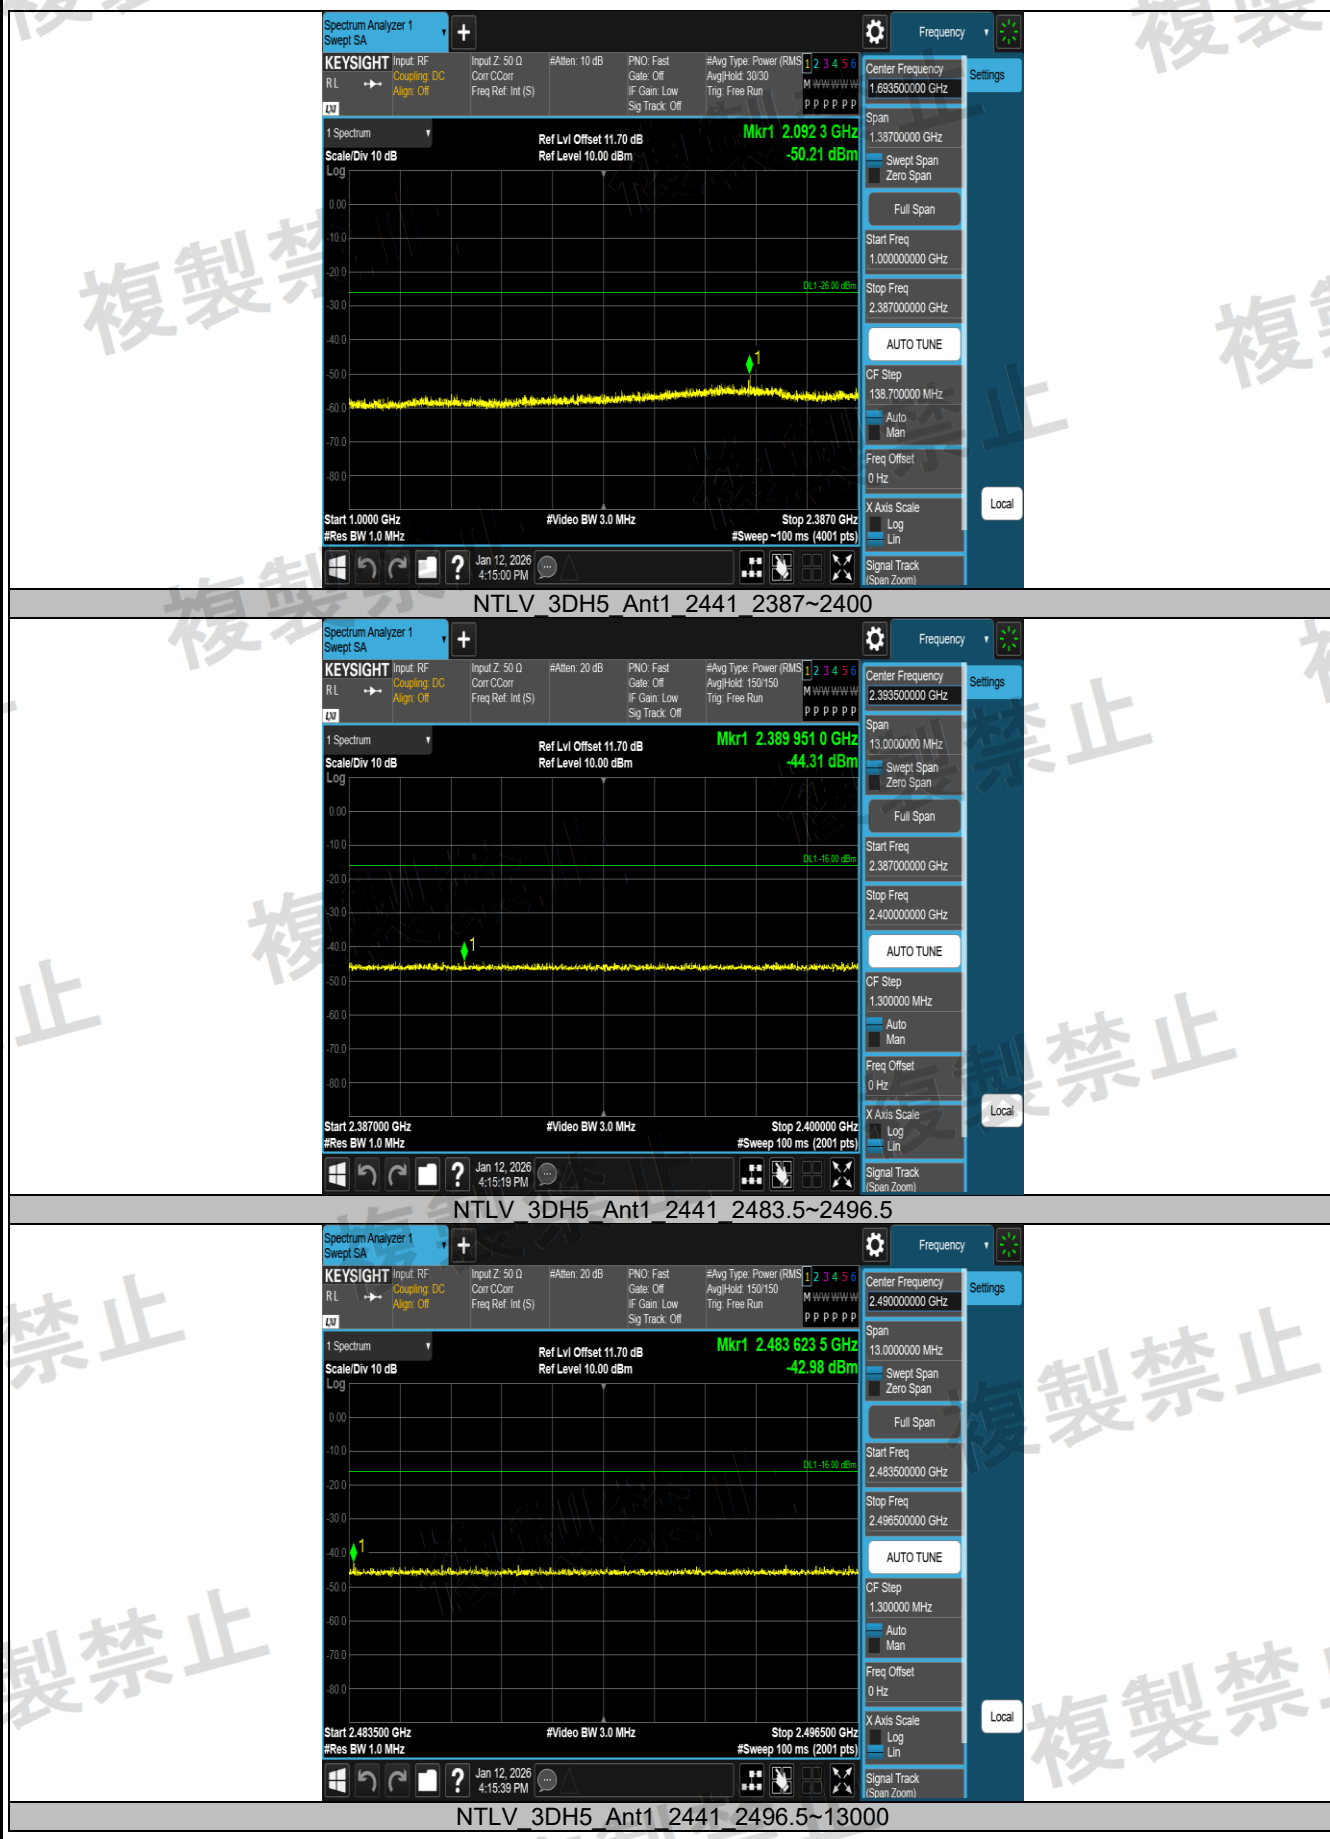

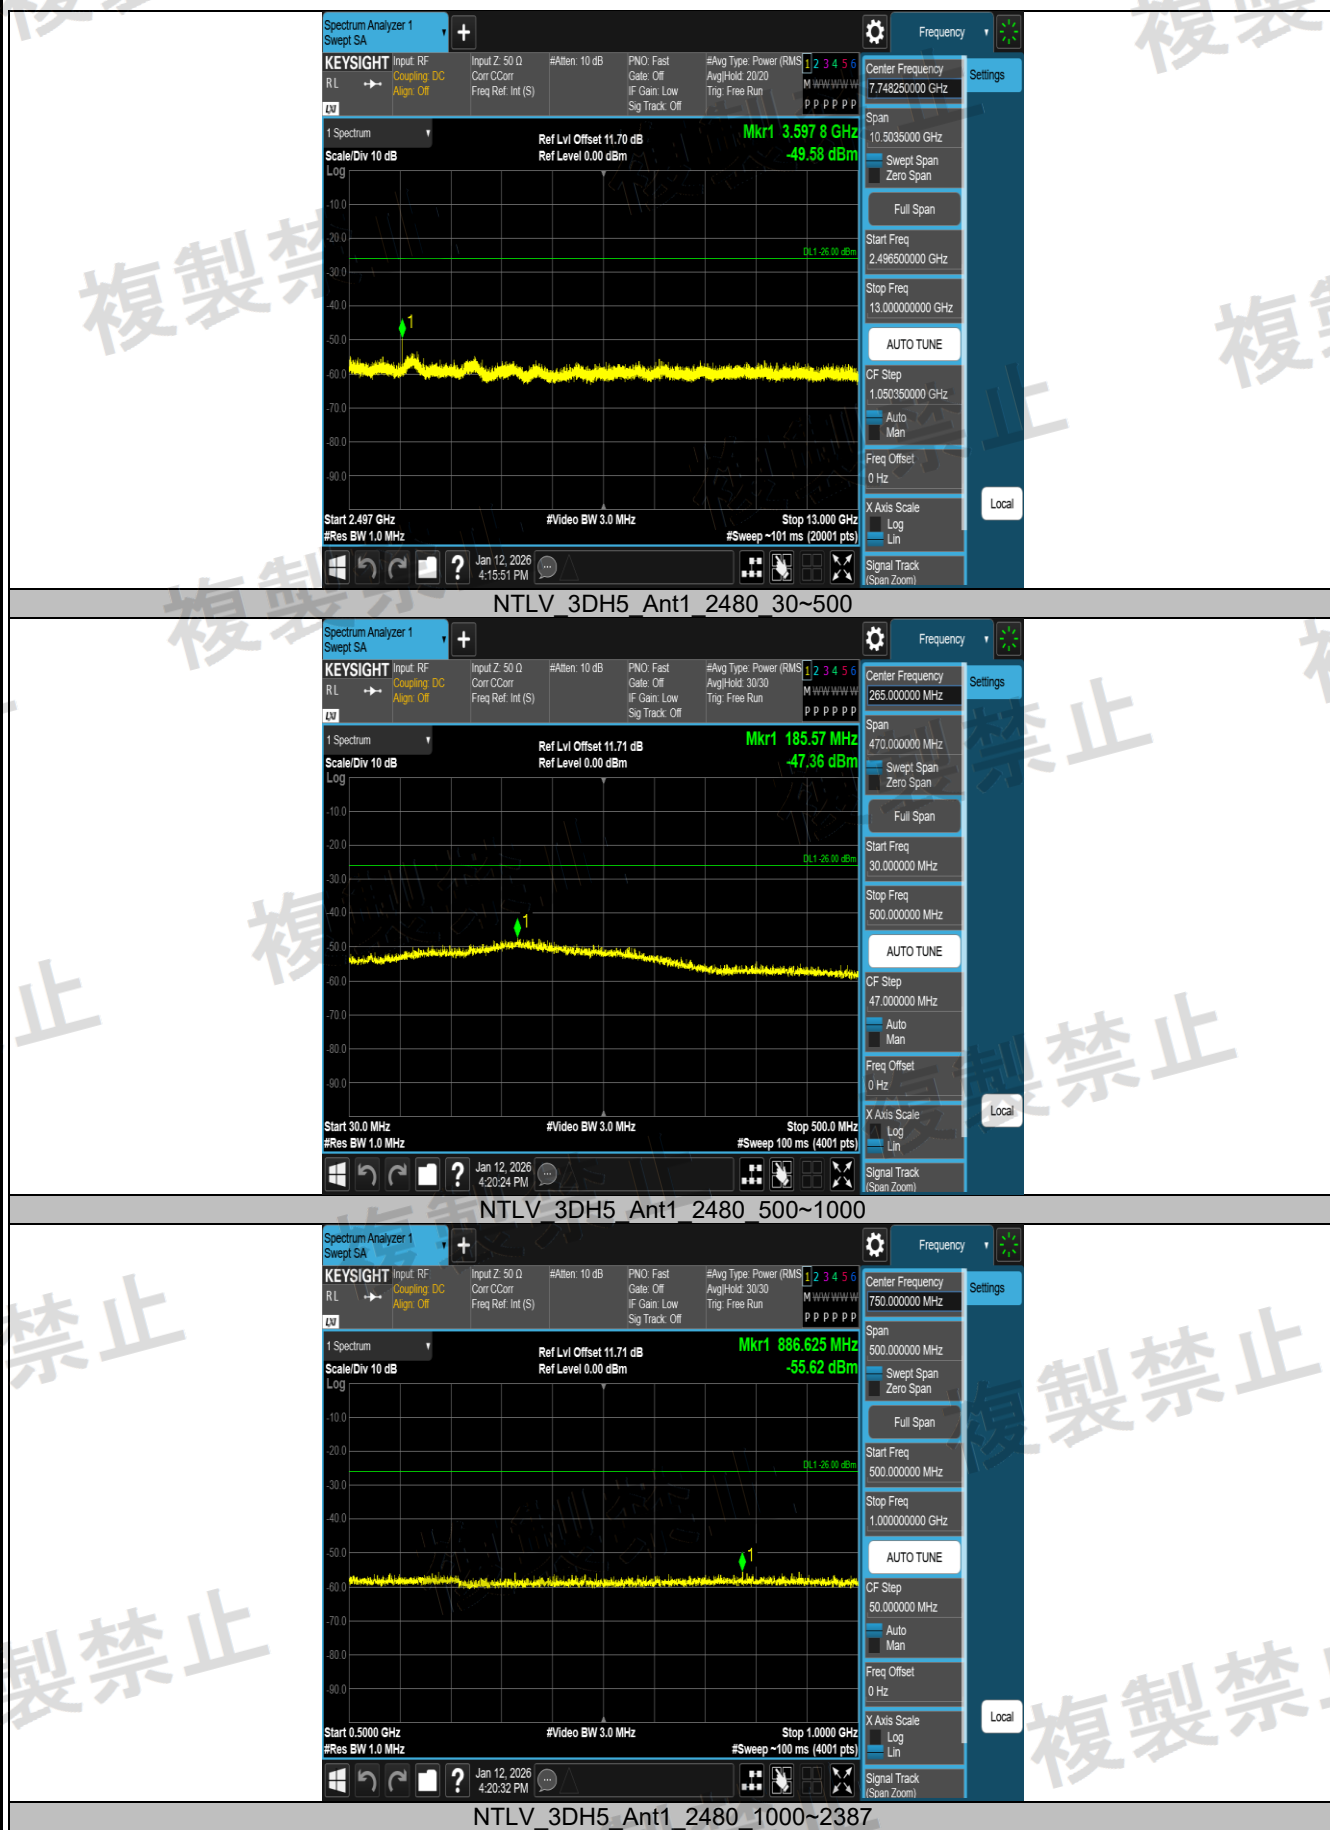


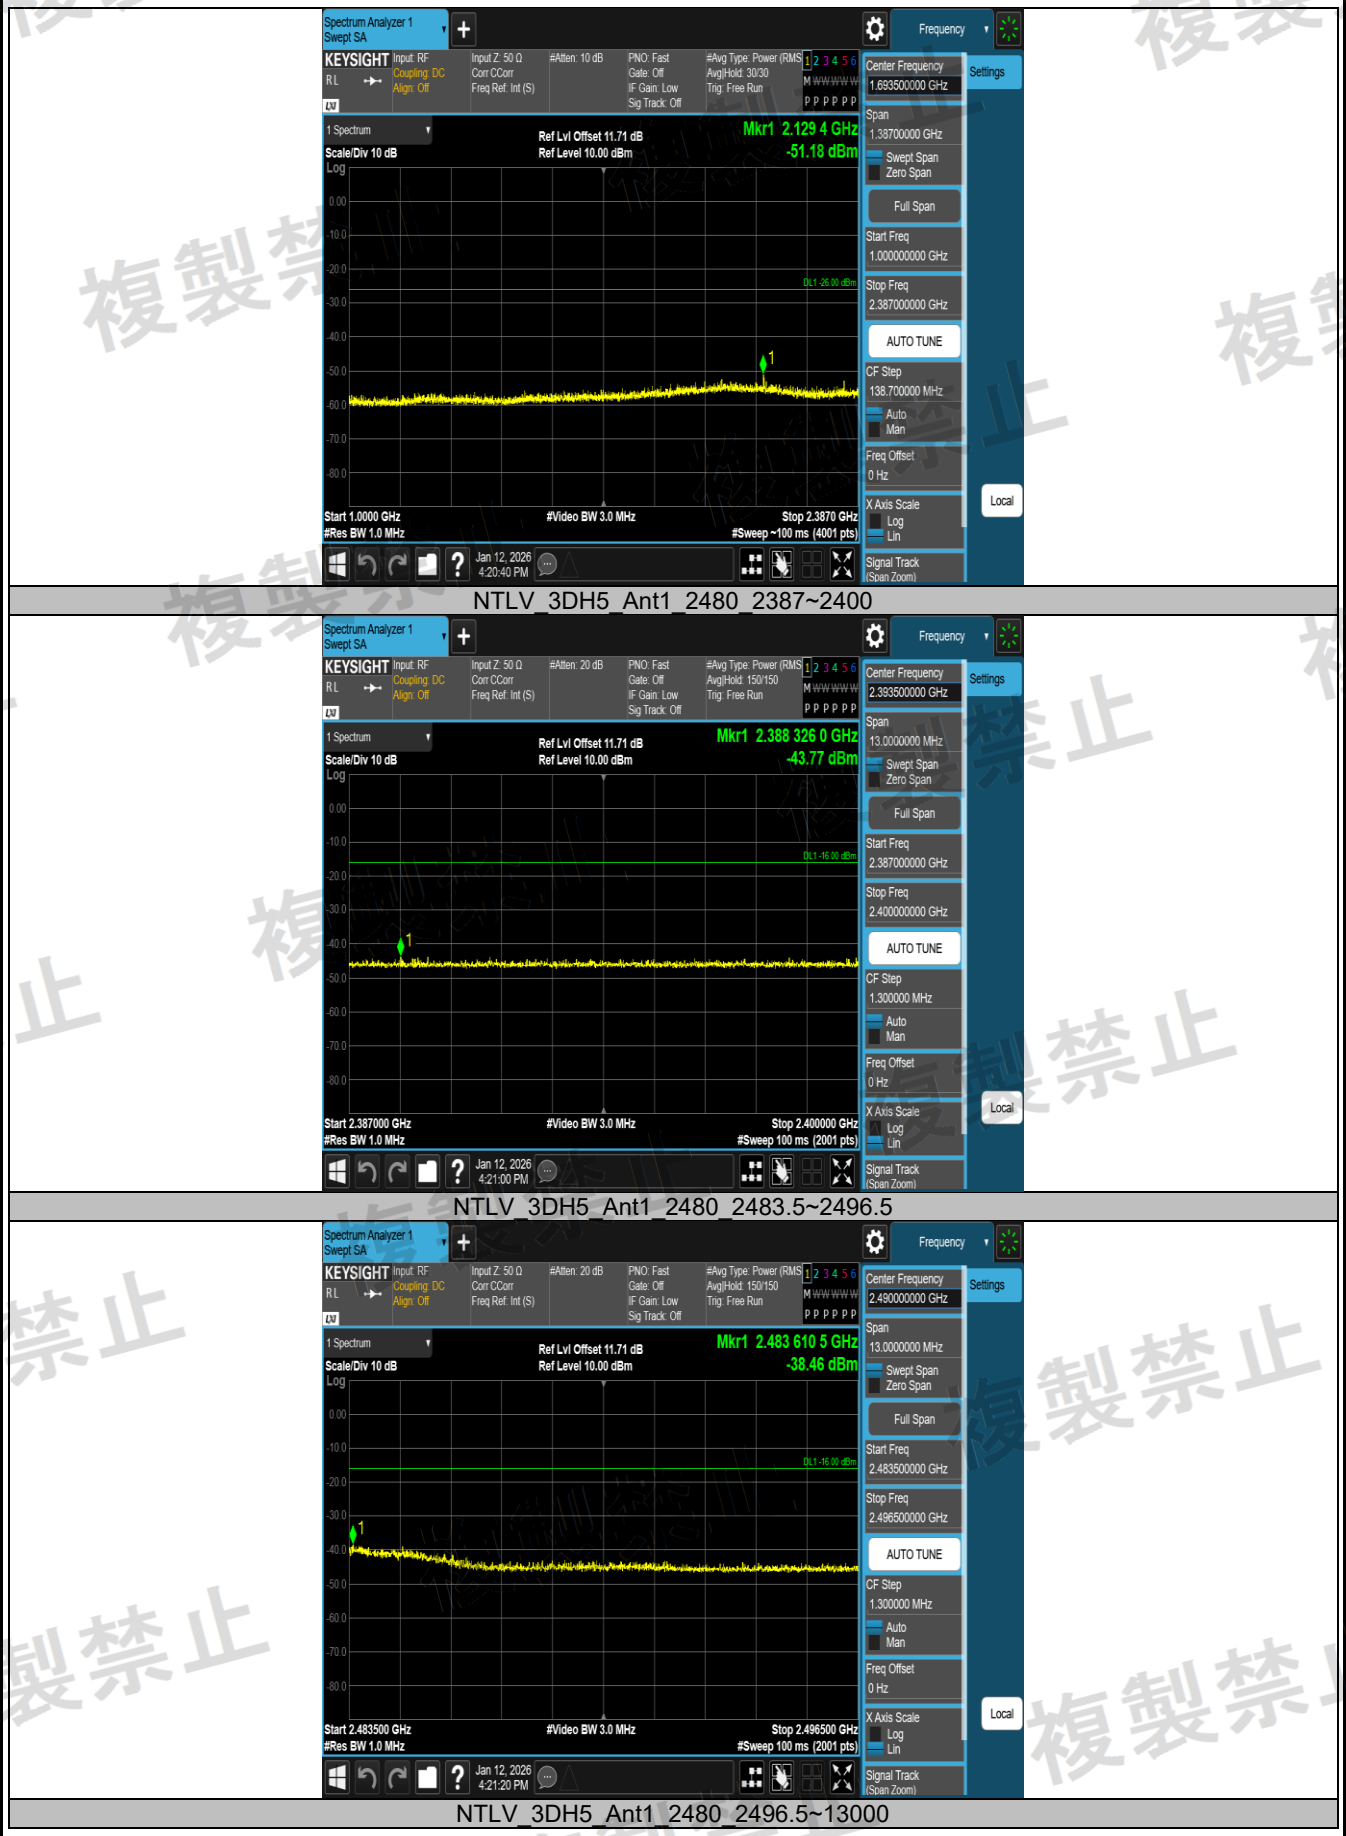




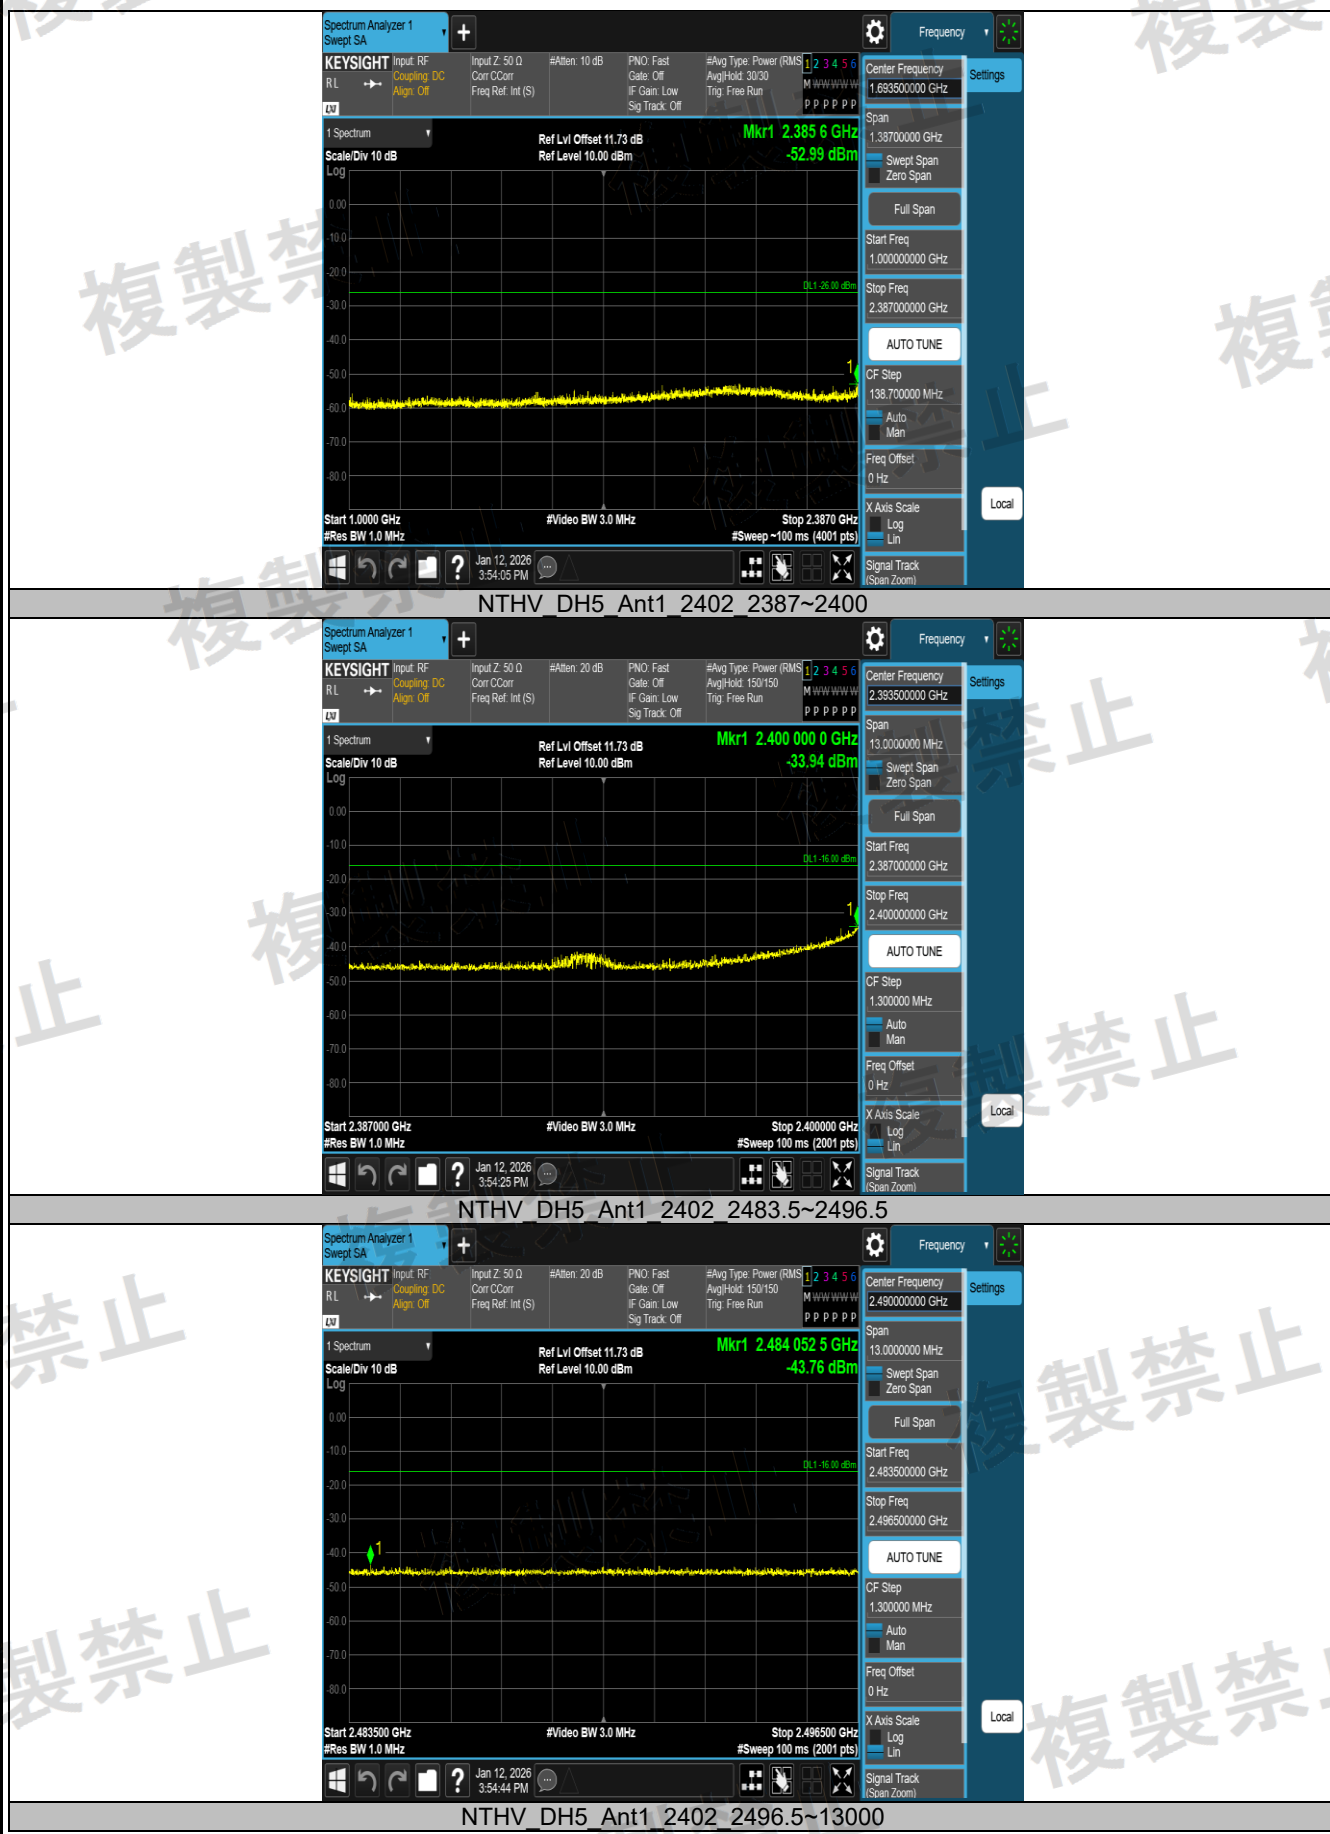



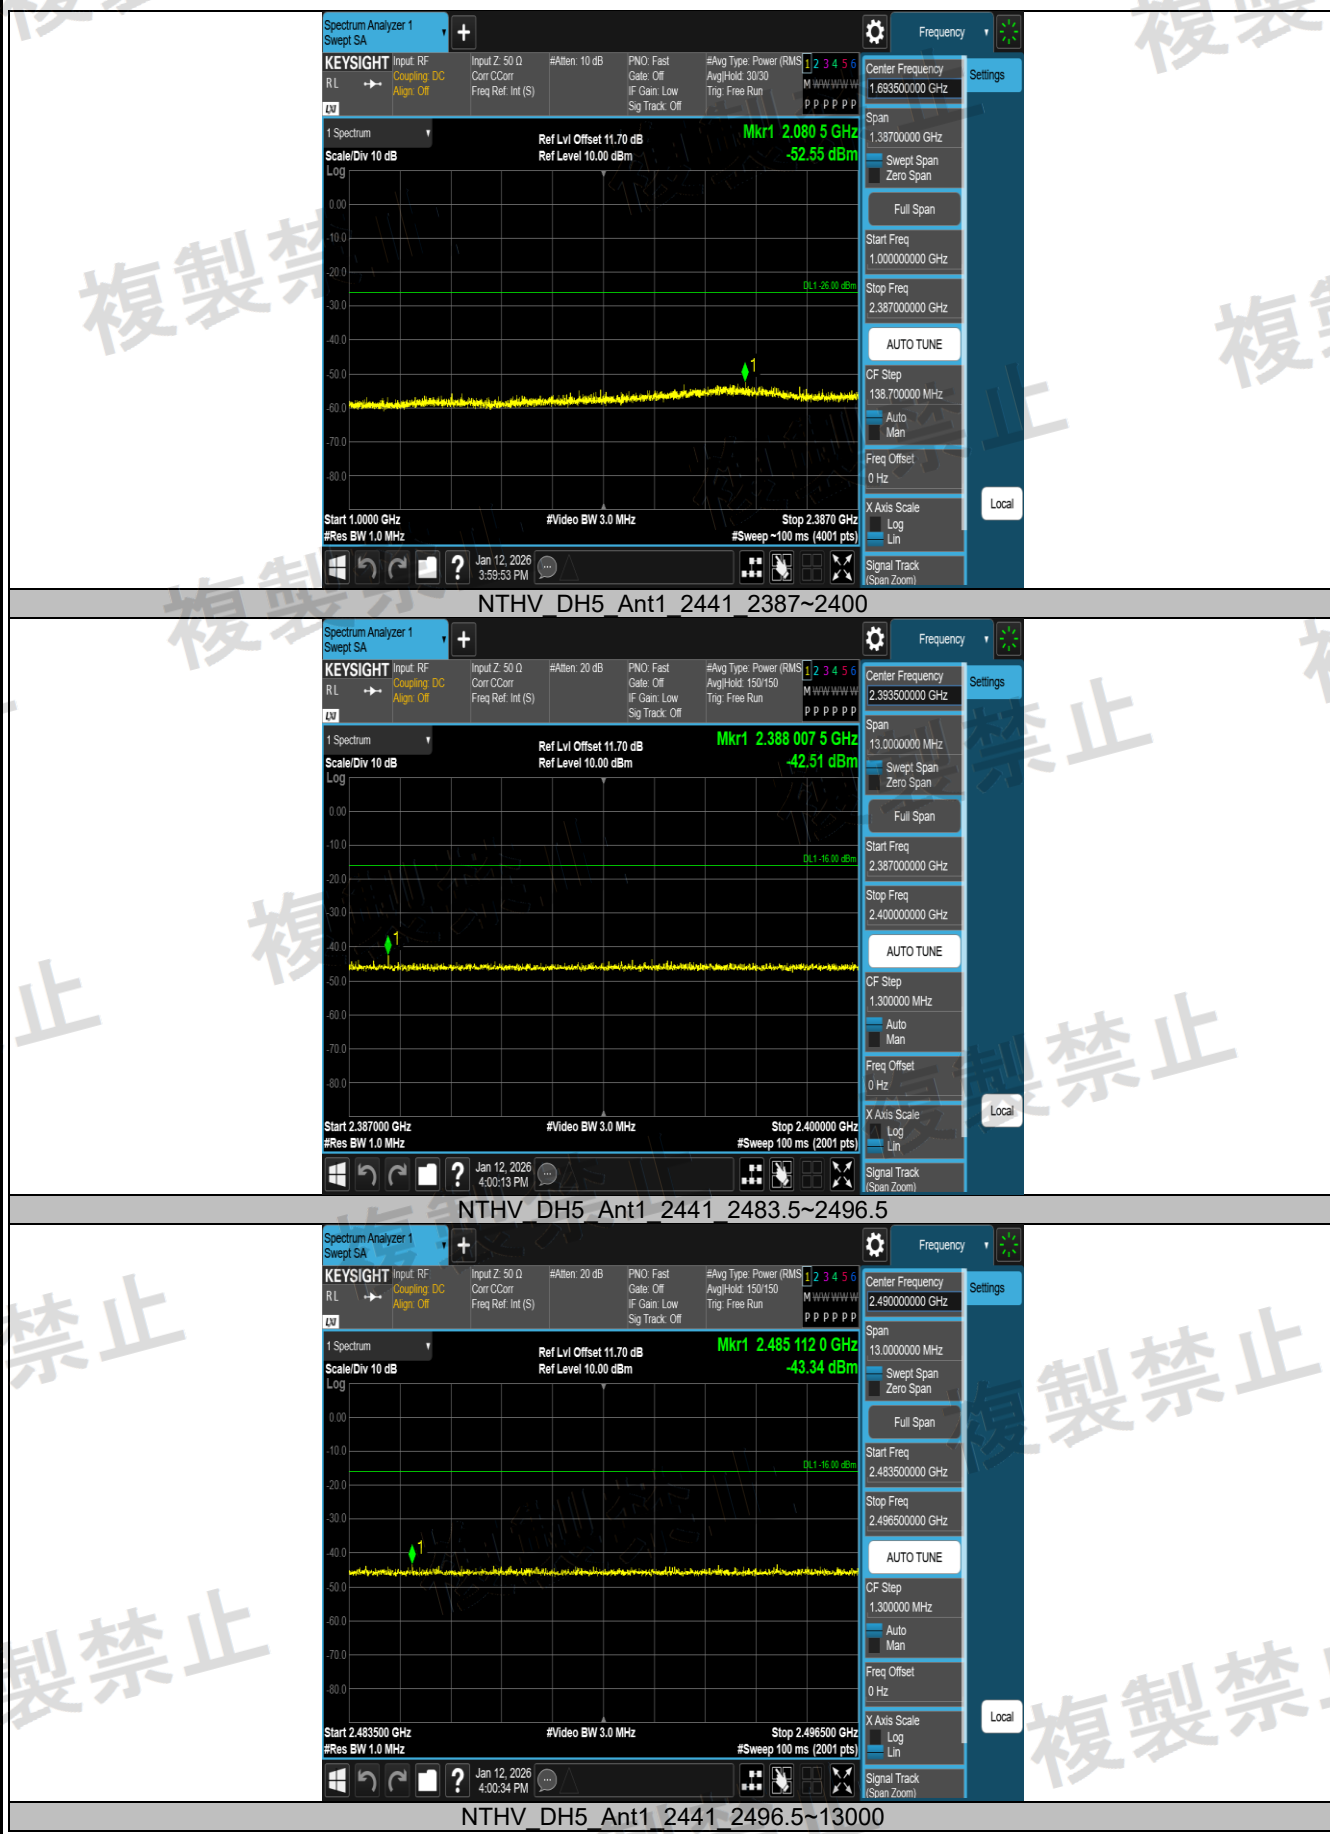




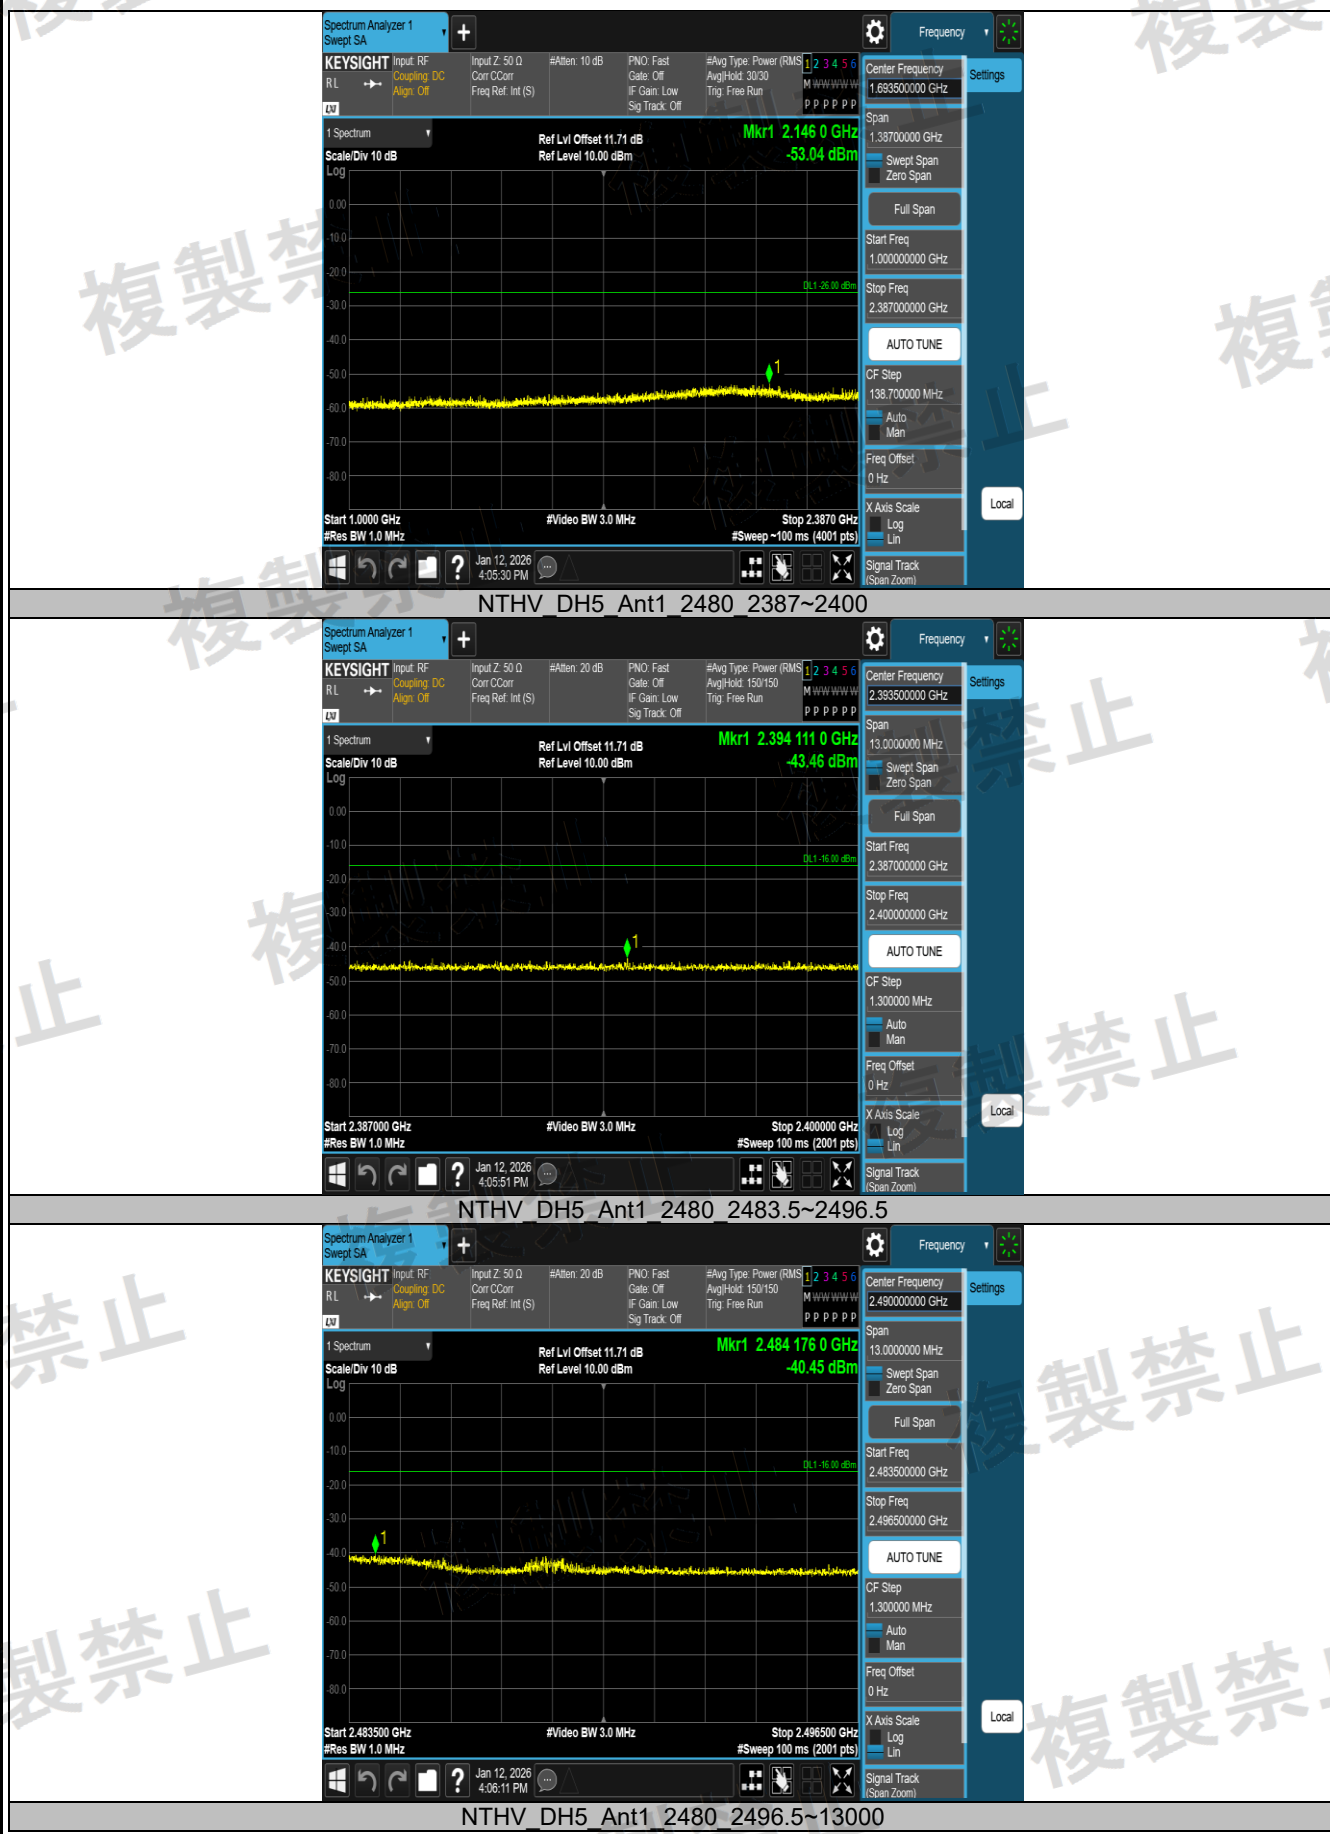









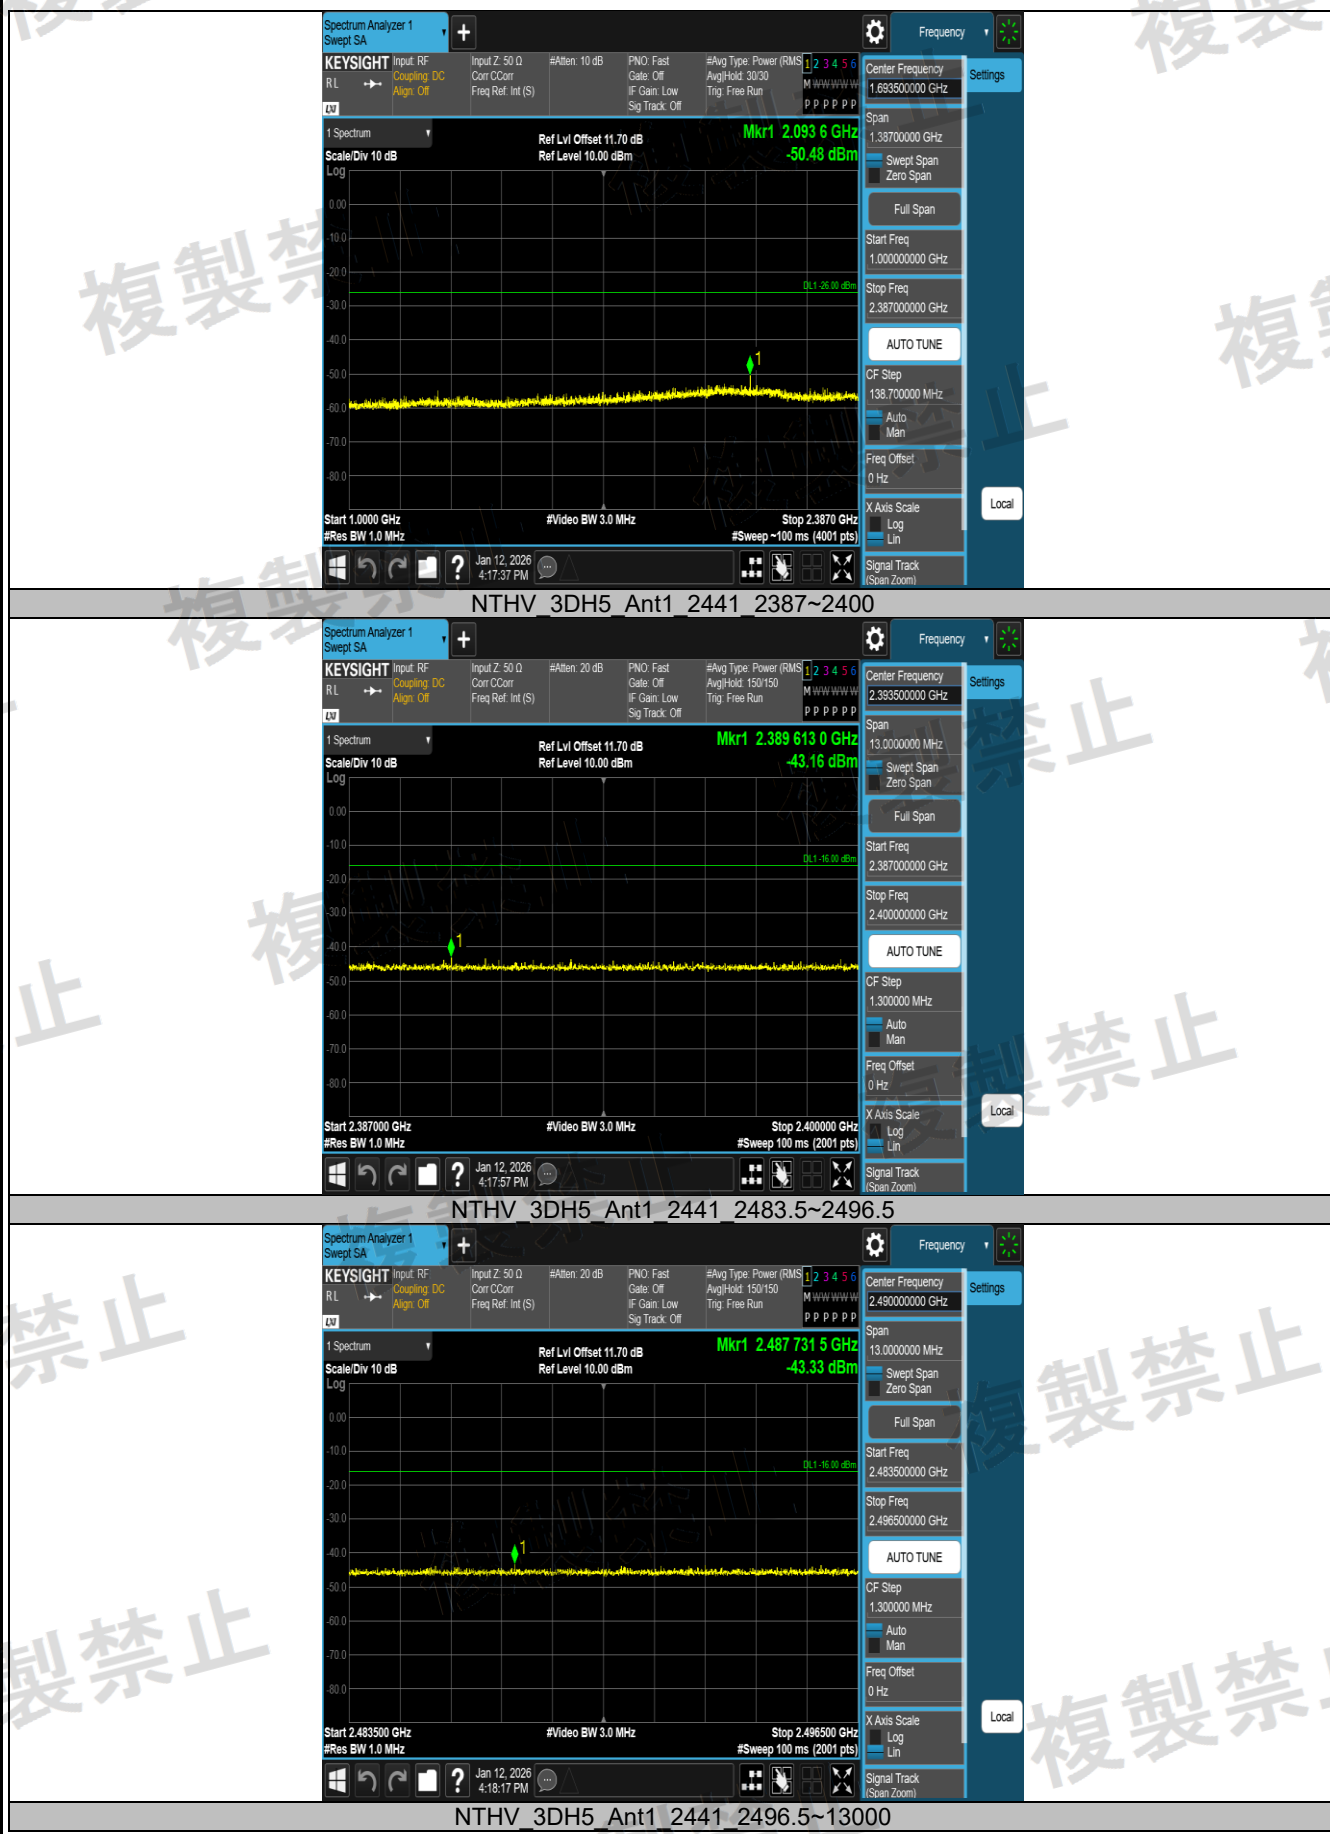



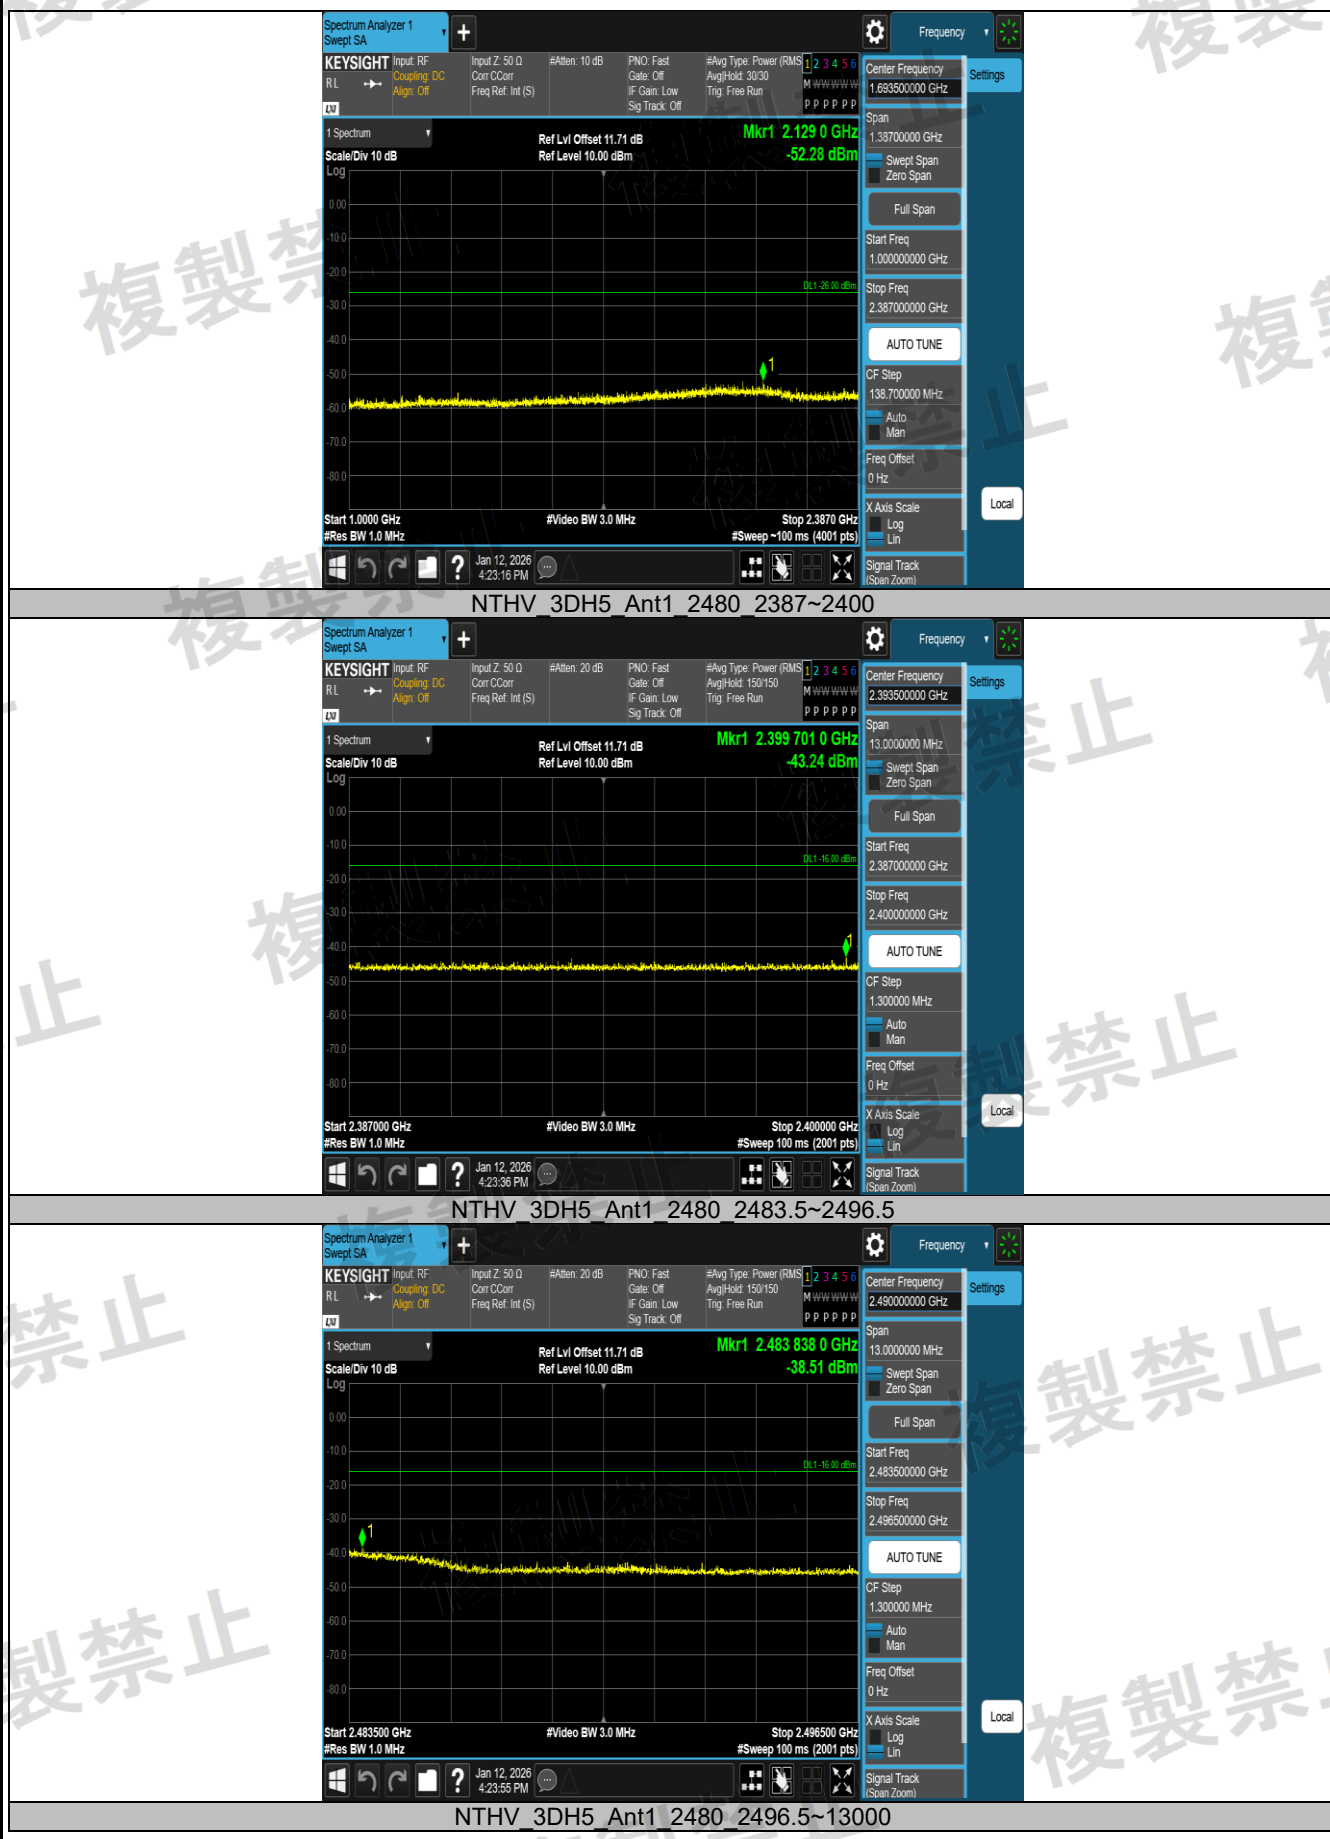

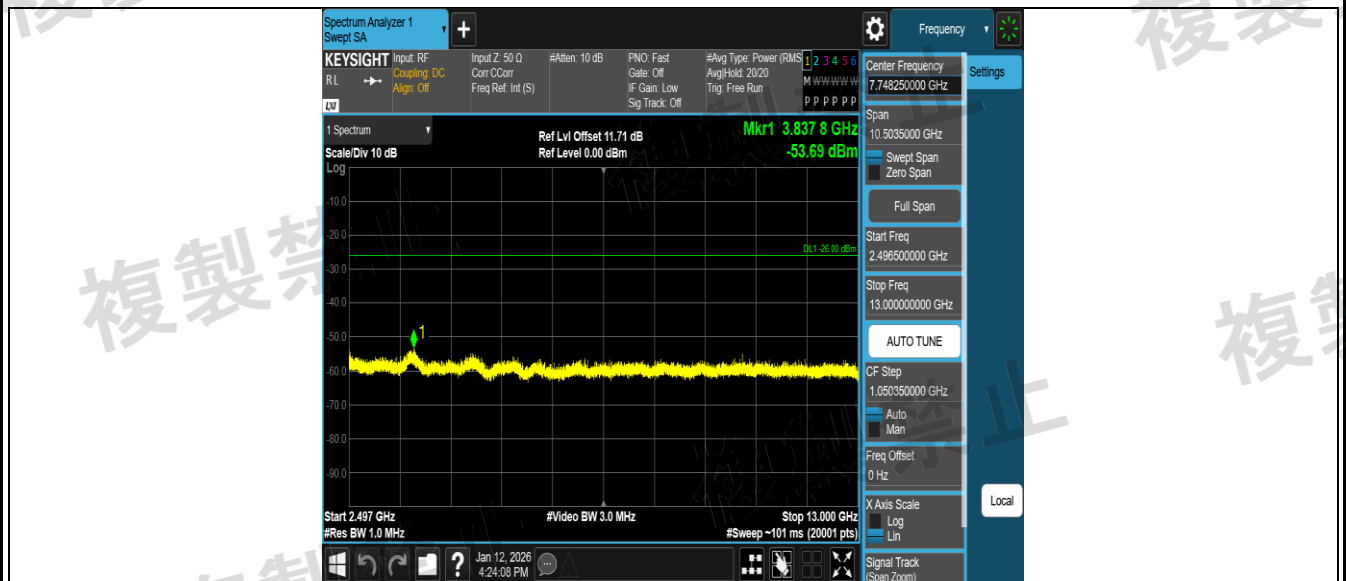


Appendix A.6: Test Results of Spurious Emissions for Receiver

Test Result


Test Condition	Test Mode	Antenna	Freq (MHz)	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	DH5	Ant1	2402	30~500	189.57	-69.66	≤-54	0.10814	≤4	PASS
				500~1000	731.75	-79.35	≤-54	0.01161	≤4	PASS
				1000~12500	2017.18	-68.47	≤-47	0.14223	≤20	PASS
			2441	30~500	185.57	-70.81	≤-54	0.08299	≤4	PASS
				500~1000	731.75	-80.17	≤-54	0.00962	≤4	PASS
				1000~12500	1853.30	-68.58	≤-47	0.13868	≤20	PASS
			2480	30~500	166.30	-71.05	≤-54	0.07852	≤4	PASS
				500~1000	731.75	-79.65	≤-54	0.01084	≤4	PASS
				1000~12500	2056.85	-67.67	≤-47	0.17100	≤20	PASS
	3DH5	Ant1	2402	30~500	184.40	-70.89	≤-54	0.08147	≤4	PASS
				500~1000	854.25	-80.06	≤-54	0.00986	≤4	PASS
				1000~12500	2048.80	-69.09	≤-47	0.12331	≤20	PASS
			2441	30~500	182.75	-70.32	≤-54	0.09290	≤4	PASS
				500~1000	731.75	-79.92	≤-54	0.01019	≤4	PASS
				1000~12500	2051.10	-68.93	≤-47	0.12794	≤20	PASS
			2480	30~500	185.10	-70.11	≤-54	0.09750	≤4	PASS
				500~1000	731.75	-80.85	≤-54	0.00822	≤4	PASS
				1000~12500	2001.08	-68.56	≤-47	0.13932	≤20	PASS
NTLV	DH5	Ant1	2402	30~500	183.46	-70.55	≤-54	0.08810	≤4	PASS
				500~1000	731.75	-80.33	≤-54	0.00927	≤4	PASS
				1000~12500	2089.63	-67.27	≤-47	0.18750	≤20	PASS
			2441	30~500	187.22	-70.02	≤-54	0.09954	≤4	PASS
				500~1000	731.75	-79.98	≤-54	0.01005	≤4	PASS
				1000~12500	2031.55	-68.53	≤-47	0.14028	≤20	PASS
			2480	30~500	187.92	-70.85	≤-54	0.08222	≤4	PASS
				500~1000	731.75	-80.35	≤-54	0.00923	≤4	PASS
				1000~12500	2148.85	-68.82	≤-47	0.13122	≤20	PASS
	3DH5	Ant1	2402	30~500	184.87	-70.40	≤-54	0.09120	≤4	PASS
				500~1000	731.75	-79.18	≤-54	0.01208	≤4	PASS
				1000~12500	2025.80	-68.84	≤-47	0.13062	≤20	PASS
			2441	30~500	184.63	-70.93	≤-54	0.08072	≤4	PASS
				500~1000	731.75	-80.06	≤-54	0.00986	≤4	PASS
				1000~12500	2049.95	-68.15	≤-47	0.15311	≤20	PASS
			2480	30~500	183.22	-70.61	≤-54	0.08690	≤4	PASS
				500~1000	731.75	-79.54	≤-54	0.01112	≤4	PASS
				1000~12500	2043.63	-67.88	≤-47	0.16293	≤20	PASS
NTHV	DH5	Ant1	2402	30~500	182.52	-70.23	≤-54	0.09484	≤4	PASS
				500~1000	731.75	-80.18	≤-54	0.00959	≤4	PASS
				1000~12500	1981.53	-68.75	≤-47	0.13335	≤20	PASS
			2441	30~500	167.24	-70.89	≤-54	0.08147	≤4	PASS
				500~1000	731.75	-79.95	≤-54	0.01012	≤4	PASS
				1000~12500	2060.88	-68.47	≤-47	0.14223	≤20	PASS
			2480	30~500	199.91	-71.09	≤-54	0.07780	≤4	PASS
				500~1000	731.75	-80.38	≤-54	0.00916	≤4	PASS
				1000~12500	2091.35	-68.59	≤-47	0.13836	≤20	PASS
	3DH5	Ant1	2402	30~500	182.05	-70.61	≤-54	0.08690	≤4	PASS
				500~1000	731.75	-79.68	≤-54	0.01076	≤4	PASS
				1000~12500	2007.98	-68.06	≤-47	0.15631	≤20	PASS
			2441	30~500	187.69	-70.55	≤-54	0.08810	≤4	PASS
				500~1000	731.75	-78.77	≤-54	0.01327	≤4	PASS
				1000~12500	2001.65	-68.43	≤-47	0.14355	≤20	PASS
			2480	30~500	190.04	-70.46	≤-54	0.08995	≤4	PASS
				500~1000	731.75	-80.68	≤-54	0.00855	≤4	PASS
				1000~12500	2161.50	-68.03	≤-47	0.15740	≤20	PASS





Test Graphs

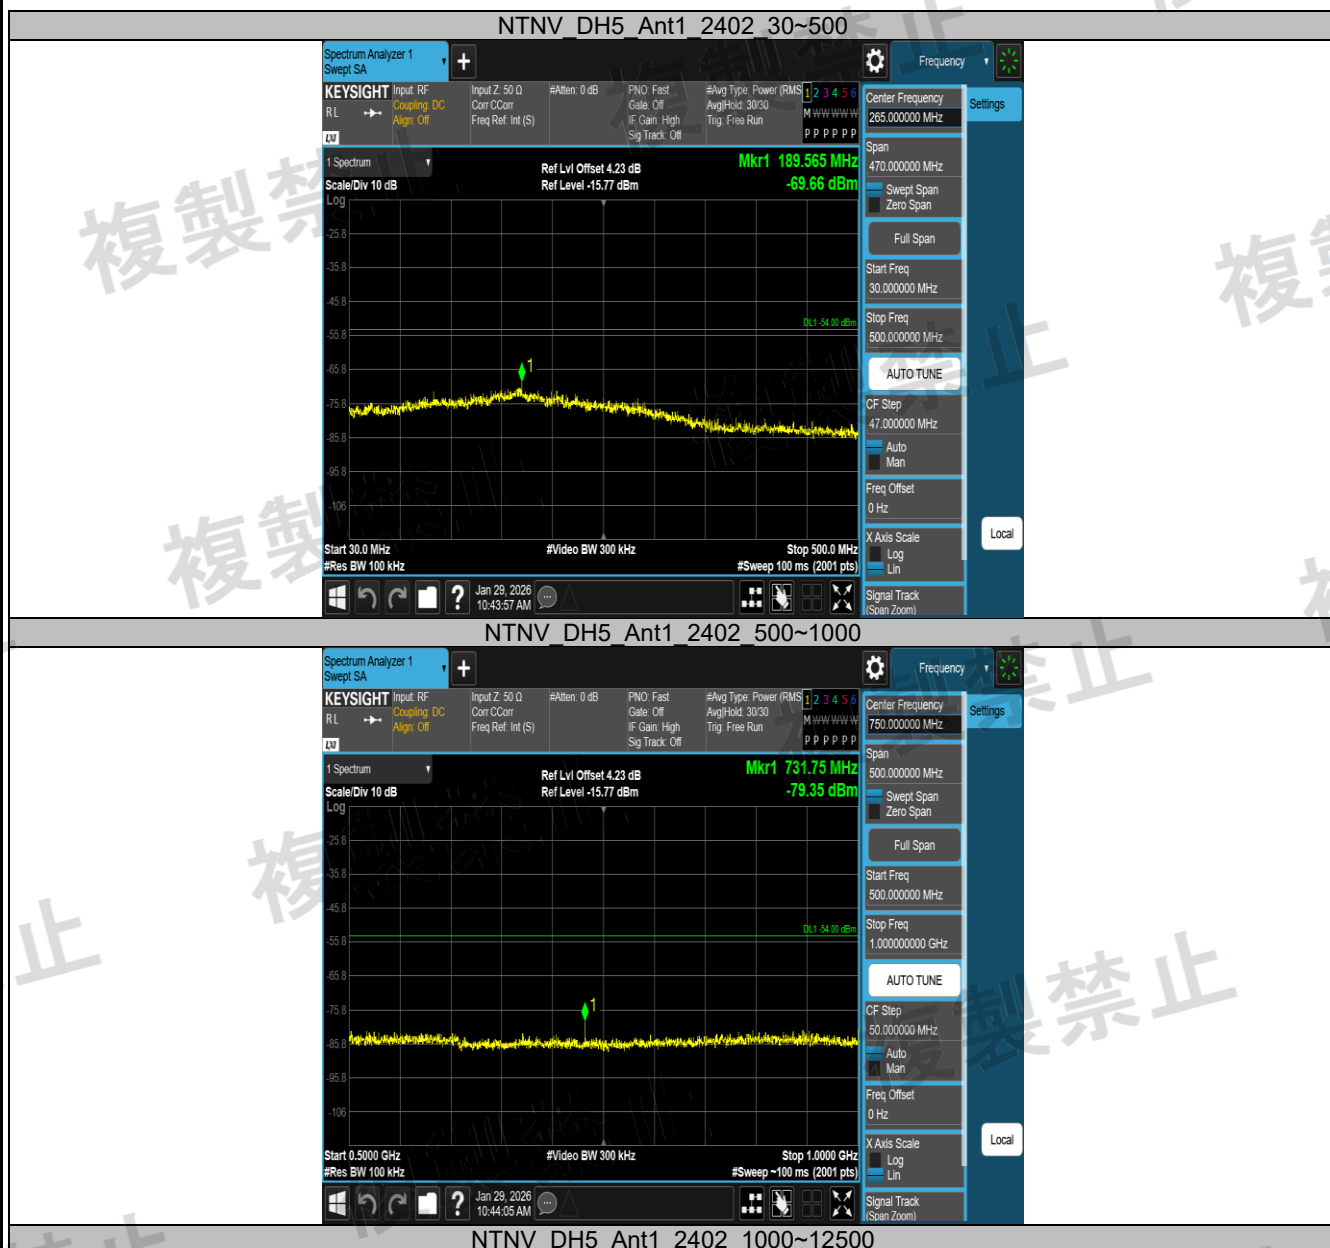




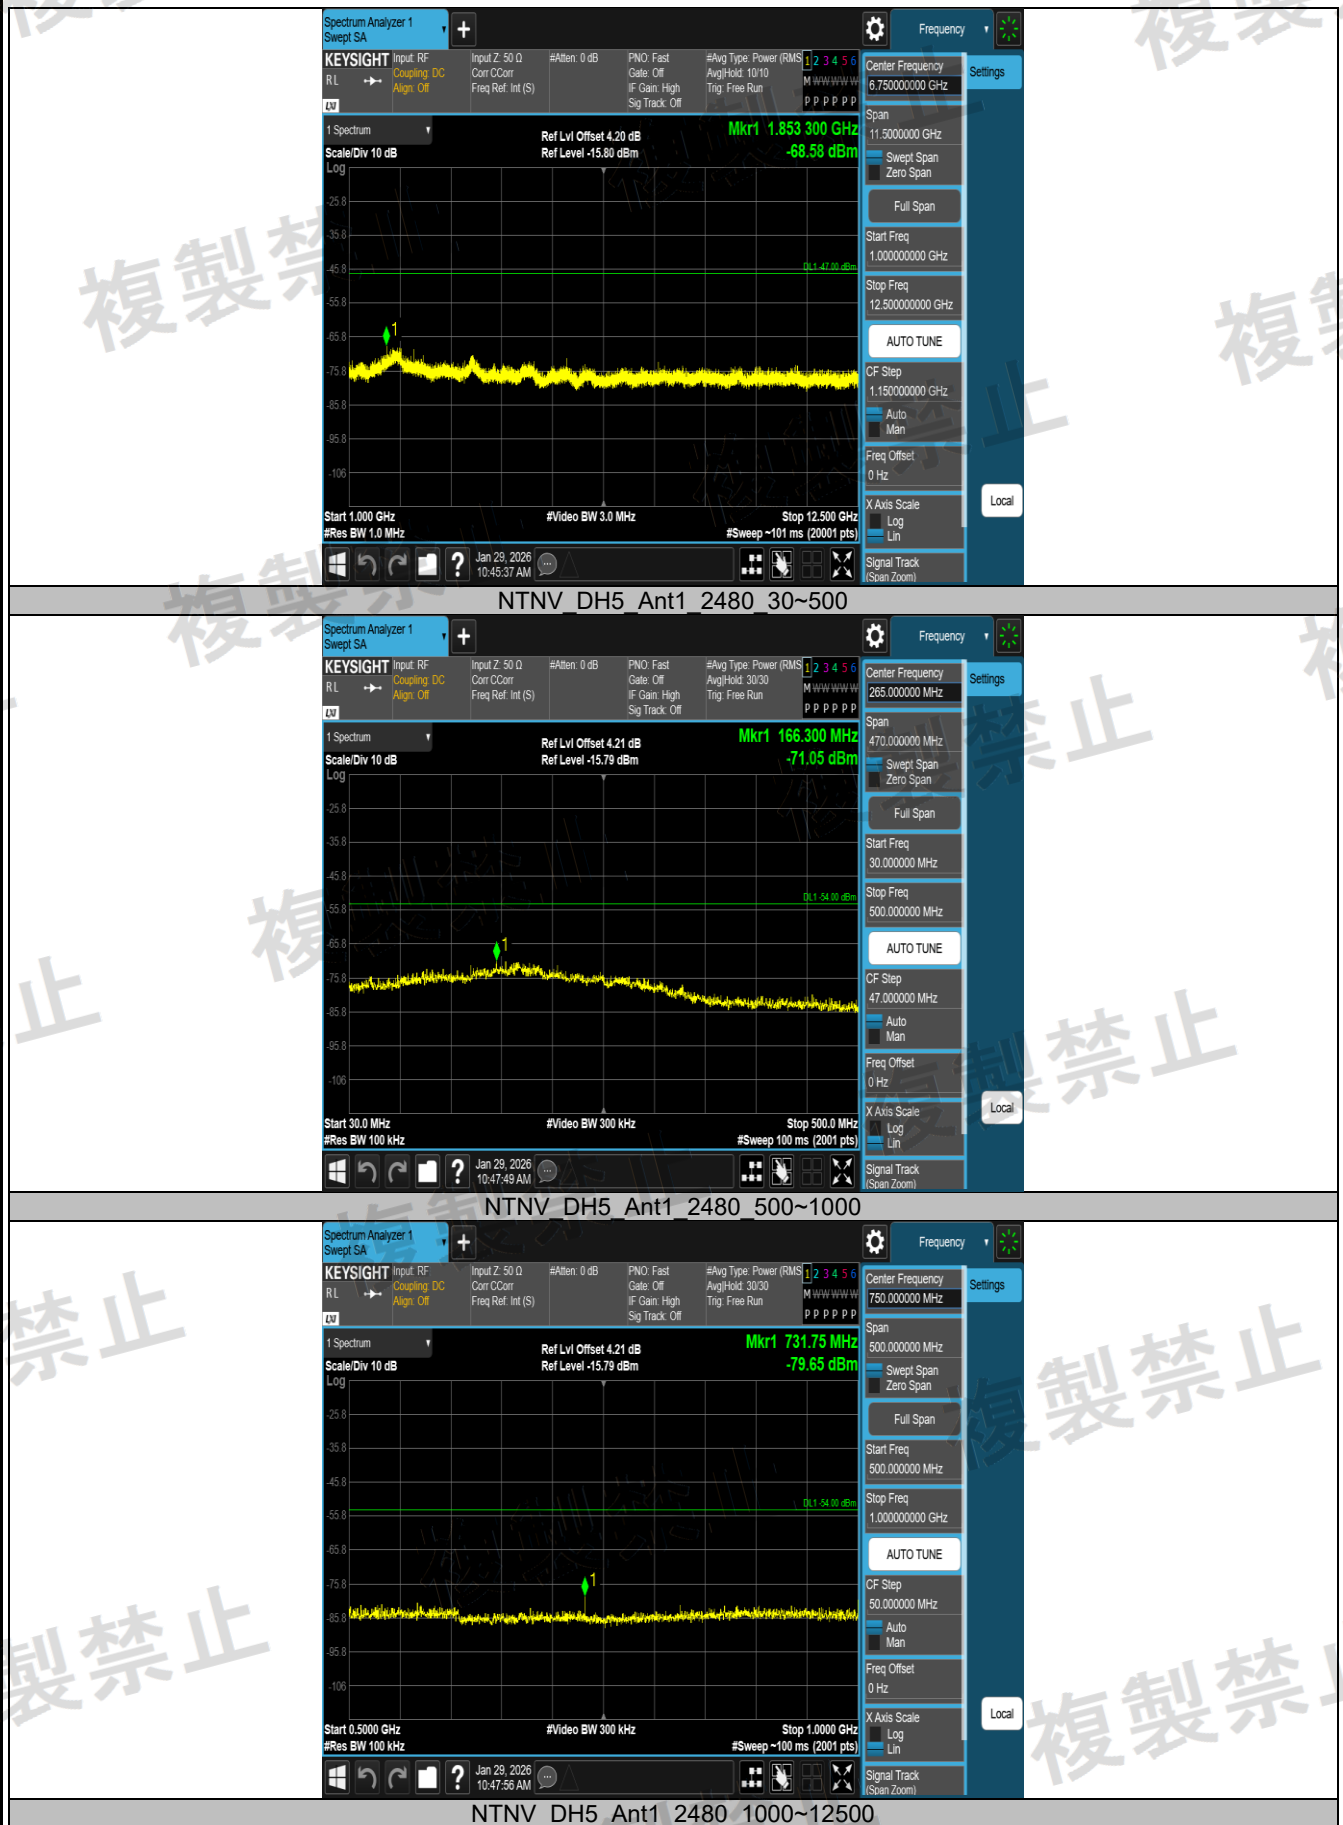


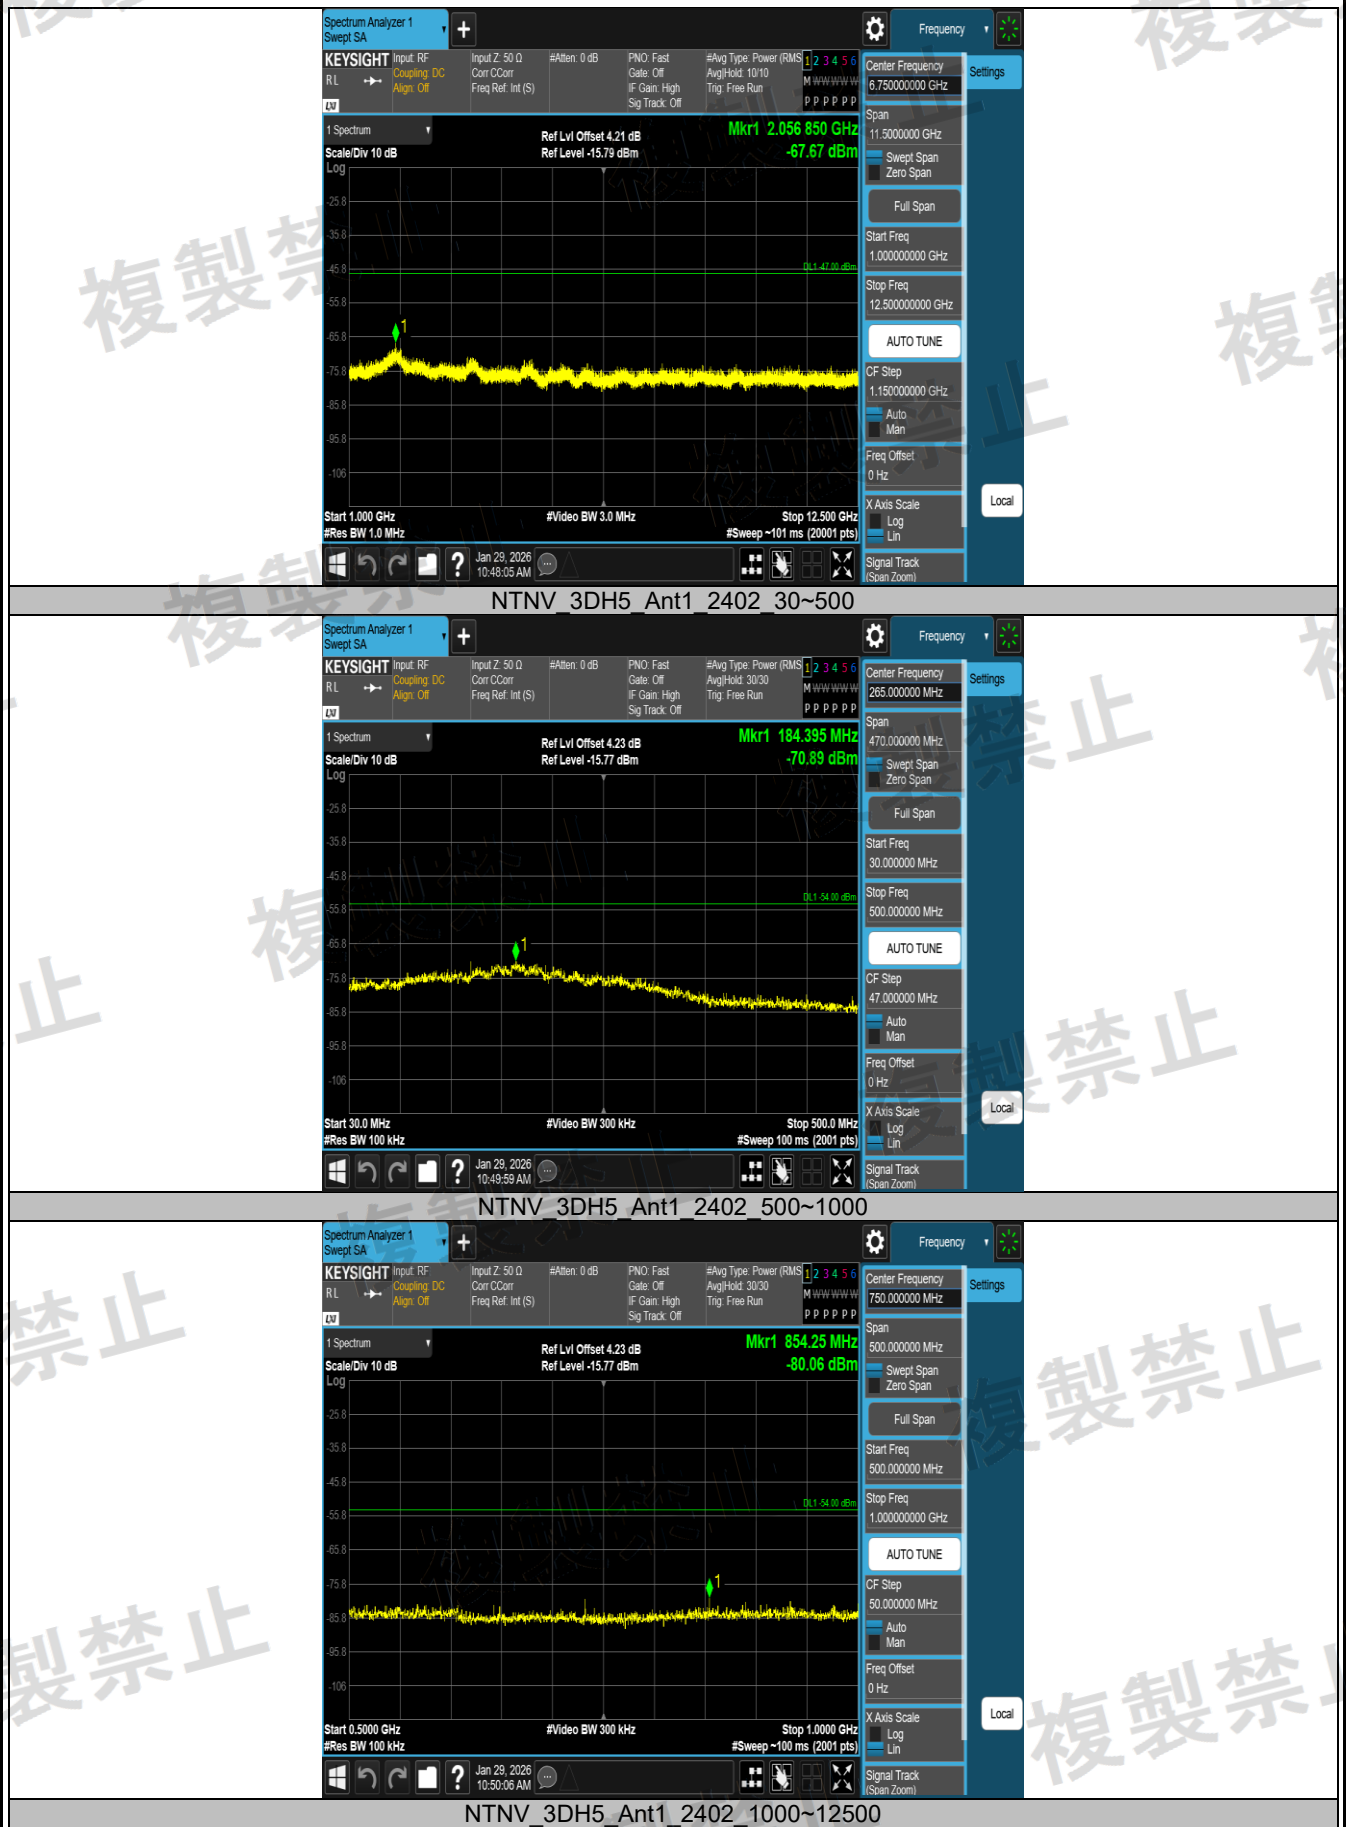


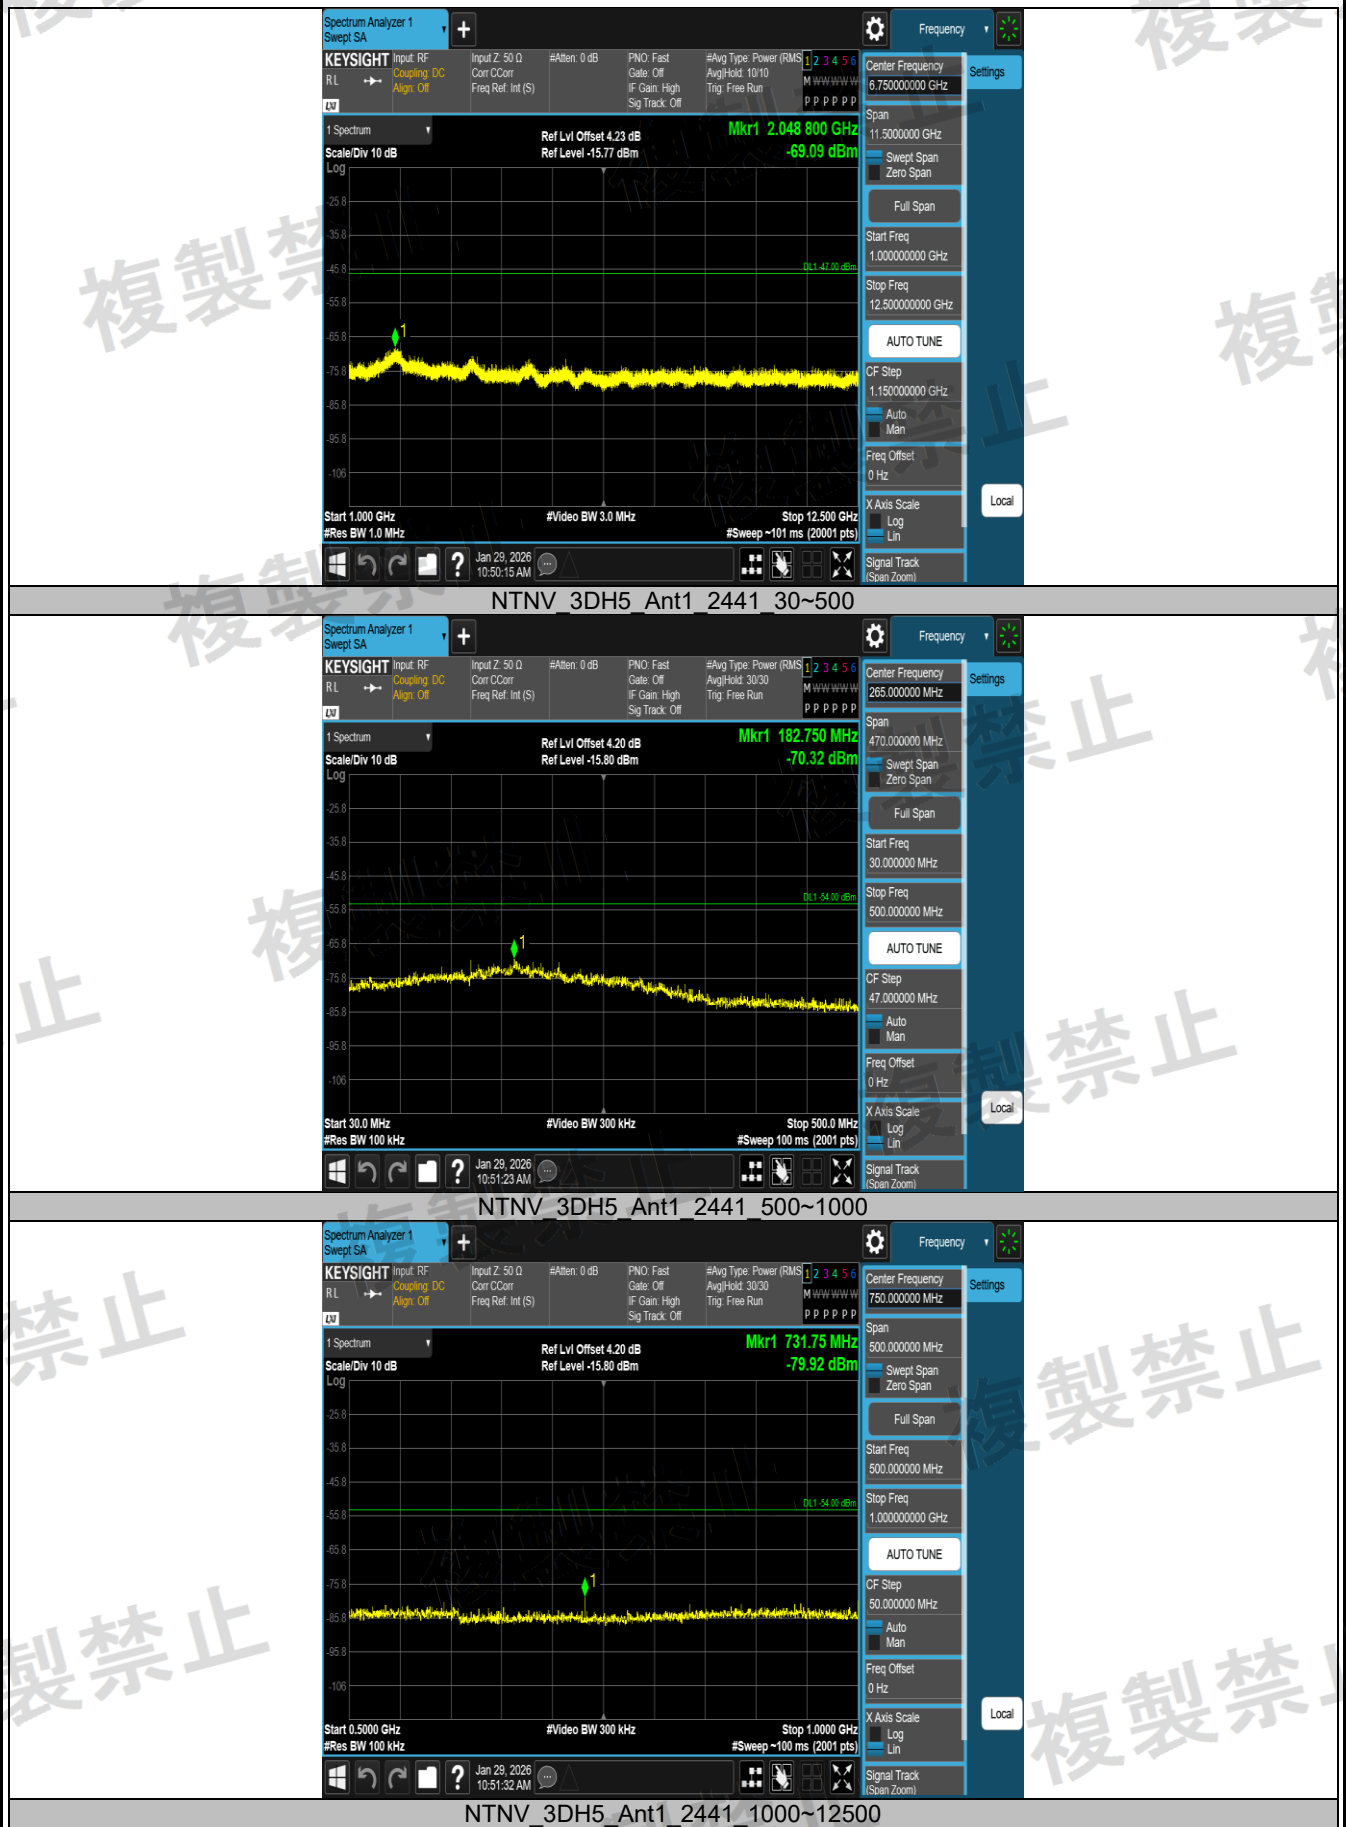




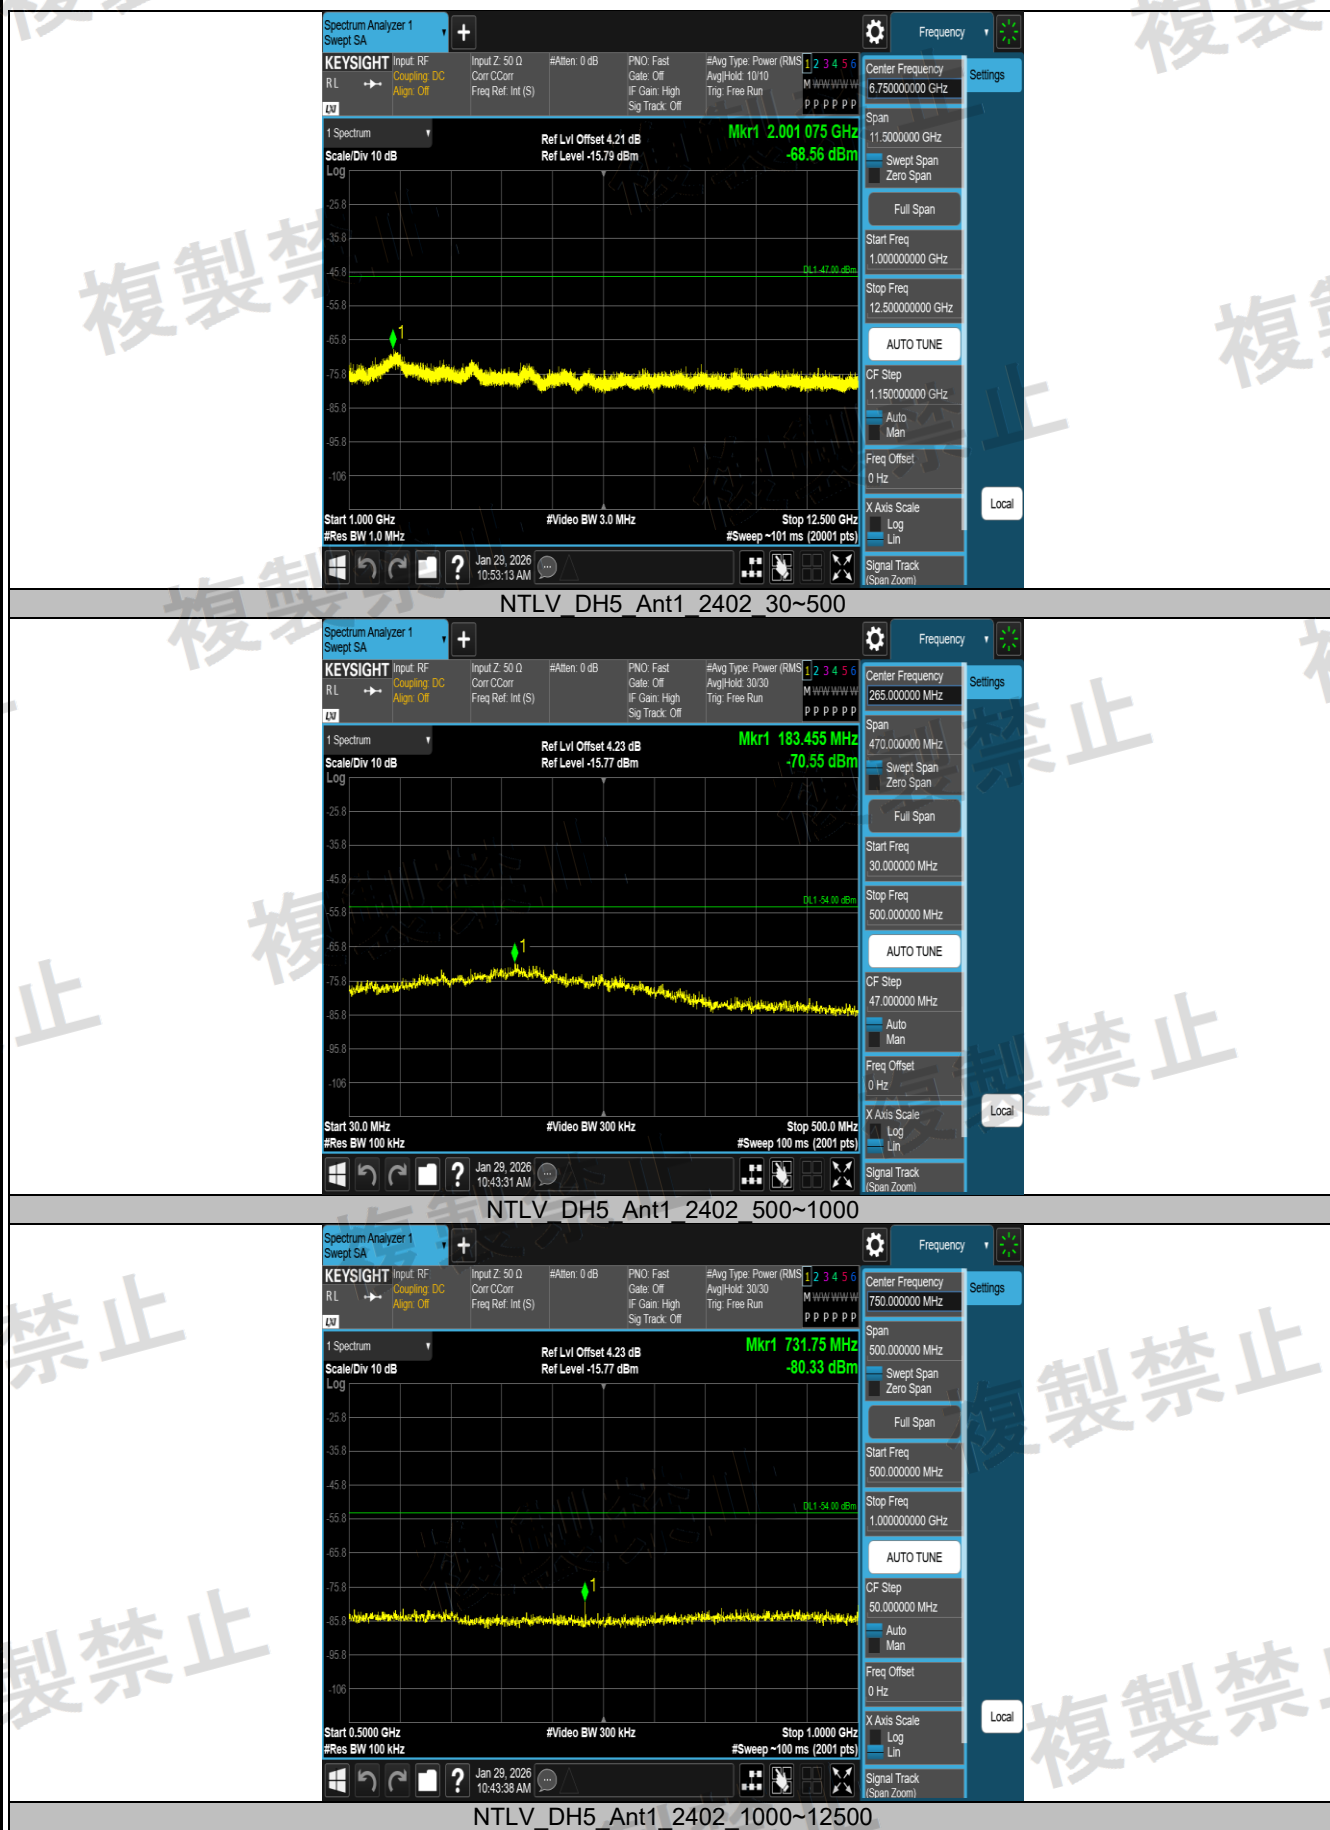

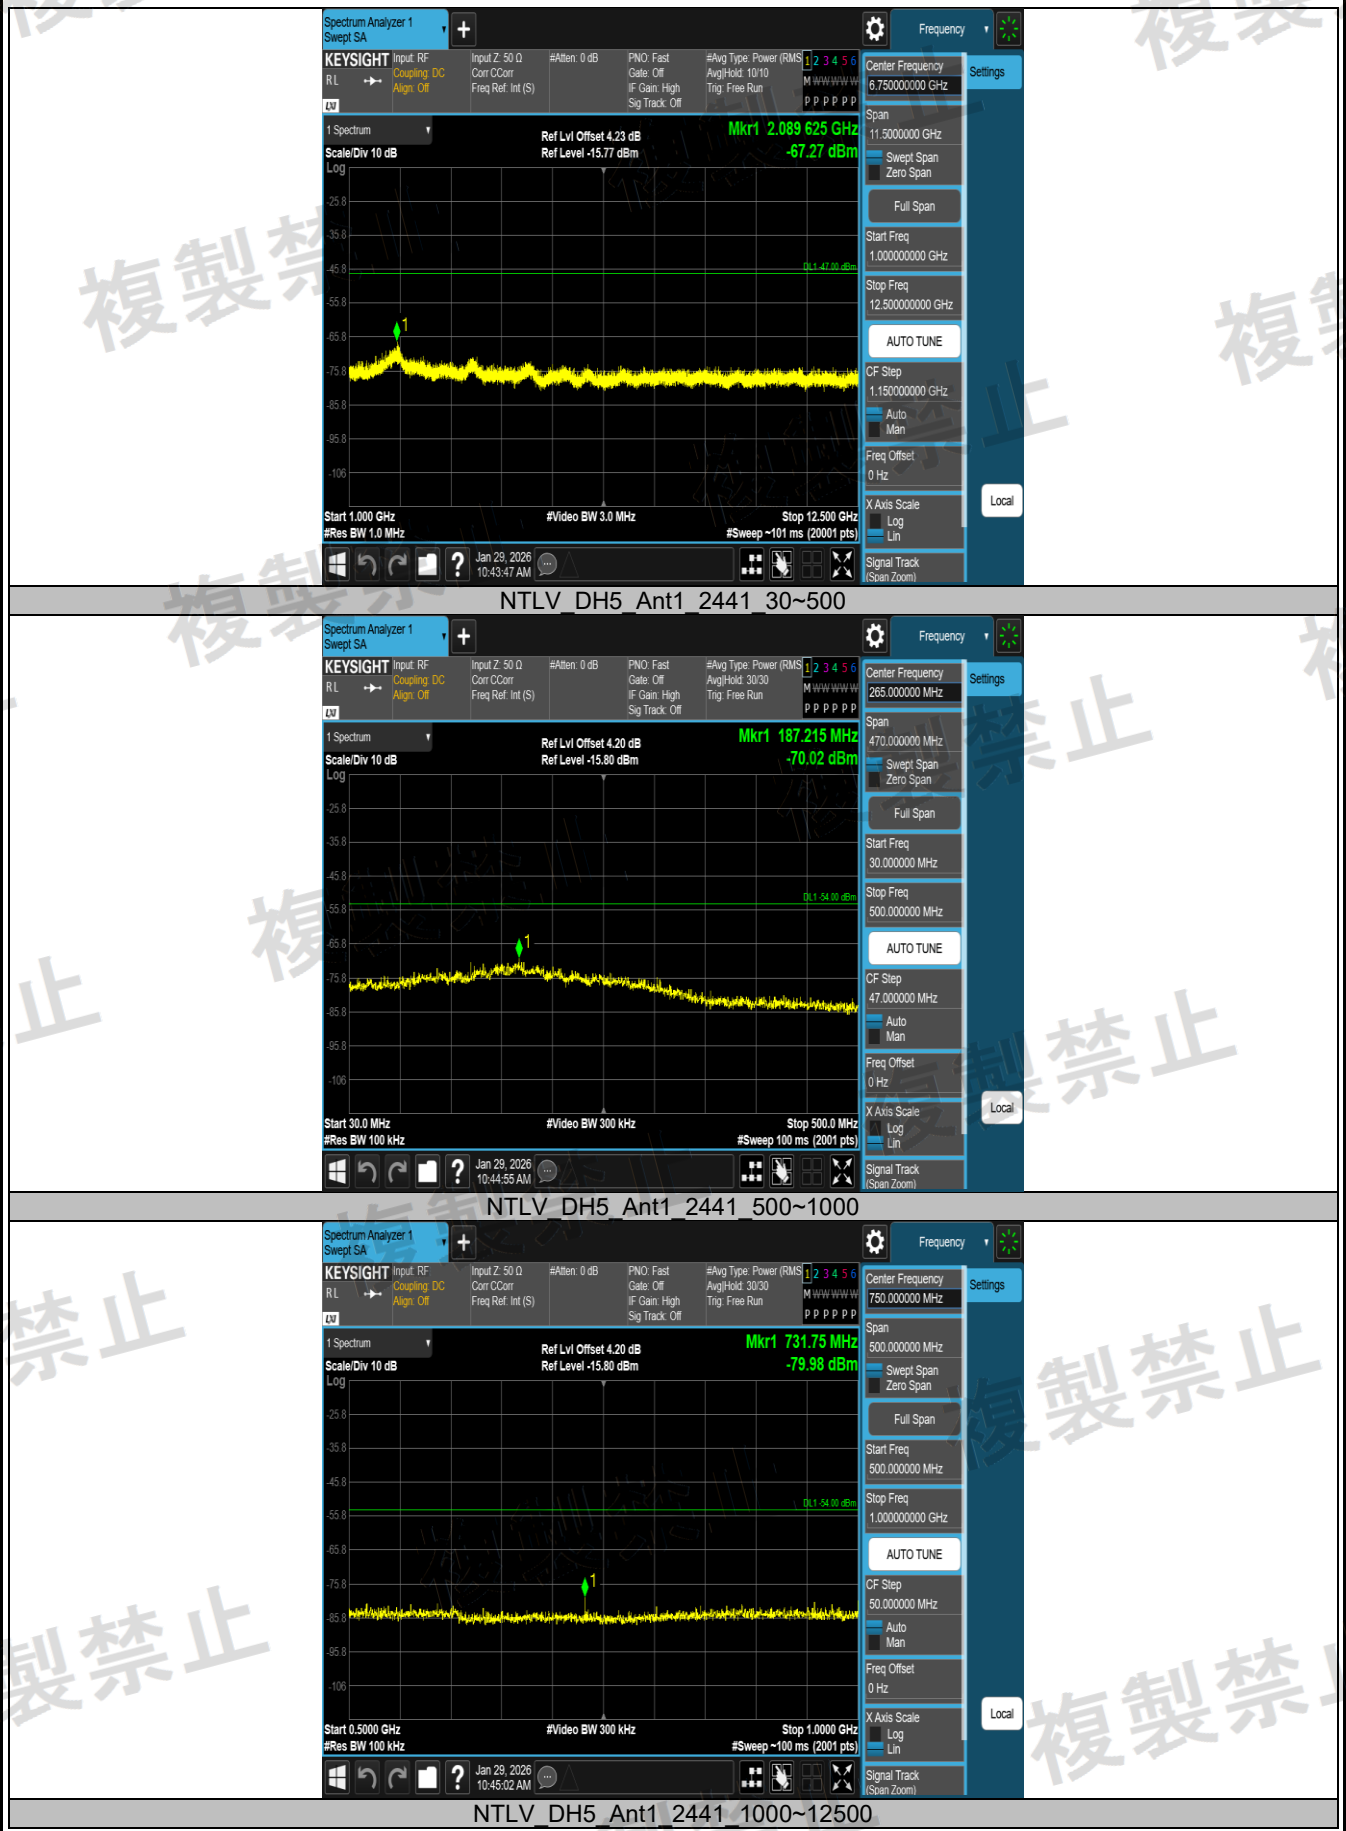

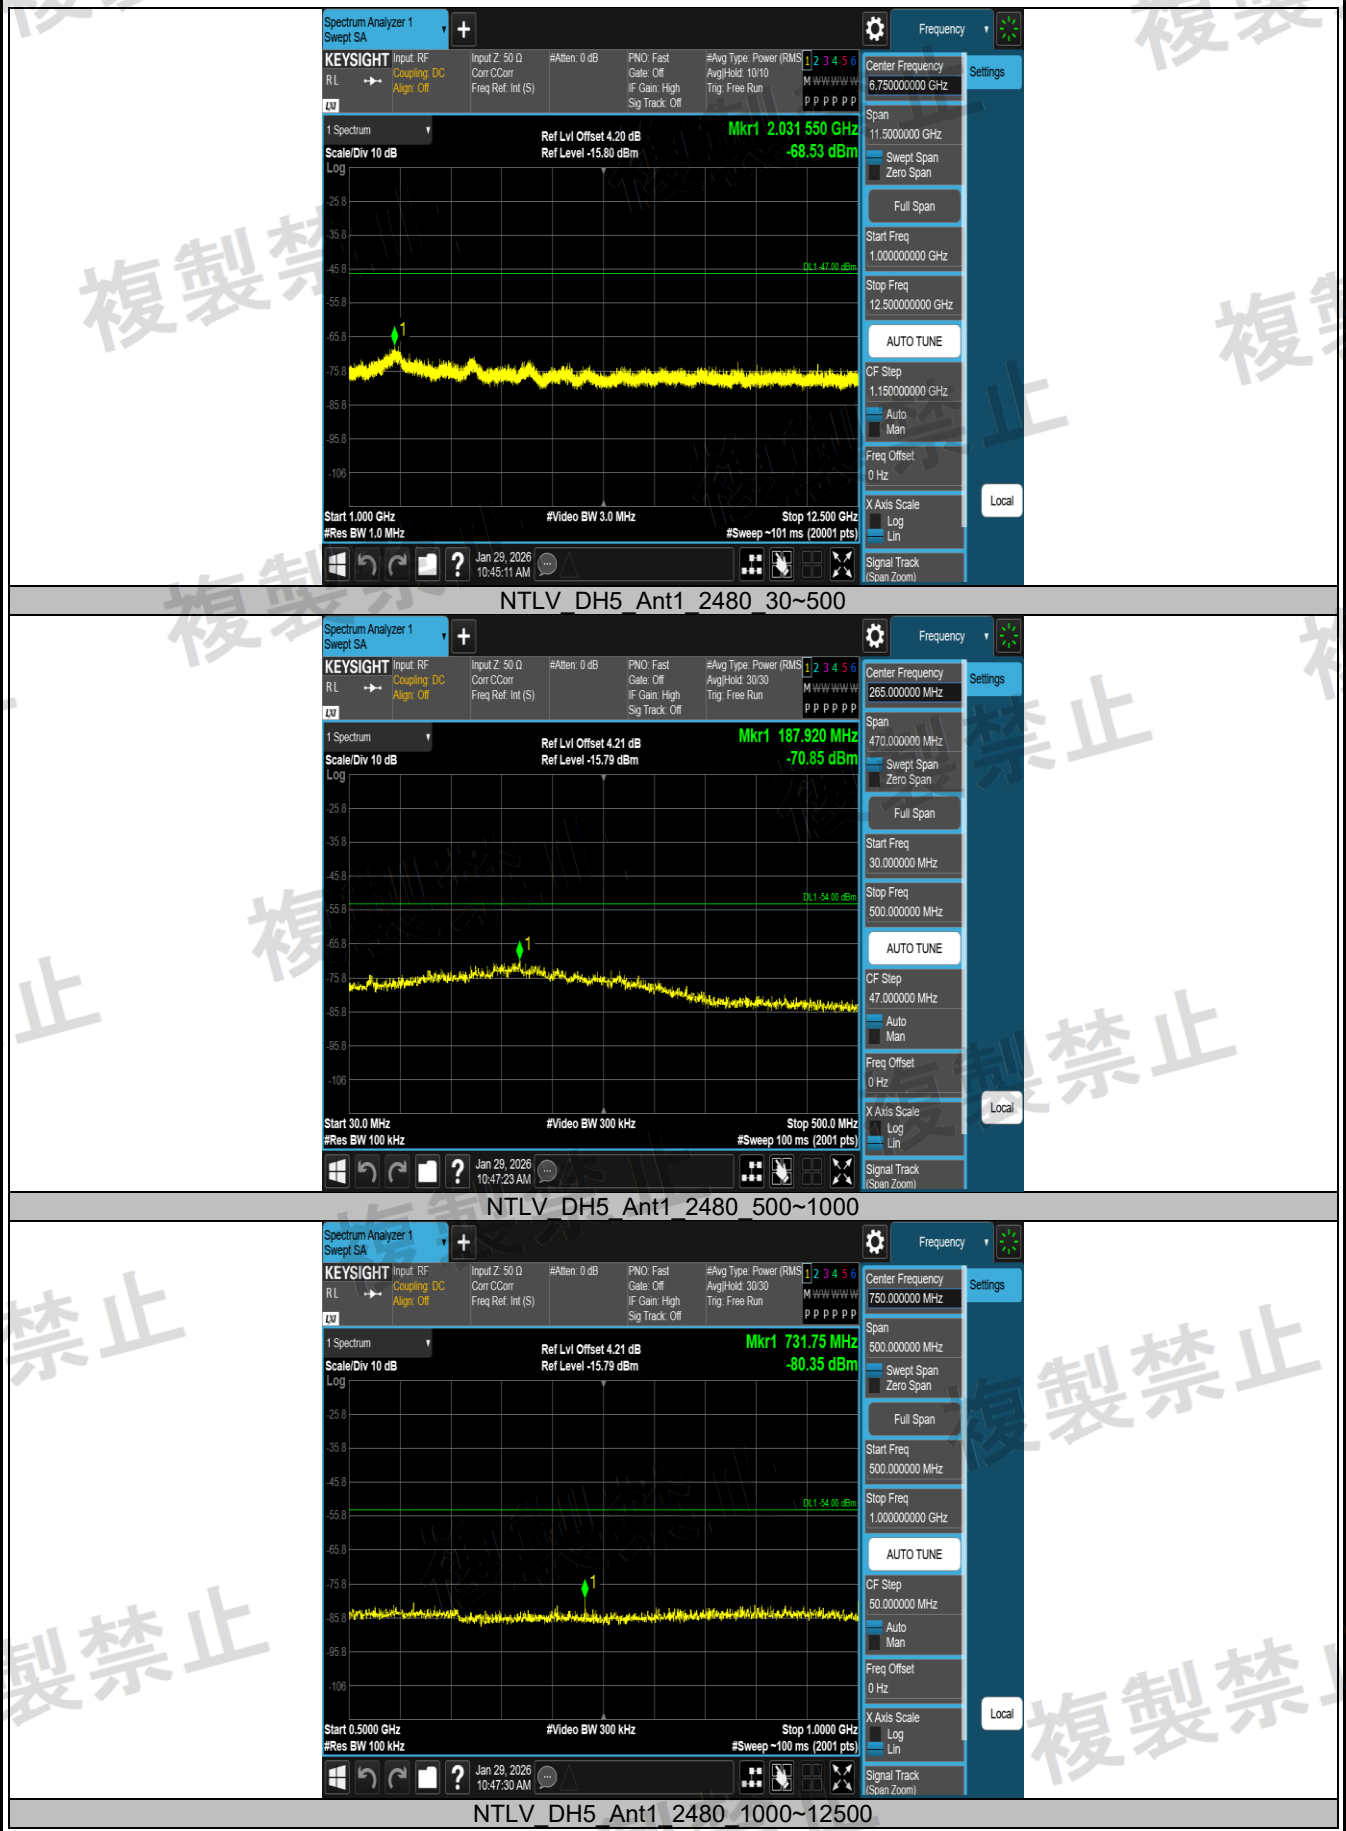

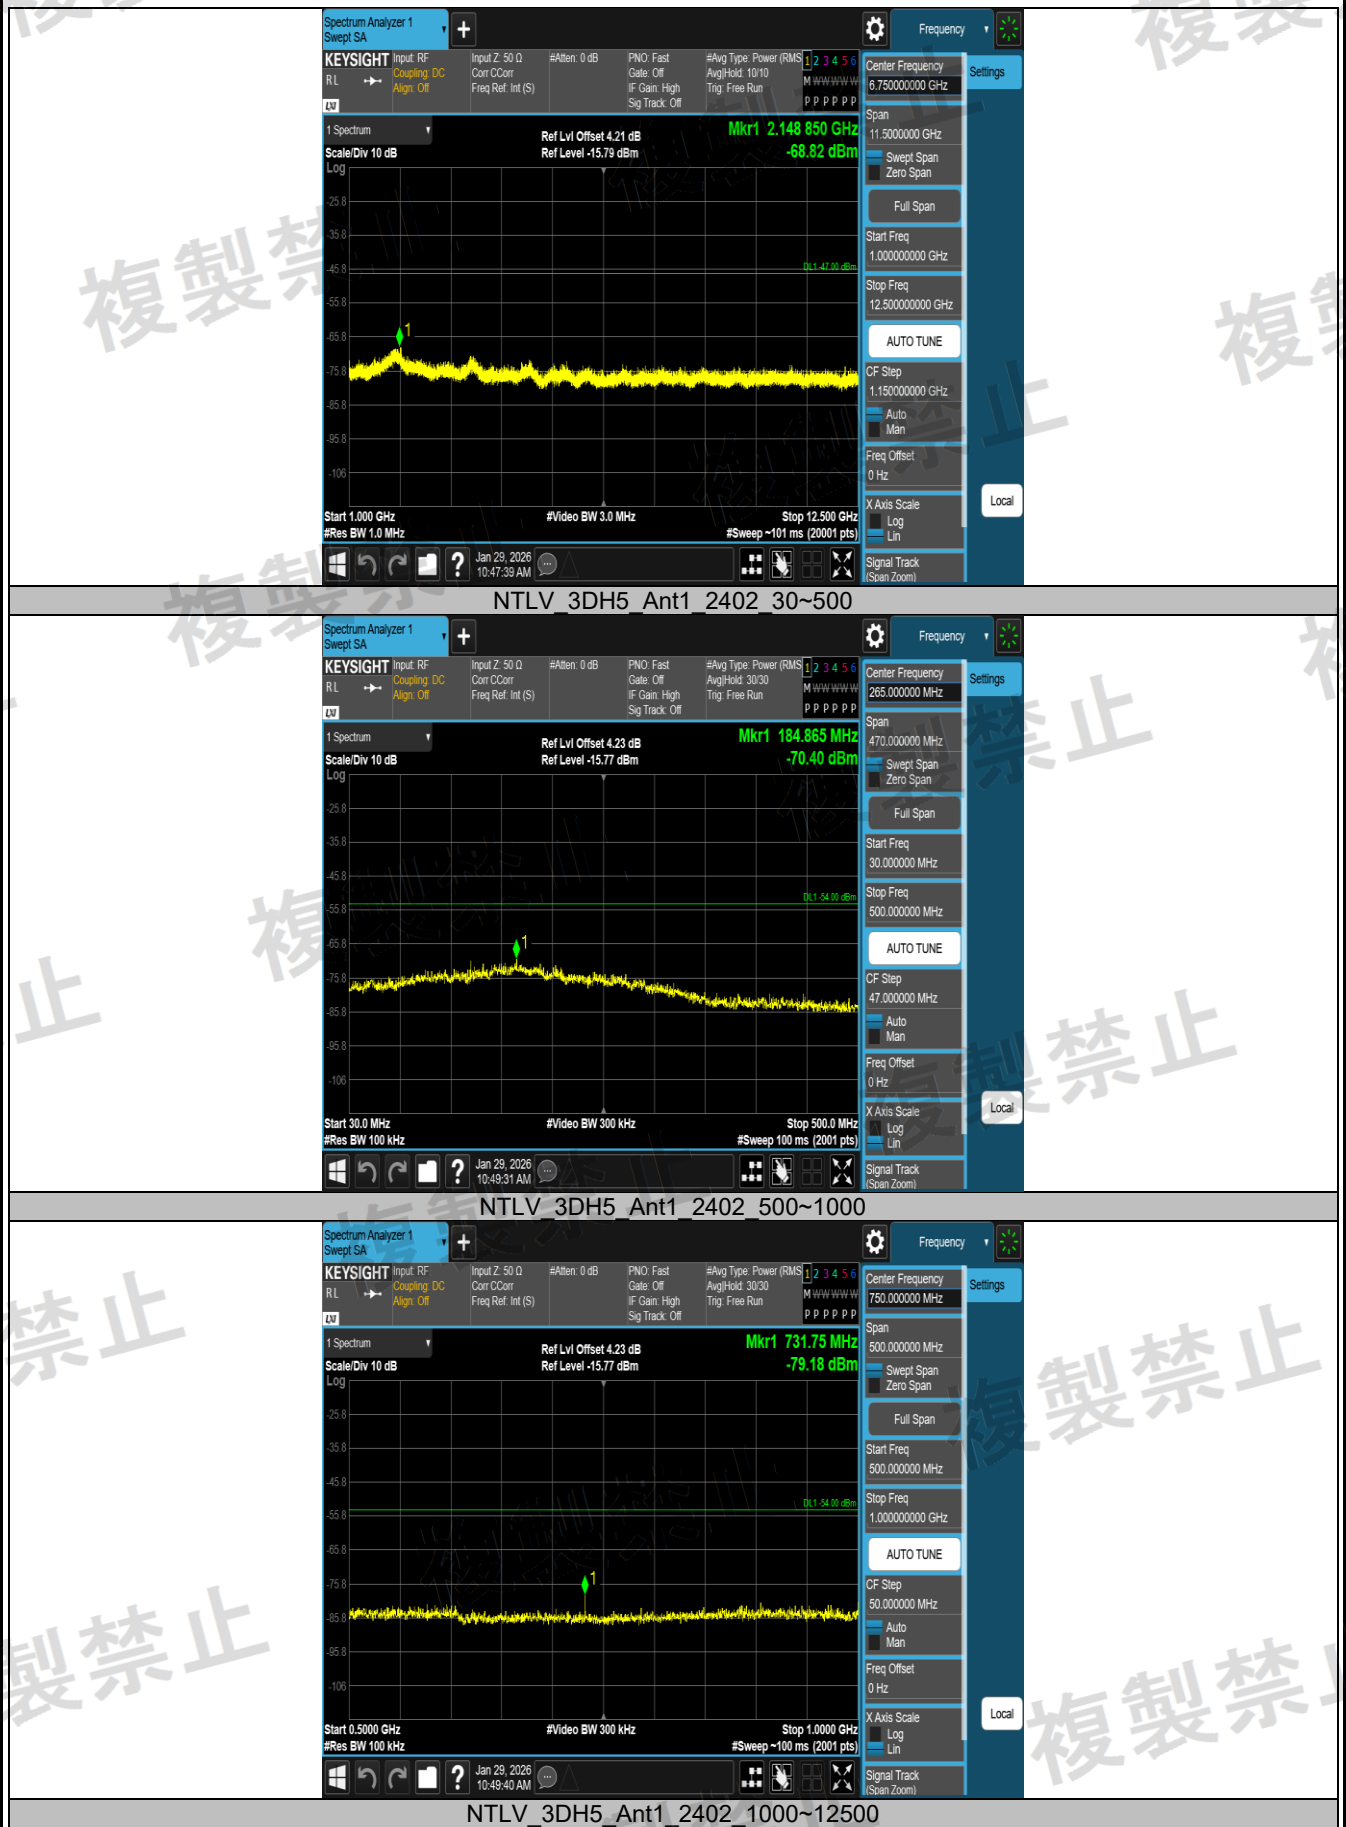













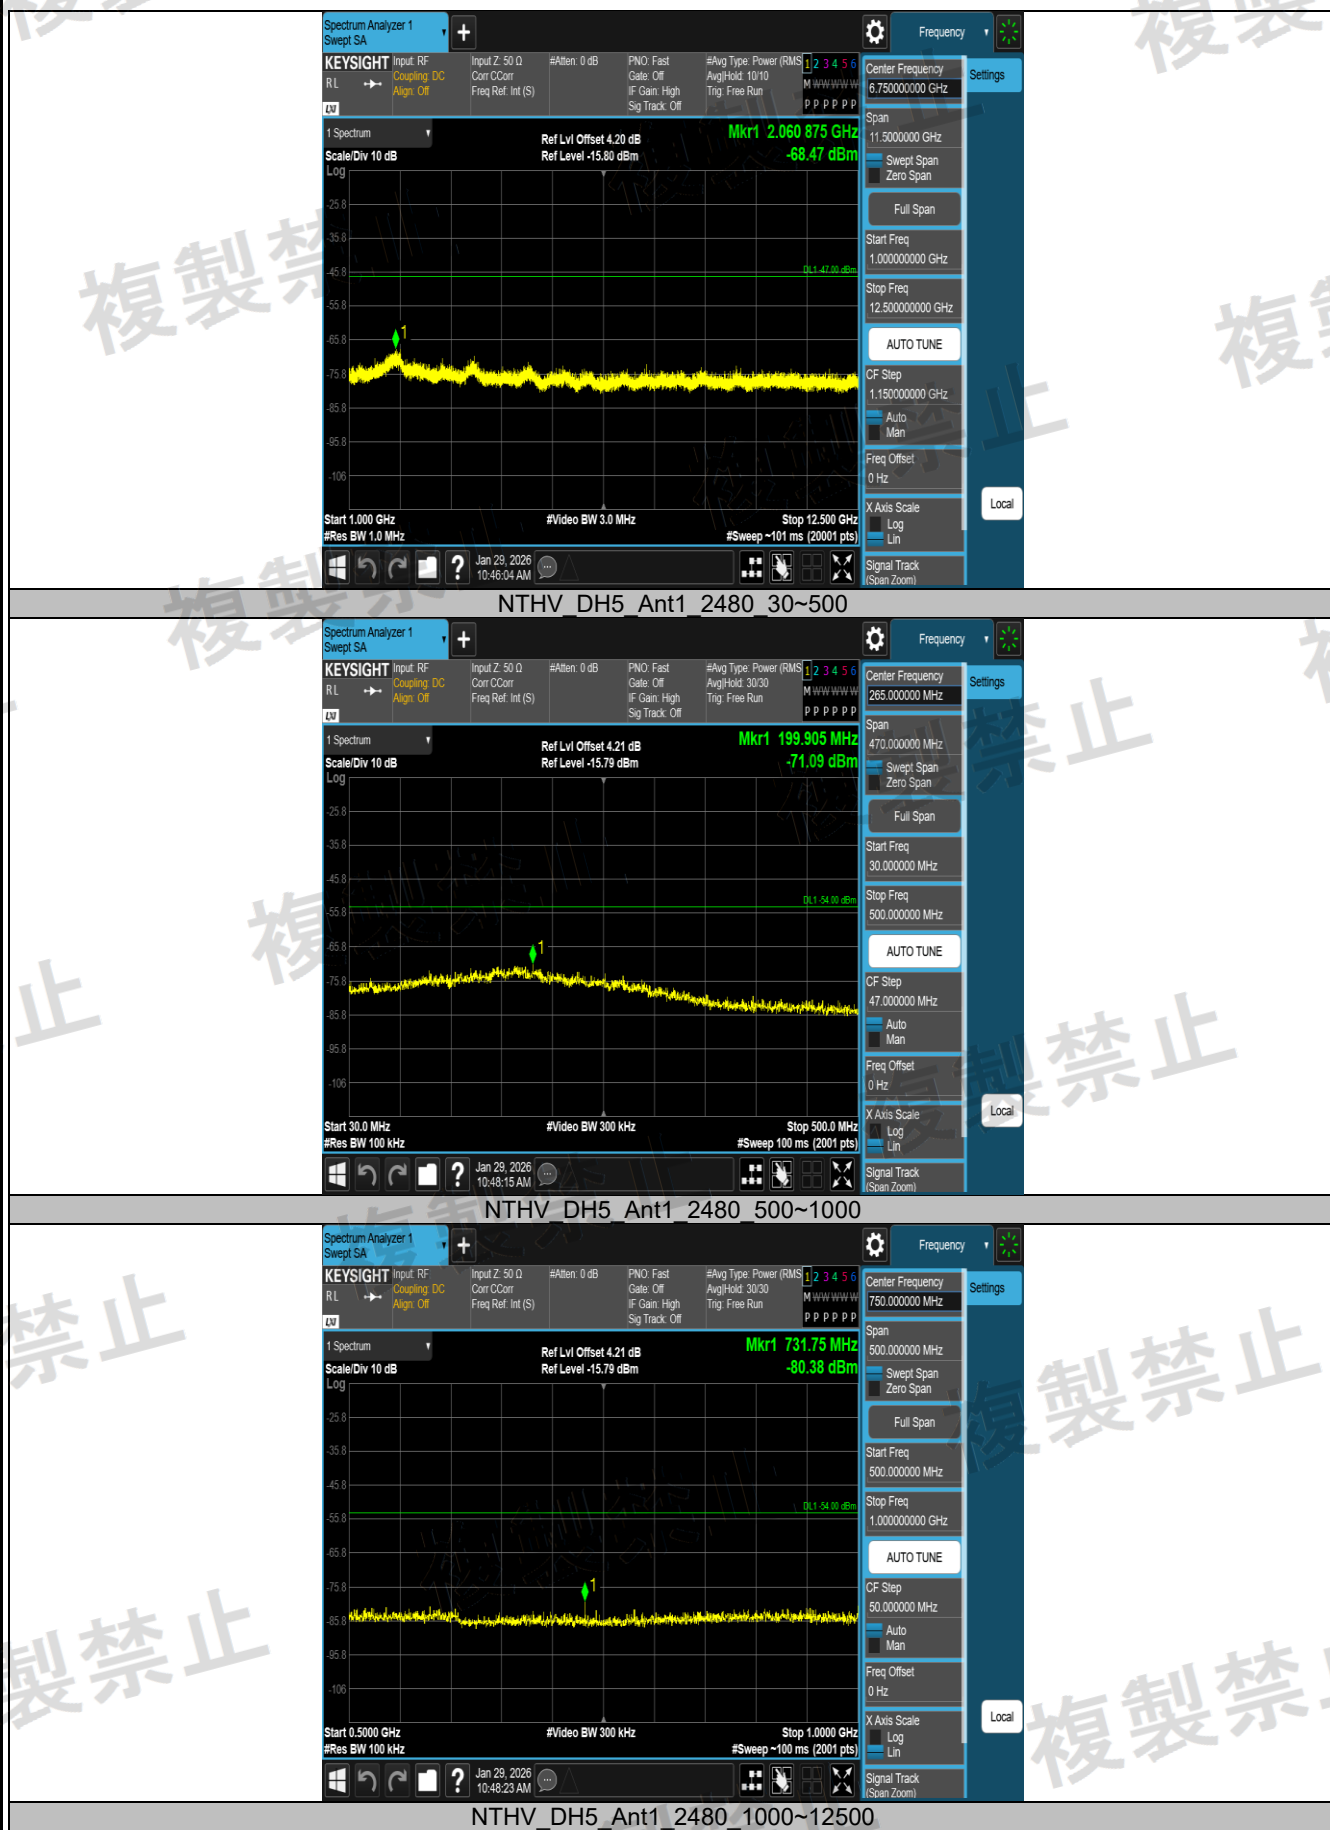



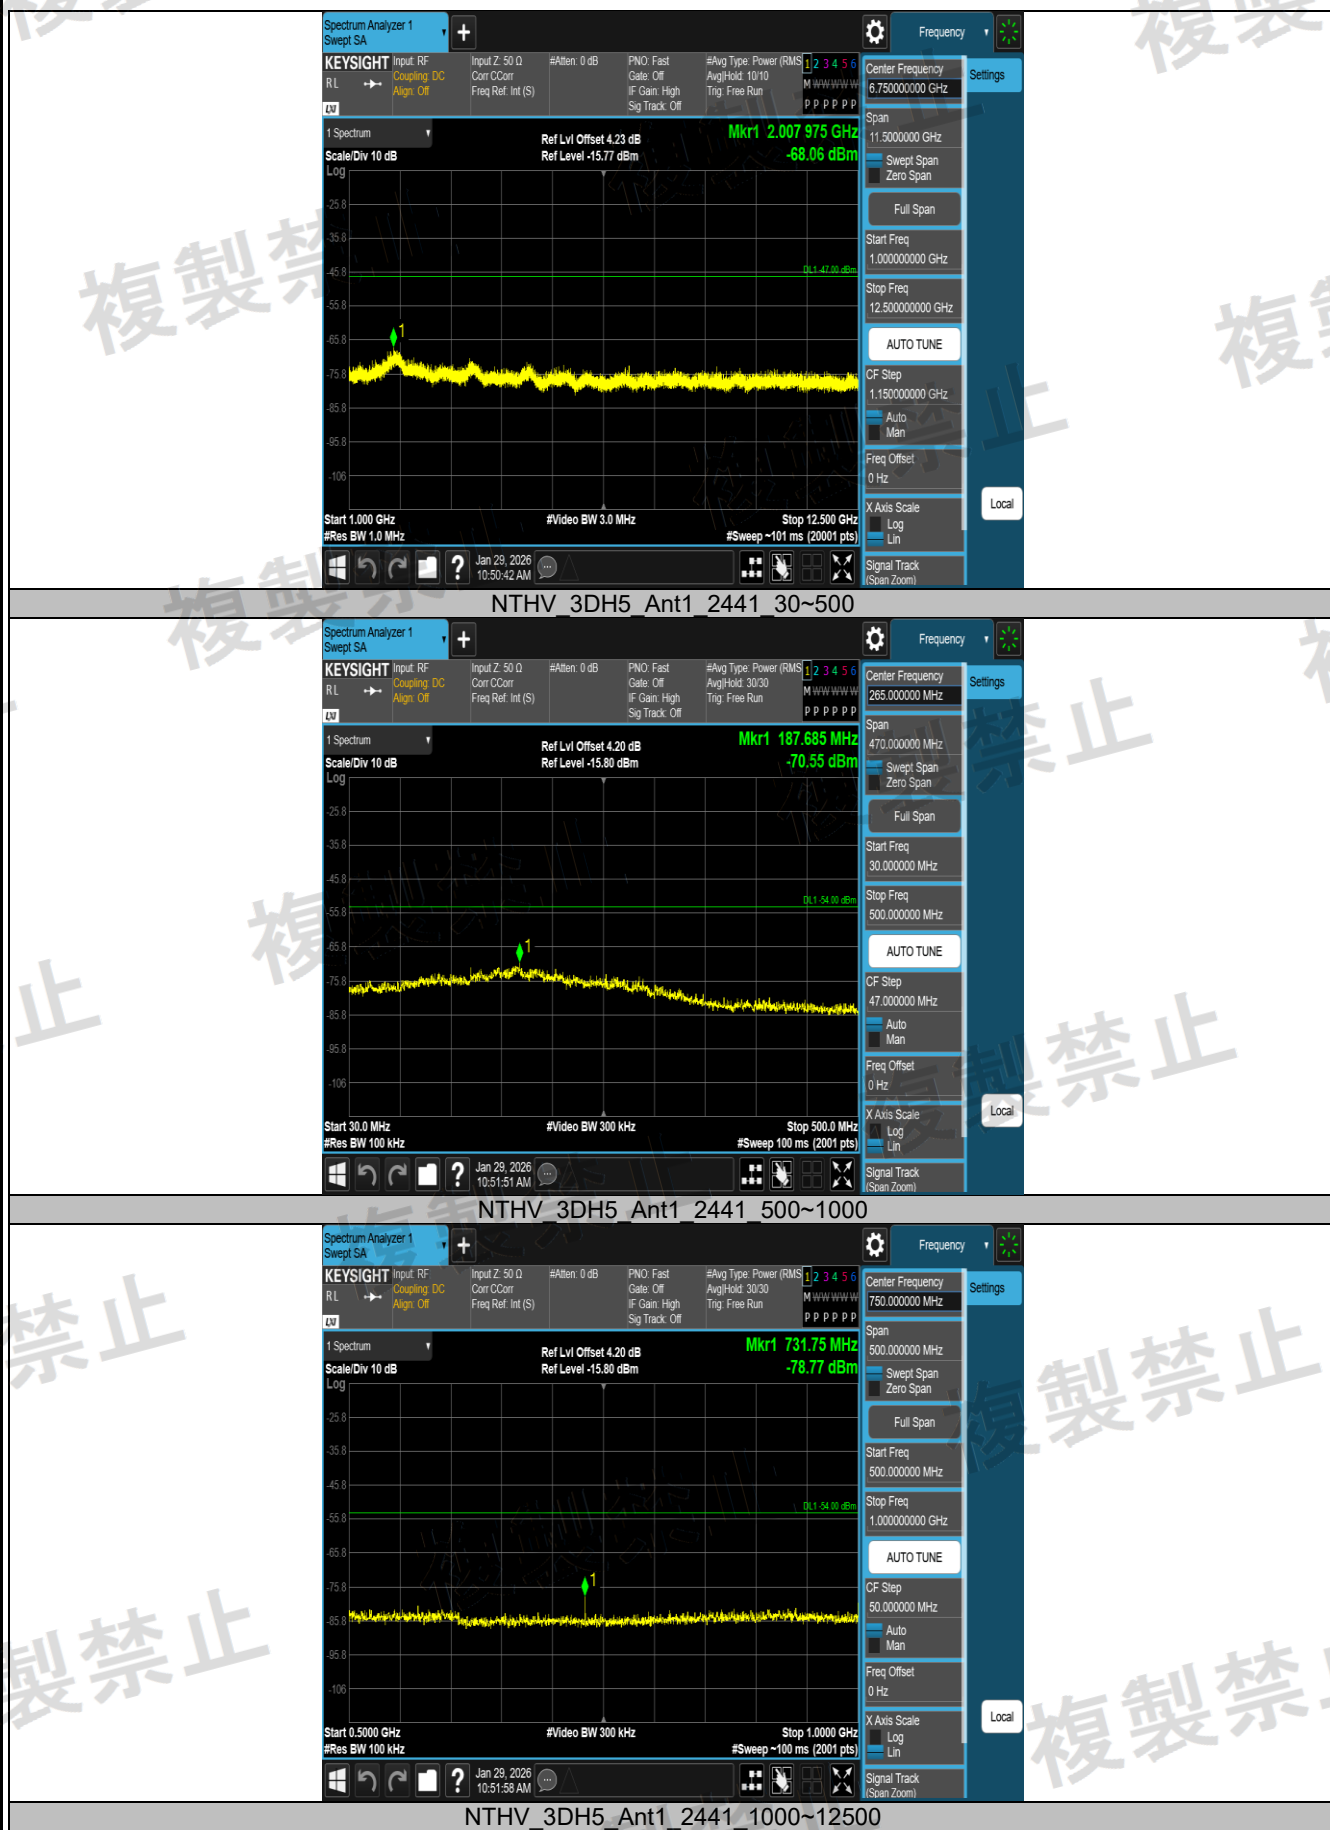

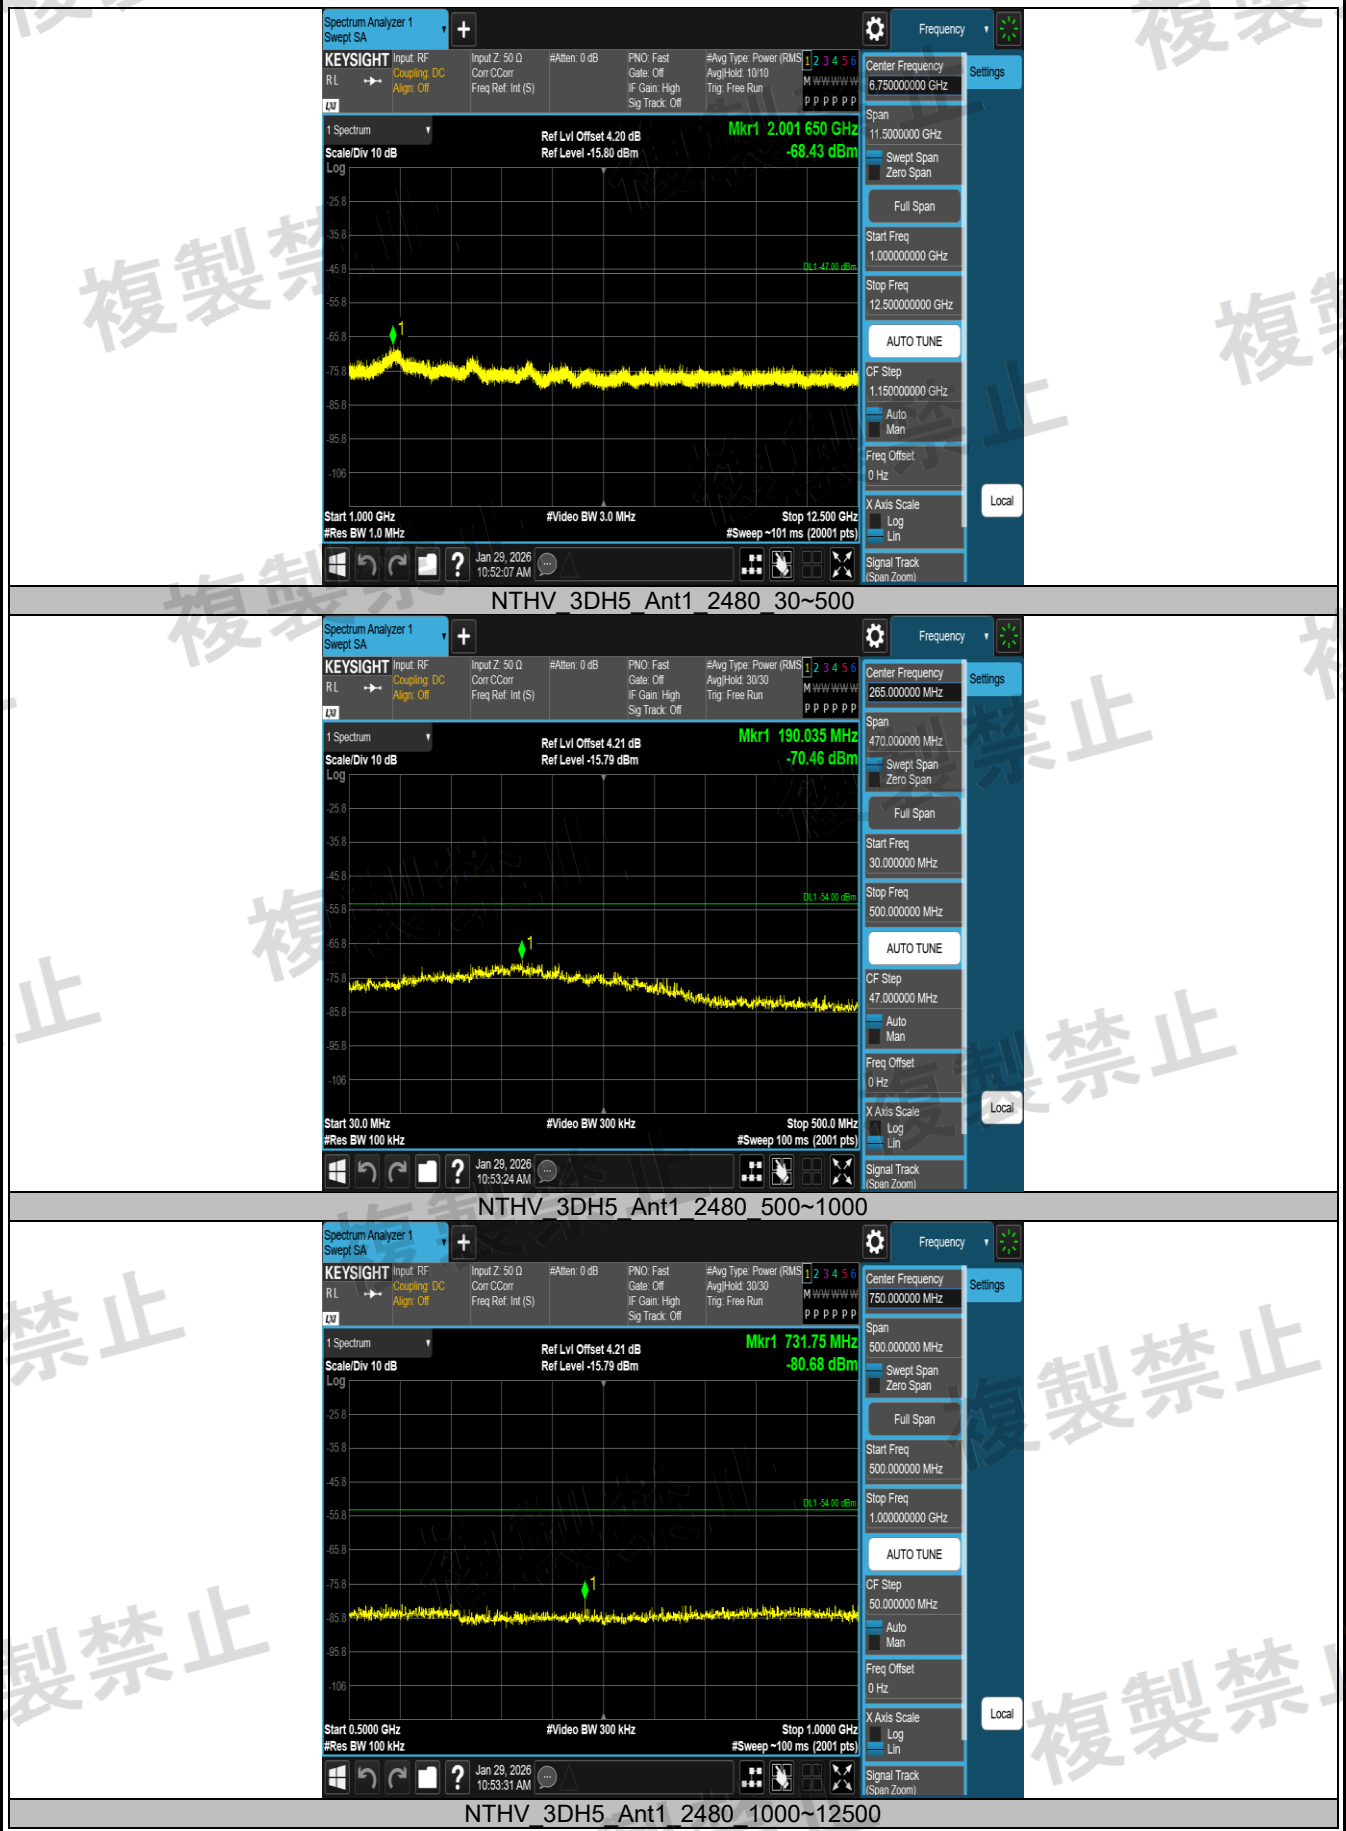

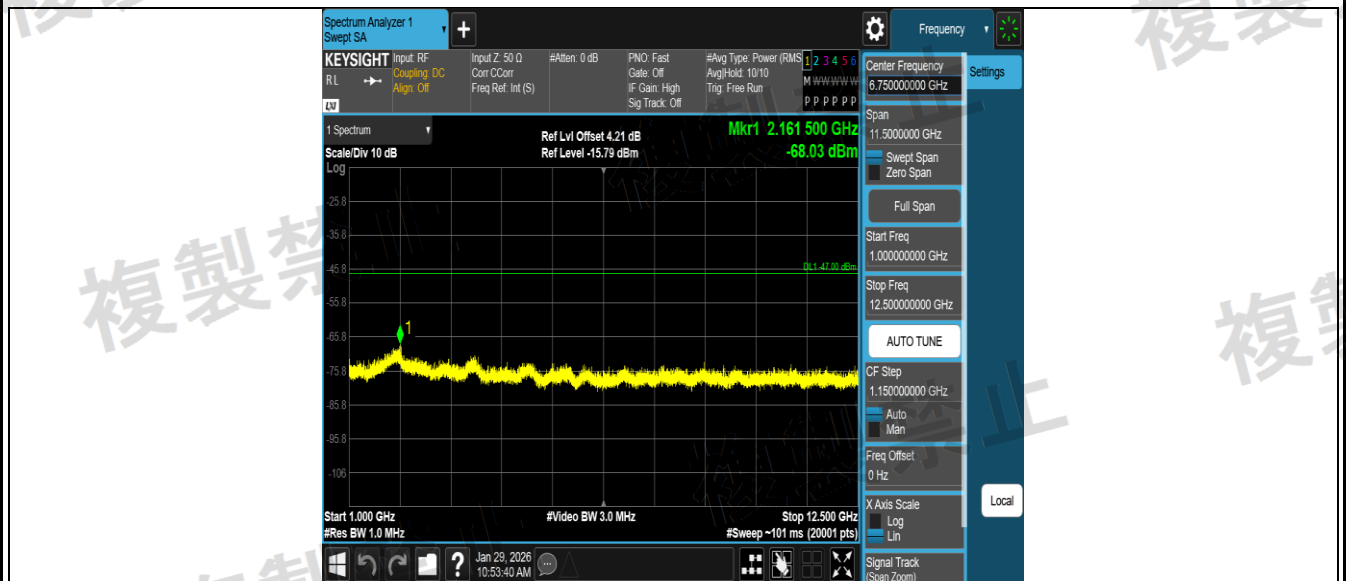

**Appendix A.7: Test Results of Max. Burst Length / Dwell Time***Test Result*

Test mode	Duty cycle	Spreading Bandwidth (MHz)	Channel numbers	Dwell Time (msec)	Limit (msec)	Verdict
DH5	76.53%	71.798	79	0.278	0.4	PASS
3DH5	76.53%	71.723	79	0.278	0.4	PASS