

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

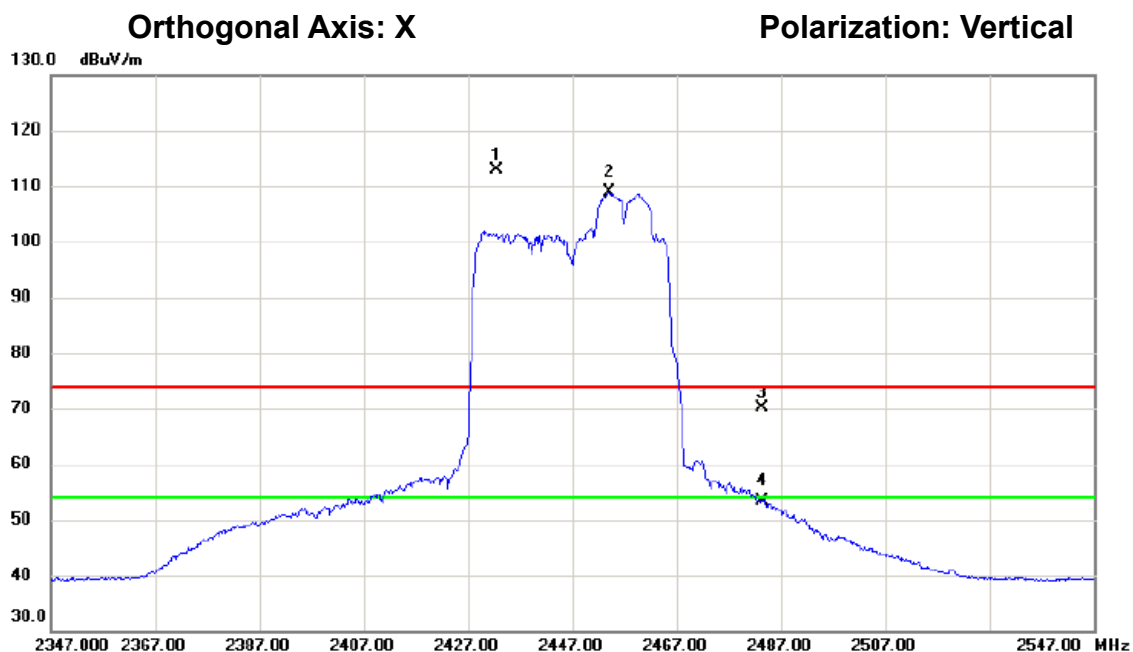

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	2432.500	119.95	-7.06	112.89	74.00	38.89	peak	主波訊號不予判定
2	*	2454.200	115.93	-6.96	108.97	54.00	54.97	AVG	主波訊號不予判定
3		2483.500	77.04	-6.85	70.19	74.00	-3.81	peak	
4		2483.500	60.27	-6.85	53.42	54.00	-0.58	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

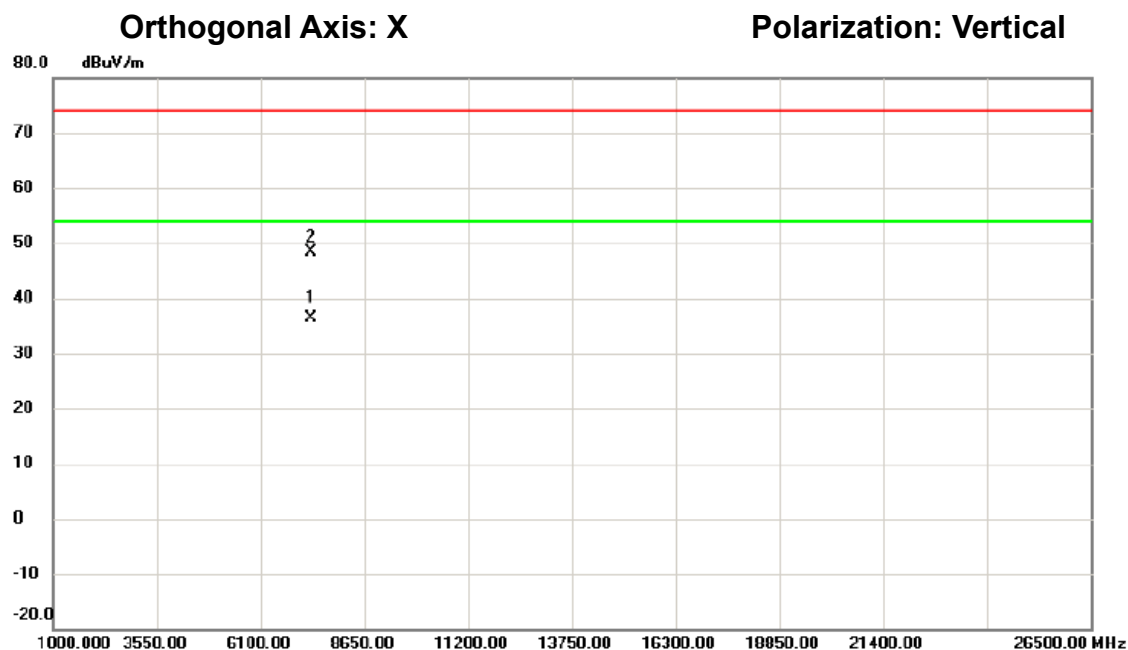

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7339.330	41.16	-4.90	36.26	54.00	-17.74	AVG	
2		7342.440	53.26	-4.89	48.37	74.00	-25.63	peak	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

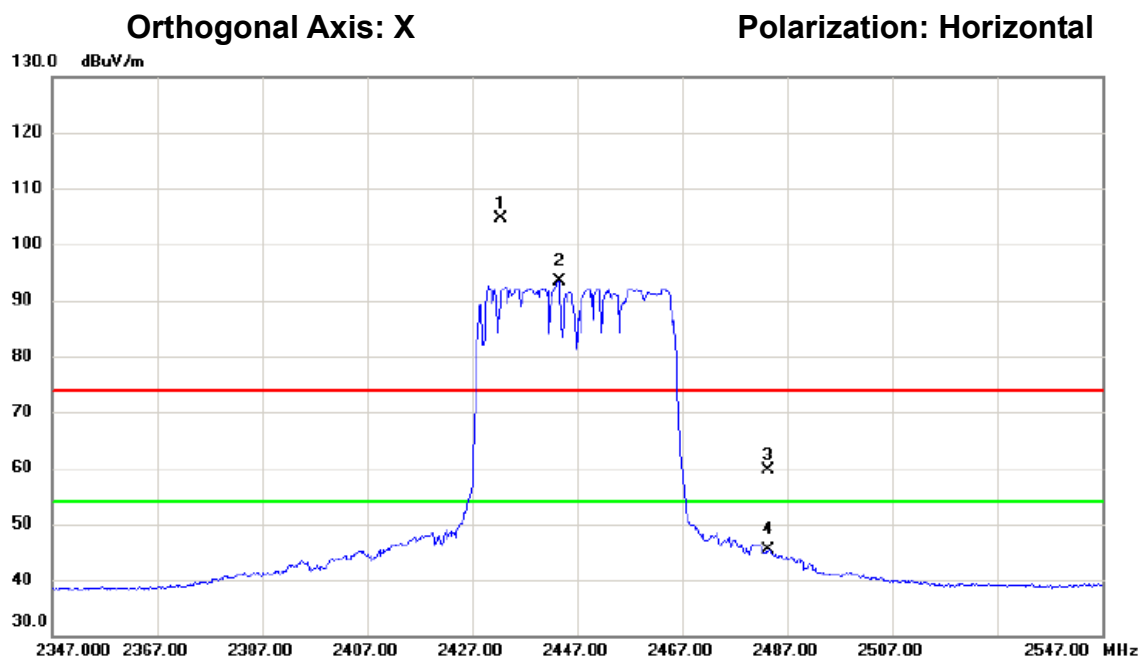

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2432.500	111.79	-7.06	104.73	74.00	30.73	peak	主波訊號不予判定
2	*	2443.600	100.39	-7.01	93.38	54.00	39.38	AVG	主波訊號不予判定
3		2483.500	66.45	-6.85	59.60	74.00	-14.40	peak	
4		2483.500	52.20	-6.85	45.35	54.00	-8.65	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

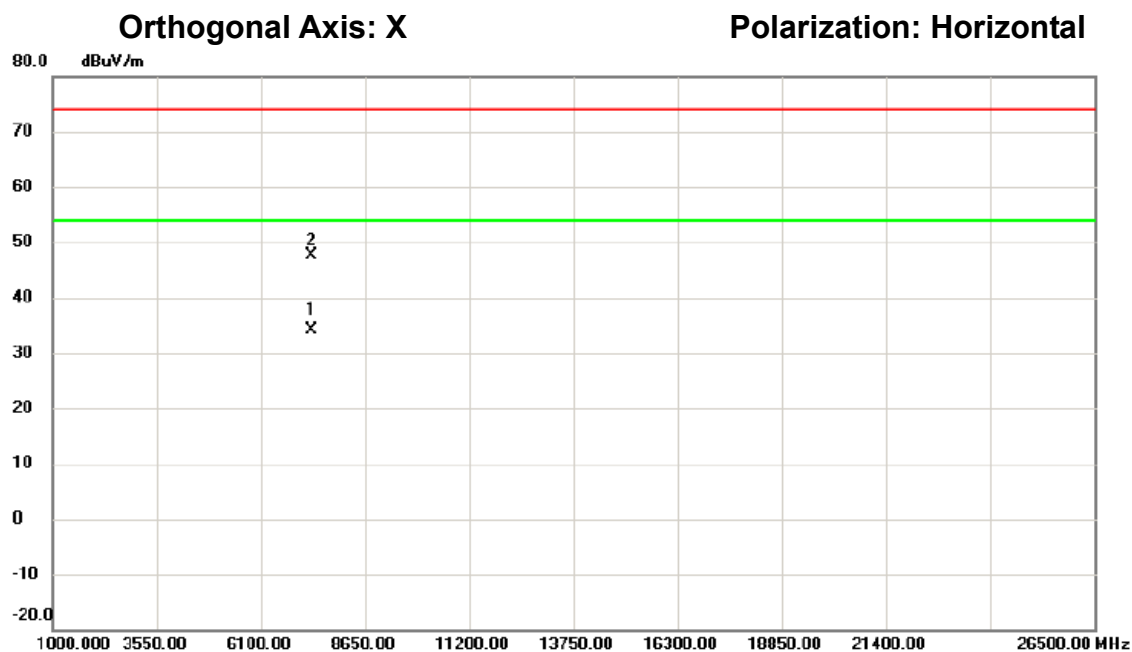

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7340.260	39.12	-4.89	34.23	54.00	-19.77	AVG	
2		7341.850	52.50	-4.89	47.61	74.00	-26.39	peak	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

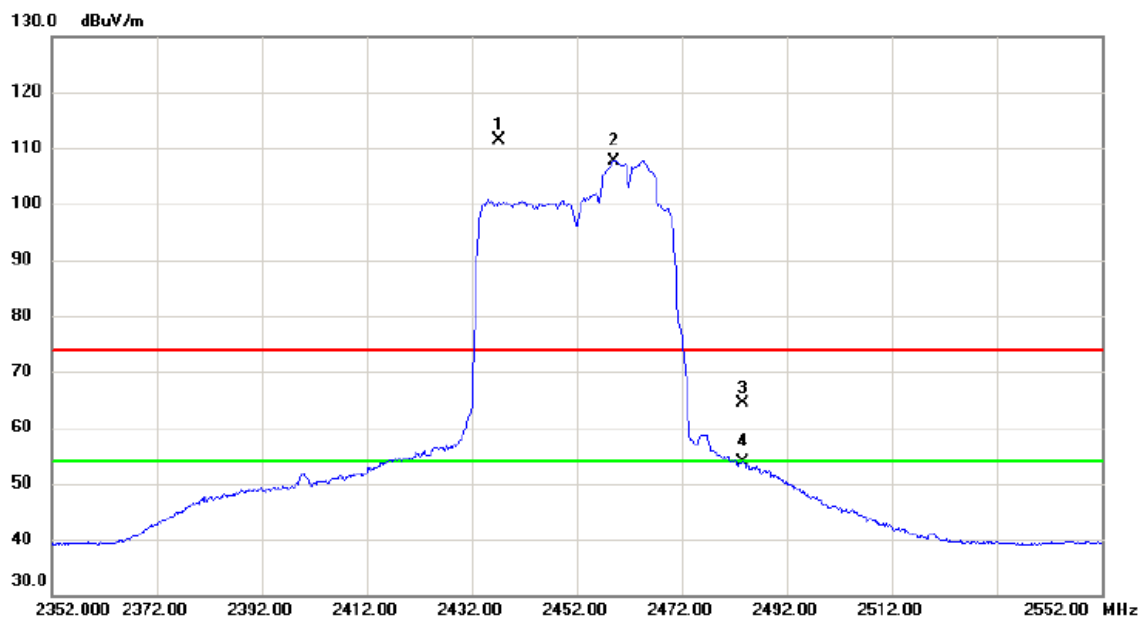

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.200	118.52	-7.04	111.48	74.00	37.48	peak	主波訊號不予判定
2	*	2459.200	114.64	-6.94	107.70	54.00	53.70	AVG	主波訊號不予判定
3		2483.500	71.24	-6.85	64.39	74.00	-9.61	peak	
4		2483.500	60.61	-6.85	53.76	54.00	-0.24	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

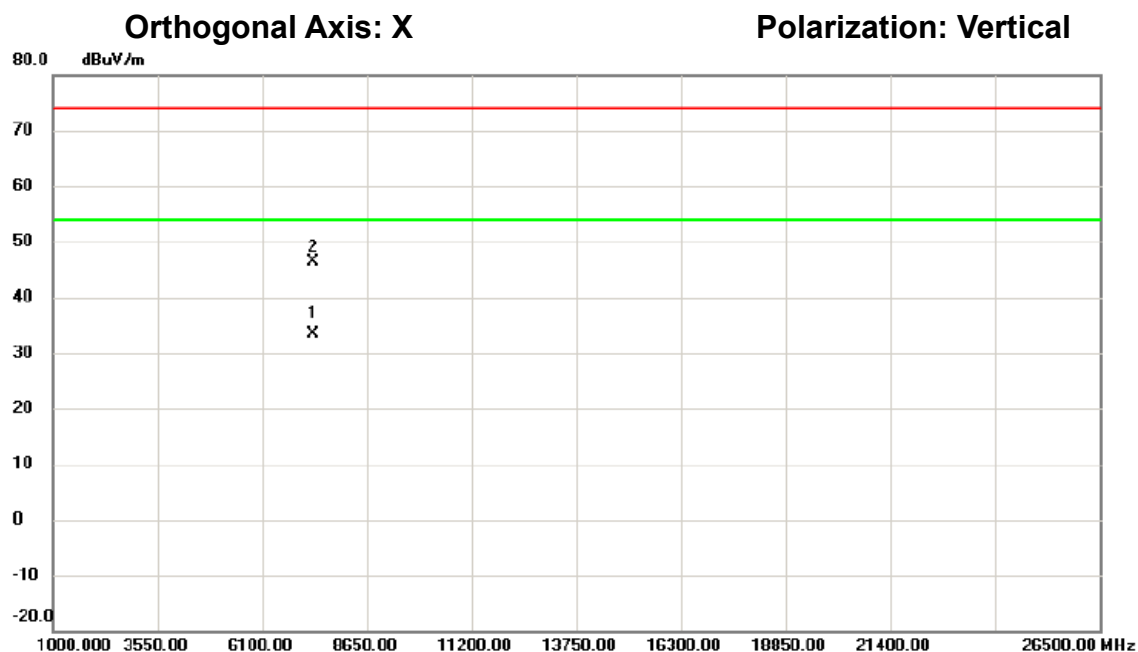

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7356.347	38.13	-4.82	33.31	54.00	-20.69	AVG	
2		7357.462	51.15	-4.82	46.33	74.00	-27.67	peak	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

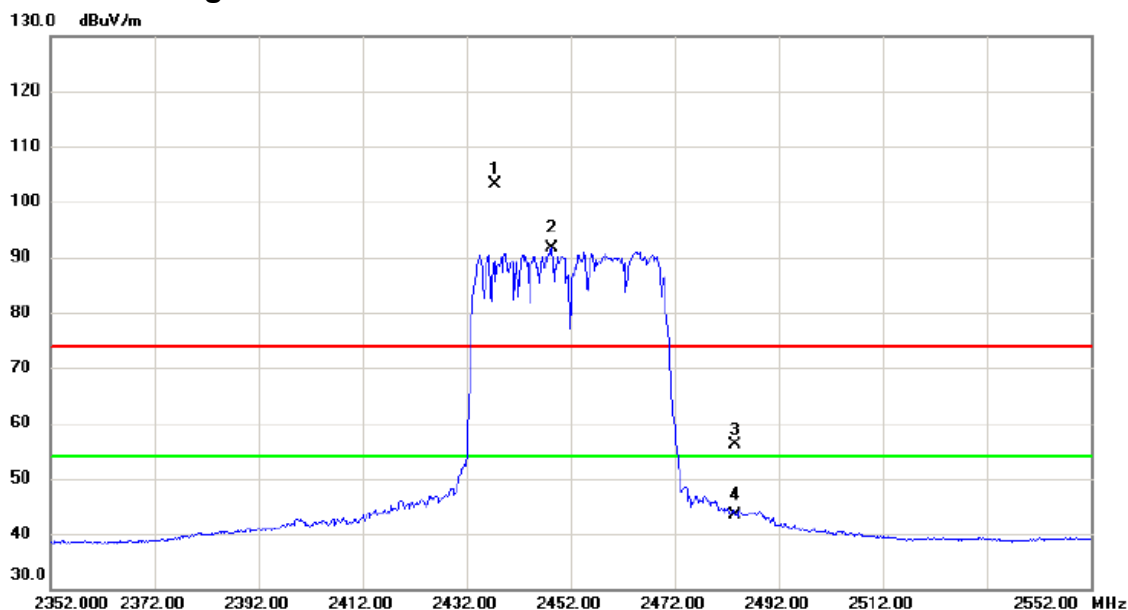

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.500	110.21	-7.03	103.18	74.00	29.18	peak	主波訊號不予判定
2	*	2448.500	98.57	-6.99	91.58	54.00	37.58	AVG	主波訊號不予判定
3		2483.500	63.05	-6.85	56.20	74.00	-17.80	peak	
4		2483.500	50.30	-6.85	43.45	54.00	-10.55	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

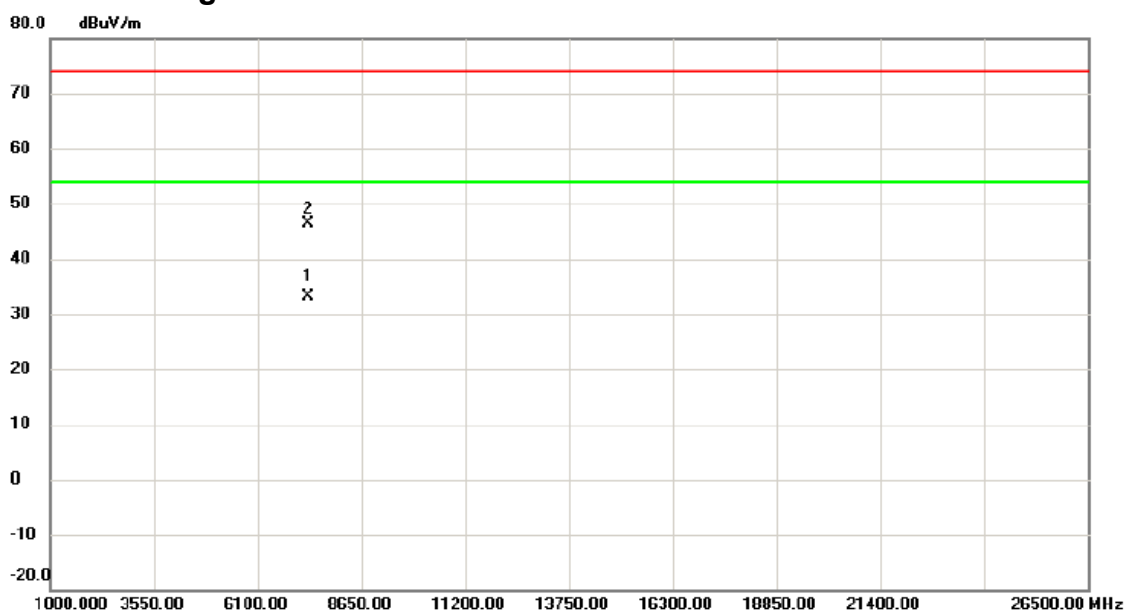


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7354.595	37.97	-4.84	33.13	54.00	-20.87	AVG	
2		7356.208	51.19	-4.84	46.35	74.00	-27.65	peak	

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/07
 環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

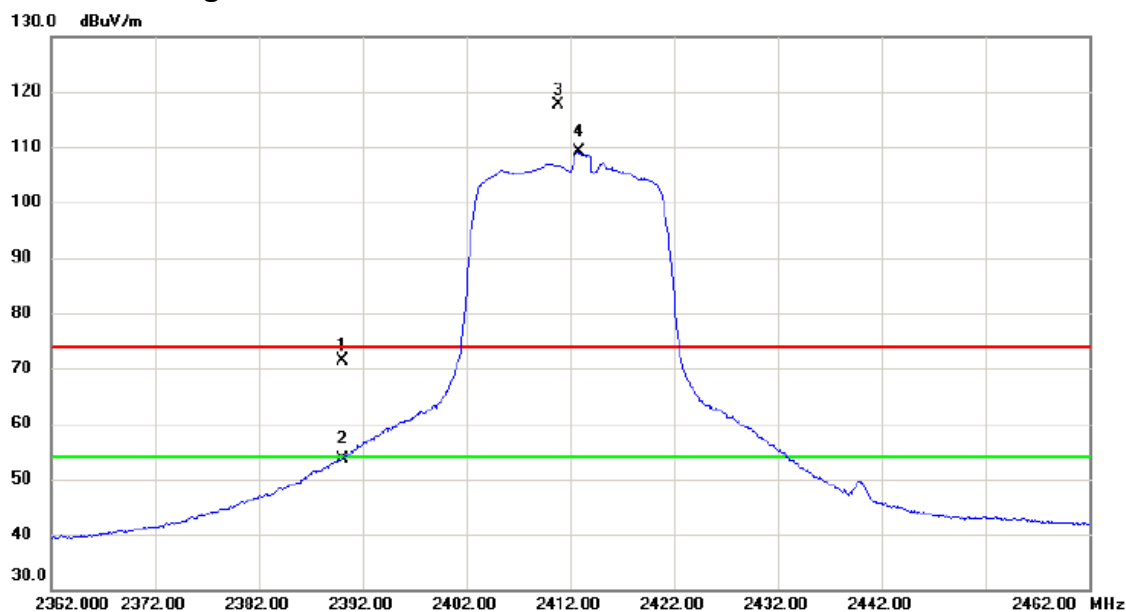

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	78.62	-7.23	71.39	74.00	-2.61	peak	
2		2390.000	60.81	-7.23	53.58	54.00	-0.42	AVG	
3	X	2410.900	124.90	-7.15	117.75	74.00	43.75	peak	主波訊號不予判定
4	*	2412.800	116.22	-7.13	109.09	54.00	55.09	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

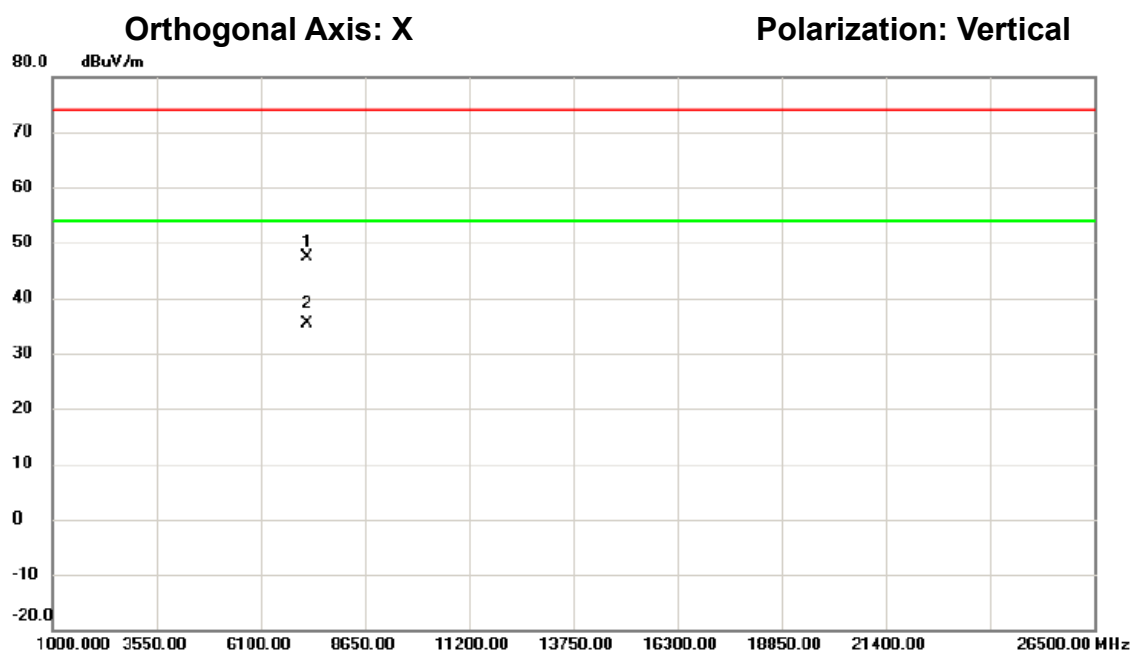

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7235.690	52.54	-5.26	47.28	74.00	-26.72	peak	
2	*	7236.028	40.65	-5.26	35.39	54.00	-18.61	AVG	

測試頻道: IEEE vht20 / 2412 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/07


環境濕度: 66%

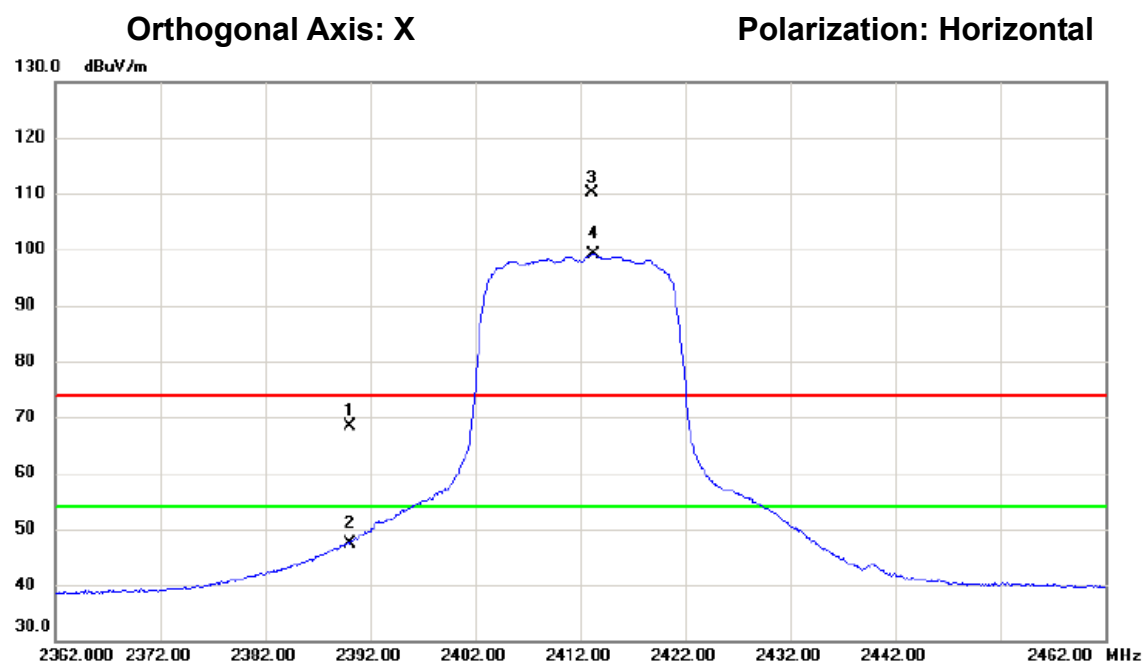

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	75.70	-7.23	68.47	74.00	-5.53	peak	
2		2390.000	54.73	-7.23	47.50	54.00	-6.50	AVG	
3	X	2413.200	117.18	-7.13	110.05	74.00	36.05	peak	主波訊號不予判定
4	*	2413.300	106.30	-7.13	99.17	54.00	45.17	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2412 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

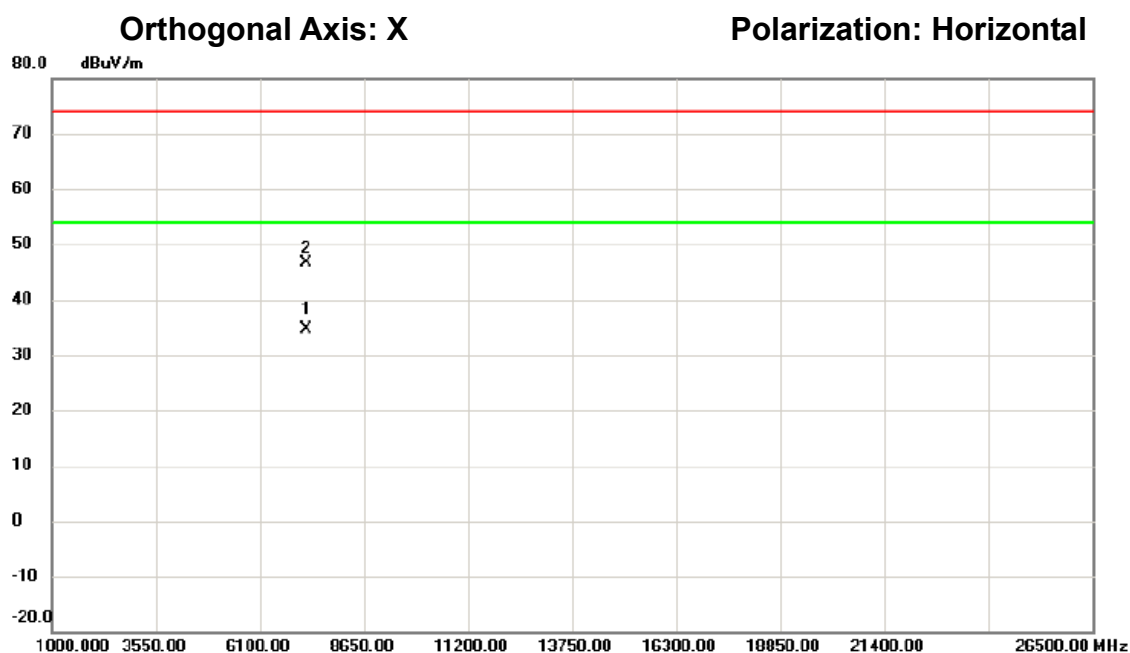

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7236.100	39.93	-5.26	34.67	54.00	-19.33	AVG	
2		7236.102	51.84	-5.26	46.58	74.00	-27.42	peak	

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/07
 環境濕度: 66%

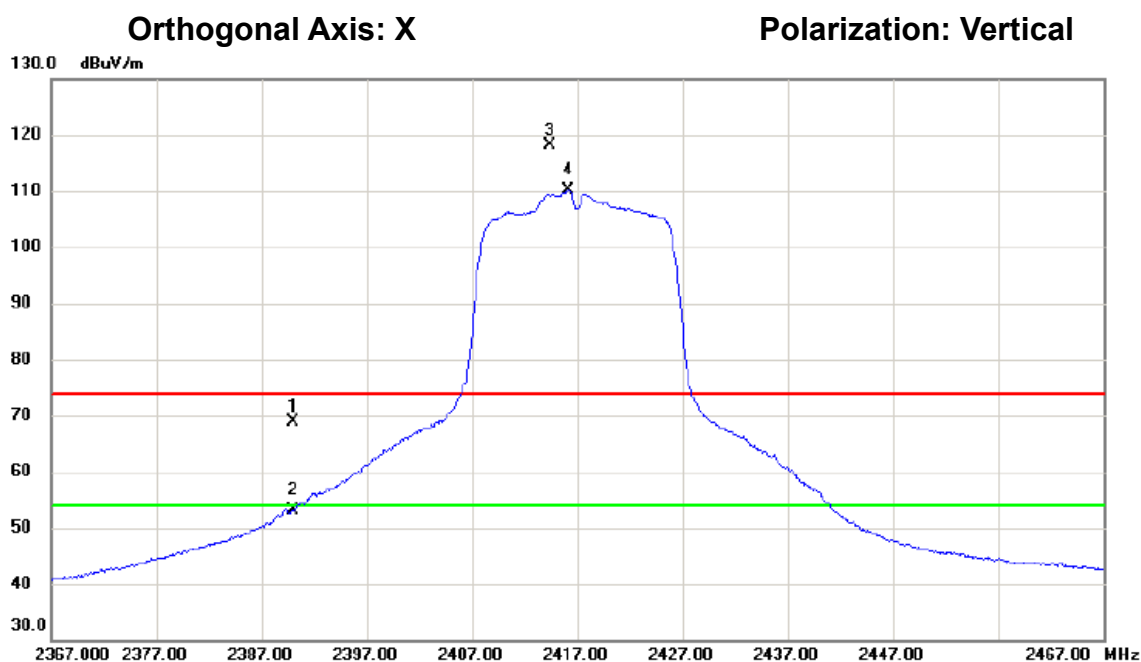

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	76.06	-7.23	68.83	74.00	-5.17	peak	
2		2390.000	60.29	-7.23	53.06	54.00	-0.94	AVG	
3	X	2414.450	125.23	-7.13	118.10	74.00	44.10	peak	主波訊號不予判定
4	*	2416.200	117.35	-7.12	110.23	54.00	56.23	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

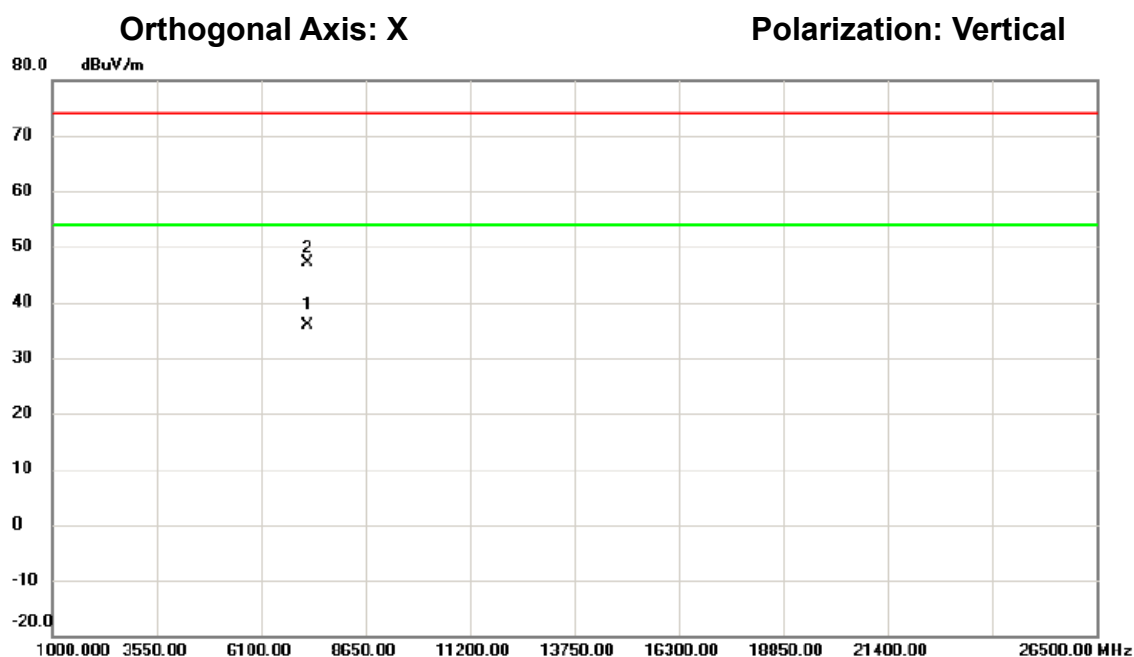

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7250.970	41.05	-5.21	35.84	54.00	-18.16	AVG	
2		7251.328	52.44	-5.21	47.23	74.00	-26.77	peak	

測試頻道: IEEE vht20 / 2417 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

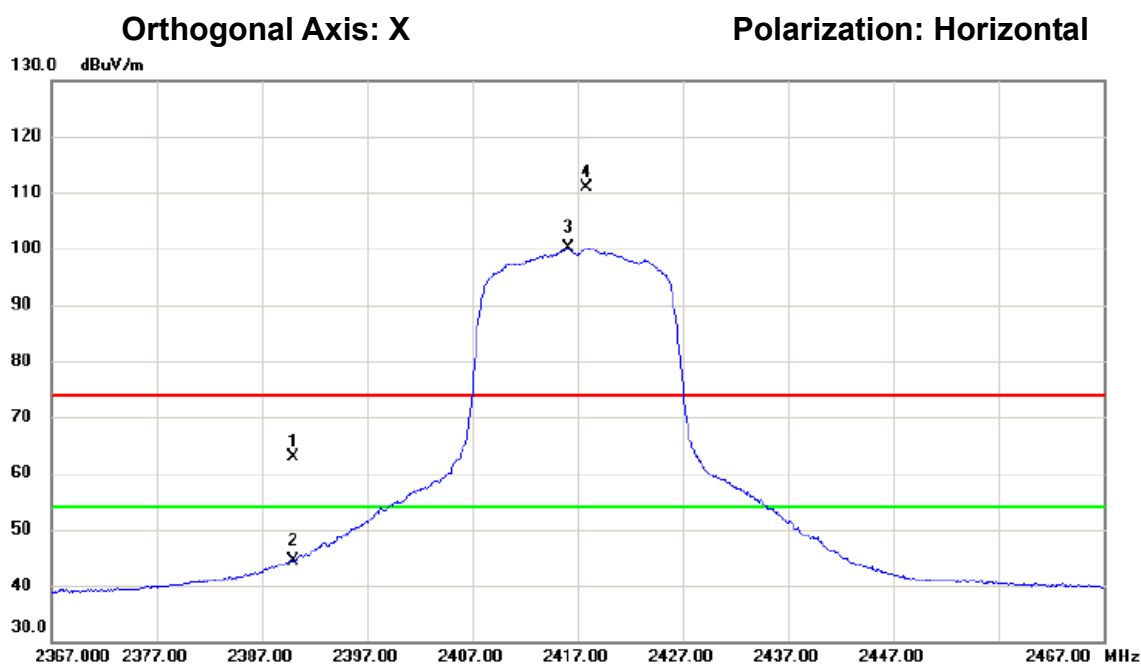

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	70.17	-7.23	62.94	74.00	-11.06	peak	
2		2390.000	51.63	-7.23	44.40	54.00	-9.60	AVG	
3	*	2416.150	107.32	-7.12	100.20	54.00	46.20	AVG	主波訊號不予判定
4	X	2417.900	117.98	-7.11	110.87	74.00	36.87	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

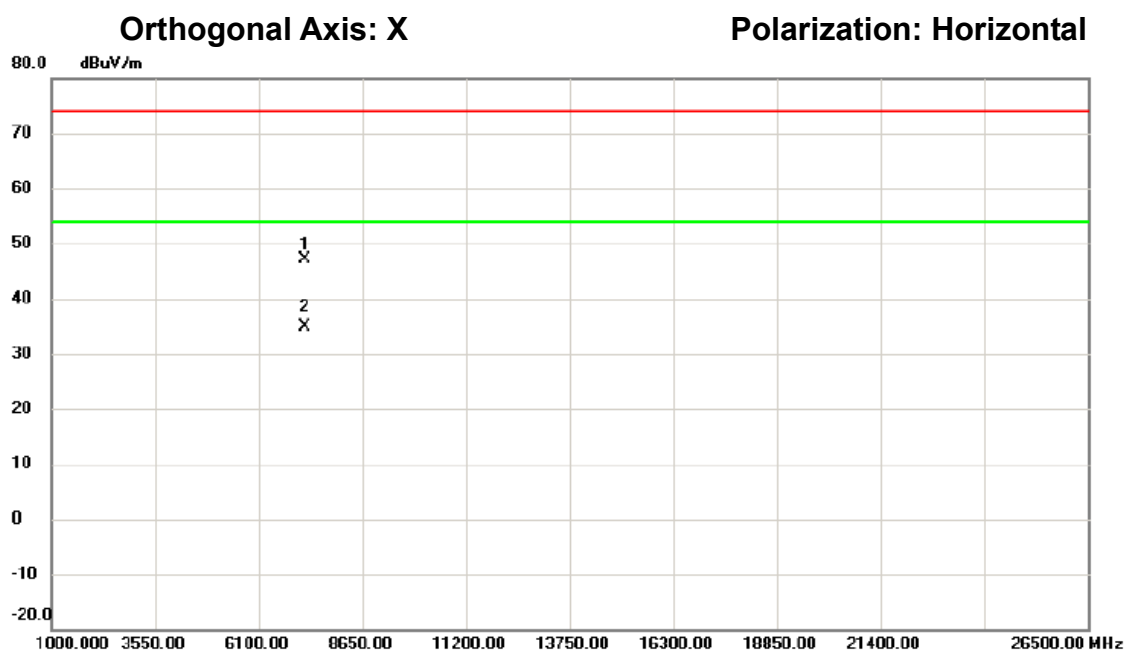

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7250.785	52.45	-5.21	47.24	74.00	-26.76	peak	
2	*	7251.045	40.10	-5.21	34.89	54.00	-19.11	AVG	

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/07
 環境濕度: 66%

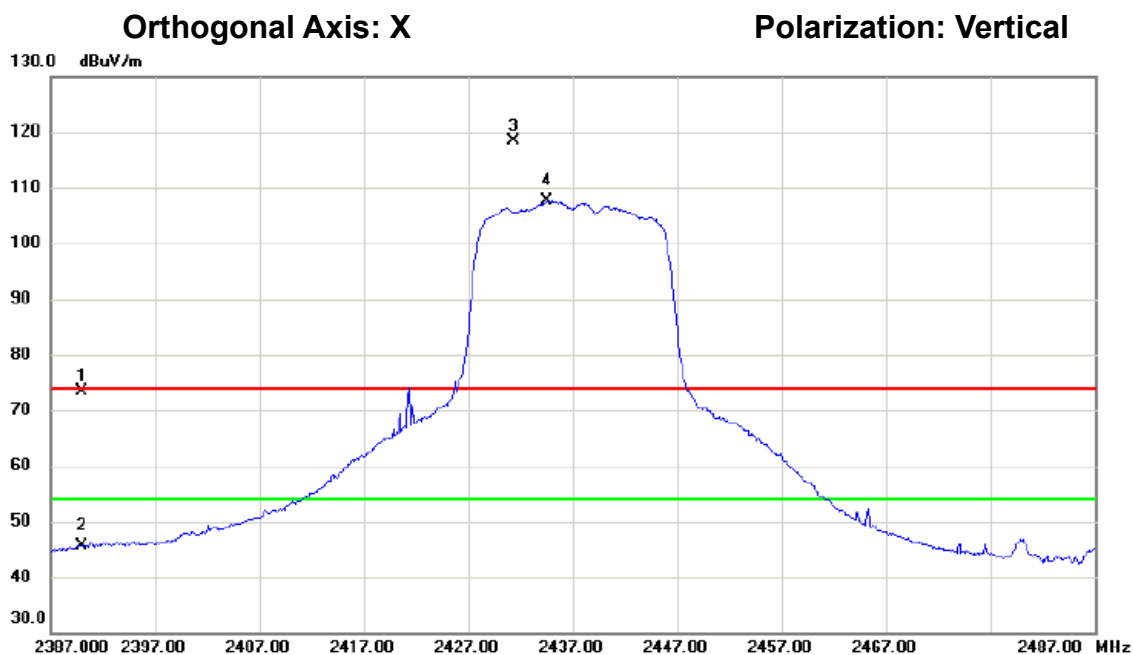

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	80.65	-7.23	73.42	74.00	-0.58	peak	
2		2390.000	52.75	-7.23	45.52	54.00	-8.48	AVG	
3	X	2431.350	125.46	-7.06	118.40	74.00	44.40	peak	主波訊號不予判定
4	*	2434.600	114.64	-7.05	107.59	54.00	53.59	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

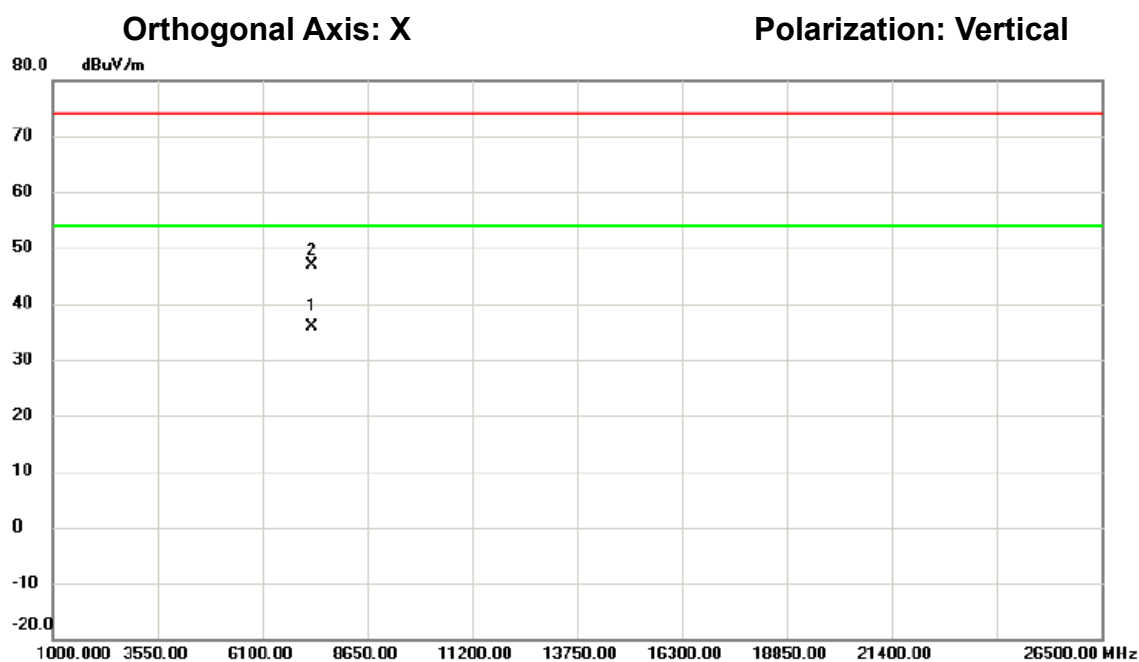

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7310.993	40.80	-4.99	35.81	54.00	-18.19	AVG	
2		7311.180	51.83	-4.99	46.84	74.00	-27.16	peak	

測試頻道: IEEE vht20 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

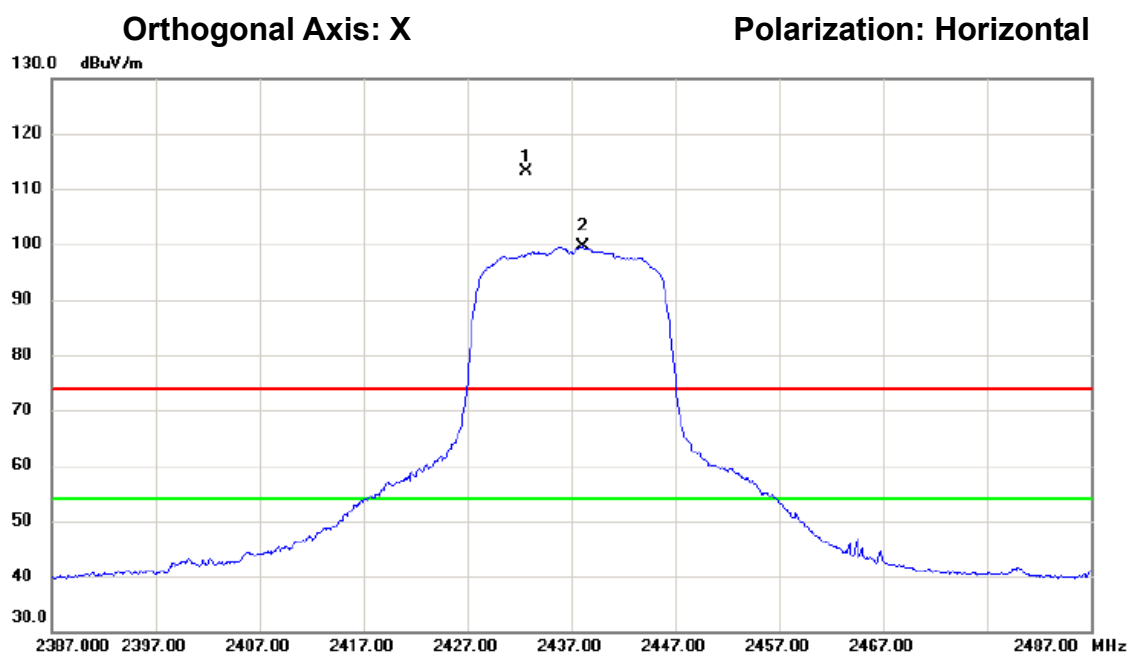

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2432.650	120.31	-7.06	113.25	74.00	39.25	peak	主波訊號不予判定
2	*	2438.150	106.62	-7.03	99.59	54.00	45.59	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

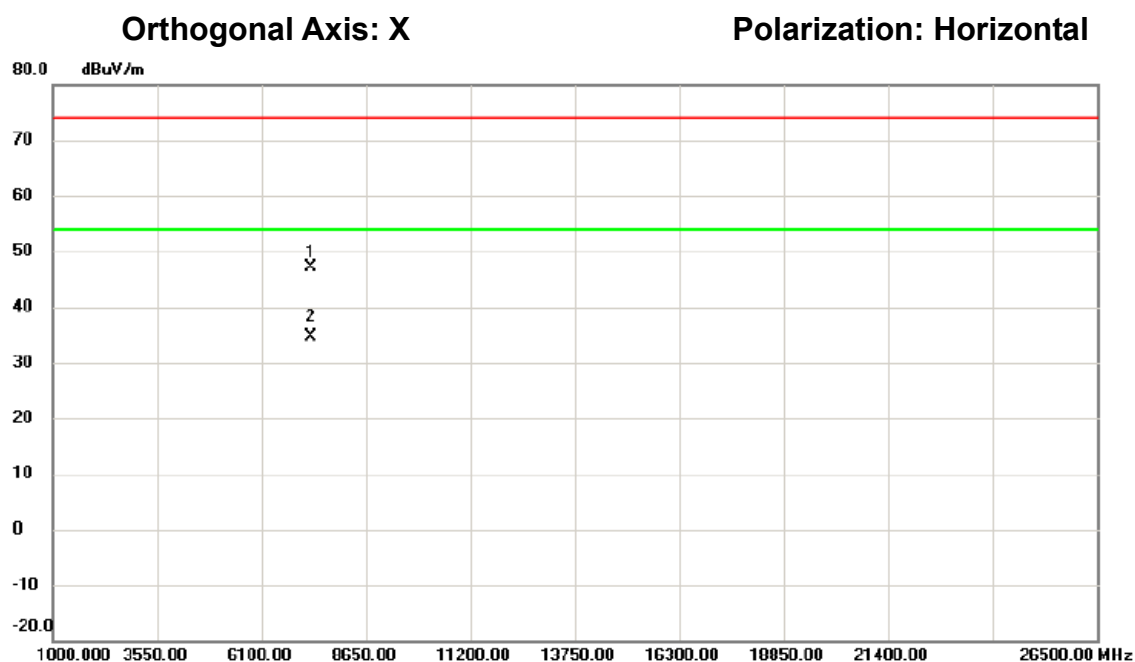

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7309.158	52.02	-5.00	47.02	74.00	-26.98	peak	
2	*	7311.060	39.62	-4.99	34.63	54.00	-19.37	AVG	

測試頻道: IEEE vht20 / 2457 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/07


環境濕度: 66%

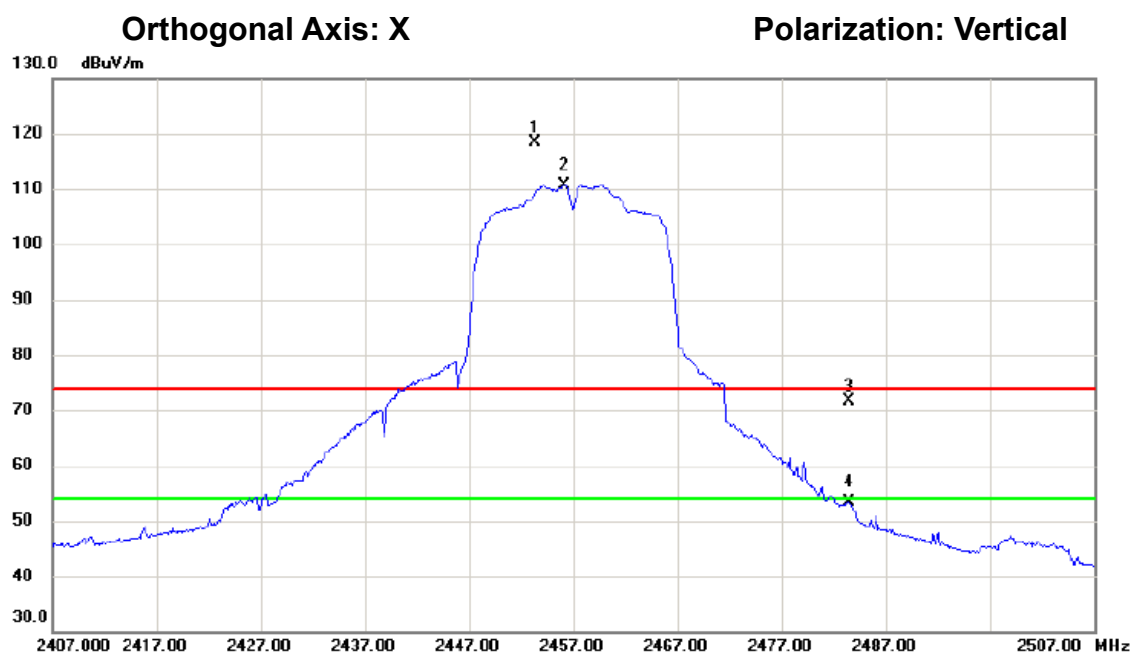

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2453.350	125.27	-6.97	118.30	74.00	44.30	peak	主波訊號不予判定
2	*	2456.150	117.67	-6.95	110.72	54.00	56.72	AVG	主波訊號不予判定
3		2483.500	78.49	-6.85	71.64	74.00	-2.36	peak	
4		2483.500	60.14	-6.85	53.29	54.00	-0.71	AVG	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

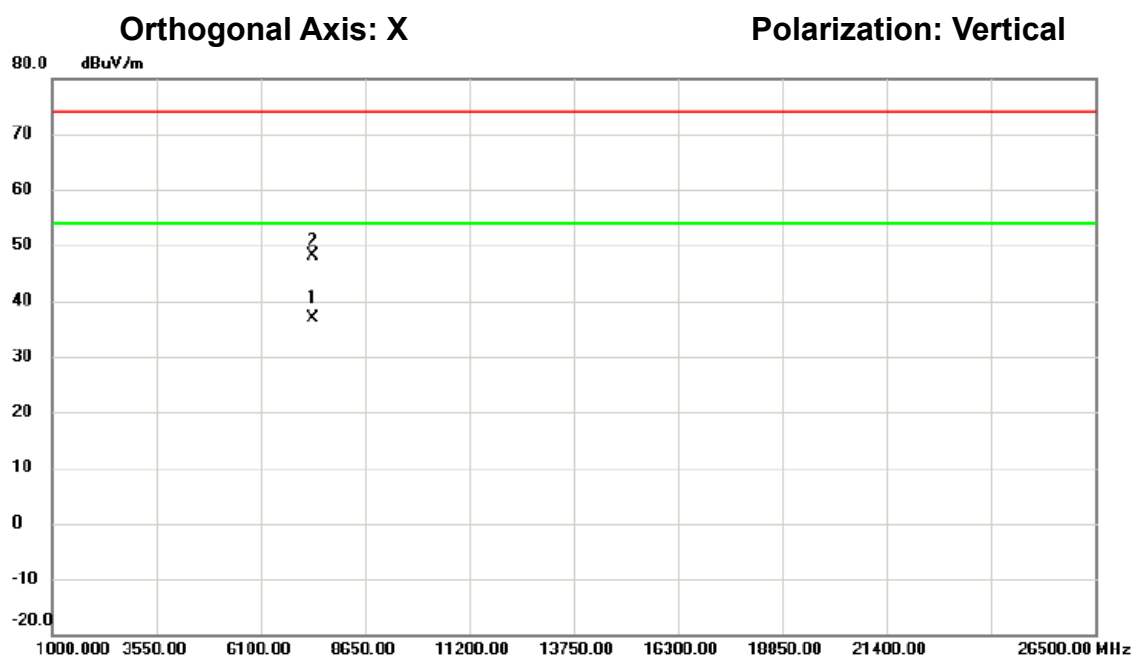

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7370.970	41.71	-4.77	36.94	54.00	-17.06	AVG	
2		7371.297	52.80	-4.77	48.03	74.00	-25.97	peak	

測試頻道: IEEE vht20 / 2457 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

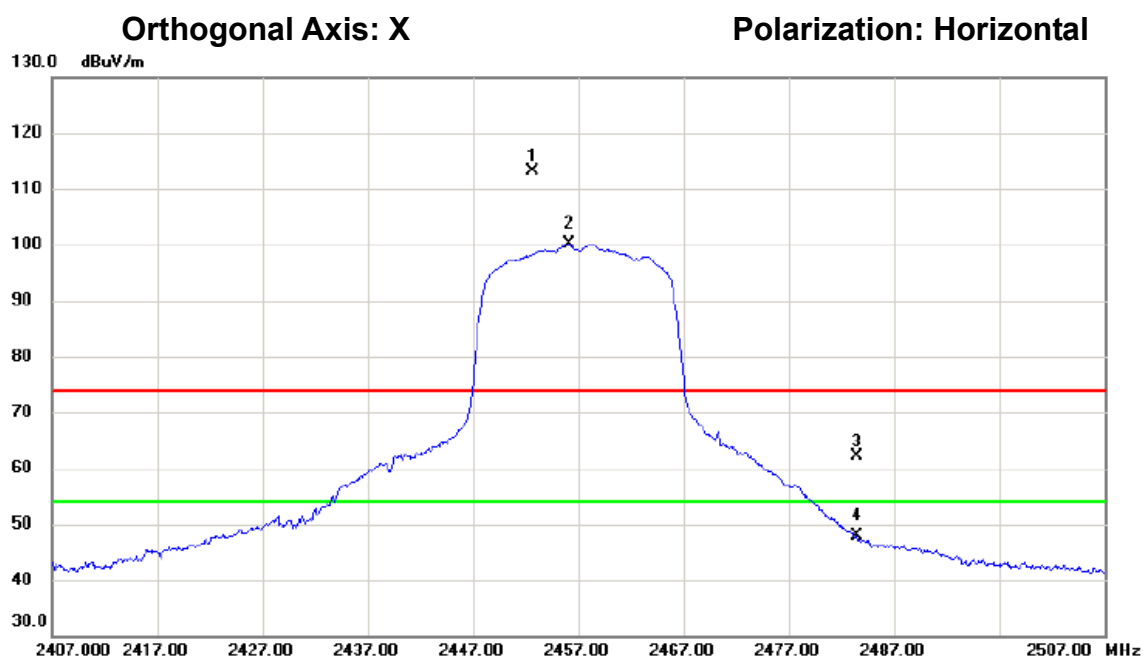

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2452.700	120.10	-6.98	113.12	74.00	39.12	peak	主波訊號不予判定
2	*	2456.200	106.97	-6.95	100.02	54.00	46.02	AVG	主波訊號不予判定
3		2483.500	68.94	-6.85	62.09	74.00	-11.91	peak	
4		2483.500	54.62	-6.85	47.77	54.00	-6.23	AVG	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

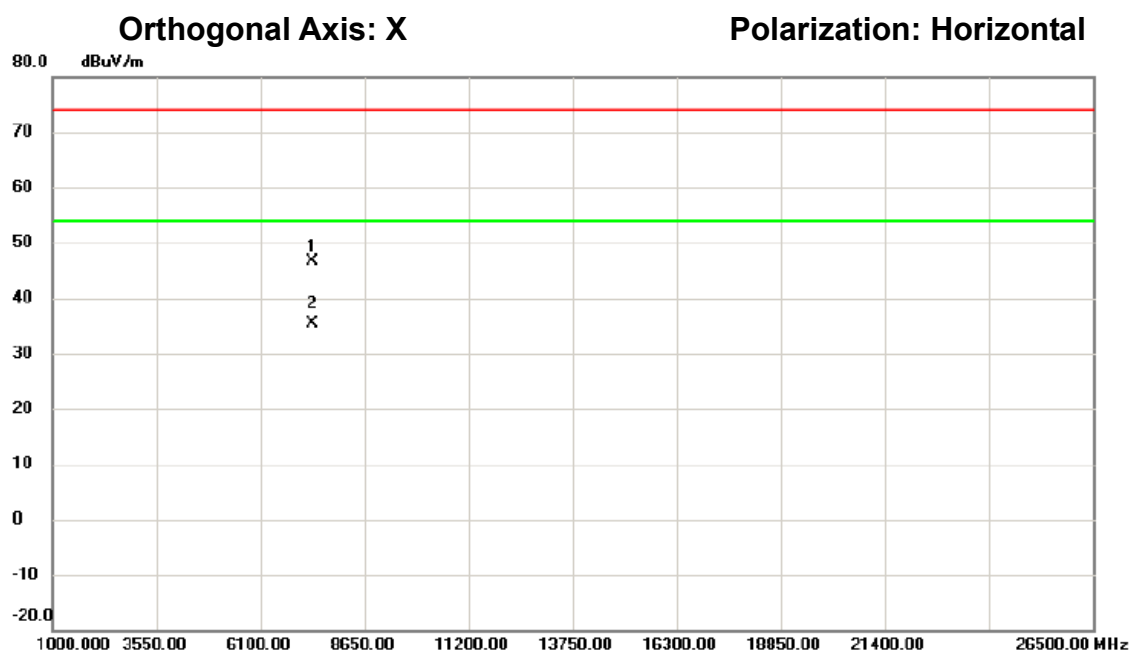


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		7370.512	51.48	-4.77	46.71	74.00	-27.29	peak
2	*	7370.985	40.12	-4.77	35.35	54.00	-18.65	AVG

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/07
 環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

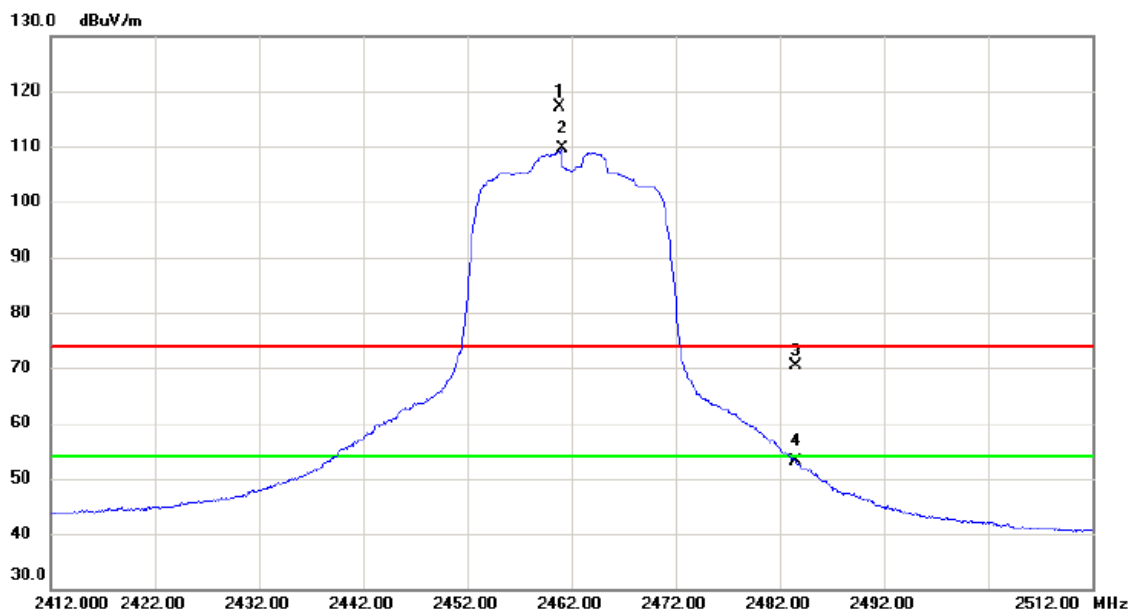

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2460.900	123.99	-6.94	117.05	74.00	43.05	peak	主波訊號不予判定
2	*	2461.150	116.56	-6.94	109.62	54.00	55.62	AVG	主波訊號不予判定
3		2483.500	77.13	-6.85	70.28	74.00	-3.72	peak	
4		2483.500	60.01	-6.85	53.16	54.00	-0.84	AVG	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

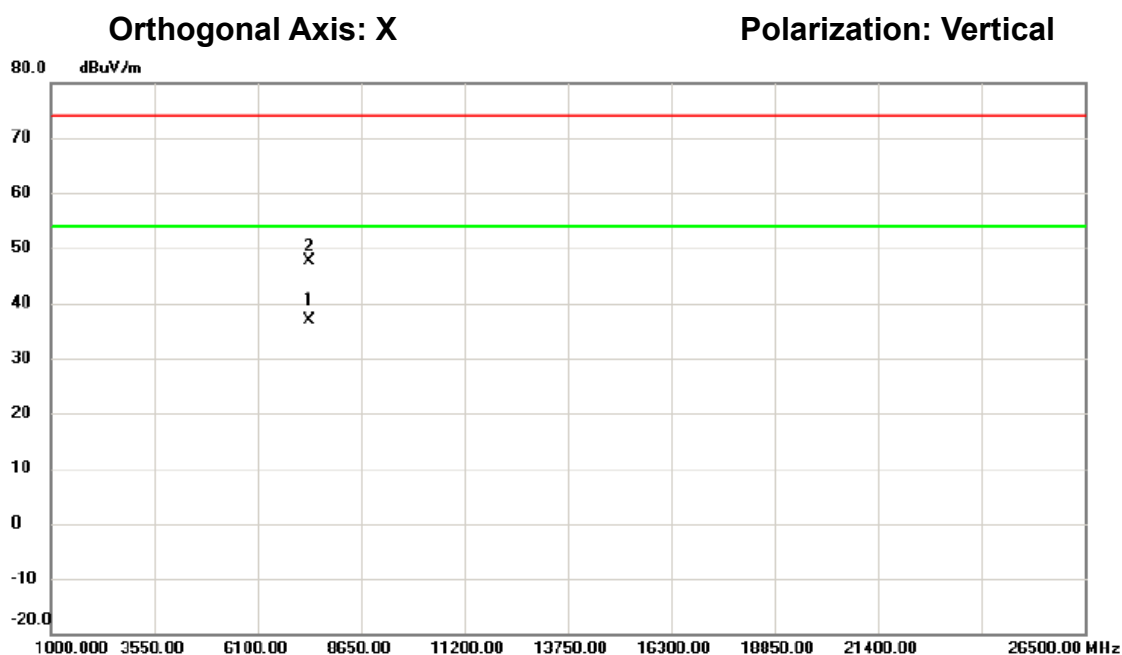


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7385.985	41.60	-4.72	36.88	54.00	-17.12	AVG	
2		7386.132	52.37	-4.72	47.65	74.00	-26.35	peak	

測試頻道: IEEE vht20 / 2462 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

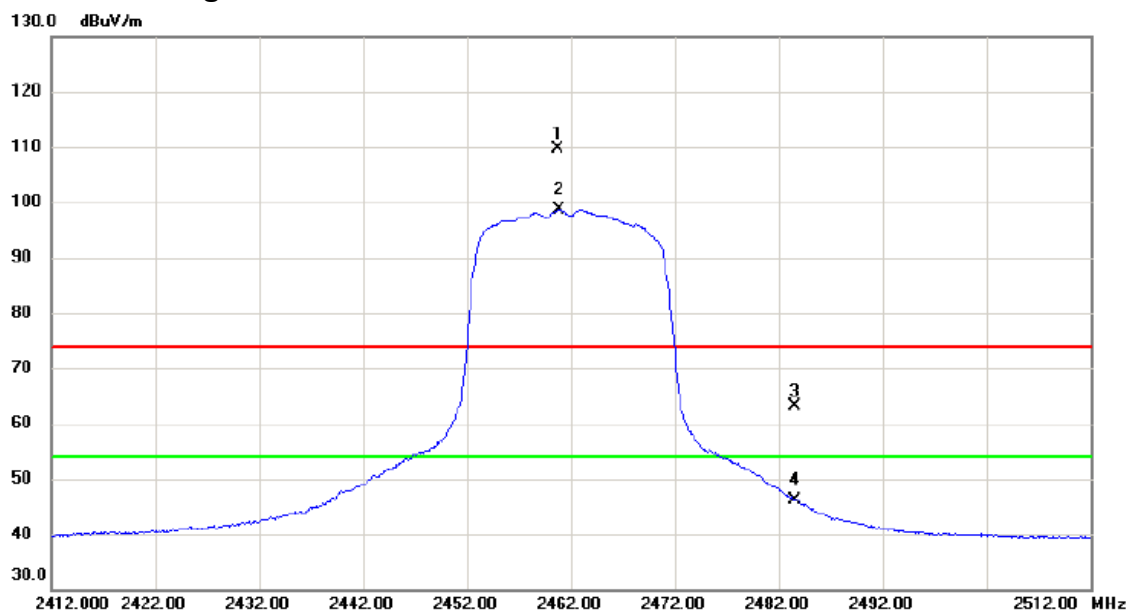

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2460.750	116.63	-6.94	109.69	74.00	35.69	peak	主波訊號不予判定
2	*	2460.900	105.56	-6.94	98.62	54.00	44.62	AVG	主波訊號不予判定
3		2483.500	70.10	-6.85	63.25	74.00	-10.75	peak	
4		2483.500	53.07	-6.85	46.22	54.00	-7.78	AVG	

測試頻道: IEEE vht20 / 2462 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

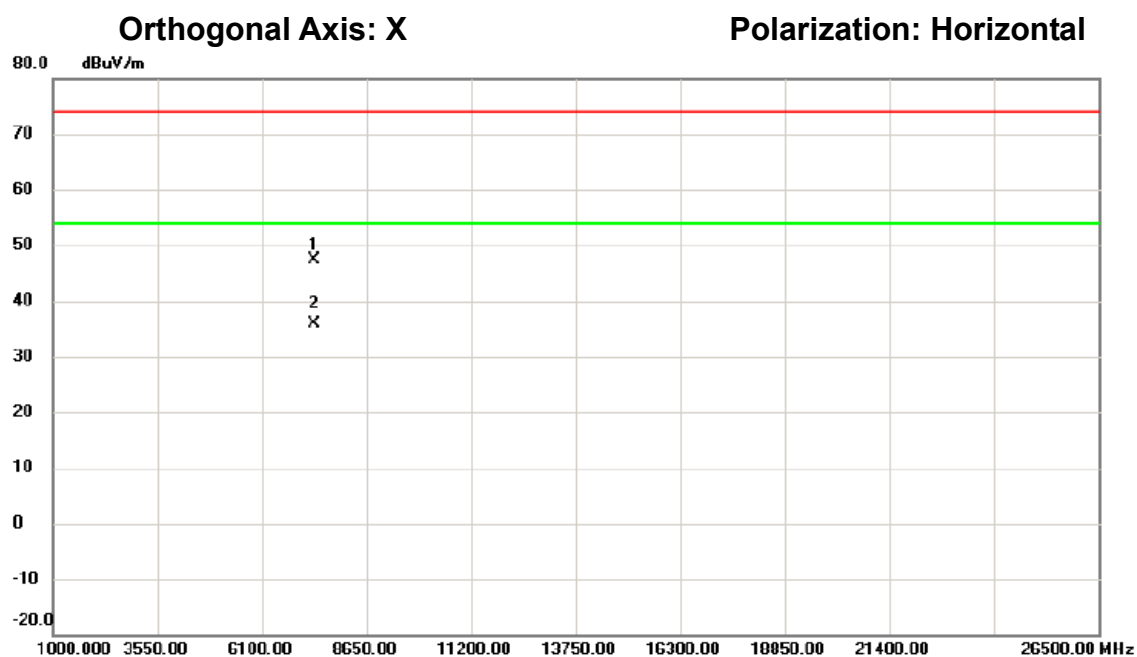

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7384.925	52.14	-4.73	47.41	74.00	-26.59	peak	
2	*	7385.970	40.51	-4.72	35.79	54.00	-18.21	AVG	

測試頻道: IEEE vht40 / 2422 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

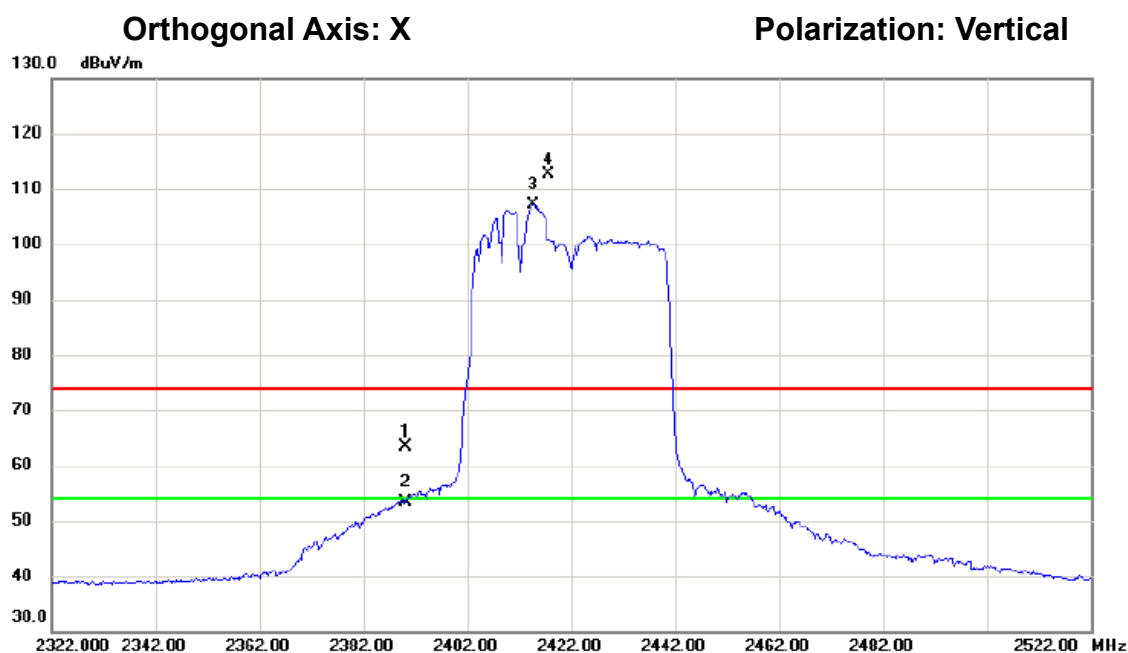

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	70.53	-7.23	63.30	74.00	-10.70	peak	
2		2390.000	60.64	-7.23	53.41	54.00	-0.59	AVG	
3	*	2414.700	114.27	-7.13	107.14	54.00	53.14	AVG	主波訊號不予判定
4	X	2417.600	119.72	-7.11	112.61	74.00	38.61	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2422 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

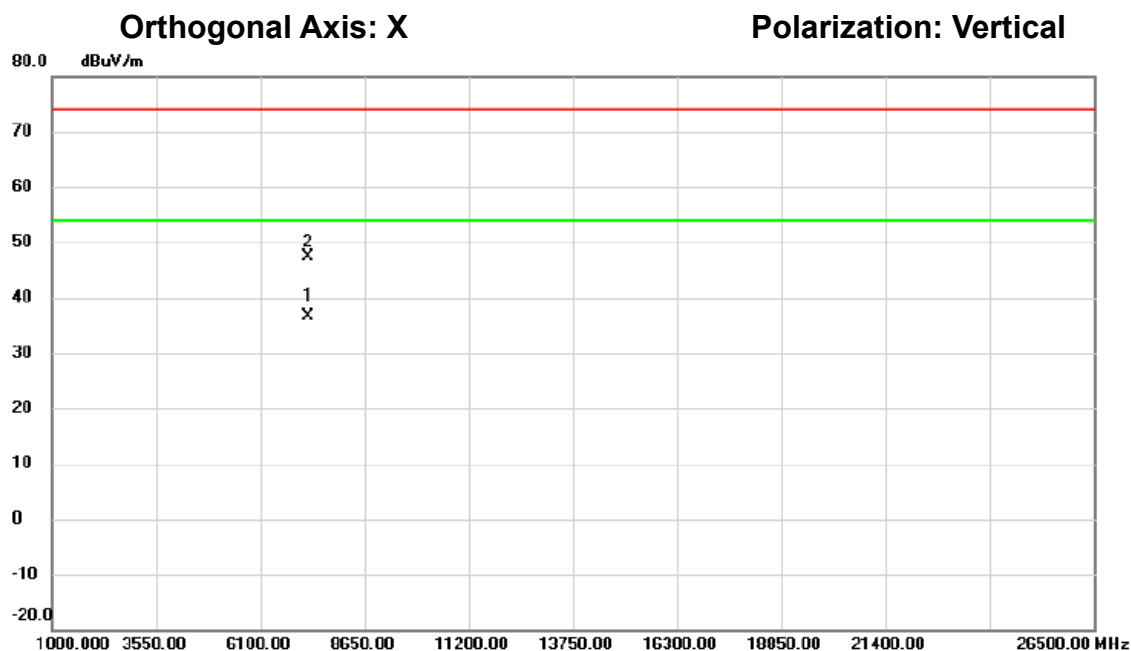


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7266.030	41.77	-5.16	36.61	54.00	-17.39	AVG	
2		7266.092	52.66	-5.16	47.50	74.00	-26.50	peak	

測試頻道: IEEE vht40 / 2422 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

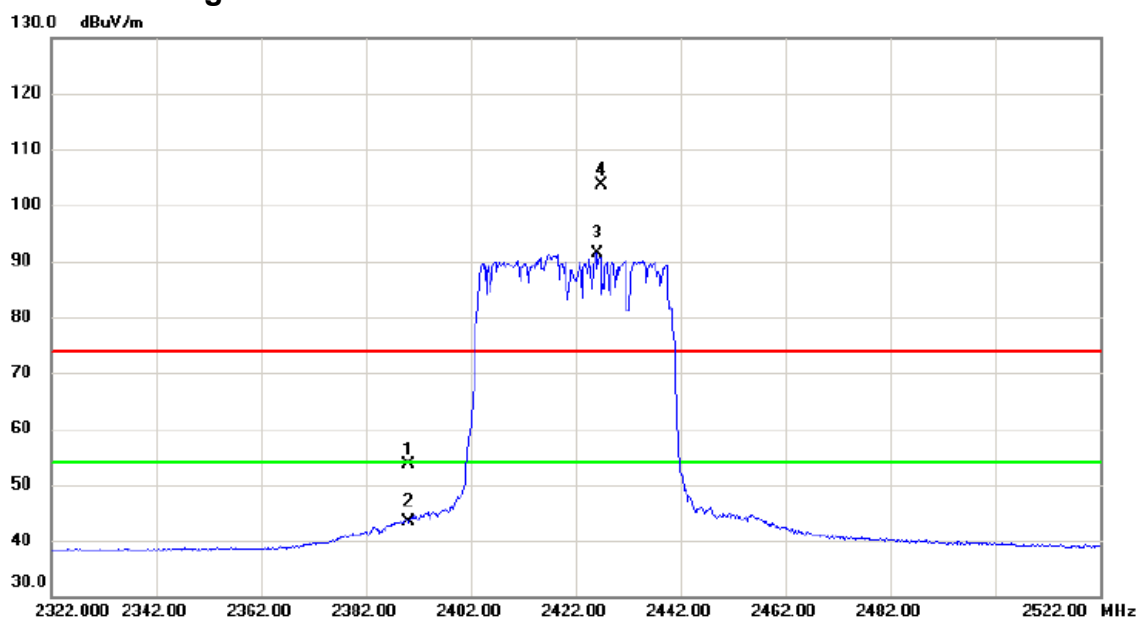

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	60.86	-7.23	53.63	74.00	-20.37	peak	
2		2390.000	50.69	-7.23	43.46	54.00	-10.54	AVG	
3	*	2426.000	98.47	-7.08	91.39	54.00	37.39	AVG	主波訊號不予判定
4	X	2426.900	110.68	-7.07	103.61	74.00	29.61	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

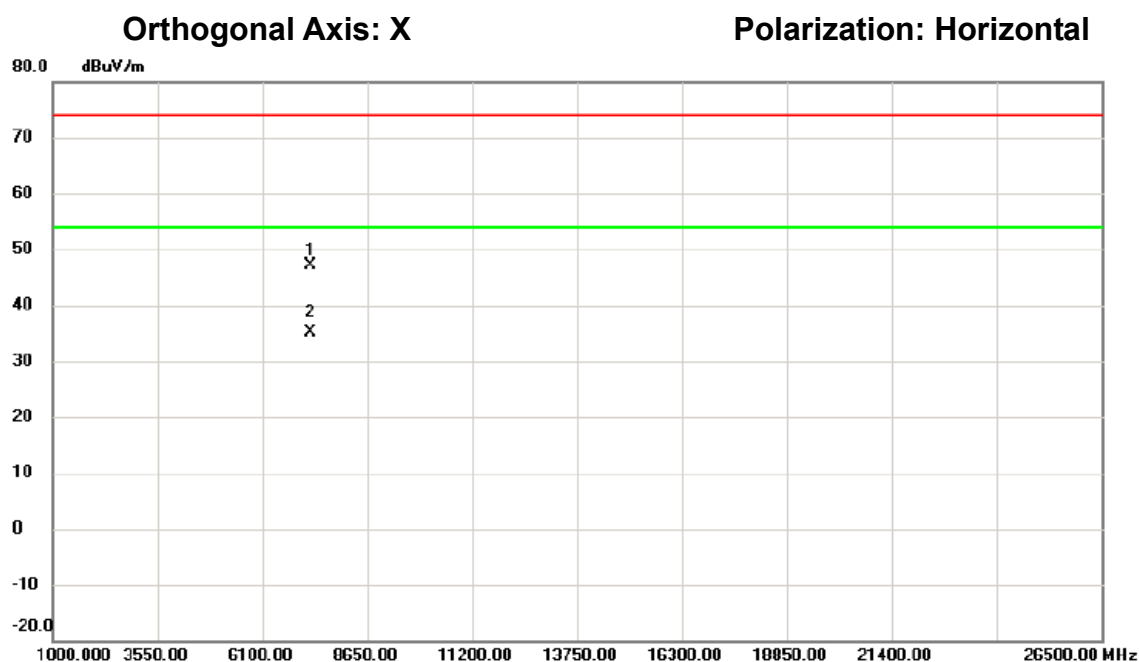

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7265.675	52.34	-5.16	47.18	74.00	-26.82	peak	
2	*	7265.885	40.29	-5.16	35.13	54.00	-18.87	AVG	

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/07
 環境濕度: 66%

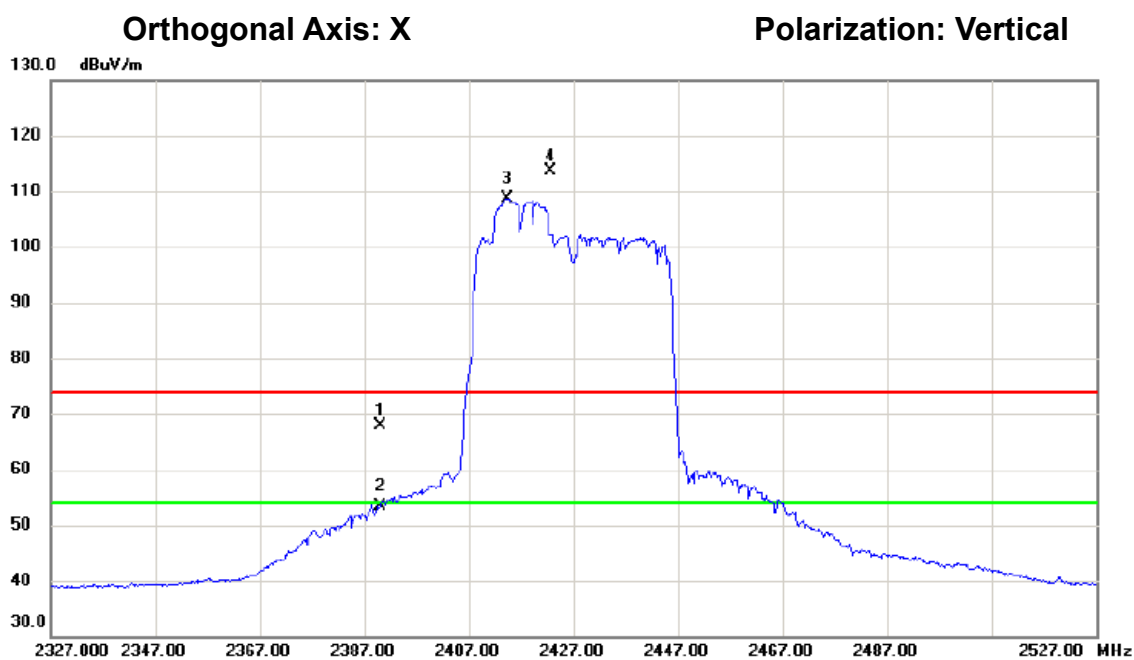

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	75.08	-7.23	67.85	74.00	-6.15	peak	
2		2390.000	60.60	-7.23	53.37	54.00	-0.63	AVG	
3	*	2414.300	115.87	-7.13	108.74	54.00	54.74	AVG	主波訊號不予判定
4	X	2422.500	120.64	-7.10	113.54	74.00	39.54	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

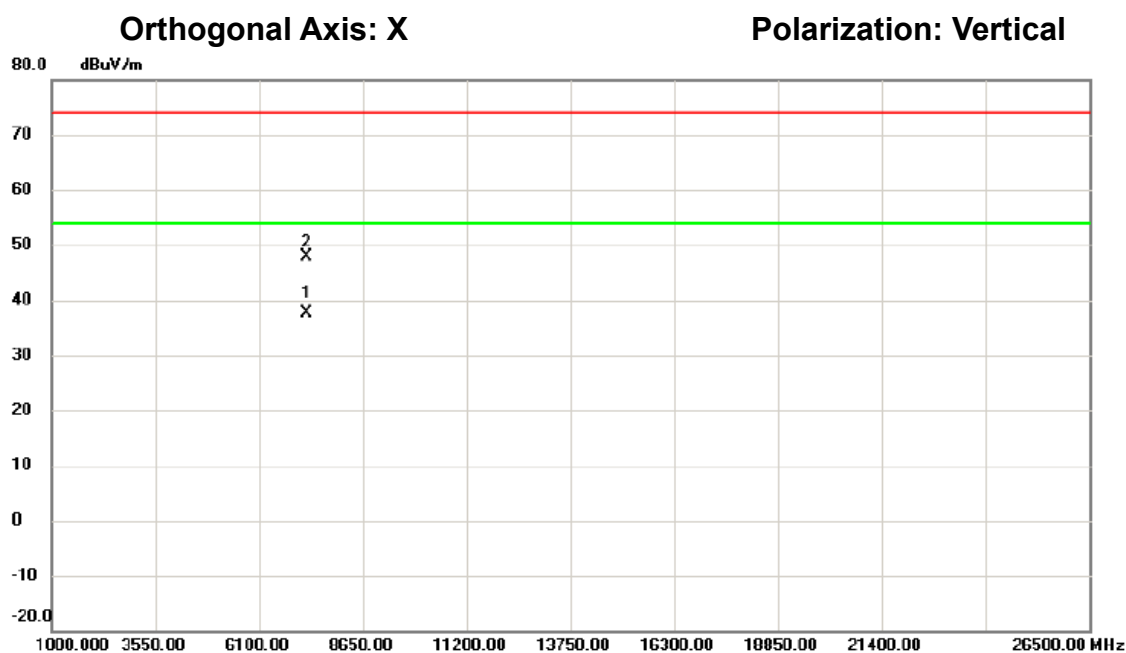


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7280.967	42.63	-5.11	37.52	54.00	-16.48	AVG	
2		7281.038	52.99	-5.11	47.88	74.00	-26.12	peak	

測試頻道: IEEE vht40 / 2427 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

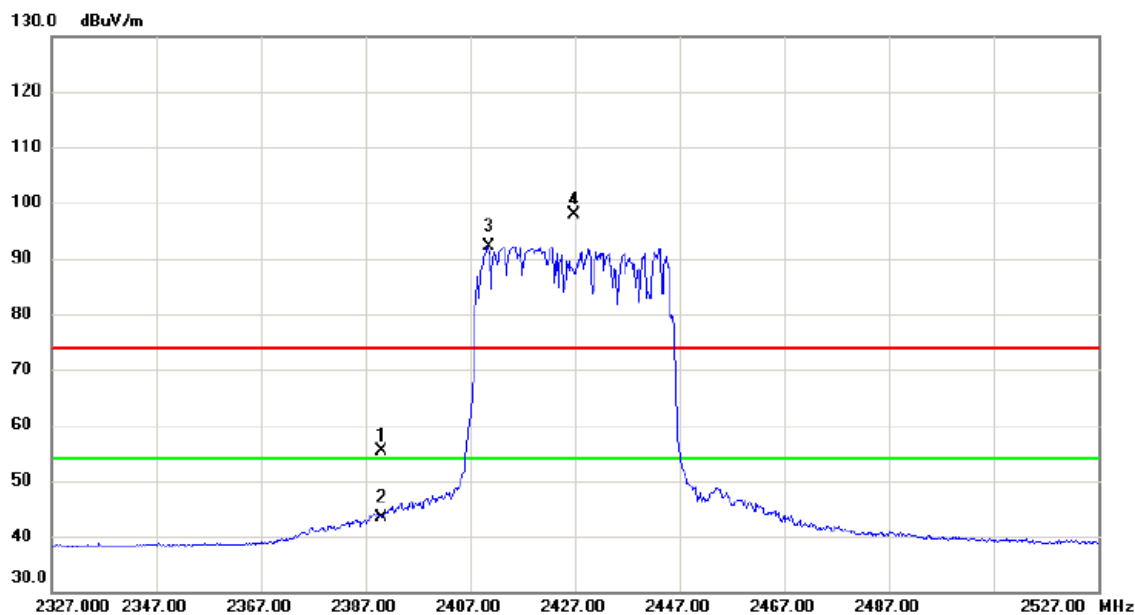


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	62.67	-7.23	55.44	74.00	-18.56	peak	
2		2390.000	50.58	-7.23	43.35	54.00	-10.65	AVG	
3	*	2410.500	99.34	-7.15	92.19	54.00	38.19	AVG	主波訊號不予判定
4	X	2426.900	104.86	-7.07	97.79	74.00	23.79	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

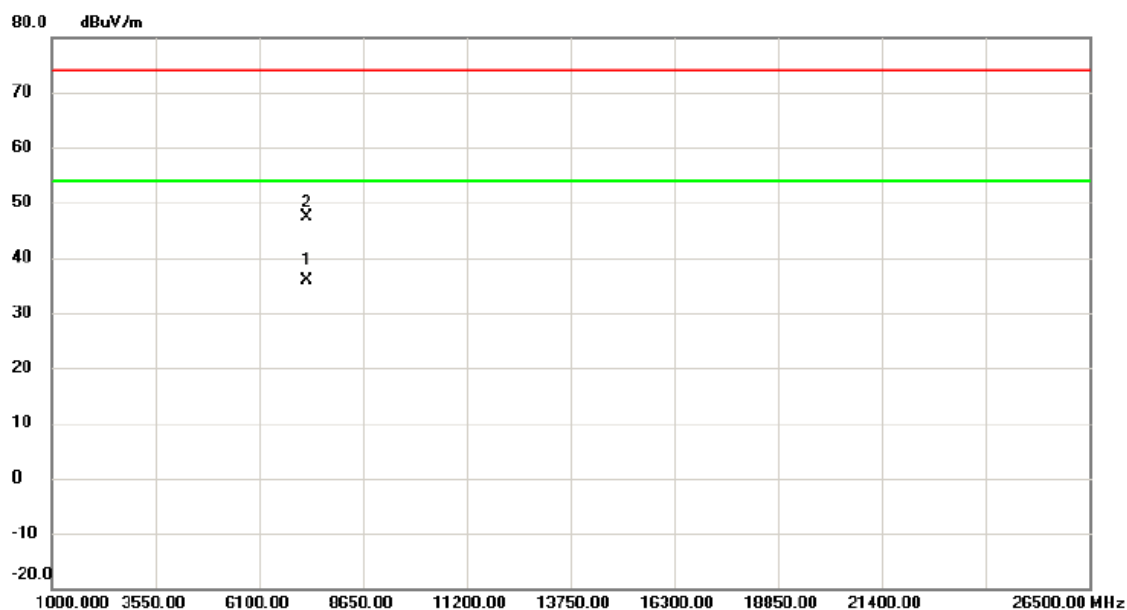


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7281.055	41.07	-5.11	35.96	54.00	-18.04	AVG	
2		7281.520	52.49	-5.09	47.40	74.00	-26.60	peak	

測試頻道: IEEE vht40 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

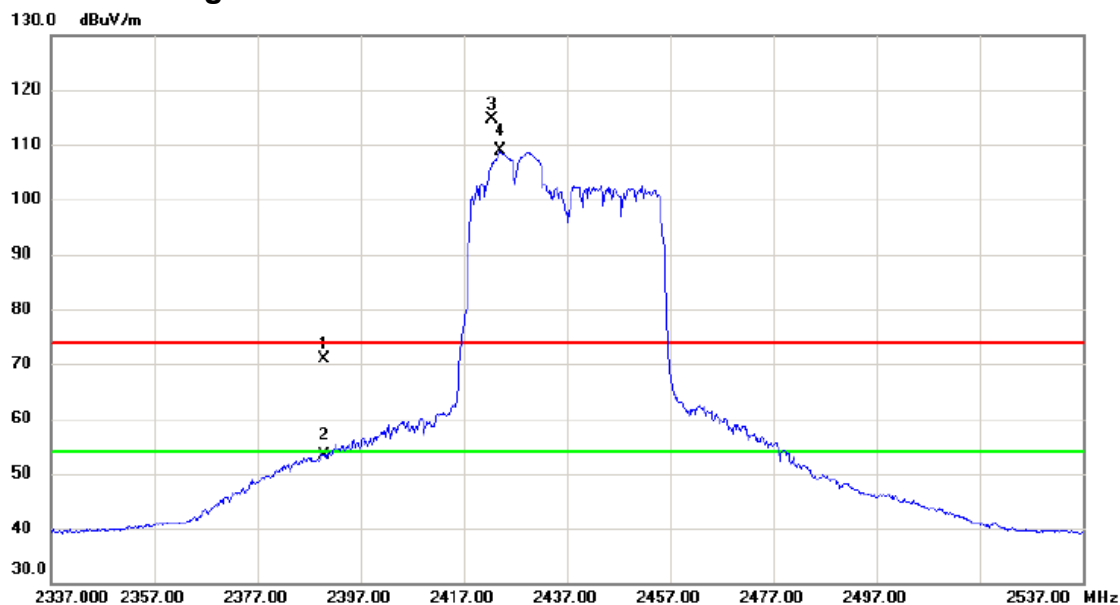

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	78.16	-7.23	70.93	74.00	-3.07	peak	
2		2390.000	60.66	-7.23	53.43	54.00	-0.57	AVG	
3	X	2422.600	121.62	-7.10	114.52	74.00	40.52	peak	主波訊號不予判定
4	*	2424.200	115.88	-7.09	108.79	54.00	54.79	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/13
環境濕度: 66%

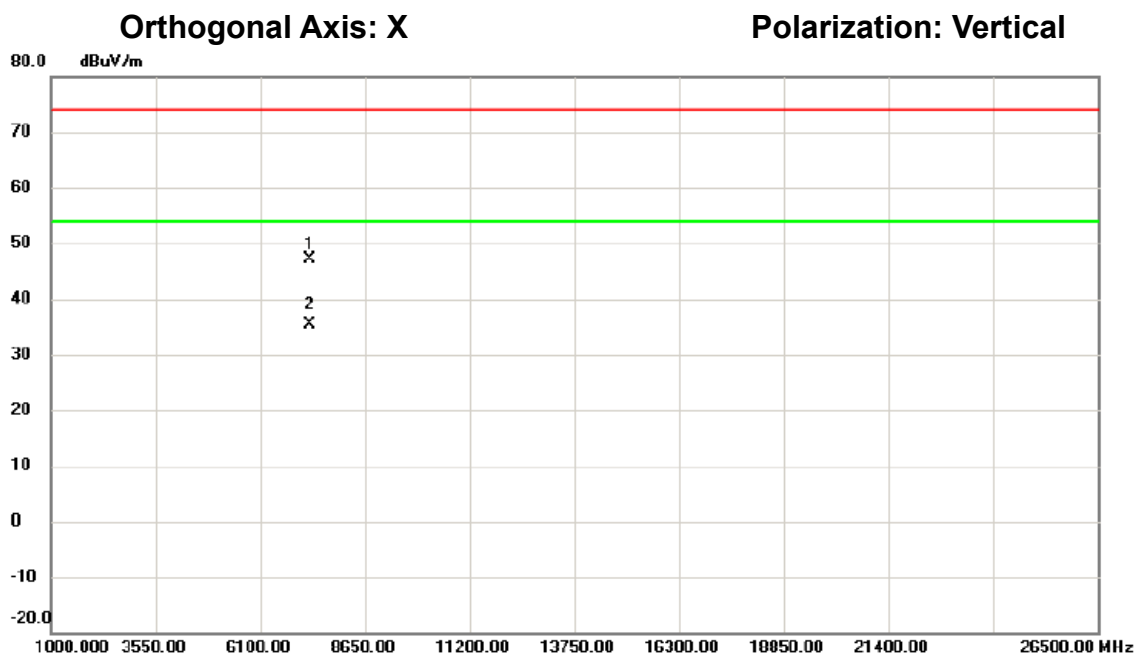


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	7310.860	52.04	-4.99	47.05	74.00	-26.95	peak	
2 *	7311.057	40.30	-4.99	35.31	54.00	-18.69	AVG	

測試頻道: IEEE vht40 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

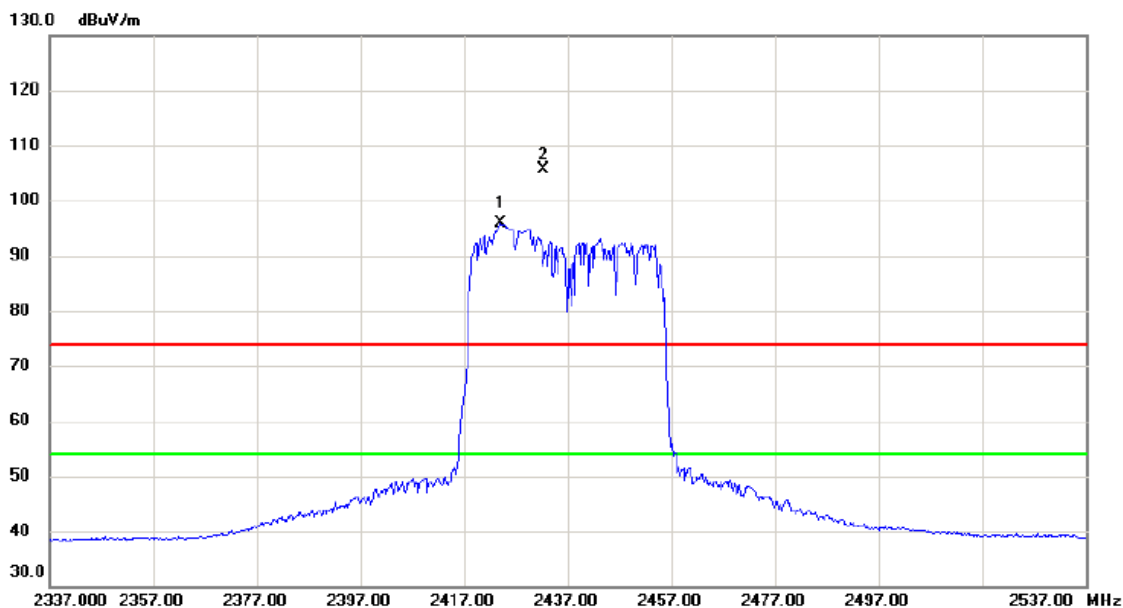

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2424.200	102.88	-7.09	95.79	54.00	41.79	AVG	主波訊號不予判定
2	X	2432.400	112.72	-7.06	105.66	74.00	31.66	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

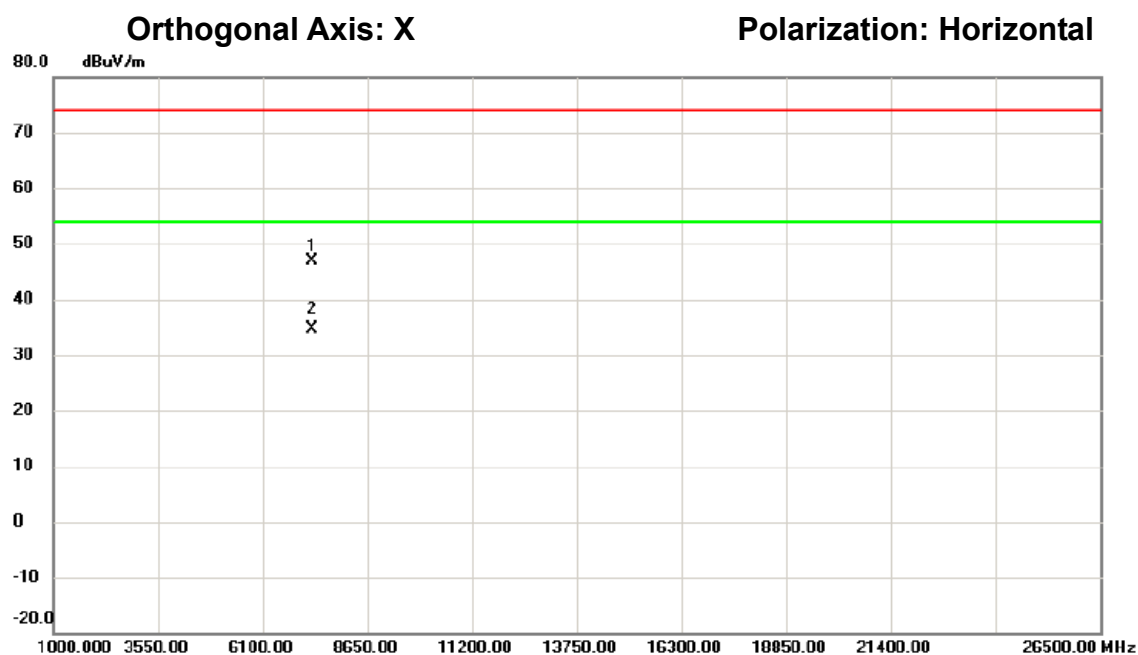

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7310.948	51.90	-4.99	46.91	74.00	-27.09	peak	
2	*	7311.045	39.64	-4.99	34.65	54.00	-19.35	AVG	

測試頻道: IEEE vht40 / 2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

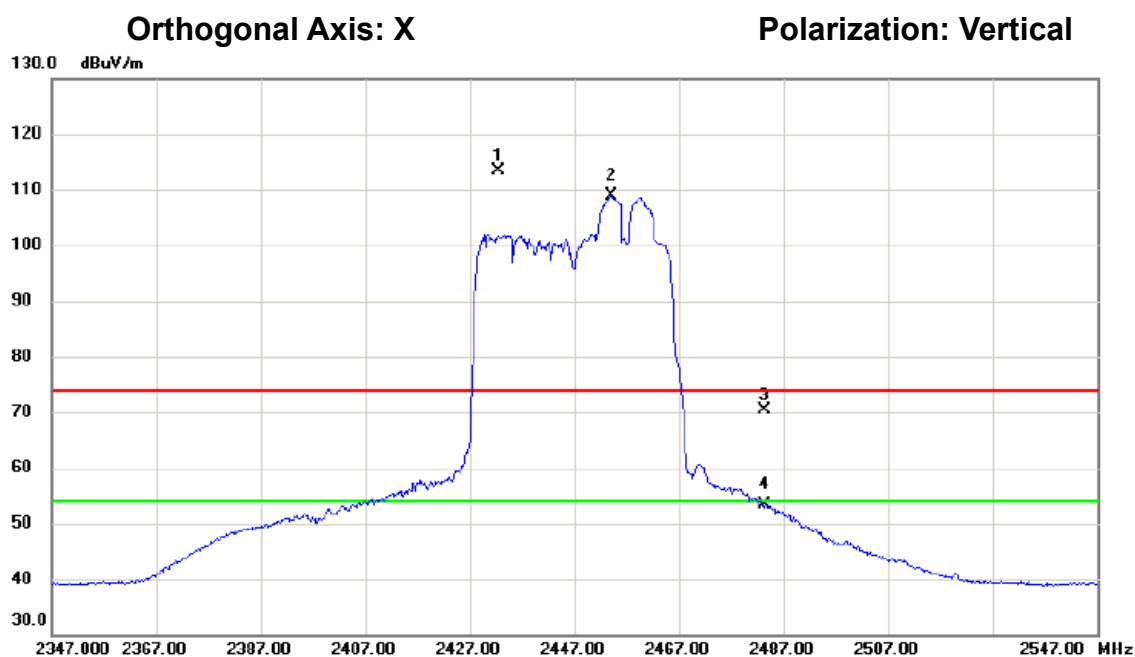

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2432.400	120.33	-7.06	113.27	74.00	39.27	peak	主波訊號不予判定
2	*	2454.200	115.96	-6.96	109.00	54.00	55.00	AVG	主波訊號不予判定
3		2483.500	77.21	-6.85	70.36	74.00	-3.64	peak	
4		2483.500	60.13	-6.85	53.28	54.00	-0.72	AVG	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

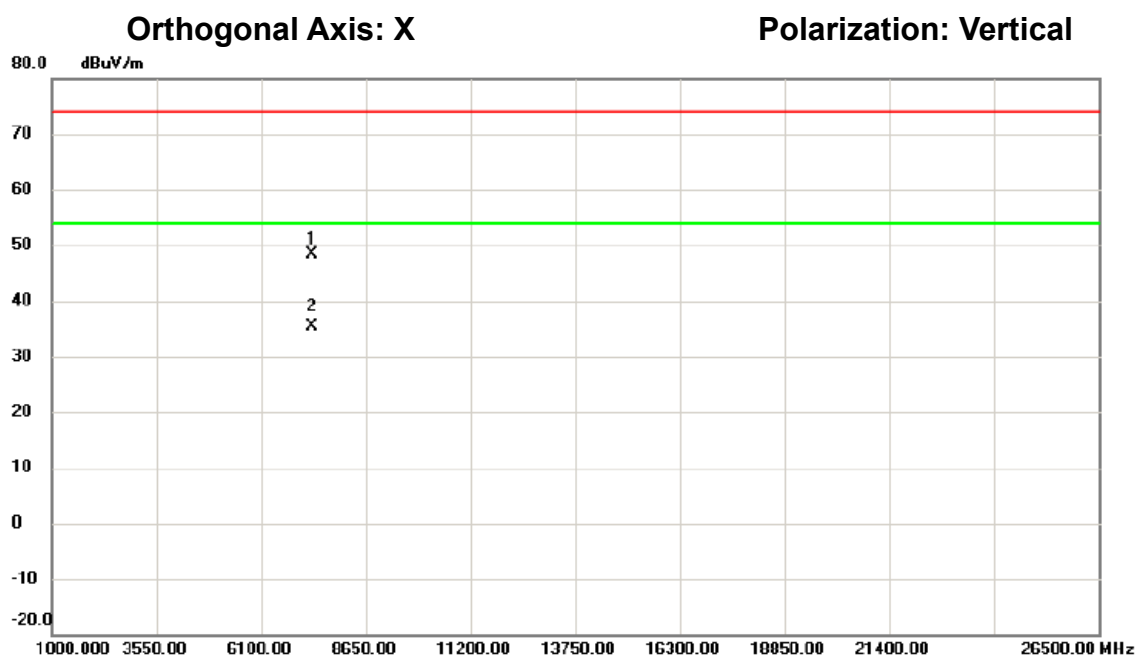


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7338.555	53.19	-4.90	48.29	74.00	-25.71	peak	
2	*	7339.700	40.24	-4.89	35.35	54.00	-18.65	AVG	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/07
 環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

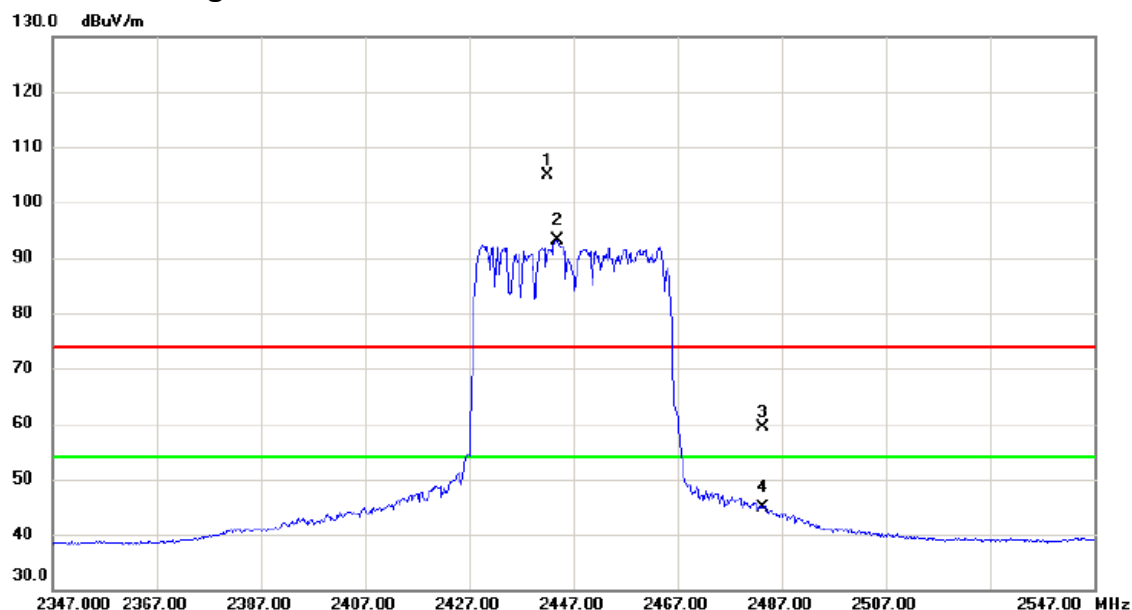

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2442.000	111.91	-7.01	104.90	74.00	30.90	peak	主波訊號不予判定
2	*	2443.800	100.14	-7.01	93.13	54.00	39.13	AVG	主波訊號不予判定
3		2483.500	66.18	-6.85	59.33	74.00	-14.67	peak	
4		2483.500	51.83	-6.85	44.98	54.00	-9.02	AVG	

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

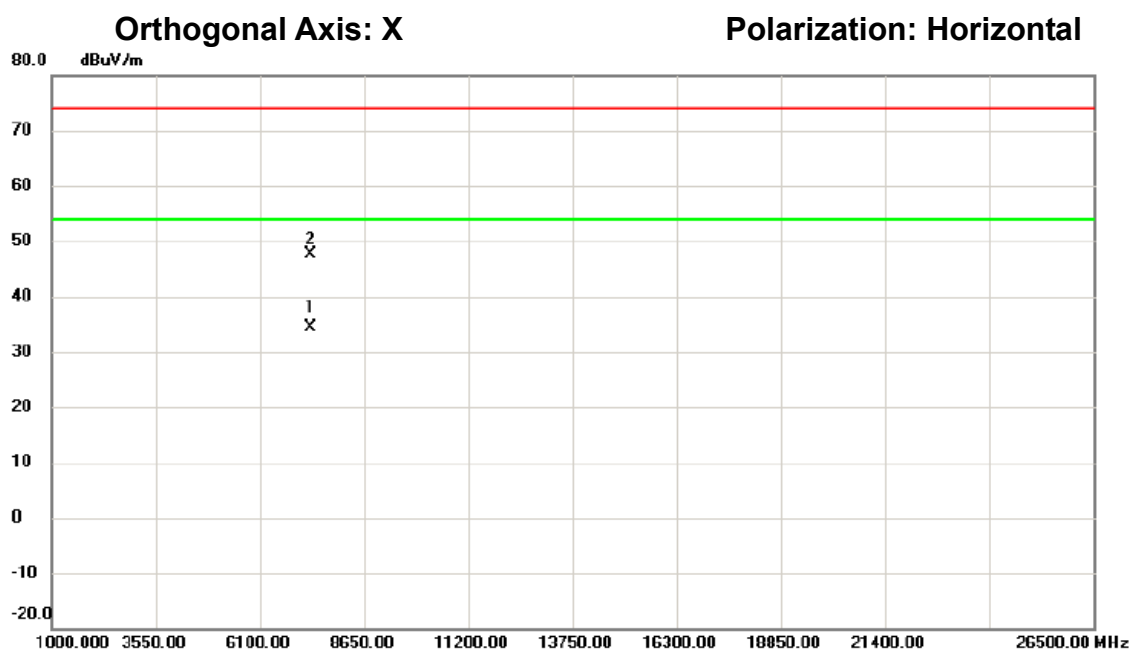


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7338.510	39.33	-4.90	34.43	54.00	-19.57	AVG	
2		7339.725	52.63	-4.89	47.74	74.00	-26.26	peak	

測試頻道: IEEE vht40 / 2452 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/03/07
環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

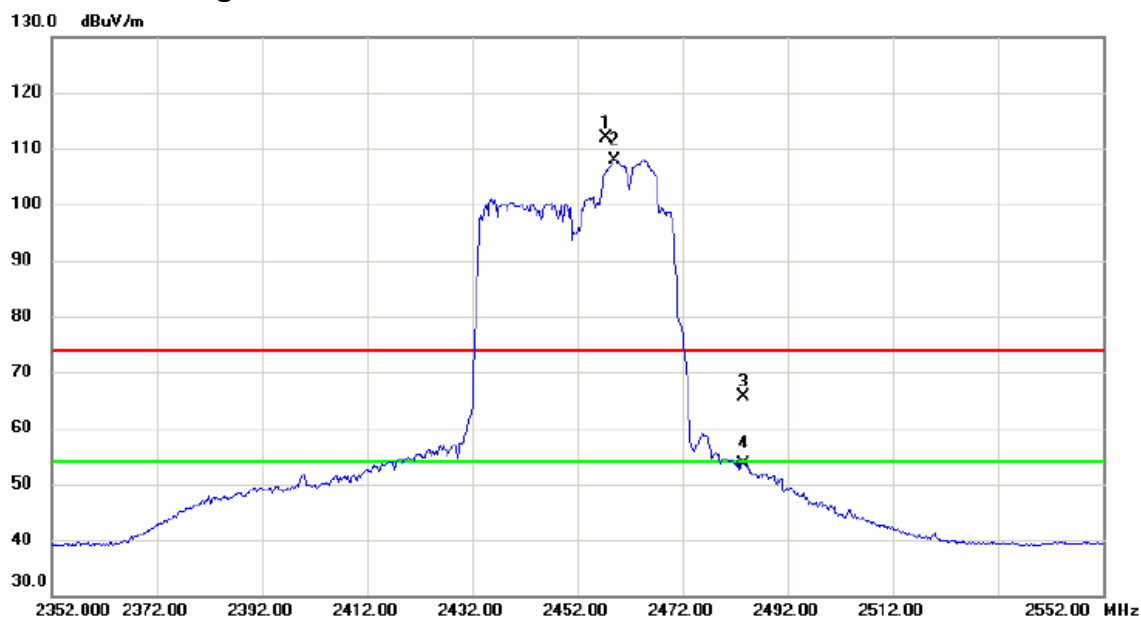

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2457.400	118.89	-6.95	111.94	74.00	37.94	peak	主波訊號不予判定
2	*	2459.200	114.90	-6.94	107.96	54.00	53.96	AVG	主波訊號不予判定
3		2483.500	72.39	-6.85	65.54	74.00	-8.46	peak	
4		2483.500	60.41	-6.85	53.56	54.00	-0.44	AVG	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

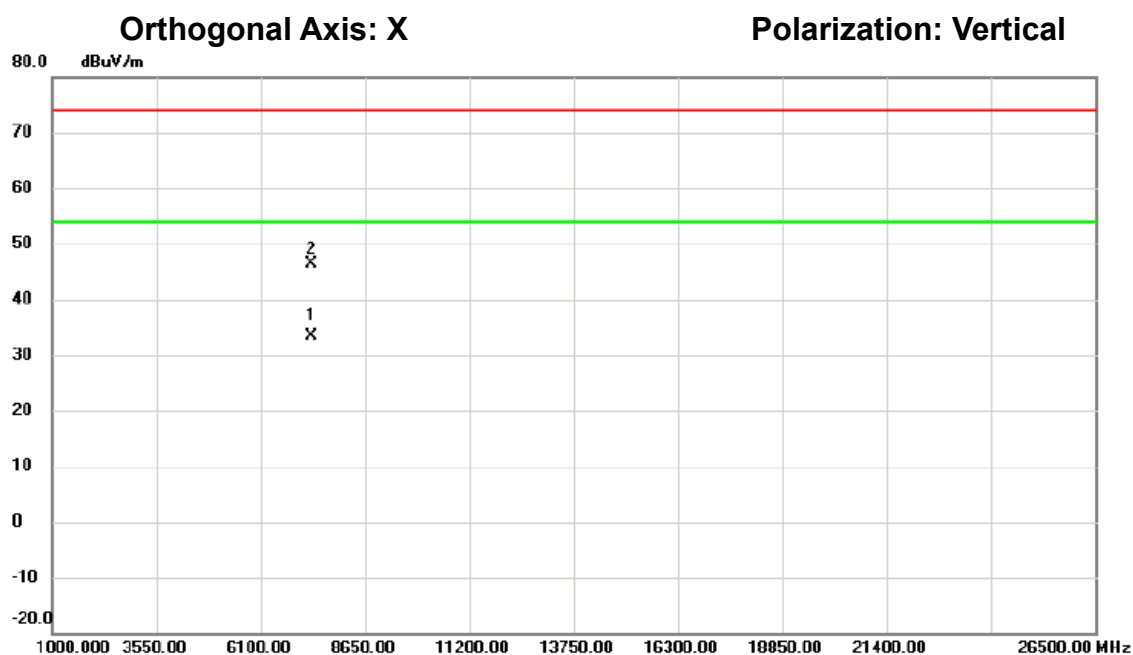

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7357.535	38.12	-4.82	33.30	54.00	-20.70	AVG	
2		7357.882	51.31	-4.82	46.49	74.00	-27.51	peak	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/07
 環境濕度: 66%

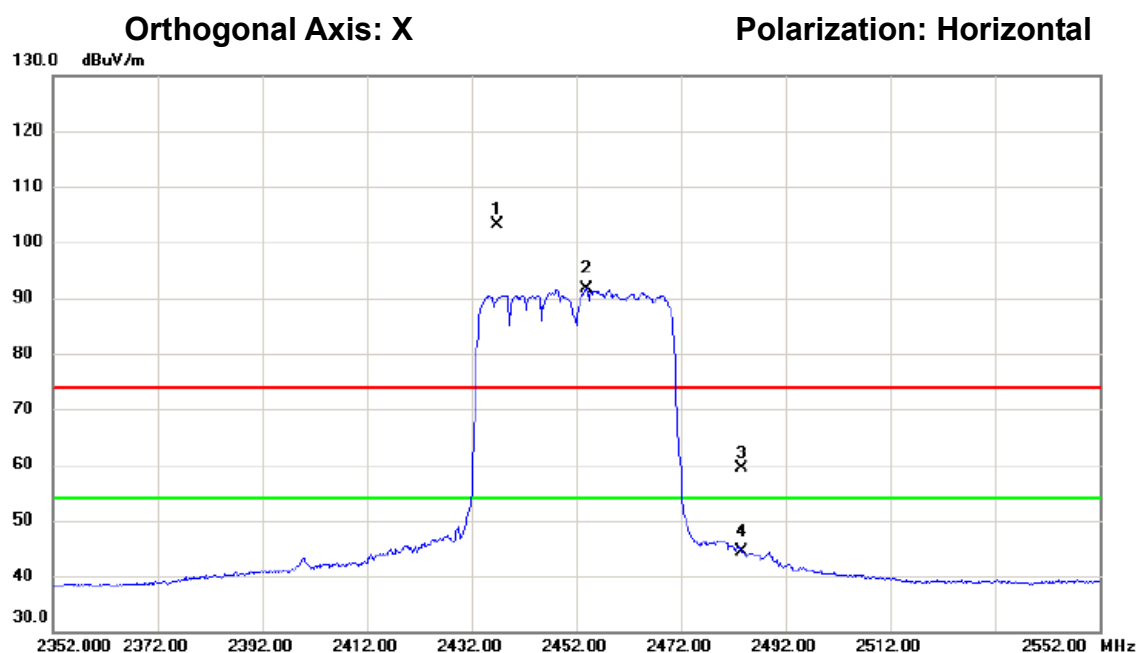

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2436.800	110.13	-7.04	103.09	74.00	29.09	peak	主波訊號不予判定
2	*	2454.100	98.51	-6.96	91.55	54.00	37.55	AVG	主波訊號不予判定
3		2483.500	66.18	-6.85	59.33	74.00	-14.67	peak	
4		2483.500	51.29	-6.85	44.44	54.00	-9.56	AVG	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/03/13
 環境濕度: 66%

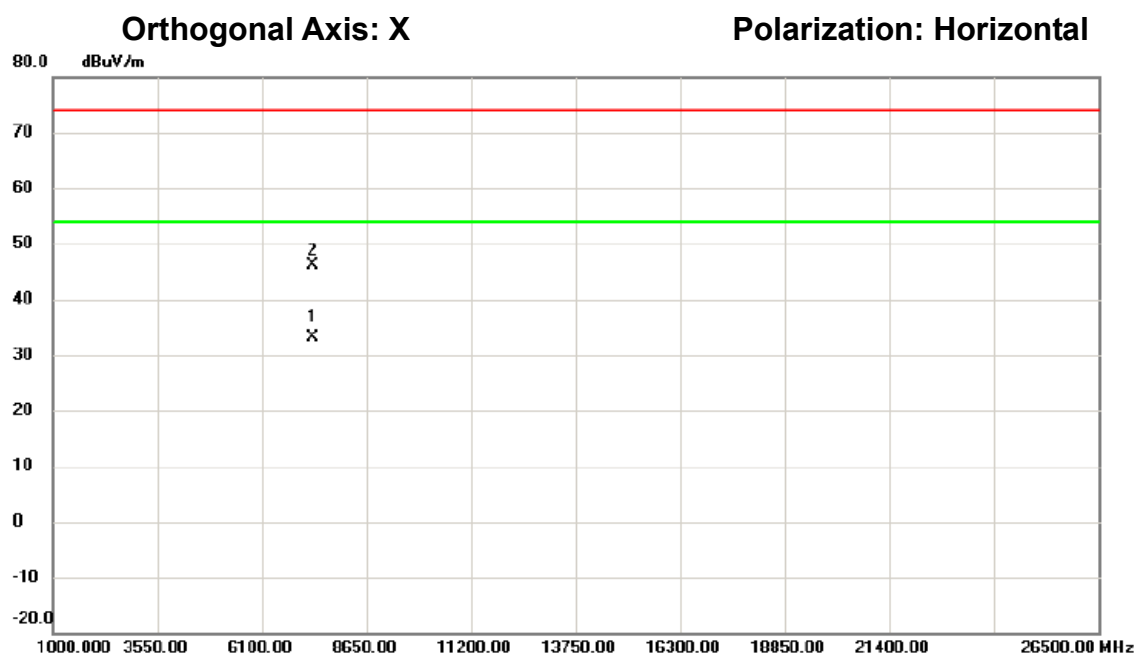

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	7355.360	38.04	-4.84	33.20	54.00	-20.80	AVG	
2	7357.047	51.02	-4.82	46.20	74.00	-27.80	peak	

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 接收
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

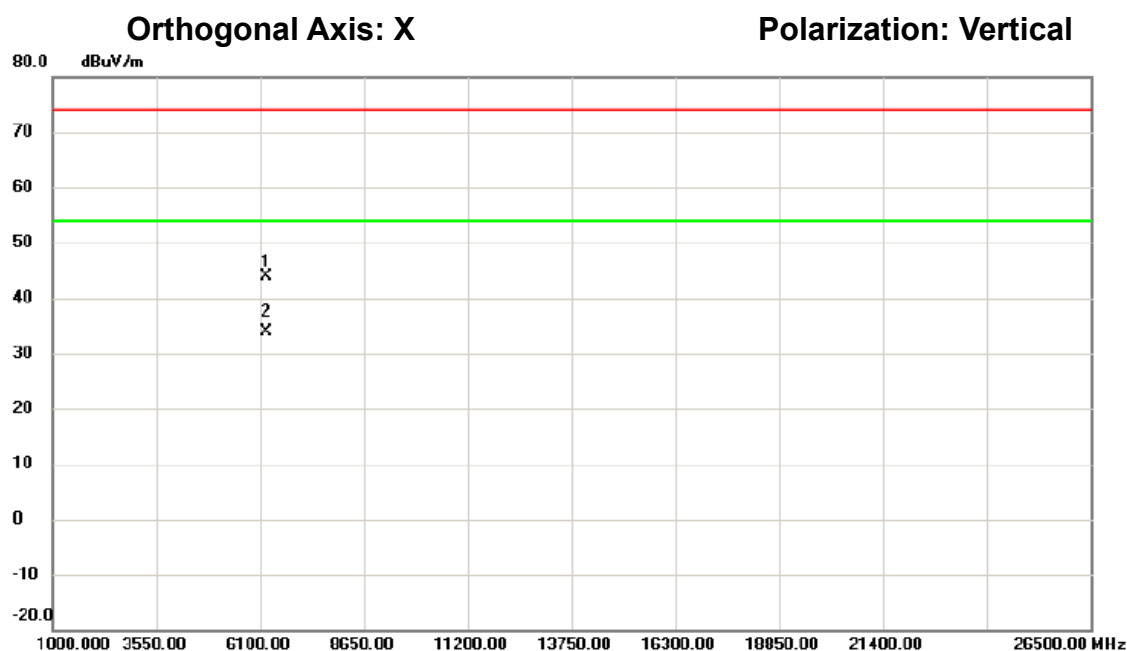

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		6250.350	52.82	-8.82	44.00	74.00	-30.00	peak	
2	*	6250.350	42.80	-8.82	33.98	54.00	-20.02	AVG	

測試頻道: IEEE vht20 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 接收
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

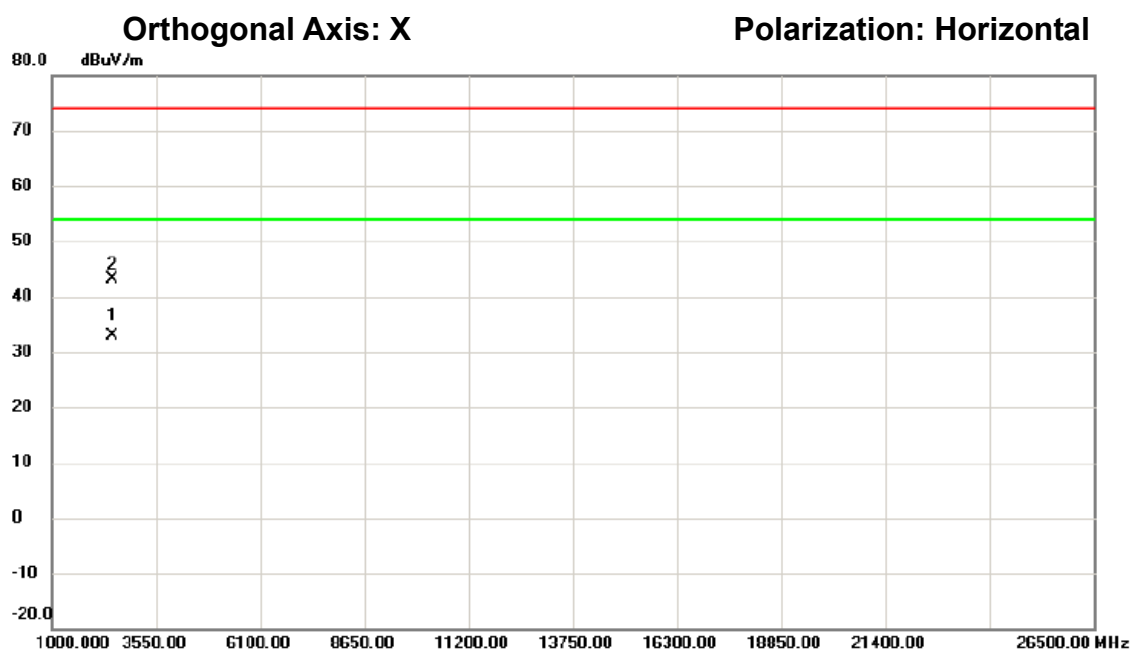

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2485.397	49.68	-16.84	32.84	54.00	-21.16	AVG	
2		2485.574	60.06	-16.84	43.22	74.00	-30.78	peak	

16.3.3 禁用頻帶內之混附發射

Non-Beamforming

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

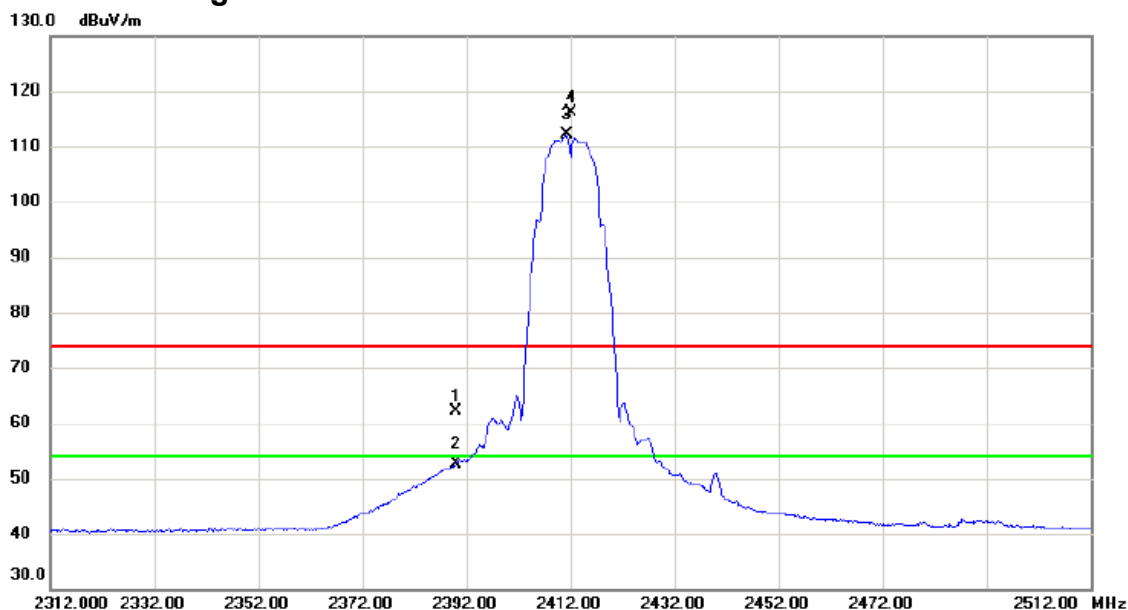

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	69.35	-7.23	62.12	74.00	-11.88	peak	
2		2390.000	59.91	-7.23	52.68	54.00	-1.32	AVG	
3	*	2411.300	119.17	-7.15	112.02	54.00	58.02	AVG	主波訊號不予判定
4	X	2412.000	123.17	-7.15	116.02	74.00	42.02	peak	主波訊號不予判定

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射

2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

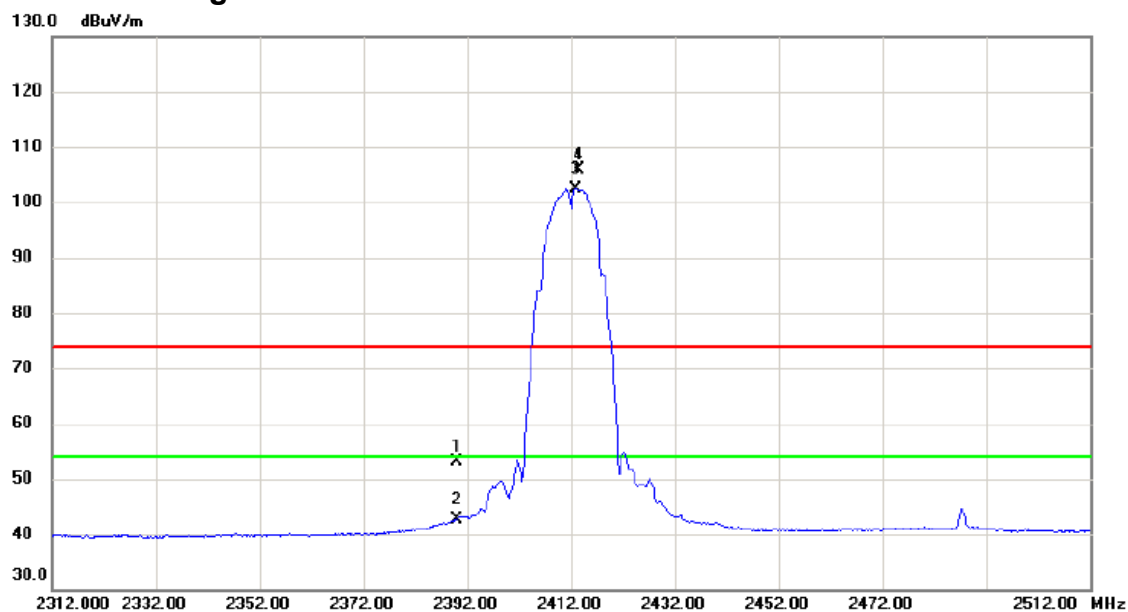

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	60.45	-7.23	53.22	74.00	-20.78	peak	
2		2390.000	49.80	-7.23	42.57	54.00	-11.43	AVG	
3	*	2412.800	109.57	-7.13	102.44	54.00	48.44	AVG	主波訊號不予判定
4	X	2413.500	113.12	-7.13	105.99	74.00	31.99	peak	主波訊號不予判定

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

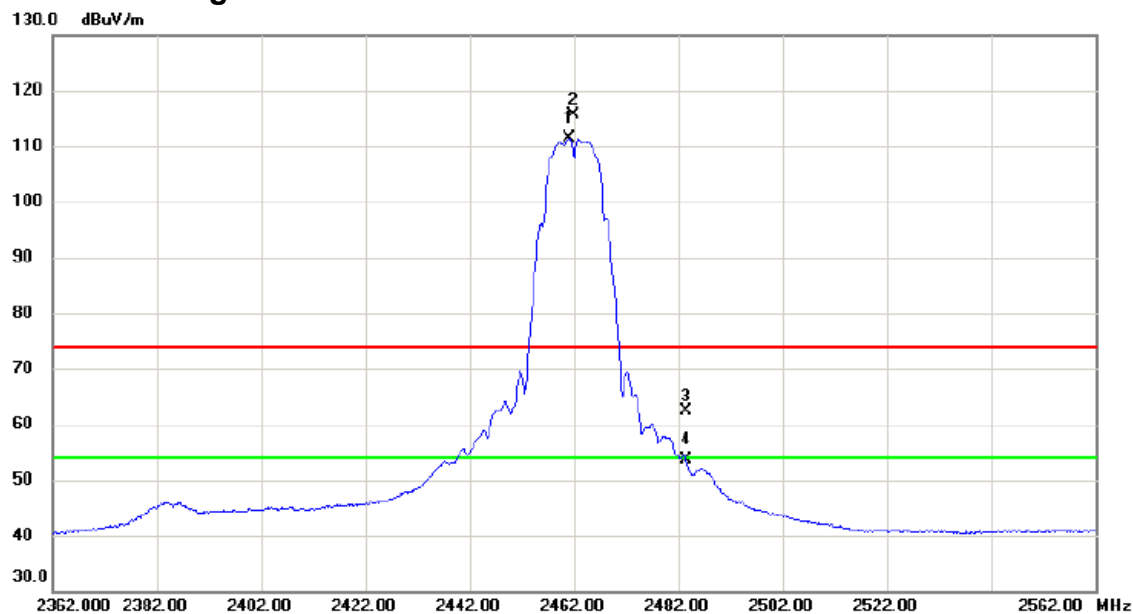

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2461.200	118.44	-6.94	111.50	54.00	57.50	AVG	主波訊號不予判定
2	X	2461.900	122.48	-6.94	115.54	74.00	41.54	peak	主波訊號不予判定
3		2483.500	69.16	-6.85	62.31	74.00	-11.69	peak	
4		2483.500	60.50	-6.85	53.65	54.00	-0.35	AVG	

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

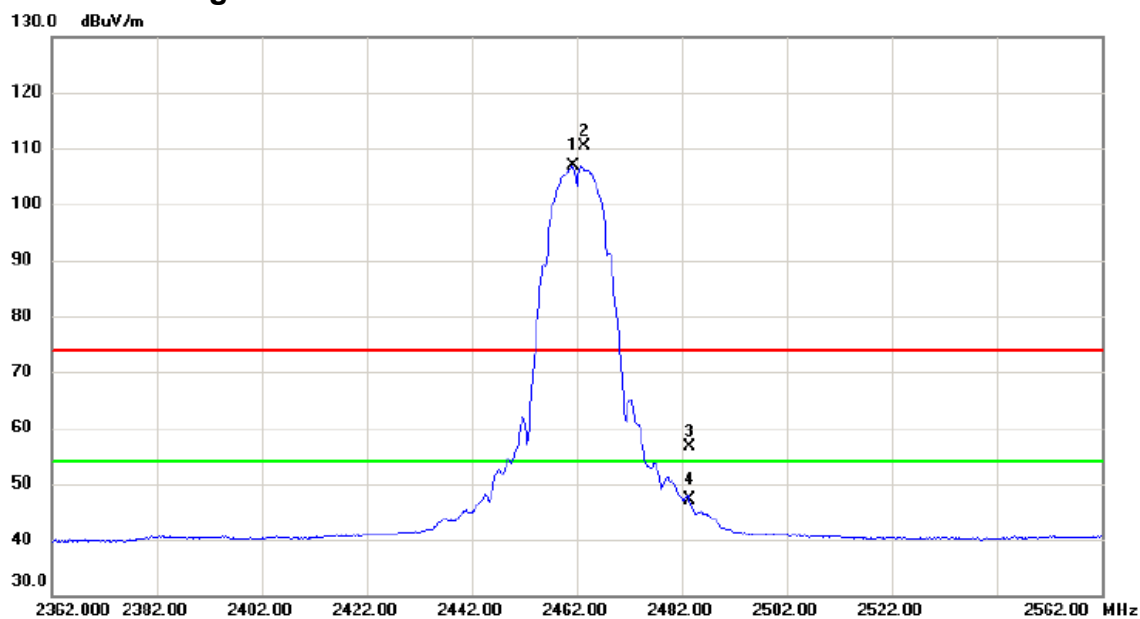

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2461.300	113.76	-6.94	106.82	54.00	52.82	AVG	主波訊號不予判定
2	X	2463.400	117.20	-6.93	110.27	74.00	36.27	peak	主波訊號不予判定
3		2483.500	63.58	-6.85	56.73	74.00	-17.27	peak	
4		2483.500	53.92	-6.85	47.07	54.00	-6.93	AVG	

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射

2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

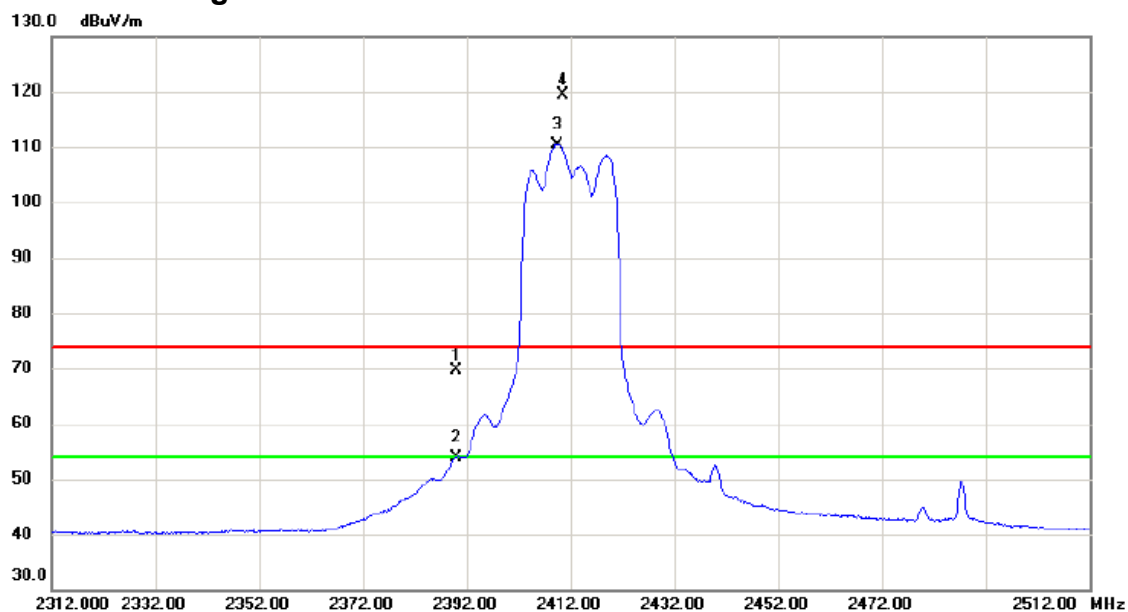

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	76.94	-7.23	69.71	74.00	-4.29	peak	
2		2390.000	61.01	-7.23	53.78	54.00	-0.22	AVG	
3	*	2409.500	117.59	-7.15	110.44	54.00	56.44	AVG	主波訊號不予判定
4	X	2410.400	126.57	-7.15	119.42	74.00	45.42	peak	主波訊號不予判定

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射

2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

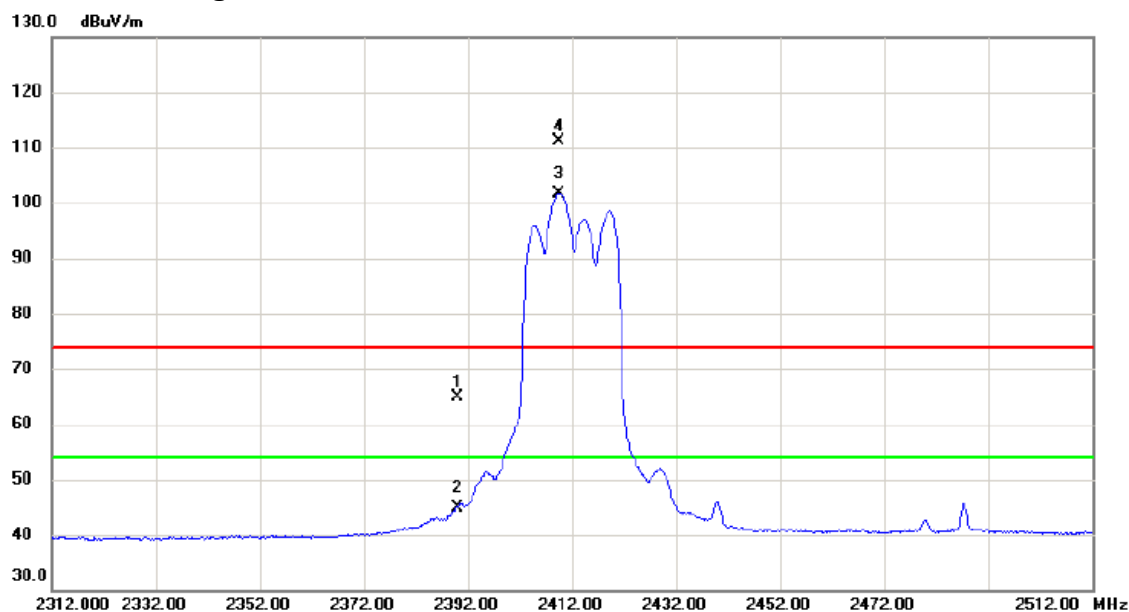

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	72.20	-7.23	64.97	74.00	-9.03	peak	
2		2390.000	52.23	-7.23	45.00	54.00	-9.00	AVG	
3	*	2409.500	108.76	-7.15	101.61	54.00	47.61	AVG	主波訊號不予判定
4	X	2409.600	118.32	-7.15	111.17	74.00	37.17	peak	主波訊號不予判定

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

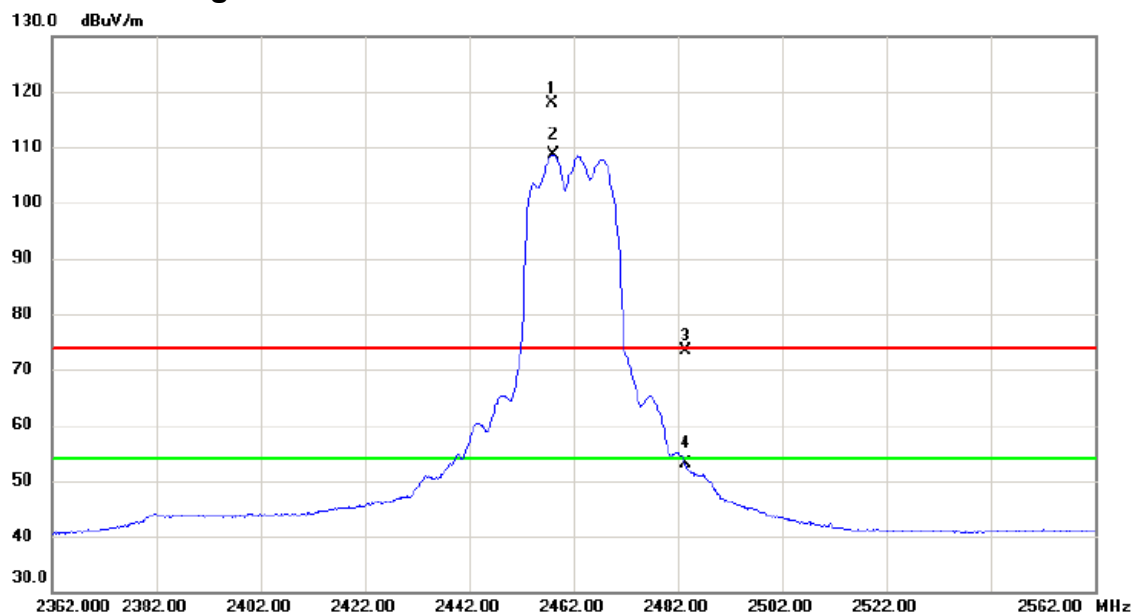

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2457.900	124.91	-6.95	117.96	74.00	43.96	peak	主波訊號不予判定
2	*	2458.000	115.64	-6.95	108.69	54.00	54.69	AVG	主波訊號不予判定
3		2483.500	80.19	-6.85	73.34	74.00	-0.66	peak	
4		2483.500	59.89	-6.85	53.04	54.00	-0.96	AVG	

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

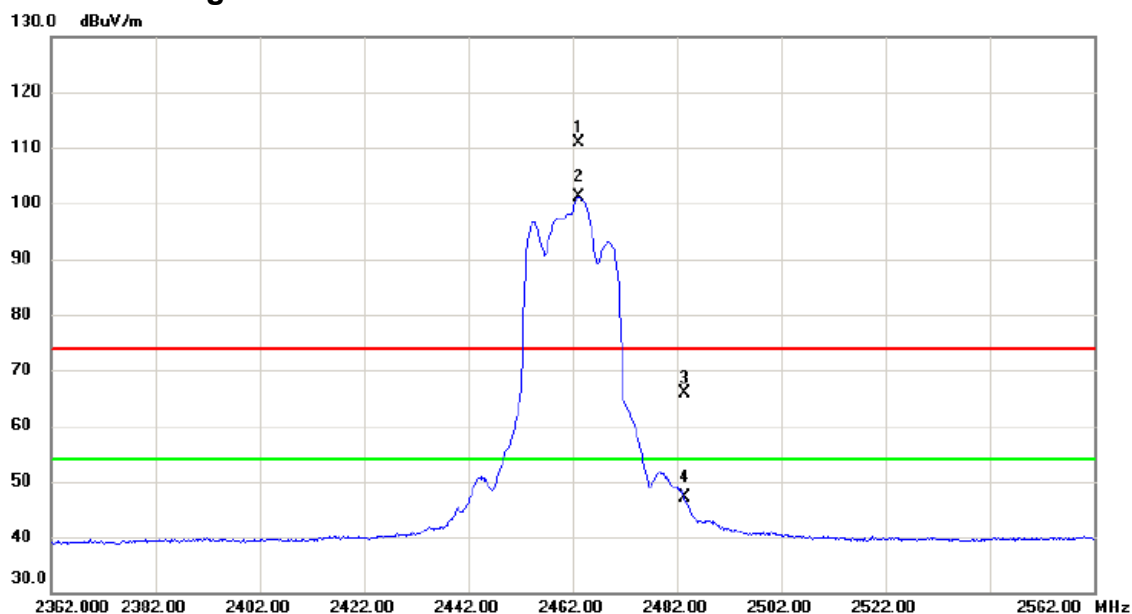

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2463.200	117.76	-6.93	110.83	74.00	36.83	peak	主波訊號不予判定
2	*	2463.300	108.06	-6.93	101.13	54.00	47.13	AVG	主波訊號不予判定
3		2483.500	72.78	-6.85	65.93	74.00	-8.07	peak	
4		2483.500	53.96	-6.85	47.11	54.00	-6.89	AVG	

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

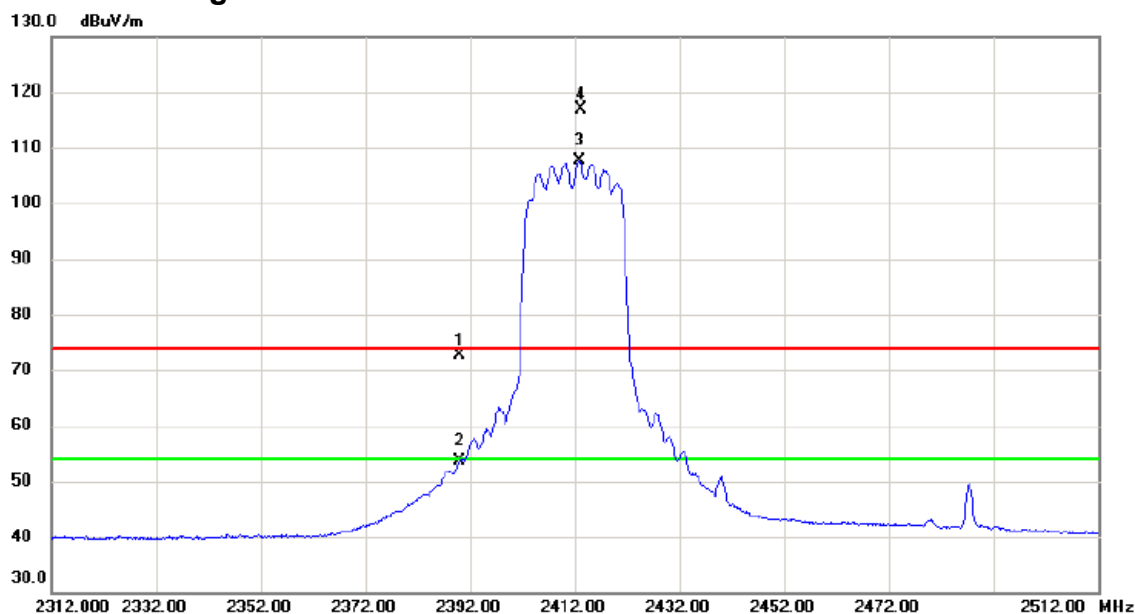

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	79.92	-7.23	72.69	74.00	-1.31	peak	
2		2390.000	60.76	-7.23	53.53	54.00	-0.47	AVG	
3	*	2413.000	114.66	-7.13	107.53	54.00	53.53	AVG	主波訊號不予判定
4	X	2413.200	123.97	-7.13	116.84	74.00	42.84	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	67.39	-7.23	60.16	74.00	-13.84	peak	
2		2390.000	49.55	-7.23	42.32	54.00	-11.68	AVG	
3	*	2414.600	105.64	-7.13	98.51	54.00	44.51	AVG	主波訊號不予判定
4	X	2414.700	115.15	-7.13	108.02	74.00	34.02	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

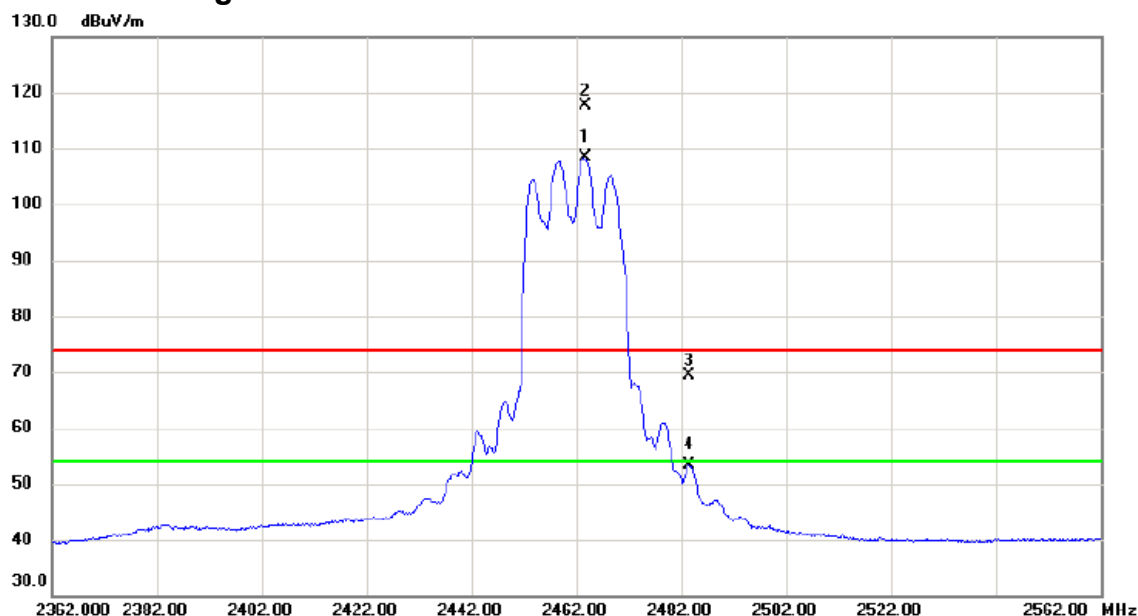

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2463.700	115.39	-6.93	108.46	54.00	54.46	AVG	主波訊號不予判定
2	X	2463.800	124.64	-6.93	117.71	74.00	43.71	peak	主波訊號不予判定
3		2483.500	76.33	-6.85	69.48	74.00	-4.52	peak	
4		2483.500	60.13	-6.85	53.28	54.00	-0.72	AVG	

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2459.500	116.40	-6.94	109.46	74.00	35.46	peak	主波訊號不予判定
2	*	2459.700	107.23	-6.94	100.29	54.00	46.29	AVG	主波訊號不予判定
3		2483.500	64.98	-6.85	58.13	74.00	-15.87	peak	
4		2483.500	52.55	-6.85	45.70	54.00	-8.30	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

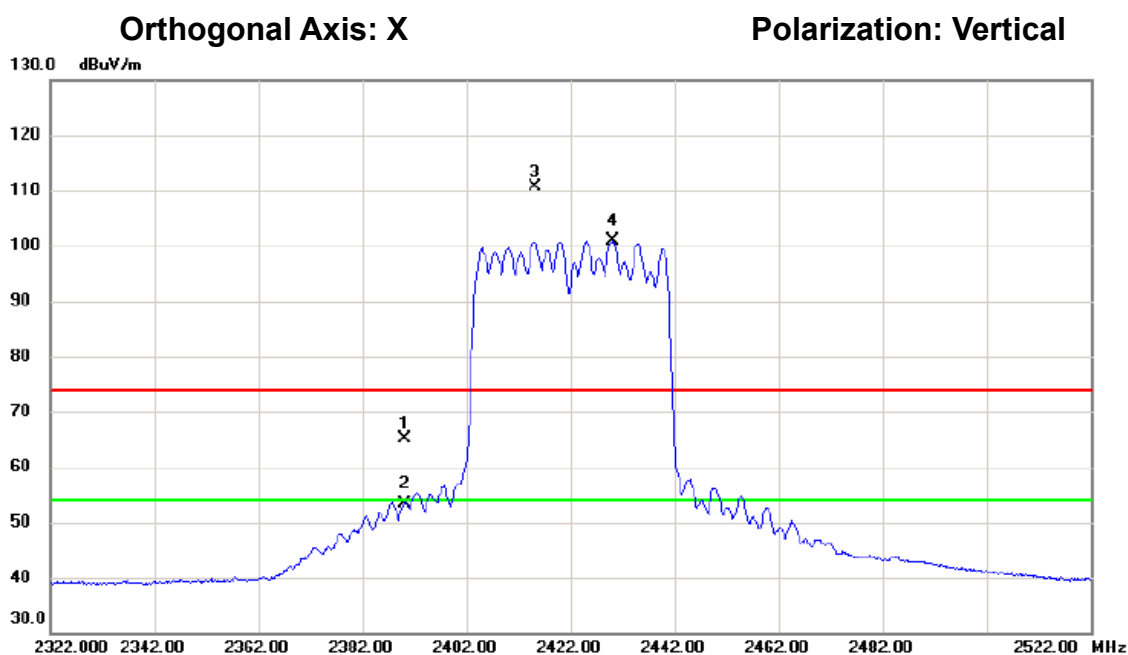

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	72.24	-7.23	65.01	74.00	-8.99	peak	
2		2390.000	60.63	-7.23	53.40	54.00	-0.60	AVG	
3	X	2415.300	117.82	-7.13	110.69	74.00	36.69	peak	主波訊號不予判定
4	*	2430.000	107.91	-7.07	100.84	54.00	46.84	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

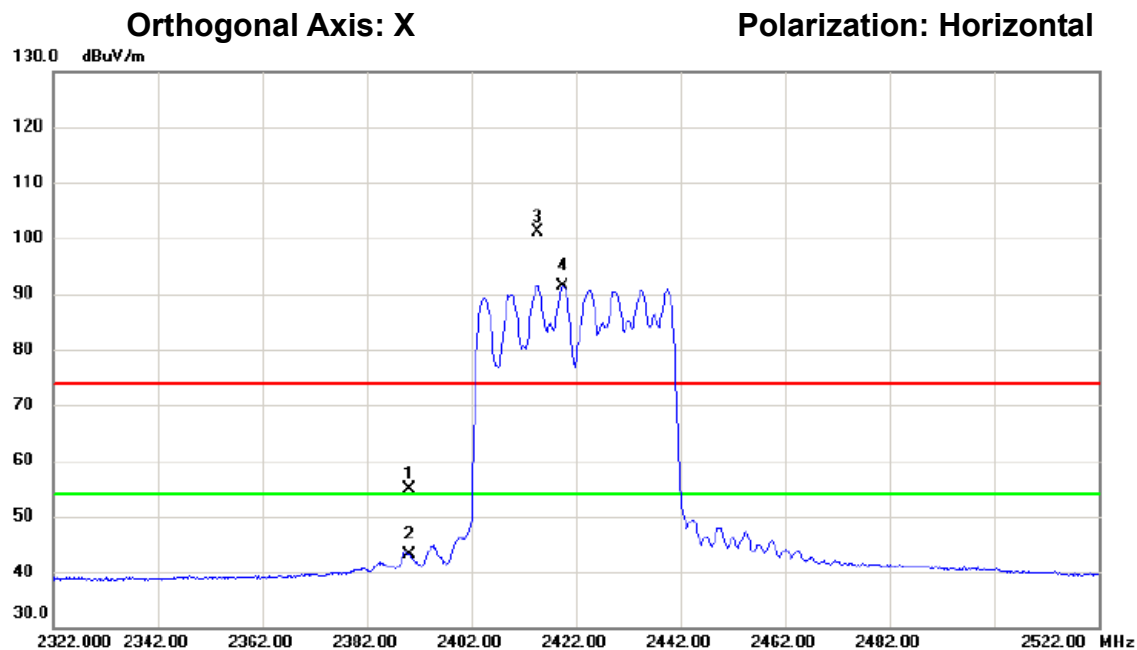

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	62.19	-7.23	54.96	74.00	-19.04	peak	
2		2390.000	50.42	-7.23	43.19	54.00	-10.81	AVG	
3	X	2414.700	108.22	-7.13	101.09	74.00	27.09	peak	主波訊號不予判定
4	*	2419.400	98.54	-7.11	91.43	54.00	37.43	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

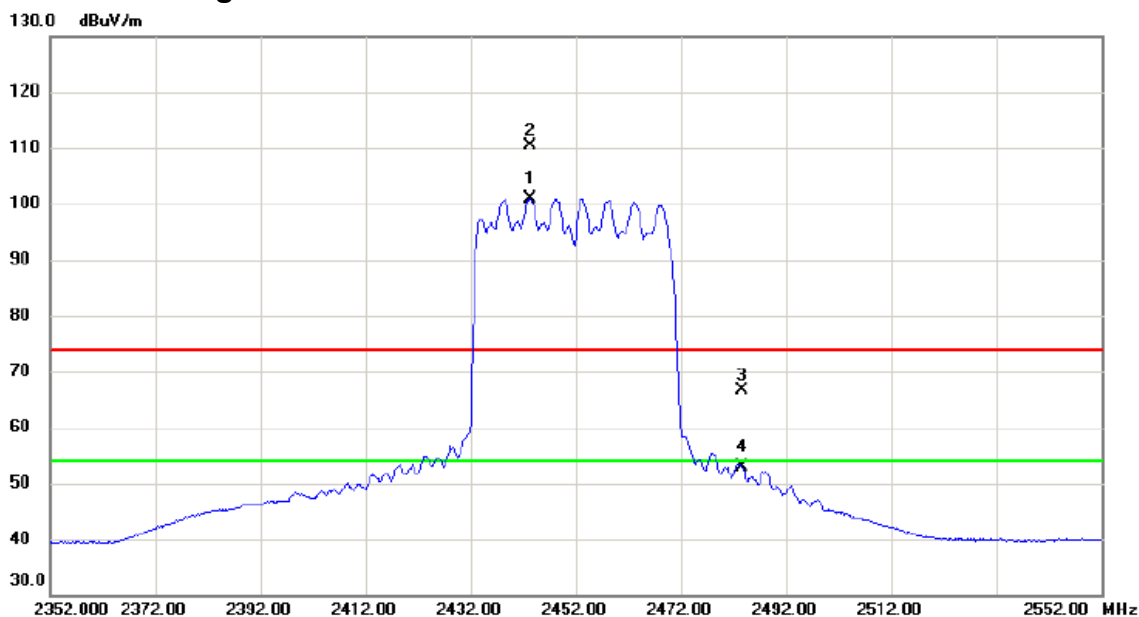

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2443.300	108.00	-7.01	100.99	54.00	46.99	AVG	主波訊號不予判定
2	X	2443.400	117.45	-7.01	110.44	74.00	36.44	peak	主波訊號不予判定
3		2483.500	73.49	-6.85	66.64	74.00	-7.36	peak	
4		2483.500	59.78	-6.85	52.93	54.00	-1.07	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

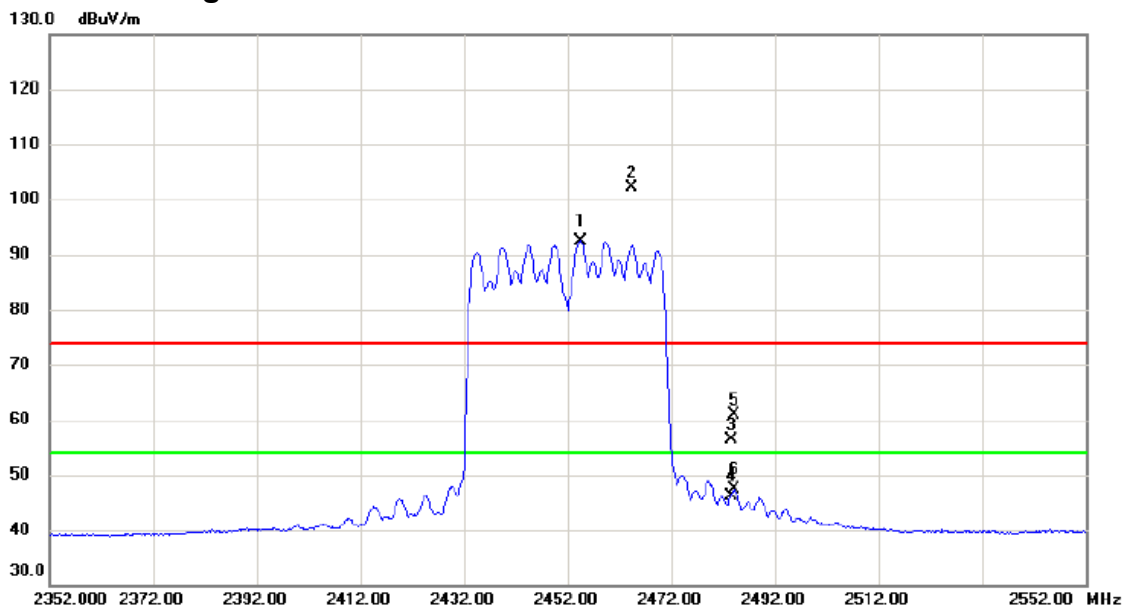

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2454.400	99.46	-6.96	92.50	54.00	38.50	AVG	主波訊號不予判定
2	X	2464.400	109.10	-6.93	102.17	74.00	28.17	peak	主波訊號不予判定
3		2483.500	63.19	-6.85	56.34	74.00	-17.66	peak	
4		2483.500	52.89	-6.85	46.04	54.00	-7.96	AVG	
5		2484.100	67.82	-6.84	60.98	74.00	-13.02	peak	
6		2484.100	54.19	-6.84	47.35	54.00	-6.65	AVG	

測試頻道: IEEE vht20 / 2.4 GHz 頻帶 /
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

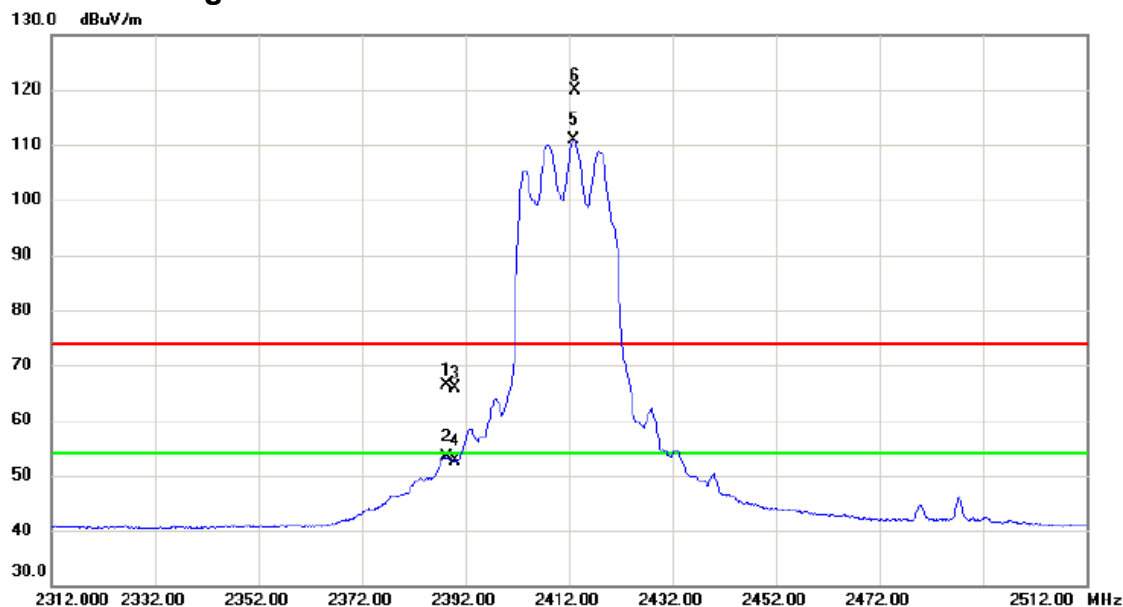

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2388.300	73.50	-7.23	66.27	74.00	-7.73	peak	
2		2388.300	60.49	-7.23	53.26	54.00	-0.74	AVG	
3		2390.000	73.21	-7.23	65.98	74.00	-8.02	peak	
4		2390.000	59.98	-7.23	52.75	54.00	-1.25	AVG	
5	*	2413.000	118.09	-7.13	110.96	54.00	56.96	AVG	主波訊號不予判定
6	X	2413.200	126.91	-7.13	119.78	74.00	45.78	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2.4 GHz 頻帶 /
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

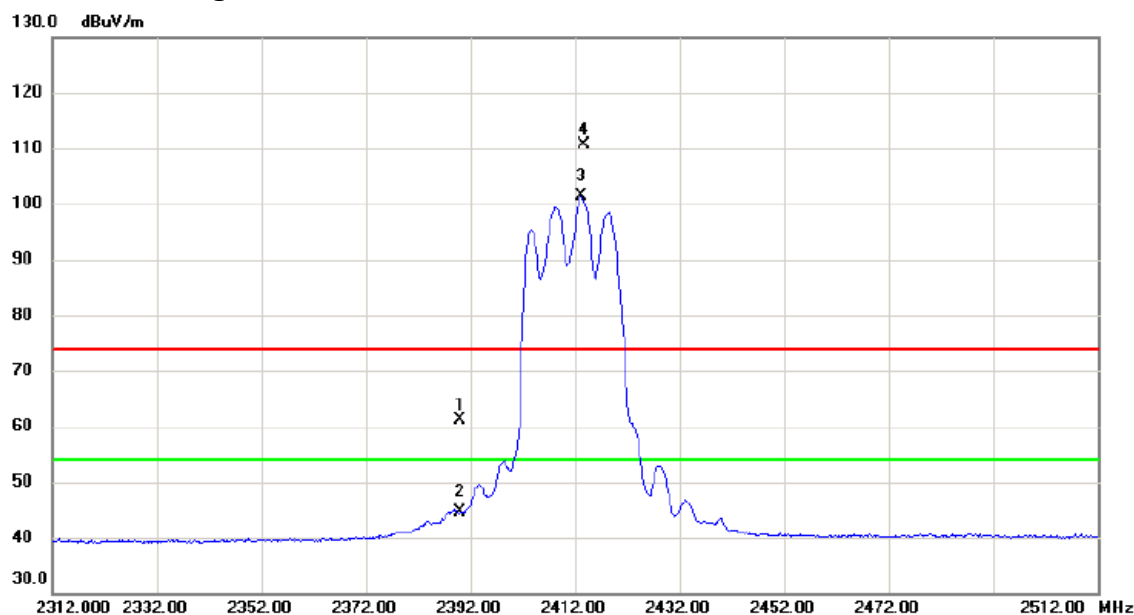

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	68.34	-7.23	61.11	74.00	-12.89	peak	
2		2390.000	51.89	-7.23	44.66	54.00	-9.34	AVG	
3	*	2413.200	108.42	-7.13	101.29	54.00	47.29	AVG	主波訊號不予判定
4	X	2413.700	117.70	-7.13	110.57	74.00	36.57	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2.4 GHz 頻帶 /
2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

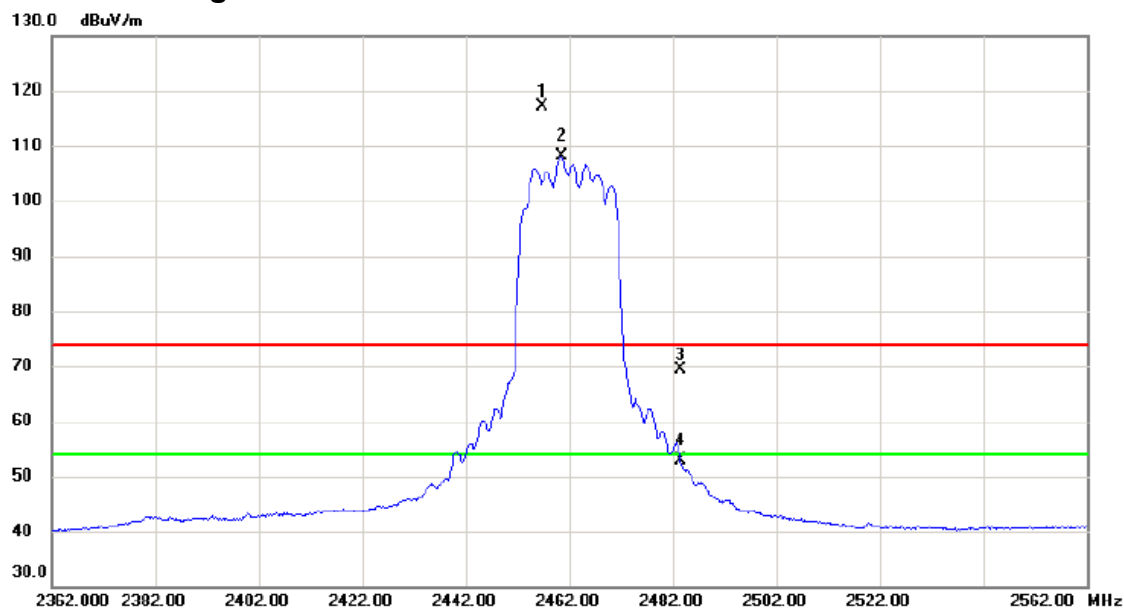

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2456.700	124.09	-6.95	117.14	74.00	43.14	peak	主波訊號不予判定
2	*	2460.400	115.07	-6.94	108.13	54.00	54.13	AVG	主波訊號不予判定
3		2483.500	76.22	-6.85	69.37	74.00	-4.63	peak	
4		2483.500	59.83	-6.85	52.98	54.00	-1.02	AVG	

測試頻道: IEEE vht20 / 2.4 GHz 頻帶 /
2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

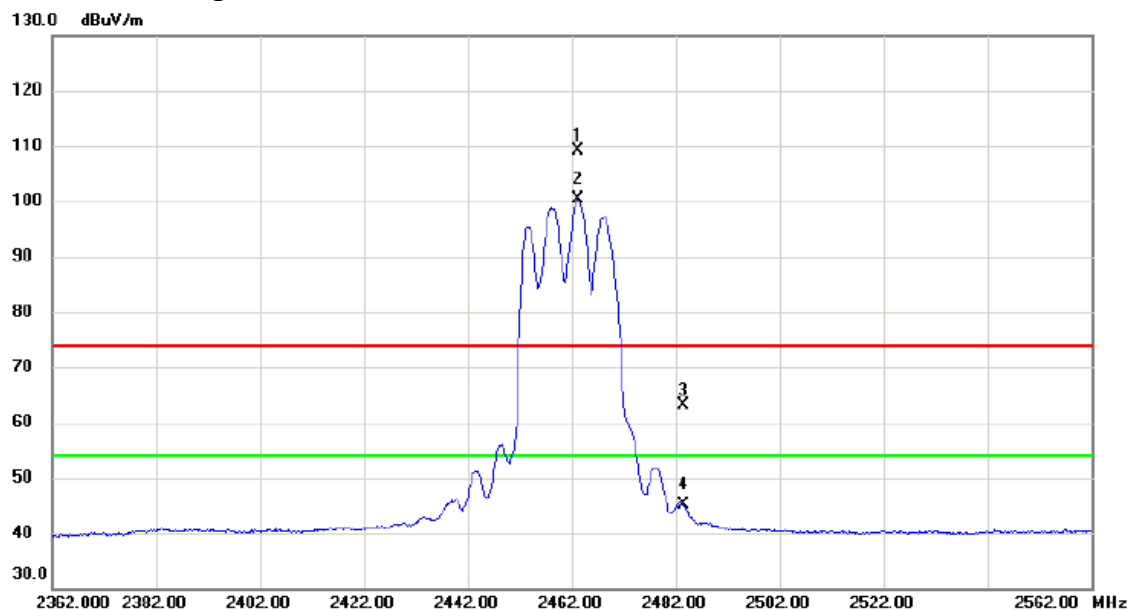

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2463.200	116.02	-6.93	109.09	74.00	35.09	peak	主波訊號不予判定
2	*	2463.300	107.22	-6.93	100.29	54.00	46.29	AVG	主波訊號不予判定
3		2483.500	69.98	-6.85	63.13	74.00	-10.87	peak	
4		2483.500	51.88	-6.85	45.03	54.00	-8.97	AVG	

測試頻道: IEEE vht40 / 2.4 GHz 頻帶 /
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

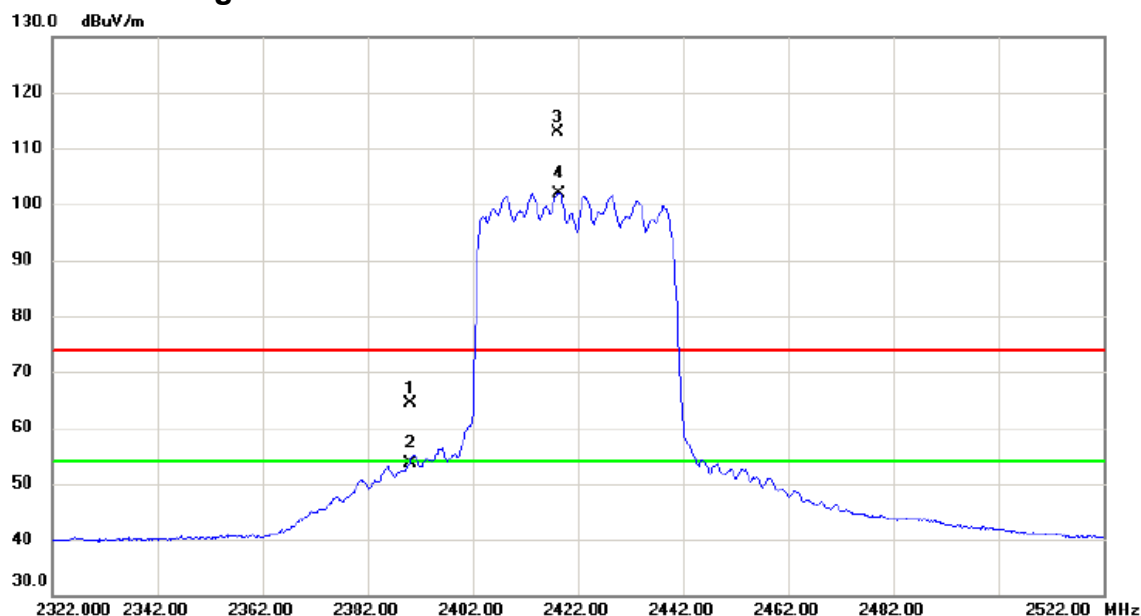

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	71.64	-7.23	64.41	74.00	-9.59	peak	
2		2390.000	60.97	-7.23	53.74	54.00	-0.26	AVG	
3	X	2418.200	120.10	-7.11	112.99	74.00	38.99	peak	主波訊號不予判定
4	*	2418.300	109.02	-7.11	101.91	54.00	47.91	AVG	主波訊號不予判定

測試頻道: IEEE vht40 /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

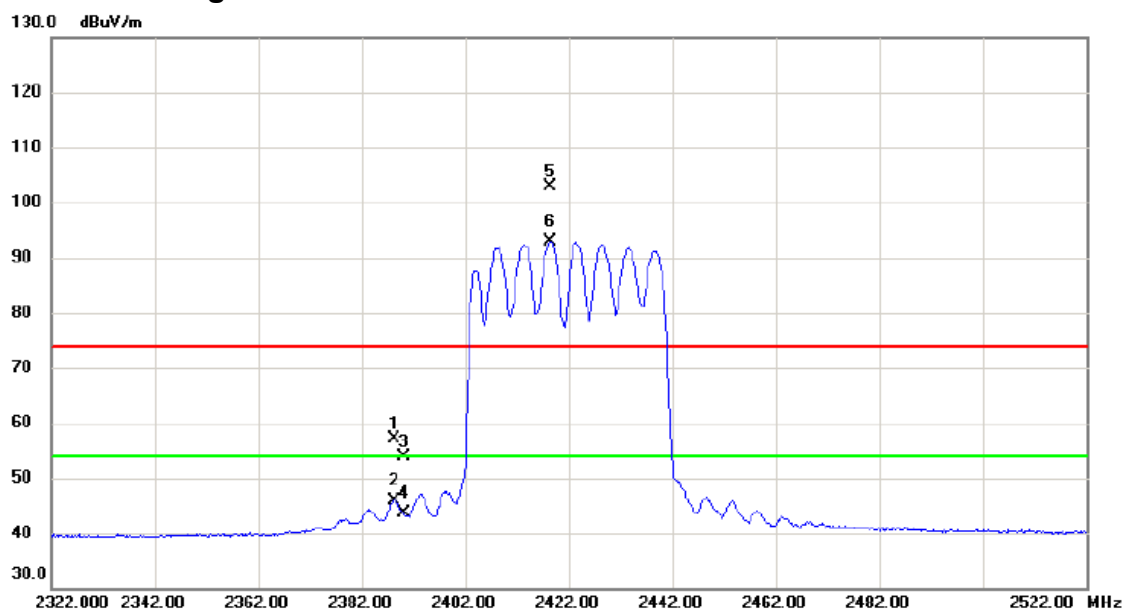

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	2388.300	64.42	-7.23	57.19	74.00	-16.81	peak	
2	2388.300	53.23	-7.23	46.00	54.00	-8.00	AVG	
3	2390.000	61.02	-7.23	53.79	74.00	-20.21	peak	
4	2390.000	50.96	-7.23	43.73	54.00	-10.27	AVG	
5 X	2418.400	109.97	-7.11	102.86	74.00	28.86	peak	主波訊號不予判定
6 *	2418.500	100.04	-7.11	92.93	54.00	38.93	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2.4 GHz 頻帶 /
2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/28

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

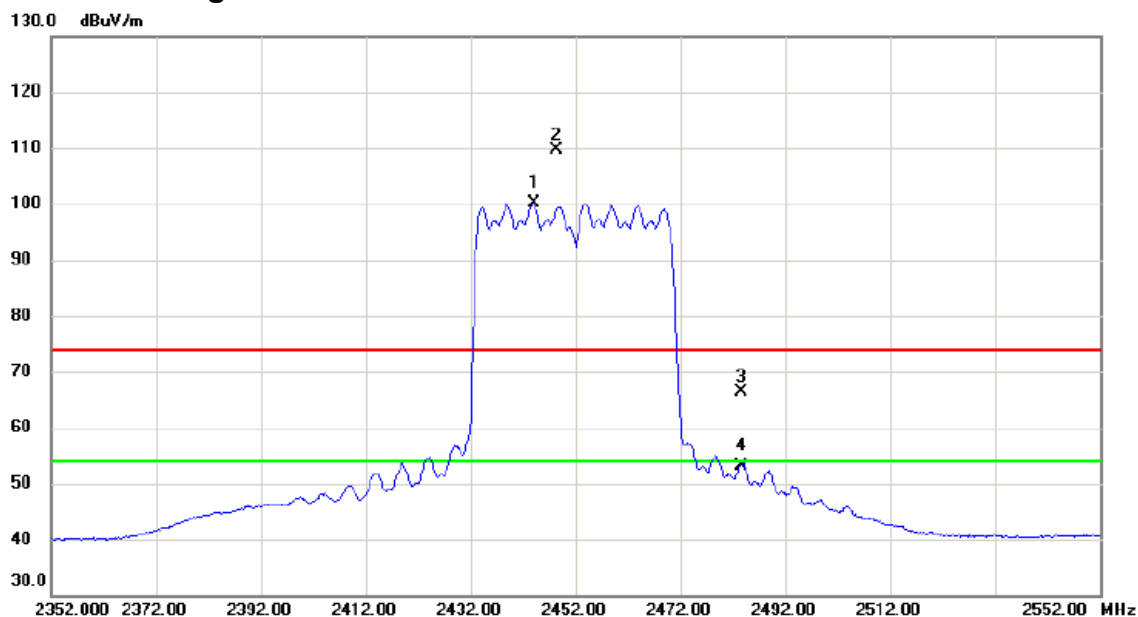

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2444.000	107.07	-7.01	100.06	54.00	46.06	AVG	主波訊號不予判定
2	X	2448.300	116.73	-6.99	109.74	74.00	35.74	peak	主波訊號不予判定
3		2483.500	73.28	-6.85	66.43	74.00	-7.57	peak	
4		2483.500	59.90	-6.85	53.05	54.00	-0.95	AVG	

測試頻道: IEEE vht40 / 2.4 GHz 頻帶 /

測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/02/28

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

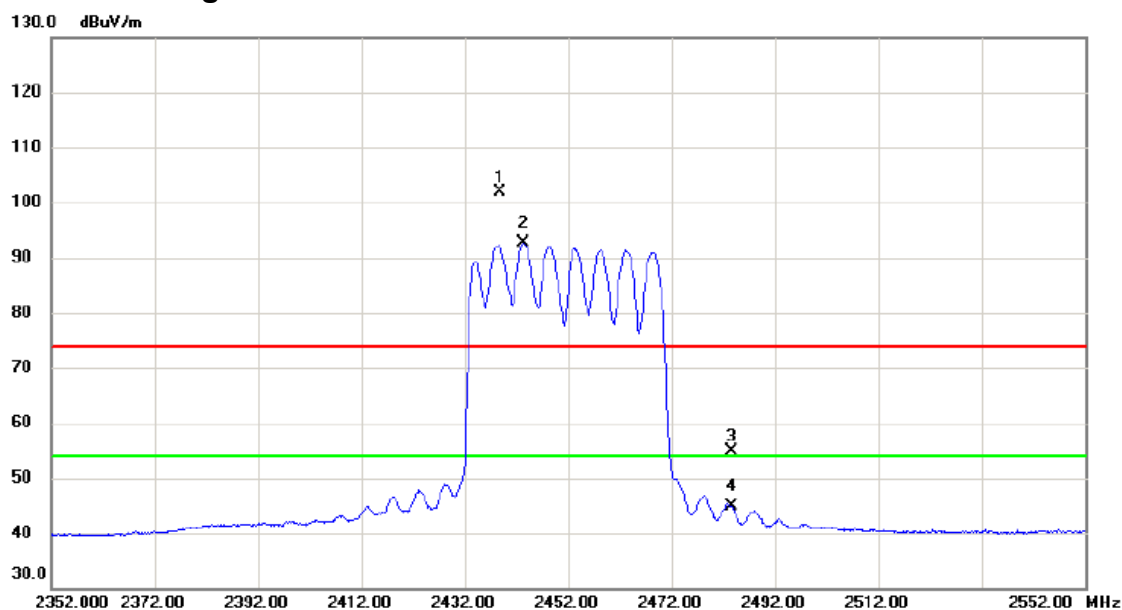

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2438.700	109.03	-7.03	102.00	74.00	28.00	peak	主波訊號不予判定
2	*	2443.400	99.56	-7.01	92.55	54.00	38.55	AVG	主波訊號不予判定
3		2483.500	61.84	-6.85	54.99	74.00	-19.01	peak	
4		2483.500	51.63	-6.85	44.78	54.00	-9.22	AVG	

With Beamforming

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

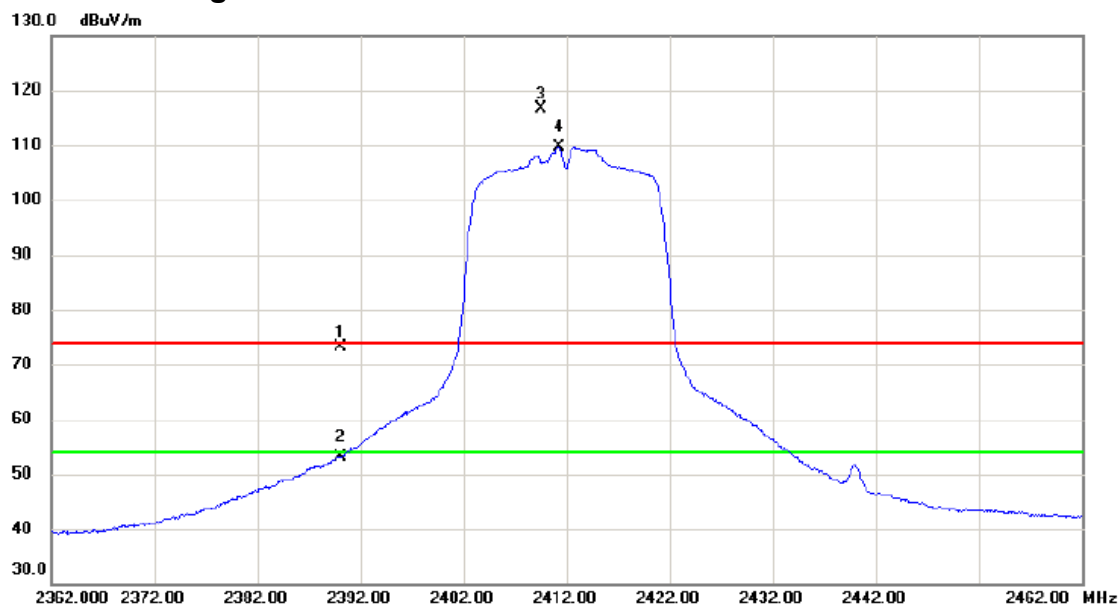

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	80.33	-7.23	73.10	74.00	-0.90	peak	
2		2390.000	60.28	-7.23	53.05	54.00	-0.95	AVG	
3	X	2409.550	123.67	-7.15	116.52	74.00	42.52	peak	主波訊號不予判定
4	*	2411.250	116.76	-7.15	109.61	54.00	55.61	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

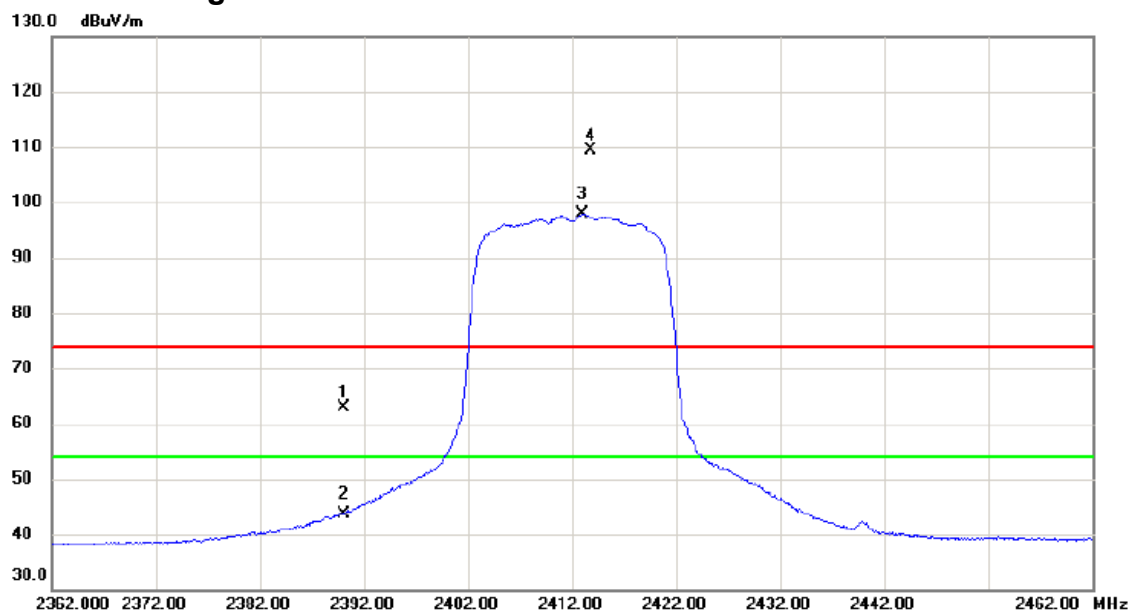

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	70.02	-7.23	62.79	74.00	-11.21	peak	
2		2390.000	50.93	-7.23	43.70	54.00	-10.30	AVG	
3	*	2413.000	105.02	-7.13	97.89	54.00	43.89	AVG	主波訊號不予判定
4	X	2413.750	116.46	-7.13	109.33	74.00	35.33	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

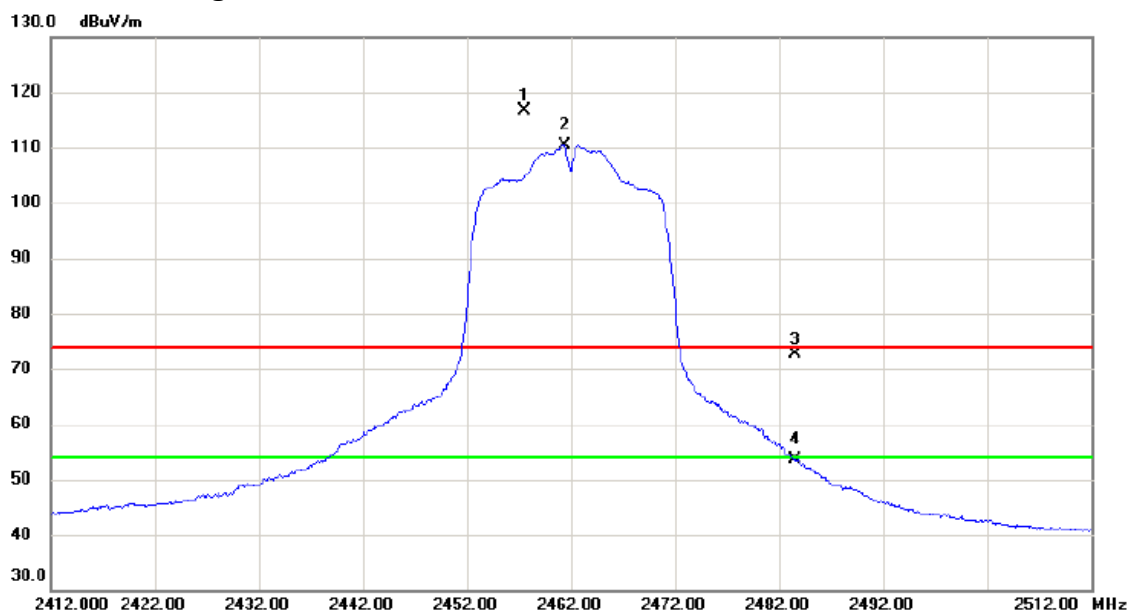

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2457.550	123.61	-6.95	116.66	74.00	42.66	peak	主波訊號不予判定
2	*	2461.350	117.27	-6.94	110.33	54.00	56.33	AVG	主波訊號不予判定
3		2483.500	79.47	-6.85	72.62	74.00	-1.38	peak	
4		2483.500	60.49	-6.85	53.64	54.00	-0.36	AVG	

測試頻道: IEEE 802.11n (HT20) /
2.4 GHz 頻帶 / 2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

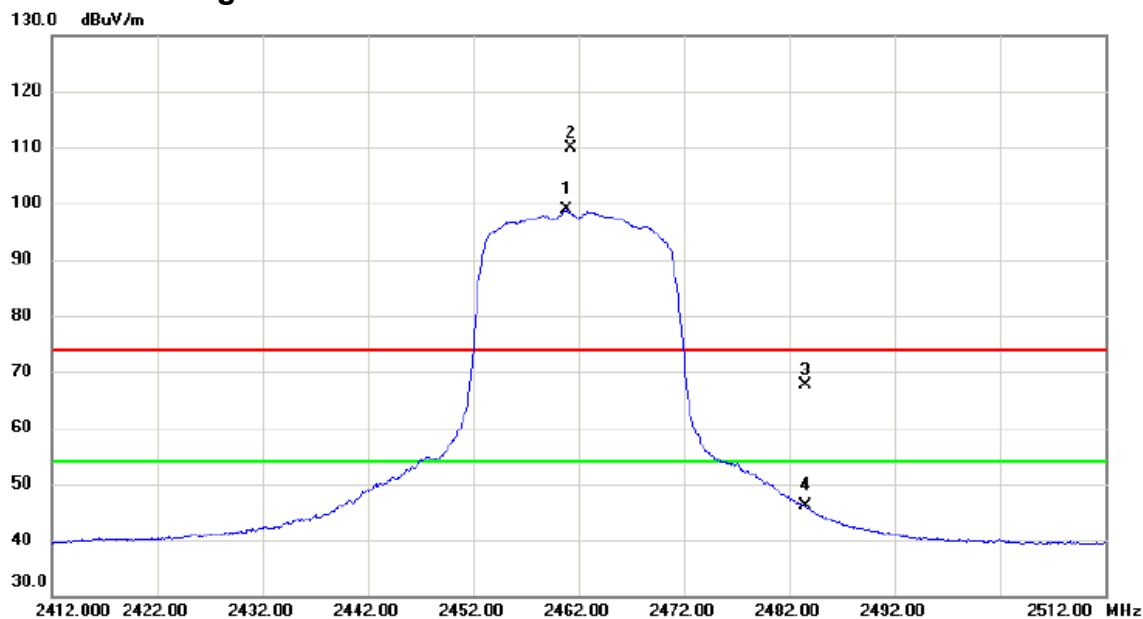

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2460.850	105.72	-6.94	98.78	54.00	44.78	AVG	主波訊號不予判定
2	X	2461.250	116.89	-6.94	109.95	74.00	35.95	peak	主波訊號不予判定
3		2483.500	74.47	-6.85	67.62	74.00	-6.38	peak	
4		2483.500	52.88	-6.85	46.03	54.00	-7.97	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

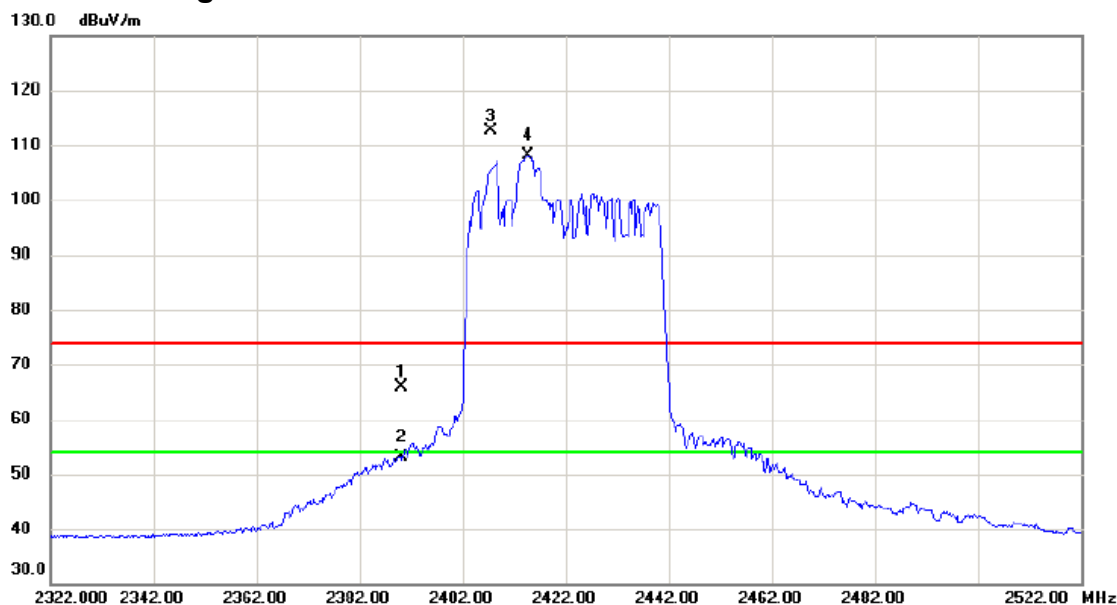

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	73.06	-7.23	65.83	74.00	-8.17	peak	
2		2390.000	60.28	-7.23	53.05	54.00	-0.95	AVG	
3	X	2407.600	119.79	-7.16	112.63	74.00	38.63	peak	主波訊號不予判定
4	*	2414.700	115.28	-7.13	108.15	54.00	54.15	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

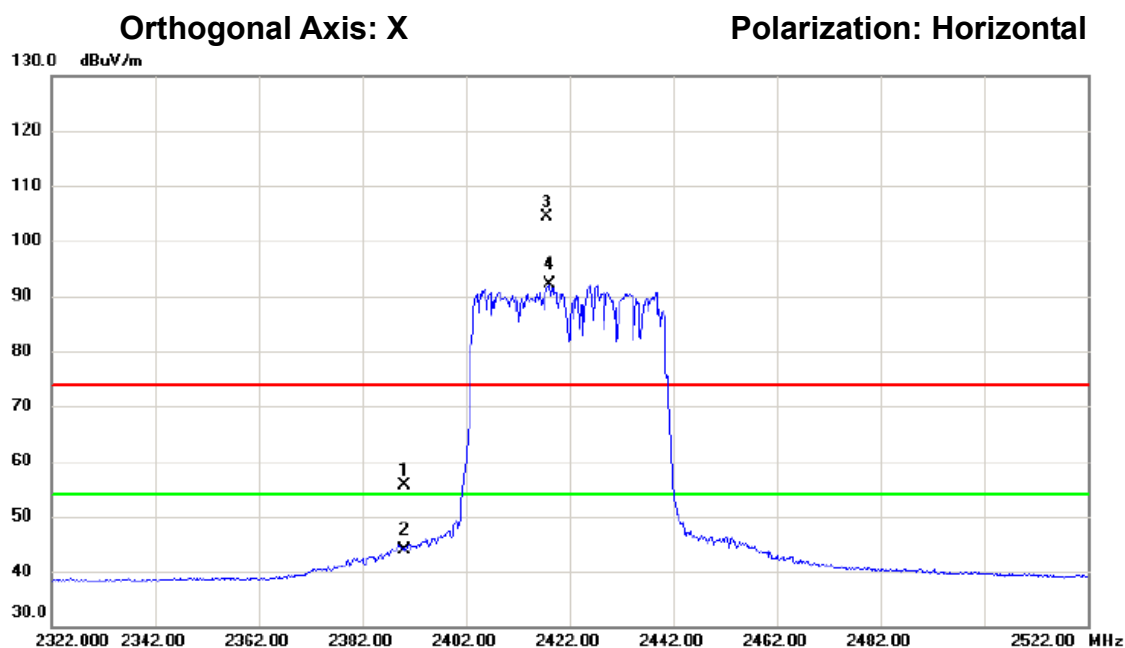

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	62.74	-7.23	55.51	74.00	-18.49	peak	
2		2390.000	51.10	-7.23	43.87	54.00	-10.13	AVG	
3	X	2417.500	111.51	-7.11	104.40	74.00	30.40	peak	主波訊號不予判定
4	*	2418.200	99.21	-7.11	92.10	54.00	38.10	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

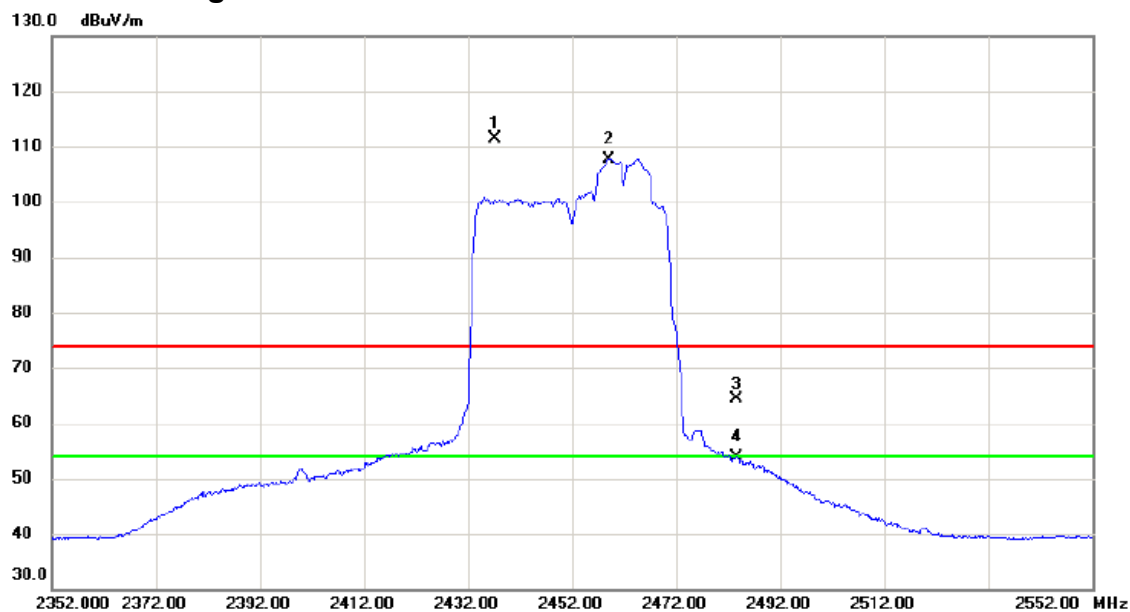

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.200	118.52	-7.04	111.48	74.00	37.48	peak	主波訊號不予判定
2	*	2459.200	114.64	-6.94	107.70	54.00	53.70	AVG	主波訊號不予判定
3		2483.500	71.24	-6.85	64.39	74.00	-9.61	peak	
4		2483.500	60.61	-6.85	53.76	54.00	-0.24	AVG	

測試頻道: IEEE 802.11n (HT40) /
2.4 GHz 頻帶 / 2483.5 - 2900 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

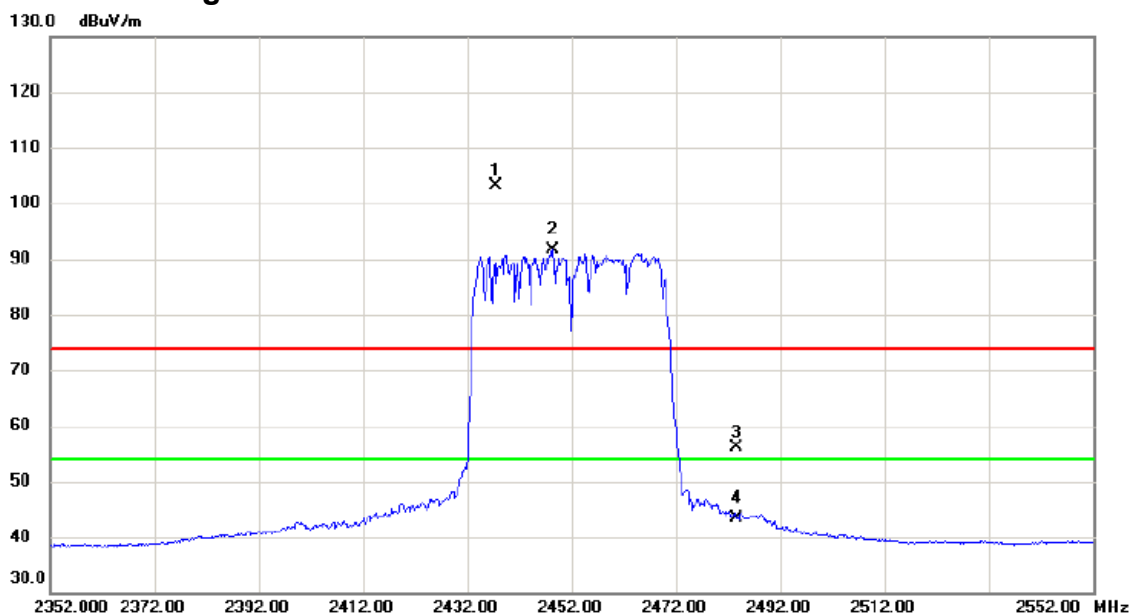

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2437.500	110.21	-7.03	103.18	74.00	29.18	peak	主波訊號不予判定
2	*	2448.500	98.57	-6.99	91.58	54.00	37.58	AVG	主波訊號不予判定
3		2483.500	63.05	-6.85	56.20	74.00	-17.80	peak	
4		2483.500	50.30	-6.85	43.45	54.00	-10.55	AVG	

測試頻道: IEEE vht20 / 2.4 GHz 頻帶 /
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

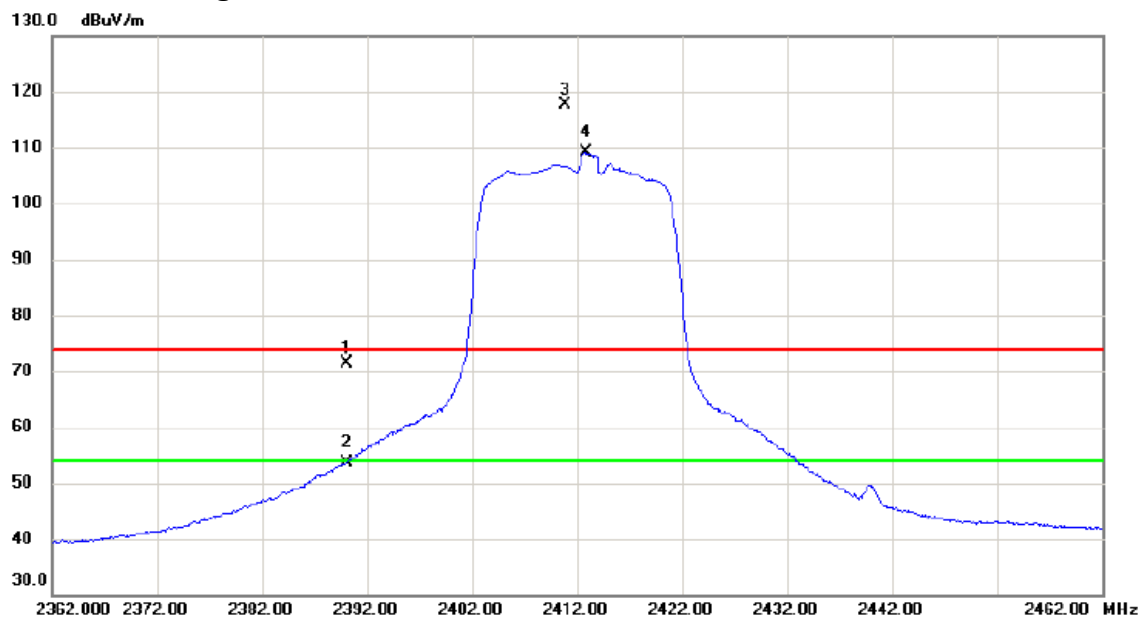

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	78.62	-7.23	71.39	74.00	-2.61	peak	
2		2390.000	60.81	-7.23	53.58	54.00	-0.42	AVG	
3	X	2410.900	124.90	-7.15	117.75	74.00	43.75	peak	主波訊號不予判定
4	*	2412.800	116.22	-7.13	109.09	54.00	55.09	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2.4 GHz 頻帶 /
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

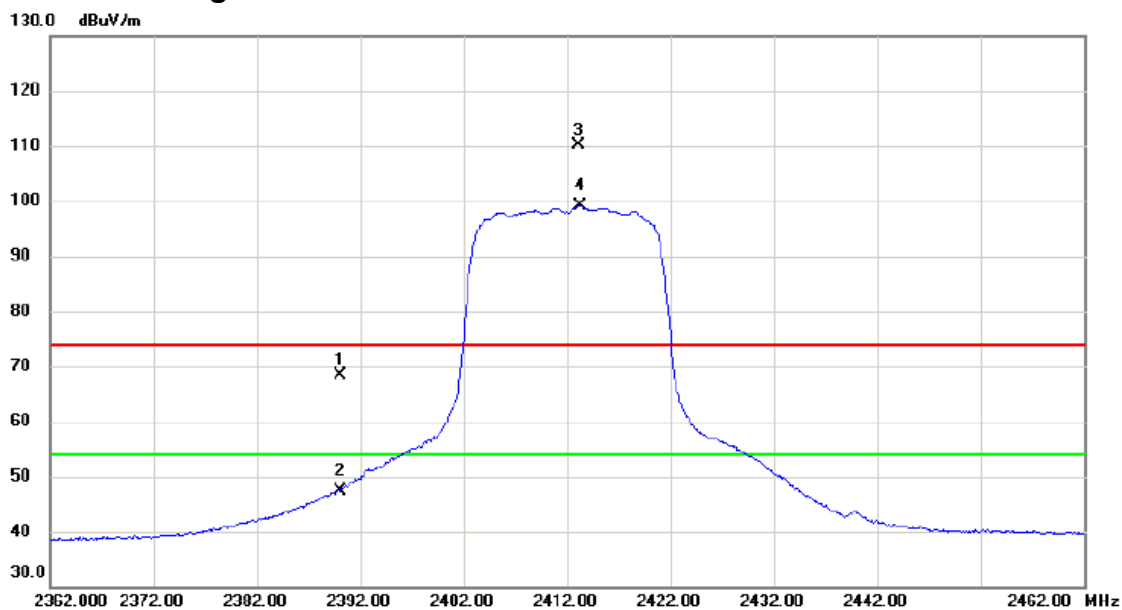

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	75.70	-7.23	68.47	74.00	-5.53	peak	
2		2390.000	54.73	-7.23	47.50	54.00	-6.50	AVG	
3	X	2413.200	117.18	-7.13	110.05	74.00	36.05	peak	主波訊號不予判定
4	*	2413.300	106.30	-7.13	99.17	54.00	45.17	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2.4 GHz 頻帶 /

測試模式: 發射

2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

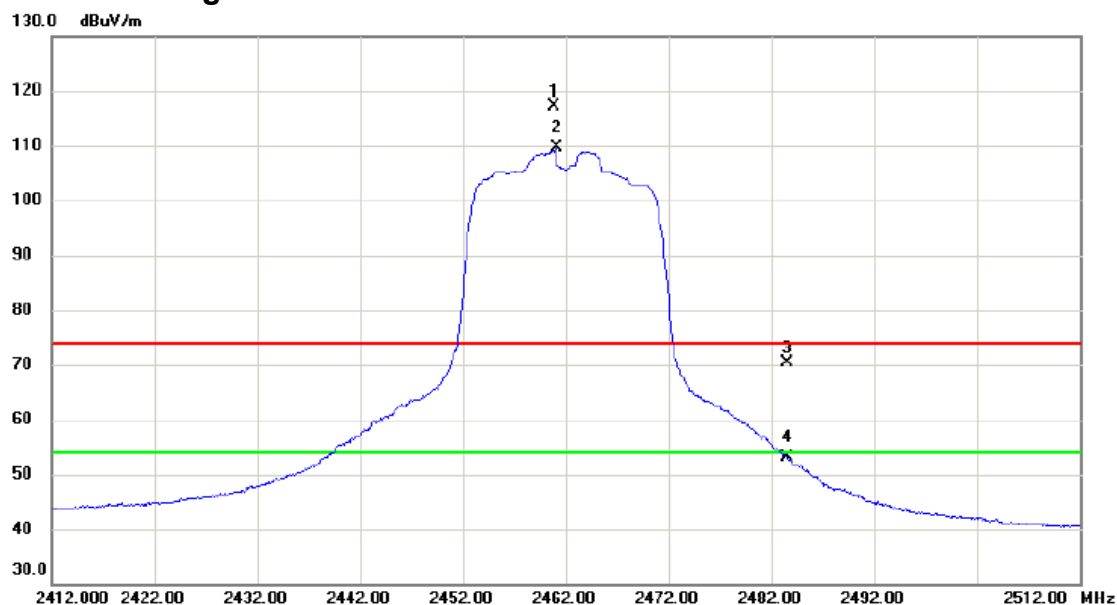

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2460.900	123.99	-6.94	117.05	74.00	43.05	peak	主波訊號不予判定
2	*	2461.150	116.56	-6.94	109.62	54.00	55.62	AVG	主波訊號不予判定
3		2483.500	77.13	-6.85	70.28	74.00	-3.72	peak	
4		2483.500	60.01	-6.85	53.16	54.00	-0.84	AVG	

測試頻道: IEEE vht20 / 2.4 GHz 頻帶 /
2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

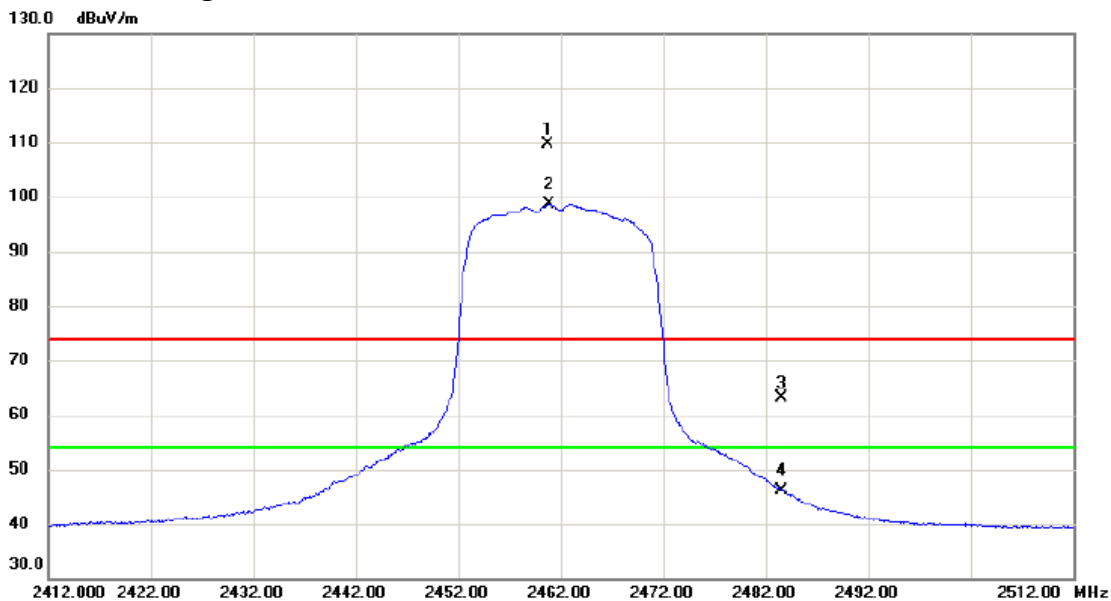

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2460.750	116.63	-6.94	109.69	74.00	35.69	peak	主波訊號不予判定
2	*	2460.900	105.56	-6.94	98.62	54.00	44.62	AVG	主波訊號不予判定
3		2483.500	70.10	-6.85	63.25	74.00	-10.75	peak	
4		2483.500	53.07	-6.85	46.22	54.00	-7.78	AVG	

測試頻道: IEEE vht40 / 2.4 GHz 頻帶 /
2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

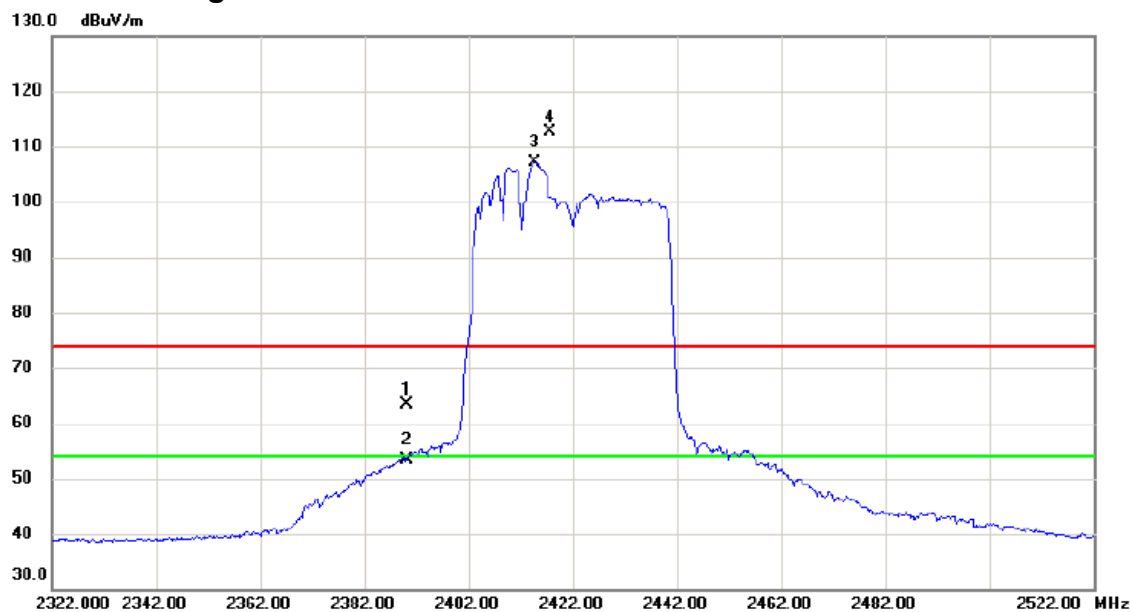

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	70.53	-7.23	63.30	74.00	-10.70	peak	
2		2390.000	60.64	-7.23	53.41	54.00	-0.59	AVG	
3	*	2414.700	114.27	-7.13	107.14	54.00	53.14	AVG	主波訊號不予判定
4	X	2417.600	119.72	-7.11	112.61	74.00	38.61	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2.4 GHz 頻帶 /
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

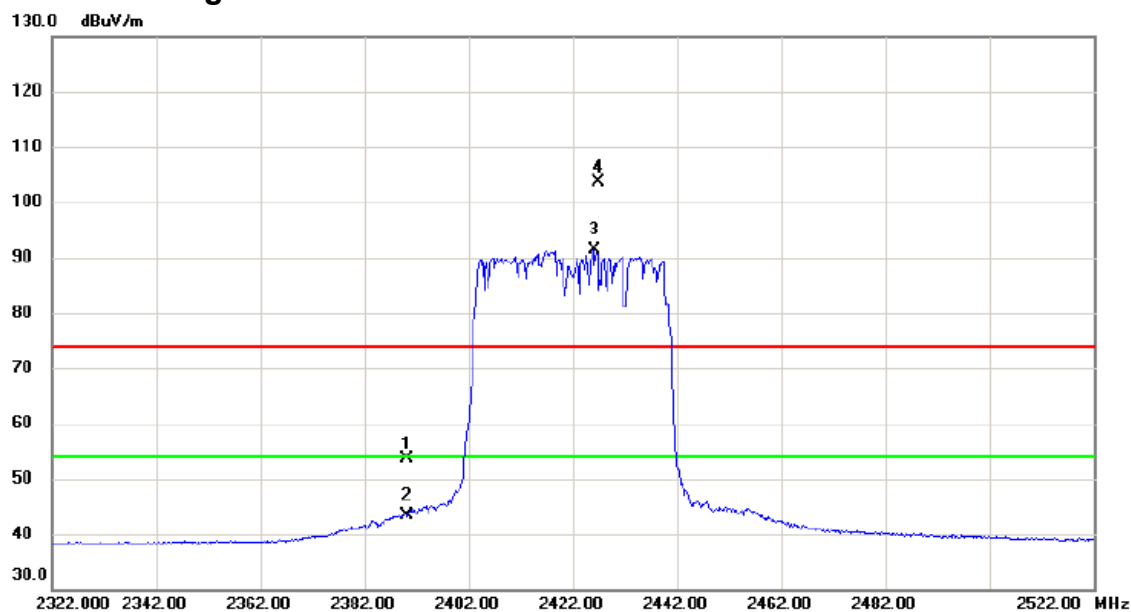

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	60.86	-7.23	53.63	74.00	-20.37	peak	
2		2390.000	50.69	-7.23	43.46	54.00	-10.54	AVG	
3	*	2426.000	98.47	-7.08	91.39	54.00	37.39	AVG	主波訊號不予判定
4	X	2426.900	110.68	-7.07	103.61	74.00	29.61	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2.4 GHz 頻帶 /
2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2457.400	118.89	-6.95	111.94	74.00	37.94	peak	主波訊號不予判定
2	*	2459.200	114.90	-6.94	107.96	54.00	53.96	AVG	主波訊號不予判定
3		2483.500	72.39	-6.85	65.54	74.00	-8.46	peak	
4		2483.500	60.41	-6.85	53.56	54.00	-0.44	AVG	

測試頻道: IEEE vht40 / 2.4 GHz 頻帶 /
2483.5 - 2900 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

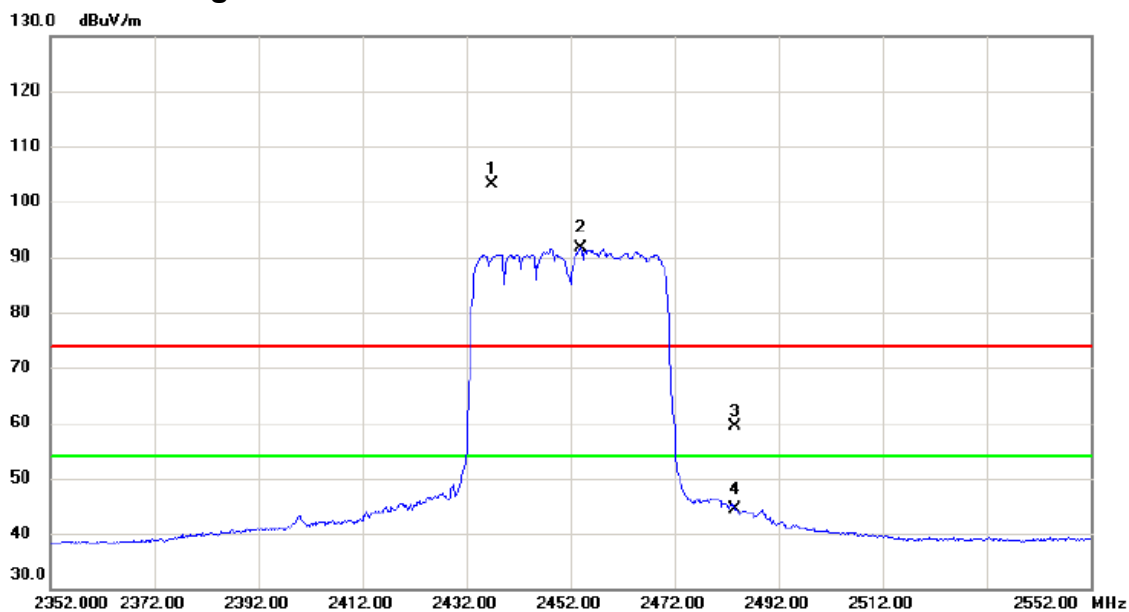

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2436.800	110.13	-7.04	103.09	74.00	29.09	peak	主波訊號不予判定
2	*	2454.100	98.51	-6.96	91.55	54.00	37.55	AVG	主波訊號不予判定
3		2483.500	66.18	-6.85	59.33	74.00	-14.67	peak	
4		2483.500	51.29	-6.85	44.44	54.00	-9.56	AVG	