

RF Test Data

For

Project No.:	DLE-260519034R
Client:	Shenzhen Wodefeng Technology Co., Ltd.
Manufacturer:	Zhuhai Bigway Electronic Co.,Ltd.
Product Description:	Wireless HDMI Transmitter and Receiver
Test model:	TC03
Test Engineer:	Alisa Song
Test Date:	2026-05-06

Test Summary

Item	Result
Frequency Error	Pass
Occupied Bandwidth	Pass
Antenna	Pass
Adjacent Channel Leakage Power	Pass
Out Of Bands Leakage Power	Pass
Transmission Burst Length	Pass
Spurious Emission Intensity	Pass
Secondary Radiated Emission	Pass

1. Frequency Error


1.1 Test Result



1.1.1 Ant1

Ant1							
ENV	Mode	TX Type	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (ppm)		Verdict
					Result	Limit	
NTNV	Carrier Wave	SISO	5500	5500.006	1.09	-20 to 20	Pass
			5600	5600.007	1.25	-20 to 20	Pass
			5700	5700.007	1.23	-20 to 20	Pass
			5720	5720.009	1.57	-20 to 20	Pass

1.2 Test Graph

1.2.1 Ant1

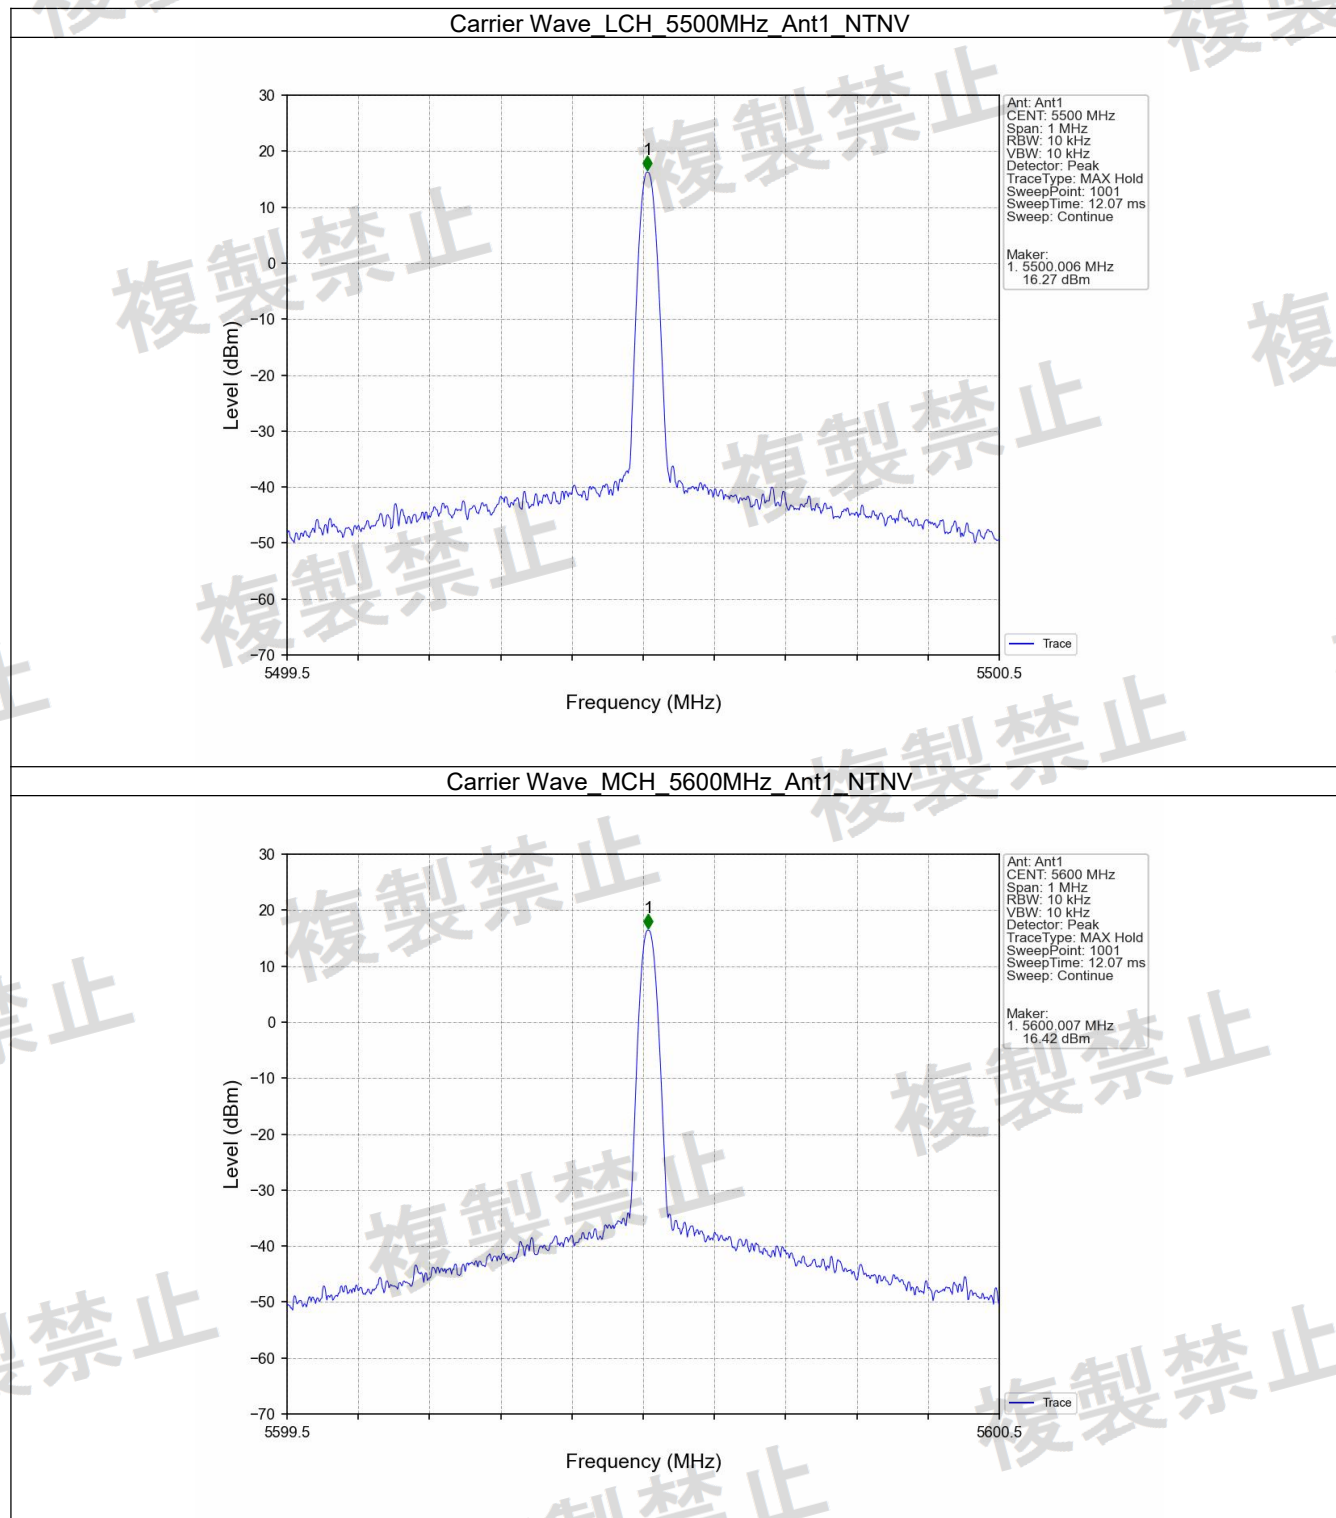

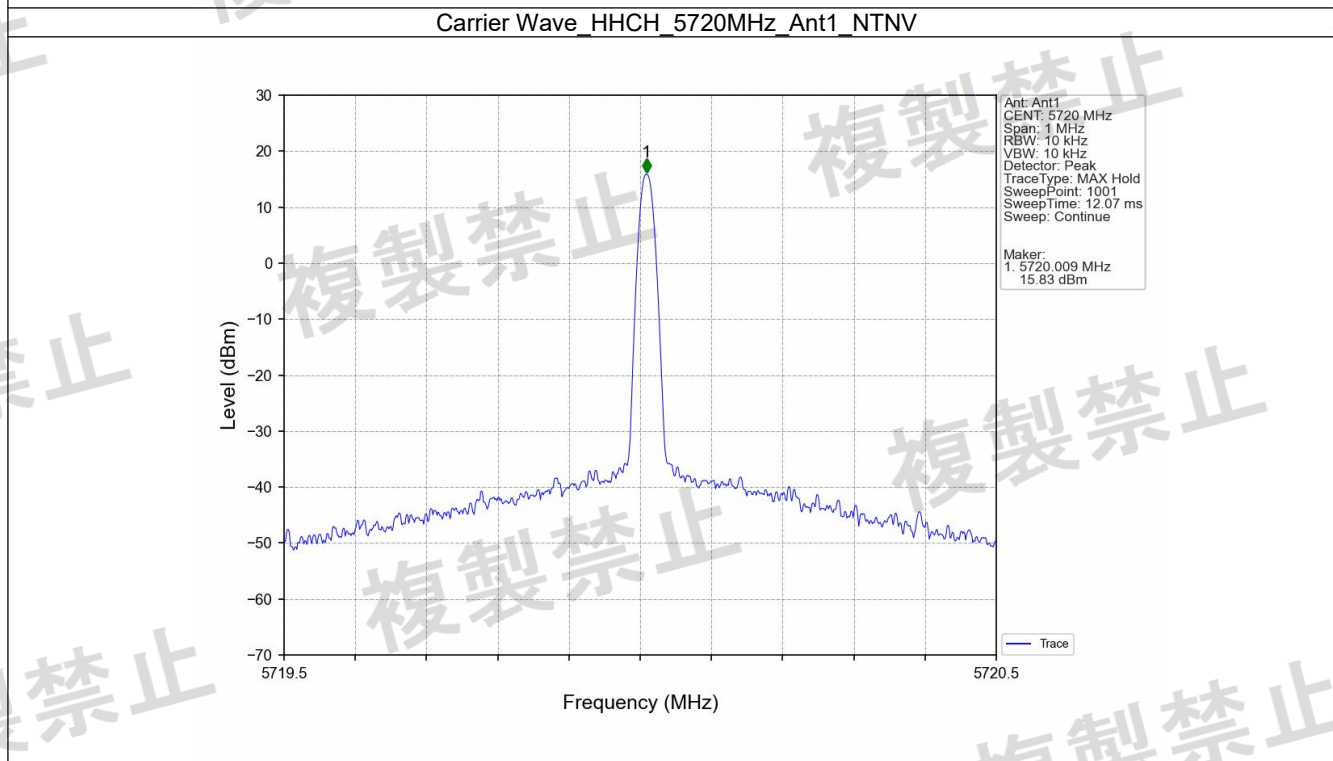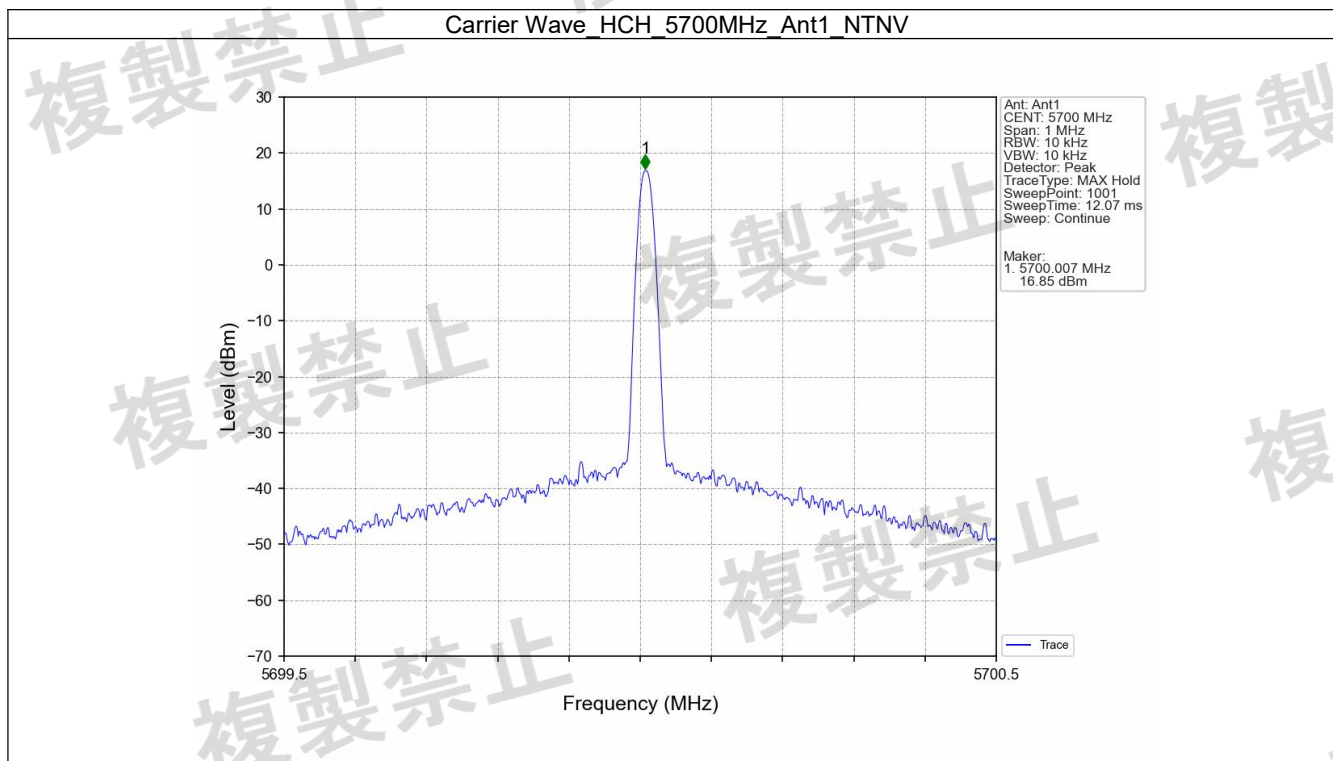

2. Occupied Bandwidth


2.1 Test Result



2.1.1 OBW



ENV	Mode	TX Type	Frequency (MHz)	99% Occupied Bandwidth (MHz)		Verdict
				ANT1	Limit	
NTNV	802.11a	SISO	5500	16.244	<=20	Pass
			5600	16.280	<=20	Pass
			5700	16.312	<=20	Pass
			5720	16.259	<=20	Pass
	802.11n (HT20)	SISO	5500	17.338	<=20	Pass
			5600	17.438	<=20	Pass
			5700	17.439	<=20	Pass
			5720	17.418	<=20	Pass



2.2 Test Graph

2.2.1 OBW

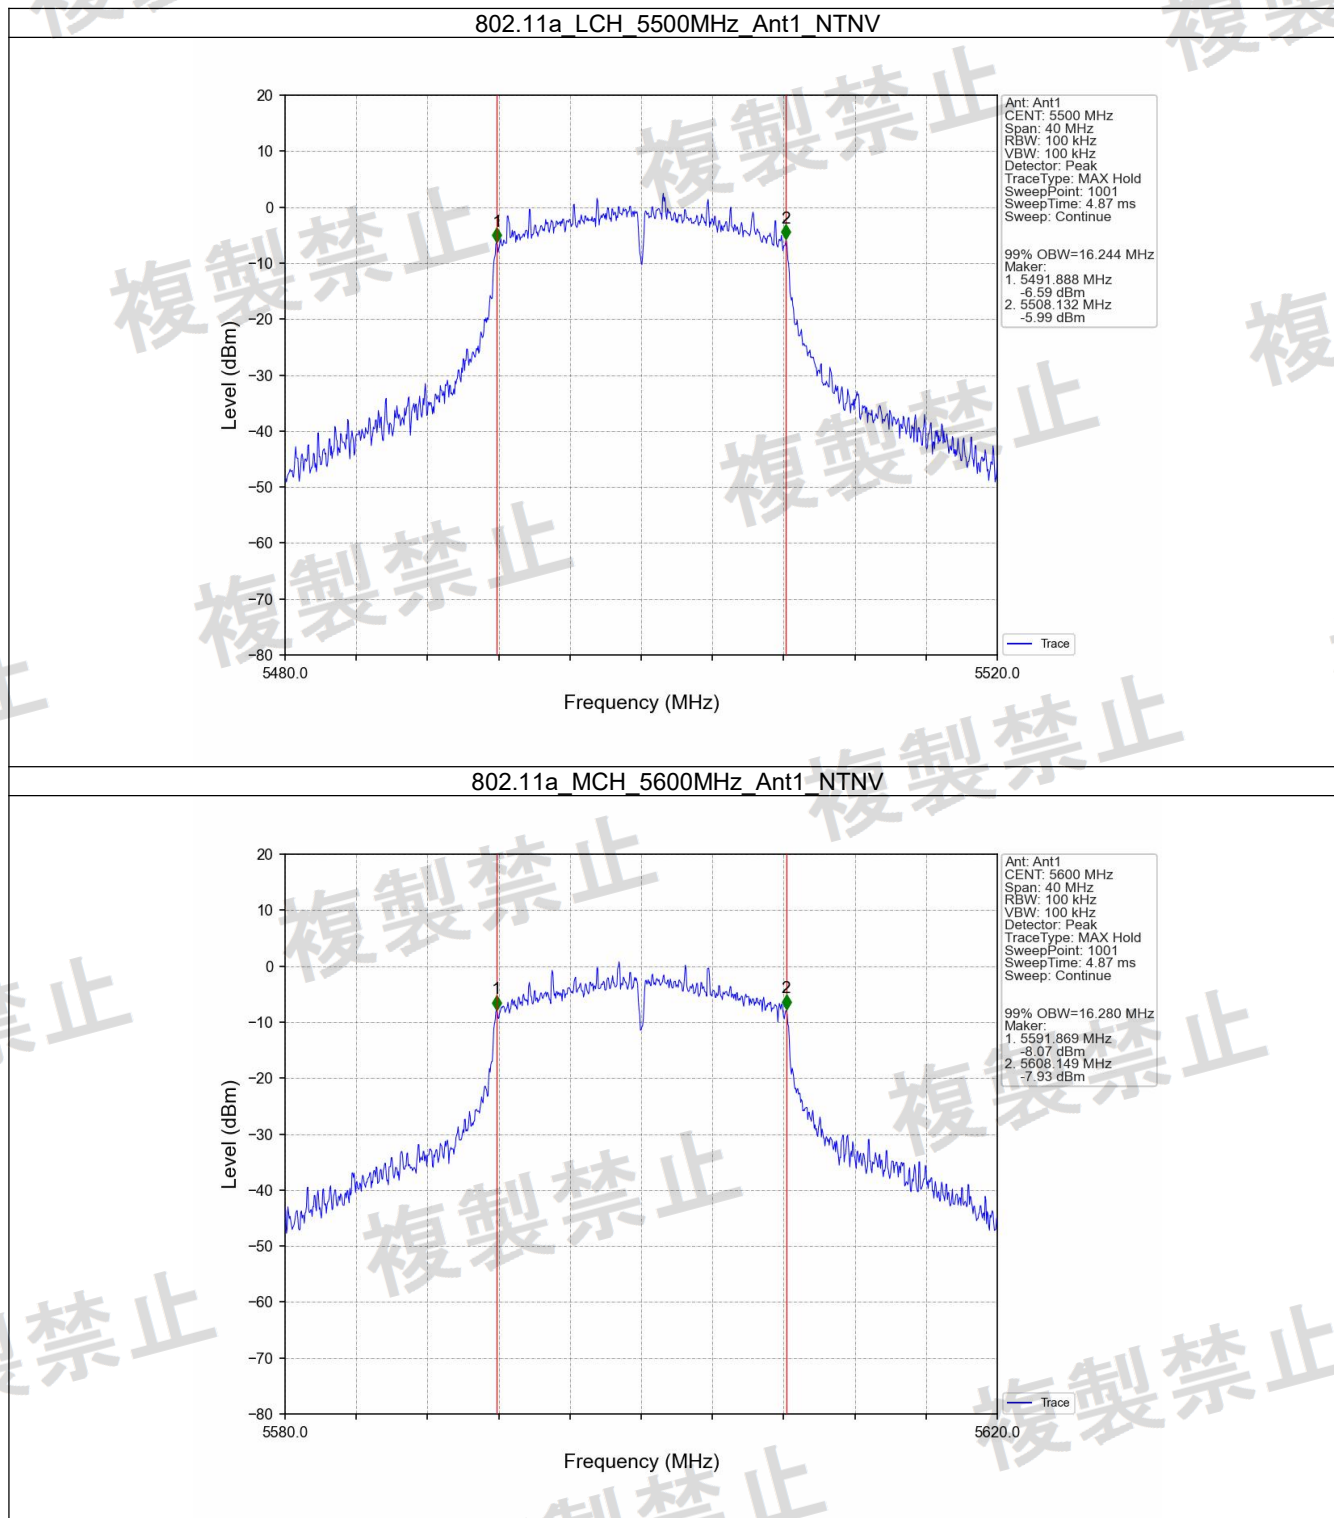

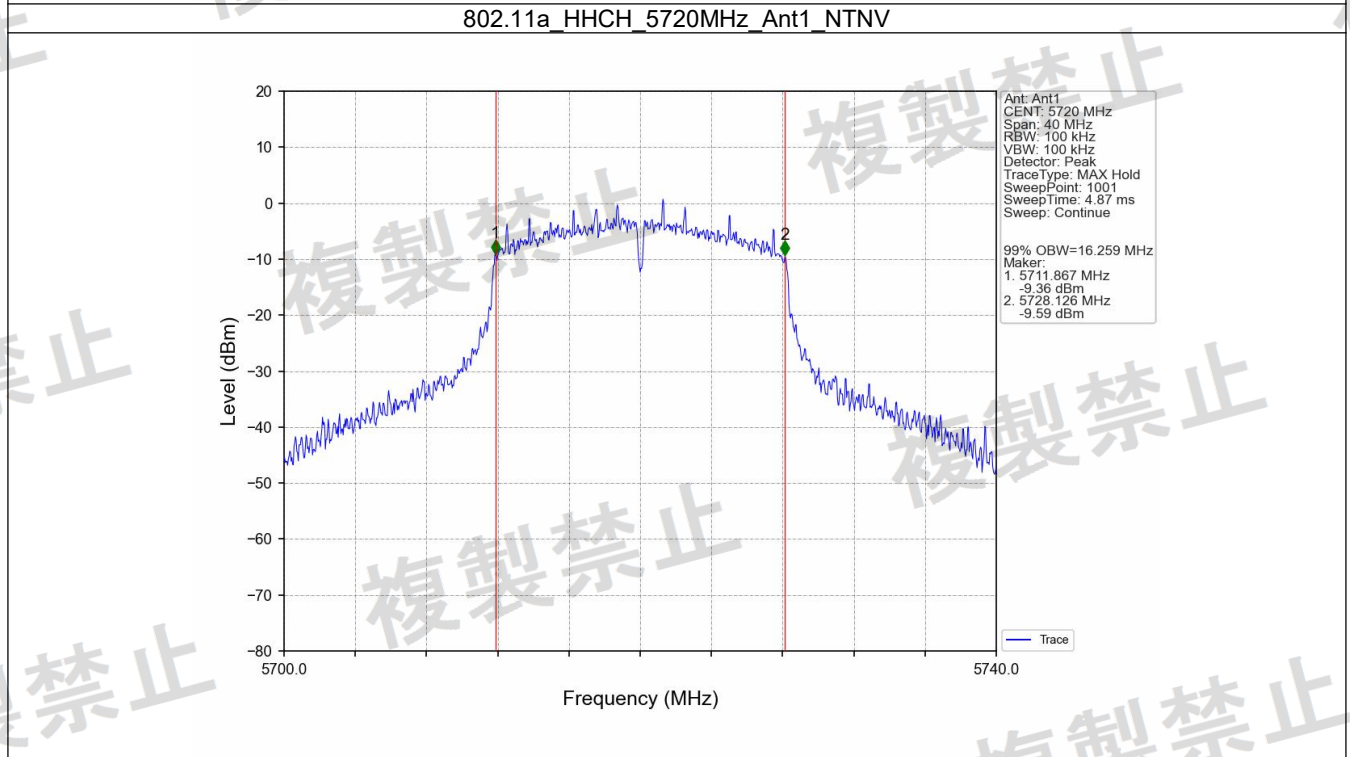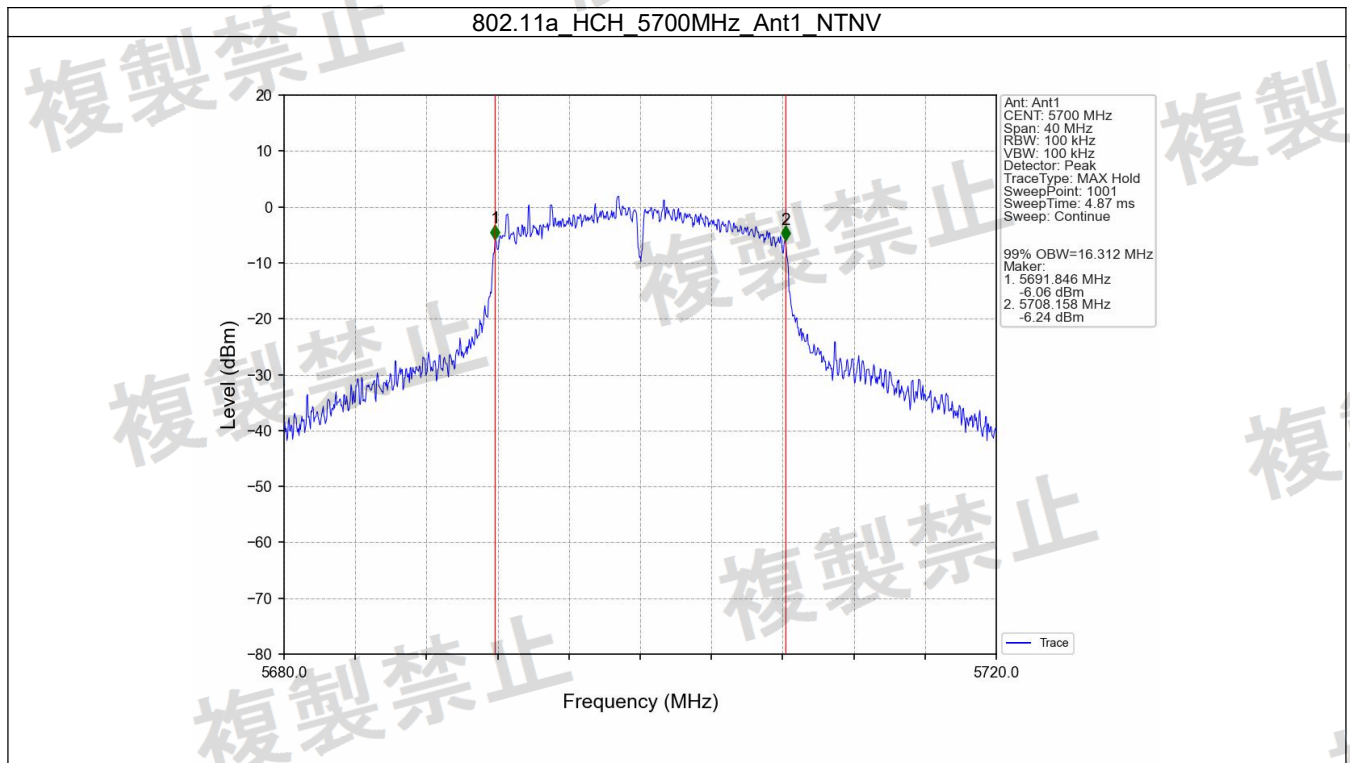

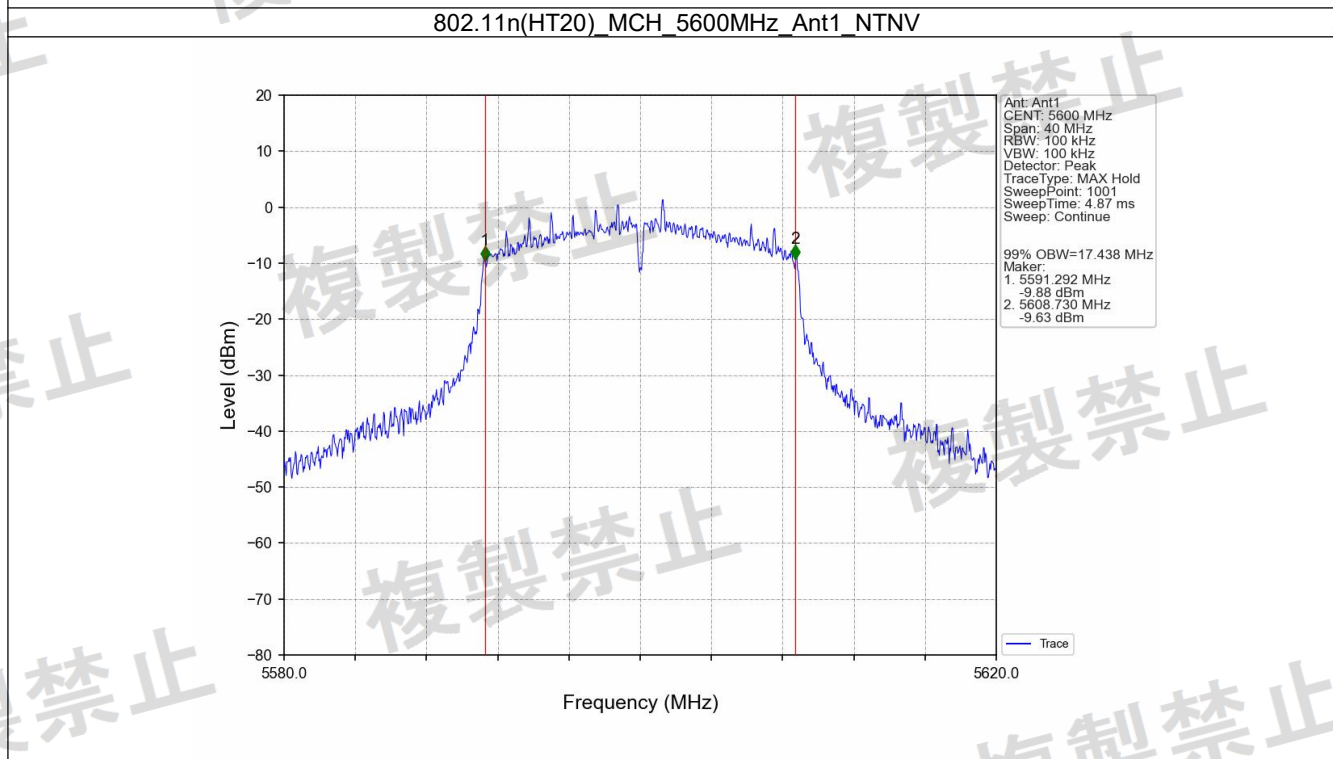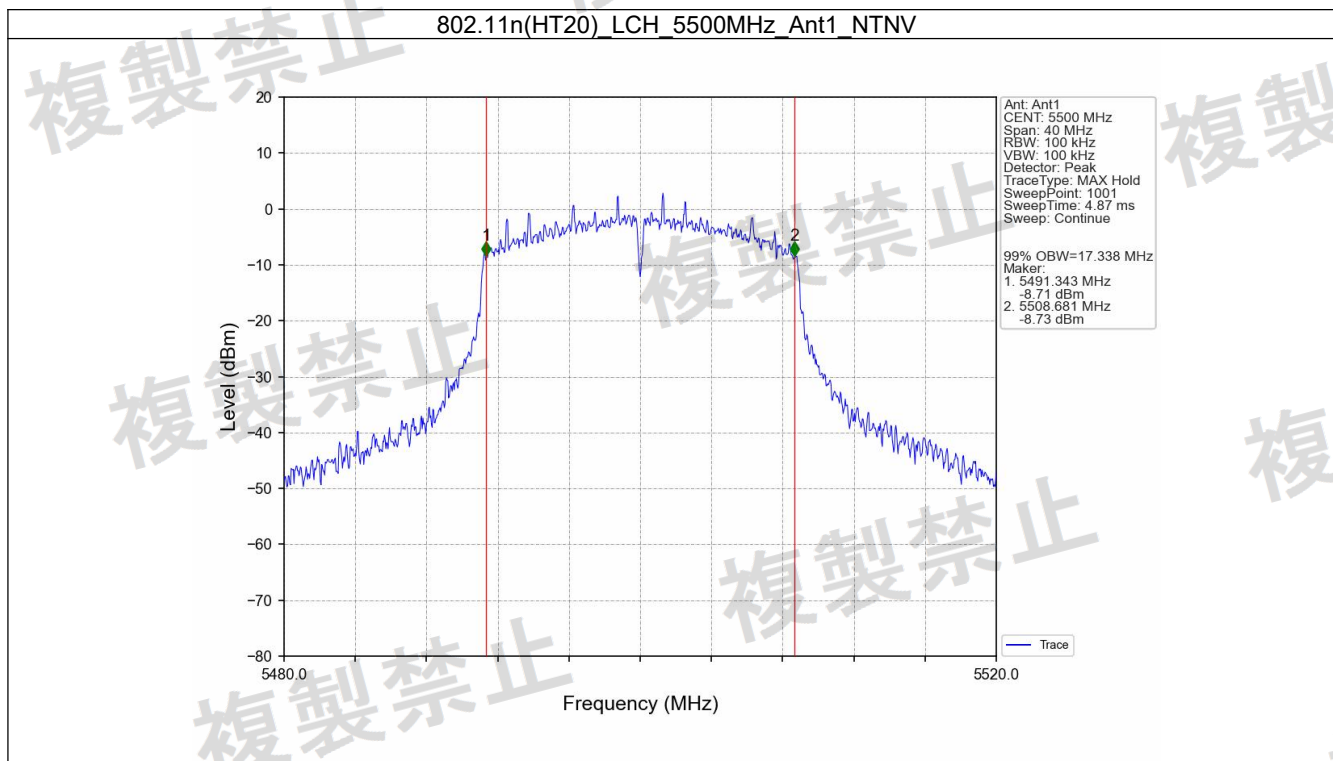

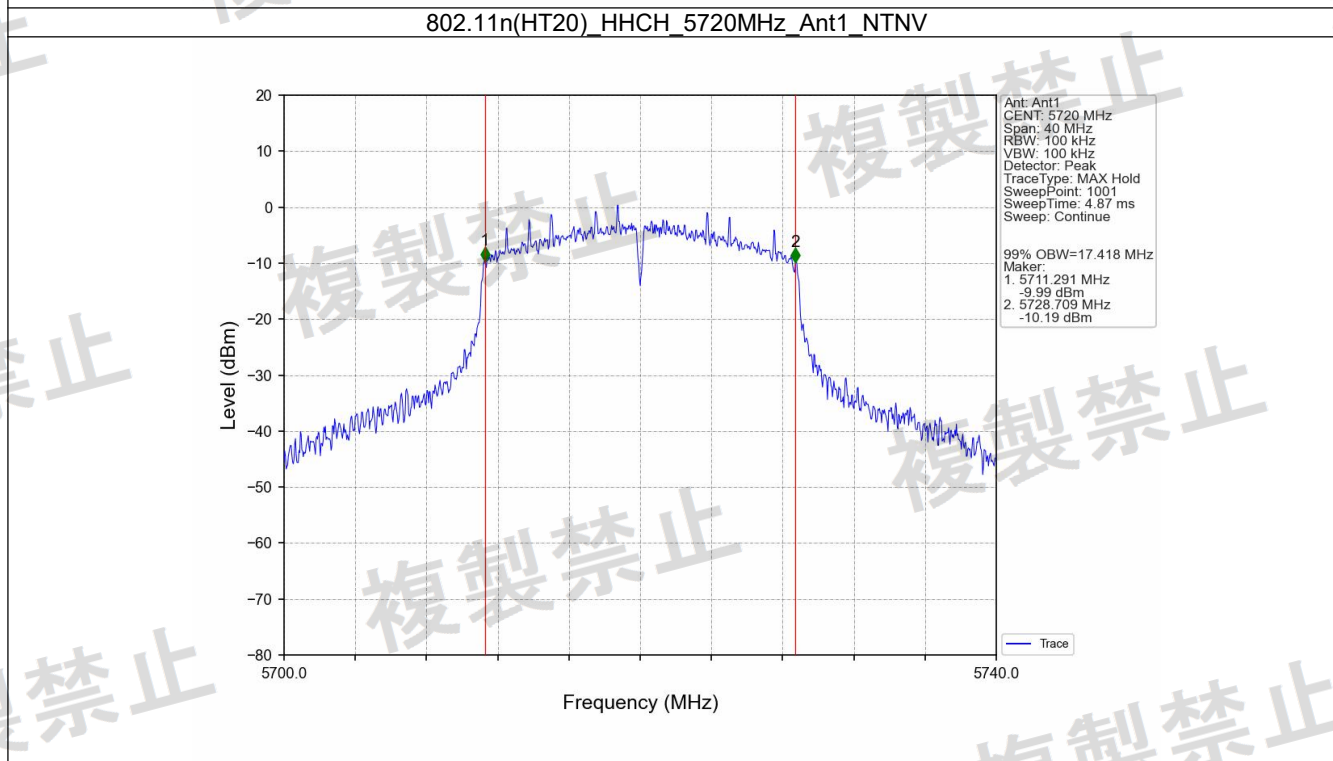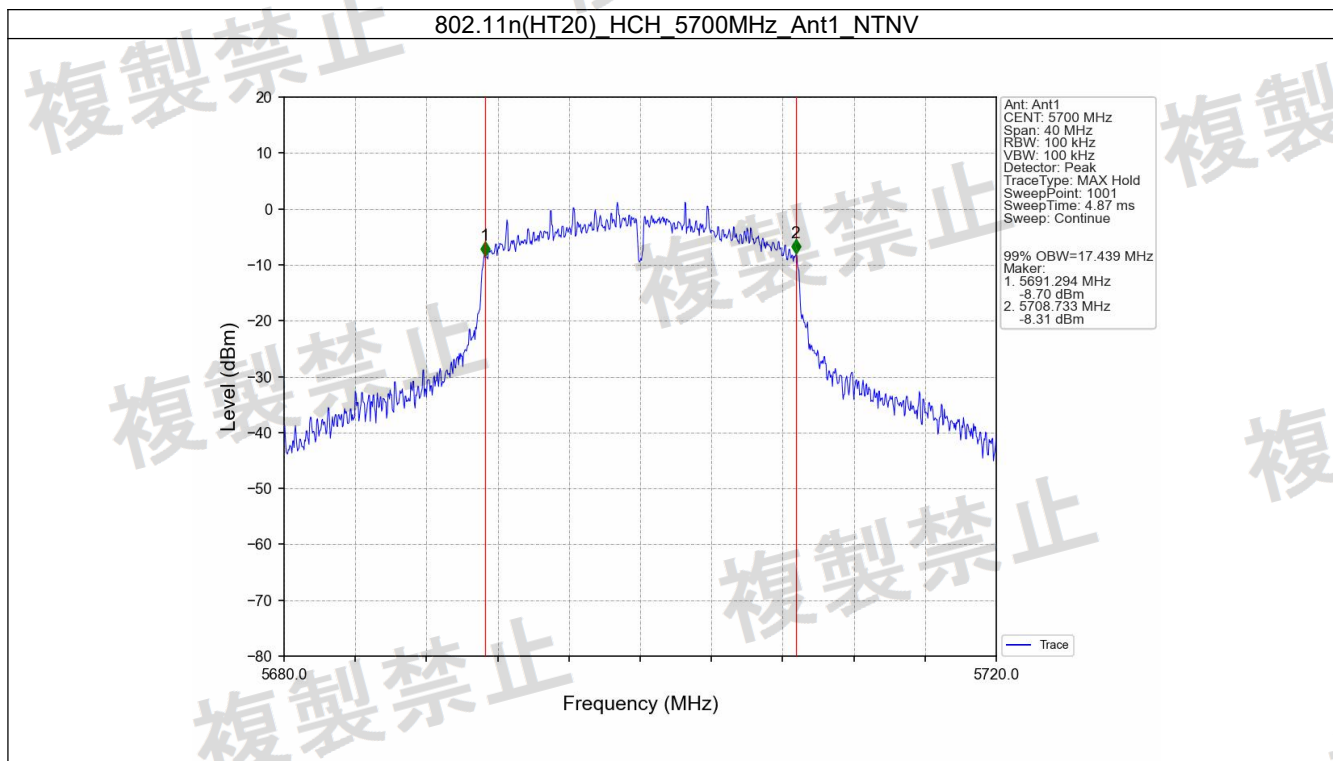

3. Antenna Power

3.1 Test Result

3.1.1 Power_NTNV

NTNV									
Mode	TX Type	Frequency (MHz)	ANT	Antenna Power (mW/MHz)		Nominal Power (mW/MHz)	Tolerance (%)		Verdict
				Measured	Limit		Measured	Limit	
802.11a	SISO	5500	1	1.862	<=10.00	1.900	-2.00	-50 to 50	Pass
		5600	1	1.392	<=10.00	1.900	-26.74	-50 to 50	Pass
		5700	1	1.900	<=10.00	1.900	0.00	-50 to 50	Pass
		5720	1	1.103	<=10.00	1.900	-41.95	-50 to 50	Pass
802.11n (HT20)	SISO	5500	1	1.570	<=10.00	1.600	-1.88	-50 to 50	Pass
		5600	1	1.210	<=10.00	1.600	-24.38	-50 to 50	Pass
		5700	1	1.609	<=10.00	1.600	0.56	-50 to 50	Pass
		5720	1	1.128	<=10.00	1.600	-29.50	-50 to 50	Pass

3.1.2 EIRP_NTNV

NTNV							
Mode	TX Type	Frequency (MHz)	ANT	Gain (dBi)	EIRP (mW/MHz)		Verdict
					Result	Limit	
802.11a	SISO	5500	1	2.12	3.03	<=25	Pass
		5600	1	2.12	2.27	<=25	Pass
		5700	1	2.12	3.10	<=25	Pass
		5720	1	2.12	1.80	<=25	Pass
802.11n (HT20)	SISO	5500	1	2.12	2.56	<=25	Pass
		5600	1	2.12	1.97	<=25	Pass
		5700	1	2.12	2.62	<=25	Pass
		5720	1	2.12	1.84	<=25	Pass

4. Adjacent Channel Leakage Power


4.1 Test Result

4.1.1 ACLR_NTV_SISO


Mode	TX Type	Frequency (MHz)	ANT	NTNV					
				Offset (MHz)	Integ BW (MHz)	Power (dBm)	Result (dBc)	Limit (dBc)	Verdict
802.11a	SISO	5500	1	-40	20	-31.15	-50.27	<=-40	Pass
				-20	20	-15.43	-34.55	<=-25	Pass
				0	20	19.12	/	/	/
				20	20	-15.43	-34.55	<=-25	Pass
				40	20	-31.69	-50.81	<=-40	Pass
		5600	1	-40	20	-34.12	-51.67	<=-40	Pass
				-20	20	-14.65	-32.20	<=-25	Pass
				0	20	17.55	/	/	/
				20	20	-14.61	-32.16	<=-25	Pass
				40	20	-34.42	-51.97	<=-40	Pass
		5700	1	-40	20	-31.22	-50.62	<=-40	Pass
				-20	20	-10.06	-29.46	<=-25	Pass
				0	20	19.40	/	/	/
				20	20	-10.87	-30.27	<=-25	Pass
				40	20	-30.65	-50.05	<=-40	Pass
		5720	1	-40	20	-33.96	-50.41	<=-40	Pass
				-20	20	-15.15	-31.60	<=-25	Pass
				0	20	16.45	/	/	/
				20	20	-16.35	-32.80	<=-25	Pass
				40	20	-33.93	-50.38	<=-40	Pass
802.11n (HT20)	SISO	5500	1	-40	20	-34.41	-52.86	<=-40	Pass
				-20	20	-16.14	-34.59	<=-25	Pass
				0	20	18.45	/	/	/
				20	20	-15.97	-34.42	<=-25	Pass
				40	20	-34.61	-53.06	<=-40	Pass
		5600	1	-40	20	-34.33	-51.58	<=-40	Pass
				-20	20	-15.38	-32.63	<=-25	Pass
				0	20	17.25	/	/	/
				20	20	-15.28	-32.53	<=-25	Pass
				40	20	-33.82	-51.07	<=-40	Pass
		5700	1	-40	20	-33.17	-51.64	<=-40	Pass
				-20	20	-12.32	-30.79	<=-25	Pass
				0	20	18.47	/	/	/
				20	20	-13.17	-31.64	<=-25	Pass
				40	20	-32.95	-51.42	<=-40	Pass
		5720	1	-40	20	-33.64	-50.48	<=-40	Pass
				-20	20	-13.78	-30.62	<=-25	Pass
				0	20	16.84	/	/	/
				20	20	-15.16	-32.00	<=-25	Pass
				40	20	-33.63	-50.47	<=-40	Pass

4.2 Test Graph

4.2.1 ACLR_NTNV_SISO

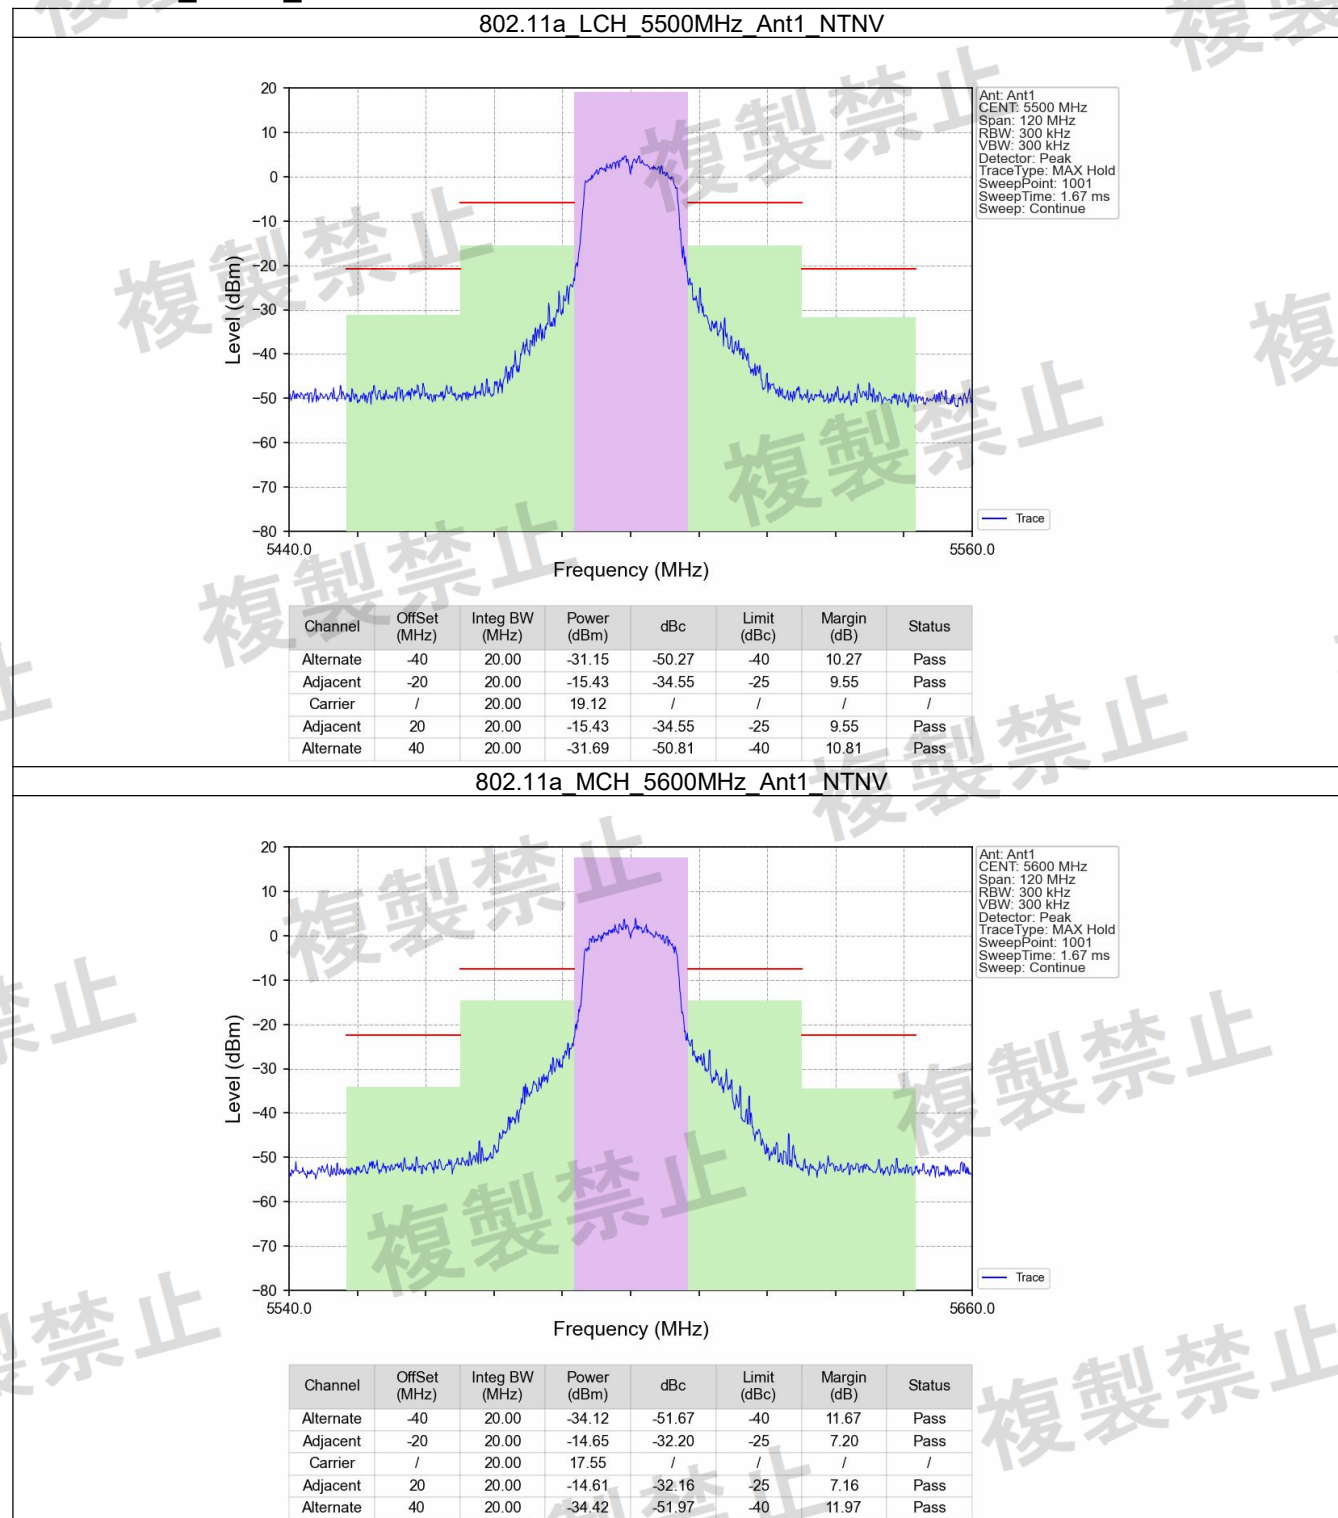


802.11a_HCH_5700MHz_Ant1_NTNV

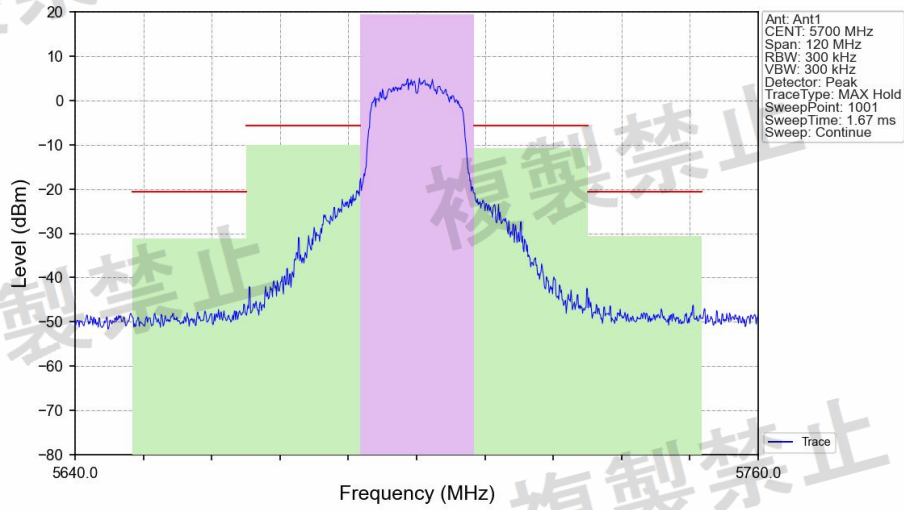


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-31.22	-50.62	-40	10.62	Pass
Adjacent	-20	20.00	-10.06	-29.46	-25	4.46	Pass
Carrier	/	20.00	19.40	/	/	/	/
Adjacent	20	20.00	-10.87	-30.27	-25	5.27	Pass
Alternate	40	20.00	-30.65	-50.05	-40	10.05	Pass

802.11a_HHCH_5720MHz_Ant1_NTNV

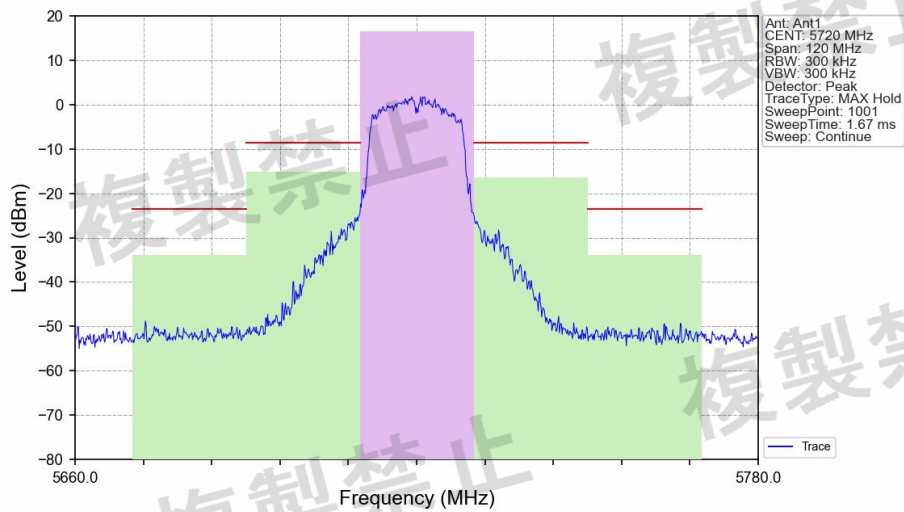


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-33.96	-50.41	-40	10.41	Pass
Adjacent	-20	20.00	-15.15	-31.60	-25	6.60	Pass
Carrier	/	20.00	16.45	/	/	/	/
Adjacent	20	20.00	-16.35	-32.80	-25	7.80	Pass
Alternate	40	20.00	-33.93	-50.38	-40	10.38	Pass

802.11n(HT20) LCH_5500MHz_Ant1_NTNV

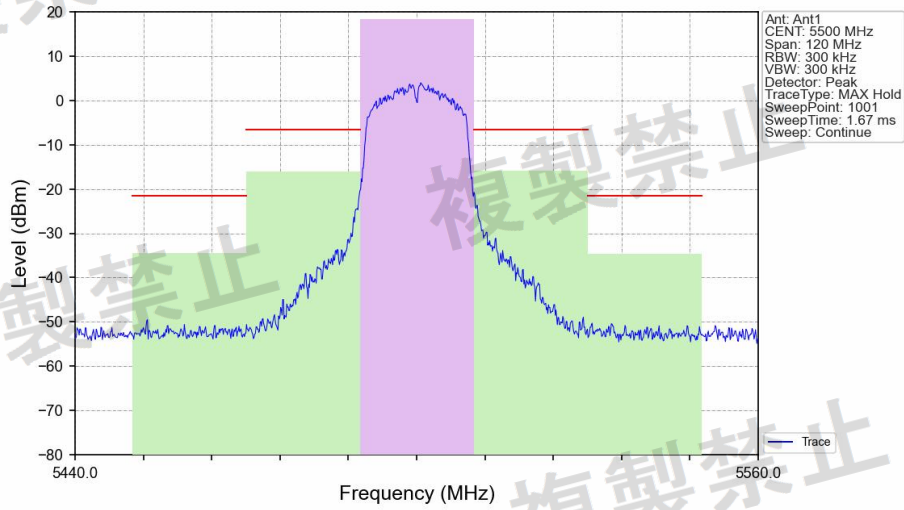


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-34.41	-52.86	-40	12.86	Pass
Adjacent	-20	20.00	-16.14	-34.59	-25	9.59	Pass
Carrier	/	20.00	18.45	/	/	/	/
Adjacent	20	20.00	-15.97	-34.42	-25	9.42	Pass
Alternate	40	20.00	-34.61	-53.06	-40	13.06	Pass

802.11n(HT20) MCH_5600MHz_Ant1_NTNV

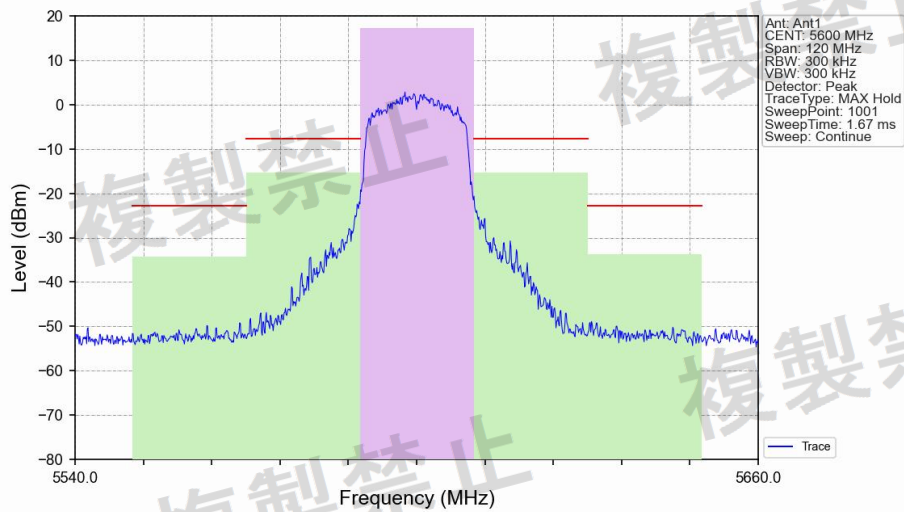


Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-34.33	-51.58	-40	11.58	Pass
Adjacent	-20	20.00	-15.38	-32.63	-25	7.63	Pass
Carrier	/	20.00	17.25	/	/	/	/
Adjacent	20	20.00	-15.28	-32.53	-25	7.53	Pass
Alternate	40	20.00	-33.82	-51.07	-40	11.07	Pass

802.11n(HT20) HCH 5700MHz_Ant1_NTNV

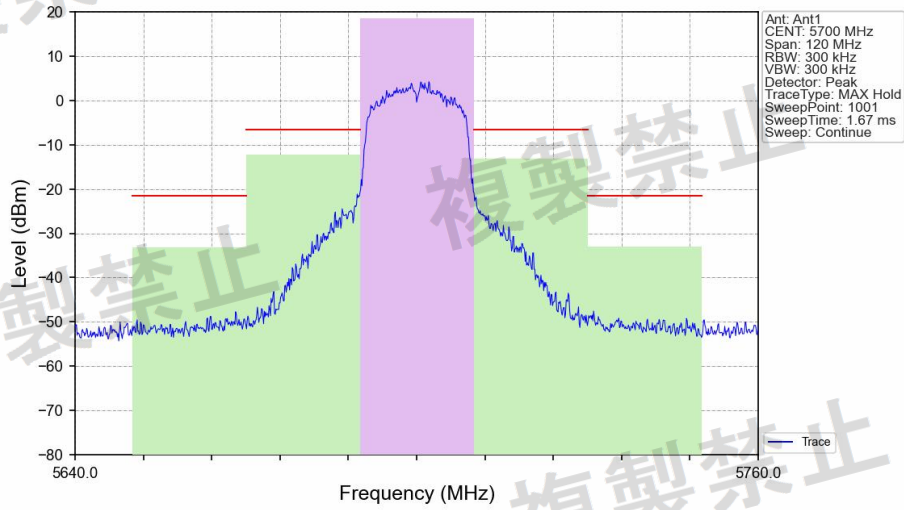

Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-33.17	-51.64	-40	11.64	Pass
Adjacent	-20	20.00	-12.32	-30.79	-25	5.79	Pass
Carrier	/	20.00	18.47	/	/	/	/
Adjacent	20	20.00	-13.17	-31.64	-25	6.64	Pass
Alternate	40	20.00	-32.95	-51.42	-40	11.42	Pass

802.11n(HT20) HHCH 5720MHz_Ant1_NTNV

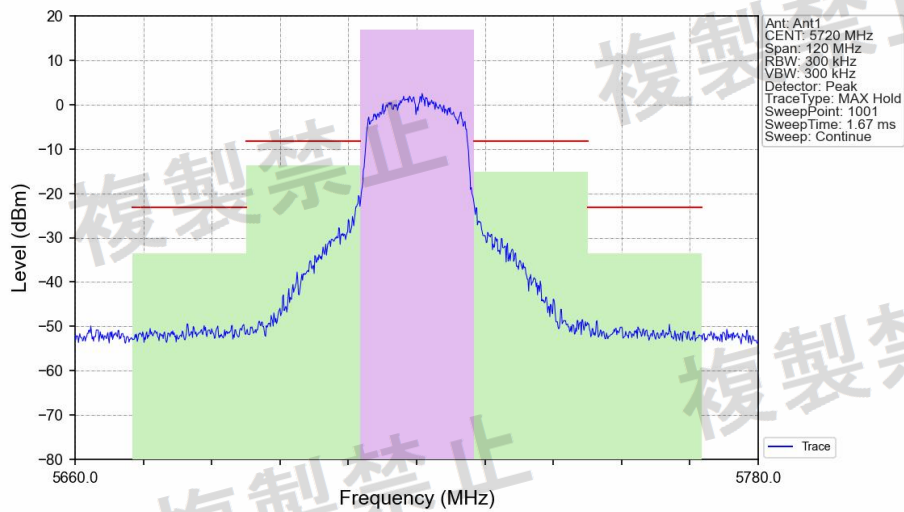

Channel	OffSet (MHz)	Integ BW (MHz)	Power (dBm)	dBc	Limit (dBc)	Margin (dB)	Status
Alternate	-40	20.00	-33.64	-50.48	-40	10.48	Pass
Adjacent	-20	20.00	-13.78	-30.62	-25	5.62	Pass
Carrier	/	20.00	16.84	/	/	/	/
Adjacent	20	20.00	-15.16	-32.00	-25	7.00	Pass
Alternate	40	20.00	-33.63	-50.47	-40	10.47	Pass

5. Out Of Bands Leakage Power


5.1 Test Result



5.1.1 OOB_NTNV_SISO



NTNV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (uW /MHz)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK EIRP (dBm /MHz)	PK EIRP (uW /MHz)	AV EIRP (dBm /MHz)	AV EIRP (uW /MHz)		
802.11a	SISO	5500	1	5460	5470	5466.31	-38.78	0.132	/	/	12.5	Pass
				5745	5765	5761.54	-39.98	0.100	/	/	12.5	Pass
		5600	1	5460	5470	5465.83	-43.11	0.049	/	/	12.5	Pass
				5745	5765	5755.28	-41.88	0.065	/	/	12.5	Pass
		5700	1	5460	5470	5461.06	-39.59	0.110	/	/	12.5	Pass
				5745	5765	5756.28	-39.41	0.115	/	/	12.5	Pass
		5720	1	5460	5470	5469.13	-43.75	0.042	/	/	12.5	Pass
				5745	5765	5745.36	-37.45	0.180	/	/	12.5	Pass
		5500	1	5460	5470	5466.23	-42.16	0.061	/	/	12.5	Pass
				5745	5765	5758.94	-42.40	0.058	/	/	12.5	Pass
802.11n (HT20)	SISO	5600	1	5460	5470	5462	-42.37	0.058	/	/	12.5	Pass
				5745	5765	5763.92	-42.63	0.055	/	/	12.5	Pass
		5700	1	5460	5470	5462.92	-42.74	0.053	/	/	12.5	Pass
				5745	5765	5757.5	-41.98	0.063	/	/	12.5	Pass
		5720	1	5460	5470	5462.21	-43.40	0.046	/	/	12.5	Pass
				5745	5765	5745.32	-35.82	0.262	/	/	12.5	Pass



5.2 Test Graph



5.2.1 OOB_NTNV_SISO


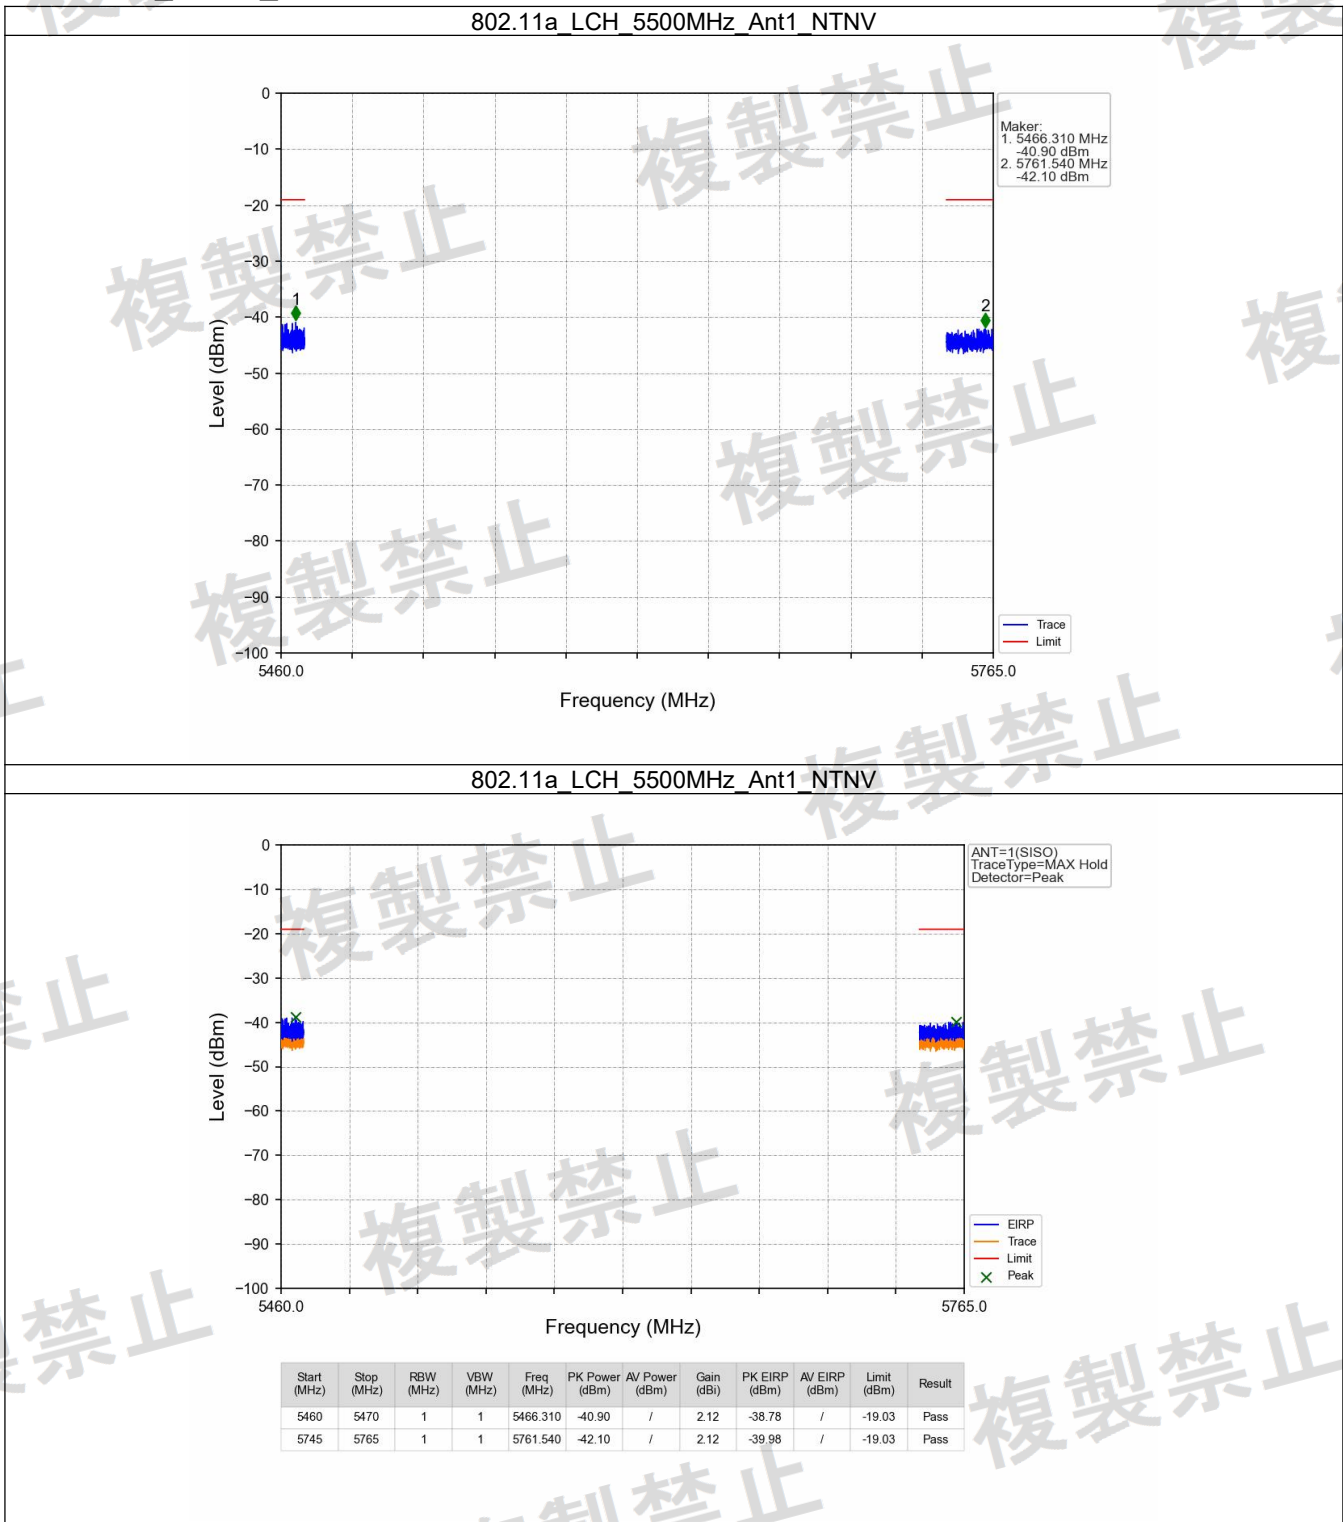


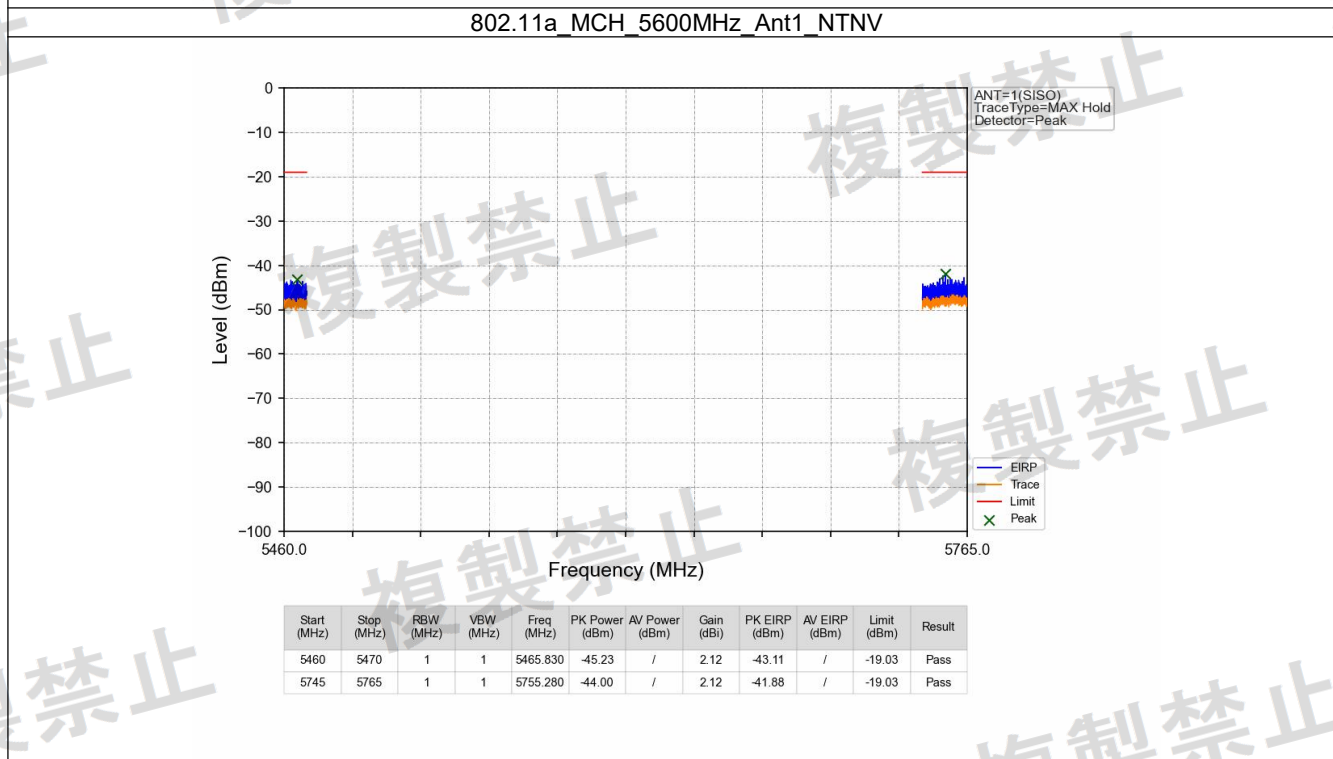
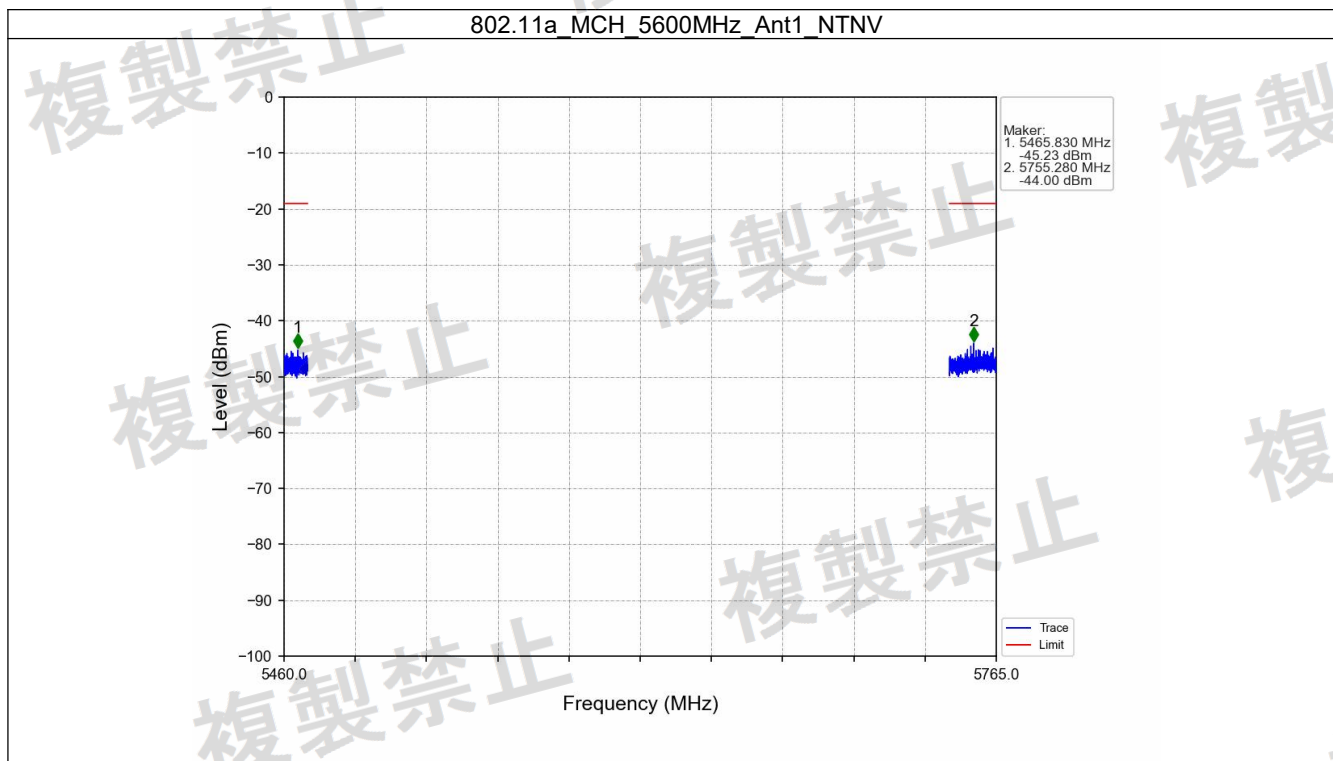


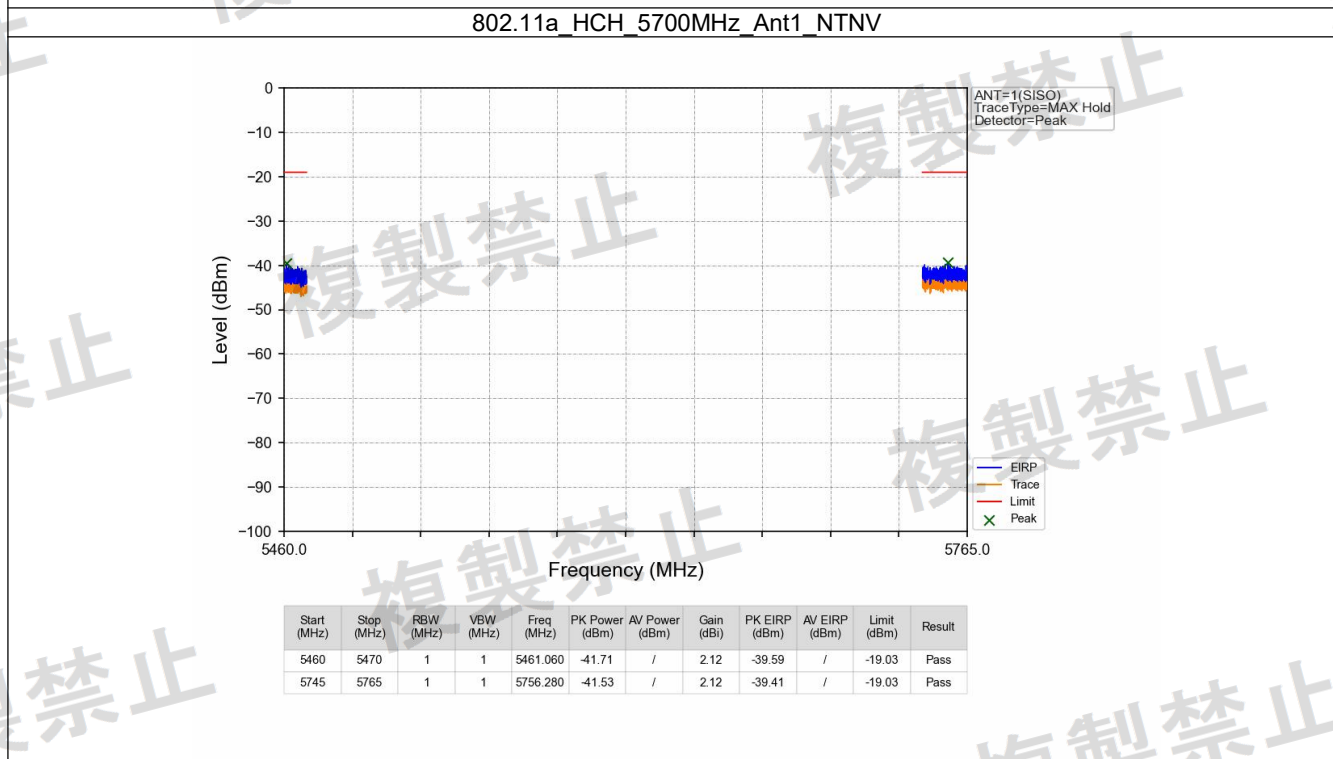
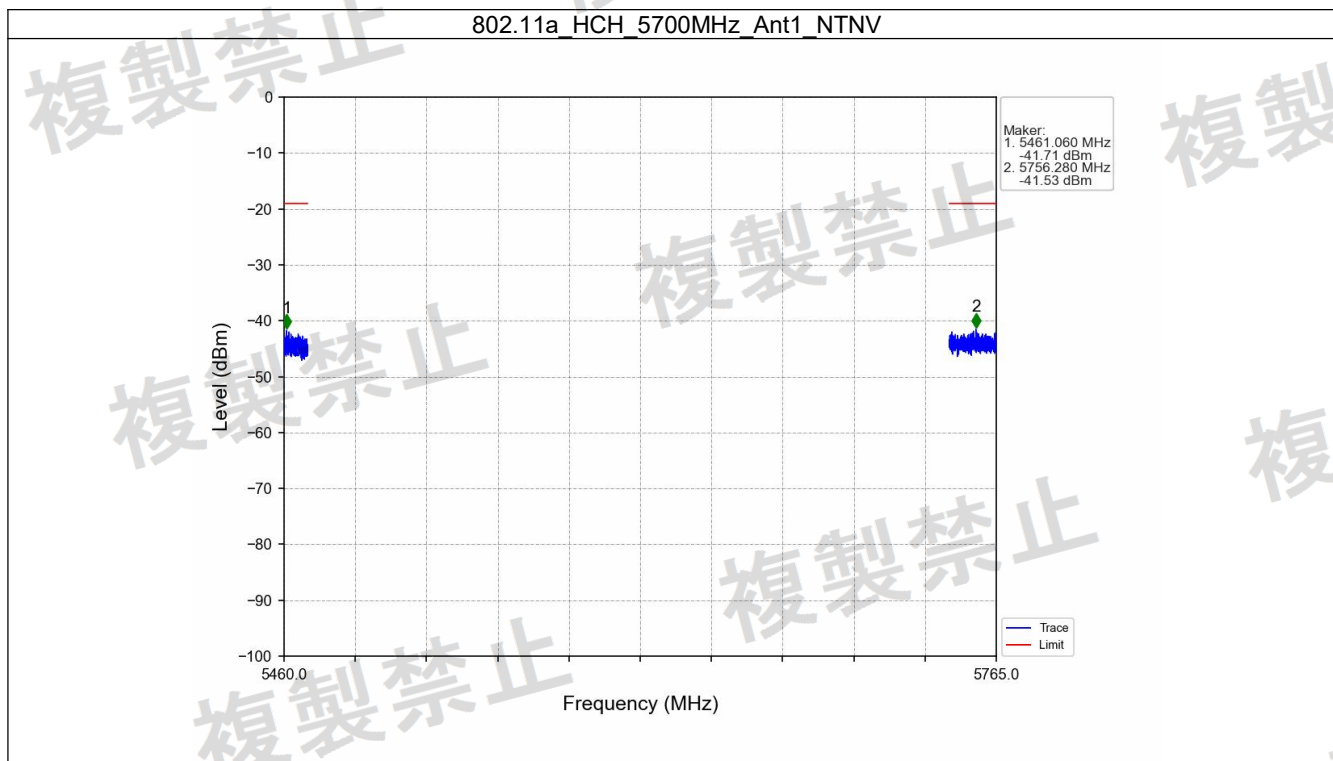


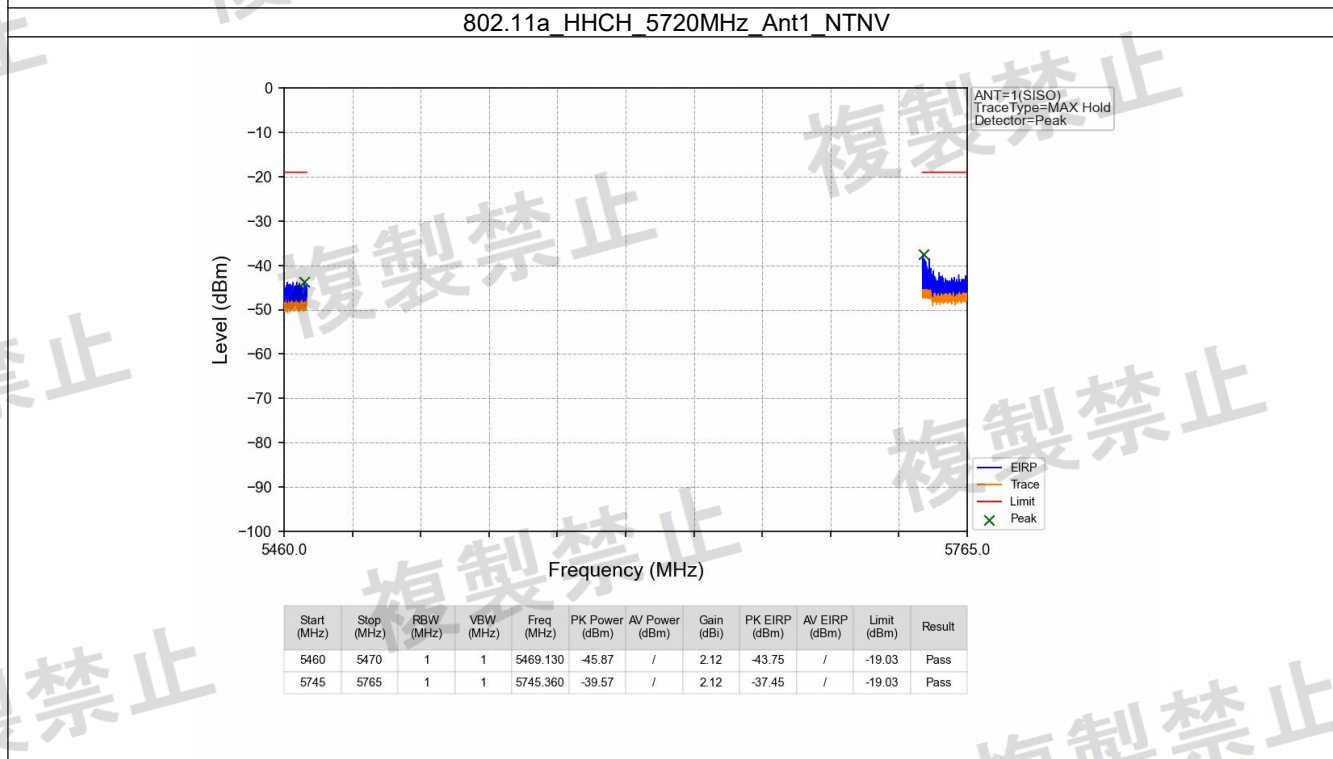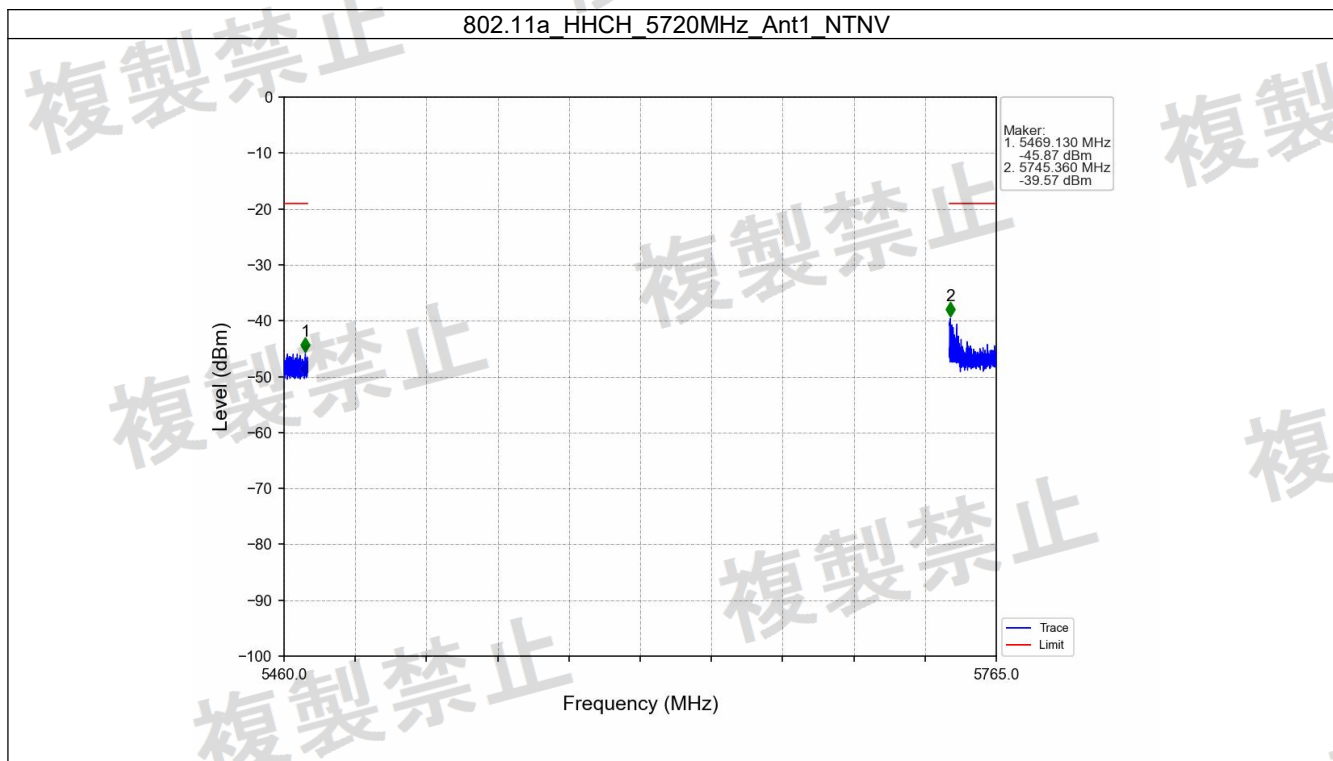

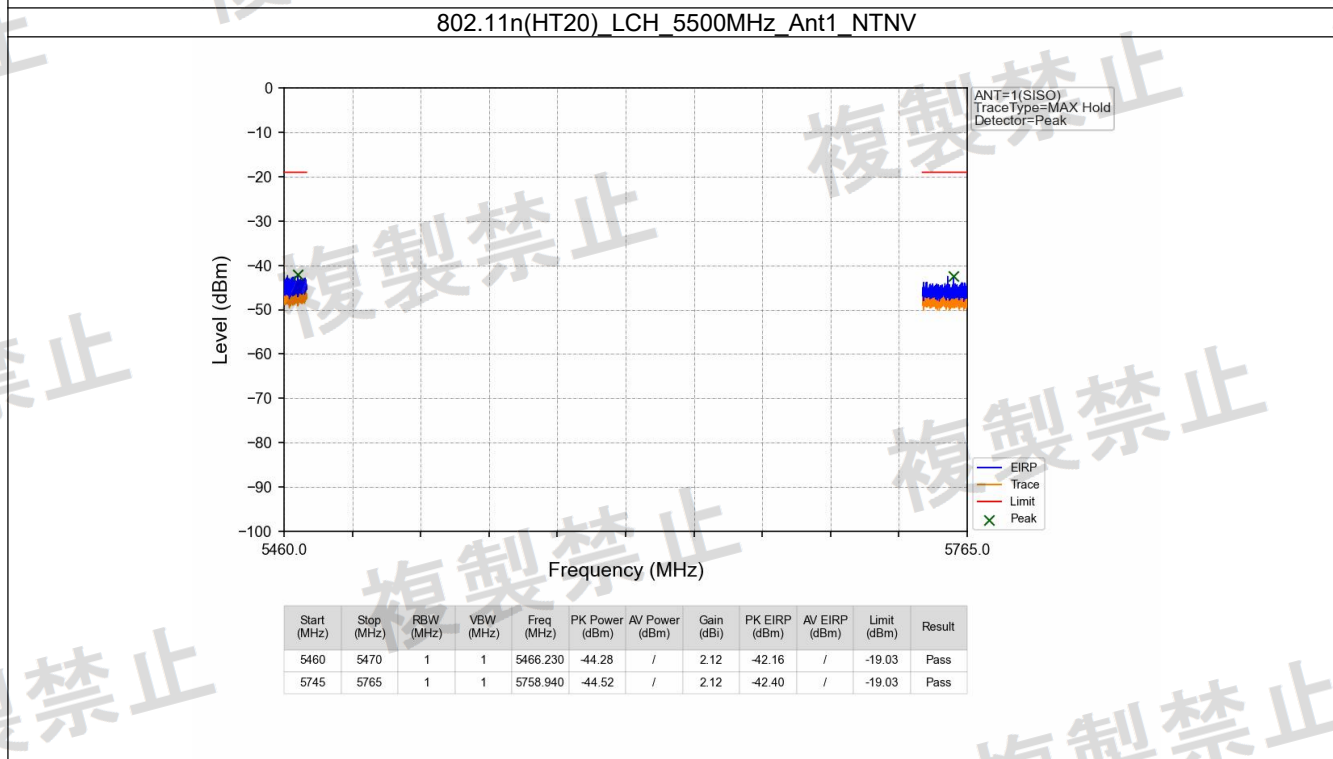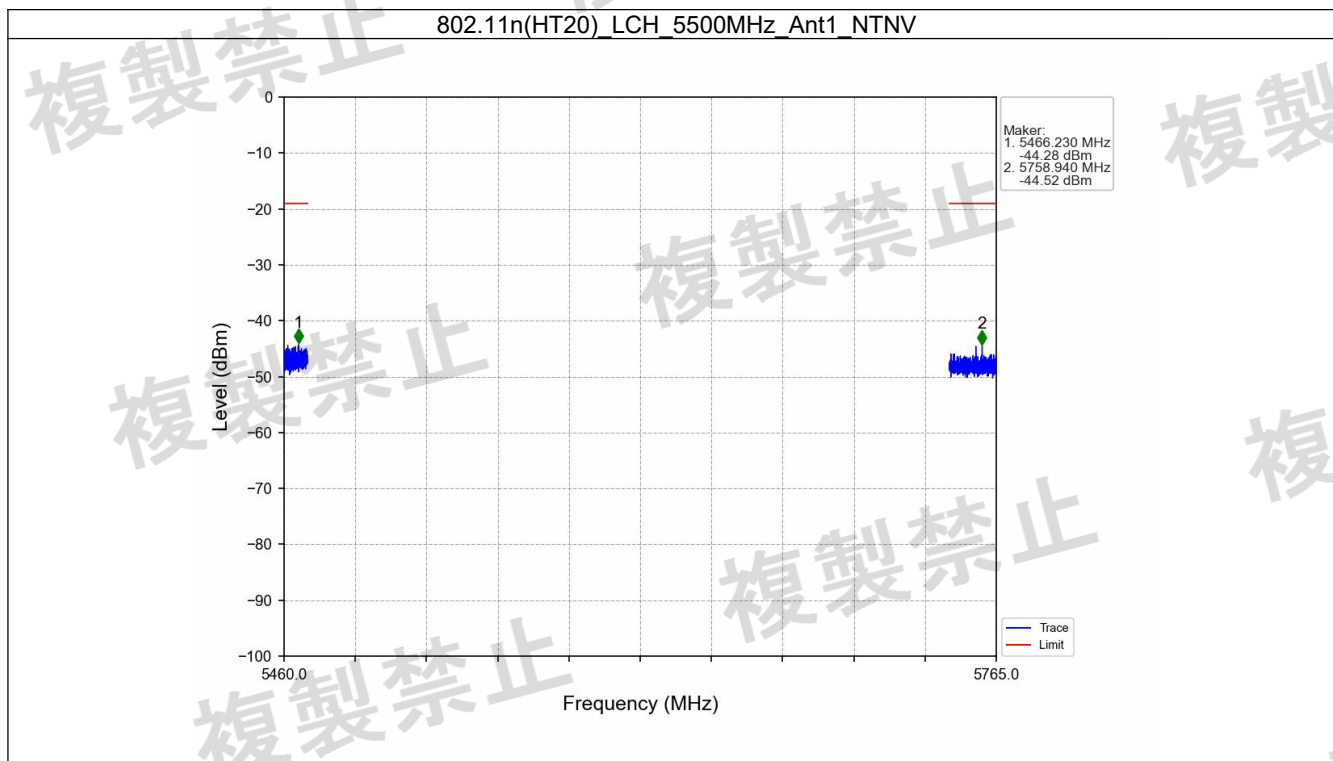

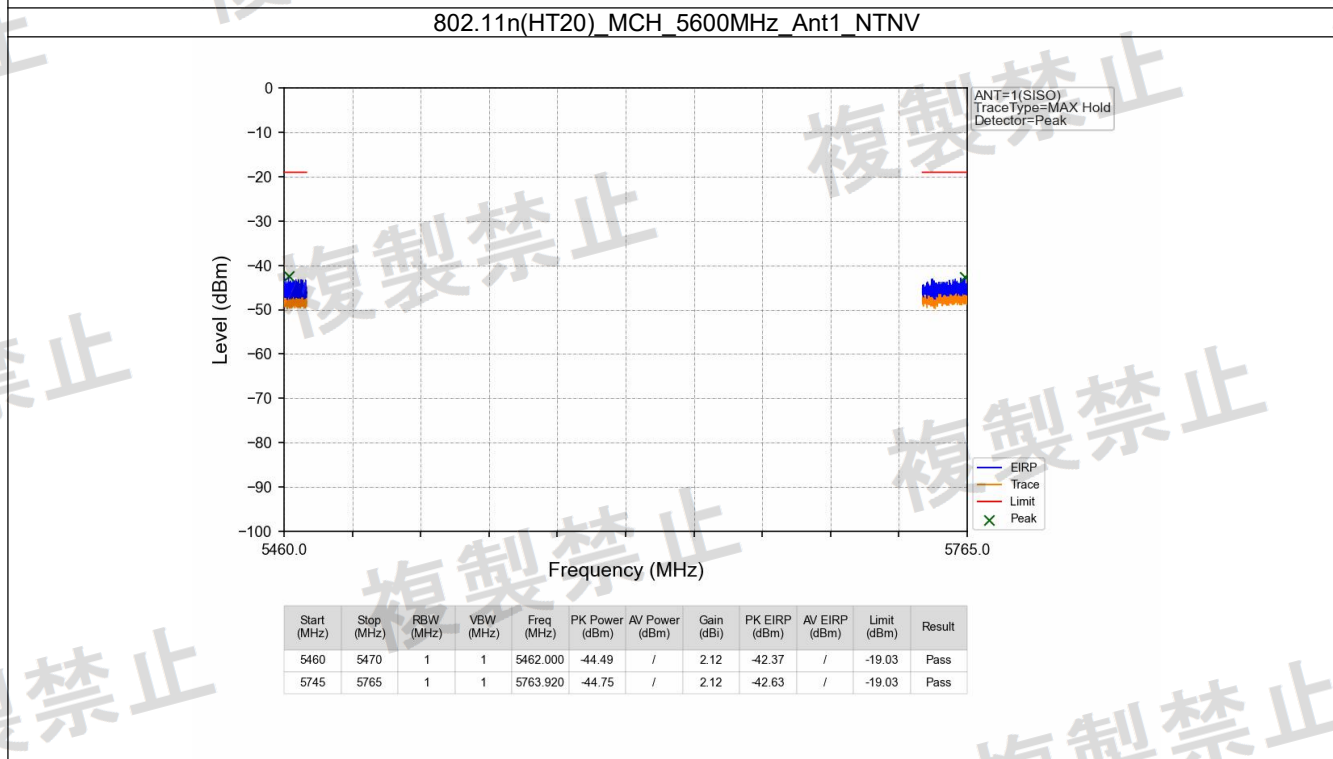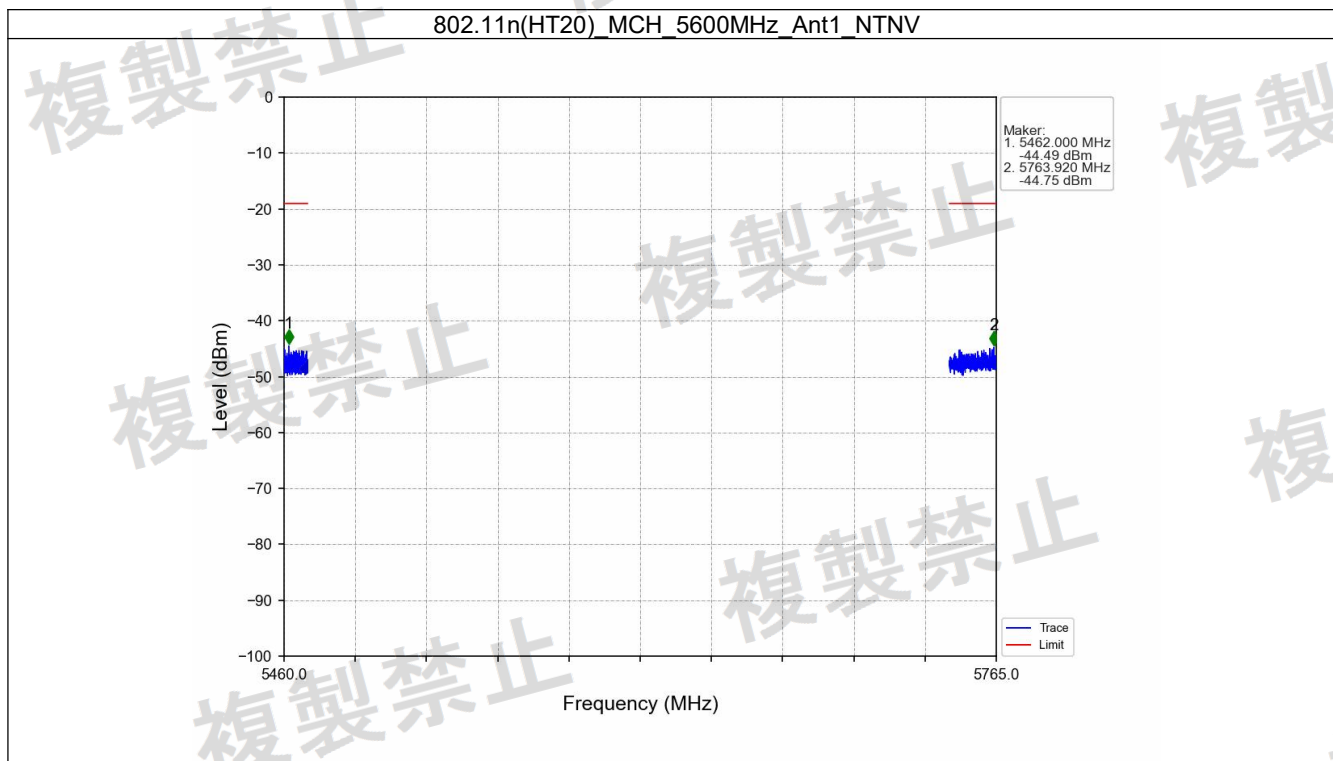

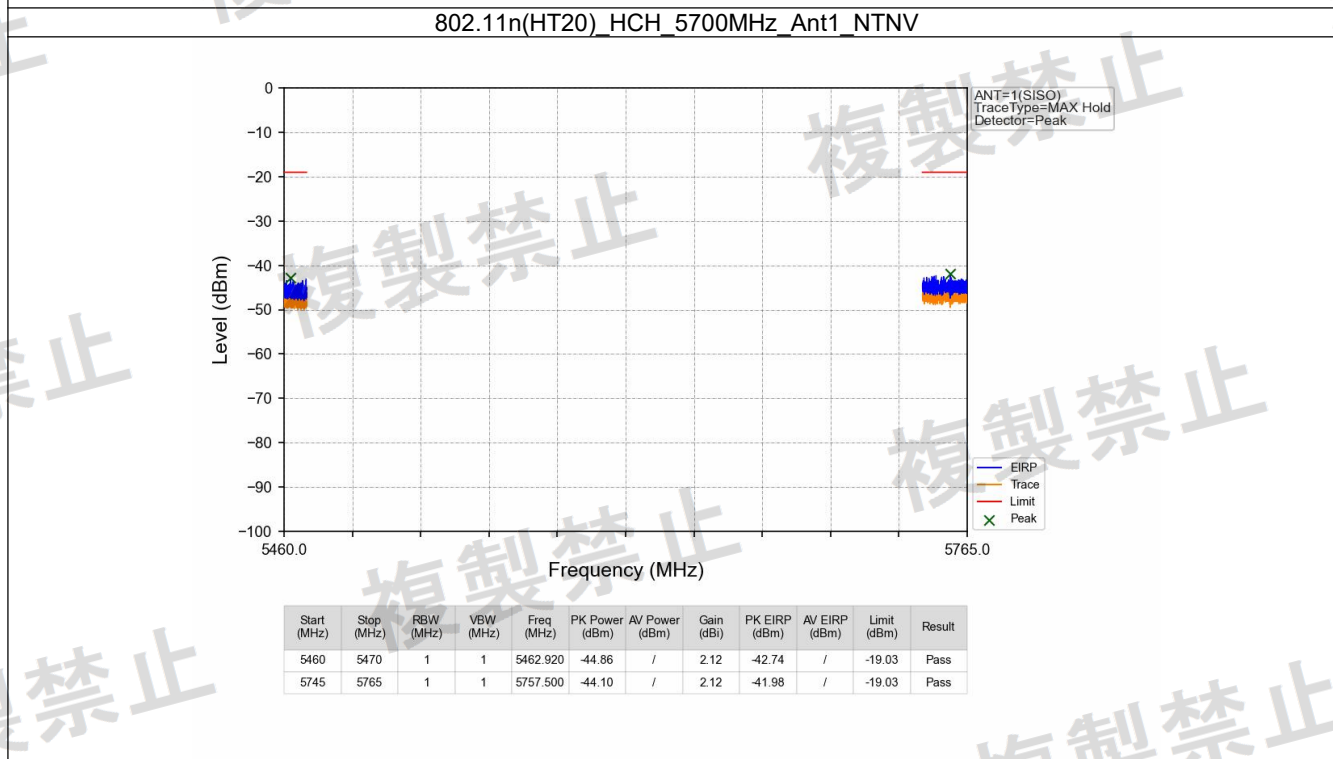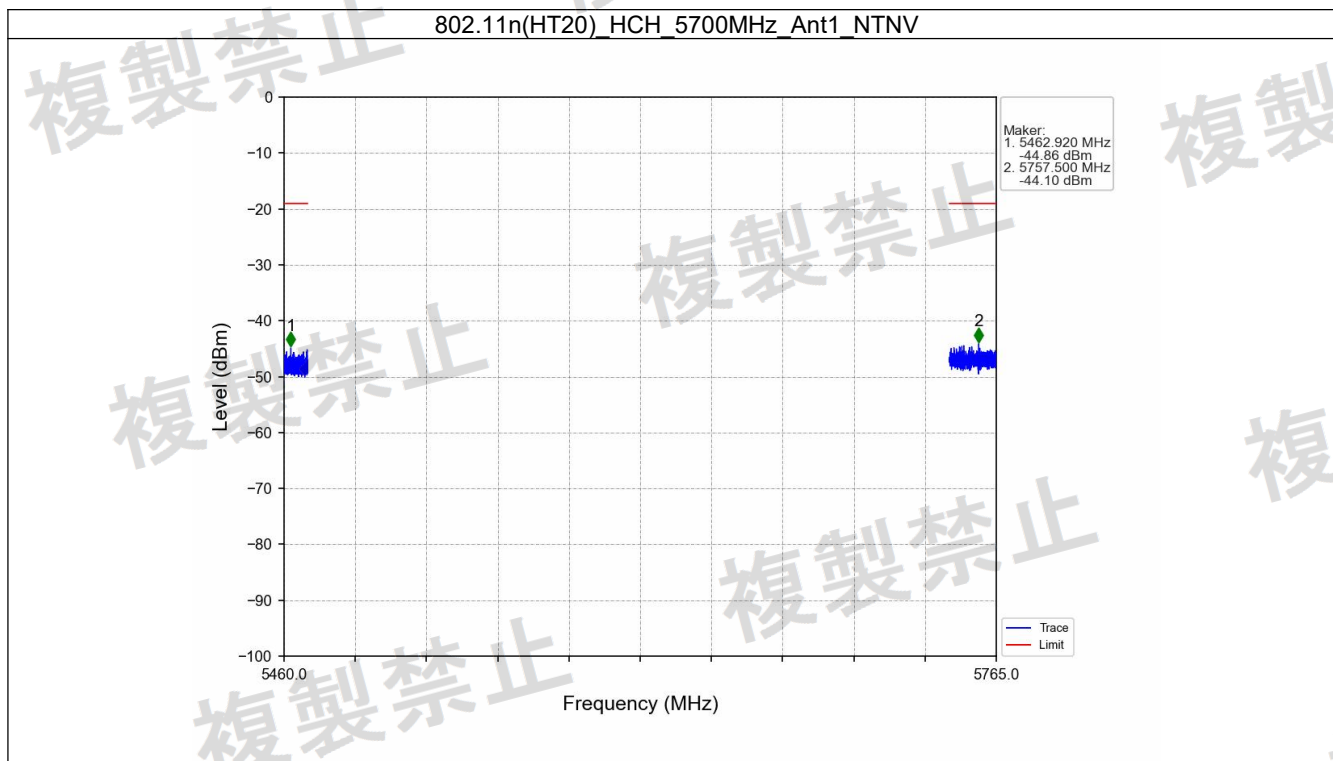

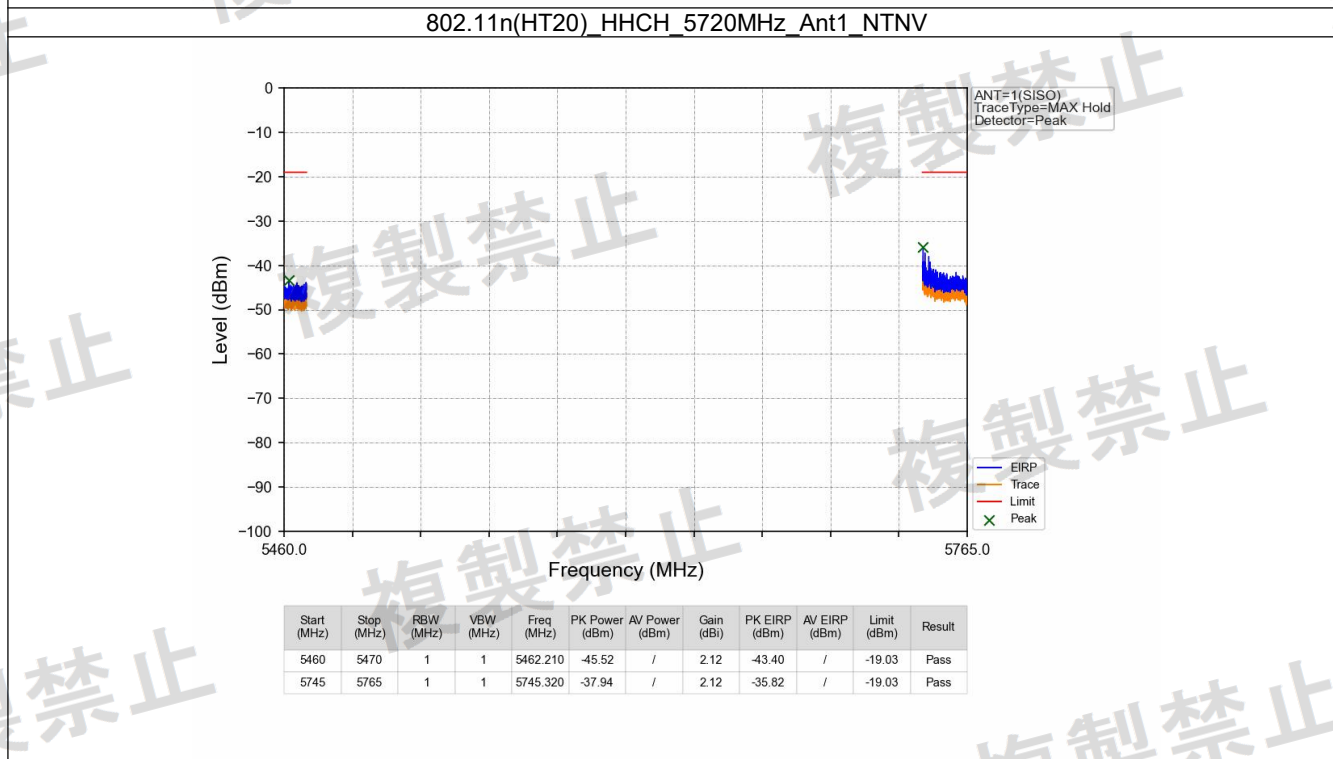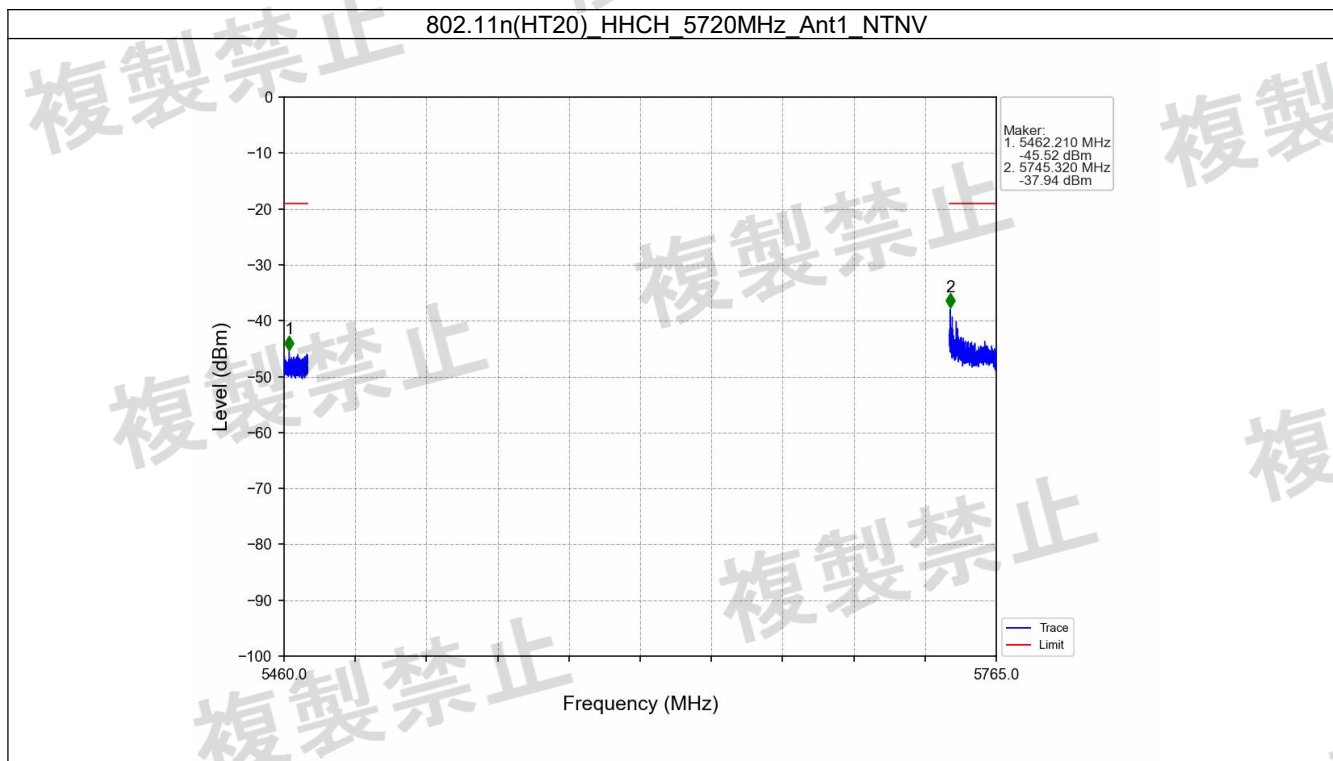

6. Transmission Burst Length


6.1 Test Result



6.1.1 Ant1_NTNV



Ant1_NTNV					
Mode	TX Type	Frequency (MHz)	Burst Length (ms)		Verdict
			Result	Limit	
802.11a	SISO	5500	1.410	<=8	Pass
		5600	1.410	<=8	Pass
		5700	1.410	<=8	Pass
		5720	1.410	<=8	Pass
802.11n (HT20)	SISO	5500	1.318	<=8	Pass
		5600	1.318	<=8	Pass
		5700	1.318	<=8	Pass
		5720	1.318	<=8	Pass



6.2 Test Graph

6.2.1 Ant1_NTNV

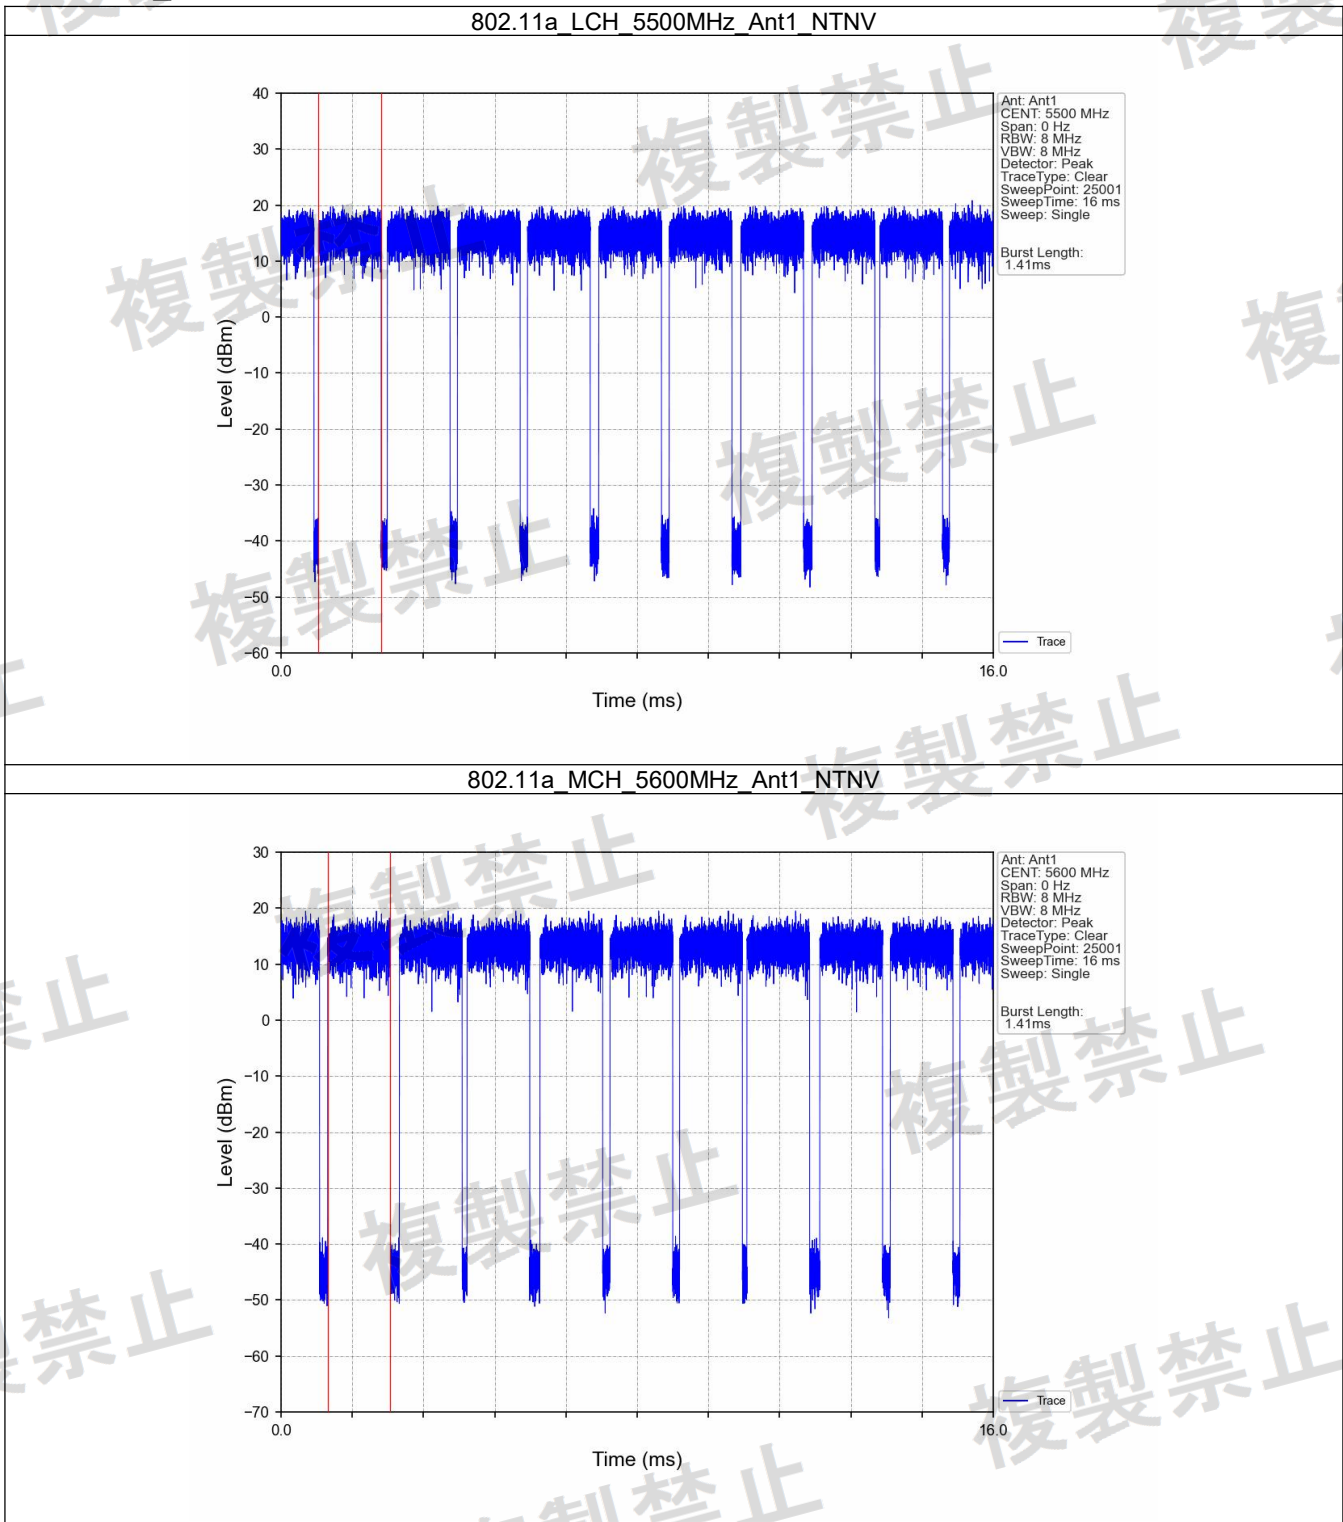

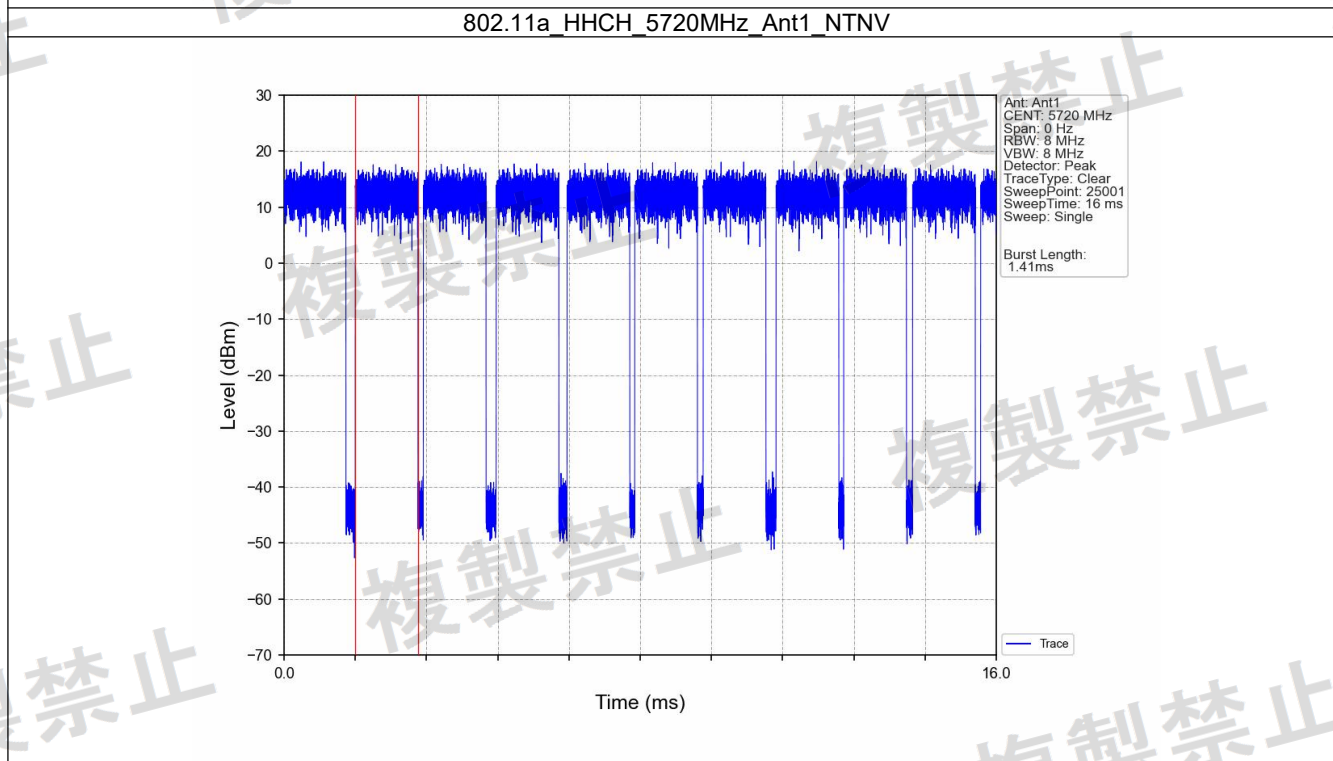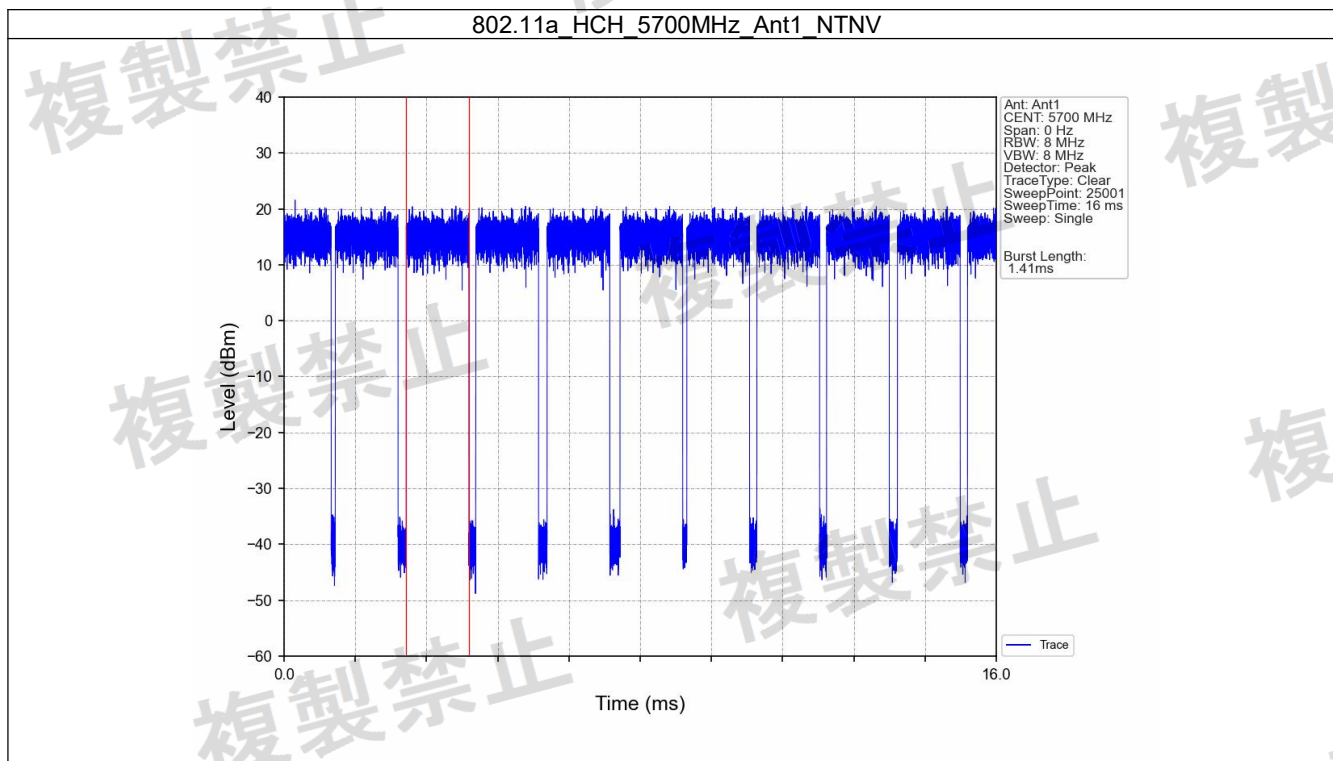

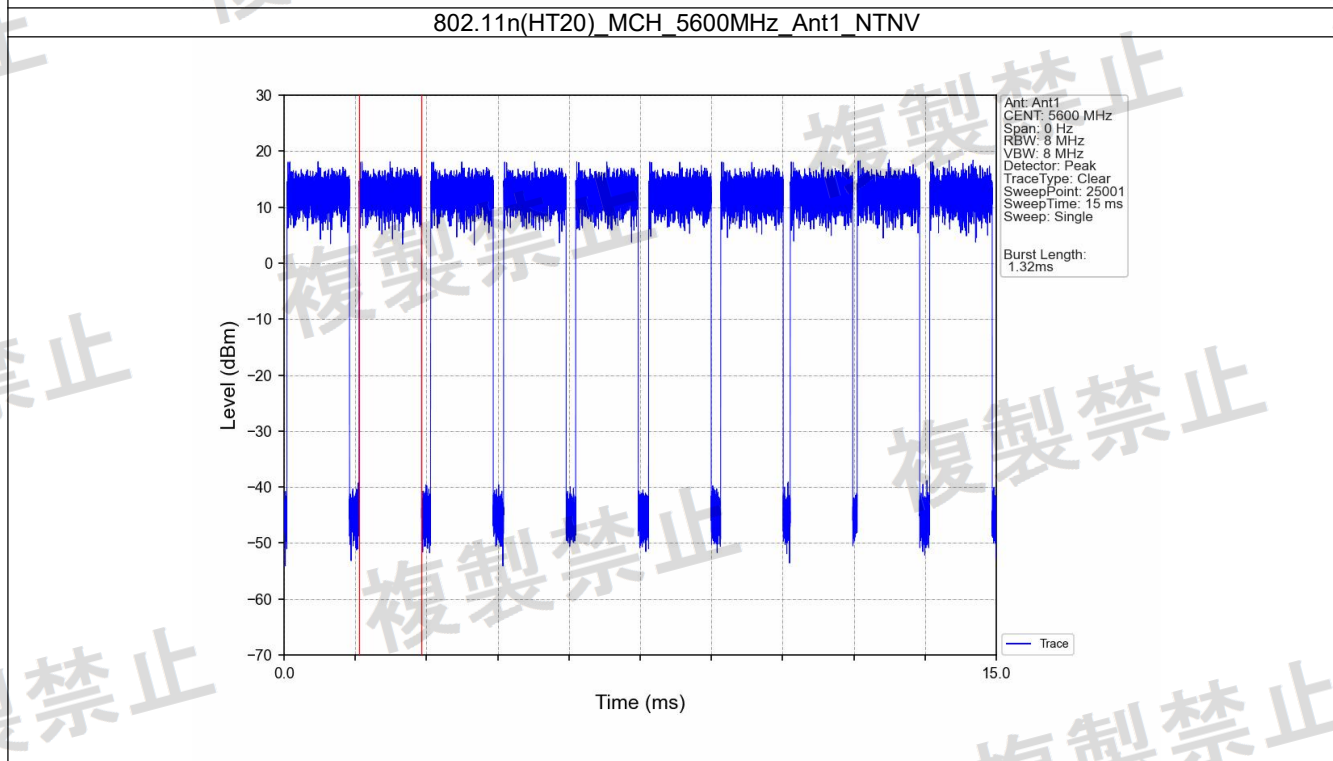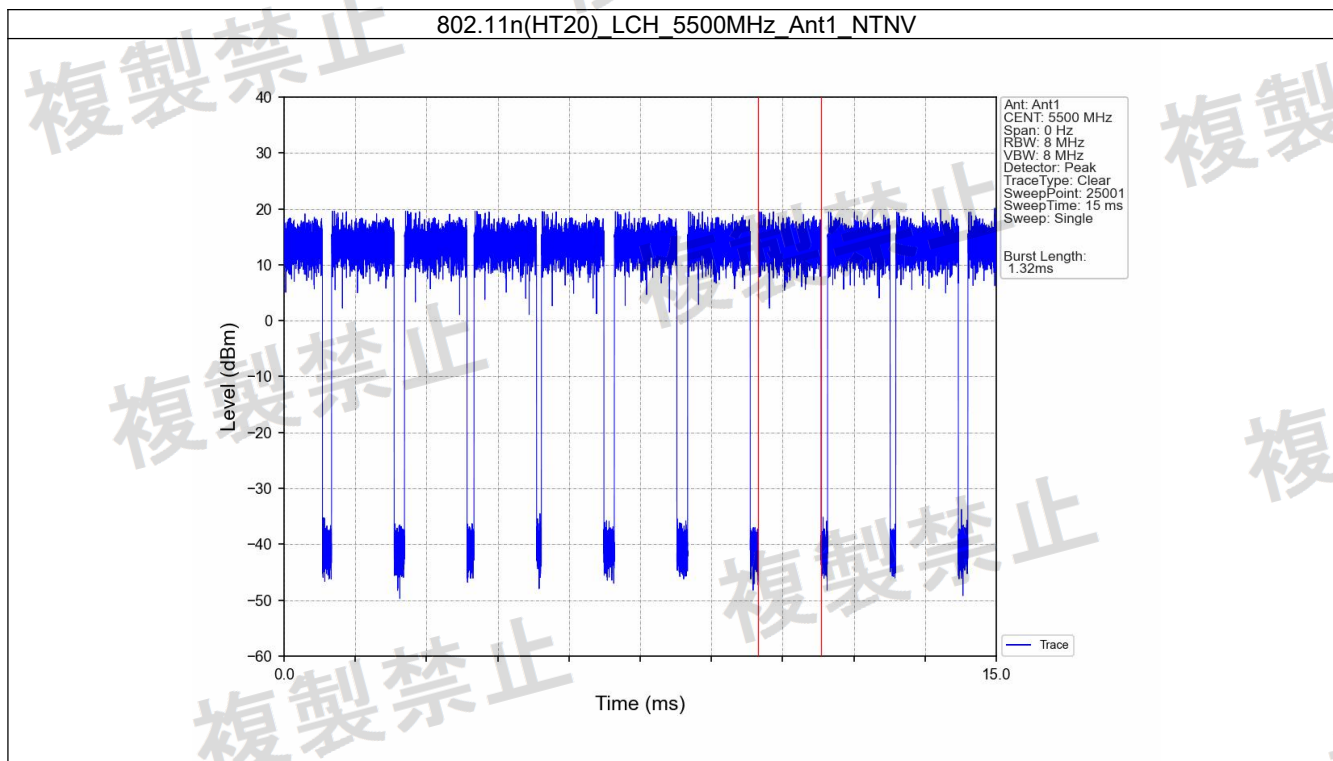

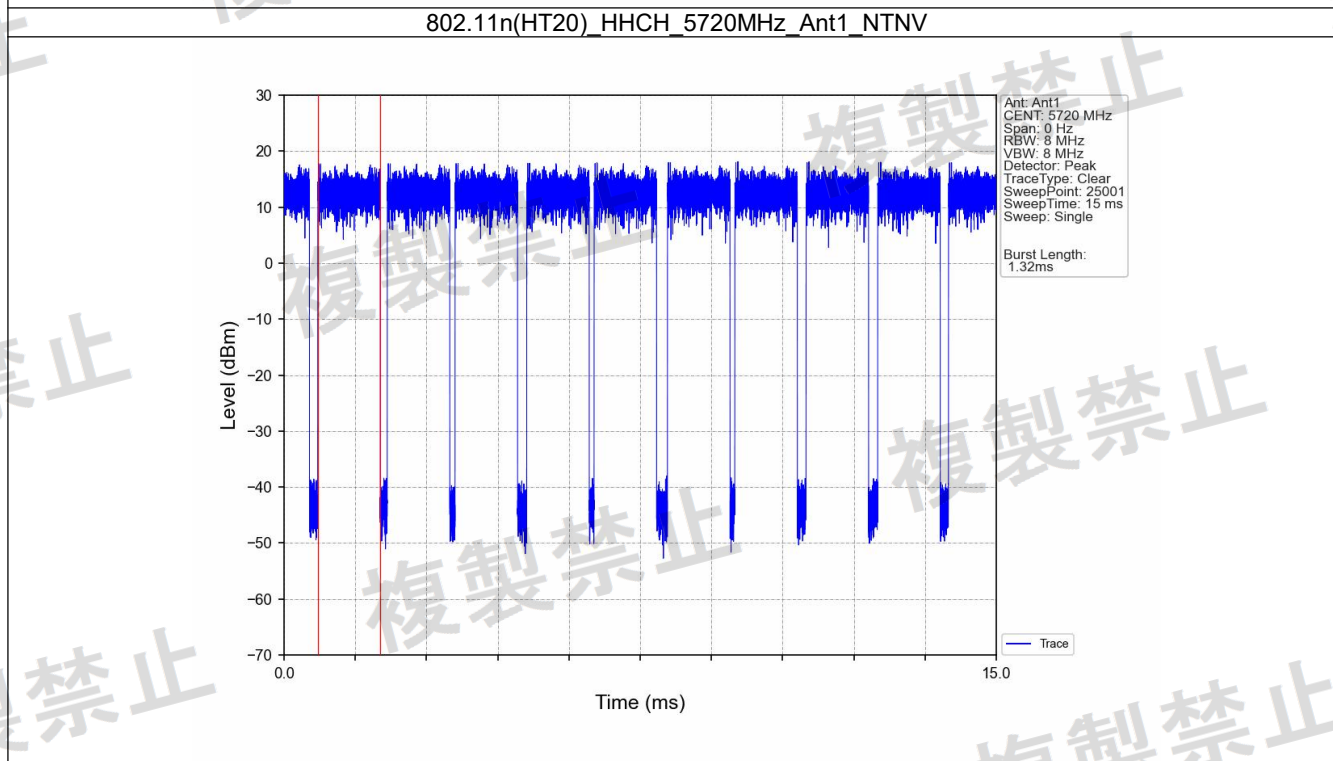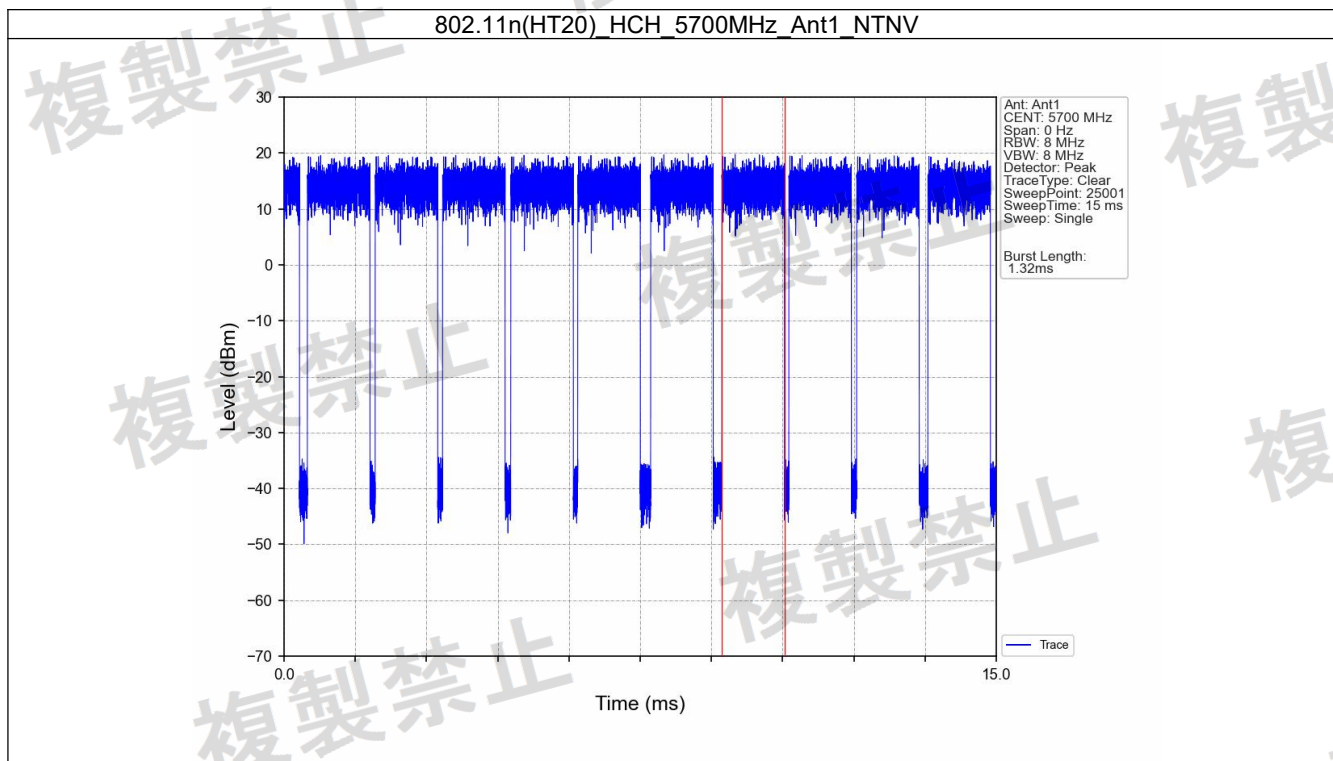

7. Spurious Emission Intensity


7.1 Test Result



7.1.1 TxSe_NTNV_SISO



NTNV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (uW /MHz)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK EIRP (dBm /MHz)	PK EIRP (uW /MHz)	AV EIRP (dBm /MHz)	AV EIRP (uW /MHz)		
802.11a	SISO	5500	1	30	5460	110.5	-32.33	0.585	/	/	2.5	Pass
				5765	26000	24845.256	-24.76	3.342	-36.97	0.201	2.5	Pass
						24961.27	-25.77	2.649	-34.99	0.317	2.5	Pass
						25033.442	-26.45	2.265	-35.88	0.258	2.5	Pass
						25502.894	-25.81	2.624	-35.48	0.283	2.5	Pass
						25975.718	-26.01	2.506	-35.64	0.273	2.5	Pass
		5600	1	30	5460	239	-30.24	0.946	/	/	2.5	Pass
				5765	26000	24958.572	-28.27	1.489	-38.75	0.133	2.5	Pass
						25548.085	-29.00	1.259	-39.69	0.107	2.5	Pass
		5700	1	30	5460	54	-31.64	0.685	/	/	2.5	Pass
				5765	26000	21035.006	-25.71	2.685	-36.79	0.209	2.5	Pass
						24968.69	-24.35	3.673	-35.00	0.316	2.5	Pass
						25433.42	-25.00	3.162	-35.82	0.262	2.5	Pass
						25500.87	-25.11	3.083	-35.36	0.291	2.5	Pass
						25925.131	-25.71	2.685	-36.12	0.244	2.5	Pass
		5720	1	30	5460	54	-30.43	0.906	/	/	2.5	Pass
				5765	26000	25003.764	-28.40	1.445	-39.17	0.121	2.5	Pass
802.11n (HT20)	SISO	5500	1	30	5460	110.5	-33.23	0.475	/	/	2.5	Pass
				5765	26000	21018.143	-25.88	2.582	-36.72	0.213	2.5	Pass
						24910.683	-25.48	2.831	-35.53	0.280	2.5	Pass
						24976.784	-24.84	3.281	-35.06	0.312	2.5	Pass
						25865.1	-25.97	2.529	-37.02	0.199	2.5	Pass
		5600	1	30	5460	2411.5	-30.54	0.883	/	/	2.5	Pass
				5765	26000	24934.29	-28.84	1.306	-38.99	0.126	2.5	Pass
		5700	1	30	5460	39	-32.74	0.532	/	/	2.5	Pass
				5765	26000	24930.918	-29.18	1.208	/	/	2.5	Pass
		5720	1	30	5460	240.5	-25.82	2.618	-36.64	0.217	2.5	Pass
						2451	-28.39	1.449	-55.74	0.003	2.5	Pass
						25993.93	-29.01	1.256	-39.22	0.120	2.5	Pass



7.2 Test Graph



7.2.1 TxSe_NTNV_SISO


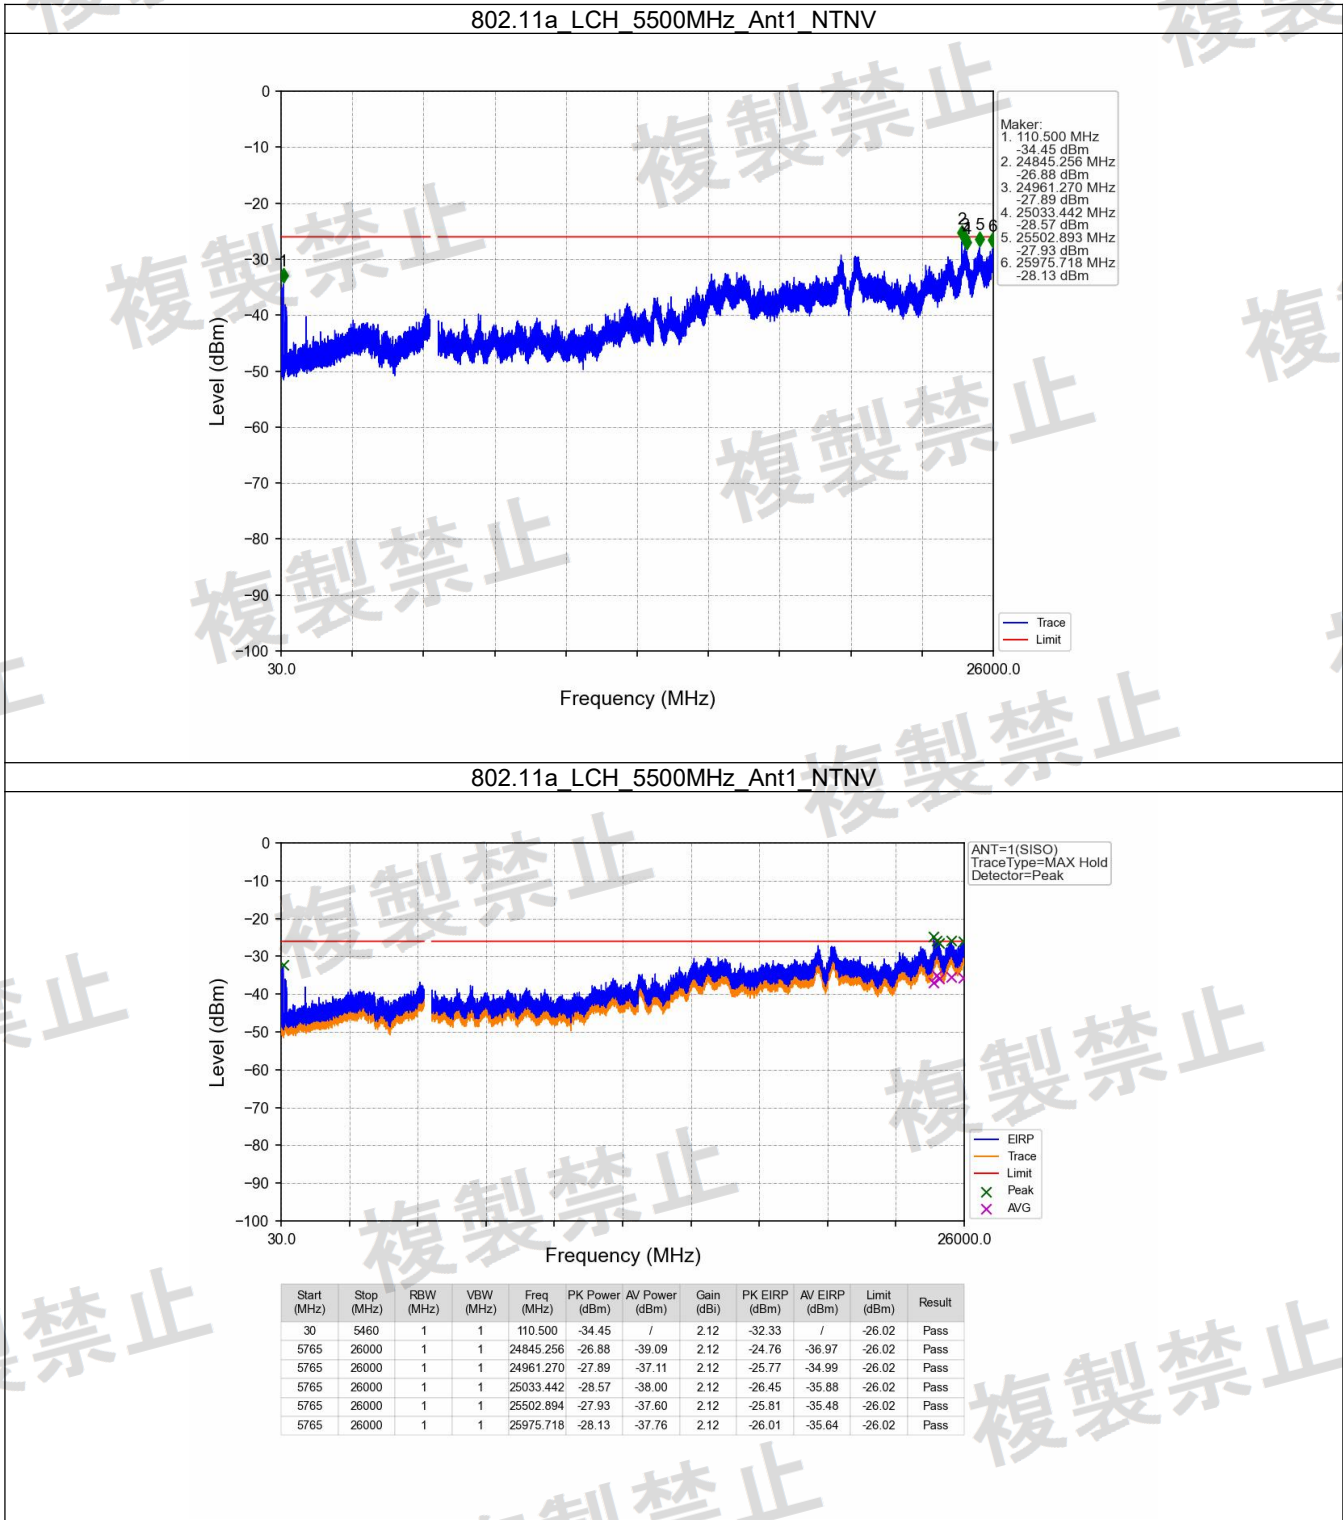


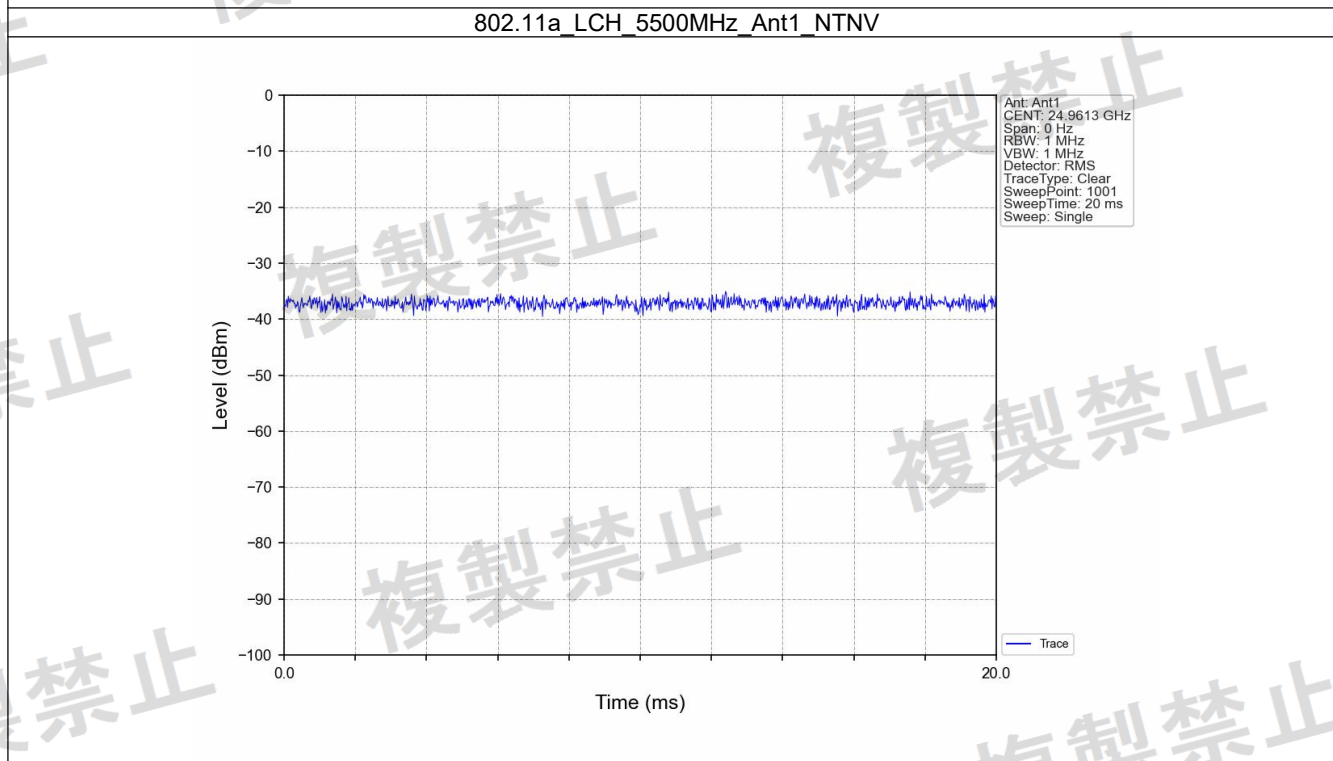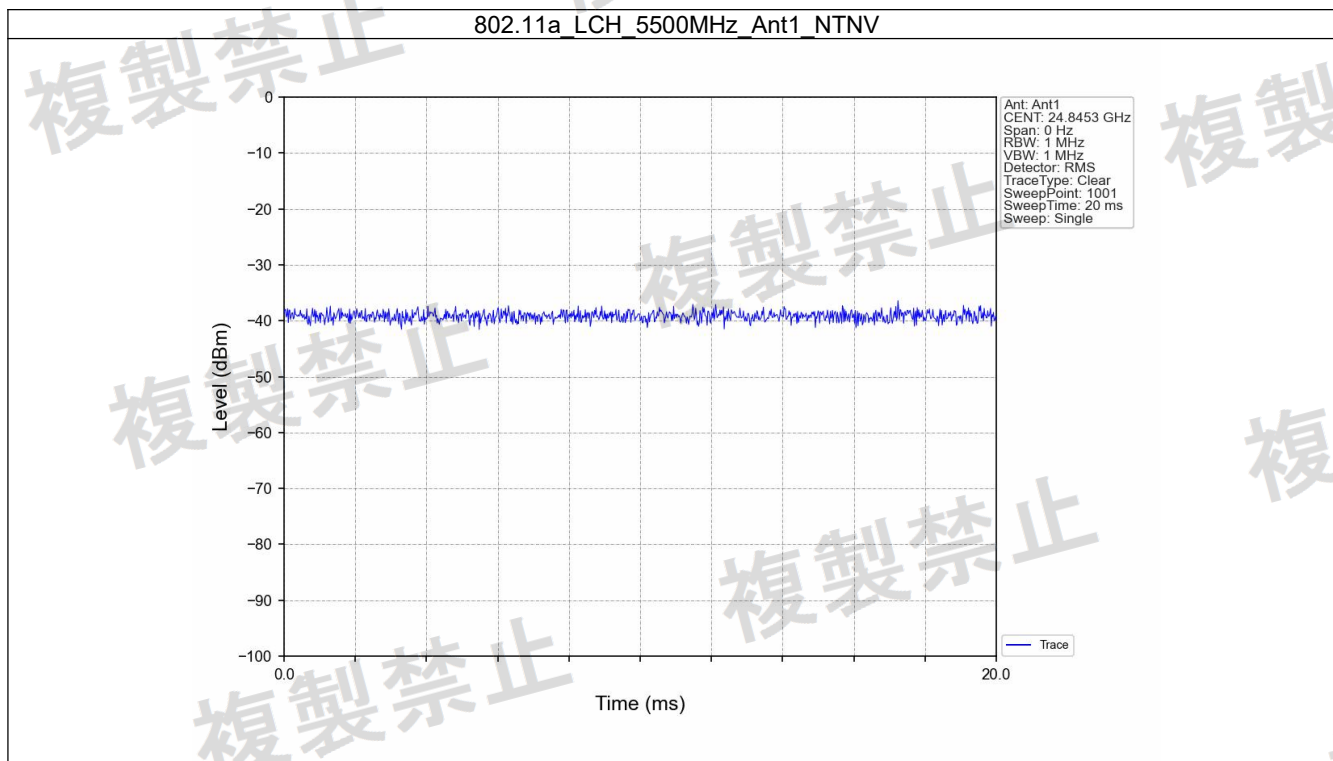

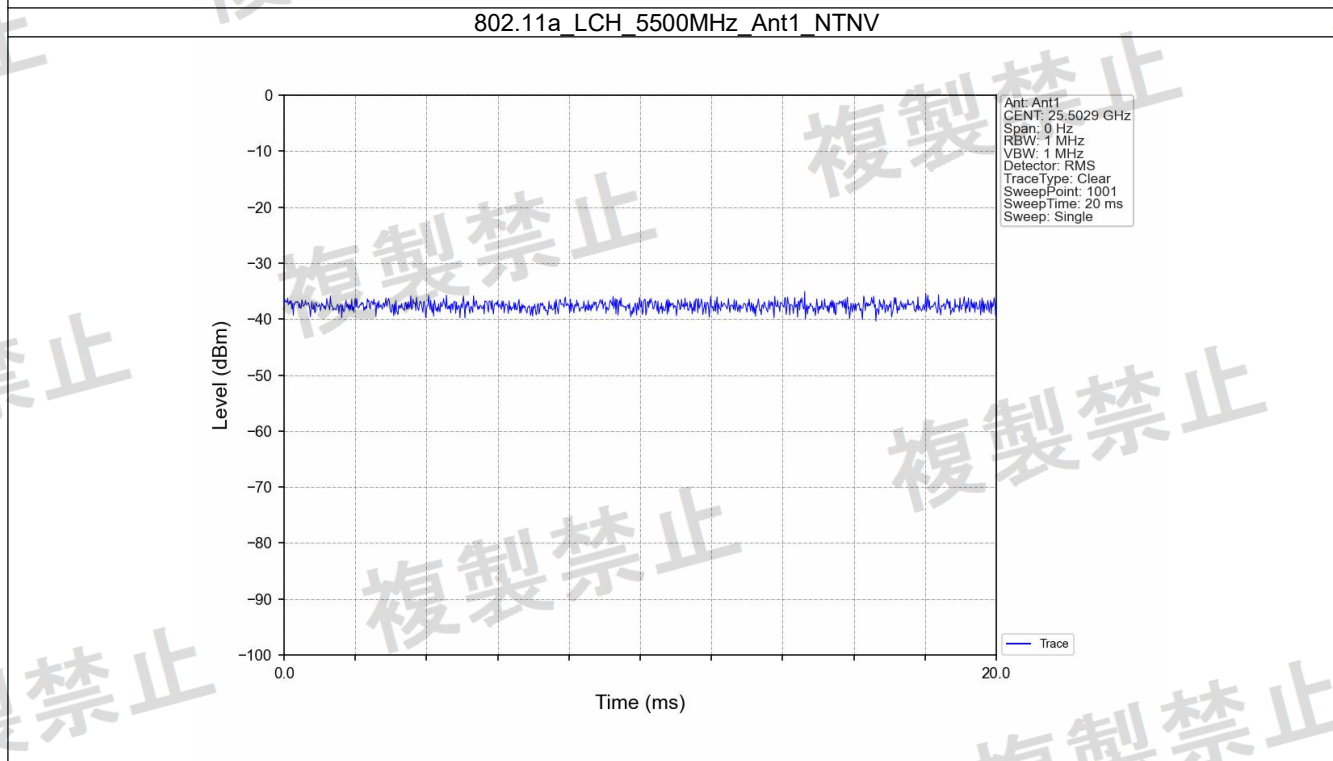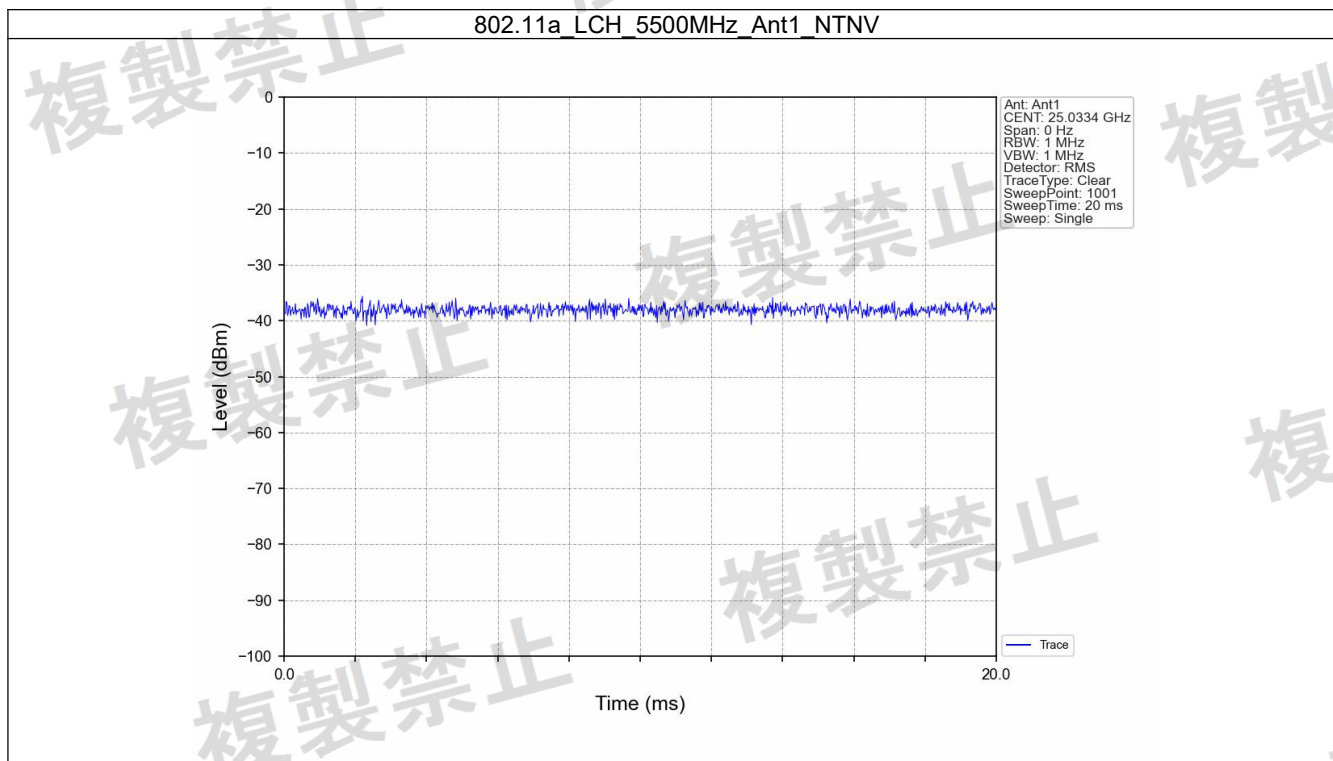


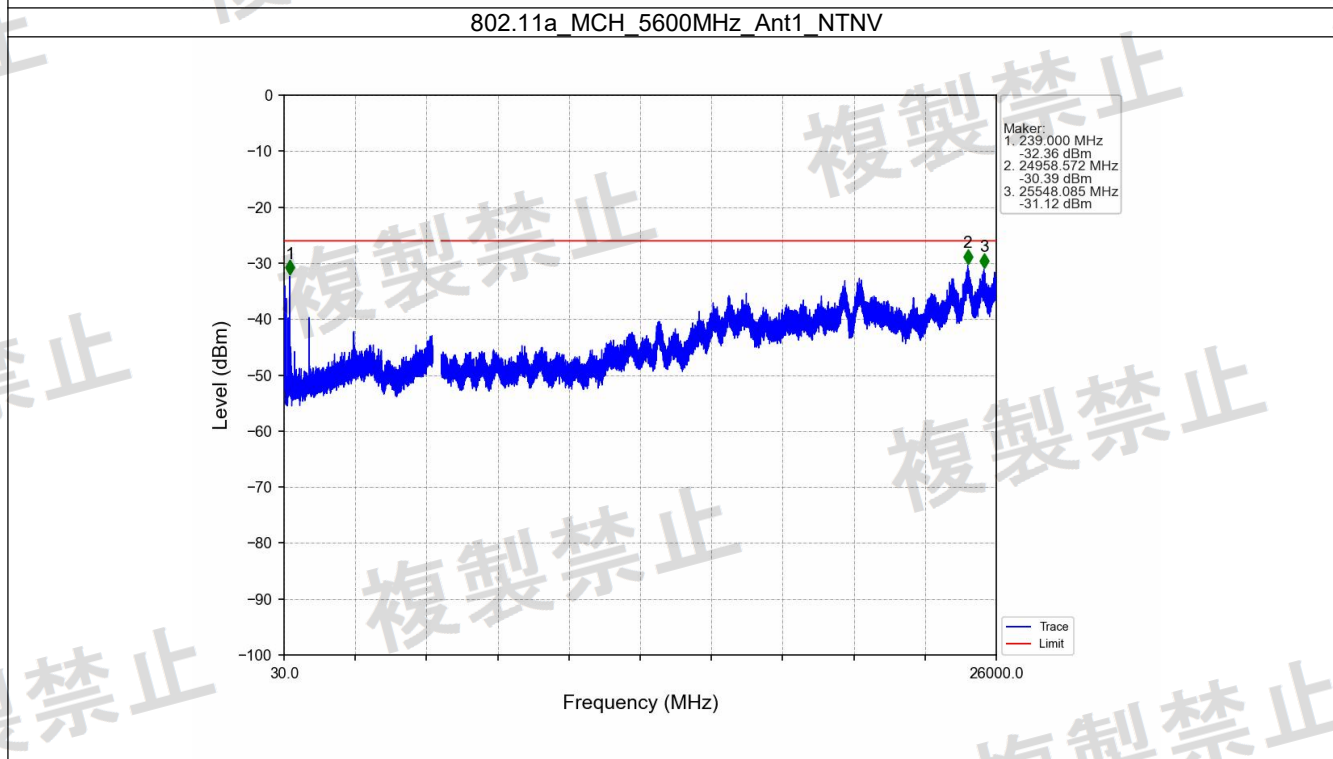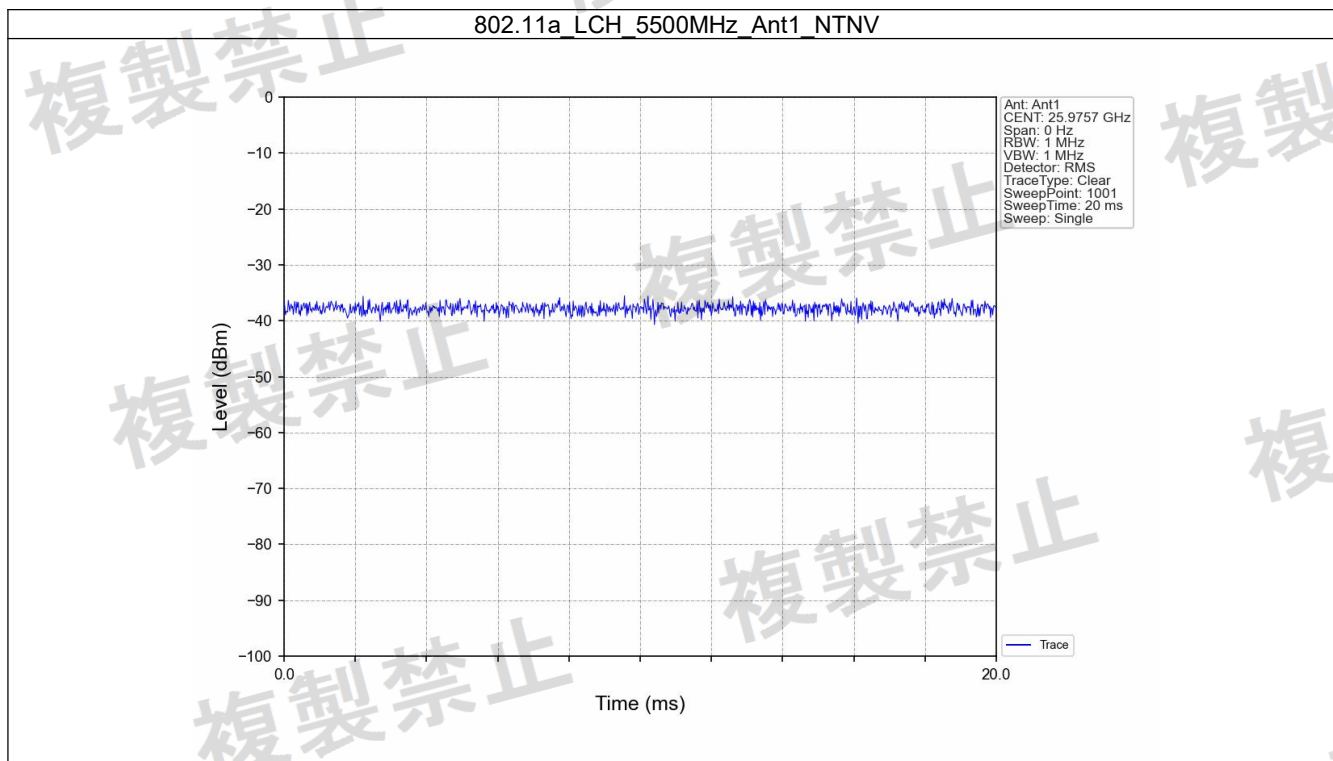

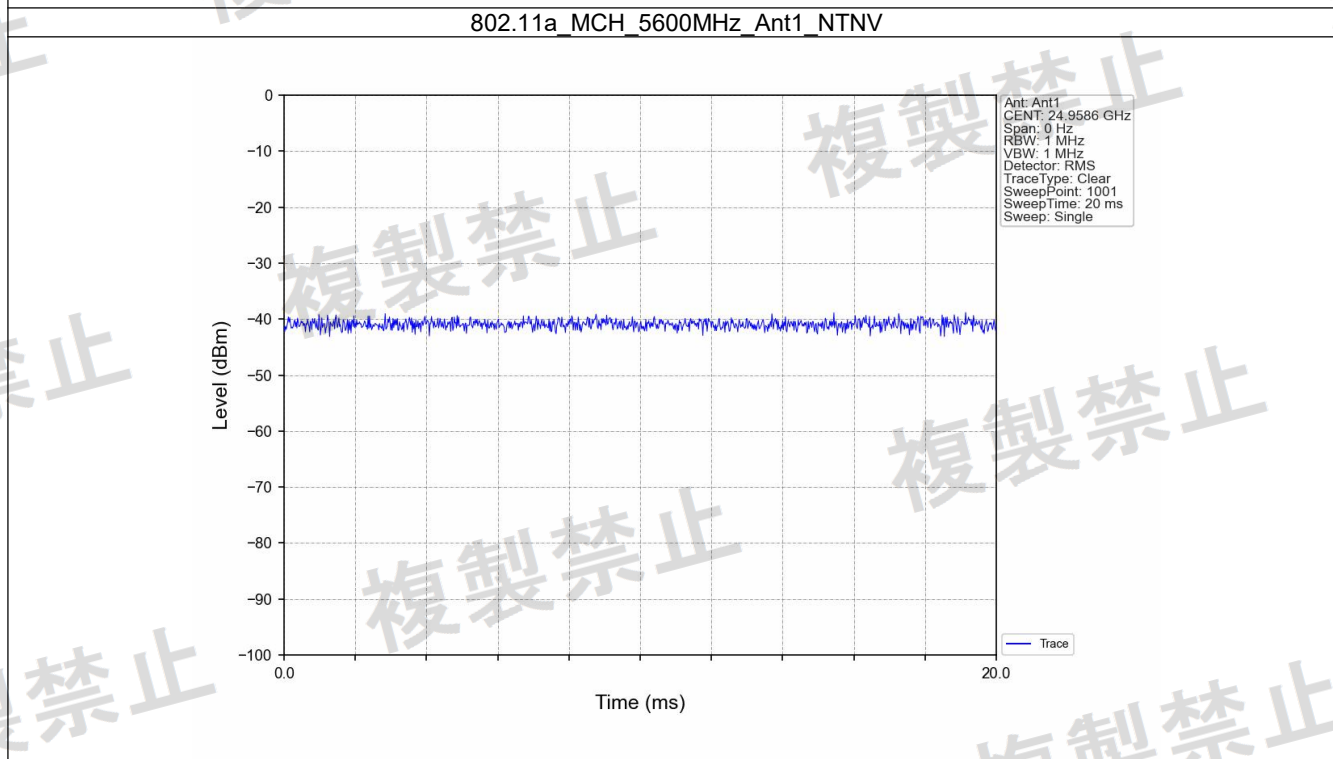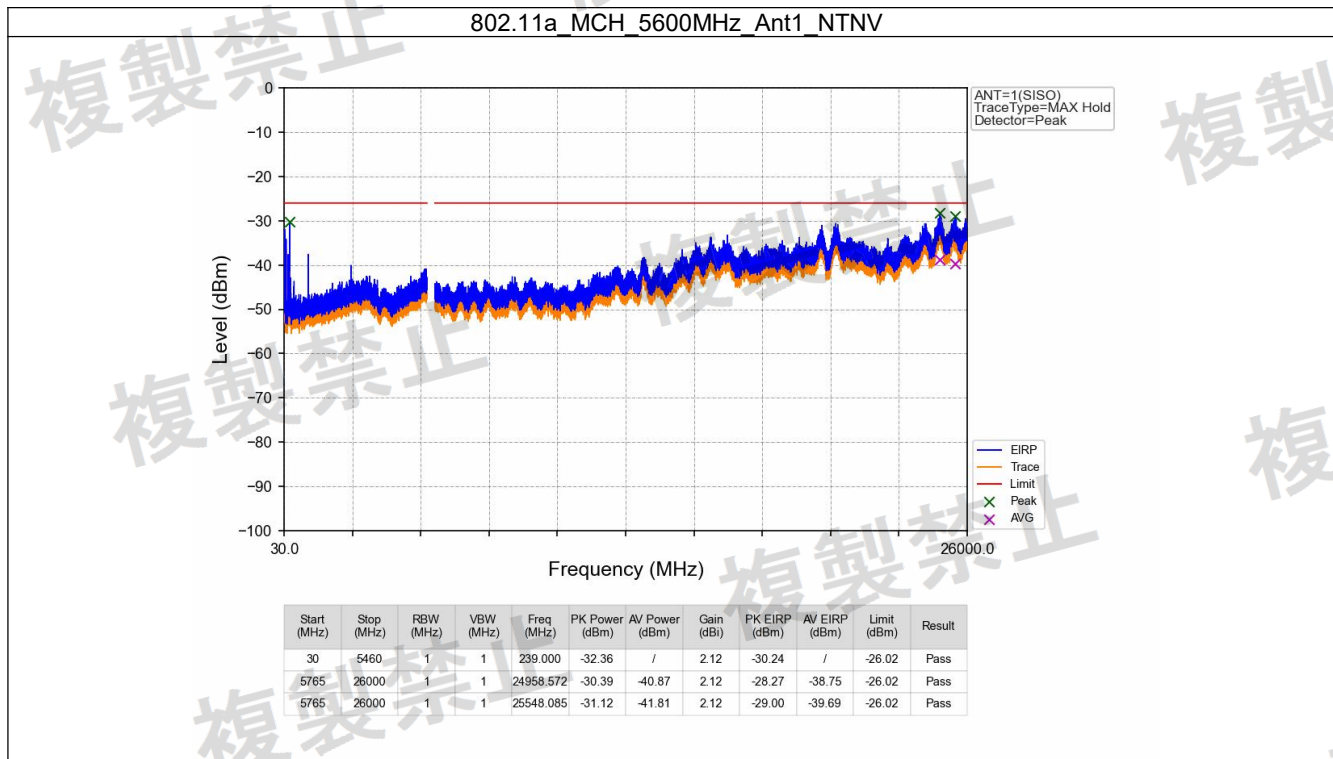

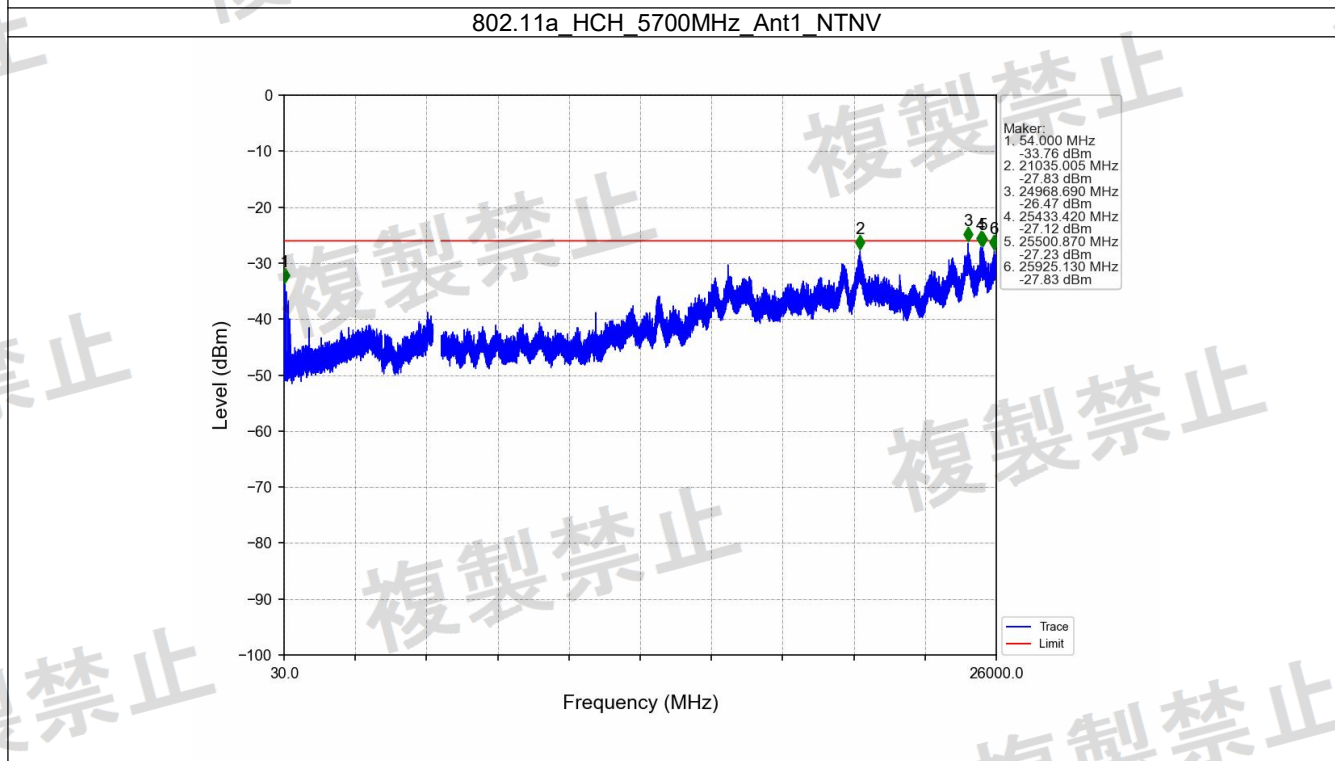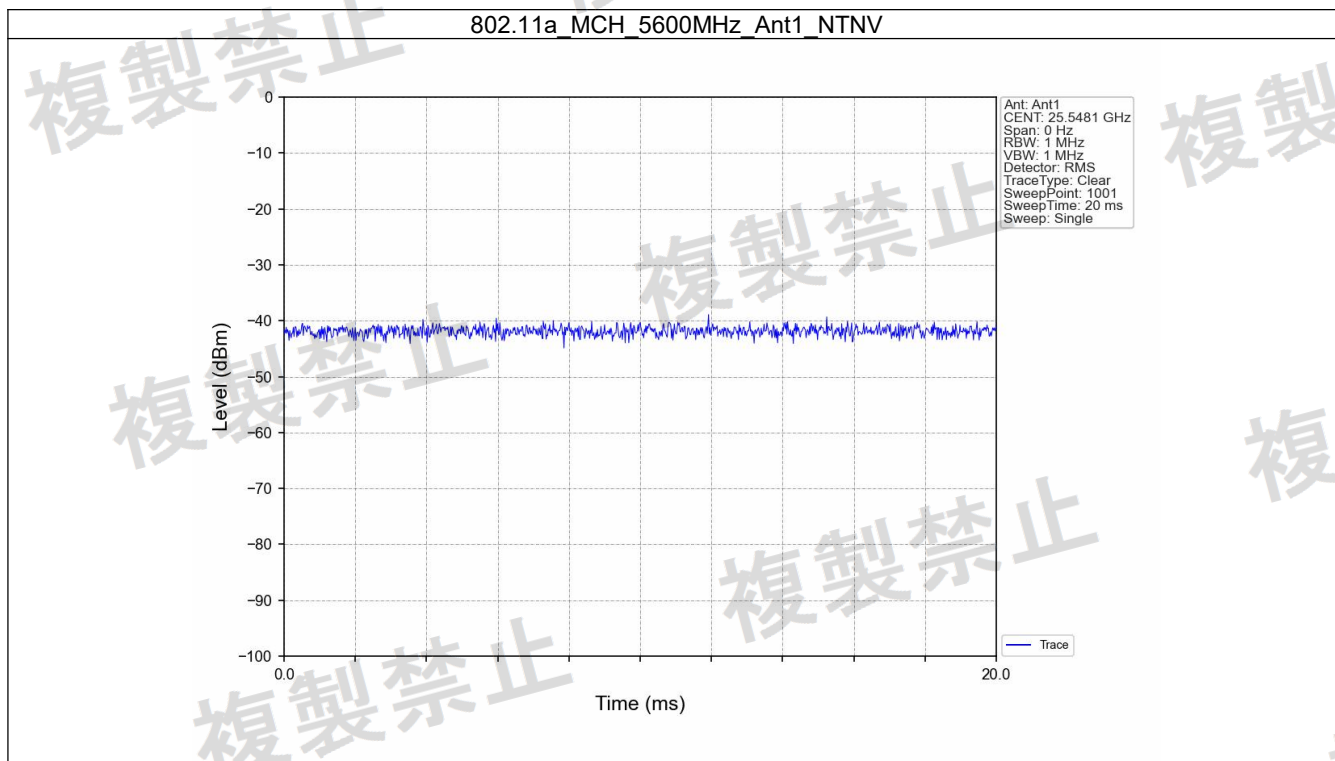




802.11a_HCH_5700MHz_Ant1_NTNV


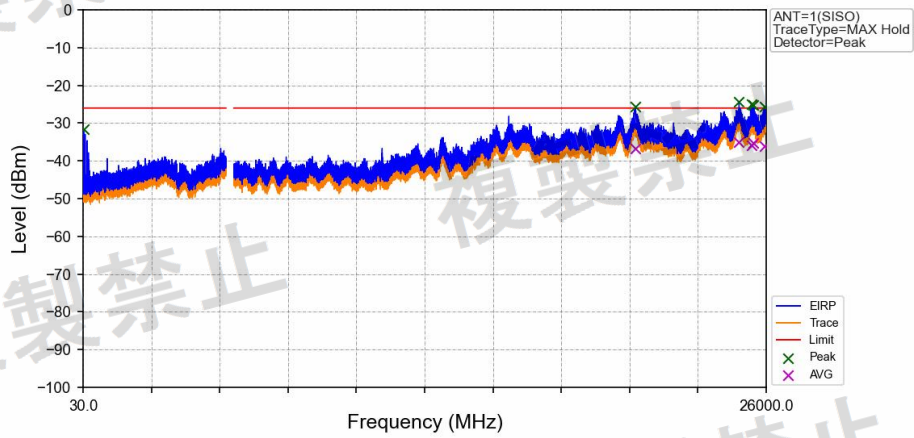




Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Gain (dB)	PK EIRP (dBm)	AV EIRP (dBm)	Limit (dBm)	Result
30	5460	1	1	54.000	-33.76	/	2.12	-31.64	/	-26.02	Pass
5765	26000	1	1	21035.006	-27.83	-38.91	2.12	-25.71	-36.79	-26.02	Pass
5765	26000	1	1	24968.690	-26.47	-37.12	2.12	-24.35	-35.00	-26.02	Pass
5765	26000	1	1	25433.420	-27.12	-37.04	2.12	-25.00	-35.82	-26.02	Pass
5765	26000	1	1	25500.870	-27.23	-37.48	2.12	-25.11	-35.36	-26.02	Pass
5765	26000	1	1	25925.131	-27.83	-38.24	2.12	-25.71	-36.12	-26.02	Pass



802.11a_HCH_5700MHz_Ant1_NTNV


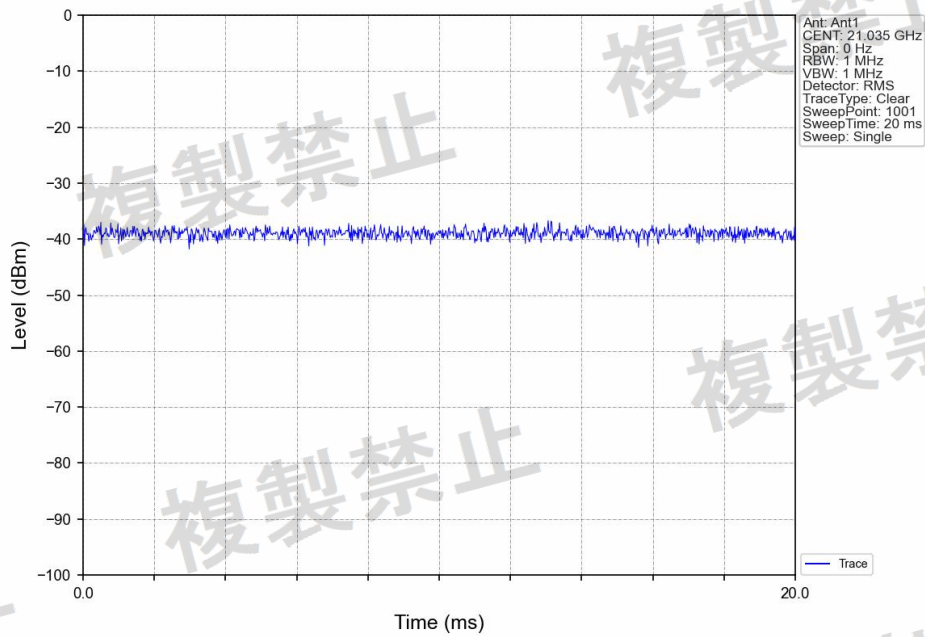


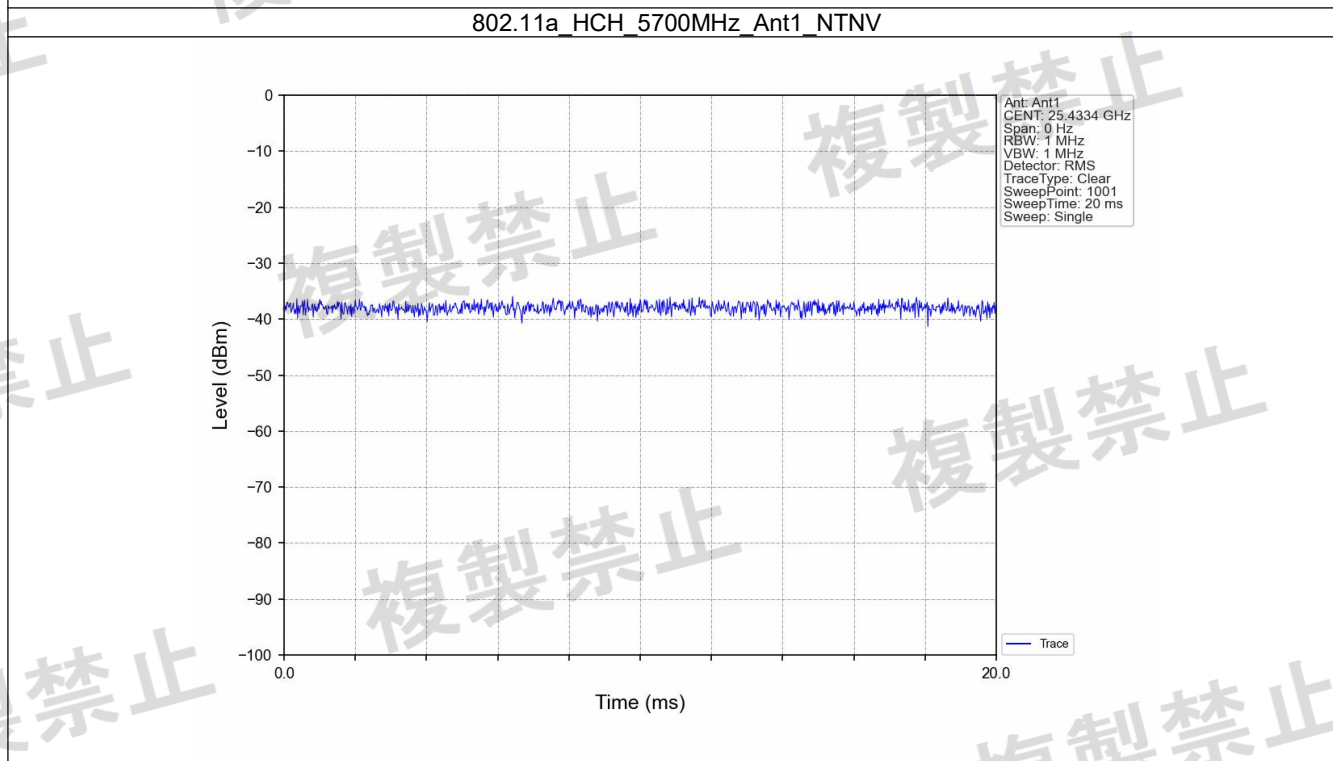
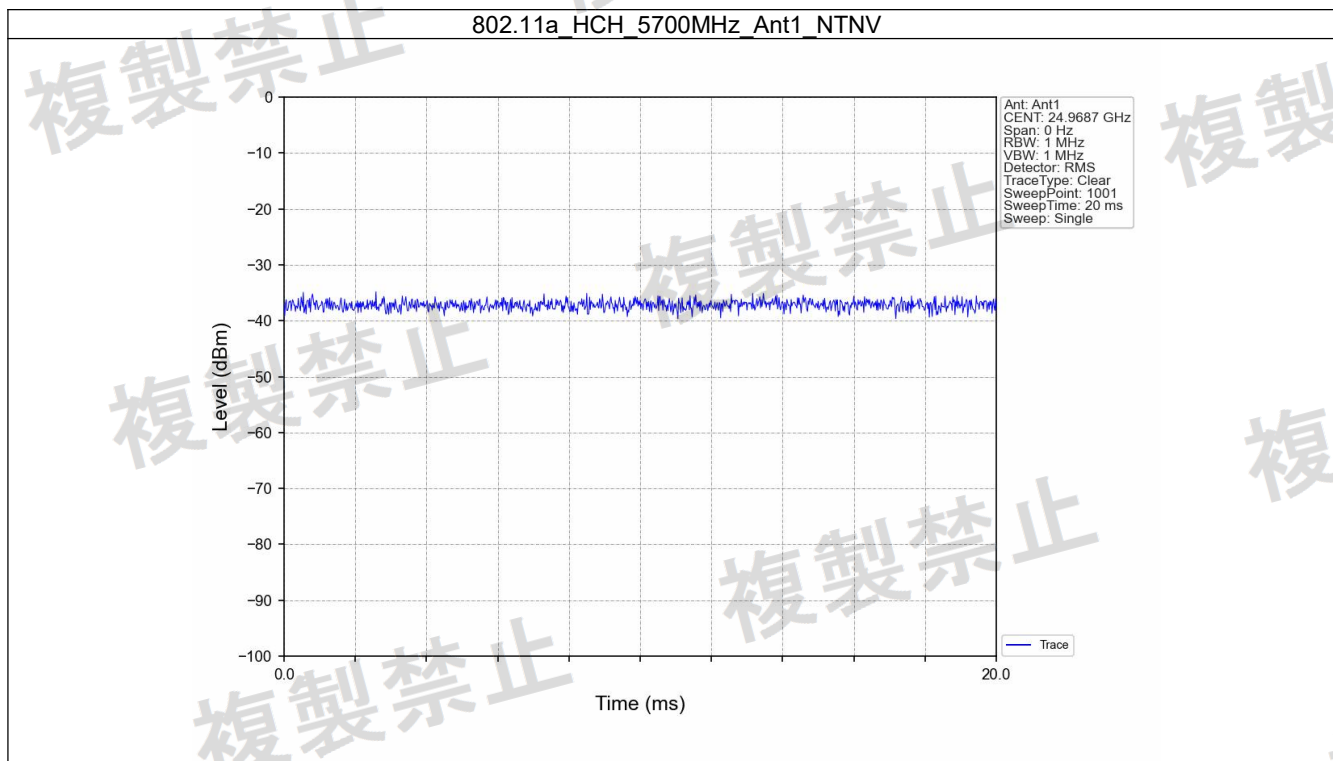


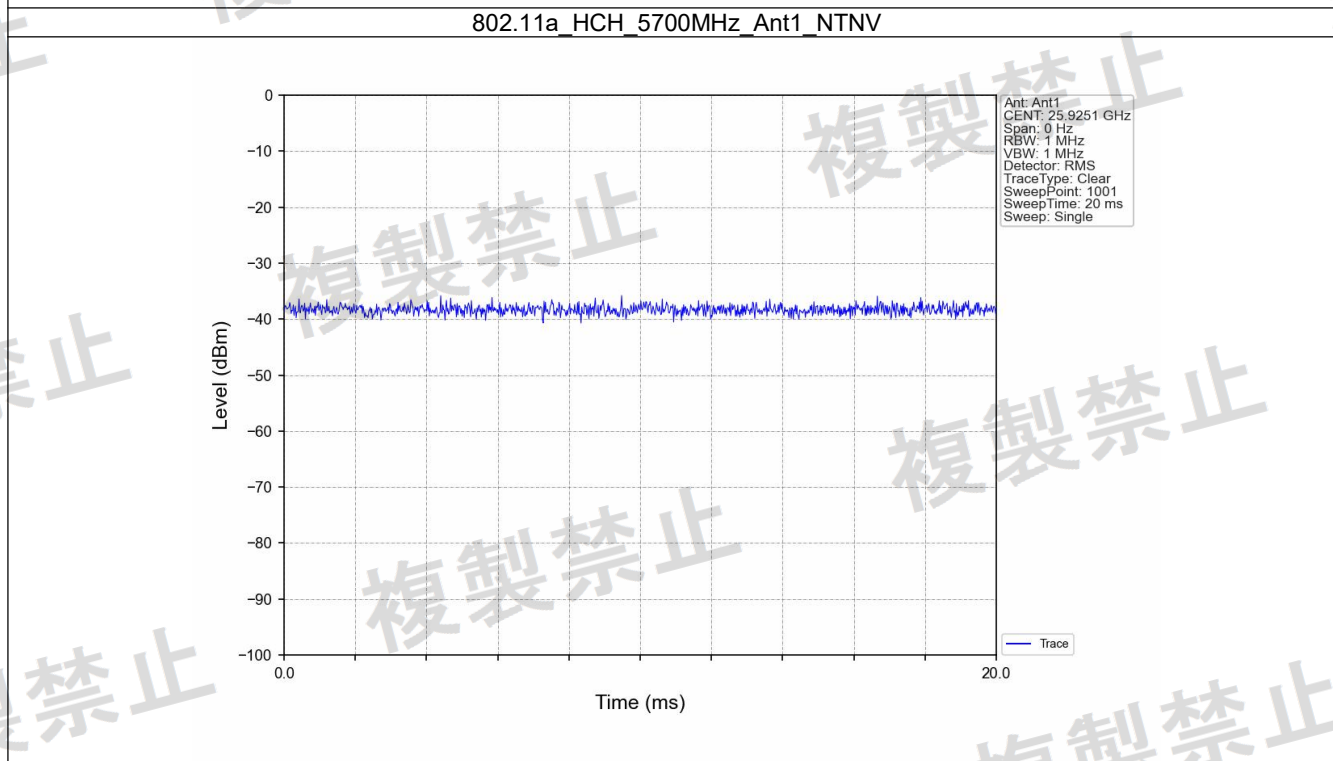
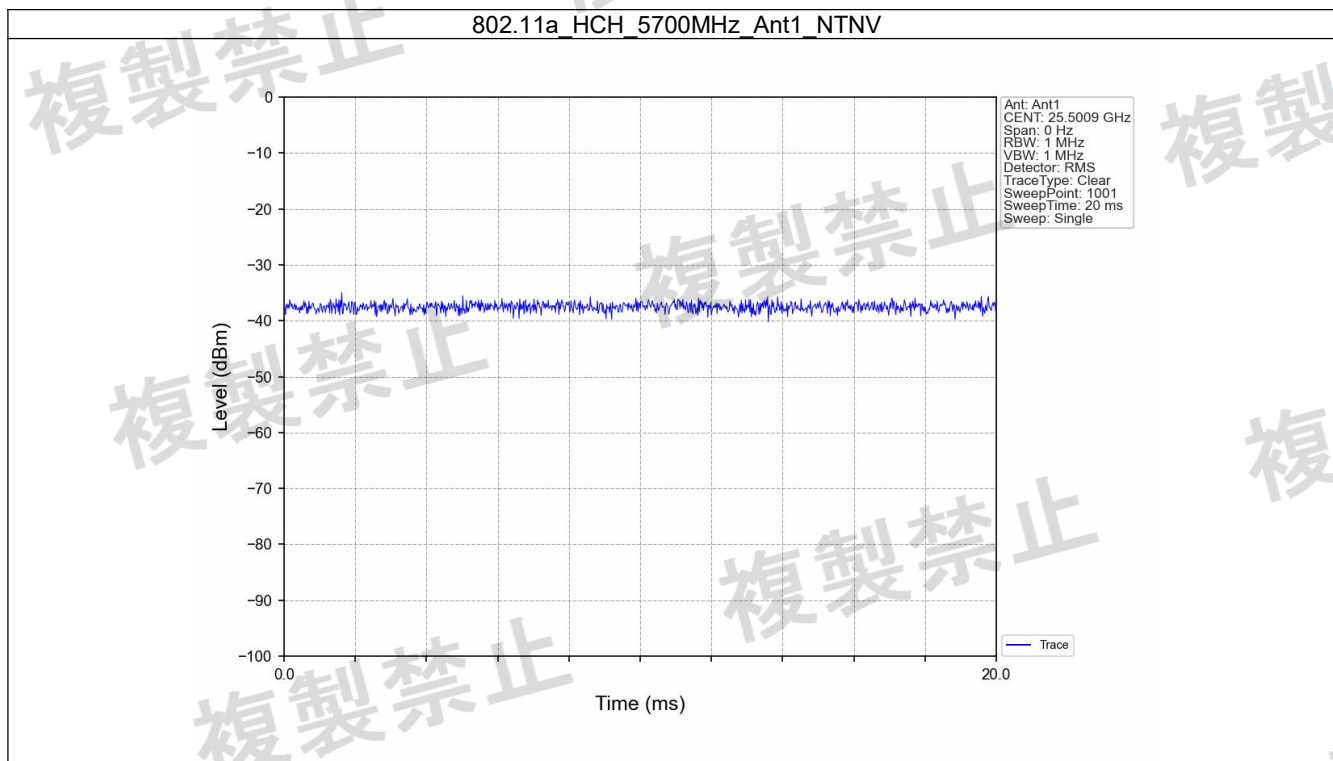


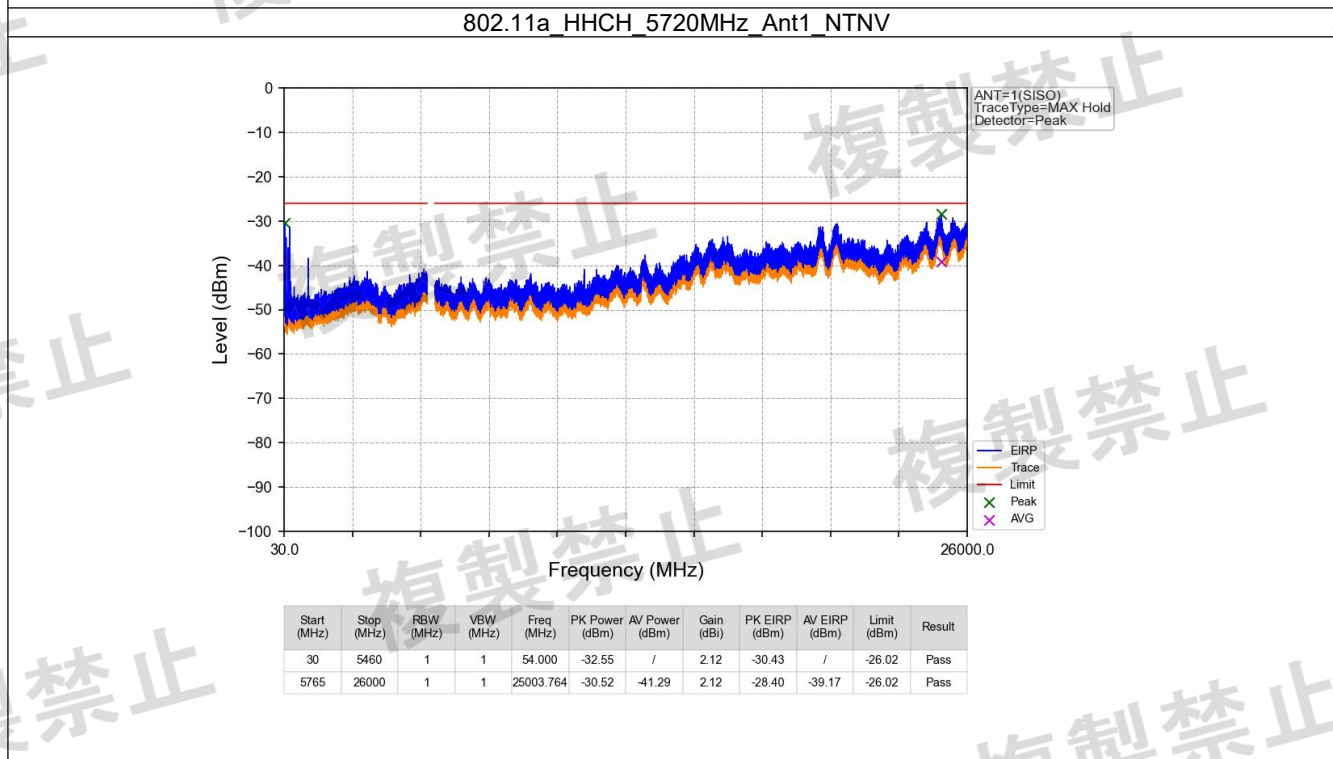
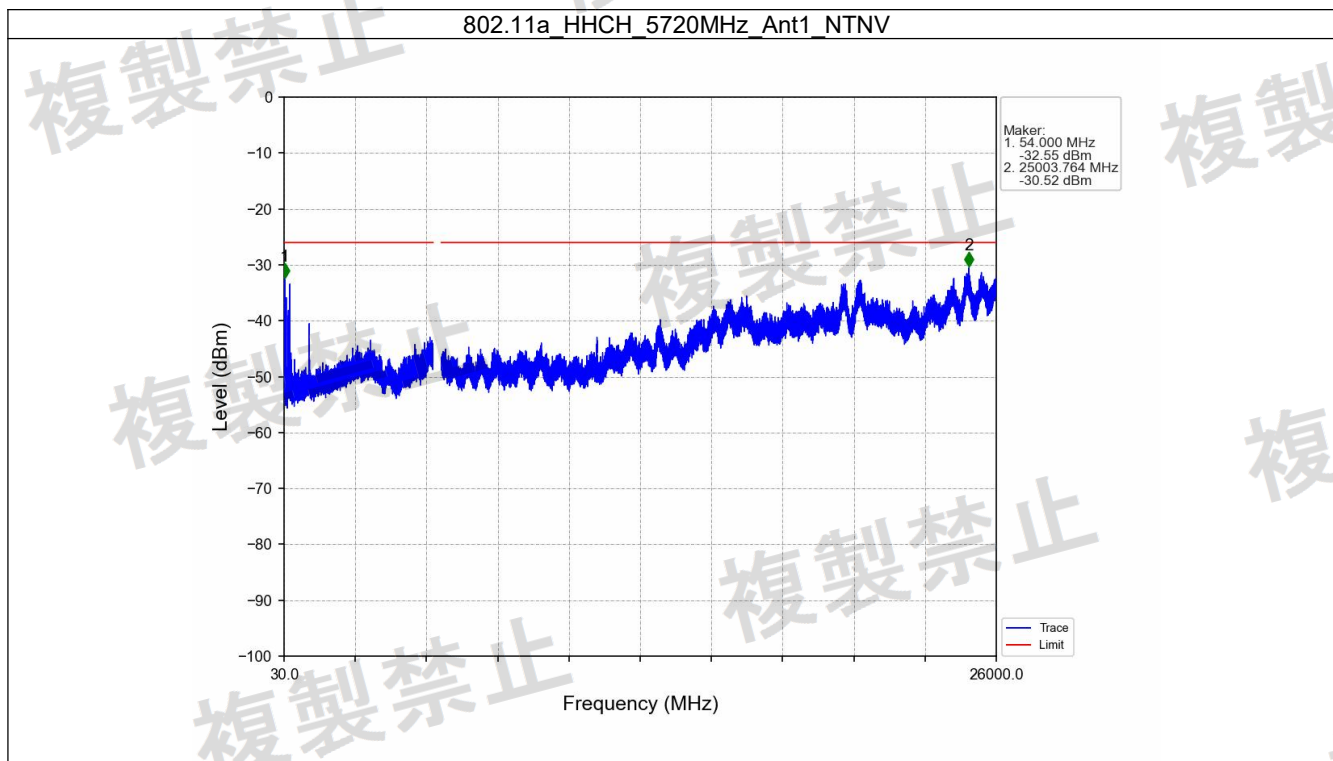


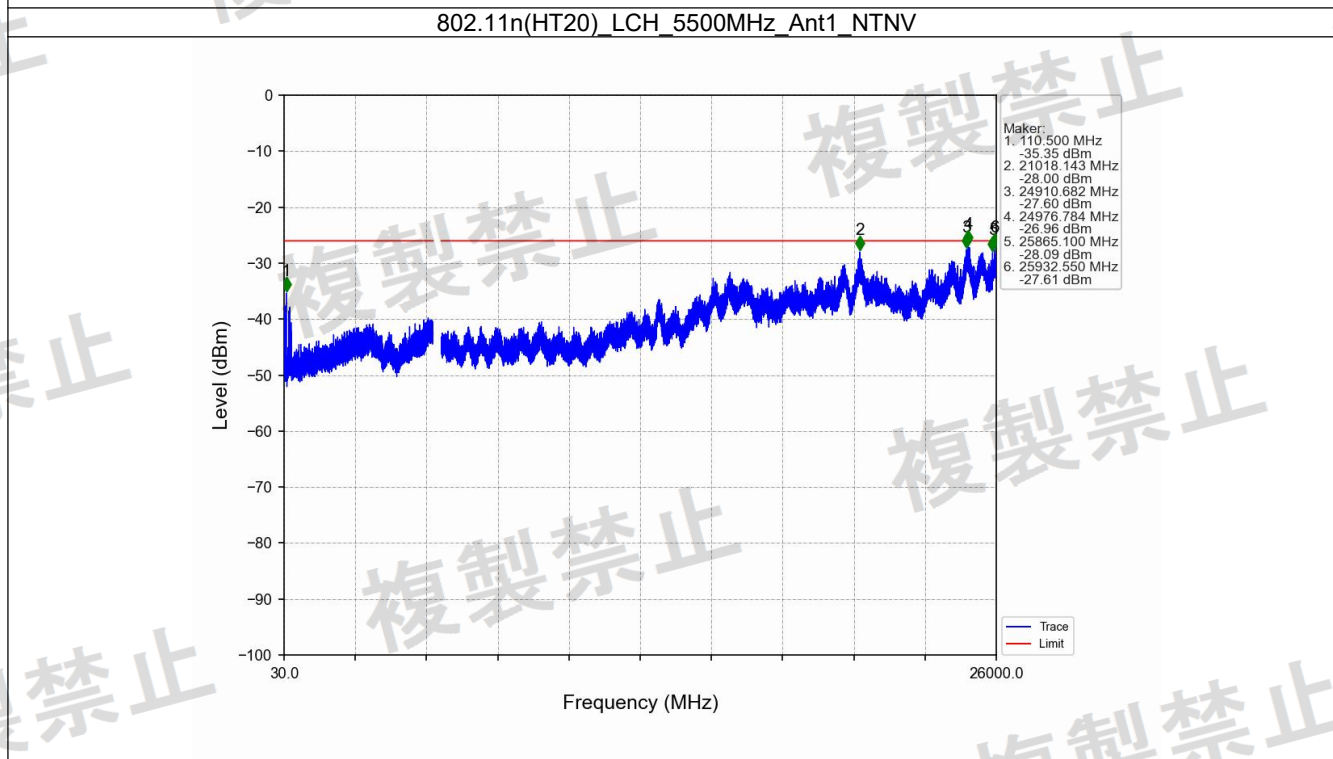
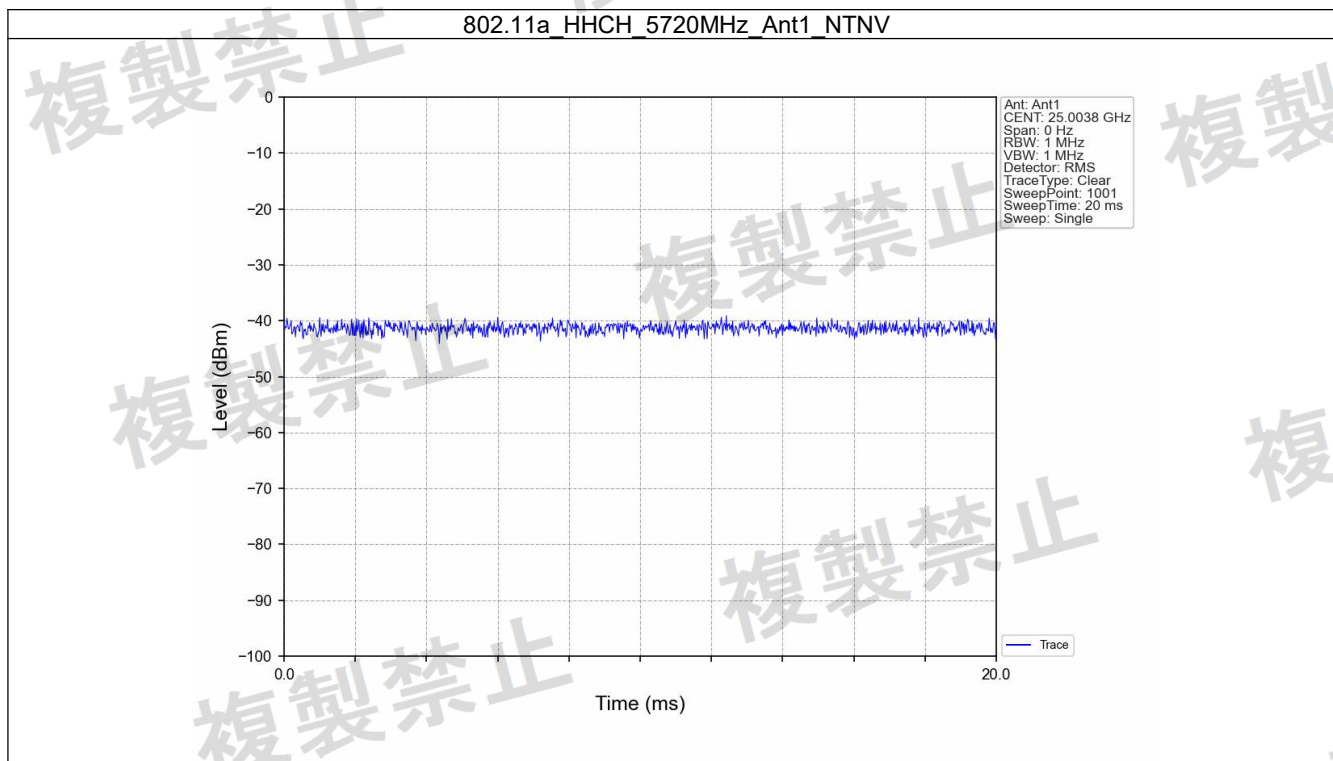


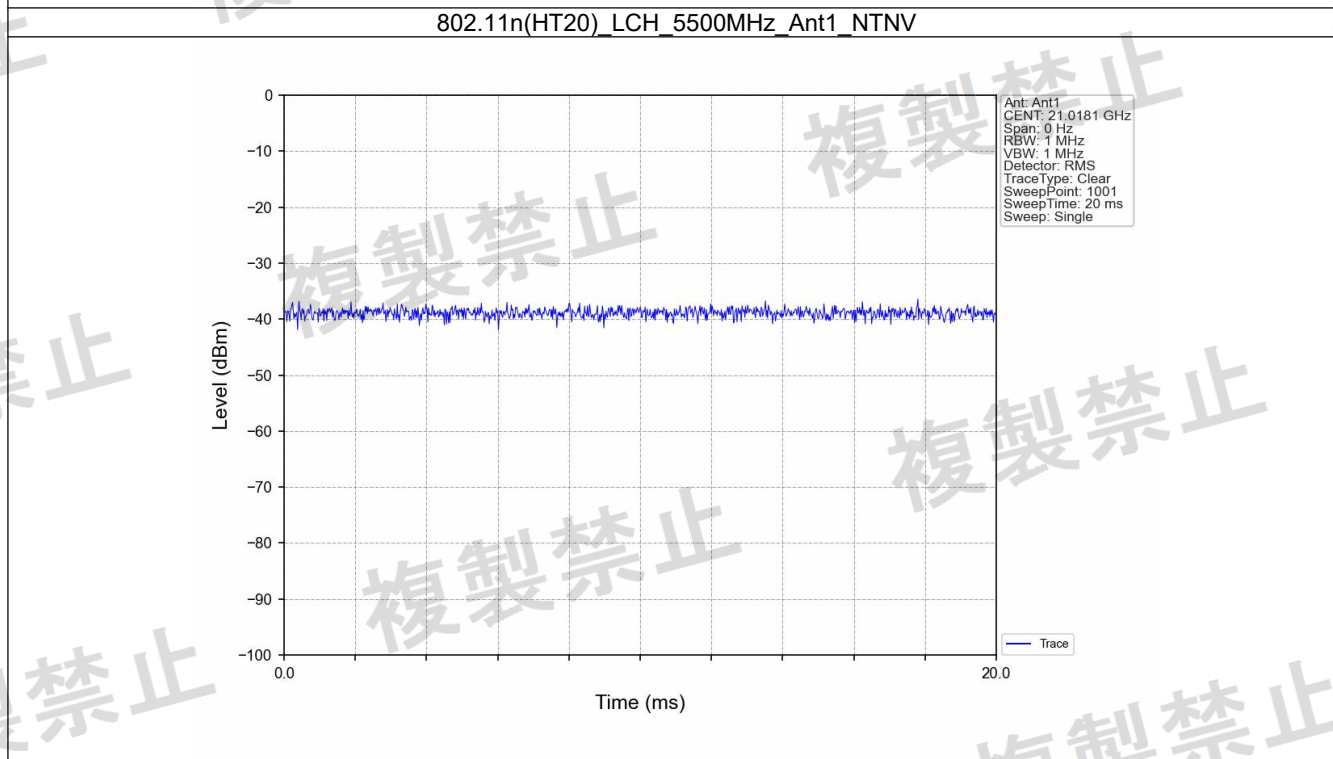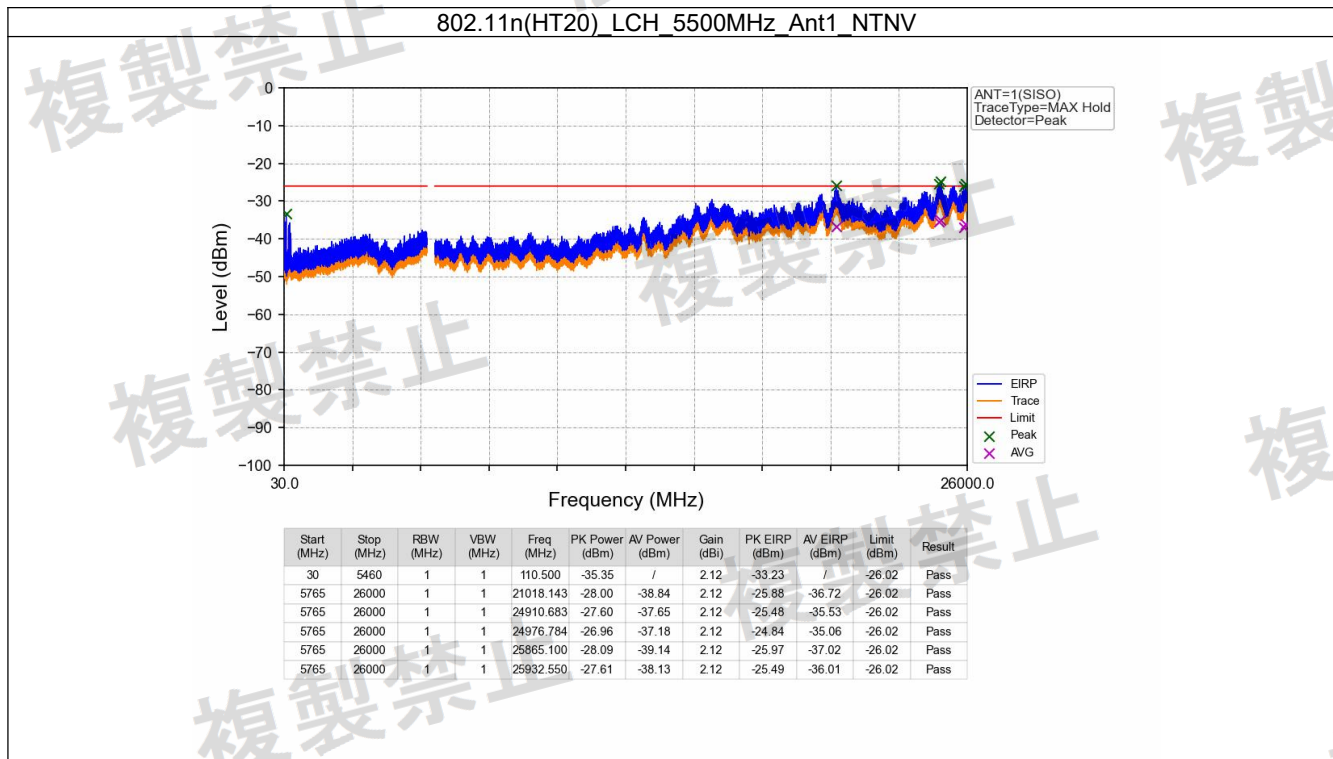

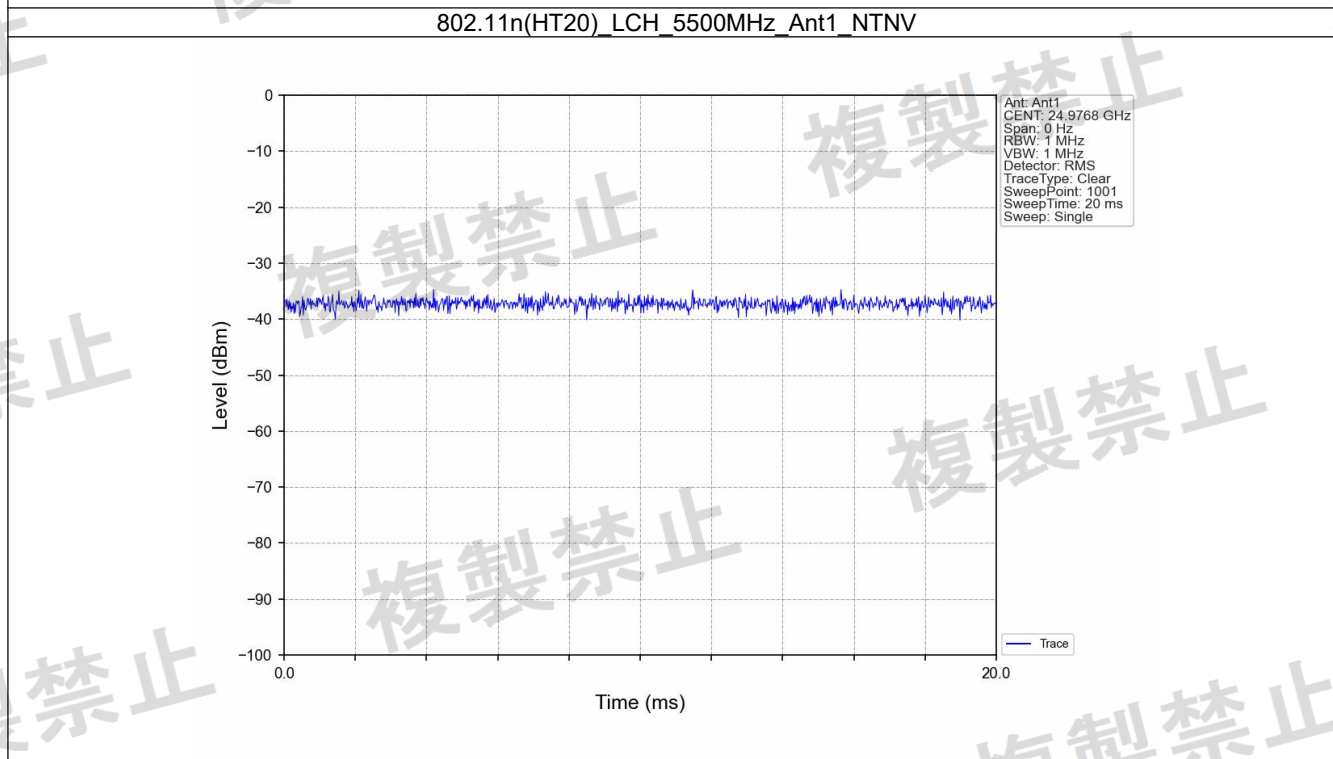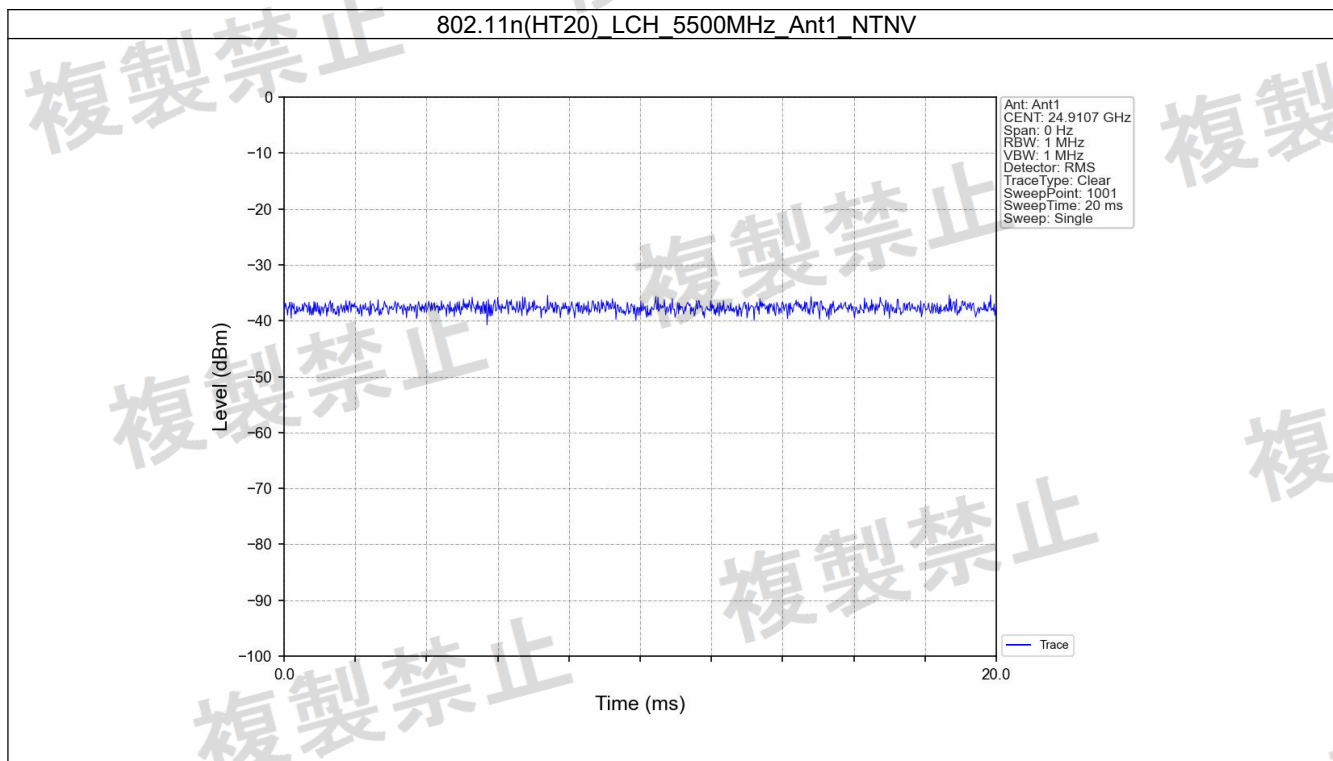


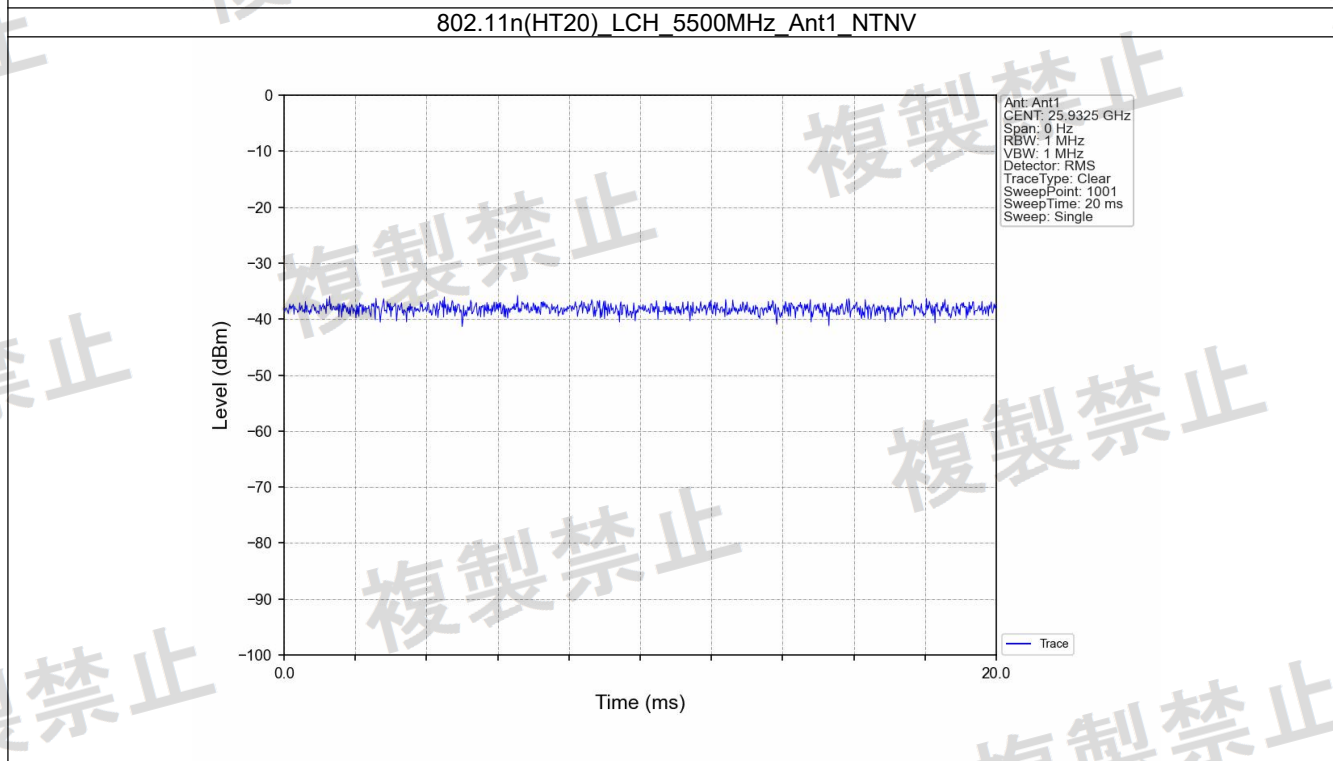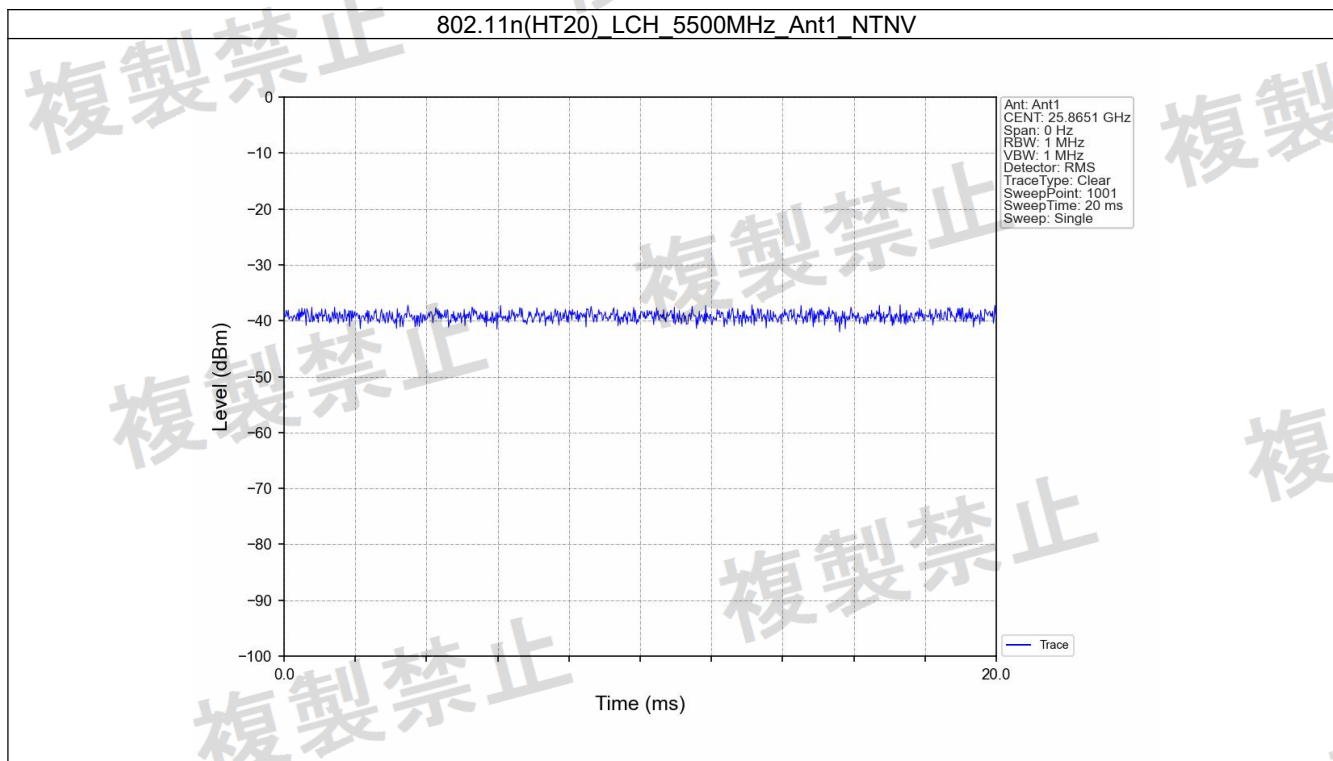

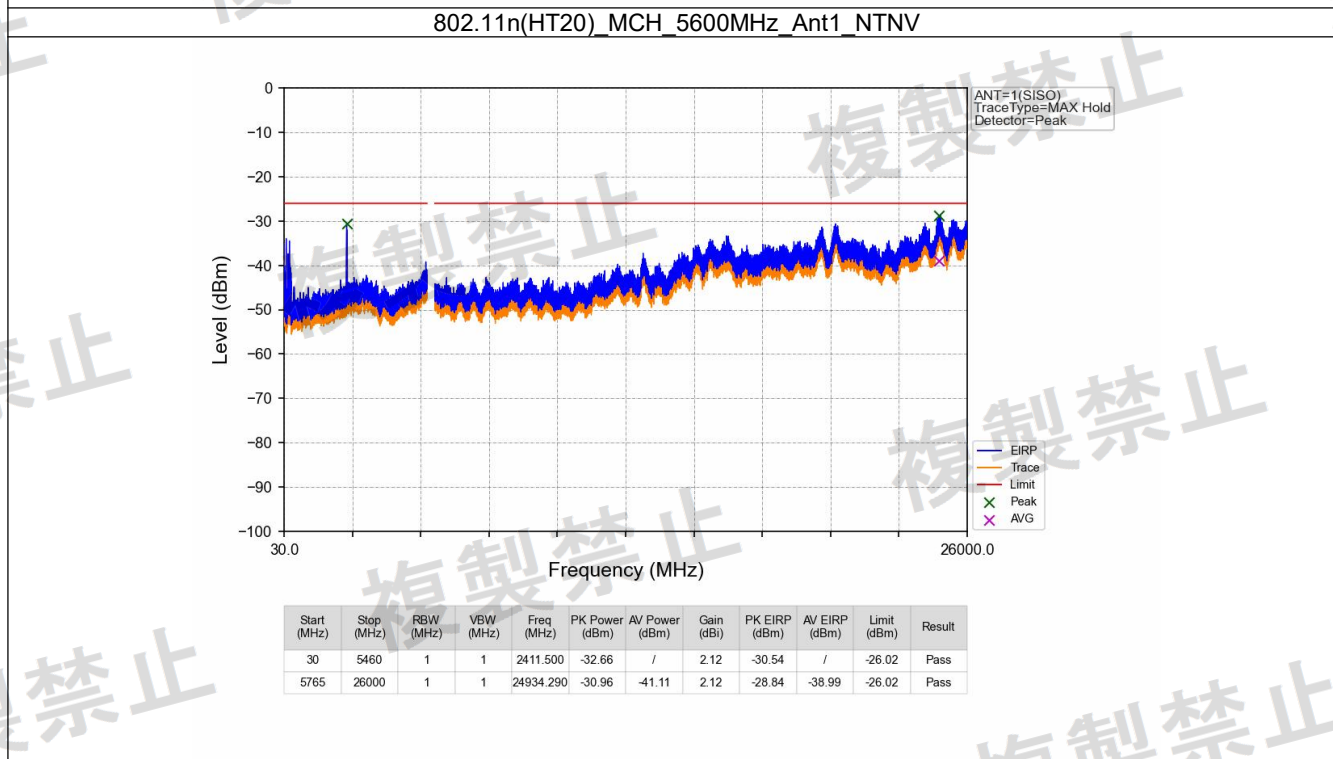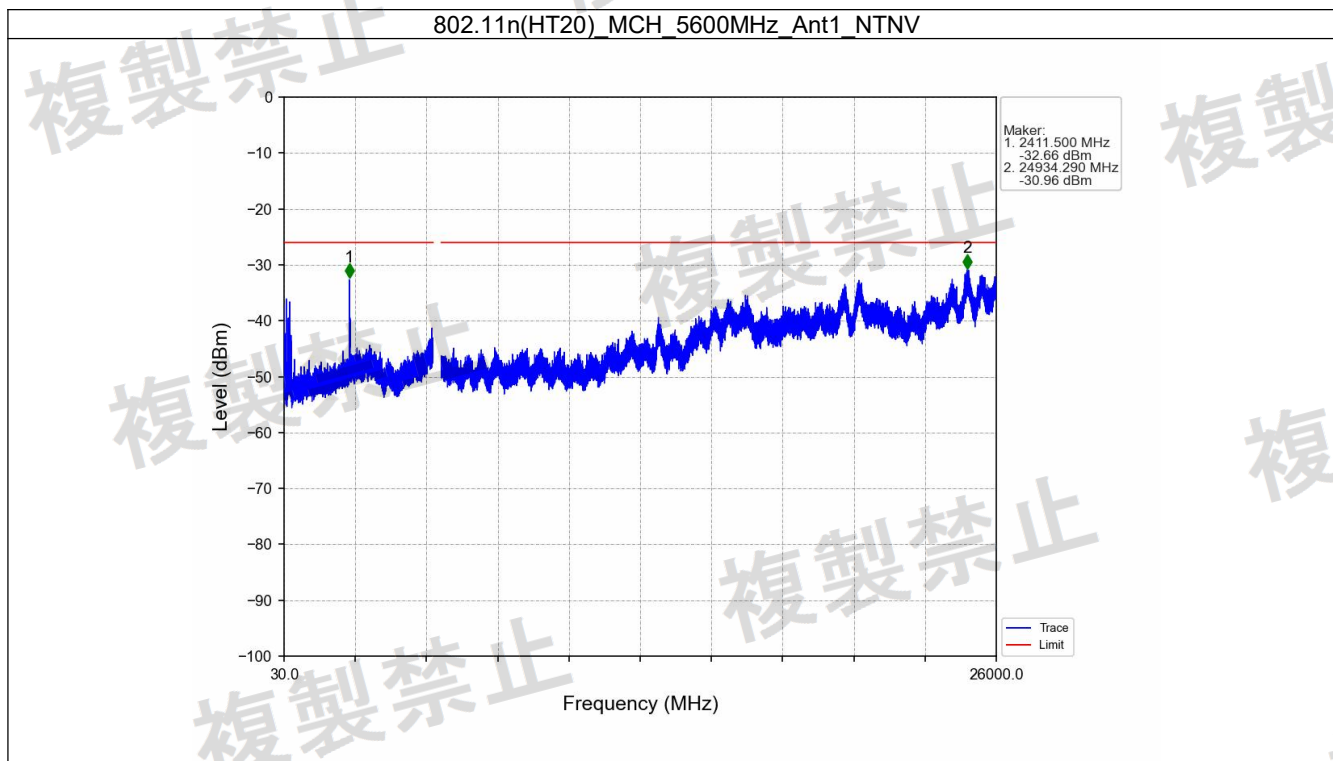


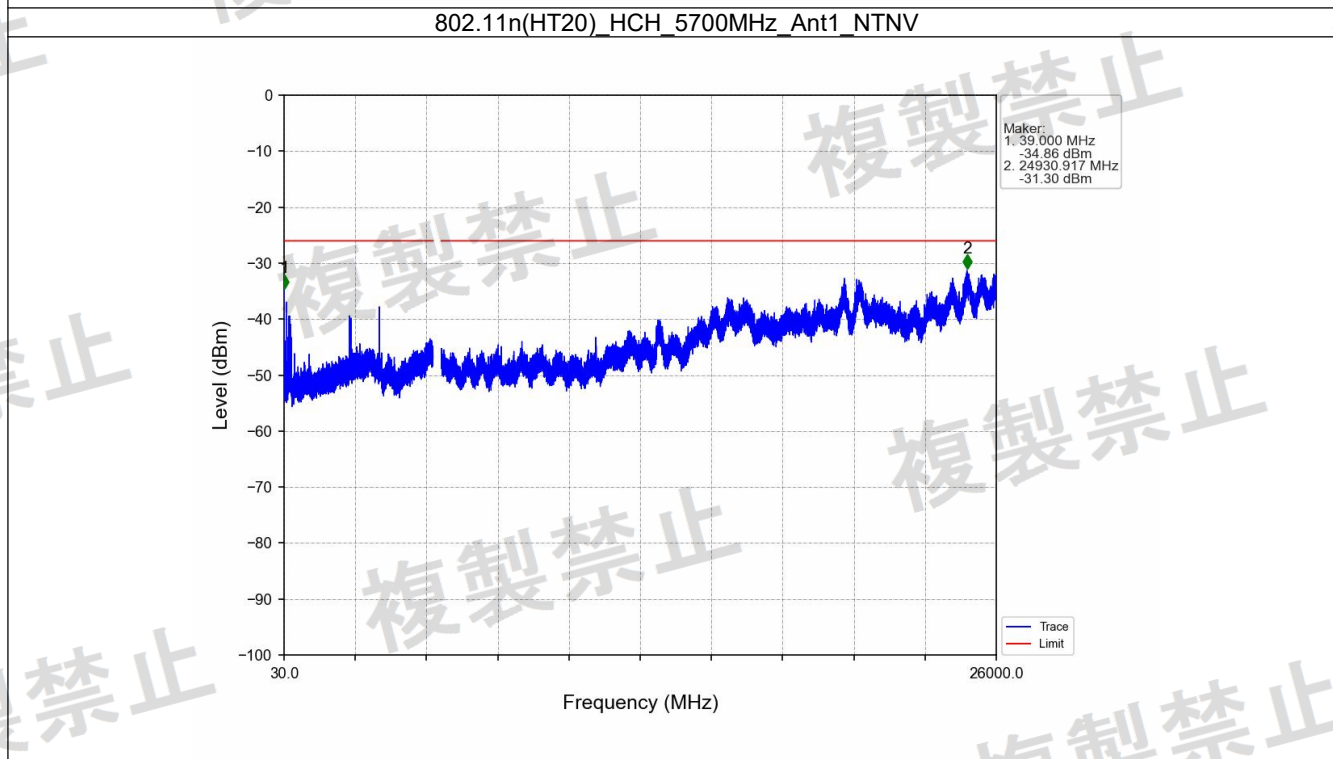
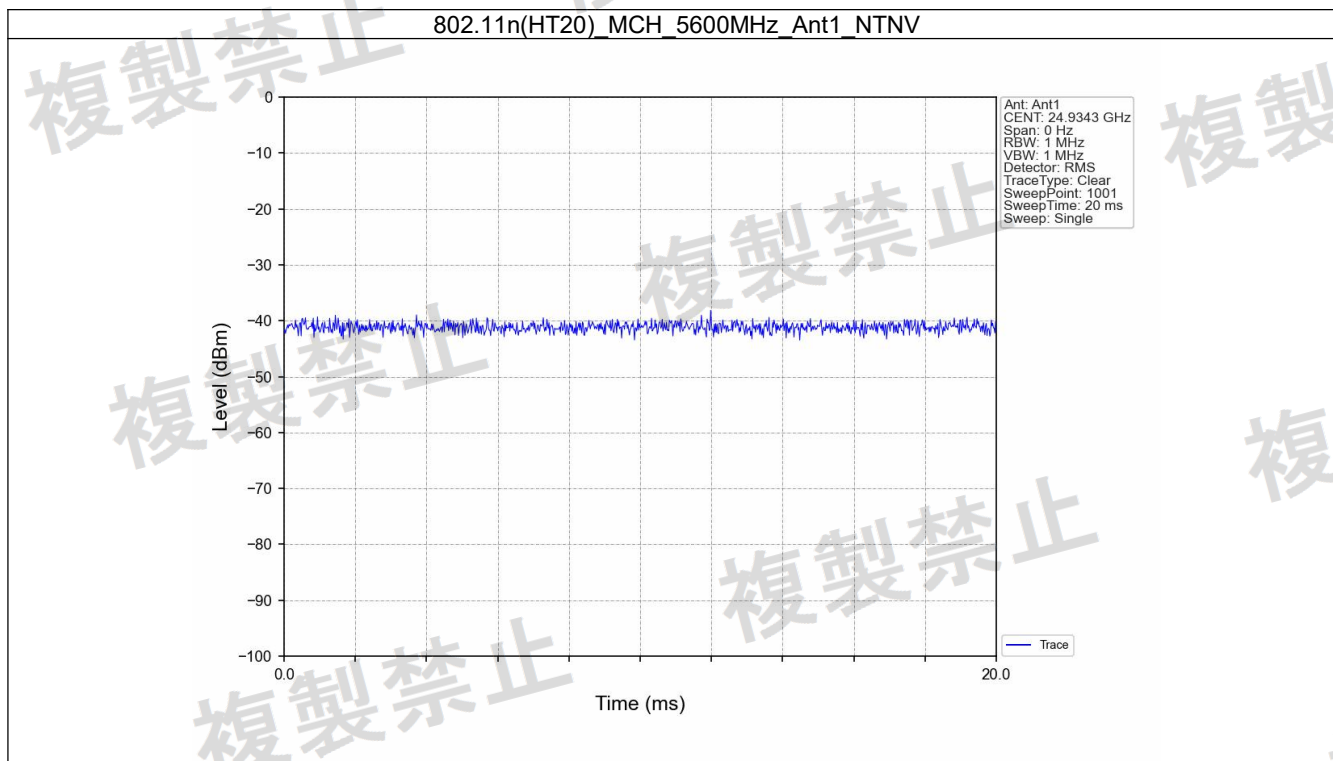




802.11n(HT20) HCH_5700MHz_Ant1_NTNV

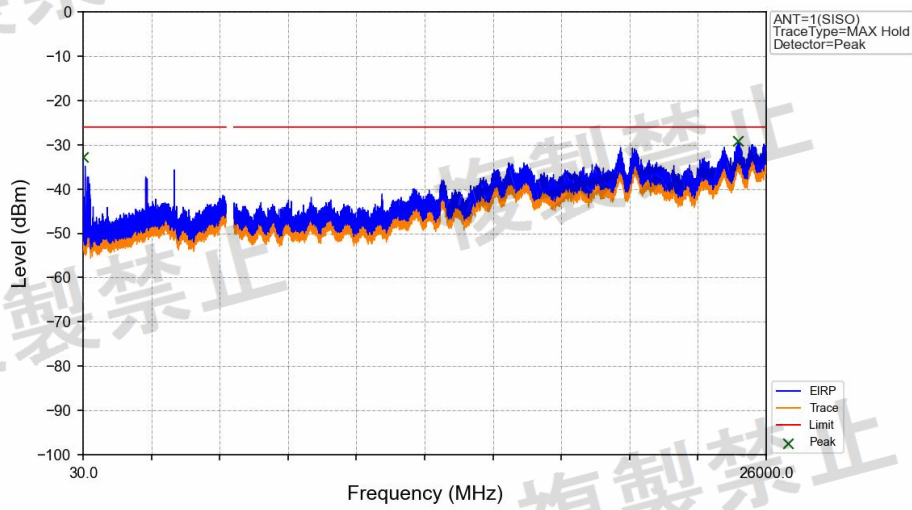

802.11n(HT20) HHCH_5720MHz_Ant1_NTNV

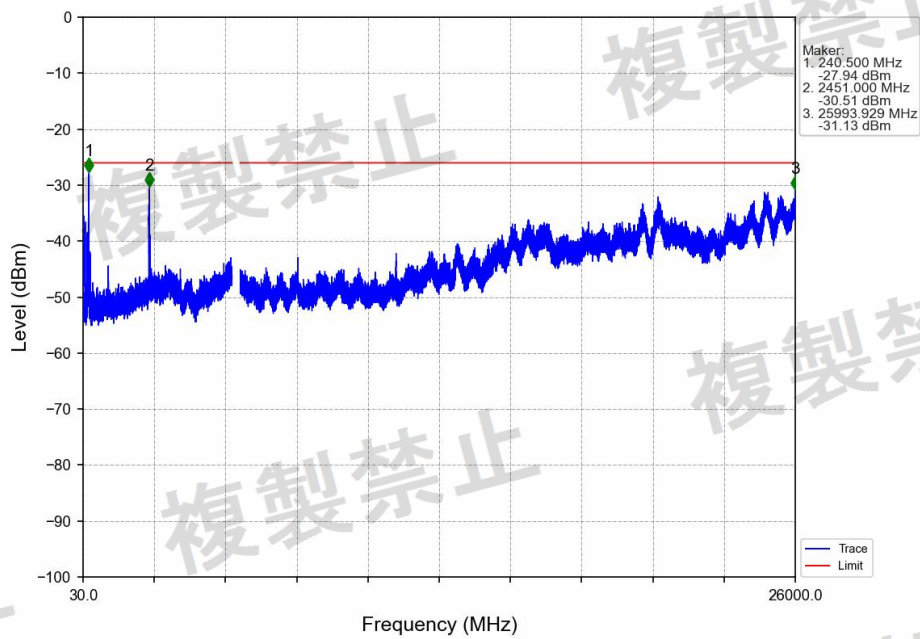

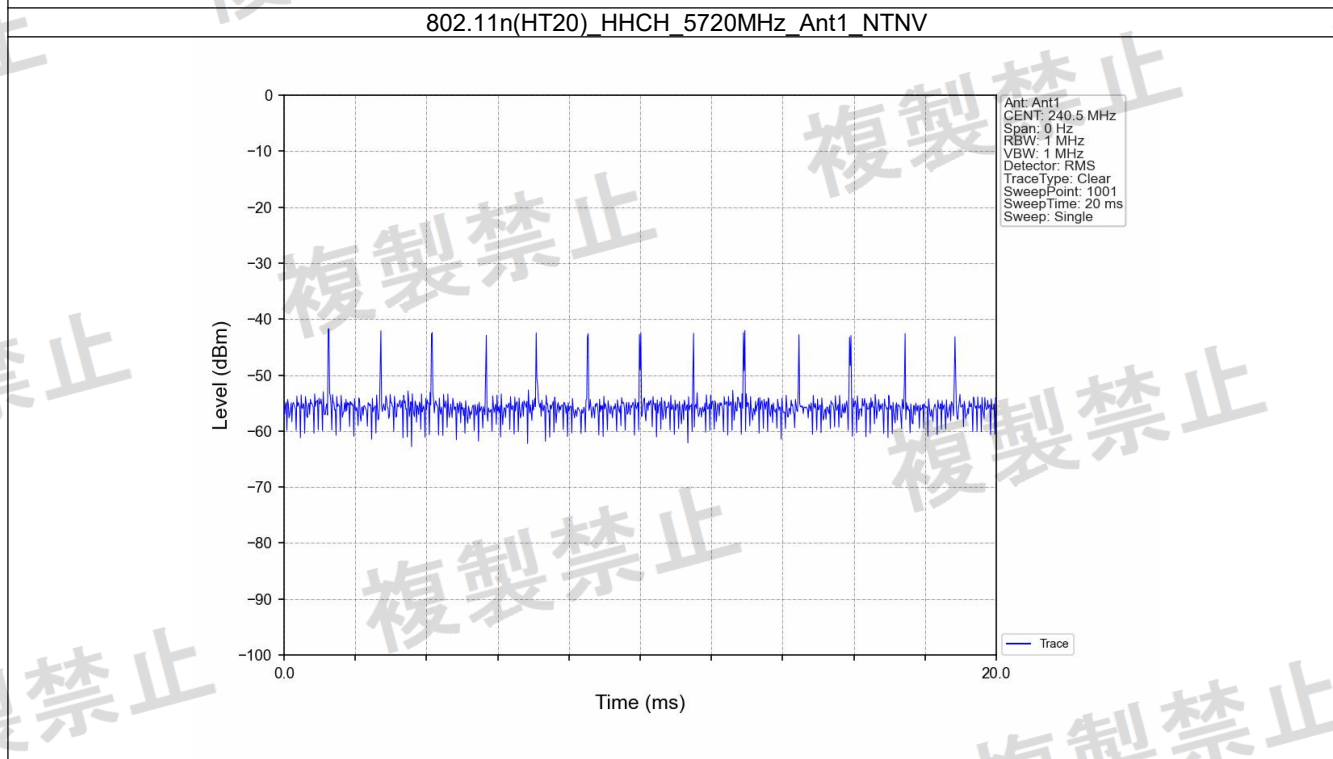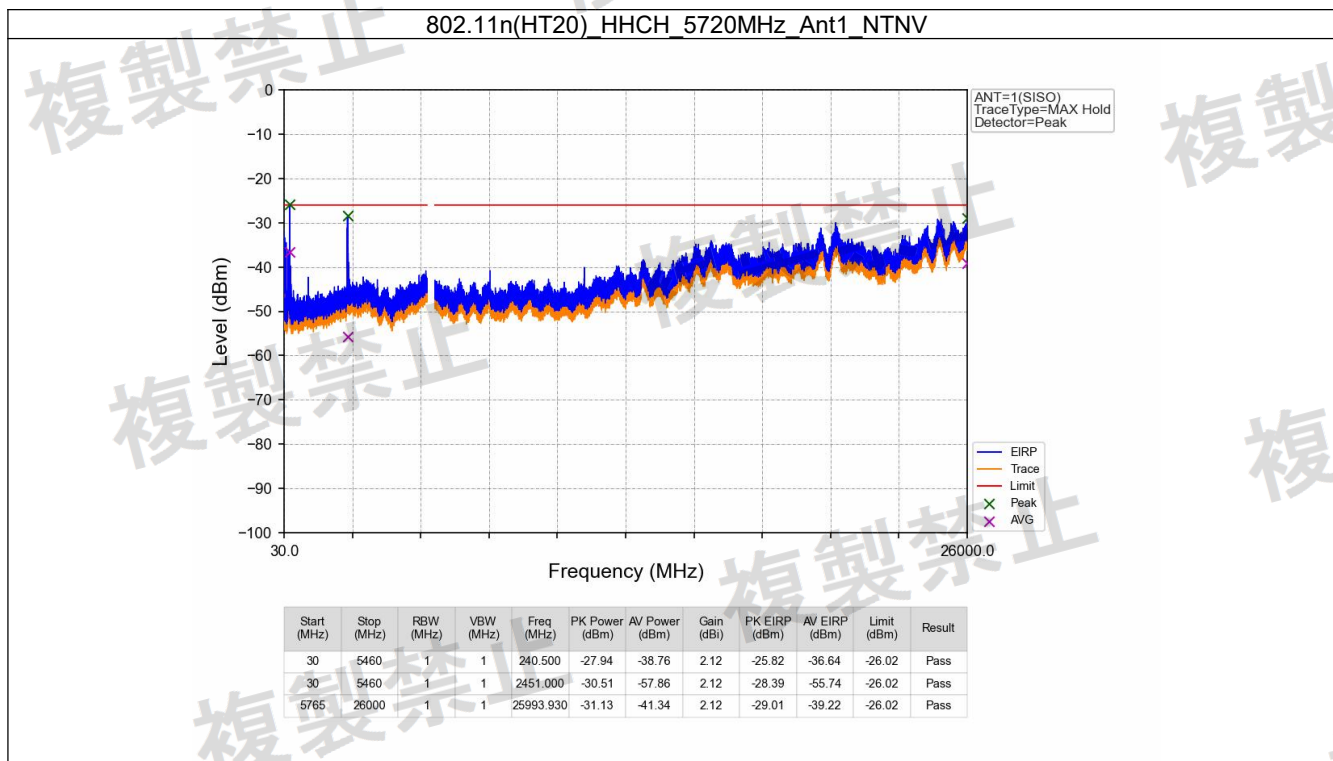

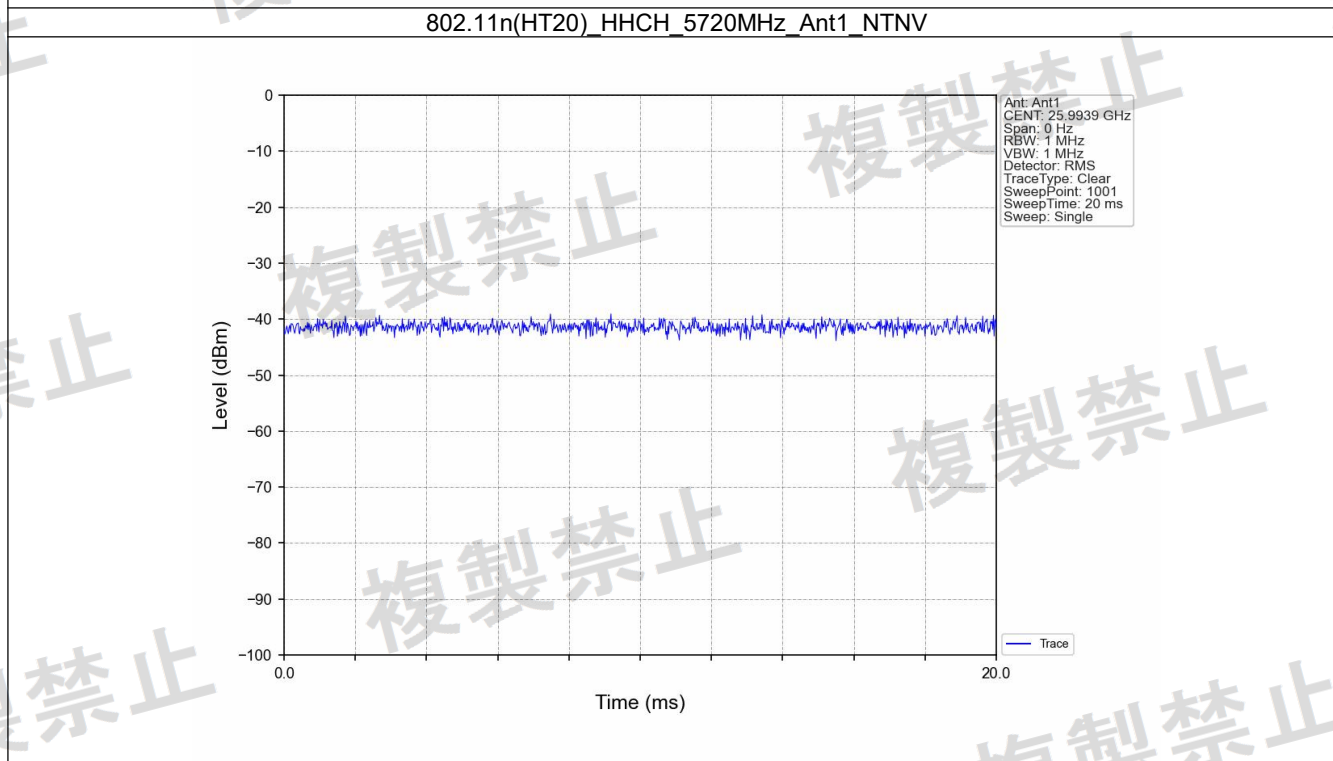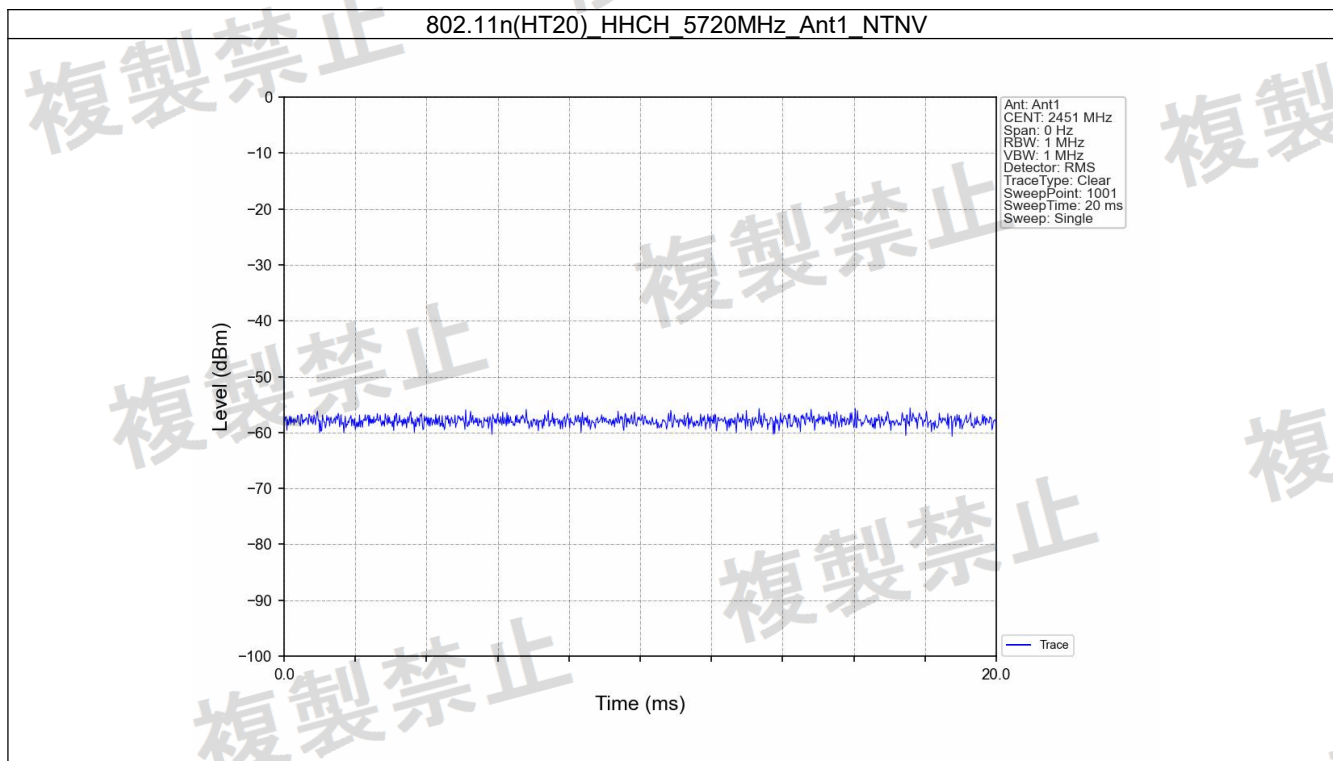

8. Secondary Radiated Emission

8.1 Test Result


8.1.1 RxSe_NTNV_SISO



NTNV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (nW)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm)	PK Power (nW)	AV Power (dBm)	AV Power (nW)		
802.11a	SISO	5500	1	30	1000	990	-67.90	0.162	/	/	4	Pass
				1000	26500	24954.7	-47.36	18.365	-53.52	4.446	20	Pass
						25499.55	-47.67	17.100	-50.97	7.998	20	Pass
						26074.15	-47.95	16.032	-54.00	3.981	20	Pass
						26202.5	-48.15	15.311	-55.12	3.076	20	Pass
						26321.5	-47.90	16.218	-52.57	5.534	20	Pass
		5600	1	30	1000	990	-68.53	0.140	/	/	4	Pass
				1000	26500	25003.15	-47.28	18.707	-53.55	4.416	20	Pass
						25446.85	-47.96	15.996	-53.70	4.266	20	Pass
						26024.85	-48.29	14.825	-54.83	3.289	20	Pass
						26327.45	-47.97	15.959	-55.12	3.076	20	Pass
						26392.9	-47.40	18.197	-54.73	3.365	20	Pass
		5700	1	30	1000	990	-69.58	0.110	/	/	4	Pass
				1000	26500	24898.6	-48.14	15.346	-51.39	7.261	20	Pass
						24964.9	-47.45	17.989	-51.75	6.683	20	Pass
						25386.5	-48.02	15.776	-54.59	3.475	20	Pass
						25497	-47.94	16.069	-55.17	3.041	20	Pass
						25977.25	-47.12	19.409	-52.83	5.212	20	Pass
		5720	1	30	1000	990	-67.97	0.160	/	/	4	Pass
				1000	26500	24952.15	-46.95	20.184	-55.10	3.090	20	Pass
						25949.2	-47.70	16.982	-55.36	2.911	20	Pass
						26115.8	-48.51	14.093	-56.46	2.259	20	Pass
						26243.3	-48.01	15.812	-53.40	4.571	20	Pass
						26412.45	-47.67	17.100	-54.86	3.266	20	Pass
802.11n (HT20)	SISO	5500	1	30	1000	990	-68.30	0.148	/	/	4	Pass
				1000	26500	24976.8	-46.31	23.388	-52.42	5.728	20	Pass
						25947.5	-47.80	16.596	-54.48	3.565	20	Pass
						26061.4	-47.80	16.596	-56.09	2.460	20	Pass
						26381.85	-48.01	15.812	-53.58	4.385	20	Pass
						26478.75	-47.76	16.749	-53.84	4.130	20	Pass
		5600	1	30	1000	990	-67.40	0.182	/	/	4	Pass
				1000	26500	24947.9	-46.96	20.137	-54.49	3.556	20	Pass
						25491.9	-48.05	15.668	-53.76	4.207	20	Pass
						26148.95	-47.95	16.032	-54.89	3.243	20	Pass
						26398	-48.22	15.066	-54.78	3.327	20	Pass
						26470.25	-48.54	13.996	-52.32	5.861	20	Pass
		5700	1	30	1000	990	-68.55	0.140	/	/	4	Pass
				1000	26500	24946.2	-47.86	16.368	-54.34	3.681	20	Pass
						25494.45	-47.65	17.179	-52.07	6.209	20	Pass
						26103.9	-48.29	14.825	-55.02	3.148	20	Pass
						26265.4	-48.11	15.453	-56.23	2.382	20	Pass
						26437.95	-48.14	15.346	-55.10	3.090	20	Pass
		5720	1	30	1000	990	-69.46	0.113	/	/	4	Pass
				1000	26500	24972.55	-47.09	19.543	-52.60	5.495	20	Pass
						25427.3	-48.24	14.997	-55.59	2.761	20	Pass



					26138.75	-48.39	14.488	-54.05	3.936	20	Pass
					26397.15	-46.20	23.988	-55.05	3.126	20	Pass
					26496.6	-47.74	16.827	-54.12	3.873	20	Pass



8.2 Test Graph



8.2.1 RxSe_NTNV_SISO


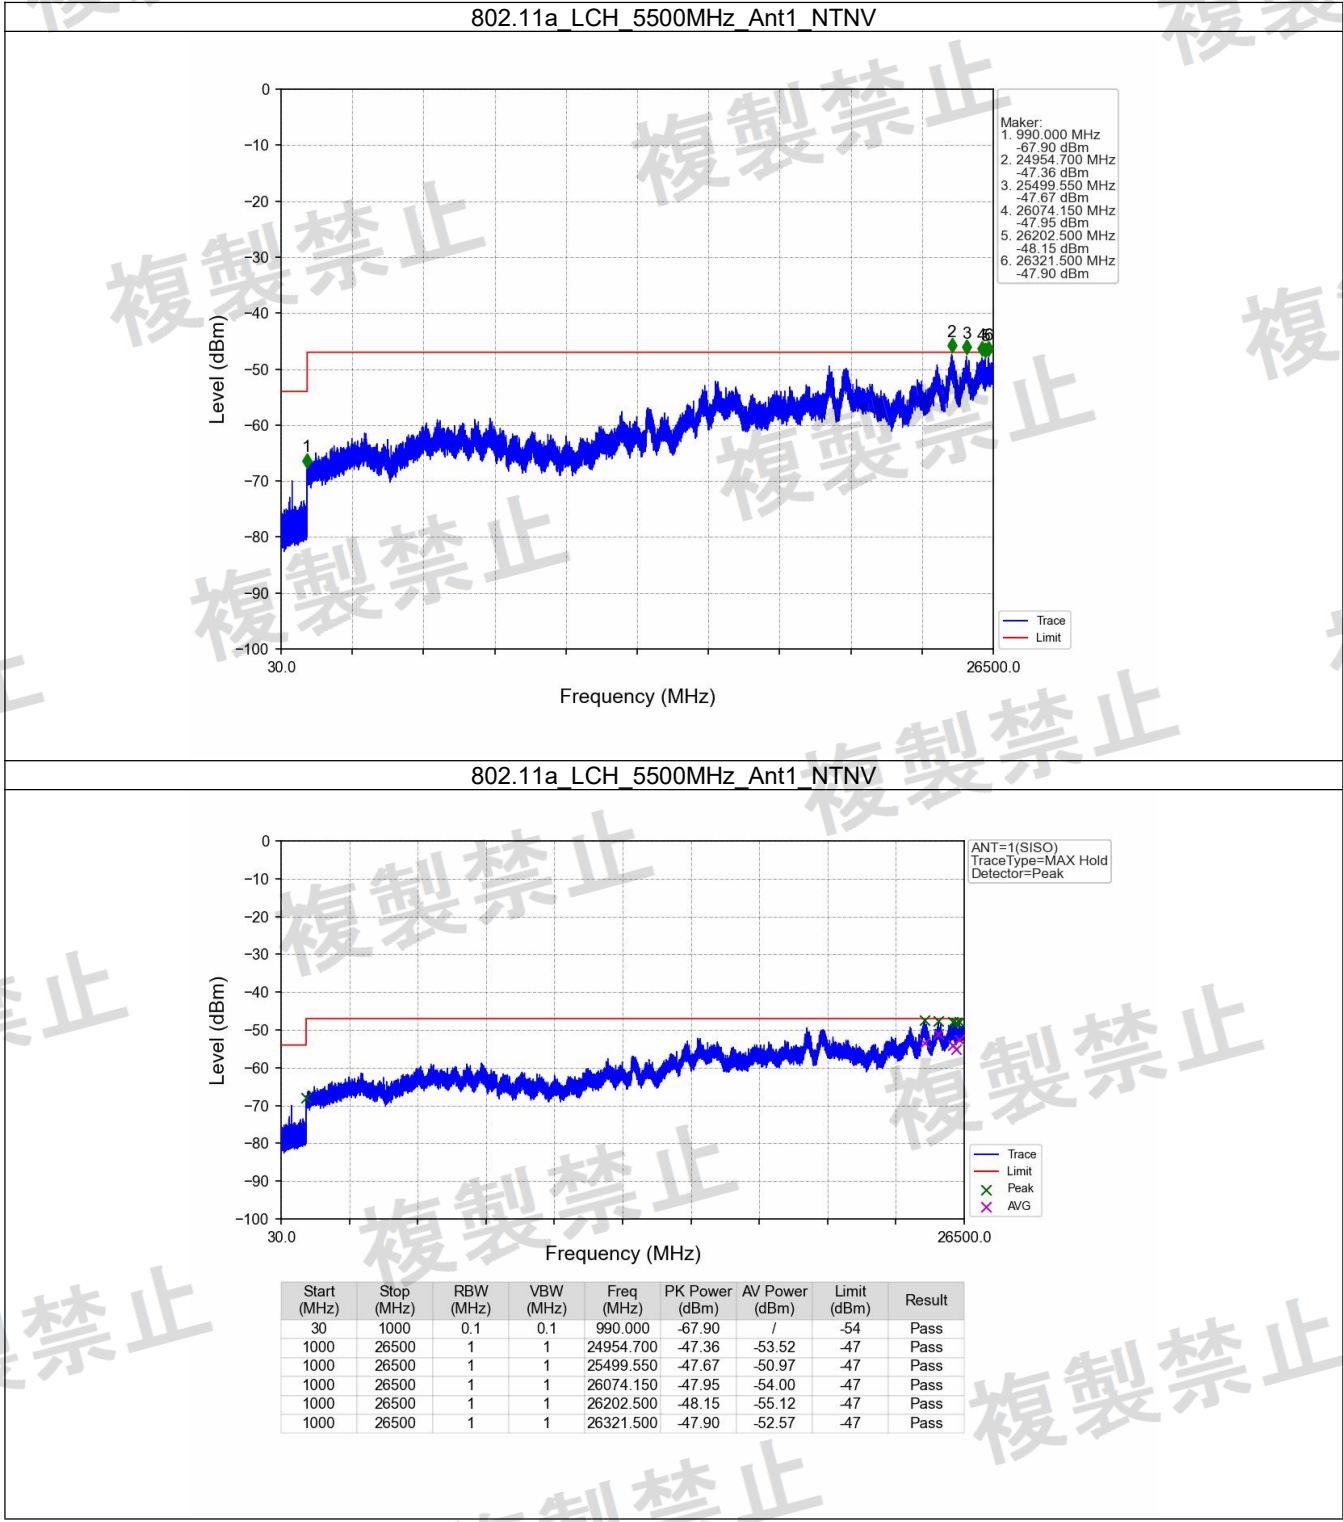


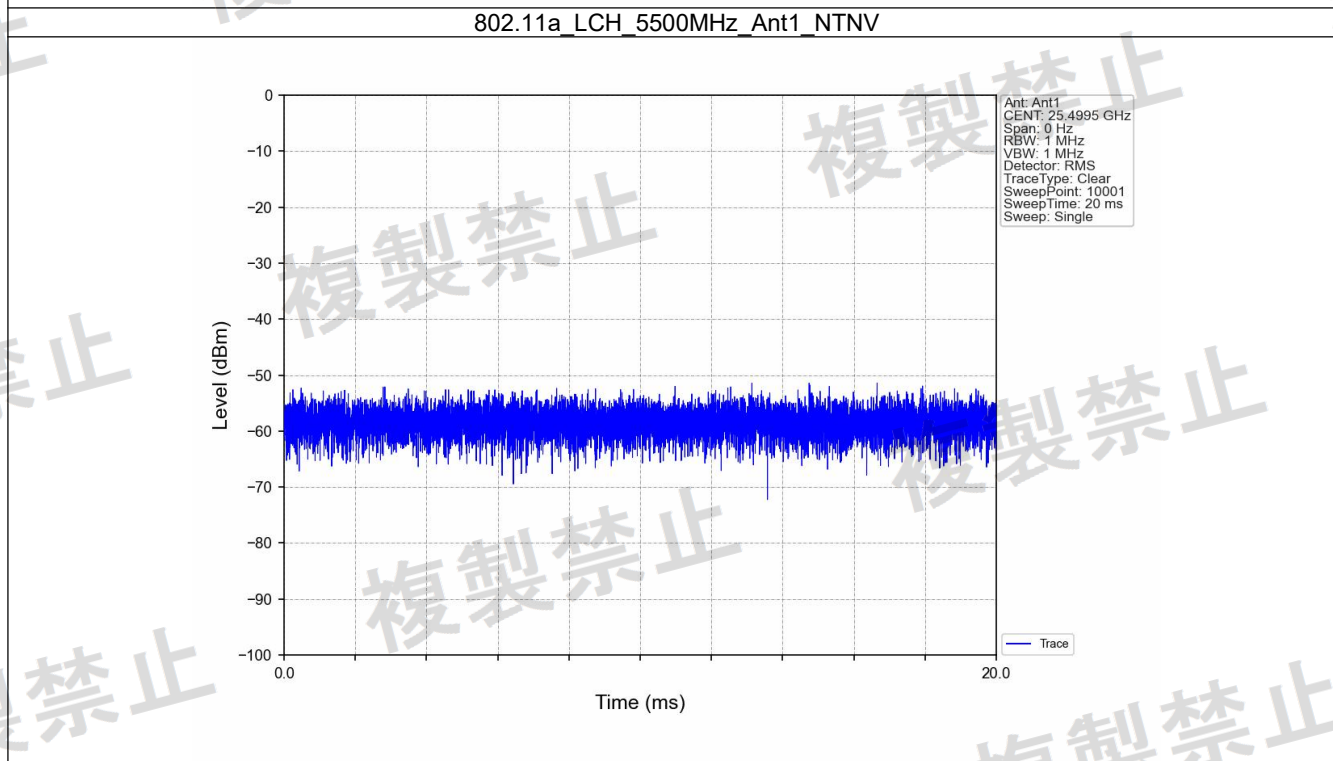
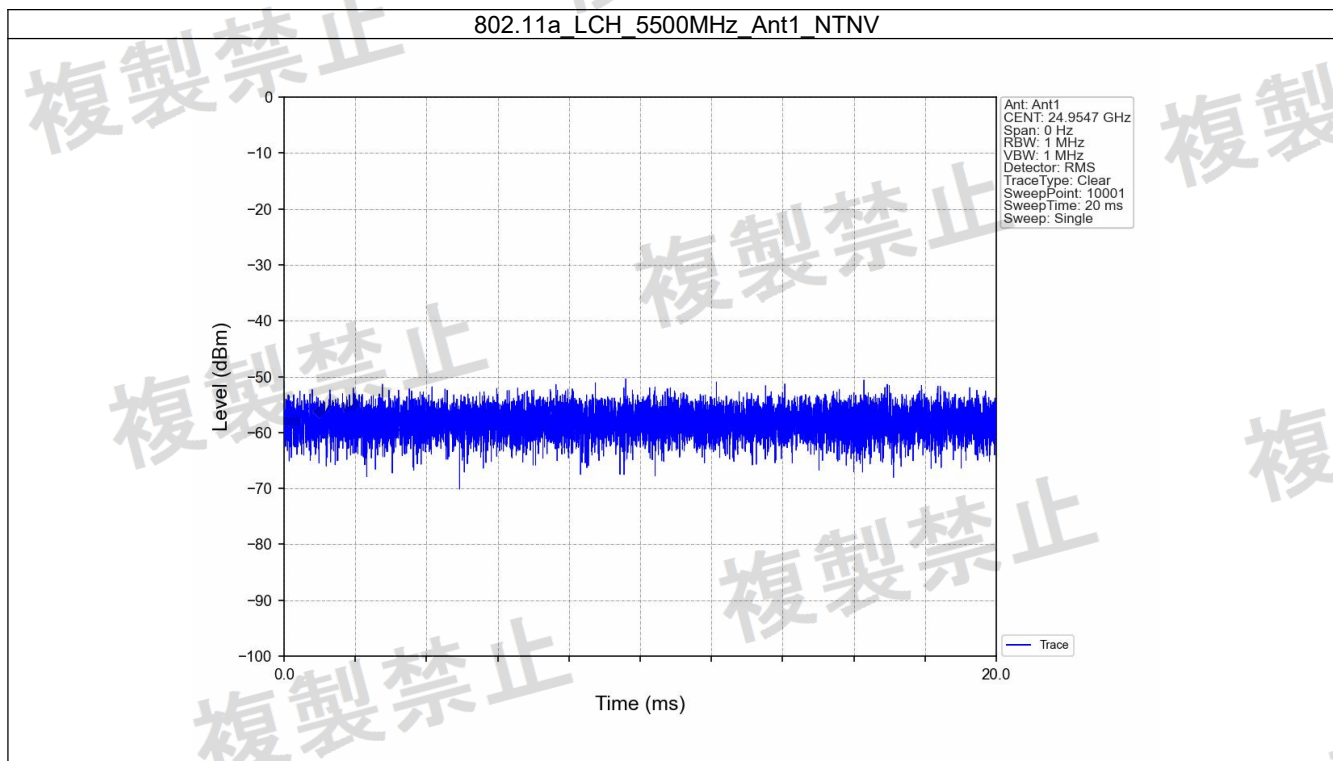


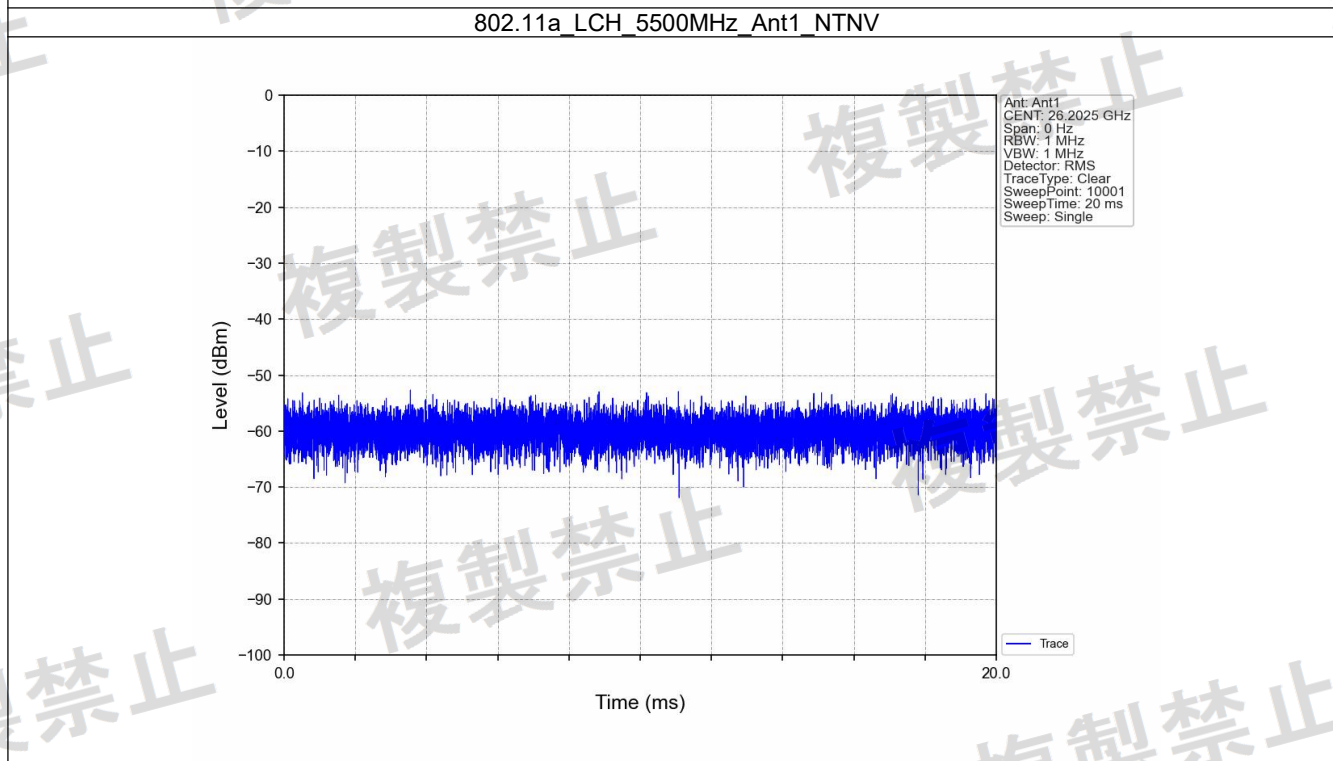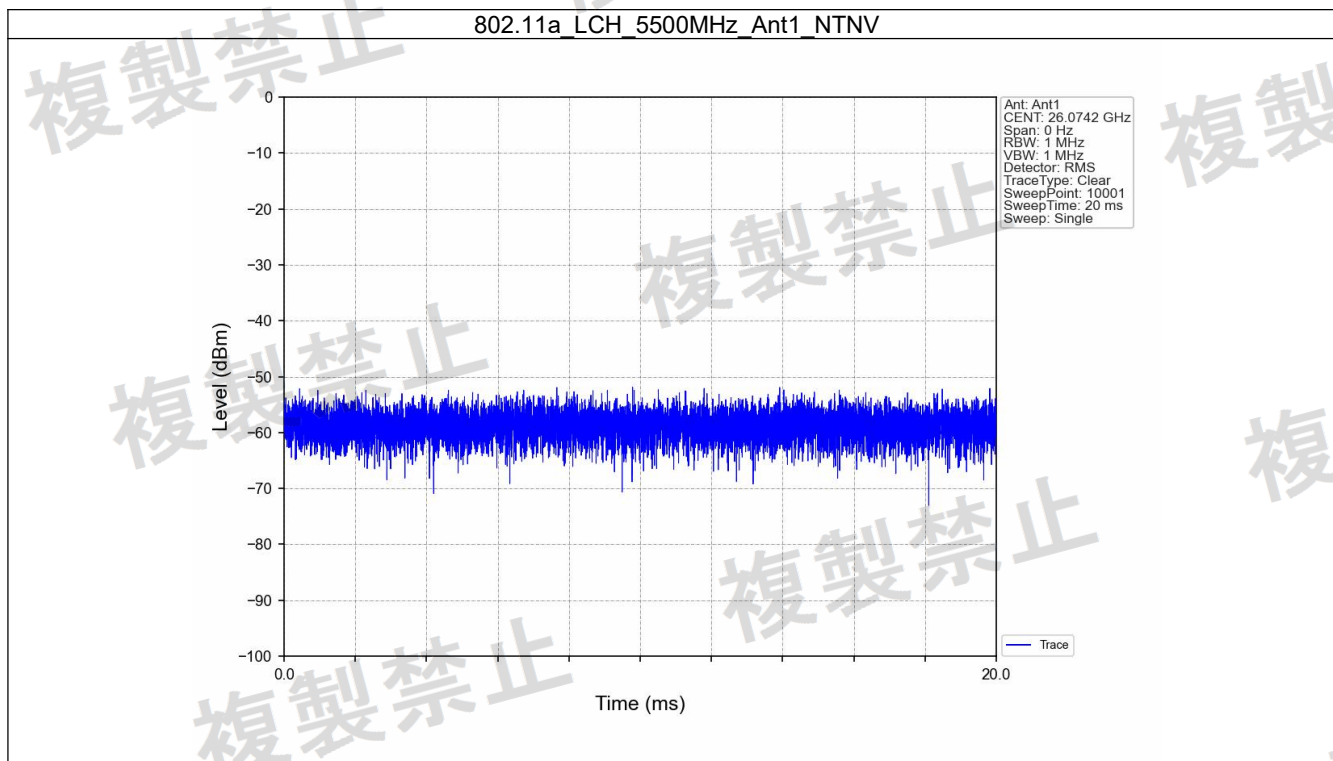

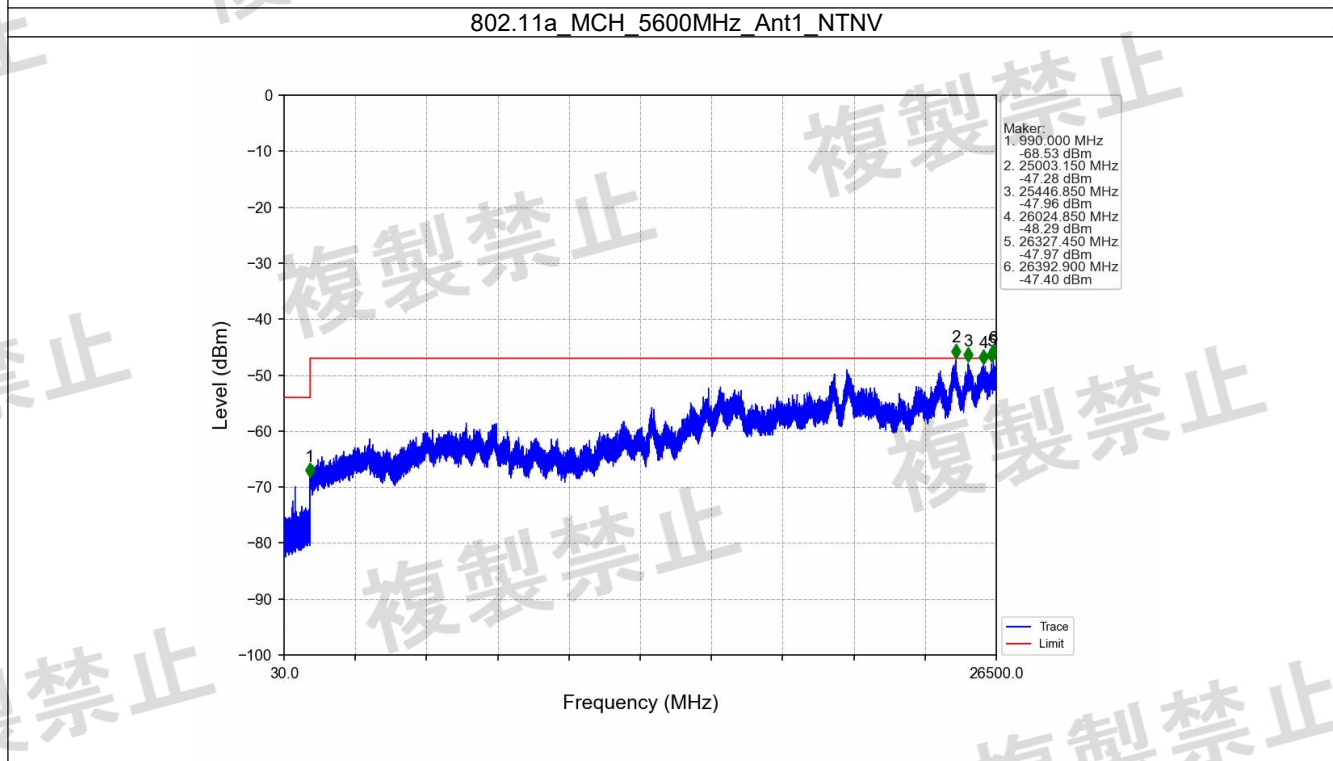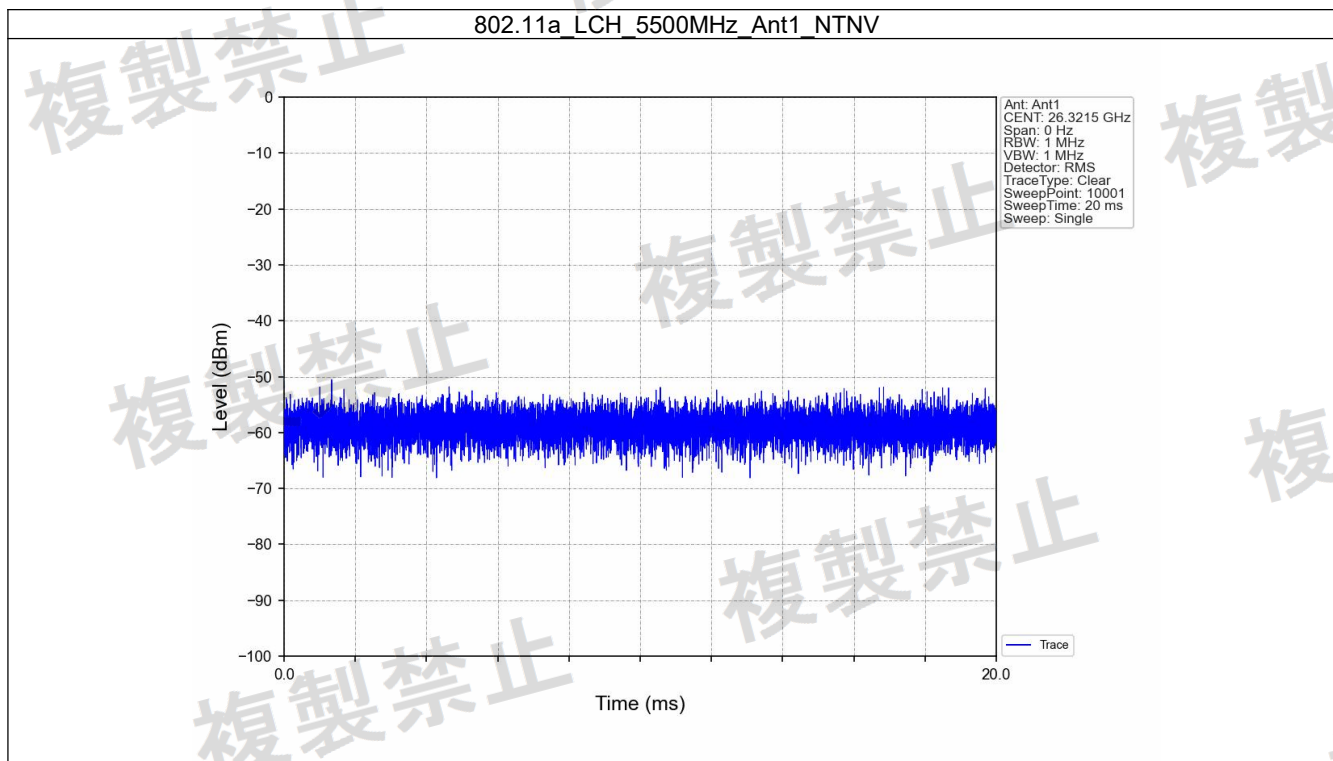


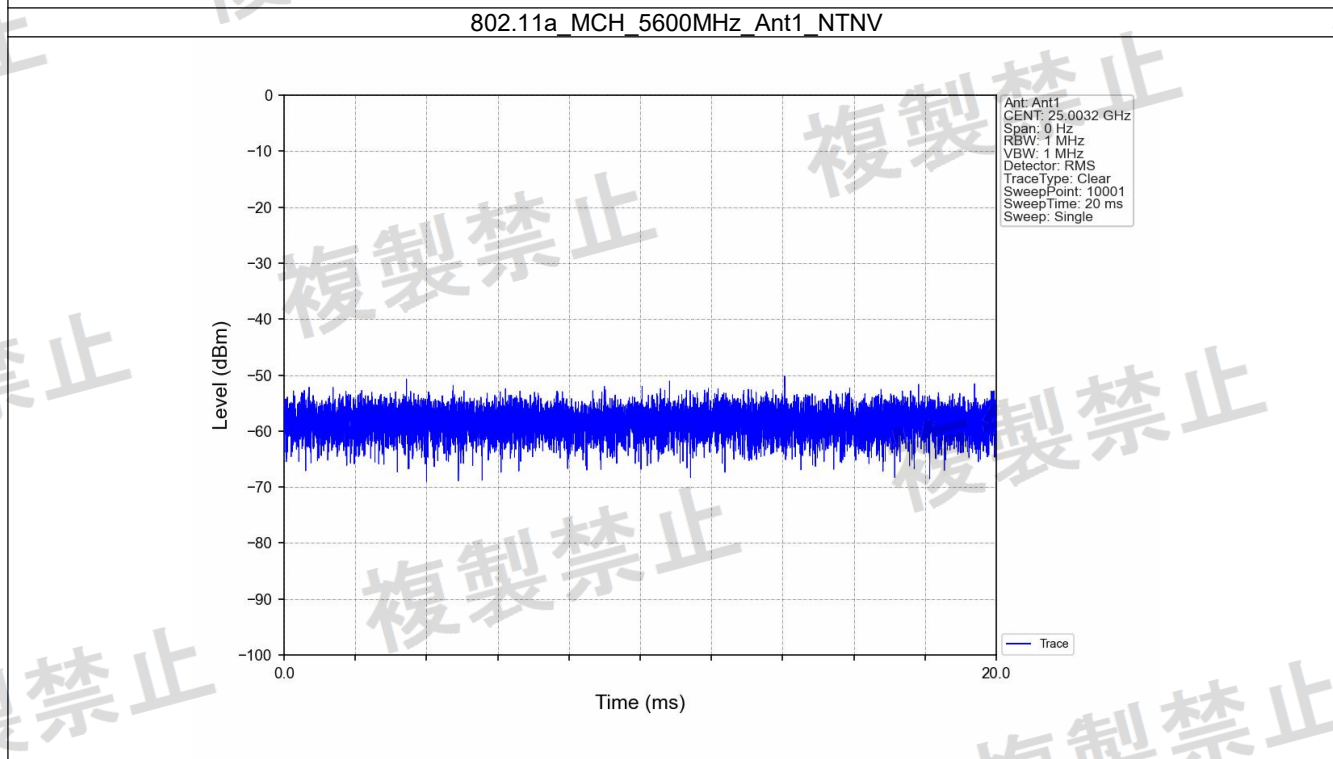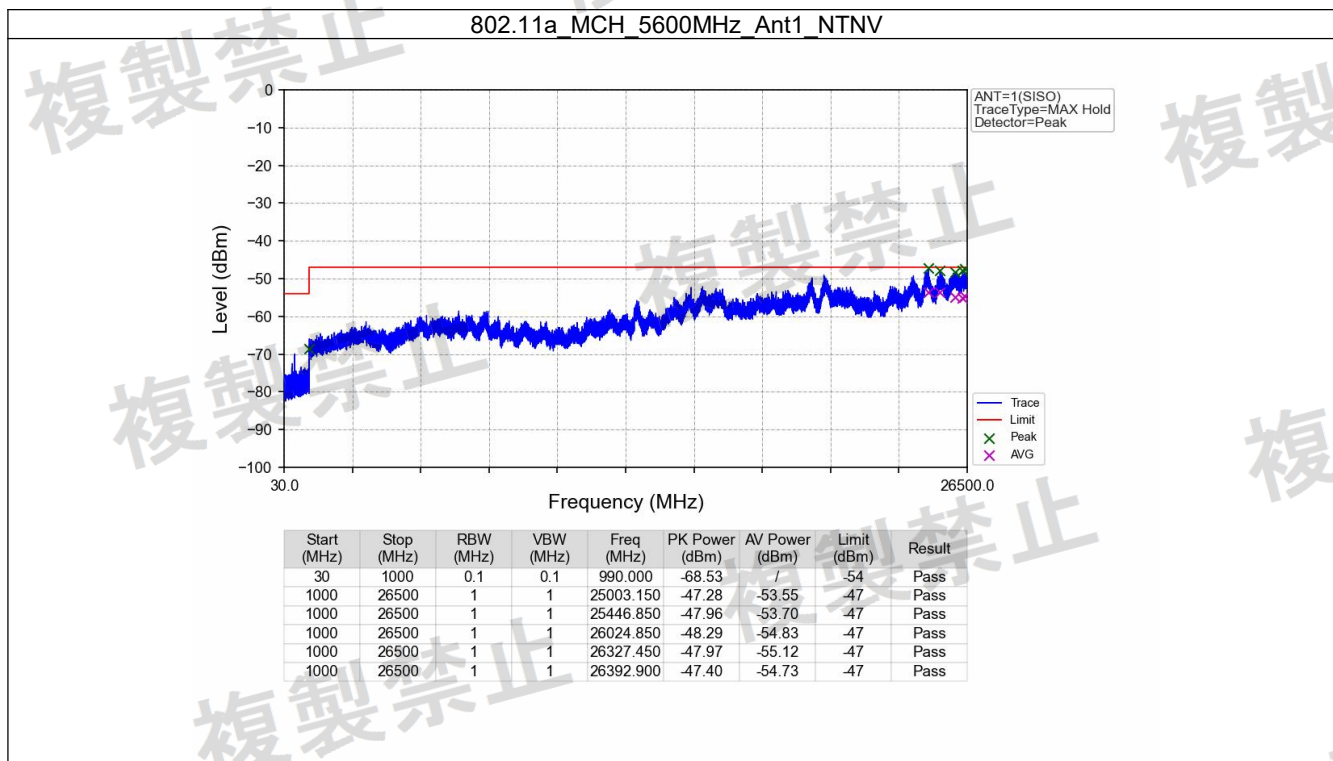

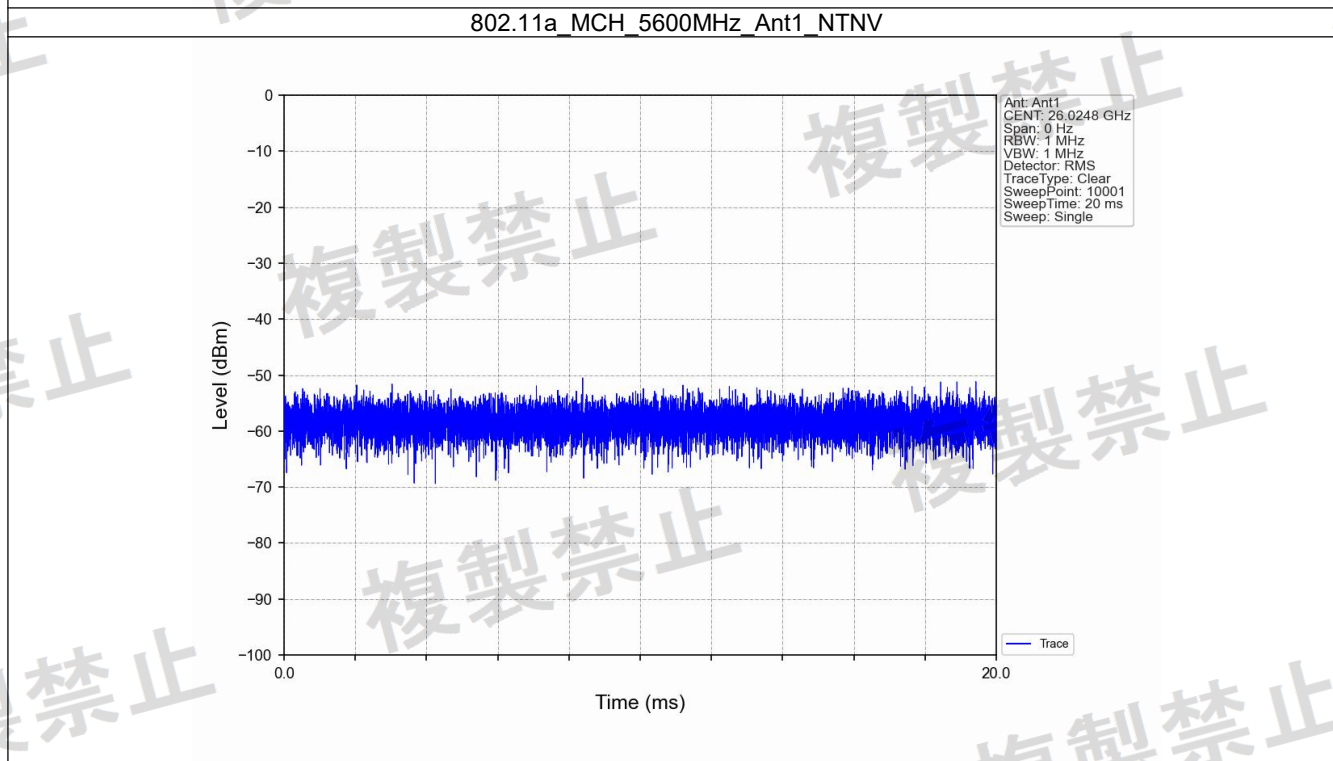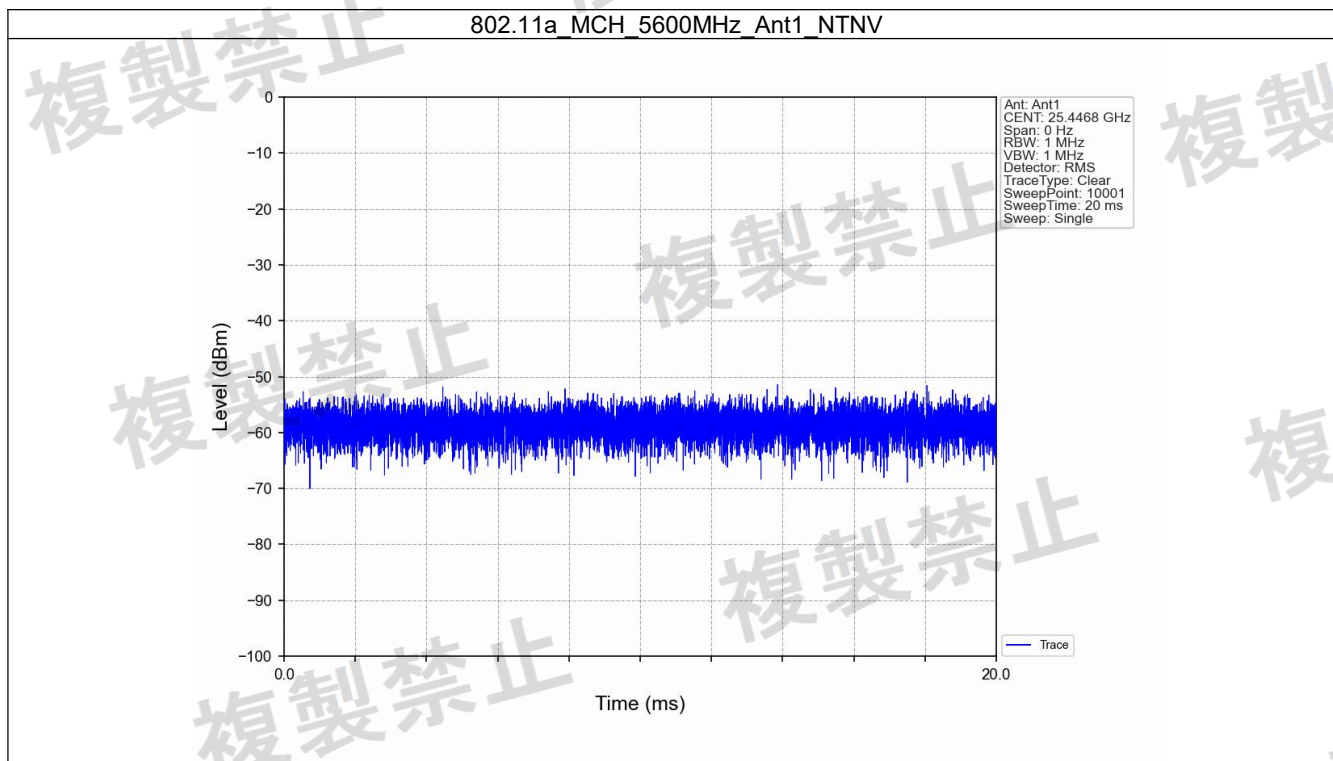


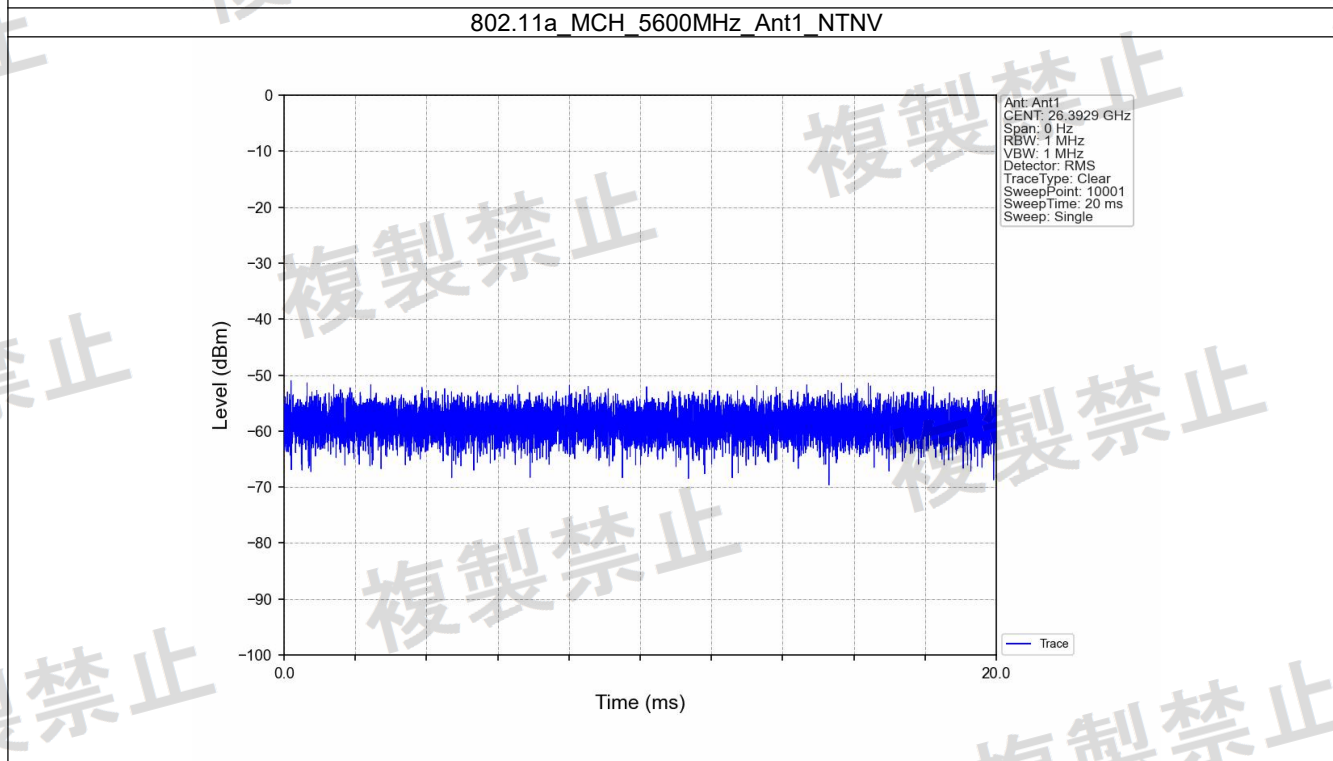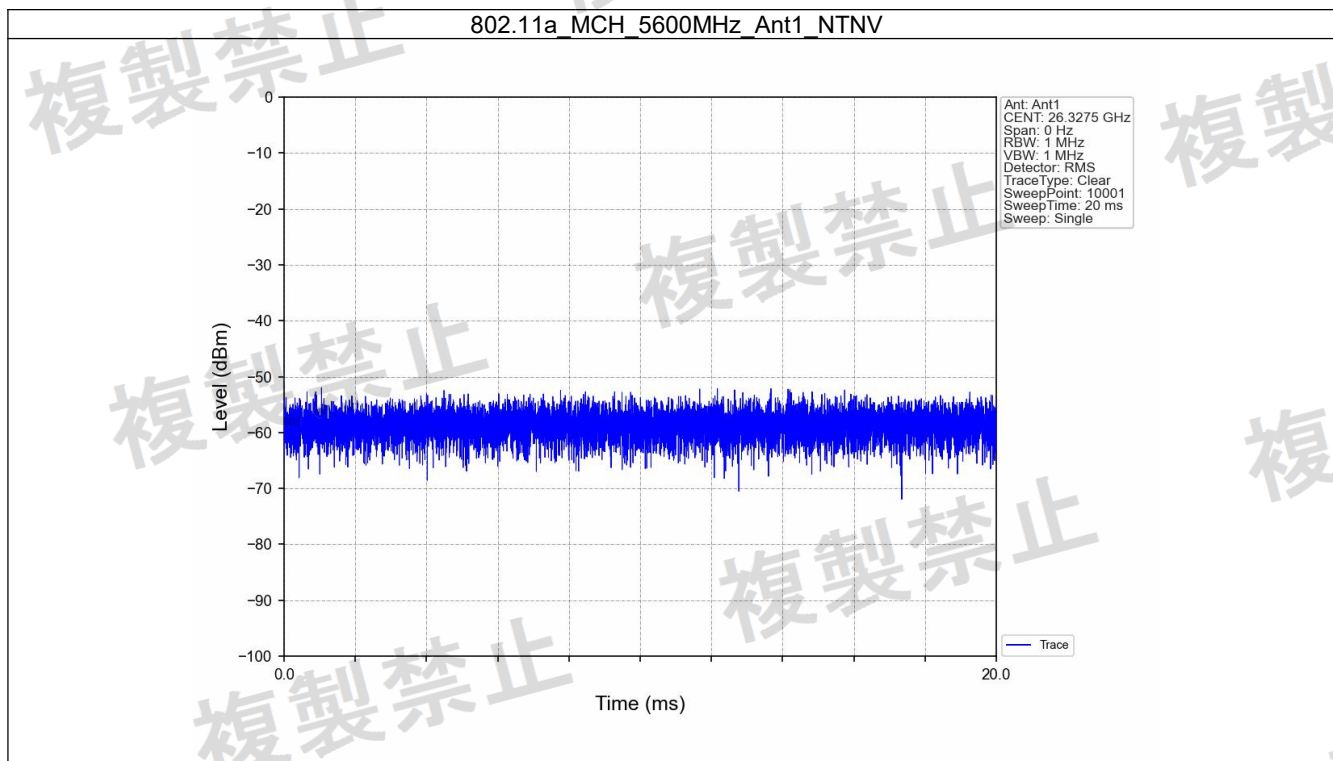



802.11a_HCH_5700MHz_Ant1_NTNV


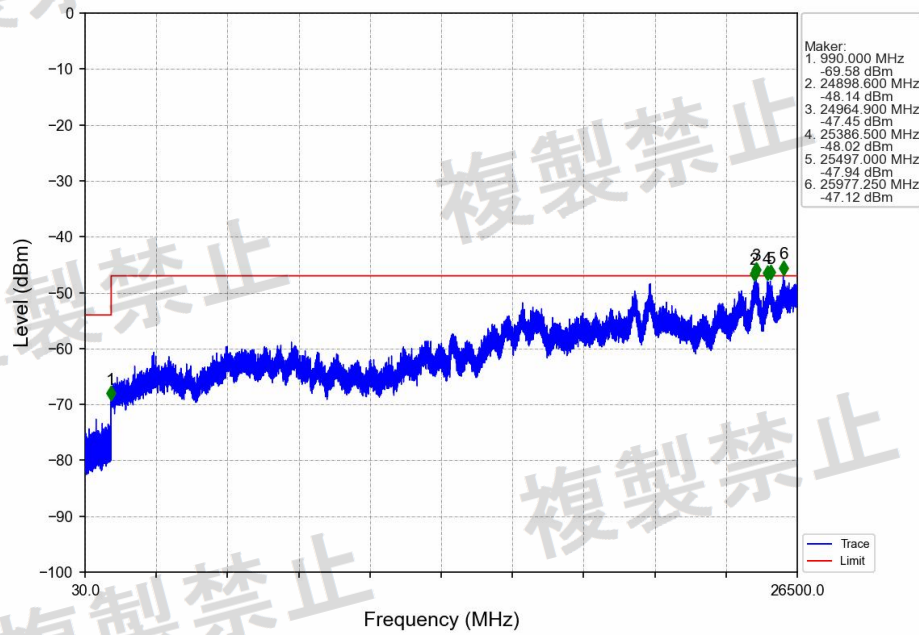




802.11a_HCH_5700MHz_Ant1_NTNV


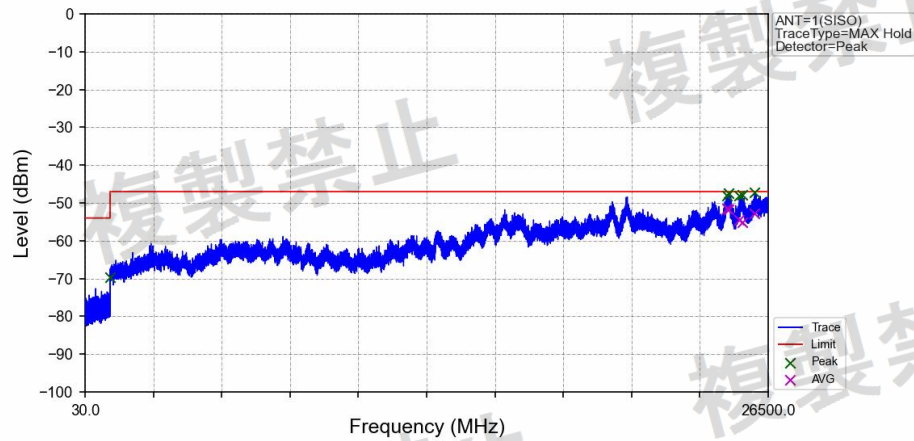




Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	990.000	-69.58	/	-54	Pass
1000	26500	1	1	24898.600	-48.14	-51.39	-47	Pass
1000	26500	1	1	24964.900	-47.45	-51.75	-47	Pass
1000	26500	1	1	25386.500	-48.02	-54.59	-47	Pass
1000	26500	1	1	25497.000	-47.94	-55.17	-47	Pass
1000	26500	1	1	25977.250	-47.12	-52.83	-47	Pass

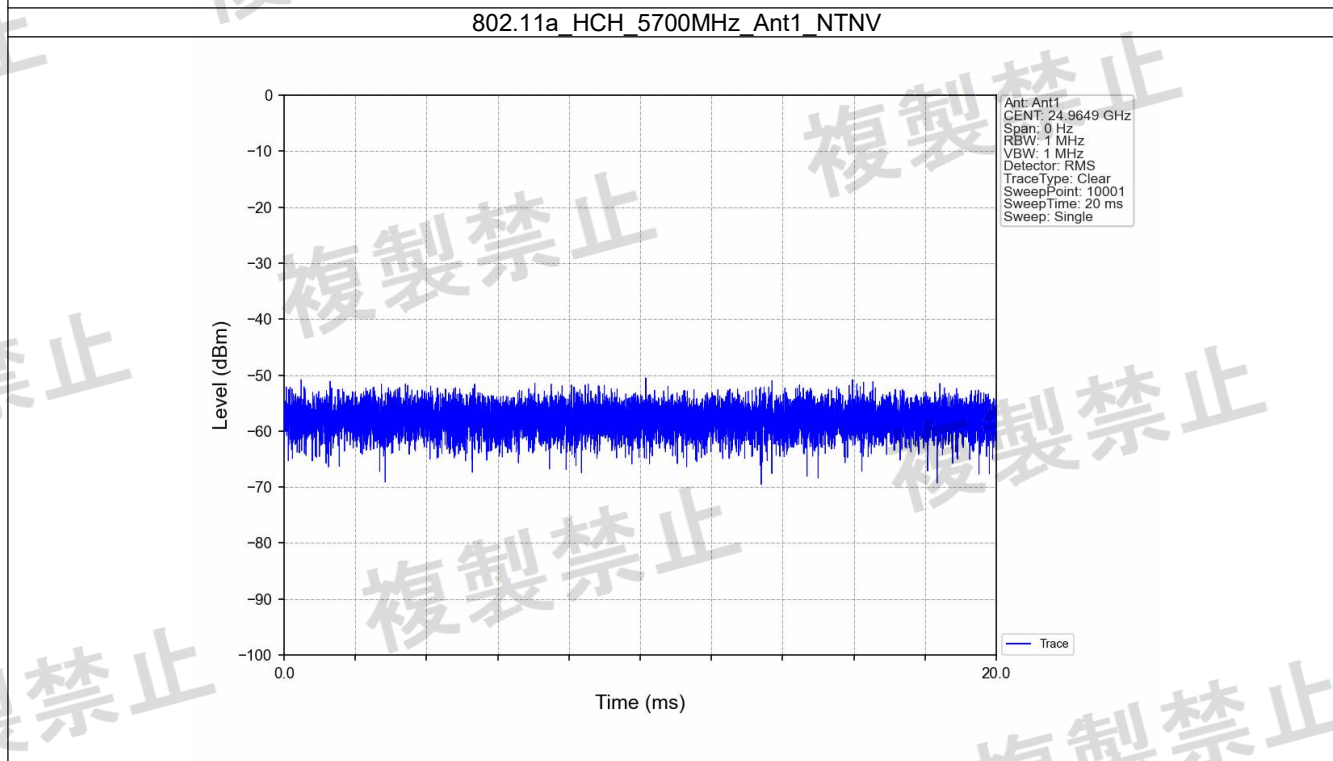
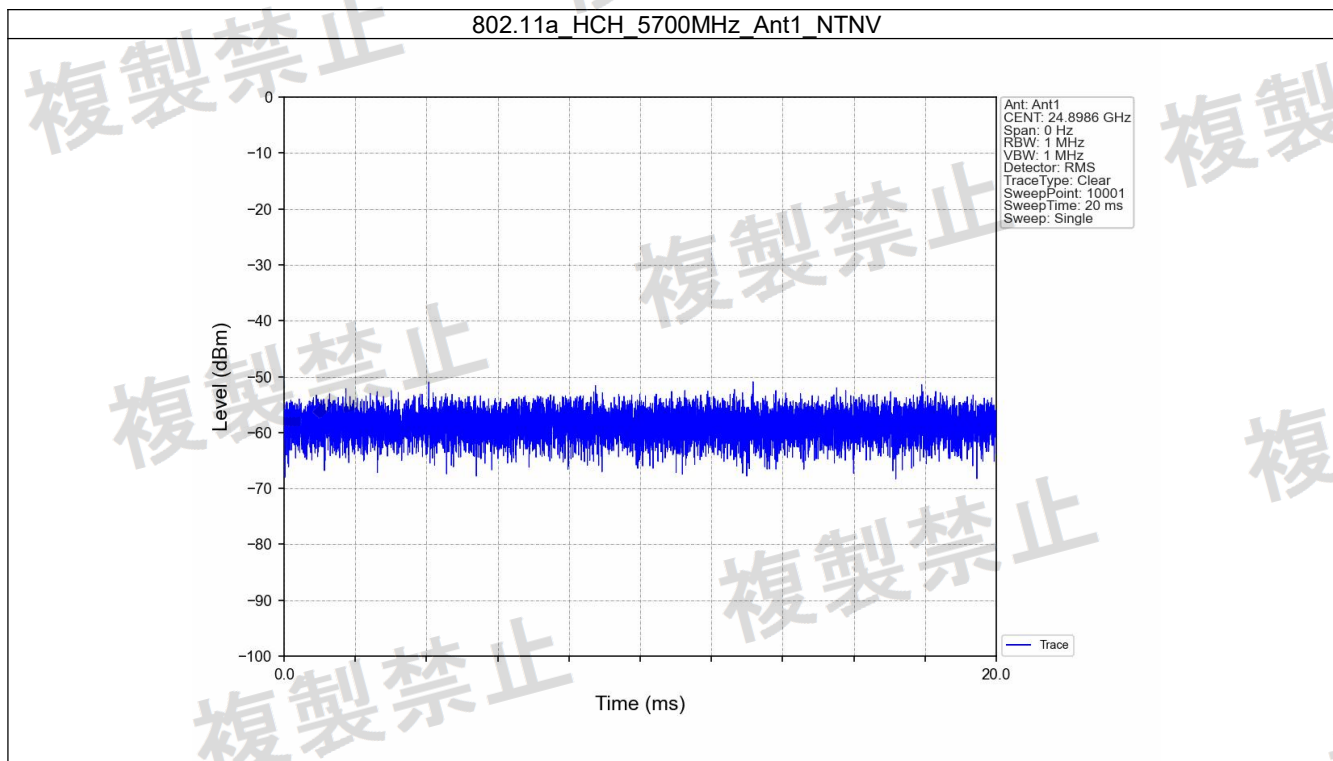


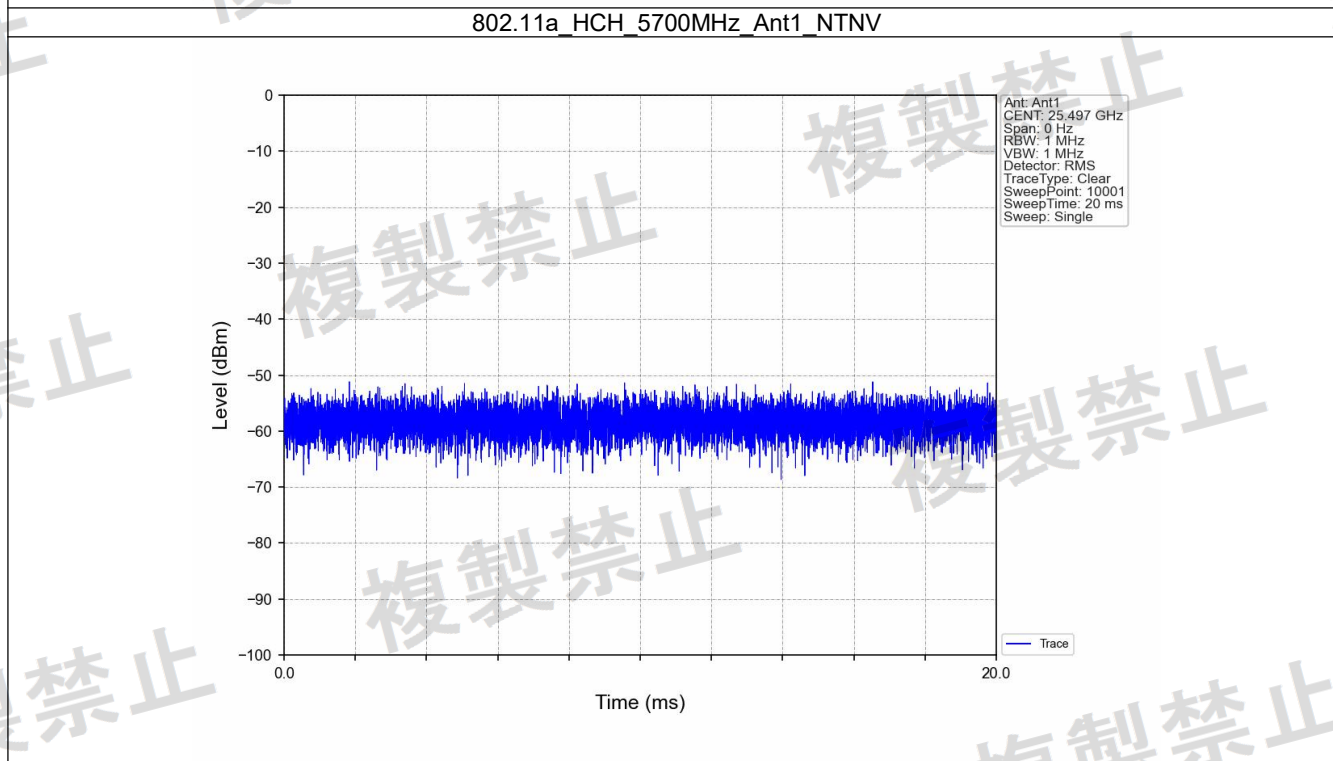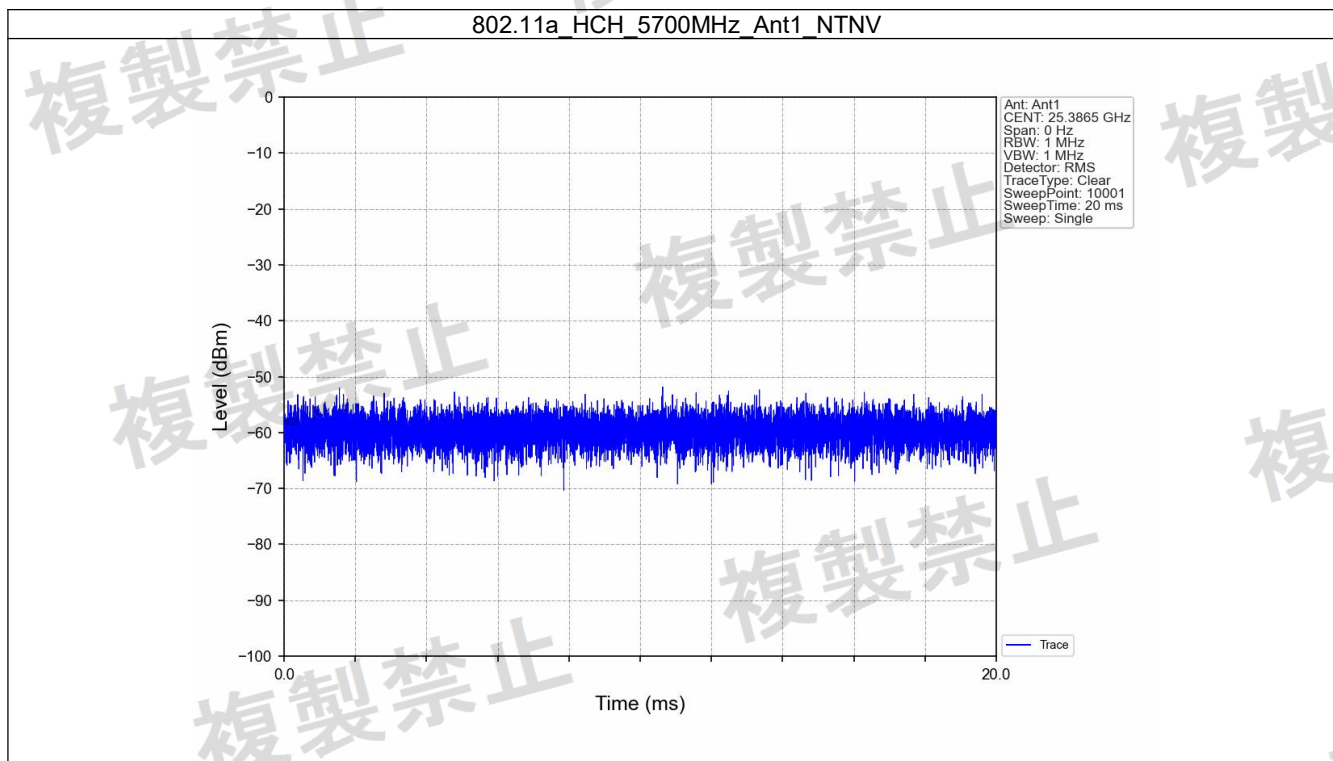

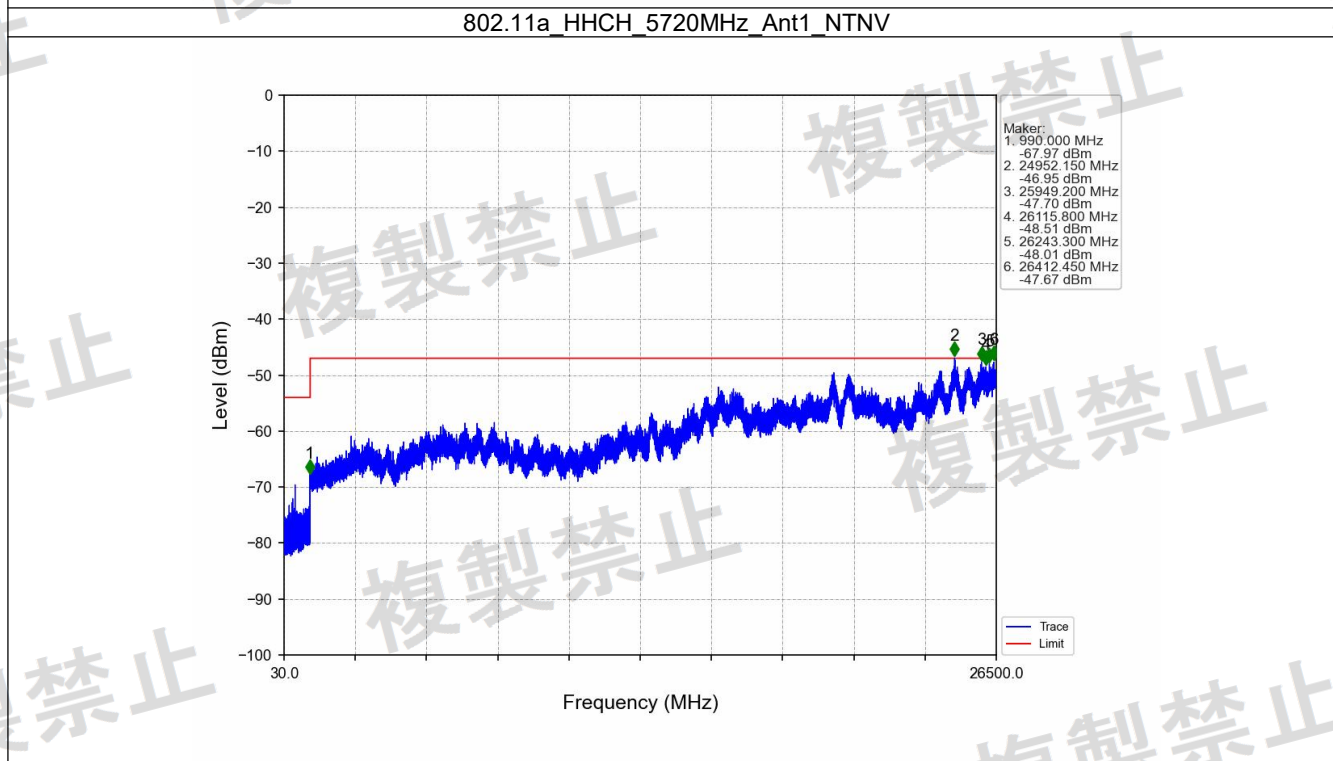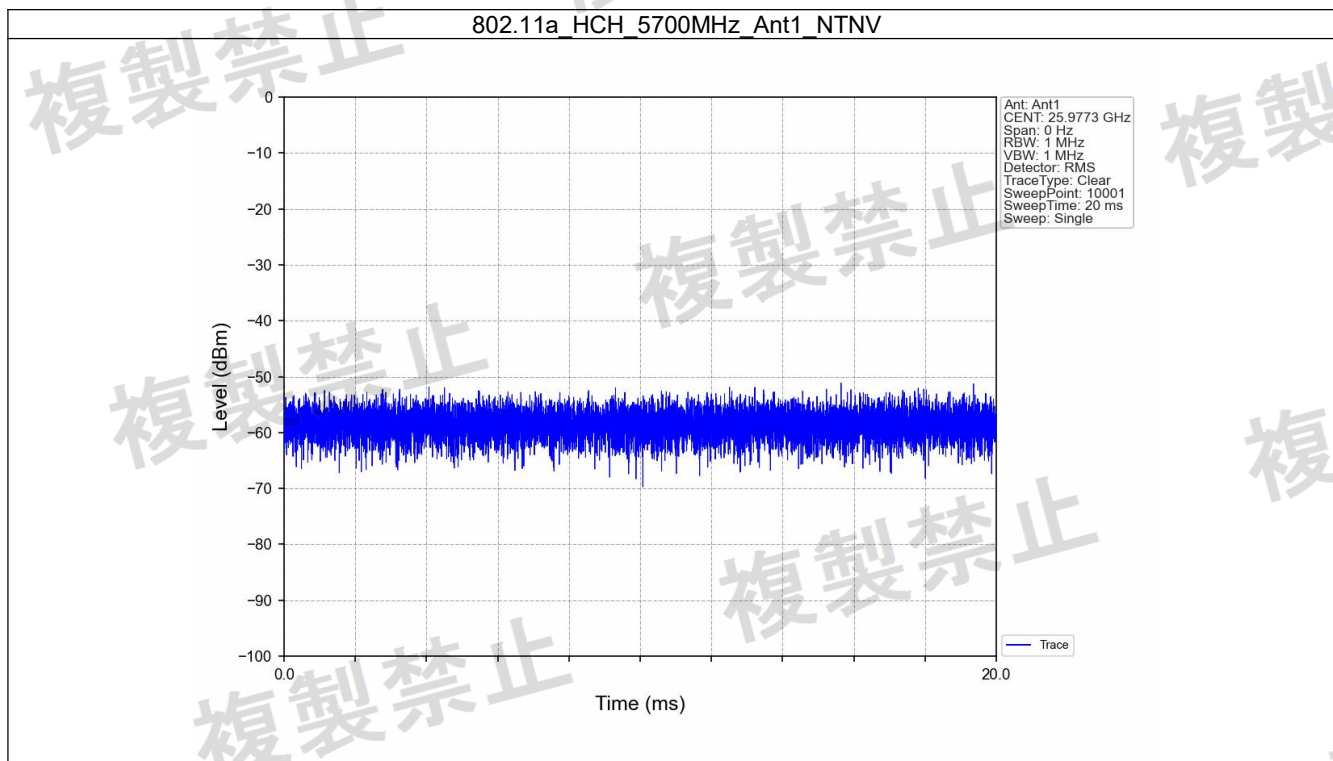


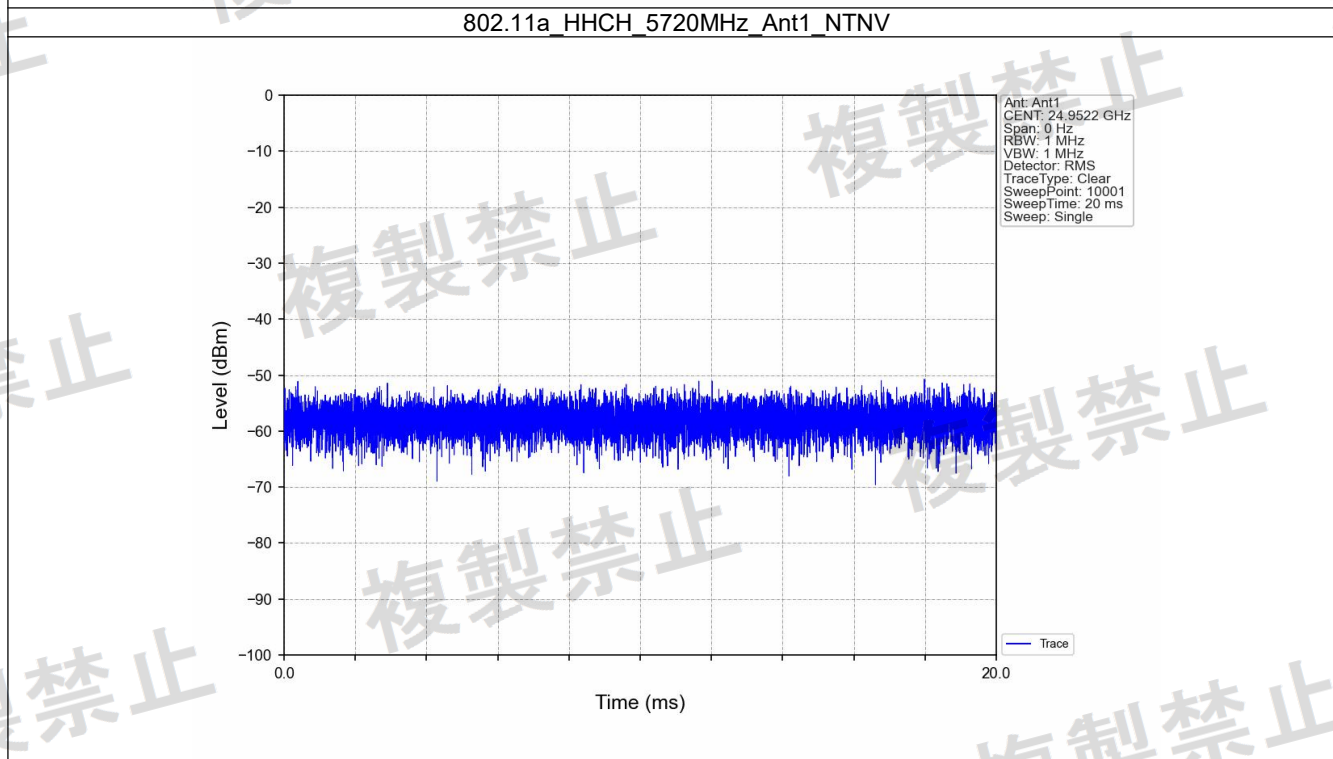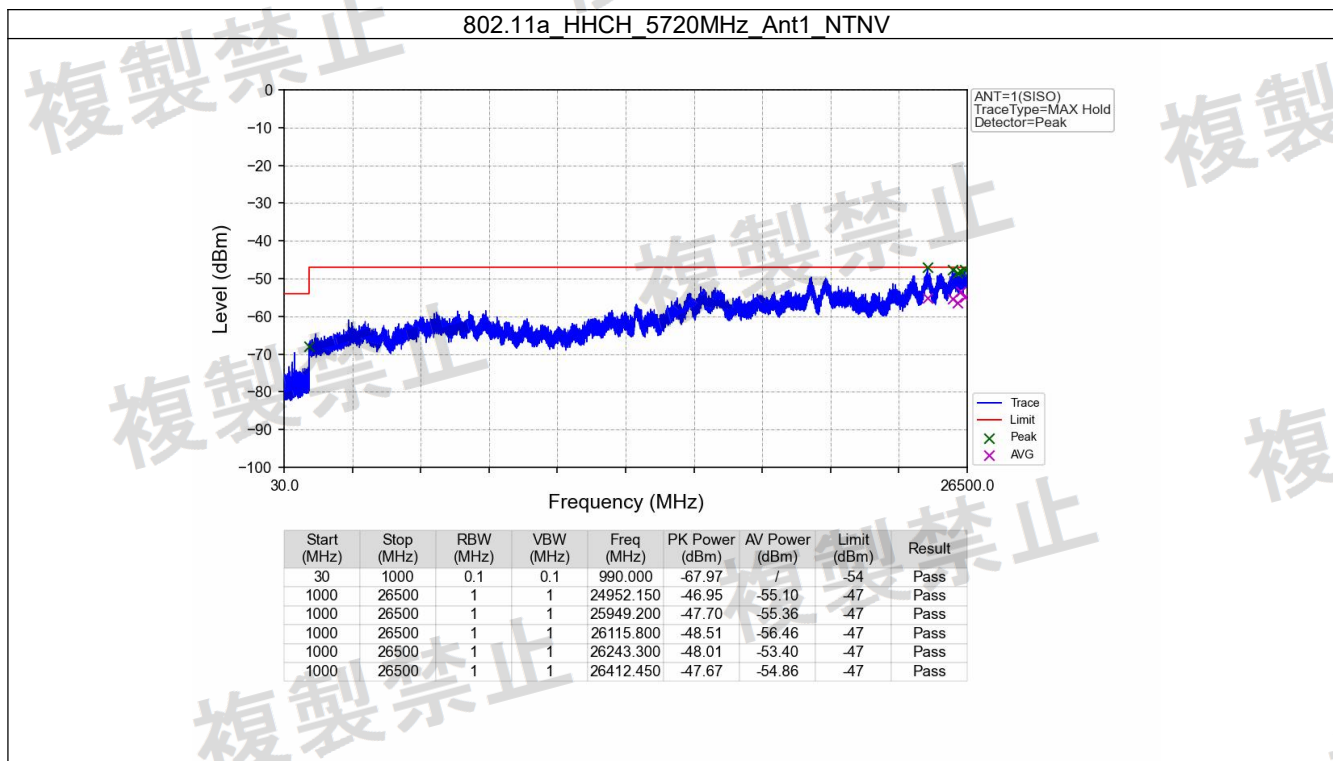

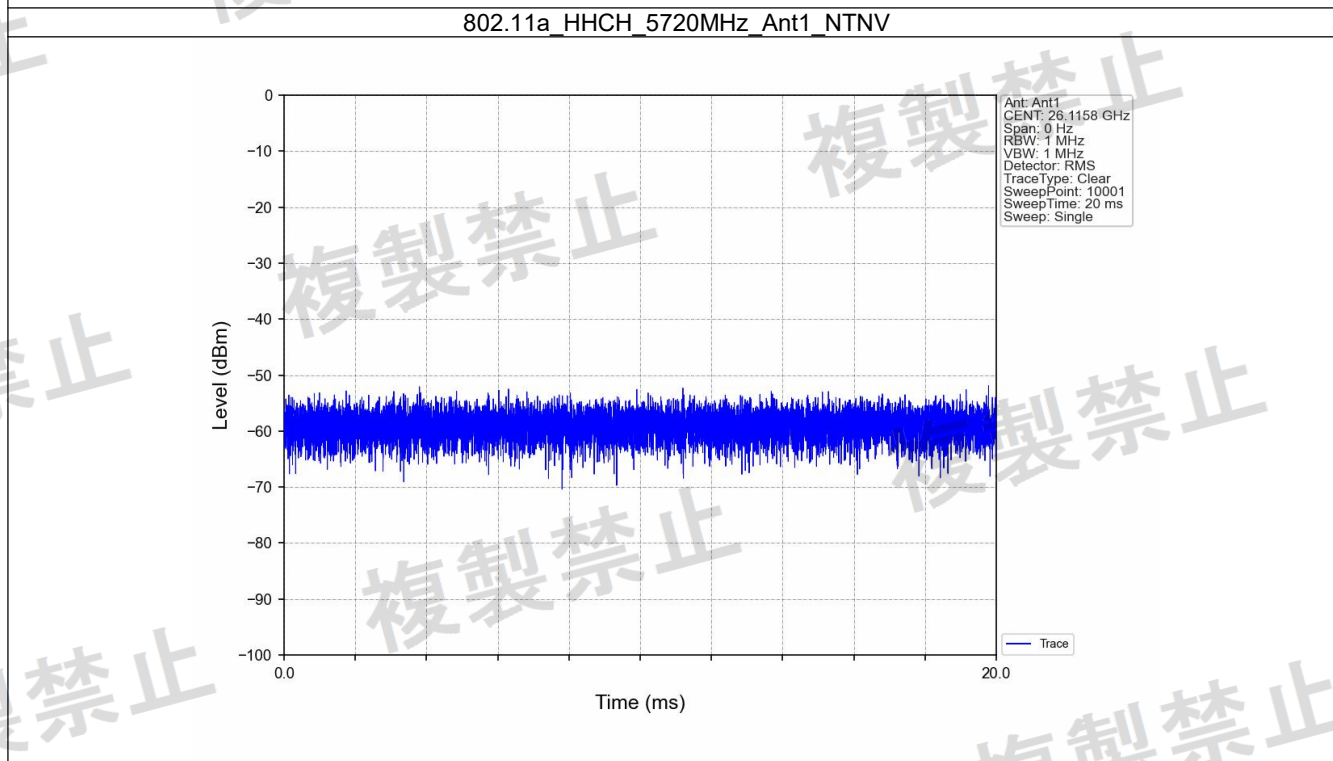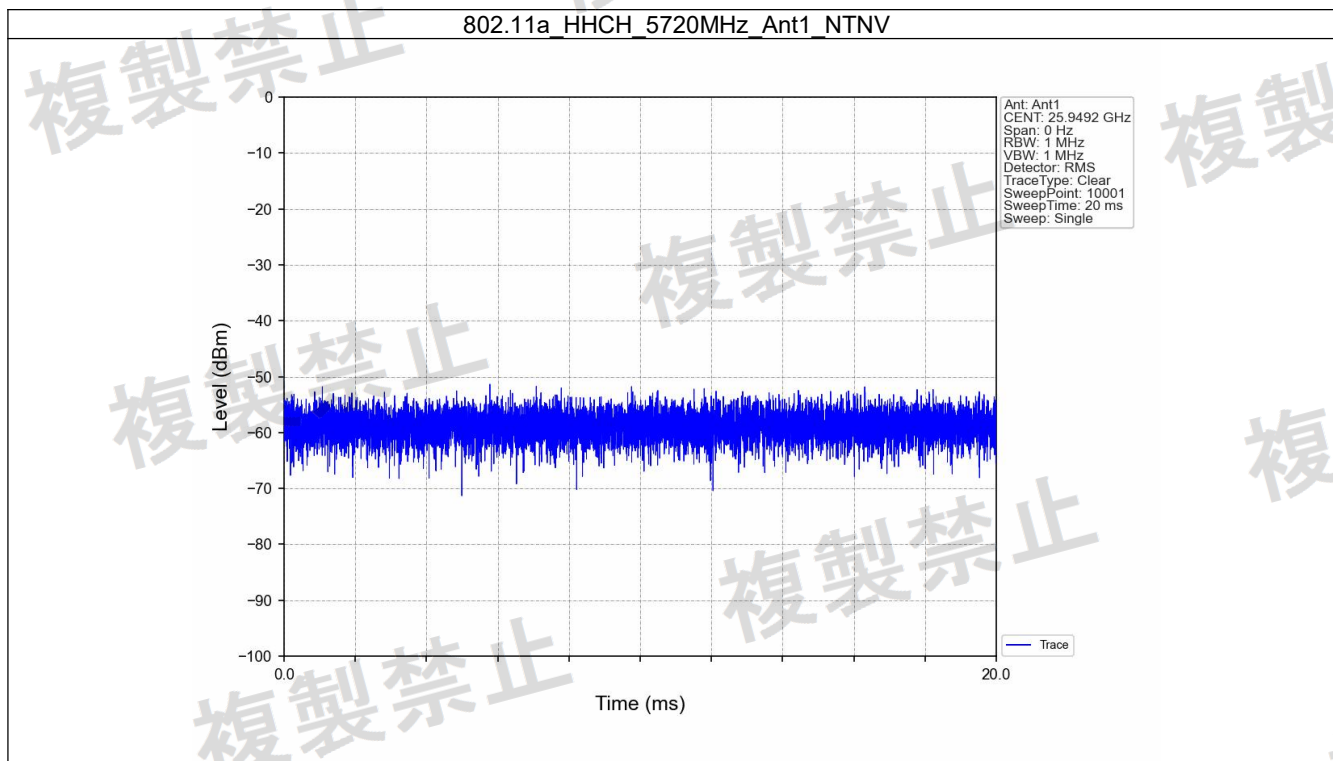


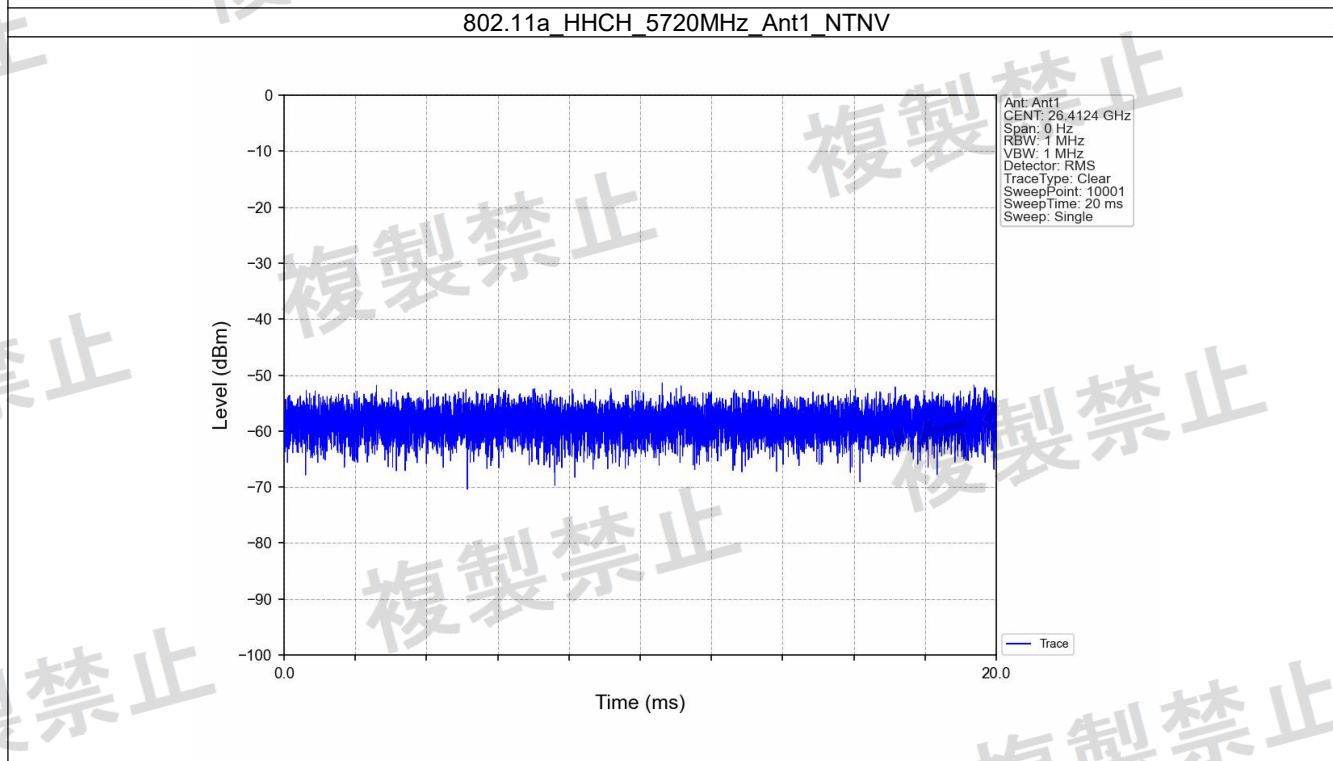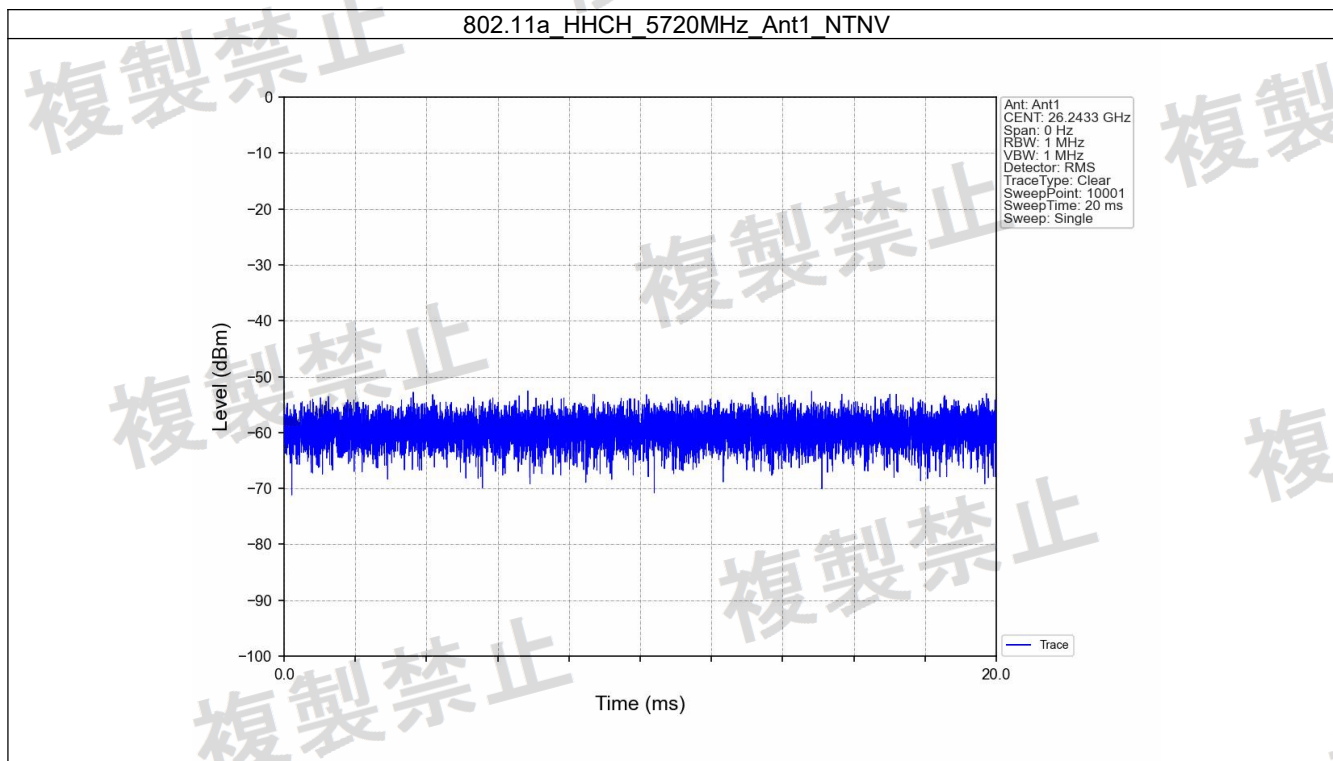



802.11n(HT20)_LCH_5500MHz_Ant1_NTNV


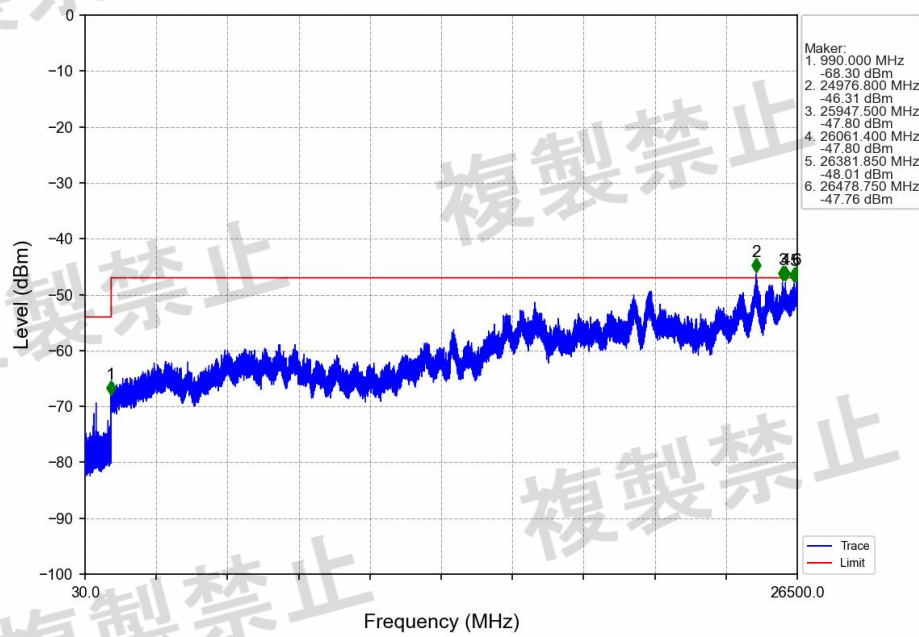




802.11n(HT20)_LCH_5500MHz_Ant1_NTNV


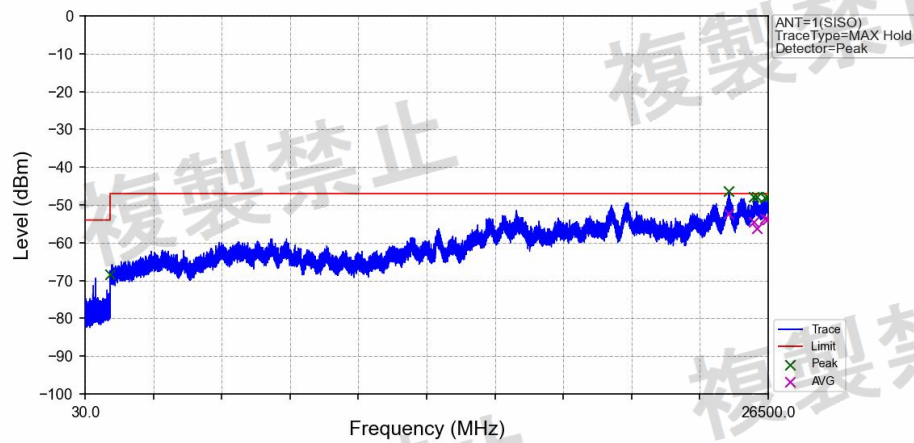




Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	990.000	-68.30	/	-54	Pass
1000	26500	1	1	24976.800	-46.31	-52.42	-47	Pass
1000	26500	1	1	25947.500	-47.80	-54.48	-47	Pass
1000	26500	1	1	26061.400	-47.80	-56.09	-47	Pass
1000	26500	1	1	26381.850	-48.01	-53.58	-47	Pass
1000	26500	1	1	26478.750	-47.76	-53.84	-47	Pass

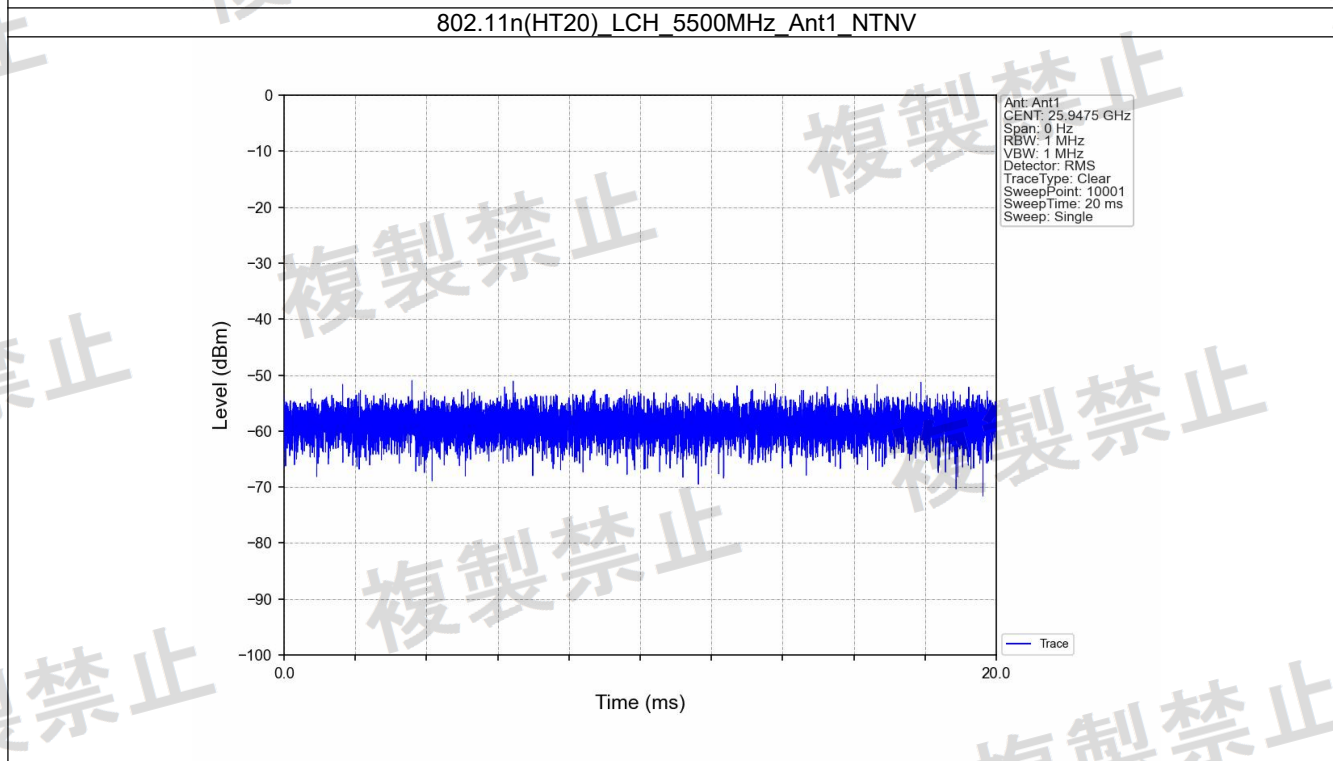
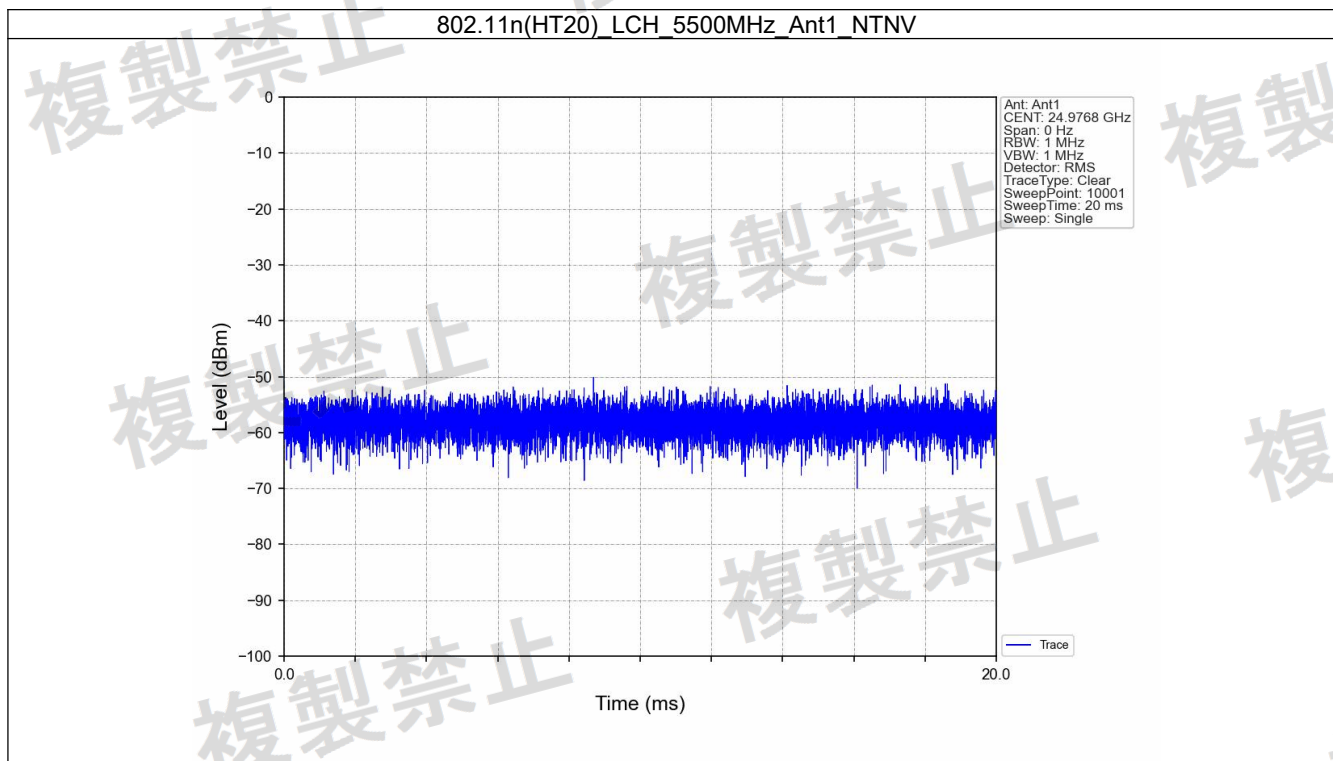


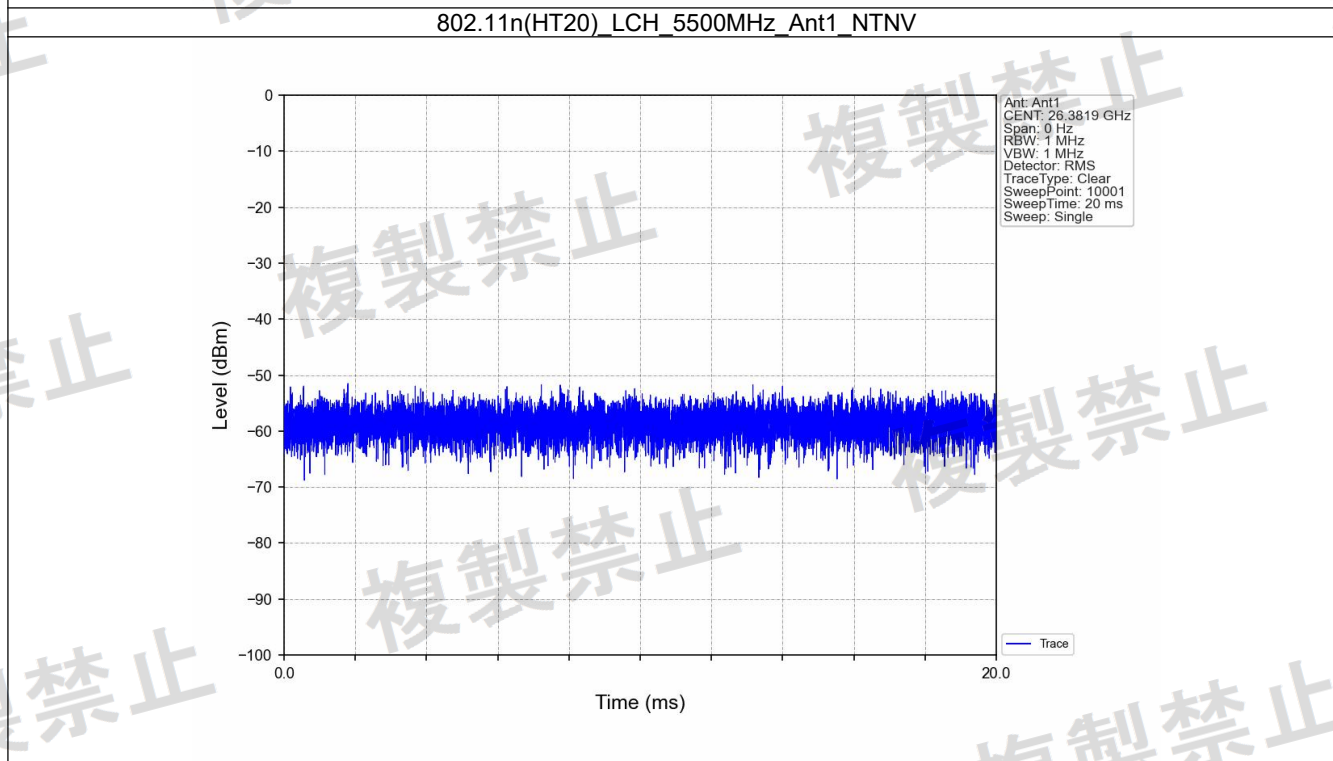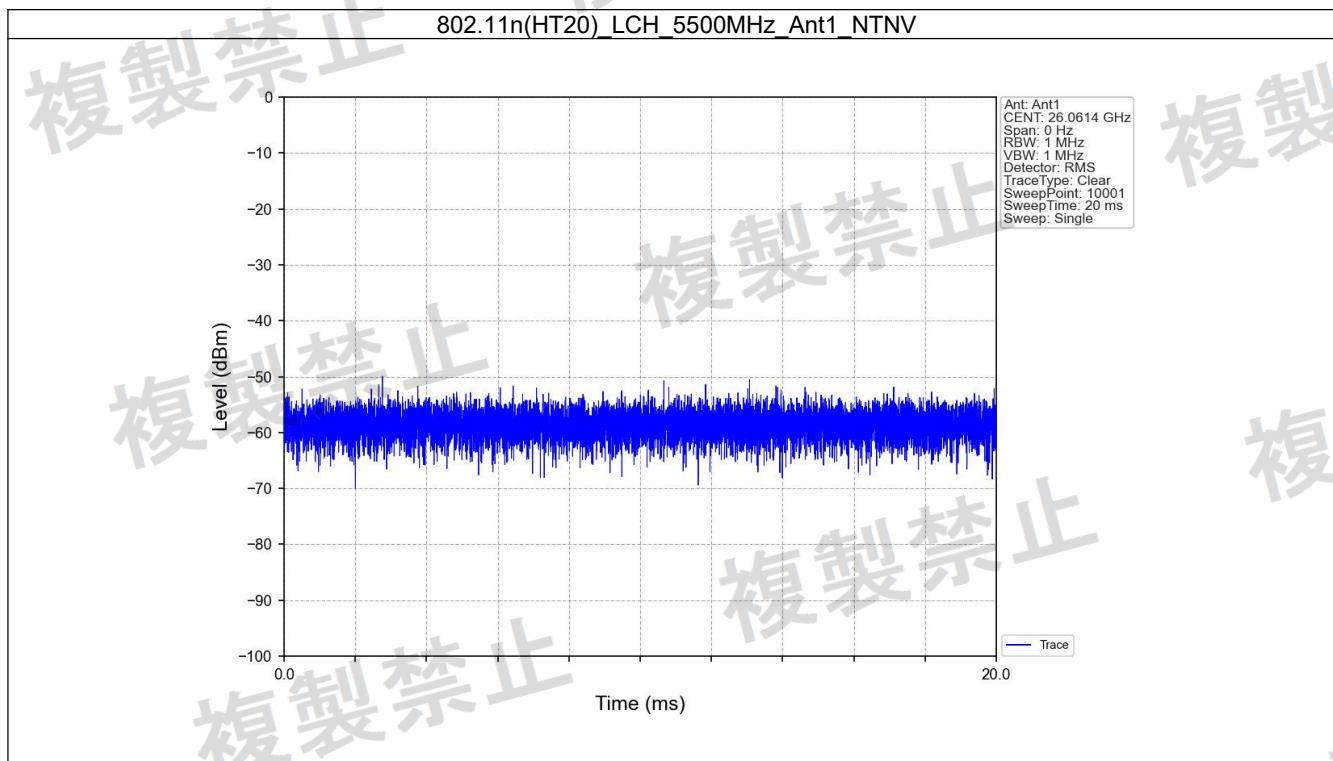

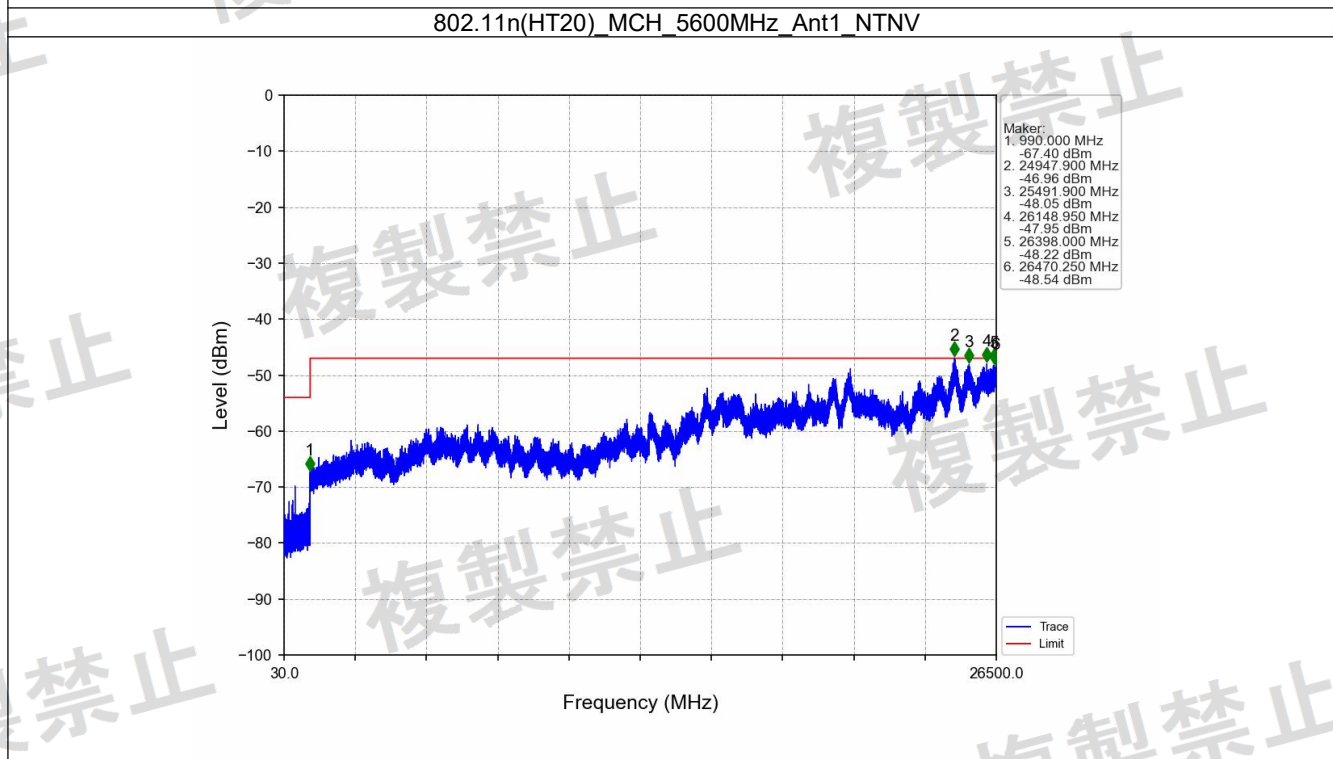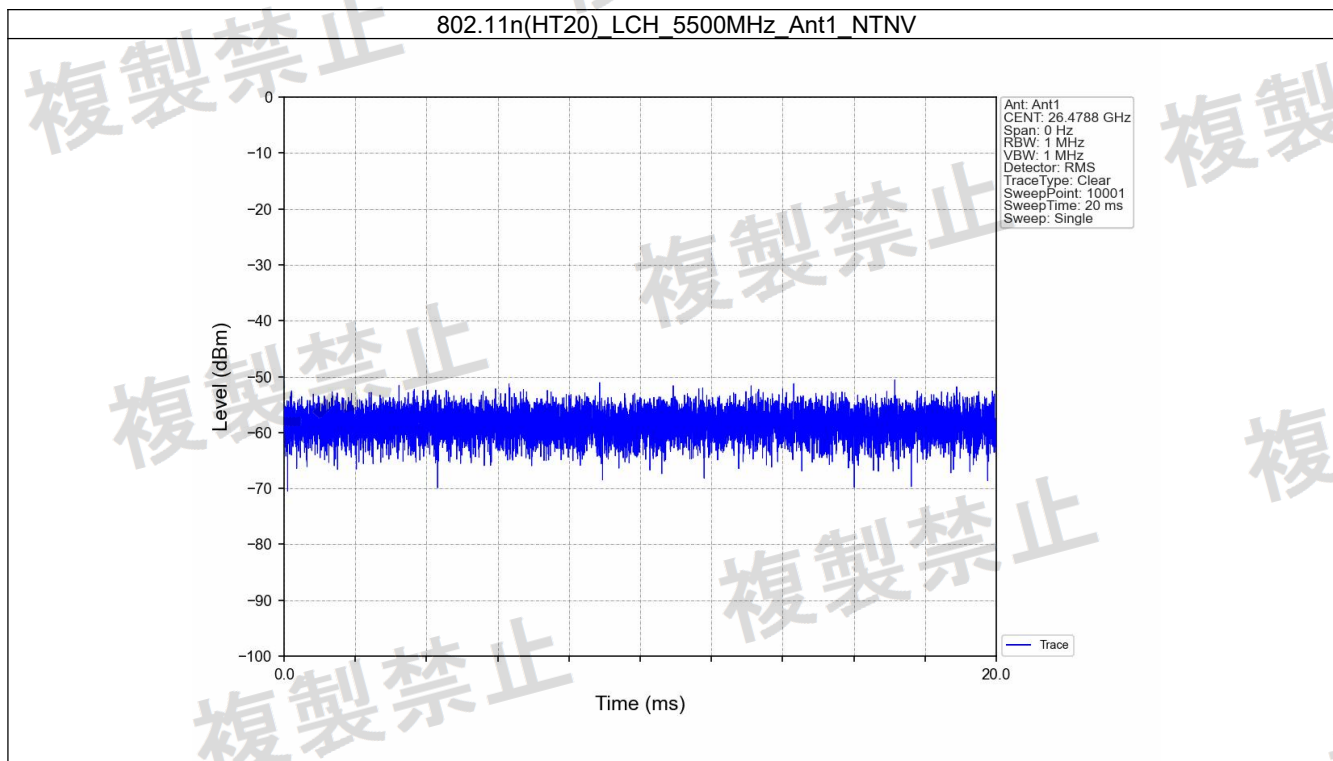


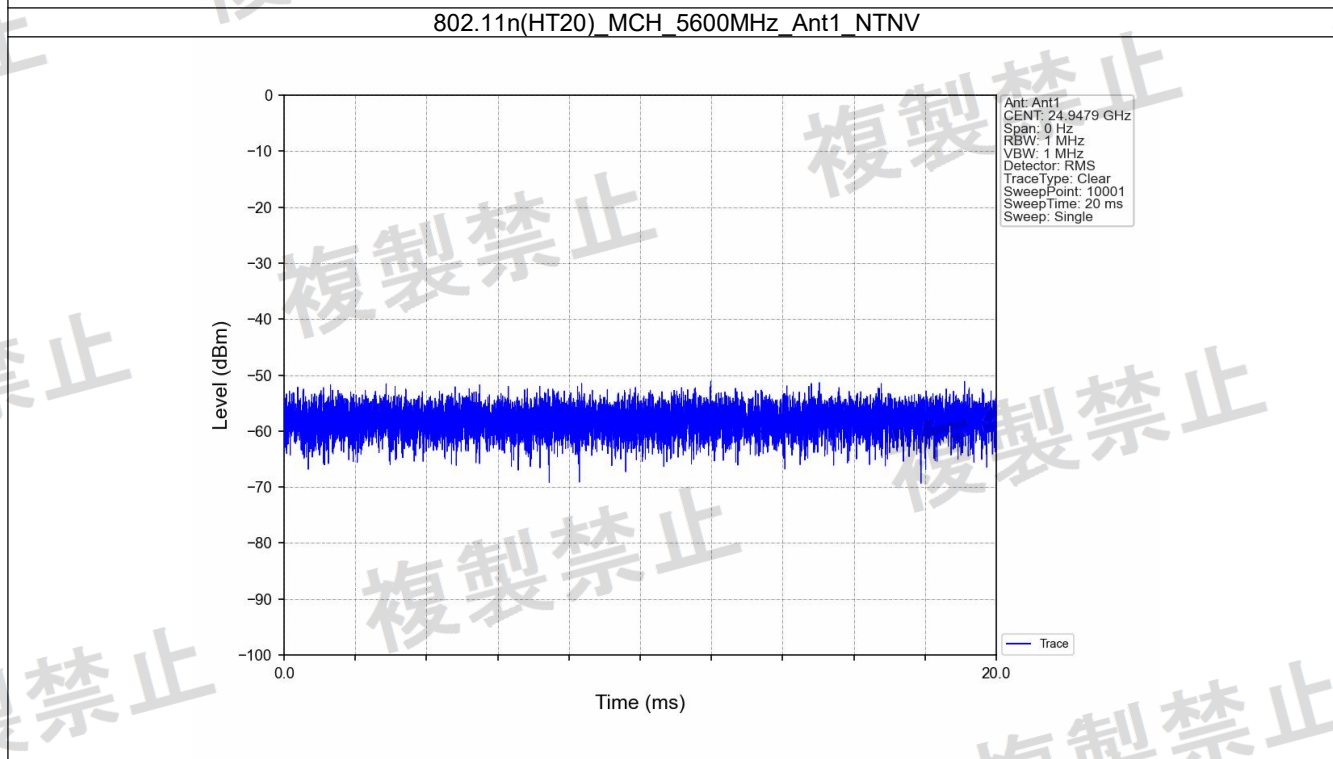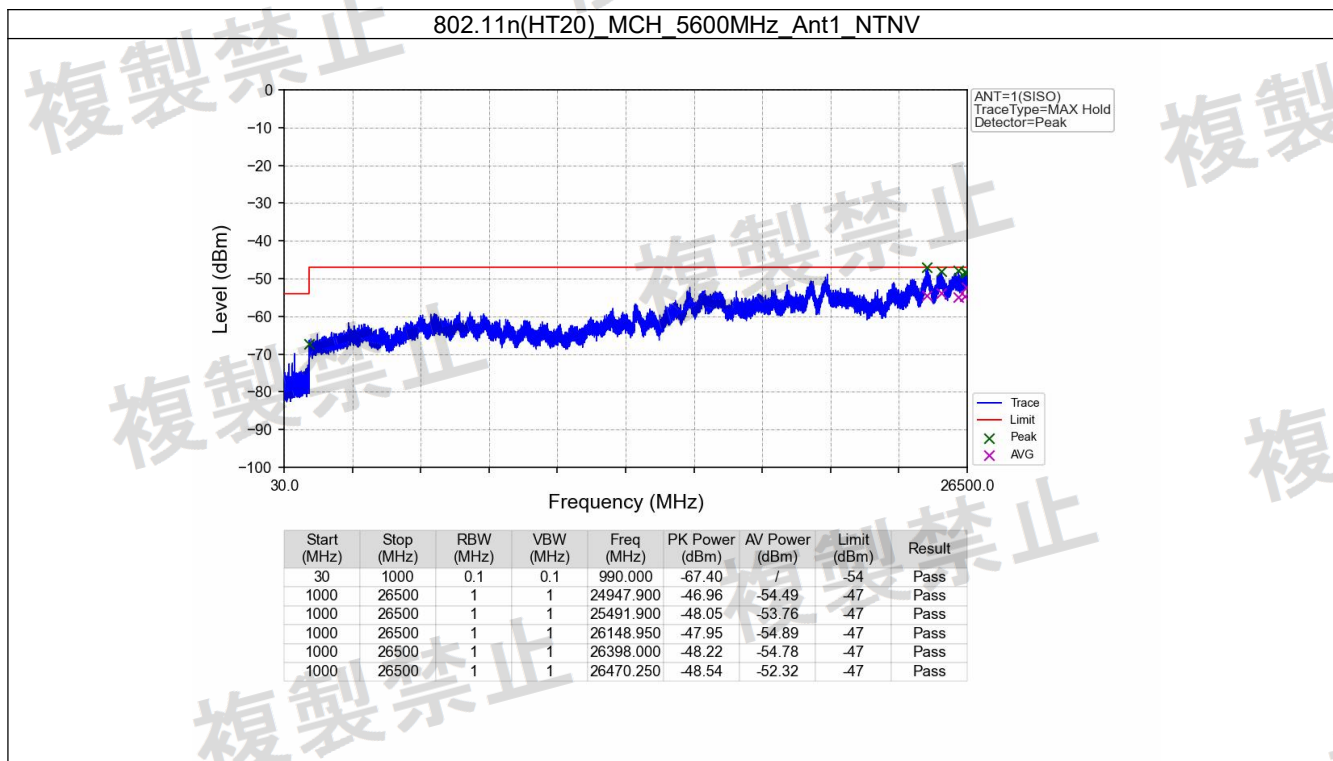

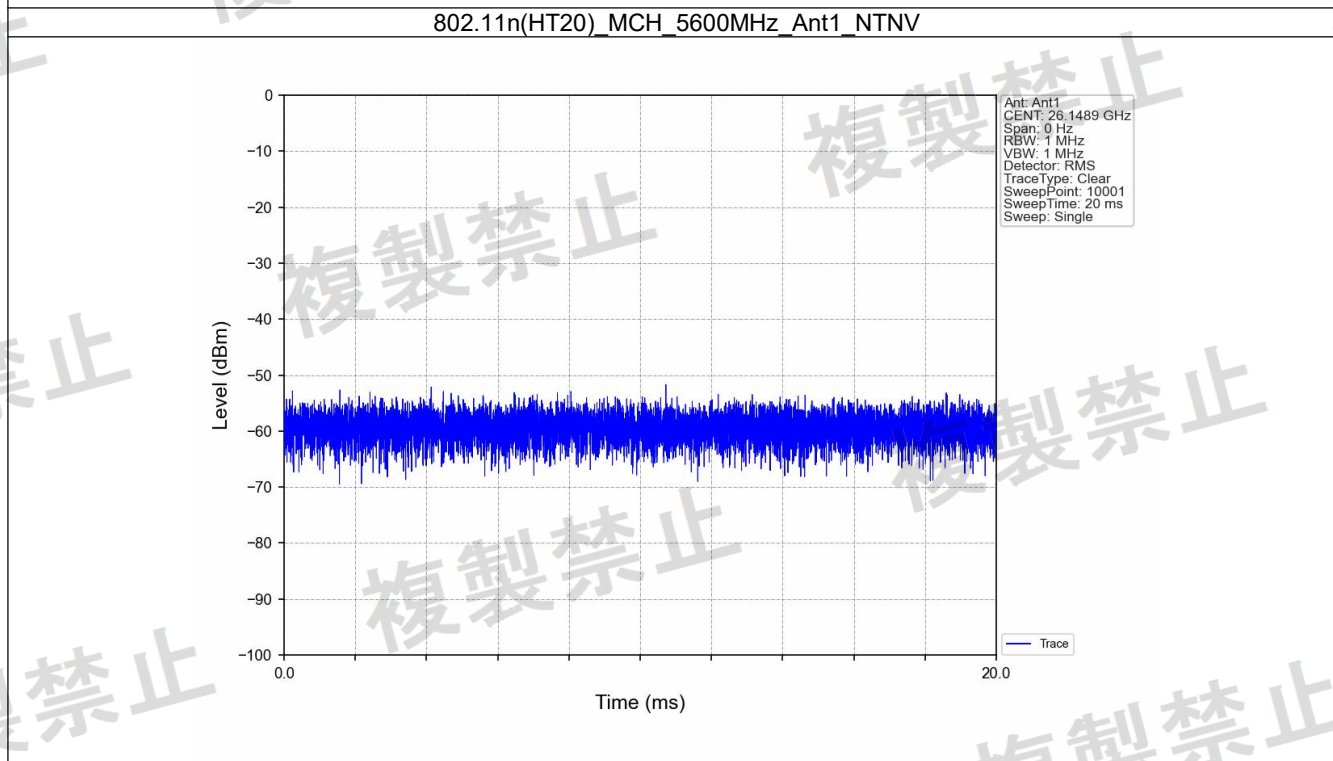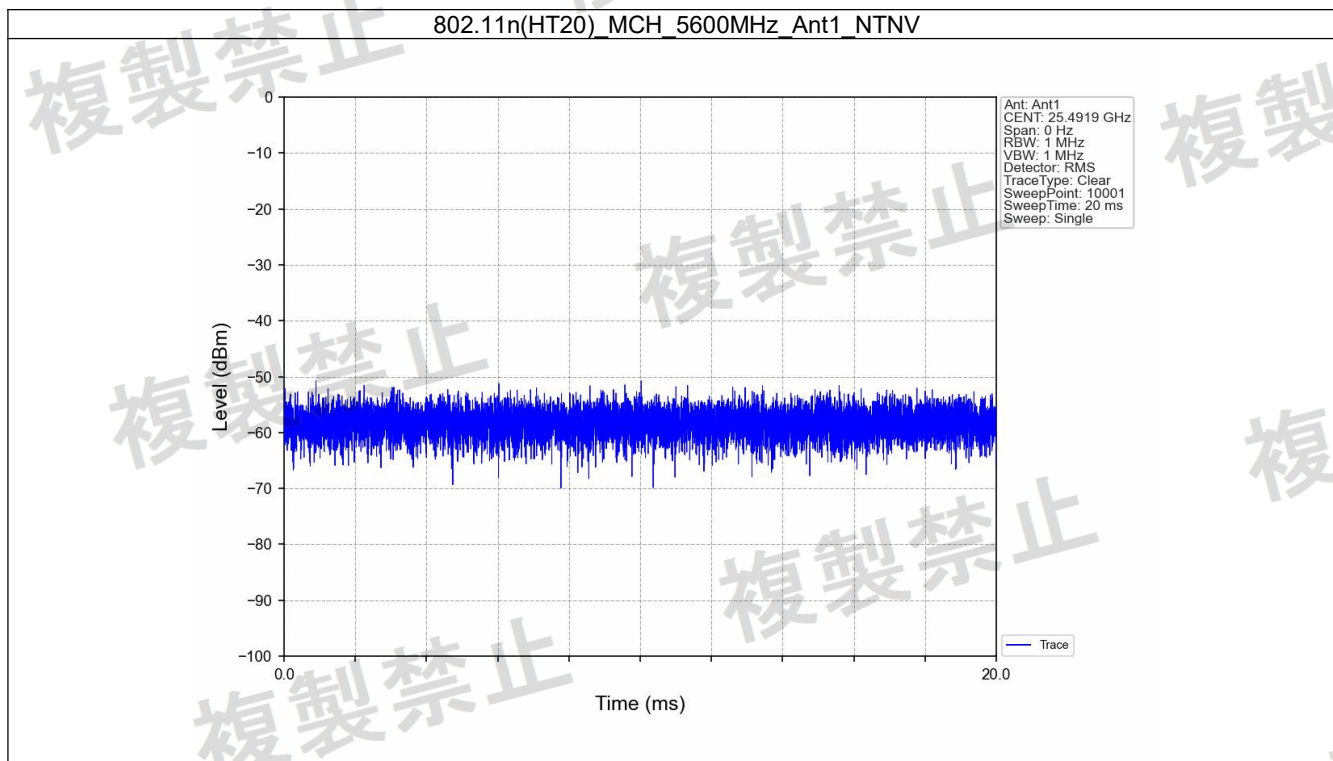


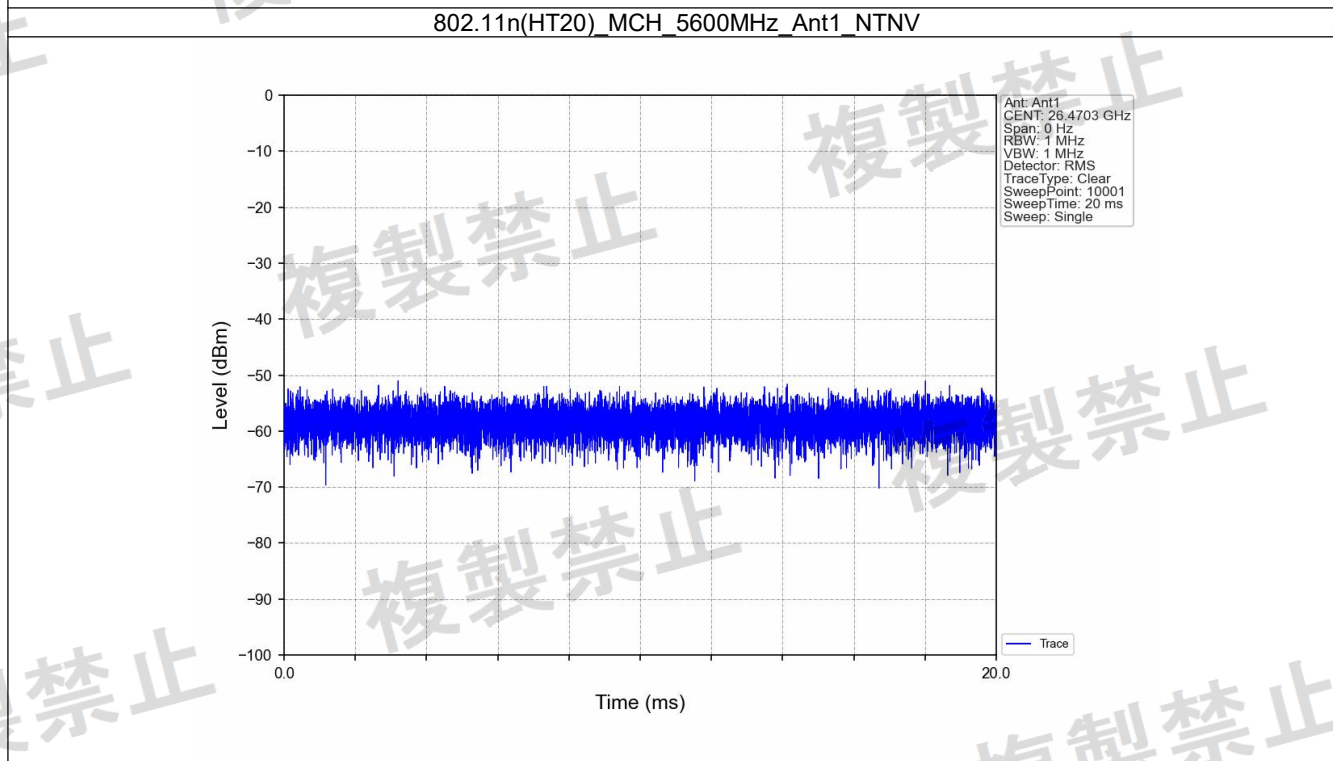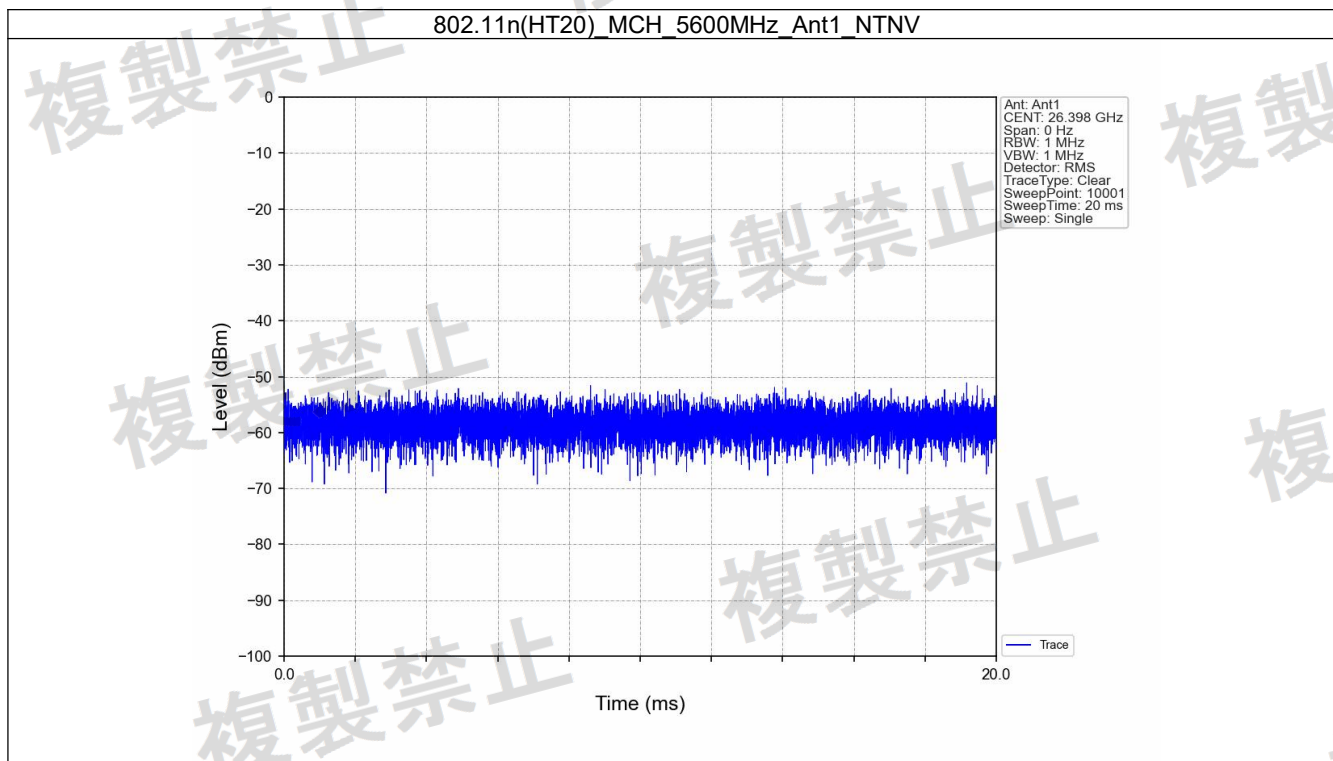

802.11n(HT20)_HCH_5700MHz_Ant1_NTNV

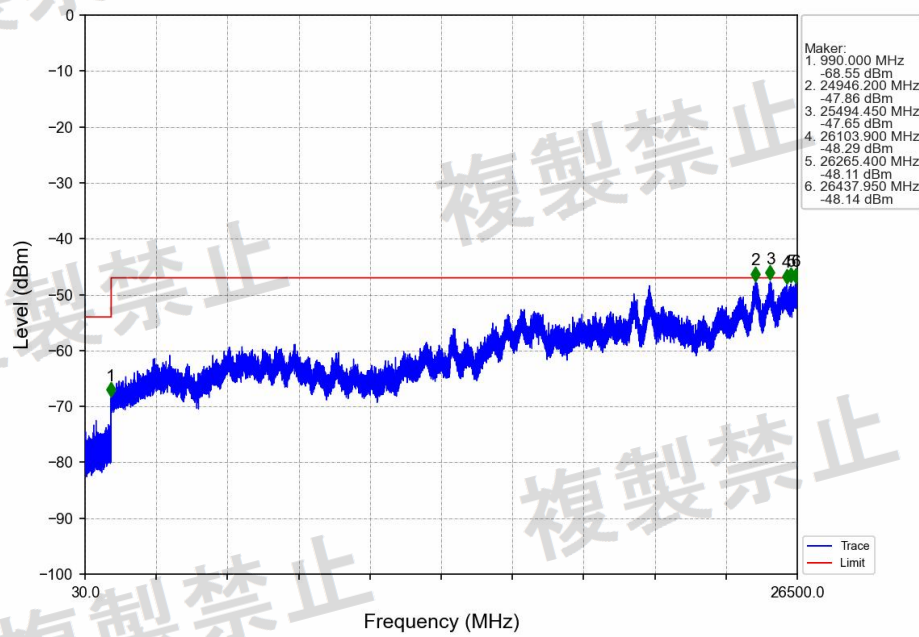

802.11n(HT20)_HCH_5700MHz_Ant1_NTNV

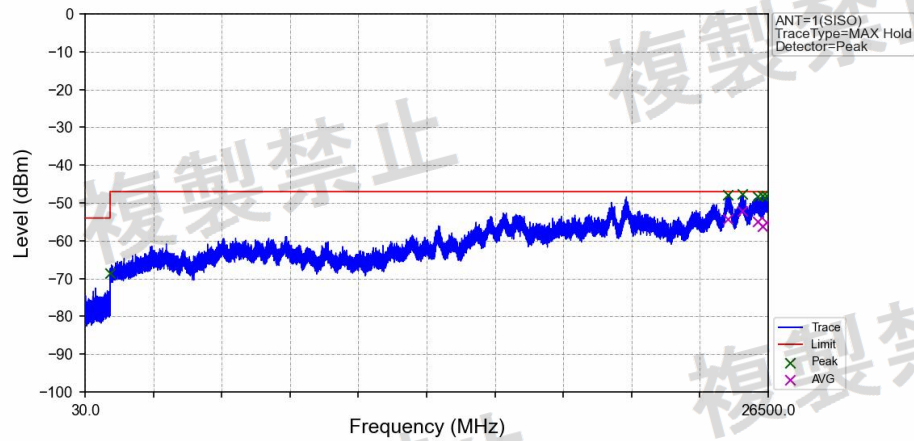

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	990.000	-68.55	/	-54	Pass
1000	26500	1	1	24946.200	-47.86	-54.34	-47	Pass
1000	26500	1	1	25494.450	-47.65	-52.07	-47	Pass
1000	26500	1	1	26103.900	-48.29	-55.02	-47	Pass
1000	26500	1	1	26265.400	-48.11	-56.23	-47	Pass
1000	26500	1	1	26437.950	-48.14	-55.10	-47	Pass

