

測試頻道: IEEE 802.11n (HT20) / 5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

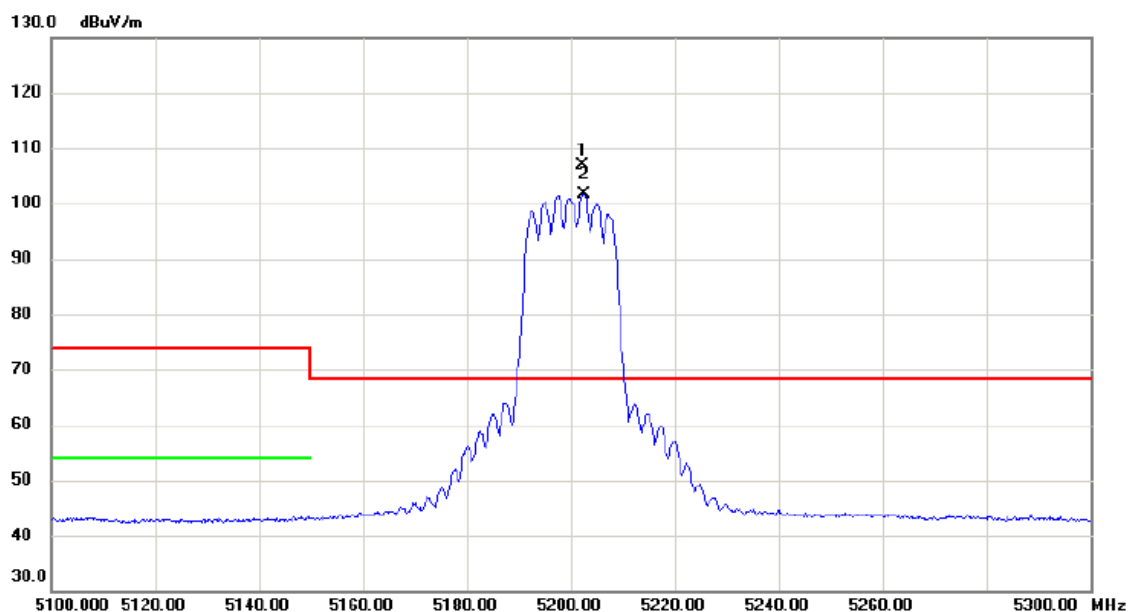

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5202.300	108.65	-1.68	106.97	68.30	38.67	peak	主波訊號不予判定
2	X	5202.500	103.35	-1.68	101.67	68.30	33.37	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

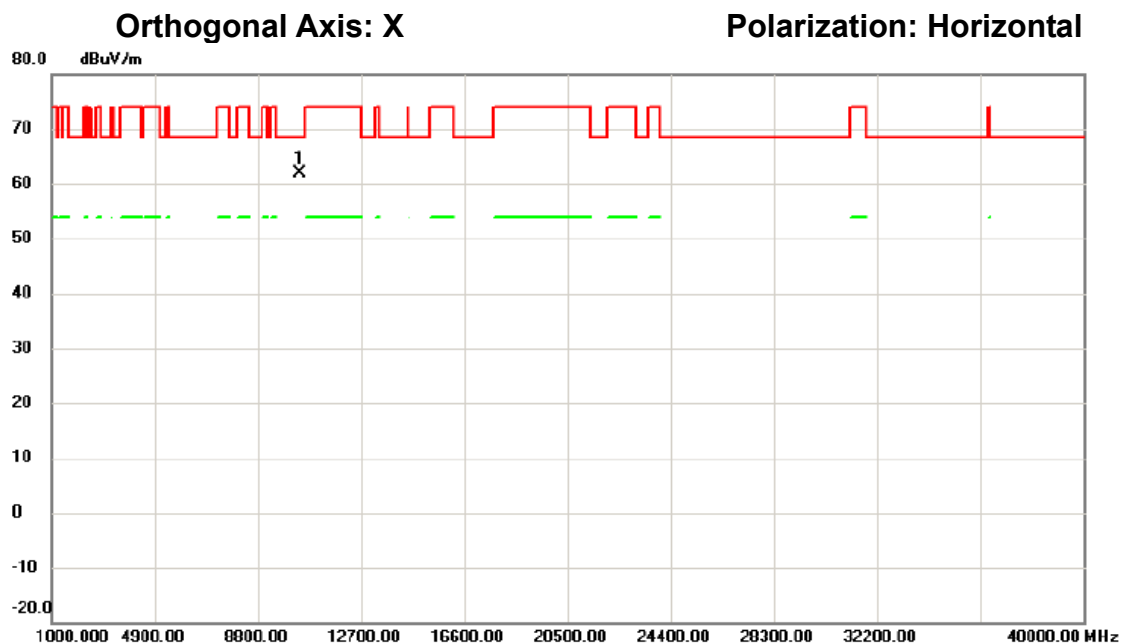

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10402.12	60.25	1.61	61.86	68.30	-6.44	peak	

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

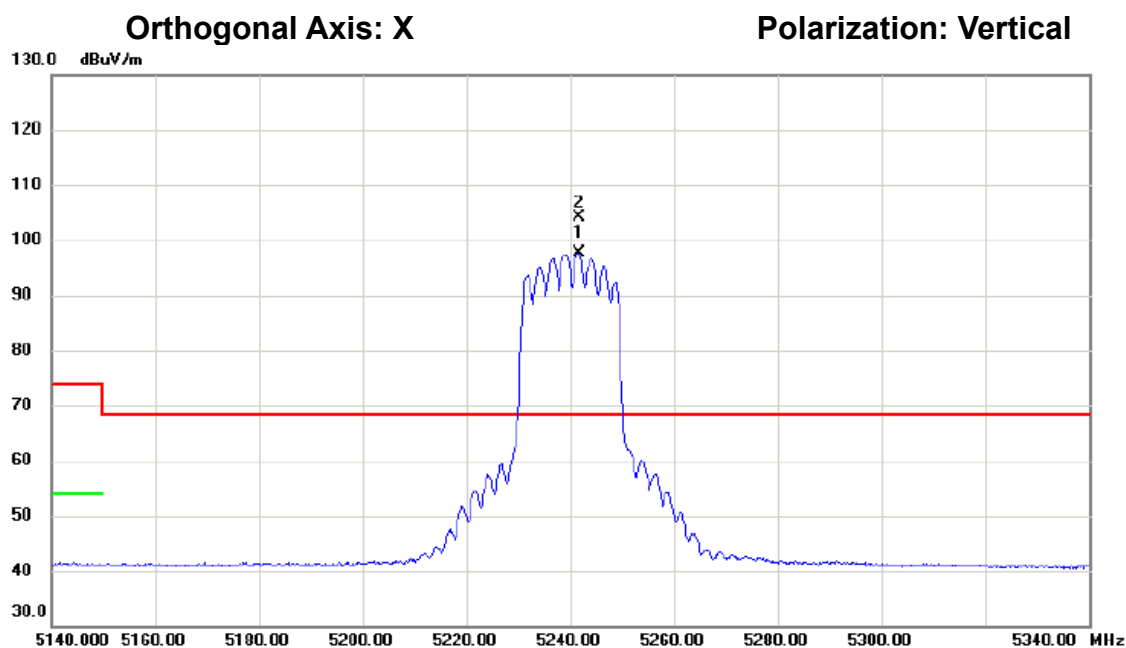

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5241.600	99.35	-1.66	97.69	68.30	29.39	AVG	主波訊號不予判定
2	*	5241.700	105.83	-1.65	104.18	68.30	35.88	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

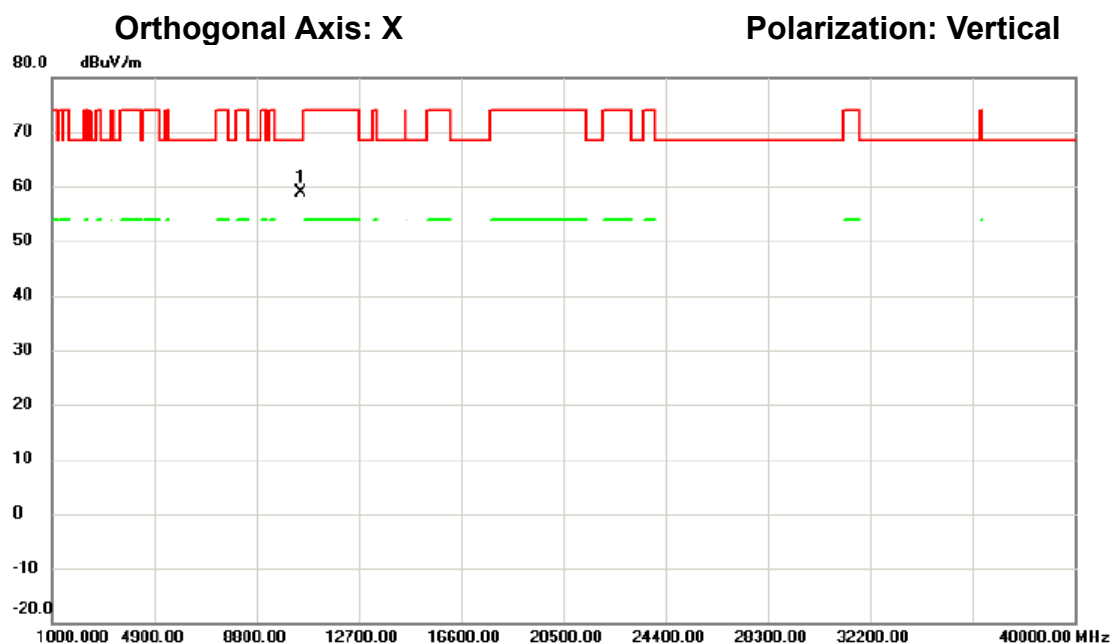

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.55	57.24	1.69	58.93	68.30	-9.37	peak	

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/09/07

環境濕度: 66%

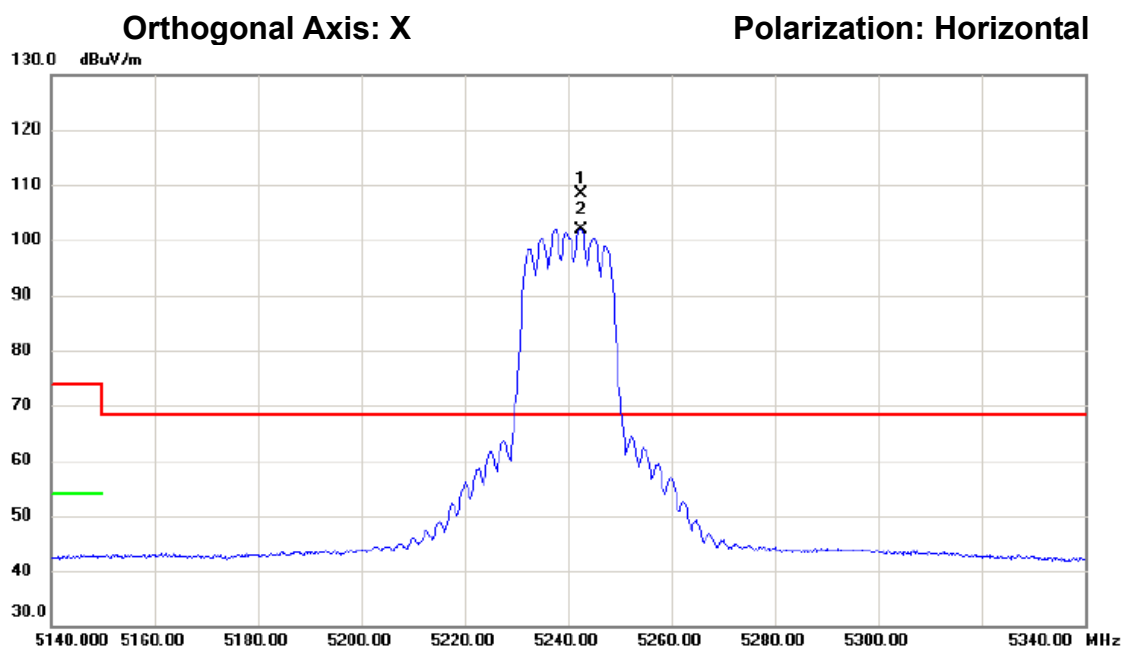

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5242.500	110.13	-1.65	108.48	68.30	40.18	peak	主波訊號不予判定
2	X	5242.500	103.61	-1.65	101.96	68.30	33.66	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

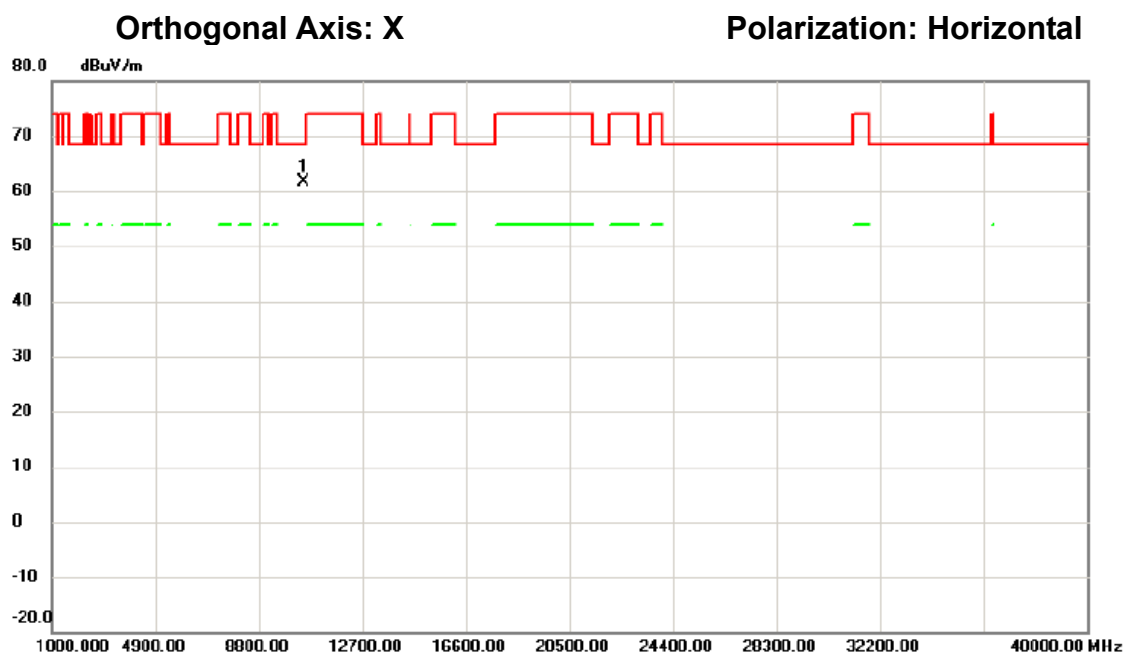

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10481.90	59.97	1.69	61.66	68.30	-6.64	peak	

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

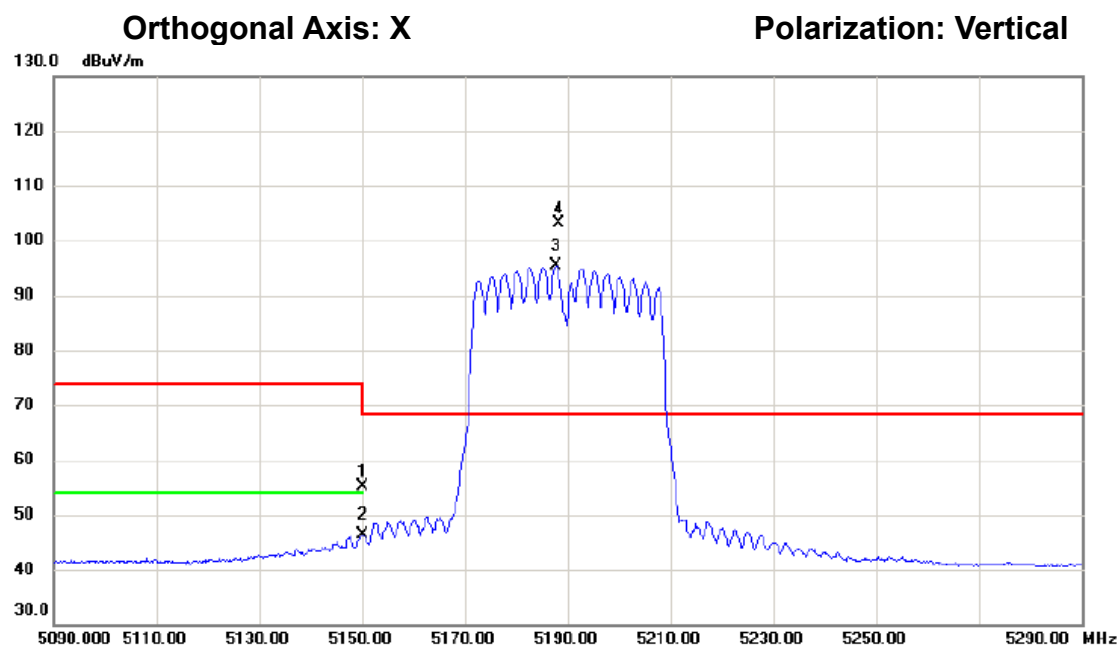

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	56.93	-1.71	55.22	74.00	-18.78	peak	
2		5150.000	47.97	-1.71	46.26	54.00	-7.74	AVG	
3	X	5187.800	97.07	-1.70	95.37	68.30	27.07	AVG	主波訊號不予判定
4	*	5188.200	104.77	-1.70	103.07	68.30	34.77	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

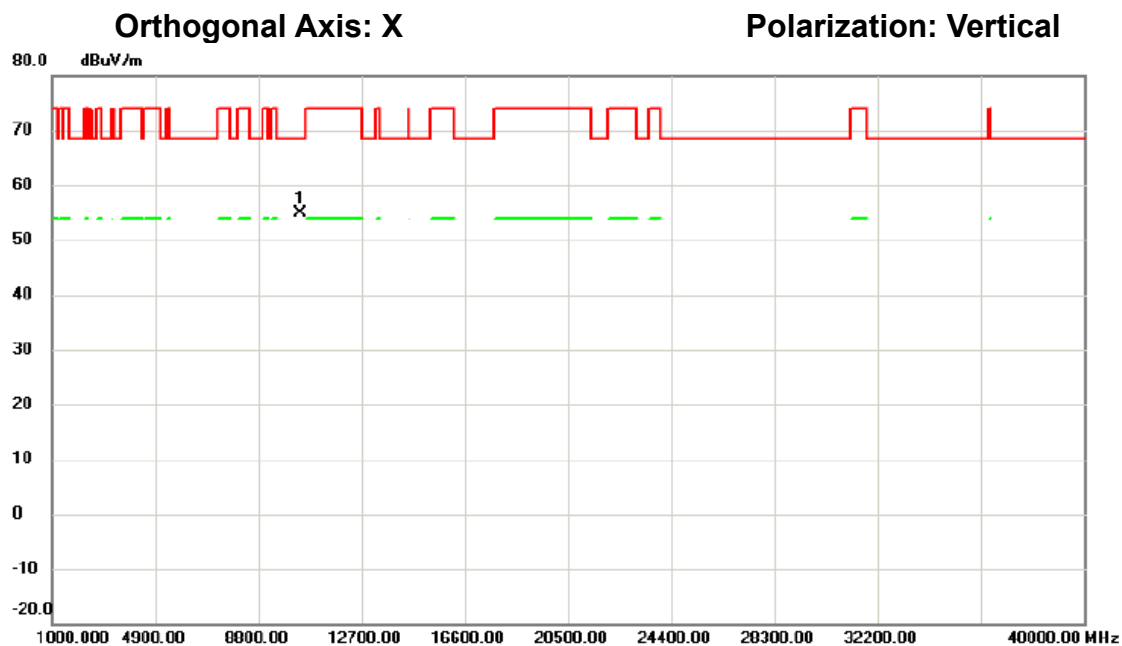

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10381.33	53.28	1.59	54.87	68.30	-13.43	peak	

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

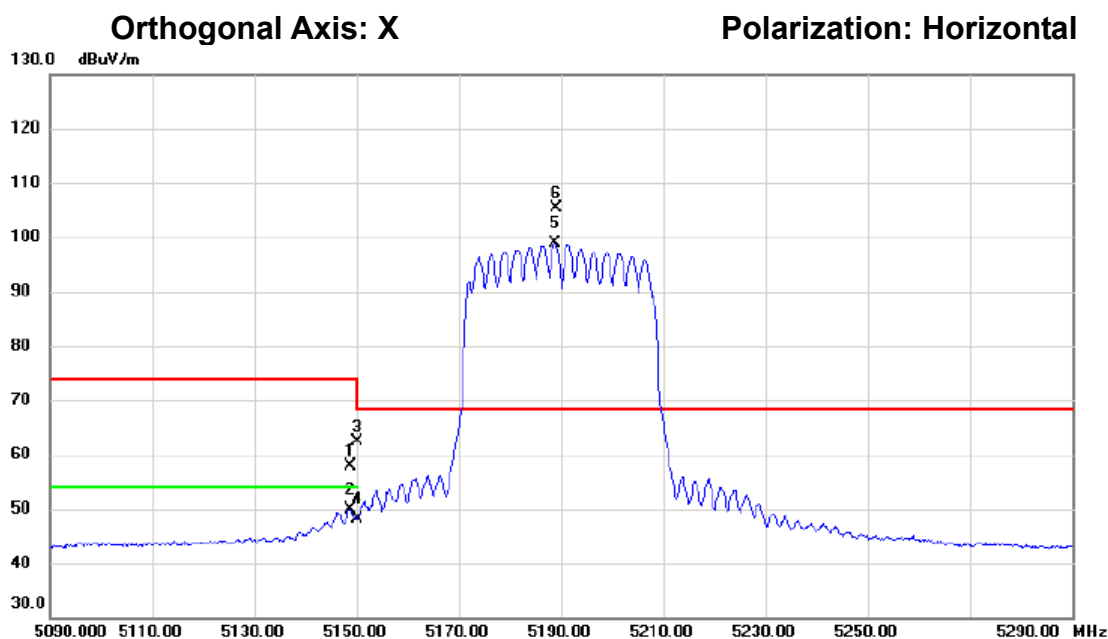

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5148.900	59.54	-1.72	57.82	74.00	-16.18	peak	
2		5148.900	51.61	-1.72	49.89	54.00	-4.11	AVG	
3		5150.000	64.01	-1.71	62.30	74.00	-11.70	peak	
4		5150.000	49.81	-1.71	48.10	54.00	-5.90	AVG	
5	X	5188.900	100.50	-1.70	98.80	68.30	30.50	AVG	主波訊號不予判定
6	*	5189.000	106.99	-1.70	105.29	68.30	36.99	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C


環境濕度: 66%

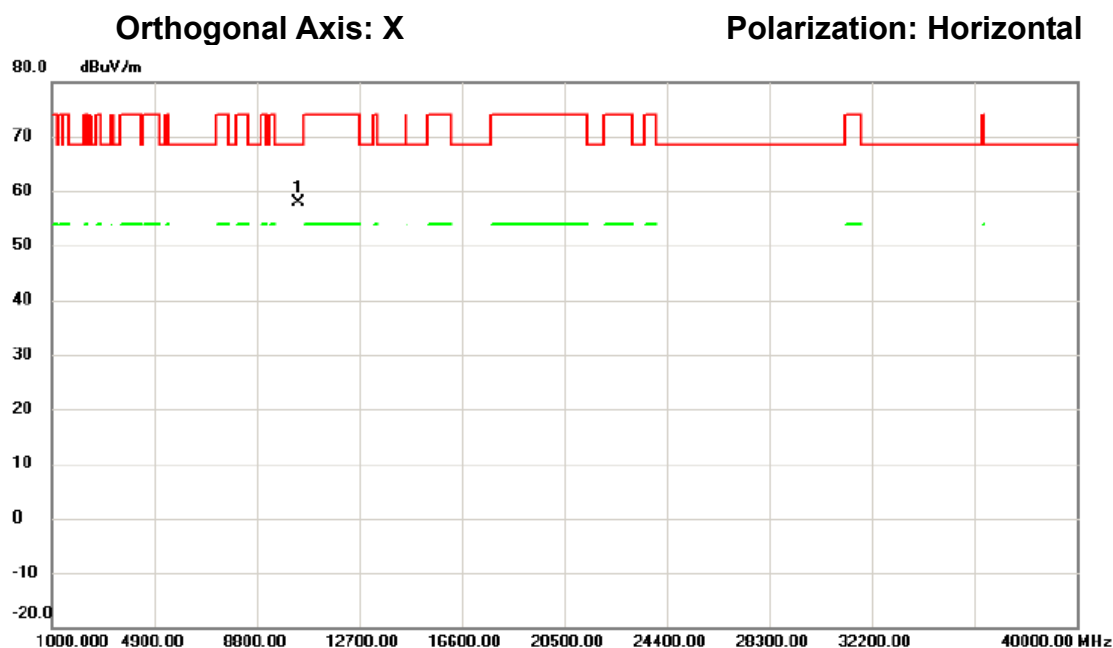

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10377.55	56.38	1.59	57.97	68.30	-10.33	peak	

測試頻道: IEEE 802.11n (HT40) /
5230 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/09/07
環境濕度: 66%

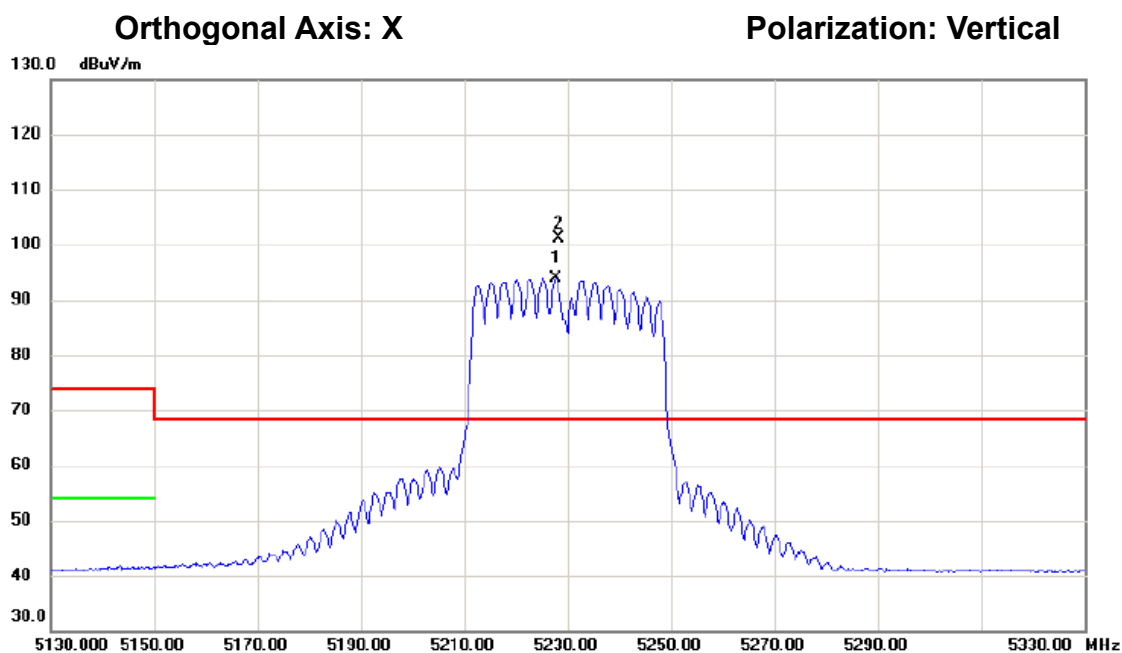

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5227.800	95.55	-1.66	93.89	68.30	25.59	AVG	主波訊號不予判定
2	*	5228.200	102.80	-1.66	101.14	68.30	32.84	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

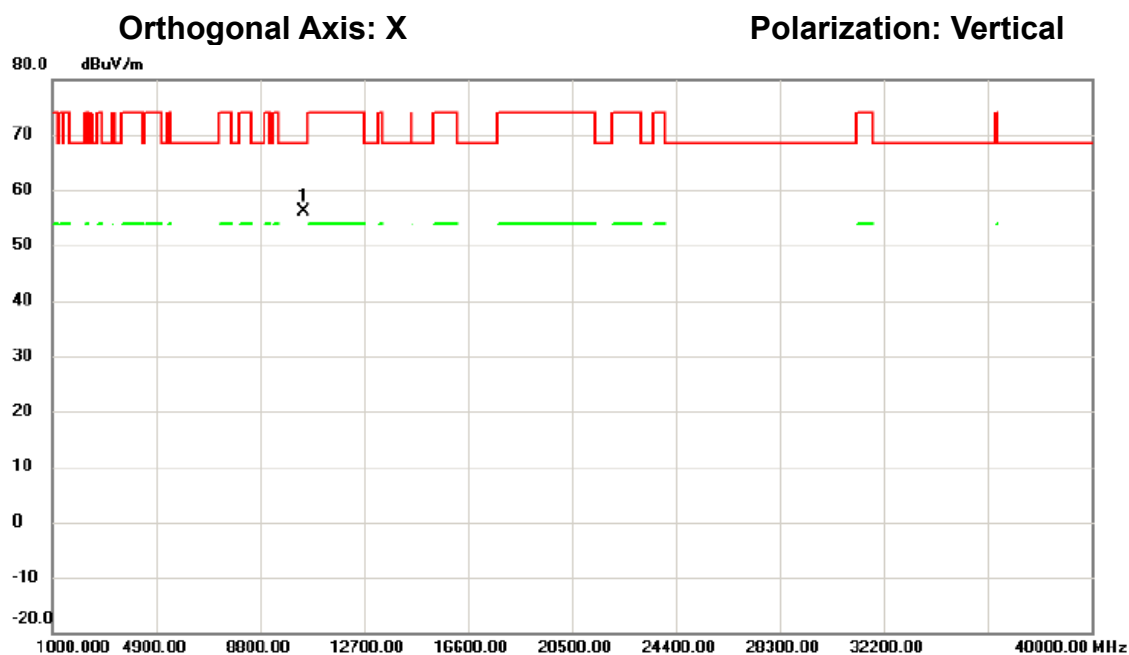

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.21	54.46	1.68	56.14	68.30	-12.16	peak	

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

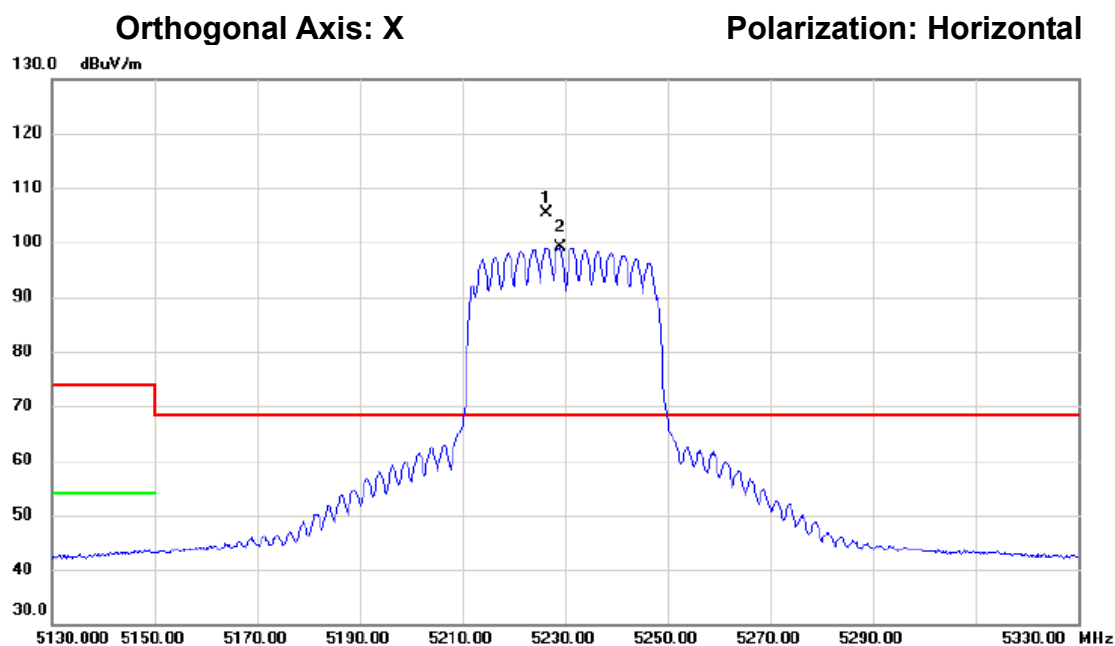

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5226.500	107.15	-1.66	105.49	68.30	37.19	peak	主波訊號不予判定
2	X	5229.000	100.79	-1.66	99.13	68.30	30.83	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

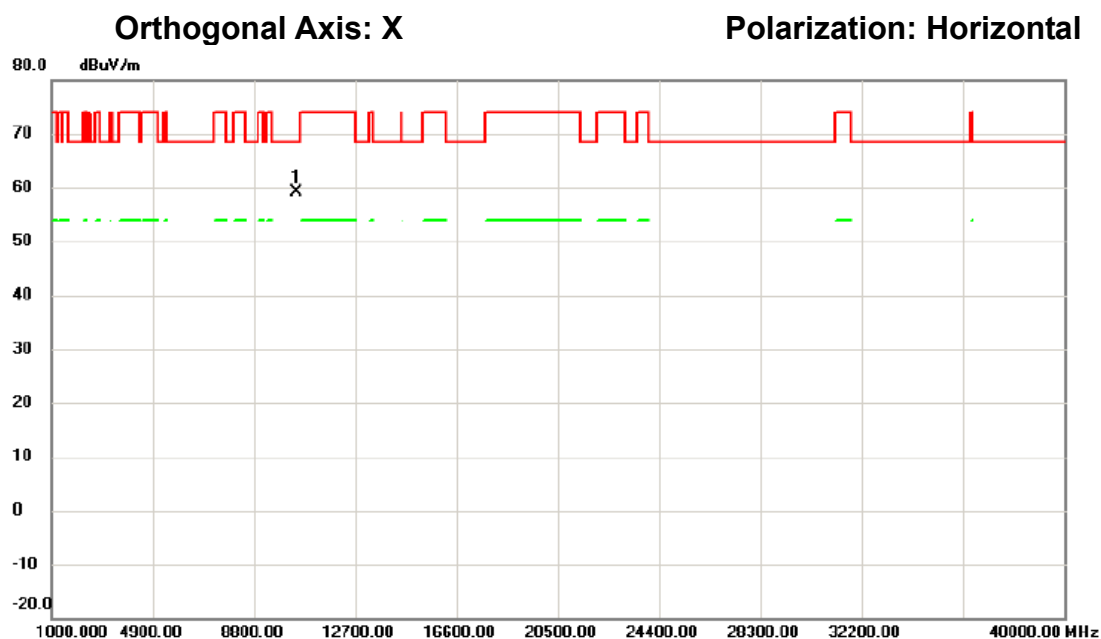

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.37	57.37	1.68	59.05	68.30	-9.25	peak	

測試頻道: IEEE 802.11a / 5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

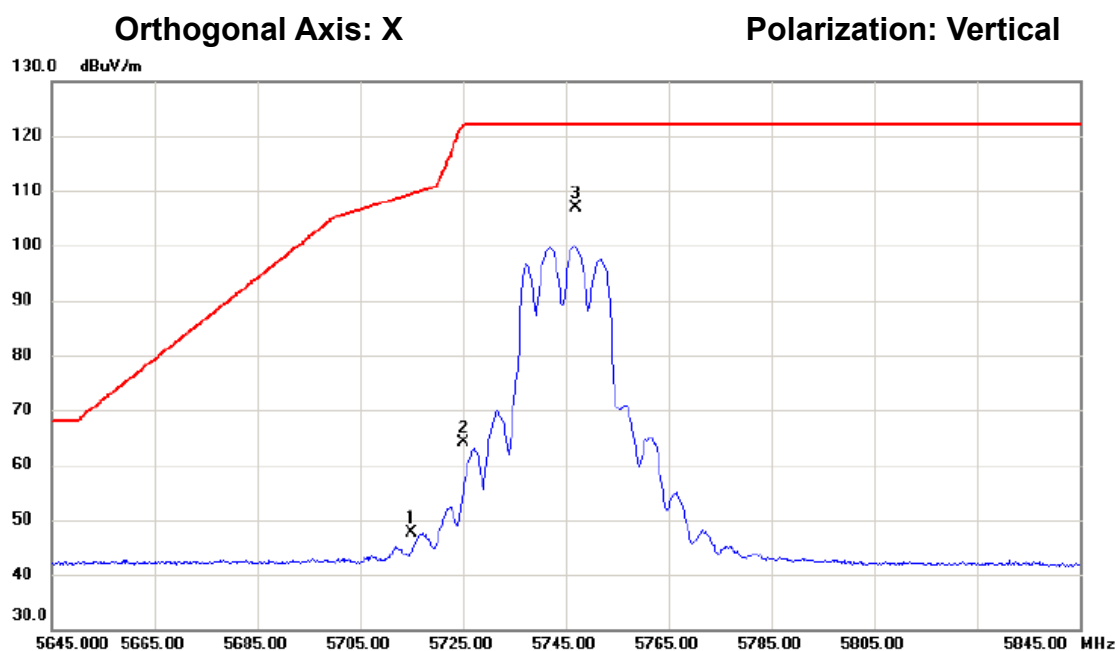

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	48.54	-0.92	47.62	109.40	-61.78	peak	
2		5725.000	64.97	-0.89	64.08	122.20	-58.12	peak	
3	*	5746.900	107.75	-0.83	106.92	122.20	-15.28	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

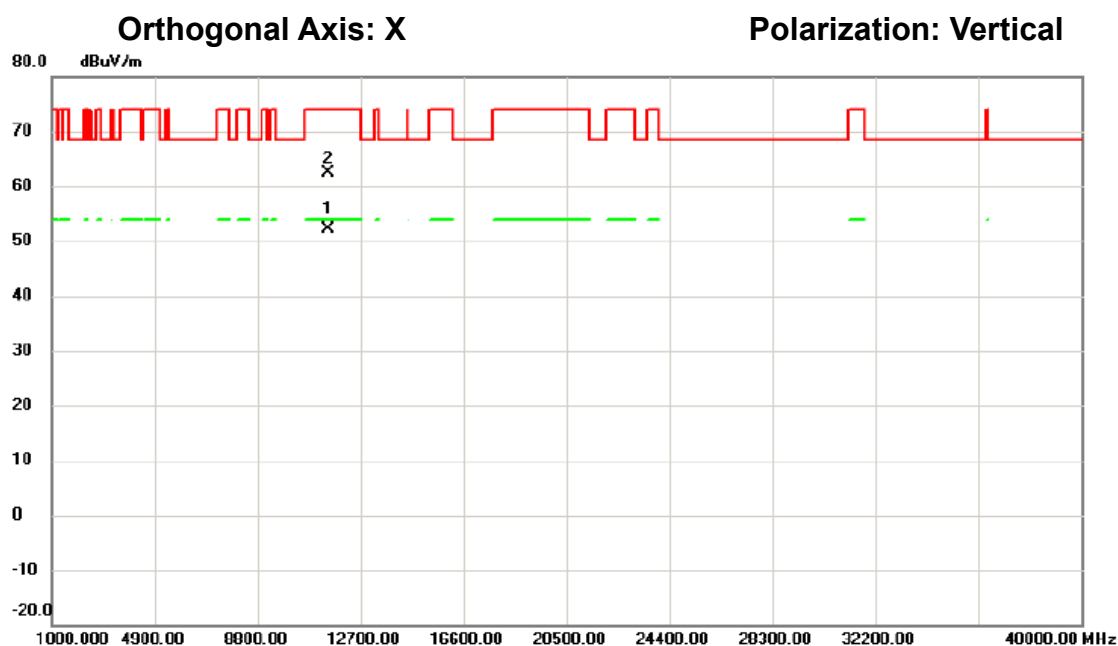

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11488.44	49.33	2.89	52.22	54.00	-1.78	AVG	
2		11488.84	59.38	2.89	62.27	74.00	-11.73	peak	

測試頻道: IEEE 802.11a / 5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

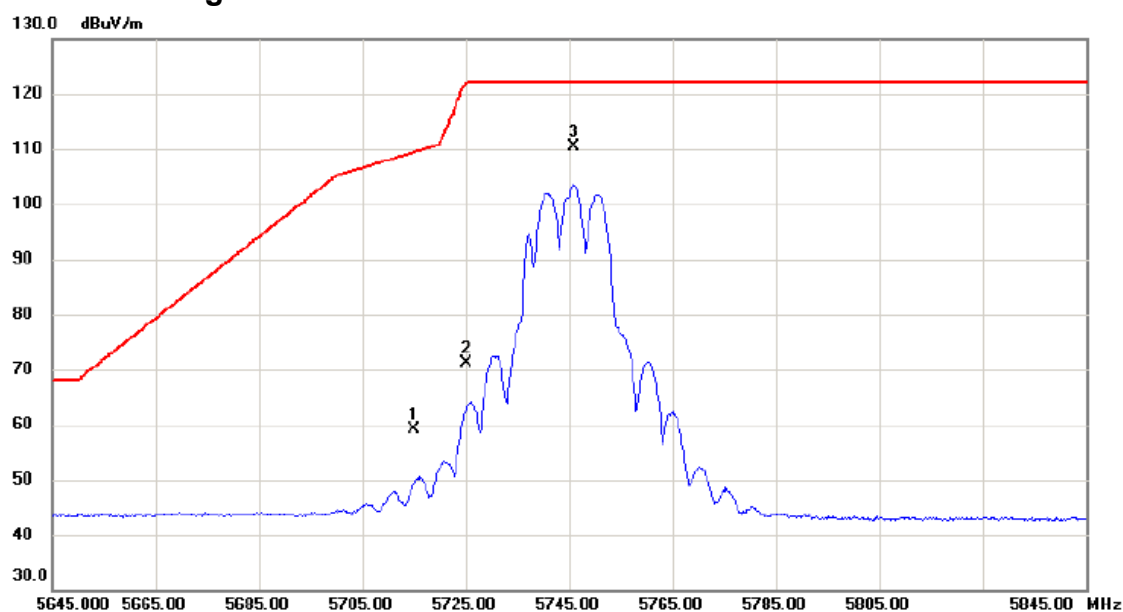

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	60.12	-0.92	59.20	109.40	-50.20	peak	
2		5725.000	72.03	-0.89	71.14	122.20	-51.06	peak	
3	*	5746.000	111.16	-0.84	110.32	122.20	-11.88	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

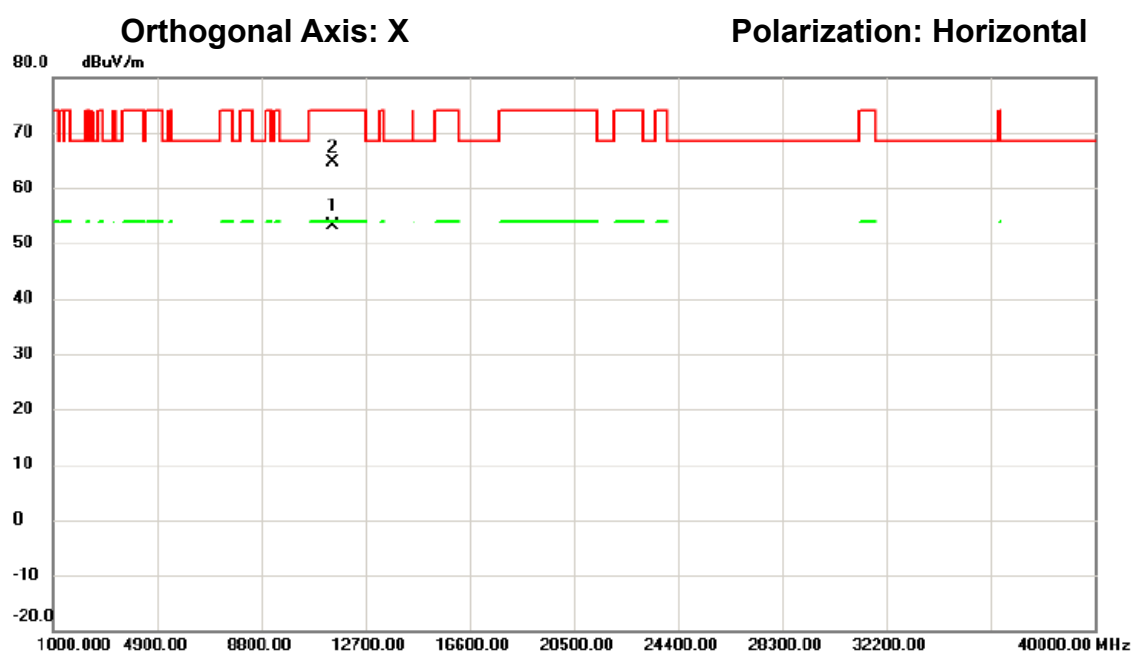

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11492.40	50.31	2.90	53.21	54.00	-0.79	AVG	
2		11492.40	61.67	2.90	64.57	74.00	-9.43	peak	

測試頻道: IEEE 802.11a / 5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

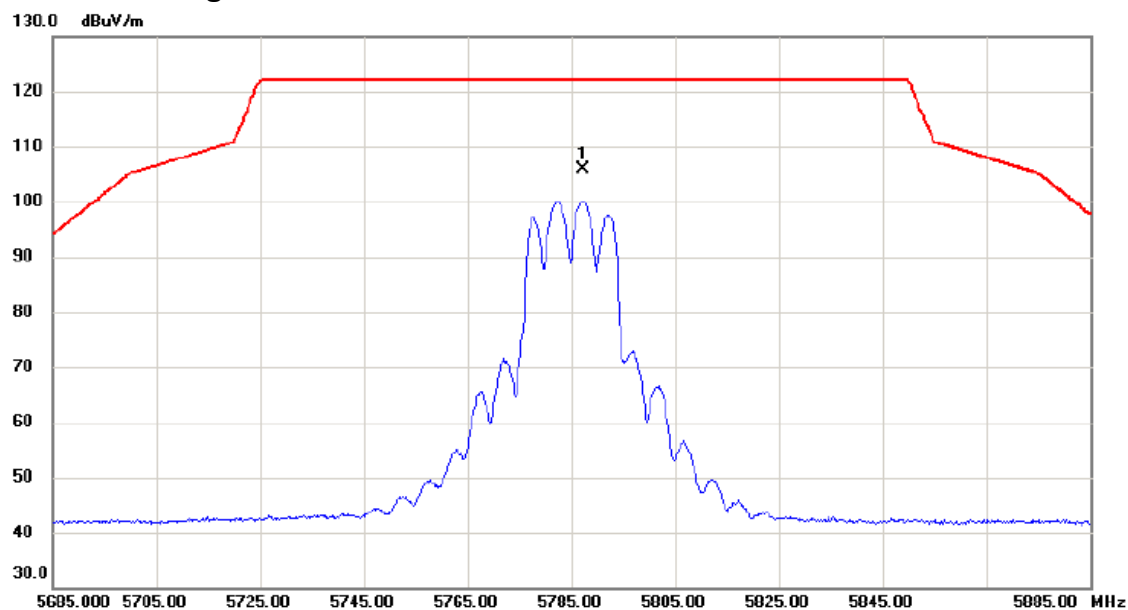

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5787.400	106.51	-0.73	105.78	122.20	-16.42	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/09/07
環境濕度: 66%

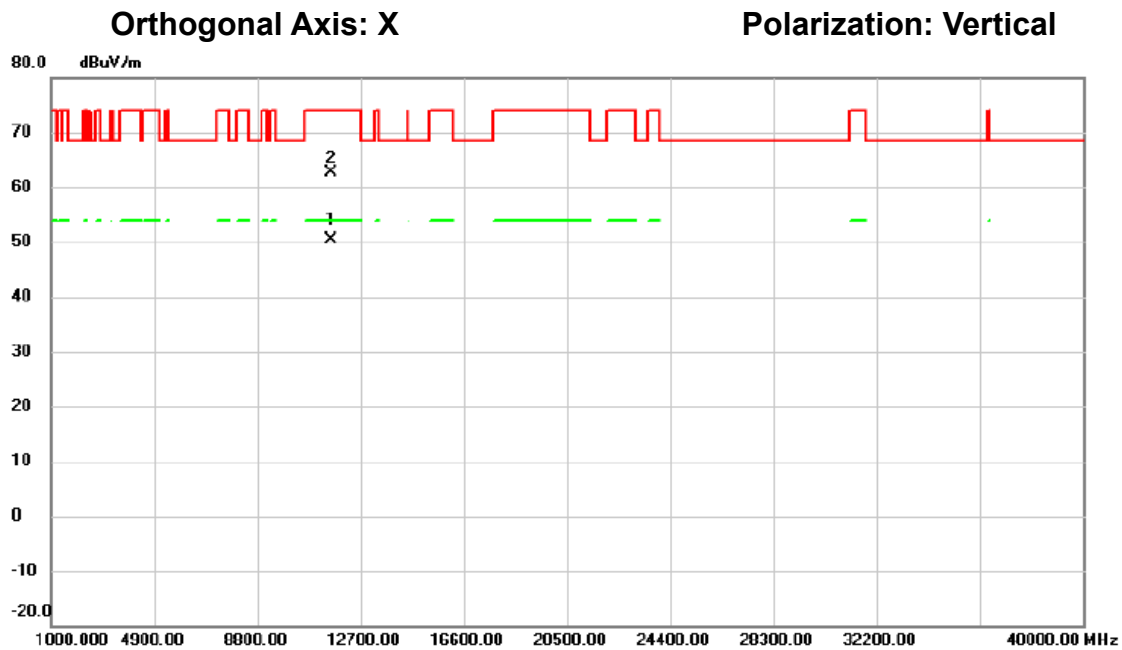

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11571.38	47.62	2.71	50.33	54.00	-3.67	AVG	
2		11572.18	59.85	2.71	62.56	74.00	-11.44	peak	

測試頻道: IEEE 802.11a / 5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

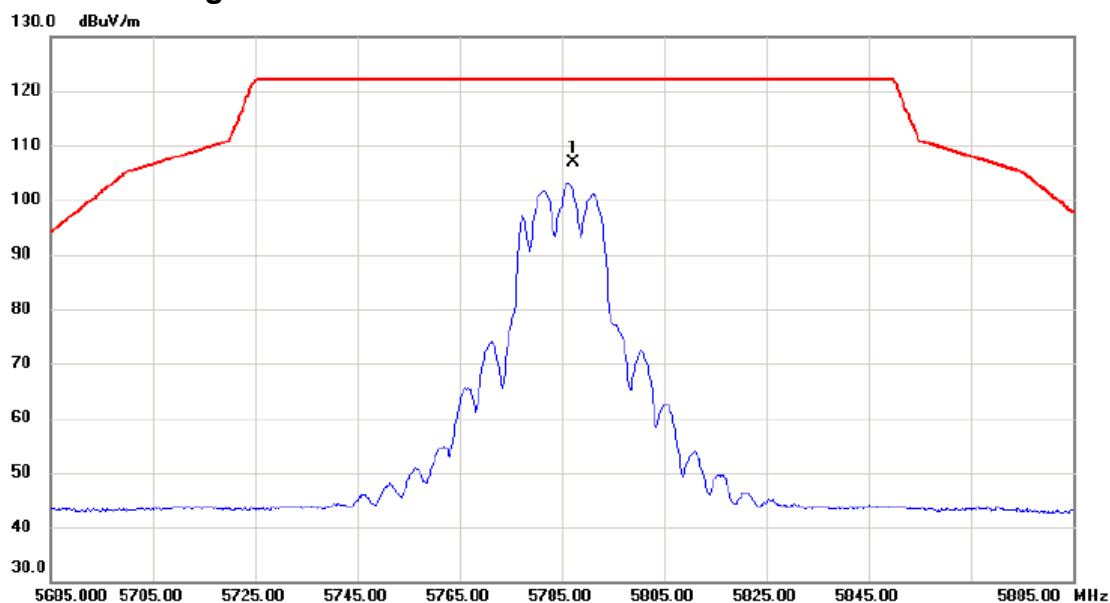

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5787.400	107.73	-0.73	107.00	122.20	-15.20	peak	主波訊號不予判定

測試頻道: IEEE 802.11a / 5785 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/09/07
環境濕度: 66%

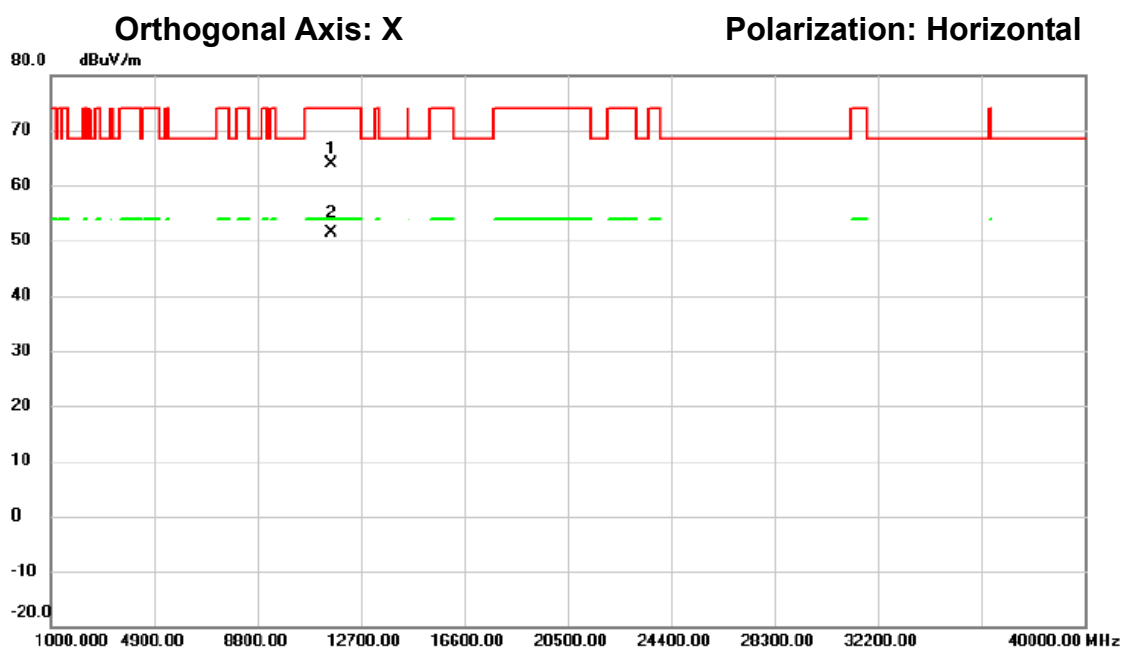

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11572.16	61.08	2.71	63.79	74.00	-10.21	peak	
2	*	11572.46	48.79	2.71	51.50	54.00	-2.50	AVG	

測試頻道: IEEE 802.11a / 5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

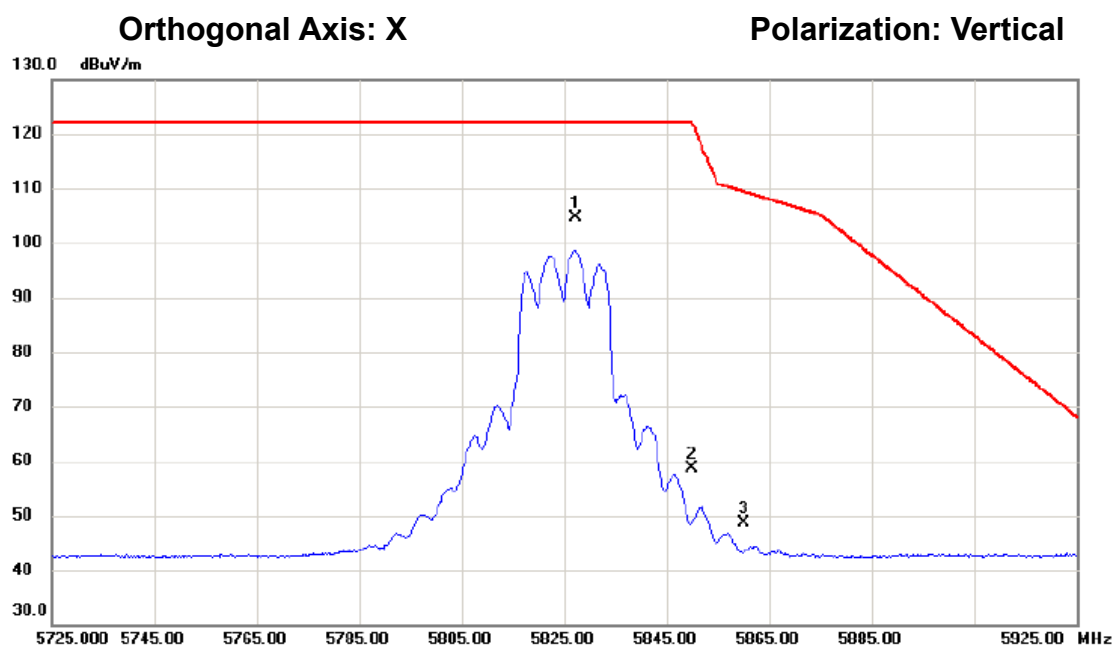

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5827.300	105.19	-0.63	104.56	122.20	-17.64	peak	主波訊號不予判定
2		5850.000	59.13	-0.57	58.56	122.20	-63.64	peak	
3		5860.000	49.11	-0.54	48.57	109.40	-60.83	peak	

測試頻道: IEEE 802.11a / 5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C


環境濕度: 66%

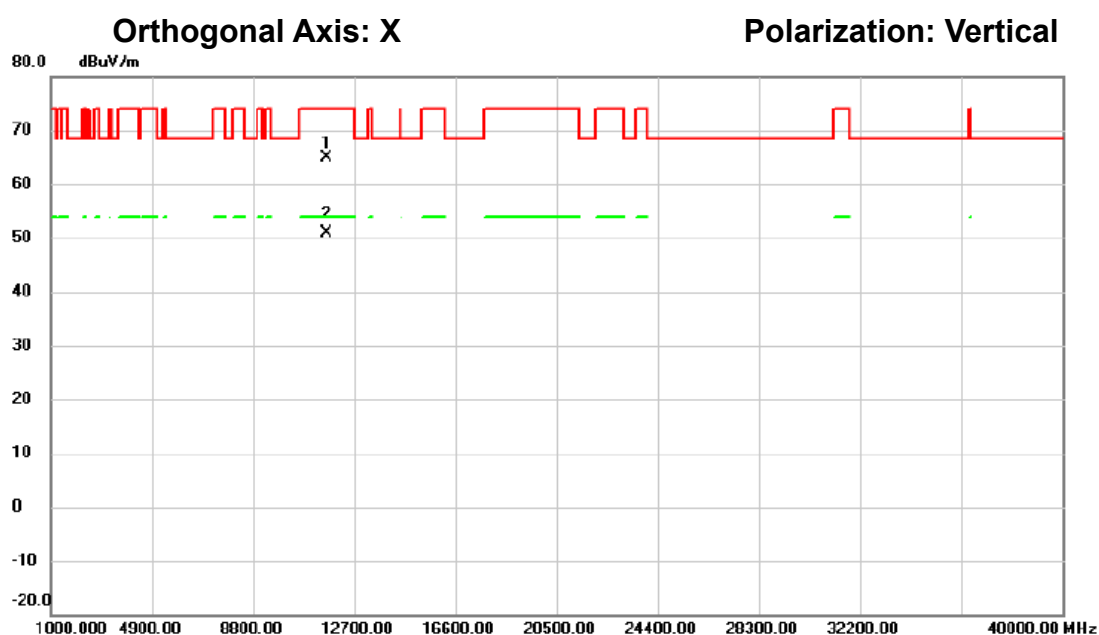

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11652.15	62.30	2.50	64.80	74.00	-9.20	peak	
2	*	11652.21	48.43	2.50	50.93	54.00	-3.07	AVG	

測試頻道: IEEE 802.11a / 5825 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/09/07
 環境濕度: 66%

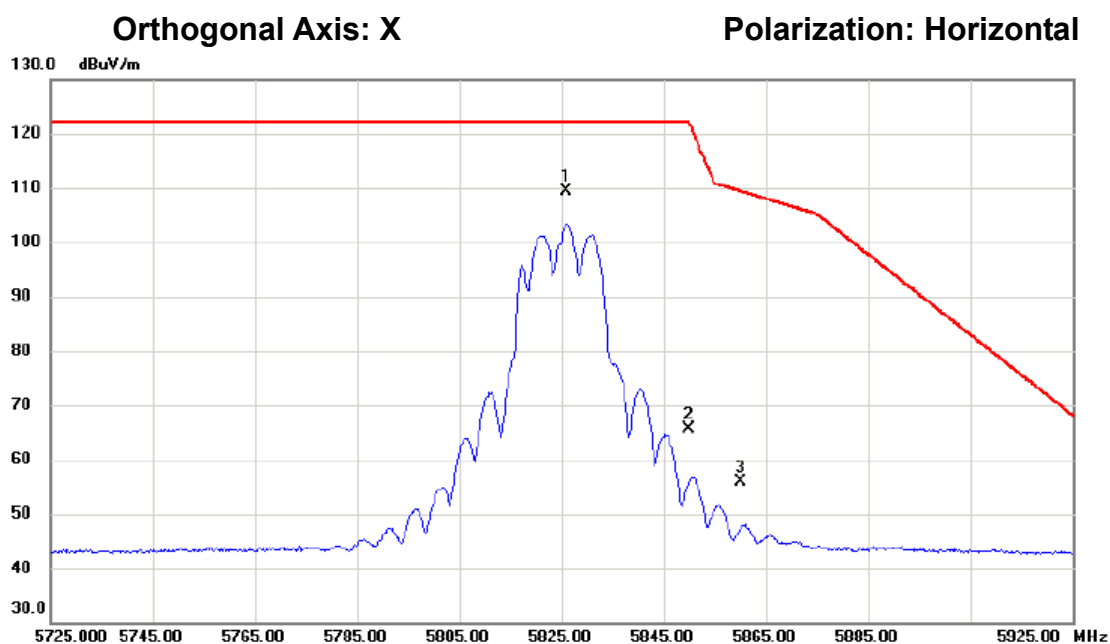

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5825.900	110.07	-0.63	109.44	122.20	-12.76	peak	主波訊號不予判定
2		5850.000	66.10	-0.57	65.53	122.20	-56.67	peak	
3		5860.000	56.31	-0.54	55.77	109.40	-53.63	peak	

測試頻道: IEEE 802.11a / 5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

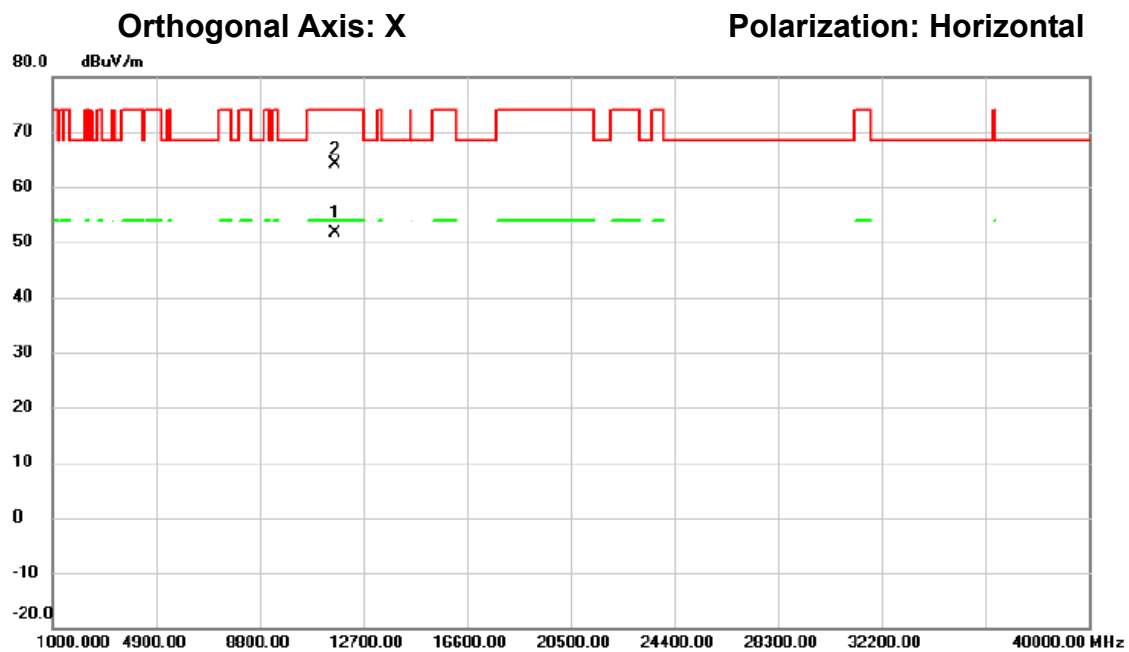

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11648.66	49.12	2.50	51.62	54.00	-2.38	AVG	
2		11648.74	61.67	2.50	64.17	74.00	-9.83	peak	

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

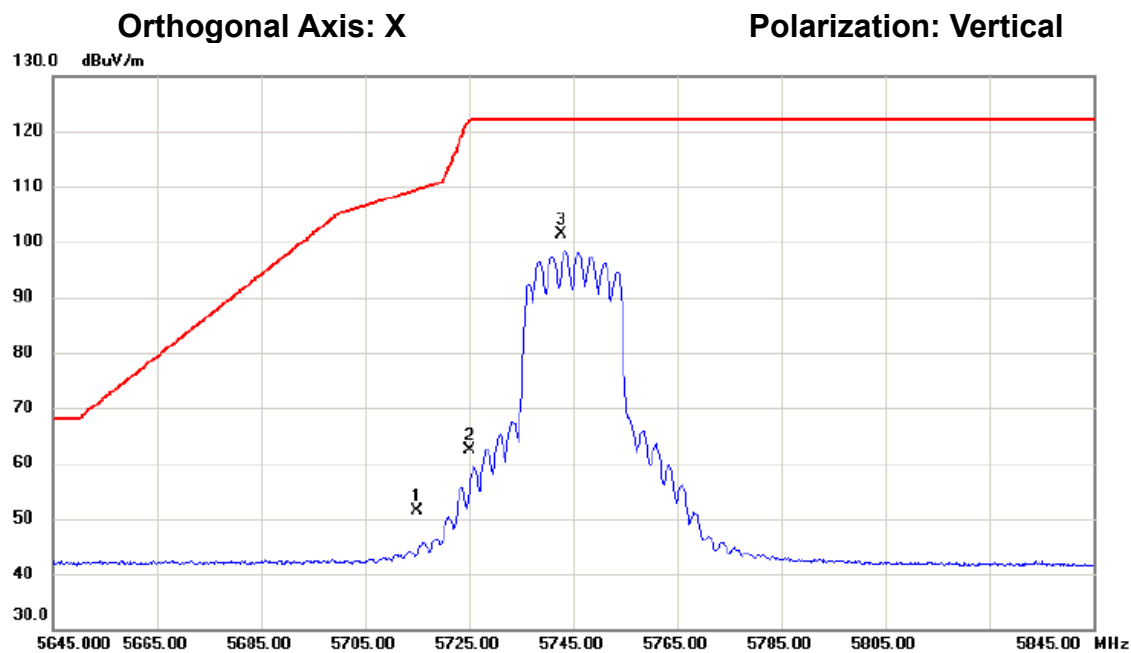

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	52.38	-0.92	51.46	109.40	-57.94	peak	
2		5725.000	63.16	-0.89	62.27	122.20	-59.93	peak	
3	*	5742.700	102.31	-0.84	101.47	122.20	-20.73	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) / 5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

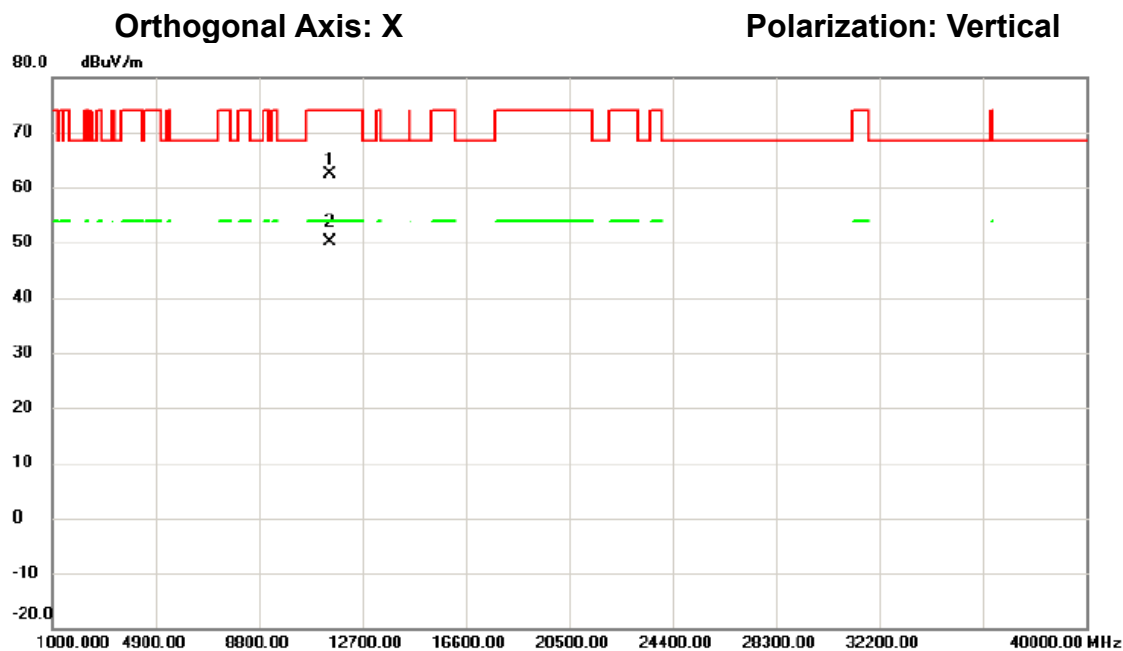

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11487.60	59.46	2.89	62.35	74.00	-11.65	peak	
2	*	11490.35	47.20	2.89	50.09	54.00	-3.91	AVG	

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/09/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

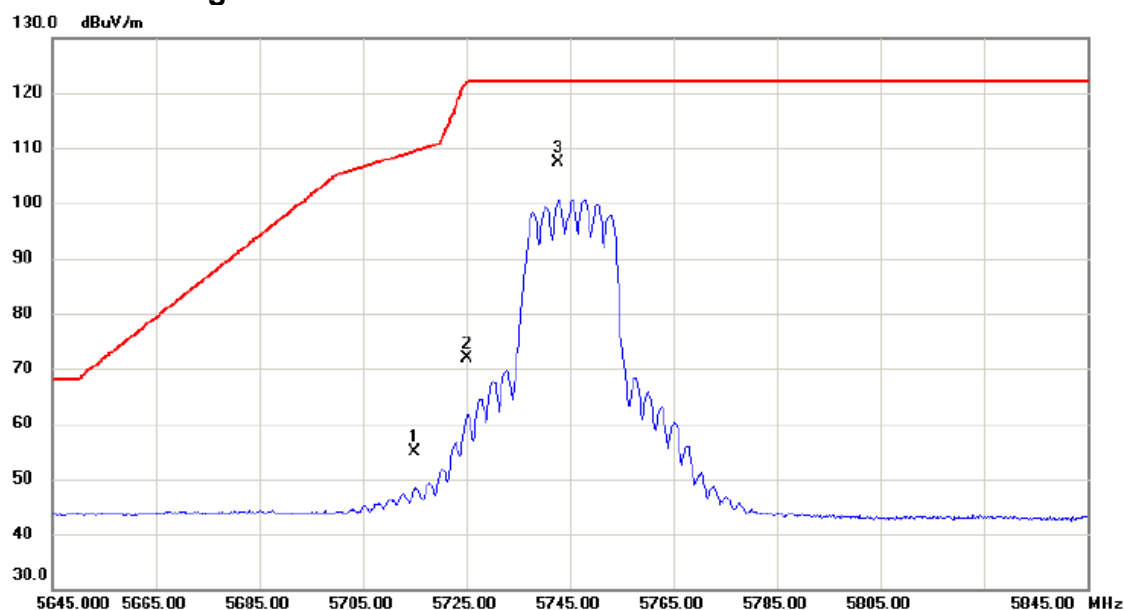

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	55.76	-0.92	54.84	109.40	-54.56	peak	
2		5725.000	72.84	-0.89	71.95	122.20	-50.25	peak	
3	*	5742.700	108.15	-0.84	107.31	122.20	-14.89	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

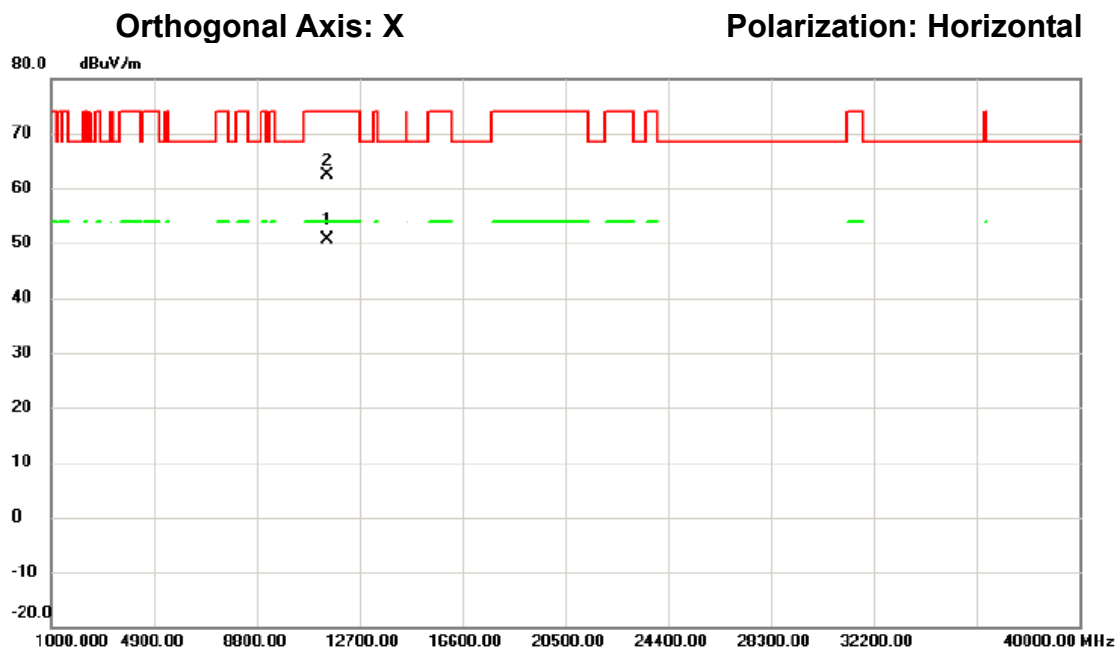

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11489.16	47.75	2.89	50.64	54.00	-3.36	AVG	
2		11491.51	59.44	2.90	62.34	74.00	-11.66	peak	

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

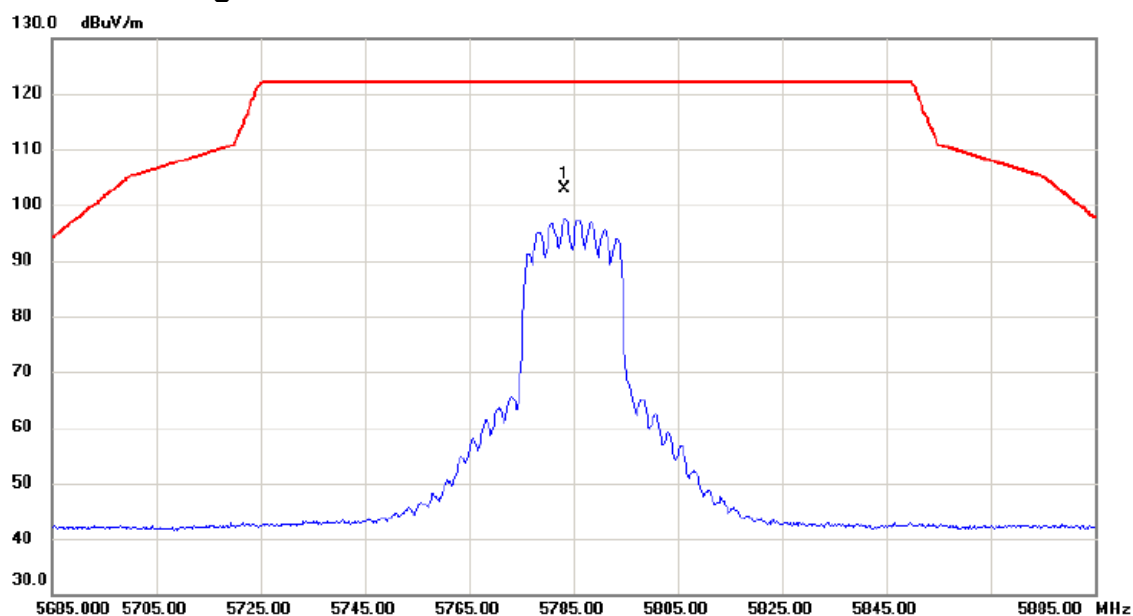

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5783.400	103.74	-0.74	103.00	122.20	-19.20	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

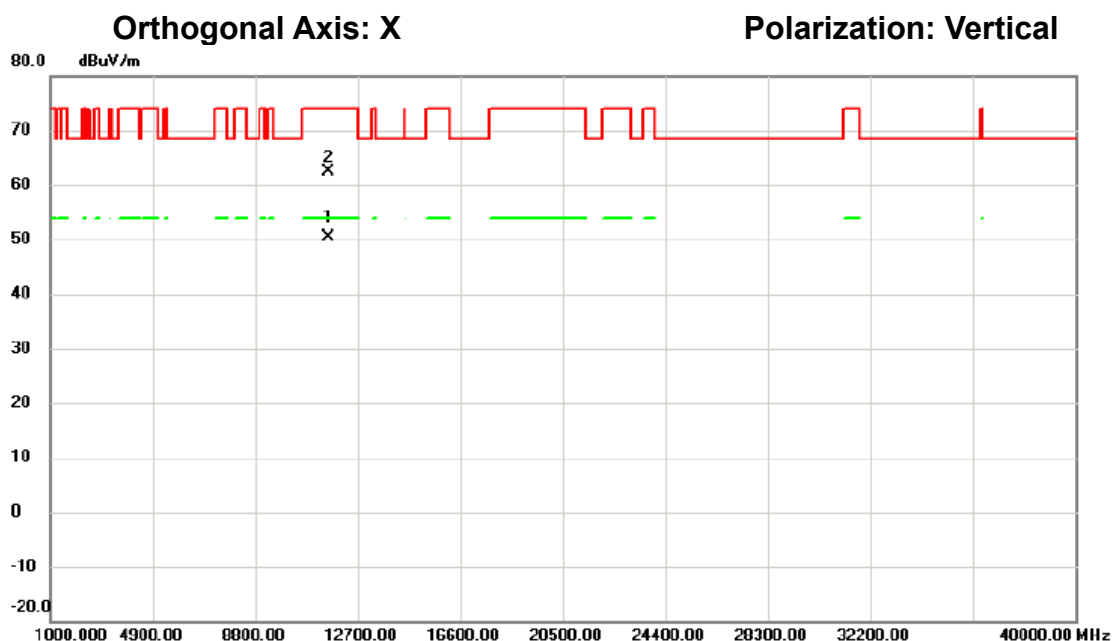

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11570.73	47.58	2.71	50.29	54.00	-3.71	AVG	
2		11570.80	59.76	2.71	62.47	74.00	-11.53	peak	

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

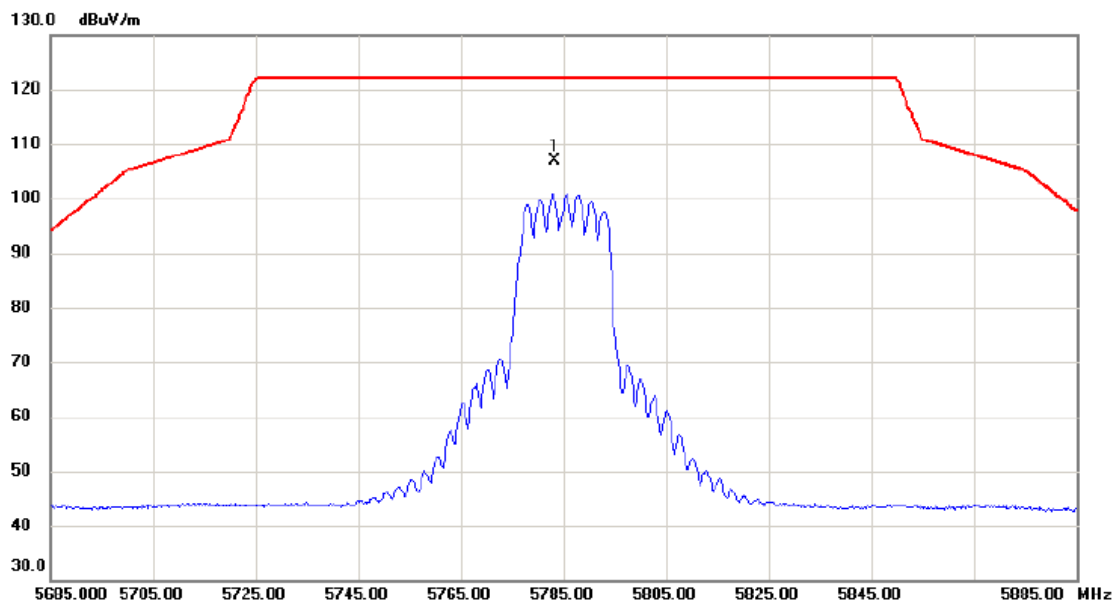

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5783.400	107.61	-0.74	106.87	122.20	-15.33	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

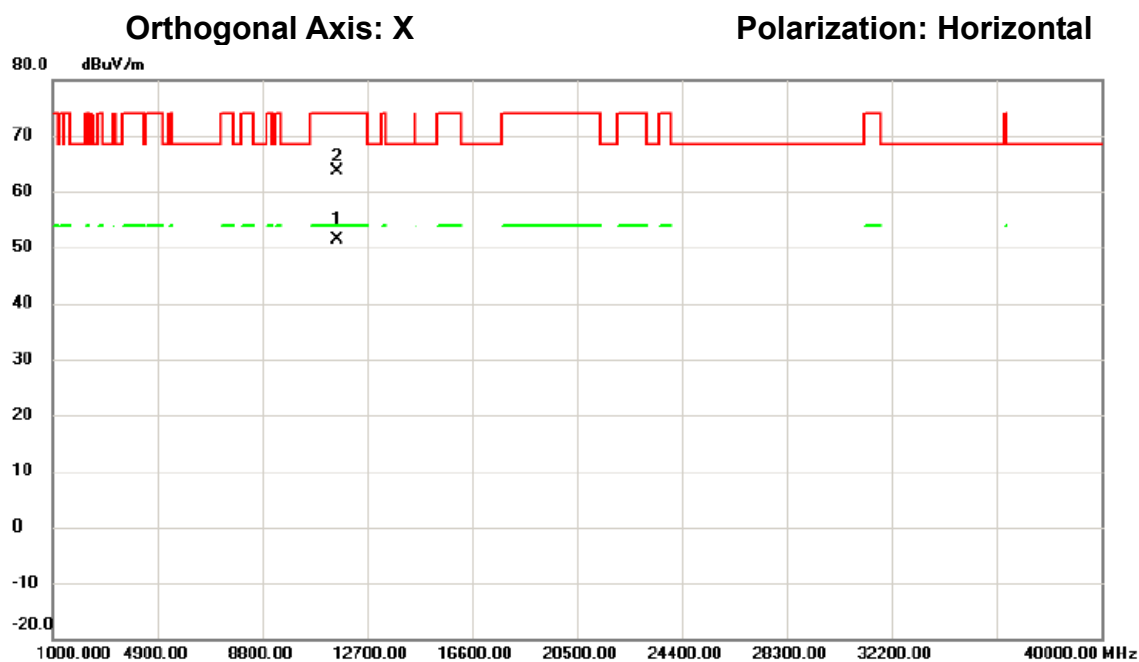

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11568.88	48.77	2.73	51.50	54.00	-2.50	AVG	
2		11571.21	61.01	2.71	63.72	74.00	-10.28	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

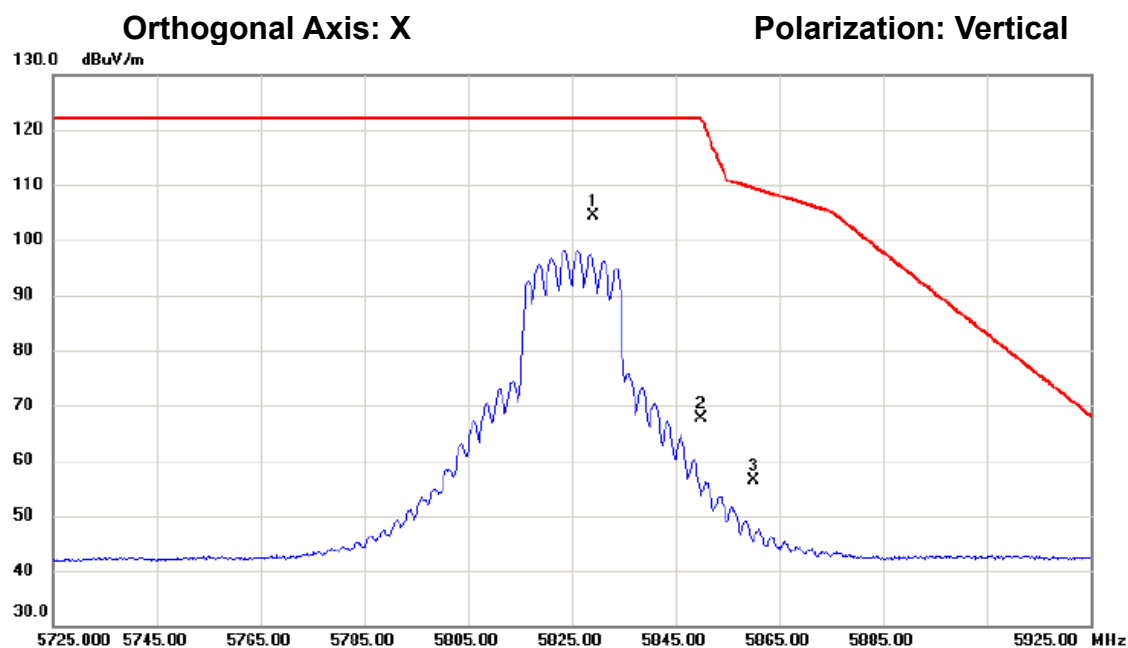

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5829.000	105.03	-0.62	104.41	122.20	-17.79	peak	主波訊號不予判定
2		5850.000	68.30	-0.57	67.73	122.20	-54.47	peak	
3		5860.000	56.89	-0.54	56.35	109.40	-53.05	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

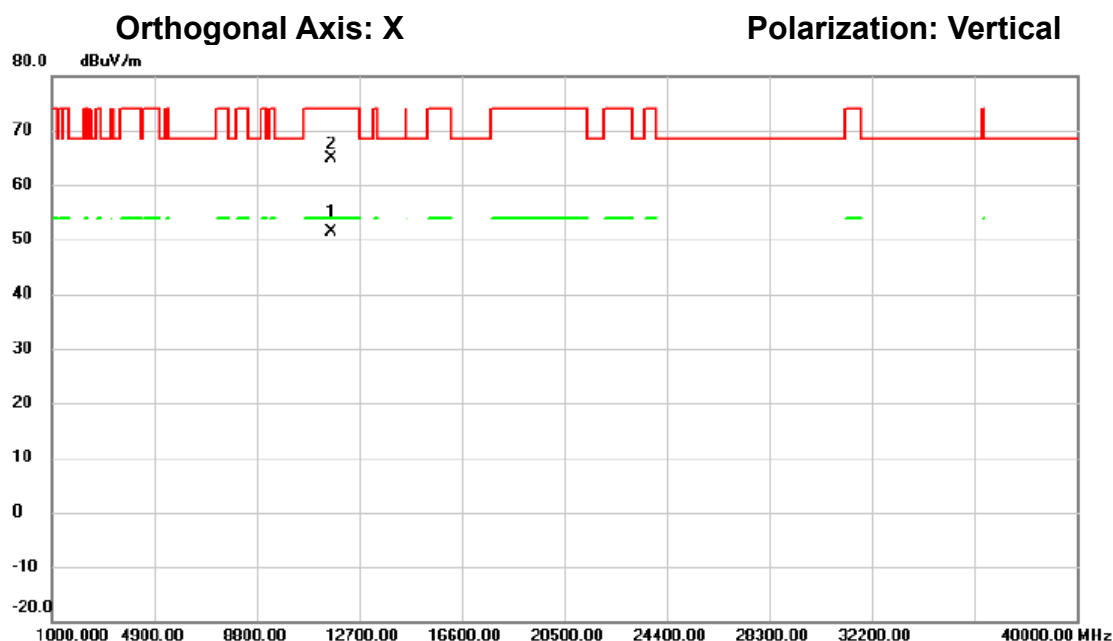

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11650.58	49.00	2.50	51.50	54.00	-2.50	AVG	
2		11650.76	62.36	2.50	64.86	74.00	-9.14	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

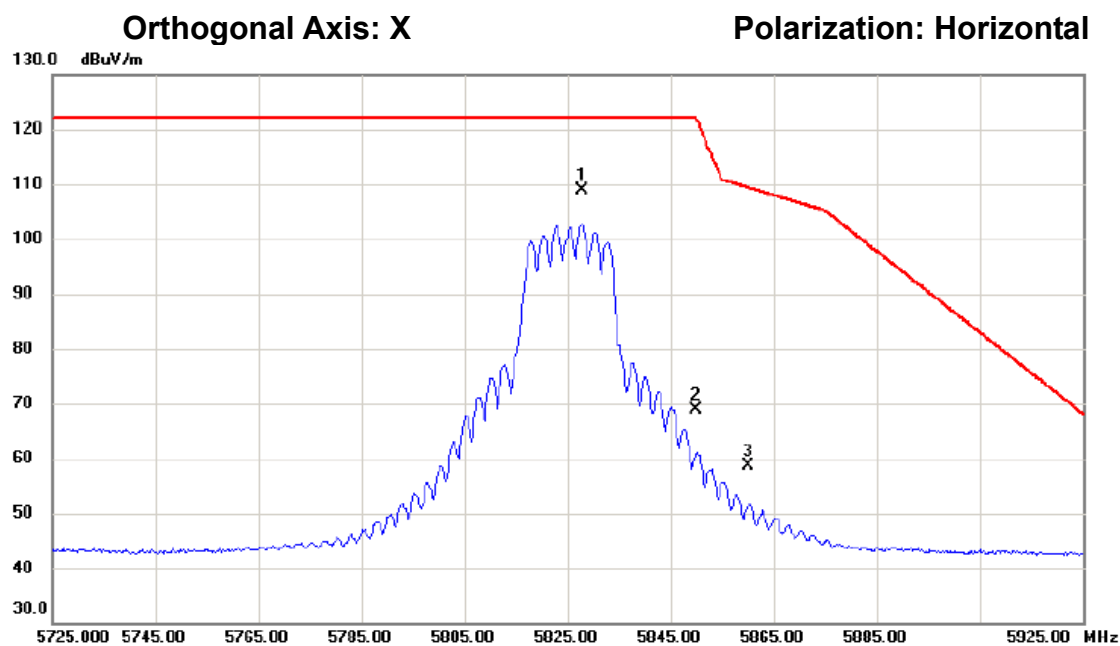

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5827.800	109.63	-0.63	109.00	122.20	-13.20	peak	主波訊號不予判定
2		5850.000	69.48	-0.57	68.91	122.20	-53.29	peak	
3		5860.000	59.17	-0.54	58.63	109.40	-50.77	peak	

測試頻道: IEEE 802.11n (HT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

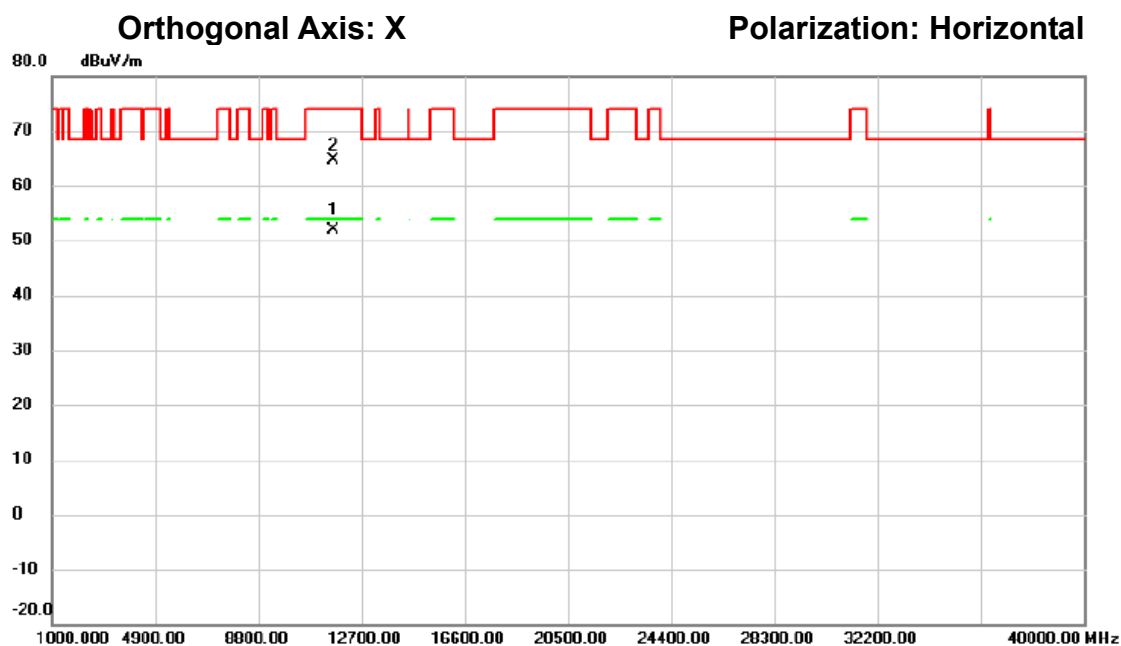

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11649.25	49.43	2.50	51.93	54.00	-2.07	AVG	
2		11651.52	62.21	2.50	64.71	74.00	-9.29	peak	

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

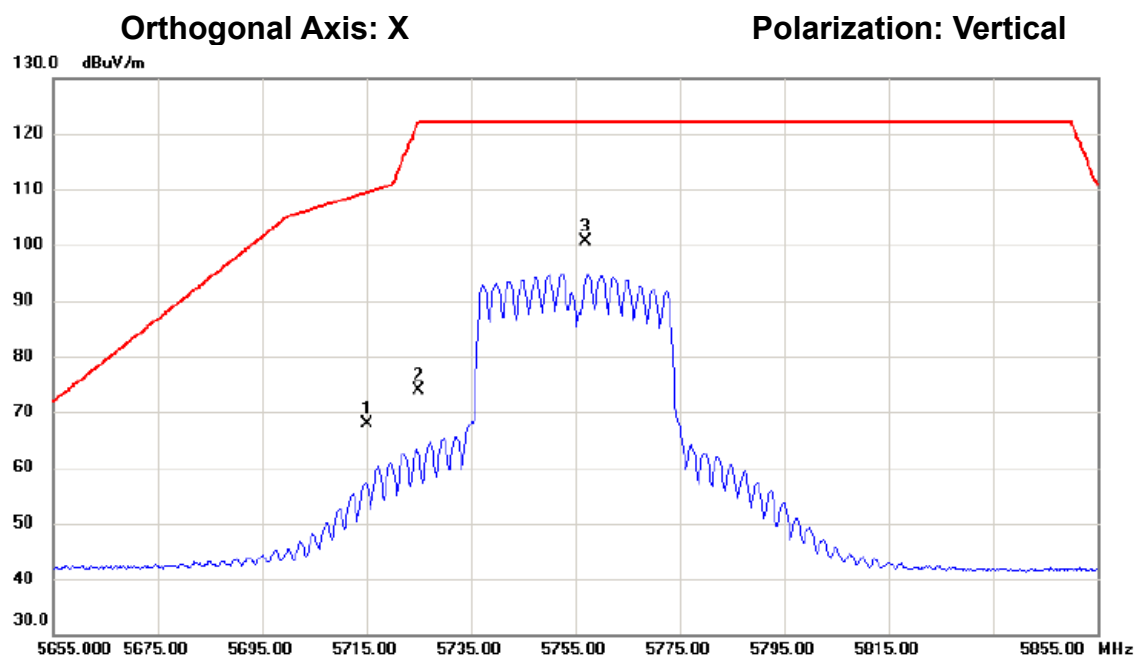

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	68.69	-0.92	67.77	109.40	-41.63	peak	
2		5725.000	74.84	-0.89	73.95	122.20	-48.25	peak	
3	*	5757.000	101.40	-0.81	100.59	122.20	-21.61	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C


環境濕度: 66%

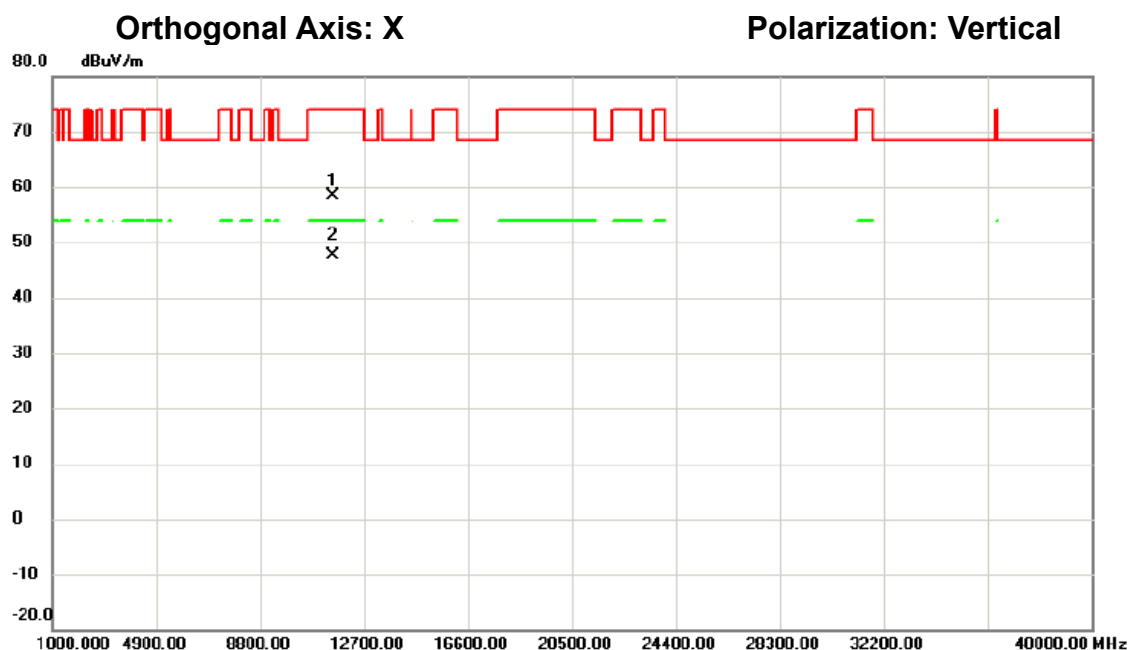

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.19	55.57	2.88	58.45	74.00	-15.55	peak	
2	*	11510.41	44.79	2.88	47.67	54.00	-6.33	AVG	

測試頻道: IEEE 802.11n (HT40) /
5755 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/09/07
環境濕度: 66%

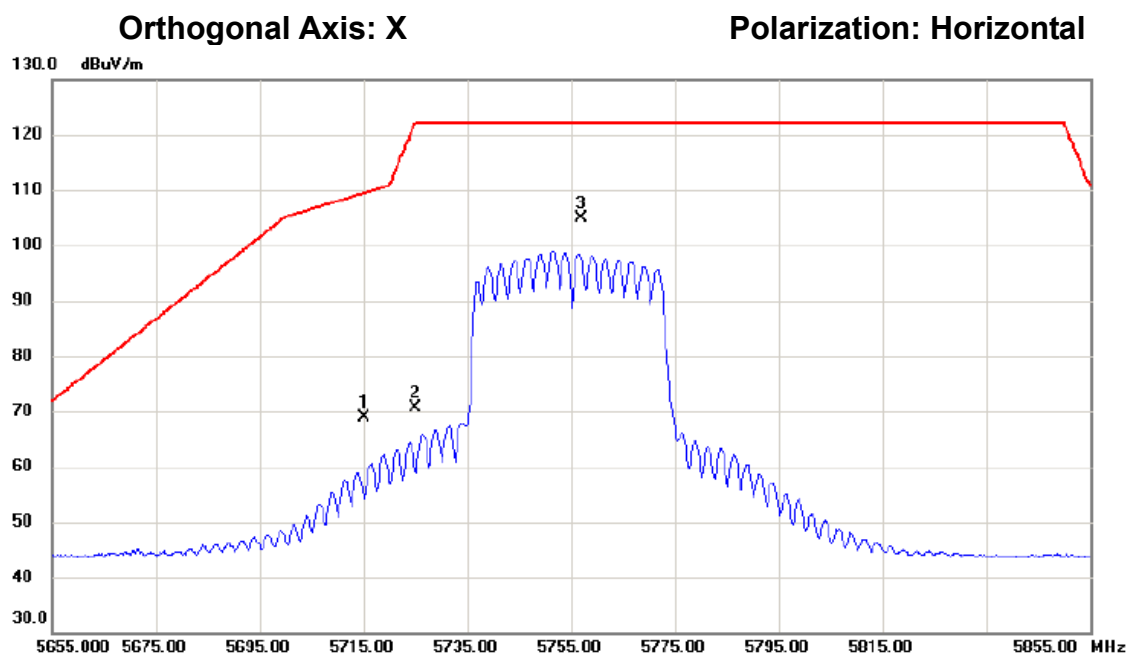

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	69.79	-0.92	68.87	109.40	-40.53	peak	
2		5725.000	71.50	-0.89	70.61	122.20	-51.59	peak	
3	*	5757.000	105.74	-0.81	104.93	122.20	-17.27	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

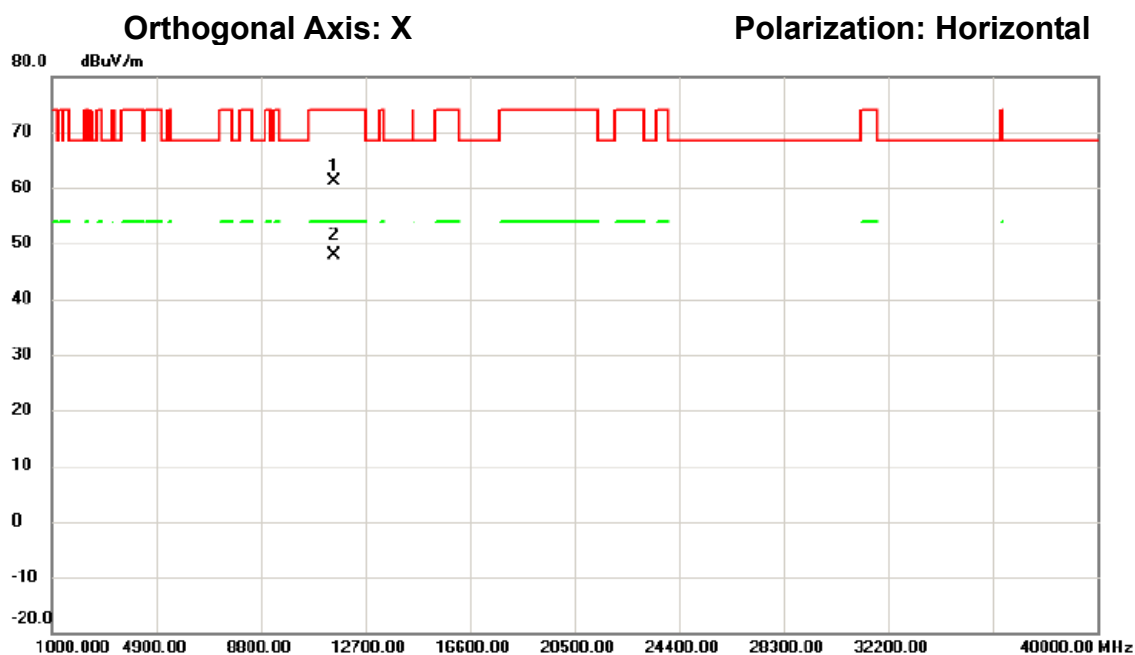

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11511.30	58.32	2.88	61.20	74.00	-12.80	peak	
2	*	11511.35	45.07	2.88	47.95	54.00	-6.05	AVG	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

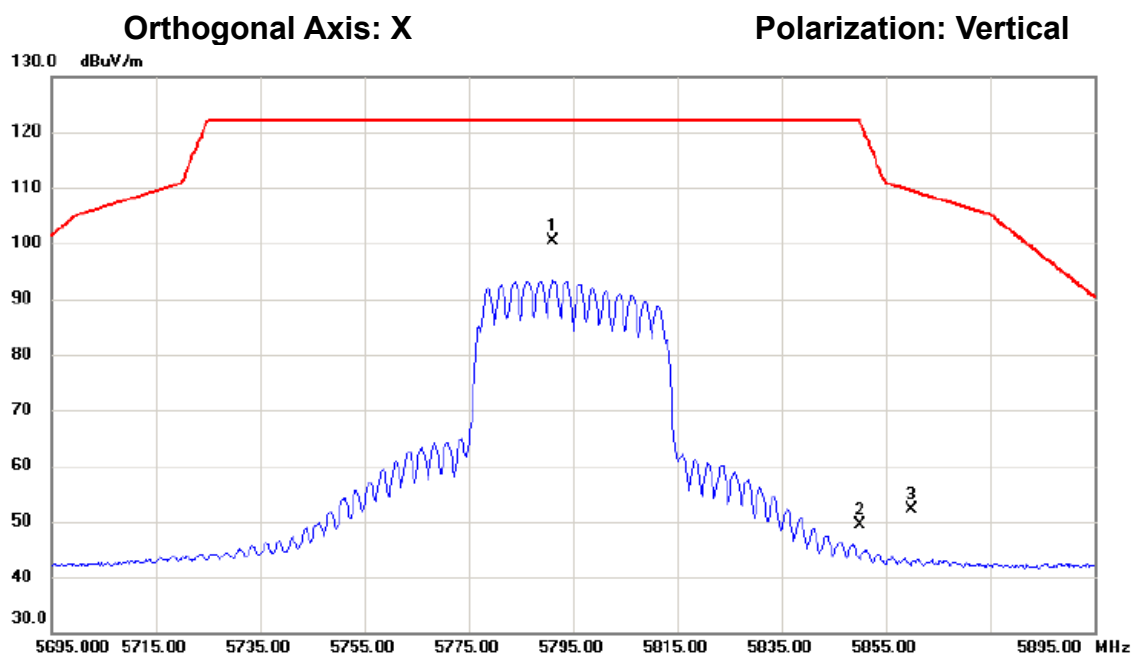

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5791.100	101.11	-0.72	100.39	122.20	-21.81	peak	主波訊號不予判定
2		5850.000	49.98	-0.57	49.41	122.20	-72.79	peak	
3		5860.000	52.65	-0.54	52.11	109.40	-57.29	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

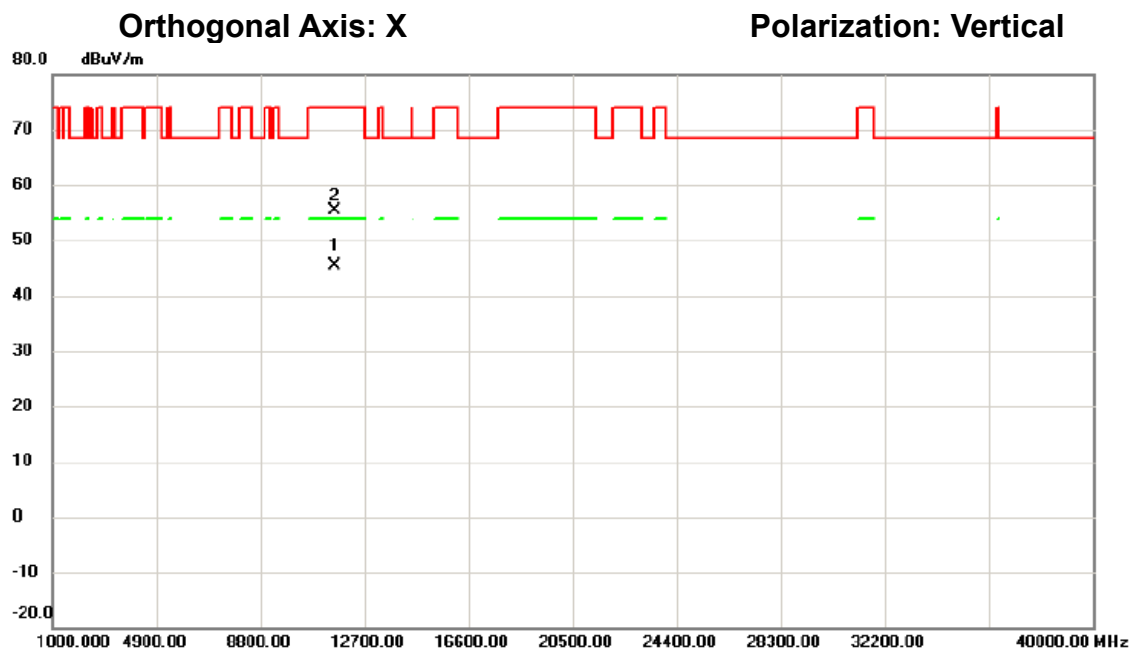

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11590.00	42.72	2.67	45.39	54.00	-8.61	AVG	
2		11594.70	52.68	2.65	55.33	74.00	-18.67	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

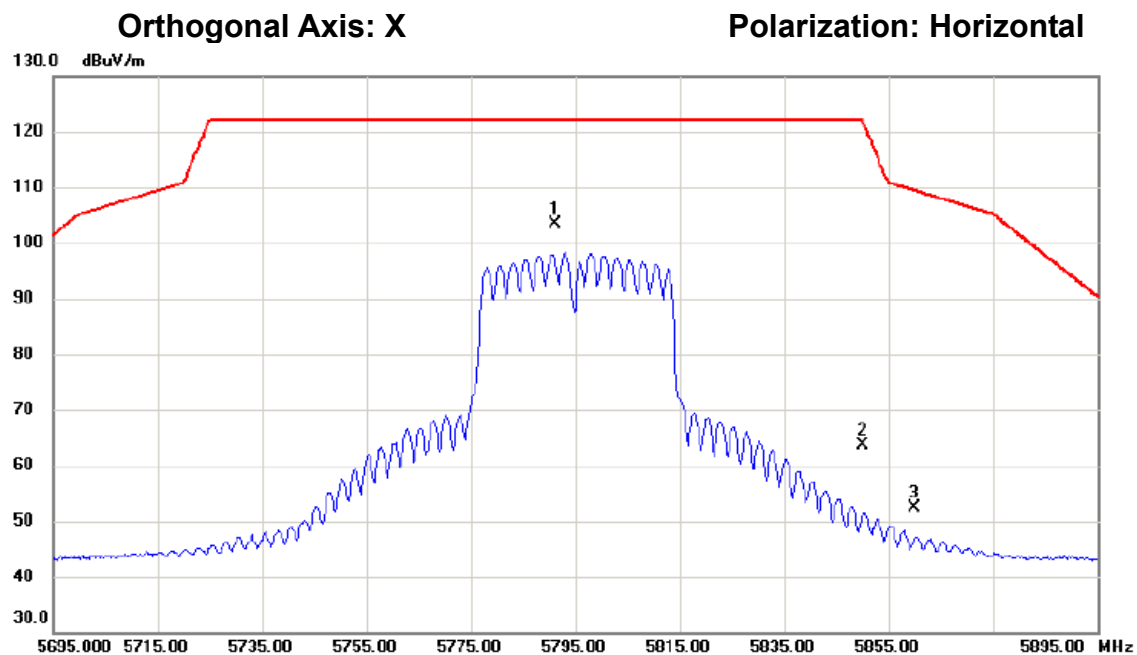

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5791.100	104.17	-0.72	103.45	122.20	-18.75	peak	主波訊號不予判定
2		5850.000	64.13	-0.57	63.56	122.20	-58.64	peak	
3		5860.000	52.85	-0.54	52.31	109.40	-57.09	peak	

測試頻道: IEEE 802.11n (HT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

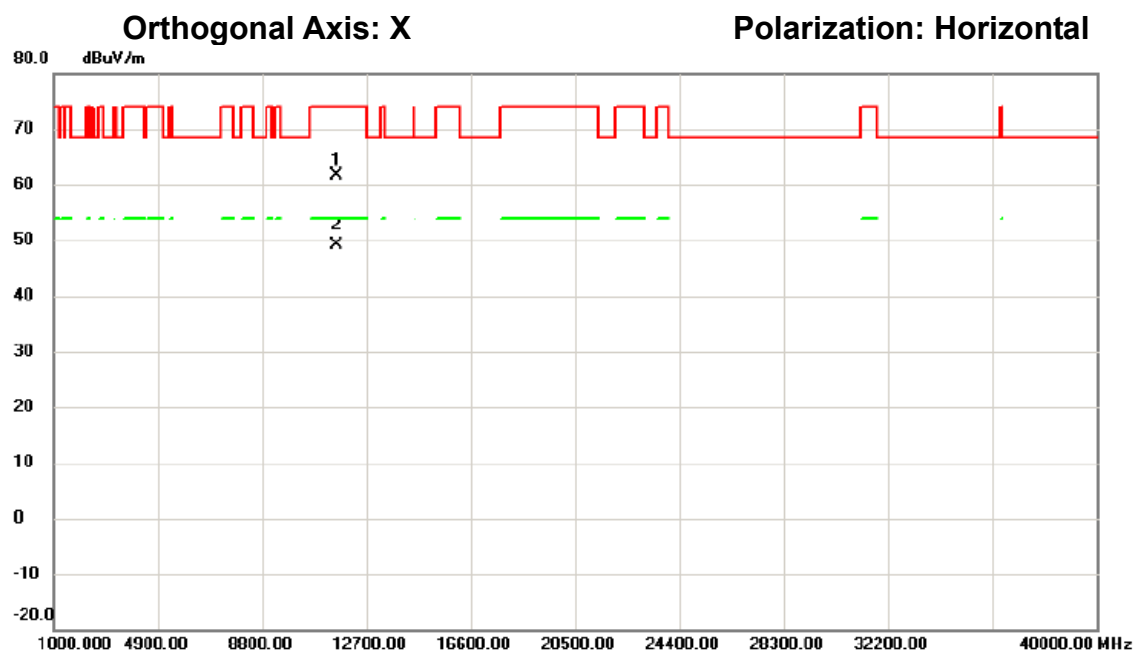

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11591.41	59.08	2.66	61.74	74.00	-12.26	peak	
2	*	11591.43	46.56	2.66	49.22	54.00	-4.78	AVG	

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

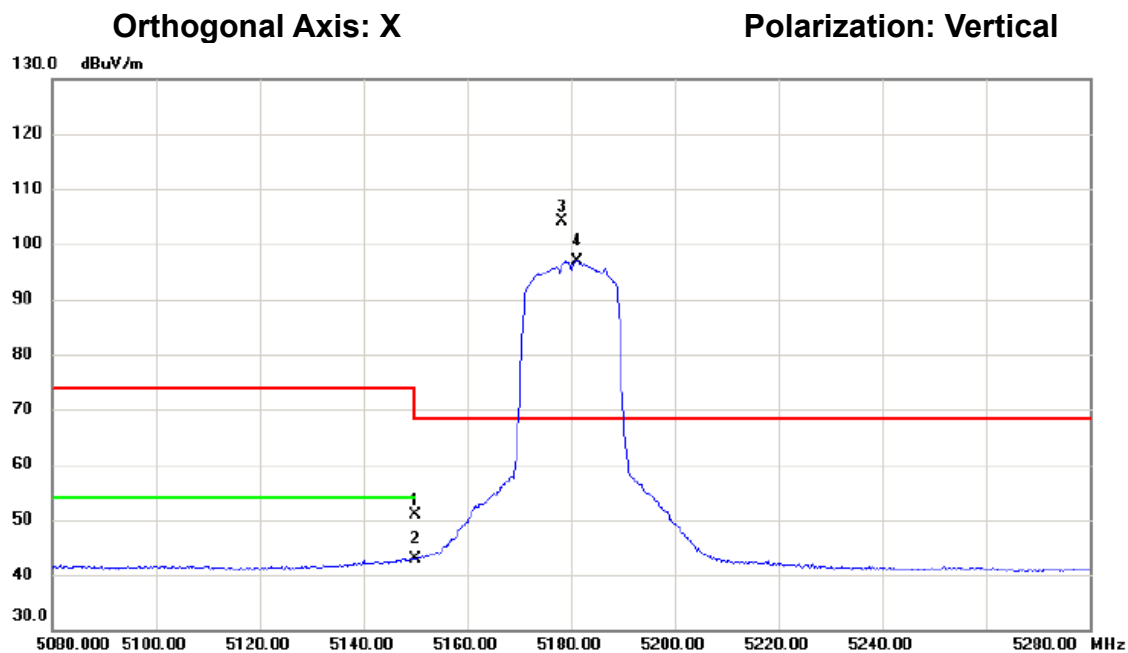

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	52.47	-1.71	50.76	74.00	-23.24	peak	
2		5150.000	44.62	-1.71	42.91	54.00	-11.09	AVG	
3	*	5178.300	105.86	-1.69	104.17	68.30	35.87	peak	主波訊號不予判定
4	X	5181.300	98.51	-1.70	96.81	68.30	28.51	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

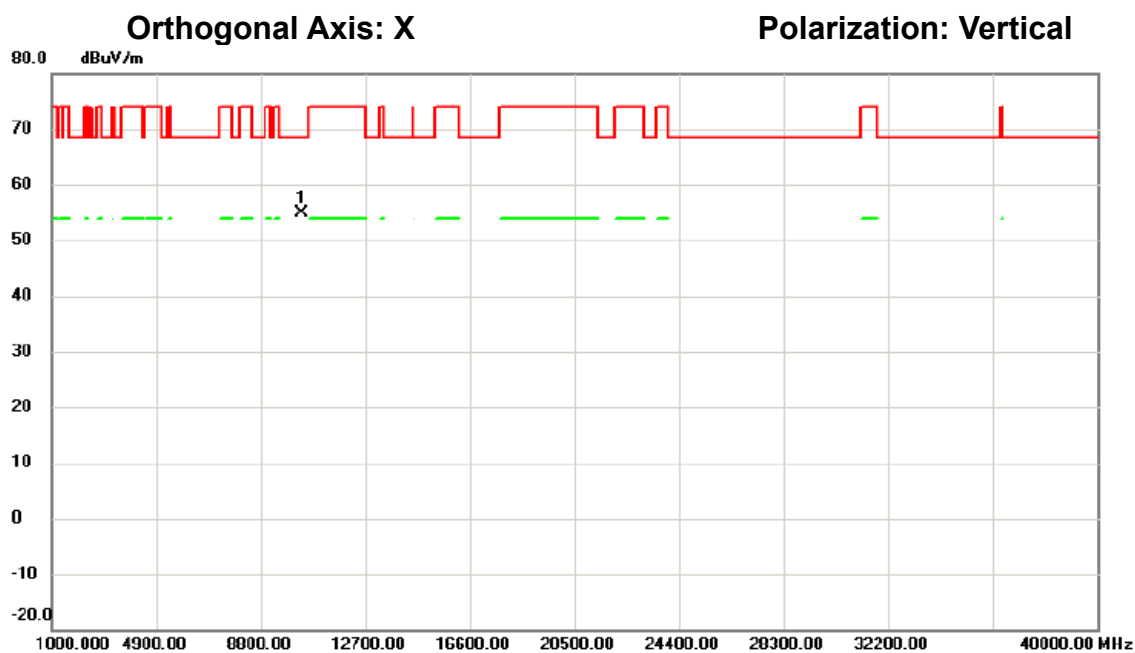

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10359.46	53.27	1.57	54.84	68.30	-13.46	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

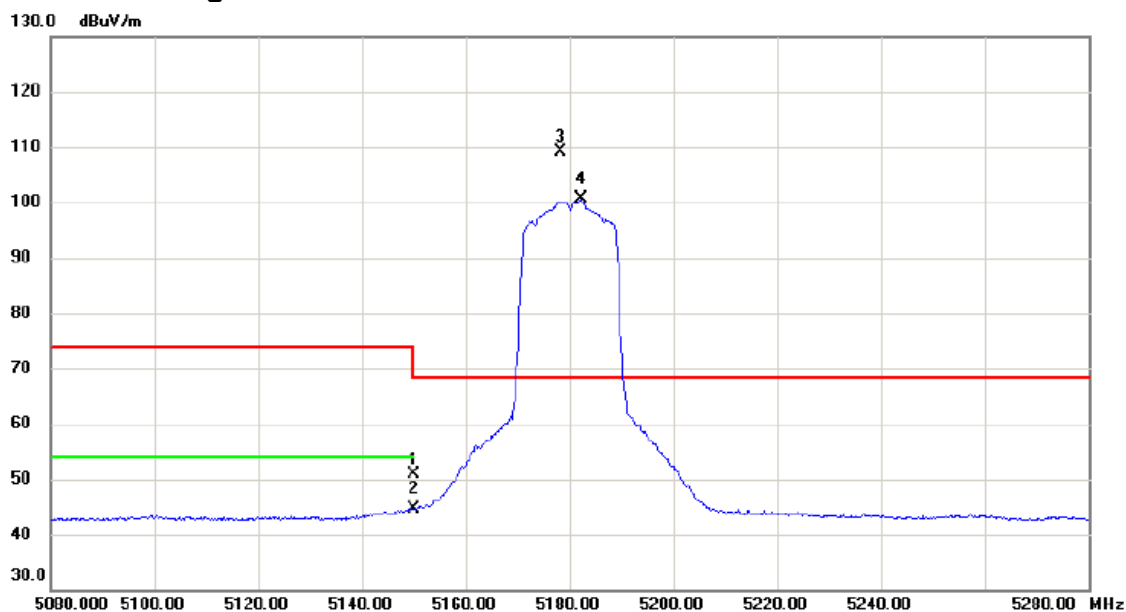

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	52.69	-1.71	50.98	74.00	-23.02	peak	
2		5150.000	46.33	-1.71	44.62	54.00	-9.38	AVG	
3	*	5178.300	110.82	-1.69	109.13	68.30	40.83	peak	主波訊號不予判定
4	X	5182.300	102.40	-1.70	100.70	68.30	32.40	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5180 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

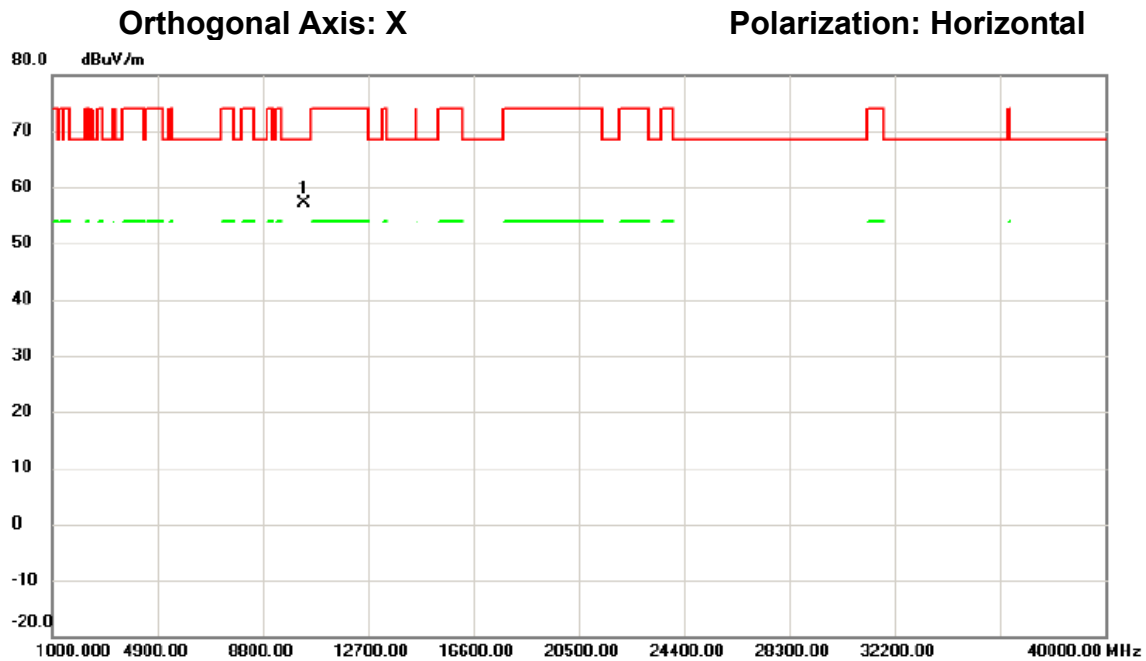

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10359.43	55.58	1.57	57.15	68.30	-11.15	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

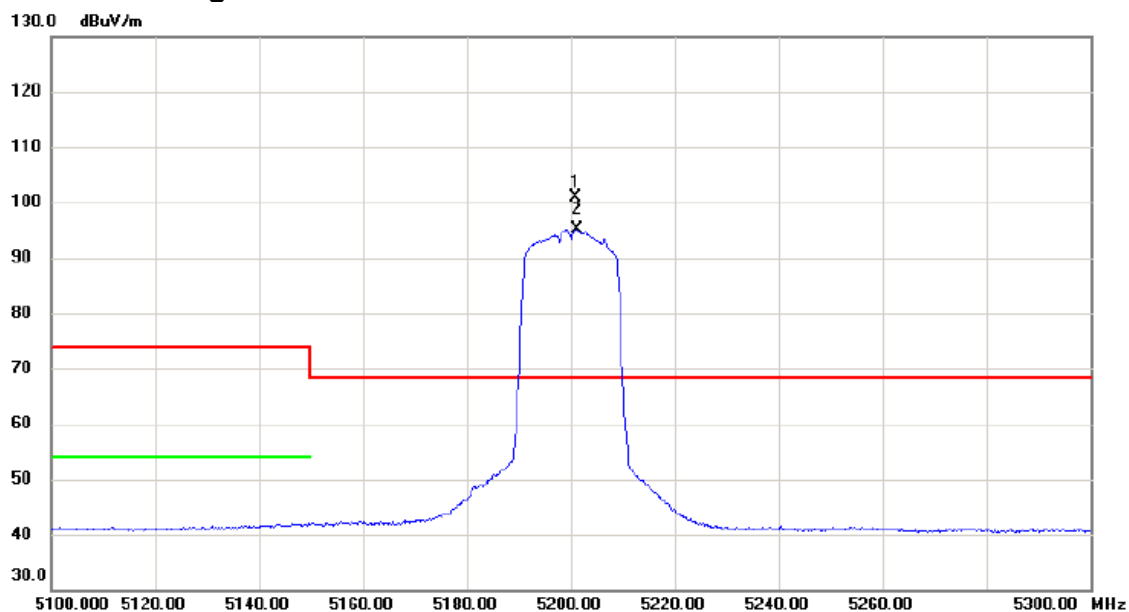

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5201.000	102.62	-1.68	100.94	68.30	32.64	peak	主波訊號不予判定
2	X	5201.300	96.76	-1.68	95.08	68.30	26.78	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

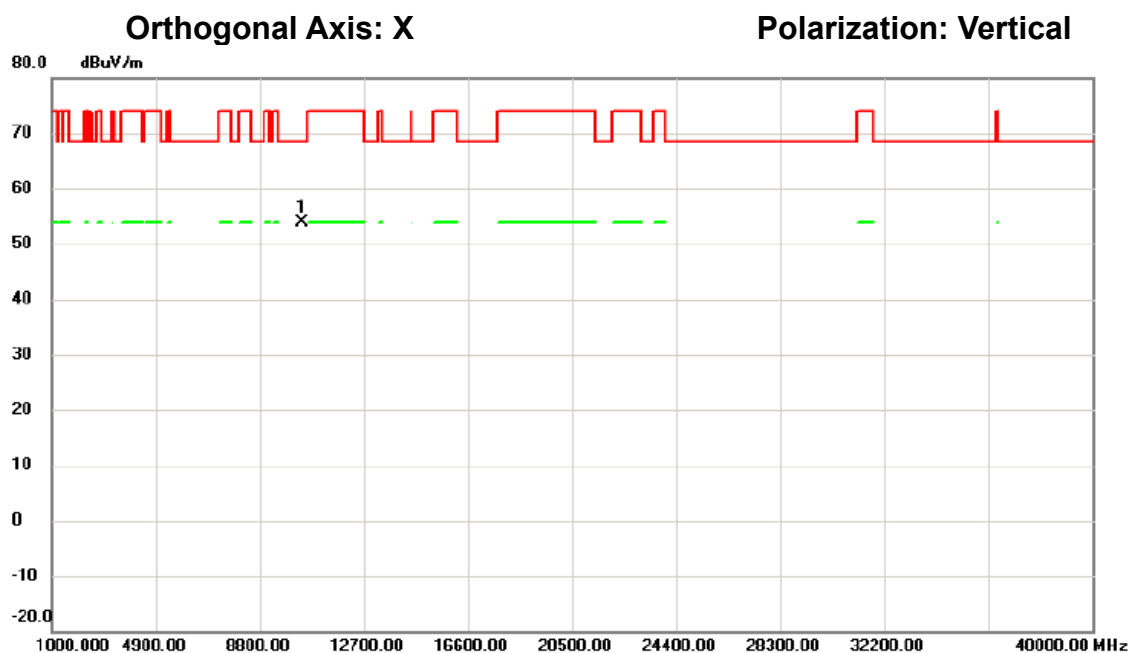

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10398.36	52.16	1.62	53.78	68.30	-14.52	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

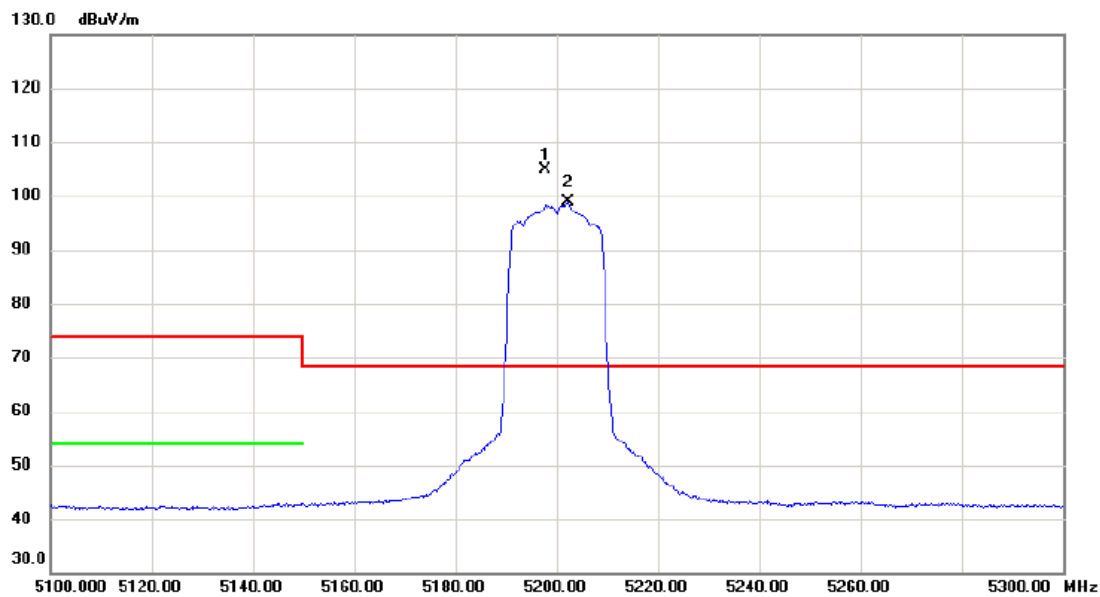

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5197.850	106.60	-1.68	104.92	68.30	36.62	peak	主波訊號不予判定
2	X	5202.200	100.53	-1.68	98.85	68.30	30.55	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5200 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

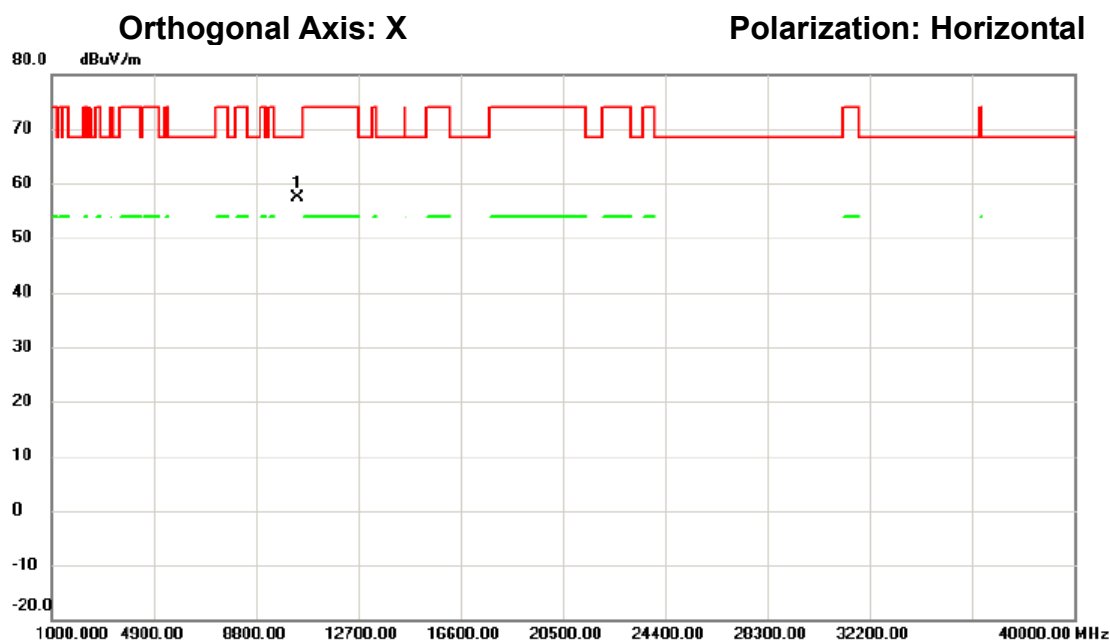

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.14	55.66	1.62	57.28	68.30	-11.02	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

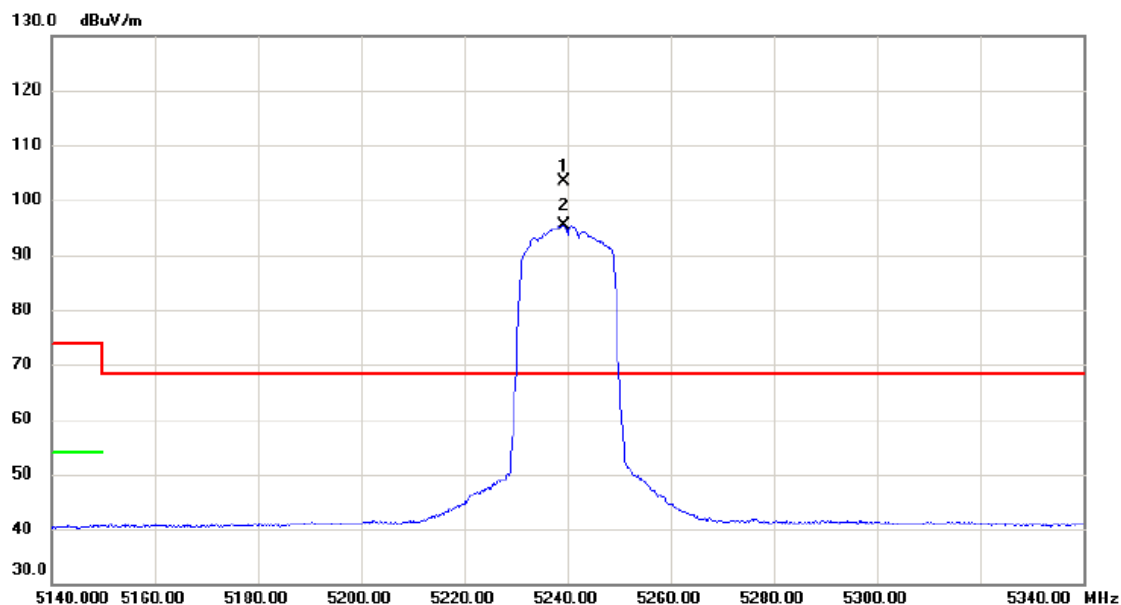

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5239.300	105.09	-1.66	103.43	68.30	35.13	peak	主波訊號不予判定
2	X	5239.400	97.08	-1.66	95.42	68.30	27.12	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

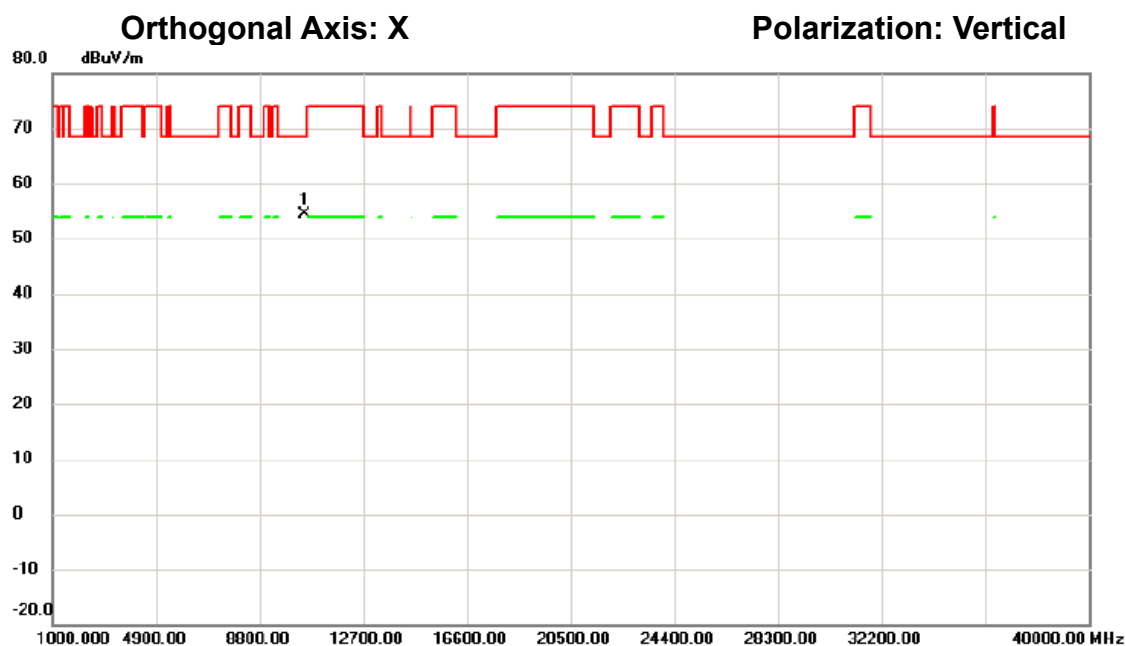

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.70	52.66	1.69	54.35	68.30	-13.95	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

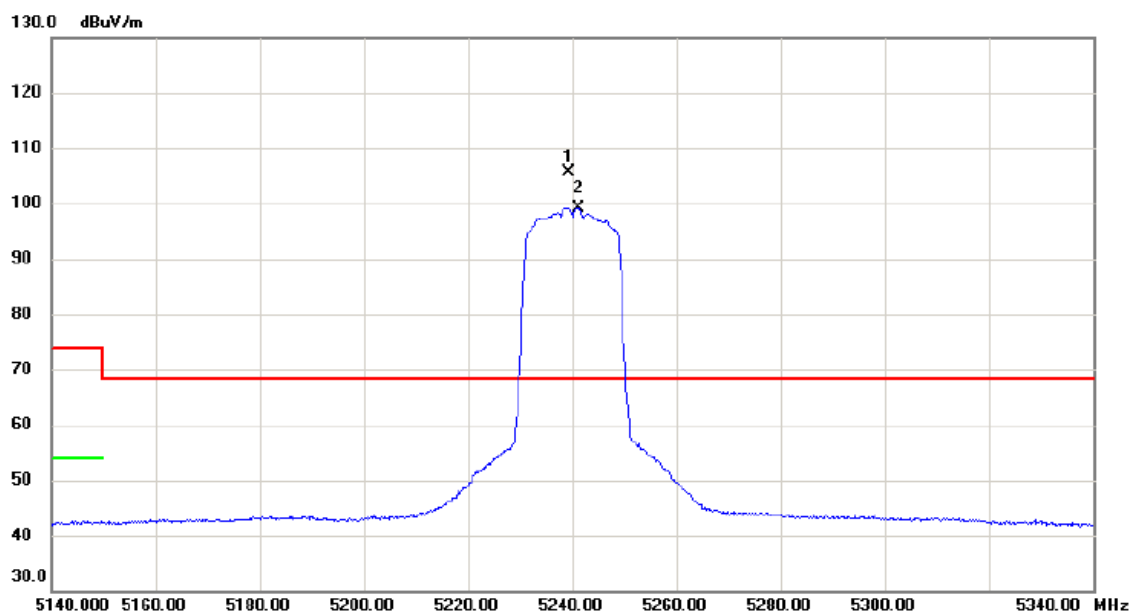

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5239.300	107.29	-1.66	105.63	68.30	37.33	peak	主波訊號不予判定
2	X	5241.100	100.89	-1.66	99.23	68.30	30.93	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5240 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

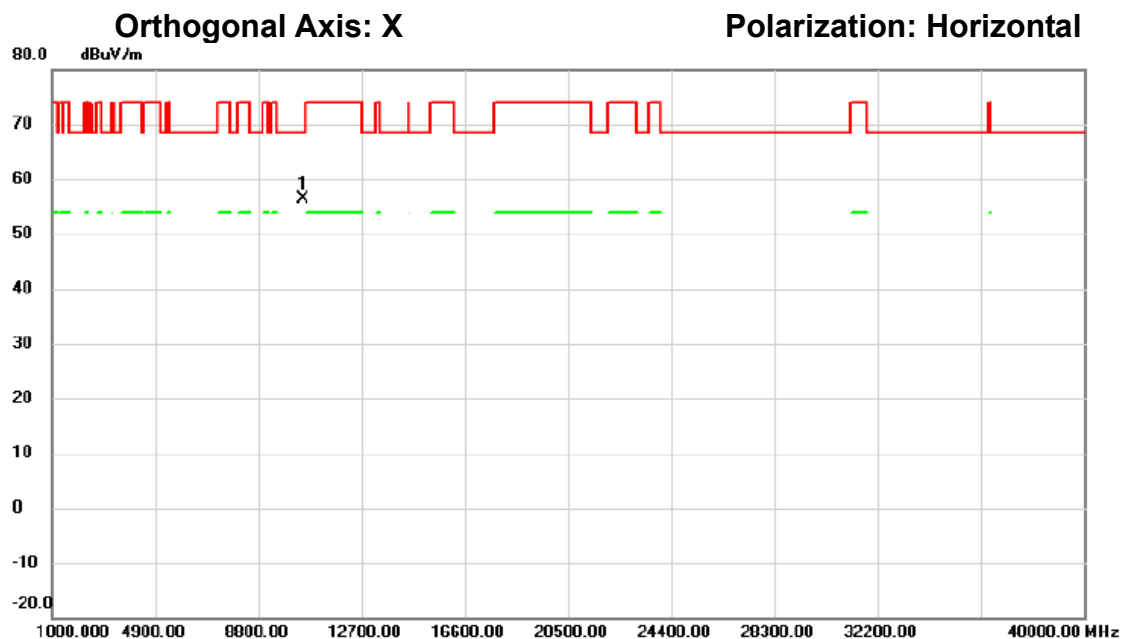

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10479.43	54.76	1.69	56.45	68.30	-11.85	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

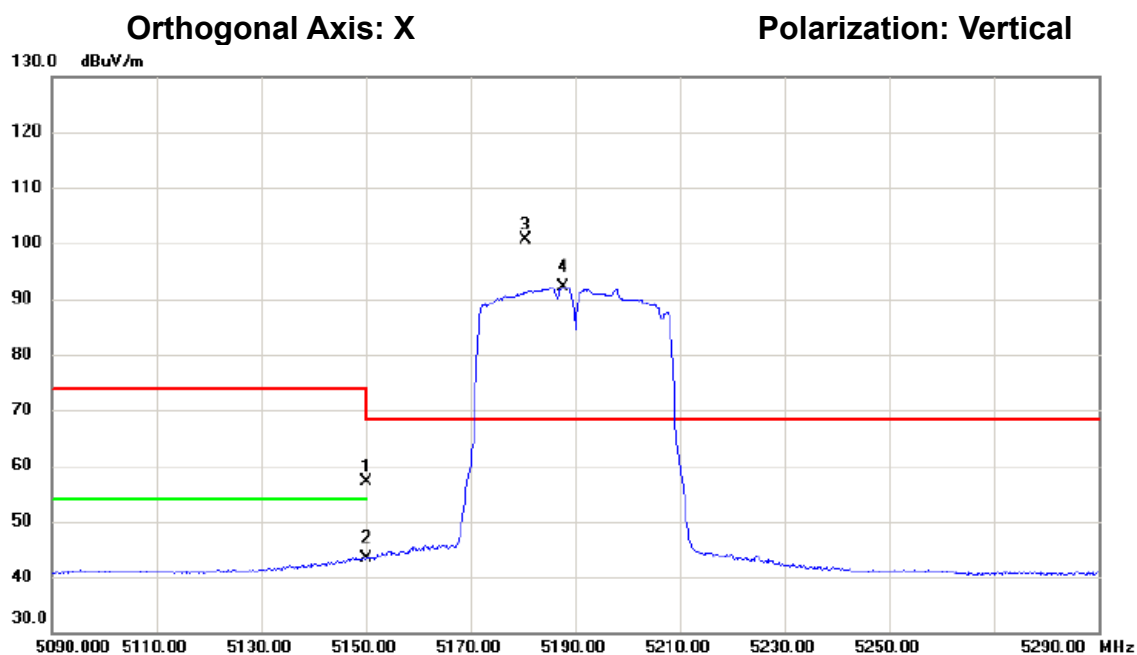

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	58.81	-1.71	57.10	74.00	-16.90	peak	
2		5150.000	45.04	-1.71	43.33	54.00	-10.67	AVG	
3	*	5180.600	102.43	-1.70	100.73	68.30	32.43	peak	主波訊號不予判定
4	X	5187.700	93.89	-1.70	92.19	68.30	23.89	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

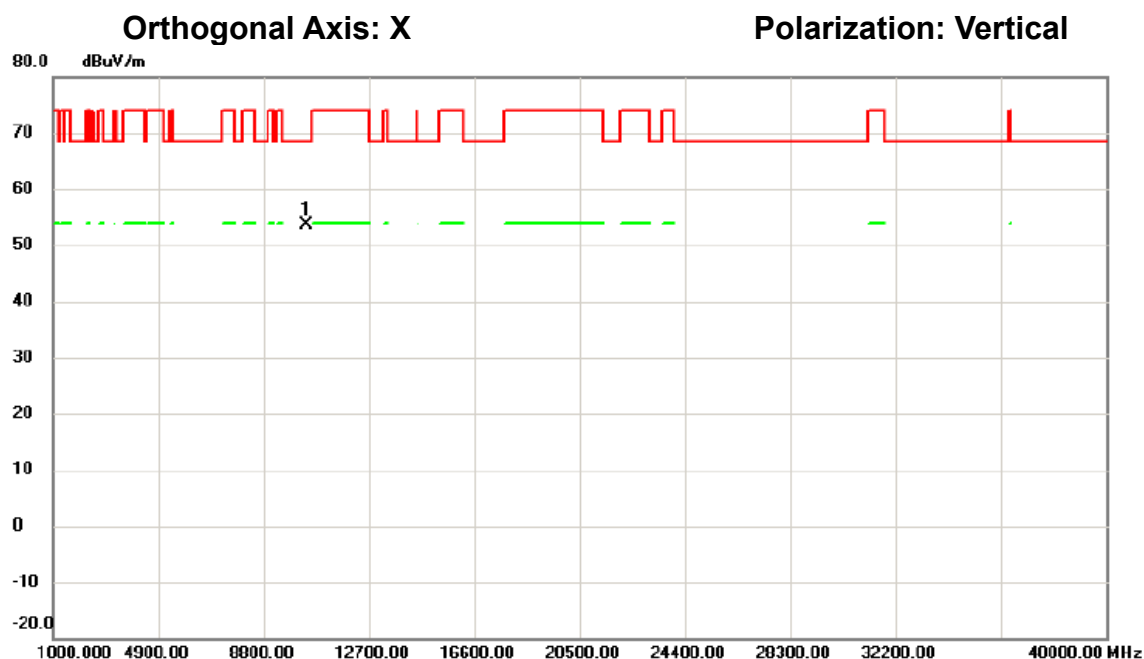

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10378.76	51.97	1.59	53.56	68.30	-14.74	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

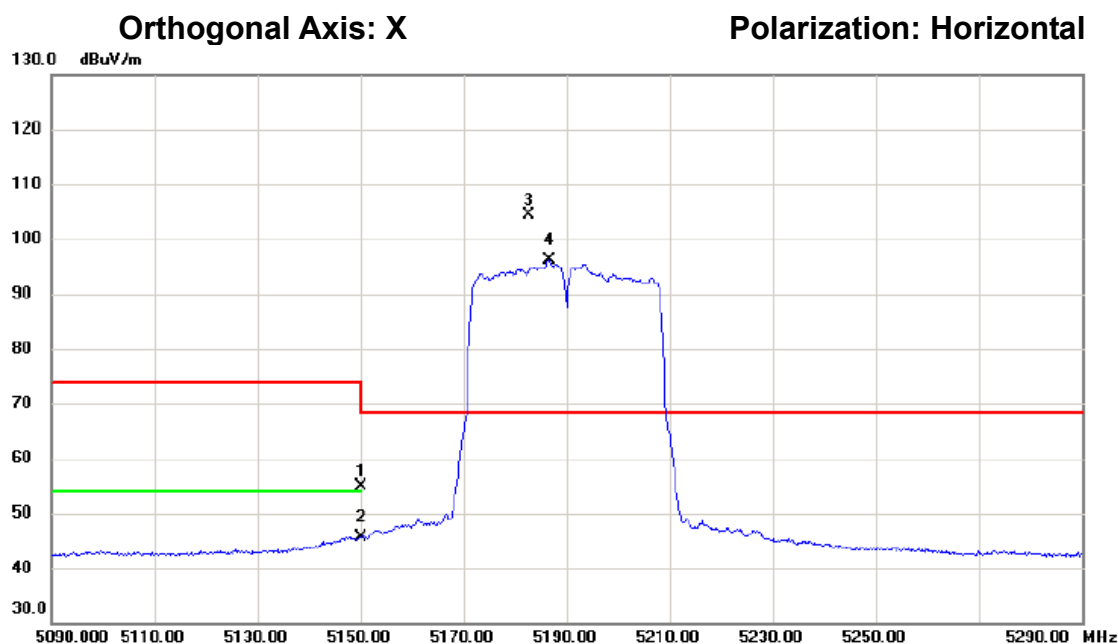

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	56.66	-1.71	54.95	74.00	-19.05	peak	
2		5150.000	47.42	-1.71	45.71	54.00	-8.29	AVG	
3	*	5182.600	106.17	-1.70	104.47	68.30	36.17	peak	主波訊號不予判定
4	X	5186.600	97.90	-1.70	96.20	68.30	27.90	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5190 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

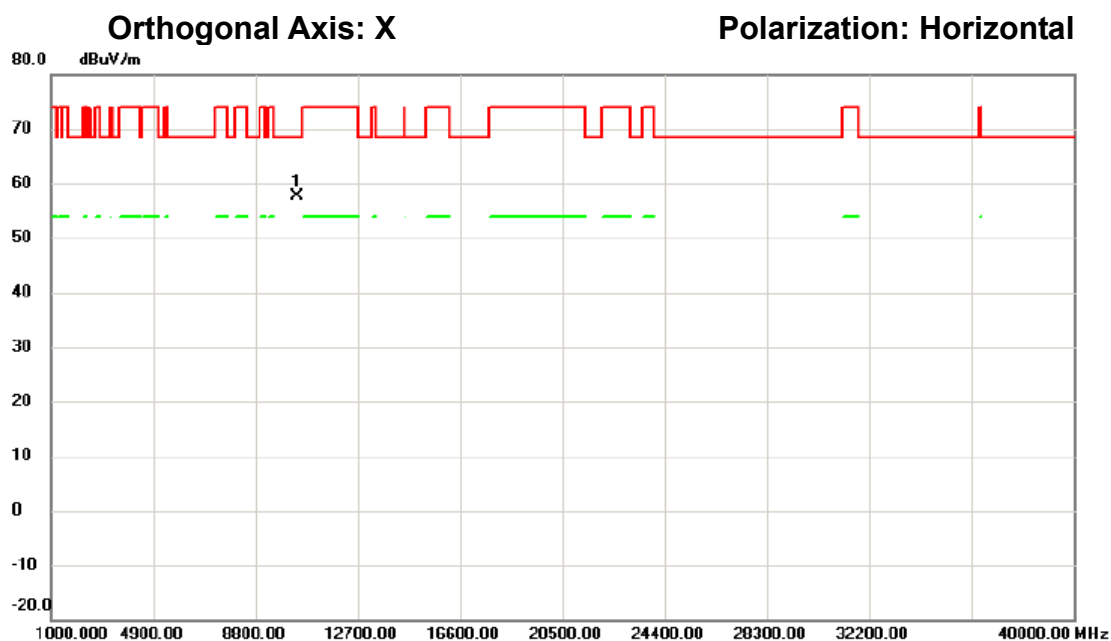

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10379.95	56.16	1.59	57.75	68.30	-10.55	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

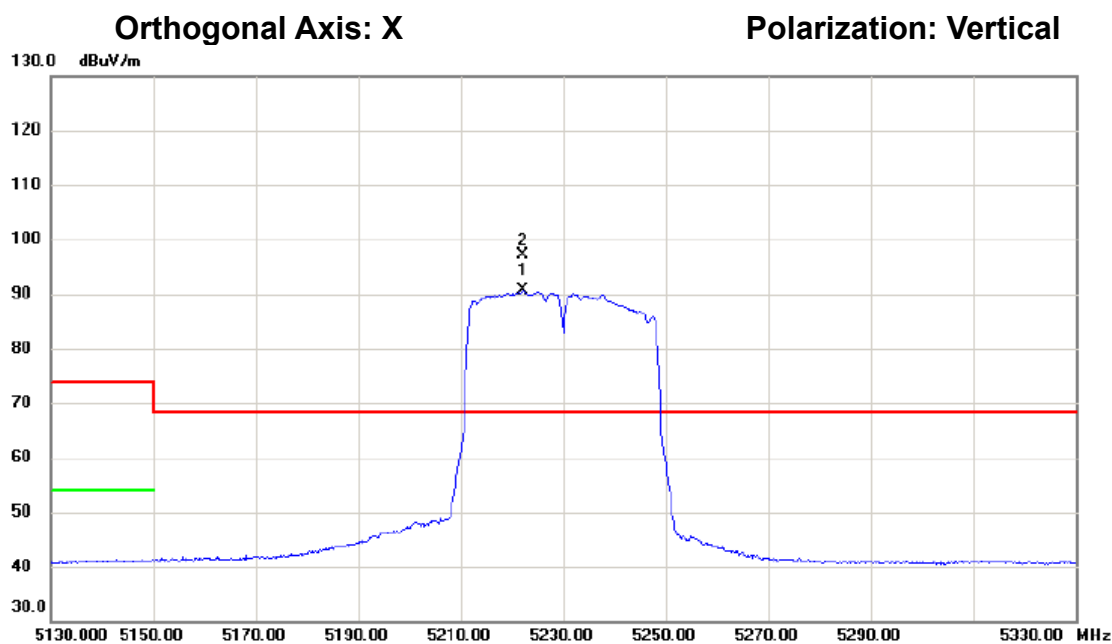

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5222.100	92.31	-1.67	90.64	68.30	22.34	AVG	主波訊號不予判定
2	*	5222.200	98.88	-1.67	97.21	68.30	28.91	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

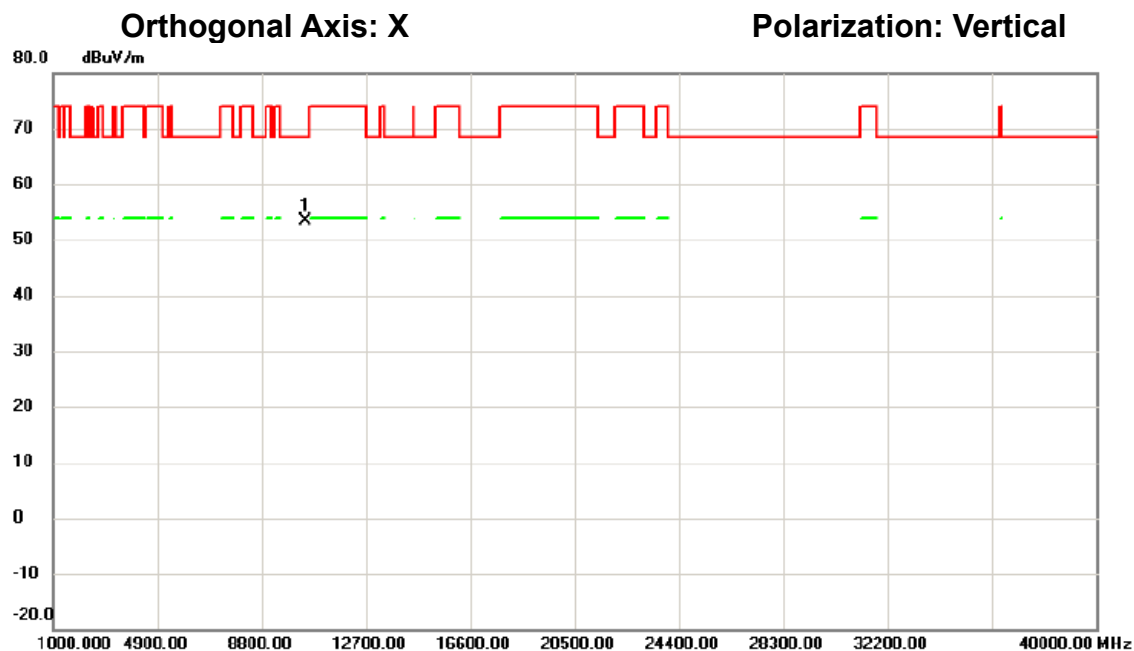

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10457.98	51.81	1.68	53.49	68.30	-14.81	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

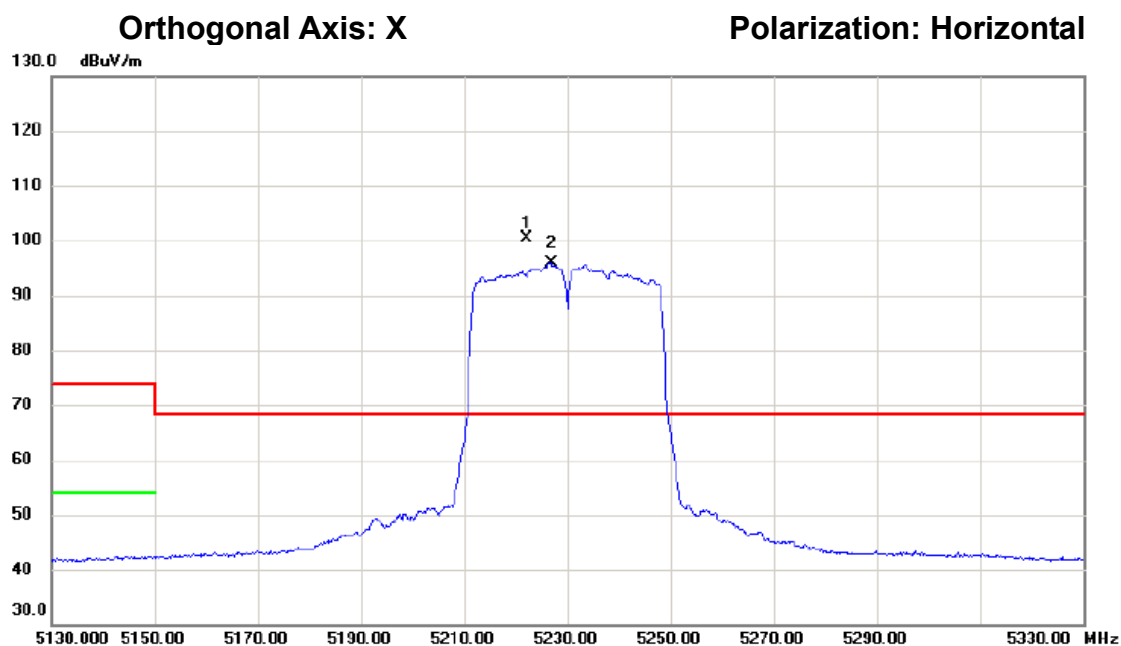

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5222.200	102.09	-1.67	100.42	68.30	32.12	peak	主波訊號不予判定
2	X	5226.800	97.60	-1.66	95.94	68.30	27.64	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) /
5230 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

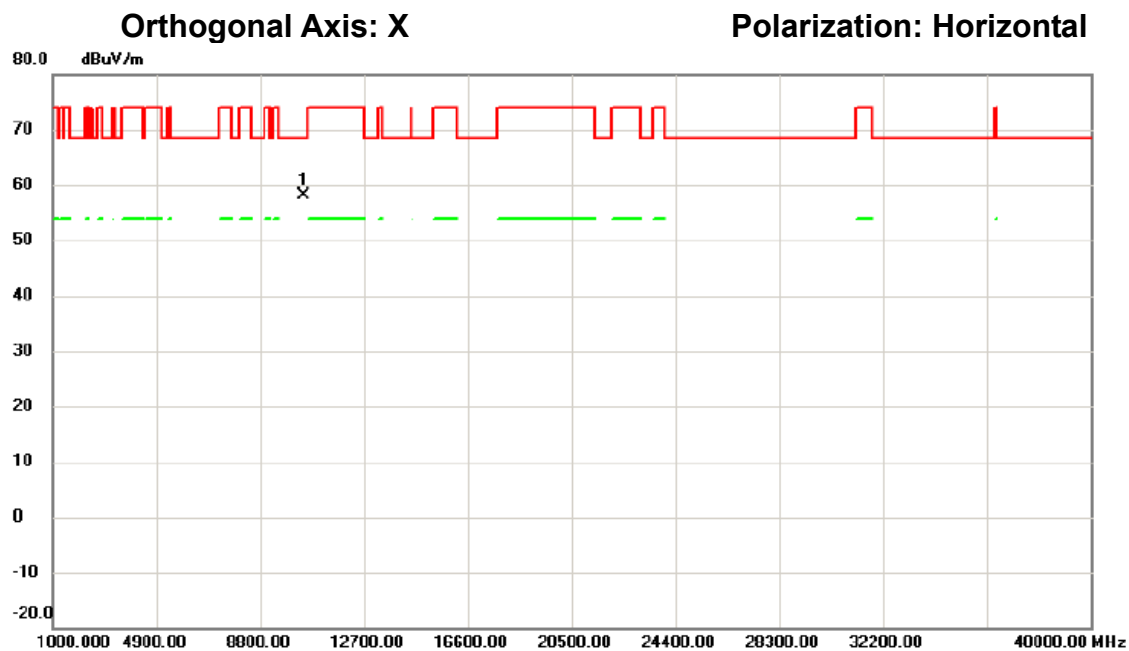

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10461.41	56.33	1.69	58.02	68.30	-10.28	peak	

測試頻道: IEEE 802.11ac (VHT80) / 5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

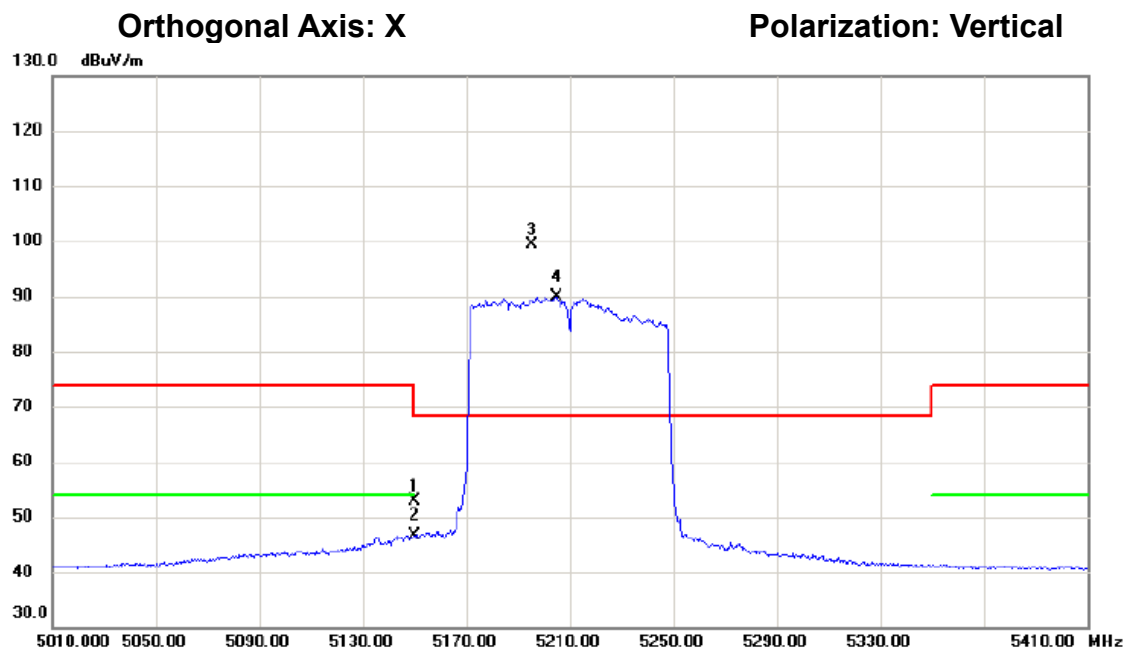

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	54.55	-1.71	52.84	74.00	-21.16	peak	
2		5150.000	48.29	-1.71	46.58	54.00	-7.42	AVG	
3	*	5195.200	100.97	-1.68	99.29	68.30	30.99	peak	主波訊號不予判定
4	X	5205.000	91.63	-1.68	89.95	68.30	21.65	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

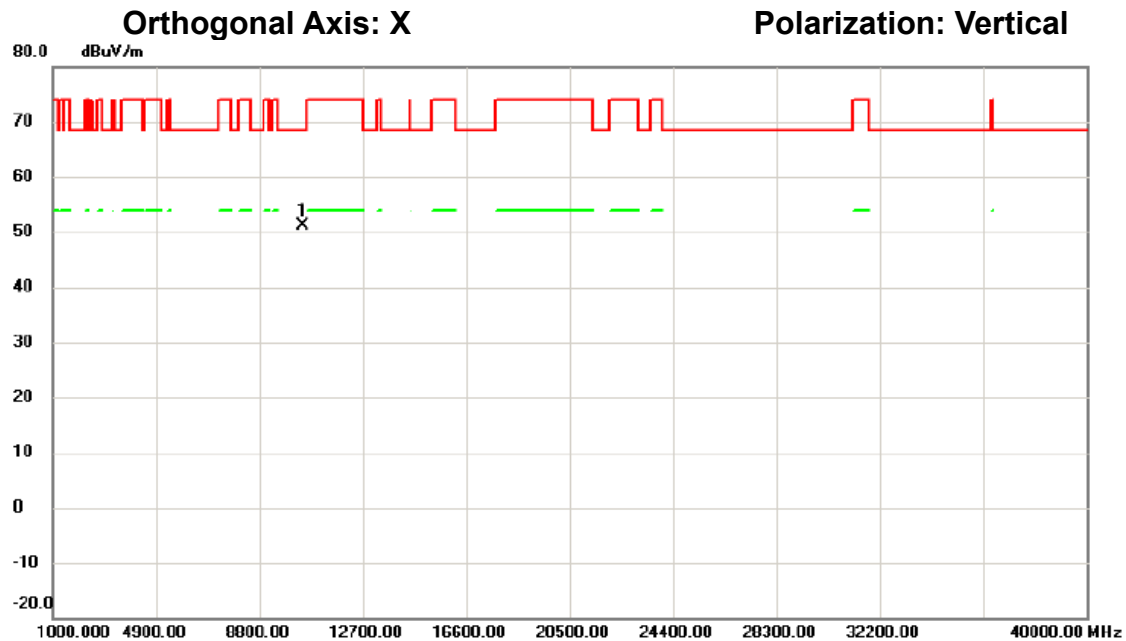

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.07	49.50	1.64	51.14	68.30	-17.16	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

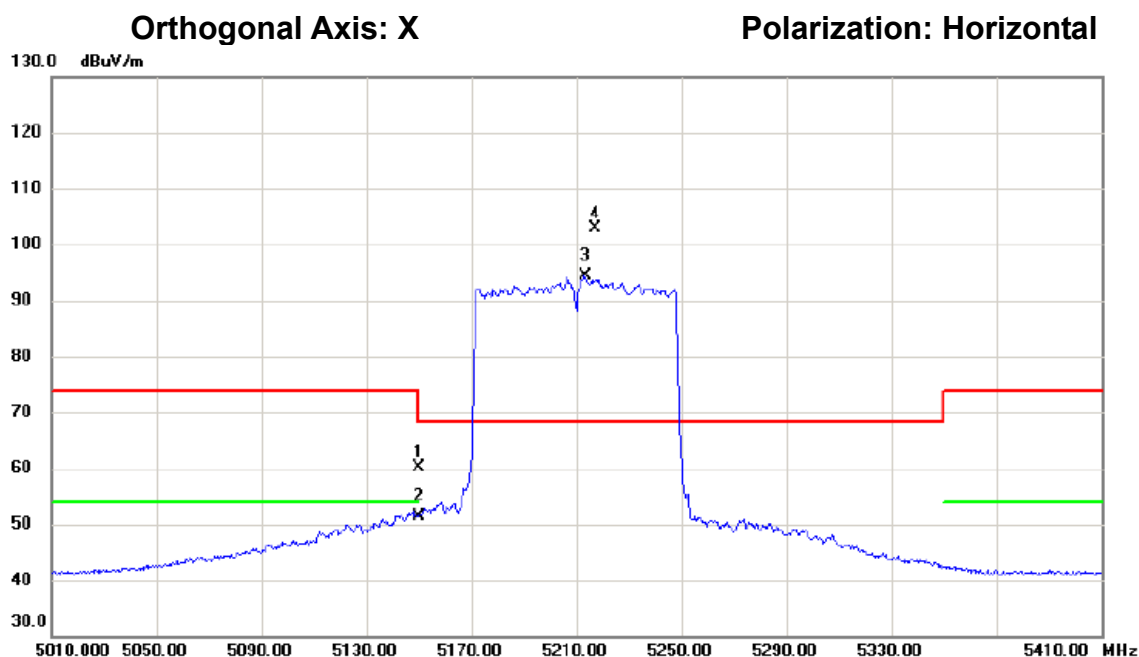

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	61.90	-1.71	60.19	74.00	-13.81	peak	
2		5150.000	53.07	-1.71	51.36	54.00	-2.64	AVG	
3	X	5213.400	96.03	-1.67	94.36	68.30	26.06	AVG	主波訊號不予判定
4	*	5217.200	104.46	-1.67	102.79	68.30	34.49	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT80) /
5210 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

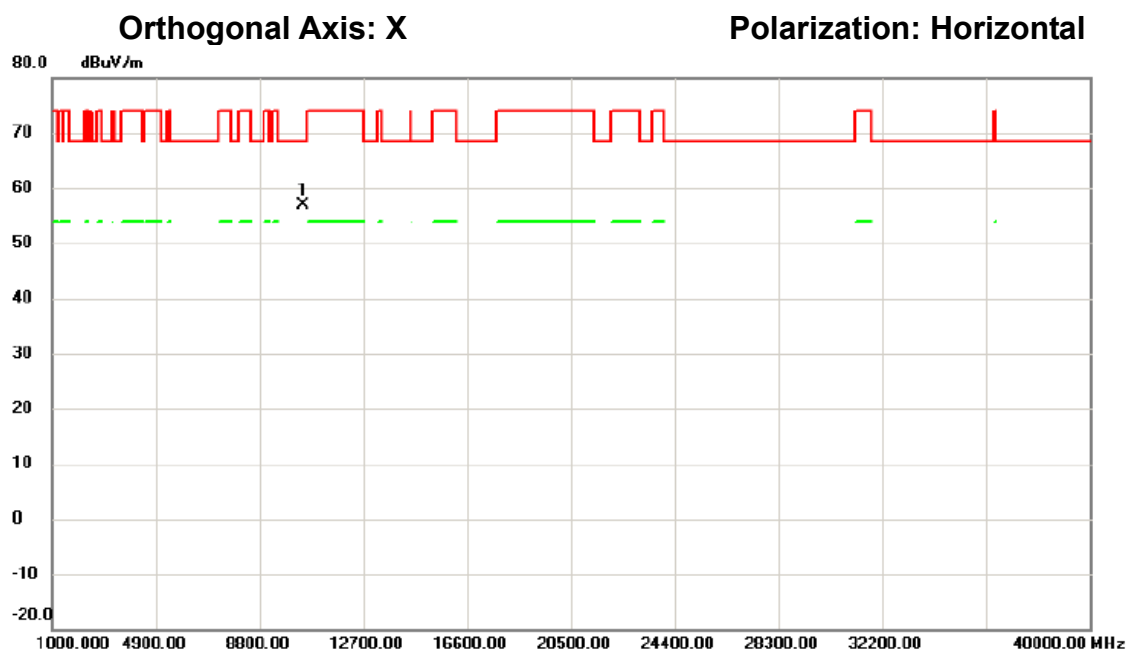

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10418.98	55.19	1.64	56.83	68.30	-11.47	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

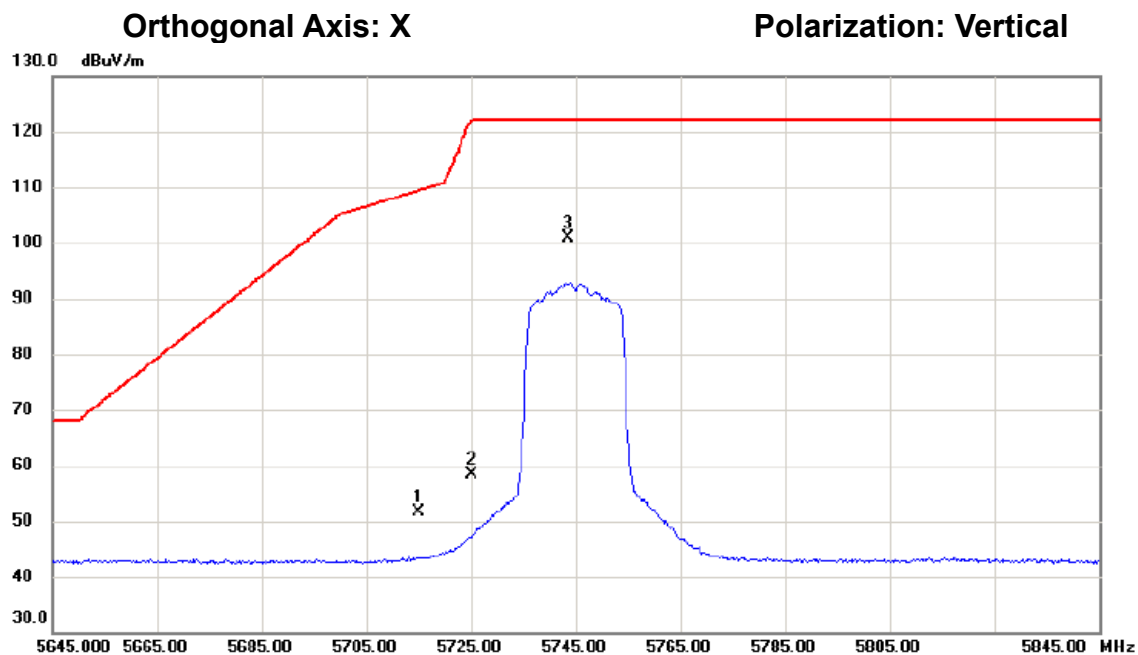

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	52.54	-0.92	51.62	109.40	-57.78	peak	
2		5725.000	59.28	-0.89	58.39	122.20	-63.81	peak	
3	*	5743.600	101.69	-0.84	100.85	122.20	-21.35	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

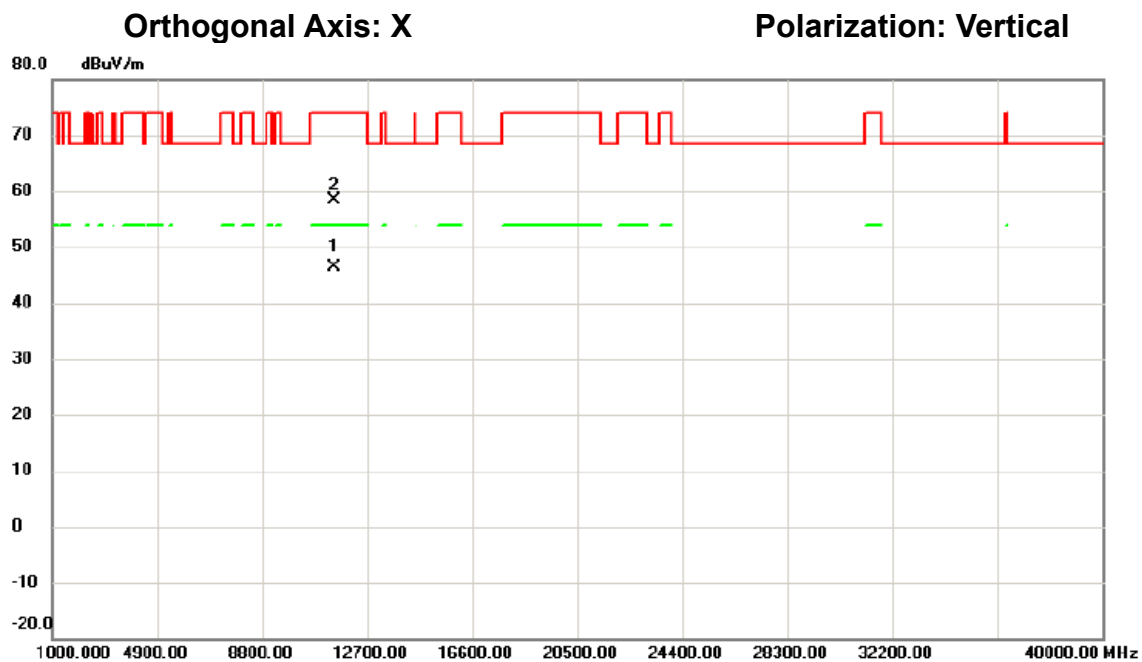

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11488.25	43.52	2.89	46.41	54.00	-7.59	AVG	
2		11488.30	55.37	2.89	58.26	74.00	-15.74	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

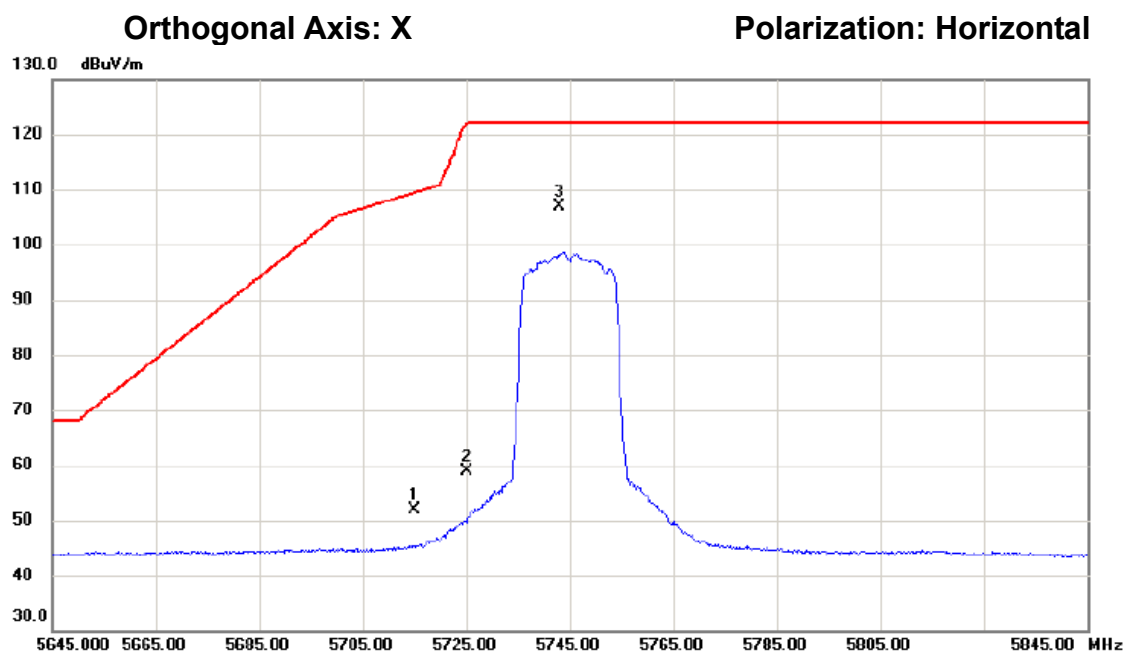

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	52.73	-0.92	51.81	109.40	-57.59	peak	
2		5725.000	59.81	-0.89	58.92	122.20	-63.28	peak	
3	*	5743.000	107.61	-0.84	106.77	122.20	-15.43	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

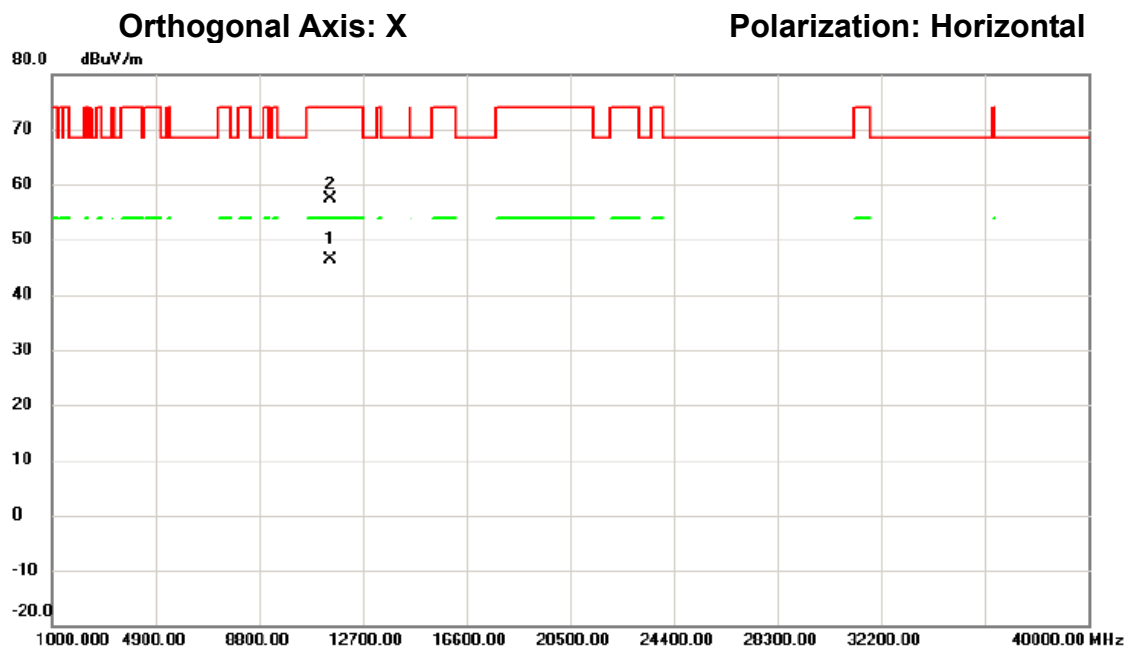

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11488.90	43.58	2.89	46.47	54.00	-7.53	AVG	
2		11489.62	54.41	2.89	57.30	74.00	-16.70	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

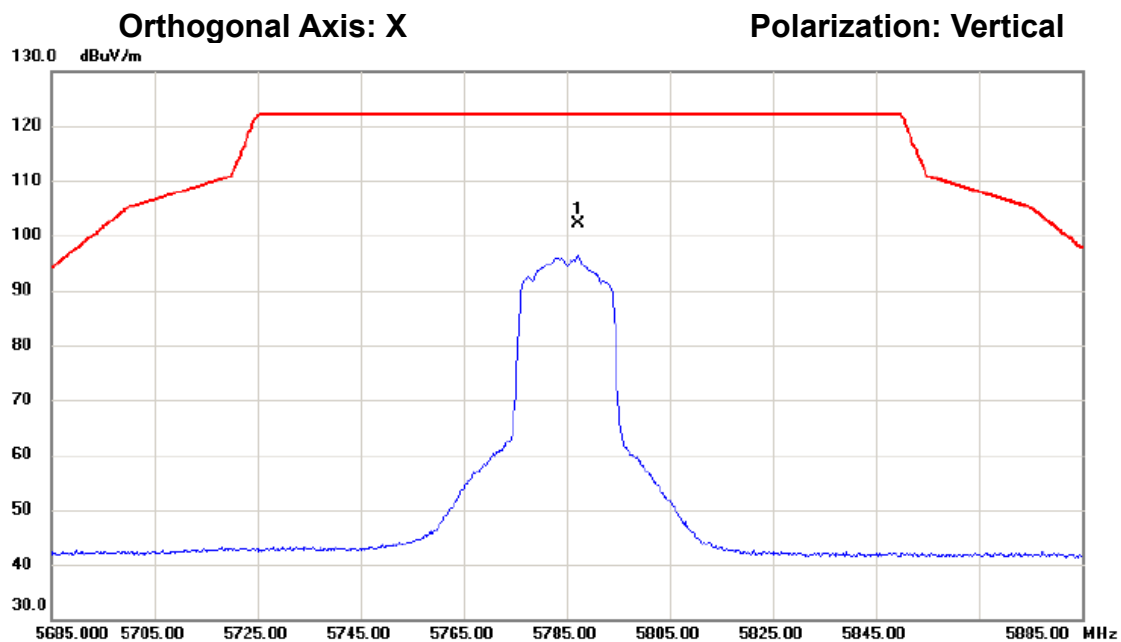

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5787.400	102.87	-0.73	102.14	122.20	-20.06	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

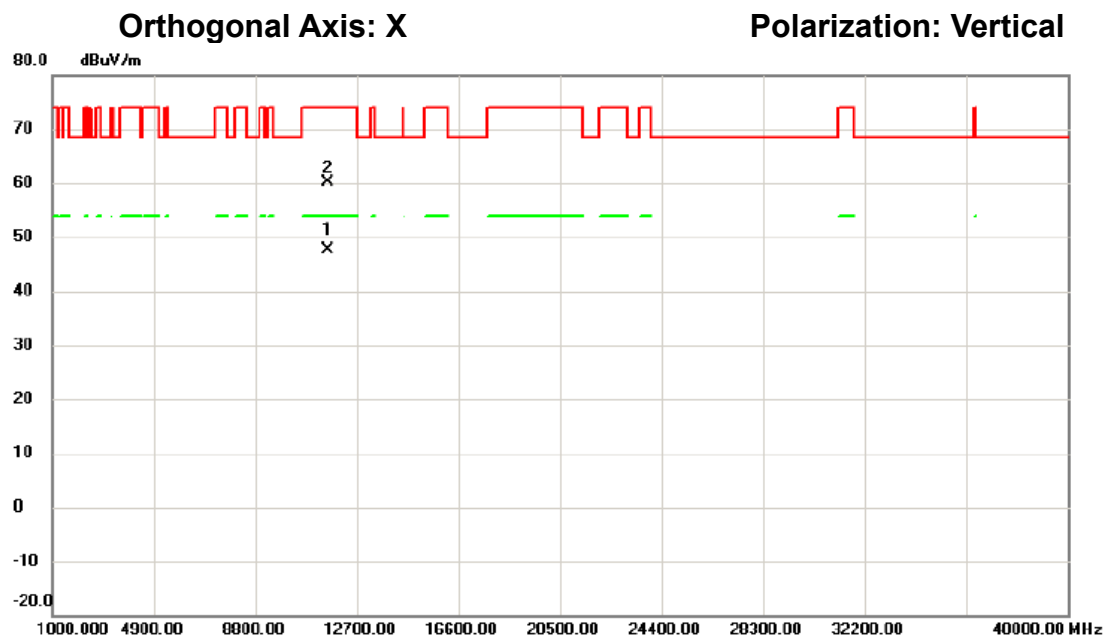

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11568.35	44.89	2.73	47.62	54.00	-6.38	AVG	
2		11571.98	57.42	2.71	60.13	74.00	-13.87	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

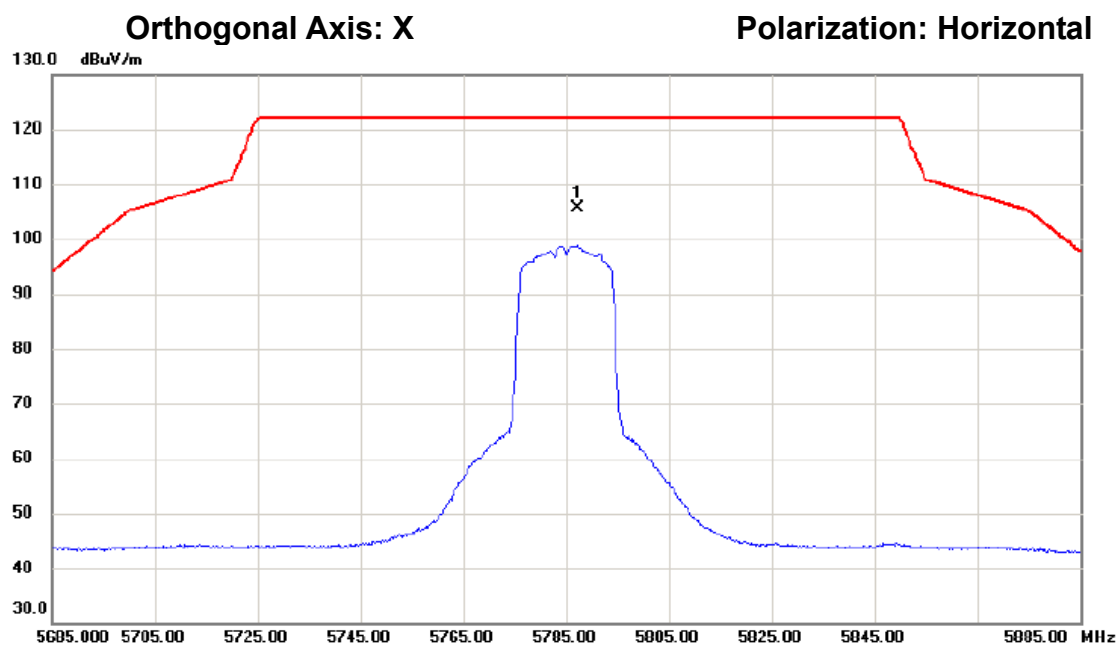

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5787.400	106.45	-0.73	105.72	122.20	-16.48	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT20) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

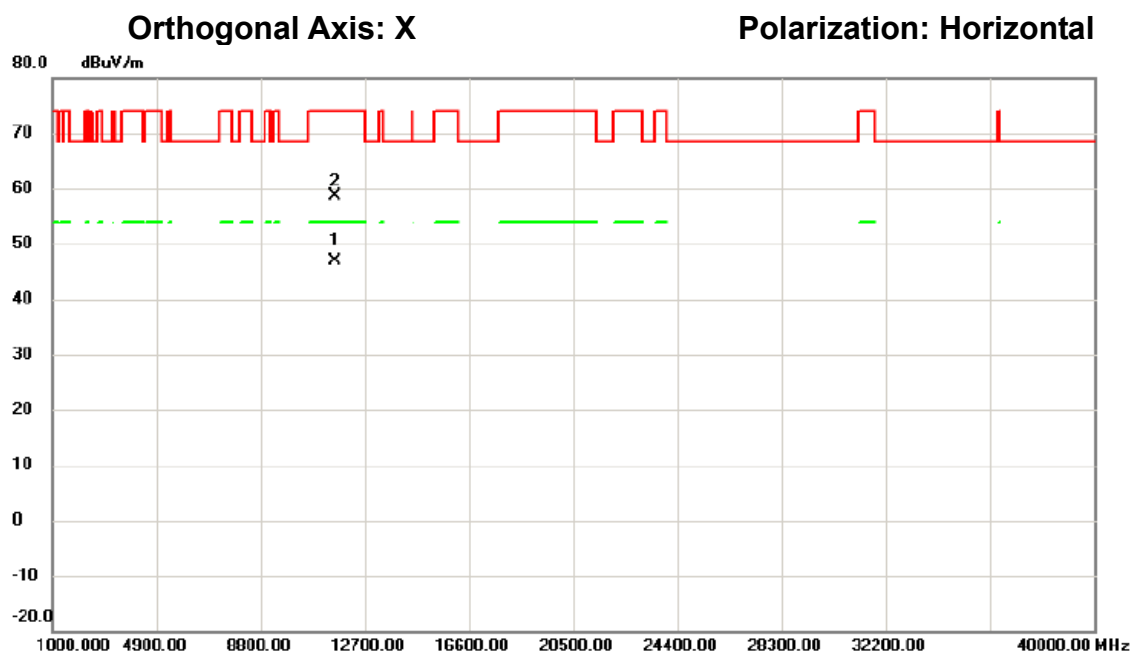

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11568.91	44.22	2.73	46.95	54.00	-7.05	AVG	
2		11572.43	55.91	2.71	58.62	74.00	-15.38	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

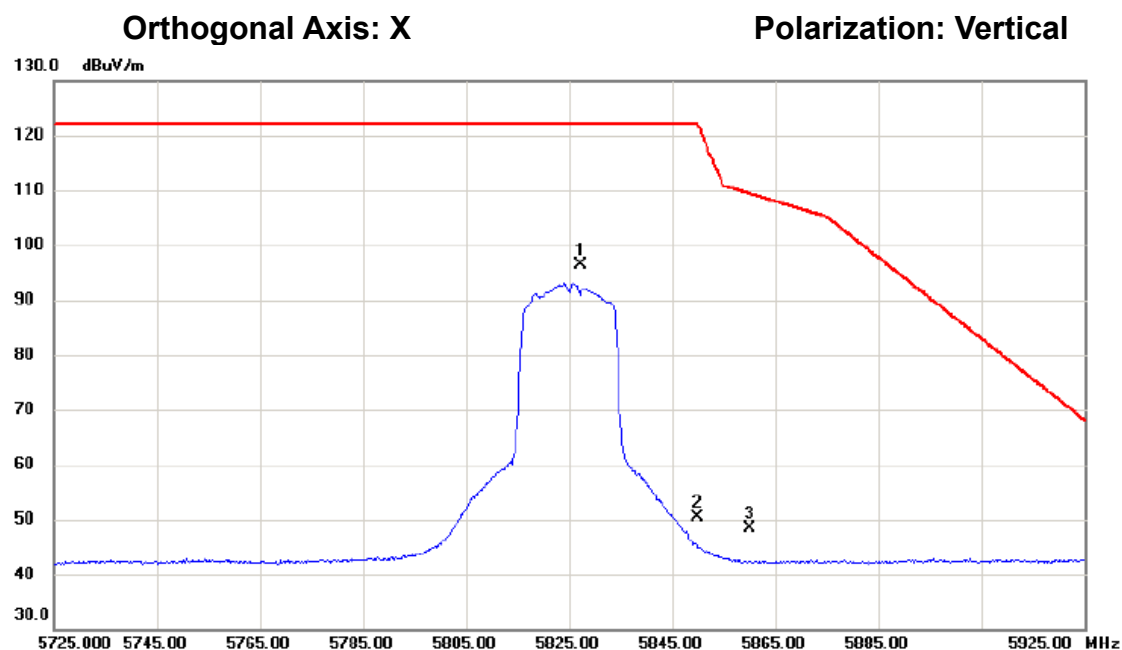

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5827.300	97.02	-0.63	96.39	122.20	-25.81	peak	主波訊號不予判定
2		5850.000	50.92	-0.57	50.35	122.20	-71.85	peak	
3		5860.000	49.04	-0.54	48.50	109.40	-60.90	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

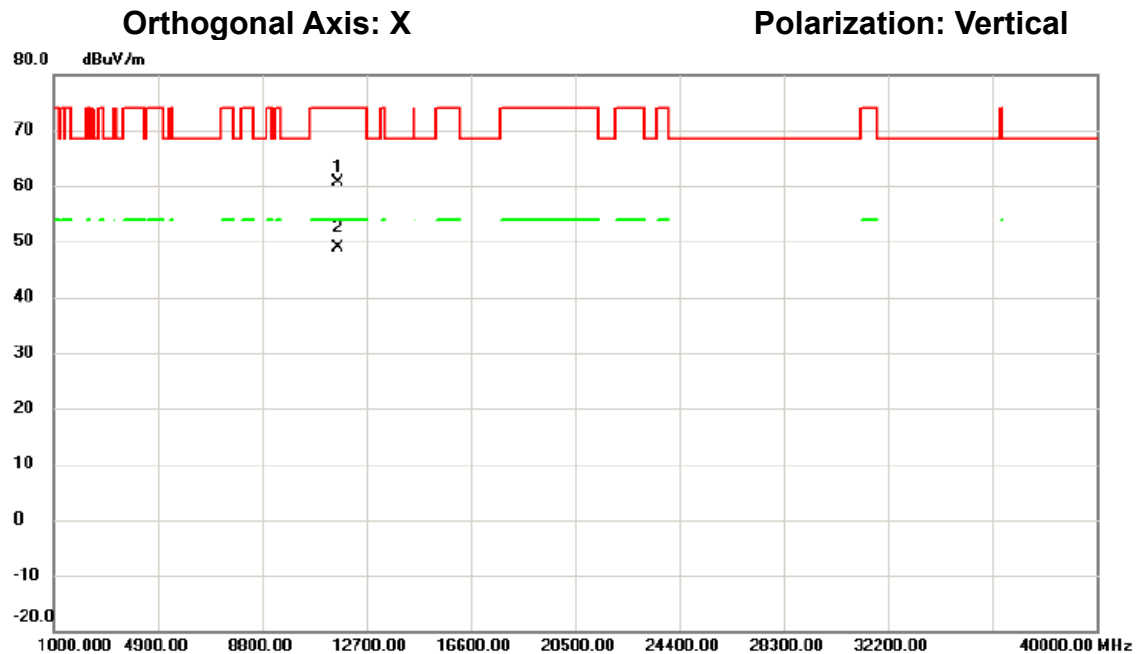

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11649.56	58.01	2.50	60.51	74.00	-13.49	peak	
2	*	11652.21	46.46	2.50	48.96	54.00	-5.04	AVG	

測試頻道: IEEE 802.11ac (VHT20) / 5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

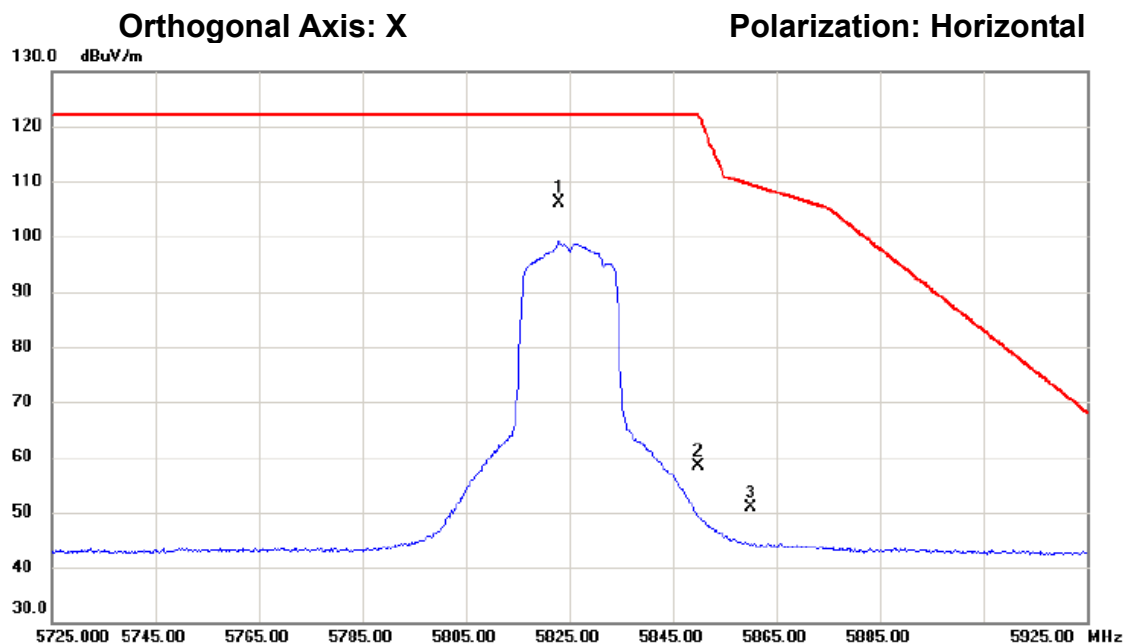

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5823.100	106.73	-0.63	106.10	122.20	-16.10	peak	主波訊號不予判定
2		5850.000	58.94	-0.57	58.37	122.20	-63.83	peak	
3		5860.000	51.44	-0.54	50.90	109.40	-58.50	peak	

測試頻道: IEEE 802.11ac (VHT20) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

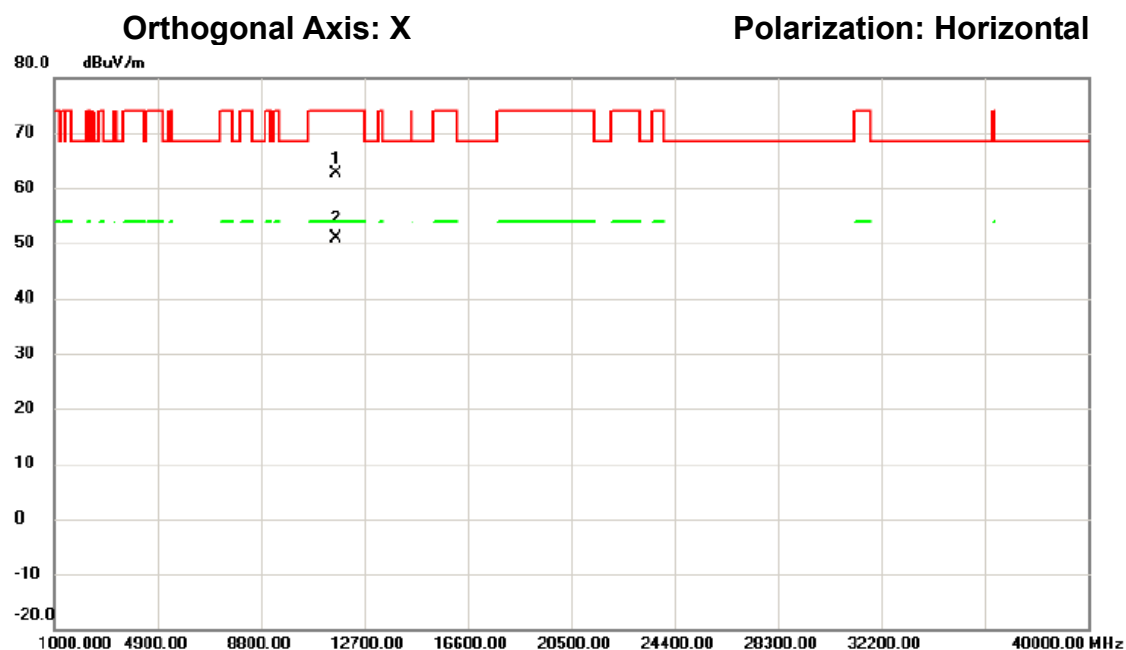

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11649.56	60.23	2.50	62.73	74.00	-11.27	peak	
2	*	11651.25	48.38	2.50	50.88	54.00	-3.12	AVG	

測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

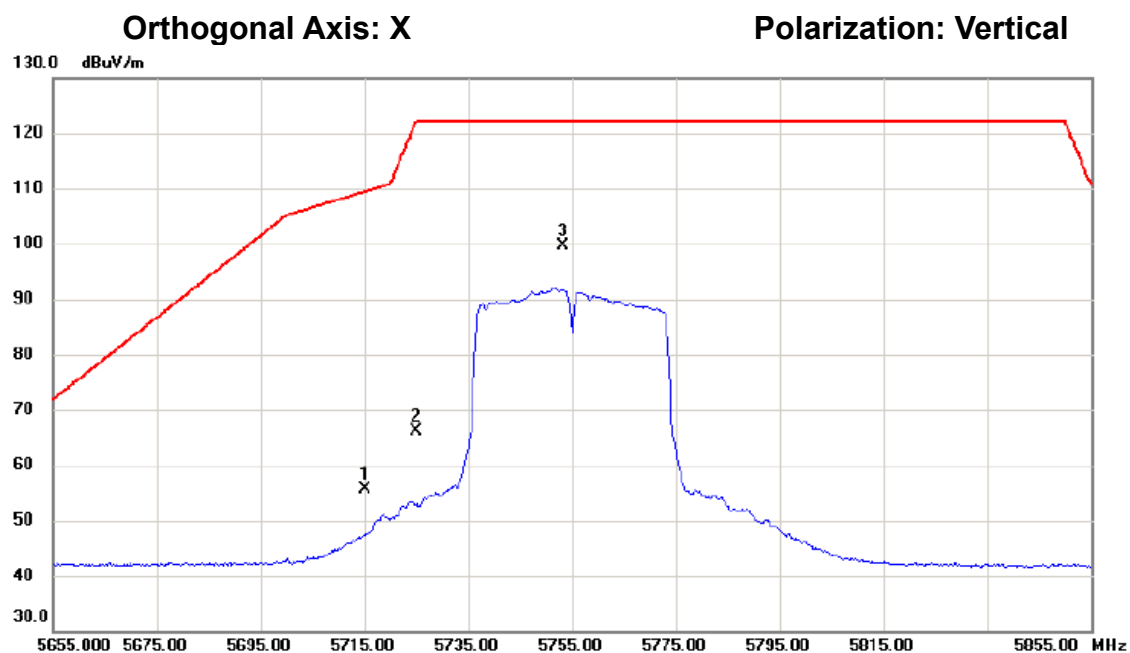

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

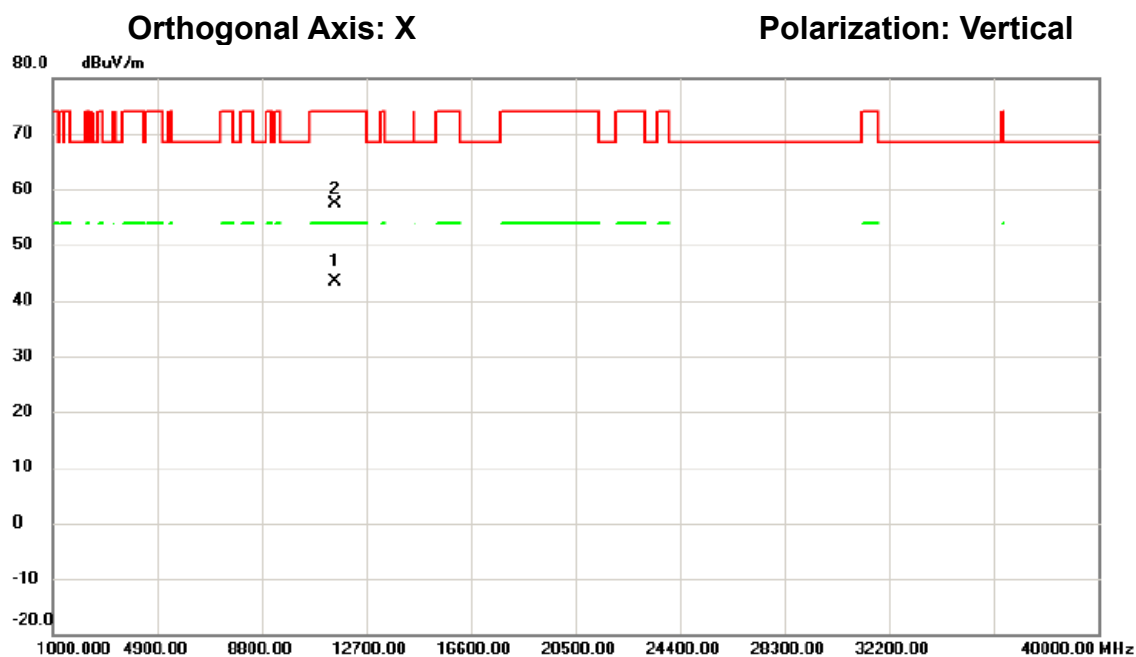

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11508.75	40.61	2.88	43.49	54.00	-10.51	AVG	
2		11509.04	54.42	2.88	57.30	74.00	-16.70	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

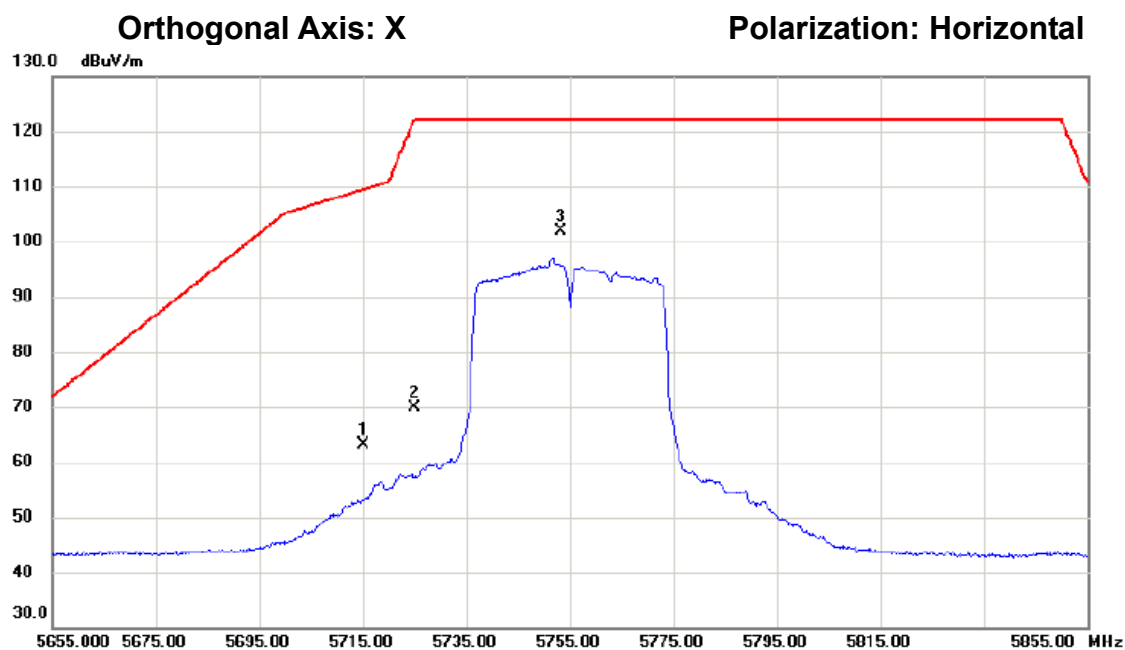

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	64.03	-0.92	63.11	109.40	-46.29	peak	
2		5725.000	70.66	-0.89	69.77	122.20	-52.43	peak	
3	*	5753.200	102.77	-0.81	101.96	122.20	-20.24	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (VHT40) / 5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

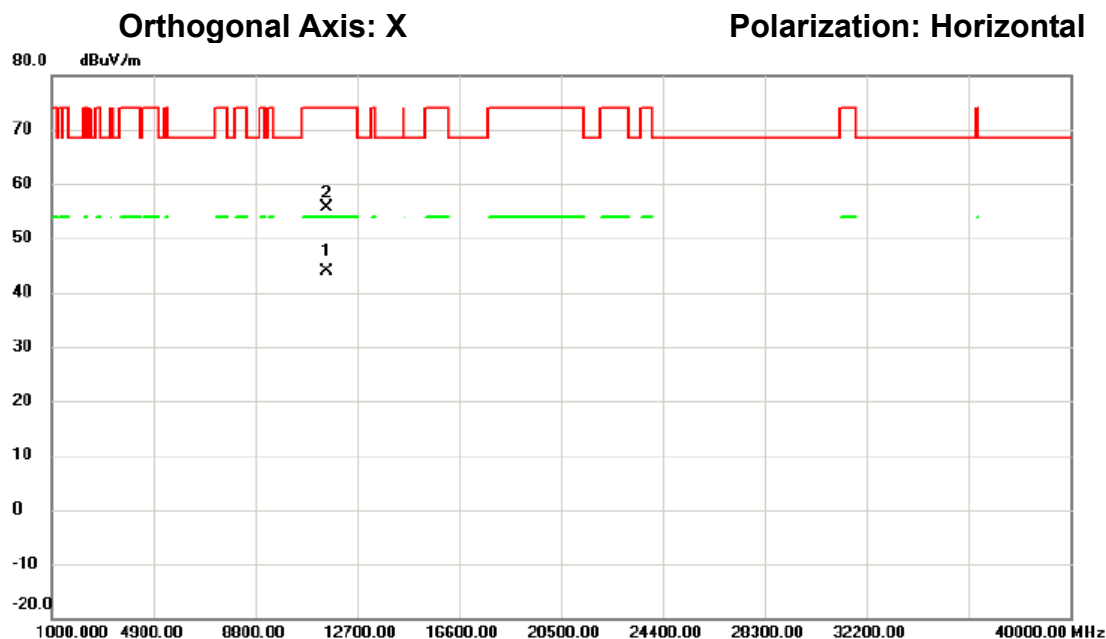

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11511.31	41.00	2.88	43.88	54.00	-10.12	AVG	
2		11512.12	52.87	2.88	55.75	74.00	-18.25	peak	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

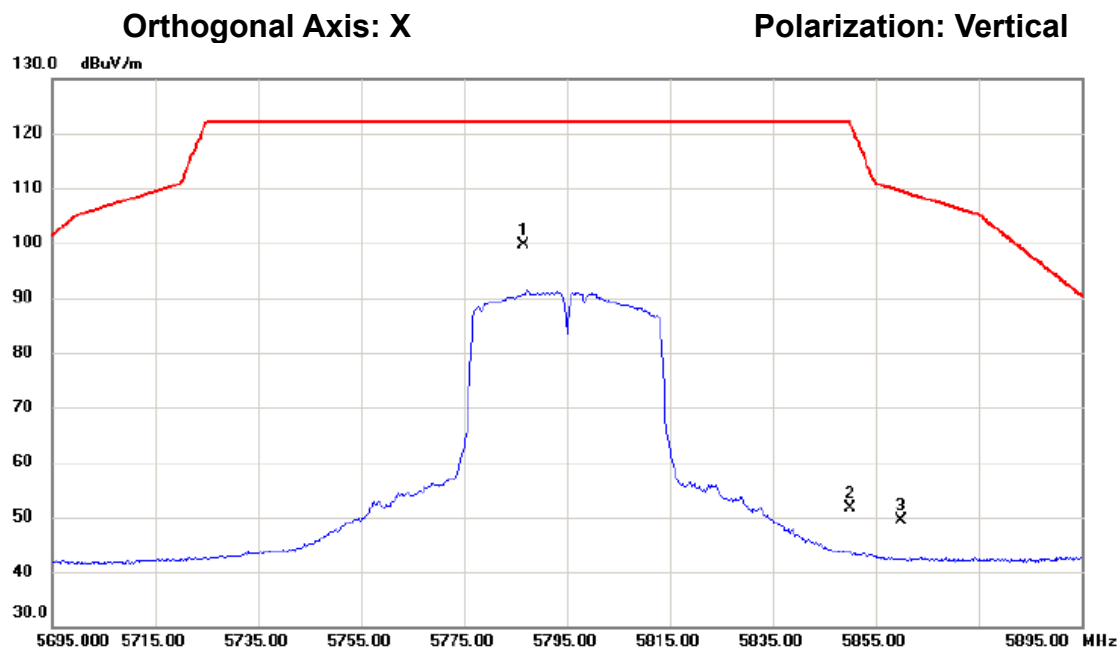

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5786.700	100.35	-0.73	99.62	122.20	-22.58	peak	主波訊號不予判定
2		5850.000	52.23	-0.57	51.66	122.20	-70.54	peak	
3		5860.000	49.87	-0.54	49.33	109.40	-60.07	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

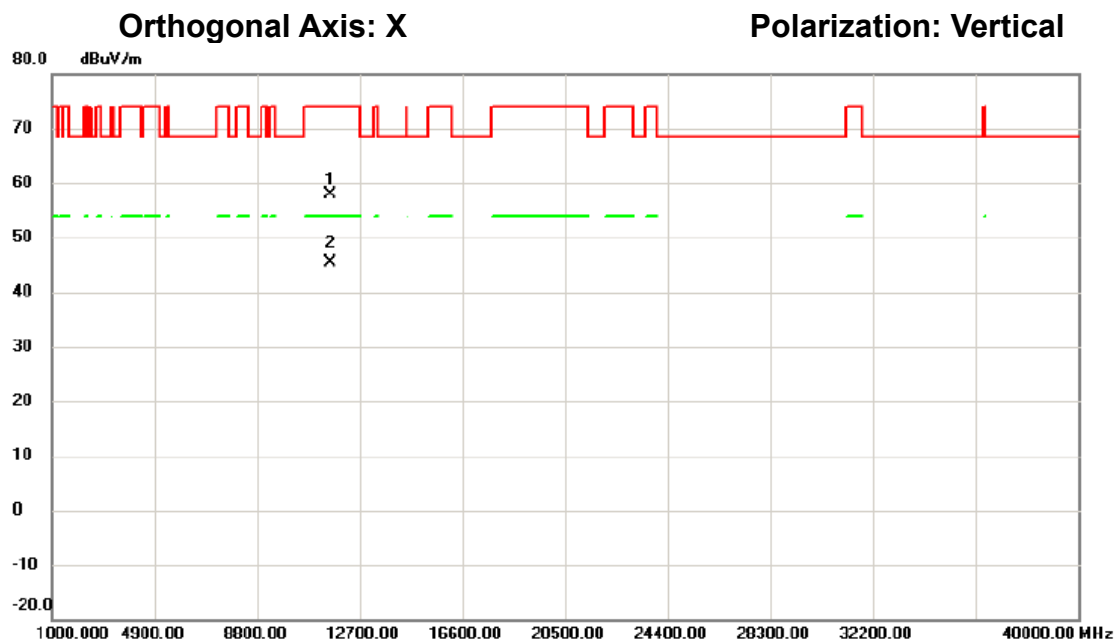

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.72	55.33	2.66	57.99	74.00	-16.01	peak	
2	*	11591.38	42.60	2.66	45.26	54.00	-8.74	AVG	

測試頻道: IEEE 802.11ac (VHT40) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

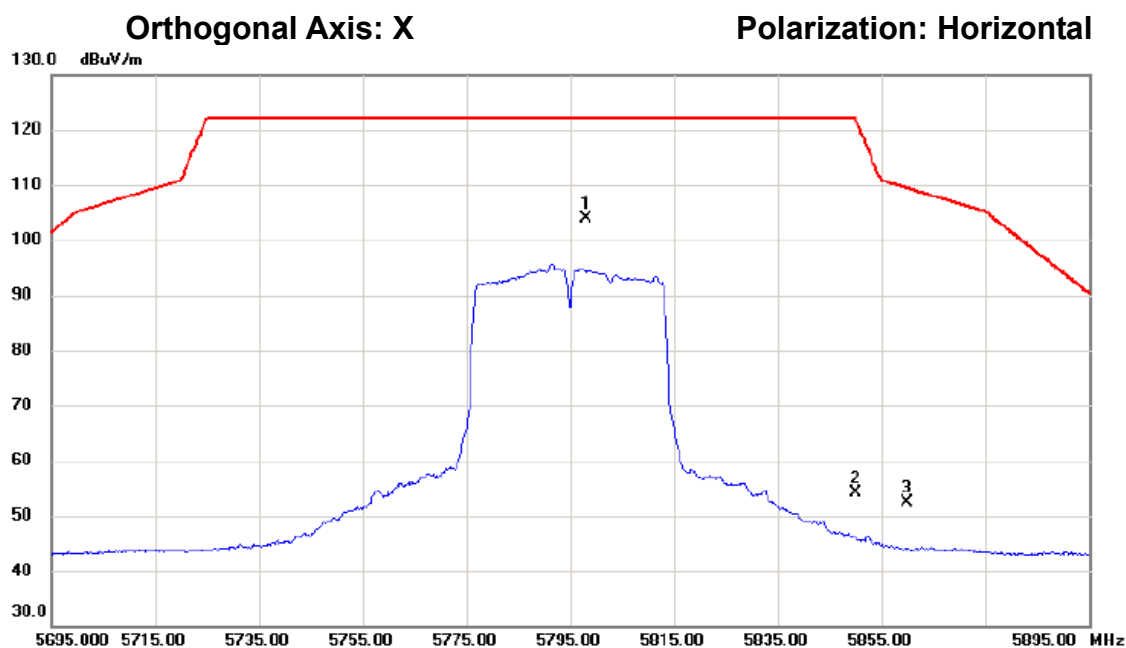

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5798.200	104.63	-0.70	103.93	122.20	-18.27	peak	主波訊號不予判定
2		5850.000	54.66	-0.57	54.09	122.20	-68.11	peak	
3		5860.000	52.95	-0.54	52.41	109.40	-56.99	peak	

測試頻道: IEEE 802.11ac (VHT40) / 5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

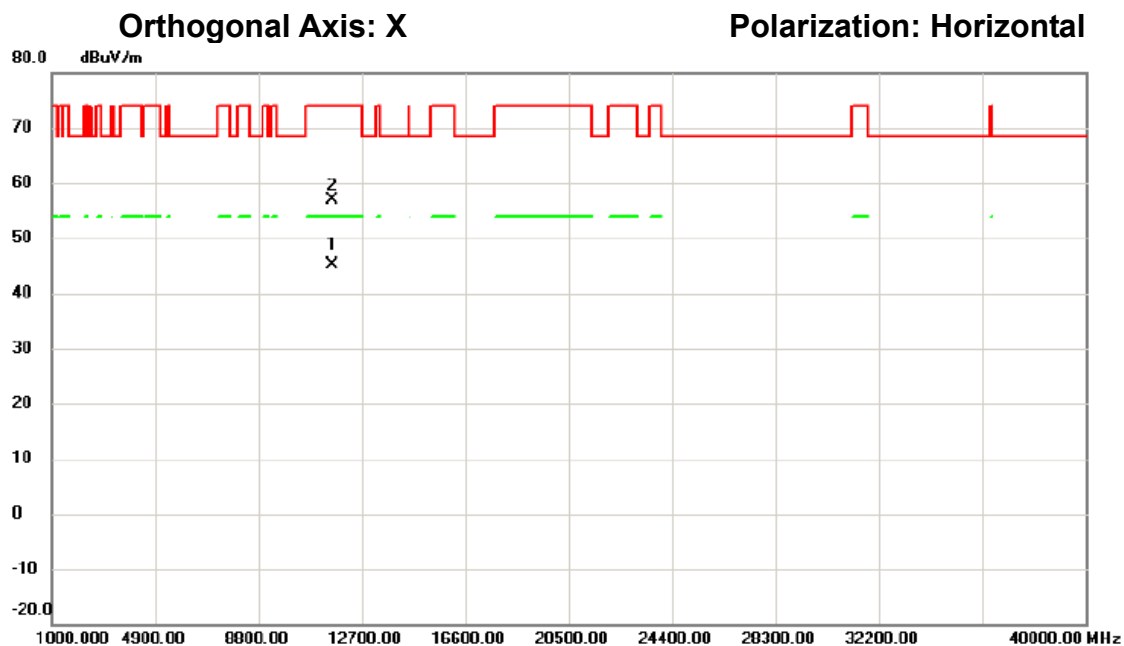

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11591.29	42.43	2.66	45.09	54.00	-8.91	AVG	
2		11591.45	54.17	2.66	56.83	74.00	-17.17	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

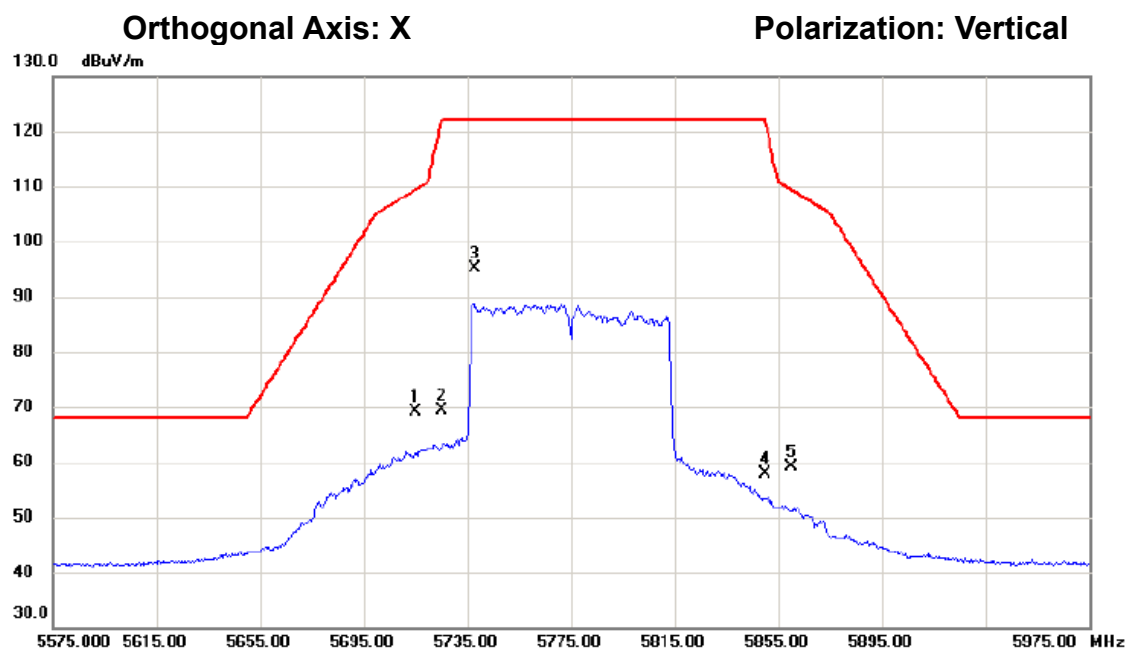

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	69.94	-0.92	69.02	109.40	-40.38	peak	
2		5725.000	70.39	-0.89	69.50	122.20	-52.70	peak	
3	*	5738.000	96.08	-0.86	95.22	122.20	-26.98	peak	主波訊號不予判定
4		5850.000	58.40	-0.57	57.83	122.20	-64.37	peak	
5		5860.000	59.67	-0.54	59.13	109.40	-50.27	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

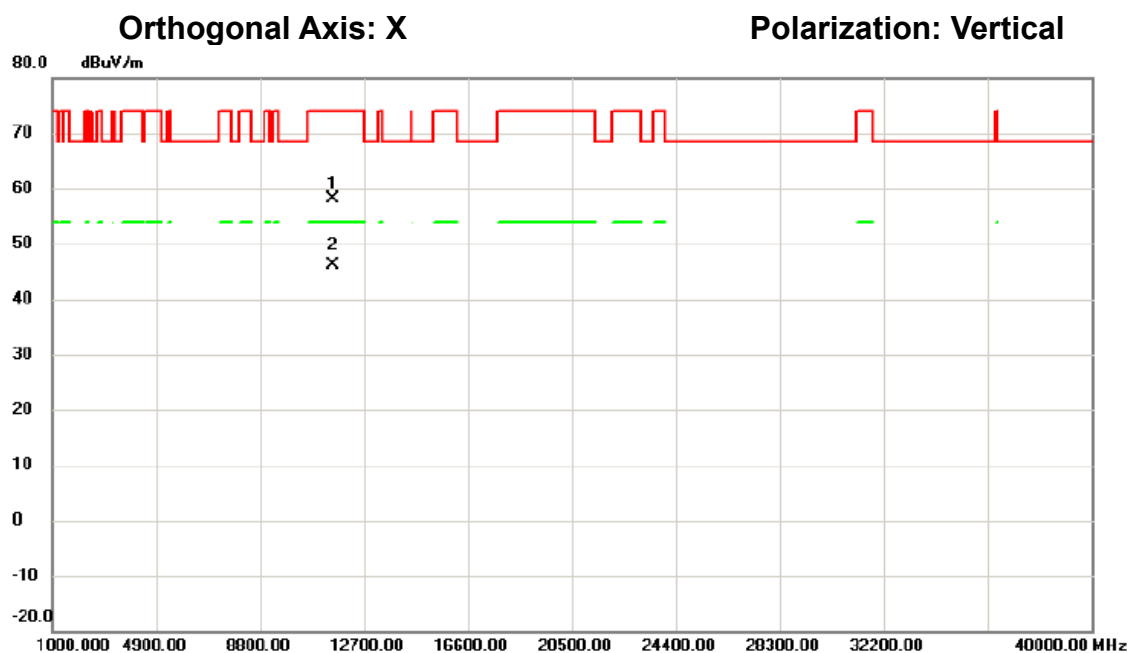

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11547.95	55.35	2.77	58.12	74.00	-15.88	peak	
2	*	11550.51	43.25	2.77	46.02	54.00	-7.98	AVG	

測試頻道: IEEE 802.11ac (VHT80) / 5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

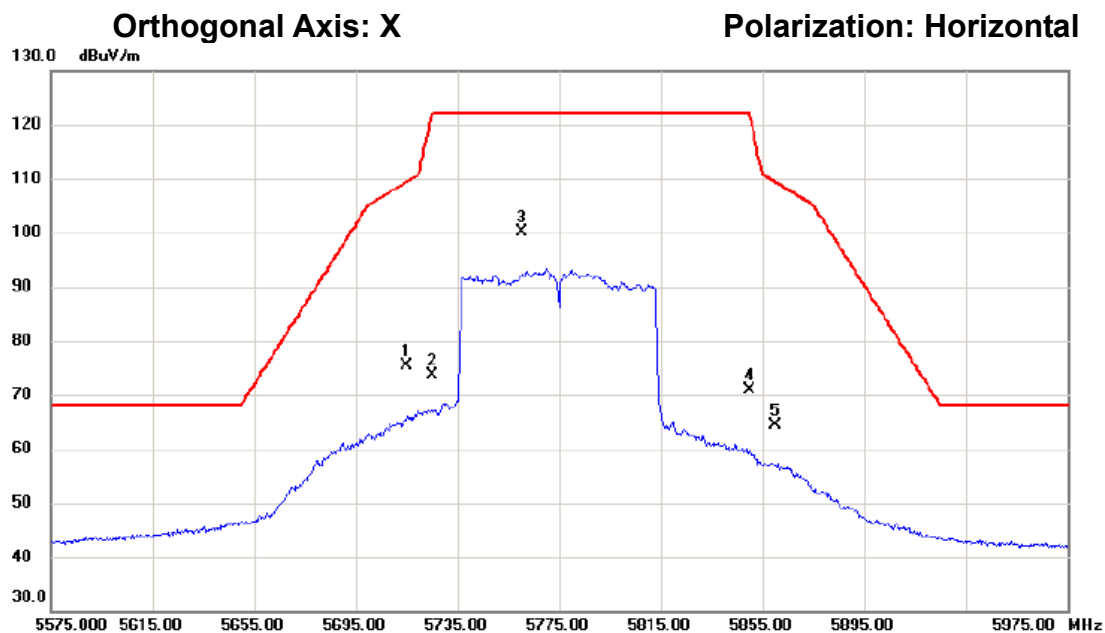

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	76.18	-0.92	75.26	109.40	-34.14	peak	
2		5725.000	74.61	-0.89	73.72	122.20	-48.48	peak	
3	*	5760.200	100.98	-0.80	100.18	122.20	-22.02	peak	主波訊號不予判定
4		5850.000	71.38	-0.57	70.81	122.20	-51.39	peak	
5		5860.000	64.88	-0.54	64.34	109.40	-45.06	peak	

測試頻道: IEEE 802.11ac (VHT80) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C


環境濕度: 66%

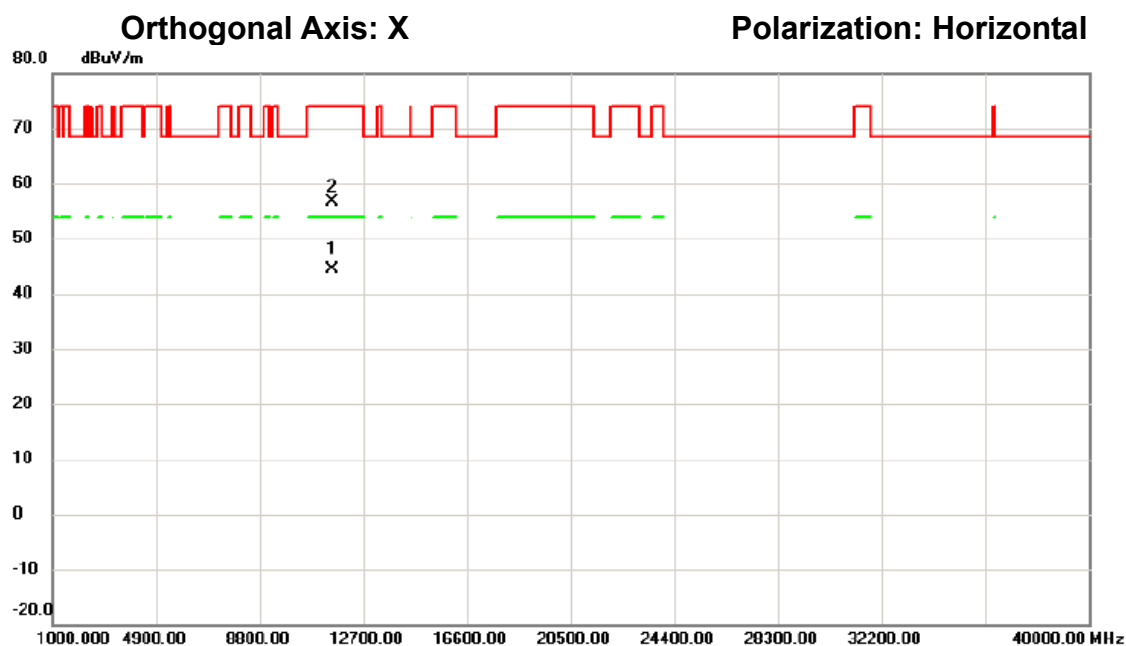

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11550.49	41.54	2.77	44.31	54.00	-9.69	AVG	
2		11550.54	53.80	2.77	56.57	74.00	-17.43	peak	

測試頻道: IEEE 802.11a / 5745 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢測器: Peak/AV
 環境溫度: 23°C

測試模式: 接收
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/09/07
 環境濕度: 66%

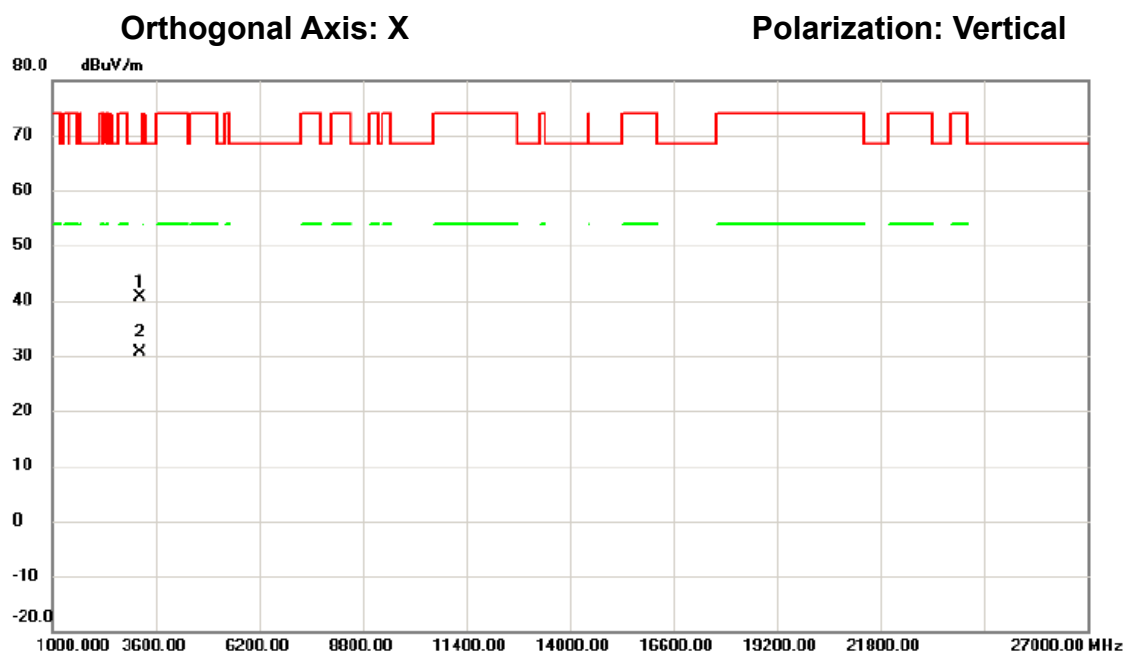

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	3184.000	55.75	-15.01	40.74	68.30	-27.56	peak	
2		3184.000	45.62	-15.01	30.61	68.30	-37.69	AVG	

測試頻道: IEEE 802.11a / 5745 MHz

測試模式: 接收

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/09/07

環境溫度: 23°C

環境濕度: 66%

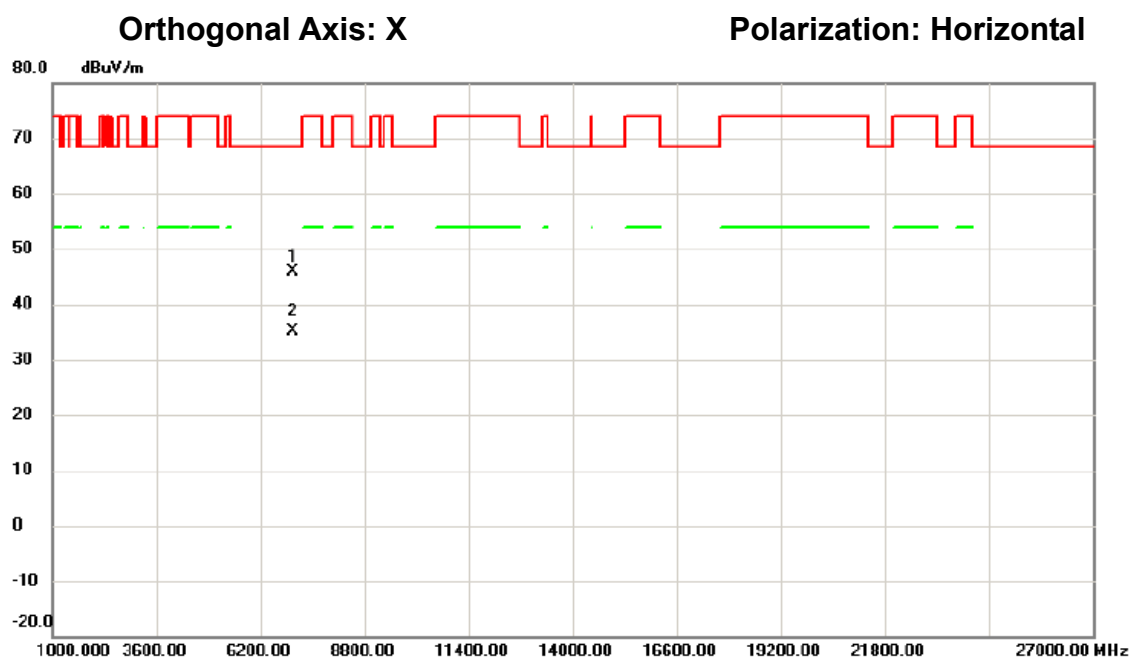

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7006.000	51.95	-6.11	45.84	68.30	-22.46	peak	
2		7006.000	41.18	-6.11	35.07	68.30	-33.23	AVG	