

測試頻道: IEEE 802.11n (20 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

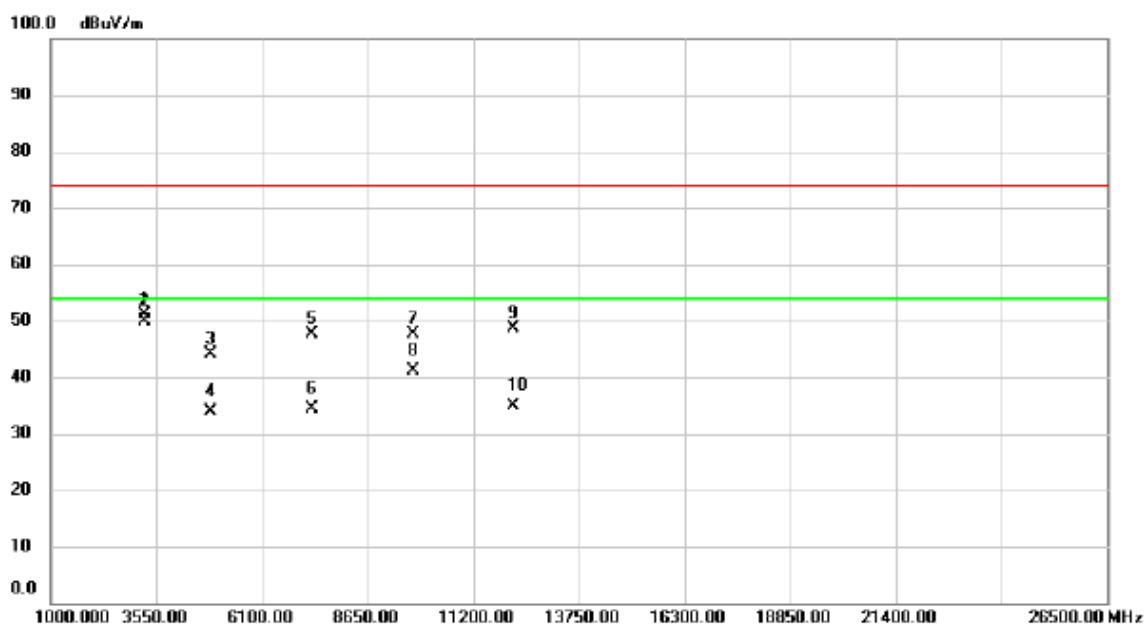

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3249.000	66.01	-14.95	51.06	74.00	-22.94	peak	
2	*	3249.000	64.91	-14.95	49.96	54.00	-4.04	AVG	
3		4874.000	55.31	-11.13	44.18	74.00	-29.82	peak	
4		4874.000	45.02	-11.13	33.89	54.00	-20.11	AVG	
5		7311.000	52.12	-4.51	47.61	74.00	-26.39	peak	
6		7311.000	38.89	-4.51	34.38	54.00	-19.62	AVG	
7		9748.000	47.68	0.00	47.68	74.00	-26.32	peak	
8		9748.000	41.10	0.00	41.10	54.00	-12.90	AVG	
9		12185.00	47.36	1.36	48.72	74.00	-25.28	peak	
10		12185.00	33.45	1.36	34.81	54.00	-19.19	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

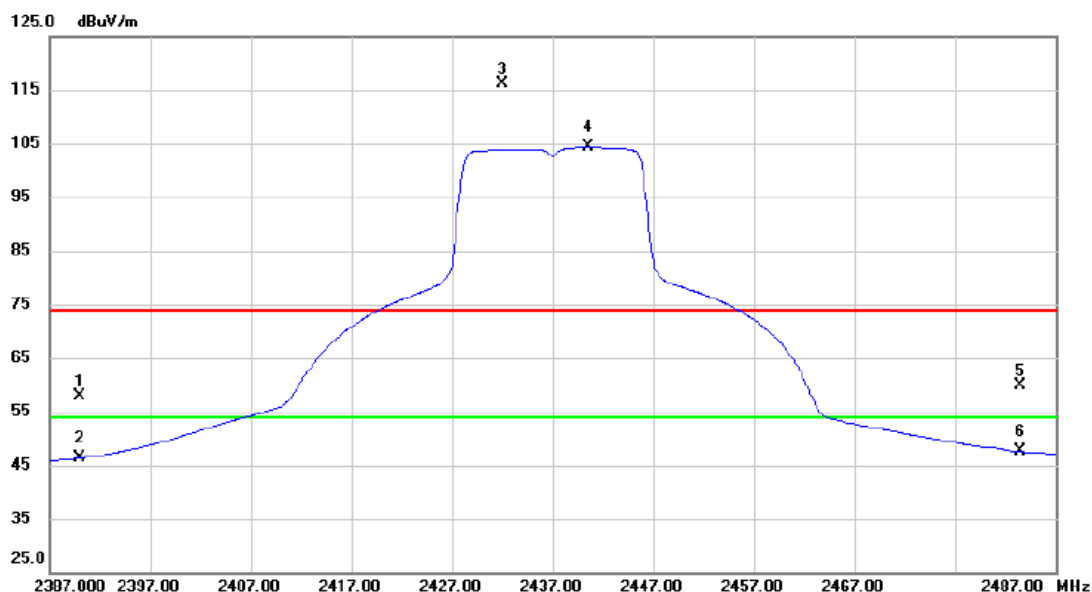

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	25.68	32.30	57.98	74.00	-16.02	peak	
2		2390.000	14.08	32.30	46.38	54.00	-7.62	AVG	
3	X	2432.000	83.62	32.50	116.12	74.00	42.12	peak	主波訊號不予判定
4	*	2440.500	71.79	32.54	104.33	54.00	50.33	AVG	主波訊號不予判定
5		2483.500	27.21	32.73	59.94	74.00	-14.06	peak	
6		2483.500	14.82	32.73	47.55	54.00	-6.45	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

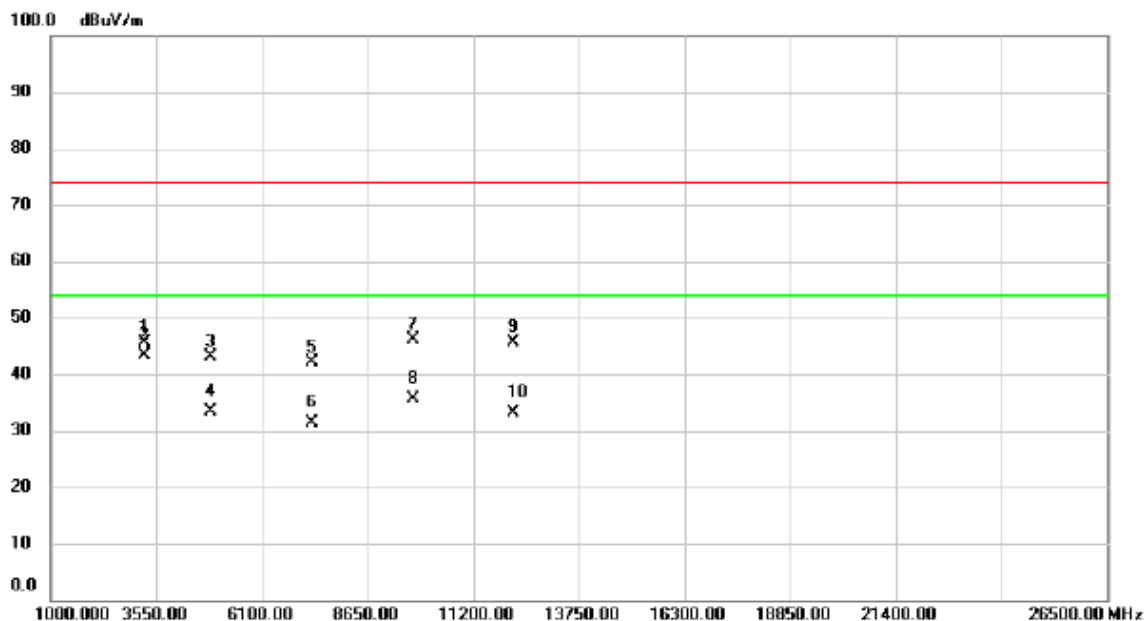

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3249.000	60.54	-14.95	45.59	74.00	-28.41	peak	
2	*	3249.000	58.39	-14.95	43.44	54.00	-10.56	AVG	
3		4874.000	54.17	-11.13	43.04	74.00	-30.96	peak	
4		4874.000	44.48	-11.13	33.35	54.00	-20.65	AVG	
5		7311.000	46.60	-4.51	42.09	74.00	-31.91	peak	
6		7311.000	35.96	-4.51	31.45	54.00	-22.55	AVG	
7		9748.000	46.01	0.00	46.01	74.00	-27.99	peak	
8		9748.000	35.74	0.00	35.74	54.00	-18.26	AVG	
9		12185.00	44.38	1.36	45.74	74.00	-28.26	peak	
10		12185.00	31.85	1.36	33.21	54.00	-20.79	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
2462 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

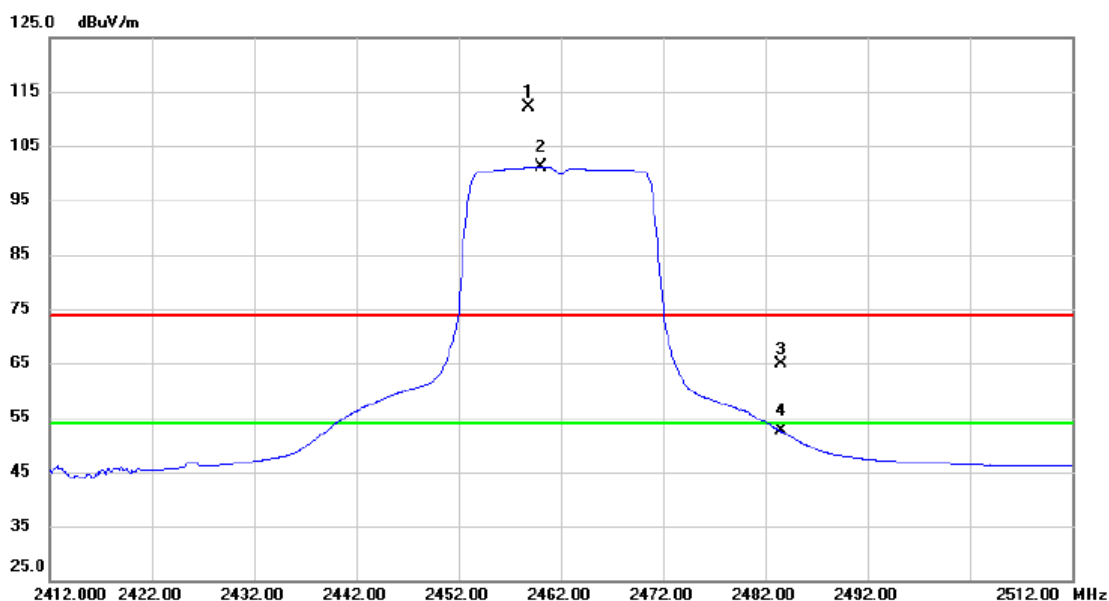

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2458.800	79.44	32.62	112.06	74.00	38.06	peak	主波訊號不予判定
2	*	2460.100	68.49	32.63	101.12	54.00	47.12	AVG	主波訊號不予判定
3		2483.500	32.14	32.73	64.87	74.00	-9.13	peak	
4		2483.500	19.85	32.73	52.58	54.00	-1.42	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
2462 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

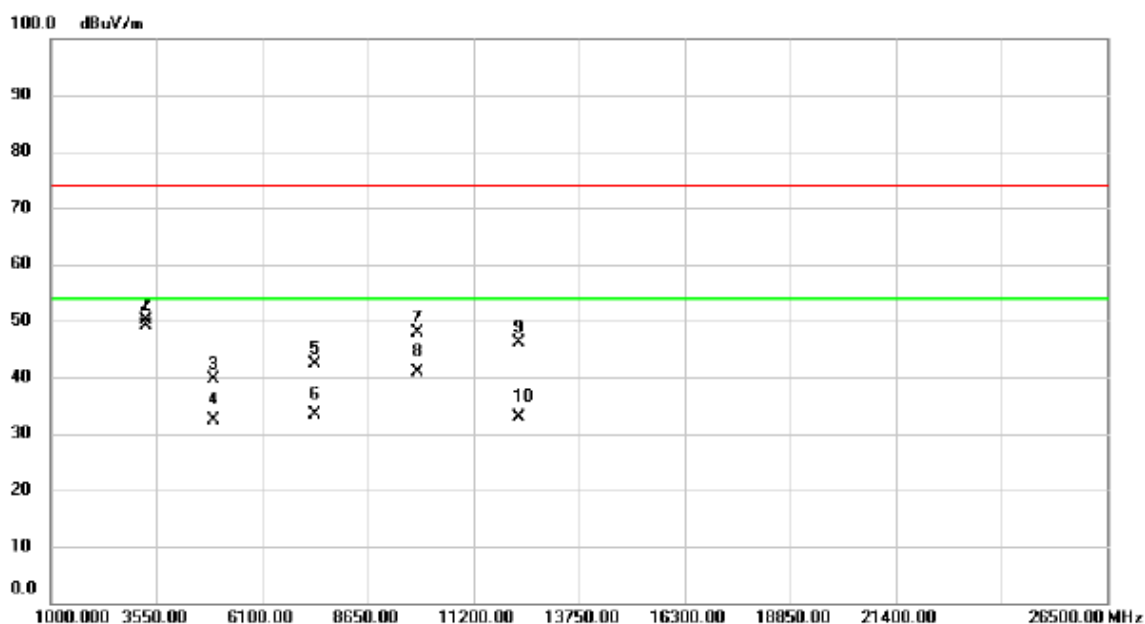

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3282.000	65.11	-14.89	50.22	74.00	-23.78	peak	
2	*	3282.000	64.06	-14.89	49.17	54.00	-4.83	AVG	
3		4924.000	50.71	-11.02	39.69	74.00	-34.31	peak	
4		4924.000	43.49	-11.02	32.47	54.00	-21.53	AVG	
5		7386.000	46.63	-4.33	42.30	74.00	-31.70	peak	
6		7386.000	37.70	-4.33	33.37	54.00	-20.63	AVG	
7		9848.000	47.78	0.17	47.95	74.00	-26.05	peak	
8		9848.000	40.77	0.17	40.94	54.00	-13.06	AVG	
9		12310.00	44.89	1.36	46.25	74.00	-27.75	peak	
10		12310.00	31.55	1.36	32.91	54.00	-21.09	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
2462 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

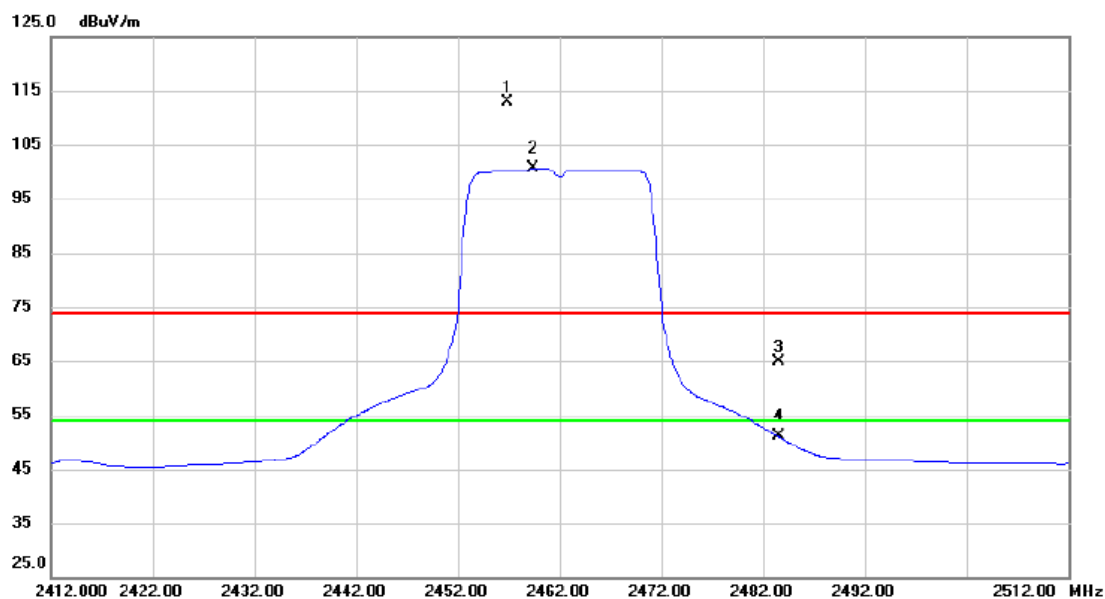

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.900	80.16	32.61	112.77	74.00	38.77	peak	主波訊號不予判定
2	*	2459.400	67.93	32.62	100.55	54.00	46.55	AVG	主波訊號不予判定
3		2483.500	32.10	32.73	64.83	74.00	-9.17	peak	
4		2483.500	18.32	32.73	51.05	54.00	-2.95	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
2462 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

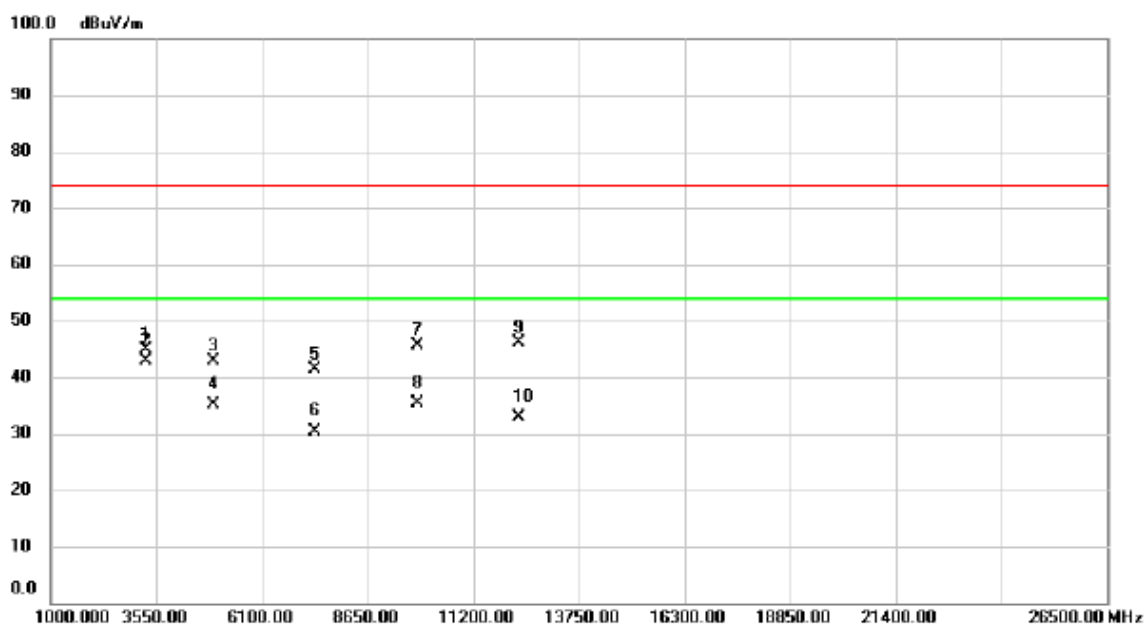

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3282.000	59.84	-14.89	44.95	74.00	-29.05	peak	
2	*	3282.000	57.78	-14.89	42.89	54.00	-11.11	AVG	
3		4924.000	53.83	-11.02	42.81	74.00	-31.19	peak	
4		4924.000	46.06	-11.02	35.04	54.00	-18.96	AVG	
5		7386.000	45.63	-4.33	41.30	74.00	-32.70	peak	
6		7386.000	34.67	-4.33	30.34	54.00	-23.66	AVG	
7		9848.000	45.56	0.17	45.73	74.00	-28.27	peak	
8		9848.000	35.28	0.17	35.45	54.00	-18.55	AVG	
9		12310.00	44.66	1.36	46.02	74.00	-27.98	peak	
10		12310.00	31.60	1.36	32.96	54.00	-21.04	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

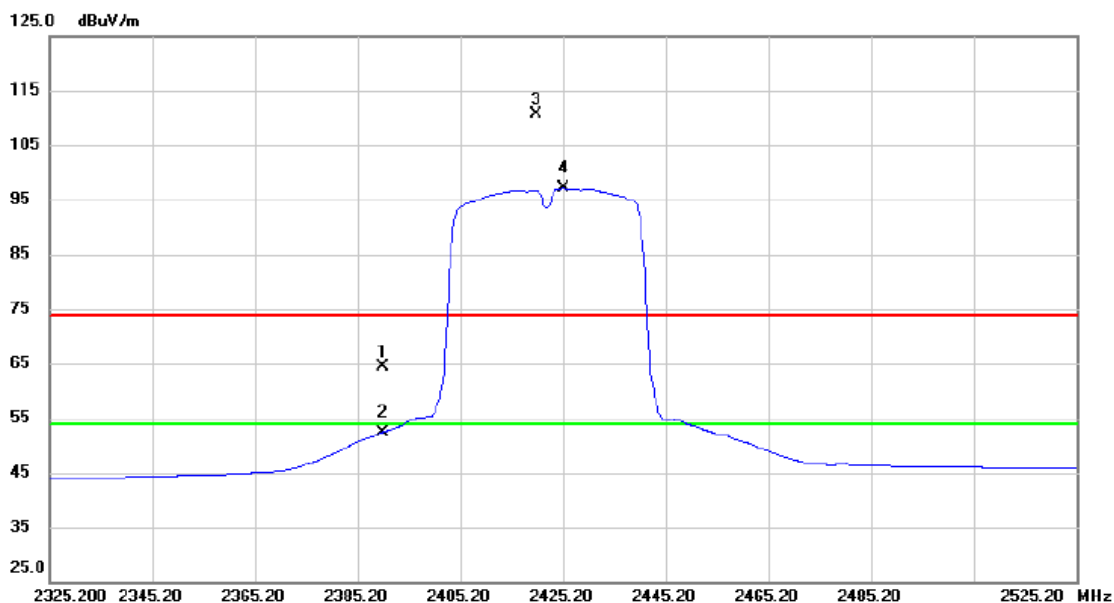

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	32.17	32.30	64.47	74.00	-9.53	peak	
2		2390.000	20.16	32.30	52.46	54.00	-1.54	AVG	
3	X	2420.000	78.23	32.44	110.67	74.00	36.67	peak	主波訊號不予判定
4	*	2425.200	64.54	32.47	97.01	54.00	43.01	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
2422 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

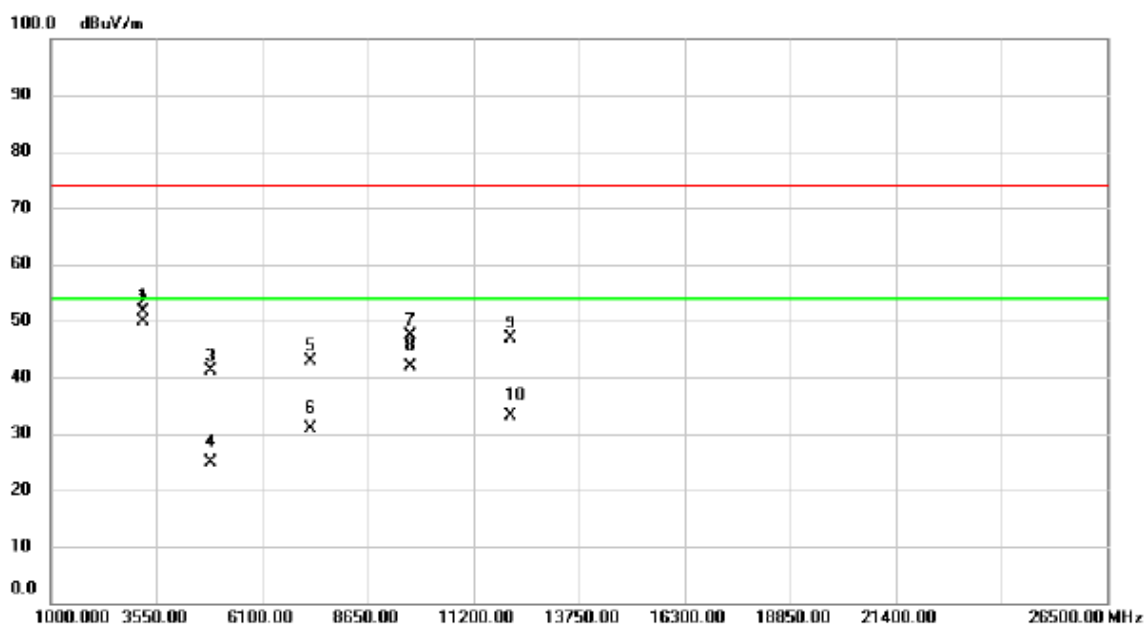

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3230.000	66.70	-14.98	51.72	74.00	-22.28	peak	
2	*	3230.000	64.83	-14.98	49.85	54.00	-4.15	AVG	
3		4844.000	52.30	-11.20	41.10	74.00	-32.90	peak	
4		4844.000	36.11	-11.20	24.91	54.00	-29.09	AVG	
5		7266.000	47.38	-4.61	42.77	74.00	-31.23	peak	
6		7266.000	35.50	-4.61	30.89	54.00	-23.11	AVG	
7		9688.000	47.39	-0.10	47.29	74.00	-26.71	peak	
8		9688.000	41.91	-0.10	41.81	54.00	-12.19	AVG	
9		12110.000	45.40	1.36	46.76	74.00	-27.24	peak	
10		12110.000	31.70	1.36	33.06	54.00	-20.94	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2422 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/02/02

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

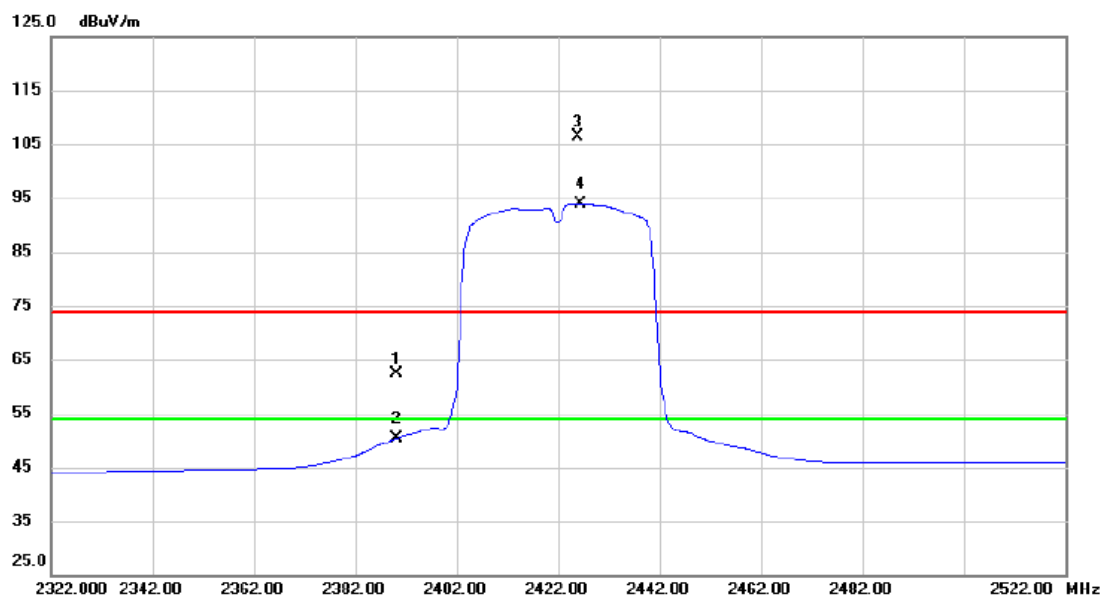

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	30.16	32.30	62.46	74.00	-11.54	peak	
2		2390.000	18.05	32.30	50.35	54.00	-3.65	AVG	
3	X	2425.800	73.89	32.47	106.36	74.00	32.36	peak	主波訊號不予判定
4	*	2426.400	61.46	32.47	93.93	54.00	39.93	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

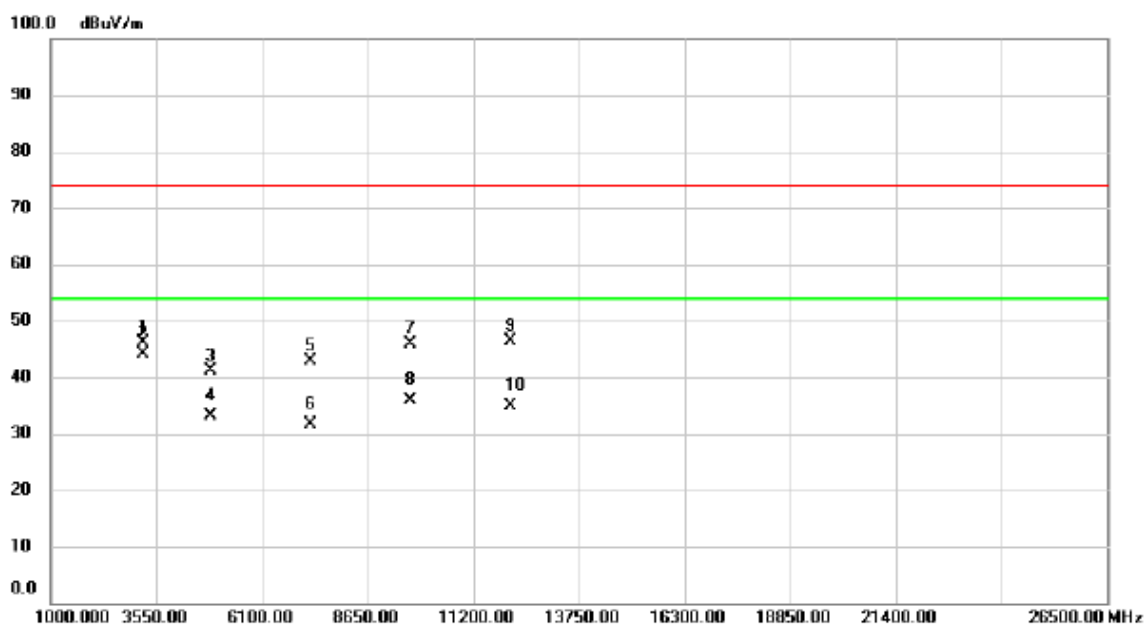

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		3230.000	61.01	-14.98	46.03	74.00	-27.97	peak	
2	*	3230.000	59.20	-14.98	44.22	54.00	-9.78	AVG	
3		4844.000	52.41	-11.20	41.21	74.00	-32.79	peak	
4		4844.000	44.33	-11.20	33.13	54.00	-20.87	AVG	
5		7266.000	47.61	-4.61	43.00	74.00	-31.00	peak	
6		7266.000	36.13	-4.61	31.52	54.00	-22.48	AVG	
7		9688.000	45.92	-0.10	45.82	74.00	-28.18	peak	
8		9688.000	35.91	-0.10	35.81	54.00	-18.19	AVG	
9		12110.000	45.02	1.36	46.38	74.00	-27.62	peak	
10		12110.000	33.52	1.36	34.88	54.00	-19.12	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

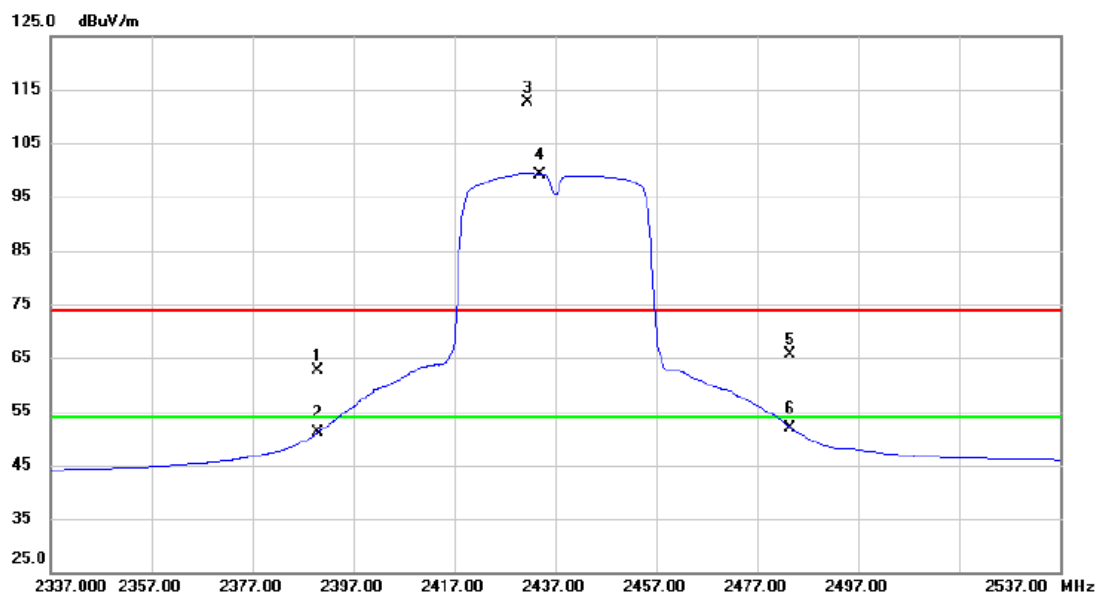

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	30.23	32.30	62.53	74.00	-11.47	peak	
2		2390.000	18.88	32.30	51.18	54.00	-2.82	AVG	
3	X	2431.600	80.14	32.50	112.64	74.00	38.64	peak	主波訊號不予判定
4	*	2434.000	66.63	32.51	99.14	54.00	45.14	AVG	主波訊號不予判定
5		2483.500	32.81	32.73	65.54	74.00	-8.46	peak	
6		2483.500	19.23	32.73	51.96	54.00	-2.04	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

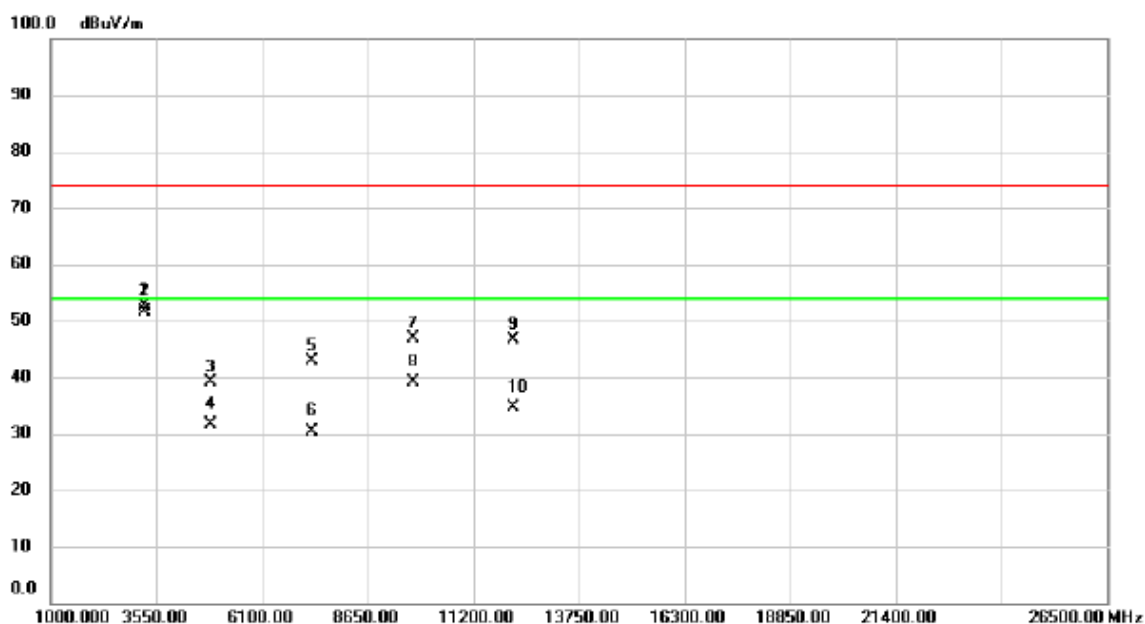

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3249.000	67.53	-14.95	52.58	74.00	-21.42	peak	
2	*	3249.000	66.52	-14.95	51.57	54.00	-2.43	AVG	
3		4874.000	50.15	-11.13	39.02	74.00	-34.98	peak	
4		4874.000	42.75	-11.13	31.62	54.00	-22.38	AVG	
5		7311.000	47.27	-4.51	42.76	74.00	-31.24	peak	
6		7311.000	34.99	-4.51	30.48	54.00	-23.52	AVG	
7		9748.000	46.95	0.00	46.95	74.00	-27.05	peak	
8		9748.000	39.12	0.00	39.12	54.00	-14.88	AVG	
9		12185.000	45.29	1.36	46.65	74.00	-27.35	peak	
10		12185.000	33.36	1.36	34.72	54.00	-19.28	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

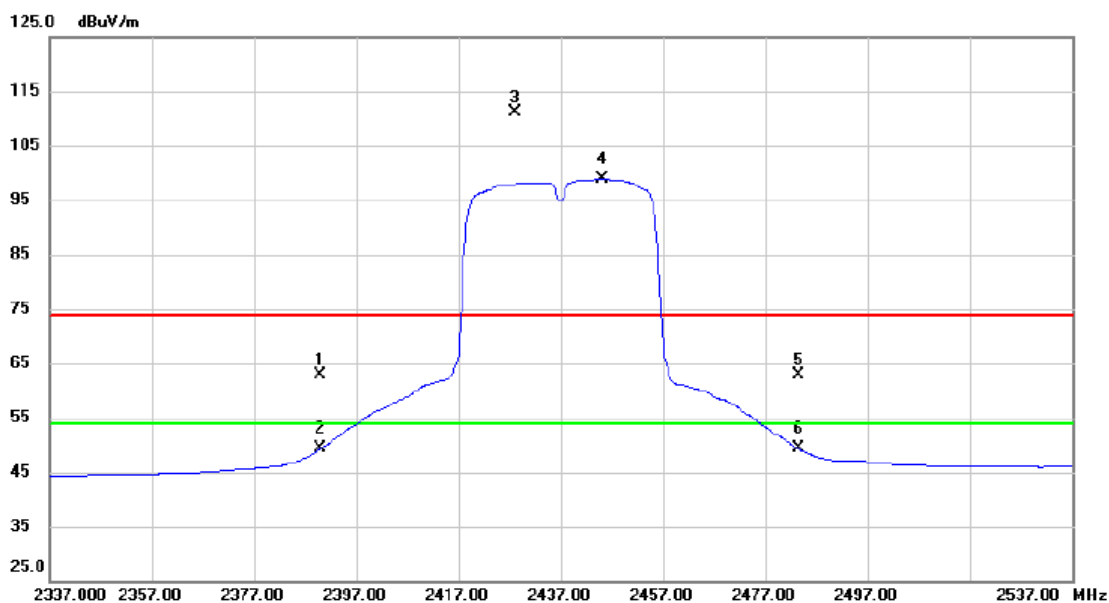

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	30.56	32.30	62.86	74.00	-11.14	peak	
2		2390.000	16.99	32.30	49.29	54.00	-4.71	AVG	
3	X	2428.200	78.65	32.48	111.13	74.00	37.13	peak	主波訊號不予判定
4	*	2445.000	66.38	32.55	98.93	54.00	44.93	AVG	主波訊號不予判定
5		2483.500	30.21	32.73	62.94	74.00	-11.06	peak	
6		2483.500	16.54	32.73	49.27	54.00	-4.73	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

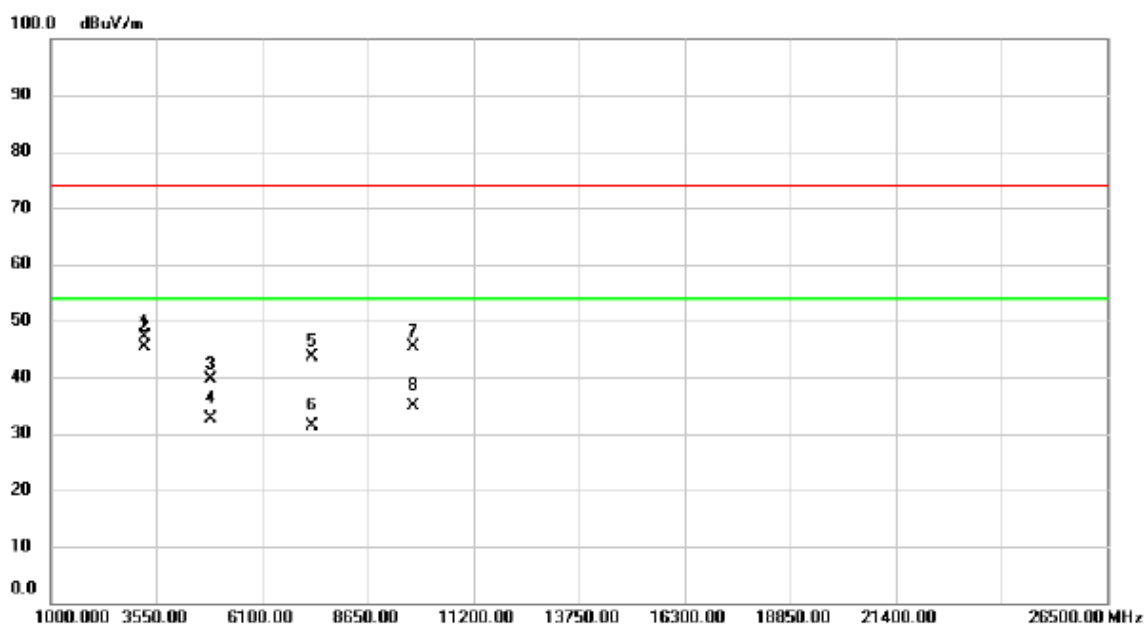

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3249.000	62.14	-14.95	47.19	74.00	-26.81	peak	
2	*	3249.000	60.41	-14.95	45.46	54.00	-8.54	AVG	
3		4874.000	50.72	-11.13	39.59	74.00	-34.41	peak	
4		4874.000	43.80	-11.13	32.67	54.00	-21.33	AVG	
5		7311.000	48.03	-4.51	43.52	74.00	-30.48	peak	
6		7311.000	35.89	-4.51	31.38	54.00	-22.62	AVG	
7		9748.000	45.39	0.00	45.39	74.00	-28.61	peak	
8		9748.000	34.77	0.00	34.77	54.00	-19.23	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

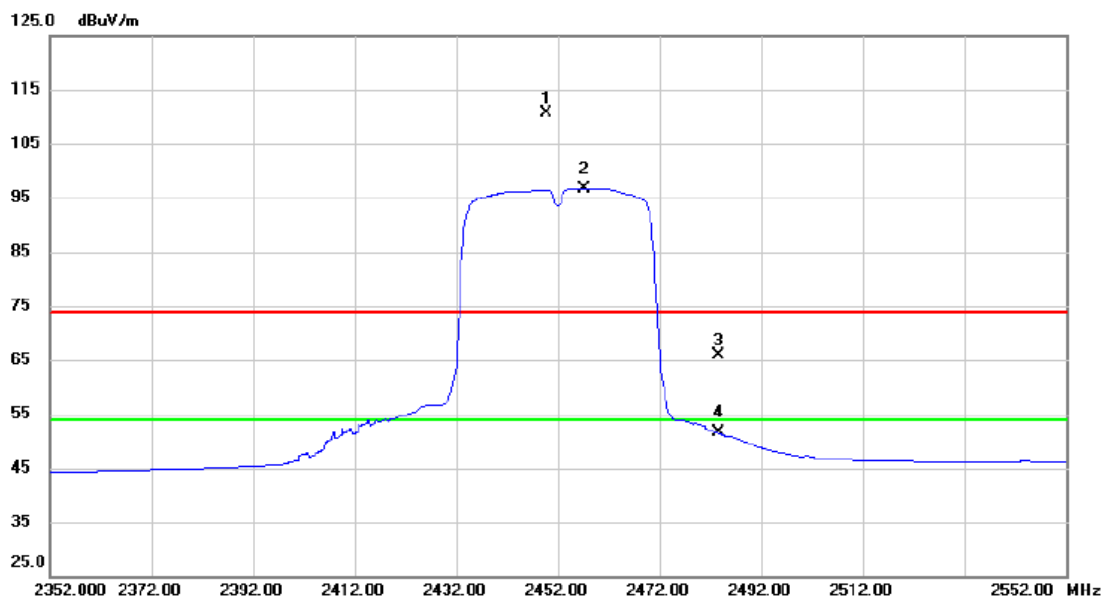

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2449.800	78.12	32.58	110.70	74.00	36.70	peak	主波訊號不予判定
2	*	2457.200	64.08	32.62	96.70	54.00	42.70	AVG	主波訊號不予判定
3		2483.500	33.17	32.73	65.90	74.00	-8.10	peak	
4		2483.500	19.00	32.73	51.73	54.00	-2.27	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

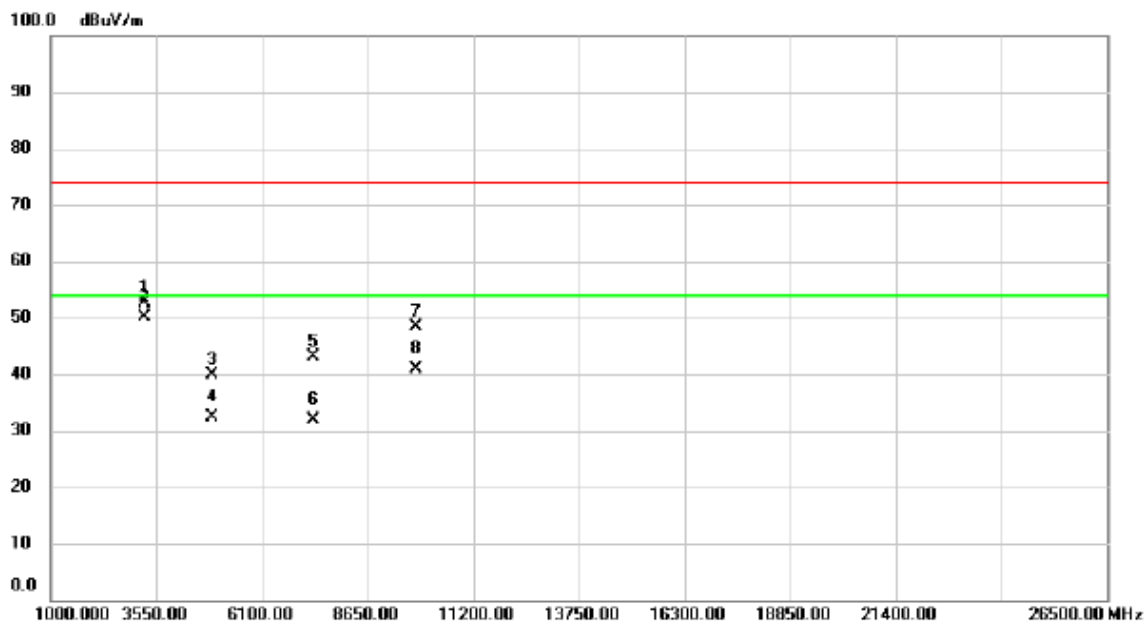

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3269.000	67.65	-14.91	52.74	74.00	-21.26	peak	
2	*	3269.000	65.11	-14.91	50.20	54.00	-3.80	AVG	
3		4904.000	50.96	-11.08	39.88	74.00	-34.12	peak	
4		4904.000	43.38	-11.08	32.30	54.00	-21.70	AVG	
5		7356.000	47.57	-4.40	43.17	74.00	-30.83	peak	
6		7356.000	36.32	-4.40	31.92	54.00	-22.08	AVG	
7		9808.000	48.30	0.11	48.41	74.00	-25.59	peak	
8		9808.000	40.65	0.11	40.76	54.00	-13.24	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2452 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/02/02

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

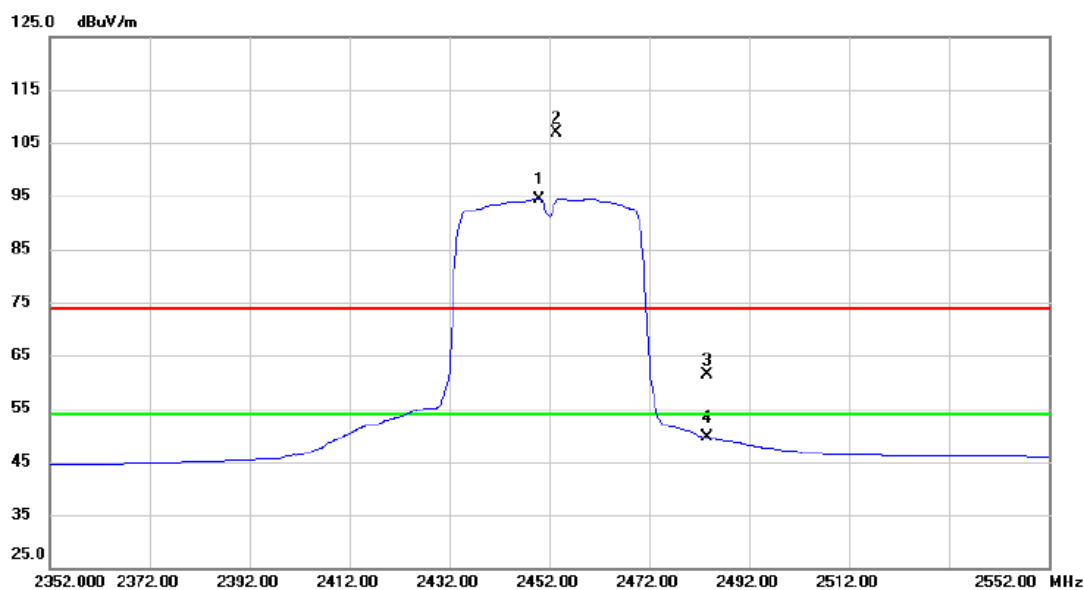

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2450.000	61.90	32.58	94.48	54.00	40.48	AVG	主波訊號不予判定
2	X	2453.600	74.32	32.59	106.91	74.00	32.91	peak	主波訊號不予判定
3		2483.500	28.56	32.73	61.29	74.00	-12.71	peak	
4		2483.500	16.79	32.73	49.52	54.00	-4.48	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

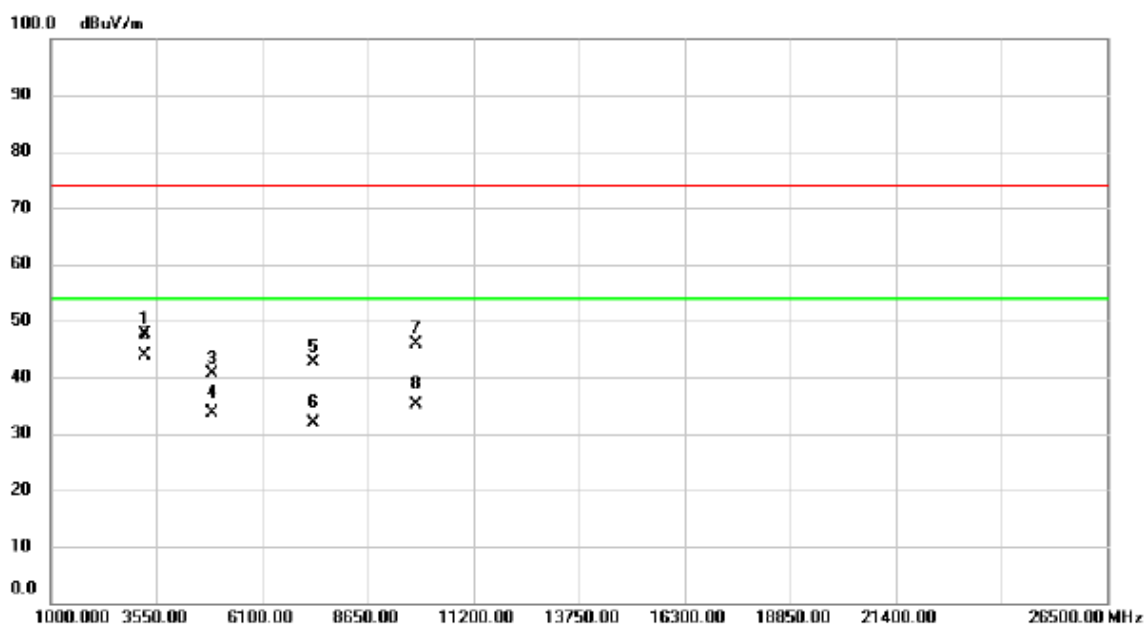

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3269.000	62.47	-14.91	47.56	74.00	-26.44	peak	
2	*	3269.000	58.68	-14.91	43.77	54.00	-10.23	AVG	
3		4904.000	51.72	-11.08	40.64	74.00	-33.36	peak	
4		4904.000	44.62	-11.08	33.54	54.00	-20.46	AVG	
5		7356.000	46.93	-4.40	42.53	74.00	-31.47	peak	
6		7356.000	36.32	-4.40	31.92	54.00	-22.08	AVG	
7		9808.000	45.65	0.11	45.76	74.00	-28.24	peak	
8		9808.000	34.91	0.11	35.02	54.00	-18.98	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2412 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

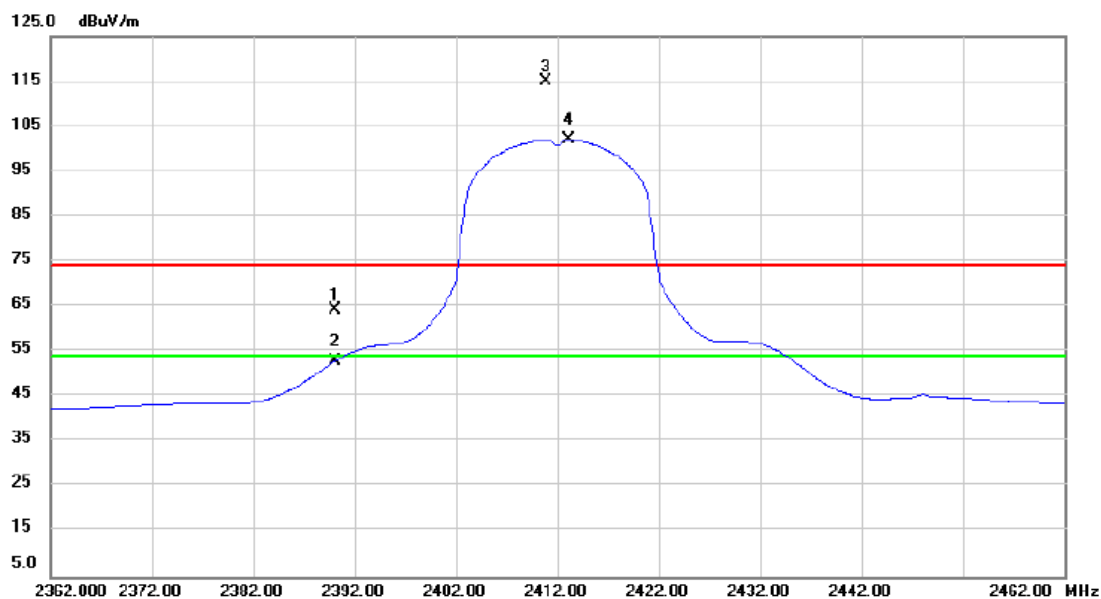

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	31.86	32.30	64.16	74.00	-9.84	peak	
2		2390.000	20.54	32.30	52.84	54.00	-1.16	AVG	
3	X	2410.900	82.69	32.40	115.09	74.00	41.09	peak	主波訊號不予判定
4	*	2413.100	69.73	32.41	102.14	54.00	48.14	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
2412 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

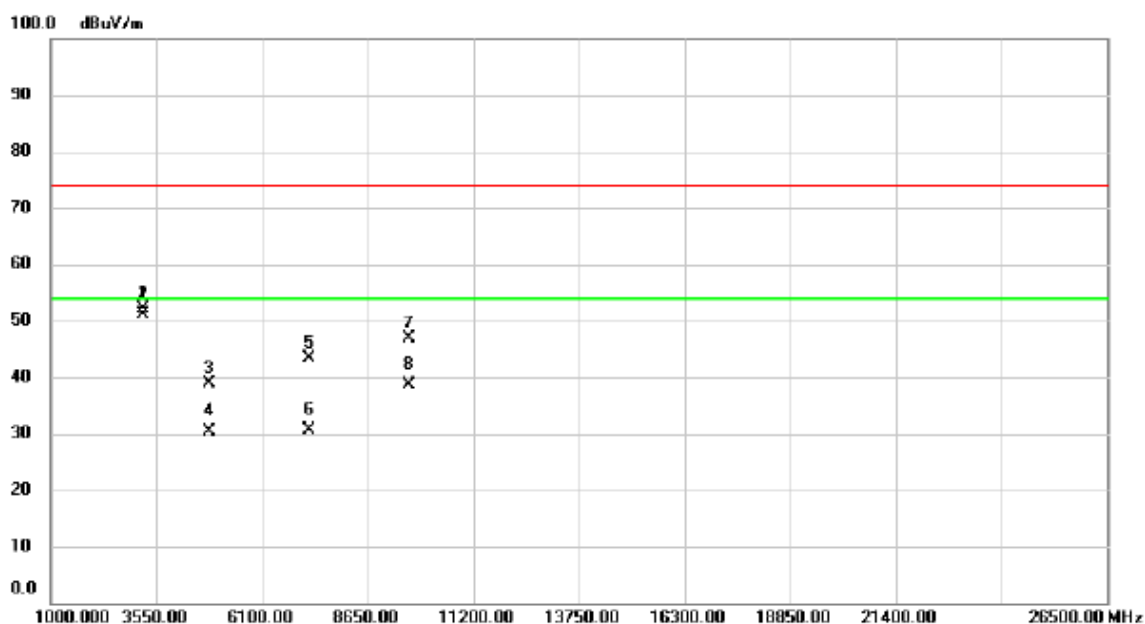

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3216.000	67.13	-15.00	52.13	74.00	-21.87	peak	
2	*	3216.000	66.13	-15.00	51.13	54.00	-2.87	AVG	
3		4828.000	50.07	-11.25	38.82	74.00	-35.18	peak	
4		4828.000	41.72	-11.25	30.47	54.00	-23.53	AVG	
5		7236.000	48.10	-4.67	43.43	74.00	-30.57	peak	
6		7236.000	35.22	-4.67	30.55	54.00	-23.45	AVG	
7		9648.000	46.93	-0.16	46.77	74.00	-27.23	peak	
8		9648.000	38.71	-0.16	38.55	54.00	-15.45	AVG	

測試頻道: IEEE 802.11ac(20 MHz) /
2412 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

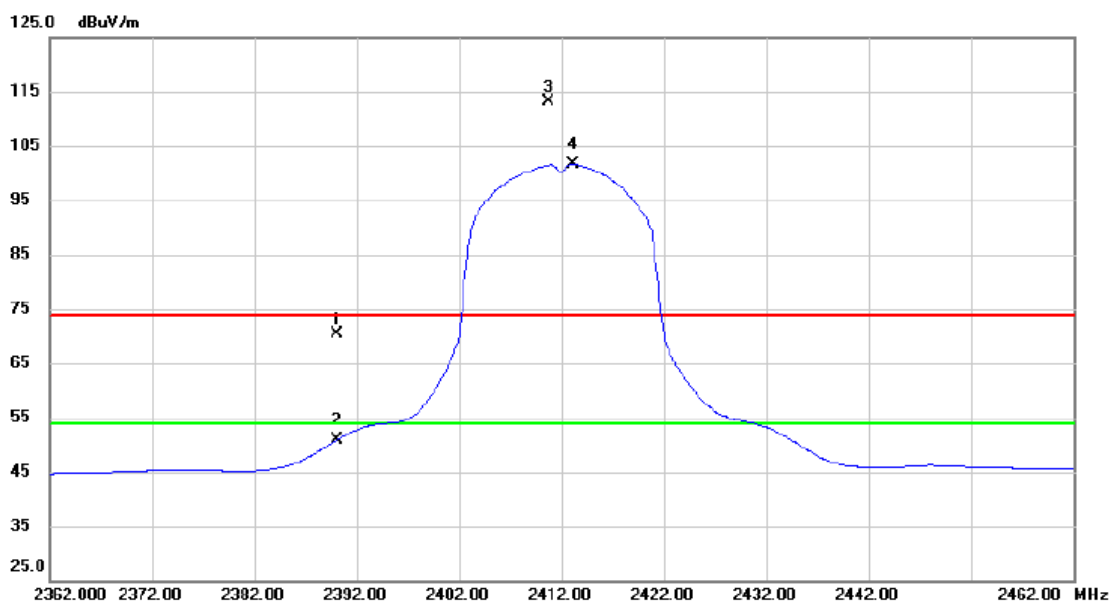


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	38.14	32.30	70.44	74.00	-3.56	peak	
2		2390.000	18.54	32.30	50.84	54.00	-3.16	AVG	
3	X	2410.700	80.81	32.40	113.21	74.00	39.21	peak	主波訊號不予判定
4	*	2413.100	69.25	32.41	101.66	54.00	47.66	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/01/03
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

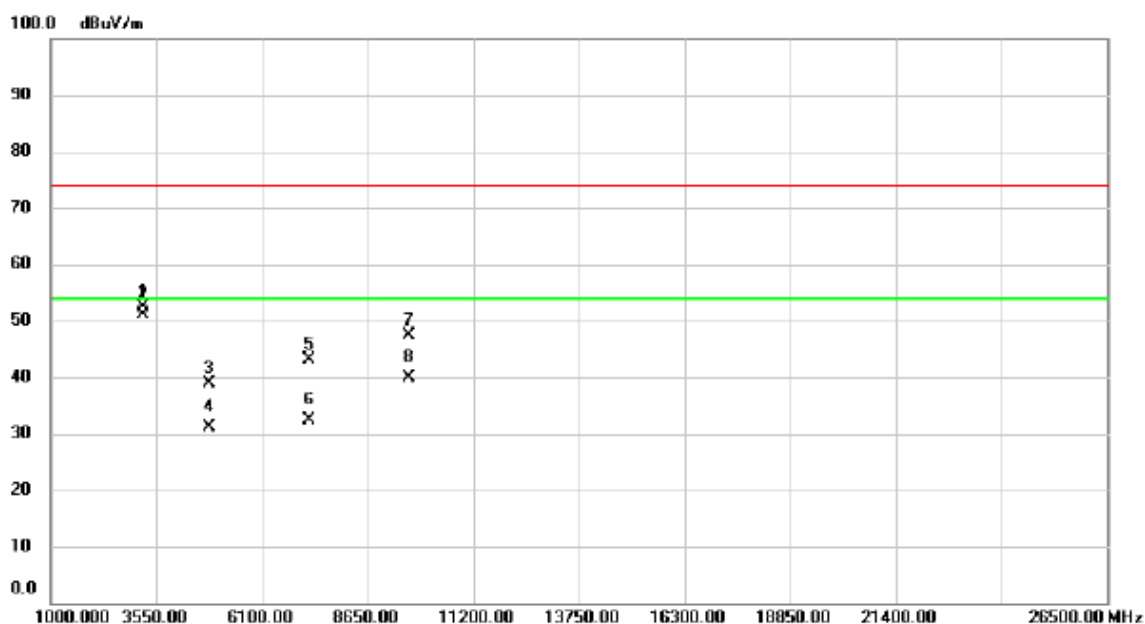

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3216.000	67.50	-15.00	52.50	74.00	-21.50	peak	
2	*	3216.000	66.20	-15.00	51.20	54.00	-2.80	AVG	
3		4824.000	50.25	-11.26	38.99	74.00	-35.01	peak	
4		4824.000	42.41	-11.26	31.15	54.00	-22.85	AVG	
5		7236.000	47.68	-4.67	43.01	74.00	-30.99	peak	
6		7236.000	37.08	-4.67	32.41	54.00	-21.59	AVG	
7		9648.000	47.50	-0.16	47.34	74.00	-26.66	peak	
8		9648.000	40.00	-0.16	39.84	54.00	-14.16	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

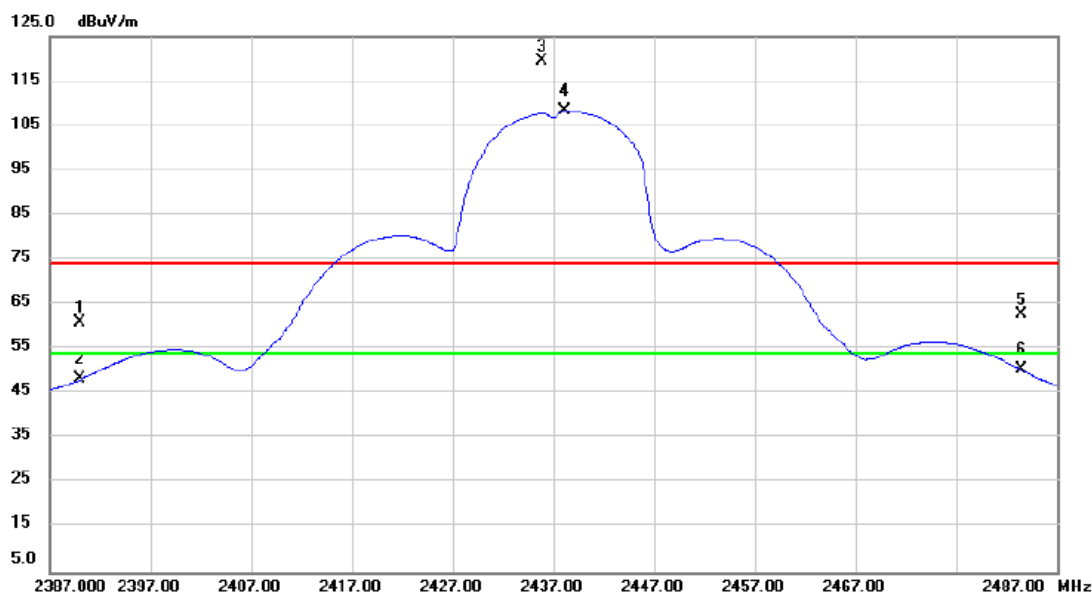

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	28.62	32.30	60.92	74.00	-13.08	peak	
2		2390.000	15.90	32.30	48.20	54.00	-5.80	AVG	
3	X	2435.900	86.93	32.51	119.44	74.00	45.44	peak	主波訊號不予判定
4	*	2438.200	75.71	32.52	108.23	54.00	54.23	AVG	主波訊號不予判定
5		2483.500	30.13	32.73	62.86	74.00	-11.14	peak	
6		2483.500	17.60	32.73	50.33	54.00	-3.67	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

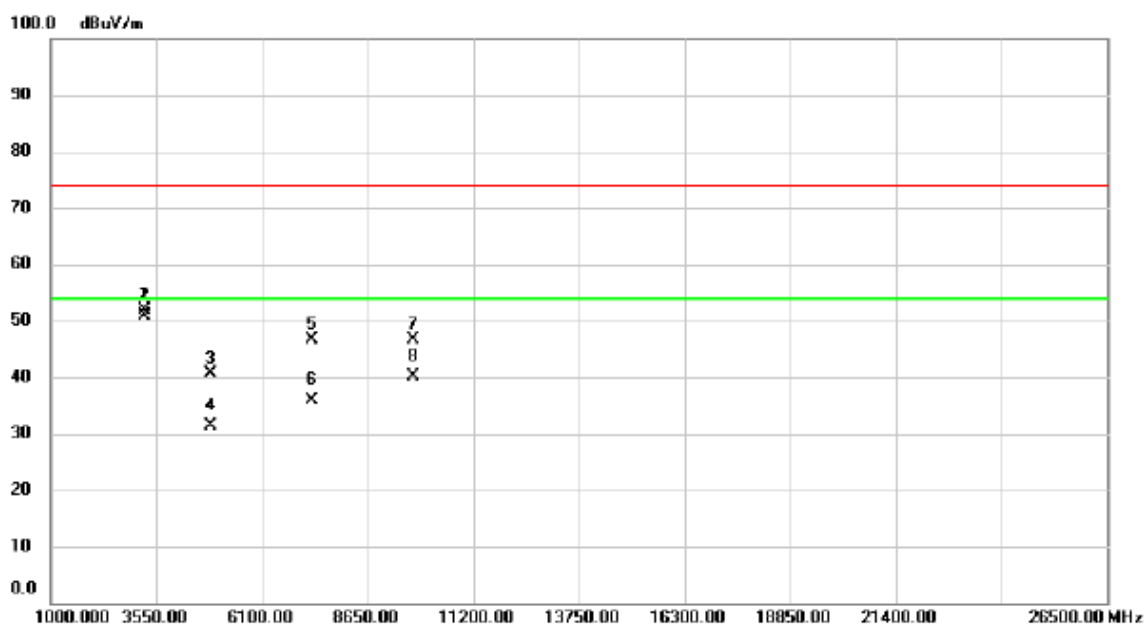

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3249.000	66.77	-14.95	51.82	74.00	-22.18	peak	
2	*	3249.000	65.77	-14.95	50.82	54.00	-3.18	AVG	
3		4874.000	51.67	-11.13	40.54	74.00	-33.46	peak	
4		4874.000	42.54	-11.13	31.41	54.00	-22.59	AVG	
5		7311.000	51.06	-4.51	46.55	74.00	-27.45	peak	
6		7311.000	40.47	-4.51	35.96	54.00	-18.04	AVG	
7		9748.000	46.60	0.00	46.60	74.00	-27.40	peak	
8		9748.000	40.10	0.00	40.10	54.00	-13.90	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

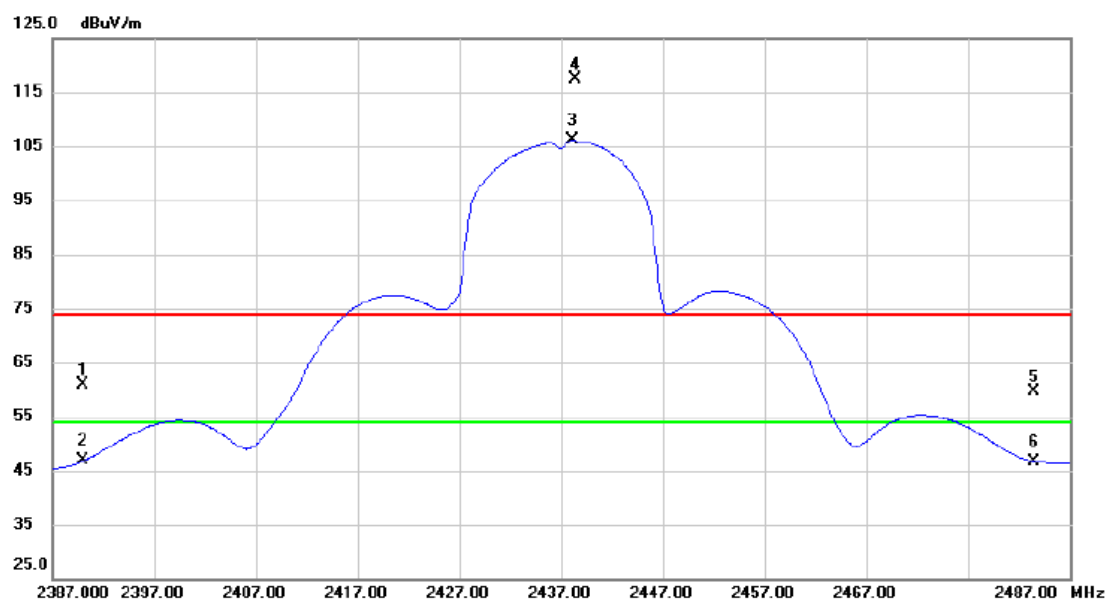

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	28.60	32.30	60.90	74.00	-13.10	peak	
2		2390.000	14.46	32.30	46.76	54.00	-7.24	AVG	
3	*	2438.200	73.51	32.52	106.03	54.00	52.03	AVG	主波訊號不予判定
4	X	2438.400	84.75	32.52	117.27	74.00	43.27	peak	主波訊號不予判定
5		2483.500	26.80	32.73	59.53	74.00	-14.47	peak	
6		2483.500	14.00	32.73	46.73	54.00	-7.27	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

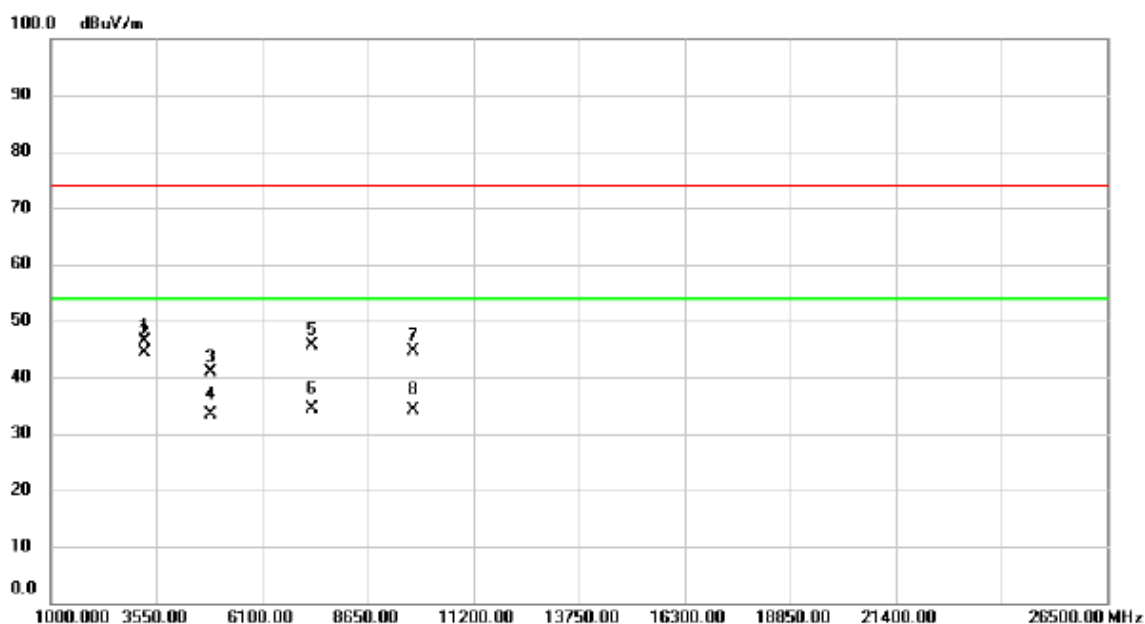

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		3249.000	61.35	-14.95	46.40	74.00	-27.60	peak	
2	*	3249.000	59.43	-14.95	44.48	54.00	-9.52	AVG	
3		4874.000	52.13	-11.13	41.00	74.00	-33.00	peak	
4		4874.000	44.50	-11.13	33.37	54.00	-20.63	AVG	
5		7311.000	50.20	-4.51	45.69	74.00	-28.31	peak	
6		7311.000	38.85	-4.51	34.34	54.00	-19.66	AVG	
7		9748.000	44.72	0.00	44.72	74.00	-29.28	peak	
8		9748.000	34.08	0.00	34.08	54.00	-19.92	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2462 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/02/02

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

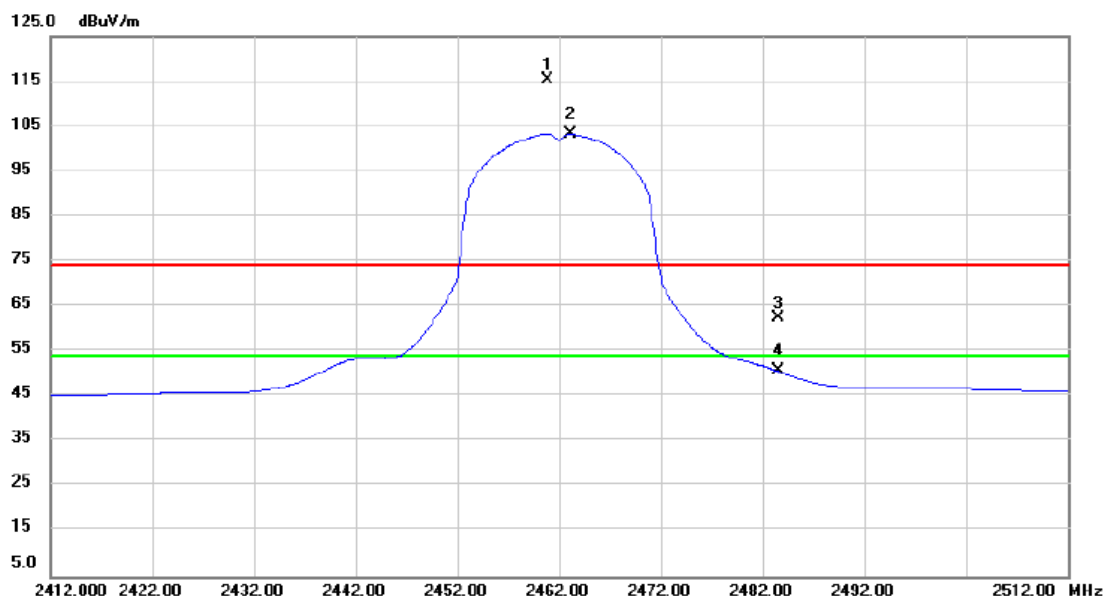

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2460.900	82.70	32.63	115.33	74.00	41.33	peak	主波訊號不予判定
2	*	2463.100	70.65	32.64	103.29	54.00	49.29	AVG	主波訊號不予判定
3		2483.500	29.76	32.73	62.49	74.00	-11.51	peak	
4		2483.500	17.91	32.73	50.64	54.00	-3.36	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2462 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

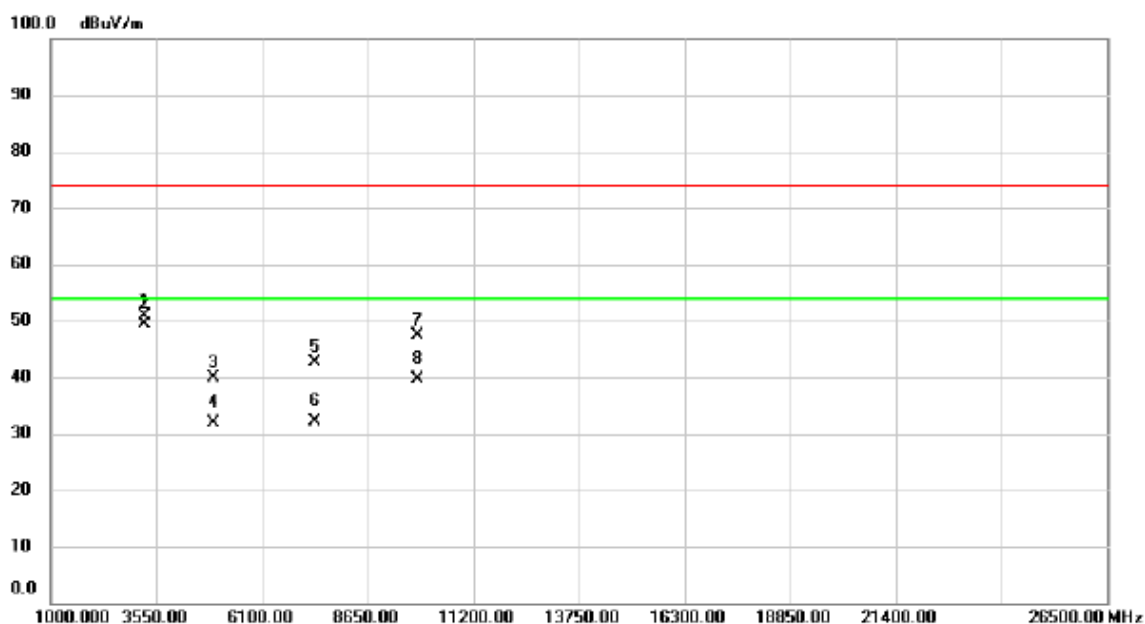

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3252.000	65.71	-14.94	50.77	74.00	-23.23	peak	
2	*	3252.000	64.30	-14.94	49.36	54.00	-4.64	AVG	
3		4924.000	50.84	-11.02	39.82	74.00	-34.18	peak	
4		4924.000	42.87	-11.02	31.85	54.00	-22.15	AVG	
5		7386.000	47.07	-4.33	42.74	74.00	-31.26	peak	
6		7386.000	36.34	-4.33	32.01	54.00	-21.99	AVG	
7		9848.000	47.26	0.17	47.43	74.00	-26.57	peak	
8		9848.000	39.56	0.17	39.73	54.00	-14.27	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2462 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/02/02

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

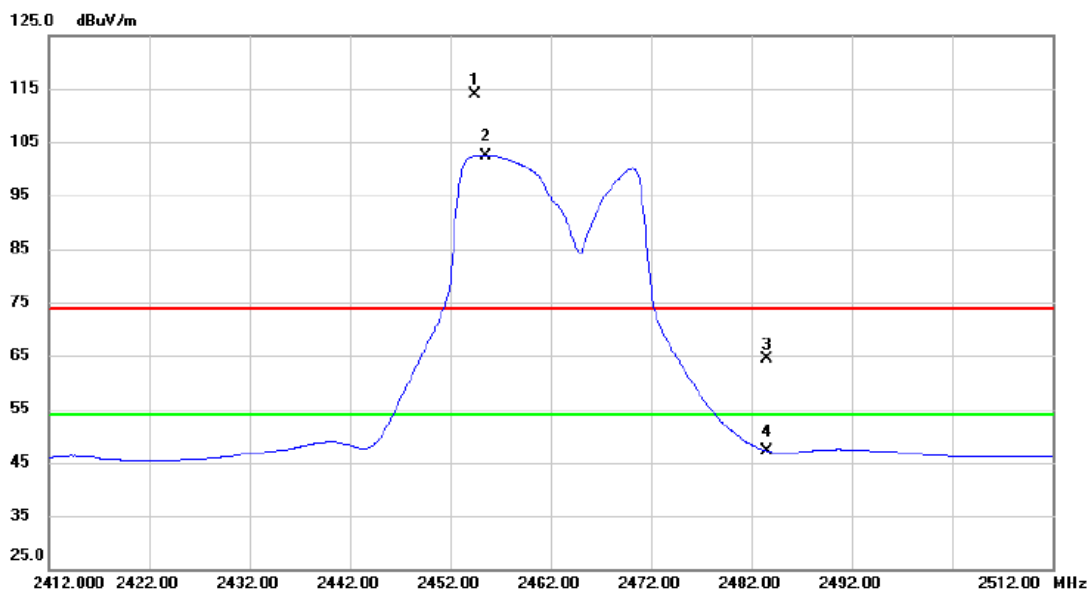

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.400	81.38	32.60	113.98	74.00	39.98	peak	主波訊號不予判定
2	*	2455.500	69.87	32.60	102.47	54.00	48.47	AVG	主波訊號不予判定
3		2483.500	31.60	32.73	64.33	74.00	-9.67	peak	
4		2483.500	14.47	32.73	47.20	54.00	-6.80	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2462 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

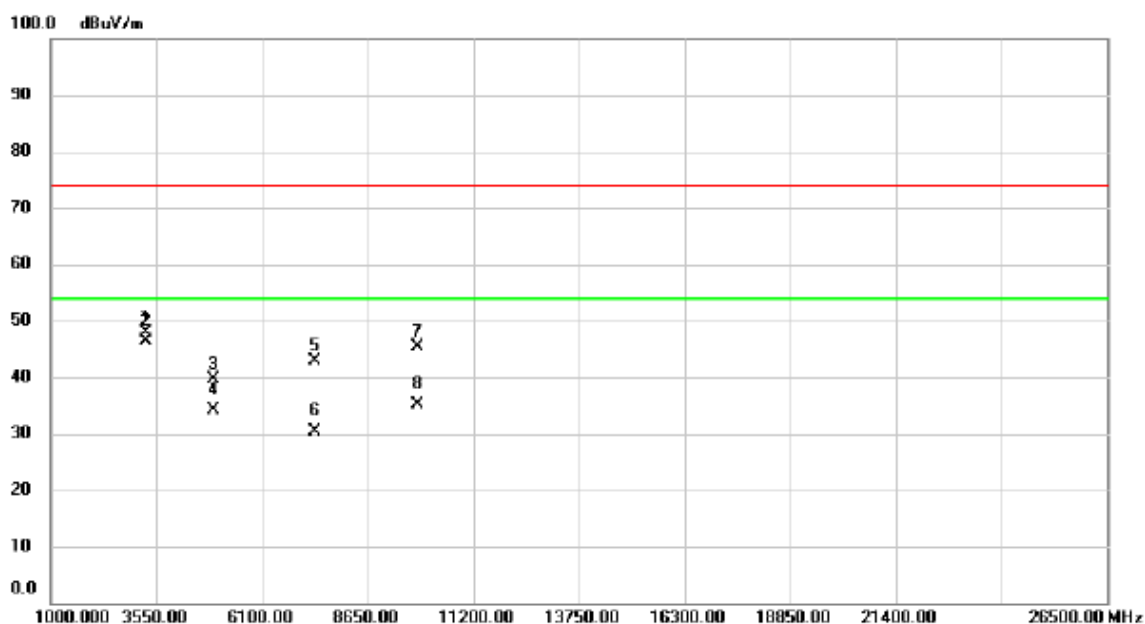

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		3282.000	62.76	-14.89	47.87	74.00	-26.13	peak	
2	*	3282.000	61.24	-14.89	46.35	54.00	-7.65	AVG	
3		4924.000	50.54	-11.02	39.52	74.00	-34.48	peak	
4		4924.000	45.20	-11.02	34.18	54.00	-19.82	AVG	
5		7386.000	47.15	-4.33	42.82	74.00	-31.18	peak	
6		7386.000	34.63	-4.33	30.30	54.00	-23.70	AVG	
7		9848.000	45.09	0.17	45.26	74.00	-28.74	peak	
8		9848.000	34.98	0.17	35.15	54.00	-18.85	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2422 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/02/02

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

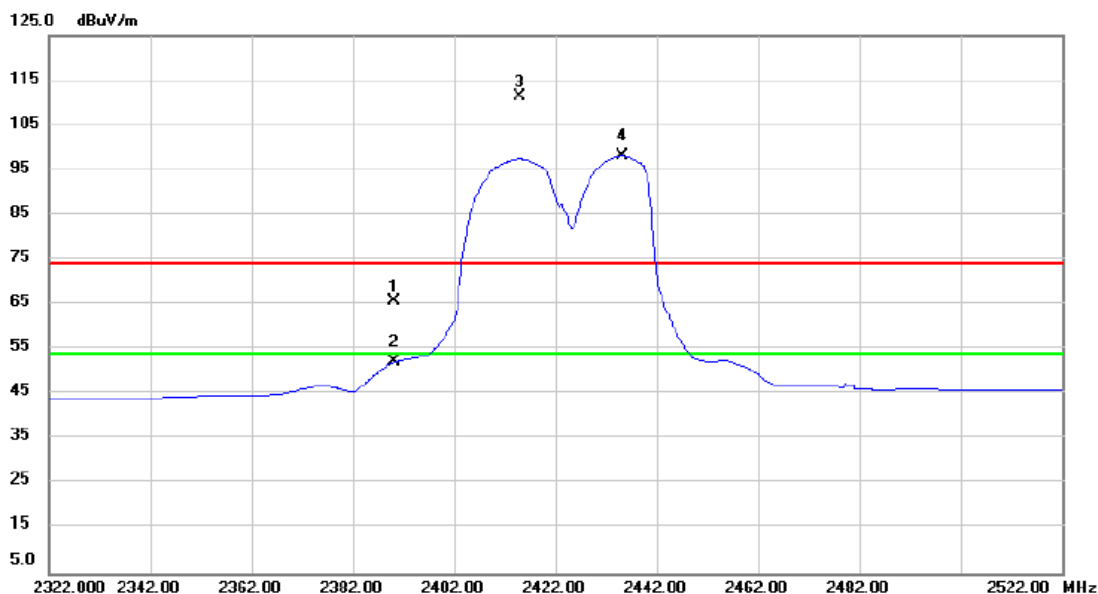

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	33.47	32.30	65.77	74.00	-8.23	peak	
2		2390.000	19.88	32.30	52.18	54.00	-1.82	AVG	
3	X	2415.000	79.02	32.41	111.43	74.00	37.43	peak	主波訊號不予判定
4	*	2435.200	65.54	32.51	98.05	54.00	44.05	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac(40 MHz) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

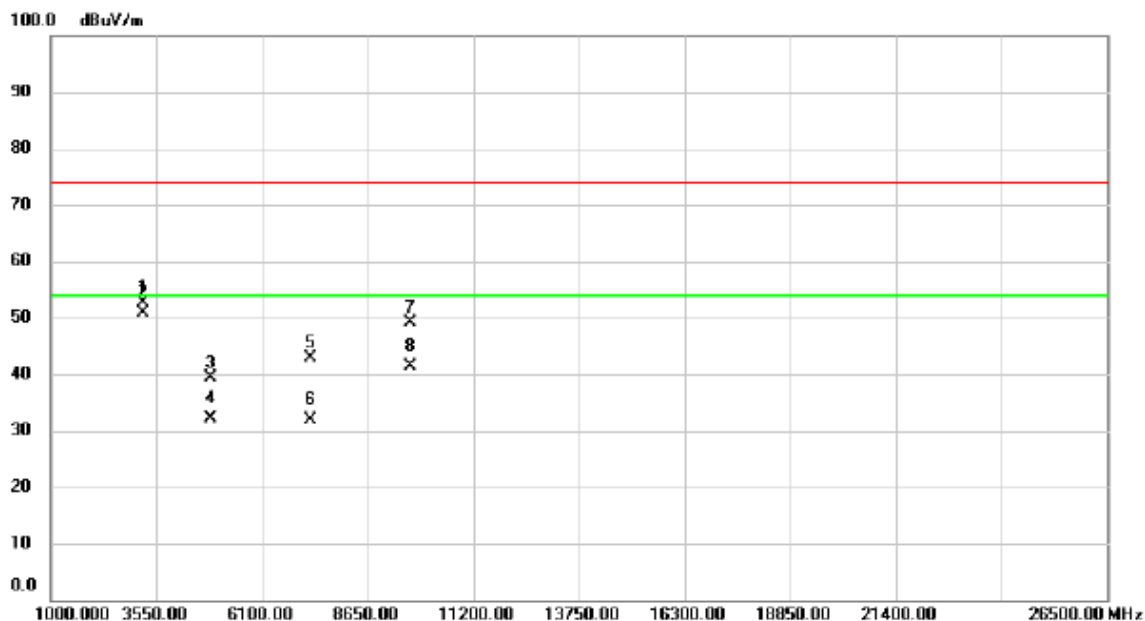

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3229.000	67.50	-14.98	52.52	74.00	-21.48	peak	
2	*	3229.000	65.85	-14.98	50.87	54.00	-3.13	AVG	
3		4844.000	50.70	-11.20	39.50	74.00	-34.50	peak	
4		4844.000	43.45	-11.20	32.25	54.00	-21.75	AVG	
5		7266.000	47.49	-4.61	42.88	74.00	-31.12	peak	
6		7266.000	36.40	-4.61	31.79	54.00	-22.21	AVG	
7		9688.000	49.21	-0.10	49.11	74.00	-24.89	peak	
8		9688.000	41.38	-0.10	41.28	54.00	-12.72	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2422 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/02/02

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

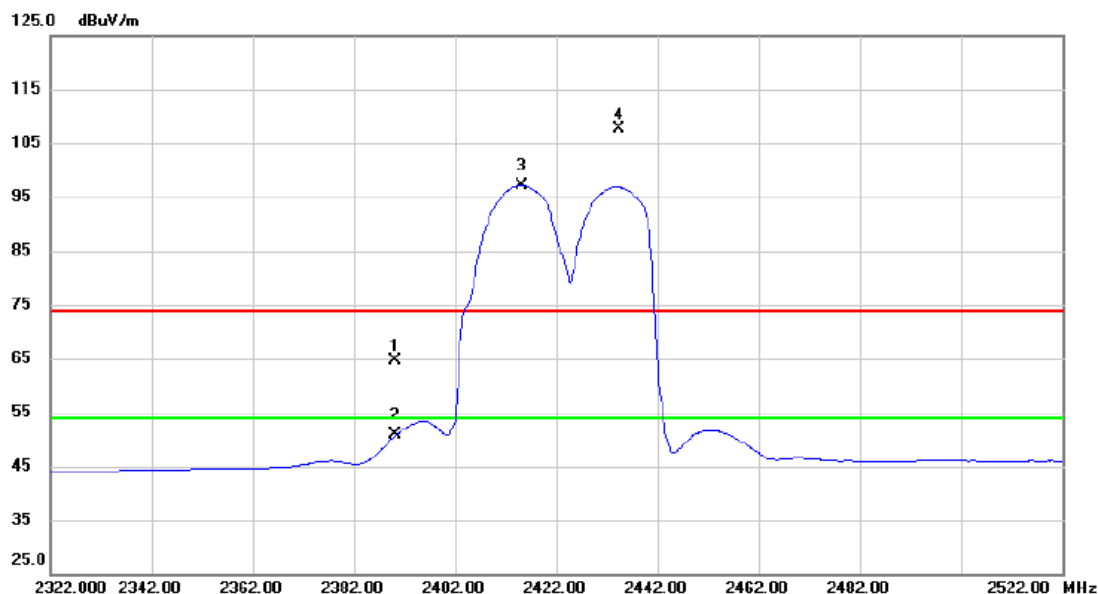

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	32.44	32.30	64.74	74.00	-9.26	peak	
2		2390.000	18.60	32.30	50.90	54.00	-3.10	AVG	
3	*	2415.200	64.78	32.41	97.19	54.00	43.19	AVG	主波訊號不予判定
4	X	2434.400	75.18	32.51	107.69	74.00	33.69	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac(40 MHz) /
2422 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

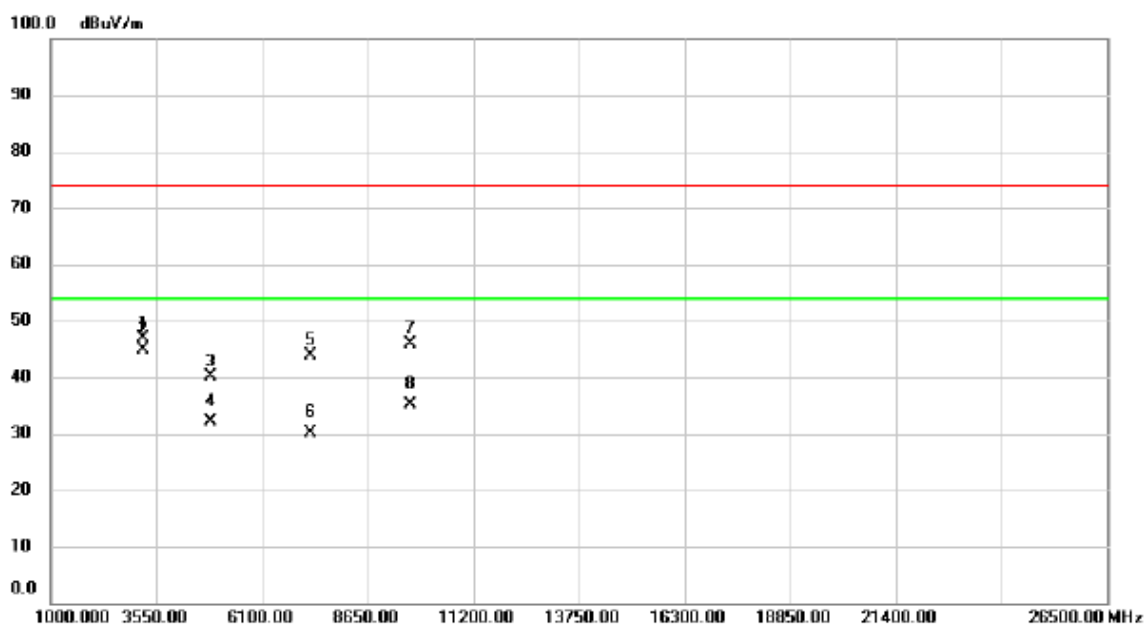

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		3229.000	61.82	-14.98	46.84	74.00	-27.16	peak	
2	*	3229.000	59.83	-14.98	44.85	54.00	-9.15	AVG	
3		4844.000	51.28	-11.20	40.08	74.00	-33.92	peak	
4		4844.000	43.43	-11.20	32.23	54.00	-21.77	AVG	
5		7266.000	48.53	-4.61	43.92	74.00	-30.08	peak	
6		7266.000	34.75	-4.61	30.14	54.00	-23.86	AVG	
7		9688.000	45.97	-0.10	45.87	74.00	-28.13	peak	
8		9688.000	35.18	-0.10	35.08	54.00	-18.92	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/02/02

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

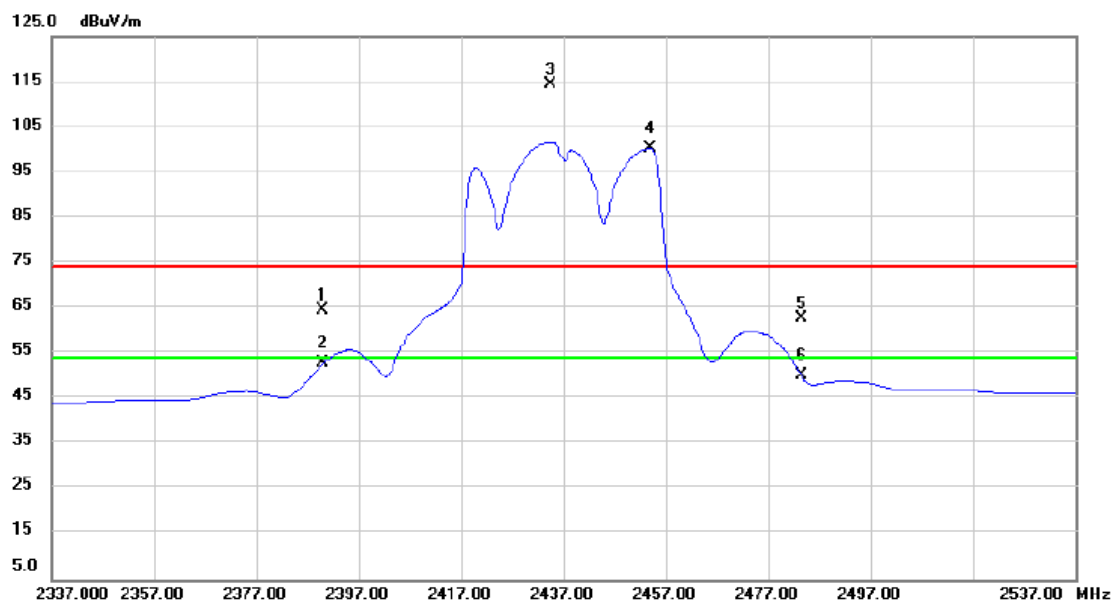

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	32.39	32.30	64.69	74.00	-9.31	peak	
2		2390.000	20.41	32.30	52.71	54.00	-1.29	AVG	
3	X	2434.600	81.99	32.51	114.50	74.00	40.50	peak	主波訊號不予判定
4	*	2454.000	67.60	32.59	100.19	54.00	46.19	AVG	主波訊號不予判定
5		2483.500	30.10	32.73	62.83	74.00	-11.17	peak	
6		2483.500	17.28	32.73	50.01	54.00	-3.99	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

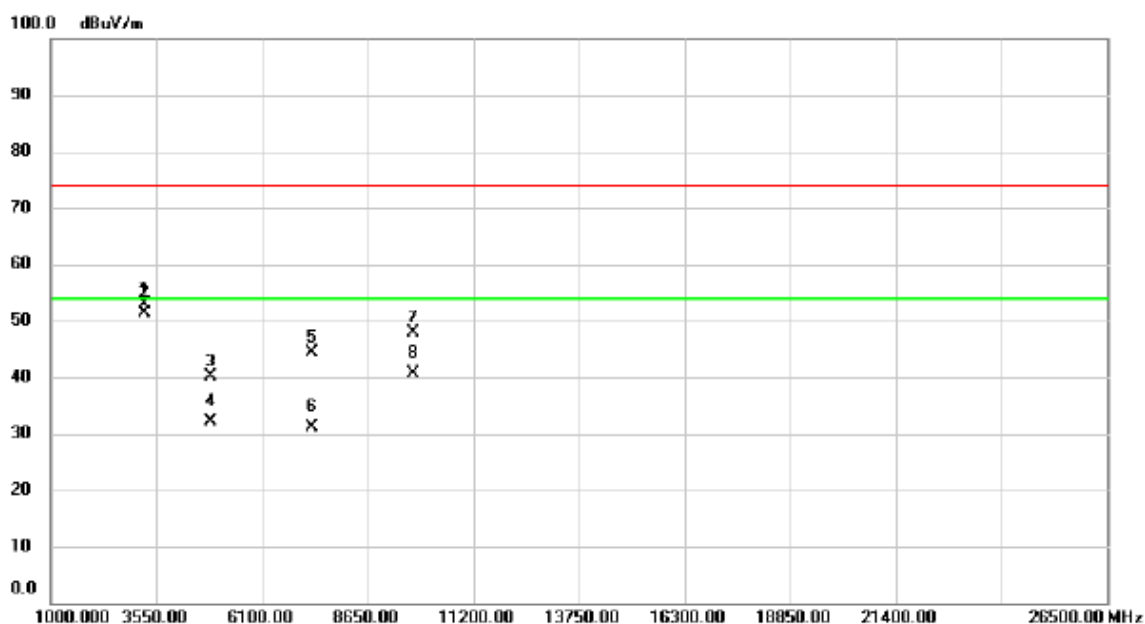

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		3249.000	67.72	-14.95	52.77	74.00	-21.23	peak	
2	*	3249.000	66.24	-14.95	51.29	54.00	-2.71	AVG	
3		4874.000	51.20	-11.13	40.07	74.00	-33.93	peak	
4		4874.000	43.16	-11.13	32.03	54.00	-21.97	AVG	
5		7311.000	48.98	-4.51	44.47	74.00	-29.53	peak	
6		7311.000	35.70	-4.51	31.19	54.00	-22.81	AVG	
7		9748.000	47.77	0.00	47.77	74.00	-26.23	peak	
8		9748.000	40.75	0.00	40.75	54.00	-13.25	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/02/02

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

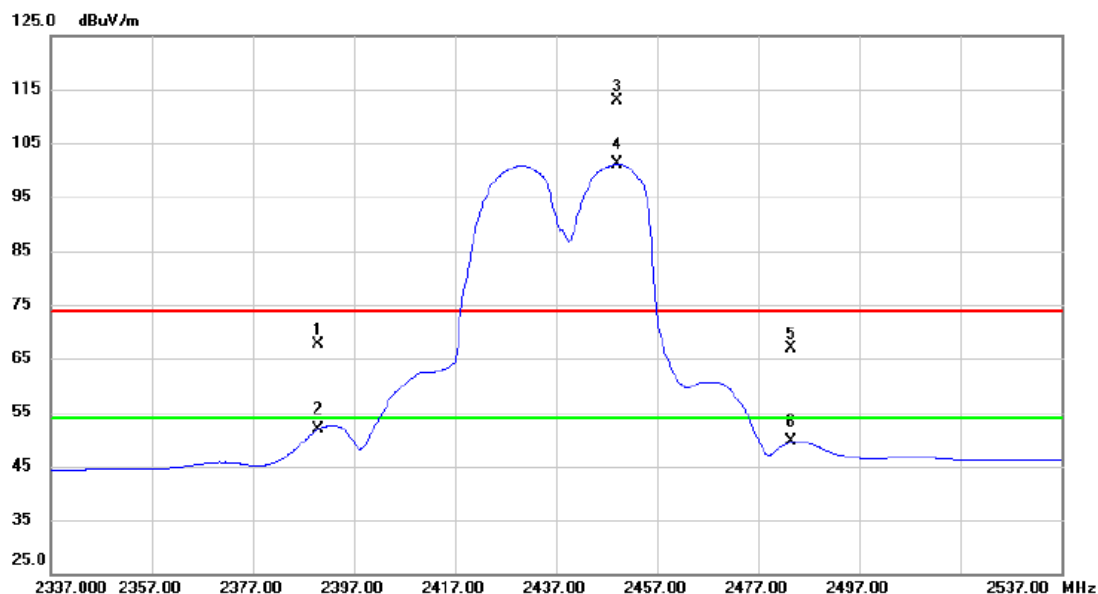

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	35.37	32.30	67.67	74.00	-6.33	peak	
2		2390.000	19.63	32.30	51.93	54.00	-2.07	AVG	
3	X	2449.200	80.32	32.58	112.90	74.00	38.90	peak	主波訊號不予判定
4	*	2449.200	68.56	32.58	101.14	54.00	47.14	AVG	主波訊號不予判定
5		2483.500	34.20	32.73	66.93	74.00	-7.07	peak	
6		2483.500	16.80	32.73	49.53	54.00	-4.47	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/03

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

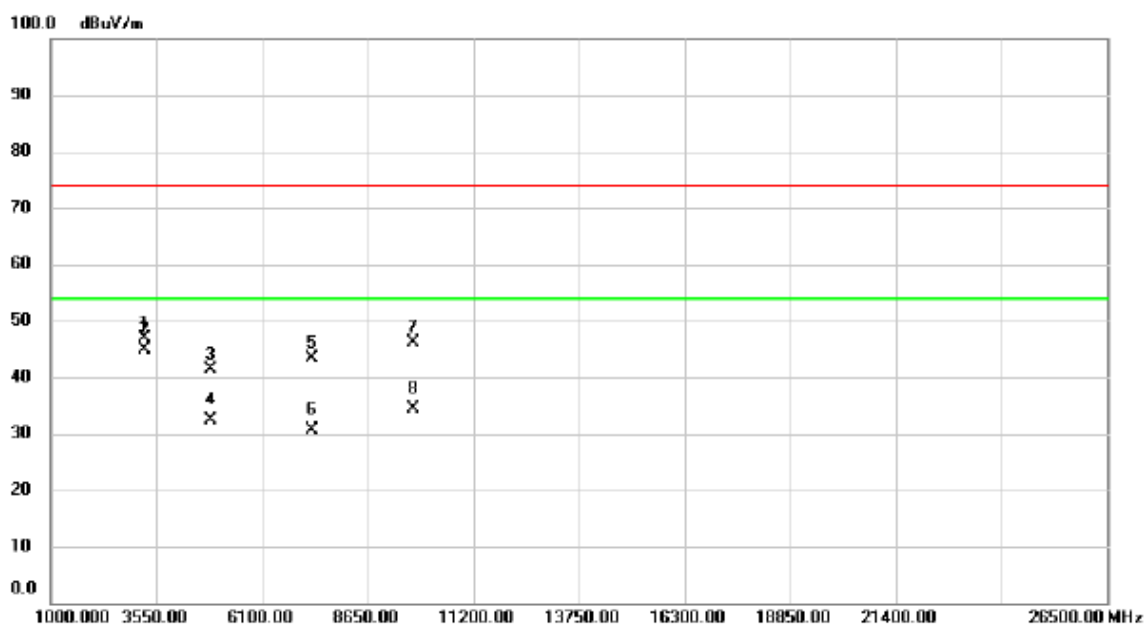

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		3249.000	61.89	-14.95	46.94	74.00	-27.06	peak	
2	*	3249.000	59.95	-14.95	45.00	54.00	-9.00	AVG	
3		4874.000	52.49	-11.13	41.36	74.00	-32.64	peak	
4		4874.000	43.62	-11.13	32.49	54.00	-21.51	AVG	
5		7311.000	47.95	-4.51	43.44	74.00	-30.56	peak	
6		7311.000	35.11	-4.51	30.60	54.00	-23.40	AVG	
7		9748.000	46.05	0.00	46.05	74.00	-27.95	peak	
8		9748.000	34.29	0.00	34.29	54.00	-19.71	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

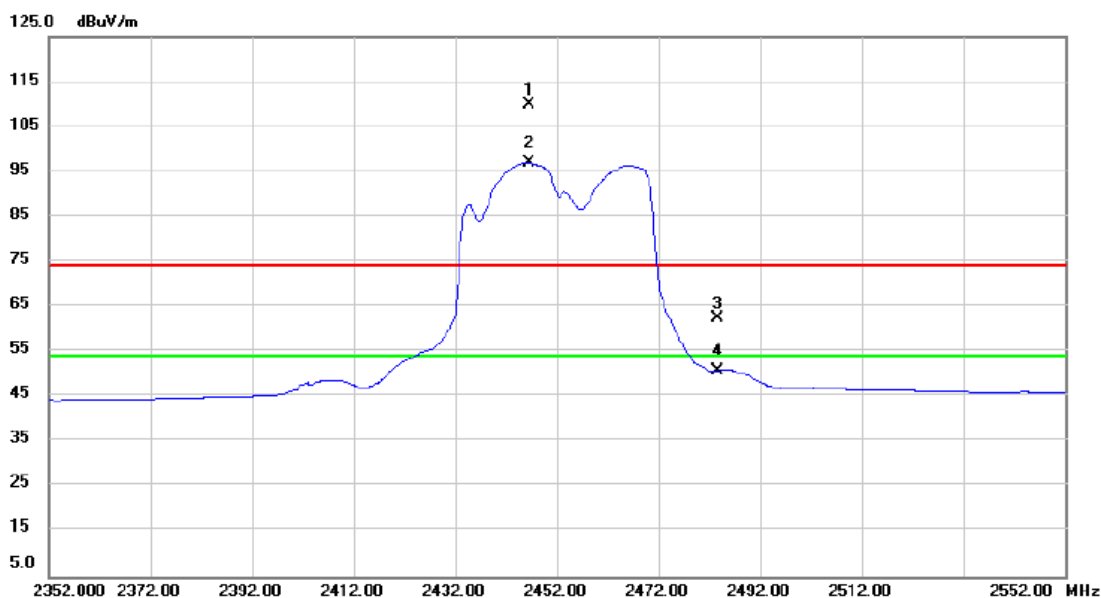

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2446.400	77.18	32.56	109.74	74.00	35.74	peak	主波訊號不予判定
2	*	2446.400	64.38	32.56	96.94	54.00	42.94	AVG	主波訊號不予判定
3		2483.500	29.61	32.73	62.34	74.00	-11.66	peak	
4		2483.500	18.11	32.73	50.84	54.00	-3.16	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/03

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

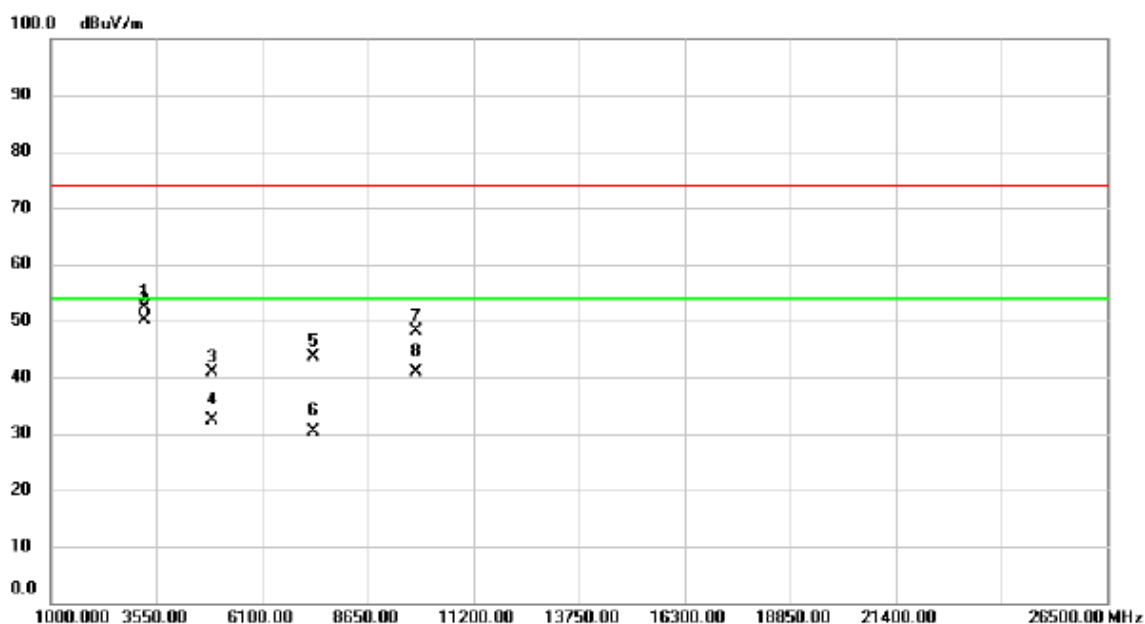

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3269.000	67.40	-14.91	52.49	74.00	-21.51	peak	
2	*	3269.000	65.12	-14.91	50.21	54.00	-3.79	AVG	
3		4904.000	51.95	-11.08	40.87	74.00	-33.13	peak	
4		4904.000	43.40	-11.08	32.32	54.00	-21.68	AVG	
5		7356.000	47.98	-4.40	43.58	74.00	-30.42	peak	
6		7356.000	34.79	-4.40	30.39	54.00	-23.61	AVG	
7		9808.000	47.90	0.11	48.01	74.00	-25.99	peak	
8		9808.000	40.71	0.11	40.82	54.00	-13.18	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/02/02

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

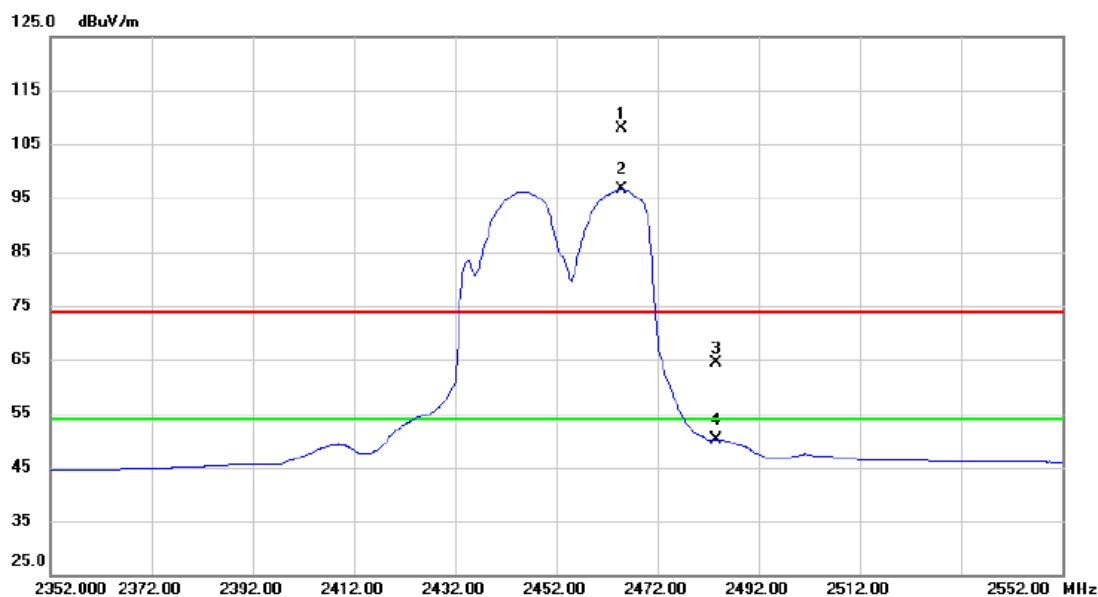


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2465.000	75.30	32.65	107.95	74.00	33.95	peak	主波訊號不予判定
2	*	2465.000	63.88	32.65	96.53	54.00	42.53	AVG	主波訊號不予判定
3		2483.500	31.60	32.73	64.33	74.00	-9.67	peak	
4		2483.500	17.29	32.73	50.02	54.00	-3.98	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/01/03
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

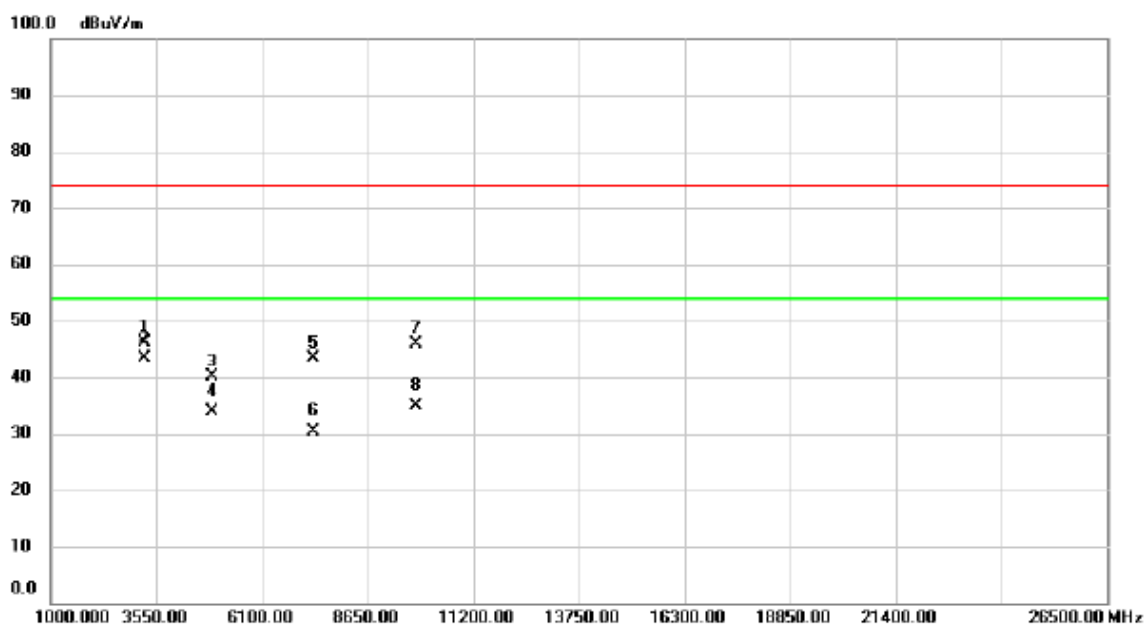


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		3269.000	61.06	-14.91	46.15	74.00	-27.85	peak	
2	*	3269.000	58.41	-14.91	43.50	54.00	-10.50	AVG	
3		4904.000	51.24	-11.08	40.16	74.00	-33.84	peak	
4		4904.000	45.08	-11.08	34.00	54.00	-20.00	AVG	
5		7356.000	47.76	-4.40	43.36	74.00	-30.64	peak	
6		7356.000	34.78	-4.40	30.38	54.00	-23.62	AVG	
7		9808.000	45.75	0.11	45.86	74.00	-28.14	peak	
8		9808.000	34.84	0.11	34.95	54.00	-19.05	AVG	

測試頻道: IEEE 802.11b / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 接收
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/03/13
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

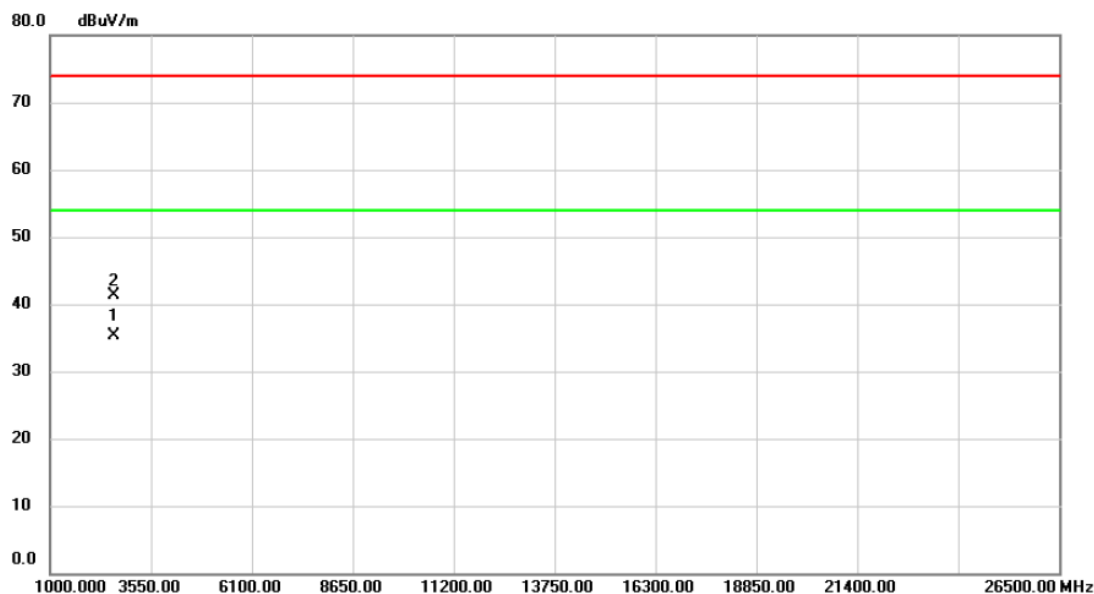


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2600.350	37.43	-2.17	35.26	54.00	-18.74	AVG	
2		2602.320	43.41	-2.16	41.25	74.00	-32.75	peak	

測試頻道: IEEE 802.11b / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 24°C

測試模式: 接收
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 107/03/15
 環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

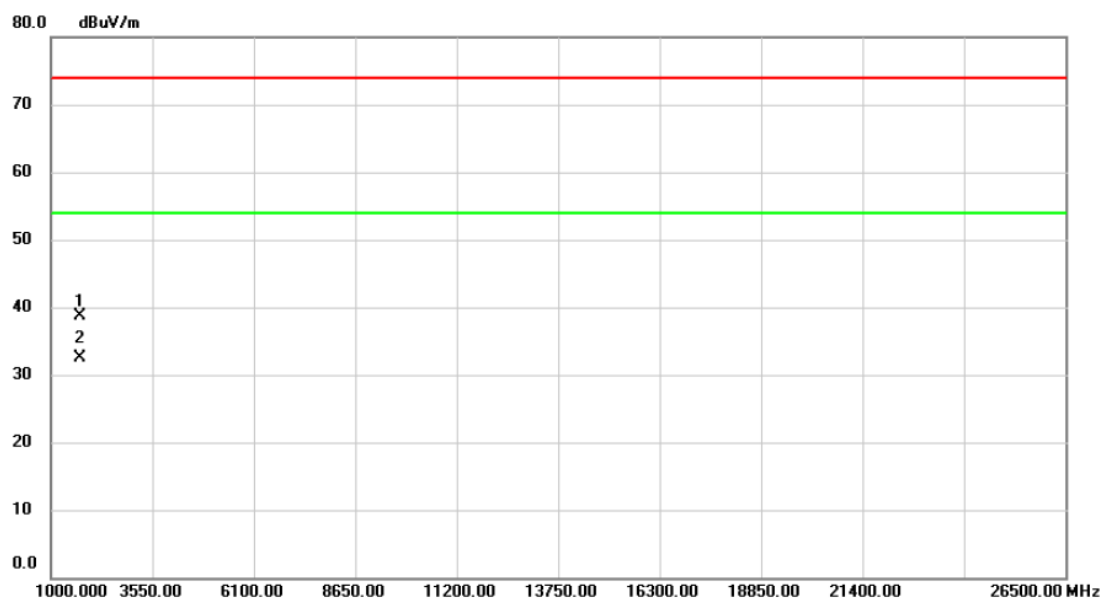

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1738.365	43.62	-5.00	38.62	74.00	-35.38	peak	
2	*	1739.500	37.56	-5.00	32.56	54.00	-21.44	AVG	

16.4.3 禁用頻帶內之混附發射

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

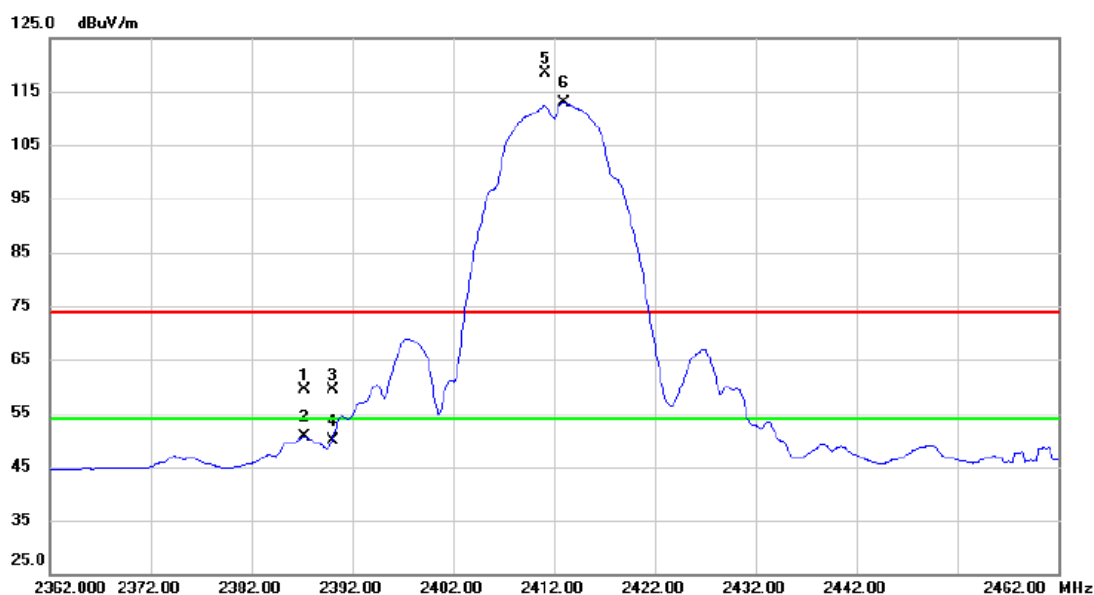

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2387.300	27.17	32.29	59.46	74.00	-14.54	peak	
2		2387.300	18.28	32.29	50.57	54.00	-3.43	AVG	
3		2390.000	27.19	32.30	59.49	74.00	-14.51	peak	
4		2390.000	17.56	32.30	49.86	54.00	-4.14	AVG	
5	X	2411.100	85.98	32.40	118.38	74.00	44.38	peak	主波訊號不予判定
6	*	2413.000	80.55	32.41	112.96	54.00	58.96	AVG	主波訊號不予判定

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

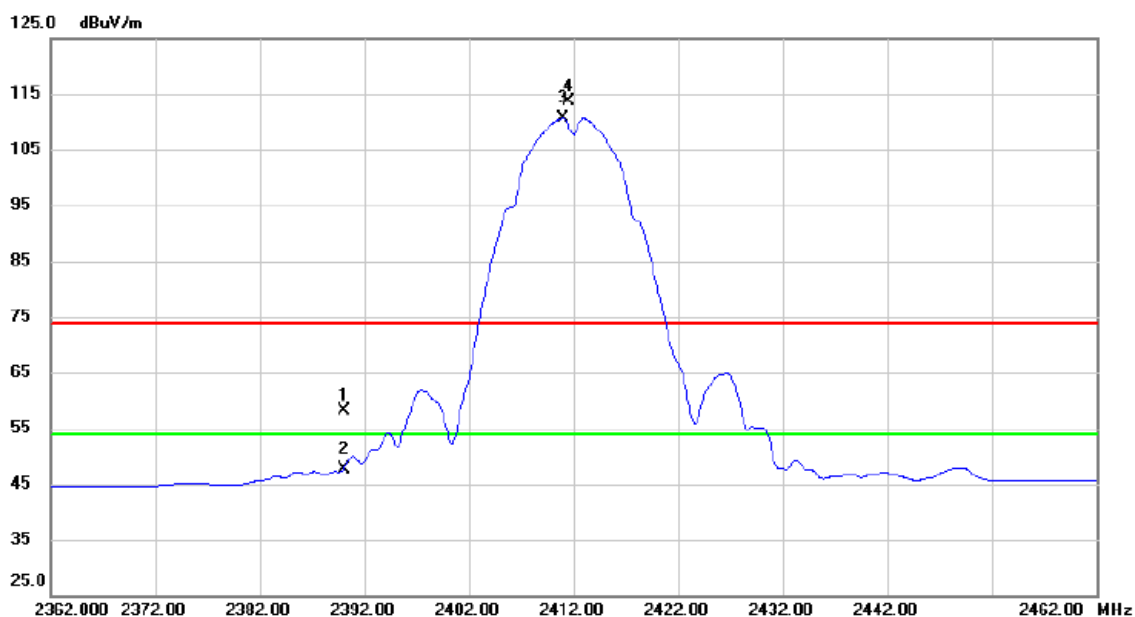

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	25.72	32.30	58.02	74.00	-15.98	peak	
2		2390.000	15.40	32.30	47.70	54.00	-6.30	AVG	
3	*	2411.000	78.29	32.40	110.69	54.00	56.69	AVG	主波訊號不予判定
4	X	2411.500	81.24	32.40	113.64	74.00	39.64	peak	主波訊號不予判定

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2500 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

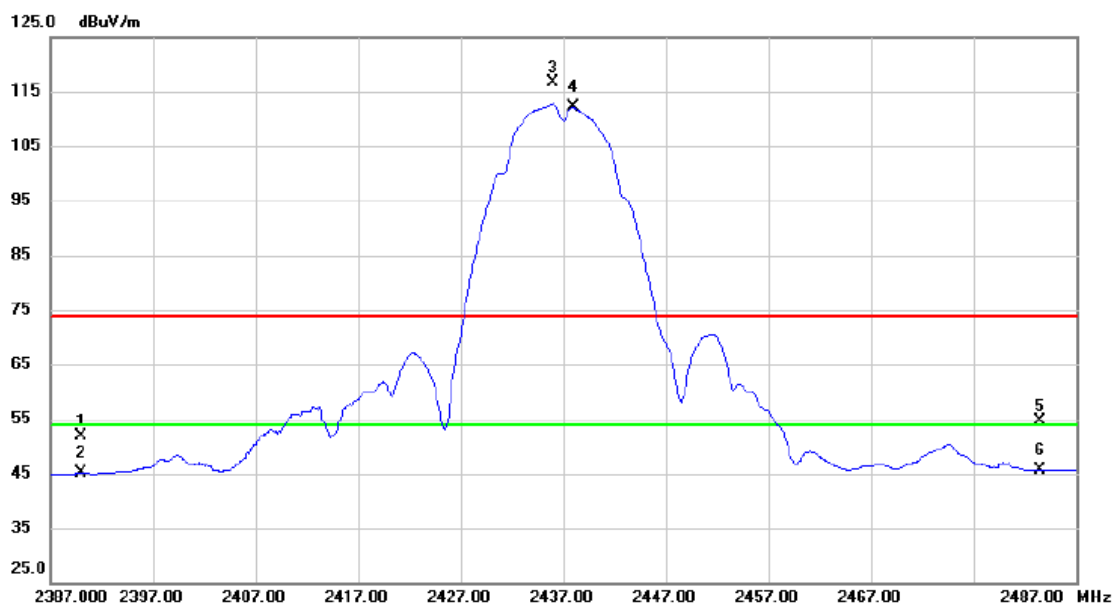

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	19.62	32.30	51.92	74.00	-22.08	peak	
2		2390.000	12.78	32.30	45.08	54.00	-8.92	AVG	
3	X	2436.000	84.15	32.51	116.66	74.00	42.66	peak	主波訊號不予判定
4	*	2438.000	79.64	32.52	112.16	54.00	58.16	AVG	主波訊號不予判定
5		2483.500	21.88	32.73	54.61	74.00	-19.39	peak	
6		2483.500	12.97	32.73	45.70	54.00	-8.30	AVG	

測試頻道: IEEE 802.11b / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2500 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

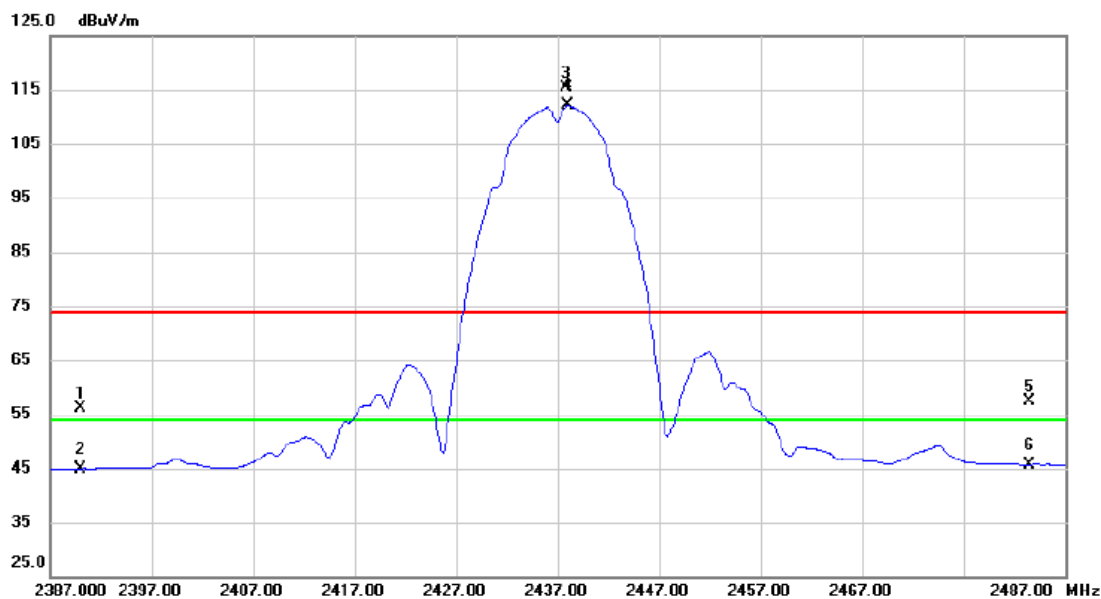

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	23.91	32.30	56.21	74.00	-17.79	peak	
2		2390.000	12.68	32.30	44.98	54.00	-9.02	AVG	
3	X	2437.800	82.89	32.52	115.41	74.00	41.41	peak	主波訊號不予判定
4	*	2438.000	79.61	32.52	112.13	54.00	58.13	AVG	主波訊號不予判定
5		2483.500	24.62	32.73	57.35	74.00	-16.65	peak	
6		2483.500	13.01	32.73	45.74	54.00	-8.26	AVG	

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/08

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

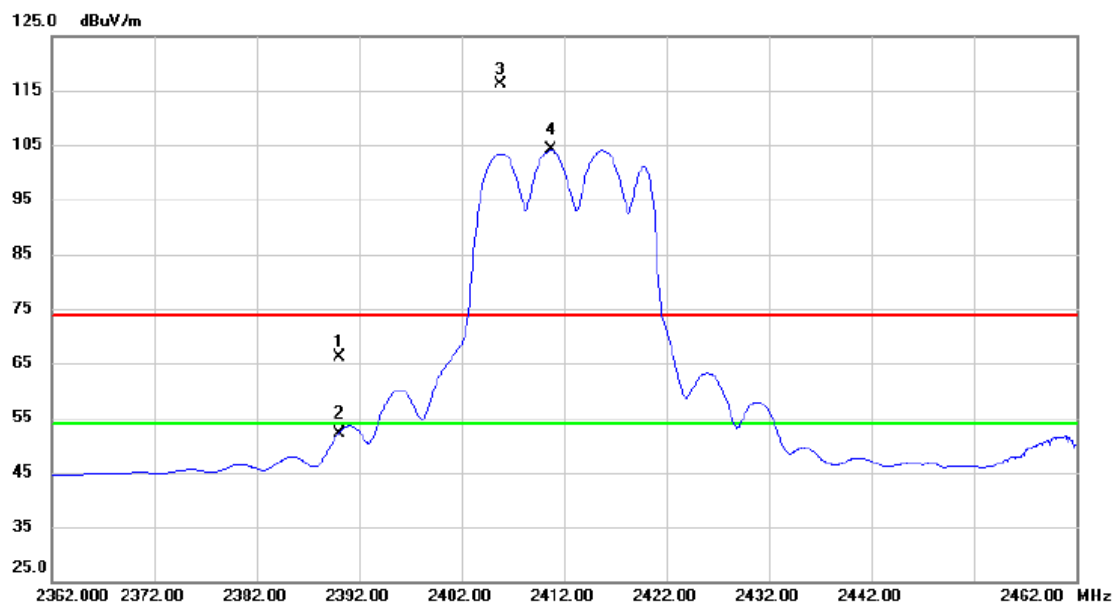

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	33.83	32.30	66.13	74.00	-7.87	peak	
2		2390.000	19.90	32.30	52.20	54.00	-1.80	AVG	
3	X	2405.800	83.68	32.37	116.05	74.00	42.05	peak	主波訊號不予判定
4	*	2410.700	71.67	32.40	104.07	54.00	50.07	AVG	主波訊號不予判定

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射
2310 - 2390 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 24°C

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 107/01/08

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

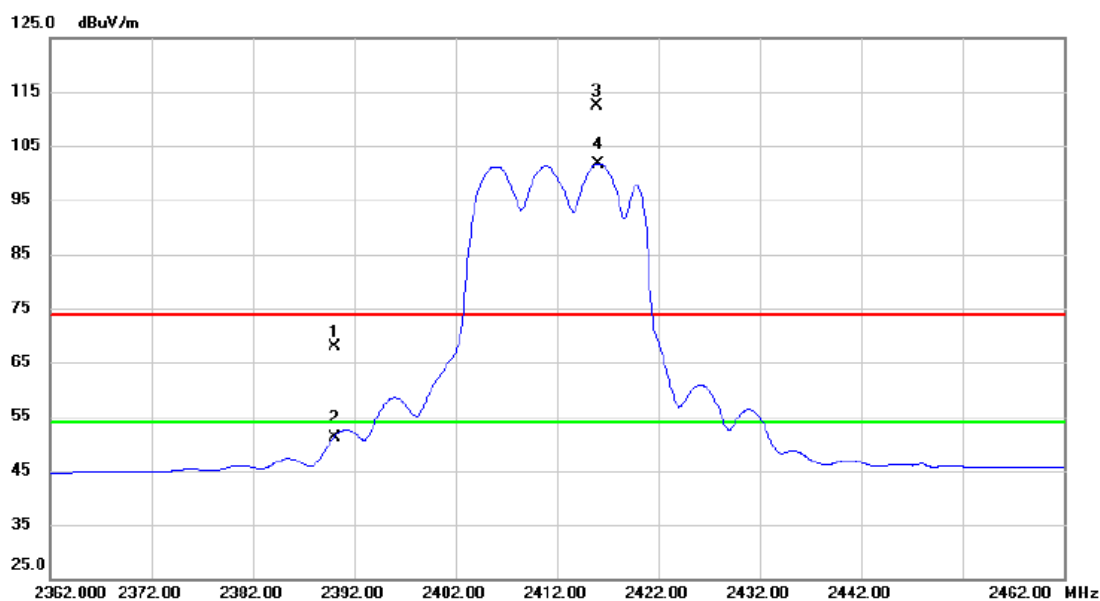

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	35.68	32.30	67.98	74.00	-6.02	peak	
2		2390.000	18.85	32.30	51.15	54.00	-2.85	AVG	
3	X	2415.900	79.90	32.43	112.33	74.00	38.33	peak	主波訊號不予判定
4	*	2416.100	69.26	32.43	101.69	54.00	47.69	AVG	主波訊號不予判定

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2500 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

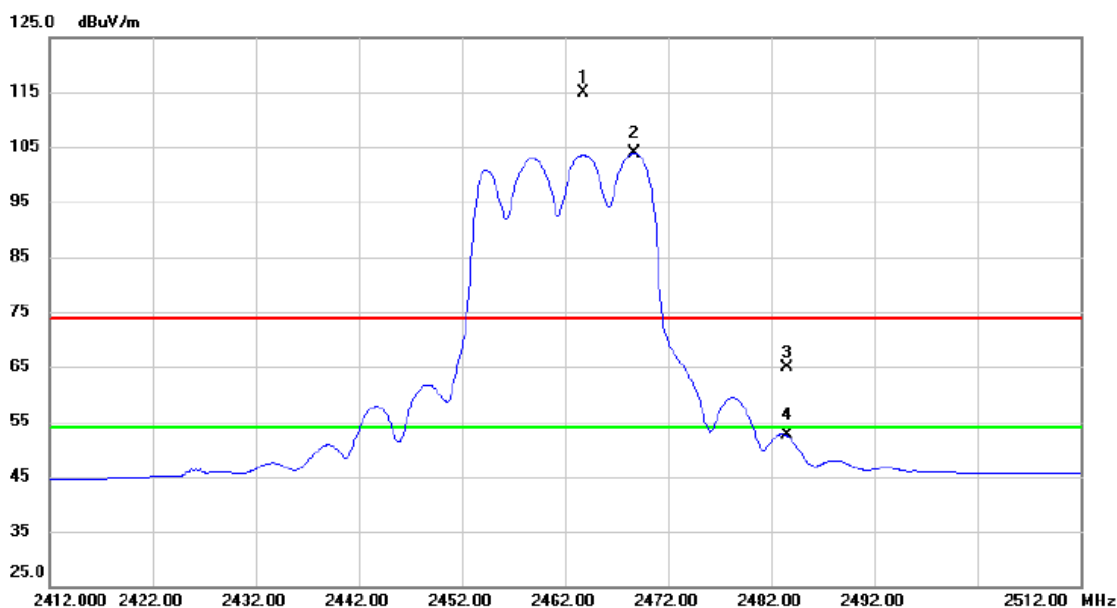

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.800	82.13	32.65	114.78	74.00	40.78	peak	主波訊號不予判定
2	*	2468.700	71.18	32.66	103.84	54.00	49.84	AVG	主波訊號不予判定
3		2483.500	32.14	32.73	64.87	74.00	-9.13	peak	
4		2483.500	19.82	32.73	52.55	54.00	-1.45	AVG	

測試頻道: IEEE 802.11g / 2.4 GHz 頻帶 / 測試模式: 發射

2483.5 - 2500 MHz

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

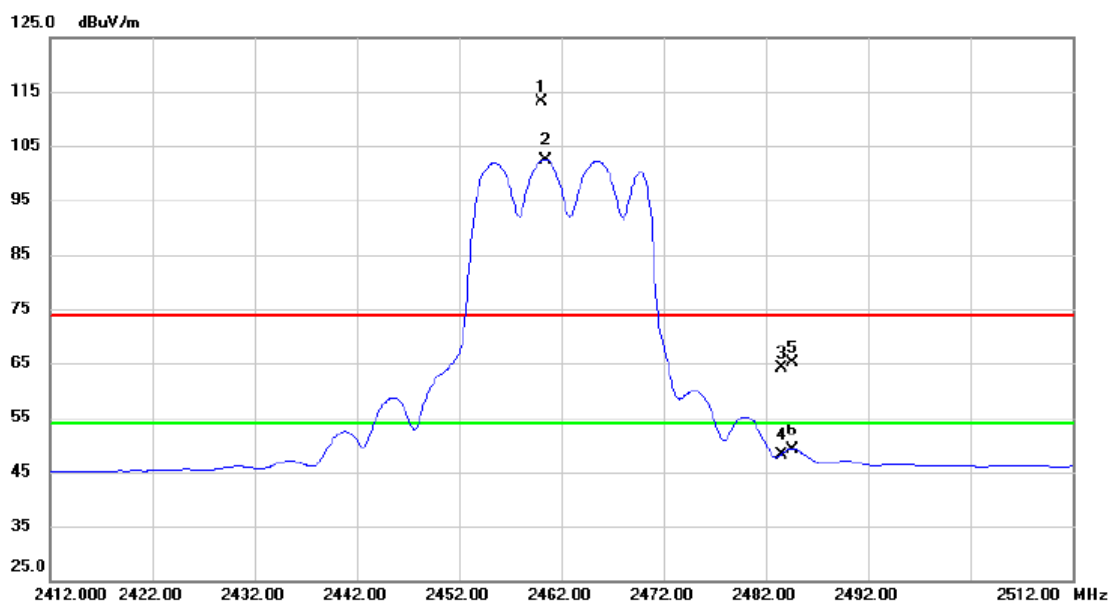

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2460.100	80.38	32.63	113.01	74.00	39.01	peak	主波訊號不予判定
2	*	2460.400	69.72	32.63	102.35	54.00	48.35	AVG	主波訊號不予判定
3		2483.500	31.36	32.73	64.09	74.00	-9.91	peak	
4		2483.500	15.52	32.73	48.25	54.00	-5.75	AVG	
5		2484.600	32.28	32.74	65.02	74.00	-8.98	peak	
6		2484.600	16.41	32.74	49.15	54.00	-4.85	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

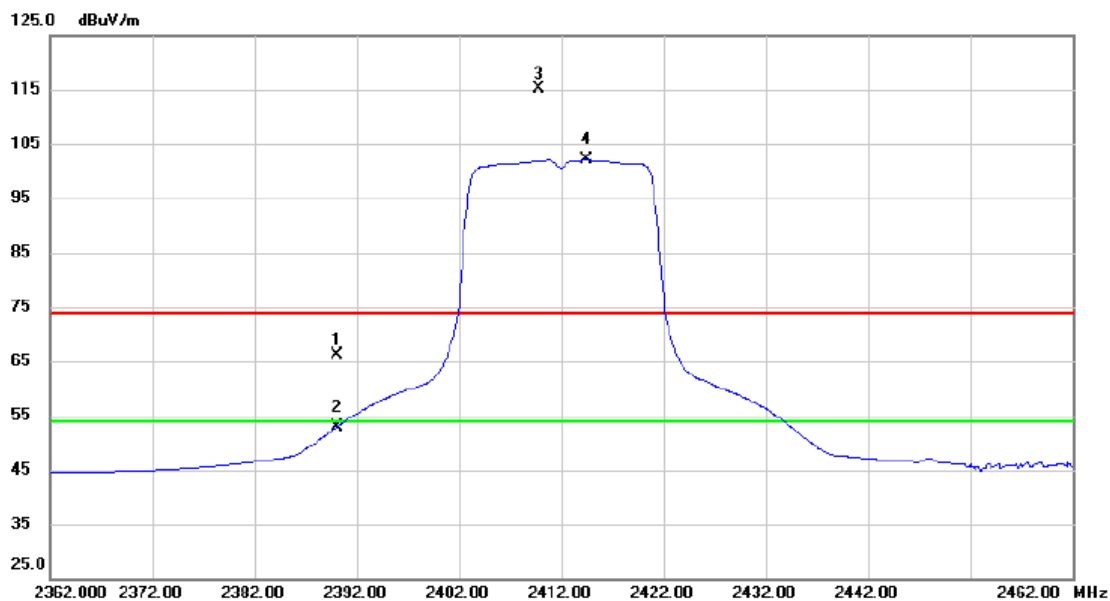

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	33.81	32.30	66.11	74.00	-7.89	peak	
2		2390.000	20.57	32.30	52.87	54.00	-1.13	AVG	
3	X	2409.800	82.68	32.40	115.08	74.00	41.08	peak	主波訊號不予判定
4	*	2414.500	69.63	32.41	102.04	54.00	48.04	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

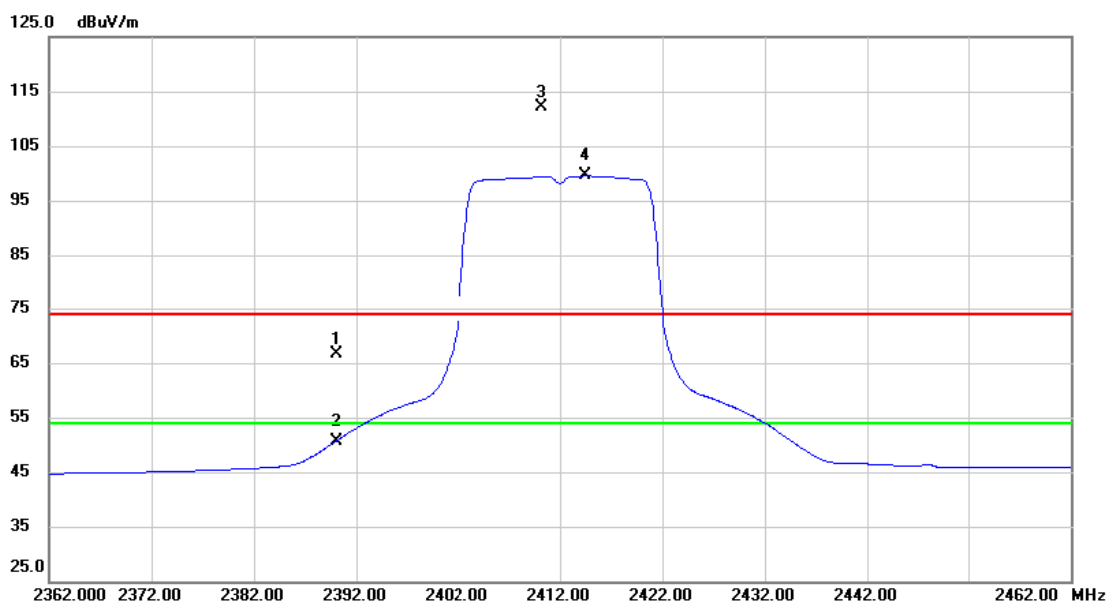

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	34.25	32.30	66.55	74.00	-7.45	peak	
2		2390.000	18.39	32.30	50.69	54.00	-3.31	AVG	
3	X	2410.200	79.74	32.40	112.14	74.00	38.14	peak	主波訊號不予判定
4	*	2414.500	67.12	32.41	99.53	54.00	45.53	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (20 MHz) /
2.4 GHz 頻帶/2483.5 - 2500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

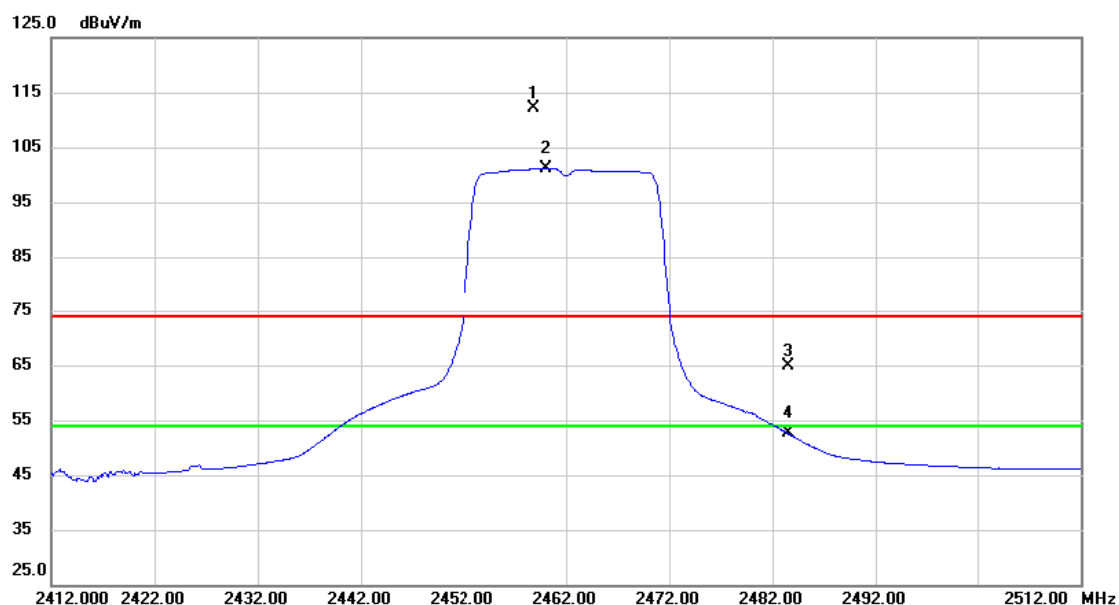

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2458.800	79.44	32.62	112.06	74.00	38.06	peak	主波訊號不予判定
2	*	2460.100	68.49	32.63	101.12	54.00	47.12	AVG	主波訊號不予判定
3		2483.500	32.14	32.73	64.87	74.00	-9.13	peak	
4		2483.500	19.85	32.73	52.58	54.00	-1.42	AVG	

測試頻道: IEEE 802.11n (20 MHz) /
2.4 GHz 頻帶/2483.5 - 2500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

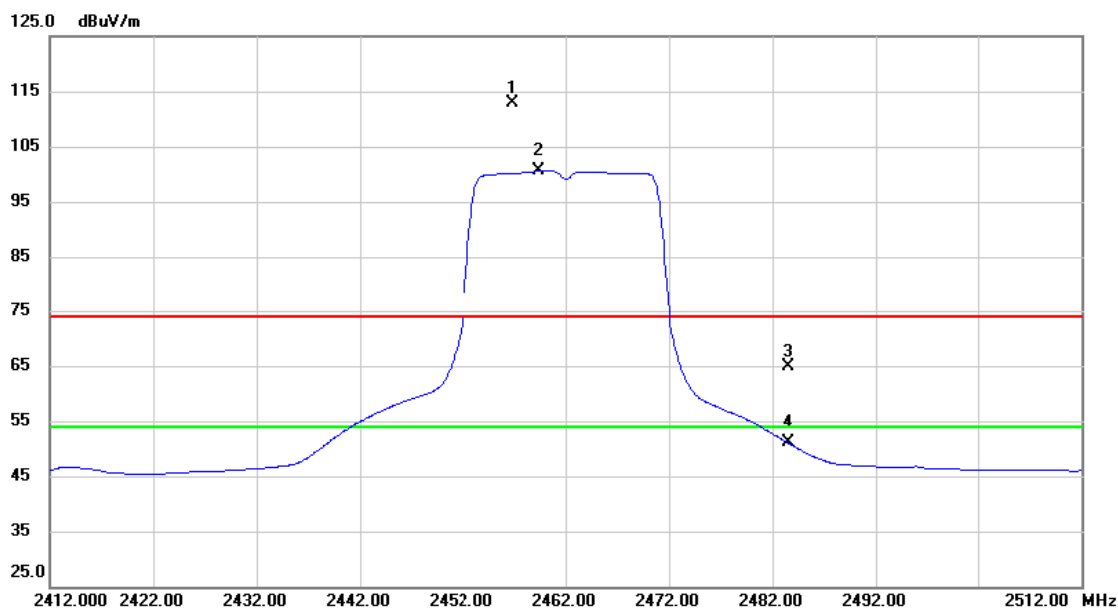

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.900	80.16	32.61	112.77	74.00	38.77	peak	主波訊號不予判定
2	*	2459.400	67.93	32.62	100.55	54.00	46.55	AVG	主波訊號不予判定
3		2483.500	32.10	32.73	64.83	74.00	-9.17	peak	
4		2483.500	18.32	32.73	51.05	54.00	-2.95	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

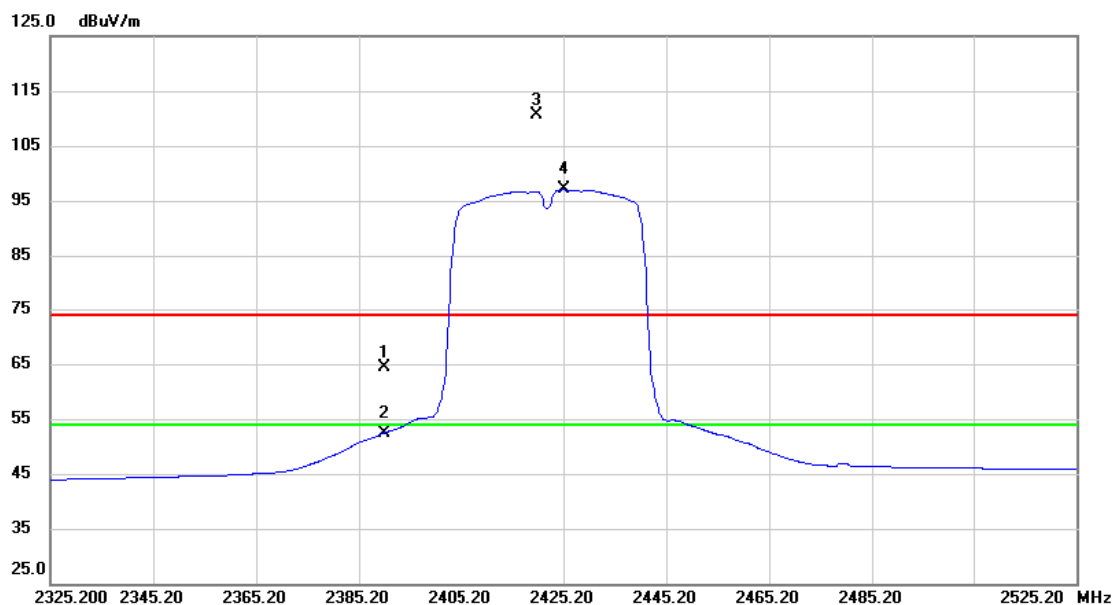

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	32.17	32.30	64.47	74.00	-9.53	peak	
2		2390.000	20.16	32.30	52.46	54.00	-1.54	AVG	
3	X	2420.000	78.23	32.44	110.67	74.00	36.67	peak	主波訊號不予判定
4	*	2425.200	64.54	32.47	97.01	54.00	43.01	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

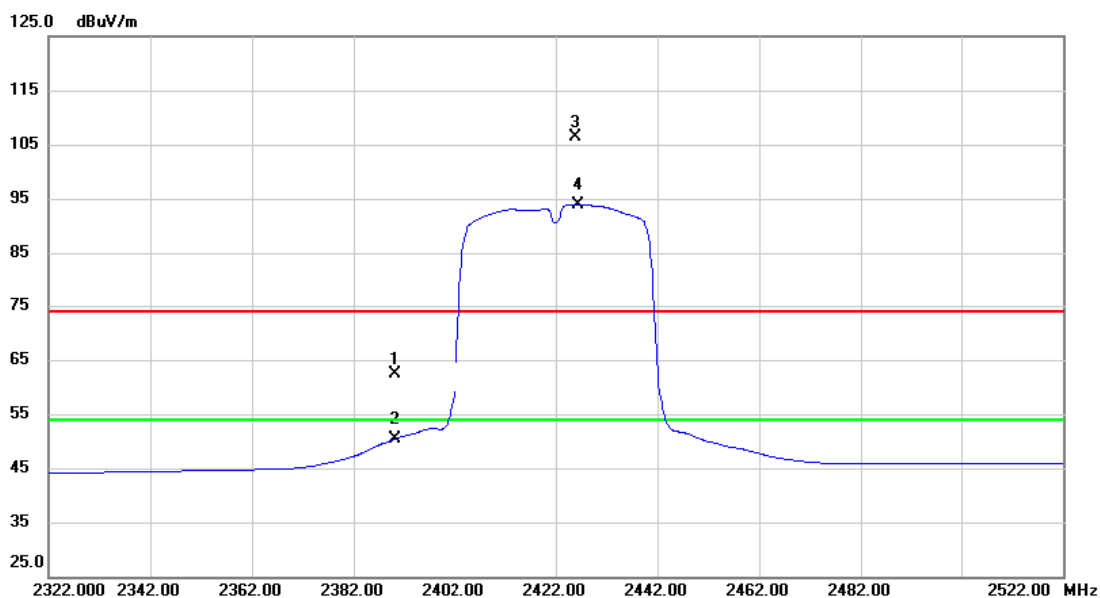

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	30.16	32.30	62.46	74.00	-11.54	peak	
2		2390.000	18.05	32.30	50.35	54.00	-3.65	AVG	
3	X	2425.800	73.89	32.47	106.36	74.00	32.36	peak	主波訊號不予判定
4	*	2426.400	61.46	32.47	93.93	54.00	39.93	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (40 MHz) /
2.4 GHz 頻帶/2483.5 - 2500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

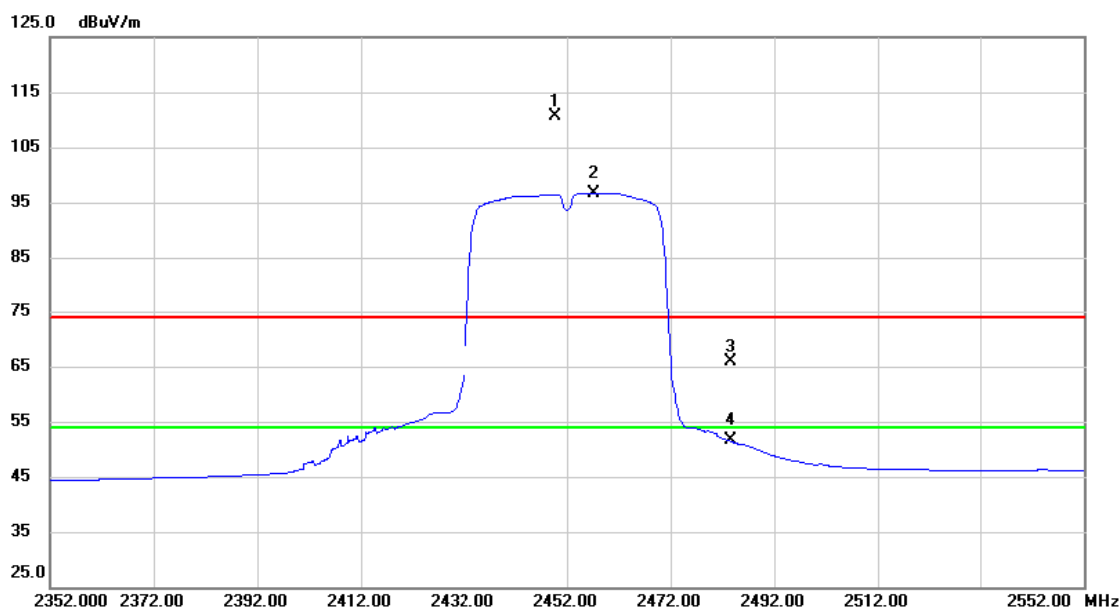

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2449.800	78.12	32.58	110.70	74.00	36.70	peak	主波訊號不予判定
2	*	2457.200	64.08	32.62	96.70	54.00	42.70	AVG	主波訊號不予判定
3		2483.500	33.17	32.73	65.90	74.00	-8.10	peak	
4		2483.500	19.00	32.73	51.73	54.00	-2.27	AVG	

測試頻道: IEEE 802.11n (40 MHz) /
2.4 GHz 頻帶/2483.5 - 2500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

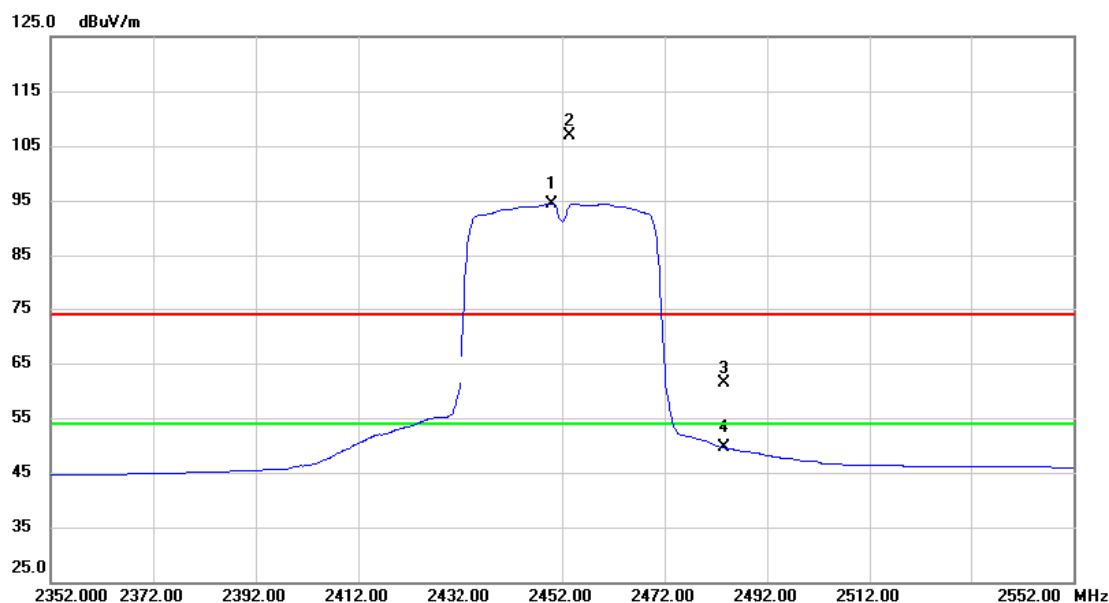

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2450.000	61.90	32.58	94.48	54.00	40.48	AVG	主波訊號不予判定
2	X	2453.600	74.32	32.59	106.91	74.00	32.91	peak	主波訊號不予判定
3		2483.500	28.56	32.73	61.29	74.00	-12.71	peak	
4		2483.500	16.79	32.73	49.52	54.00	-4.48	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

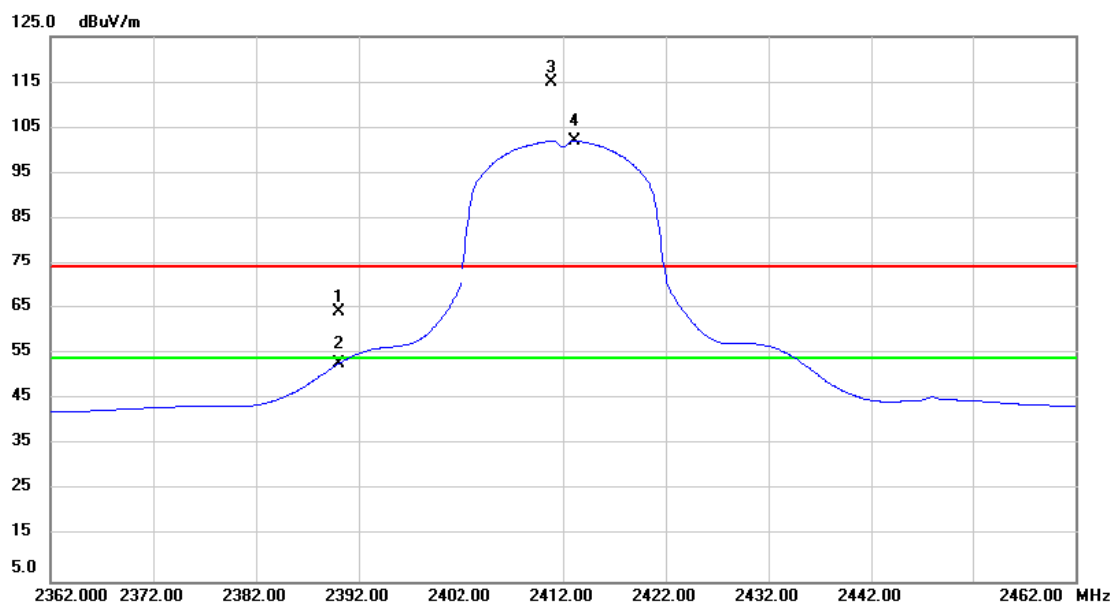

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	31.86	32.30	64.16	74.00	-9.84	peak	
2		2390.000	20.54	32.30	52.84	54.00	-1.16	AVG	
3	X	2410.900	82.69	32.40	115.09	74.00	41.09	peak	主波訊號不予判定
4	*	2413.100	69.73	32.41	102.14	54.00	48.14	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

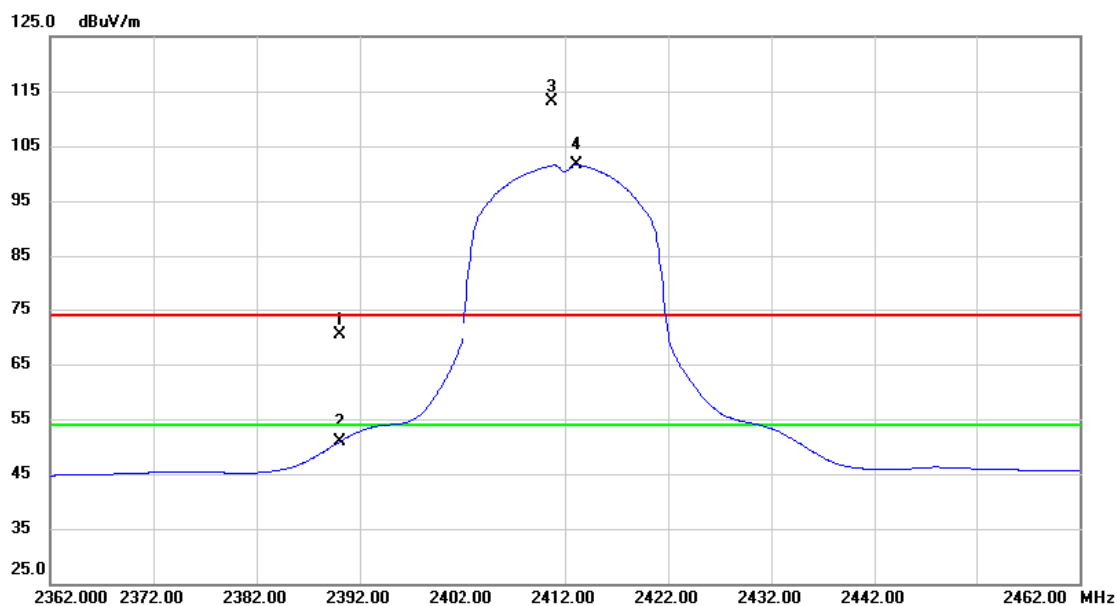

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	38.14	32.30	70.44	74.00	-3.56	peak	
2		2390.000	18.54	32.30	50.84	54.00	-3.16	AVG	
3	X	2410.700	80.81	32.40	113.21	74.00	39.21	peak	主波訊號不予判定
4	*	2413.100	69.25	32.41	101.66	54.00	47.66	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
2.4 GHz 頻帶/2483.5 - 2500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

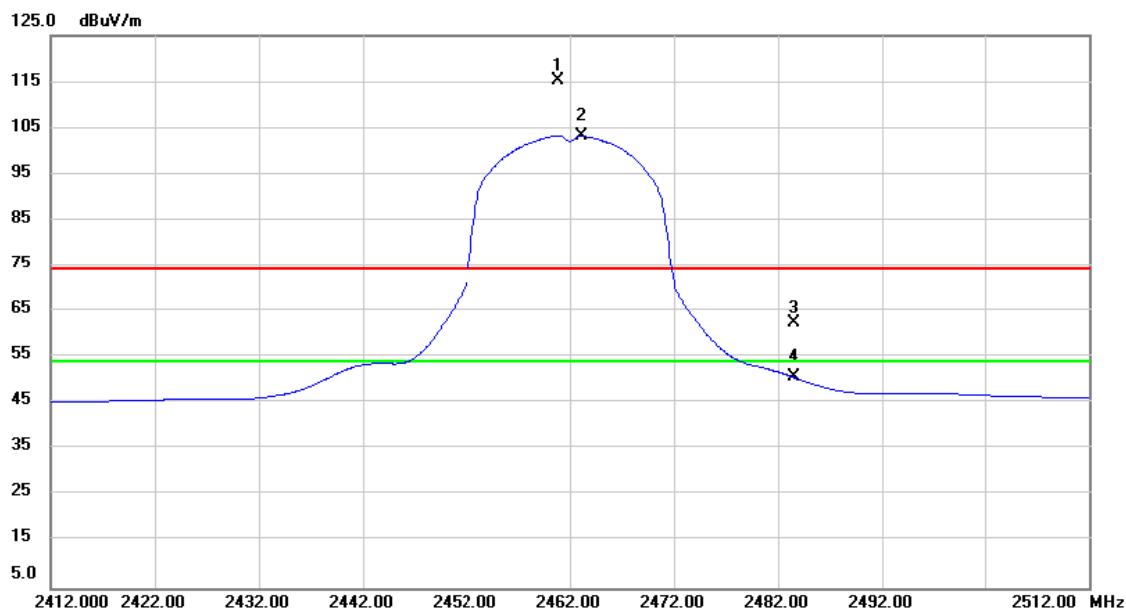

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2460.900	82.70	32.63	115.33	74.00	41.33	peak	主波訊號不予判定
2	*	2463.100	70.65	32.64	103.29	54.00	49.29	AVG	主波訊號不予判定
3		2483.500	29.76	32.73	62.49	74.00	-11.51	peak	
4		2483.500	17.91	32.73	50.64	54.00	-3.36	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
2.4 GHz 頻帶/2483.5 - 2500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

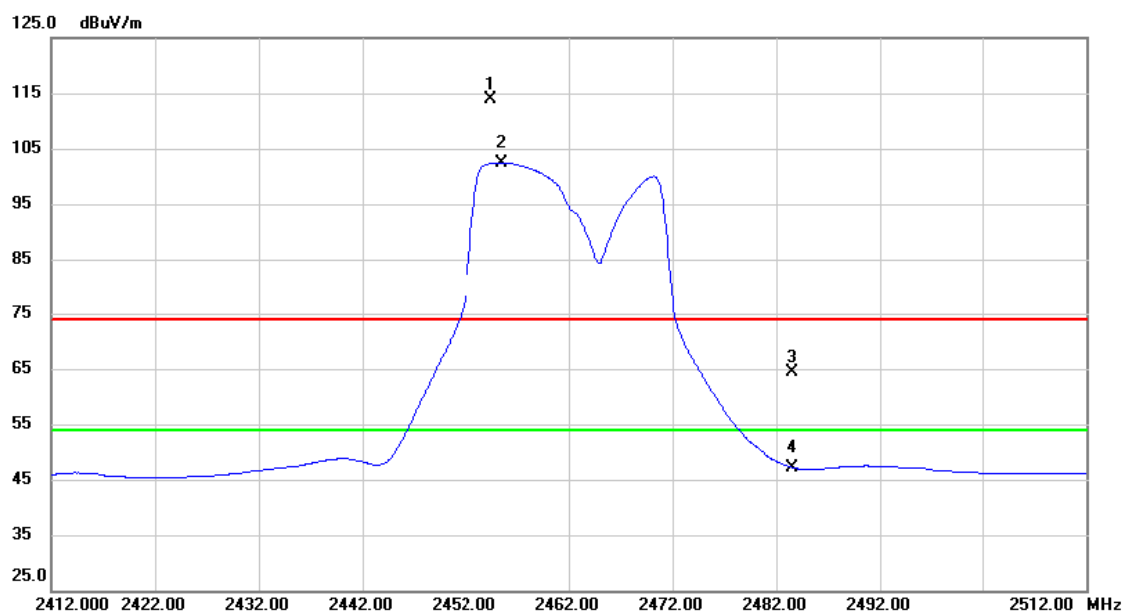

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2454.400	81.38	32.60	113.98	74.00	39.98	peak	主波訊號不予判定
2	*	2455.500	69.87	32.60	102.47	54.00	48.47	AVG	主波訊號不予判定
3		2483.500	31.60	32.73	64.33	74.00	-9.67	peak	
4		2483.500	14.47	32.73	47.20	54.00	-6.80	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

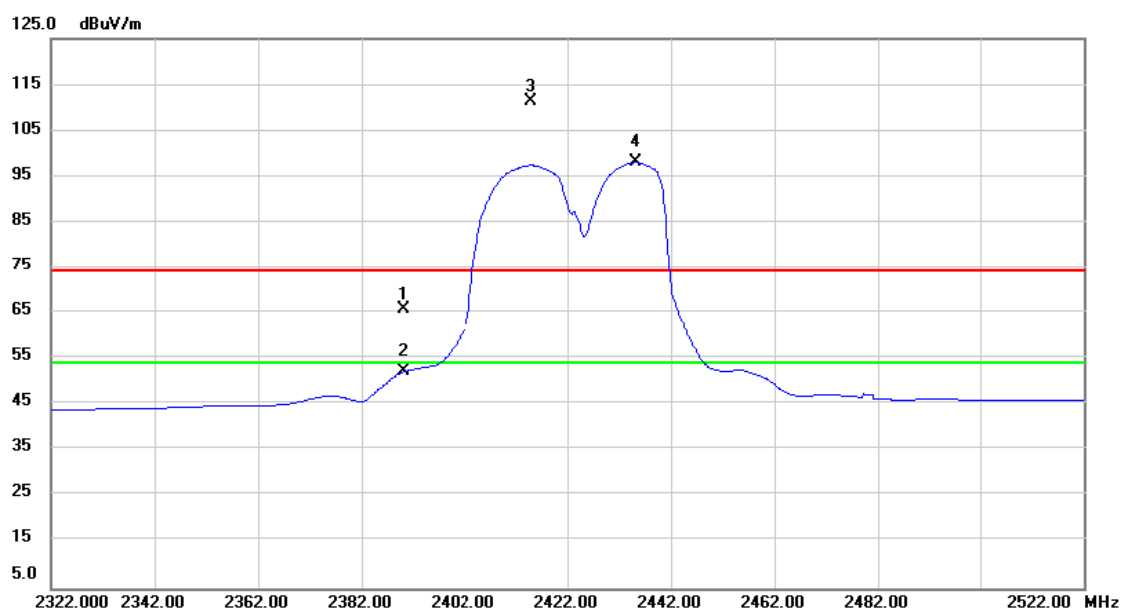

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	33.47	32.30	65.77	74.00	-8.23	peak	
2		2390.000	19.88	32.30	52.18	54.00	-1.82	AVG	
3	X	2415.000	79.02	32.41	111.43	74.00	37.43	peak	主波訊號不予判定
4	*	2435.200	65.54	32.51	98.05	54.00	44.05	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
2.4 GHz 頻帶 / 2310 - 2390 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

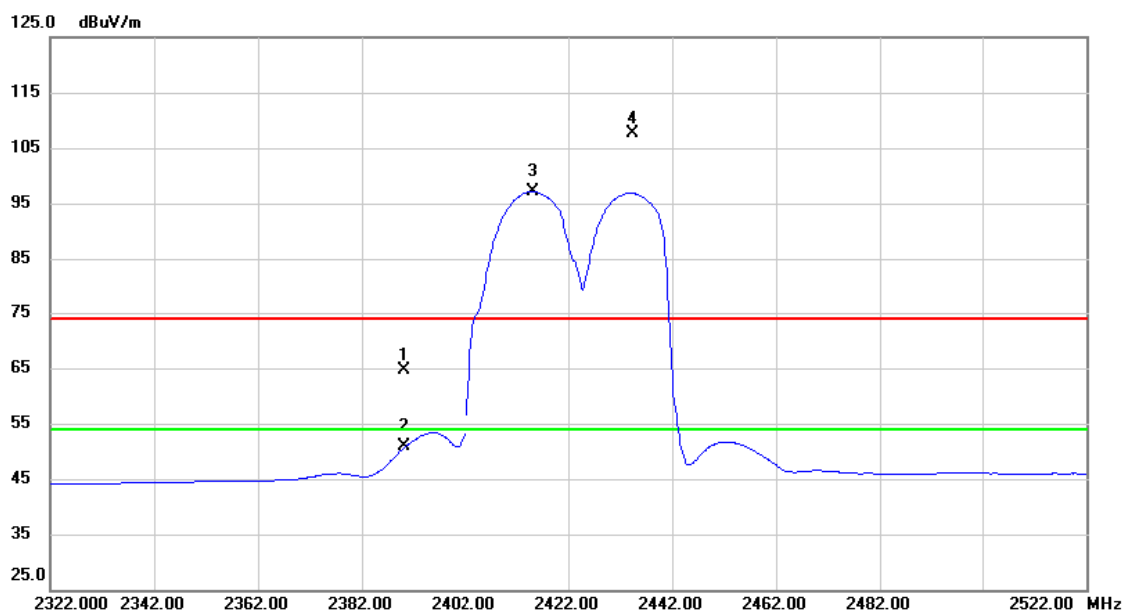

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	32.44	32.30	64.74	74.00	-9.26	peak	
2		2390.000	18.60	32.30	50.90	54.00	-3.10	AVG	
3	*	2415.200	64.78	32.41	97.19	54.00	43.19	AVG	主波訊號不予判定
4	X	2434.400	75.18	32.51	107.69	74.00	33.69	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
2.4 GHz 頻帶/2483.5 - 2500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

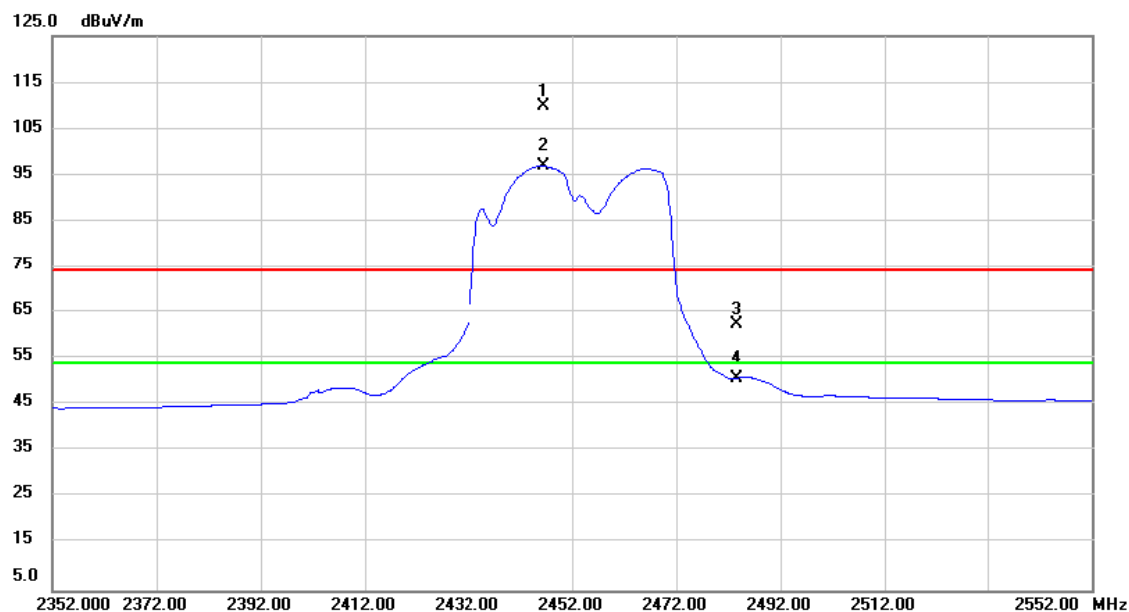

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2446.400	77.18	32.56	109.74	74.00	35.74	peak	主波訊號不予判定
2	*	2446.400	64.38	32.56	96.94	54.00	42.94	AVG	主波訊號不予判定
3		2483.500	29.61	32.73	62.34	74.00	-11.66	peak	
4		2483.500	18.11	32.73	50.84	54.00	-3.16	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
2.4 GHz 頻帶/2483.5 - 2500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 107/01/08

環境溫度: 24°C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

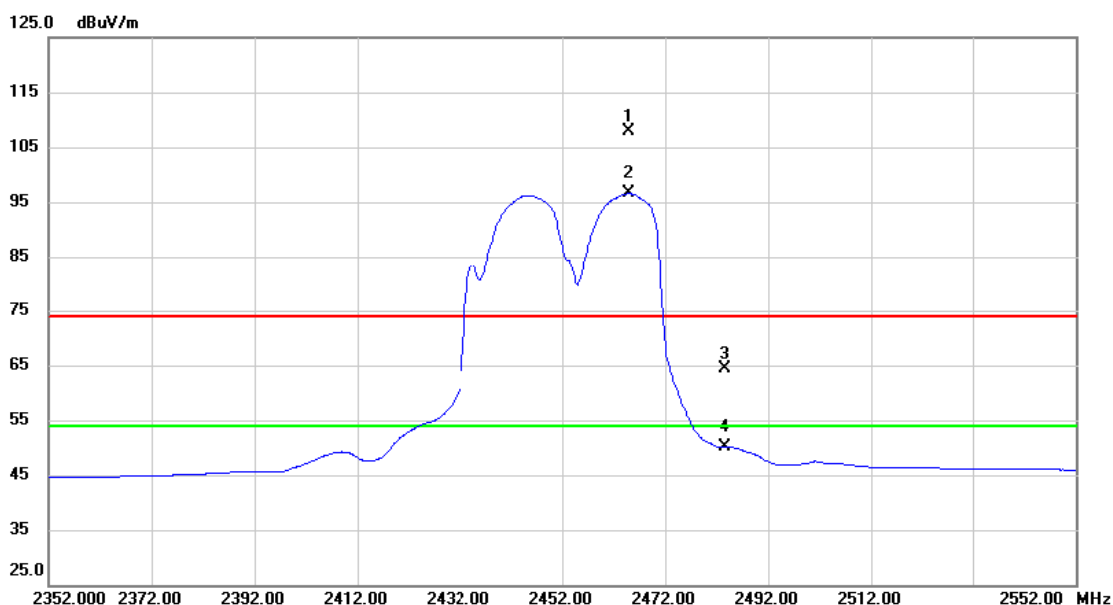

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2465.000	75.30	32.65	107.95	74.00	33.95	peak	主波訊號不予判定
2	*	2465.000	63.88	32.65	96.53	54.00	42.53	AVG	主波訊號不予判定
3		2483.500	31.60	32.73	64.33	74.00	-9.67	peak	
4		2483.500	17.29	32.73	50.02	54.00	-3.98	AVG	