


Site: AC1	Time: 2018/09/25 - 21:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2462MHz Ant 0	

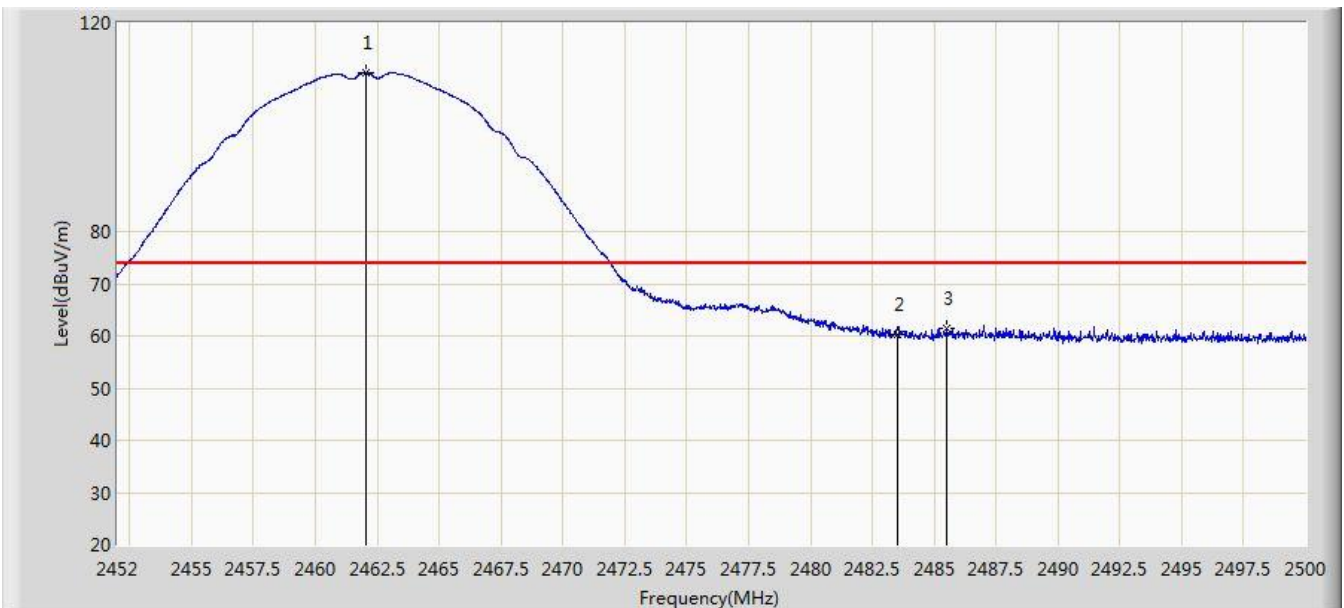

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.056	110.382	77.866	N/A	N/A	32.516	PK
2			2483.500	60.233	27.652	-13.767	74.000	32.580	PK
3			2485.528	61.478	28.891	-12.522	74.000	32.587	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 21:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2462MHz Ant 0	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.800	106.868	74.349	N/A	N/A	32.518	AV
2			2483.500	47.806	15.225	-6.194	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 21:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2412MHz Ant 0	

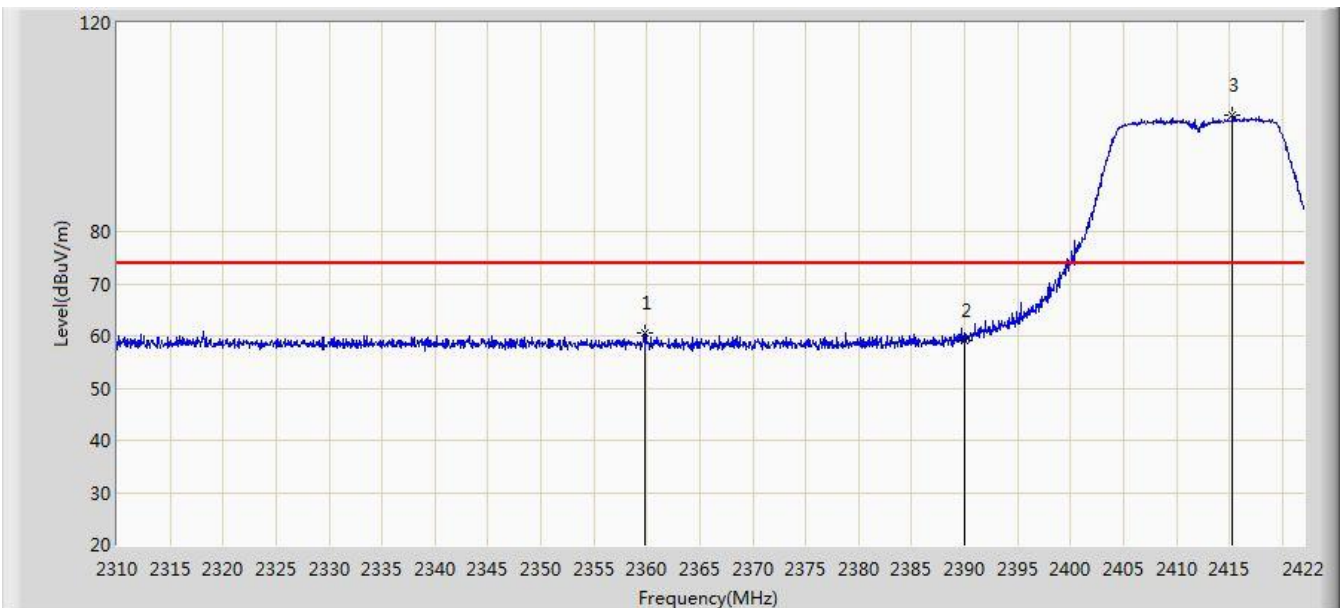


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2359.784	60.595	27.998	-13.405	74.000	32.597	PK
2			2390.000	58.997	26.443	-15.003	74.000	32.554	PK
3		*	2415.280	102.312	69.790	N/A	N/A	32.522	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 21:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2412MHz Ant 0	

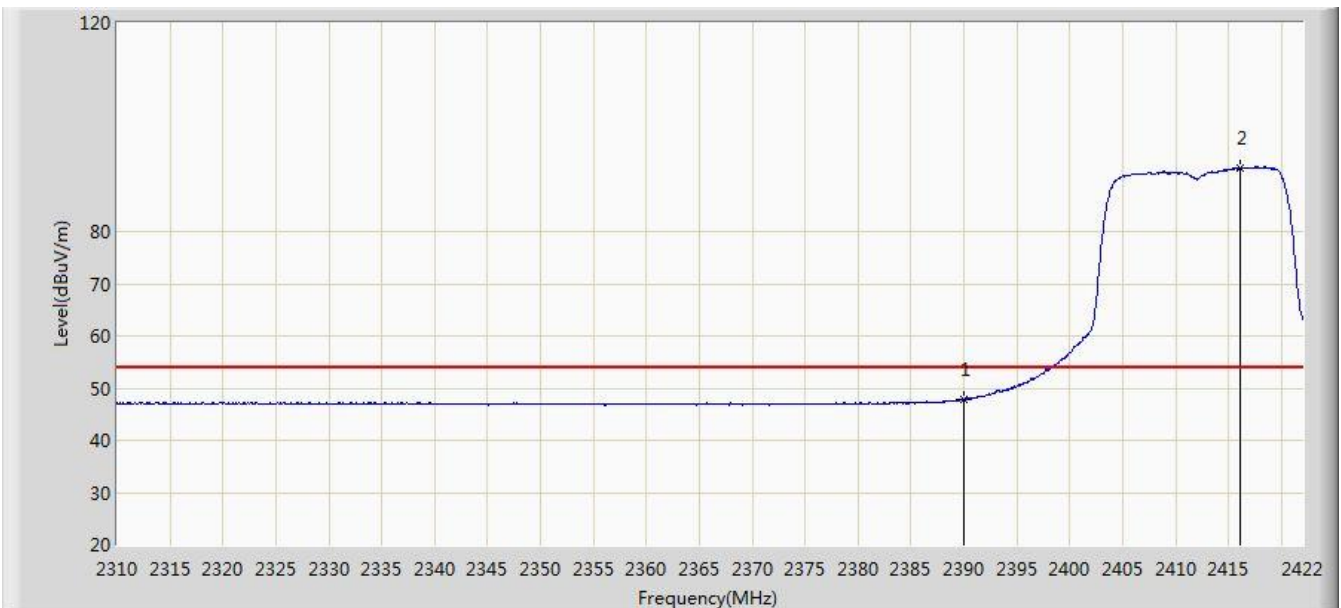


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.766	15.212	-6.234	54.000	32.554	AV
2		*	2416.064	92.219	59.698	N/A	N/A	32.521	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 21:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2412MHz Ant 0	

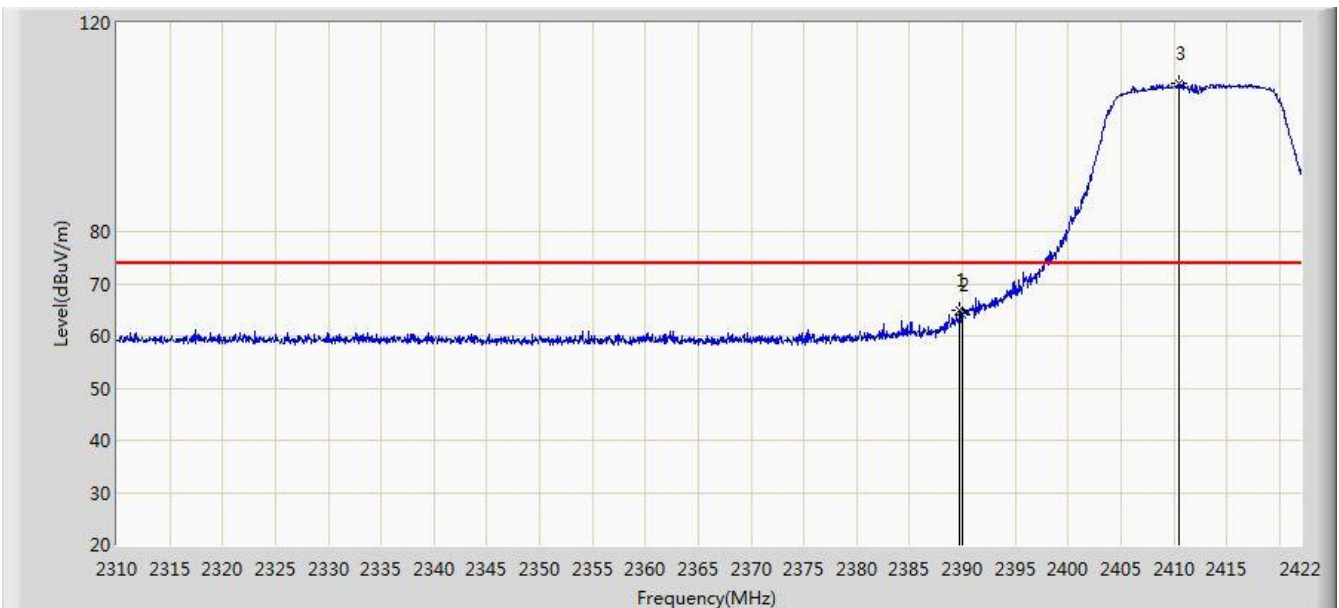


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.744	64.825	32.270	-9.175	74.000	32.555	PK
2			2390.000	64.115	31.561	-9.885	74.000	32.554	PK
3		*	2410.464	108.380	75.852	N/A	N/A	32.527	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 21:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2412MHz Ant 0	

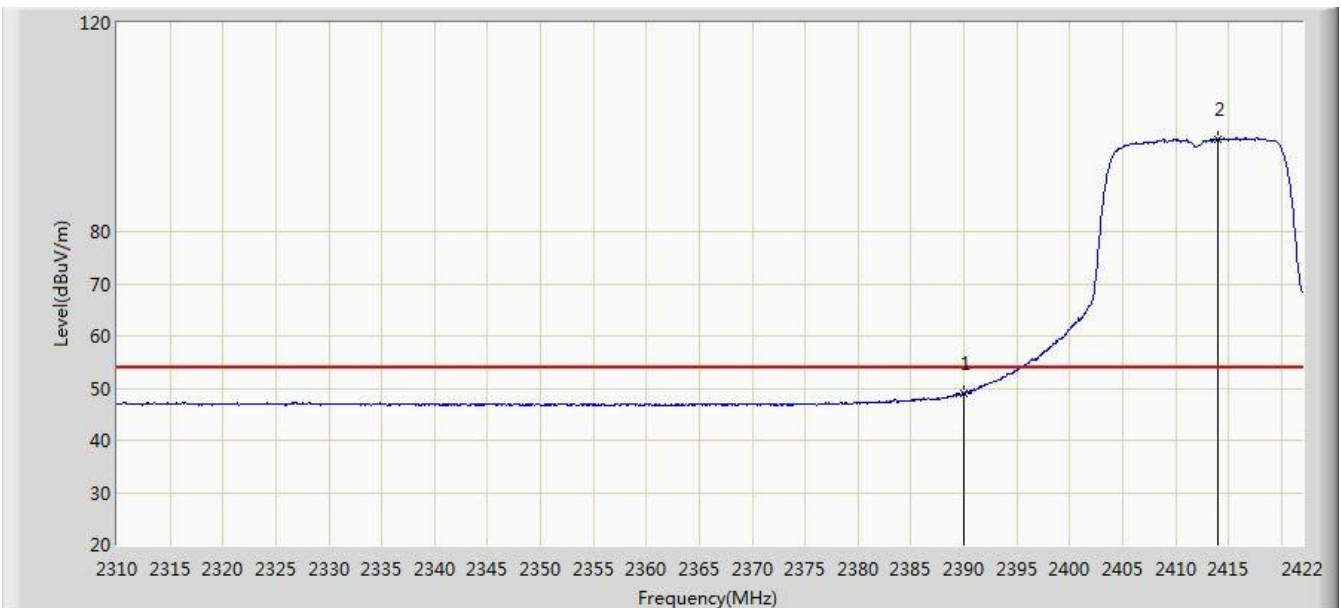


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.926	16.372	-5.074	54.000	32.554	AV
2		*	2413.936	97.810	65.287	N/A	N/A	32.523	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 21:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2462MHz Ant 0	

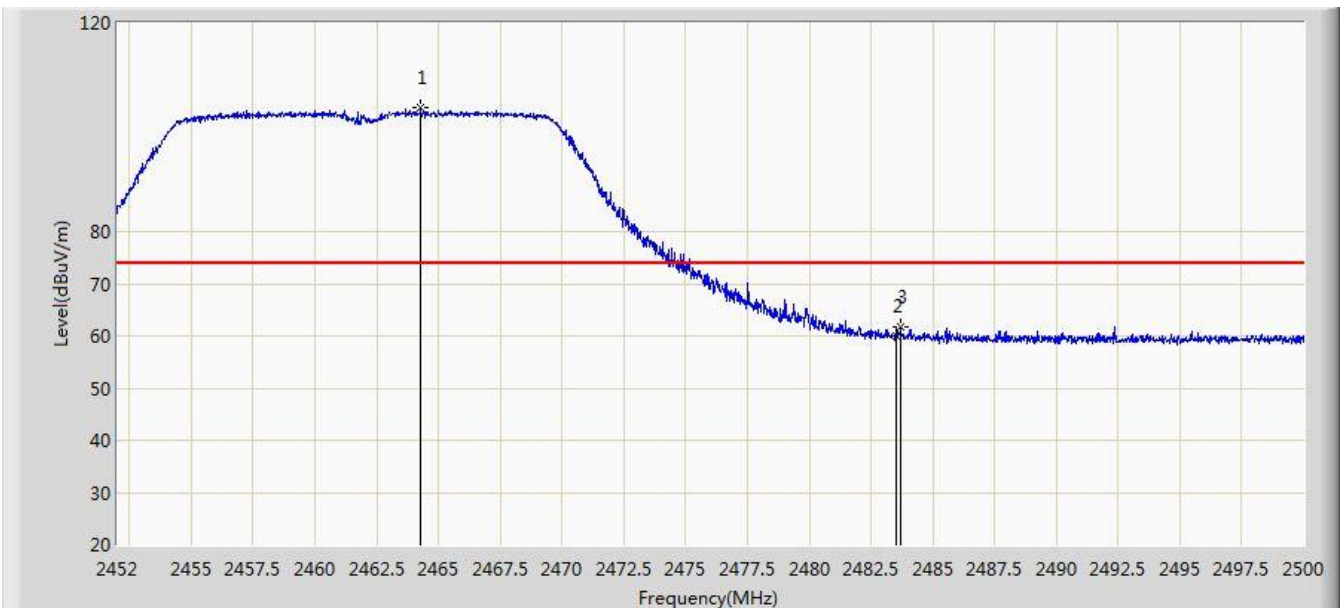


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.288	103.782	71.259	N/A	N/A	32.523	PK
2			2483.500	59.972	27.391	-14.028	74.000	32.580	PK
3			2483.704	61.711	29.130	-12.289	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 21:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2462MHz Ant 0	

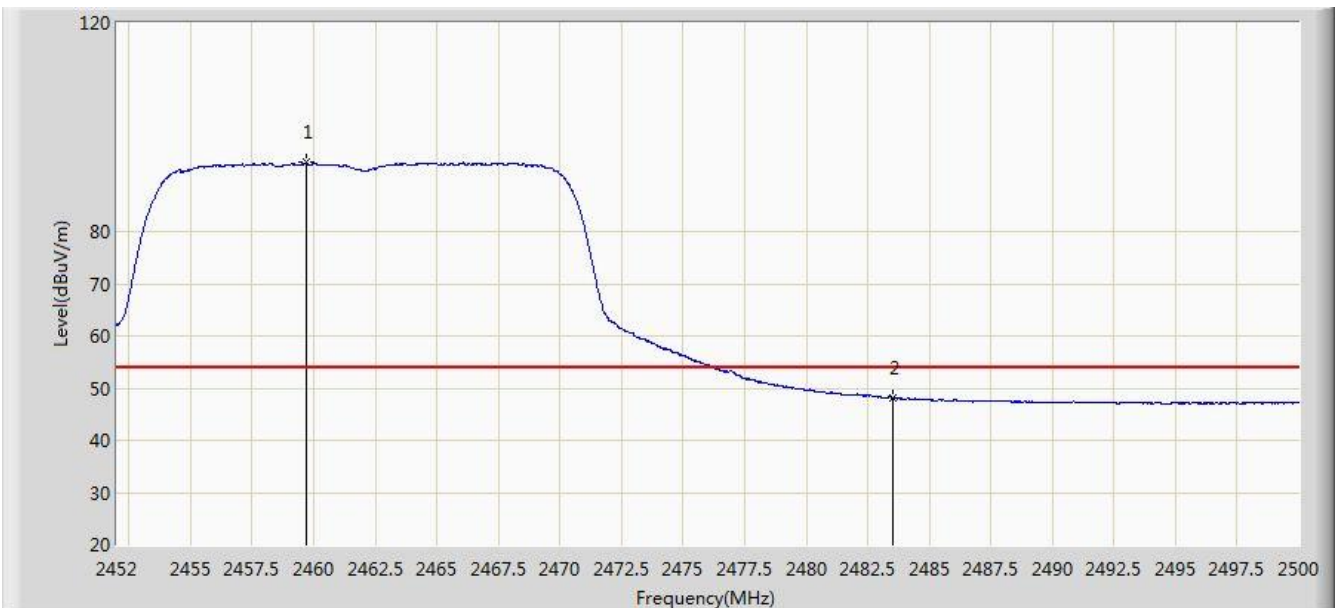


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.704	93.213	60.701	N/A	N/A	32.513	AV
2			2483.500	48.186	15.605	-5.814	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 21:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2462MHz Ant 0	

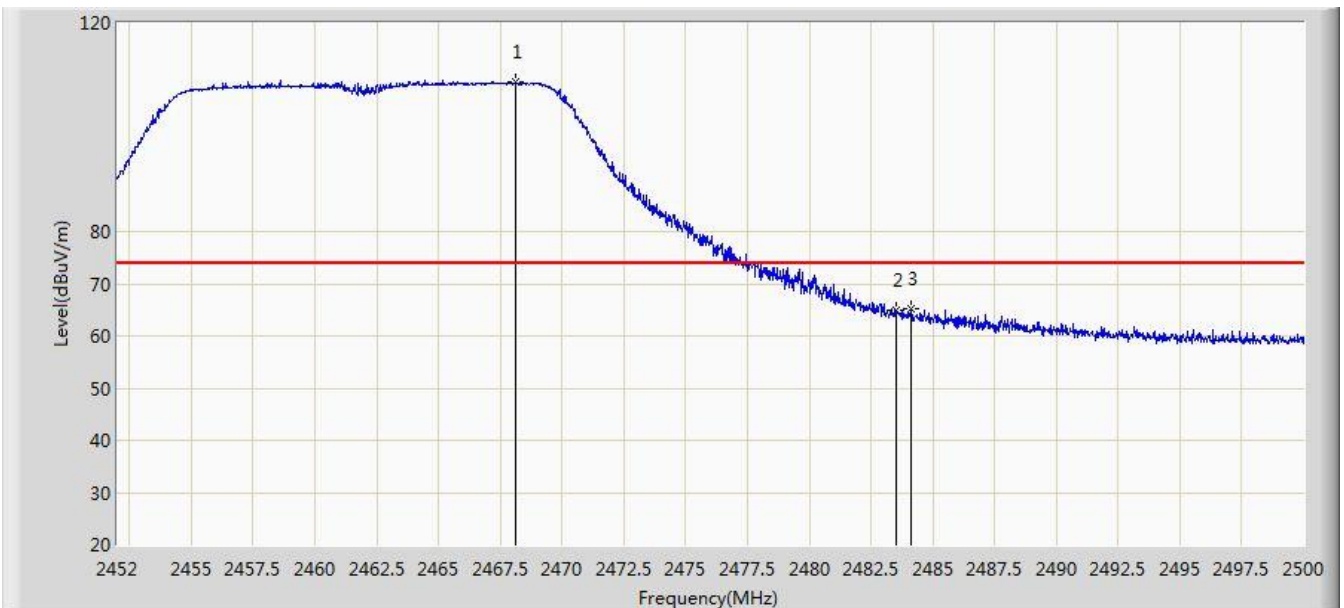


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.128	108.703	76.169	N/A	N/A	32.535	PK
2			2483.500	64.802	32.221	-9.198	74.000	32.580	PK
3			2484.136	65.142	32.559	-8.858	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 21:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2462MHz Ant 0	

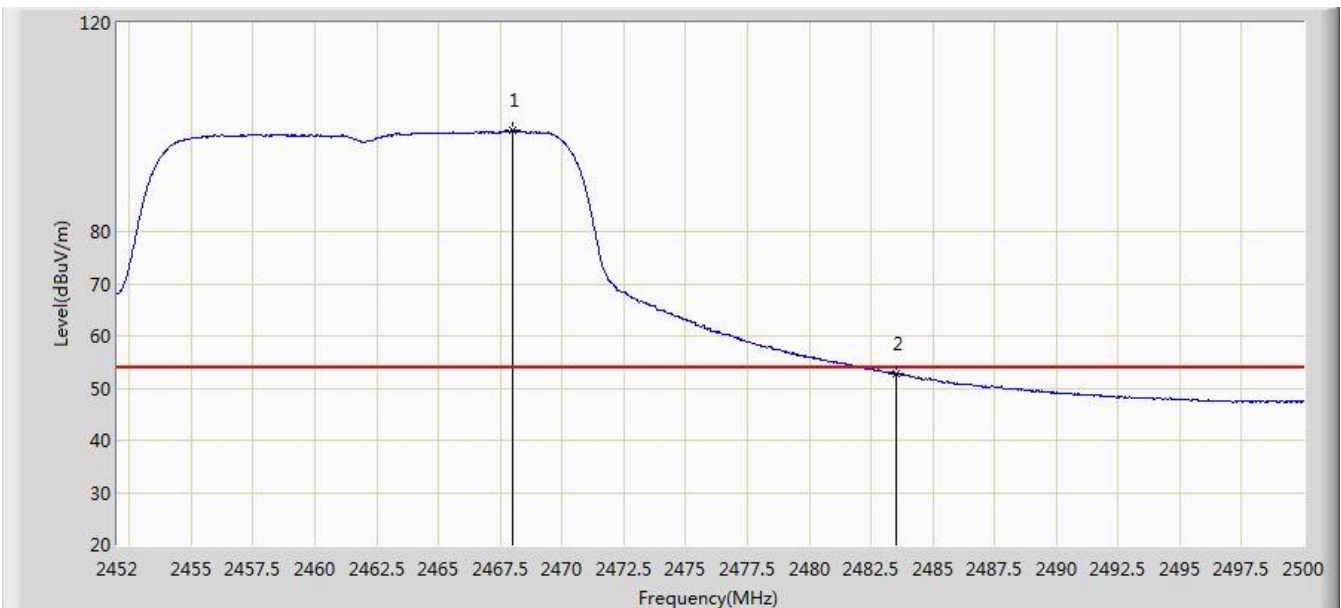


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.008	99.350	66.816	N/A	N/A	32.534	AV
2			2483.500	52.665	20.084	-1.335	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2412MHz Ant 1	

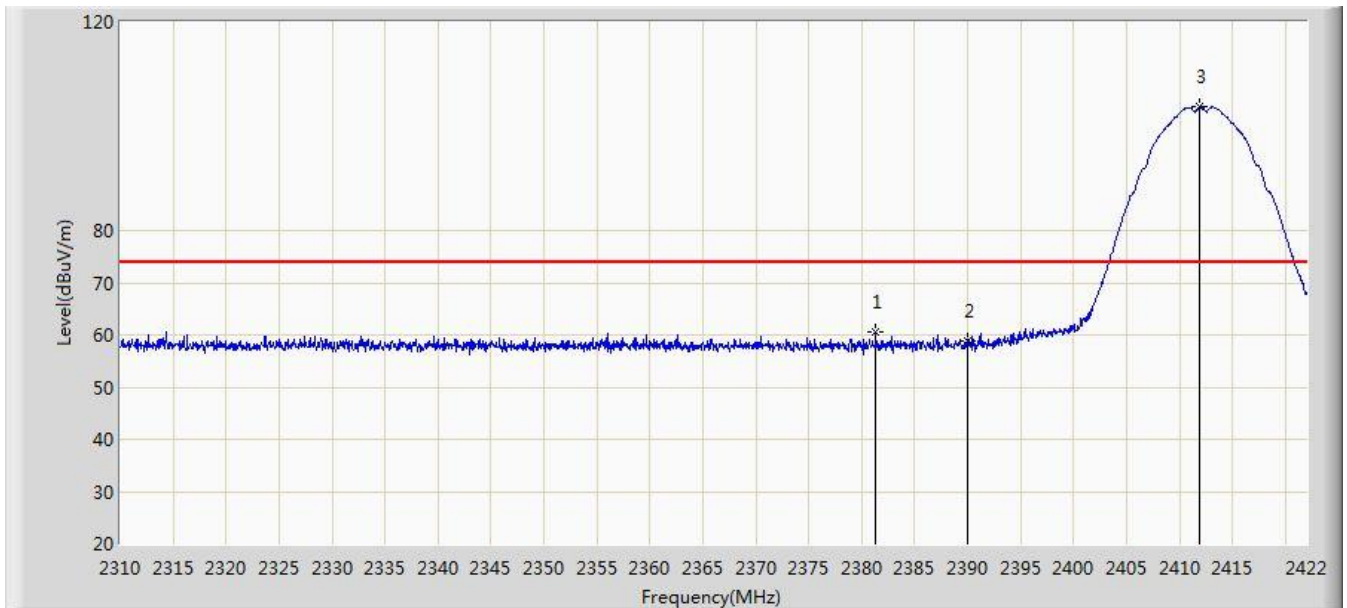


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.344	60.676	28.110	-13.324	74.000	32.567	PK
2			2390.000	58.720	26.166	-15.280	74.000	32.554	PK
3		*	2411.920	103.752	71.226	N/A	N/A	32.526	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:35
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2412MHz Ant 1	

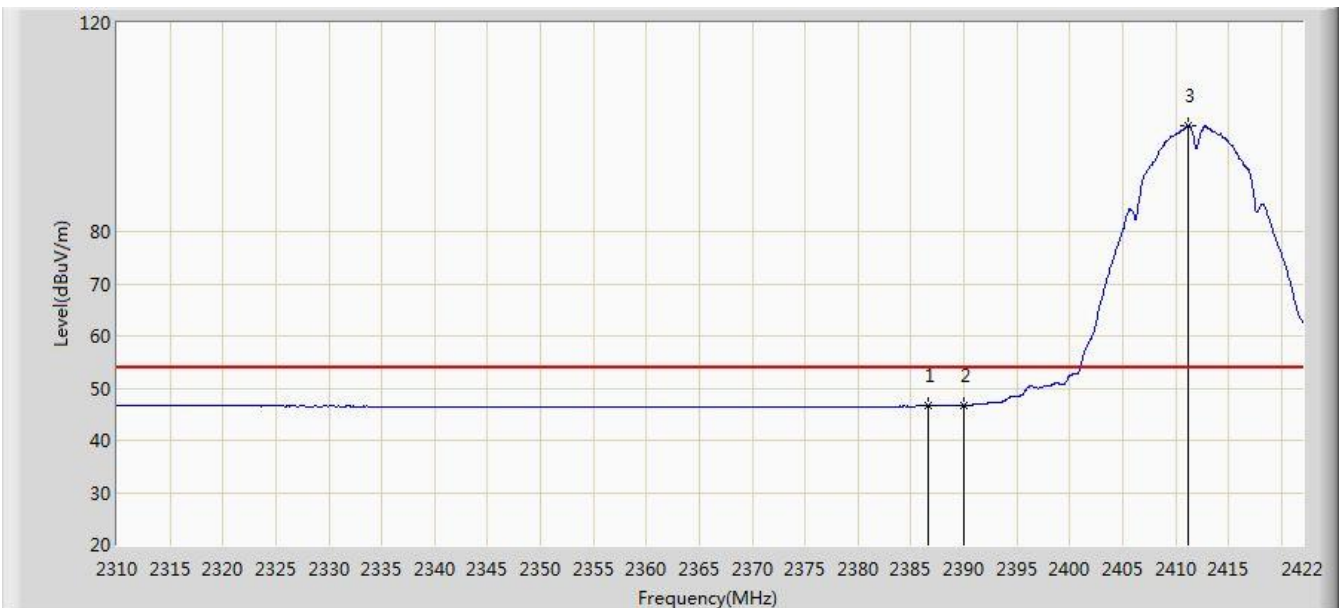


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.608	46.643	14.084	-7.357	54.000	32.559	AV
2			2390.000	46.616	14.062	-7.384	54.000	32.554	AV
3		*	2411.136	100.284	67.757	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2412MHz Ant 1	

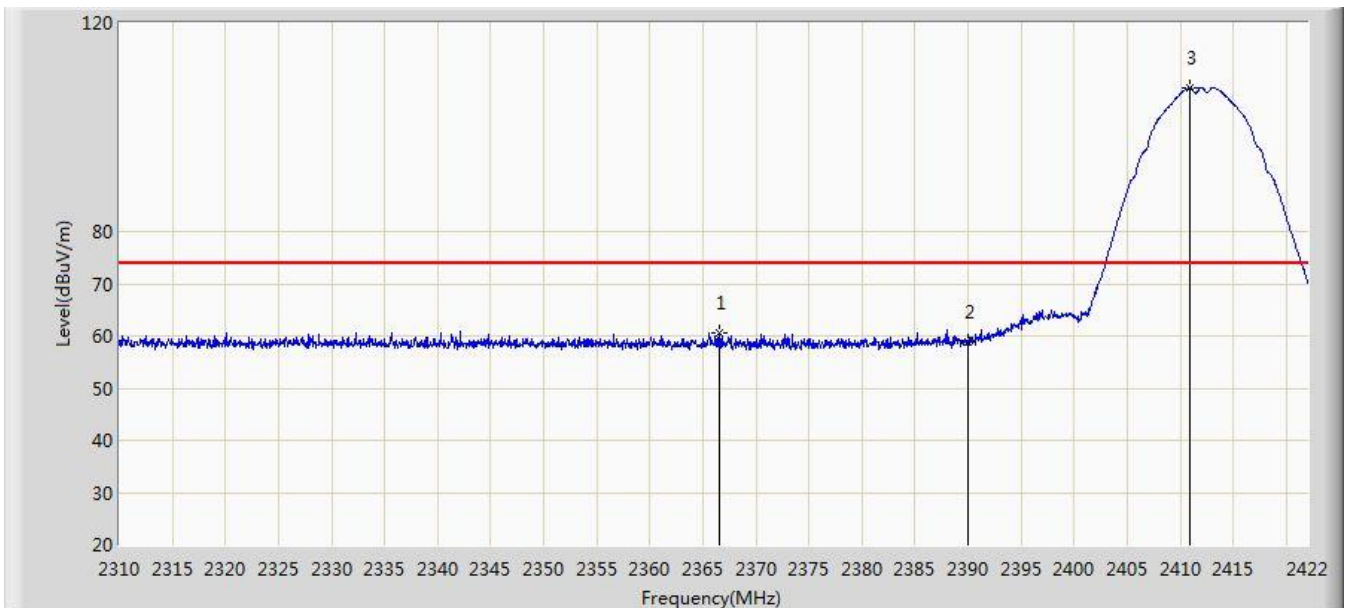


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2366.504	60.715	28.128	-13.285	74.000	32.587	PK
2			2390.000	58.906	26.352	-15.094	74.000	32.554	PK
3		*	2410.856	107.441	74.914	N/A	N/A	32.527	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2412MHz Ant 1	

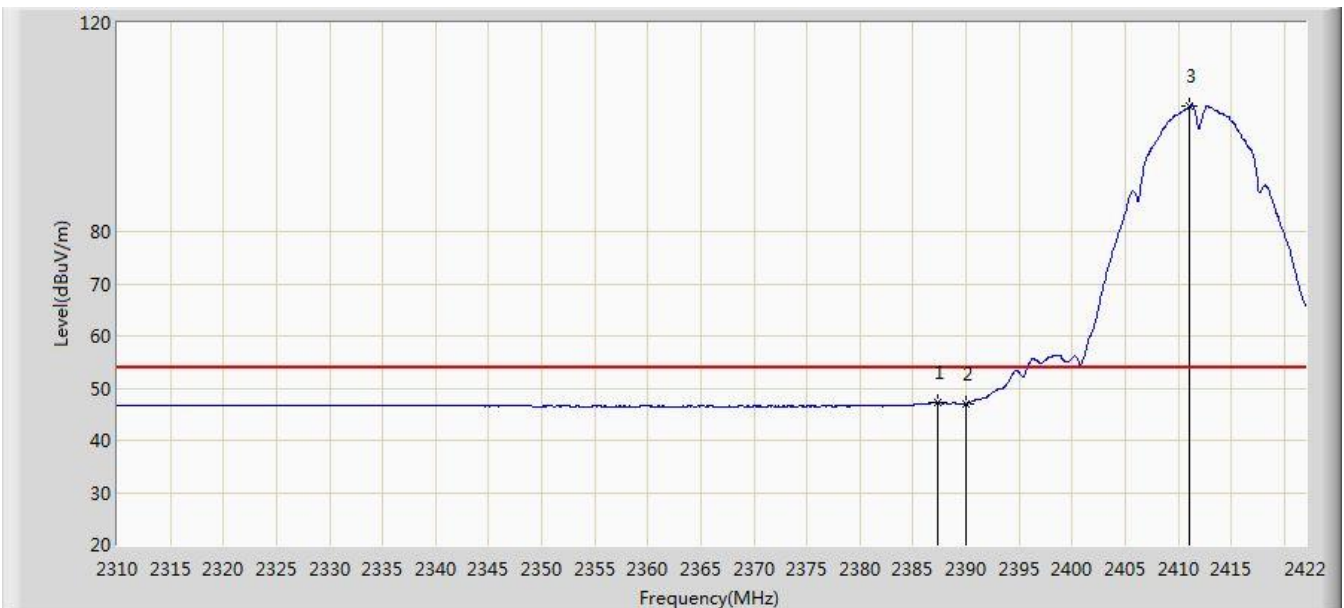


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.280	47.207	14.649	-6.793	54.000	32.558	AV
2			2390.000	47.018	14.464	-6.982	54.000	32.554	AV
3		*	2411.080	104.153	71.626	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2462MHz Ant 1	

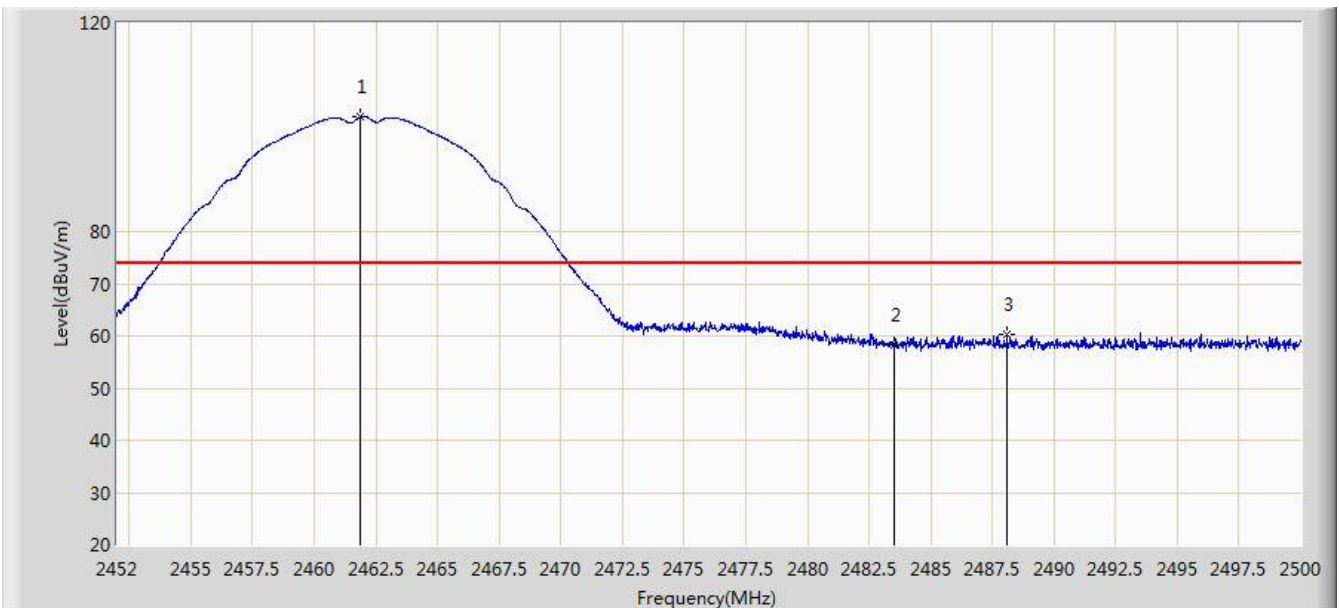


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.864	101.905	69.389	N/A	N/A	32.516	PK
2			2483.500	58.175	25.594	-15.825	74.000	32.580	PK
3			2488.096	60.428	27.834	-13.572	74.000	32.595	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2462MHz Ant 1	

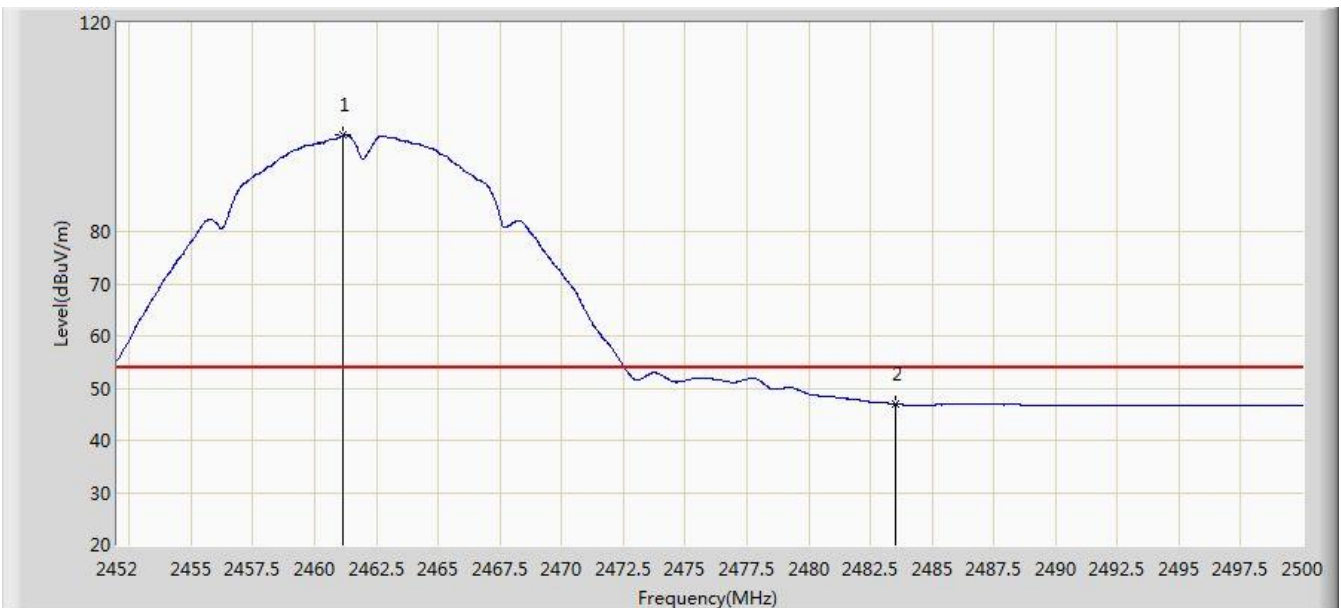


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.120	98.431	65.916	N/A	N/A	32.514	AV
2			2483.500	46.979	14.398	-7.021	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2462MHz Ant 1	

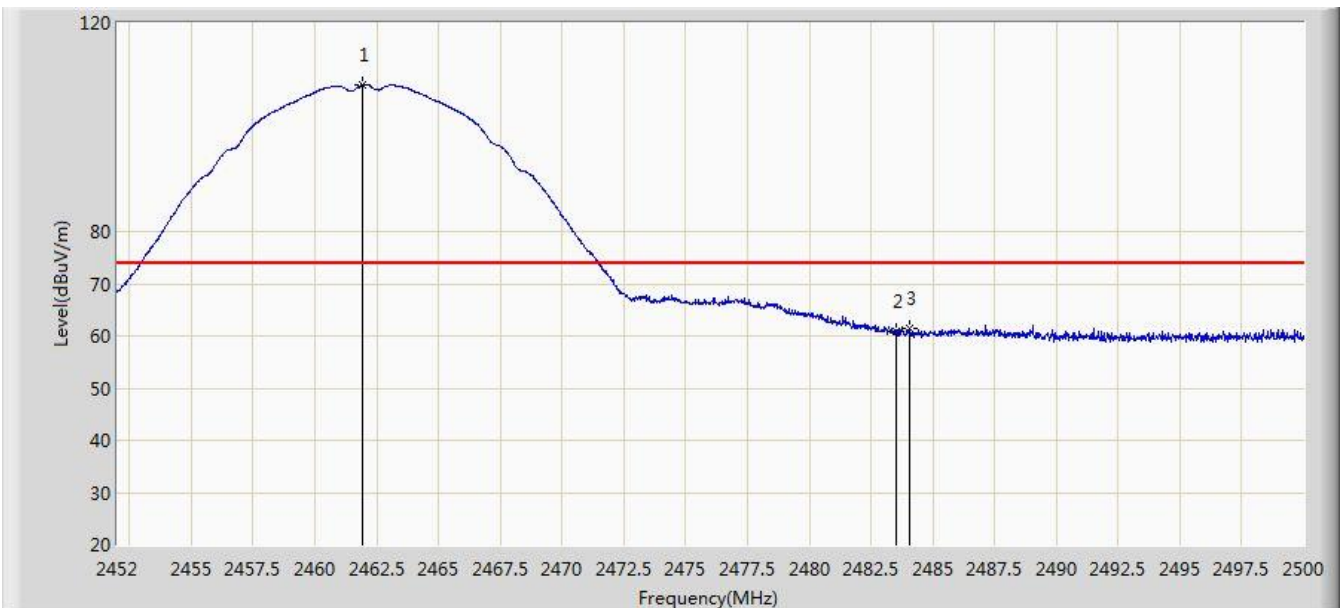

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.912	108.104	75.588	N/A	N/A	32.516	PK
2			2483.500	60.810	28.229	-13.190	74.000	32.580	PK
3			2484.088	61.573	28.991	-12.427	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11b at channel 2462MHz Ant 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.072	104.341	71.826	N/A	N/A	32.514	AV
2			2483.500	48.333	15.752	-5.667	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2412MHz Ant 1	

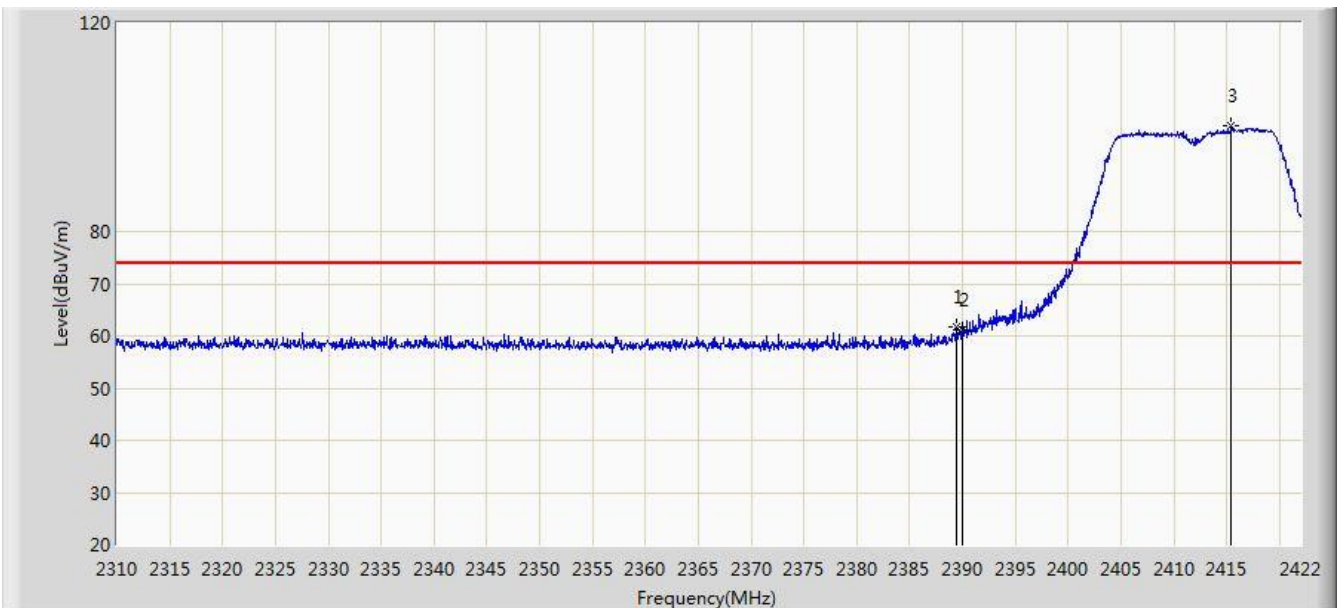


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.408	61.836	29.281	-12.164	74.000	32.555	PK
2			2390.000	61.234	28.680	-12.766	74.000	32.554	PK
3		*	2415.392	100.270	67.748	N/A	N/A	32.521	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2412MHz Ant 1	

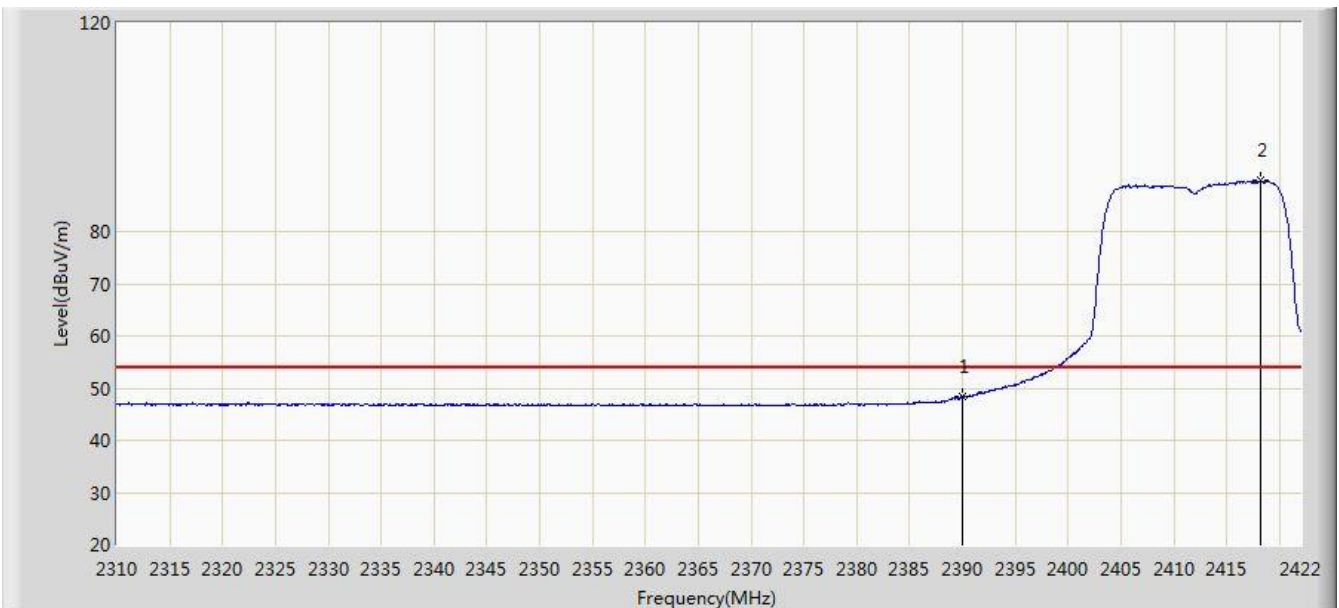


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.269	15.715	-5.731	54.000	32.554	AV
2		*	2418.192	89.731	57.213	N/A	N/A	32.519	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2412MHz Ant 1	

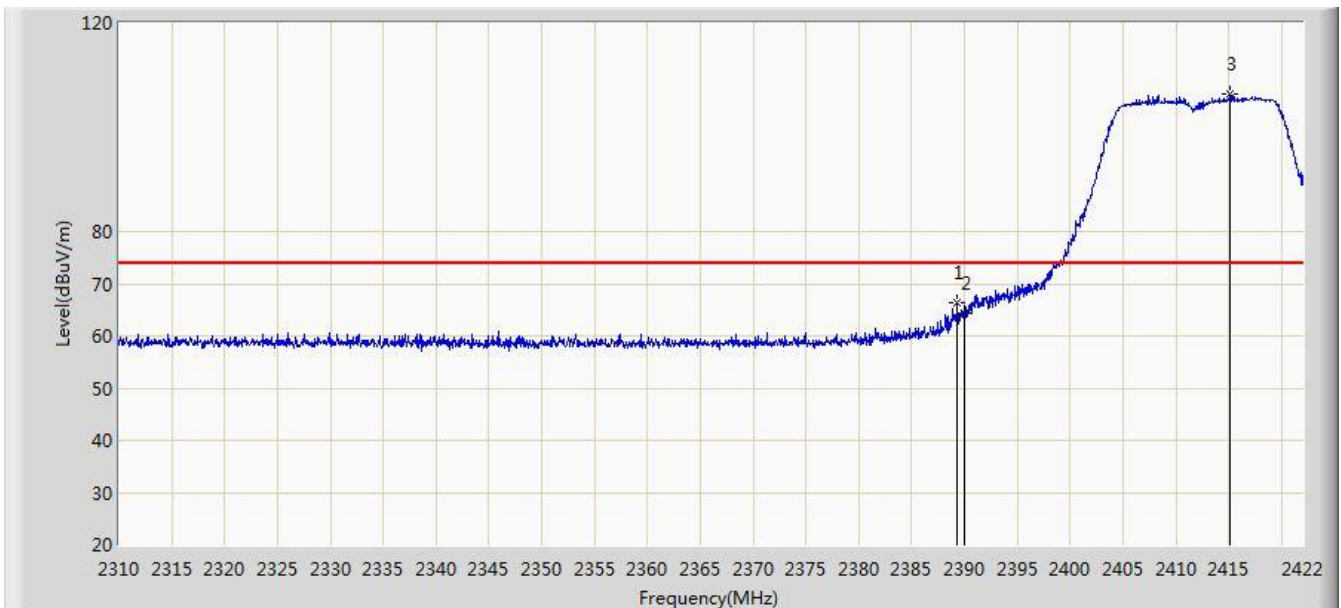


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.296	66.501	33.946	-7.499	74.000	32.555	PK
2			2390.000	64.411	31.857	-9.589	74.000	32.554	PK
3		*	2415.168	106.259	73.737	N/A	N/A	32.522	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2412MHz Ant 1	

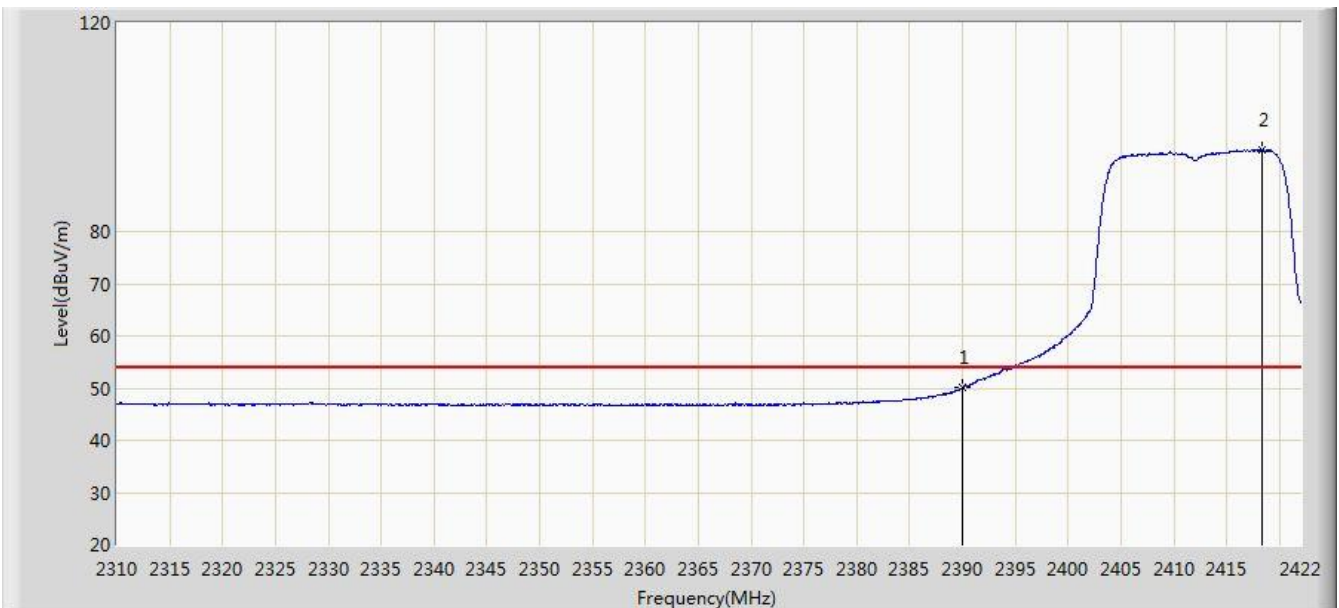


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.023	17.469	-3.977	54.000	32.554	AV
2		*	2418.416	95.659	63.141	N/A	N/A	32.518	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2462MHz Ant 1	

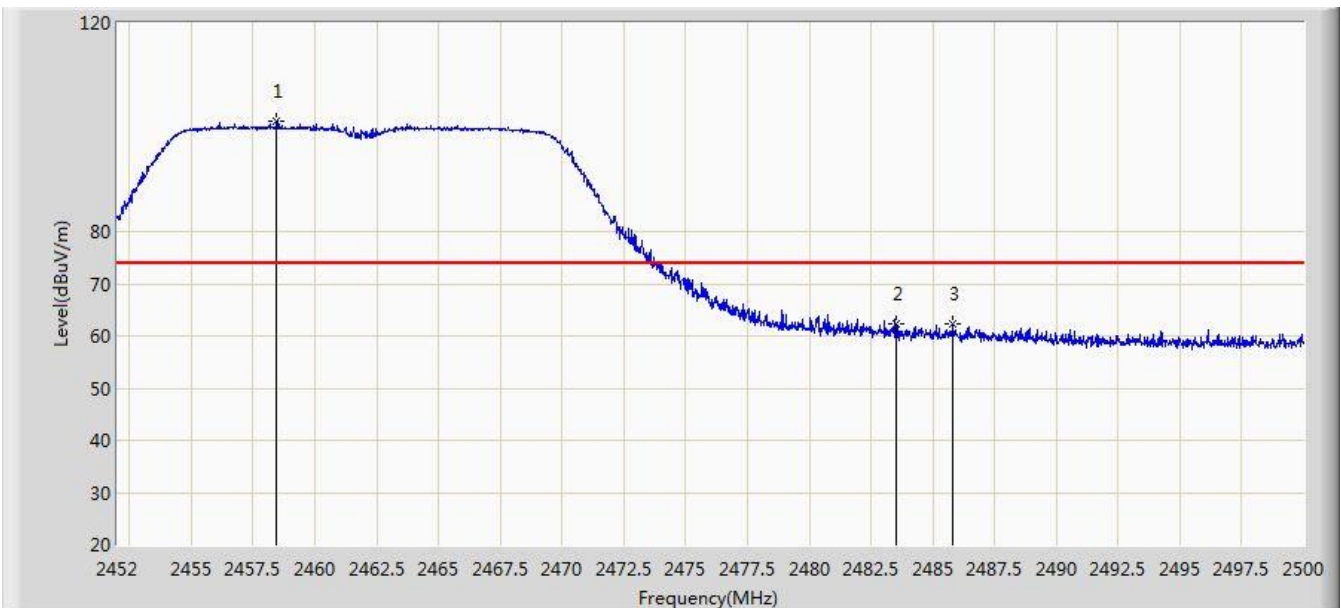


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.432	101.213	68.703	N/A	N/A	32.510	PK
2			2483.500	62.378	29.797	-11.622	74.000	32.580	PK
3			2485.816	62.326	29.738	-11.674	74.000	32.587	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2462MHz Ant 1	

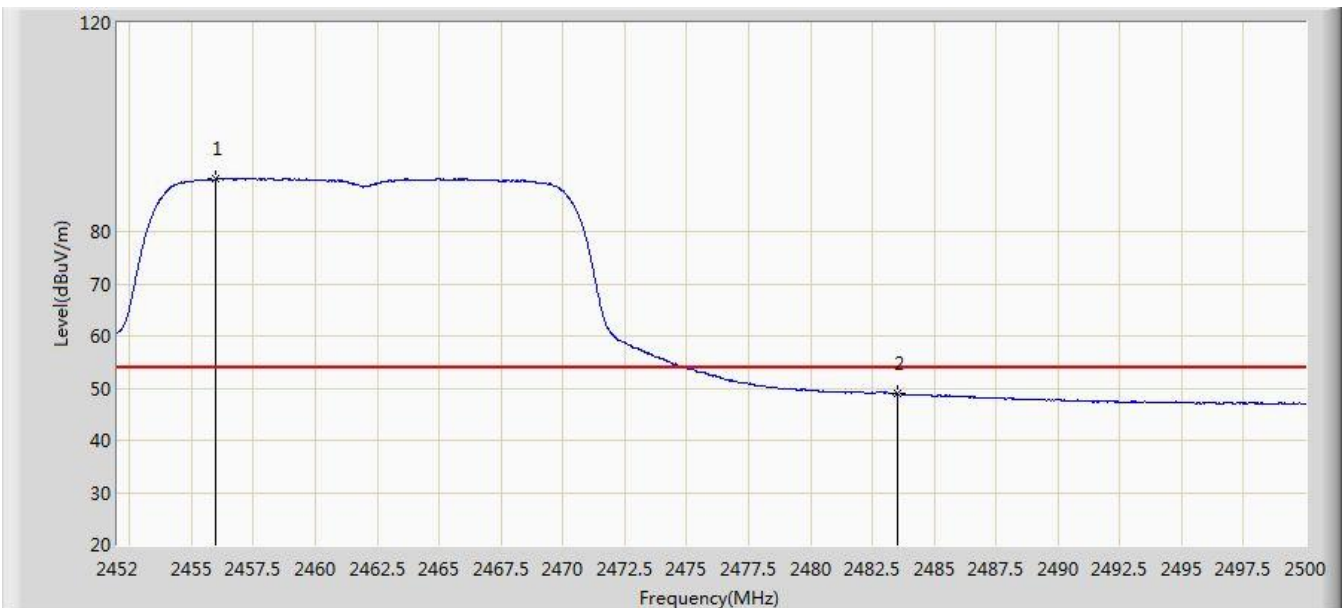


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.984	90.058	57.552	N/A	N/A	32.505	AV
2			2483.500	48.904	16.323	-5.096	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 22:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2462MHz Ant 1	

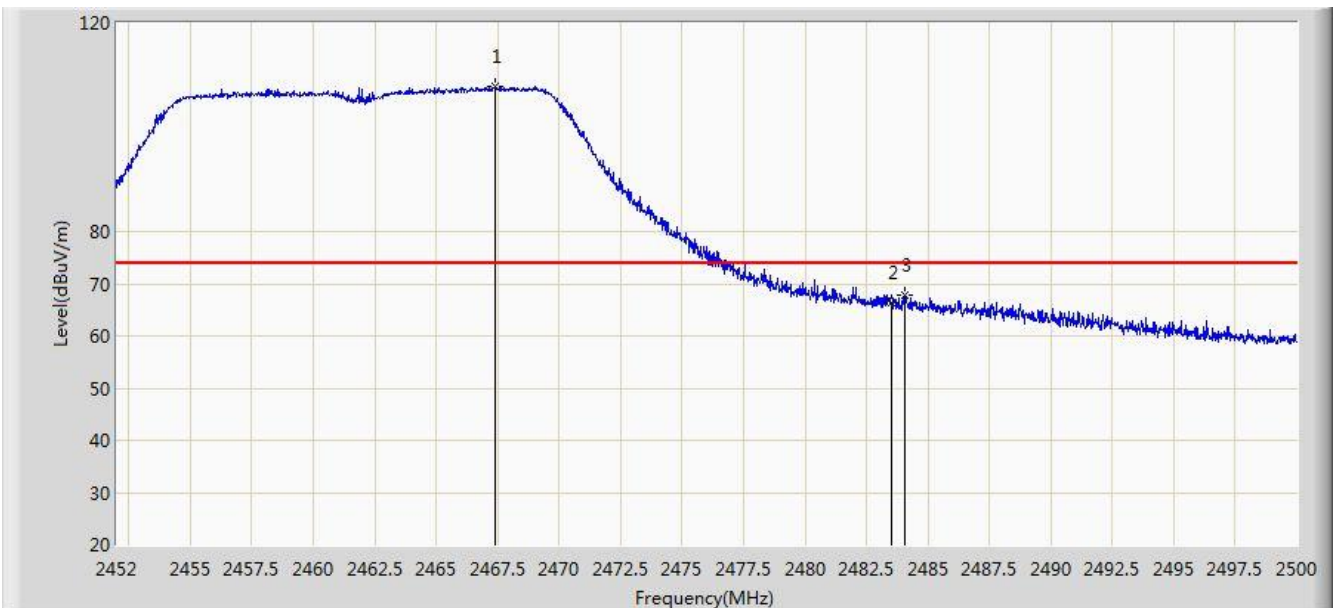


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.384	107.886	75.354	N/A	N/A	32.533	PK
2			2483.500	66.287	33.706	-7.713	74.000	32.580	PK
3			2484.040	67.719	35.137	-6.281	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 23:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11g at channel 2462MHz Ant 1	

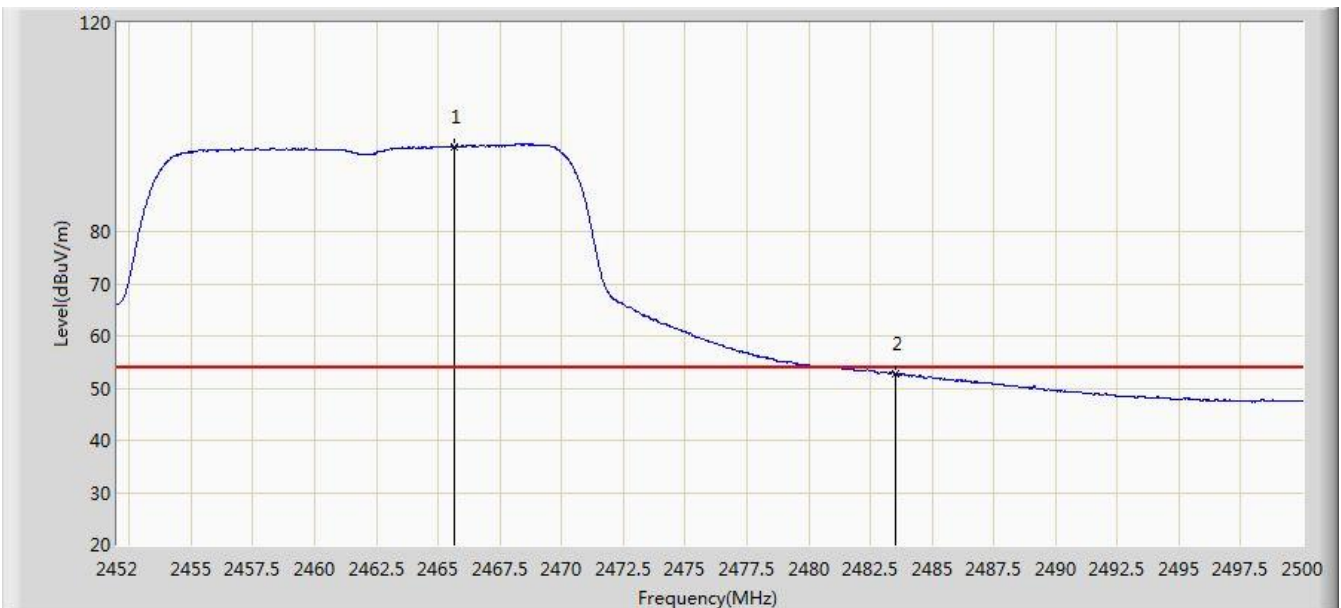


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.632	96.351	63.824	N/A	N/A	32.527	AV
2			2483.500	52.809	20.228	-1.191	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/25 - 23:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0+1	

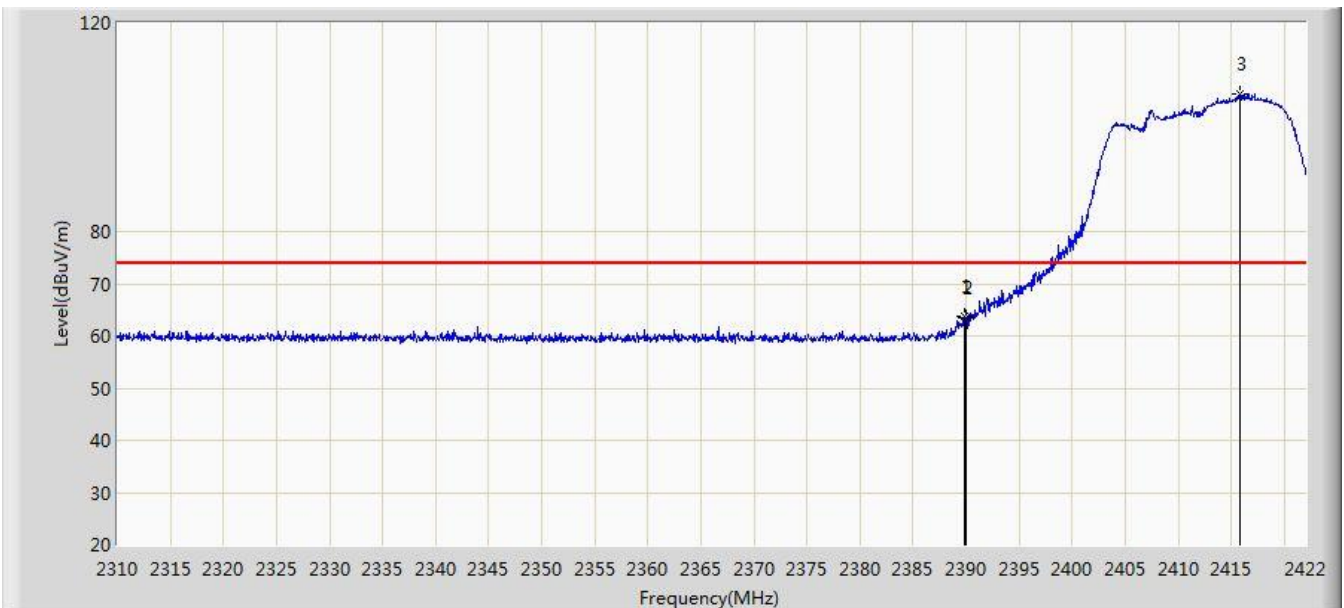


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	63.884	31.329	-10.116	74.000	32.555	PK
2			2390.000	63.403	30.849	-10.597	74.000	32.554	PK
3		*	2415.840	106.243	73.722	N/A	N/A	32.521	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0+1	

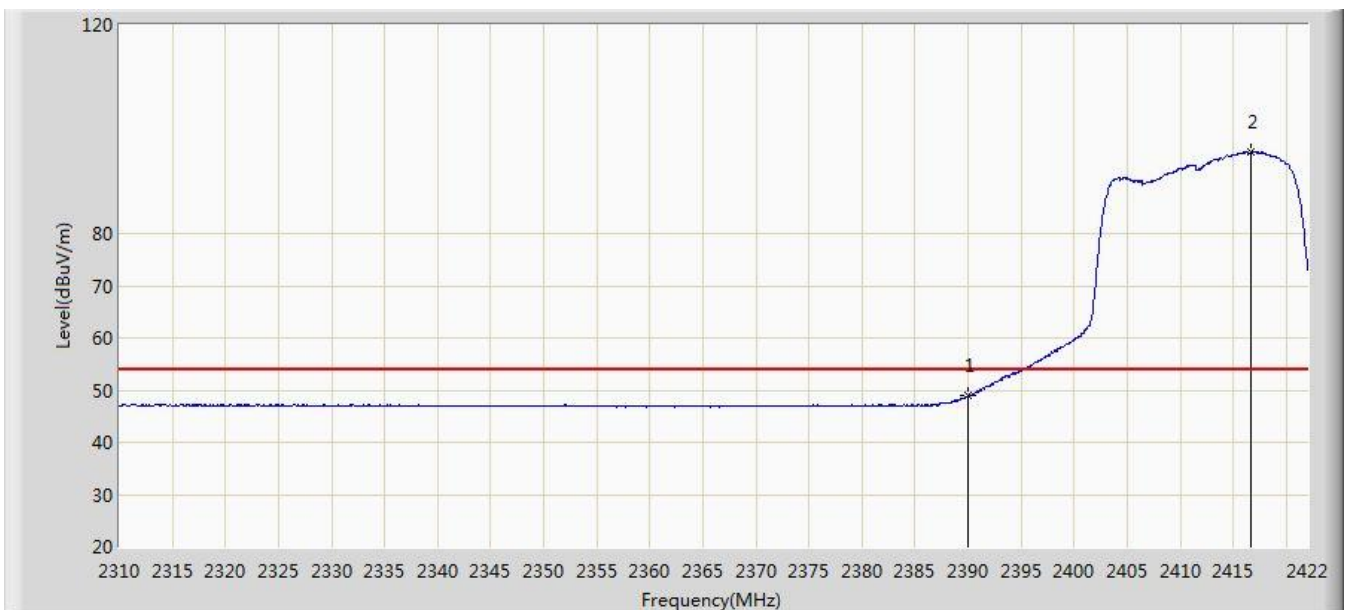


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.915	16.361	-5.085	54.000	32.554	AV
2		*	2416.680	95.655	63.135	N/A	N/A	32.520	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:04
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0+1	

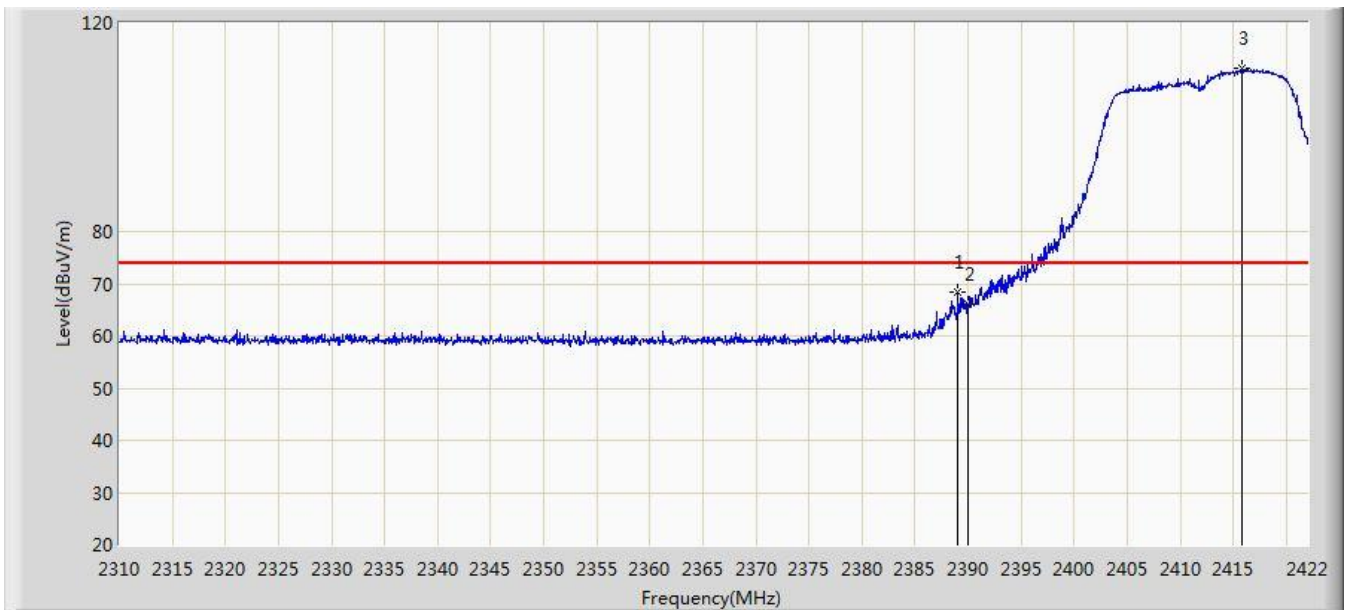


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.072	68.529	35.973	-5.471	74.000	32.556	PK
2			2390.000	66.067	33.513	-7.933	74.000	32.554	PK
3		*	2415.784	111.326	78.805	N/A	N/A	32.521	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:05
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0+1	

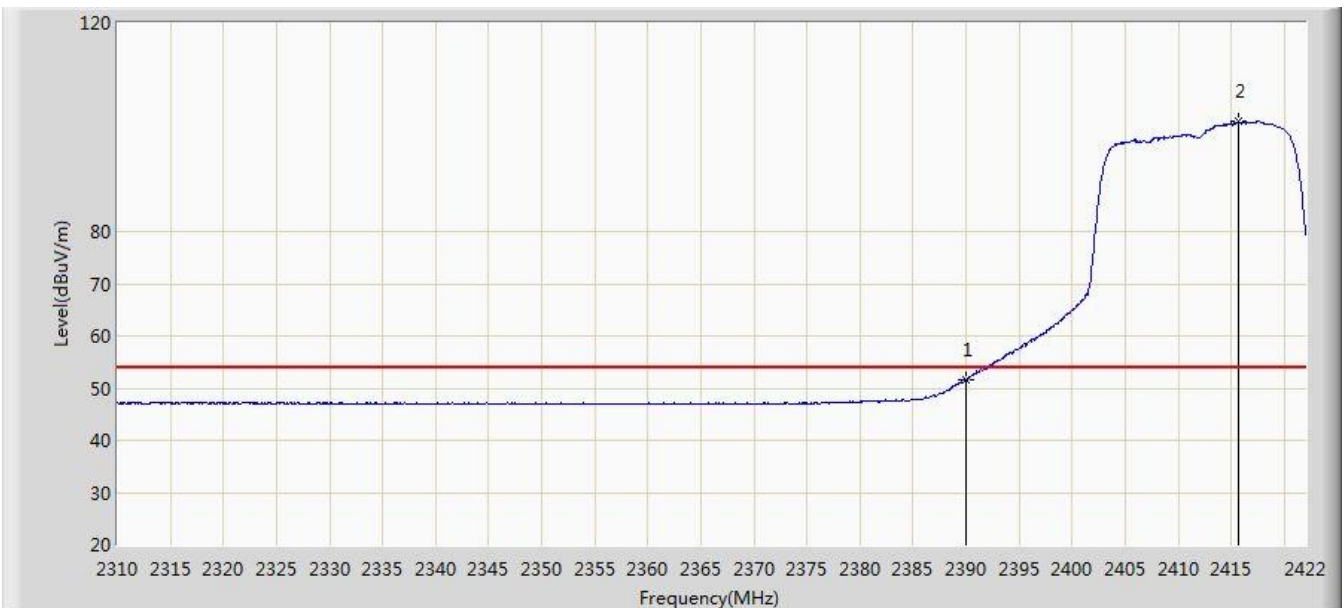


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.595	19.041	-2.405	54.000	32.554	AV
2		*	2415.672	101.018	68.497	N/A	N/A	32.521	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:07
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0+1	

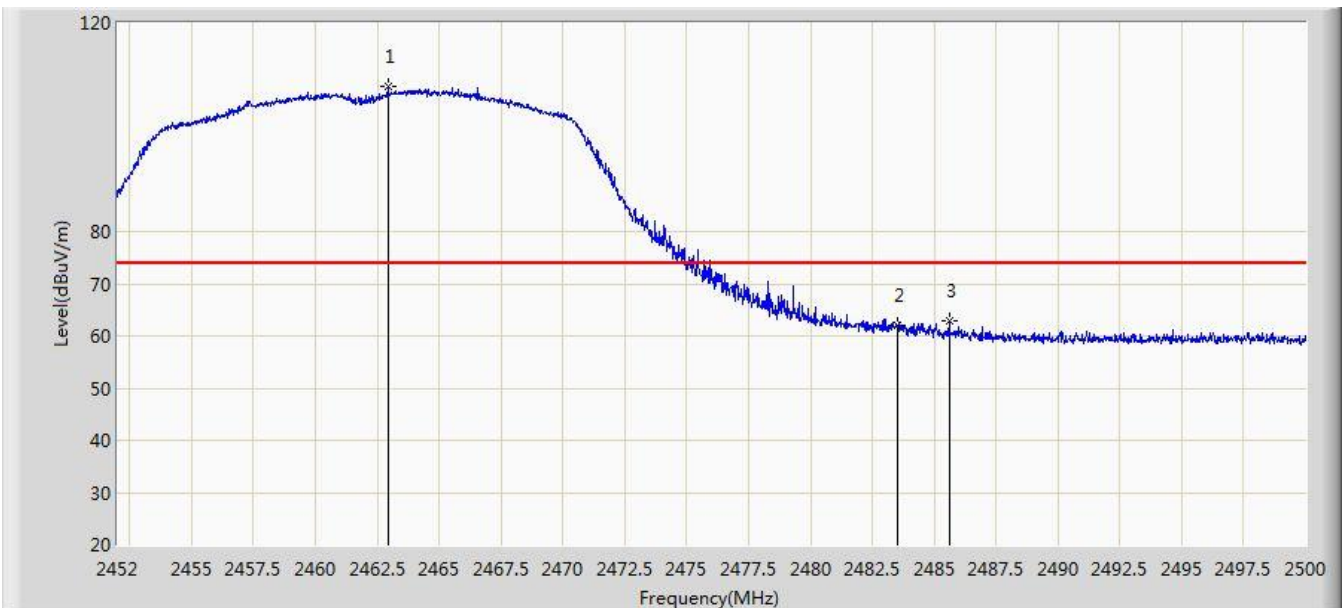


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.920	107.758	75.239	N/A	N/A	32.519	PK
2			2483.500	62.023	29.442	-11.977	74.000	32.580	PK
3			2485.600	62.825	30.238	-11.175	74.000	32.587	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0+1	

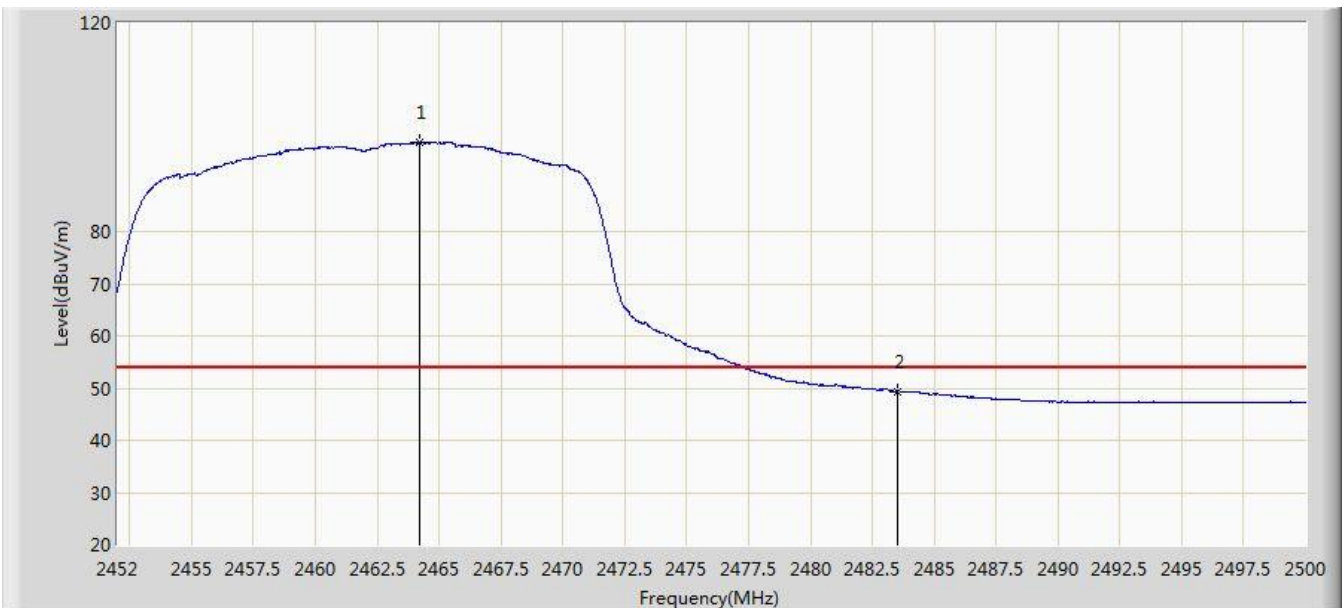


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.216	97.205	64.682	N/A	N/A	32.523	AV
2			2483.500	49.391	16.810	-4.609	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0+1	

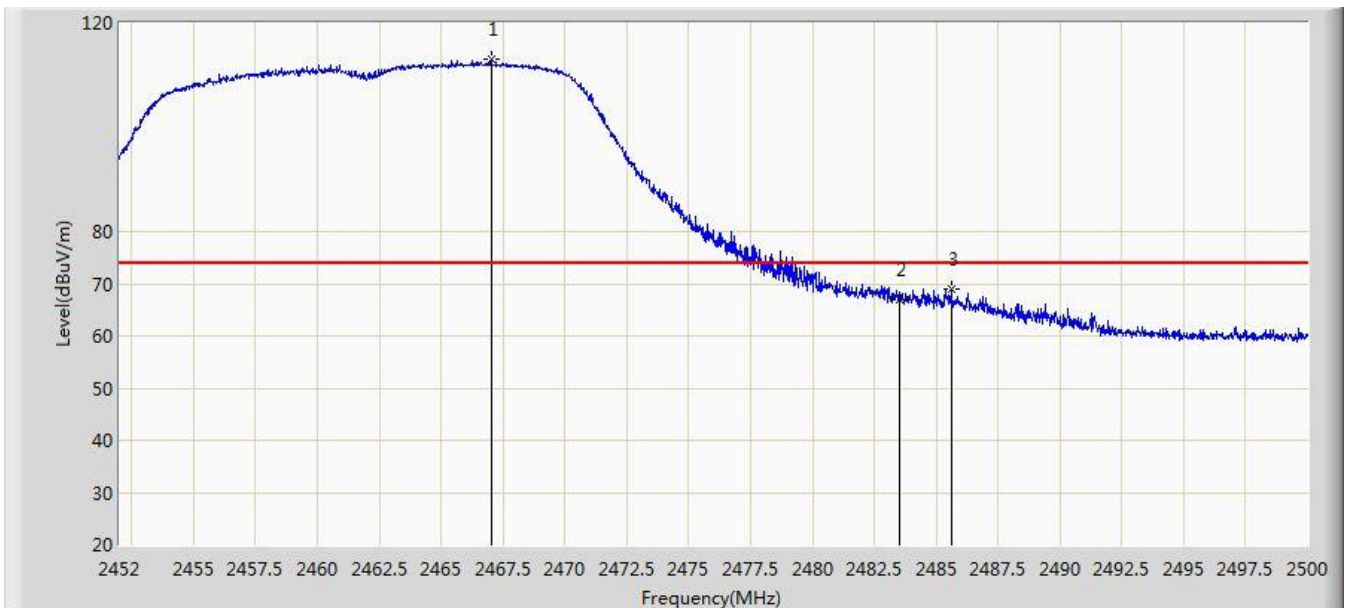


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.024	113.028	80.497	N/A	N/A	32.531	PK
2			2483.500	66.981	34.400	-7.019	74.000	32.580	PK
3			2485.624	69.074	36.487	-4.926	74.000	32.587	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0+1	

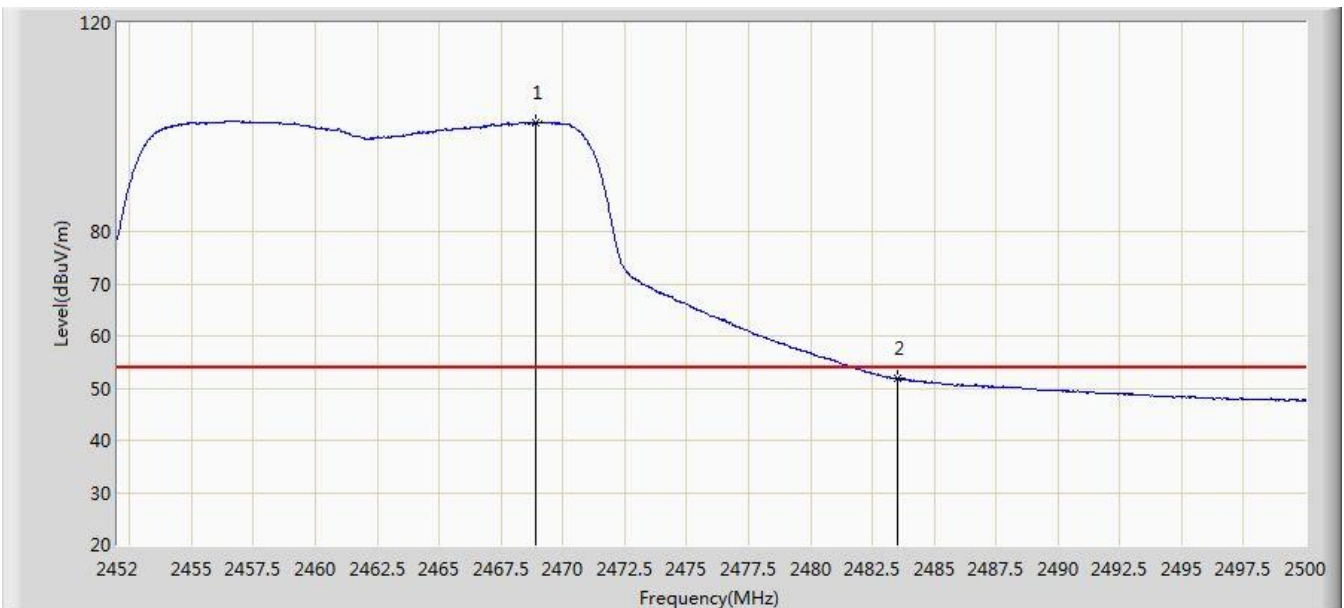


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2468.896	100.954	68.417	N/A	N/A	32.537	AV
2			2483.500	51.983	19.402	-2.017	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0+1	

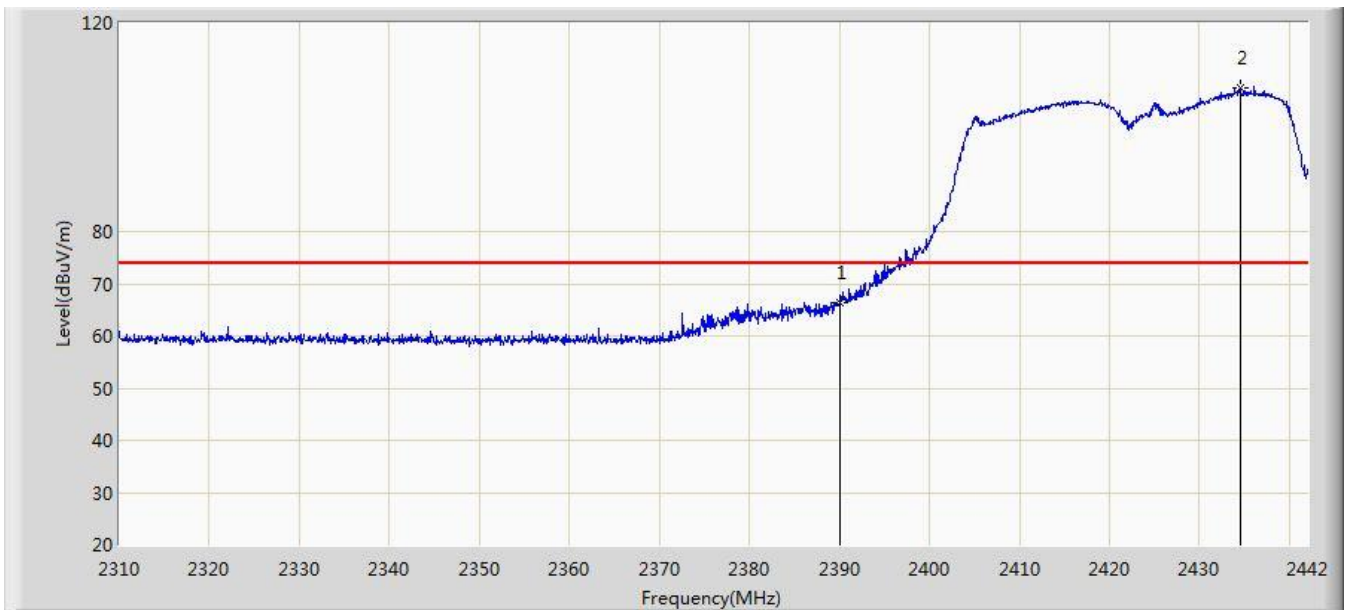


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	66.513	33.959	-7.487	74.000	32.554	PK
2		*	2434.476	107.554	75.055	N/A	N/A	32.498	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0+1	

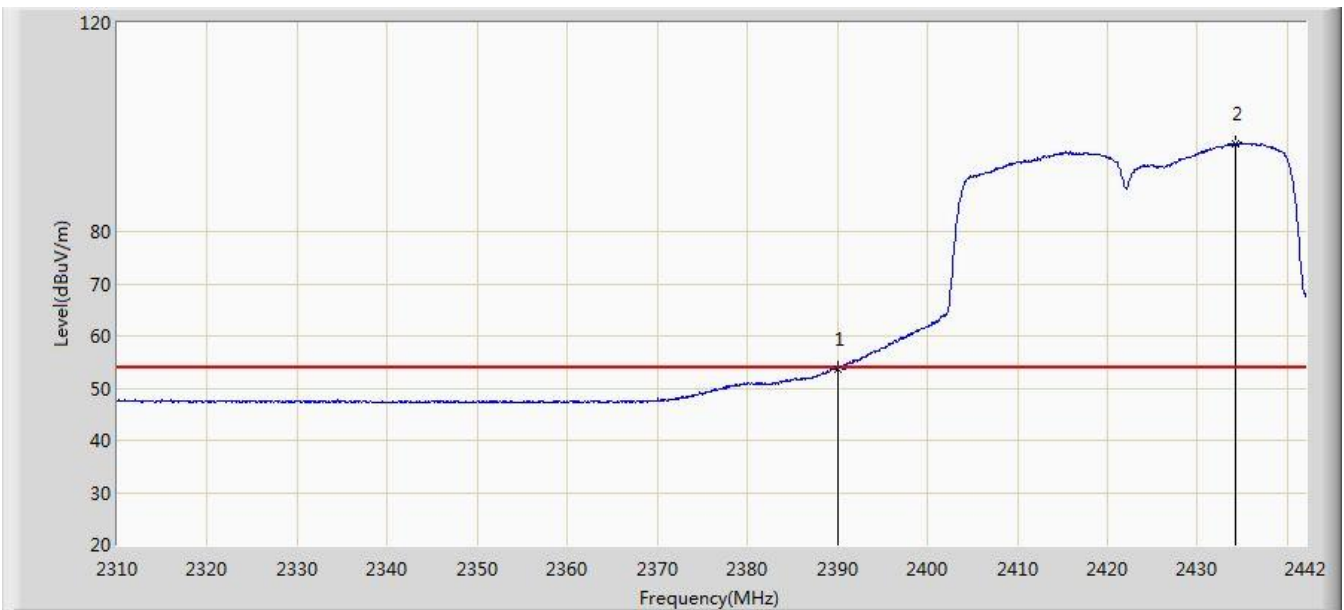


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.735	21.181	-0.265	54.000	32.554	AV
2		*	2434.146	96.899	64.400	N/A	N/A	32.499	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0+1	

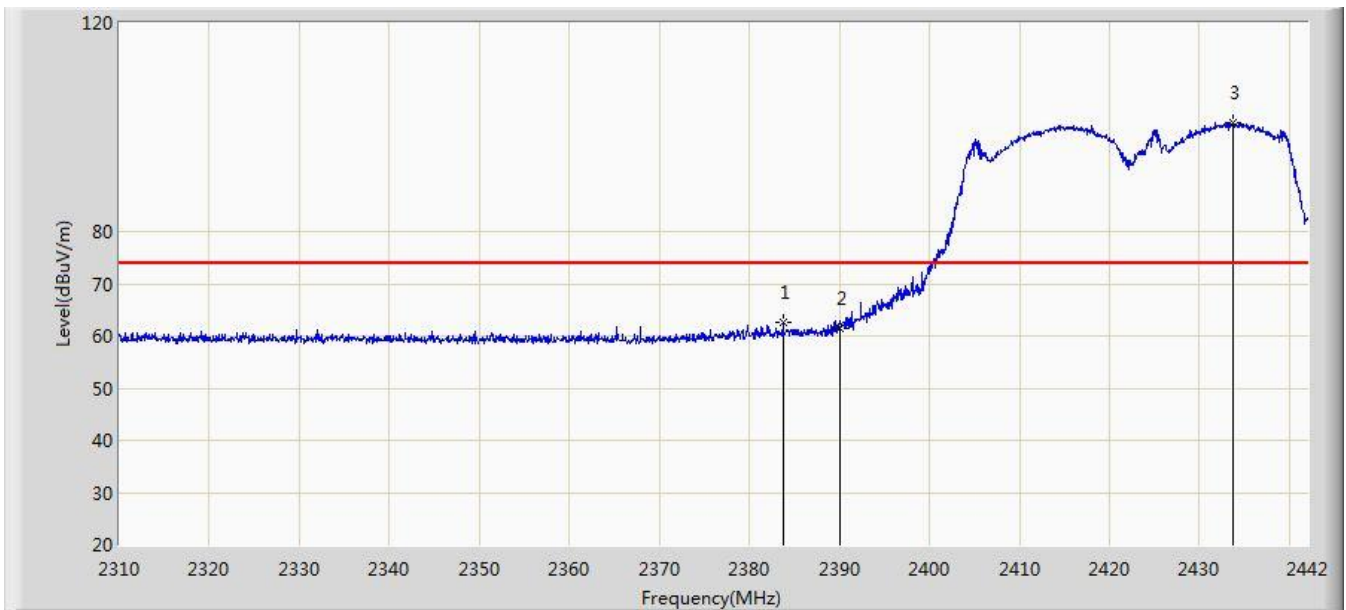


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.722	62.525	29.962	-11.475	74.000	32.563	PK
2			2390.000	61.377	28.823	-12.623	74.000	32.554	PK
3		*	2433.750	100.955	68.455	N/A	N/A	32.500	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0+1	

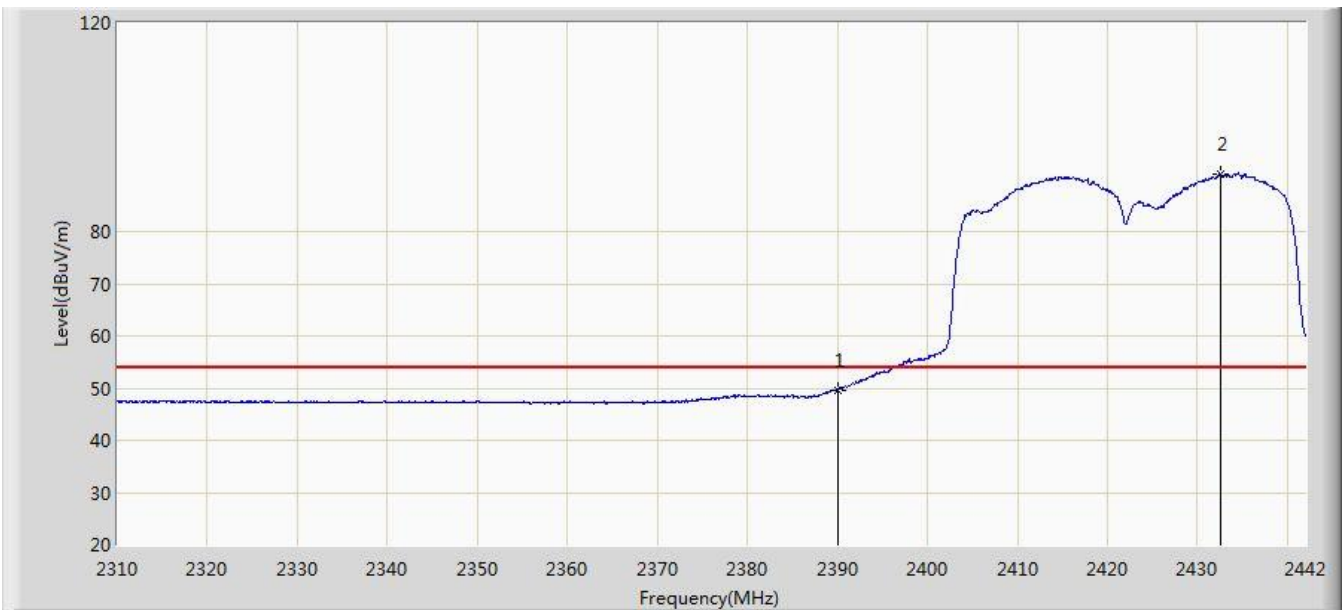


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.669	17.115	-4.331	54.000	32.554	AV
2		*	2432.628	91.008	58.507	N/A	N/A	32.501	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0+1	

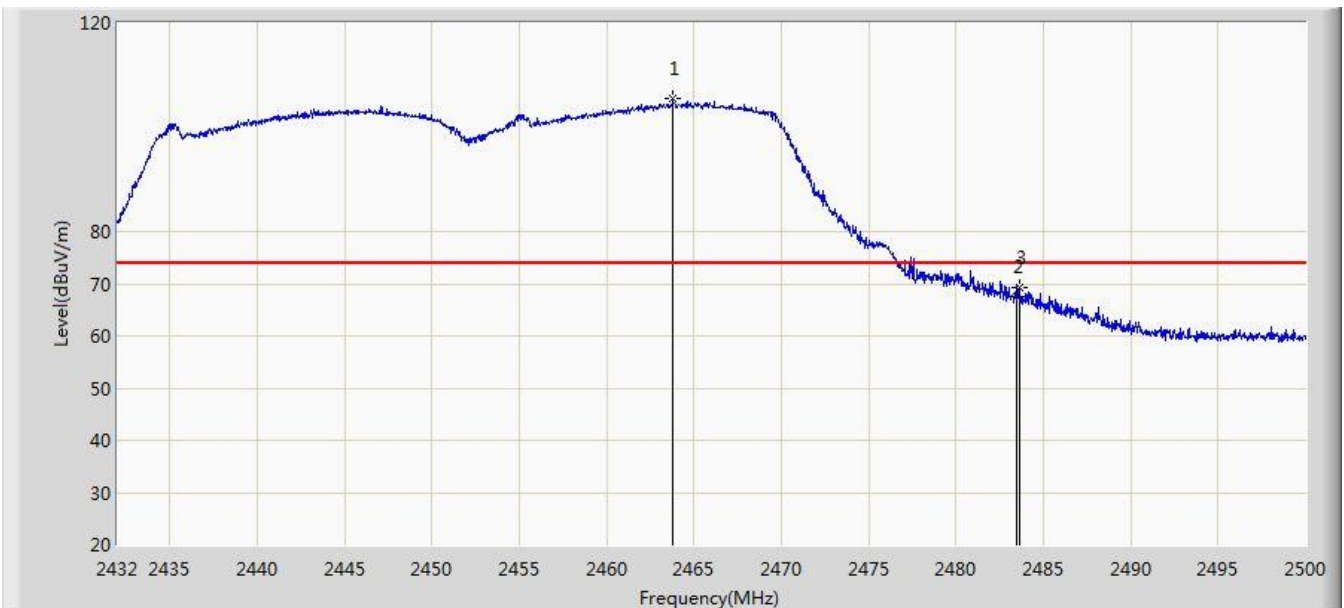


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.790	105.502	72.980	N/A	N/A	32.521	PK
2			2483.500	67.651	35.070	-6.349	74.000	32.580	PK
3			2483.612	69.243	36.662	-4.757	74.000	32.581	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Vertical
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0+1	

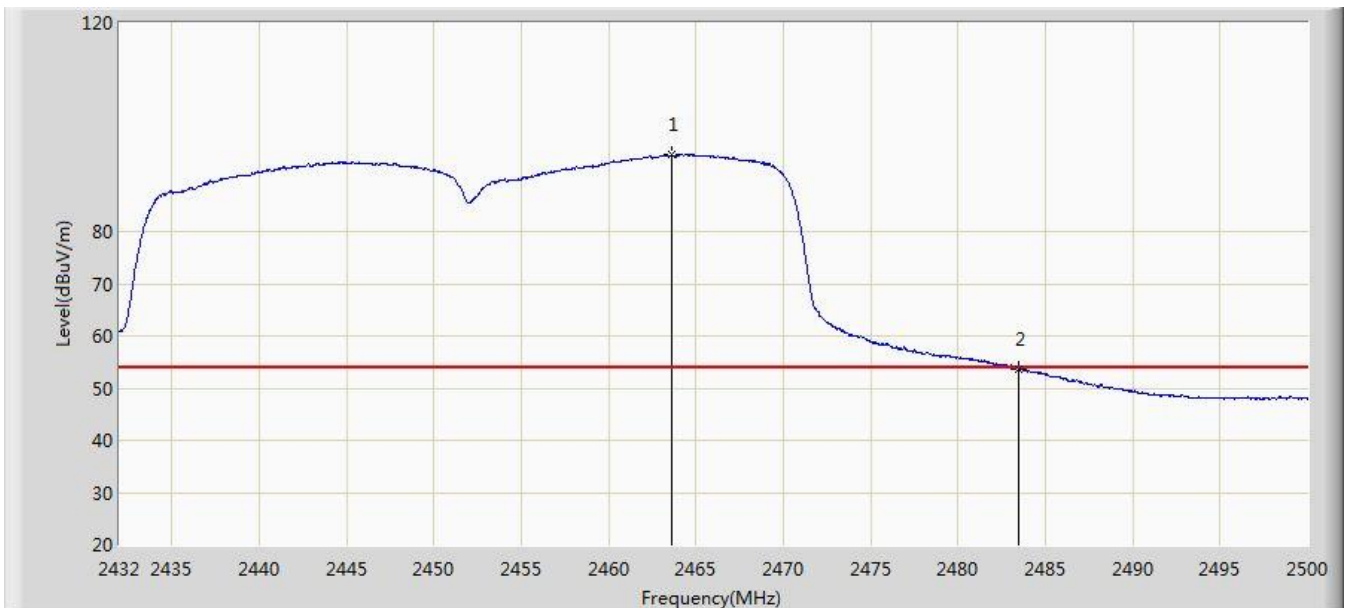


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.620	94.771	62.250	N/A	N/A	32.521	AV
2			2483.500	53.662	21.081	-0.338	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0+1	

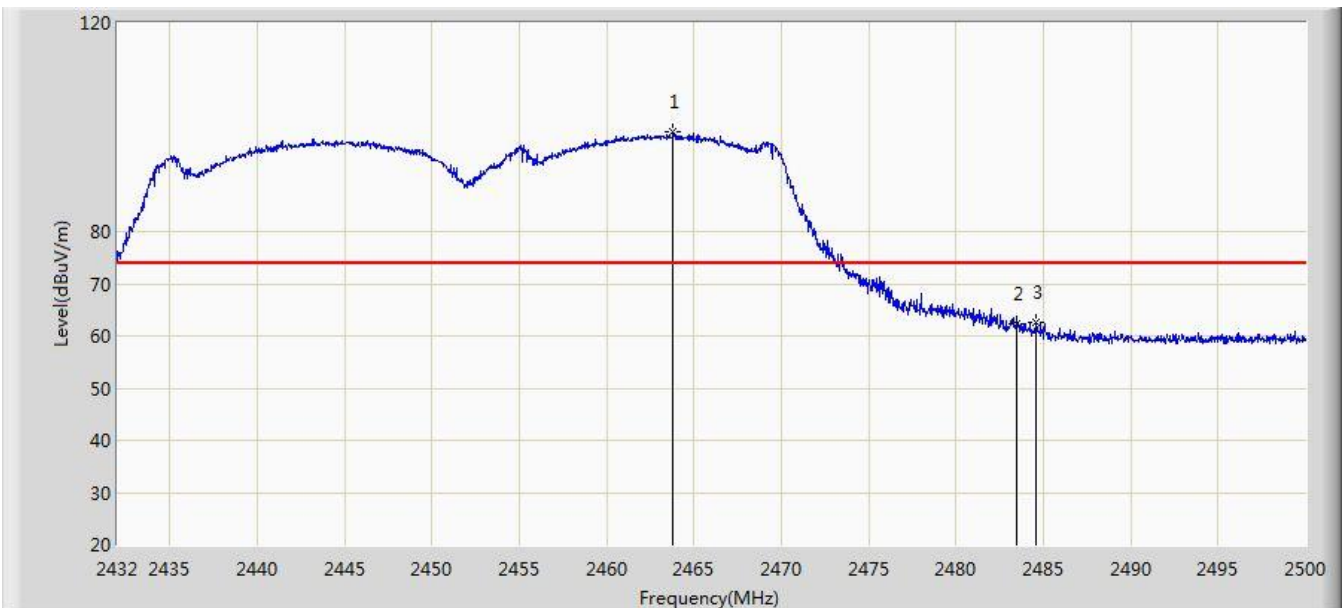


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.824	99.078	66.556	N/A	N/A	32.521	PK
2			2483.500	62.238	29.657	-11.762	74.000	32.580	PK
3			2484.564	62.483	29.899	-11.517	74.000	32.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/09/26 - 00:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz_TW	Polarity: Horizontal
EUT: 802.11ac Dual Band Module	Power: AC 110V/60Hz
Test mode: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0+1	

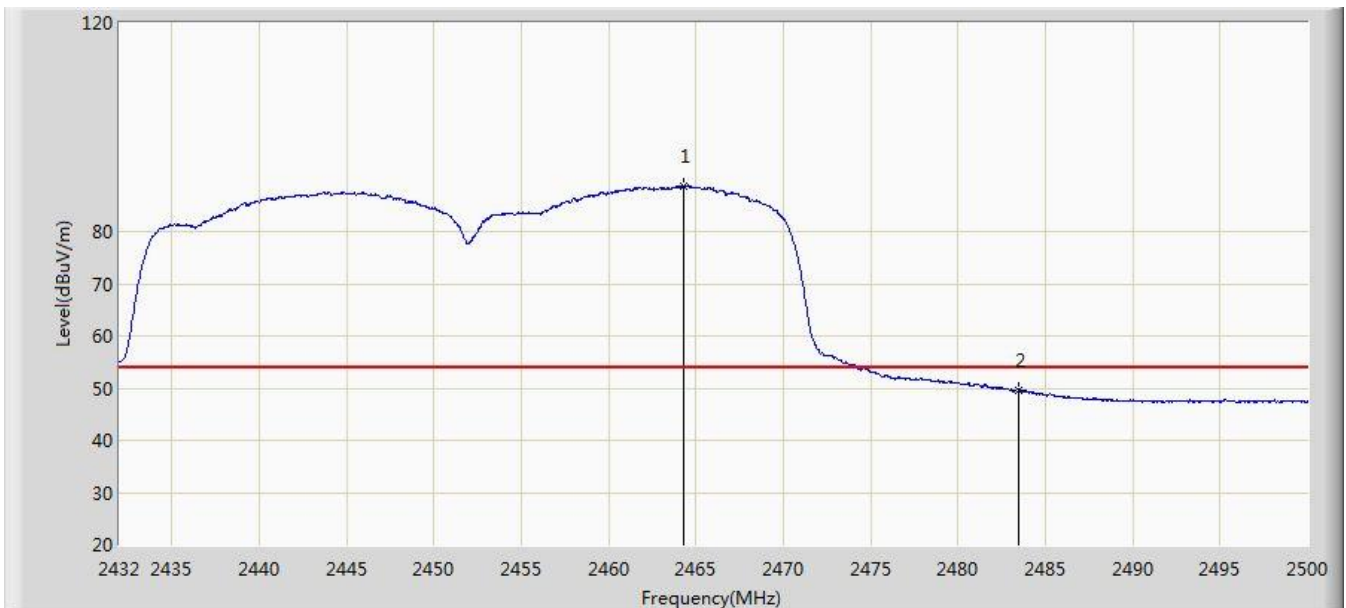

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.300	88.811	56.288	N/A	N/A	32.523	AV
2			2483.500	49.504	16.923	-4.496	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

5.7. 佔用頻道寬度

5.7.1. 適用標準


依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(A)節之要求，6dB 頻寬至少應有 500kHz。

5.7.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端，設定頻譜分析儀之解析度頻寬為 100kHz，視訊頻寬不小於解析度頻寬，頻率掃瞄範圍(SPAN)遠大於解析度頻寬。

待測物應在正常發射狀態下量測。

5.7.3. 測試架構圖

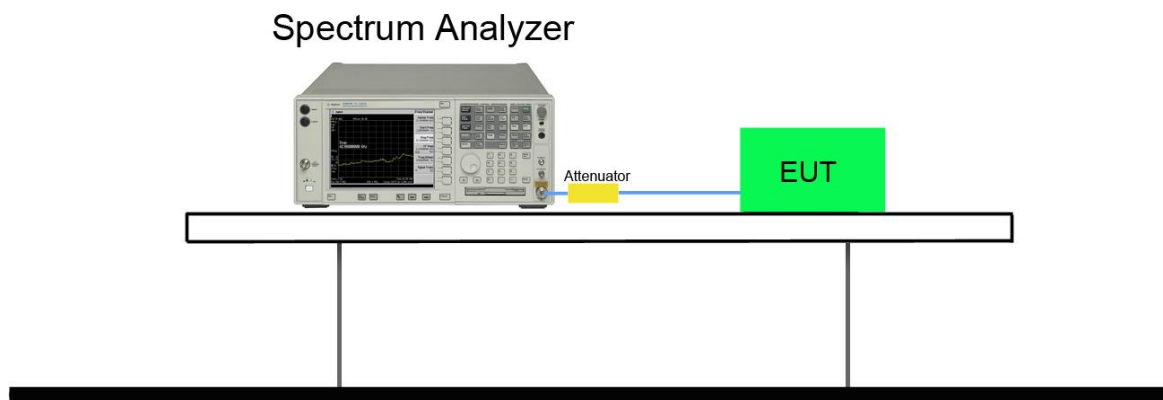

5.7.4. 佔用頻帶寬度測試結果

待測物名稱	802.11ac Dual Band Module	溫度	24°C
測試工程師	Kevin Ker	濕度	58%
測試場地	SR1	測試日期	2018/09/28

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0						
802.11b	1	01	2412	7.093	≥ 0.5	Pass
802.11b	1	06	2437	7.558	≥ 0.5	Pass
802.11b	1	11	2462	7.080	≥ 0.5	Pass
802.11g	6	01	2412	16.35	≥ 0.5	Pass
802.11g	6	06	2437	16.33	≥ 0.5	Pass
802.11g	6	11	2462	16.36	≥ 0.5	Pass


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 1						
802.11b	1	01	2412	7.078	≥ 0.5	Pass
802.11b	1	06	2437	7.088	≥ 0.5	Pass
802.11b	1	11	2462	7.102	≥ 0.5	Pass
802.11g	6	01	2412	16.37	≥ 0.5	Pass
802.11g	6	06	2437	16.35	≥ 0.5	Pass
802.11g	6	11	2462	16.36	≥ 0.5	Pass
Ant 1/Ant 0+1						
802.11n-HT20	13	01	2412	17.15	≥ 0.5	Pass
802.11n-HT20	13	06	2437	17.56	≥ 0.5	Pass
802.11n-HT20	13	11	2462	17.59	≥ 0.5	Pass
802.11n-HT40	26	03	2422	35.76	≥ 0.5	Pass
802.11n-HT40	26	06	2437	34.47	≥ 0.5	Pass
802.11n-HT40	26	09	2452	35.76	≥ 0.5	Pass

802.11b 6dB Bandwidth - Ant 0

Channel 01 (2412MHz)



Channel 06 (2437MHz)

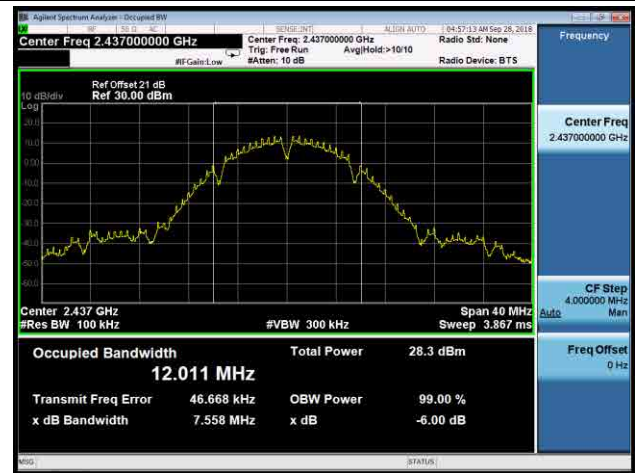


Channel 11 (2462MHz)




802.11g 6dB Bandwidth - Ant 0


Channel 01 (2412MHz)

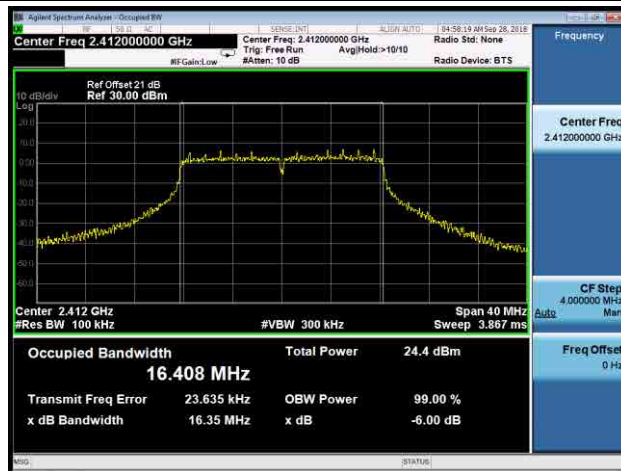

Channel 06 (2437MHz)

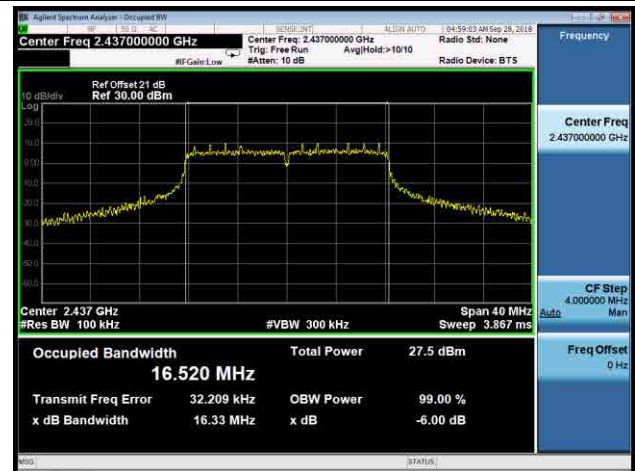

Channel 11 (2462MHz)

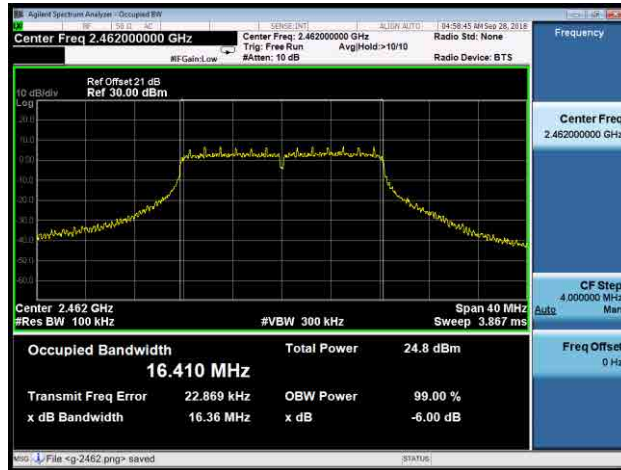


802.11b 6dB Bandwidth - Ant 1

Channel 01 (2412MHz)



Channel 06 (2437MHz)

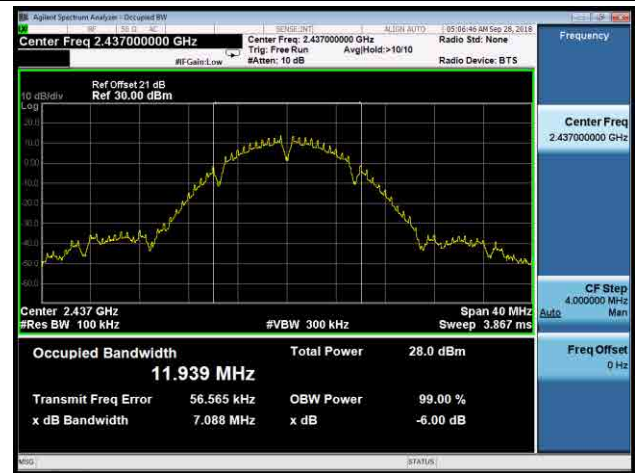

Channel 11 (2462MHz)




802.11g 6dB Bandwidth - Ant 1


Channel 01 (2412MHz)



Channel 06 (2437MHz)

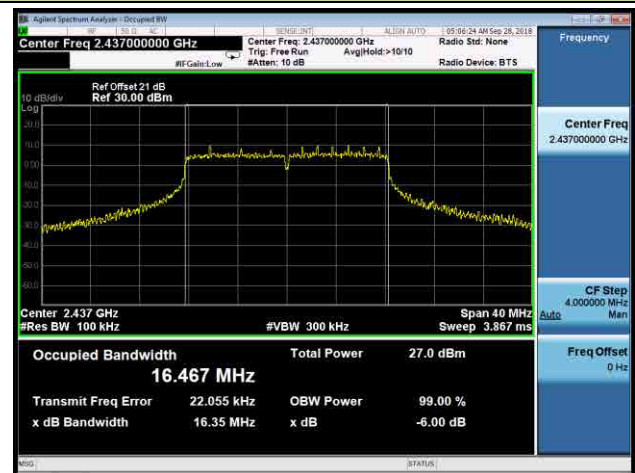

Channel 11 (2462MHz)

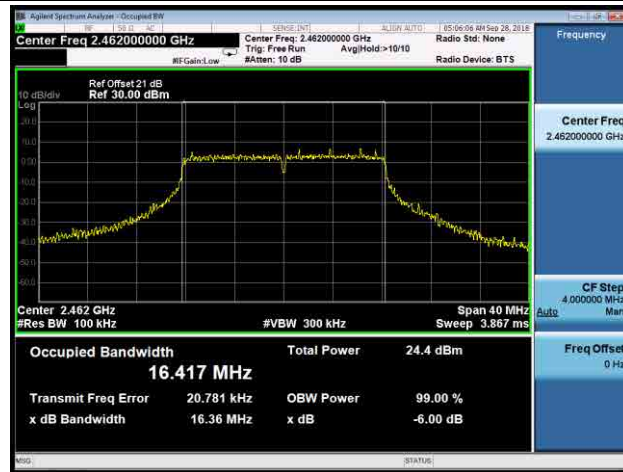


802.11n-HT20 6dB Bandwidth - Ant 1/Ant 0+1


Channel 01 (2412MHz)



Channel 06 (2437MHz)

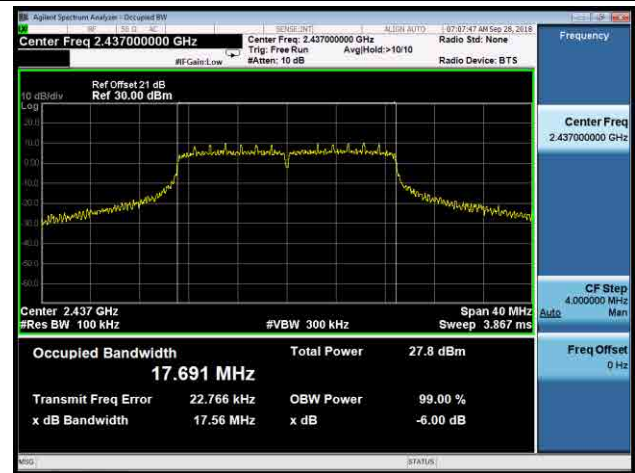


Channel 11 (2462MHz)

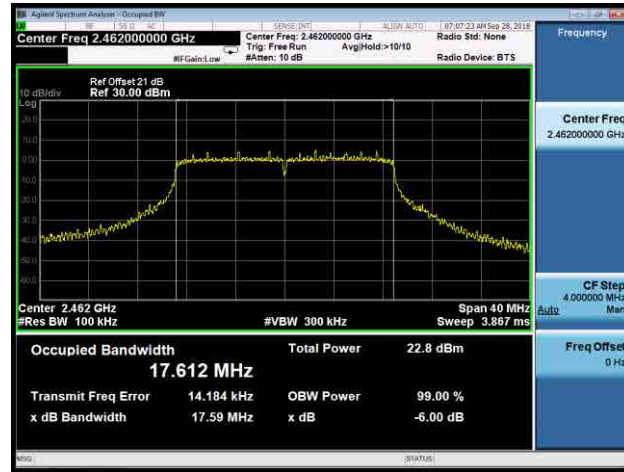

802.11n-HT40 6dB Bandwidth – Ant 1/Ant 0+1


Channel 03 (2422MHz)

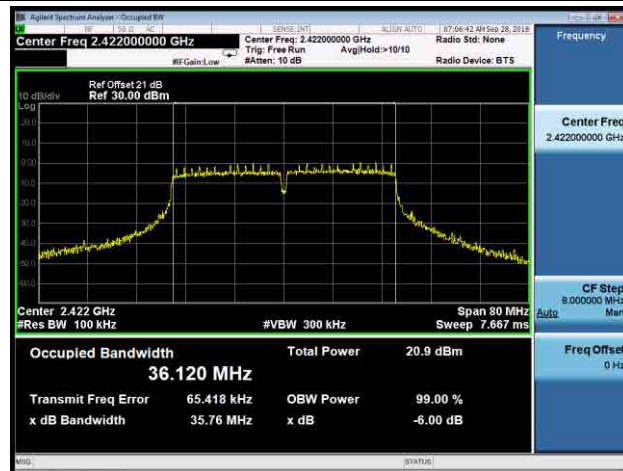

Channel 06 (2437MHz)



Channel 09 (2452MHz)

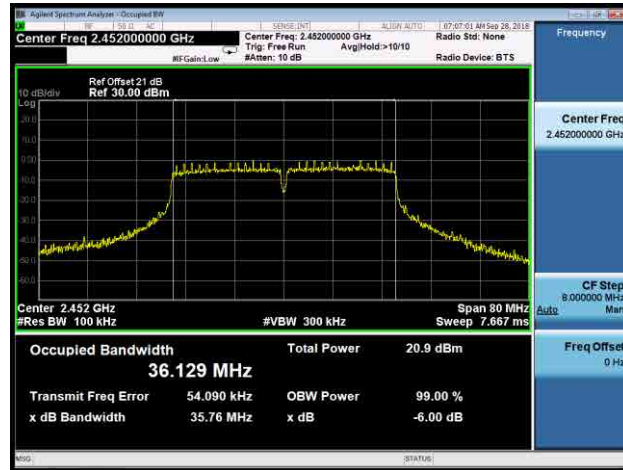

5.8. 發射電功率密度

5.8.1. 適用標準


依據國家通訊傳播委員會低功率射頻電機技術規範之第 3.10.1.6(2)(B)節，在使用頻率範圍之任意 3 千赫(kHz)頻寬內，由發射機傳導至天線之峰值發射電功率密度在任意期間內，皆不得大於 8dBm。

5.8.2. 量測方法

待測物之天線埠經由適當之衰減直接連至頻譜分析儀 RF 輸入端。找出發射峰值並擴展於通帶內，設定頻譜分析儀之解析度頻寬為 3kHz，視訊頻寬大於解析度頻寬，掃瞄時間為頻率掃瞄範圍除以 3kHz。
(SWEEP TIME = SPAN/3kHz)。

待測物應在正常發射狀態下量測。

5.8.3. 測試架構圖

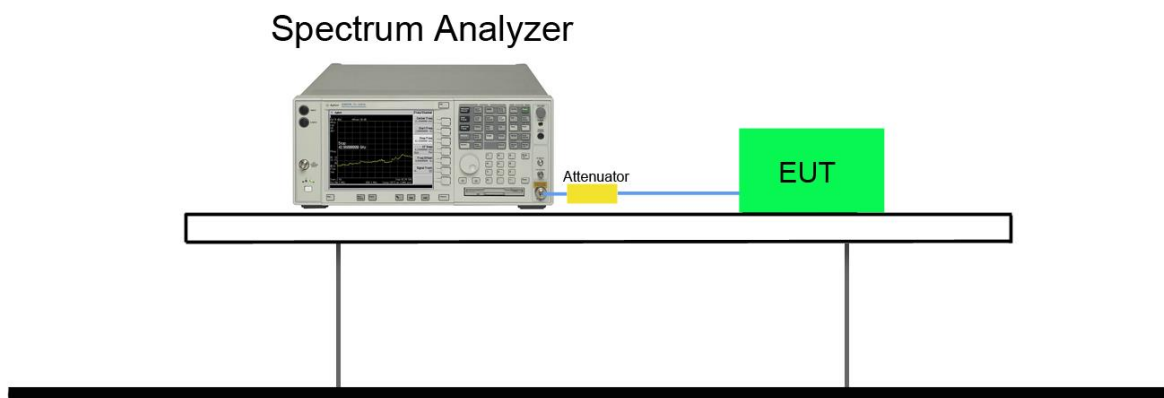

5.8.4. 功率密度量測結果

待測物名稱	802.11ac Dual Band Module	溫度	24°C
測試工程師	Kevin Ker	濕度	58%
測試場地	SR1	測試日期	2018/09/28

1Tx – Ant 0 & Ant 1										
Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm / 10kHz)	Ant 1 PSD (dBm / 10kHz)	Duty Cycle (%)	Constant Factor	Max PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
11b	1	1	2412	-4.36	-4.47	98.78	-5.23	-9.59	≤ 8.00	Pass
11b	1	6	2437	-4.11	-4.13	98.78	-5.23	-9.34	≤ 8.00	Pass
11b	1	11	2462	-4.46	-4.59	98.78	-5.23	-9.69	≤ 8.00	Pass
11g	6	1	2412	-10.90	-11.47	94.48	-5.23	-15.88	≤ 8.00	Pass
11g	6	6	2437	-8.19	-8.84	94.48	-5.23	-13.17	≤ 8.00	Pass
11g	6	11	2462	-11.71	-11.47	94.48	-5.23	-16.45	≤ 8.00	Pass

Note: 1. When EUT duty cycle < 98%, the Max PSD (dBm / 3kHz) = PSD(dBm / 10kHz)+ Constant Factor + 10*log (1/Duty Cycle). When EUT duty cycle ≥ 98%, the Max AVGPSS (dBm / 3kHz) = PSD(dBm / 10kHz)+ Constant Factor.

2Tx – Ant 0 + 1										
Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm / 10kHz)	Ant 1 PSD (dBm / 10kHz)	Duty Cycle (%)	Constant Factor	Total PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
11n-HT20	MCS0	1	2412	-13.31	-12.89	94.65	-5.23	-15.08	≤ 8.00	Pass
11n-HT20	MCS0	6	2437	-8.14	-8.62	94.65	-5.23	-10.35	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-13.26	-12.87	94.65	-5.23	-15.04	≤ 8.00	Pass
11n-HT40	MCS0	3	2422	-18.08	-18.07	92.11	-5.23	-19.94	≤ 8.00	Pass
11n-HT40	MCS0	6	2437	-10.86	-11.04	92.11	-5.23	-12.81	≤ 8.00	Pass
11n-HT40	MCS0	9	2452	-20.91	-21.27	92.11	-5.23	-22.94	≤ 8.00	Pass

Note: 1. When EUT duty cycle < 98%, the Max PSD (dBm / 3kHz) = $10 \cdot \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm / 10kHz) + Constant Factor + $10 \cdot \log(1/\text{Duty Cycle})$. When EUT duty cycle ≥ 98%, the Max $10 \cdot \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm / 3kHz) = PSD(dBm / 10kHz) + Constant Factor.

802.11b AV PSD - Ant 0

Channel 01 (2412MHz)



Channel 06 (2437MHz)



Channel 11 (2462MHz)



802.11g AV PSD - Ant 0

Channel 01 (2412MHz)



Channel 06 (2437MHz)



Channel 11 (2462MHz)



802.11b AV PSD - Ant 1

Channel 01 (2412MHz)



Channel 06 (2437MHz)



Channel 11 (2462MHz)




802.11g AV PSD - Ant 1


Channel 01 (2412MHz)



Channel 06 (2437MHz)

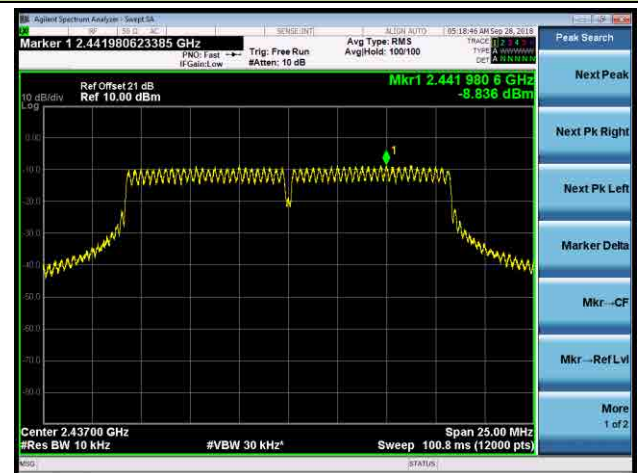


Channel 11 (2462MHz)

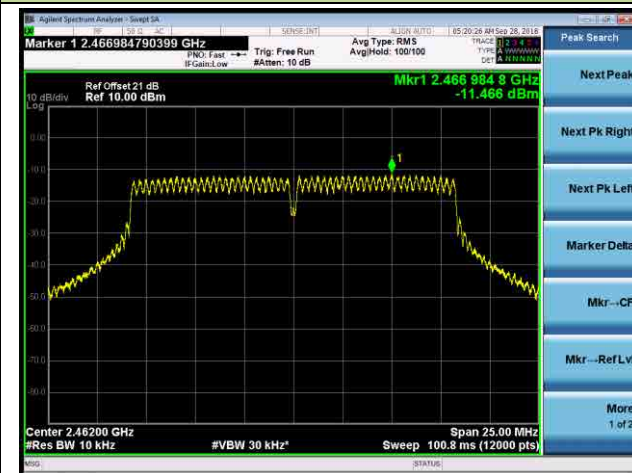


802.11n-HT20 AV PSD – Ant 0/Ant 0+1


Channel 01 (2412MHz)

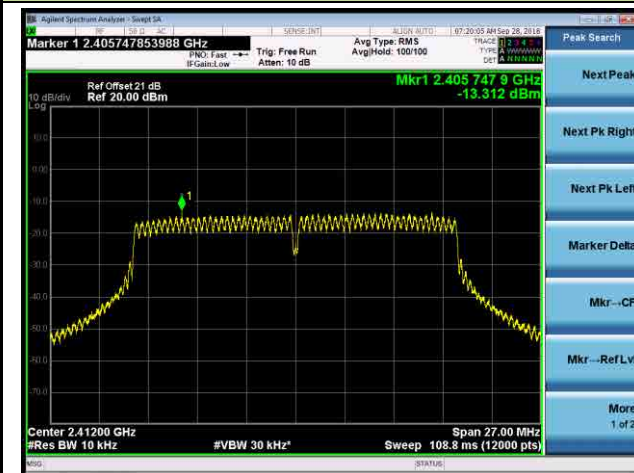

Channel 06 (2437MHz)

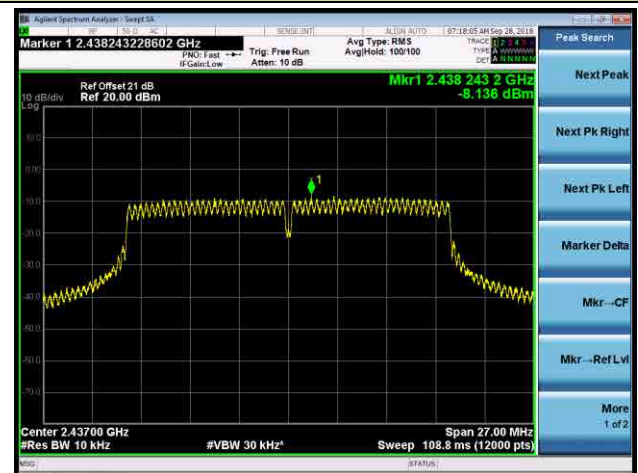


Channel 11 (2462MHz)

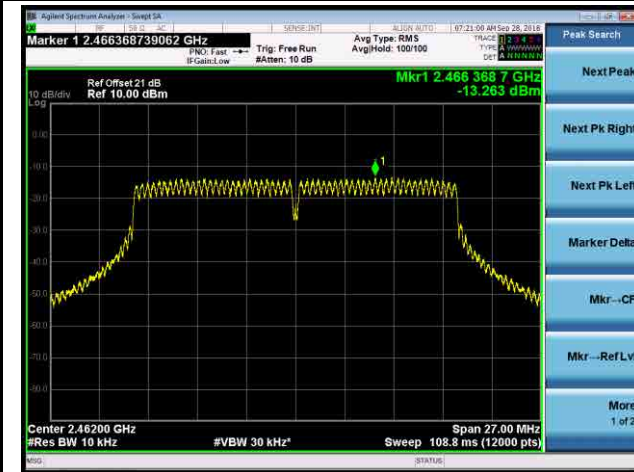

802.11n-HT40 AV PSD - Ant 0/Ant 0+1


Channel 03 (2422MHz)

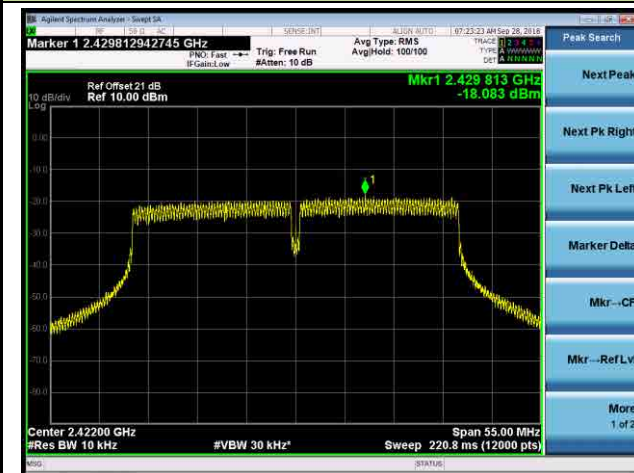

Channel 06 (2437MHz)




Channel 09 (2452MHz)

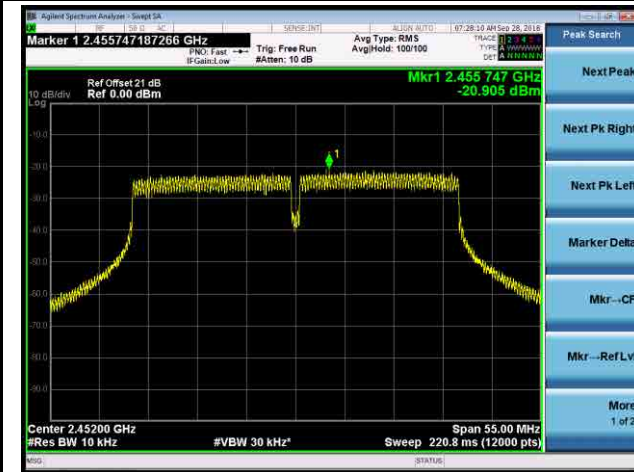


802.11n-HT20 AV PSD – Ant 1/Ant 0+1


Channel 01 (2412MHz)

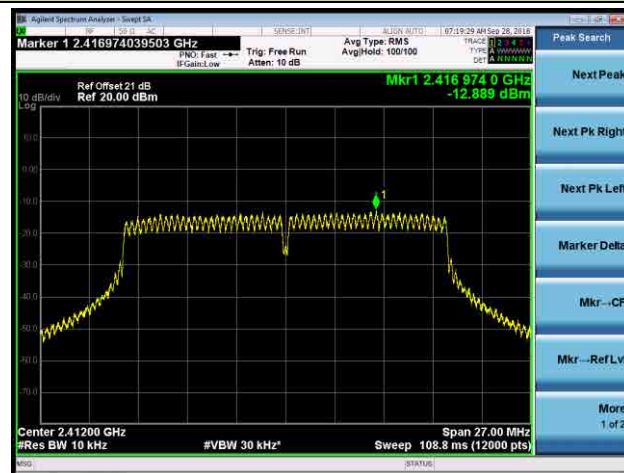

Channel 06 (2437MHz)

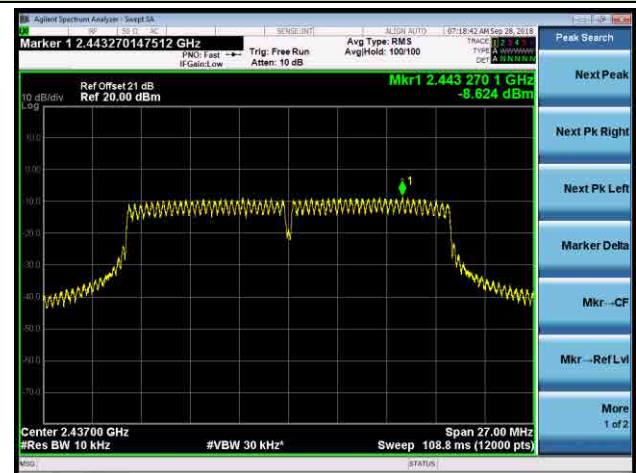


Channel 11 (2462MHz)

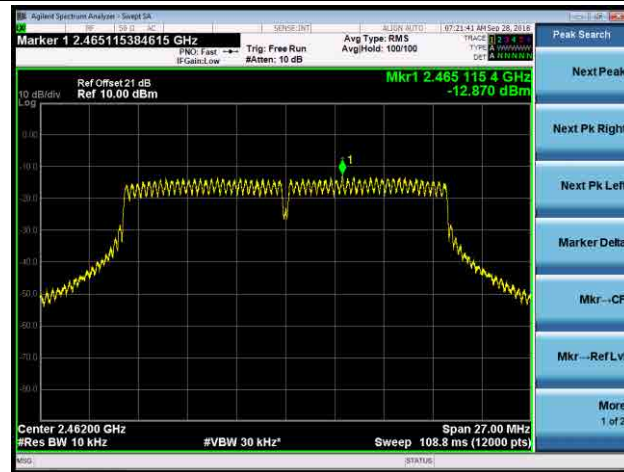


802.11n-HT40 AV PSD - Ant 1/Ant 0+1


Channel 03 (2422MHz)

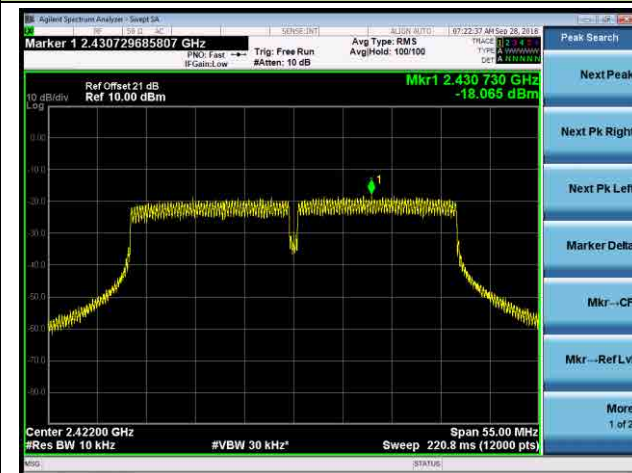

Channel 06 (2437MHz)

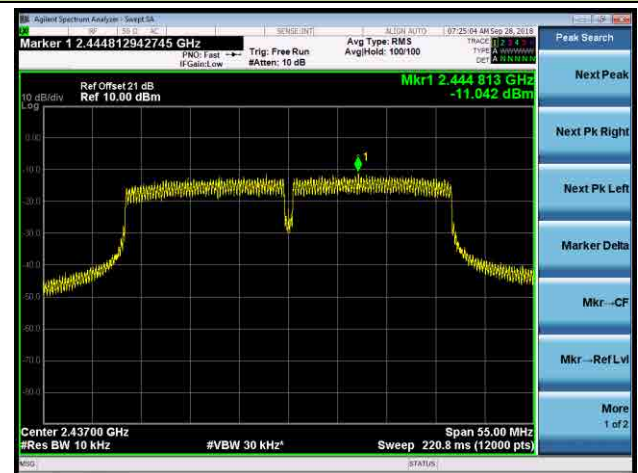

Channel 09 (2452MHz)

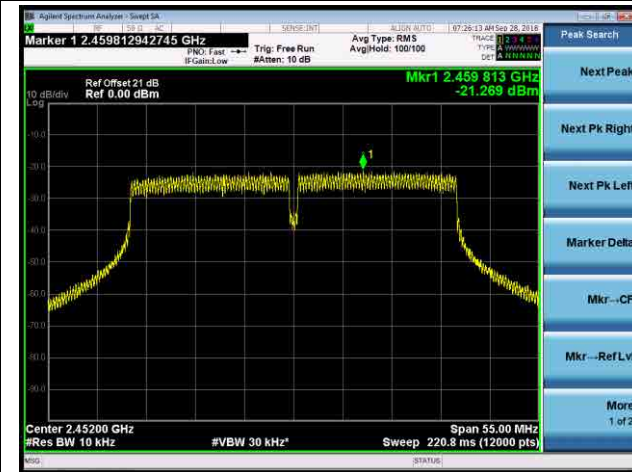

結束