

測試頻道: IEEE 802.11n (HT40) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

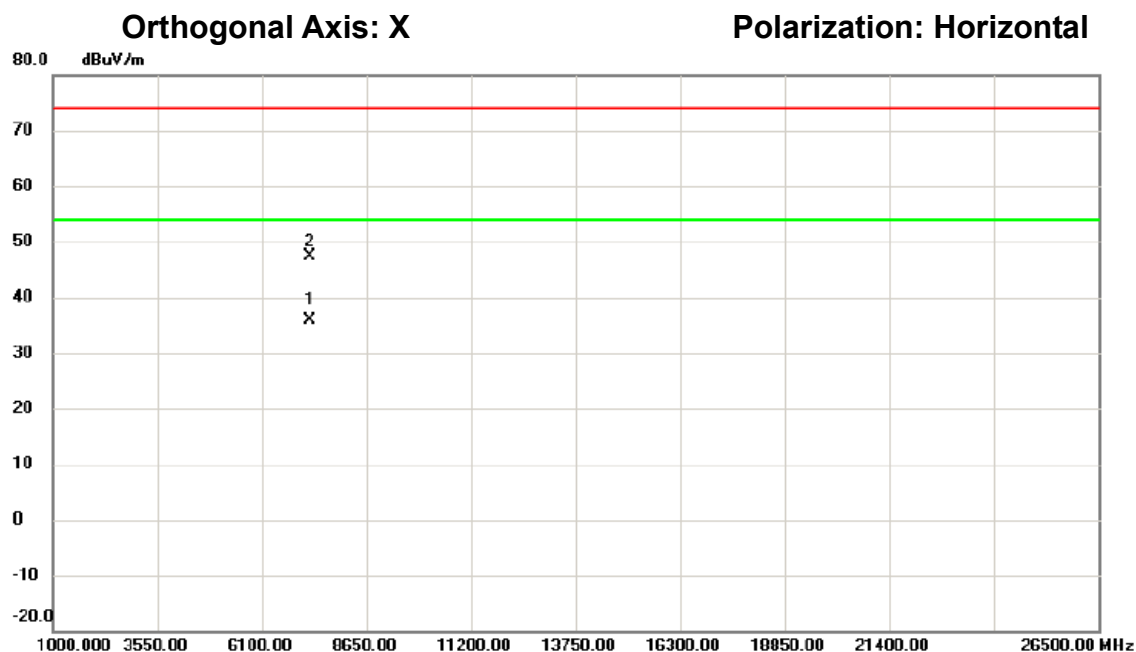

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7266.040	41.12	-5.16	35.96	54.00	-18.04	AVG	
2		7266.300	52.47	-5.16	47.31	74.00	-26.69	peak	

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

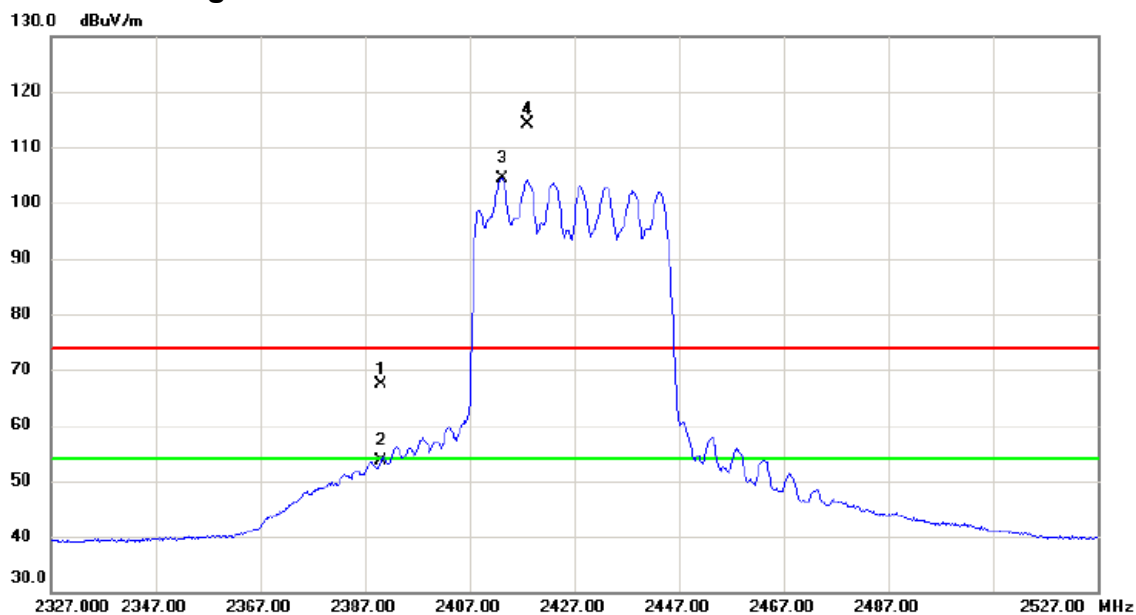

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	74.55	-7.23	67.32	74.00	-6.68	peak	
2		2390.000	60.75	-7.23	53.52	54.00	-0.48	AVG	
3	*	2413.200	111.39	-7.13	104.26	54.00	50.26	AVG	主波訊號不予判定
4	X	2418.000	121.24	-7.11	114.13	74.00	40.13	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

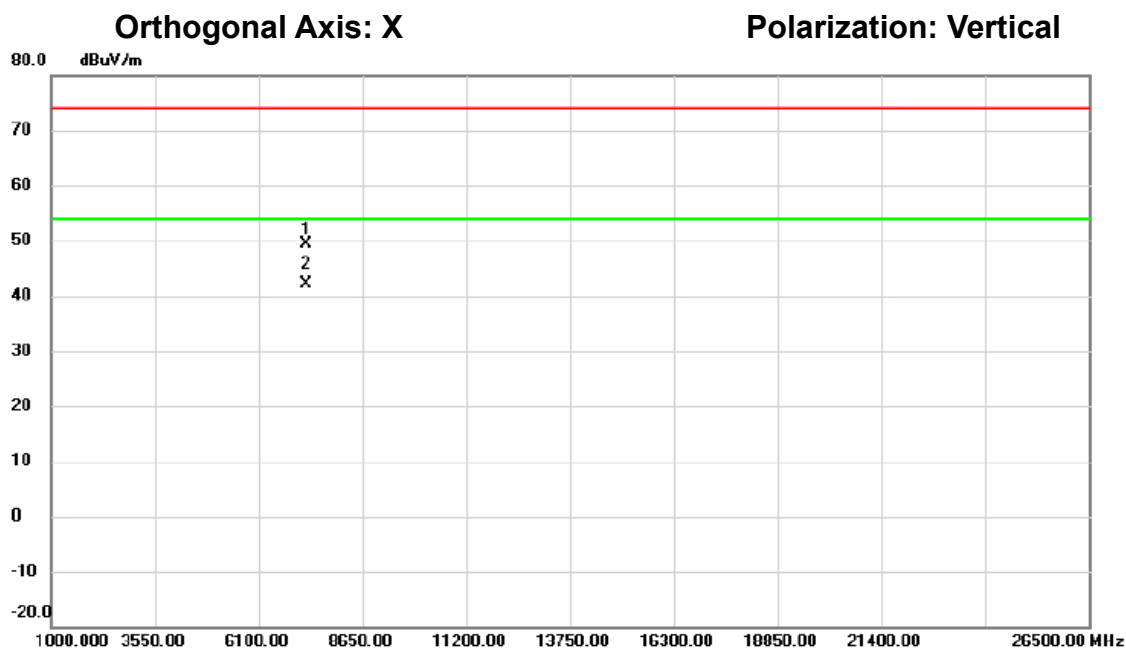

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7280.660	54.37	-5.11	49.26	74.00	-24.74	peak	
2	*	7281.020	47.18	-5.11	42.07	54.00	-11.93	AVG	

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

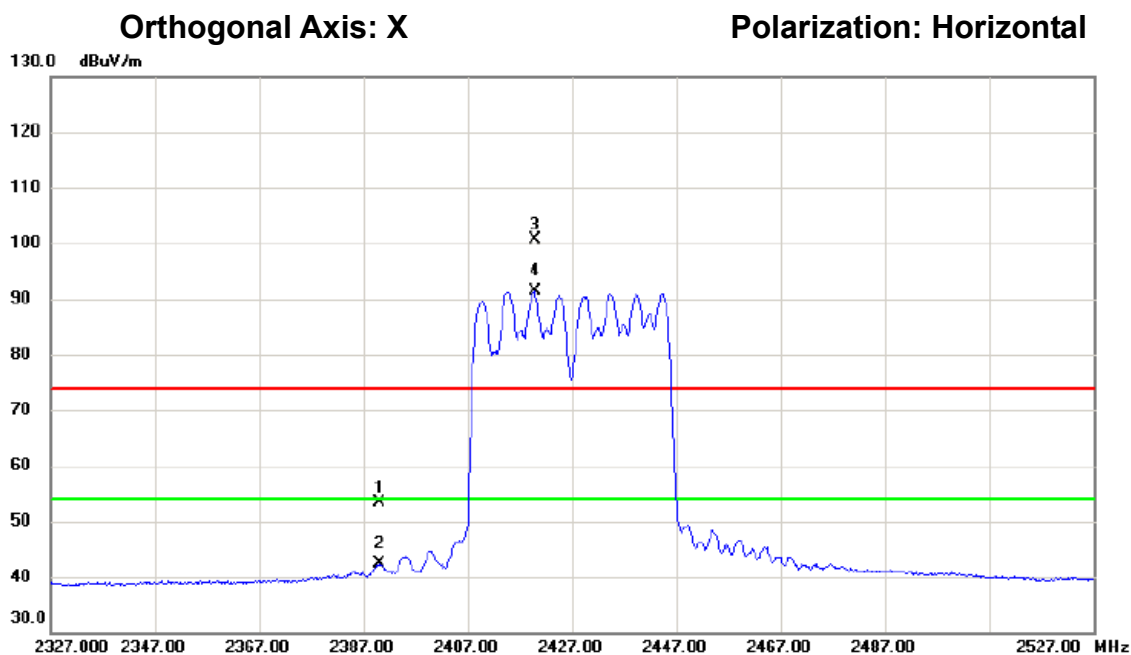

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	2390.000	60.67	-7.23	53.44	74.00	-20.56	peak	
2	2390.000	49.73	-7.23	42.50	54.00	-11.50	AVG	
3 X	2419.800	107.73	-7.10	100.63	74.00	26.63	peak	主波訊號不予判定
4 *	2419.800	98.45	-7.10	91.35	54.00	37.35	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

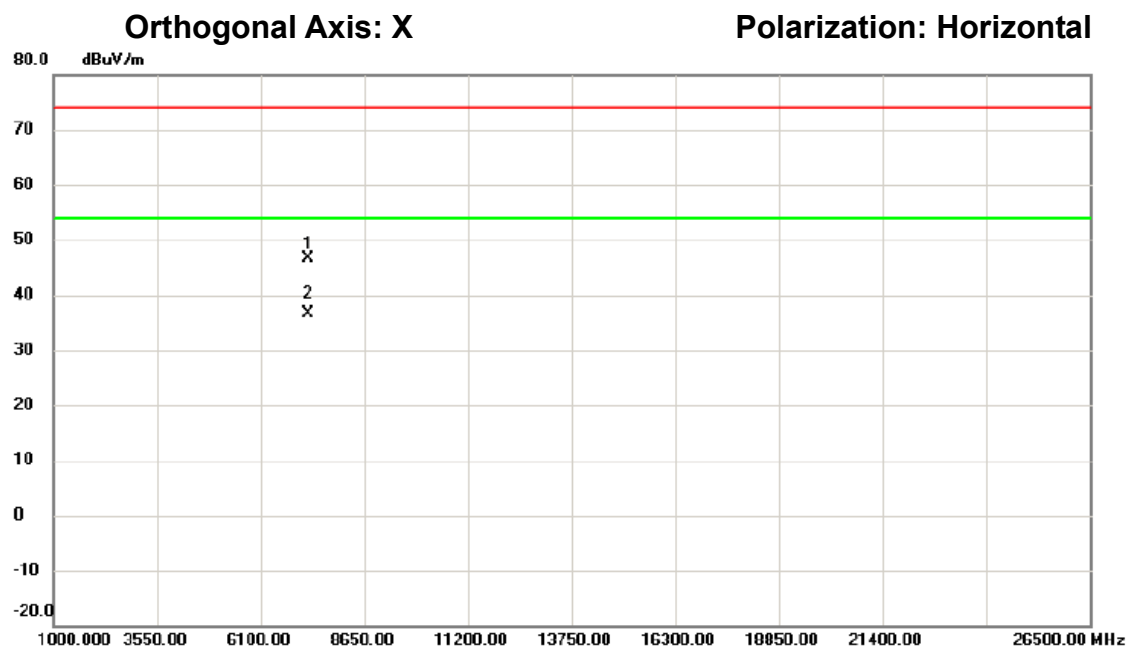

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7272.660	51.77	-5.14	46.63	74.00	-27.37	peak	
2	*	7280.960	41.86	-5.11	36.75	54.00	-17.25	AVG	

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

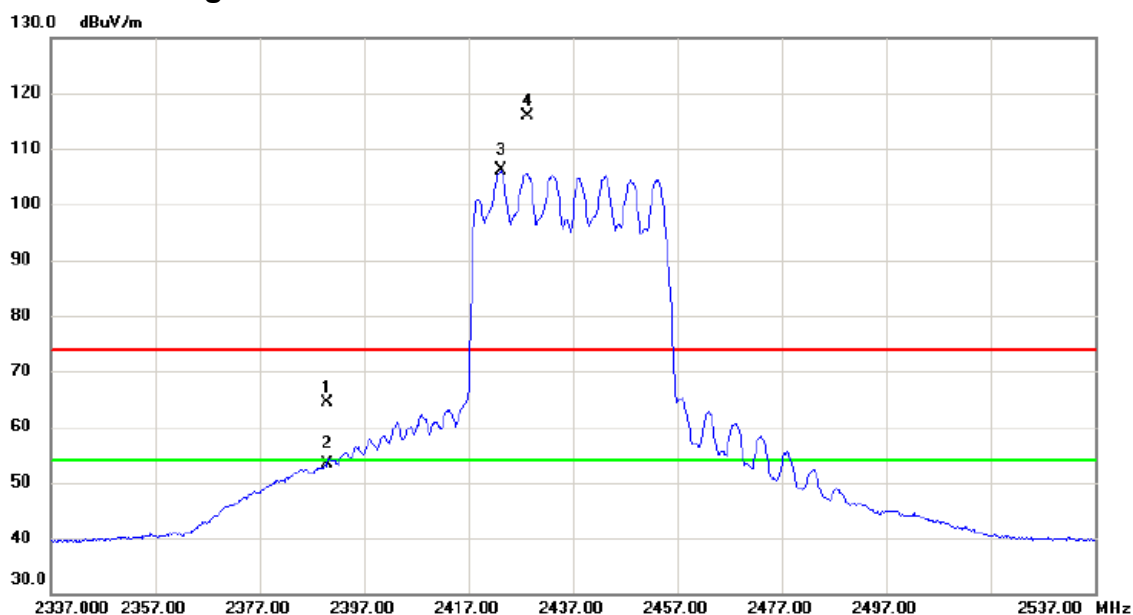

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	71.58	-7.23	64.35	74.00	-9.65	peak	
2		2390.000	60.50	-7.23	53.27	54.00	-0.73	AVG	
3	*	2423.200	113.16	-7.10	106.06	54.00	52.06	AVG	主波訊號不予判定
4	X	2428.300	122.84	-7.07	115.77	74.00	41.77	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

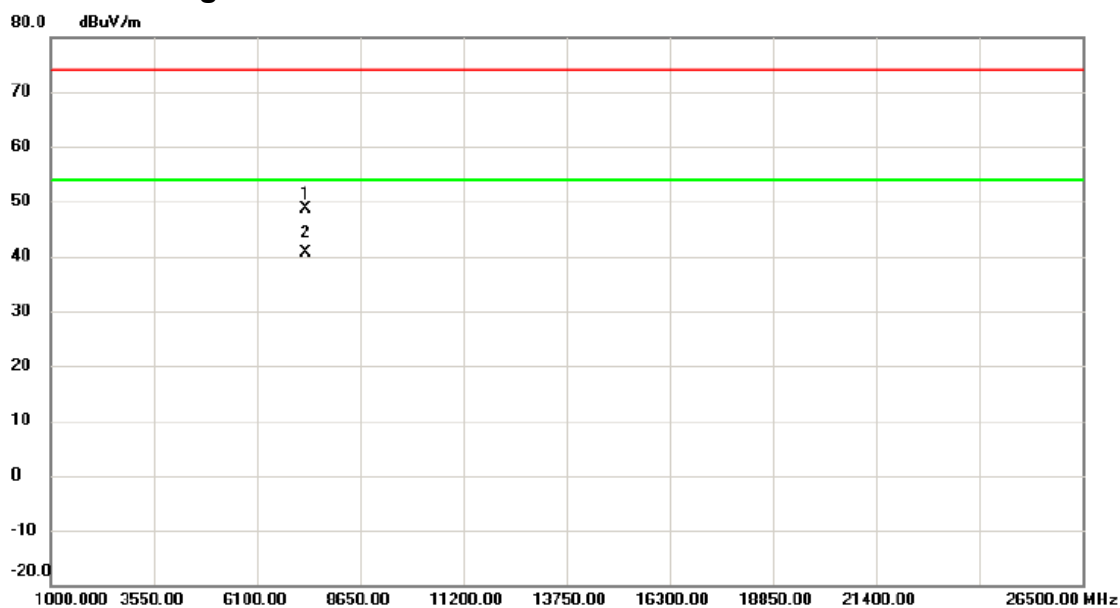

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7310.860	53.61	-4.99	48.62	74.00	-25.38	peak	
2	*	7311.020	45.51	-4.99	40.52	54.00	-13.48	AVG	

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

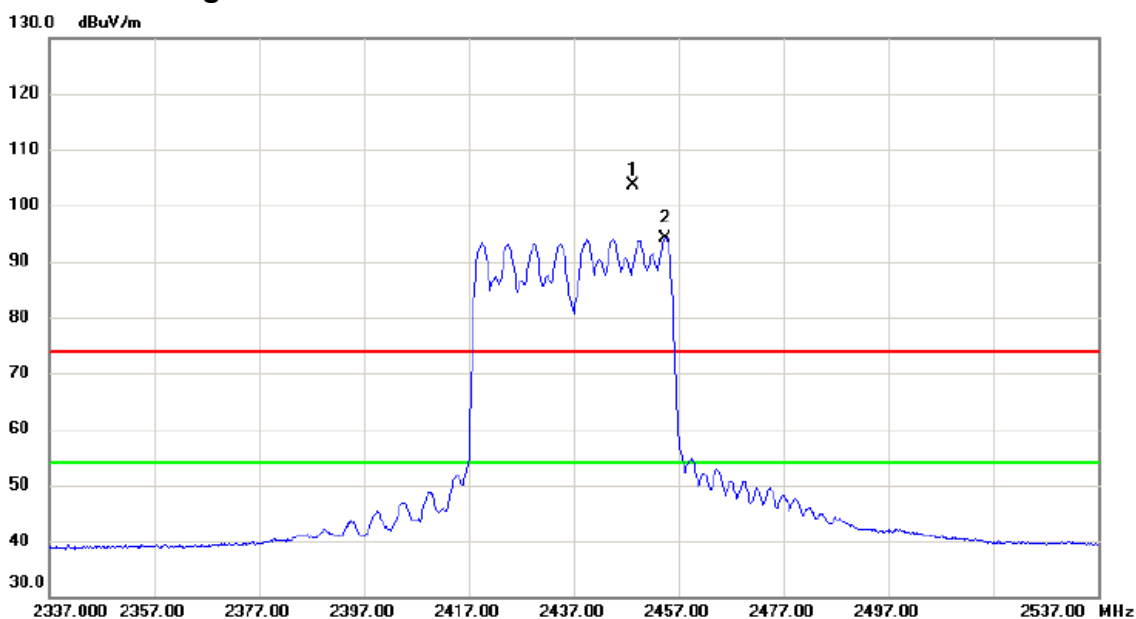

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2448.300	110.66	-6.99	103.67	74.00	29.67	peak	主波訊號不予判定
2	*	2454.600	101.13	-6.96	94.17	54.00	40.17	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢測器: Peak/AV

測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

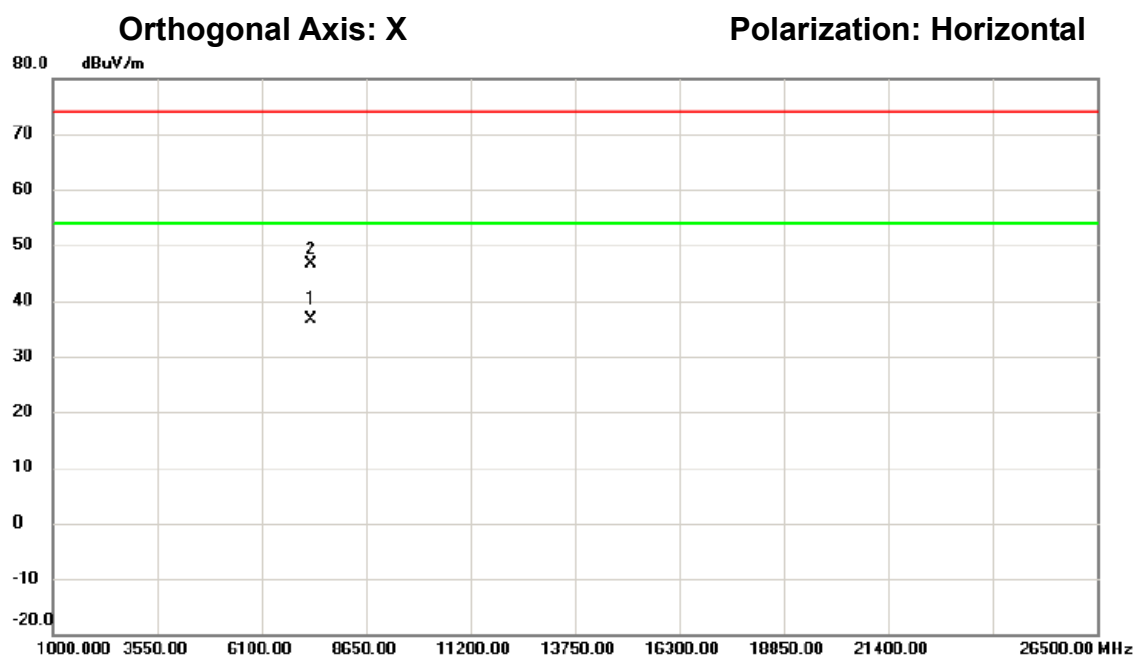

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7311.070	41.59	-4.99	36.60	54.00	-17.40	AVG	
2		7311.710	51.54	-4.99	46.55	74.00	-27.45	peak	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

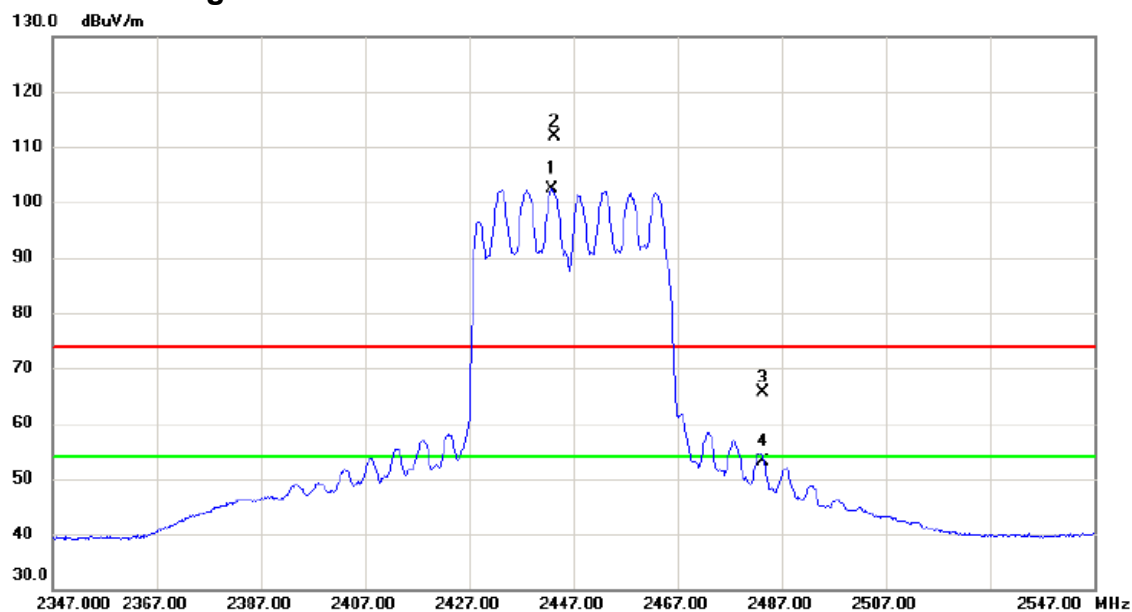

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2442.900	109.29	-7.01	102.28	54.00	48.28	AVG	主波訊號不予判定
2	X	2443.400	118.97	-7.01	111.96	74.00	37.96	peak	主波訊號不予判定
3		2483.500	72.53	-6.85	65.68	74.00	-8.32	peak	
4		2483.500	60.07	-6.85	53.22	54.00	-0.78	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

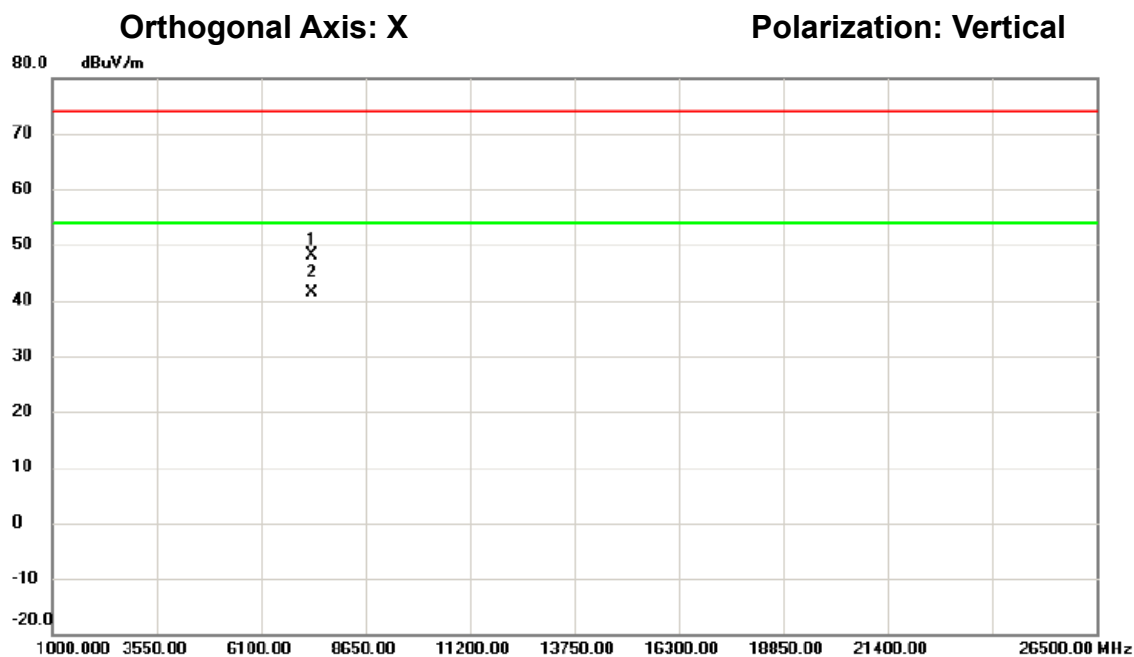

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		7337.610	52.95	-4.90	48.05	74.00	-25.95	peak	
2	*	7340.980	46.25	-4.89	41.36	54.00	-12.64	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

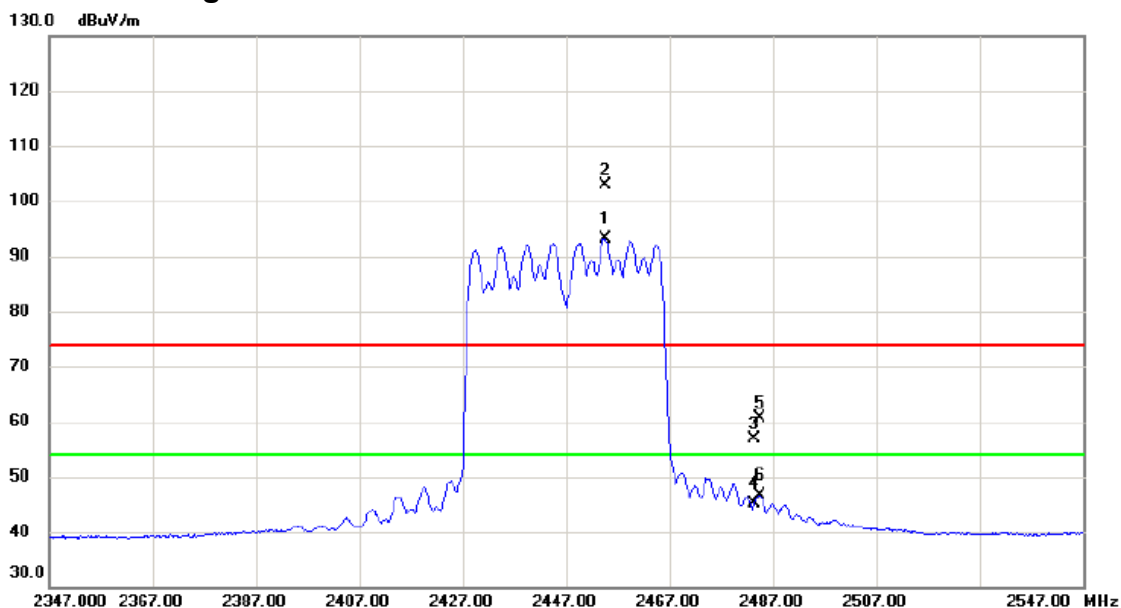

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2454.500	100.21	-6.96	93.25	54.00	39.25	AVG	主波訊號不予判定
2	X	2454.700	109.80	-6.96	102.84	74.00	28.84	peak	主波訊號不予判定
3		2483.500	63.68	-6.85	56.83	74.00	-17.17	peak	
4		2483.500	51.87	-6.85	45.02	54.00	-8.98	AVG	
5		2484.400	67.52	-6.84	60.68	74.00	-13.32	peak	
6		2484.400	53.56	-6.84	46.72	54.00	-7.28	AVG	

測試頻道: IEEE 802.11n (HT40) /
2447 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/02/26

環境溫度: 23°C

環境濕度: 66%

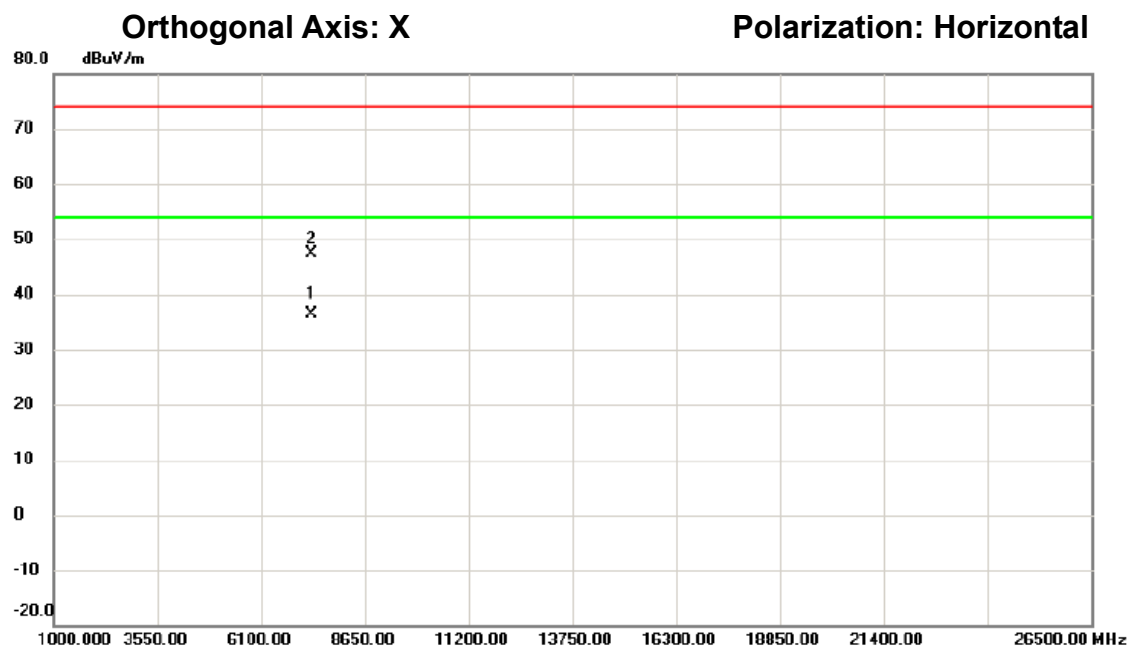

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7340.980	41.29	-4.89	36.40	54.00	-17.60	AVG	
2		7341.100	52.32	-4.89	47.43	74.00	-26.57	peak	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

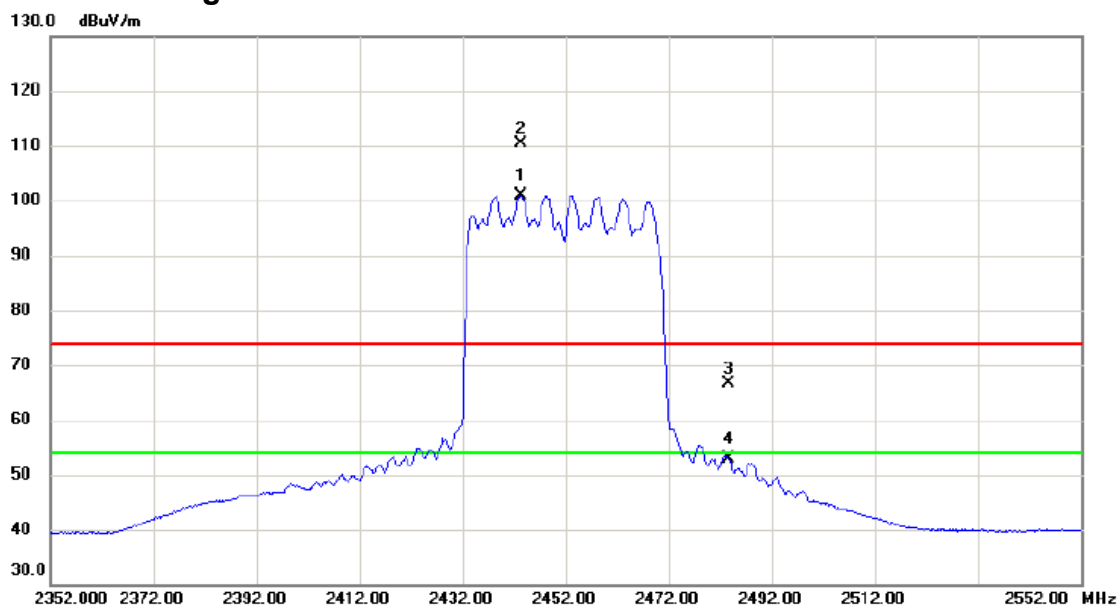

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2443.300	108.00	-7.01	100.99	54.00	46.99	AVG	主波訊號不予判定
2	X	2443.400	117.45	-7.01	110.44	74.00	36.44	peak	主波訊號不予判定
3		2483.500	73.49	-6.85	66.64	74.00	-7.36	peak	
4		2483.500	59.78	-6.85	52.93	54.00	-1.07	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

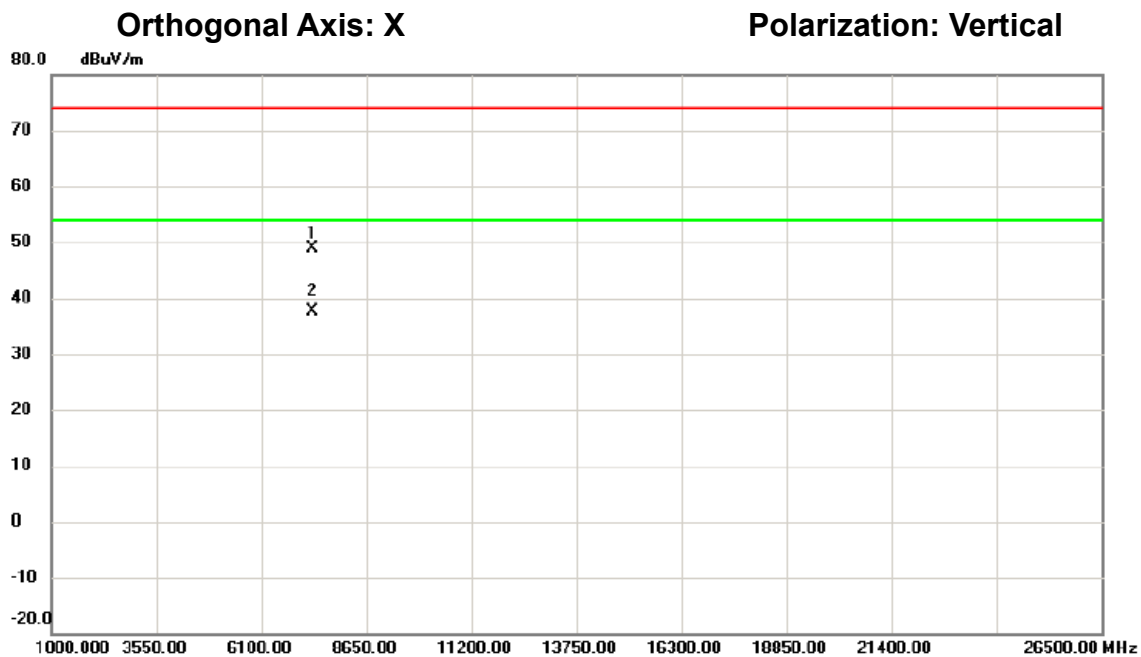

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7355.020	53.75	-4.84	48.91	74.00	-25.09	peak	
2	*	7356.870	42.49	-4.82	37.67	54.00	-16.33	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

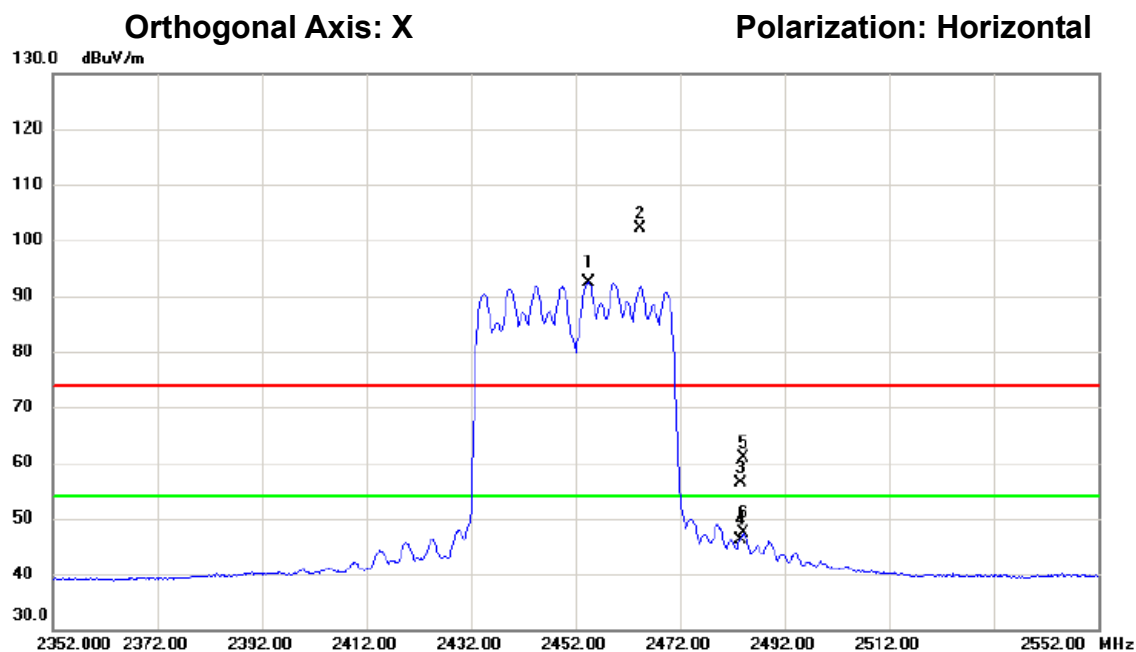

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2454.400	99.46	-6.96	92.50	54.00	38.50	AVG	主波訊號不予判定
2	X	2464.400	109.10	-6.93	102.17	74.00	28.17	peak	主波訊號不予判定
3		2483.500	63.19	-6.85	56.34	74.00	-17.66	peak	
4		2483.500	52.89	-6.85	46.04	54.00	-7.96	AVG	
5		2484.100	67.82	-6.84	60.98	74.00	-13.02	peak	
6		2484.100	54.19	-6.84	47.35	54.00	-6.65	AVG	

測試頻道: IEEE 802.11n (HT40) /
2452 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/02/26

環境濕度: 66%

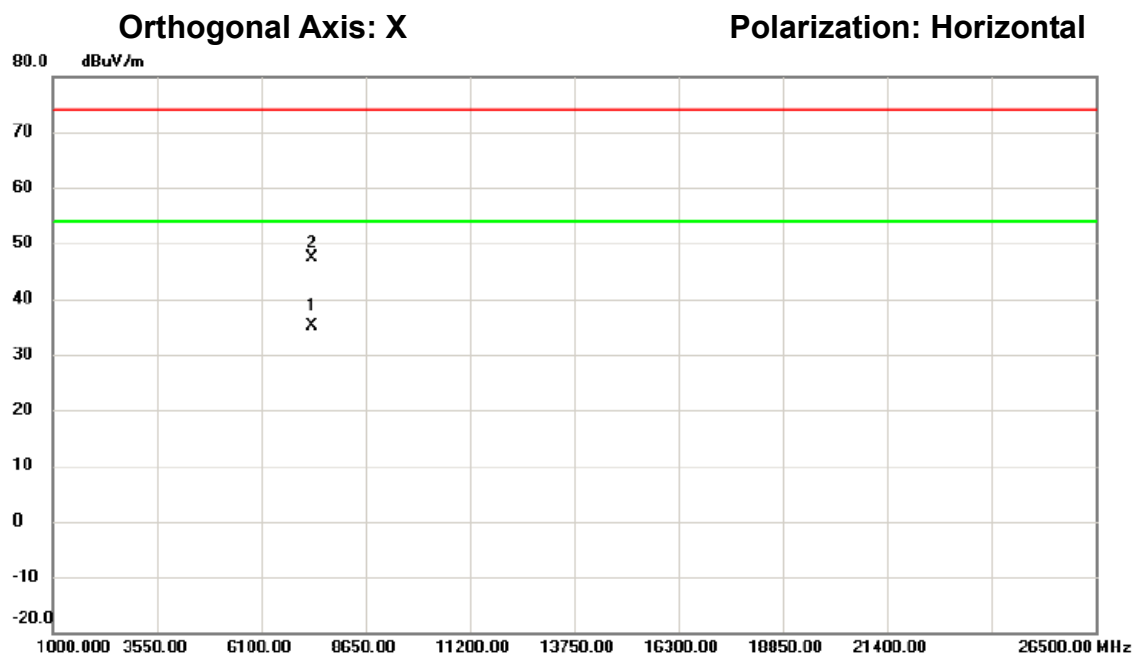


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7354.310	40.04	-4.84	35.20	54.00	-18.80	AVG	
2		7355.090	52.17	-4.84	47.33	74.00	-26.67	peak	

測試頻道: IEEE vht20 / 2412 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

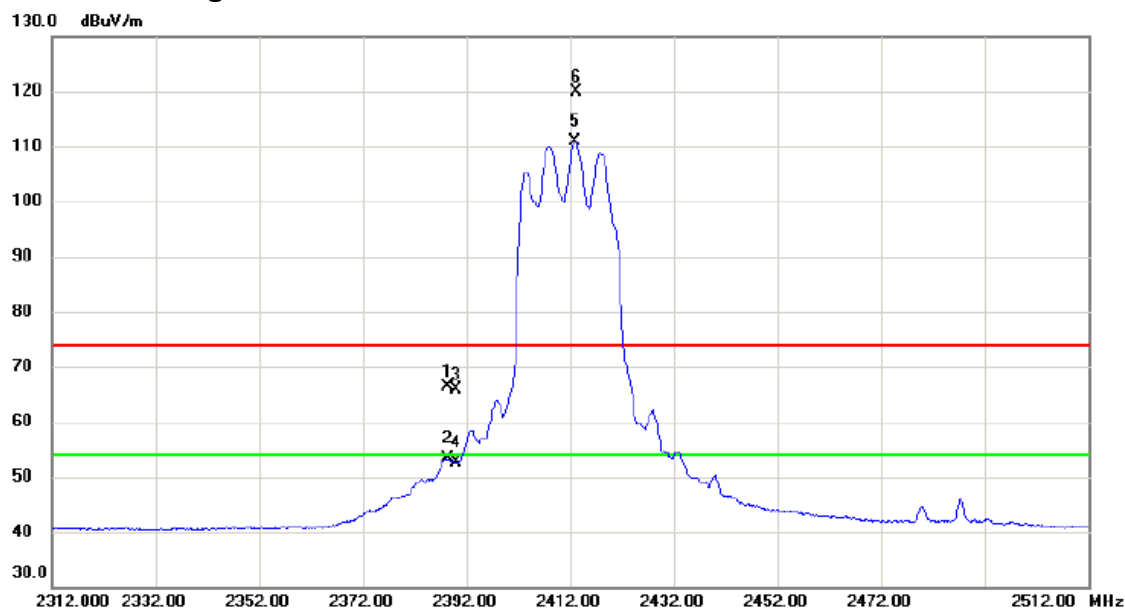

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2388.300	73.50	-7.23	66.27	74.00	-7.73	peak	
2		2388.300	60.49	-7.23	53.26	54.00	-0.74	AVG	
3		2390.000	73.21	-7.23	65.98	74.00	-8.02	peak	
4		2390.000	59.98	-7.23	52.75	54.00	-1.25	AVG	
5	*	2413.000	118.09	-7.13	110.96	54.00	56.96	AVG	主波訊號不予判定
6	X	2413.200	126.91	-7.13	119.78	74.00	45.78	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2412 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

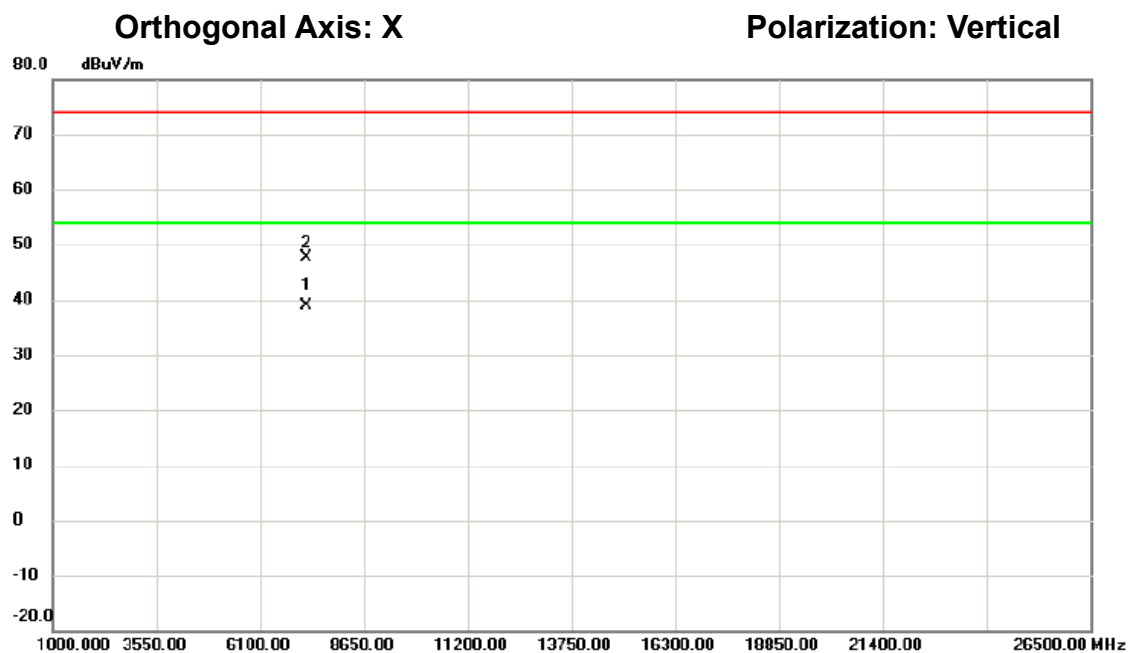


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7236.080	44.05	-5.26	38.79	54.00	-15.21	AVG	
2		7236.140	53.01	-5.26	47.75	74.00	-26.25	peak	

測試頻道: IEEE vht20 / 2412 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

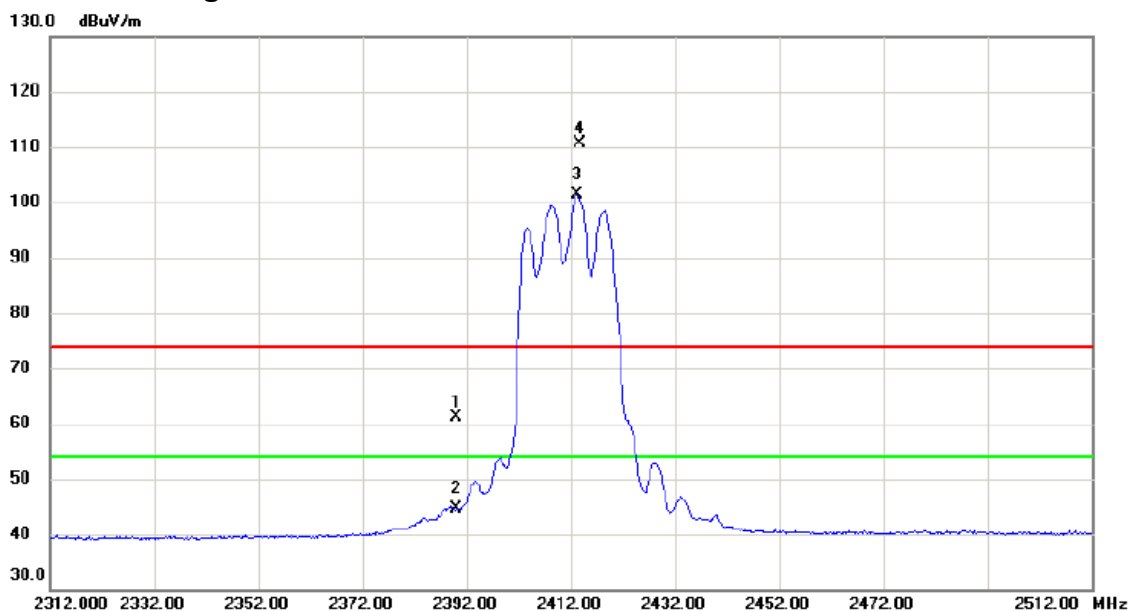

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	68.34	-7.23	61.11	74.00	-12.89	peak	
2		2390.000	51.89	-7.23	44.66	54.00	-9.34	AVG	
3	*	2413.200	108.42	-7.13	101.29	54.00	47.29	AVG	主波訊號不予判定
4	X	2413.700	117.70	-7.13	110.57	74.00	36.57	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2412 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

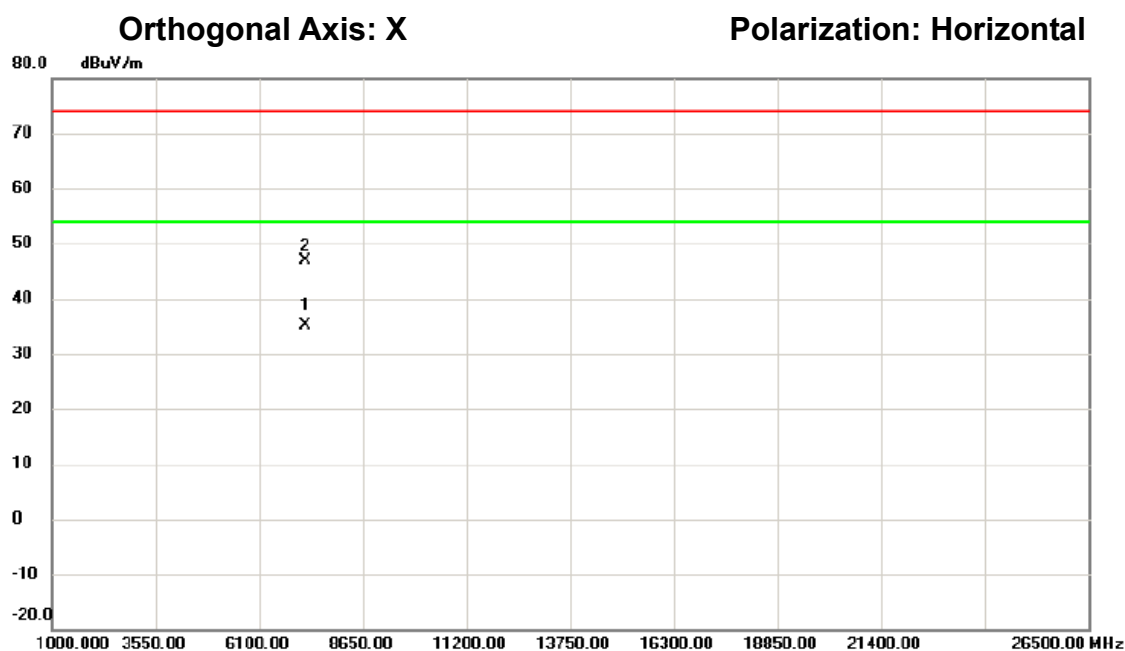


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7236.090	40.37	-5.26	35.11	54.00	-18.89	AVG	
2		7236.860	52.20	-5.26	46.94	74.00	-27.06	peak	

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

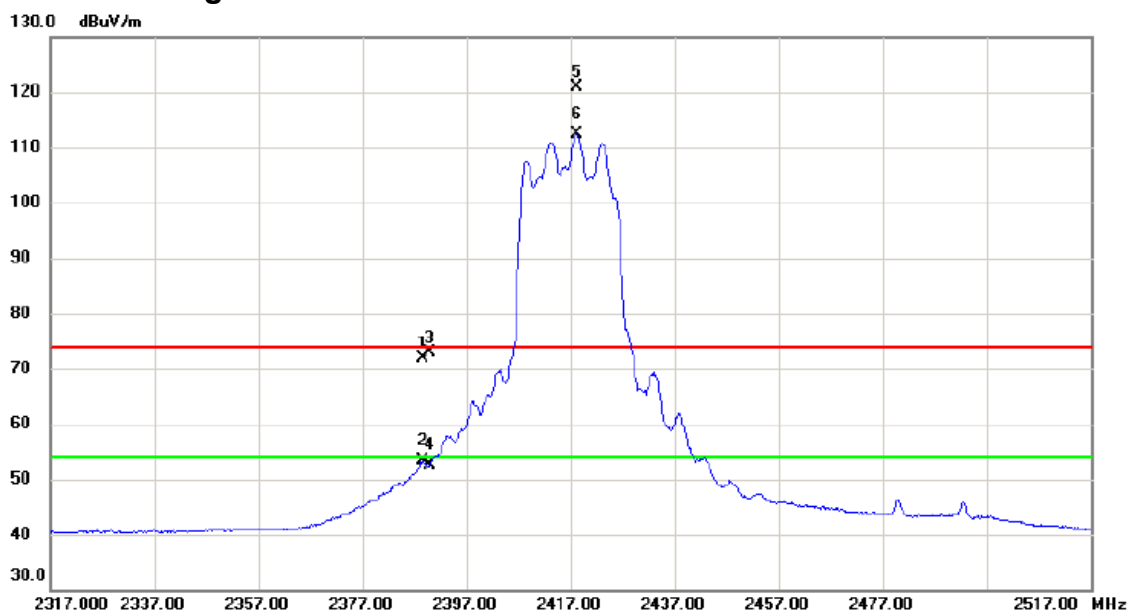

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2388.600	79.08	-7.23	71.85	74.00	-2.15	peak	
2		2388.600	60.55	-7.23	53.32	54.00	-0.68	AVG	
3		2390.000	80.21	-7.23	72.98	74.00	-1.02	peak	
4		2390.000	59.80	-7.23	52.57	54.00	-1.43	AVG	
5	X	2418.300	127.87	-7.11	120.76	74.00	46.76	peak	主波訊號不予判定
6	*	2418.300	119.51	-7.11	112.40	54.00	58.40	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2417 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

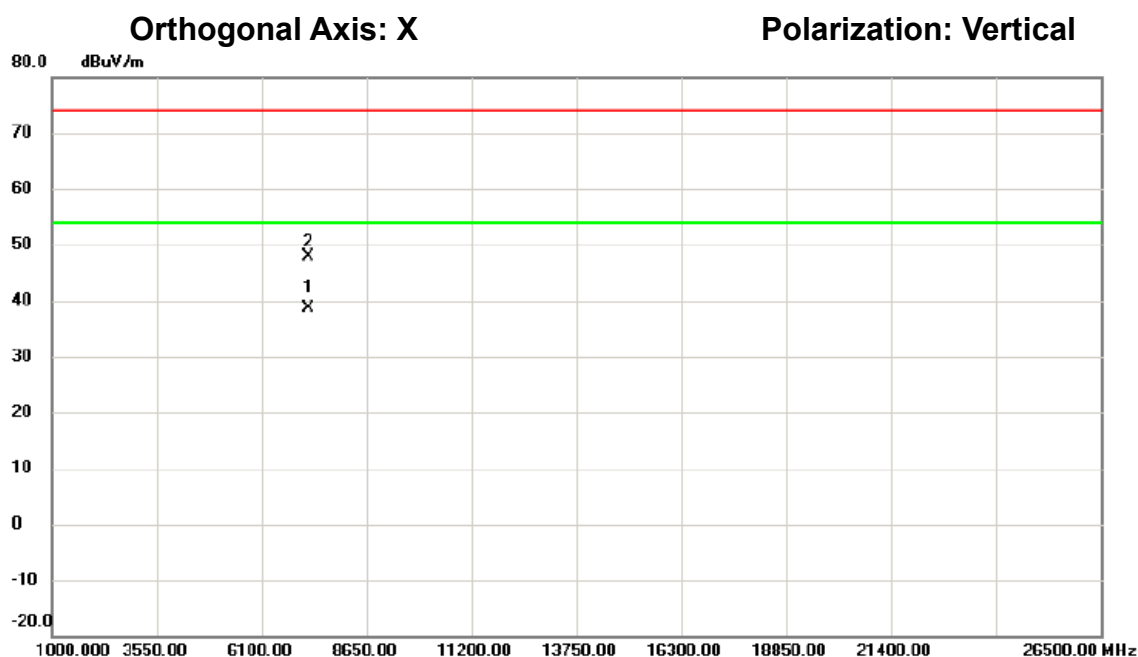

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7251.040	43.88	-5.21	38.67	54.00	-15.33	AVG	
2		7251.160	52.98	-5.21	47.77	74.00	-26.23	peak	

測試頻道: IEEE vht20 / 2417 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

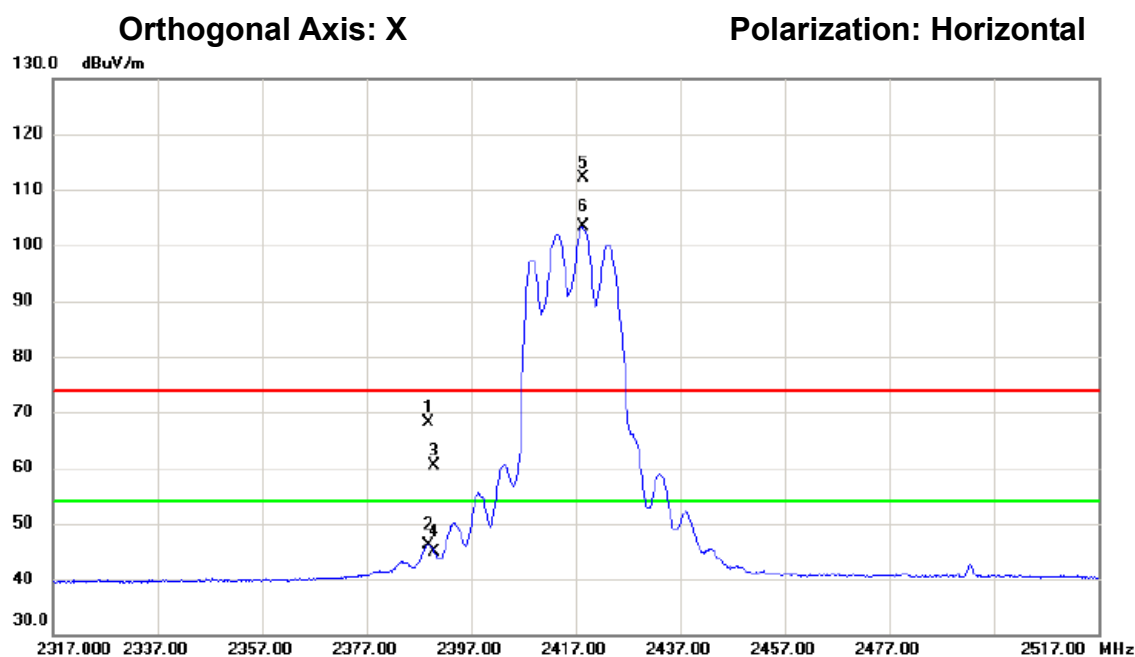

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2388.800	75.27	-7.23	68.04	74.00	-5.96	peak	
2		2388.800	53.44	-7.23	46.21	54.00	-7.79	AVG	
3		2390.000	67.60	-7.23	60.37	74.00	-13.63	peak	
4		2390.000	52.21	-7.23	44.98	54.00	-9.02	AVG	
5	X	2418.400	119.35	-7.11	112.24	74.00	38.24	peak	主波訊號不予判定
6	*	2418.400	110.56	-7.11	103.45	54.00	49.45	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2417 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

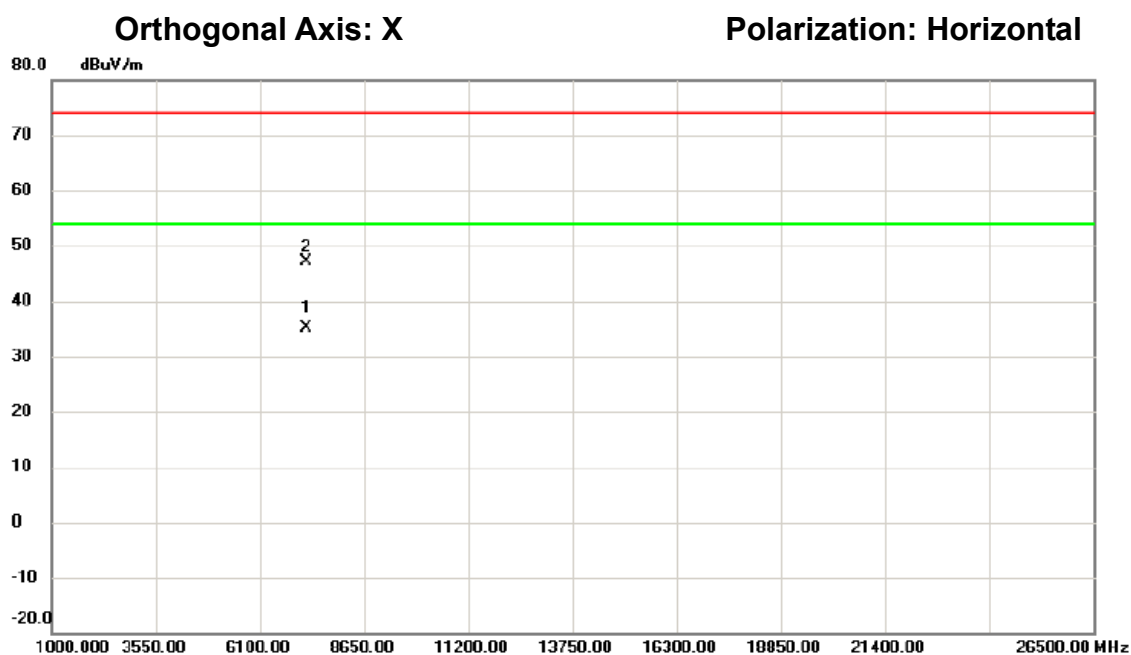


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7250.630	40.42	-5.21	35.21	54.00	-18.79	AVG	
2		7253.890	52.39	-5.20	47.19	74.00	-26.81	peak	

測試頻道: IEEE vht20 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

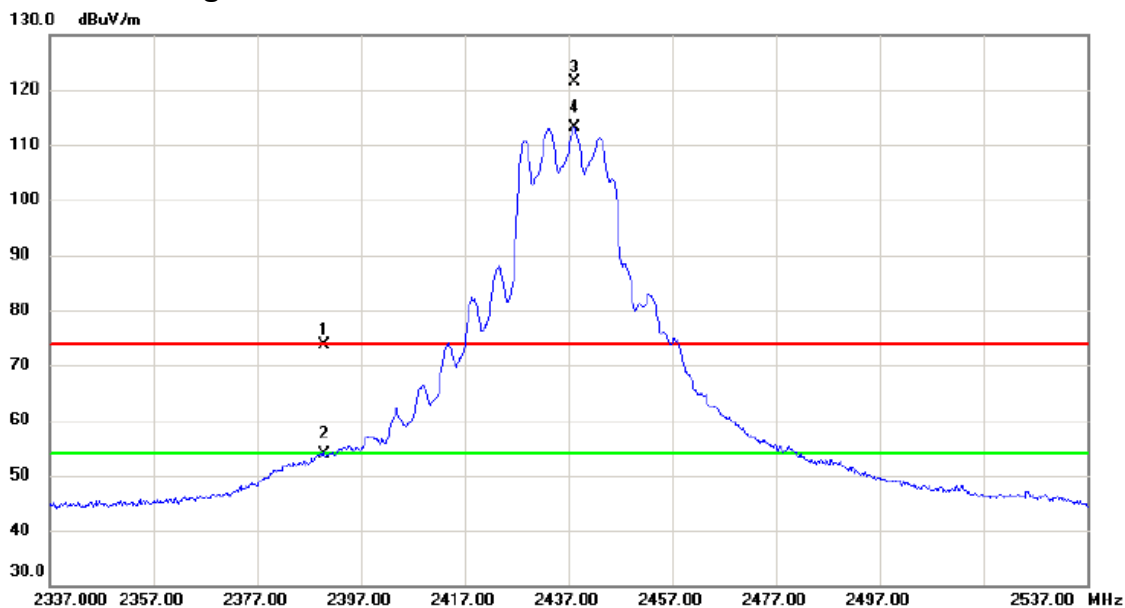

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	80.79	-7.23	73.56	74.00	-0.44	peak	
2		2390.000	61.06	-7.23	53.83	54.00	-0.17	AVG	
3	X	2438.100	128.43	-7.03	121.40	74.00	47.40	peak	主波訊號不予判定
4	*	2438.200	120.09	-7.03	113.06	54.00	59.06	AVG	主波訊號不予判定

測試頻道: IEEE vht20 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

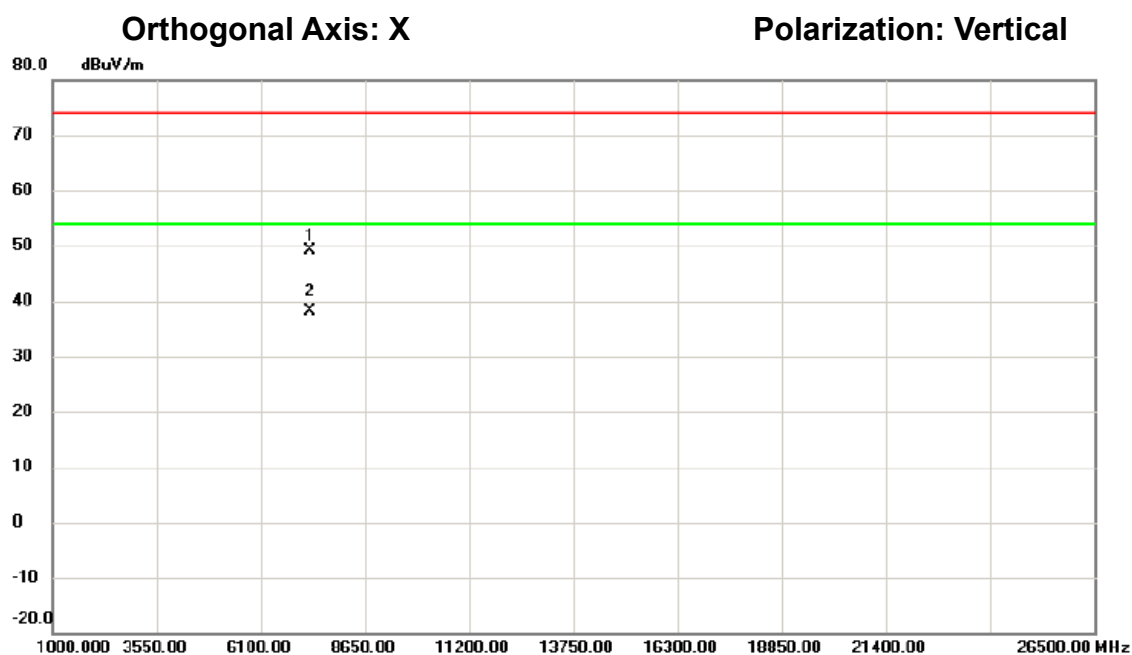

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7308.550	54.09	-5.00	49.09	74.00	-24.91	peak	
2	*	7313.000	43.20	-4.99	38.21	54.00	-15.79	AVG	

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

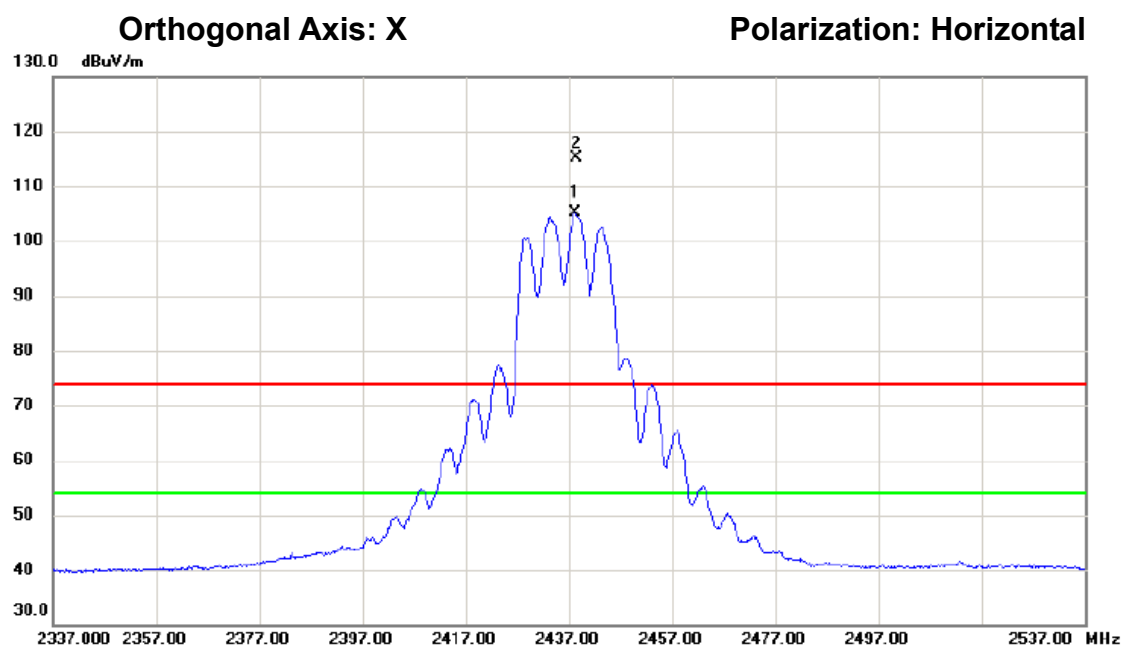

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2438.300	112.16	-7.03	105.13	54.00	51.13	AVG	主波訊號不予判定
2	X	2438.400	122.04	-7.03	115.01	74.00	41.01	peak	主波訊號不予判定

測試頻道: IEEE vht20 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

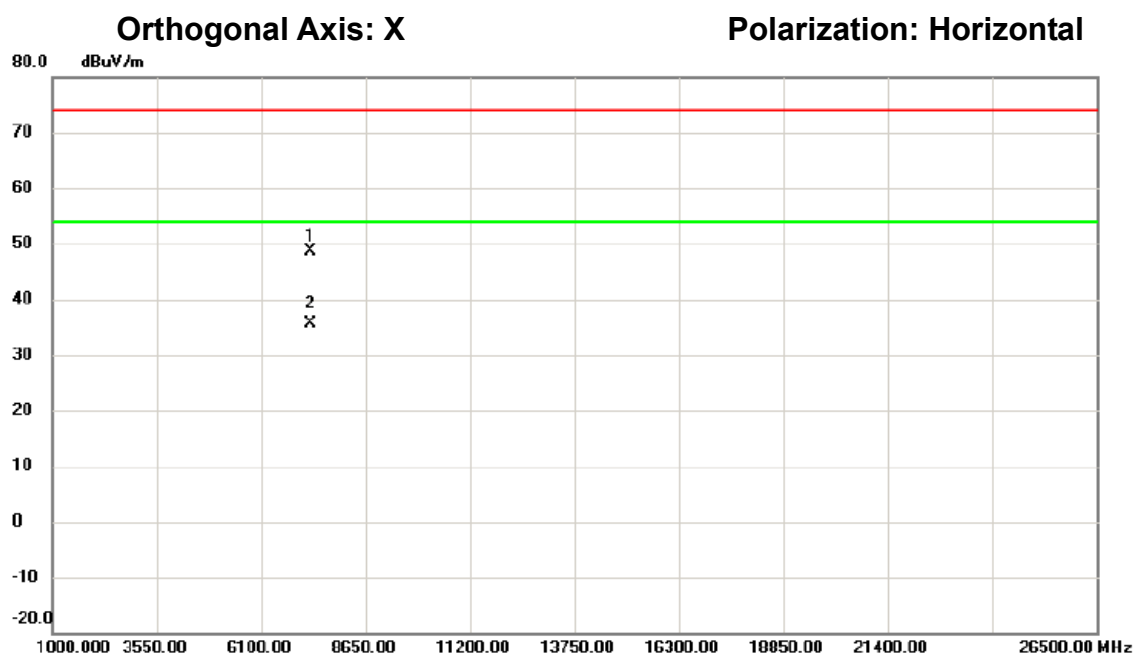

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7309.900	53.52	-5.00	48.52	74.00	-25.48	peak	
2	*	7310.110	40.74	-5.00	35.74	54.00	-18.26	AVG	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

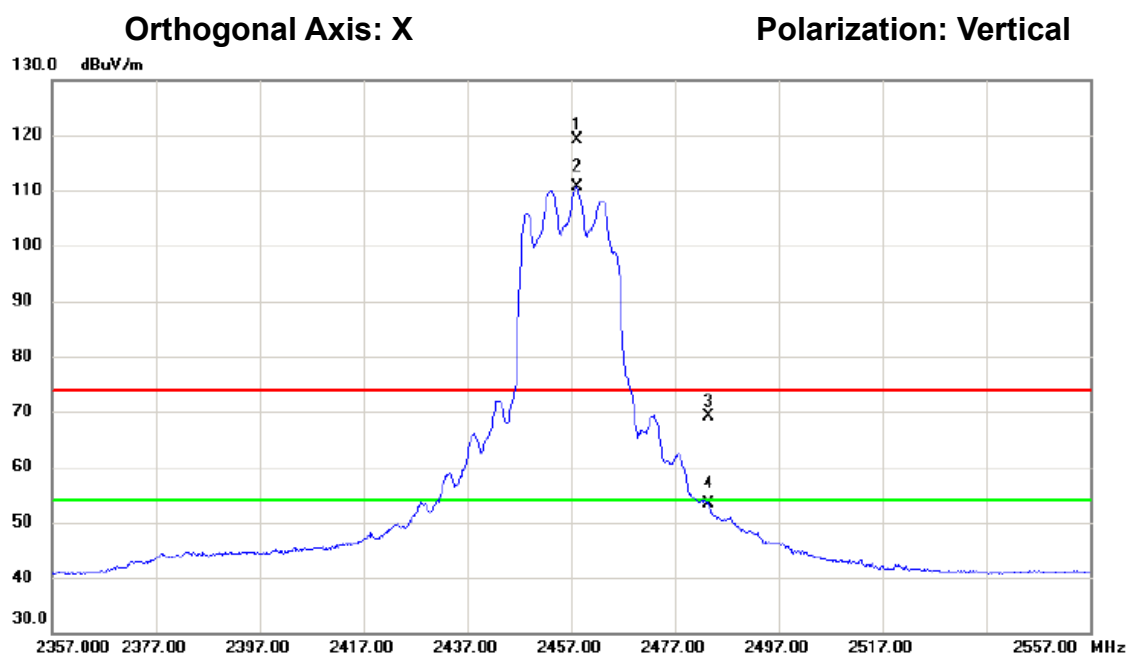

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	2458.100	126.17	-6.95	119.22	74.00	45.22	peak	主波訊號不予判定
2	*	2458.200	117.62	-6.95	110.67	54.00	56.67	AVG	主波訊號不予判定
3		2483.500	75.88	-6.85	69.03	74.00	-4.97	peak	
4		2483.500	60.19	-6.85	53.34	54.00	-0.66	AVG	

測試頻道: IEEE vht20 / 2457 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

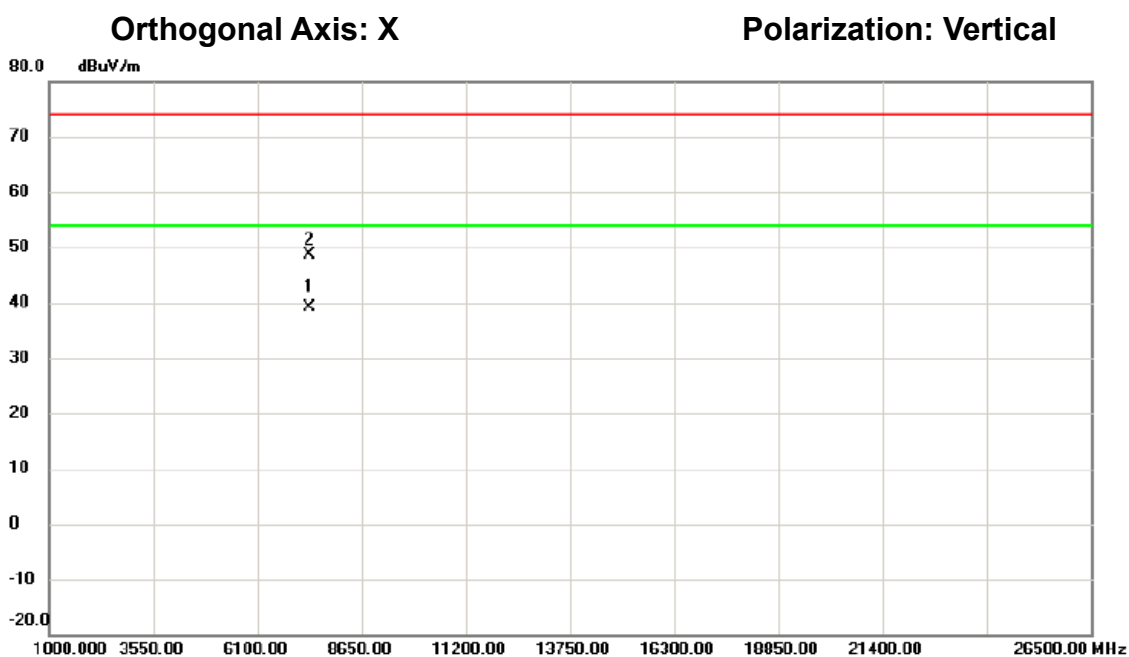

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7371.110	43.96	-4.77	39.19	54.00	-14.81	AVG	
2		7371.190	53.41	-4.77	48.64	74.00	-25.36	peak	

測試頻道: IEEE vht20 / 2457 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

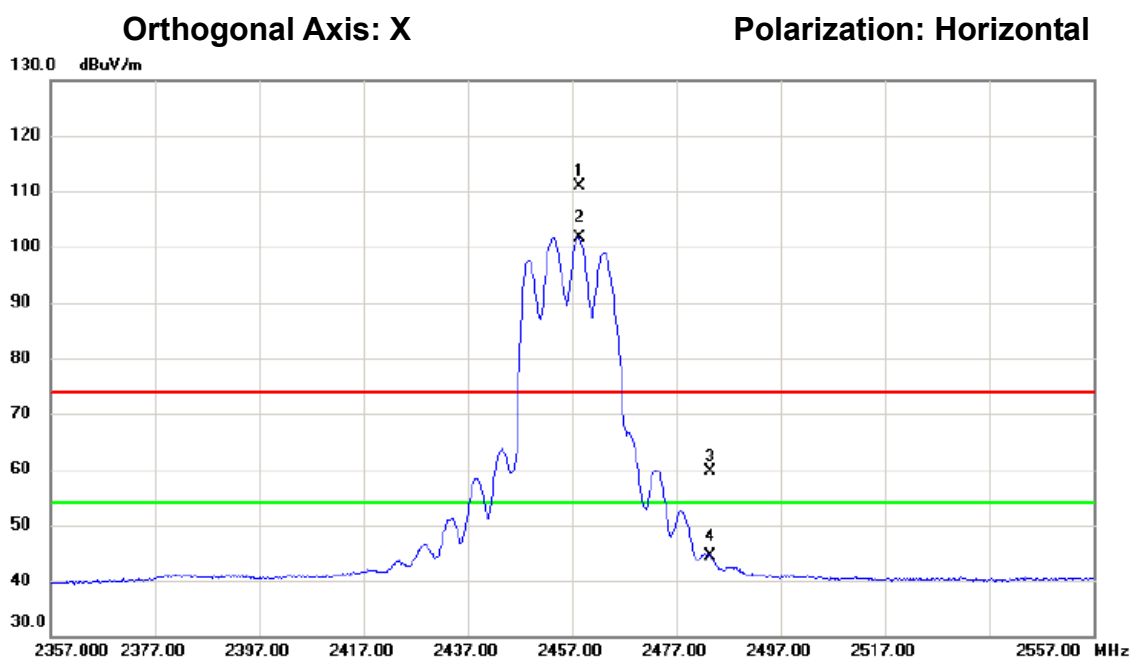

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2458.400	117.84	-6.95	110.89	74.00	36.89	peak	主波訊號不予判定
2	*	2458.400	108.69	-6.95	101.74	54.00	47.74	AVG	主波訊號不予判定
3		2483.500	66.41	-6.85	59.56	74.00	-14.44	peak	
4		2483.500	51.27	-6.85	44.42	54.00	-9.58	AVG	

測試頻道: IEEE vht20 / 2457 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

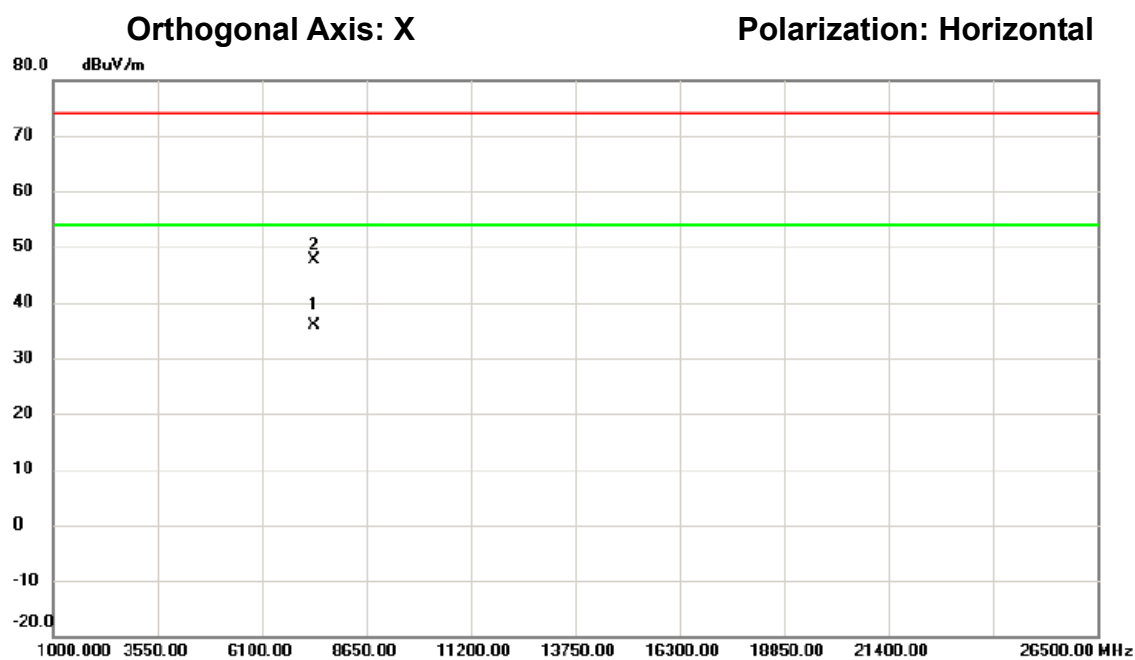


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7371.440	40.59	-4.77	35.82	54.00	-18.18	AVG	
2		7378.060	52.42	-4.75	47.67	74.00	-26.33	peak	

測試頻道: IEEE vht20 / 2462 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

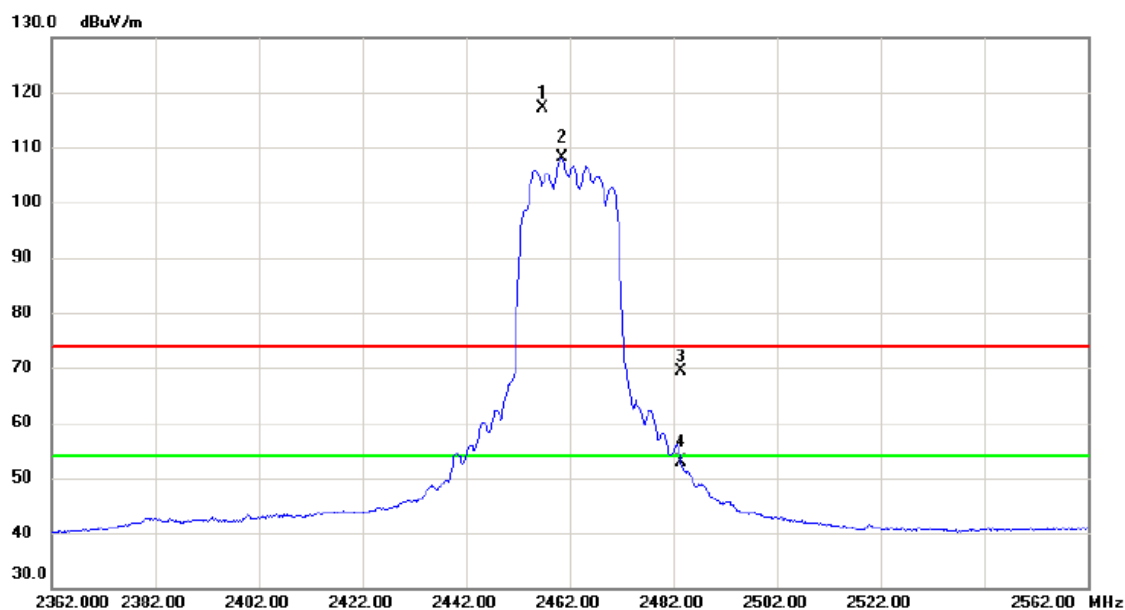

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2456.700	124.09	-6.95	117.14	74.00	43.14	peak	主波訊號不予判定
2	*	2460.400	115.07	-6.94	108.13	54.00	54.13	AVG	主波訊號不予判定
3		2483.500	76.22	-6.85	69.37	74.00	-4.63	peak	
4		2483.500	59.83	-6.85	52.98	54.00	-1.02	AVG	

測試頻道: IEEE vht20 / 2462 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

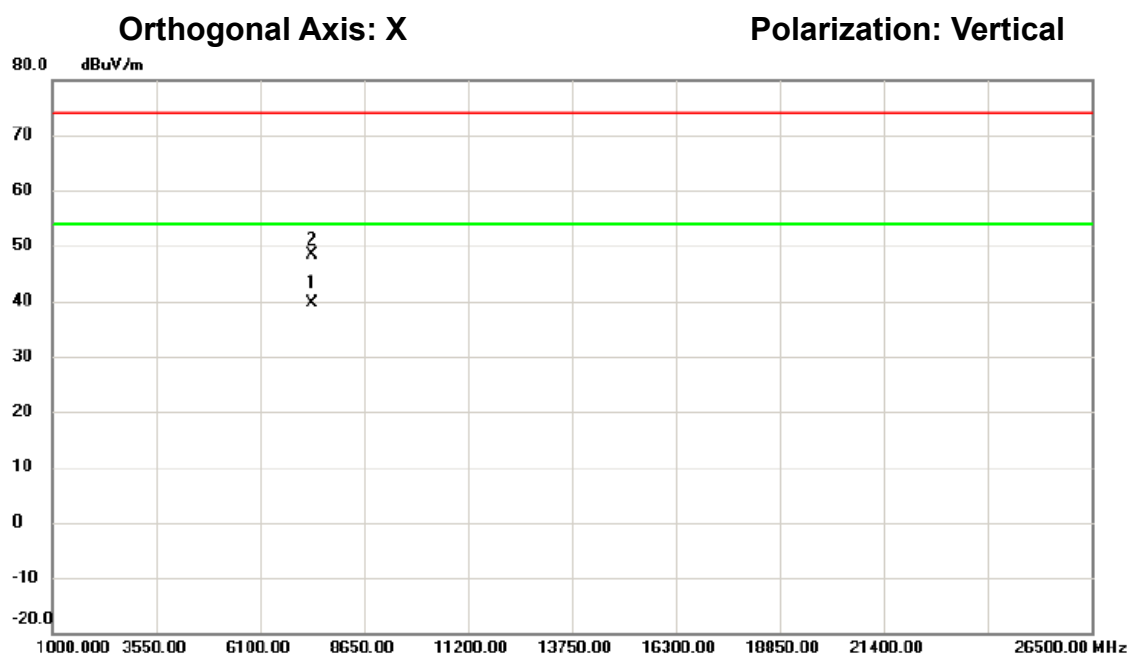

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7386.080	44.44	-4.72	39.72	54.00	-14.28	AVG	
2		7387.360	53.07	-4.72	48.35	74.00	-25.65	peak	

測試頻道: IEEE vht20 / 2462 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

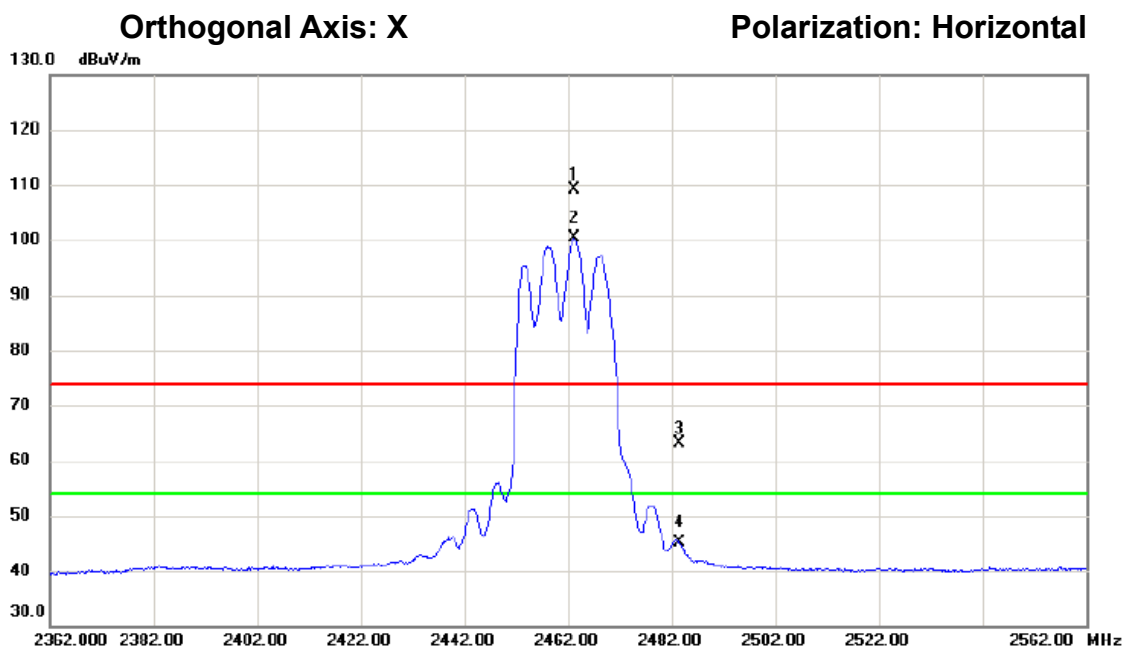


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2463.200	116.02	-6.93	109.09	74.00	35.09	peak	主波訊號不予判定
2	*	2463.300	107.22	-6.93	100.29	54.00	46.29	AVG	主波訊號不予判定
3		2483.500	69.98	-6.85	63.13	74.00	-10.87	peak	
4		2483.500	51.88	-6.85	45.03	54.00	-8.97	AVG	

測試頻道: IEEE vht20 / 2462 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

Orthogonal Axis: X


Polarization: Horizontal

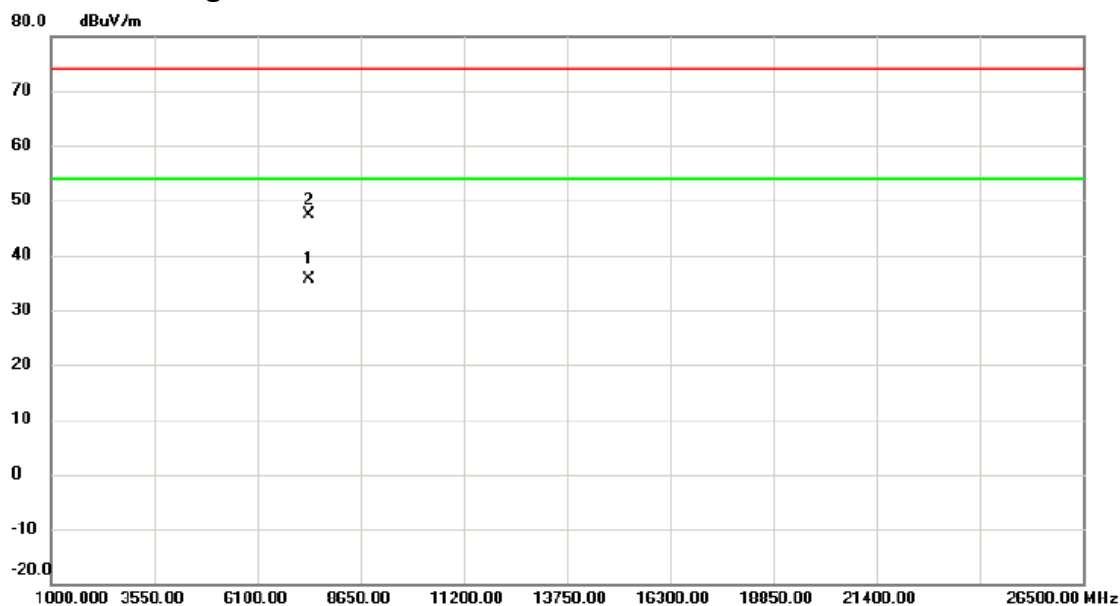

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7386.120	40.42	-4.72	35.70	54.00	-18.30	AVG	
2		7386.350	51.99	-4.72	47.27	74.00	-26.73	peak	

測試頻道: IEEE vht40 / 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

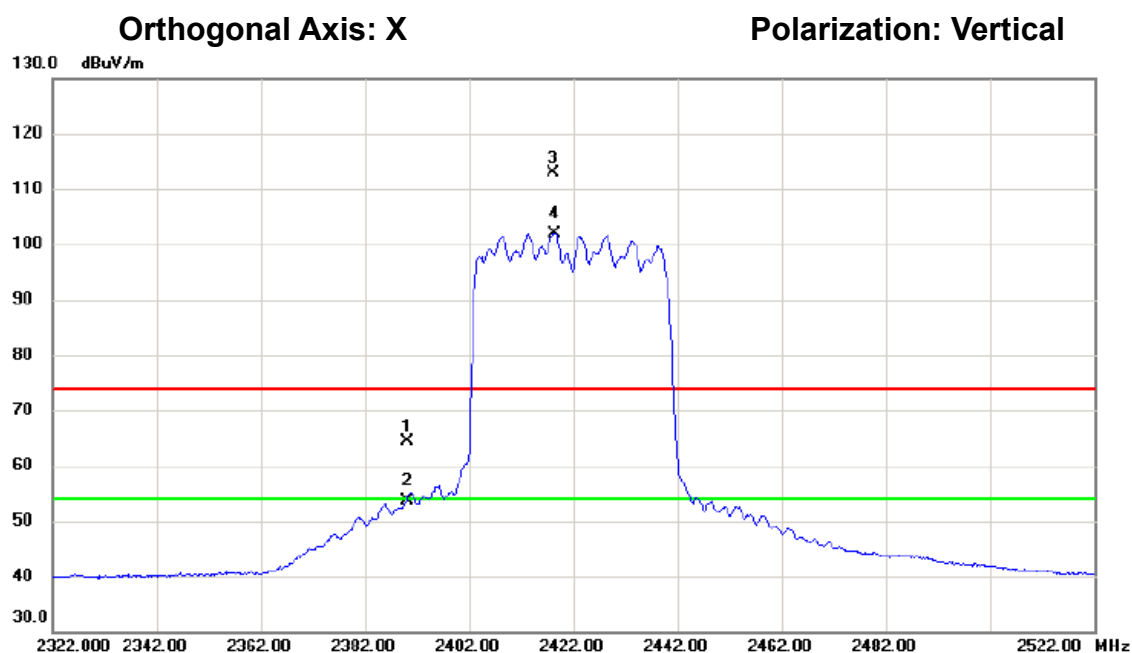

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	71.64	-7.23	64.41	74.00	-9.59	peak	
2		2390.000	60.97	-7.23	53.74	54.00	-0.26	AVG	
3	X	2418.200	120.10	-7.11	112.99	74.00	38.99	peak	主波訊號不予判定
4	*	2418.300	109.02	-7.11	101.91	54.00	47.91	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2422 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

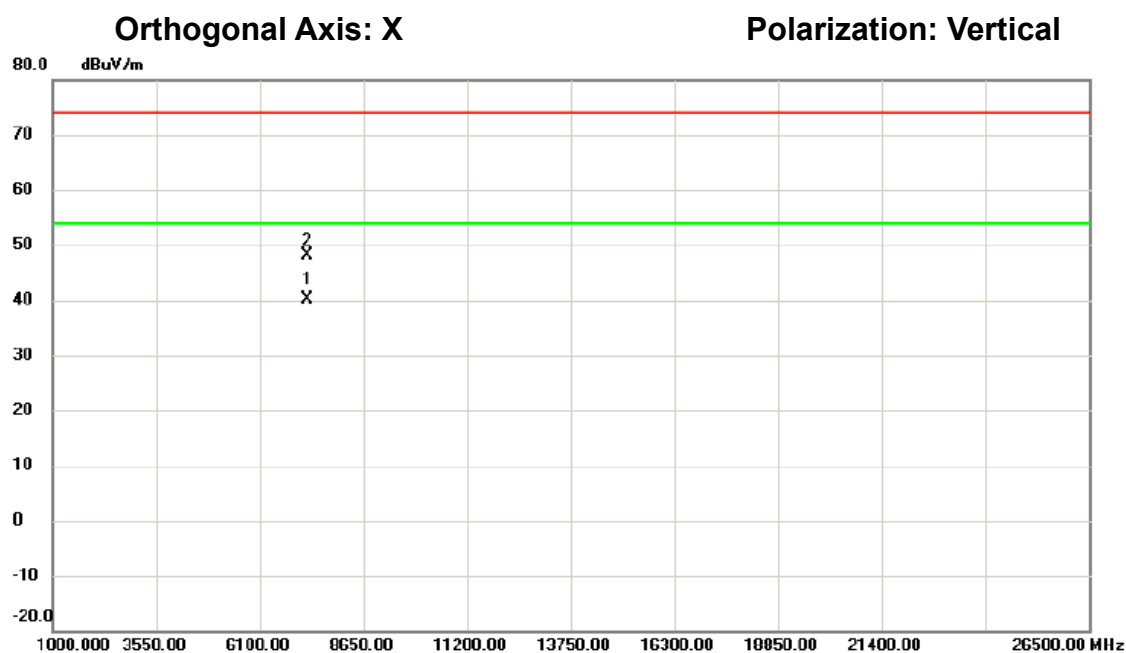

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7266.050	45.34	-5.16	40.18	54.00	-13.82	AVG	
2		7266.340	53.36	-5.16	48.20	74.00	-25.80	peak	

測試頻道: IEEE vht40 / 2422 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

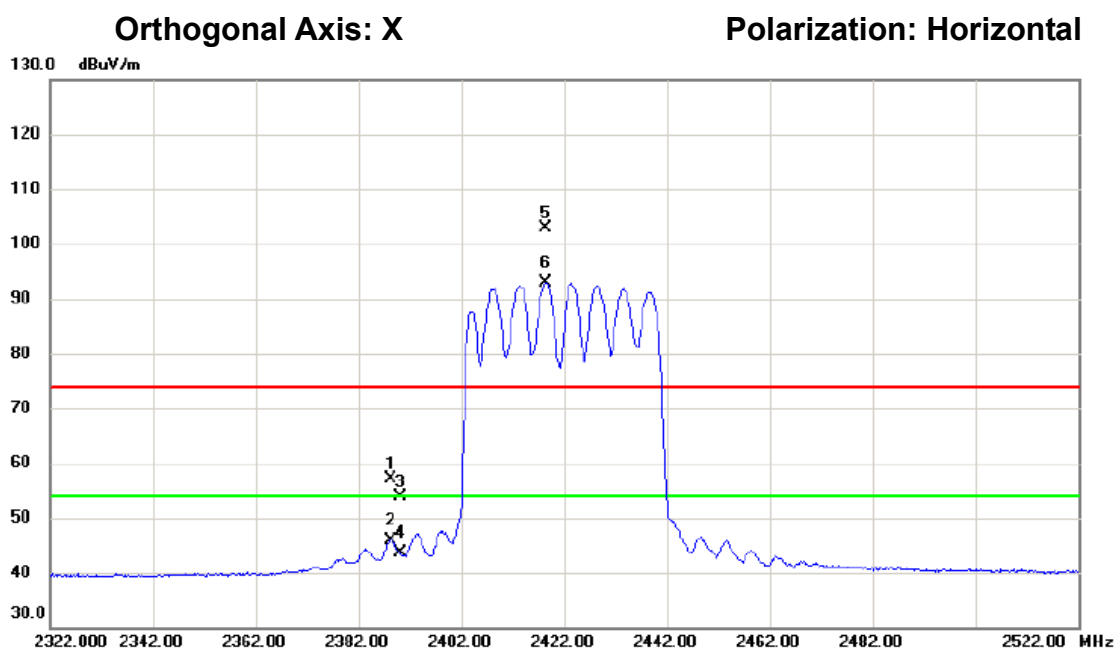

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2388.300	64.42	-7.23	57.19	74.00	-16.81	peak	
2		2388.300	53.23	-7.23	46.00	54.00	-8.00	AVG	
3		2390.000	61.02	-7.23	53.79	74.00	-20.21	peak	
4		2390.000	50.96	-7.23	43.73	54.00	-10.27	AVG	
5	X	2418.400	109.97	-7.11	102.86	74.00	28.86	peak	主波訊號不予判定
6	*	2418.500	100.04	-7.11	92.93	54.00	38.93	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2422 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

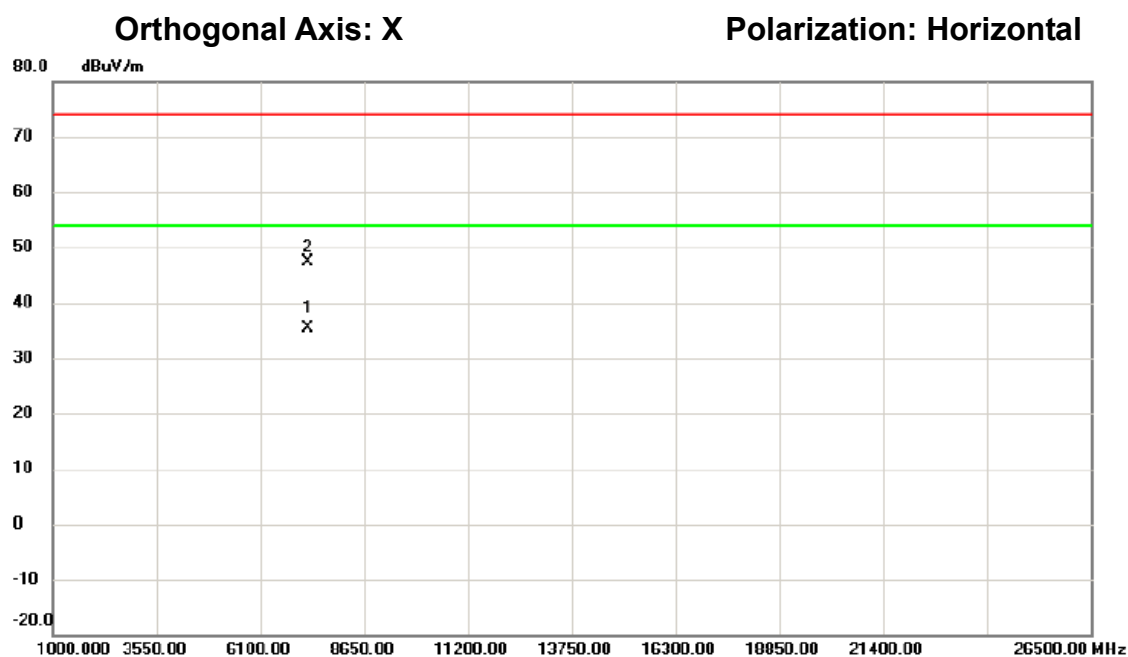

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7265.940	40.48	-5.16	35.32	54.00	-18.68	AVG	
2		7275.710	52.40	-5.12	47.28	74.00	-26.72	peak	

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

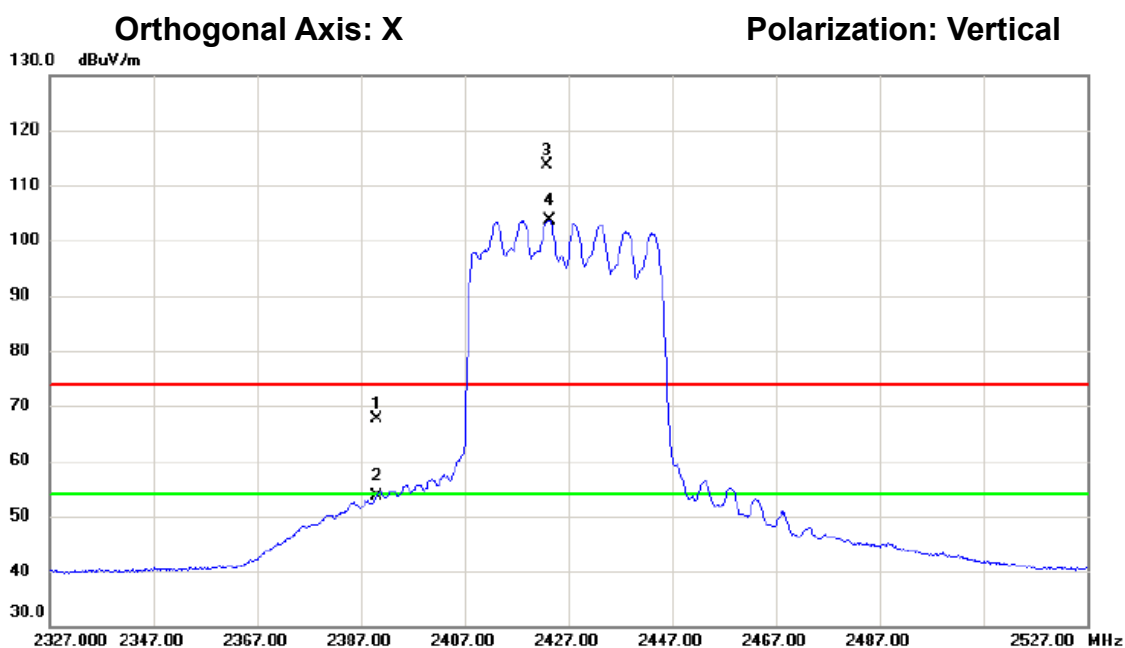

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	74.95	-7.23	67.72	74.00	-6.28	peak	
2		2390.000	60.78	-7.23	53.55	54.00	-0.45	AVG	
3	X	2422.800	120.61	-7.10	113.51	74.00	39.51	peak	主波訊號不予判定
4	*	2423.500	110.76	-7.09	103.67	54.00	49.67	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2427 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

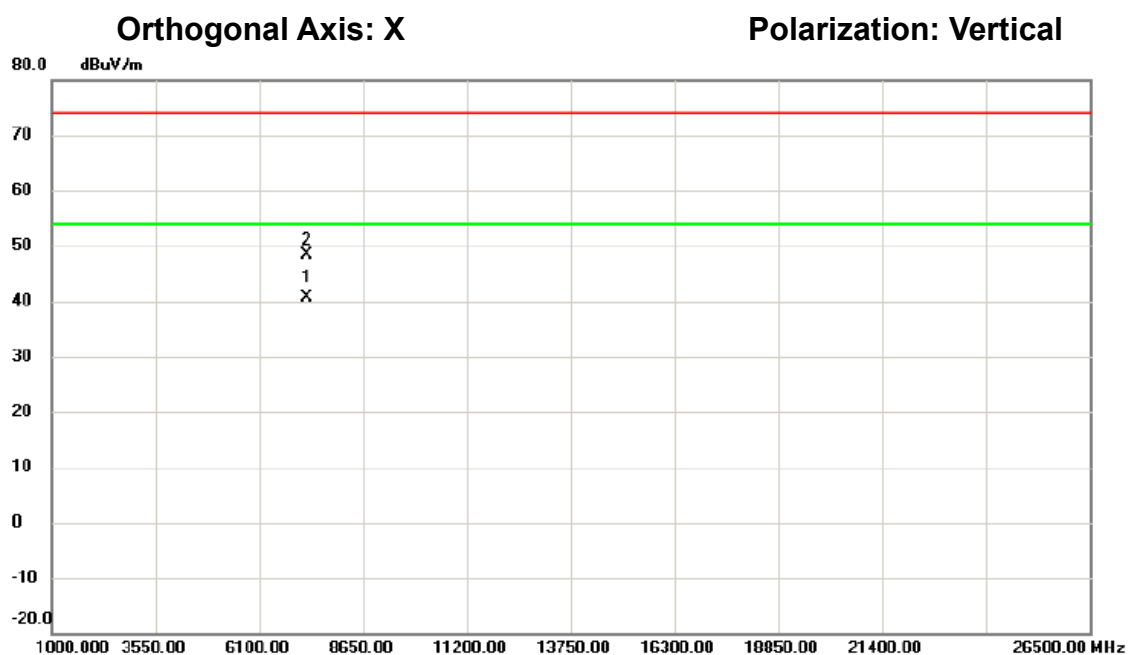

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7281.130	45.64	-5.11	40.53	54.00	-13.47	AVG	
2		7281.210	53.40	-5.11	48.29	74.00	-25.71	peak	

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

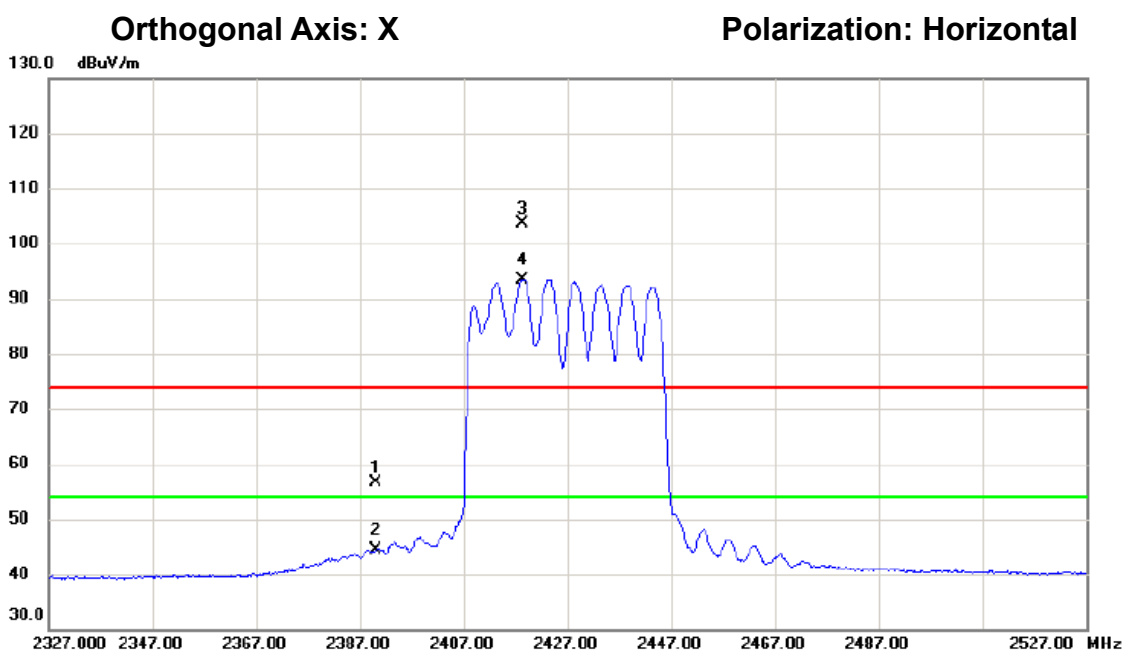

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	63.76	-7.23	56.53	74.00	-17.47	peak	
2		2390.000	51.52	-7.23	44.29	54.00	-9.71	AVG	
3	X	2418.400	110.76	-7.11	103.65	74.00	29.65	peak	主波訊號不予判定
4	*	2418.400	100.59	-7.11	93.48	54.00	39.48	AVG	主波訊號不予判定

測試頻道: IEEE vht40 / 2427 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

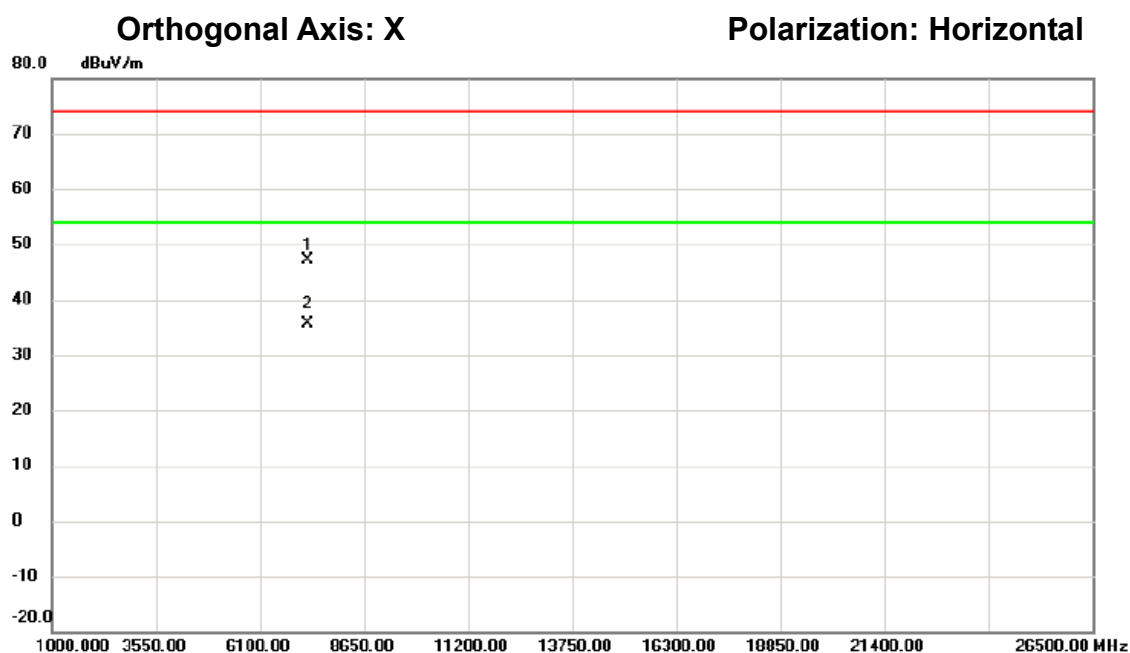

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7276.330	52.22	-5.12	47.10	74.00	-26.90	peak	
2	*	7281.110	40.64	-5.11	35.53	54.00	-18.47	AVG	

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

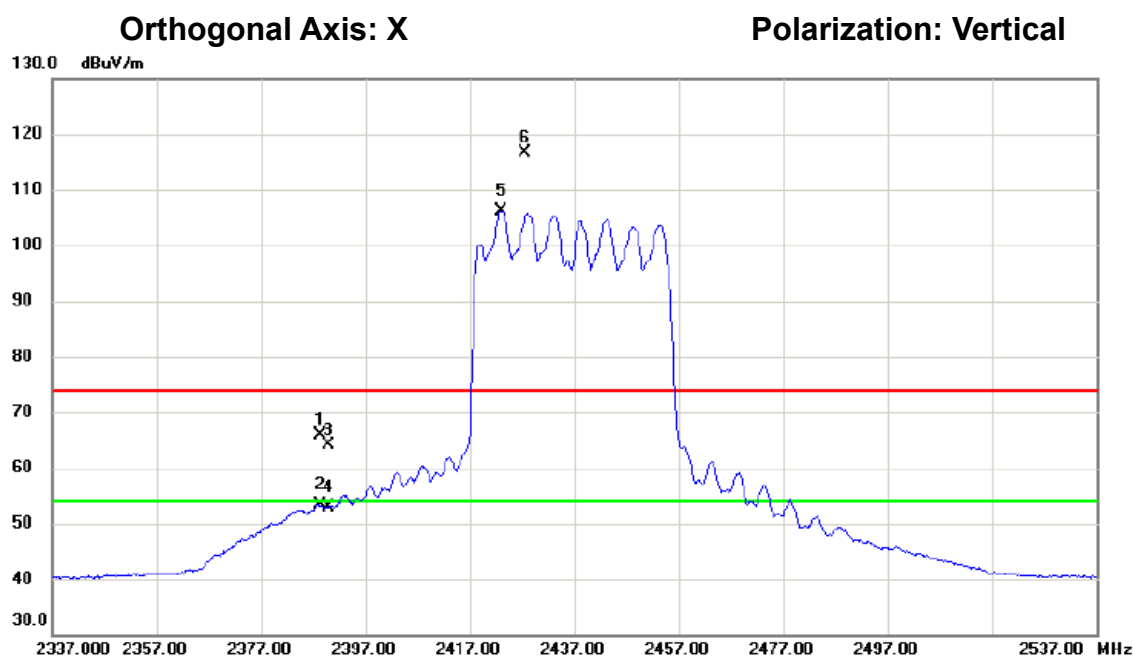

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2388.300	73.05	-7.23	65.82	74.00	-8.18	peak	
2		2388.300	60.58	-7.23	53.35	54.00	-0.65	AVG	
3		2390.000	71.38	-7.23	64.15	74.00	-9.85	peak	
4		2390.000	60.09	-7.23	52.86	54.00	-1.14	AVG	
5	*	2422.900	113.23	-7.10	106.13	54.00	52.13	AVG	主波訊號不予判定
6	X	2427.600	123.74	-7.07	116.67	74.00	42.67	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

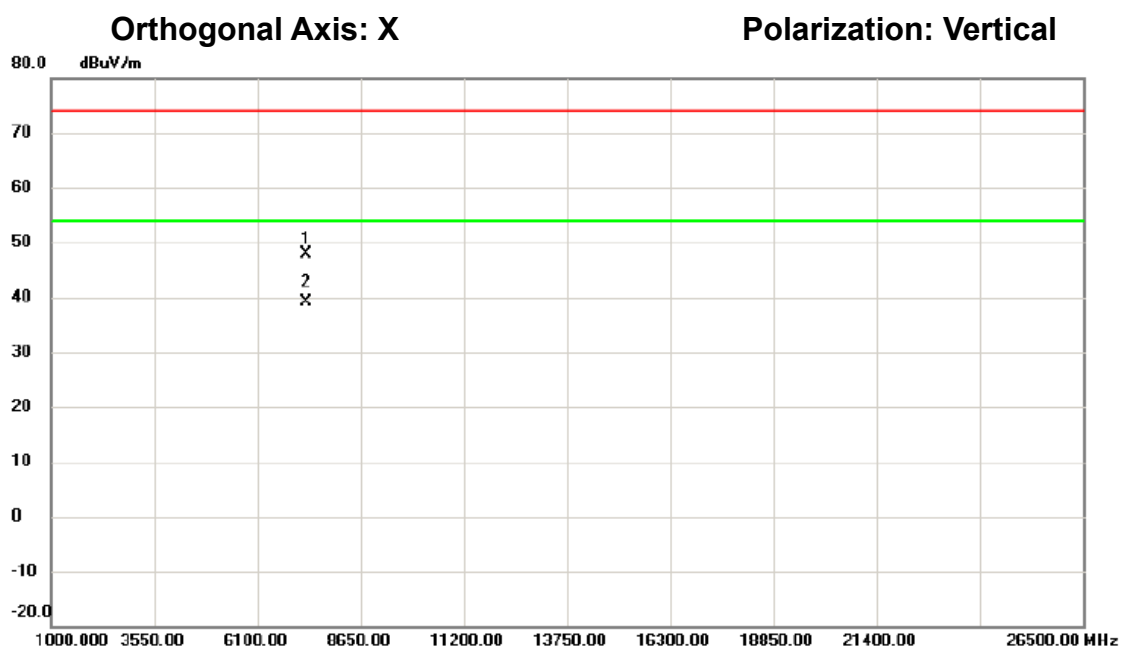

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7310.980	52.98	-4.99	47.99	74.00	-26.01	peak	
2	*	7311.110	44.04	-4.99	39.05	54.00	-14.95	AVG	

測試頻道: IEEE vht40 / 2437 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

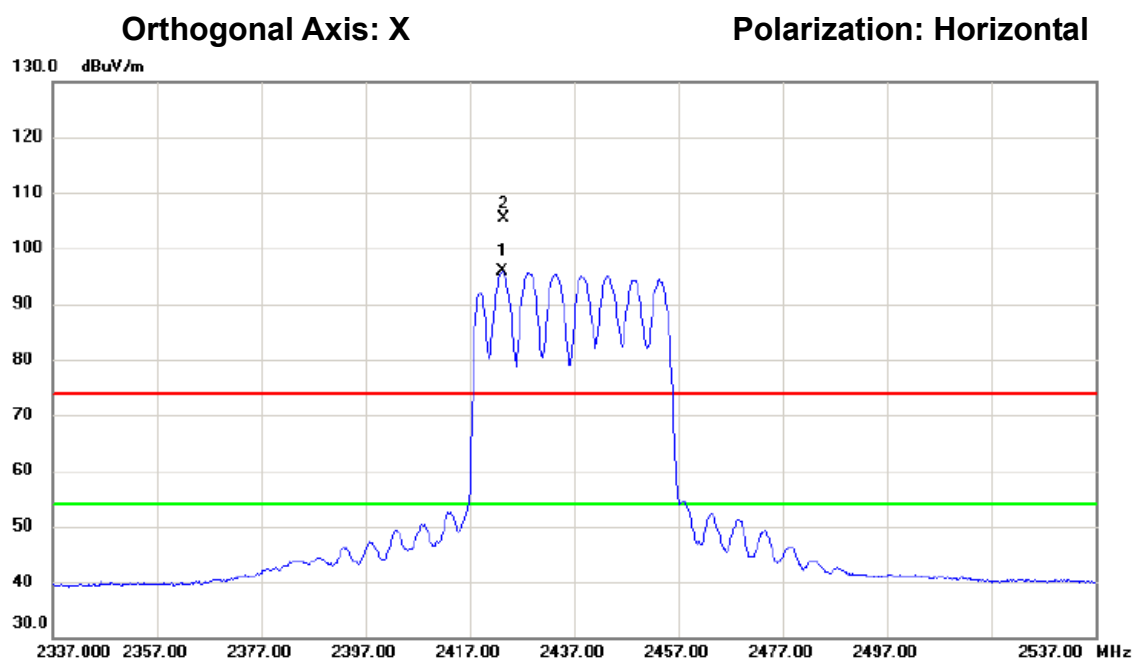

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2423.300	103.01	-7.09	95.92	54.00	41.92	AVG	主波訊號不予判定
2	X	2423.400	112.46	-7.09	105.37	74.00	31.37	peak	主波訊號不予判定

測試頻道: IEEE vht40 / 2437 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

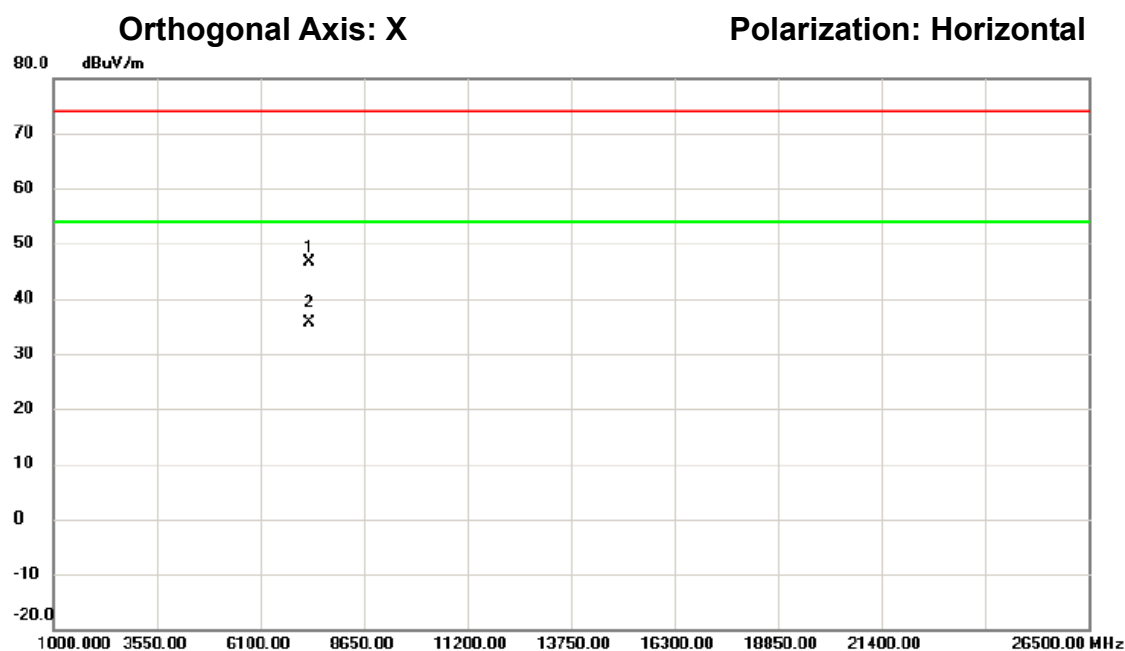


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		7301.050	51.56	-5.03	46.53	74.00	-27.47	peak
2	*	7310.870	40.59	-4.99	35.60	54.00	-18.40	AVG

測試頻道: IEEE vht40 / 2447 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C

測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

Orthogonal Axis: X


Polarization: Vertical

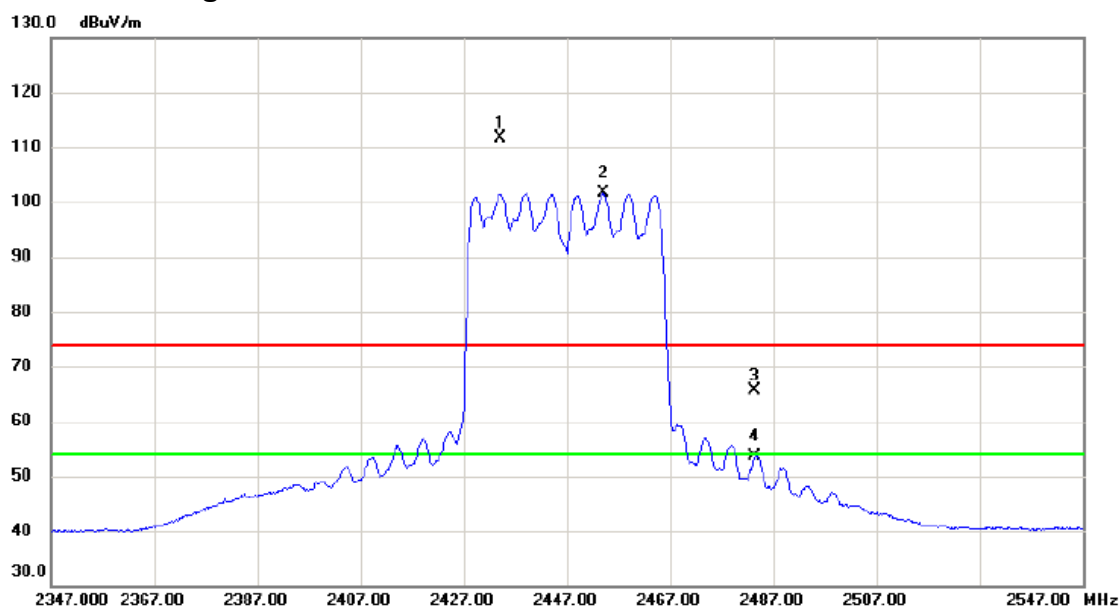

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2434.100	118.63	-7.05	111.58	74.00	37.58	peak	主波訊號不予判定
2	*	2454.000	108.55	-6.96	101.59	54.00	47.59	AVG	主波訊號不予判定
3		2483.500	72.36	-6.85	65.51	74.00	-8.49	peak	
4		2483.500	60.38	-6.85	53.53	54.00	-0.47	AVG	

測試頻道: IEEE vht40 / 2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

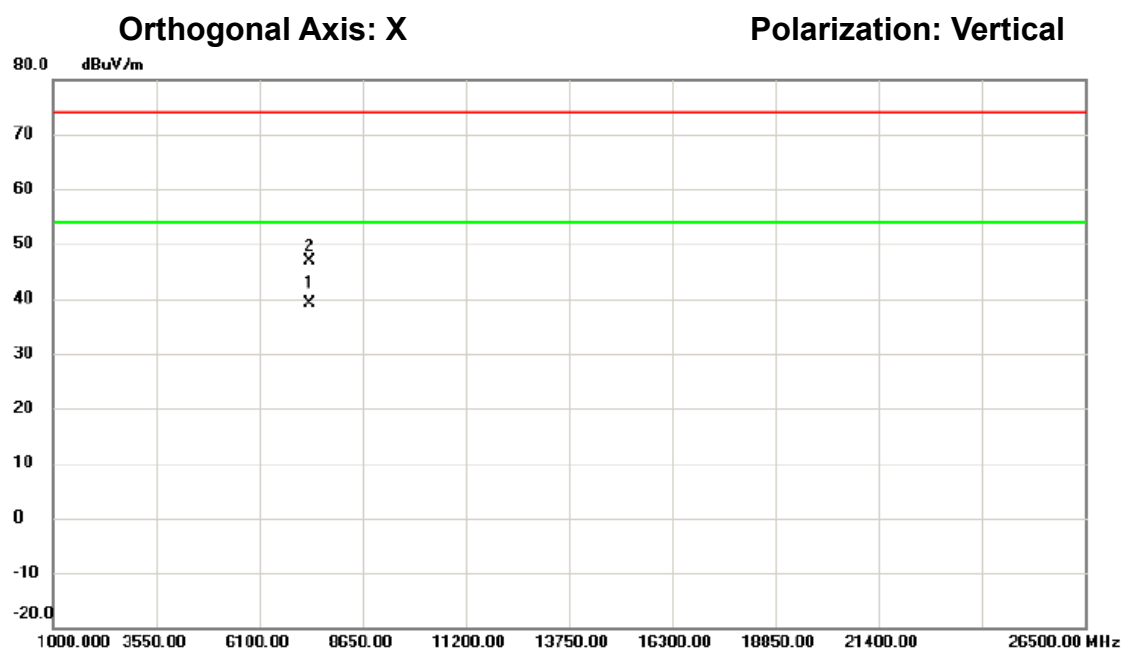

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7341.100	44.06	-4.89	39.17	54.00	-14.83	AVG	
2		7345.090	51.84	-4.87	46.97	74.00	-27.03	peak	

測試頻道: IEEE vht40 / 2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

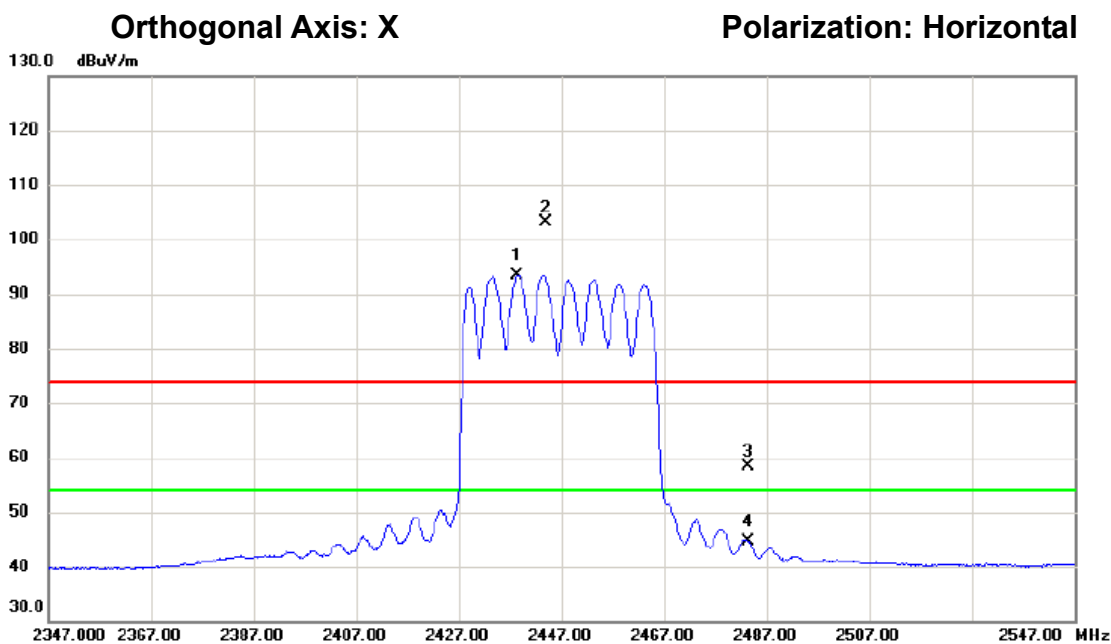

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2438.400	100.43	-7.03	93.40	54.00	39.40	AVG	主波訊號不予判定
2	X	2443.800	110.11	-7.01	103.10	74.00	29.10	peak	主波訊號不予判定
3		2483.500	65.16	-6.85	58.31	74.00	-15.69	peak	
4		2483.500	51.48	-6.85	44.63	54.00	-9.37	AVG	

測試頻道: IEEE vht40 / 2447 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

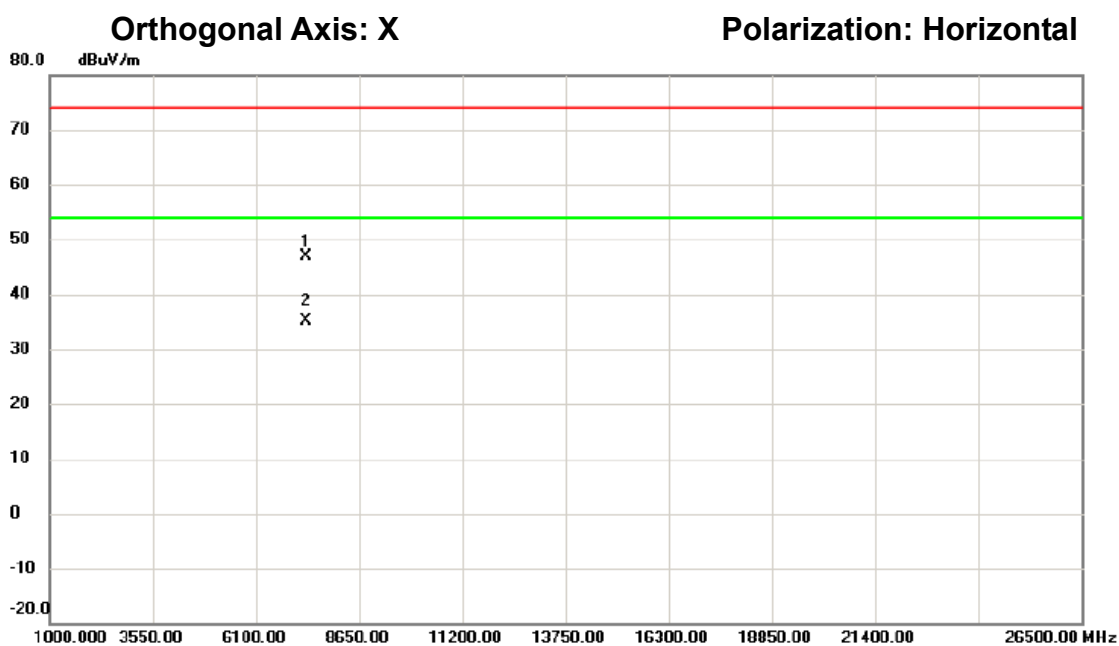

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7333.690	51.74	-4.91	46.83	74.00	-27.17	peak	
2	*	7341.330	40.14	-4.89	35.25	54.00	-18.75	AVG	

測試頻道: IEEE vht40 / 2452 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C


測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

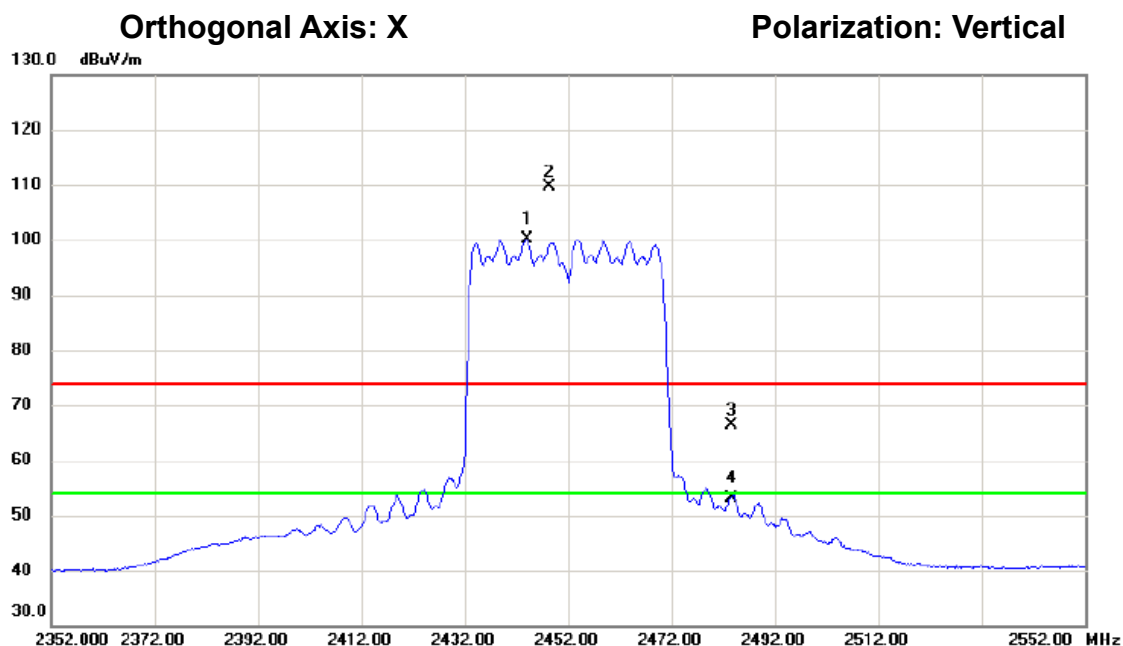

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2444.000	107.07	-7.01	100.06	54.00	46.06	AVG	主波訊號不予判定
2	X	2448.300	116.73	-6.99	109.74	74.00	35.74	peak	主波訊號不予判定
3		2483.500	73.28	-6.85	66.43	74.00	-7.57	peak	
4		2483.500	59.90	-6.85	53.05	54.00	-0.95	AVG	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

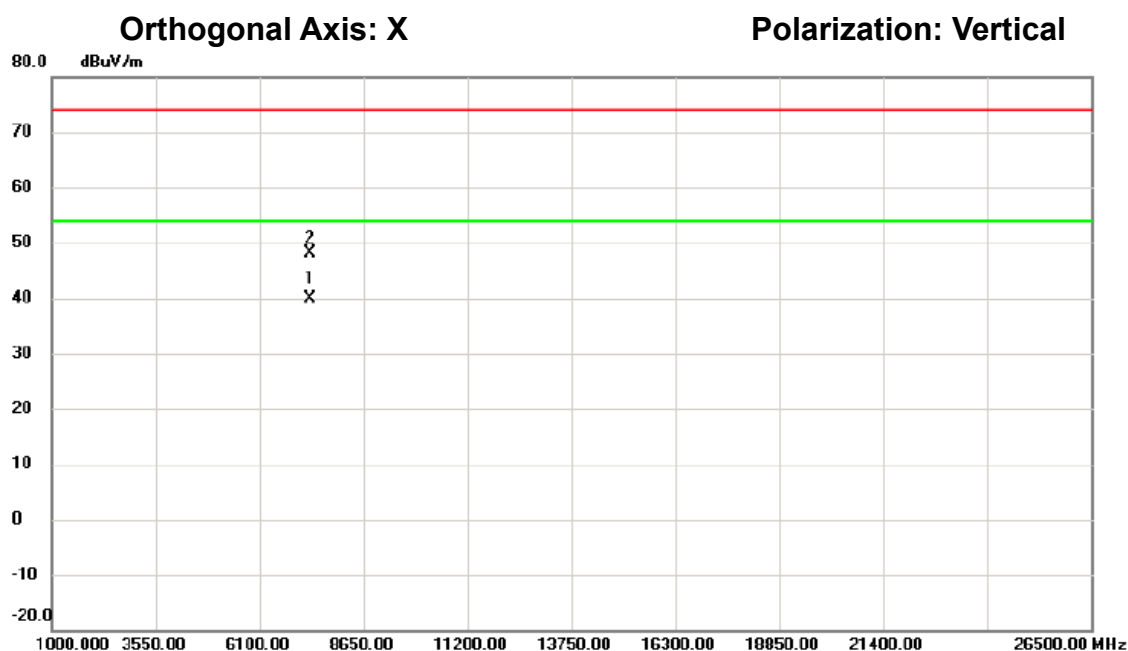

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7356.030	44.81	-4.84	39.97	54.00	-14.03	AVG	
2		7357.160	52.95	-4.82	48.13	74.00	-25.87	peak	

測試頻道: IEEE vht40 / 2452 MHz
 解析頻寬: 1000 kHz / 1000 kHz
 量測天線: Horn Antenna
 檢 測 器: Peak/AV
 環境溫度: 23°C


測試模式: 發射
 視頻頻寬: 1000 kHz / 10 Hz
 測試距離: 3 米
 測試日期: 108/02/28
 環境濕度: 66%

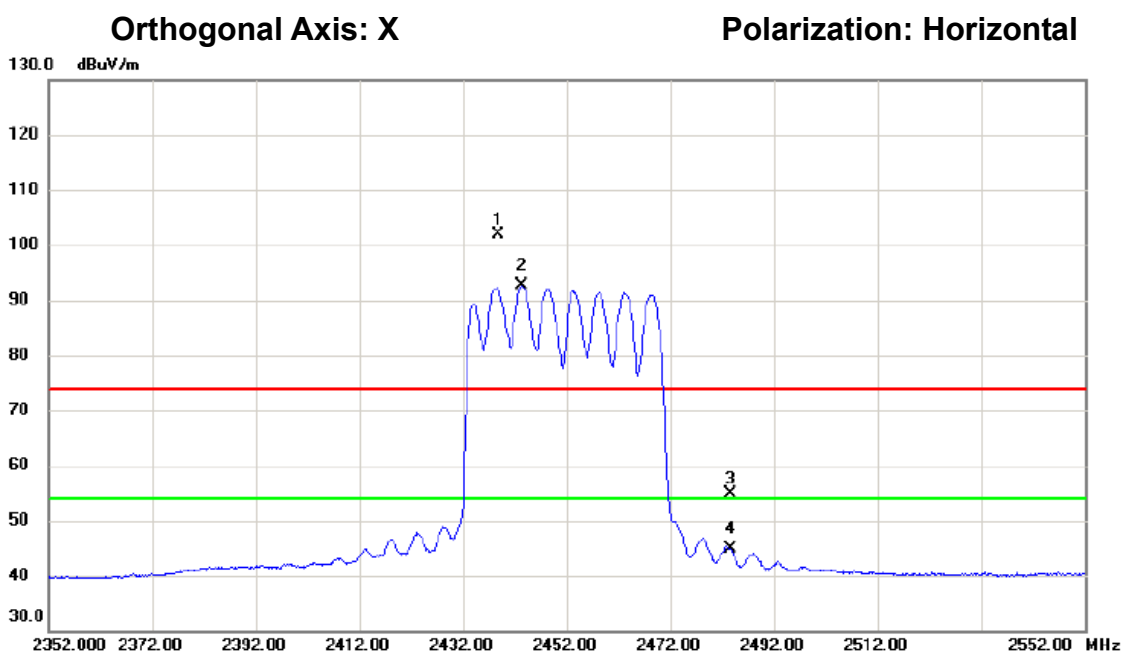

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2438.700	109.03	-7.03	102.00	74.00	28.00	peak	主波訊號不予判定
2	*	2443.400	99.56	-7.01	92.55	54.00	38.55	AVG	主波訊號不予判定
3		2483.500	61.84	-6.85	54.99	74.00	-19.01	peak	
4		2483.500	51.63	-6.85	44.78	54.00	-9.22	AVG	

測試頻道: IEEE vht40 / 2452 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢 測 器: Peak/AV
環境溫度: 23°C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/02/28
環境濕度: 66%

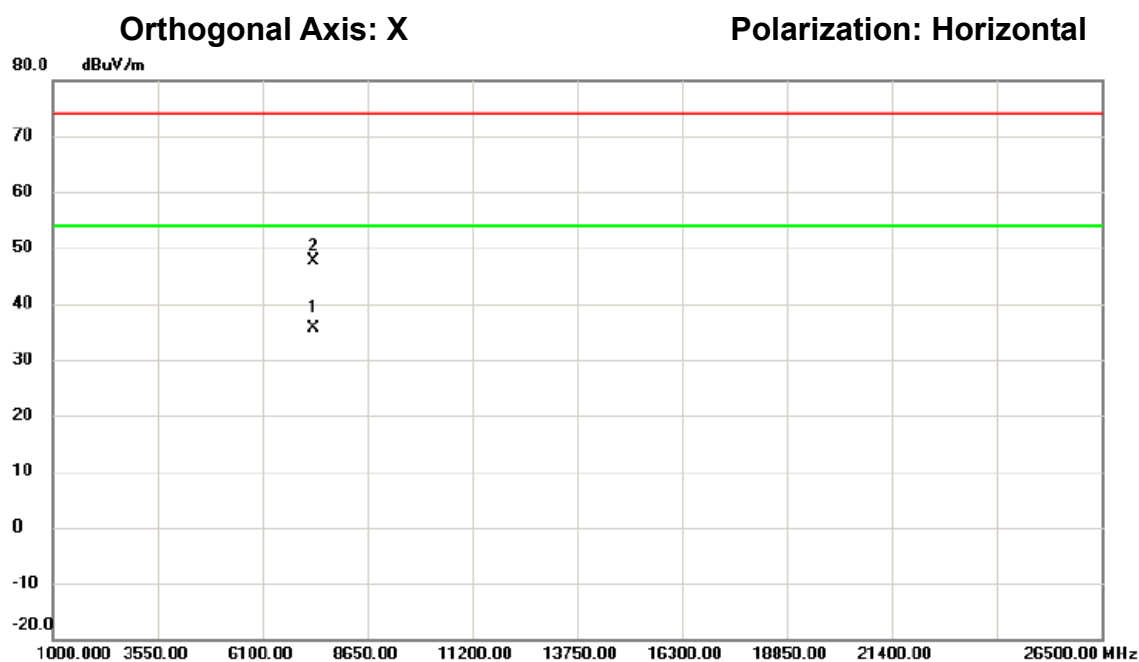

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7355.150	40.59	-4.84	35.75	54.00	-18.25	AVG	
2		7355.940	52.39	-4.84	47.55	74.00	-26.45	peak	

With Beamforming

測試頻道: IEEE 802.11n (HT20) /
2412 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

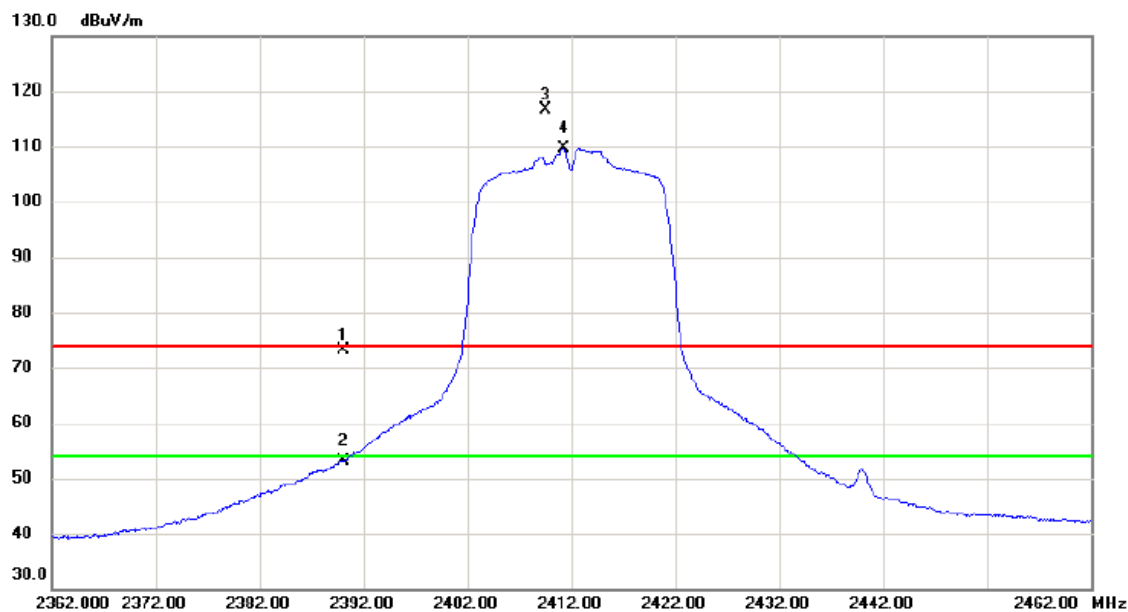

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	80.33	-7.23	73.10	74.00	-0.90	peak	
2		2390.000	60.28	-7.23	53.05	54.00	-0.95	AVG	
3	X	2409.550	123.67	-7.15	116.52	74.00	42.52	peak	主波訊號不予判定
4	*	2411.250	116.76	-7.15	109.61	54.00	55.61	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2412 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

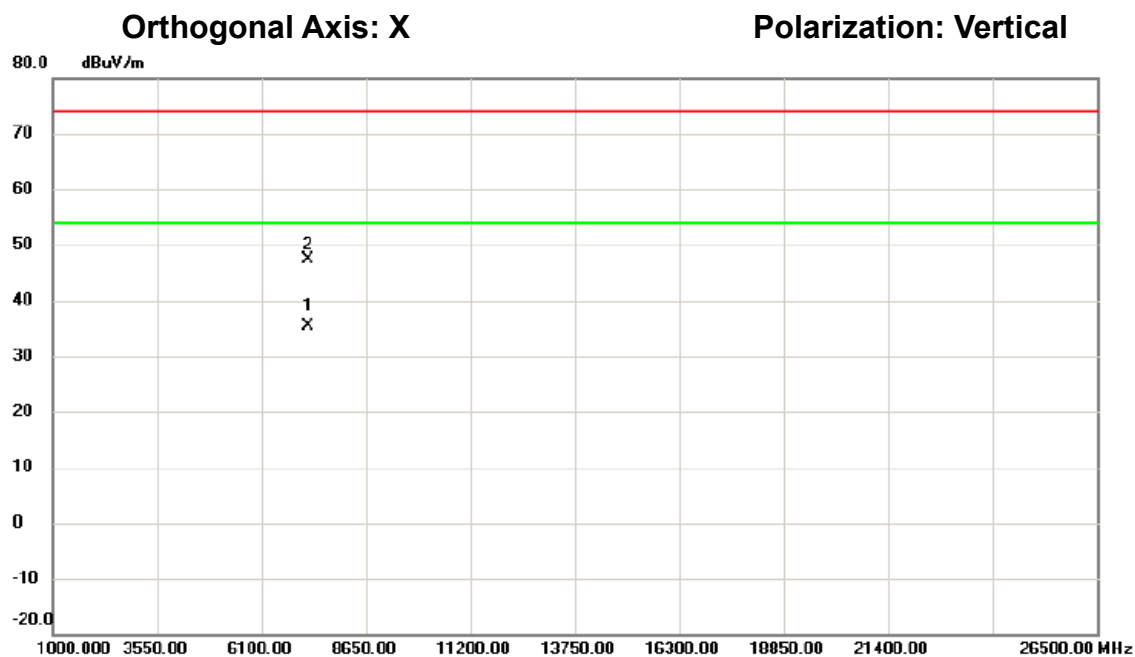

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	7235.880	40.74	-5.26	35.48	54.00	-18.52	AVG	
2		7236.097	52.57	-5.26	47.31	74.00	-26.69	peak	

測試頻道: IEEE 802.11n (HT20) /
2412 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

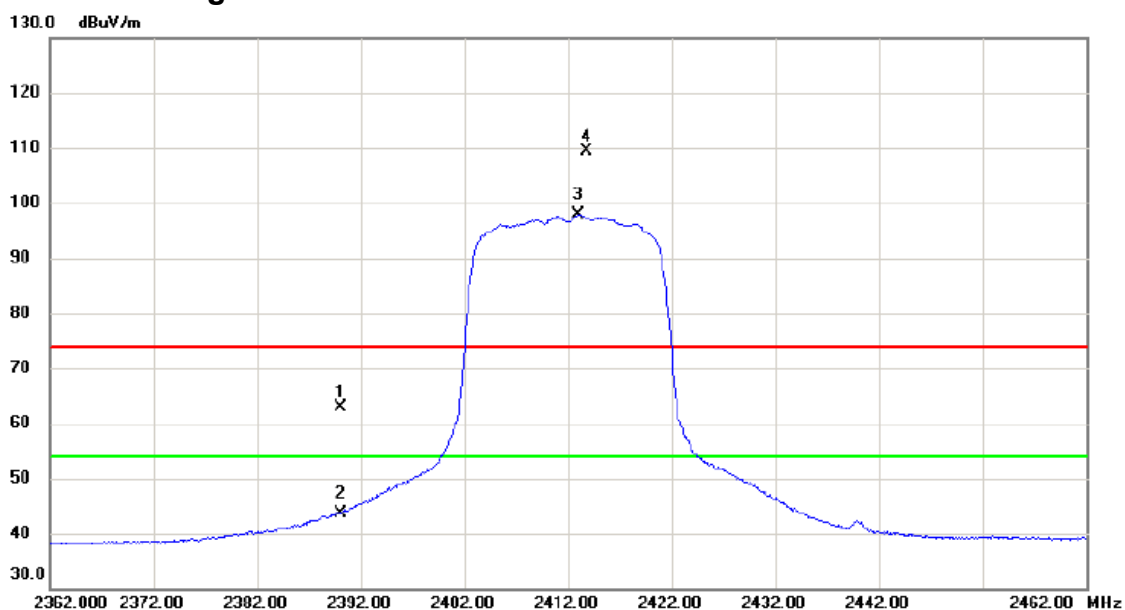

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	70.02	-7.23	62.79	74.00	-11.21	peak	
2		2390.000	50.93	-7.23	43.70	54.00	-10.30	AVG	
3	*	2413.000	105.02	-7.13	97.89	54.00	43.89	AVG	主波訊號不予判定
4	X	2413.750	116.46	-7.13	109.33	74.00	35.33	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2412 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

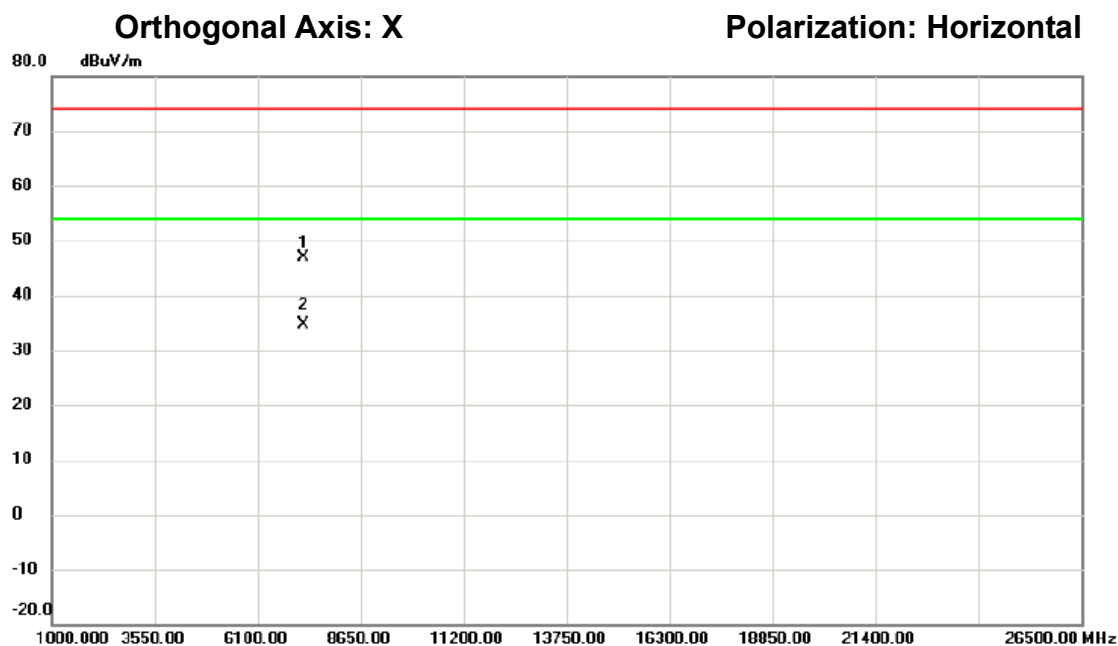

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7235.278	52.10	-5.27	46.83	74.00	-27.17	peak	
2	*	7236.035	39.82	-5.26	34.56	54.00	-19.44	AVG	

測試頻道: IEEE 802.11n (HT20) /
2417 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

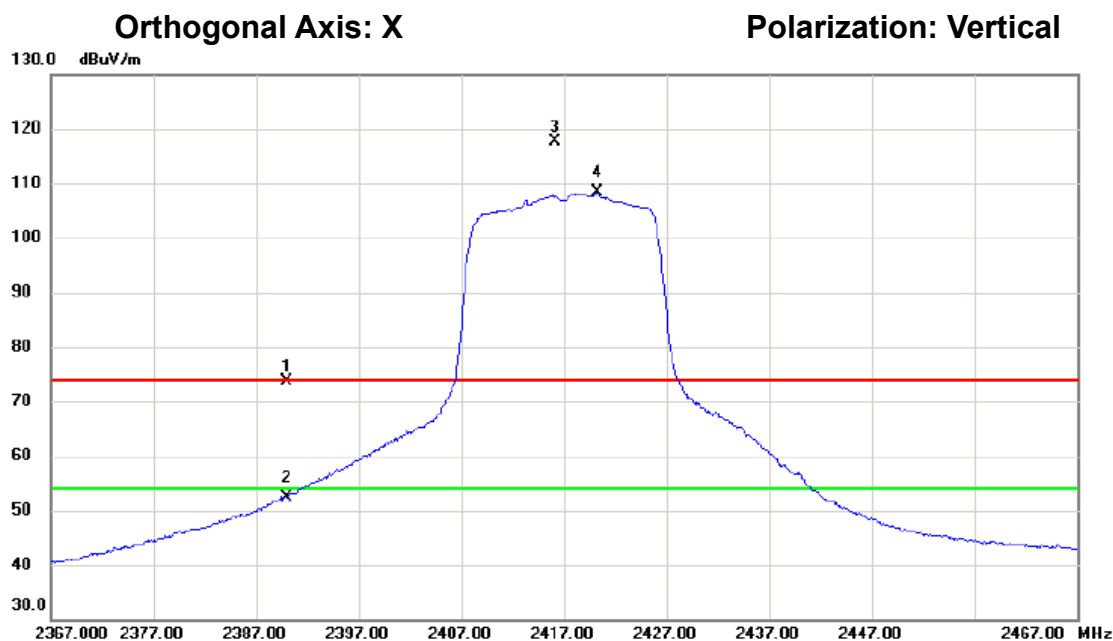

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	80.86	-7.23	73.63	74.00	-0.37	peak	
2		2390.000	59.66	-7.23	52.43	54.00	-1.57	AVG	
3	X	2416.150	124.74	-7.12	117.62	74.00	43.62	peak	主波訊號不予判定
4	*	2420.250	115.41	-7.10	108.31	54.00	54.31	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2417 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

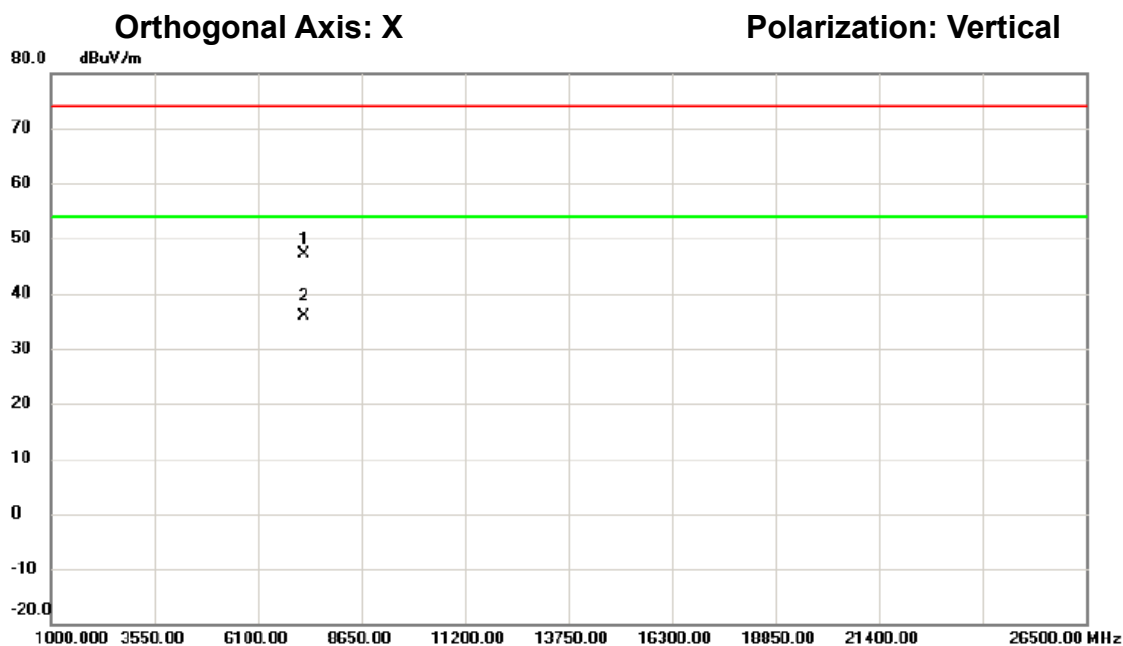

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7250.615	52.34	-5.21	47.13	74.00	-26.87	peak	
2	*	7251.000	41.04	-5.21	35.83	54.00	-18.17	AVG	

測試頻道: IEEE 802.11n (HT20) /
2417 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

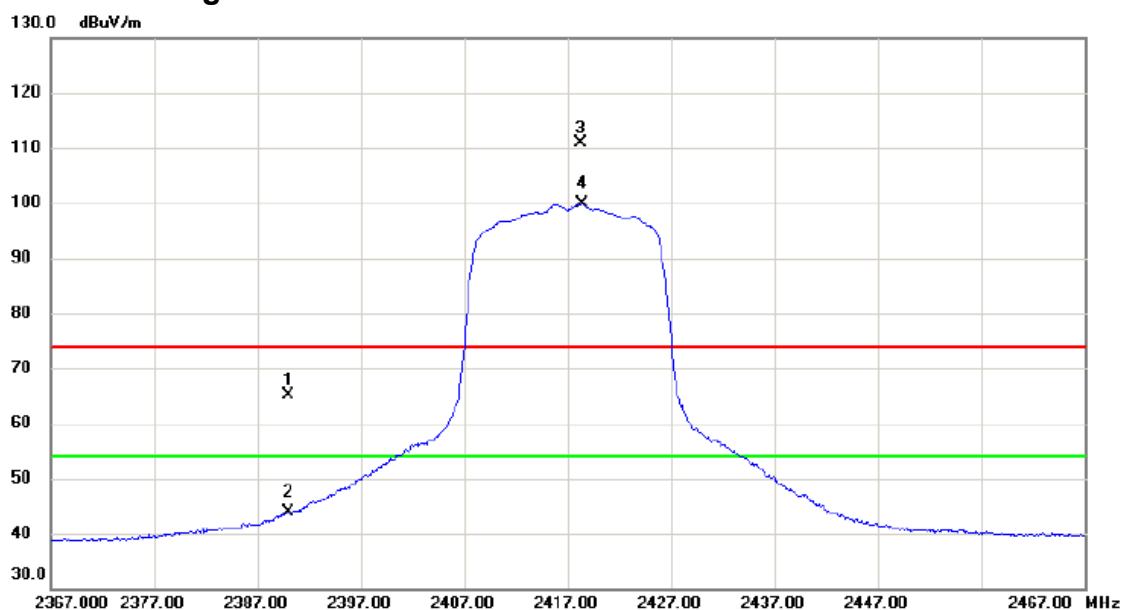

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	72.25	-7.23	65.02	74.00	-8.98	peak	
2		2390.000	51.13	-7.23	43.90	54.00	-10.10	AVG	
3	X	2418.300	118.10	-7.11	110.99	74.00	36.99	peak	主波訊號不予判定
4	*	2418.400	106.90	-7.11	99.79	54.00	45.79	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2417 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

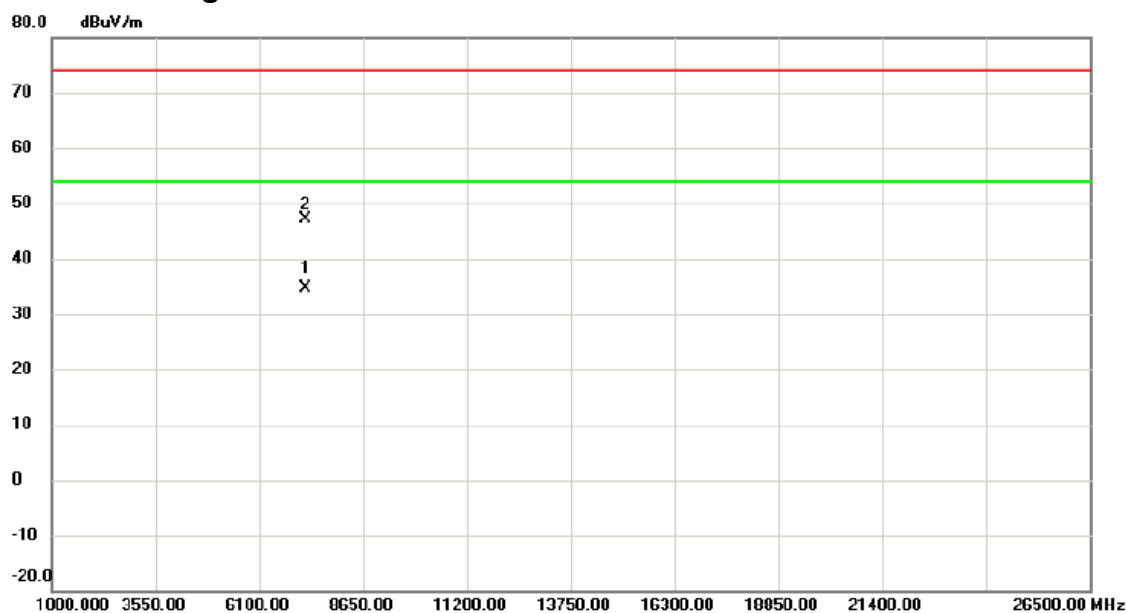

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7250.813	39.85	-5.21	34.64	54.00	-19.36	AVG	
2		7251.033	52.22	-5.21	47.01	74.00	-26.99	peak	

測試頻道: IEEE 802.11n (HT20) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

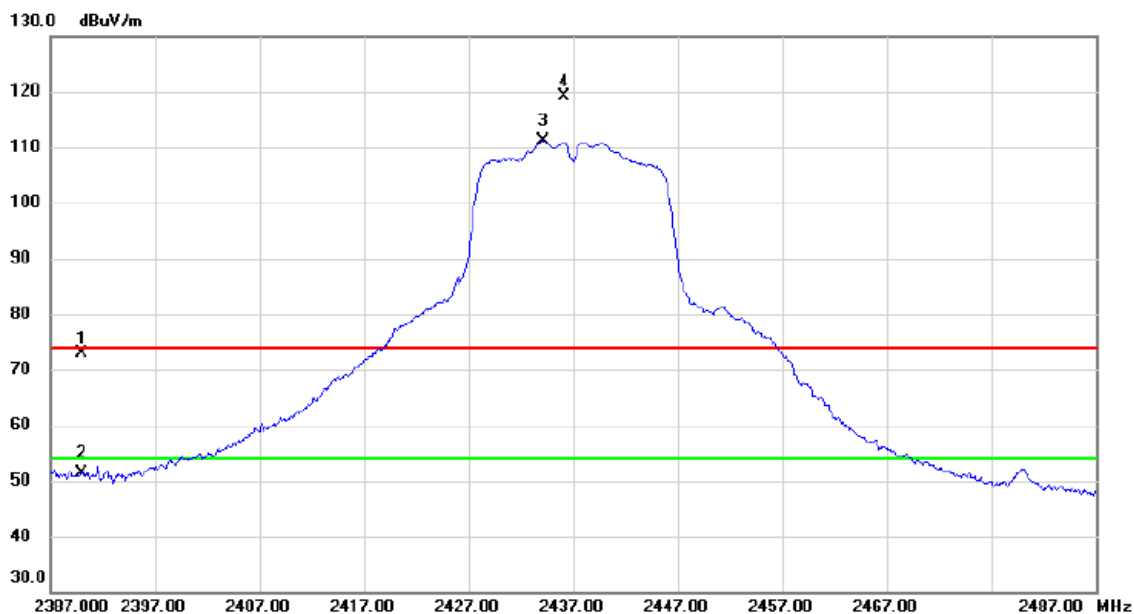

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	80.13	-7.23	72.90	74.00	-1.10	peak	
2		2390.000	58.59	-7.23	51.36	54.00	-2.64	AVG	
3	*	2434.200	118.24	-7.05	111.19	54.00	57.19	AVG	主波訊號不予判定
4	X	2436.200	126.16	-7.04	119.12	74.00	45.12	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

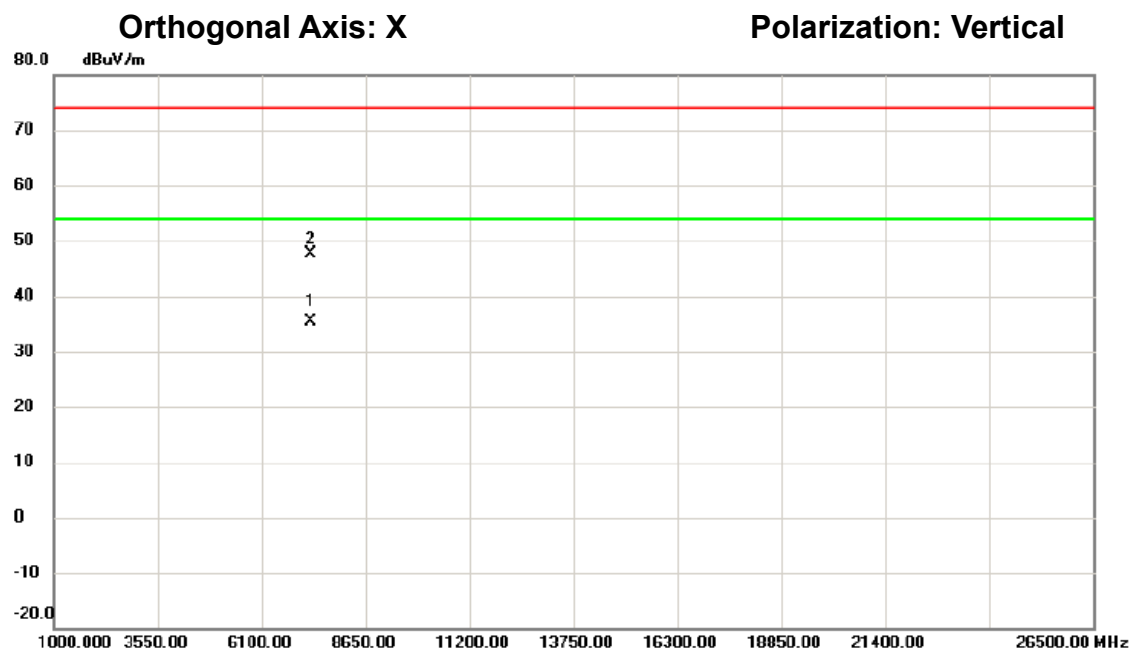

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7310.778	40.26	-4.99	35.27	54.00	-18.73	AVG	
2		7311.382	52.55	-4.99	47.56	74.00	-26.44	peak	

測試頻道: IEEE 802.11n (HT20) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

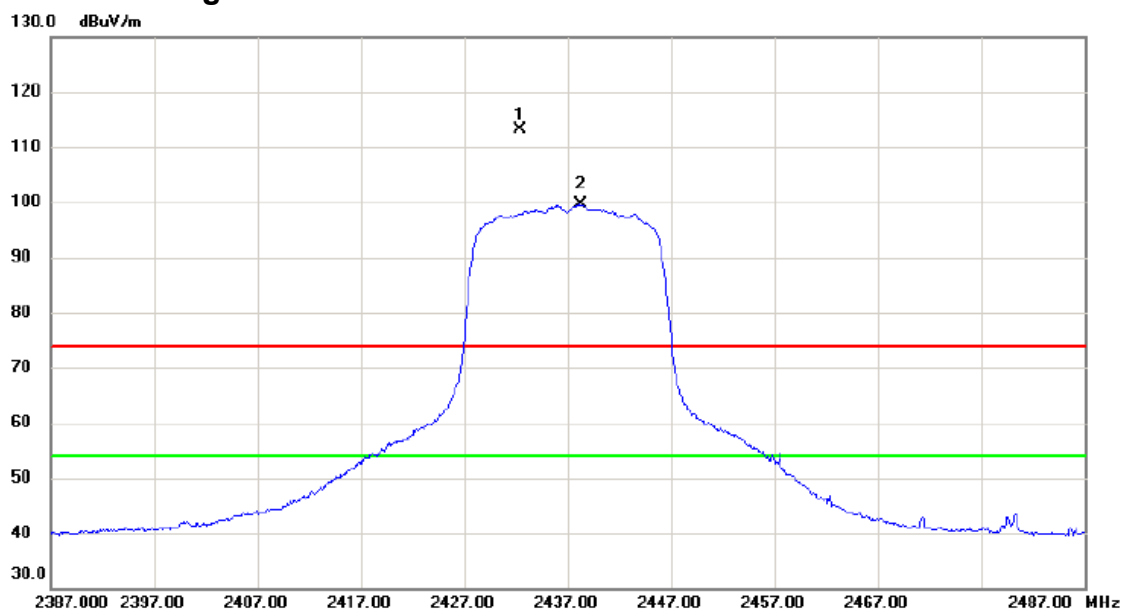

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2432.450	120.11	-7.06	113.05	74.00	39.05	peak	主波訊號不予判定
2	*	2438.250	106.64	-7.03	99.61	54.00	45.61	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT20) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

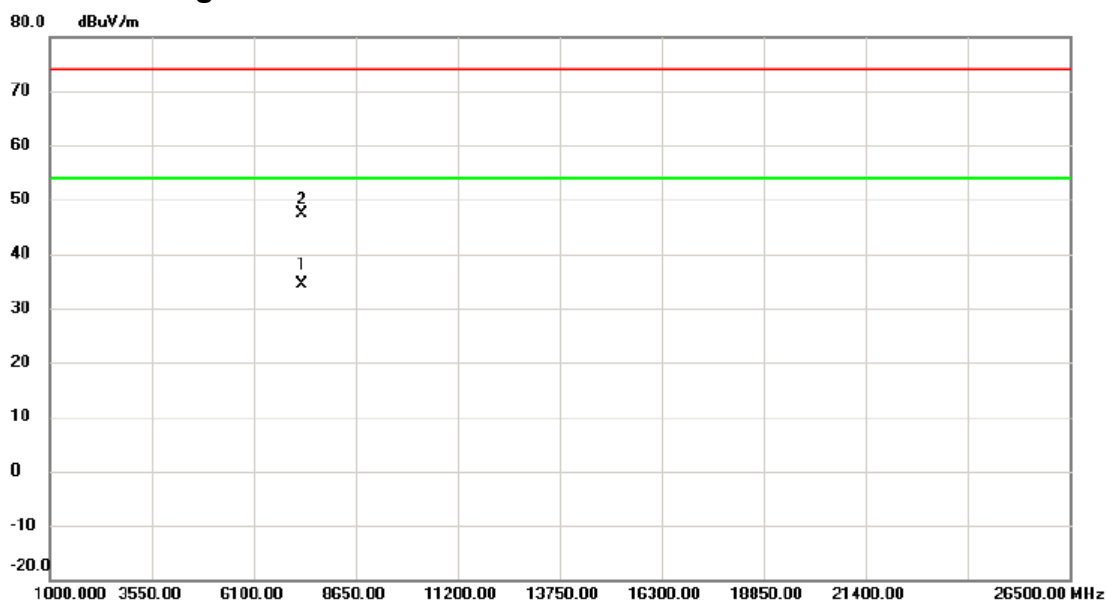

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7310.887	39.38	-4.99	34.39	54.00	-19.61	AVG	
2		7310.938	52.33	-4.99	47.34	74.00	-26.66	peak	

測試頻道: IEEE 802.11n (HT20) /
2457 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

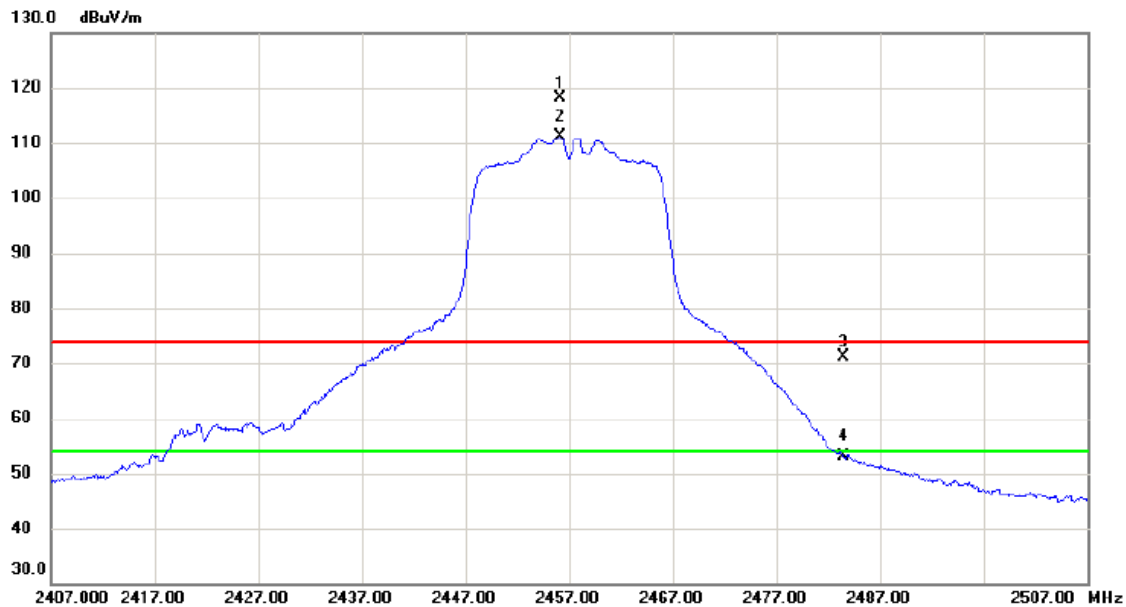

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2456.100	125.14	-6.95	118.19	74.00	44.19	peak	主波訊號不予判定
2	*	2456.200	118.01	-6.95	111.06	54.00	57.06	AVG	主波訊號不予判定
3		2483.500	78.10	-6.85	71.25	74.00	-2.75	peak	
4		2483.500	60.00	-6.85	53.15	54.00	-0.85	AVG	

測試頻道: IEEE 802.11n (HT20) /
2457 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

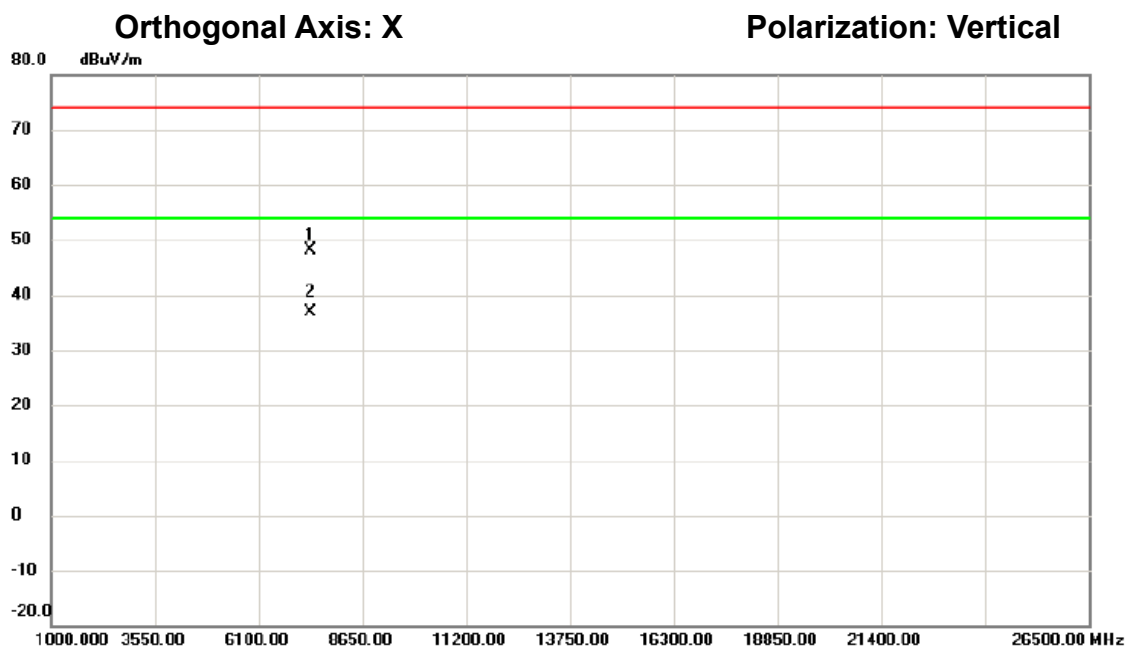

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7370.797	52.82	-4.77	48.05	74.00	-25.95	peak	
2	*	7371.050	41.58	-4.77	36.81	54.00	-17.19	AVG	

測試頻道: IEEE 802.11n (HT20) /
2457 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

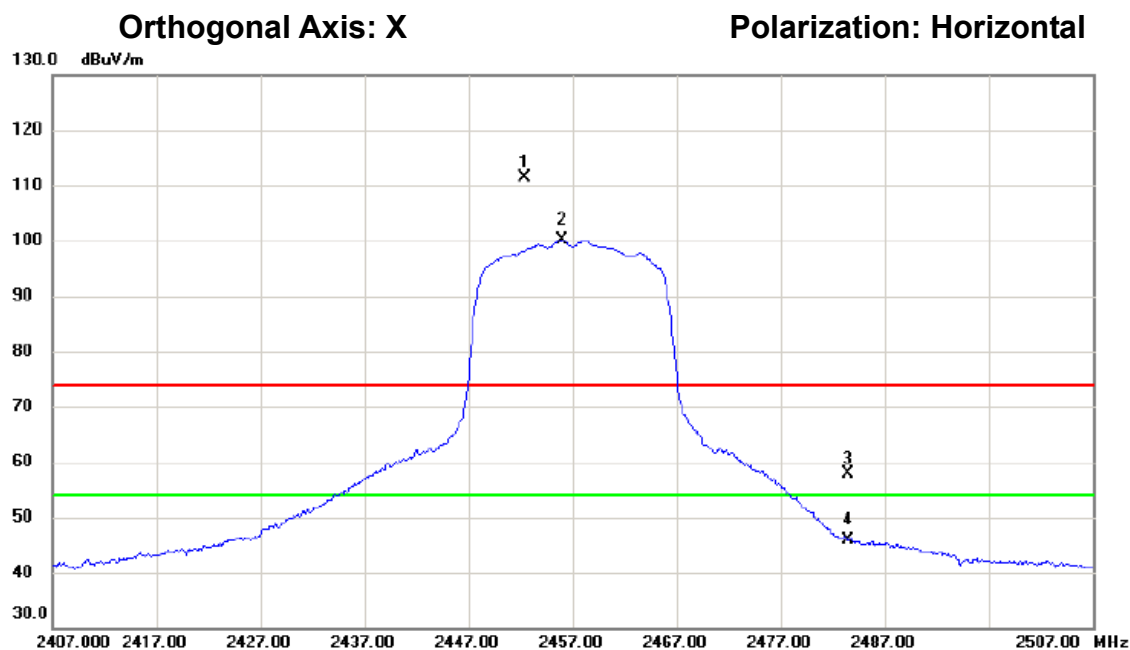

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2452.400	118.25	-6.98	111.27	74.00	37.27	peak	主波訊號不予判定
2	*	2456.050	107.05	-6.95	100.10	54.00	46.10	AVG	主波訊號不予判定
3		2483.500	64.69	-6.85	57.84	74.00	-16.16	peak	
4		2483.500	52.79	-6.85	45.94	54.00	-8.06	AVG	

測試頻道: IEEE 802.11n (HT20) /
2457 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

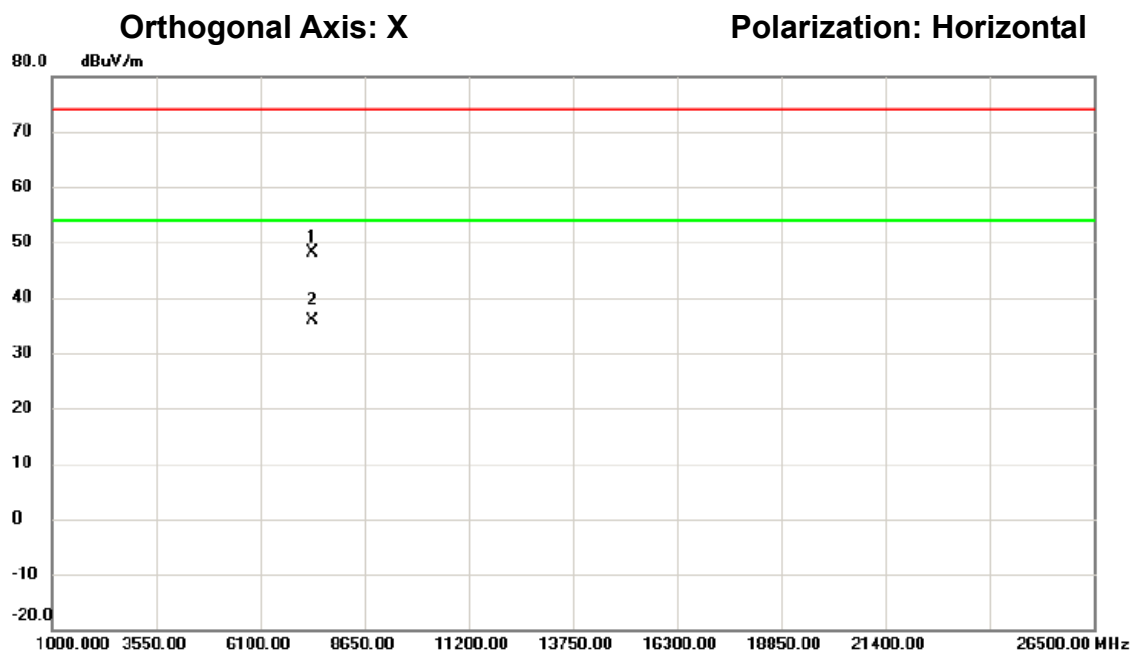

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		7370.910	52.83	-4.77	48.06	74.00	-25.94	peak
2	*	7371.083	40.70	-4.77	35.93	54.00	-18.07	AVG

測試頻道: IEEE 802.11n (HT20) /
2462 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

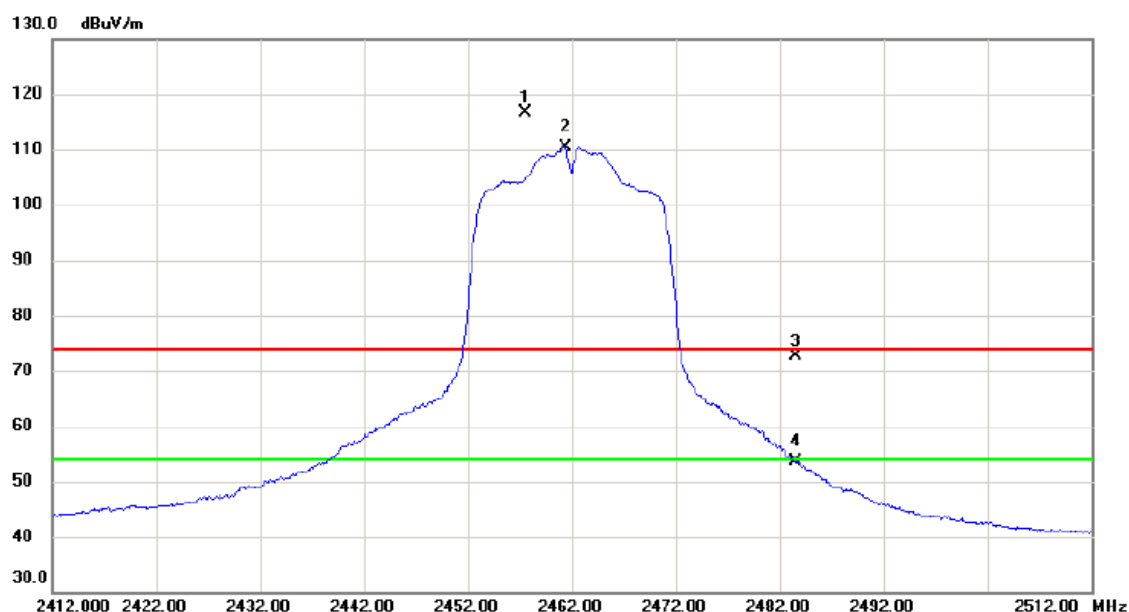

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2457.550	123.61	-6.95	116.66	74.00	42.66	peak	主波訊號不予判定
2	*	2461.350	117.27	-6.94	110.33	54.00	56.33	AVG	主波訊號不予判定
3		2483.500	79.47	-6.85	72.62	74.00	-1.38	peak	
4		2483.500	60.49	-6.85	53.64	54.00	-0.36	AVG	

測試頻道: IEEE 802.11n (HT20) /
2462 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

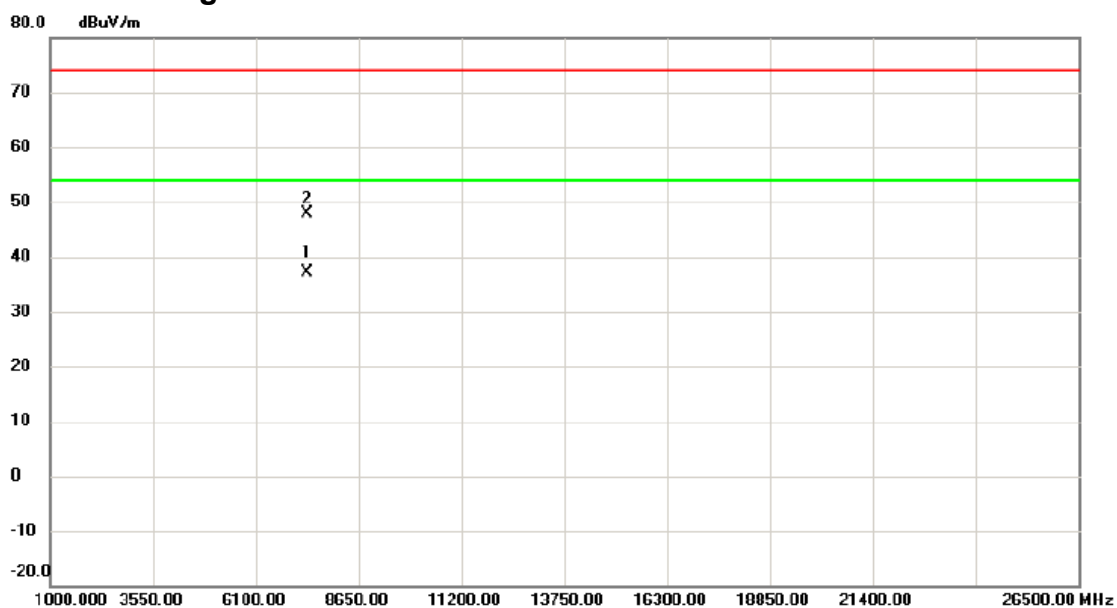

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7385.938	41.95	-4.72	37.23	54.00	-16.77	AVG	
2		7386.030	52.57	-4.72	47.85	74.00	-26.15	peak	

測試頻道: IEEE 802.11n (HT20) /
2462 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

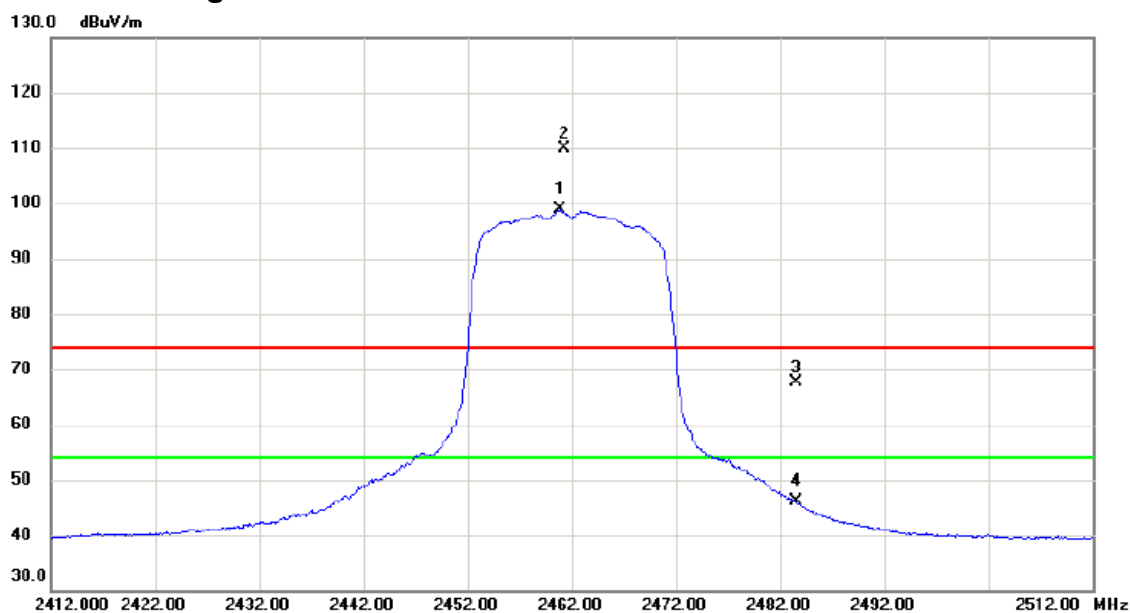

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2460.850	105.72	-6.94	98.78	54.00	44.78	AVG	主波訊號不予判定
2	X	2461.250	116.89	-6.94	109.95	74.00	35.95	peak	主波訊號不予判定
3		2483.500	74.47	-6.85	67.62	74.00	-6.38	peak	
4		2483.500	52.88	-6.85	46.03	54.00	-7.97	AVG	

測試頻道: IEEE 802.11n (HT20) /
2462 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

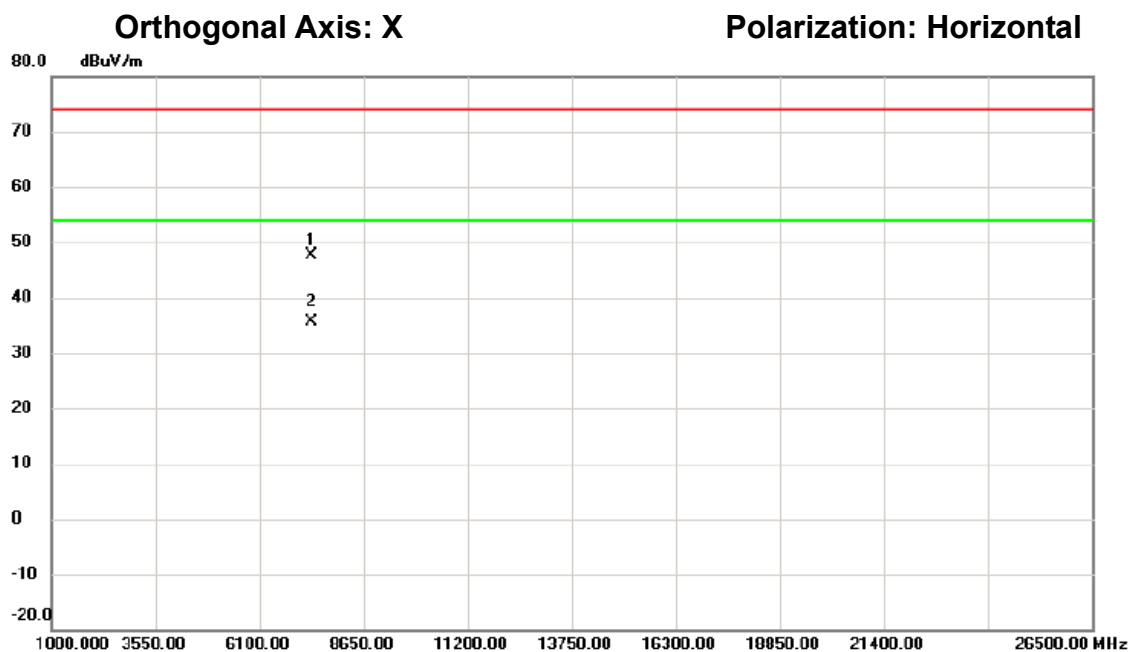

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7386.090	52.32	-4.72	47.60	74.00	-26.40	peak	
2	*	7386.130	40.44	-4.72	35.72	54.00	-18.28	AVG	

測試頻道: IEEE 802.11n (HT40) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

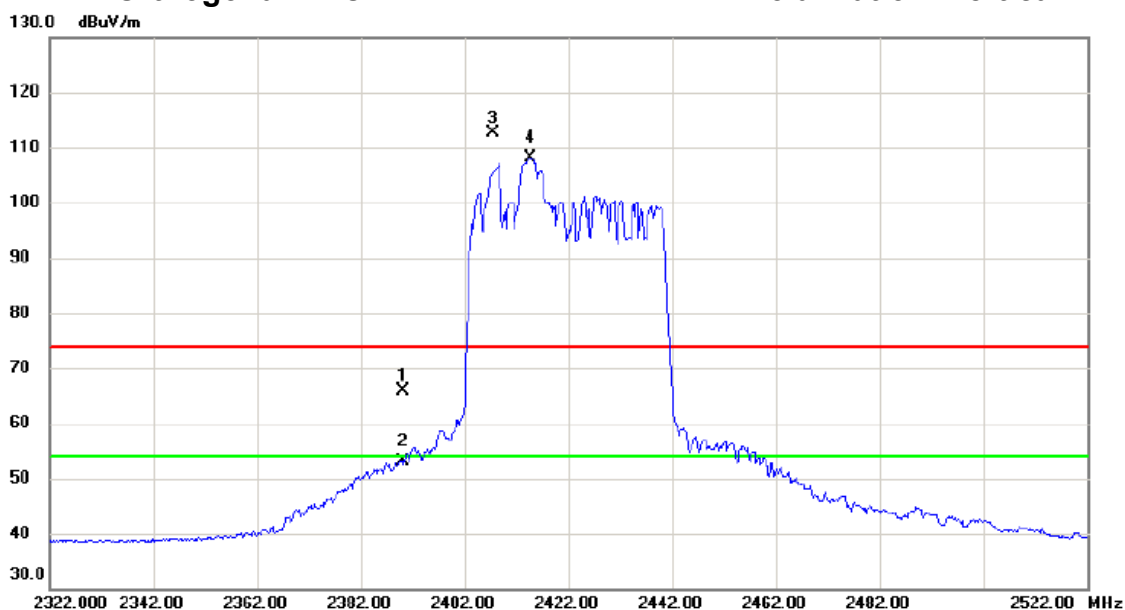

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	73.06	-7.23	65.83	74.00	-8.17	peak	
2		2390.000	60.28	-7.23	53.05	54.00	-0.95	AVG	
3	X	2407.600	119.79	-7.16	112.63	74.00	38.63	peak	主波訊號不予判定
4	*	2414.700	115.28	-7.13	108.15	54.00	54.15	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

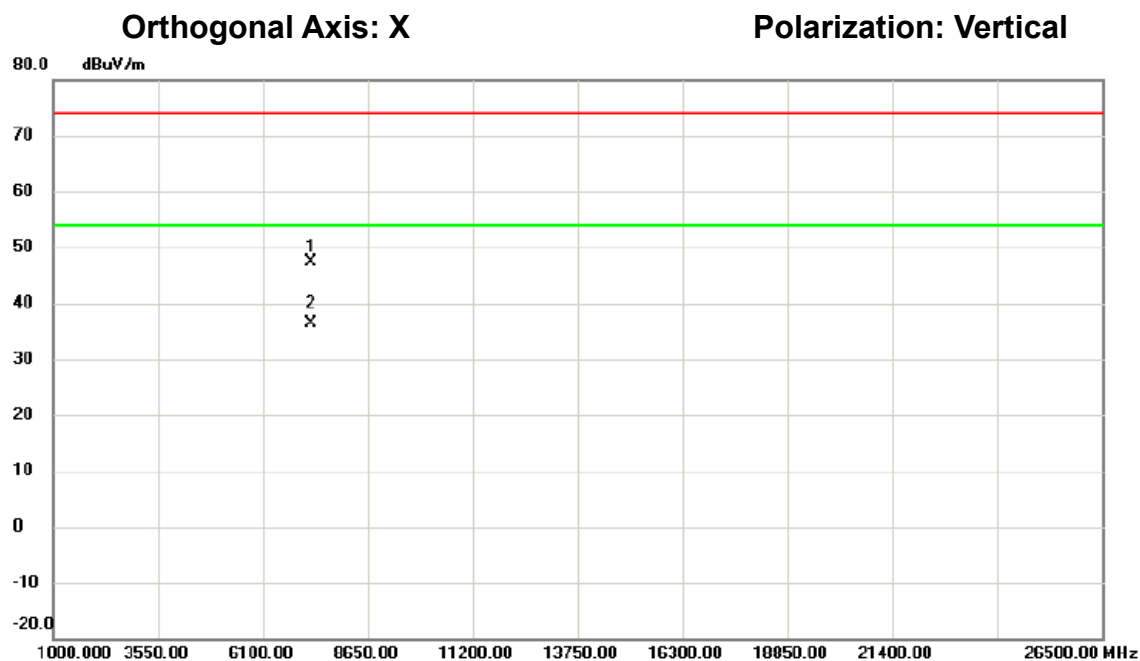

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7264.580	52.43	-5.17	47.26	74.00	-26.74	peak	
2	*	7266.113	41.51	-5.16	36.35	54.00	-17.65	AVG	

測試頻道: IEEE 802.11n (HT40) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

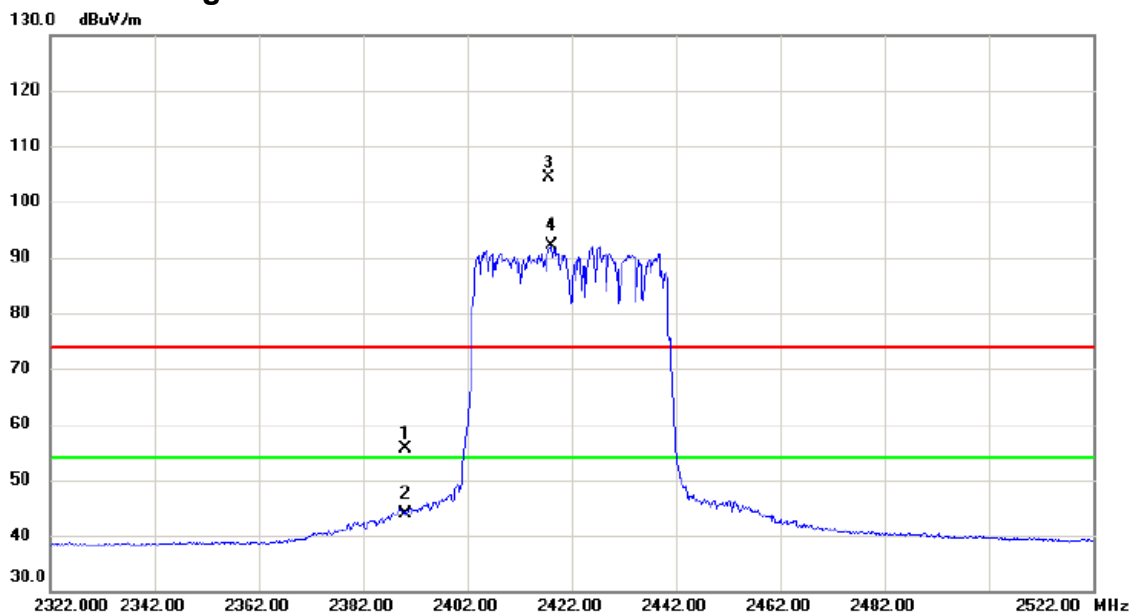

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	62.74	-7.23	55.51	74.00	-18.49	peak	
2		2390.000	51.10	-7.23	43.87	54.00	-10.13	AVG	
3	X	2417.500	111.51	-7.11	104.40	74.00	30.40	peak	主波訊號不予判定
4	*	2418.200	99.21	-7.11	92.10	54.00	38.10	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2422 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

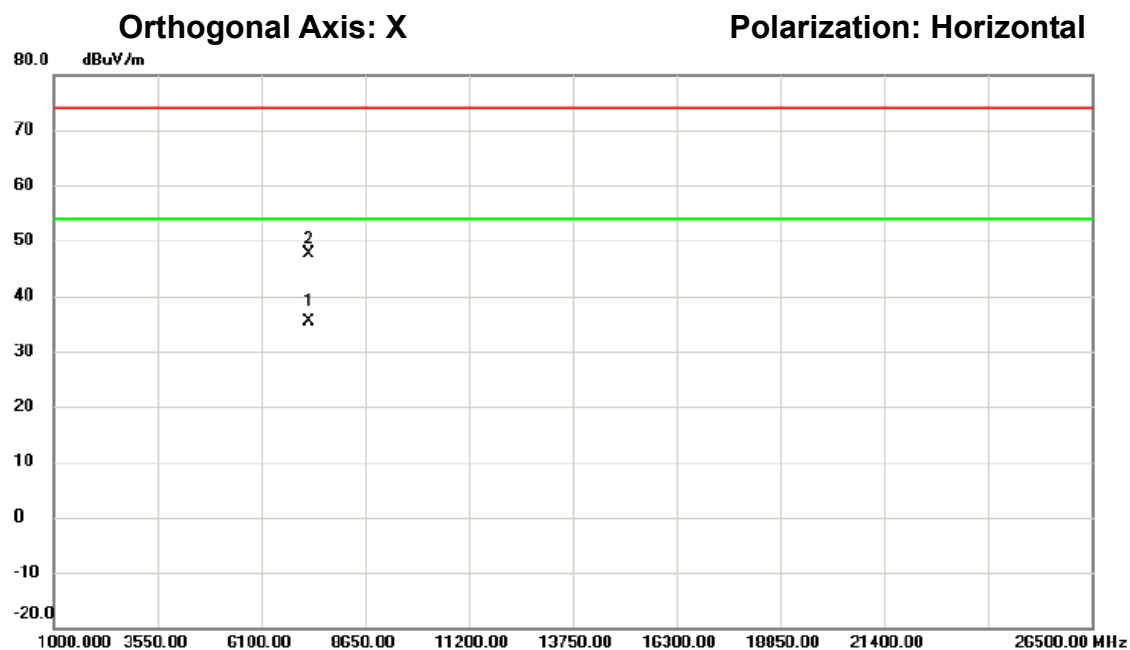

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7266.023	40.66	-5.16	35.50	54.00	-18.50	AVG	
2		7266.435	52.88	-5.16	47.72	74.00	-26.28	peak	

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

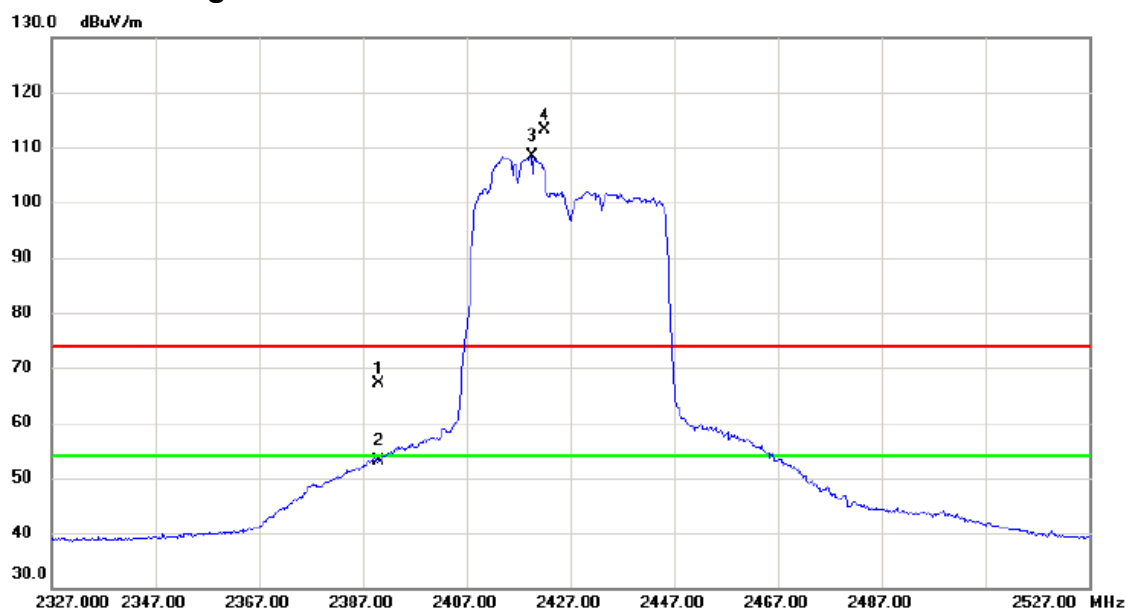

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	74.28	-7.23	67.05	74.00	-6.95	peak	
2		2390.000	60.33	-7.23	53.10	54.00	-0.90	AVG	
3	*	2419.600	115.44	-7.11	108.33	54.00	54.33	AVG	主波訊號不予判定
4	X	2422.200	120.29	-7.10	113.19	74.00	39.19	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

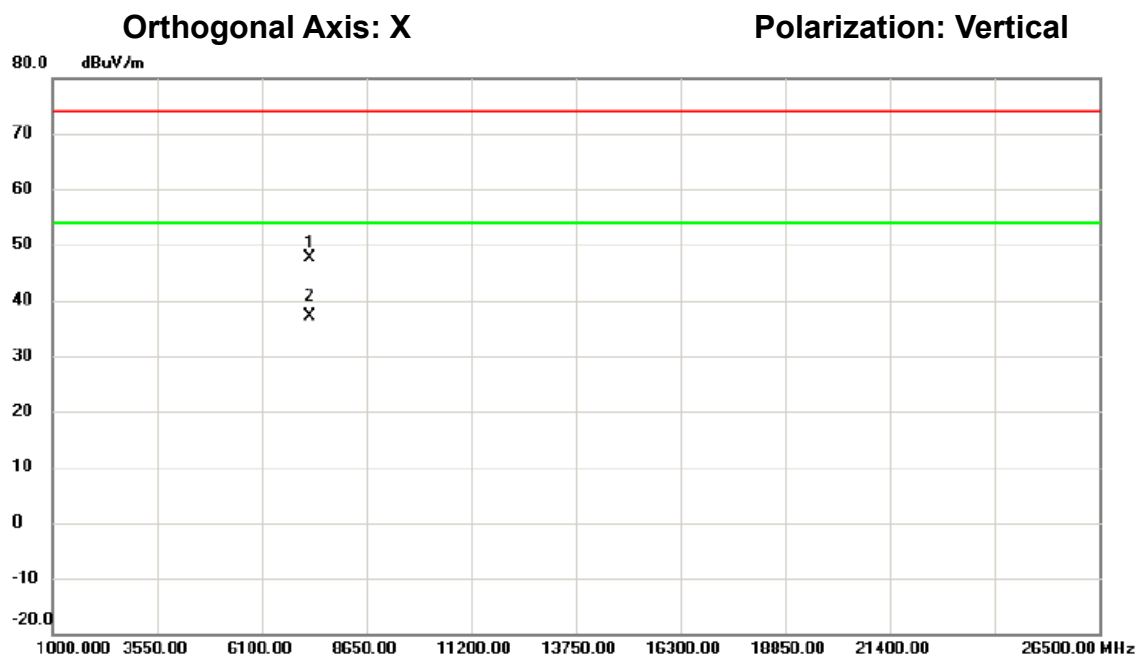

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7281.087	52.74	-5.11	47.63	74.00	-26.37	peak	
2	*	7281.193	42.27	-5.11	37.16	54.00	-16.84	AVG	

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

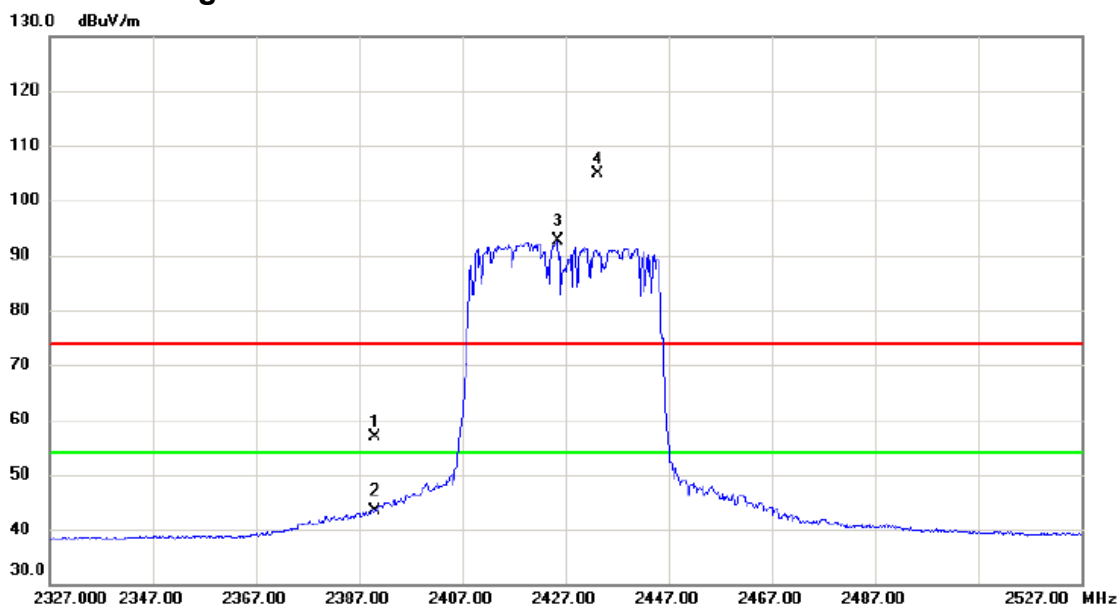

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2390.000	64.14	-7.23	56.91	74.00	-17.09	peak	
2		2390.000	50.52	-7.23	43.29	54.00	-10.71	AVG	
3	*	2425.400	99.70	-7.09	92.61	54.00	38.61	AVG	主波訊號不予判定
4	X	2433.300	111.90	-7.06	104.84	74.00	30.84	peak	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2427 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna


測試距離: 3 米

檢 測 器: Peak/AV

測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

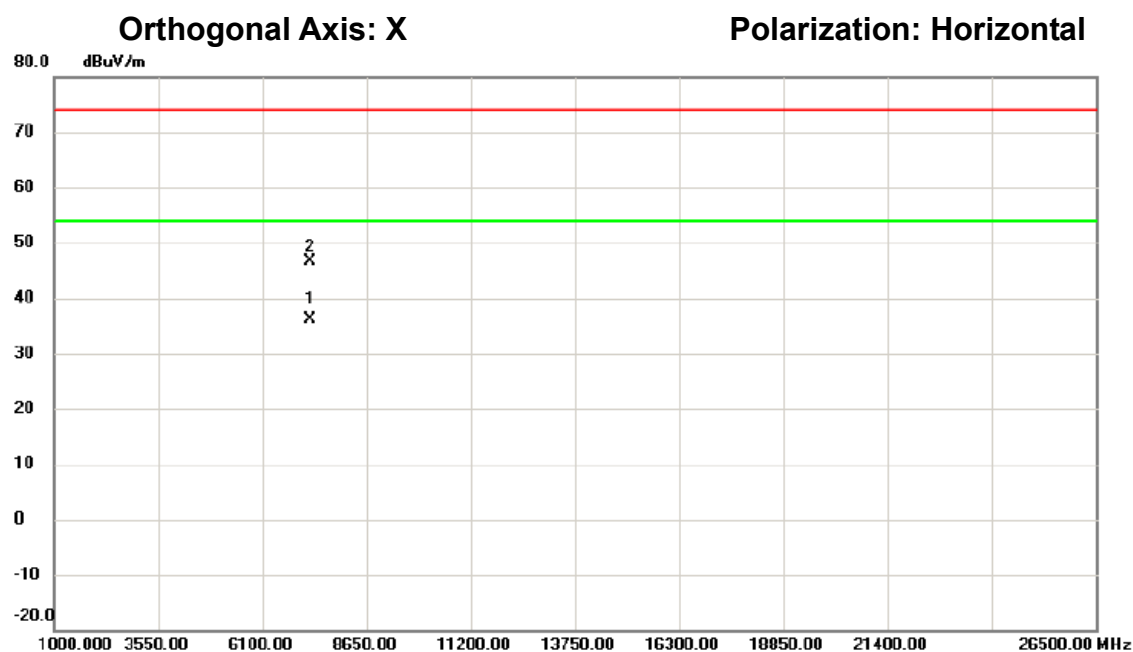

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7280.977	41.24	-5.11	36.13	54.00	-17.87	AVG	
2		7281.038	51.83	-5.11	46.72	74.00	-27.28	peak	

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

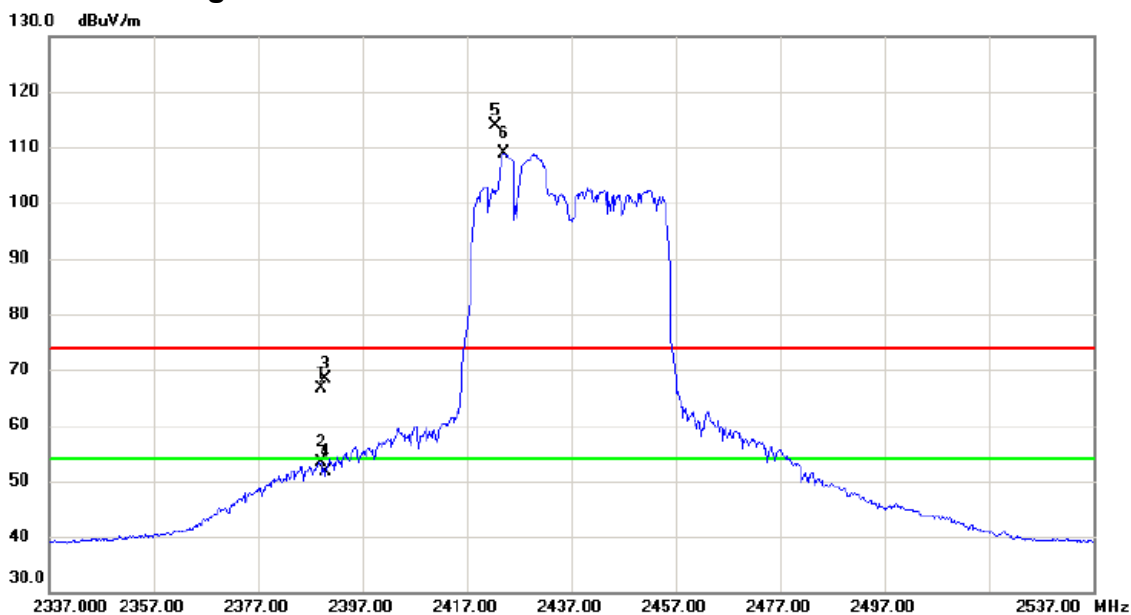

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2389.000	73.90	-7.23	66.67	74.00	-7.33	peak	
2		2389.000	60.55	-7.23	53.32	54.00	-0.68	AVG	
3		2390.000	75.56	-7.23	68.33	74.00	-5.67	peak	
4		2390.000	58.89	-7.23	51.66	54.00	-2.34	AVG	
5	X	2422.400	121.08	-7.10	113.98	74.00	39.98	peak	主波訊號不予判定
6	*	2424.200	115.98	-7.09	108.89	54.00	54.89	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C


測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz

測試距離: 3 米

測試日期: 108/03/13

環境濕度: 66%

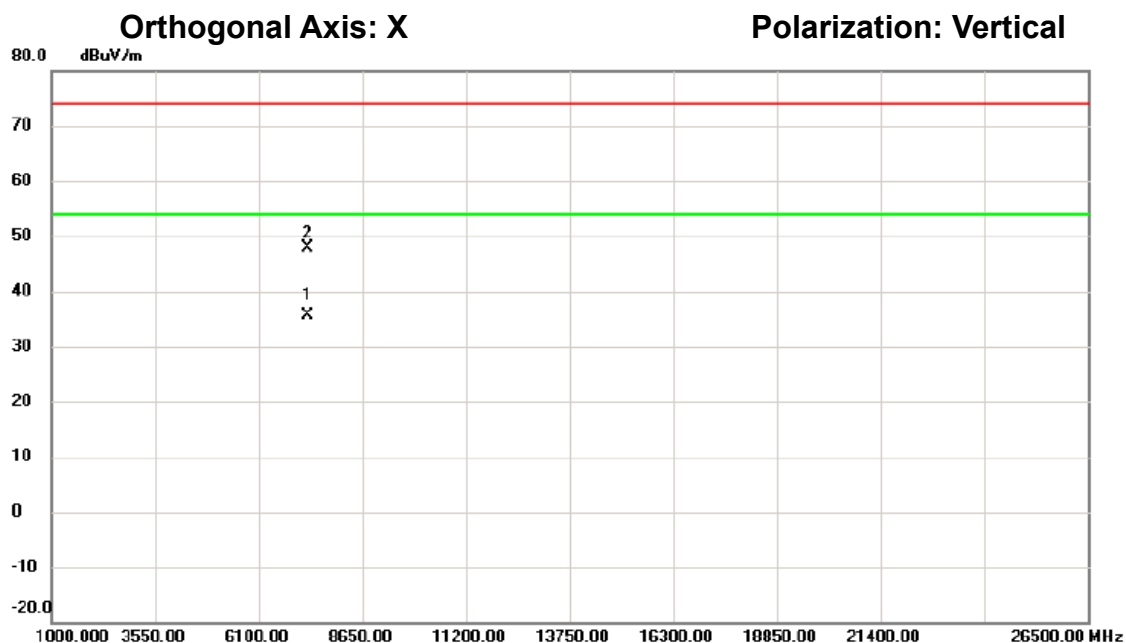

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7311.073	40.63	-4.99	35.64	54.00	-18.36	AVG	
2		7311.212	52.88	-4.99	47.89	74.00	-26.11	peak	

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢 測 器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/03/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

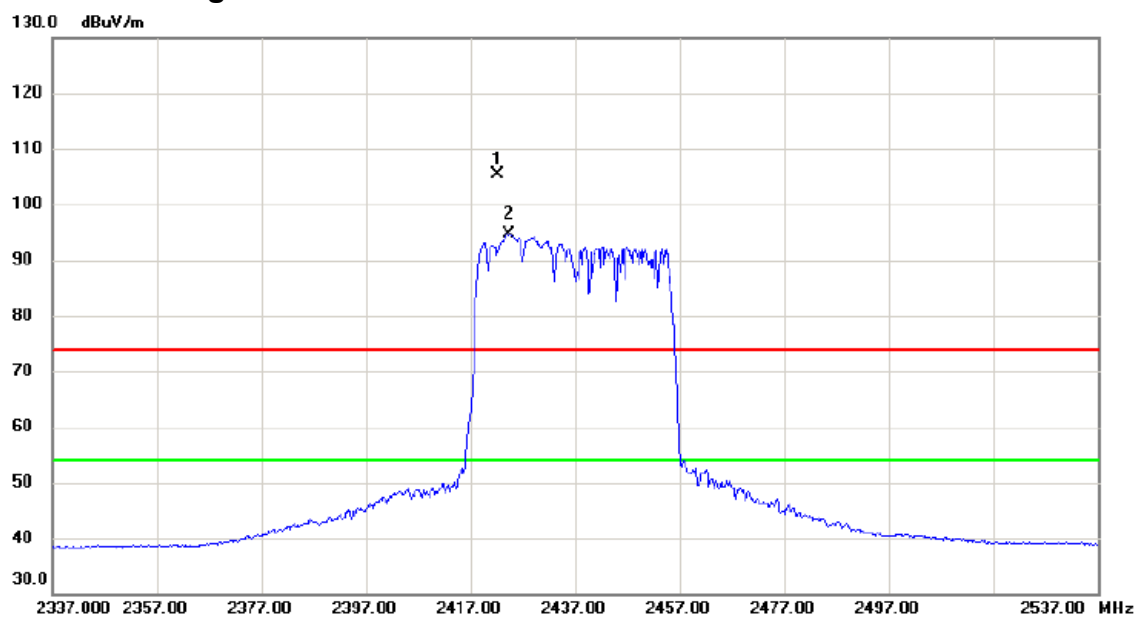

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2422.300	112.57	-7.10	105.47	74.00	31.47	peak	主波訊號不予判定
2	*	2424.300	101.76	-7.09	94.67	54.00	40.67	AVG	主波訊號不予判定

測試頻道: IEEE 802.11n (HT40) /
2437 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢 測 器: Peak/AV


測試日期: 108/03/13

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

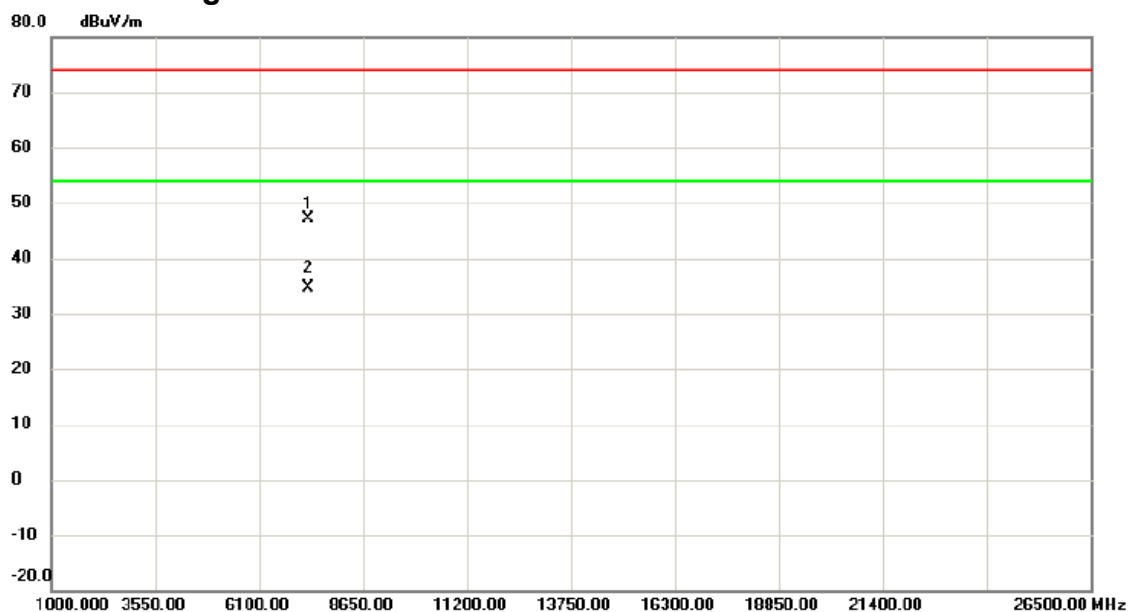

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		7310.995	52.04	-4.99	47.05	74.00	-26.95	peak	
2	*	7311.085	39.50	-4.99	34.51	54.00	-19.49	AVG	