

測試頻道: IEEE 802.11ac (160 MHz) /
5250 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/11/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

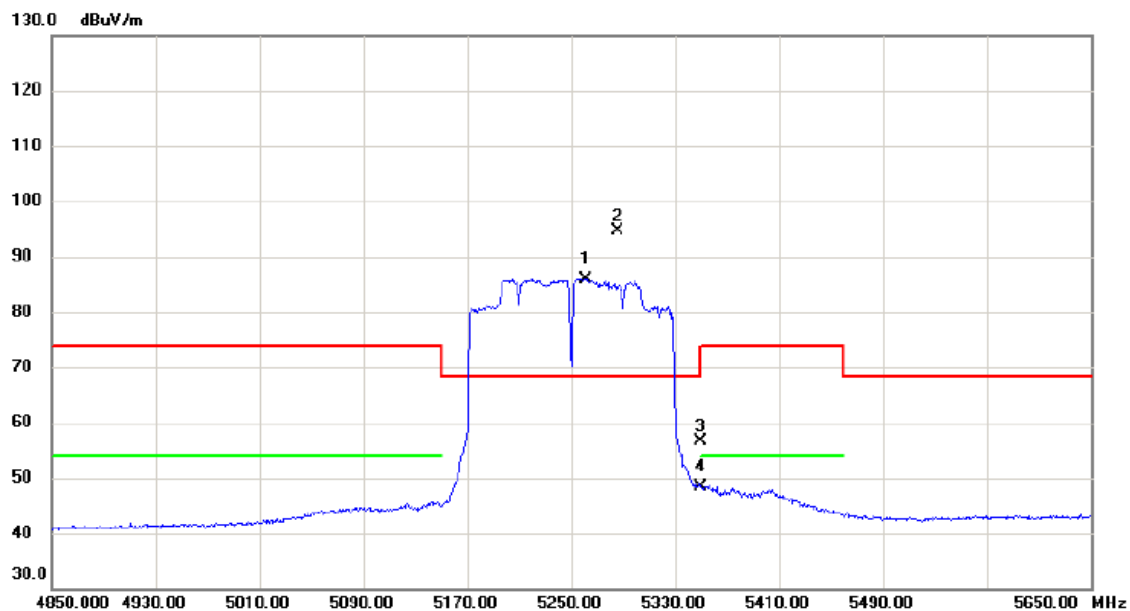

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5261.200	87.60	-1.63	85.97	68.30	17.67	AVG	主波訊號不予判定
2	*	5286.000	96.34	-1.62	94.72	68.30	26.42	peak	主波訊號不予判定
3		5350.000	58.15	-1.57	56.58	74.00	-17.42	peak	
4		5350.000	50.01	-1.57	48.44	54.00	-5.56	AVG	

測試頻道: IEEE 802.11ac (160 MHz) /
5250 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

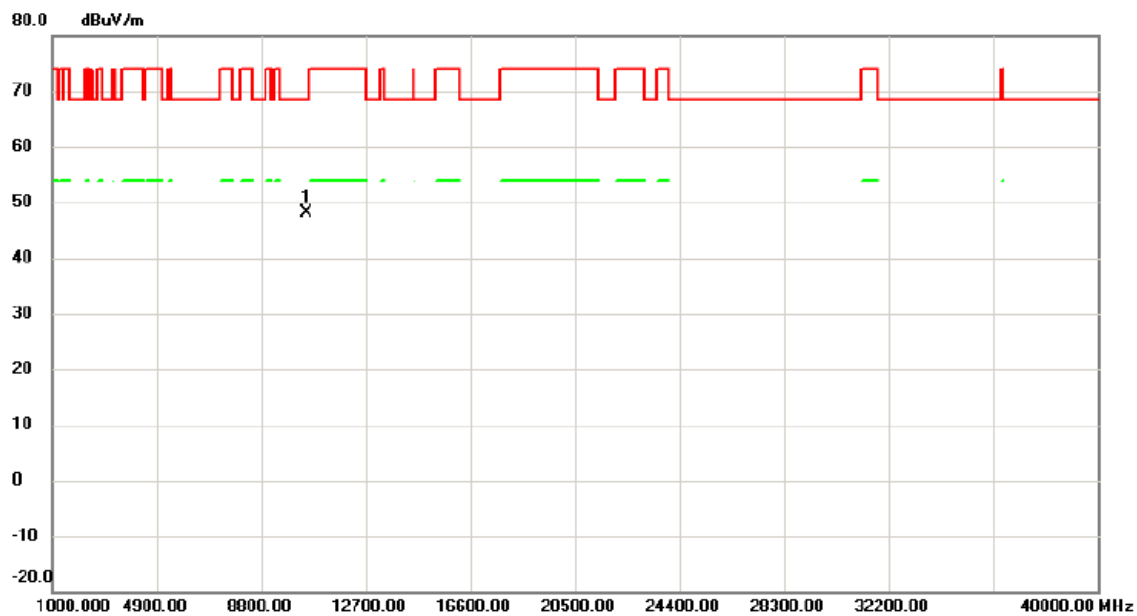

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10501.41	46.45	1.72	48.17	68.30	-20.13	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

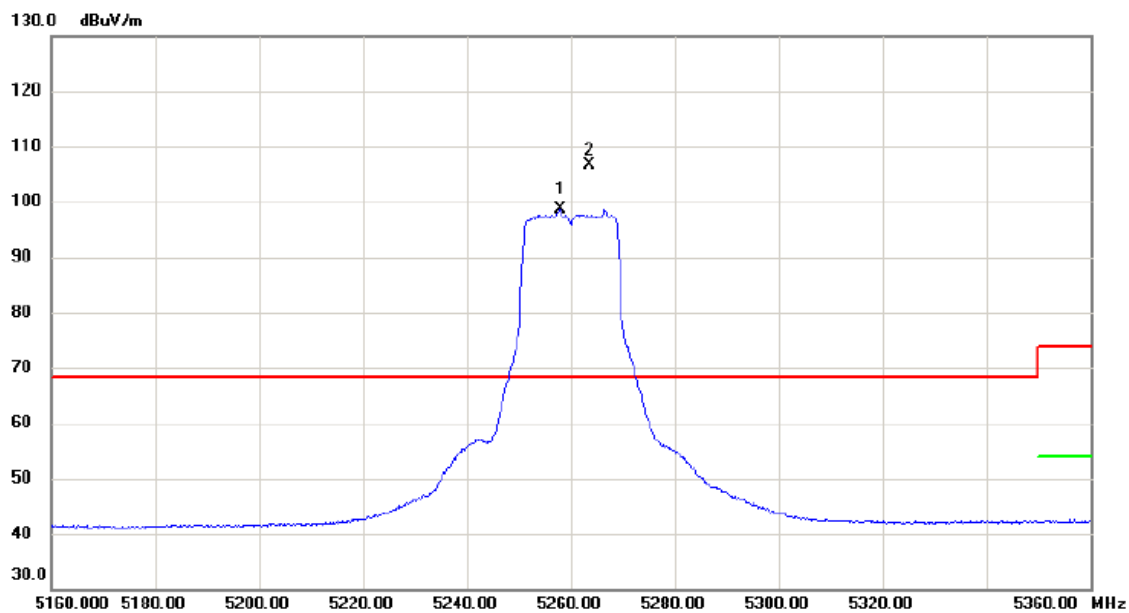

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5258.000	100.38	-1.64	98.74	68.30	30.44	AVG	主波訊號不予判定
2	*	5263.600	108.18	-1.63	106.55	68.30	38.25	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

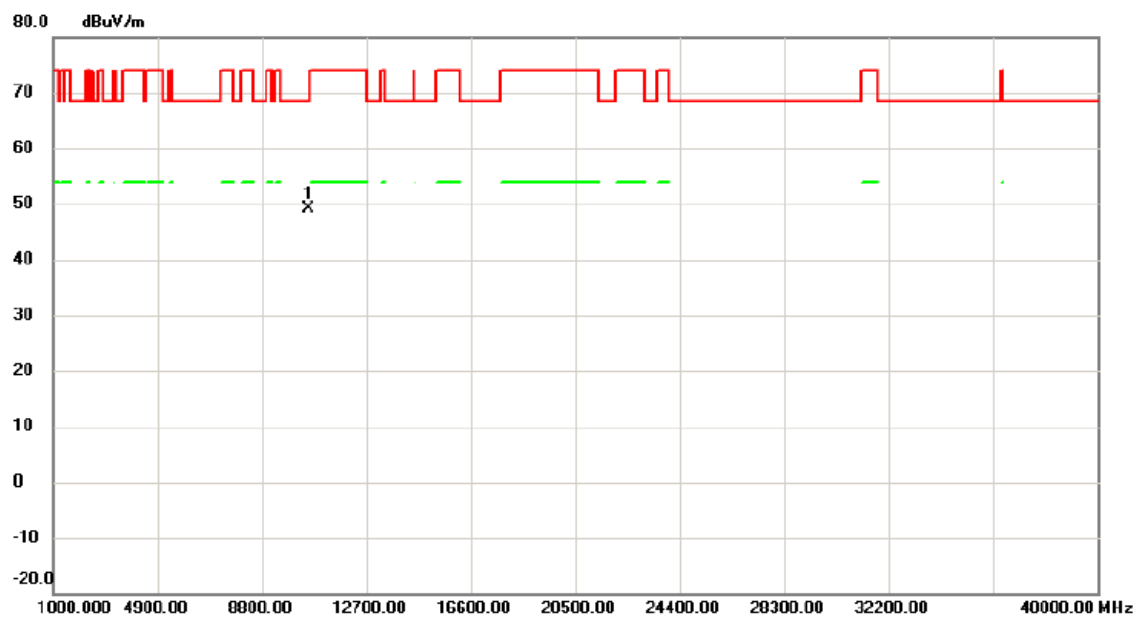

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10518.98	47.48	1.75	49.23	68.30	-19.07	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5260 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

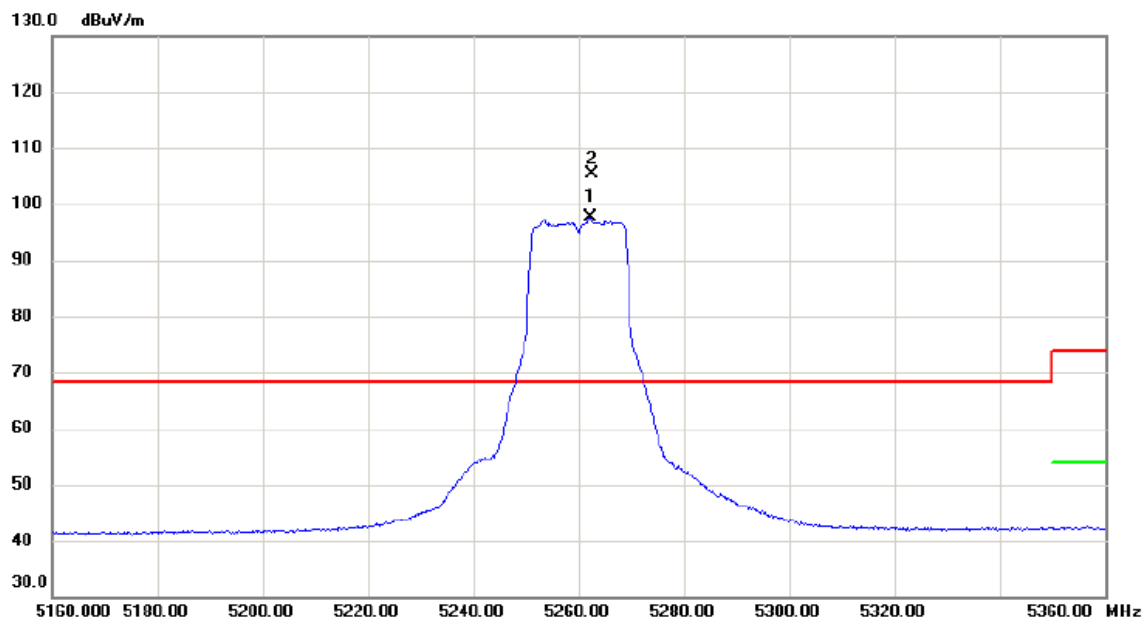


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5262.200	99.26	-1.63	97.63	68.30	29.33	AVG	主波訊號不予判定
2	*	5262.600	107.04	-1.63	105.41	68.30	37.11	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5260 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/09
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

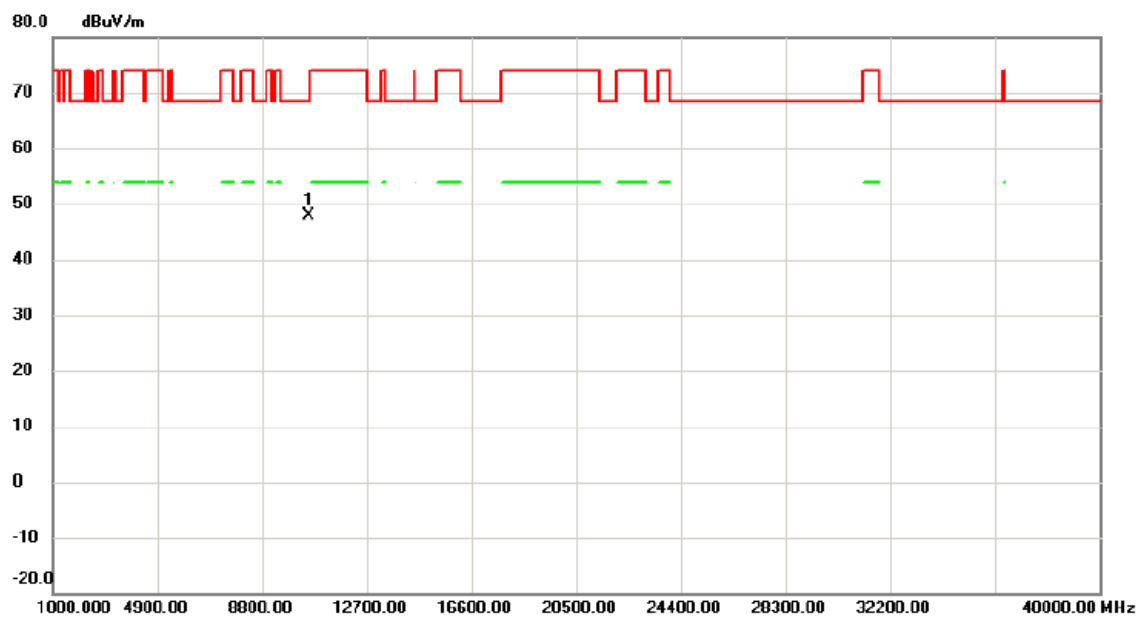

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10524.20	46.09	1.75	47.84	68.30	-20.46	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

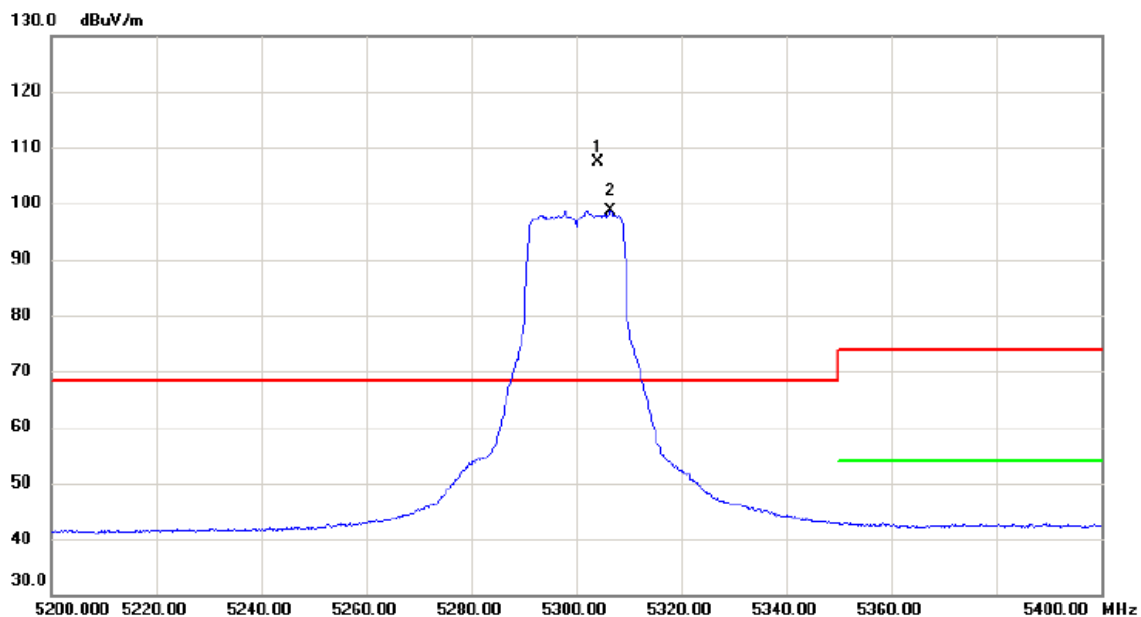

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5304.000	108.88	-1.61	107.27	68.30	38.97	peak	主波訊號不予判定
2	X	5306.600	100.27	-1.61	98.66	68.30	30.36	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) / 5300 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

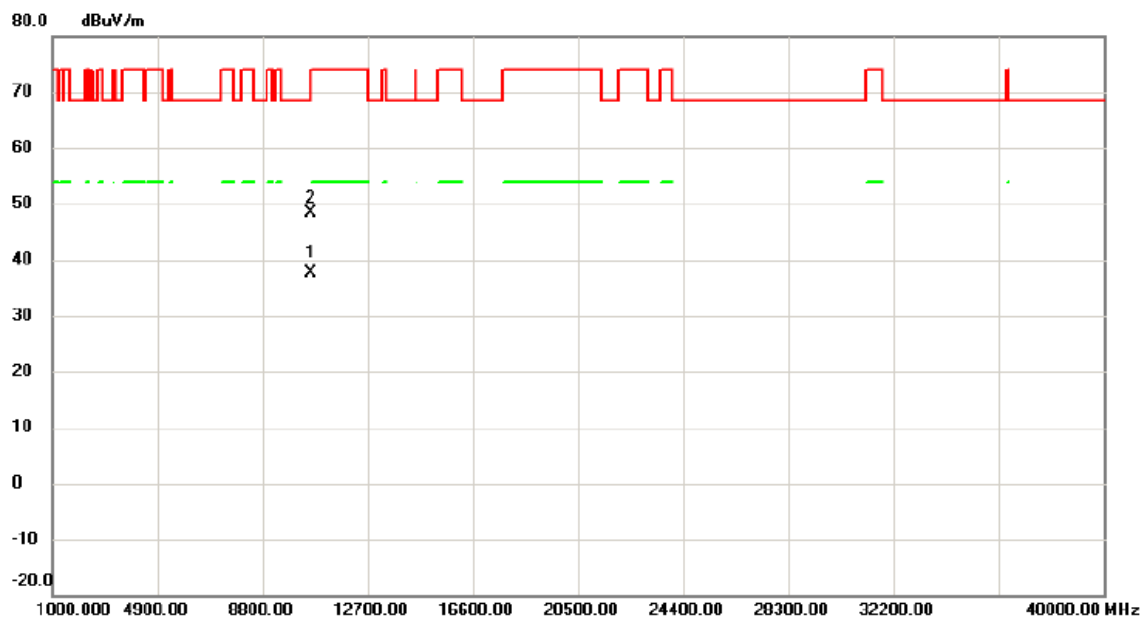

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10605.40	35.68	1.88	37.56	54.00	-16.44	AVG	
2		10607.18	46.42	1.88	48.30	74.00	-25.70	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

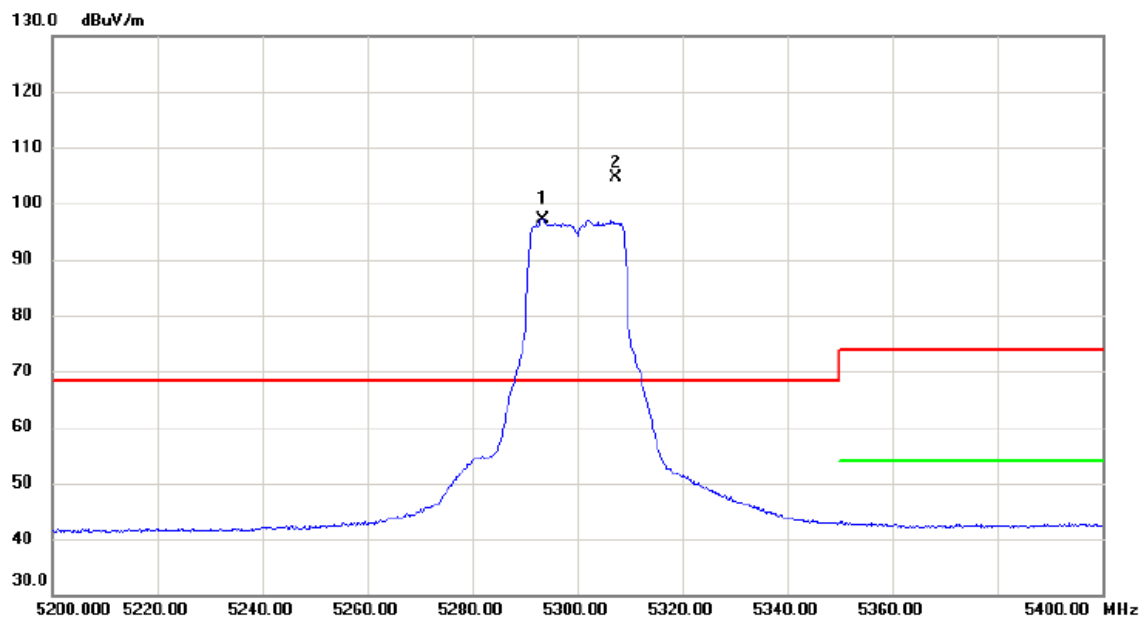

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5293.400	98.75	-1.61	97.14	68.30	28.84	AVG	主波訊號不予判定
2	*	5307.400	106.32	-1.61	104.71	68.30	36.41	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

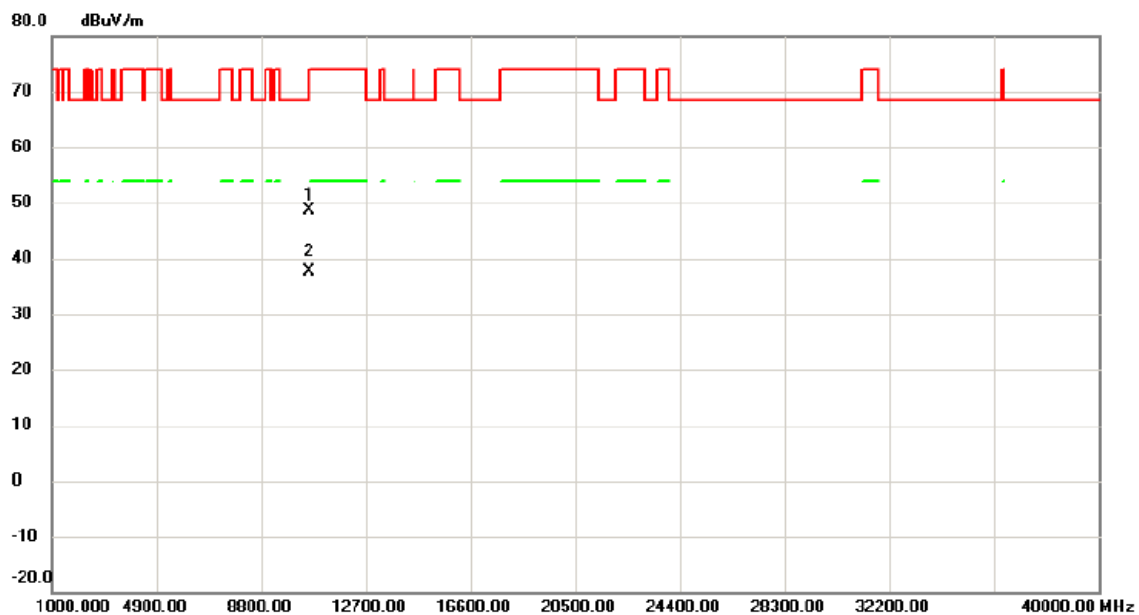

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10603.12	46.71	1.87	48.58	74.00	-25.42	peak	
2	*	10609.26	35.75	1.88	37.63	54.00	-16.37	AVG	

測試頻道: IEEE 802.11ac (20 MHz) / 5320 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

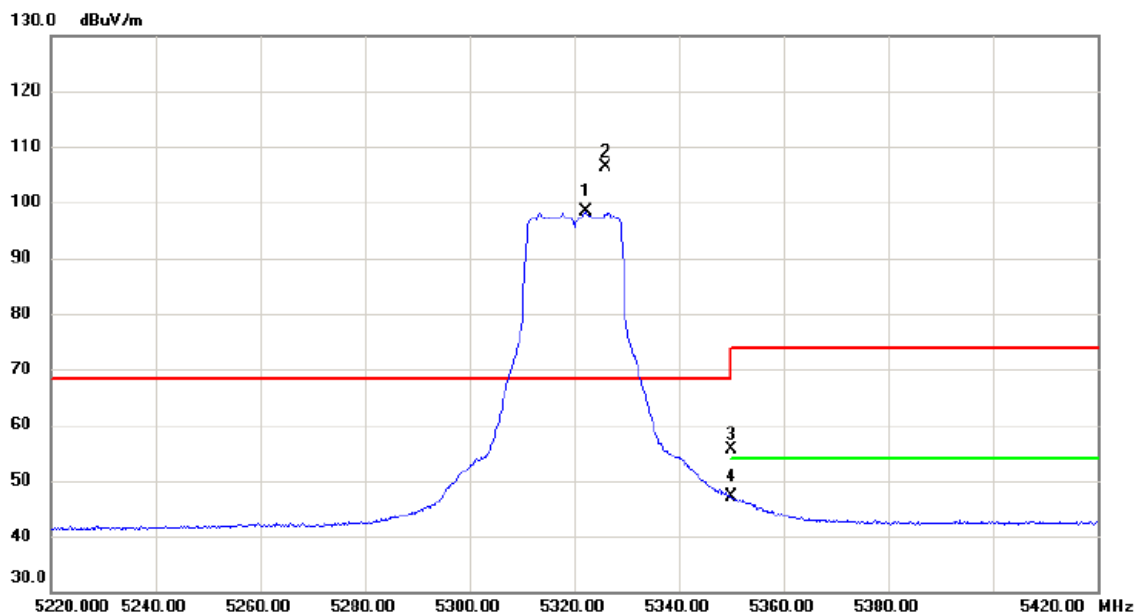

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5322.400	99.90	-1.60	98.30	68.30	30.00	AVG	主波訊號不予判定
2	*	5326.000	107.91	-1.59	106.32	68.30	38.02	peak	主波訊號不予判定
3		5350.000	57.23	-1.57	55.66	74.00	-18.34	peak	
4		5350.000	48.59	-1.57	47.02	54.00	-6.98	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
5320 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

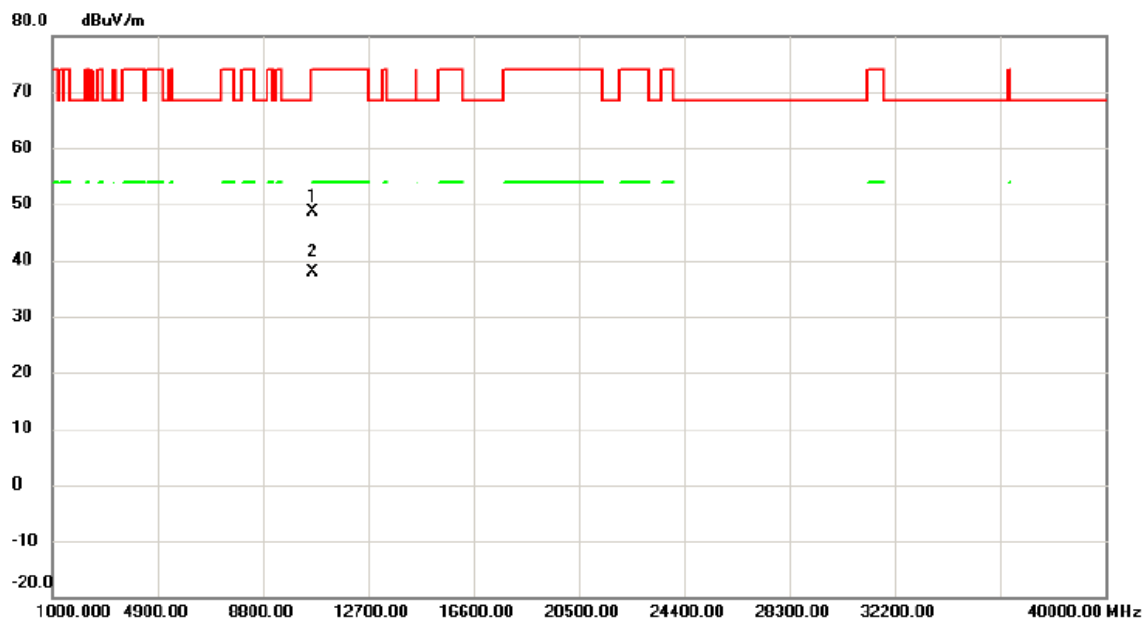

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		10633.12	46.69	1.93	48.62	74.00	-25.38	peak	
2	*	10633.40	35.98	1.93	37.91	54.00	-16.09	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
5320 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

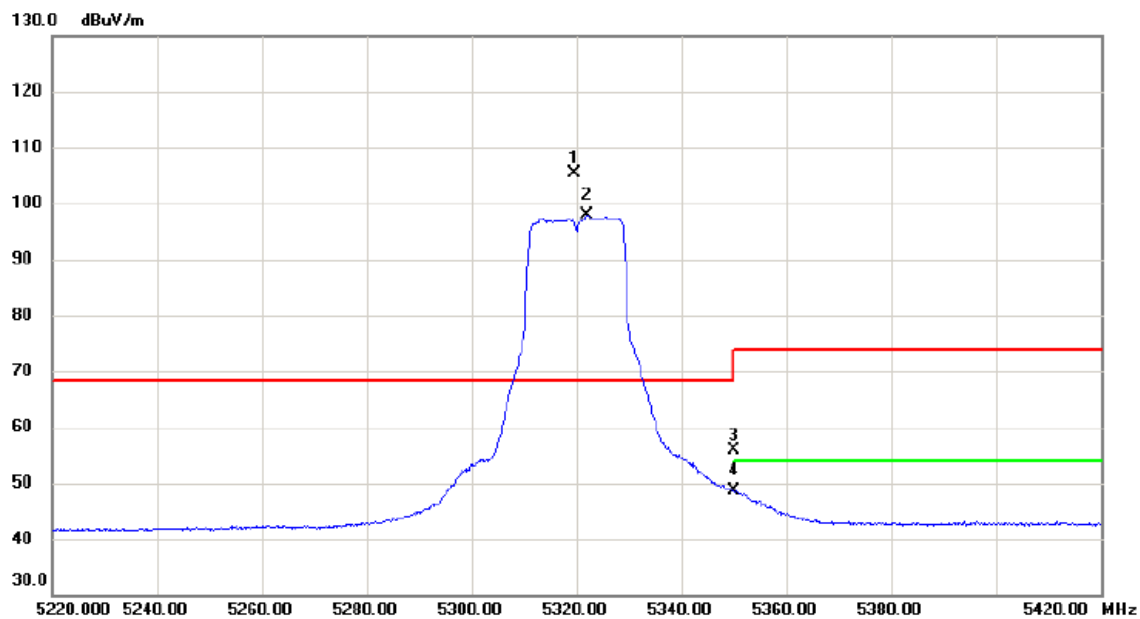

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5319.600	106.99	-1.60	105.39	68.30	37.09	peak	主波訊號不予判定
2	X	5322.000	99.48	-1.60	97.88	68.30	29.58	AVG	主波訊號不予判定
3		5350.000	57.33	-1.57	55.76	74.00	-18.24	peak	
4		5350.000	50.22	-1.57	48.65	54.00	-5.35	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
5320 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

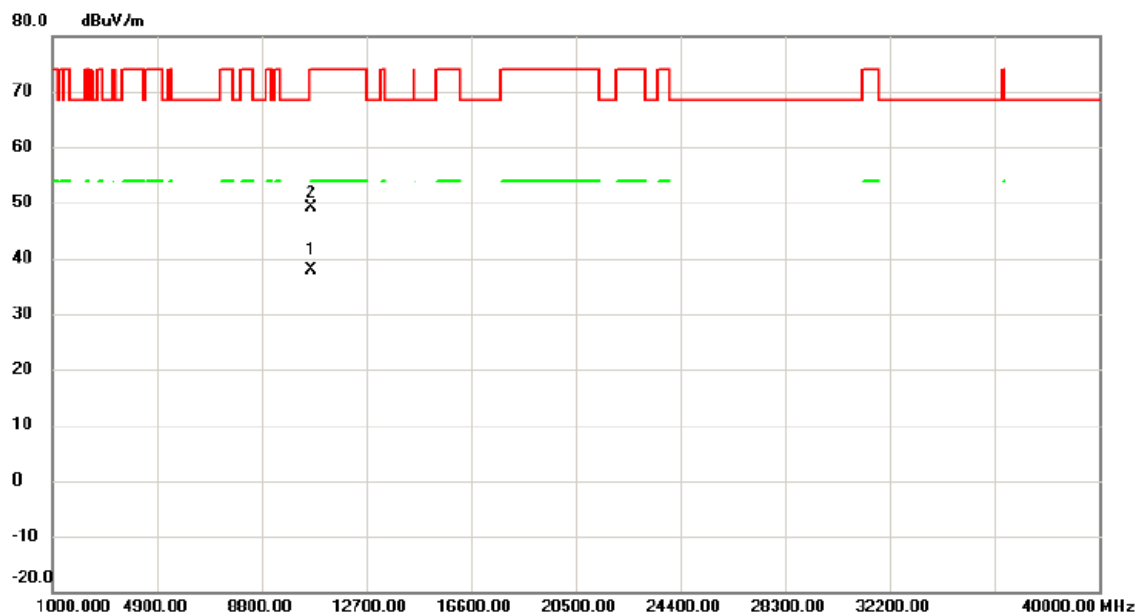

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10634.60	35.83	1.93	37.76	54.00	-16.24	AVG	
2		10648.18	47.19	1.95	49.14	74.00	-24.86	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

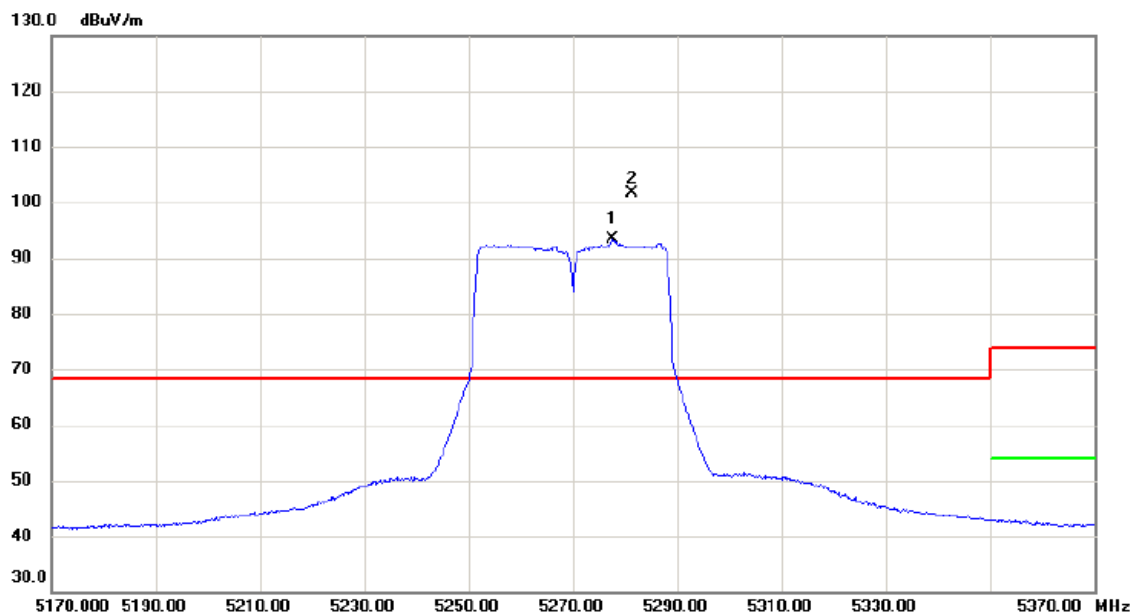

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5277.600	95.02	-1.62	93.40	68.30	25.10	AVG	主波訊號不予判定
2	*	5281.400	103.23	-1.62	101.61	68.30	33.31	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5270 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

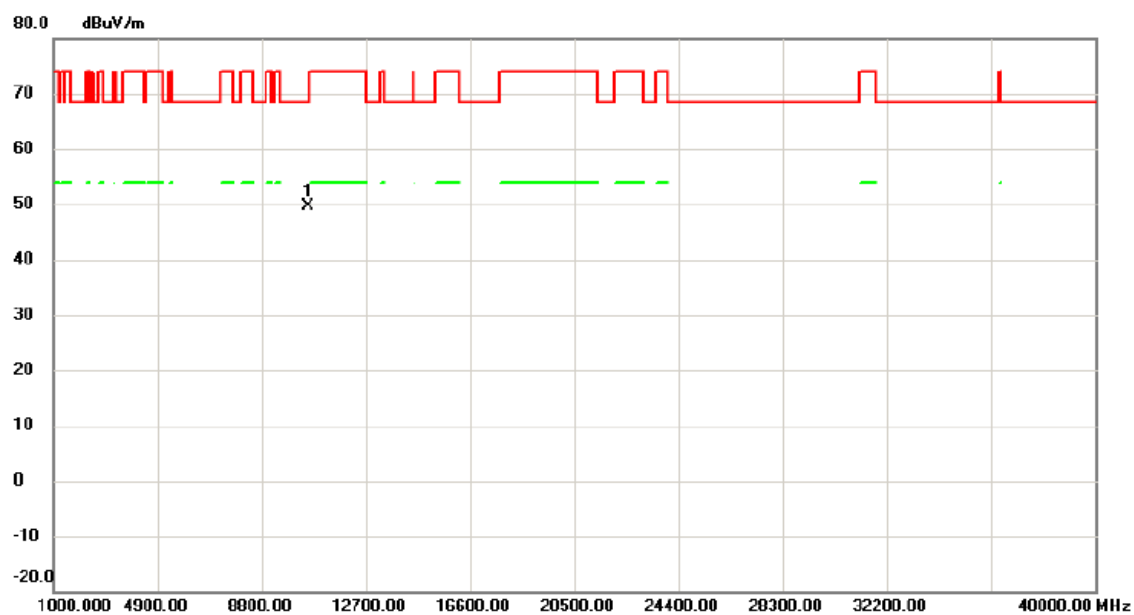

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10536.40	47.82	1.78	49.60	68.30	-18.70	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5270 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

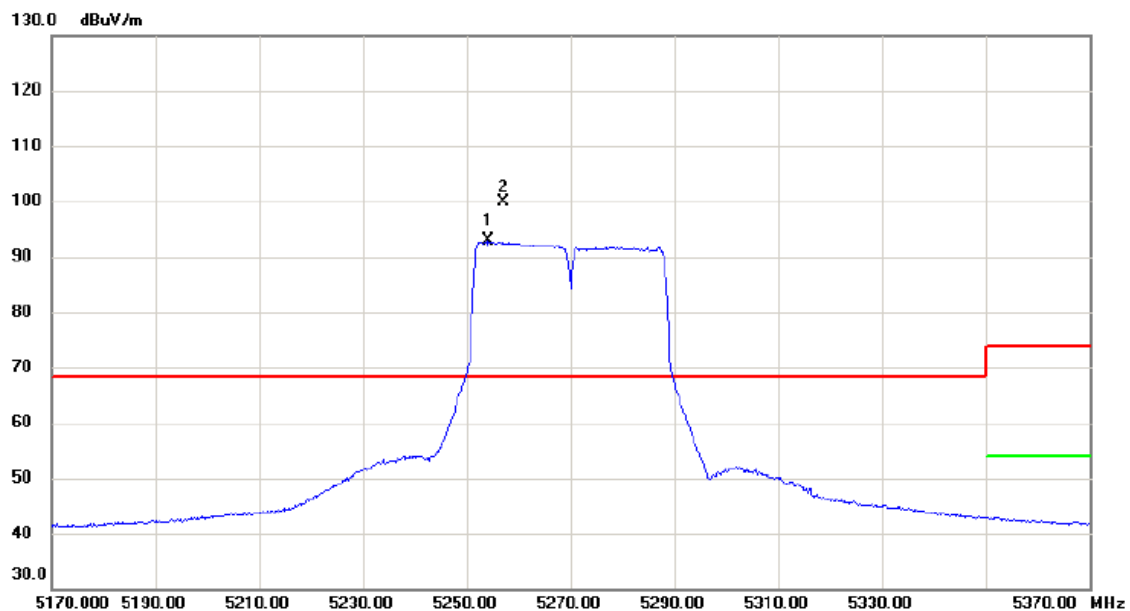

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5254.000	94.41	-1.64	92.77	68.30	24.47	AVG	主波訊號不予判定
2	*	5257.000	101.52	-1.64	99.88	68.30	31.58	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5270 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

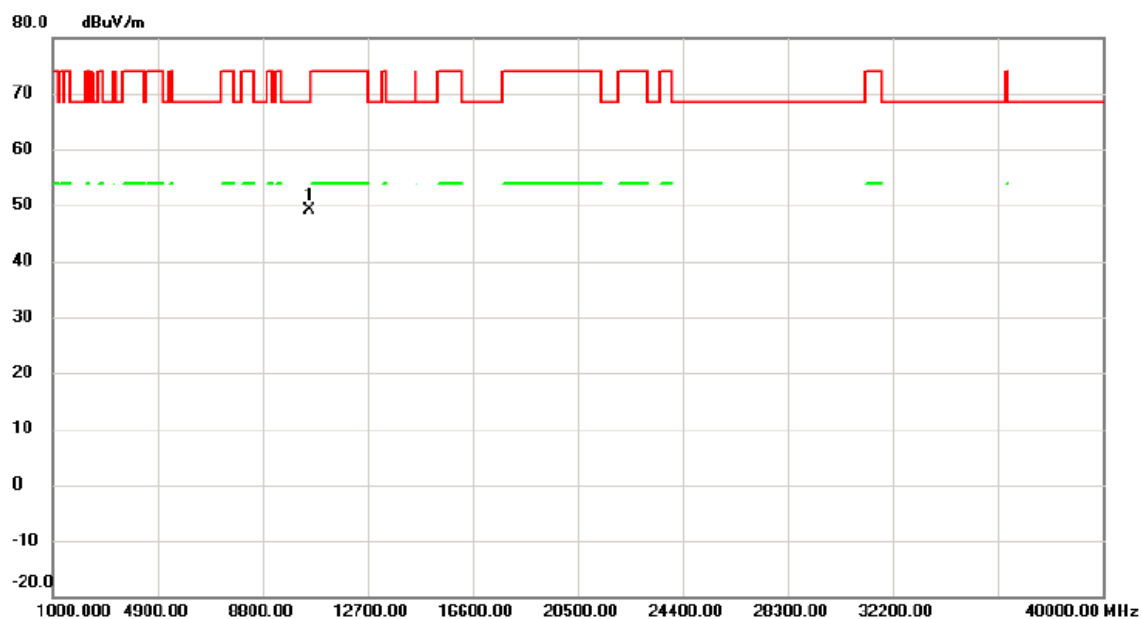

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	10531.64	47.36	1.77	49.13	68.30	-19.17	peak

測試頻道: IEEE 802.11ac (40 MHz) /
5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

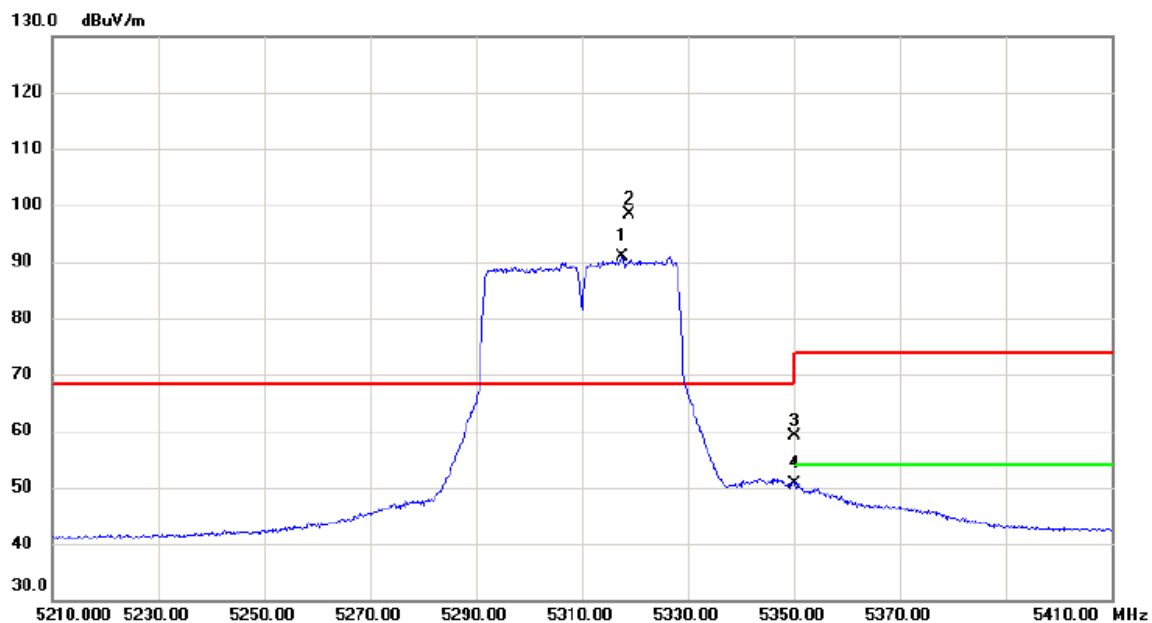

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5317.600	92.55	-1.59	90.96	68.30	22.66	AVG	主波訊號不予判定
2	*	5318.800	100.08	-1.59	98.49	68.30	30.19	peak	主波訊號不予判定
3		5350.000	60.66	-1.57	59.09	74.00	-14.91	peak	
4		5350.000	52.17	-1.57	50.60	54.00	-3.40	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

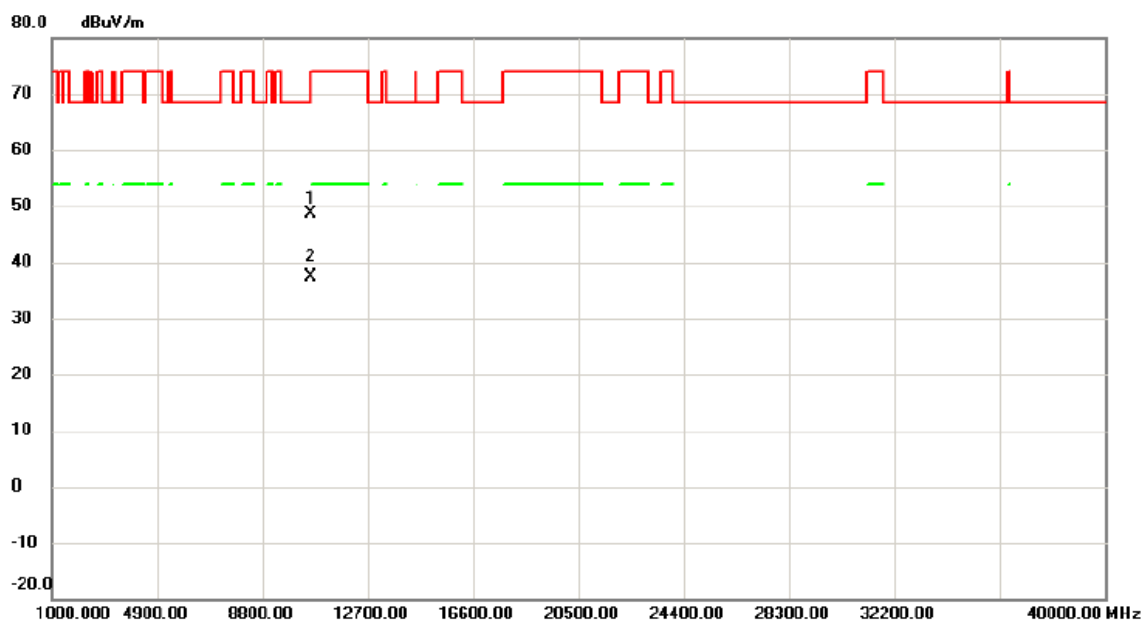

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10611.68	46.64	1.89	48.53	74.00	-25.47	peak	
2	*	10616.00	35.58	1.90	37.48	54.00	-16.52	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5310 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

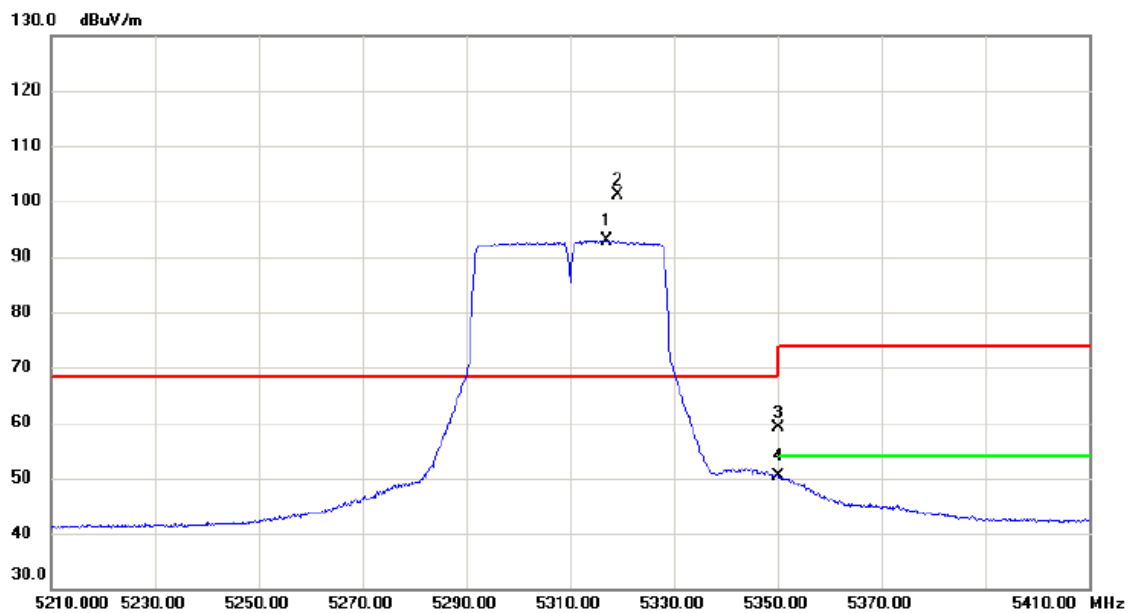

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	X	5317.200	94.56	-1.59	92.97	68.30	24.67	AVG	主波訊號不予判定
2	*	5319.200	102.83	-1.59	101.24	68.30	32.94	peak	主波訊號不予判定
3		5350.000	60.63	-1.57	59.06	74.00	-14.94	peak	
4		5350.000	52.04	-1.57	50.47	54.00	-3.53	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5310 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

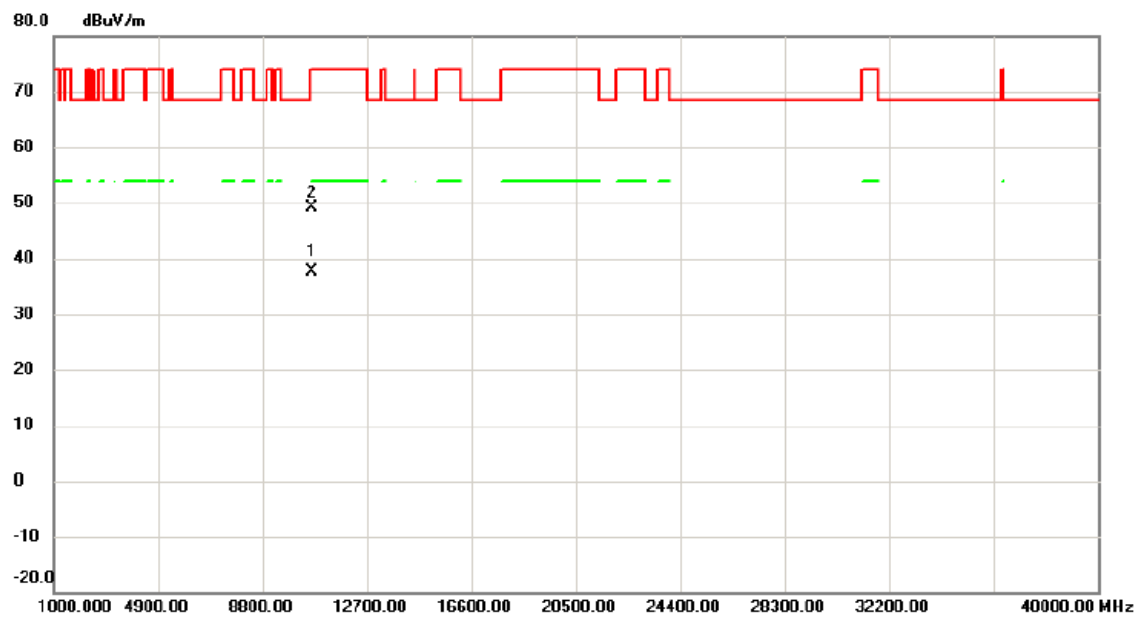

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10624.04	35.61	1.90	37.51	54.00	-16.49	AVG	
2		10624.50	47.29	1.90	49.19	74.00	-24.81	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
5290 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

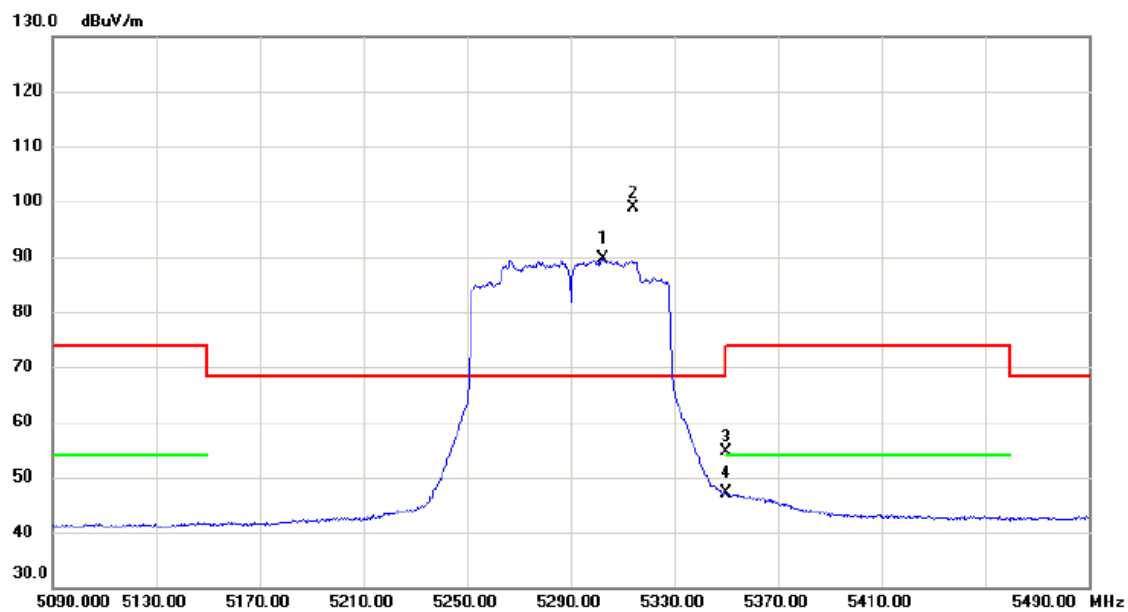

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5302.400	91.19	-1.61	89.58	68.30	21.28	AVG	主波訊號不予判定
2	*	5314.400	100.43	-1.59	98.84	68.30	30.54	peak	主波訊號不予判定
3		5350.000	56.11	-1.57	54.54	74.00	-19.46	peak	
4		5350.000	48.63	-1.57	47.06	54.00	-6.94	AVG	

測試頻道: IEEE 802.11ac (80 MHz) /
5290 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

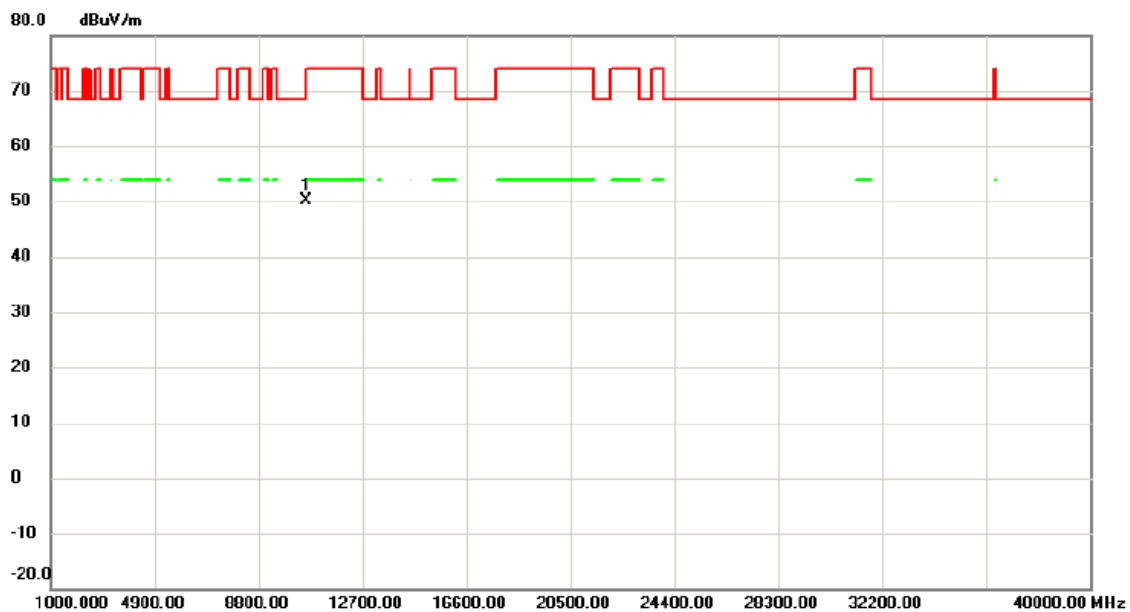

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.12	48.30	1.84	50.14	68.30	-18.16	peak	

測試頻道: IEEE 802.11ac (80 MHz) / 5290 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AVG


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

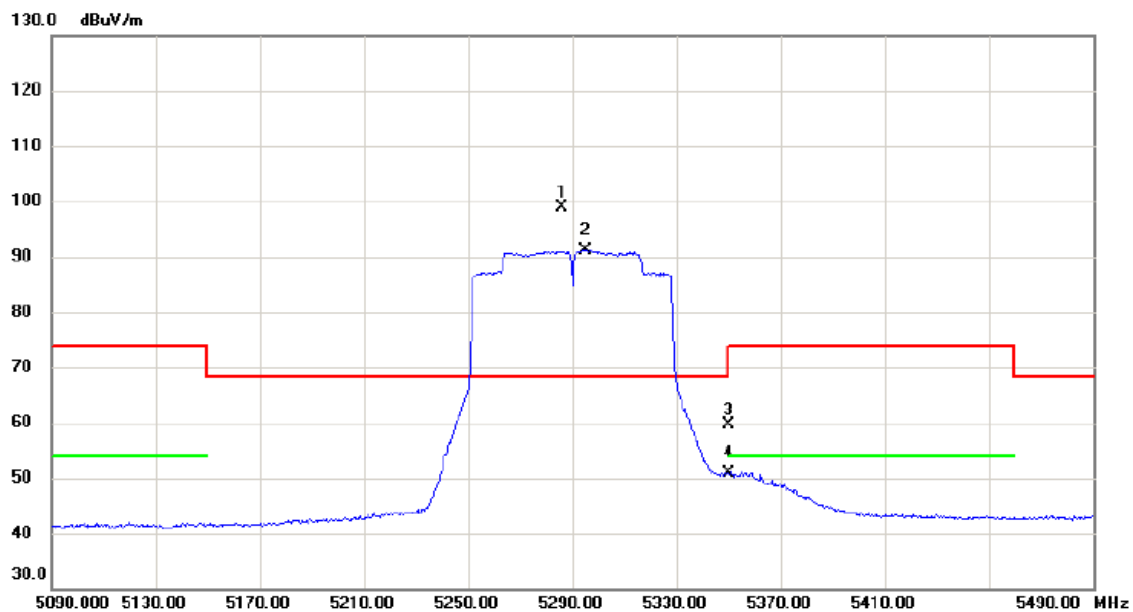

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5286.000	100.55	-1.62	98.93	68.30	30.63	peak	主波訊號不予判定
2	X	5294.800	92.85	-1.61	91.24	68.30	22.94	AVG	主波訊號不予判定
3		5350.000	61.30	-1.57	59.73	74.00	-14.27	peak	
4		5350.000	52.52	-1.57	50.95	54.00	-3.05	AVG	

測試頻道: IEEE 802.11ac (80 MHz) /
5290 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

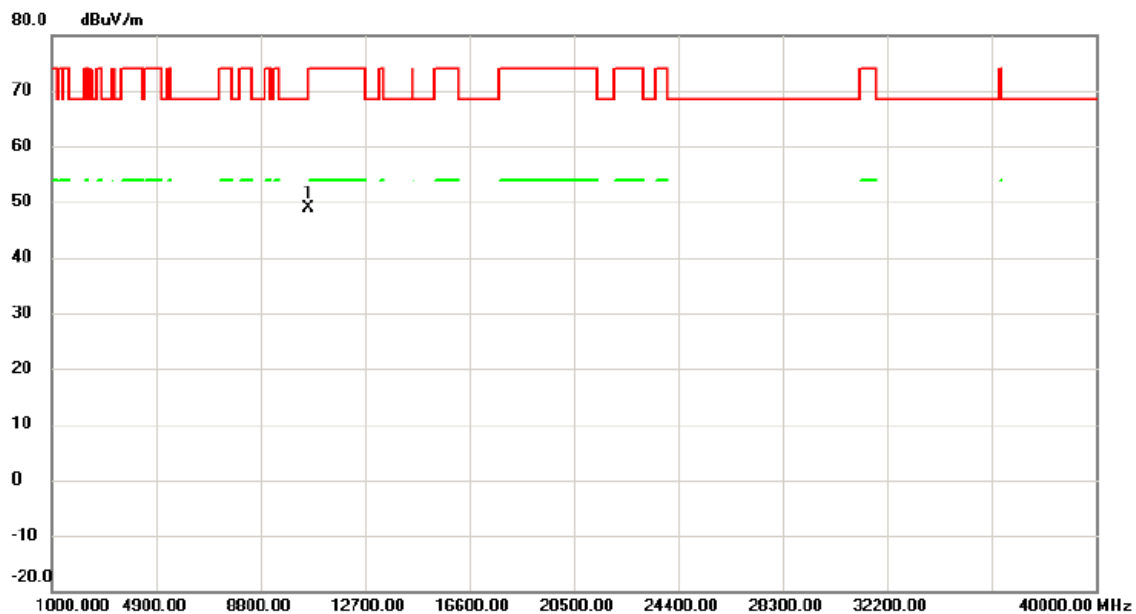

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10578.00	46.99	1.84	48.83	68.30	-19.47	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

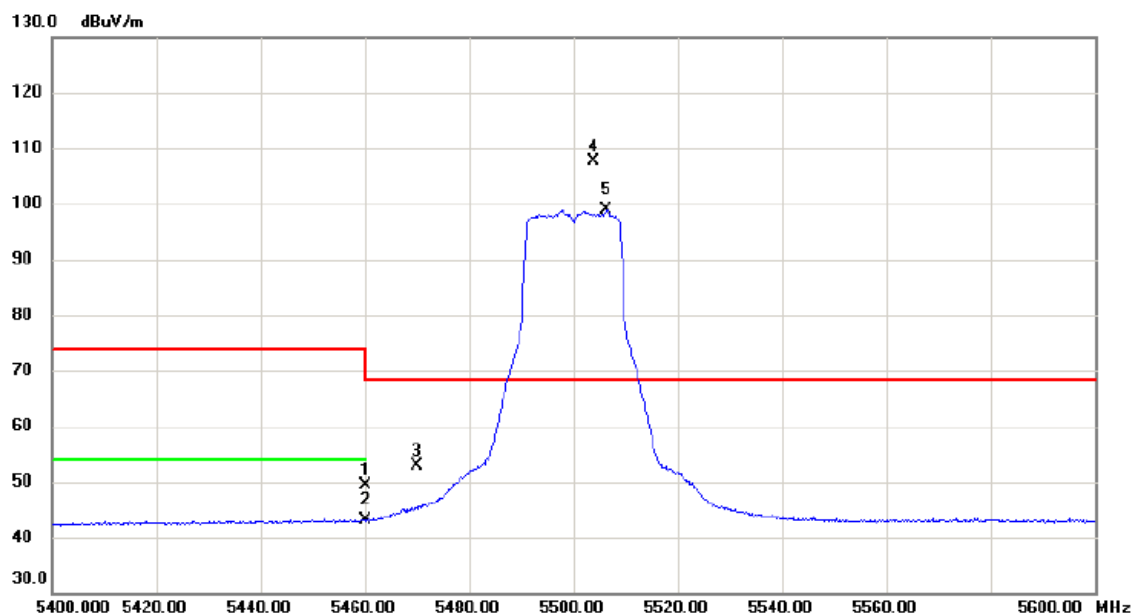

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	50.80	-1.49	49.31	74.00	-24.69	peak	
2		5460.000	44.51	-1.49	43.02	54.00	-10.98	AVG	
3		5470.000	54.39	-1.48	52.91	68.30	-15.39	peak	
4	*	5503.800	109.05	-1.45	107.60	68.30	39.30	peak	主波訊號不予判定
5	X	5506.400	100.36	-1.45	98.91	68.30	30.61	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

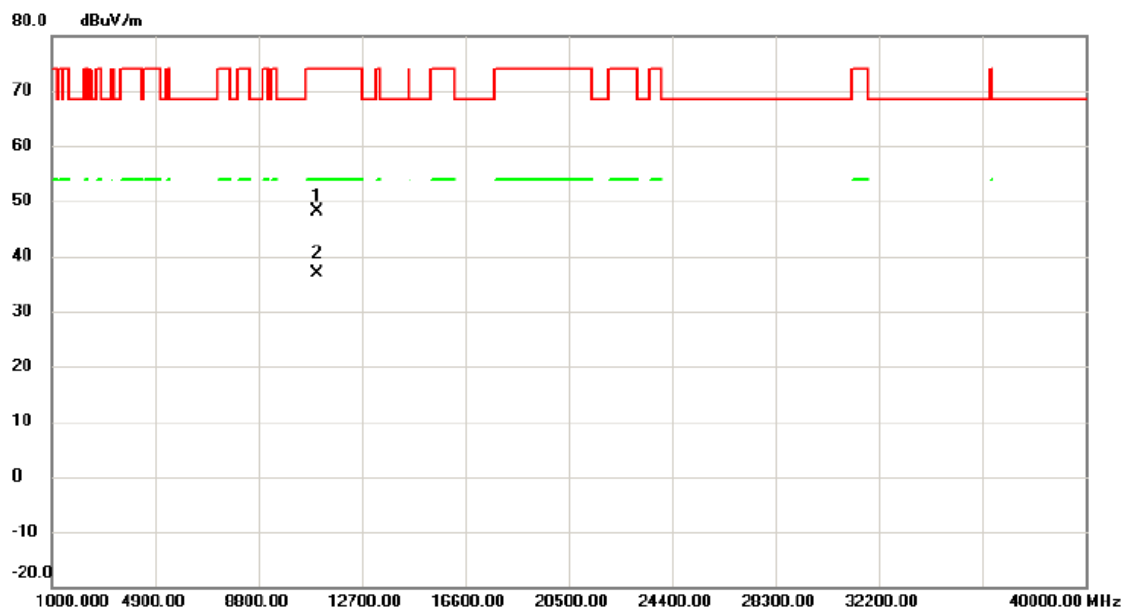

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	45.76	2.49	48.25	74.00	-25.75	peak	
2	*	11000.00	34.42	2.49	36.91	54.00	-17.09	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
5500 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

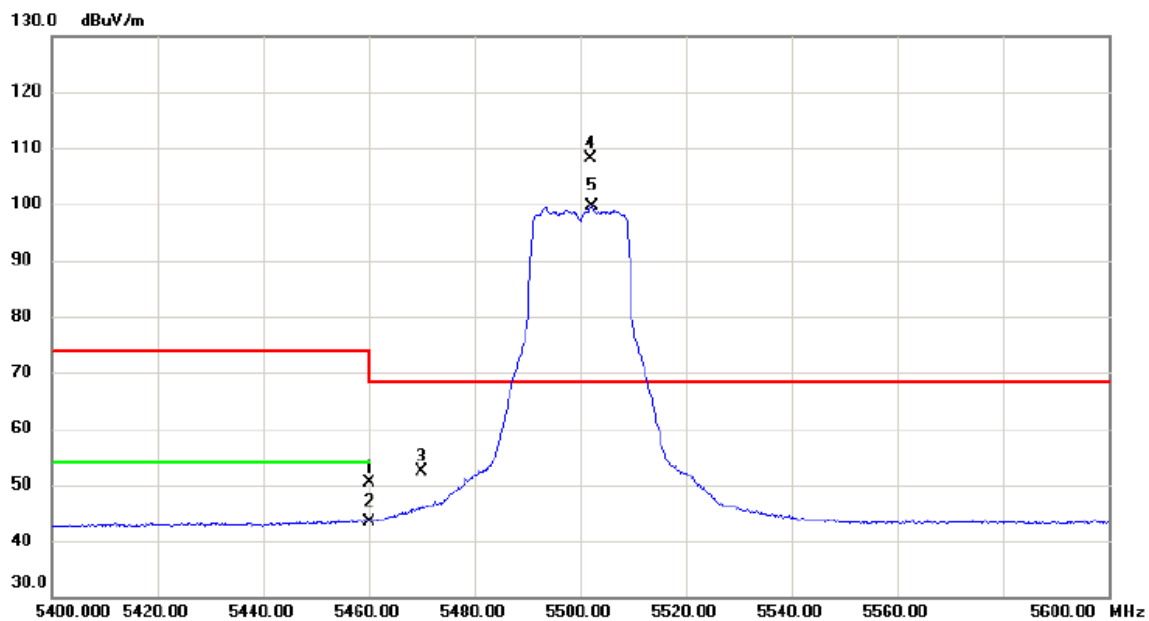

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	51.99	-1.49	50.50	74.00	-23.50	peak	
2		5460.000	44.99	-1.49	43.50	54.00	-10.50	AVG	
3		5470.000	53.83	-1.48	52.35	68.30	-15.95	peak	
4	*	5502.000	109.69	-1.46	108.23	68.30	39.93	peak	主波訊號不予判定
5	X	5502.200	101.07	-1.46	99.61	68.30	31.31	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5500 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

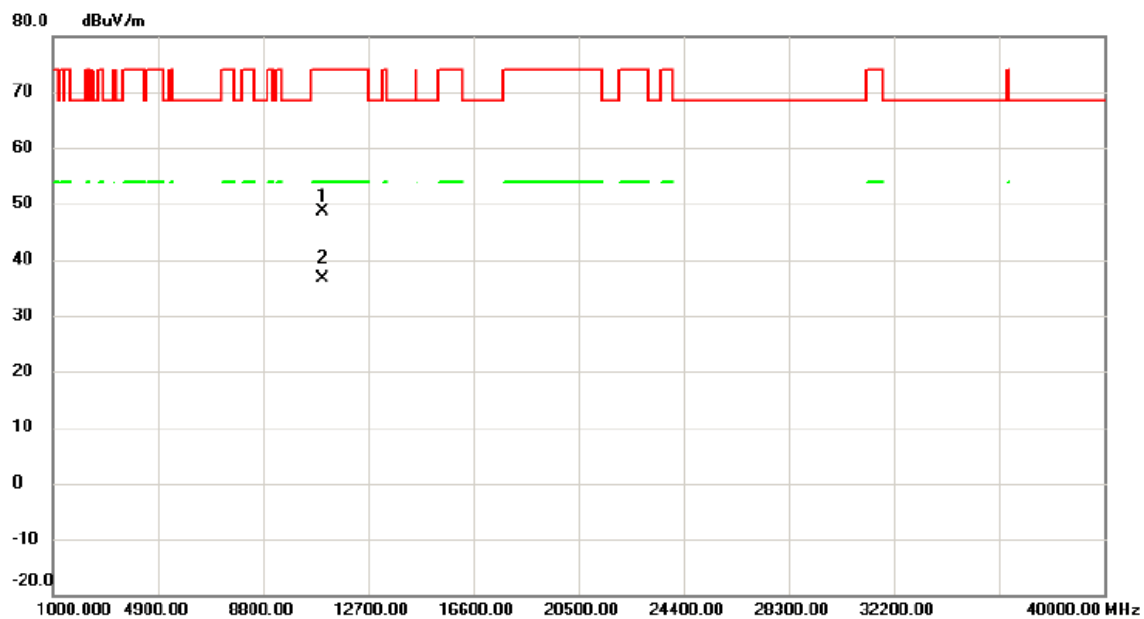

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	46.03	2.49	48.52	74.00	-25.48	peak	
2	*	11000.00	34.09	2.49	36.58	54.00	-17.42	AVG	

測試頻道: IEEE 802.11ac (20 MHz) / 5580 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

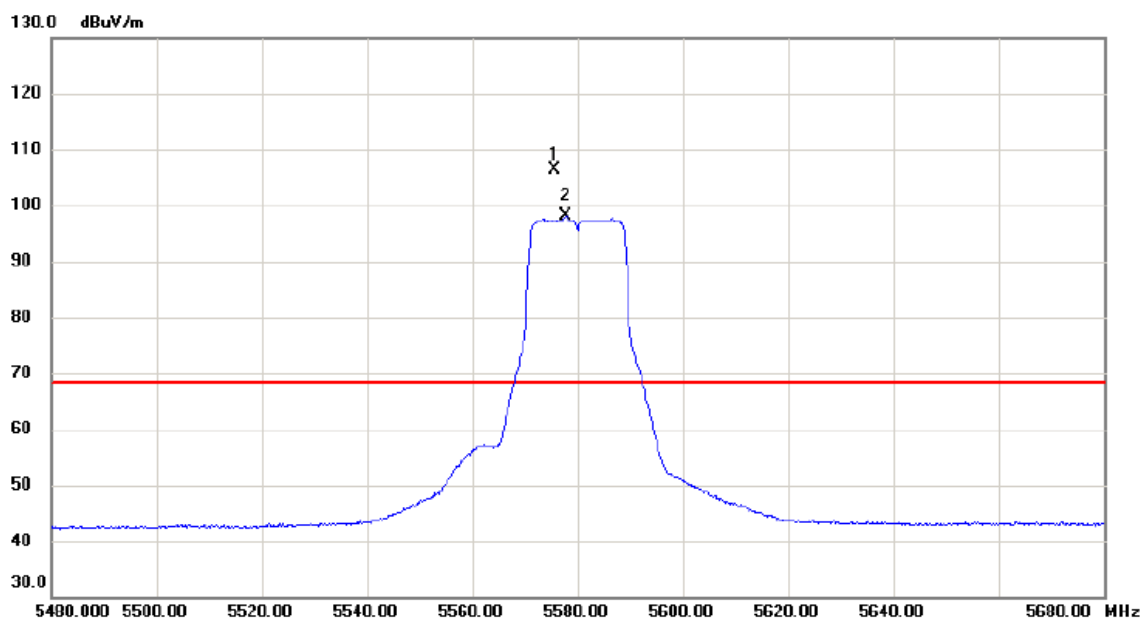

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5575.600	107.70	-1.27	106.43	68.30	38.13	peak	主波訊號不予判定
2	X	5577.800	99.39	-1.26	98.13	68.30	29.83	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

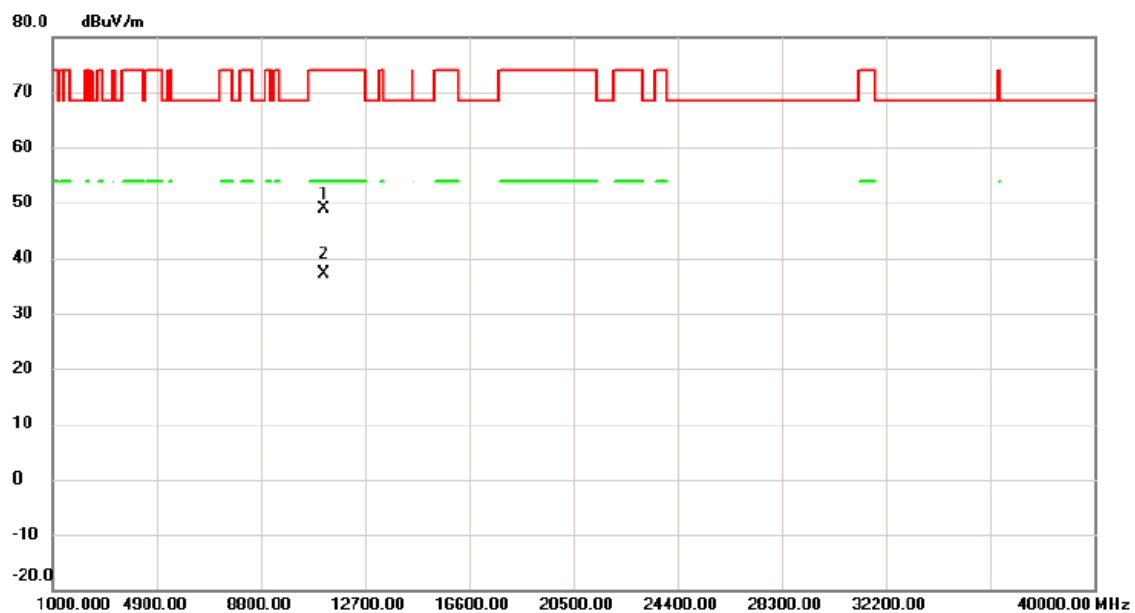

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	46.31	2.63	48.94	74.00	-25.06	peak	
2	*	11160.00	34.40	2.63	37.03	54.00	-16.97	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
5580 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

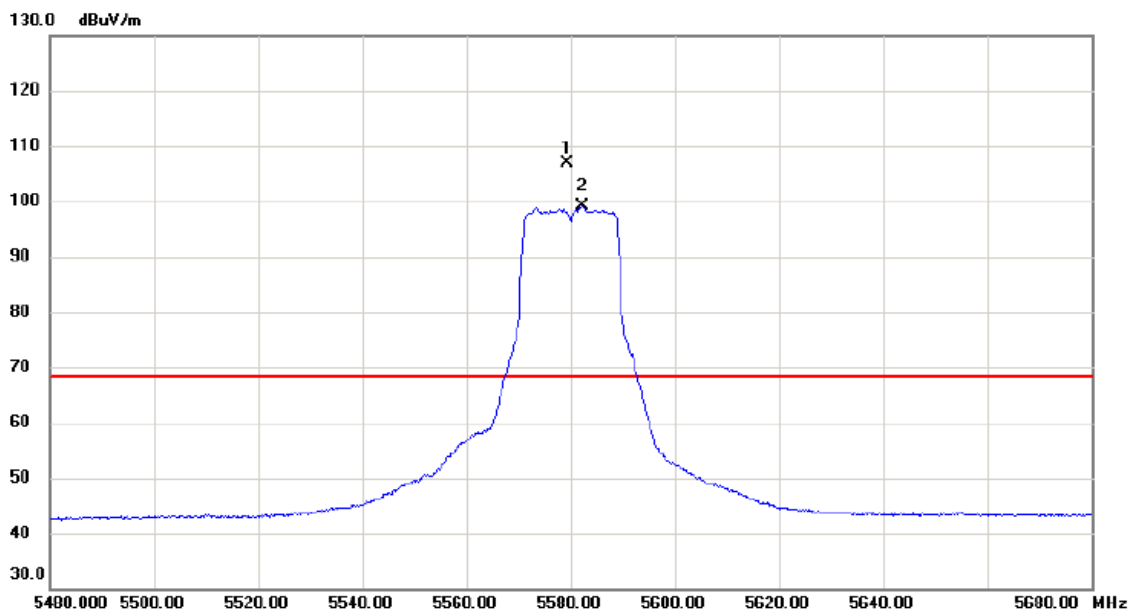

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5579.400	108.16	-1.25	106.91	68.30	38.61	peak	主波訊號不予判定
2	X	5582.200	100.47	-1.25	99.22	68.30	30.92	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5580 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

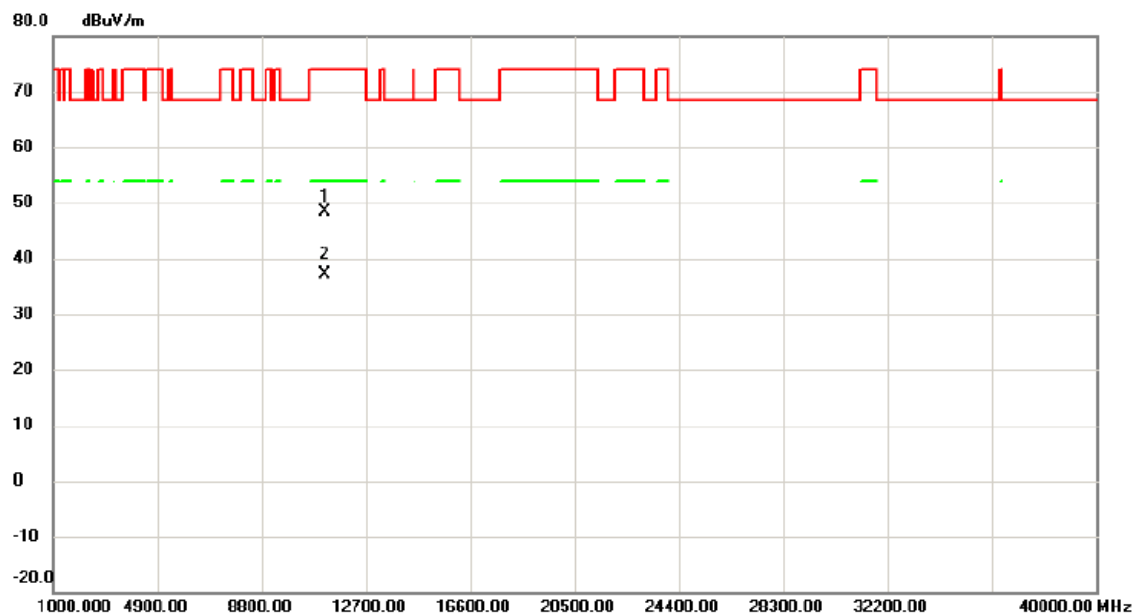

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	45.81	2.63	48.44	74.00	-25.56	peak	
2	*	11160.00	34.38	2.63	37.01	54.00	-16.99	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
5700 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

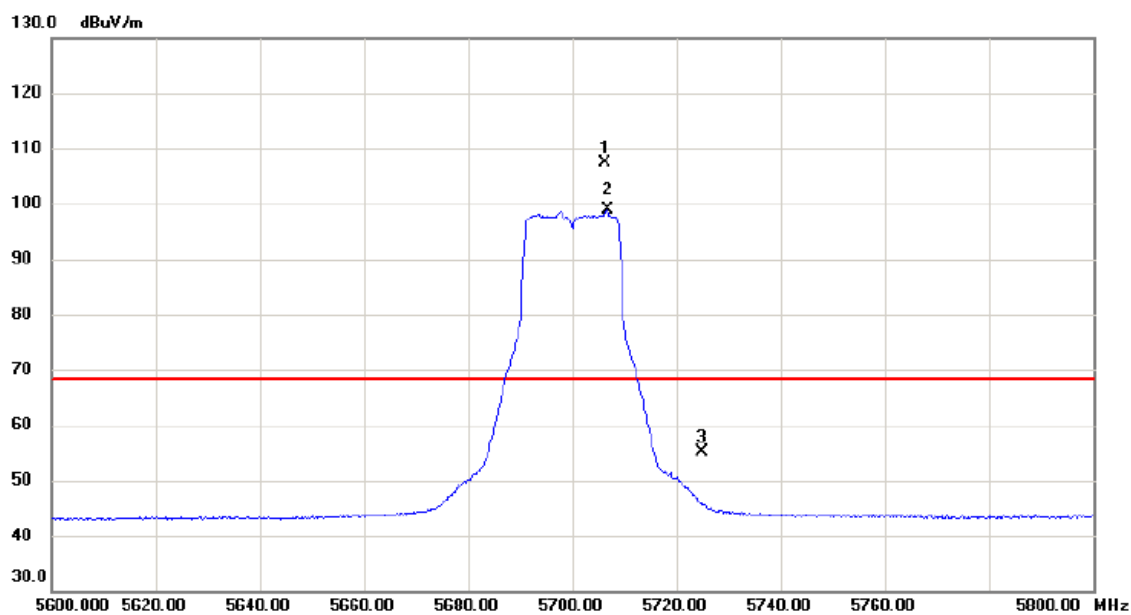

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5706.200	108.25	-0.94	107.31	68.30	39.01	peak	主波訊號不予判定
2	X	5706.800	99.75	-0.93	98.82	68.30	30.52	AVG	主波訊號不予判定
3		5725.000	56.02	-0.89	55.13	68.30	-13.17	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5700 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

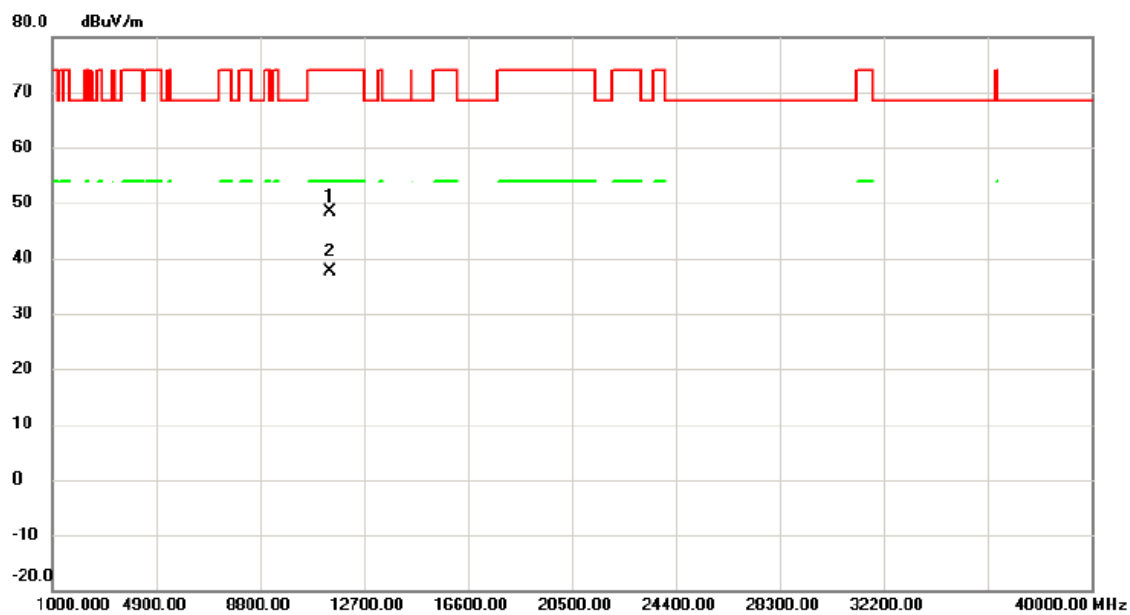


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	45.63	2.82	48.45	74.00	-25.55	peak	
2	*	11400.00	34.72	2.82	37.54	54.00	-16.46	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
5700 MHz
解析頻寬: 1000 kHz / 1000 kHz
量測天線: Horn Antenna
檢測器: Peak/AV
環境溫度: 23 °C

測試模式: 發射
視頻頻寬: 1000 kHz / 10 Hz
測試距離: 3 米
測試日期: 108/04/07
環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

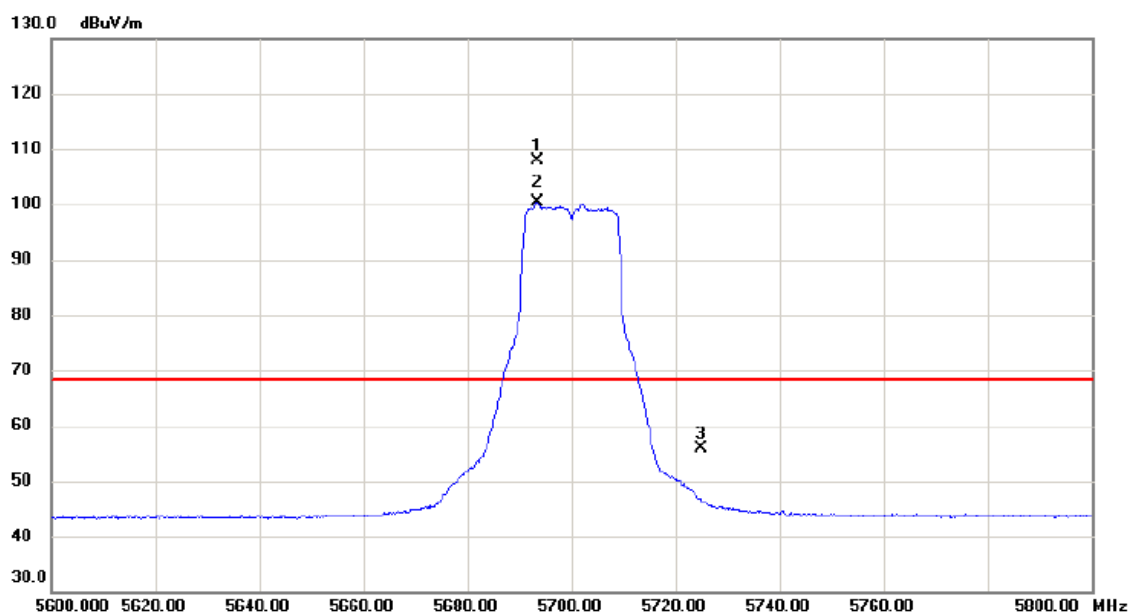

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5693.400	108.76	-0.97	107.79	68.30	39.49	peak	主波訊號不予判定
2	X	5693.400	101.30	-0.97	100.33	68.30	32.03	AVG	主波訊號不予判定
3		5725.000	56.78	-0.89	55.89	68.30	-12.41	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5700 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

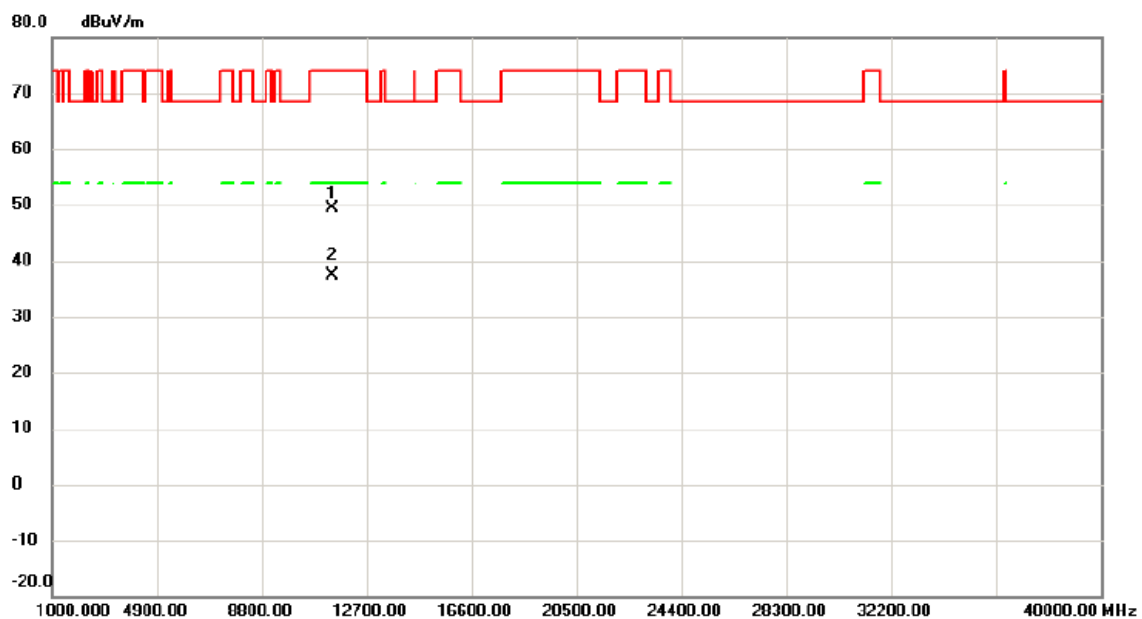

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	46.46	2.82	49.28	74.00	-24.72	peak	
2	*	11400.00	34.66	2.82	37.48	54.00	-16.52	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5510 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

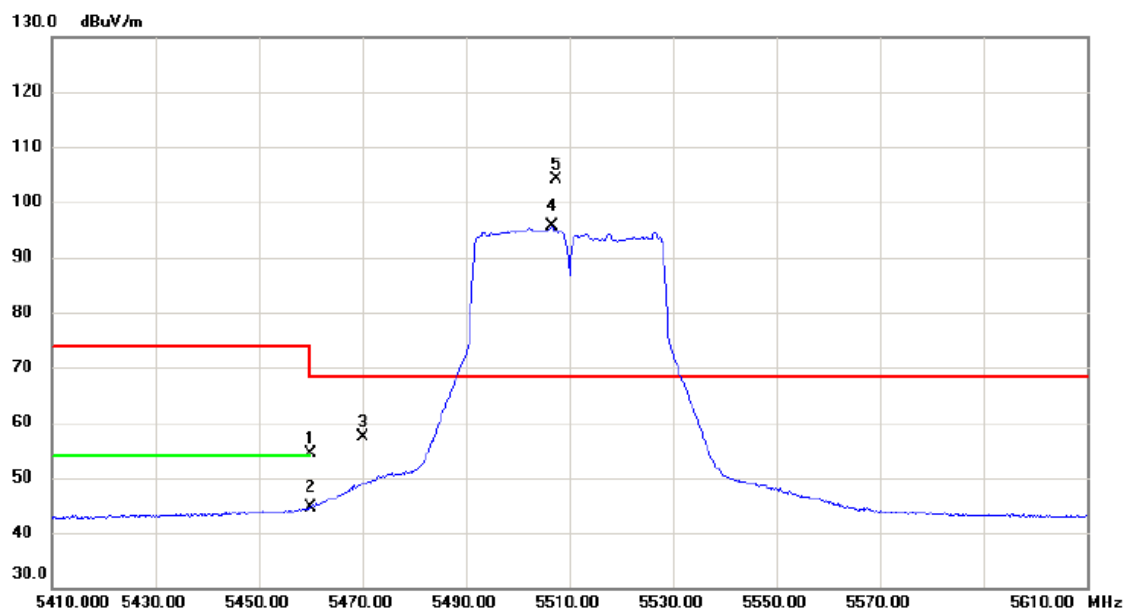

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	55.86	-1.49	54.37	74.00	-19.63	peak	
2		5460.000	46.19	-1.49	44.70	54.00	-9.30	AVG	
3		5470.000	58.82	-1.48	57.34	68.30	-10.96	peak	
4	X	5506.600	96.97	-1.45	95.52	68.30	27.22	AVG	主波訊號不予判定
5	*	5507.400	105.51	-1.45	104.06	68.30	35.76	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5510 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

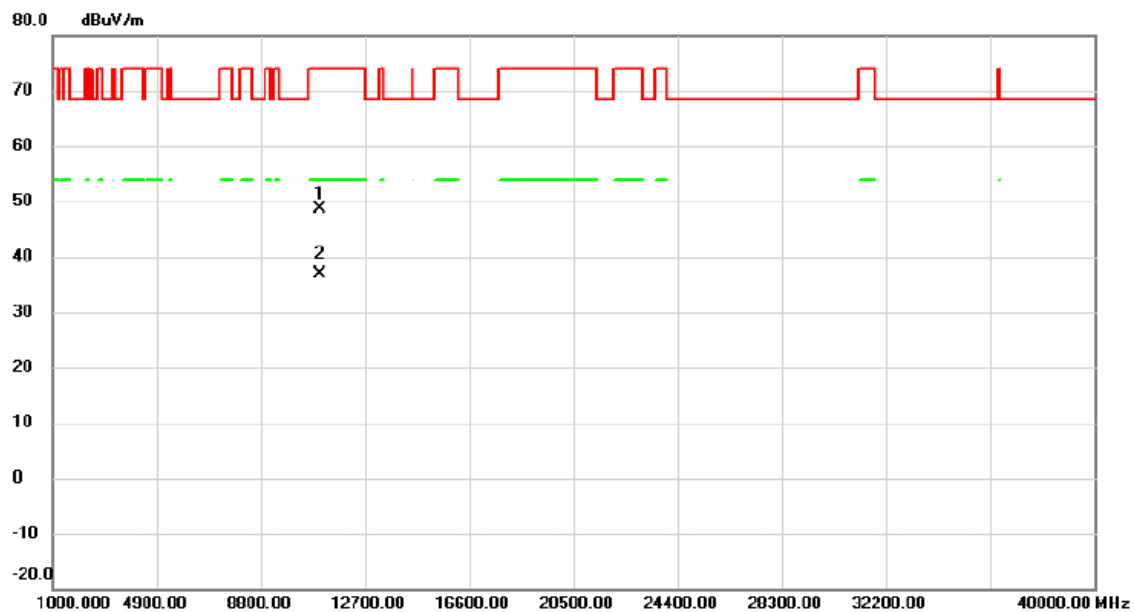

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	46.15	2.50	48.65	74.00	-25.35	peak	
2	*	11020.00	34.35	2.50	36.85	54.00	-17.15	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5510 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

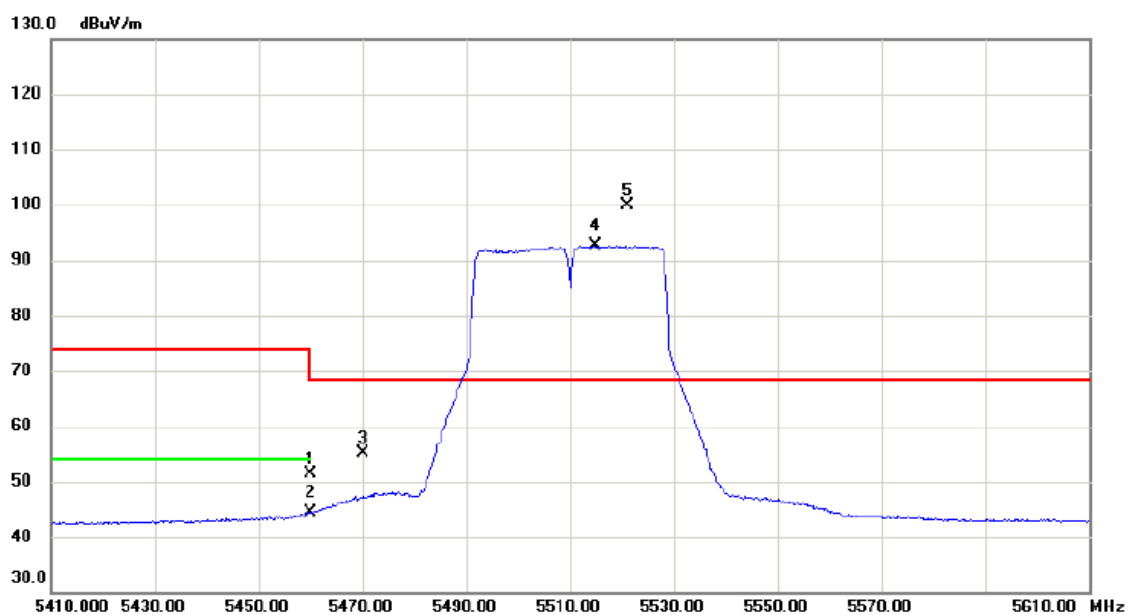

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	52.81	-1.49	51.32	74.00	-22.68	peak	
2		5460.000	45.84	-1.49	44.35	54.00	-9.65	AVG	
3		5470.000	56.63	-1.48	55.15	68.30	-13.15	peak	
4	X	5514.800	94.10	-1.42	92.68	68.30	24.38	AVG	主波訊號不予判定
5	*	5521.000	101.18	-1.41	99.77	68.30	31.47	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5510 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

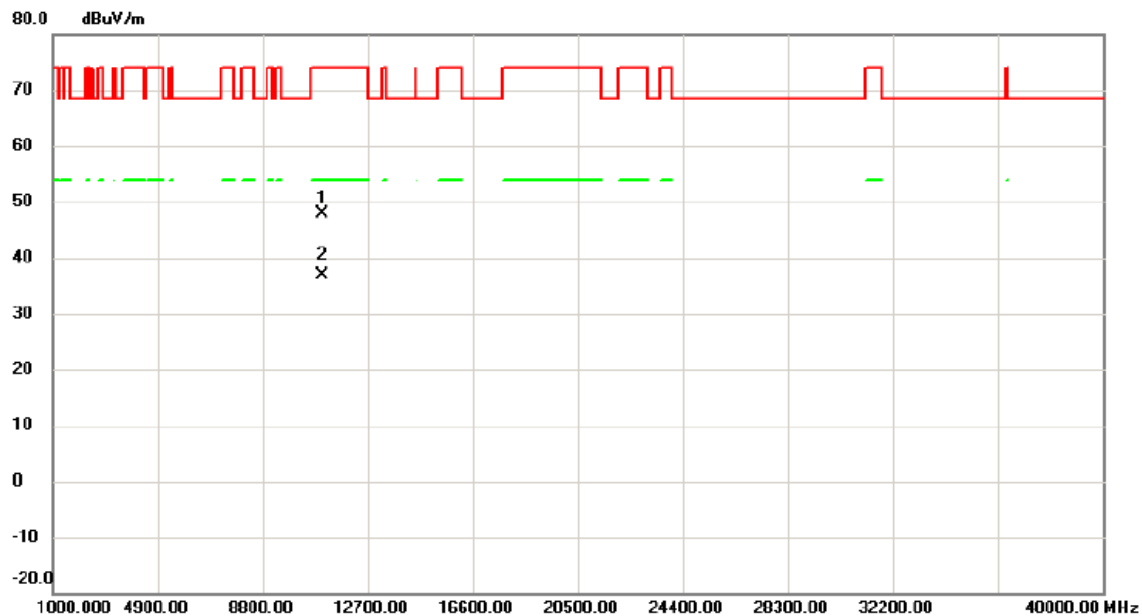

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	45.44	2.50	47.94	74.00	-26.06	peak	
2	*	11020.00	34.30	2.50	36.80	54.00	-17.20	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

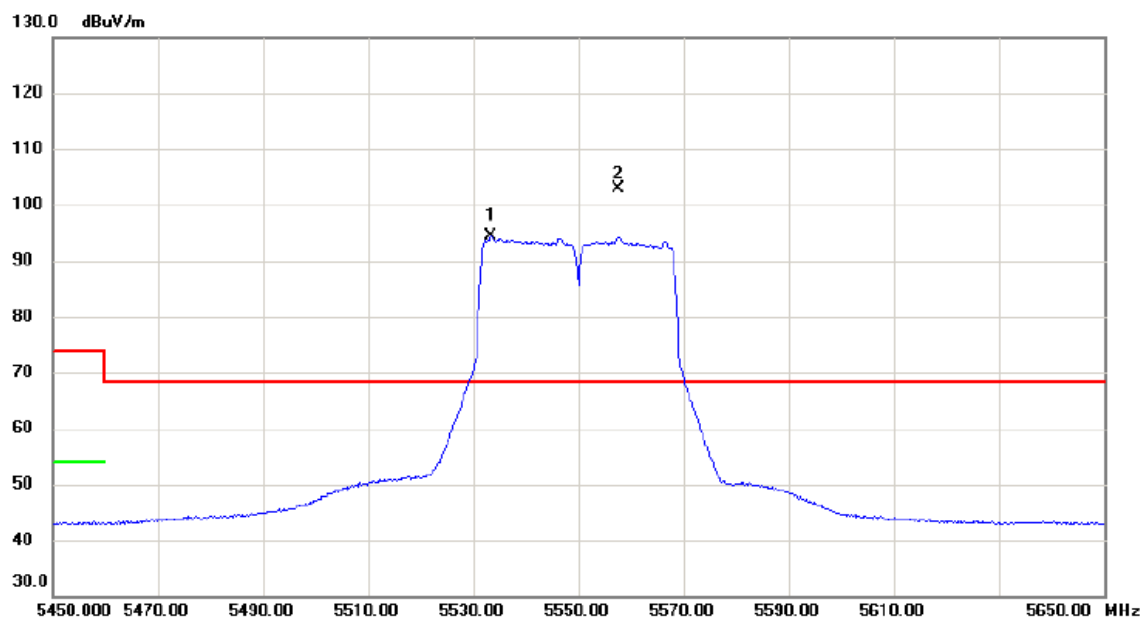

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5533.400	95.76	-1.37	94.39	68.30	26.09	AVG	主波訊號不予判定
2	*	5557.600	104.09	-1.31	102.78	68.30	34.48	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

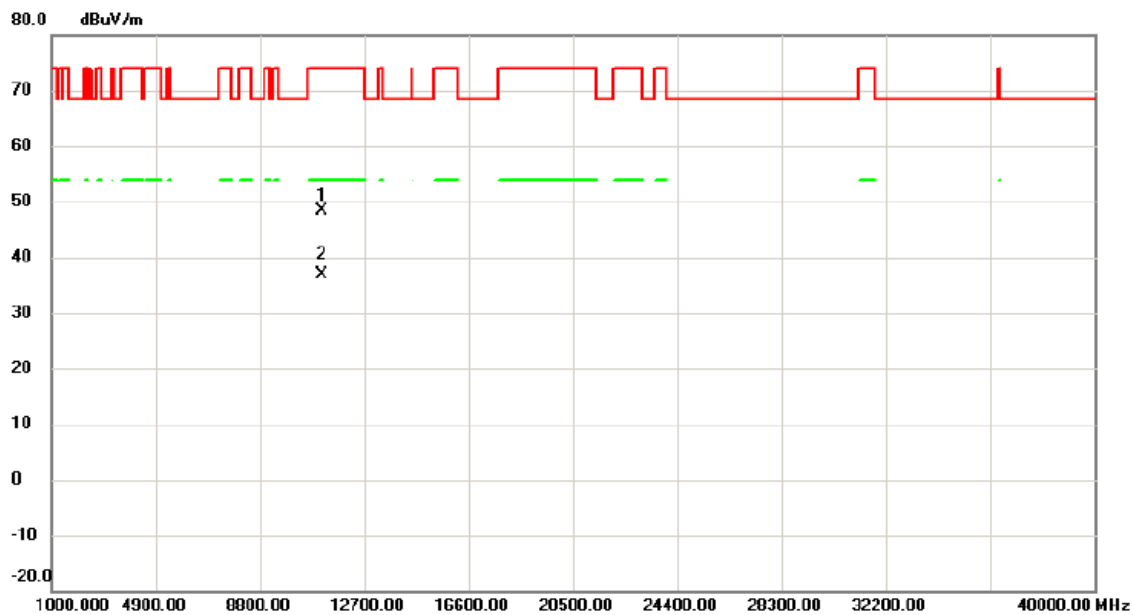

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11100.00	45.87	2.58	48.45	74.00	-25.55	peak	
2	*	11100.00	34.42	2.58	37.00	54.00	-17.00	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

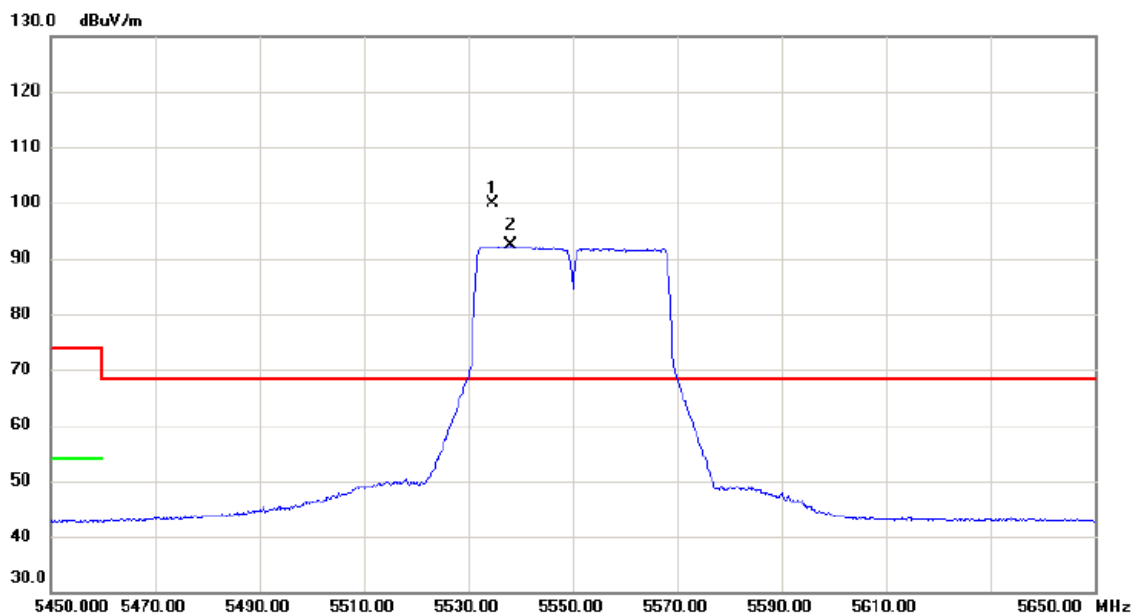

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5534.600	101.32	-1.36	99.96	68.30	31.66	peak	主波訊號不予判定
2	X	5538.000	93.80	-1.36	92.44	68.30	24.14	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5550 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

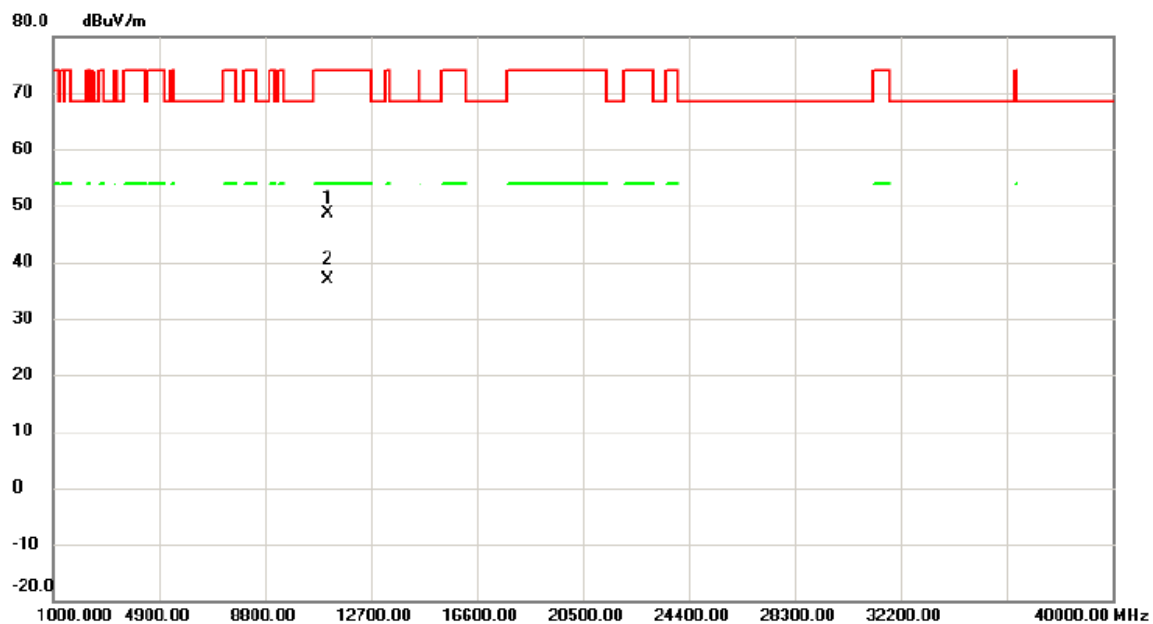

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	46.04	2.58	48.62	74.00	-25.38	peak	
2	*	11100.00	34.37	2.58	36.95	54.00	-17.05	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5670 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

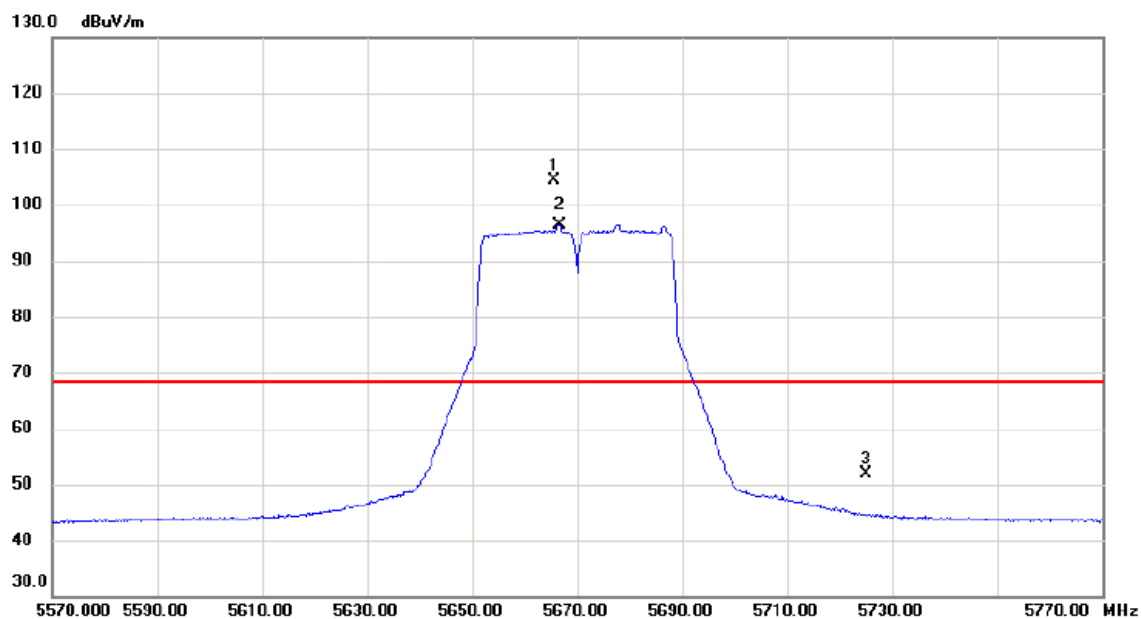

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5665.600	105.50	-1.04	104.46	68.30	36.16	peak	主波訊號不予判定
2	X	5666.600	97.49	-1.03	96.46	68.30	28.16	AVG	主波訊號不予判定
3		5725.000	52.79	-0.89	51.90	68.30	-16.40	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5670 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

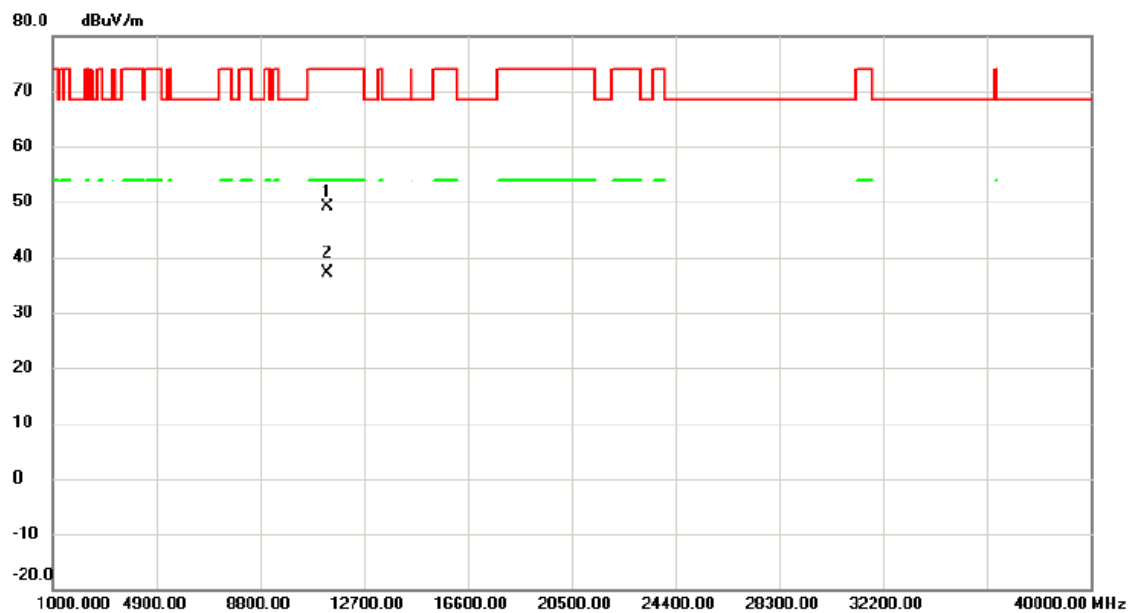

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11340.00	46.43	2.77	49.20	74.00	-24.80	peak	
2	*	11340.00	34.41	2.77	37.18	54.00	-16.82	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5670 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

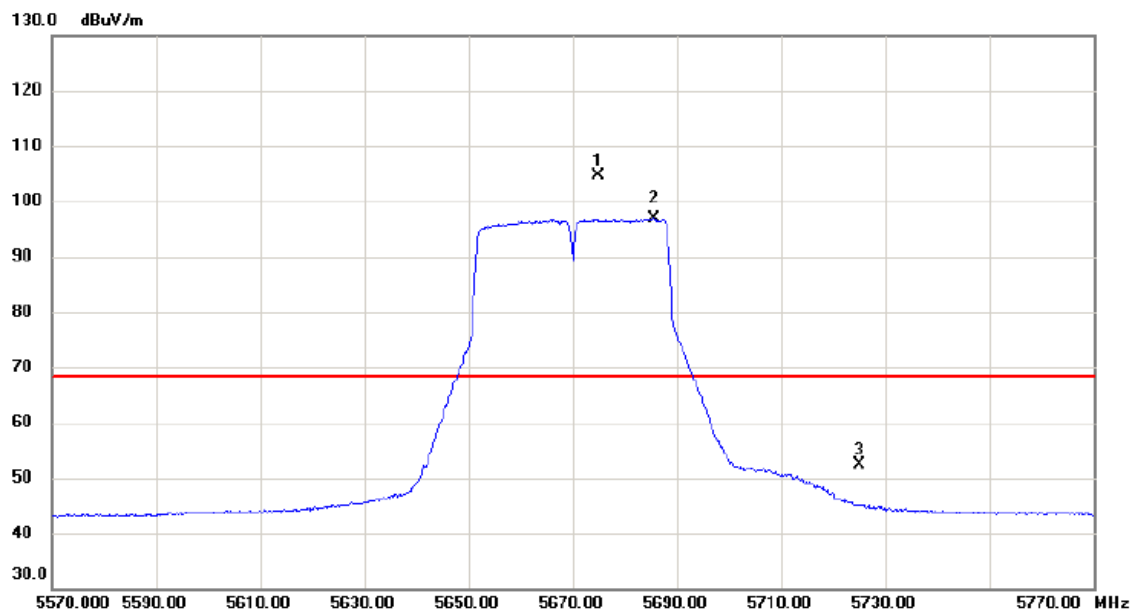

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5675.000	105.63	-1.02	104.61	68.30	36.31	peak	主波訊號不予判定
2	X	5685.600	97.75	-0.98	96.77	68.30	28.47	AVG	主波訊號不予判定
3		5725.000	53.32	-0.89	52.43	68.30	-15.87	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5670 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

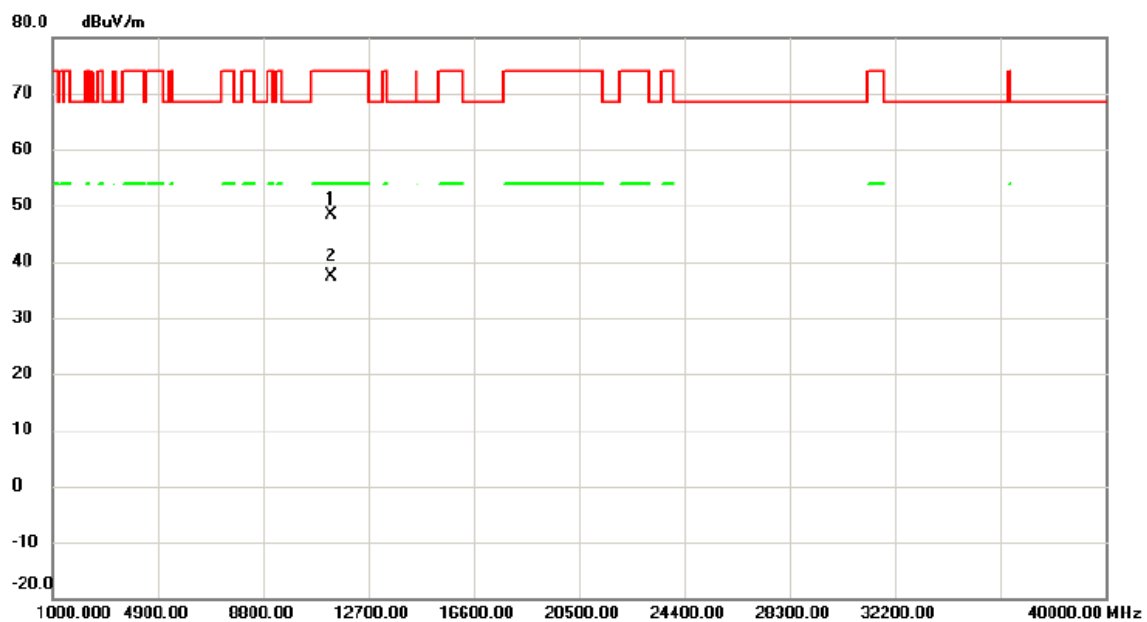

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	45.67	2.77	48.44	74.00	-25.56	peak	
2	*	11340.00	34.53	2.77	37.30	54.00	-16.70	AVG	

測試頻道: IEEE 802.11ac (80 MHz) /
5530 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

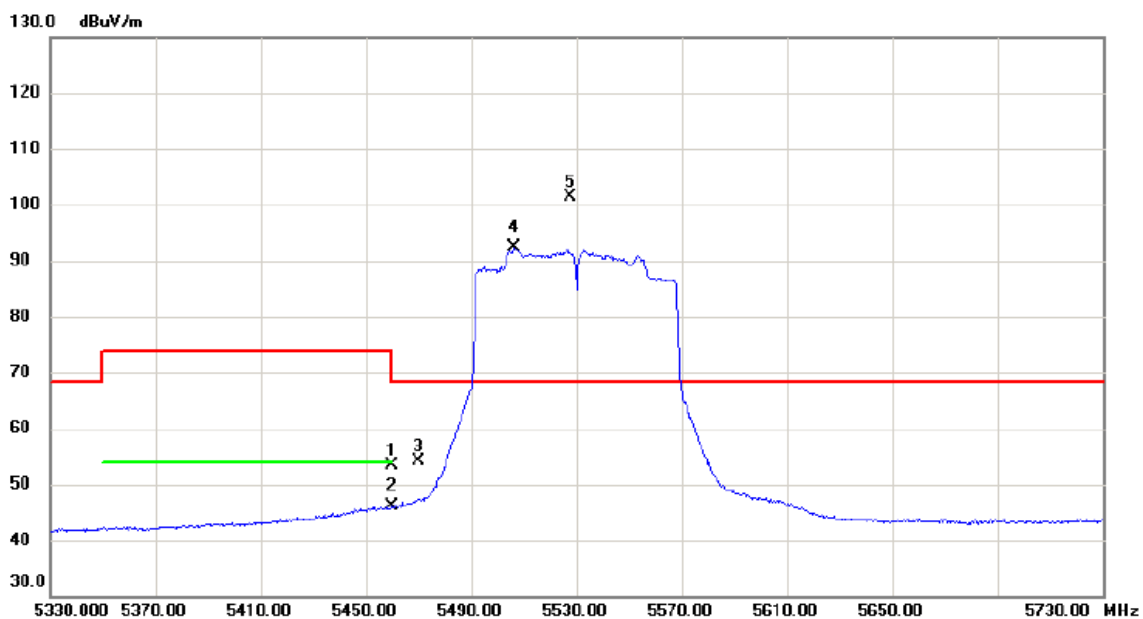

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	54.78	-1.49	53.29	74.00	-20.71	peak	
2		5460.000	47.73	-1.49	46.24	54.00	-7.76	AVG	
3		5470.000	55.54	-1.48	54.06	68.30	-14.24	peak	
4	X	5506.400	93.82	-1.45	92.37	68.30	24.07	AVG	主波訊號不予判定
5	*	5527.600	102.86	-1.40	101.46	68.30	33.16	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (80 MHz) /
5530 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

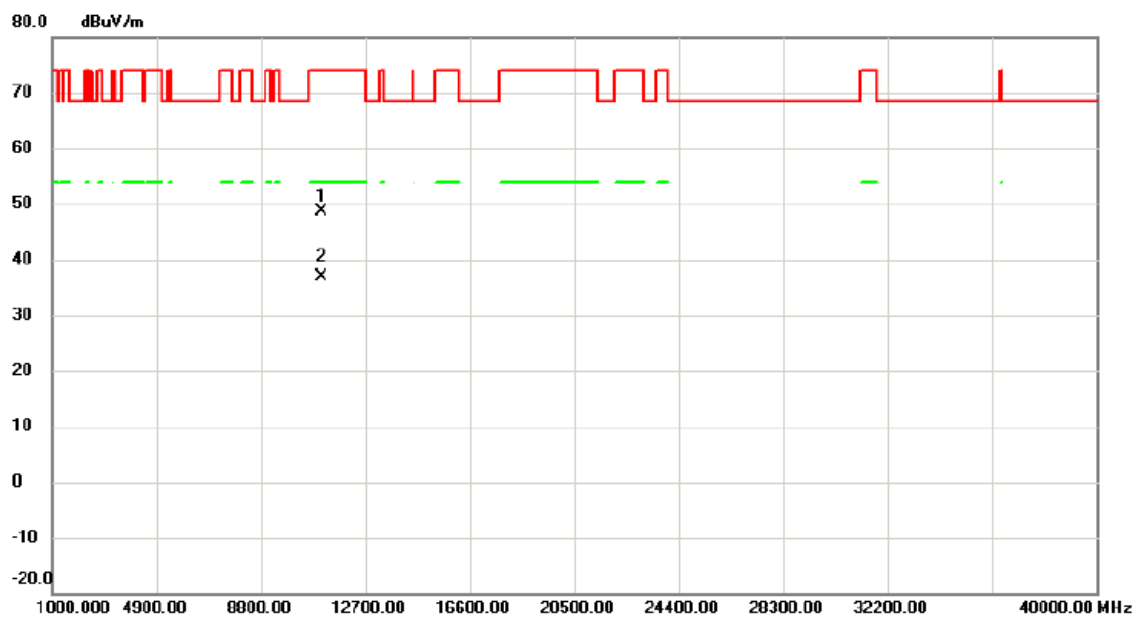

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	46.08	2.54	48.62	74.00	-25.38	peak	
2	*	11060.00	34.45	2.54	36.99	54.00	-17.01	AVG	

測試頻道: IEEE 802.11ac (80 MHz) / 5530 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

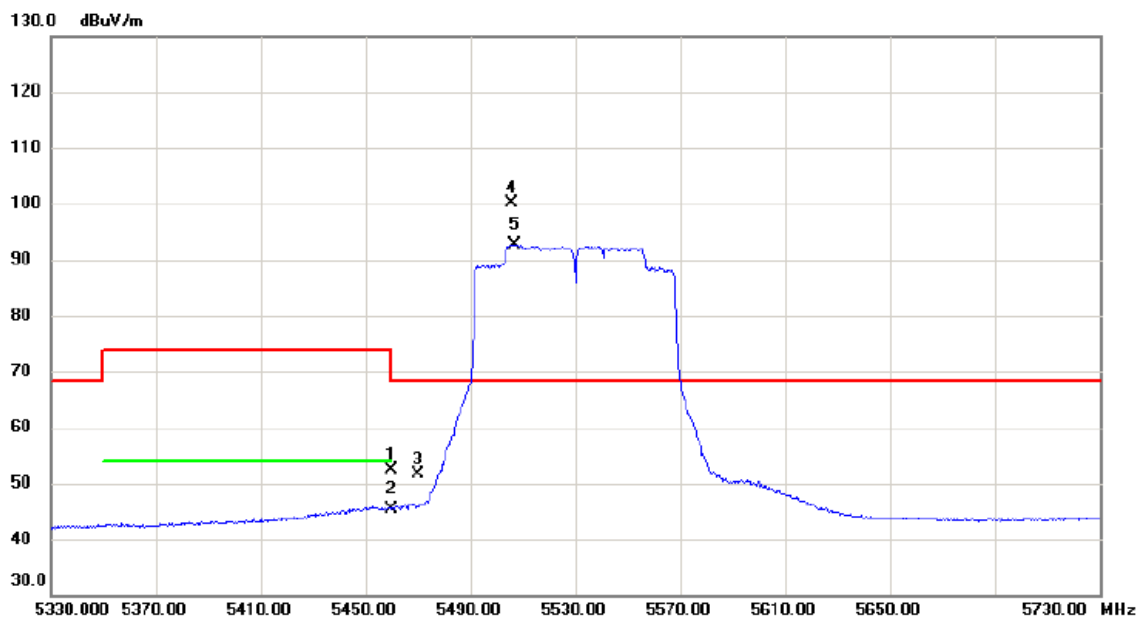

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	53.89	-1.49	52.40	74.00	-21.60	peak	
2		5460.000	46.79	-1.49	45.30	54.00	-8.70	AVG	
3		5470.000	53.16	-1.48	51.68	68.30	-16.62	peak	
4	*	5505.600	101.54	-1.45	100.09	68.30	31.79	peak	主波訊號不予判定
5	X	5506.800	94.20	-1.45	92.75	68.30	24.45	AVG	主波訊號不予判定

測試頻道: IEEE 802.11ac (80 MHz) /
5530 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

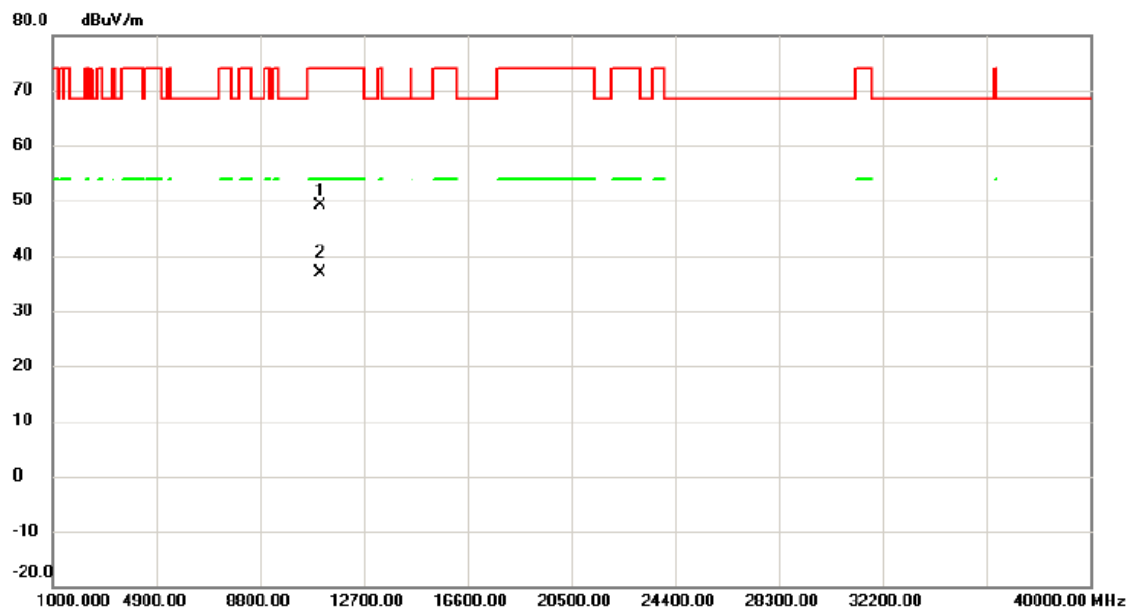

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Comment
1		11060.00	46.68	2.54	49.22	74.00	-24.78	peak	
2	*	11060.00	34.43	2.54	36.97	54.00	-17.03	AVG	

測試頻道: IEEE 802.11ac (80 MHz) /
5610 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23 °C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

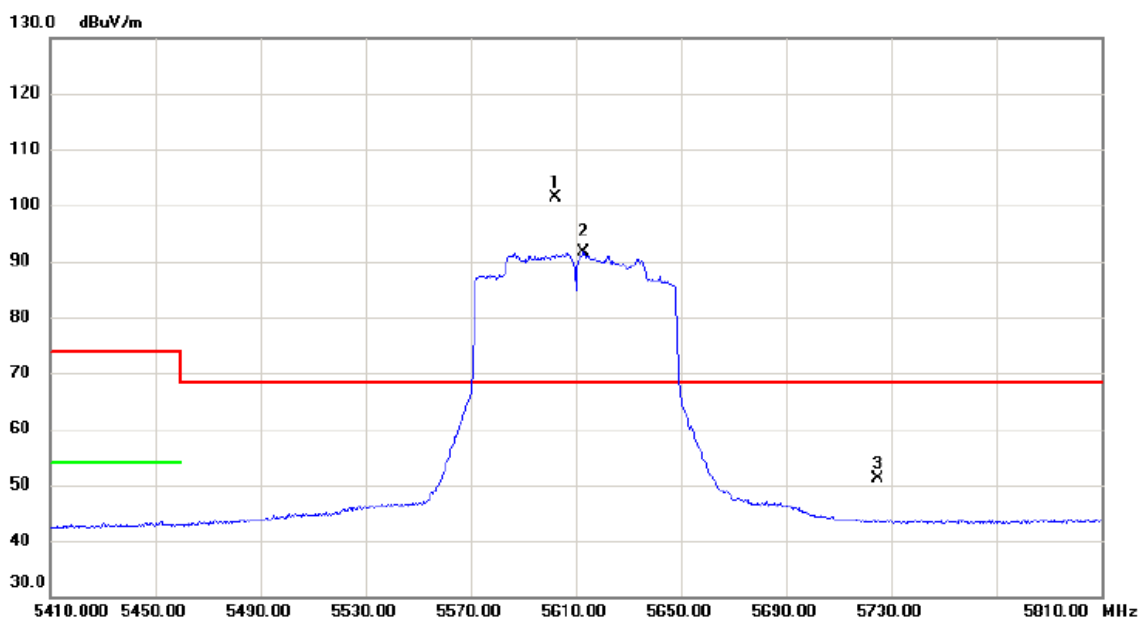

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5602.400	102.63	-1.20	101.43	68.30	33.13	peak	主波訊號不予判定
2	X	5613.200	92.71	-1.18	91.53	68.30	23.23	AVG	主波訊號不予判定
3		5725.000	52.08	-0.89	51.19	68.30	-17.11	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
5610 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

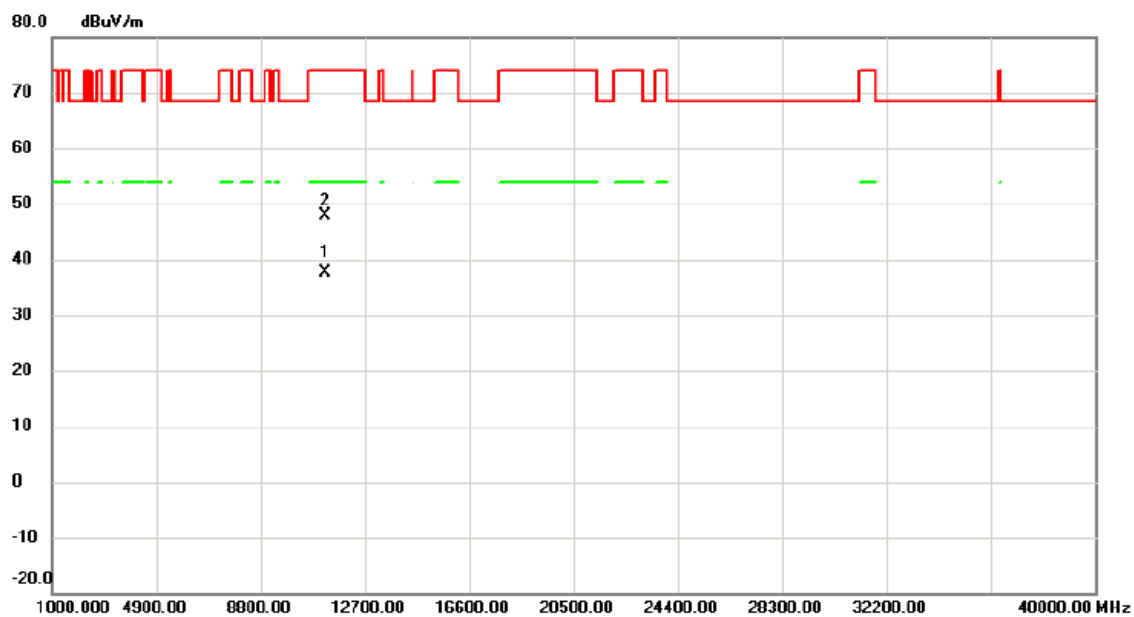

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11220.87	34.96	2.67	37.63	54.00	-16.37	AVG	
2		11221.36	45.25	2.67	47.92	74.00	-26.08	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
5610 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

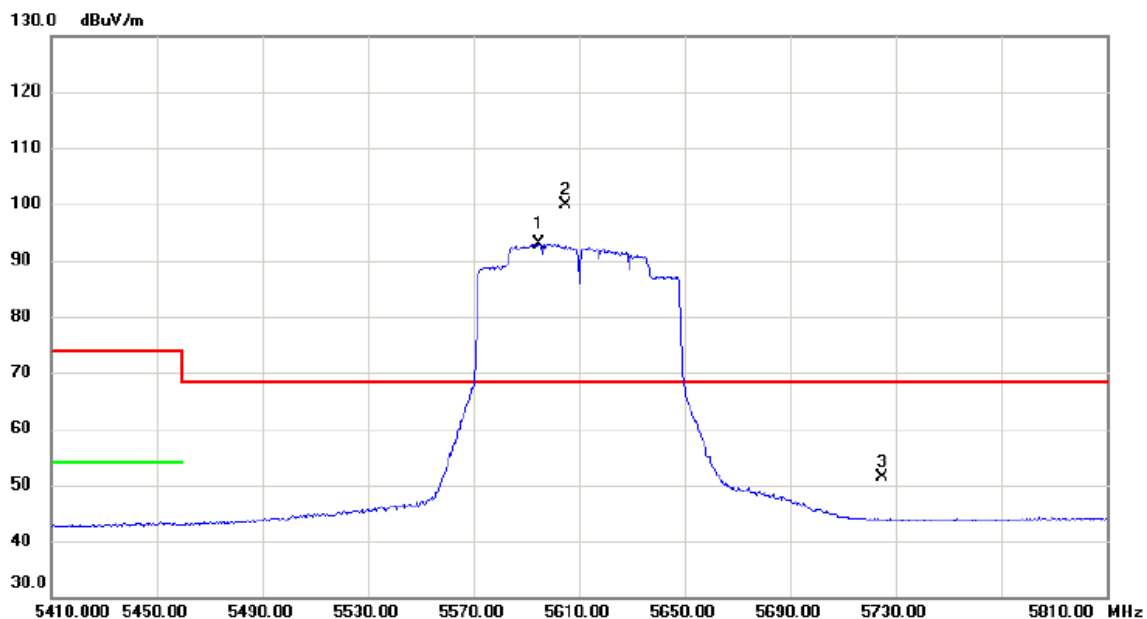

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5594.800	94.21	-1.22	92.99	68.30	24.69	AVG	主波訊號不予判定
2	*	5605.200	101.02	-1.19	99.83	68.30	31.53	peak	主波訊號不予判定
3		5725.000	52.18	-0.89	51.29	68.30	-17.01	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
5610 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

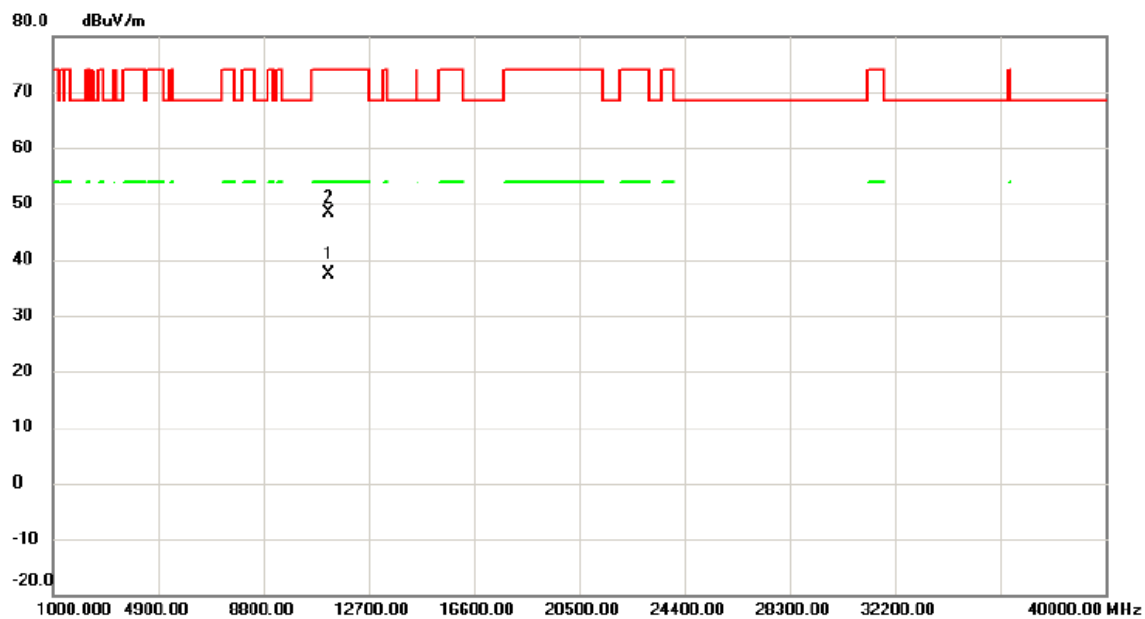

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11220.94	34.78	2.67	37.45	54.00	-16.55	AVG	
2		11221.49	45.77	2.67	48.44	74.00	-25.56	peak	

測試頻道: IEEE 802.11ac (160 MHz) /
5570 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/11/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

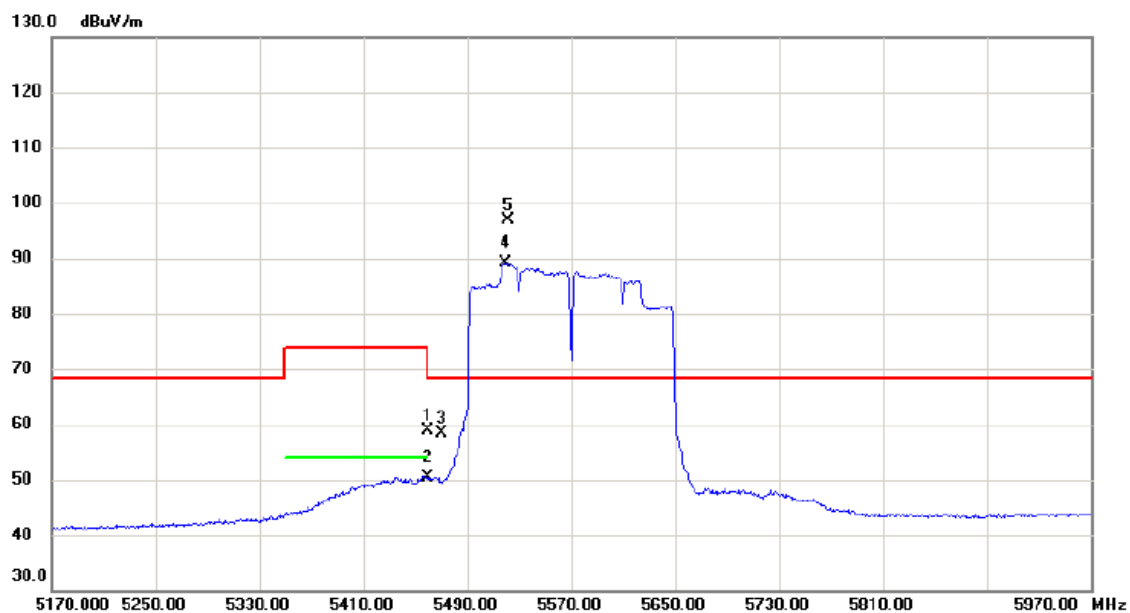

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	60.25	-1.49	58.76	74.00	-15.24	peak	
2		5460.000	51.82	-1.49	50.33	54.00	-3.67	AVG	
3		5470.000	59.74	-1.48	58.26	68.30	-10.04	peak	
4	X	5519.600	90.42	-1.41	89.01	68.30	20.71	AVG	主波訊號不予判定
5	*	5521.200	98.39	-1.41	96.98	68.30	28.68	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (160 MHz) /
5570 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Vertical

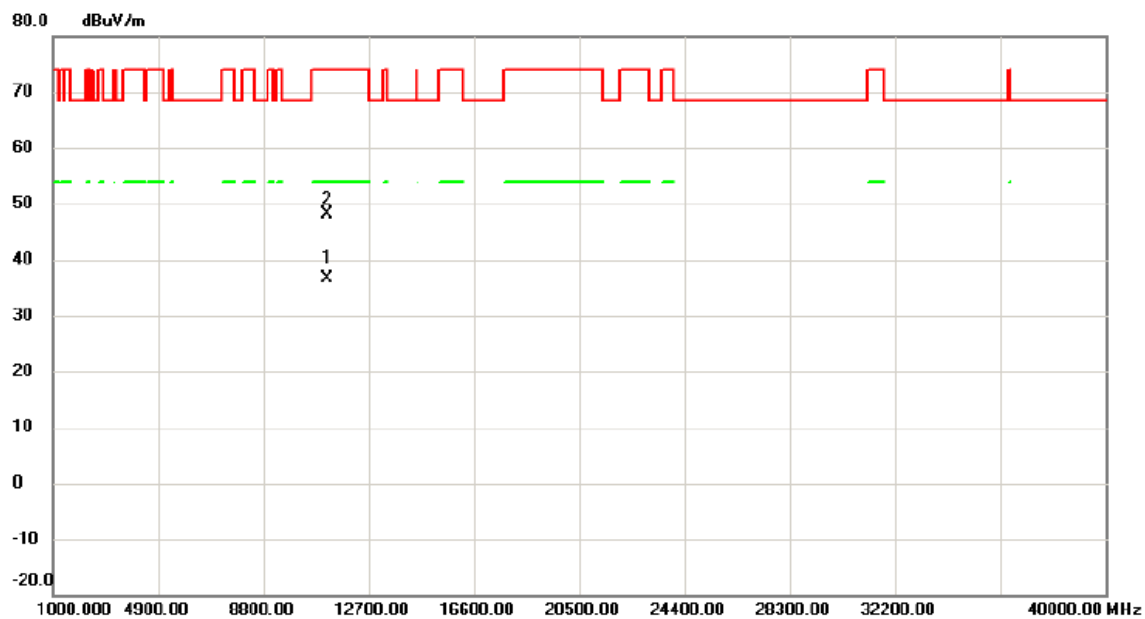

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11141.92	34.08	2.61	36.69	54.00	-17.31	AVG	
2		11142.39	45.60	2.61	48.21	74.00	-25.79	peak	

測試頻道: IEEE 802.11ac (160 MHz) /
5570 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 107/11/22

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

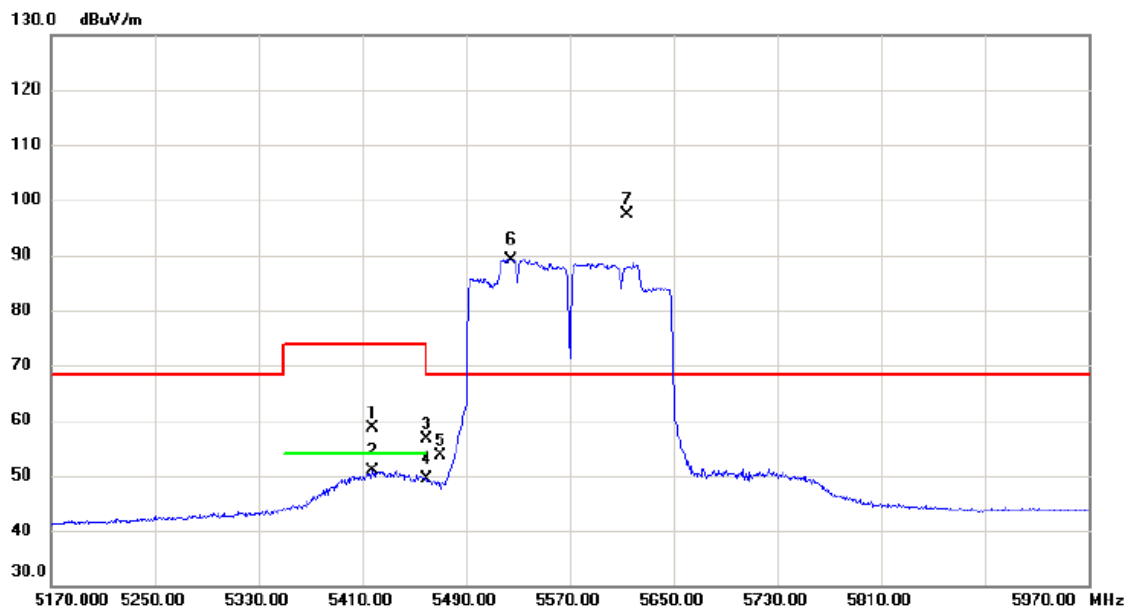

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5418.000	60.11	-1.52	58.59	74.00	-15.41	peak	
2		5418.000	52.43	-1.52	50.91	54.00	-3.09	AVG	
3		5460.000	58.17	-1.49	56.68	74.00	-17.32	peak	
4		5460.000	50.86	-1.49	49.37	54.00	-4.63	AVG	
5		5470.000	55.12	-1.48	53.64	68.30	-14.66	peak	
6	X	5525.200	90.65	-1.40	89.25	68.30	20.95	AVG	主波訊號不予判定
7	*	5614.000	98.62	-1.18	97.44	68.30	29.14	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (160 MHz) /
5570 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 24 °C

環境濕度: 52%

Orthogonal Axis: X

Polarization: Horizontal

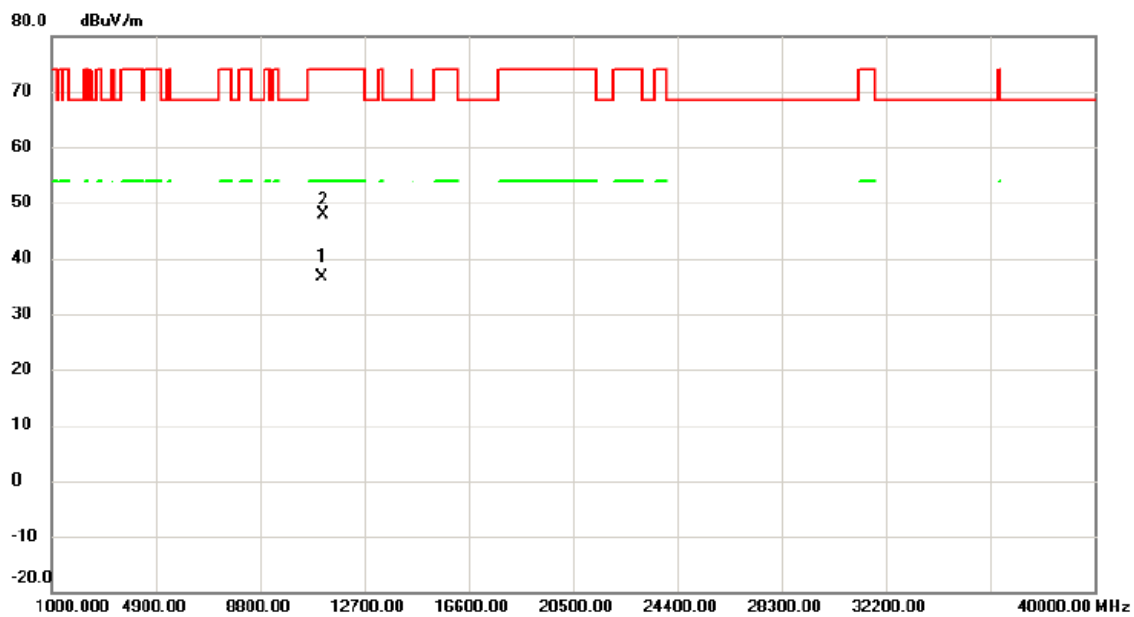

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11139.80	33.91	2.61	36.52	54.00	-17.48	AVG	
2		11141.68	45.35	2.61	47.96	74.00	-26.04	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

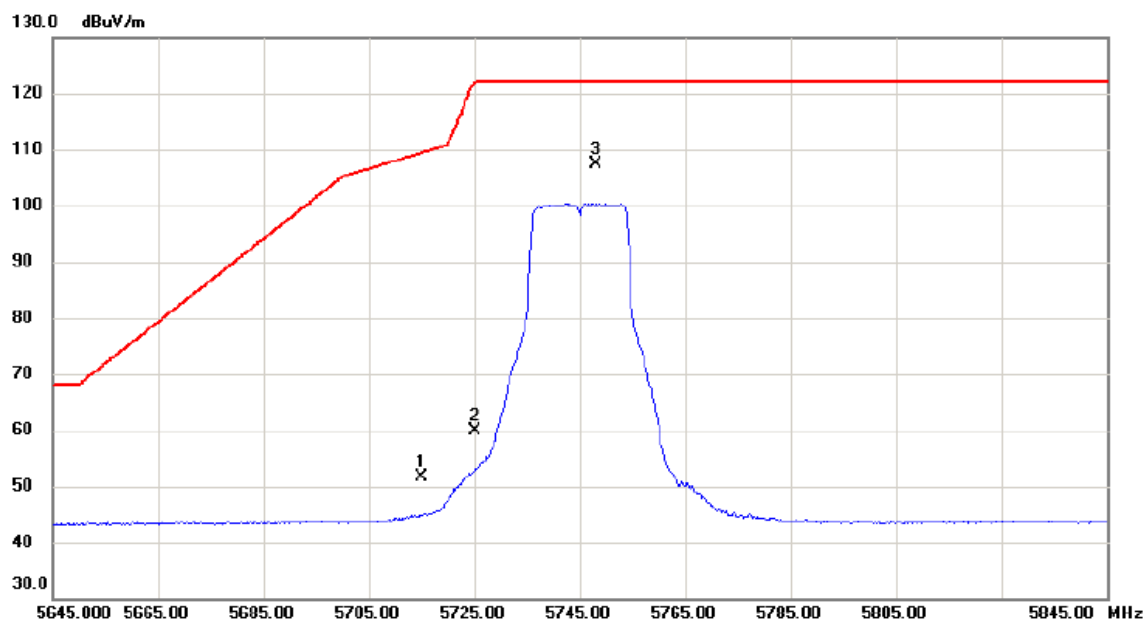

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	52.64	-0.92	51.72	109.40	-57.68	peak	
2		5725.000	60.68	-0.89	59.79	122.20	-62.41	peak	
3	*	5748.000	108.33	-0.83	107.50	122.20	-14.70	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

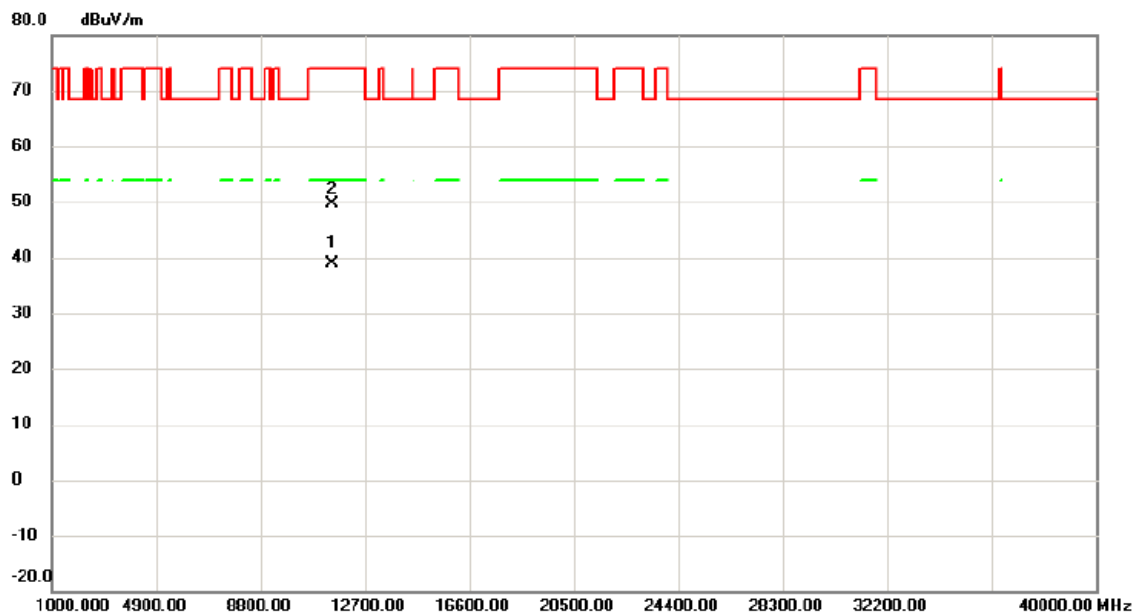

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11489.70	35.87	2.89	38.76	54.00	-15.24	AVG	
2		11499.52	46.68	2.91	49.59	74.00	-24.41	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5745 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

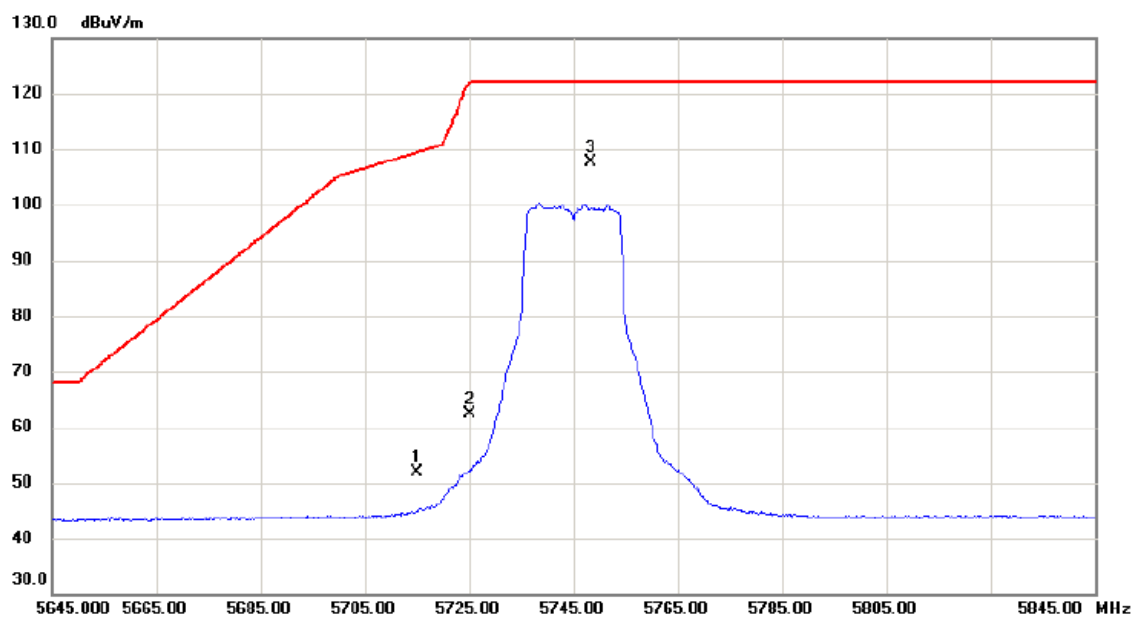

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	52.73	-0.92	51.81	109.40	-57.59	peak	
2		5725.000	63.15	-0.89	62.26	122.20	-59.94	peak	
3	*	5748.400	108.58	-0.83	107.75	122.20	-14.45	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5745 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

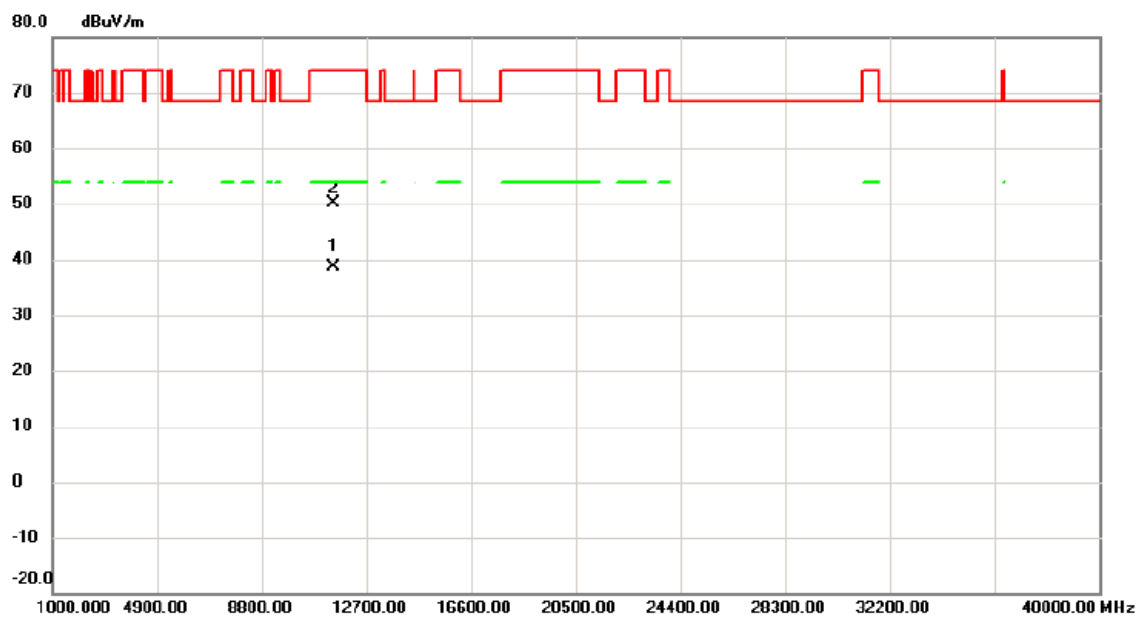

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
1	*	11489.52	35.82	2.89	38.71	54.00	-15.29	AVG	
2		11490.05	47.35	2.89	50.24	74.00	-23.76	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

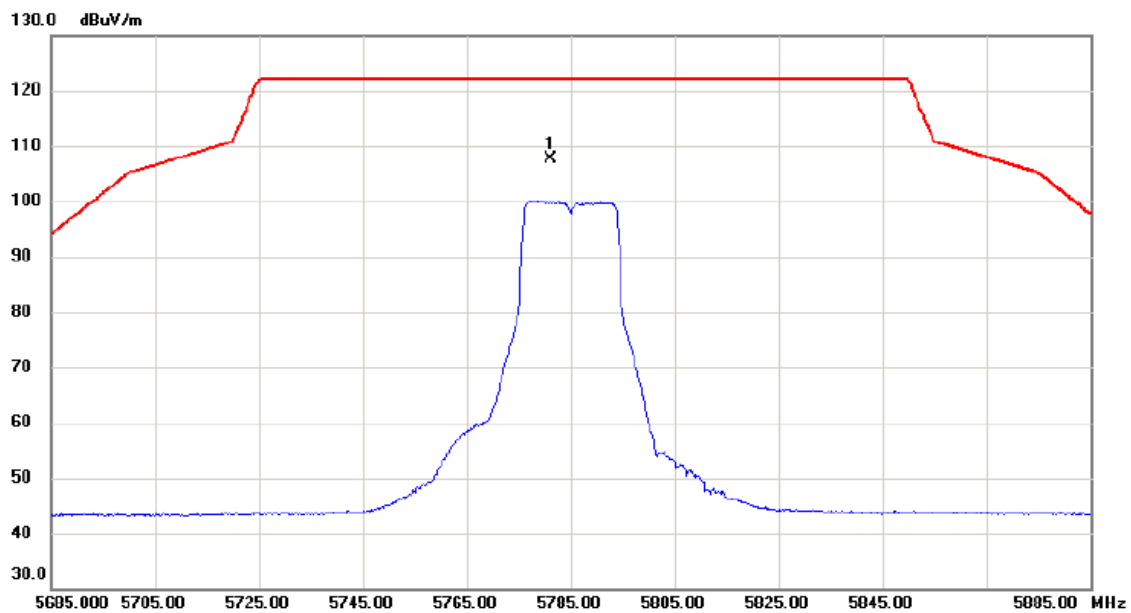

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5781.000	108.49	-0.75	107.74	122.20	-14.46	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

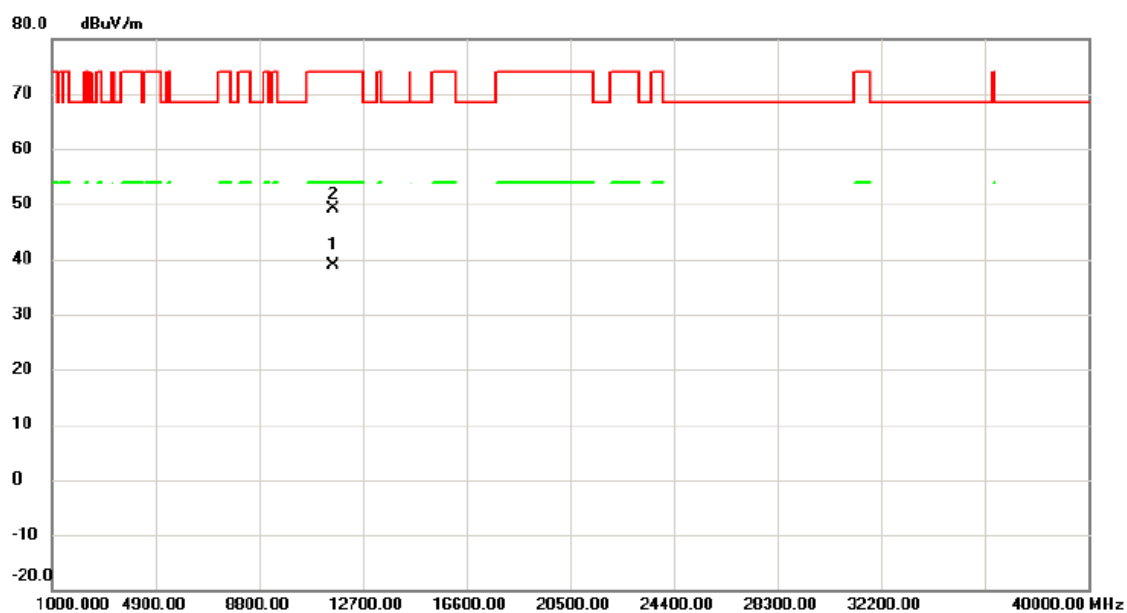

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11567.55	36.03	2.73	38.76	54.00	-15.24	AVG	
2		11569.25	46.34	2.72	49.06	74.00	-24.94	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5785 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

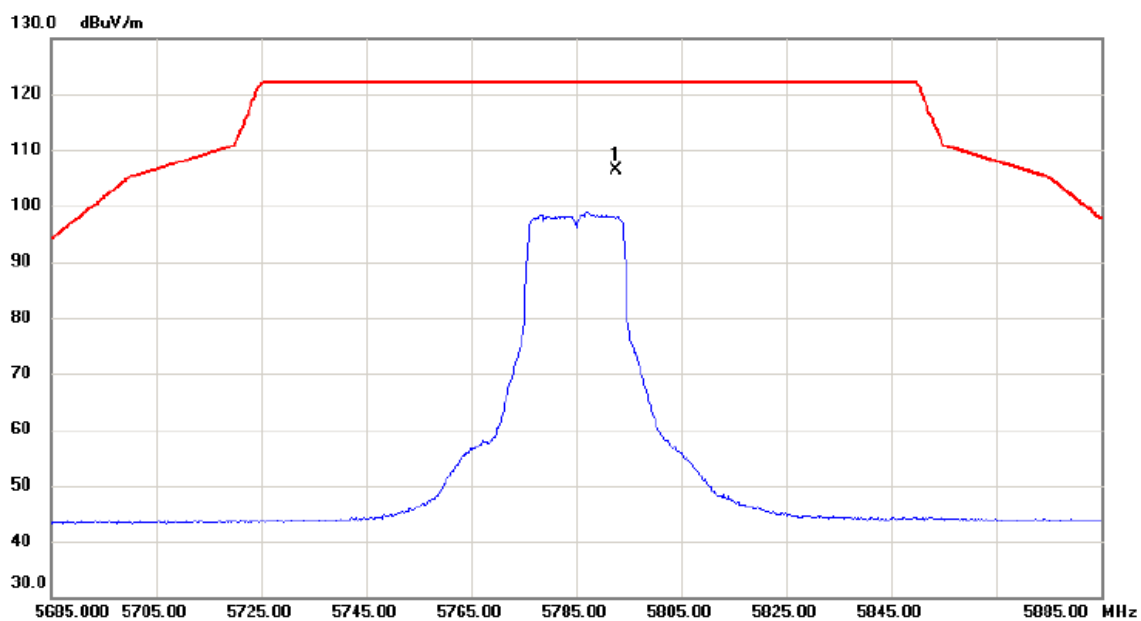

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5792.600	107.01	-0.72	106.29	122.20	-15.91	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (20 MHz) /
5785 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

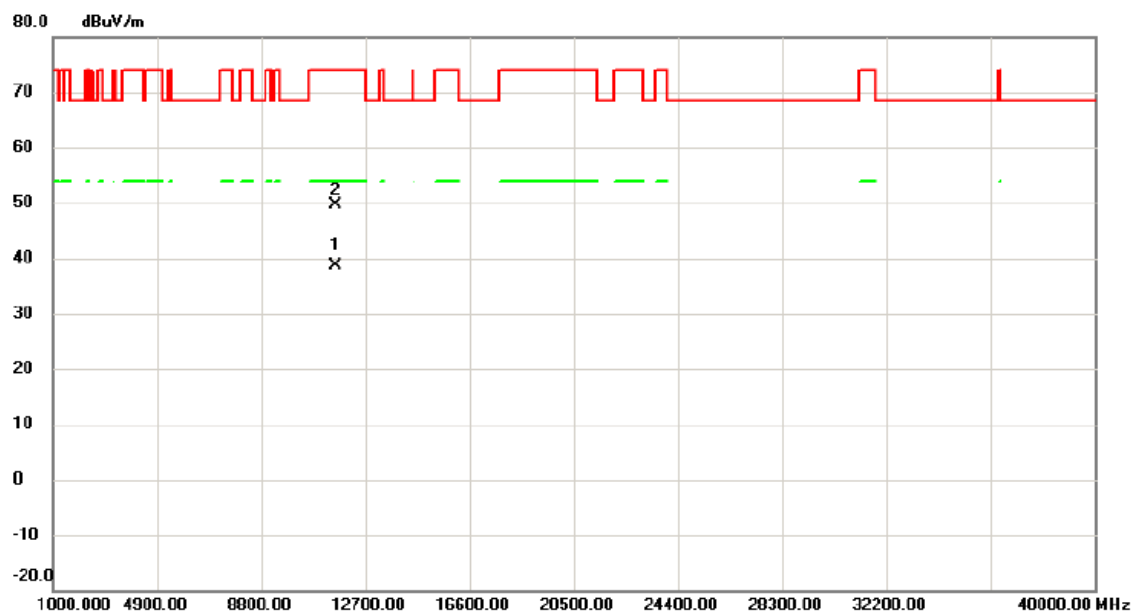

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11569.65	35.88	2.72	38.60	54.00	-15.40	AVG	
2		11591.60	47.02	2.66	49.68	74.00	-24.32	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

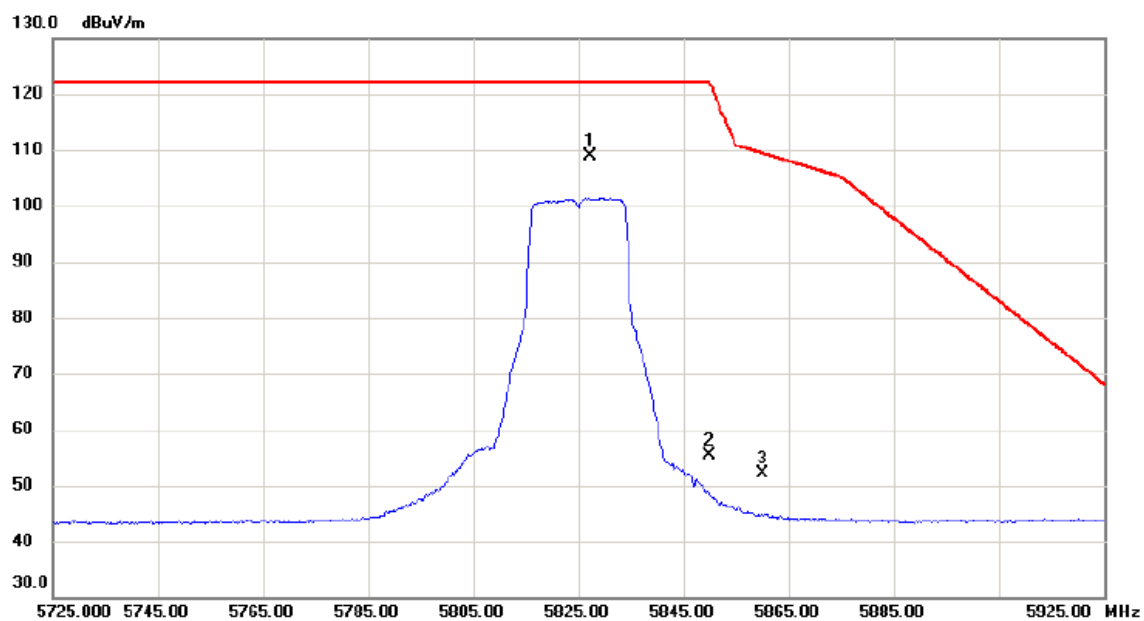

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5827.400	109.55	-0.63	108.92	122.20	-13.28	peak	主波訊號不予判定
2		5850.000	56.05	-0.57	55.48	122.20	-66.72	peak	
3		5860.000	52.73	-0.54	52.19	109.40	-57.21	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

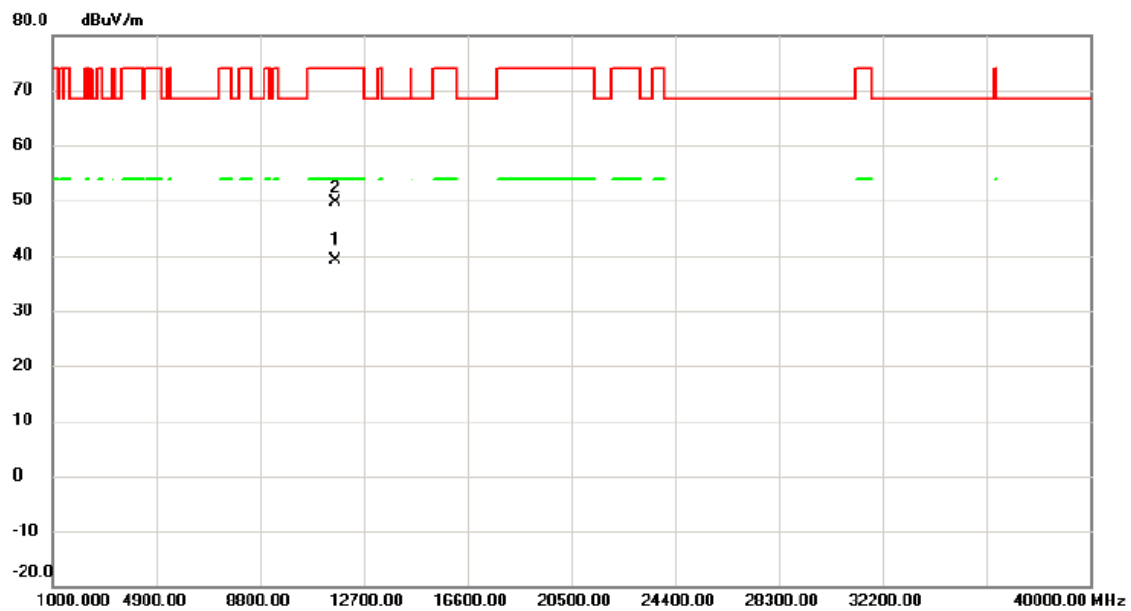

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Comment
1	*	11646.45	36.50	2.51	39.01	54.00	-14.99	AVG	
2		11652.30	47.23	2.49	49.72	74.00	-24.28	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

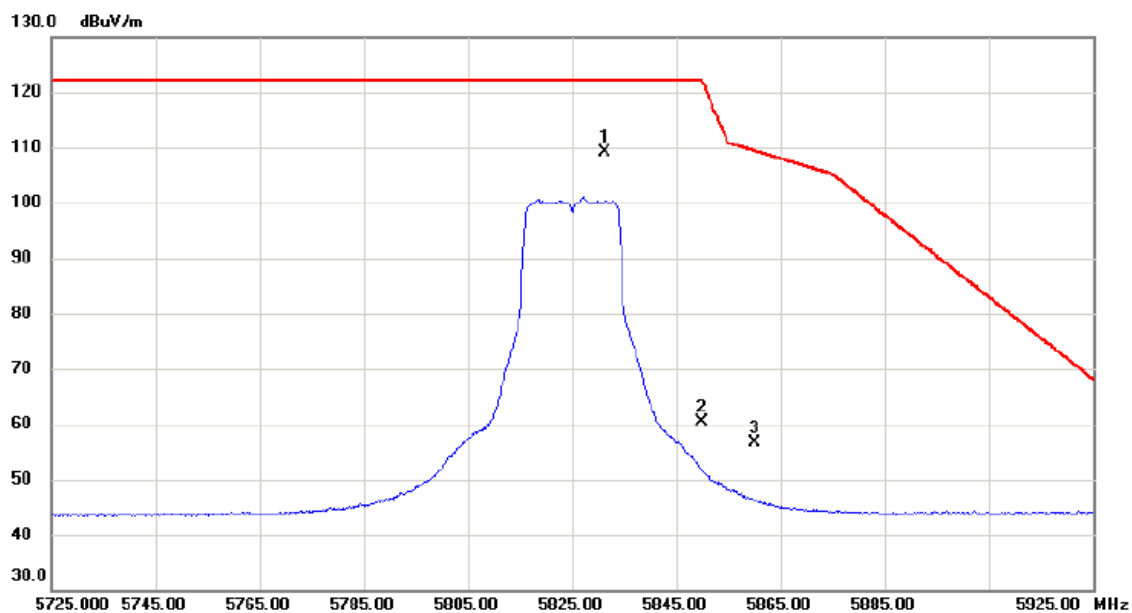

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5831.400	109.74	-0.62	109.12	122.20	-13.08	peak	主波訊號不予判定
2		5850.000	60.86	-0.57	60.29	122.20	-61.91	peak	
3		5860.000	57.06	-0.54	56.52	109.40	-52.88	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5825 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

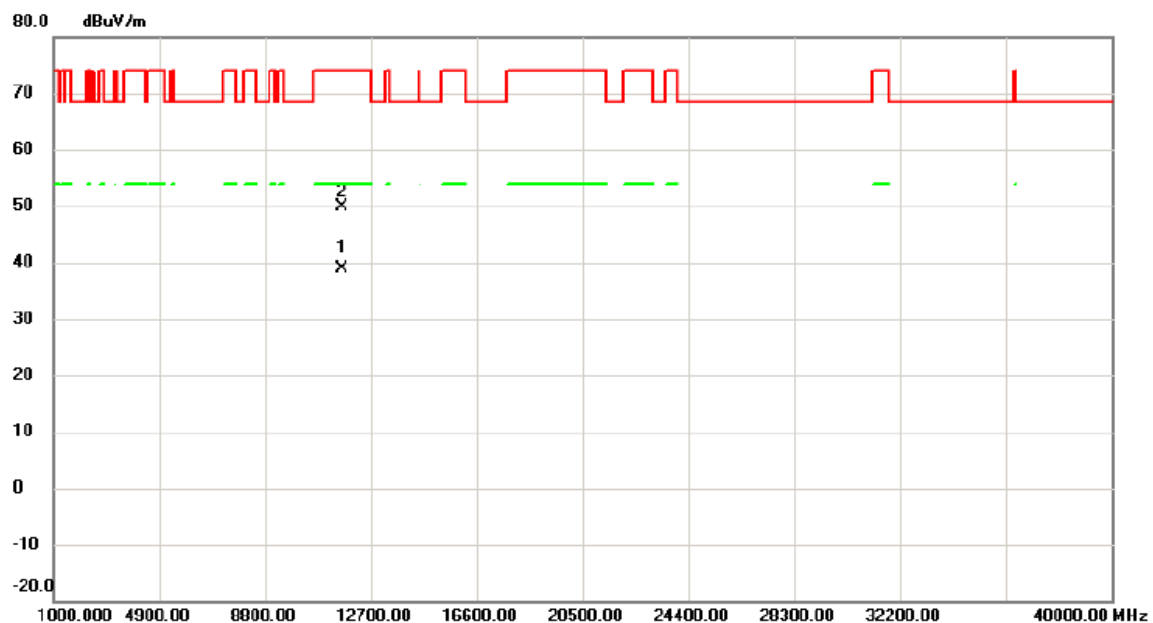

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11650.50	36.44	2.50	38.94	54.00	-15.06	AVG	
2		11652.20	47.37	2.50	49.87	74.00	-24.13	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

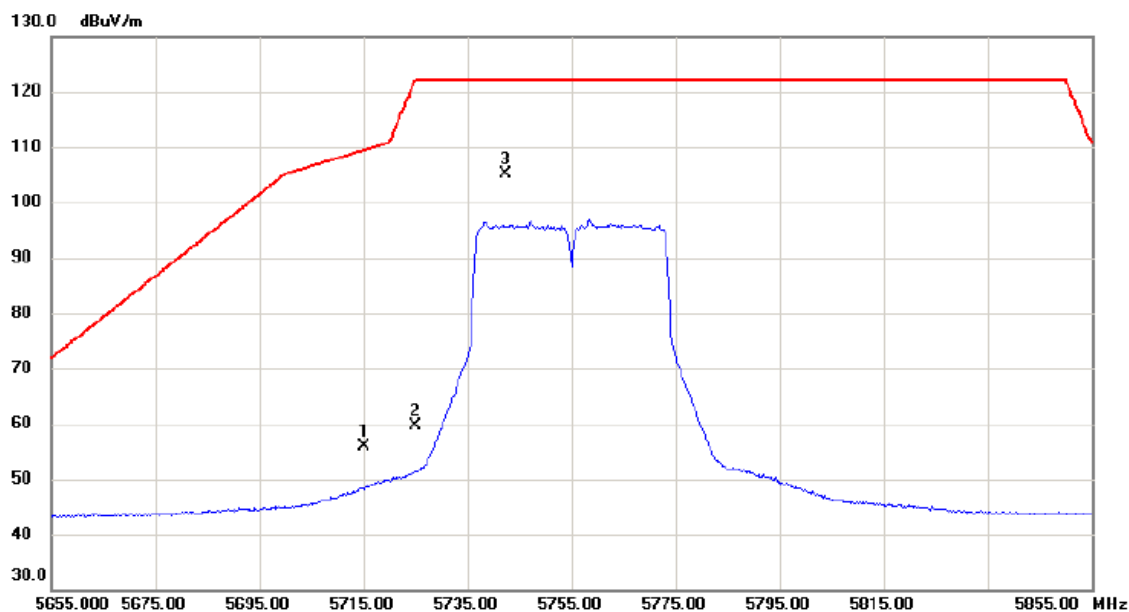

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	56.79	-0.92	55.87	109.40	-53.53	peak	
2		5725.000	60.52	-0.89	59.63	122.20	-62.57	peak	
3	*	5742.400	106.02	-0.84	105.18	122.20	-17.02	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

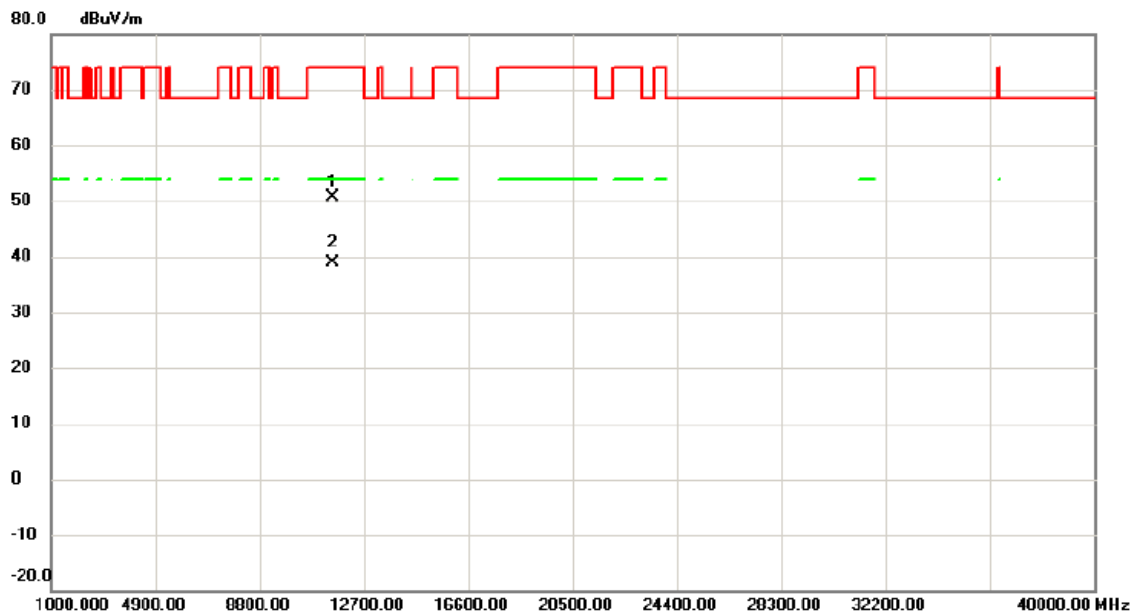

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11507.96	47.76	2.88	50.64	74.00	-23.36	peak	
2	*	11509.63	35.95	2.88	38.83	54.00	-15.17	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5755 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

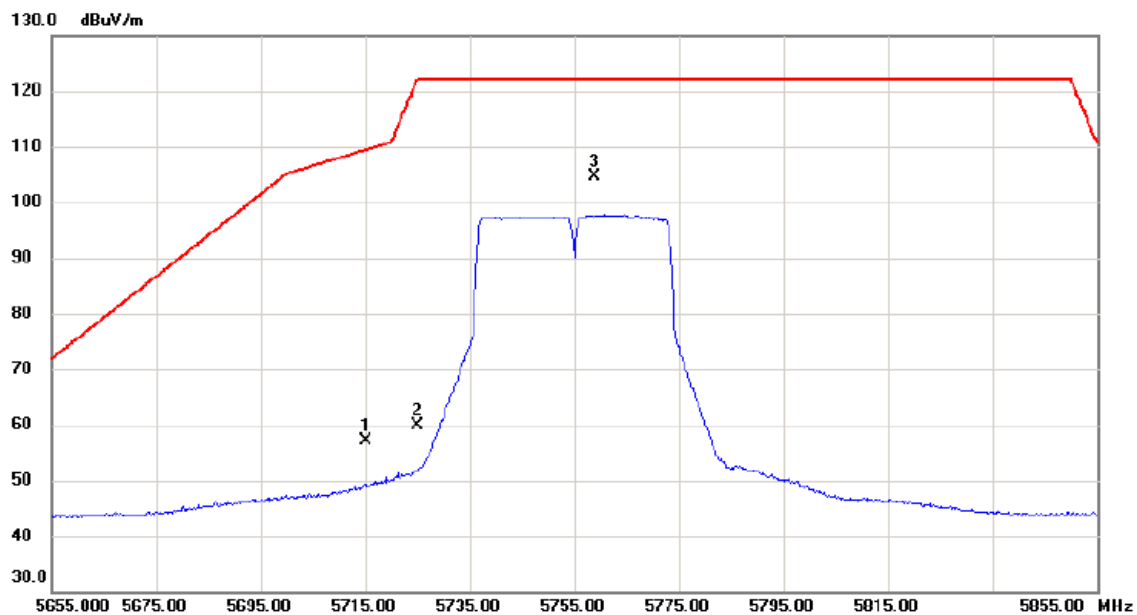

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5715.000	57.94	-0.92	57.02	109.40	-52.38	peak	
2		5725.000	60.80	-0.89	59.91	122.20	-62.29	peak	
3	*	5758.800	105.46	-0.81	104.65	122.20	-17.55	peak	主波訊號不予判定

測試頻道: IEEE 802.11ac (40 MHz) /
5755 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

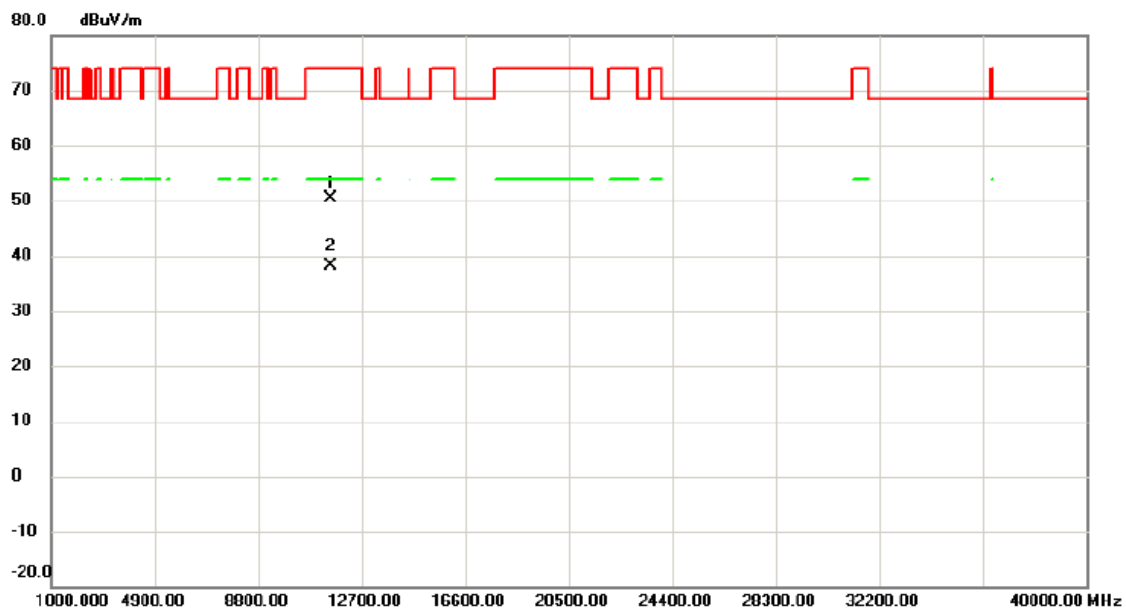

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11508.73	47.38	2.88	50.26	74.00	-23.74	peak	
2	*	11510.46	35.28	2.88	38.16	54.00	-15.84	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

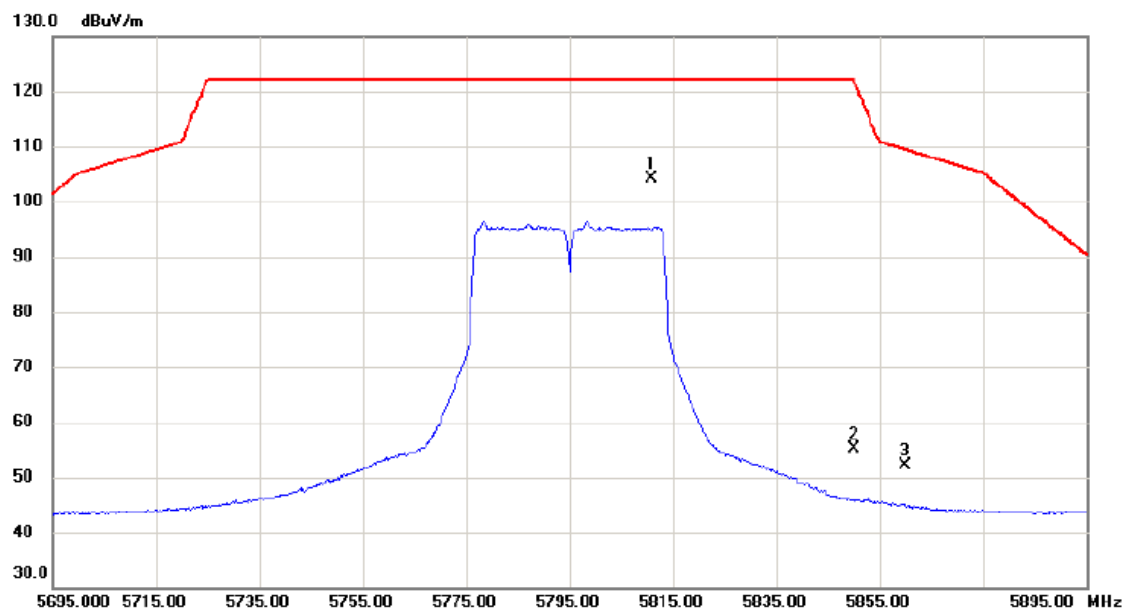

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5810.800	104.85	-0.67	104.18	122.20	-18.02	peak	主波訊號不予判定
2		5850.000	55.72	-0.57	55.15	122.20	-67.05	peak	
3		5860.000	52.69	-0.54	52.15	109.40	-57.25	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

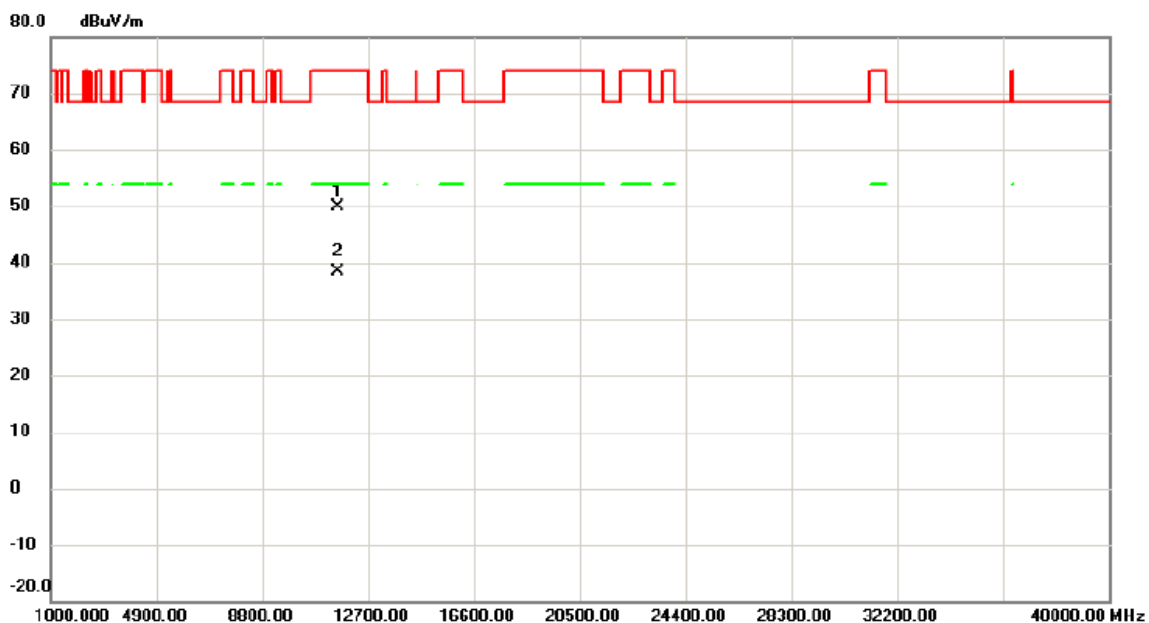

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11588.35	47.24	2.68	49.92	74.00	-24.08	peak	
2	*	11589.36	35.70	2.67	38.37	54.00	-15.63	AVG	

測試頻道: IEEE 802.11ac (40 MHz) /
5795 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23°C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/07

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

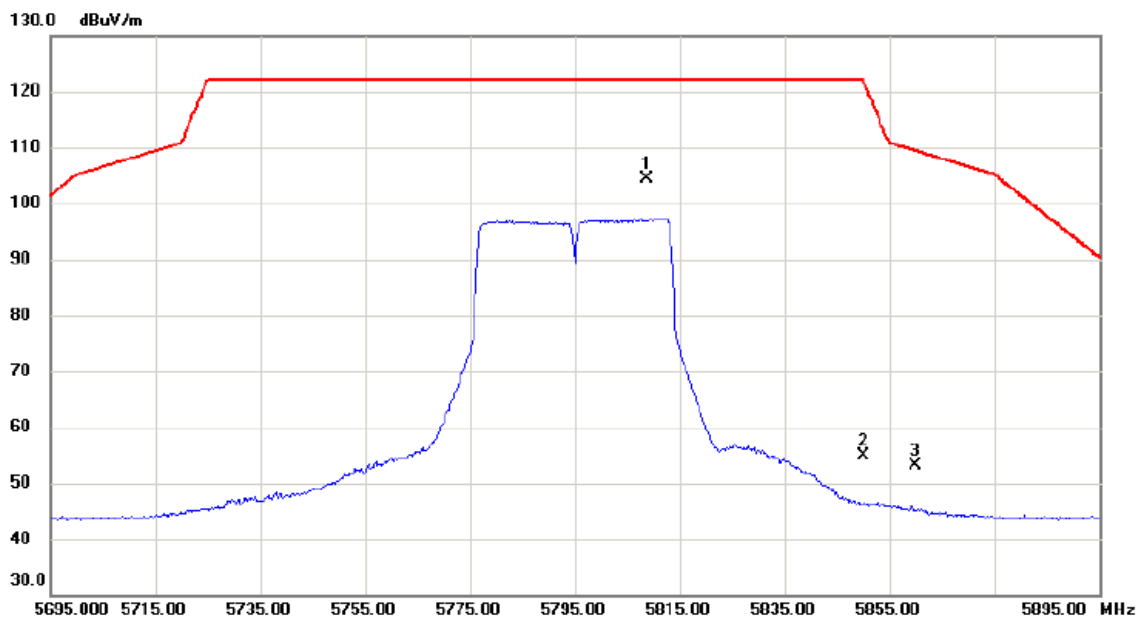

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5808.800	105.01	-0.68	104.33	122.20	-17.87	peak	主波訊號不予判定
2		5850.000	55.49	-0.57	54.92	122.20	-67.28	peak	
3		5860.000	53.77	-0.54	53.23	109.40	-56.17	peak	

測試頻道: IEEE 802.11ac (40 MHz) /
5795 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

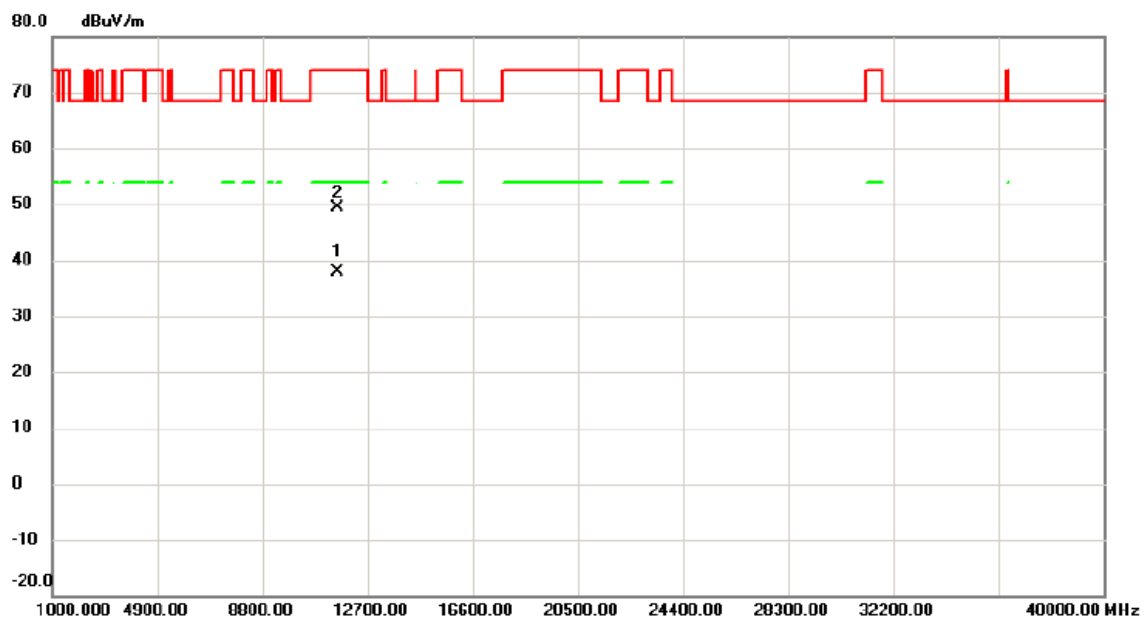

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	11590.14	35.19	2.67	37.86	54.00	-16.14	AVG
2		11591.79	46.77	2.66	49.43	74.00	-24.57	peak

測試頻道: IEEE 802.11ac (80 MHz) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

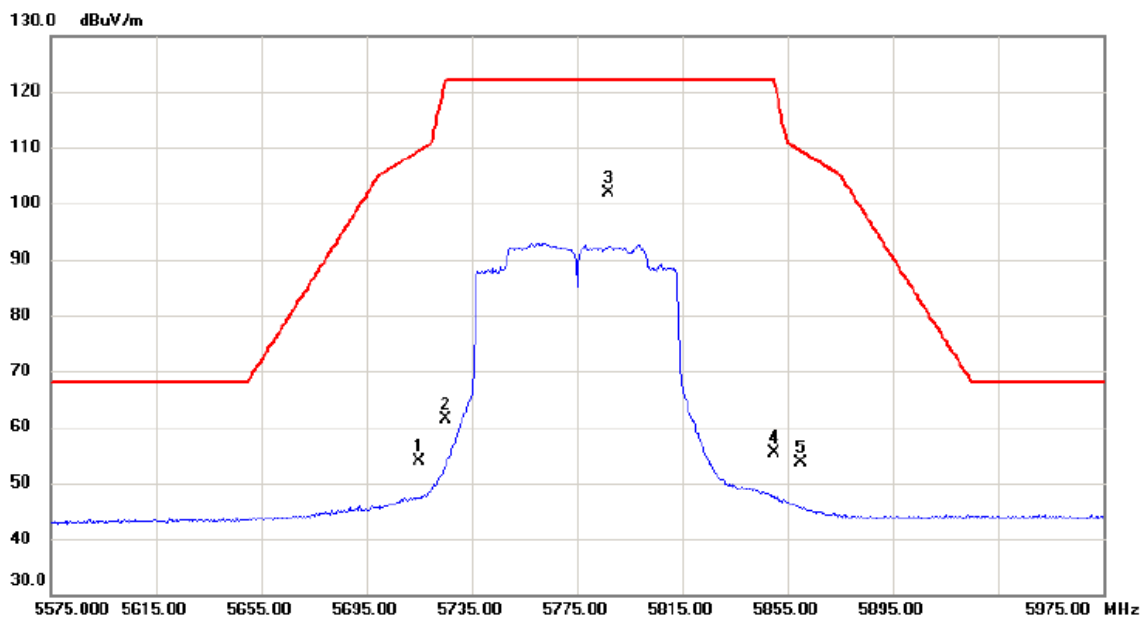

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	54.83	-0.92	53.91	109.40	-55.49	peak	
2		5725.000	62.34	-0.89	61.45	122.20	-60.75	peak	
3	*	5787.000	102.66	-0.73	101.93	122.20	-20.27	peak	主波訊號不予判定
4		5850.000	55.92	-0.57	55.35	122.20	-66.85	peak	
5		5860.000	54.14	-0.54	53.60	109.40	-55.80	peak	

測試頻道: IEEE 802.11ac (80 MHz) / 5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/09

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

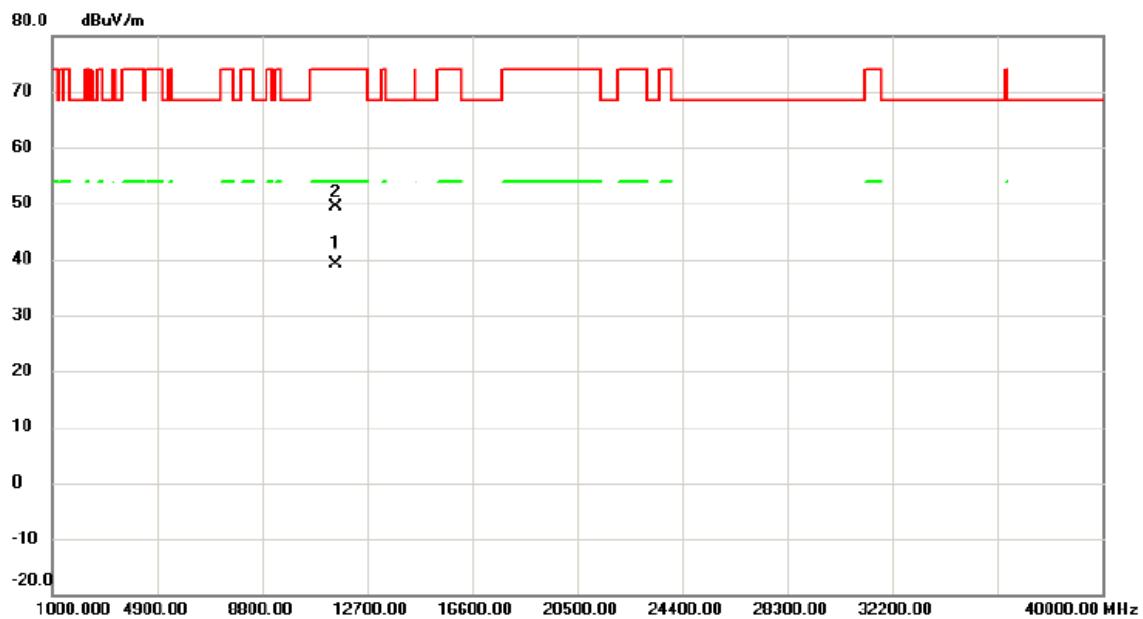

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11550.98	36.30	2.77	39.07	54.00	-14.93	AVG	
2		11551.47	46.55	2.77	49.32	74.00	-24.68	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
5775 MHz

測試模式: 發射

解析頻寬: 1000 kHz / 1000 kHz

視頻頻寬: 1000 kHz / 10 Hz

量測天線: Horn Antenna

測試距離: 3 米

檢測器: Peak/AV


測試日期: 108/04/07

環境溫度: 23°C

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

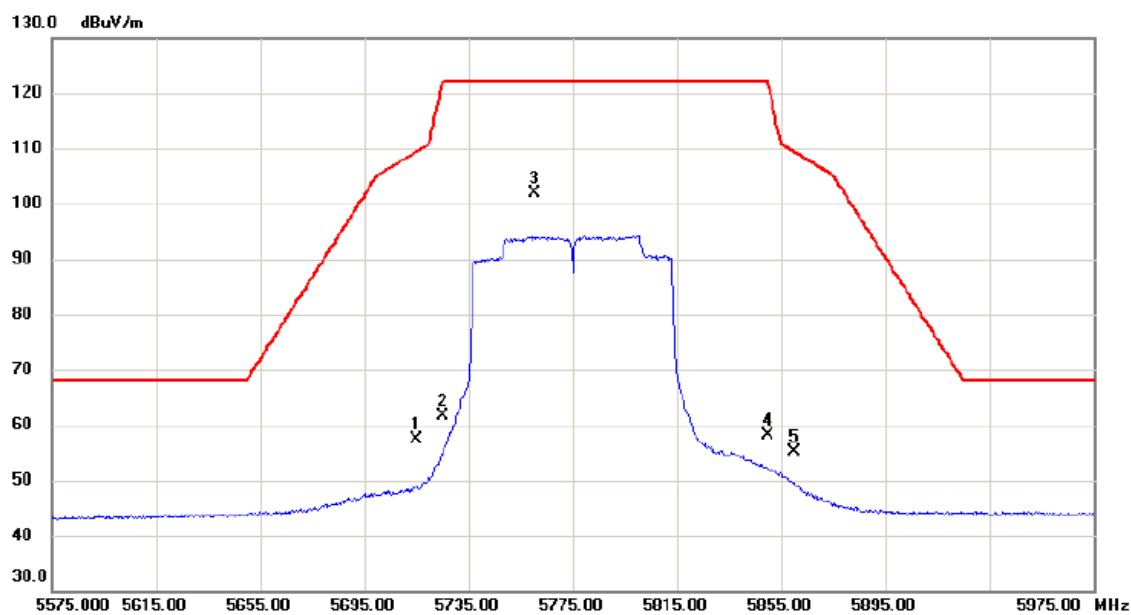

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5715.000	58.39	-0.92	57.47	109.40	-51.93	peak	
2		5725.000	62.42	-0.89	61.53	122.20	-60.67	peak	
3	*	5760.200	102.68	-0.80	101.88	122.20	-20.32	peak	主波訊號不予判定
4		5850.000	58.73	-0.57	58.16	122.20	-64.04	peak	
5		5860.000	55.76	-0.54	55.22	109.40	-54.18	peak	

測試頻道: IEEE 802.11ac (80 MHz) /
5775 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 發射

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/09

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

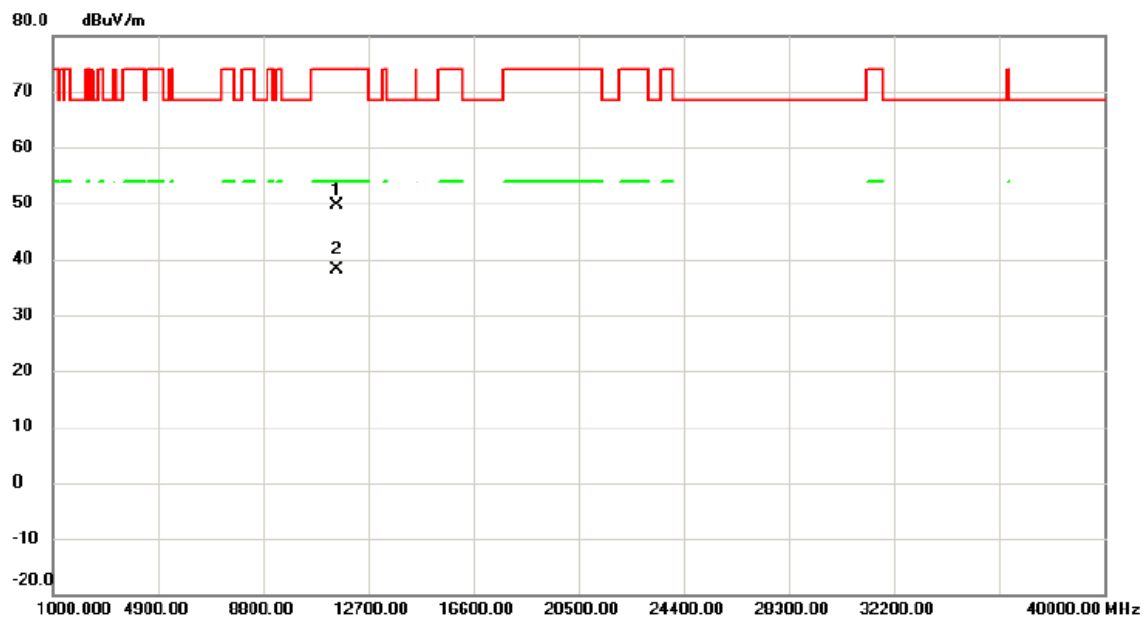

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11548.06	46.86	2.77	49.63	74.00	-24.37	peak	
2	*	11552.30	35.40	2.76	38.16	54.00	-15.84	AVG	

測試頻道: IEEE 802.11ac (20 MHz) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 接收

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/11

環境濕度: 66%

Orthogonal Axis: X

Polarization: Vertical

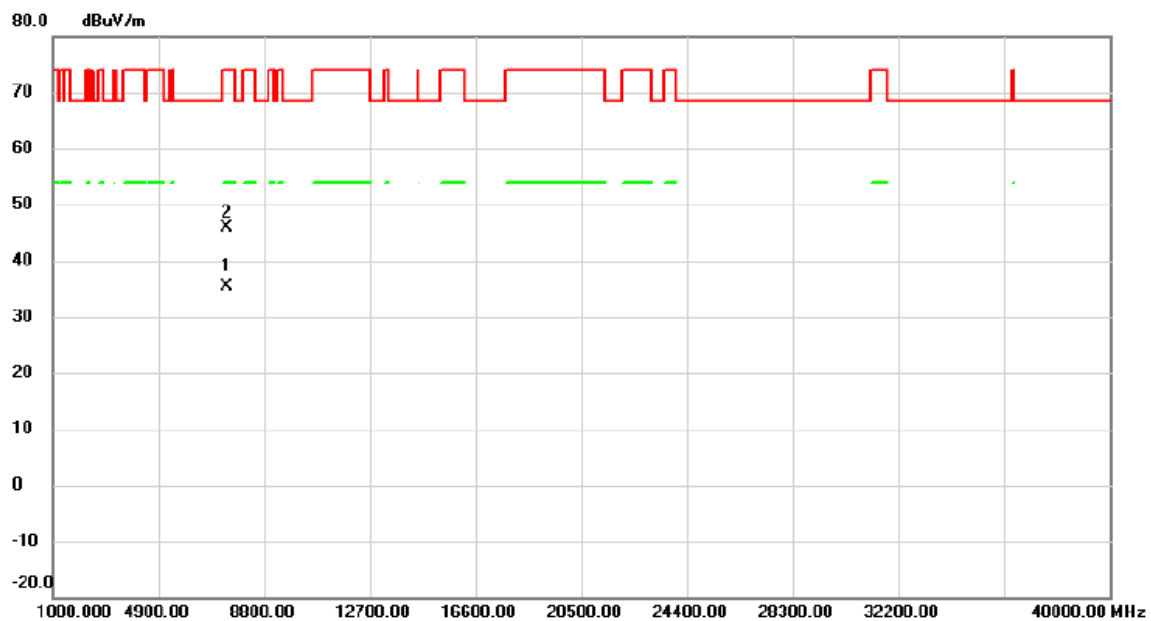

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	7441.920	39.81	-4.52	35.29	54.00	-18.71	AVG	
2		7442.390	50.43	-4.52	45.91	74.00	-28.09	peak	

測試頻道: IEEE 802.11ac (20 MHz) /
5300 MHz

解析頻寬: 1000 kHz / 1000 kHz

量測天線: Horn Antenna

檢測器: Peak/AV

環境溫度: 23 °C

測試模式: 接收

視頻頻寬: 1000 kHz / 10 Hz


測試距離: 3 米

測試日期: 108/04/11

環境濕度: 66%

Orthogonal Axis: X

Polarization: Horizontal

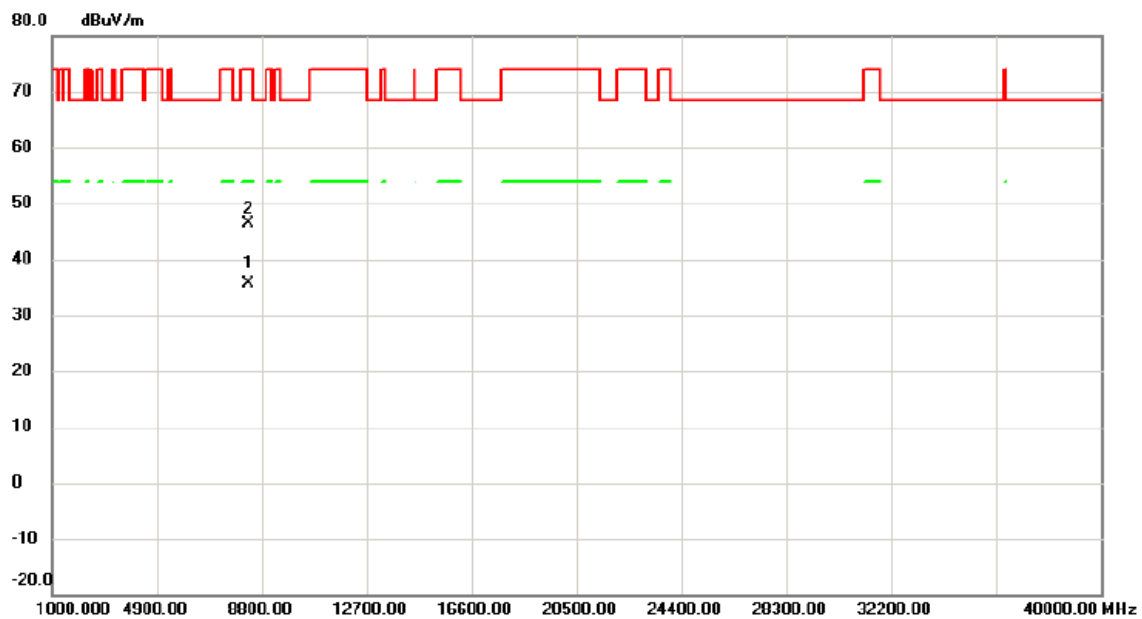

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	8318.800	38.51	-2.94	35.57	54.00	-18.43	AVG	
2		8331.685	49.34	-2.95	46.39	74.00	-27.61	peak	