



11n(HT20)_TX_CH_100_Horizontal_Peak

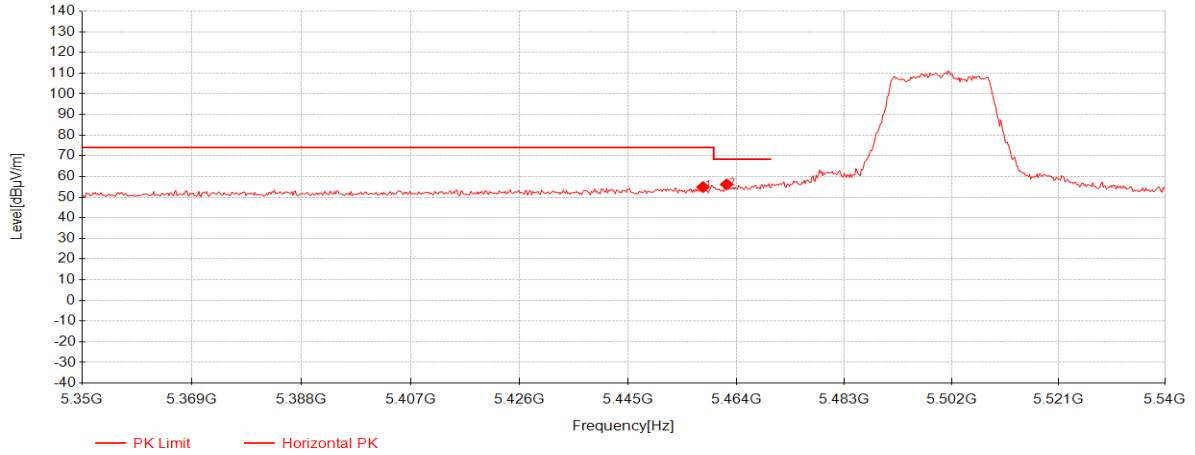


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5458.11	39.51	33.01	-17.65	54.87	74.00	19.13	Horizontal
2	5462.29	40.78	33.01	-17.63	56.15	68.30	12.15	Horizontal

11n(HT20)_TX_CH_100_Horizontal_Average

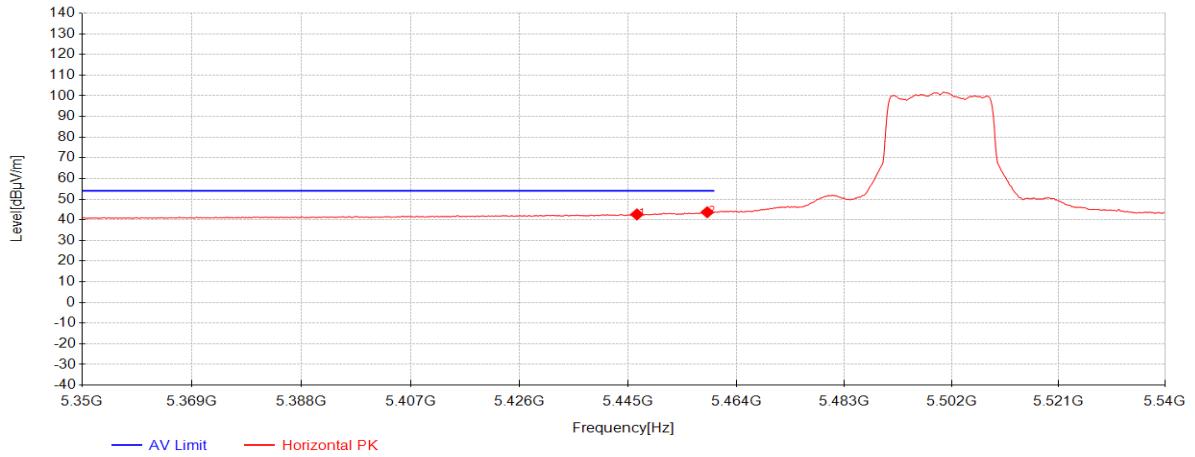


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5446.52	27.26	33.01	-17.68	42.59	54.00	11.41	Horizontal
2	5458.87	28.29	33.01	-17.64	43.65	54.00	10.35	Horizontal

11n(HT20)_TX_CH_100_Veritical_Peak

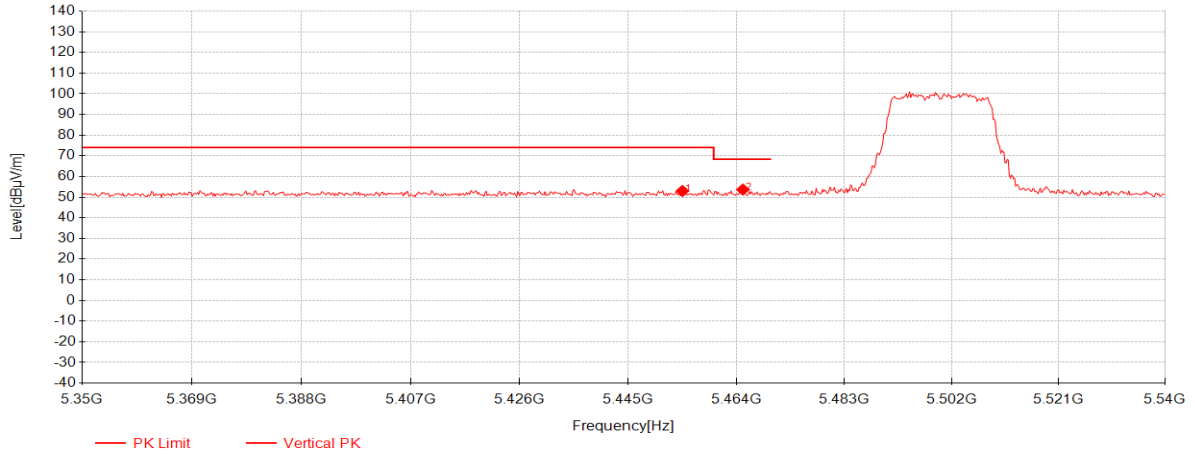


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5454.5	37.63	33.01	-17.66	52.98	74.00	21.02	Vertical
2	5465.14	38.29	33.01	-17.62	53.67	68.30	14.63	Vertical

11n(HT20)_TX_CH_100_Veritical_Average

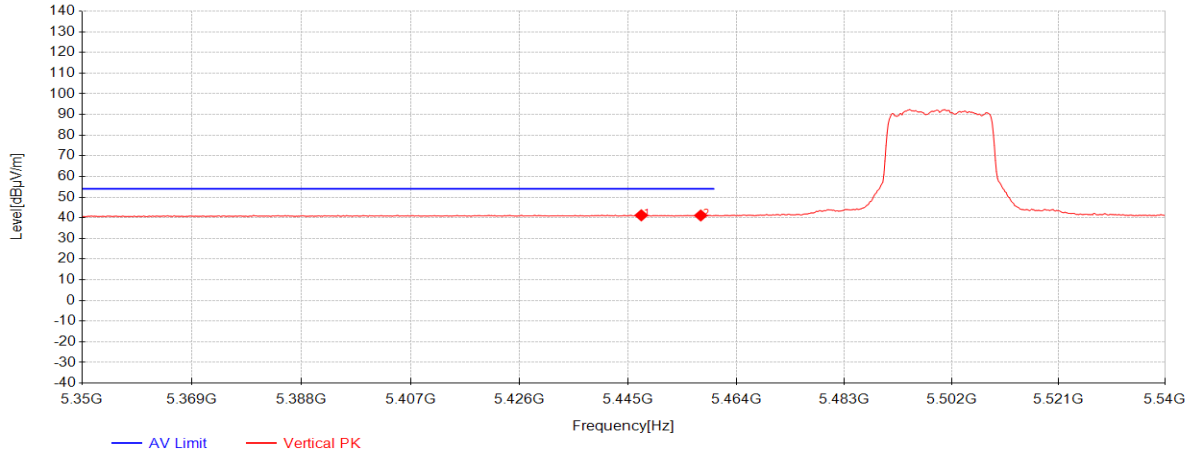


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.28	25.87	33.01	-17.68	41.20	54.00	12.80	Vertical
2	5457.73	25.77	33.01	-17.65	41.13	54.00	12.87	Vertical

11n(HT20)_TX_CH_140_Horizontal_Peak

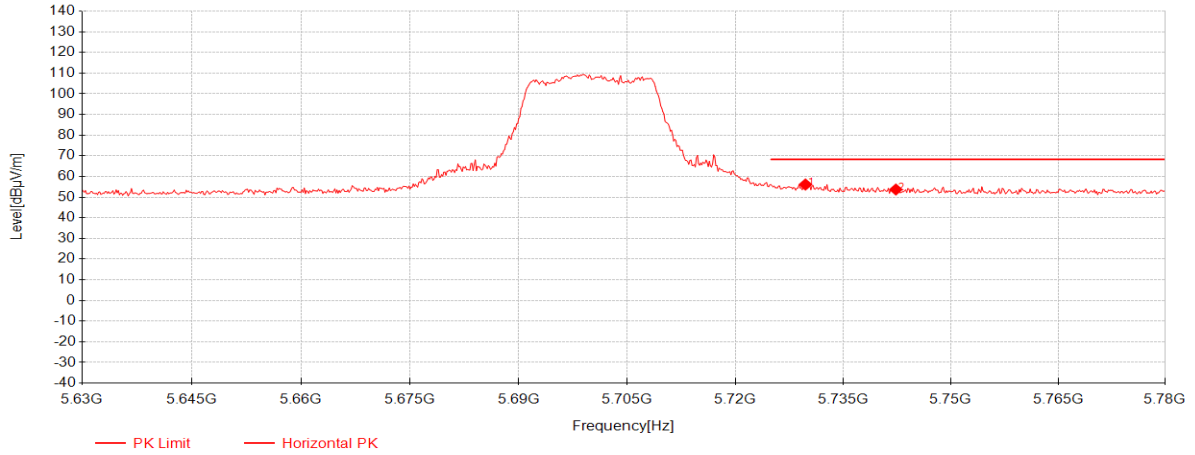


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5729.75	39.64	33.69	-17.24	56.09	68.20	12.11	Horizontal
2	5742.35	37.15	33.73	-17.20	53.68	68.20	14.52	Horizontal

11n(HT20)_TX_CH_140_Vertical_Peak

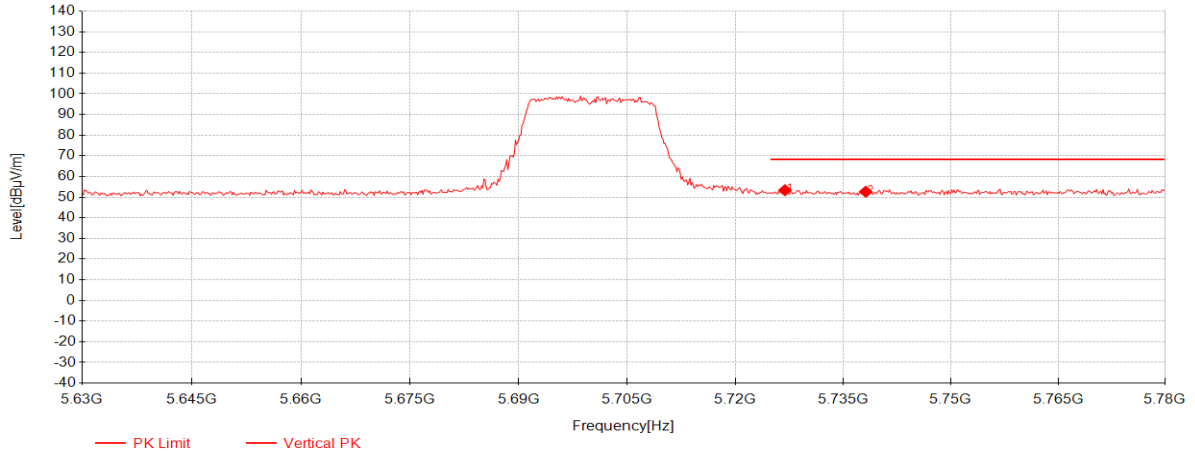


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726.9	36.92	33.68	-17.25	53.35	68.20	14.85	Vertical
2	5738.15	36.11	33.71	-17.21	52.61	68.20	15.59	Vertical

11n(HT20)_TX_CH_149_Horizontal_Peak

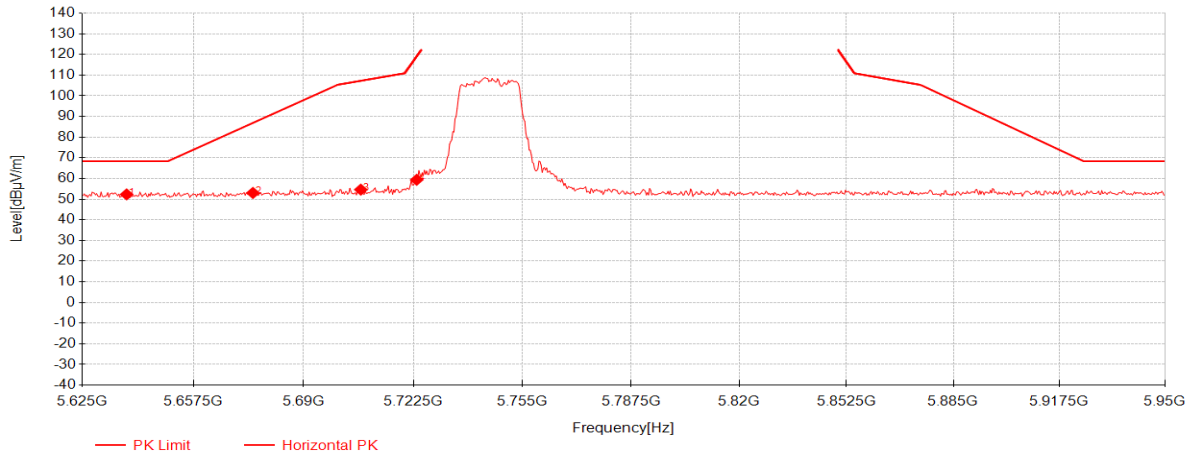


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5638	36.13	33.41	-17.27	52.28	68.30	16.02	Horizontal
2	5675.05	36.77	33.53	-17.31	52.99	86.88	33.89	Horizontal
3	5706.9	38.27	33.62	-17.31	54.58	107.23	52.65	Horizontal
4	5723.475	42.95	33.67	-17.26	59.36	118.82	59.46	Horizontal

11n(HT20)_TX_CH_149_Veritical_Peak

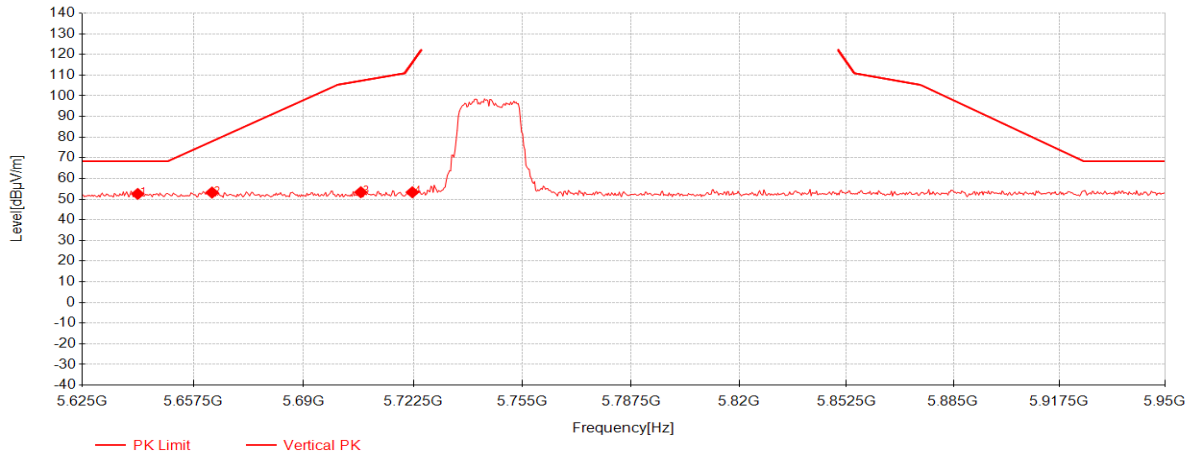


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5641.25	36.36	33.42	-17.27	52.51	68.30	15.79	Vertical
2	5663.025	36.99	33.49	-17.29	53.19	77.97	24.78	Vertical
3	5706.9	37.04	33.62	-17.31	53.35	107.23	53.88	Vertical
4	5722.175	36.91	33.67	-17.26	53.32	115.86	62.54	Vertical

11n(HT20)_TX_CH_165_Horizontal_Peak

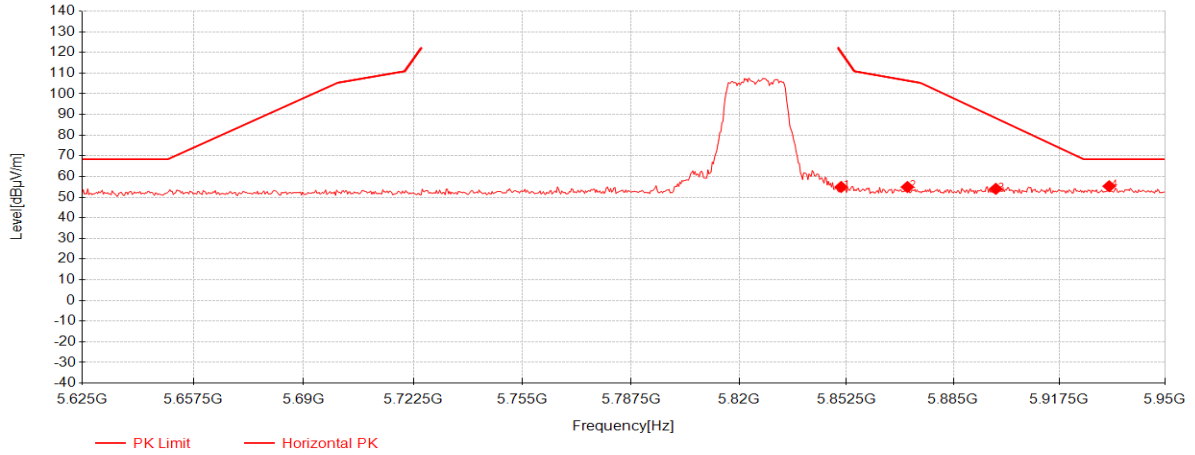


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.875	37.76	34.05	-16.91	54.90	120.30	65.40	Horizontal
2	5871.025	37.64	34.11	-16.87	54.88	106.41	51.53	Horizontal
3	5898	36.64	34.19	-16.81	54.02	88.24	34.22	Horizontal
4	5932.775	37.90	34.30	-16.91	55.29	68.30	13.01	Horizontal

11n(HT20)_TX_CH_165_Veritical_Peak

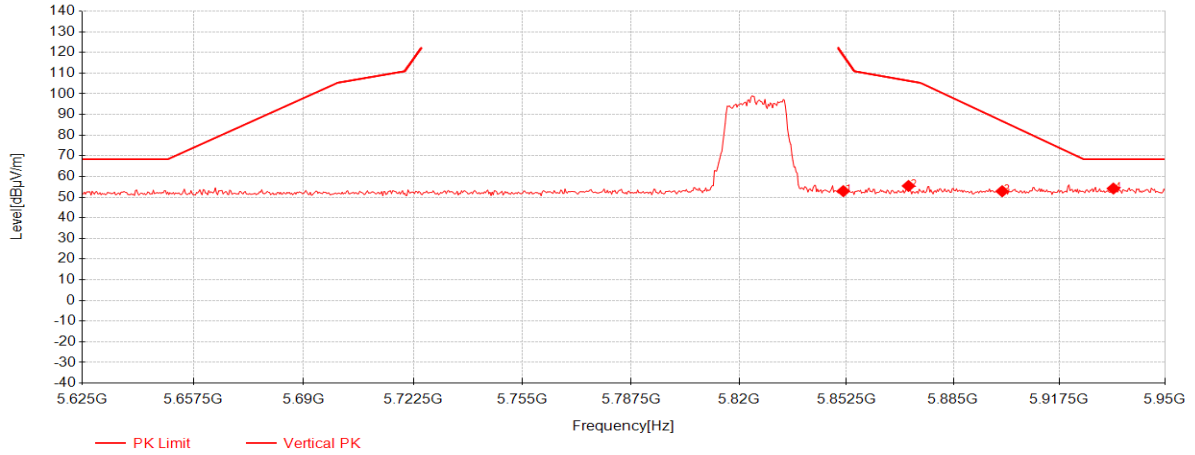


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.525	35.77	34.05	-16.91	52.91	118.82	65.91	Vertical
2	5871.35	38.17	34.11	-16.87	55.41	106.32	50.91	Vertical
3	5899.95	35.47	34.20	-16.81	52.86	86.80	33.94	Vertical
4	5934.075	36.76	34.30	-16.92	54.15	68.30	14.15	Vertical

11n(HT40)_TX_CH_38_Horizontal_Peak

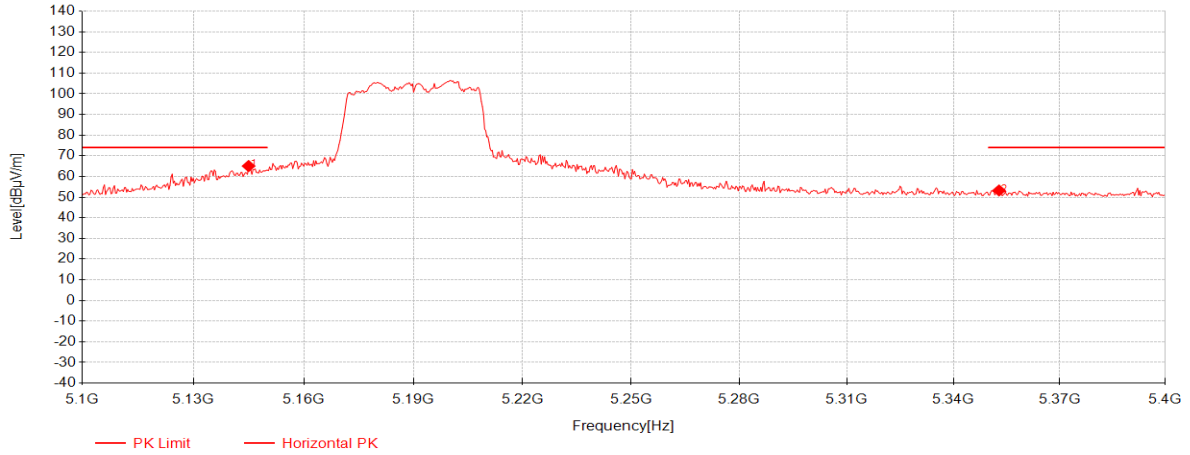


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145	50.16	33.07	-18.20	65.04	74.00	8.96	Horizontal
2	5352.9	37.95	33.03	-17.75	53.23	74.00	20.77	Horizontal

11n(HT40)_TX_CH_38_Horizontal_Average

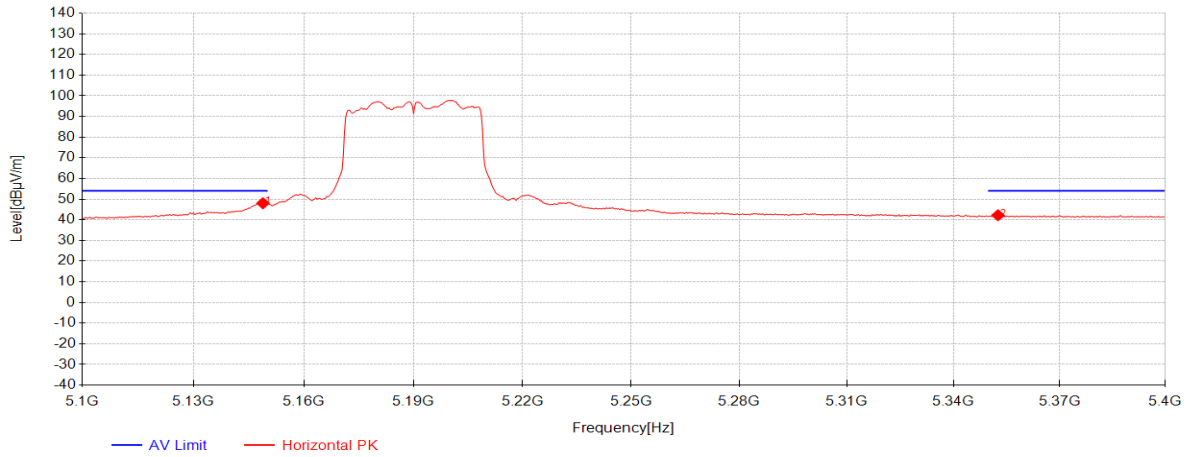


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	33.11	33.07	-18.18	48.00	54.00	6.00	Horizontal
2	5352.6	26.91	33.03	-17.75	42.19	54.00	11.81	Horizontal

11n(HT40)_TX_CH_38_Vetical_Peak

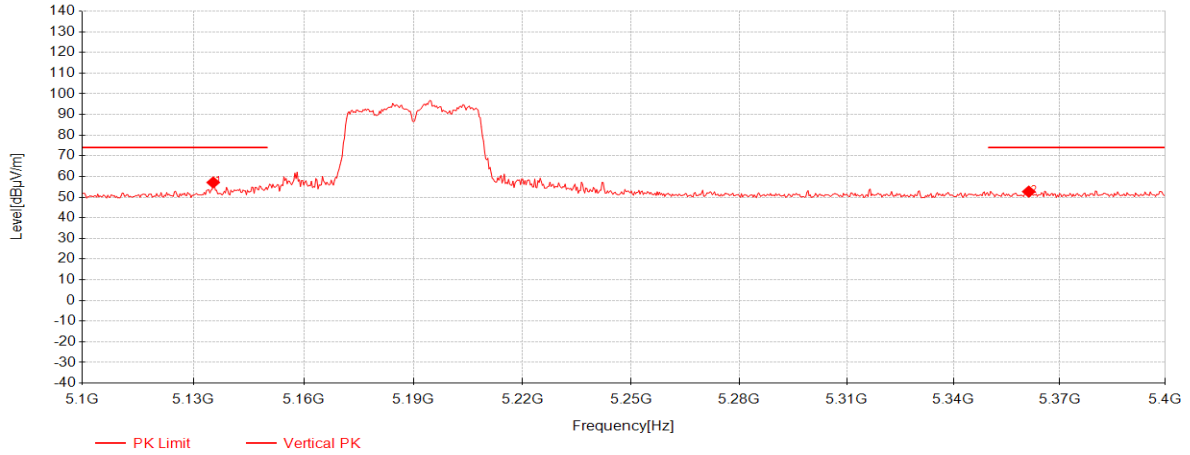


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5135.4	42.25	33.07	-18.22	57.10	74.00	16.90	Vertical
2	5361.3	37.42	33.03	-17.77	52.68	74.00	21.32	Vertical

11n(HT40)_TX_CH_38_Vetical_Average

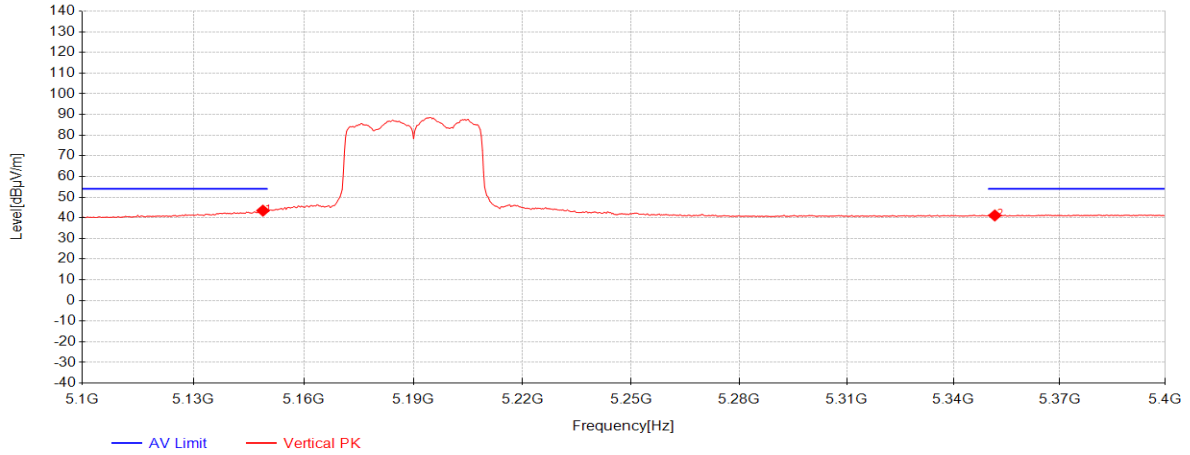


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	28.58	33.07	-18.18	43.47	54.00	10.53	Vertical
2	5351.7	25.85	33.03	-17.75	41.13	54.00	12.87	Vertical

11n(HT40)_TX_CH_62_Horizontal_Peak

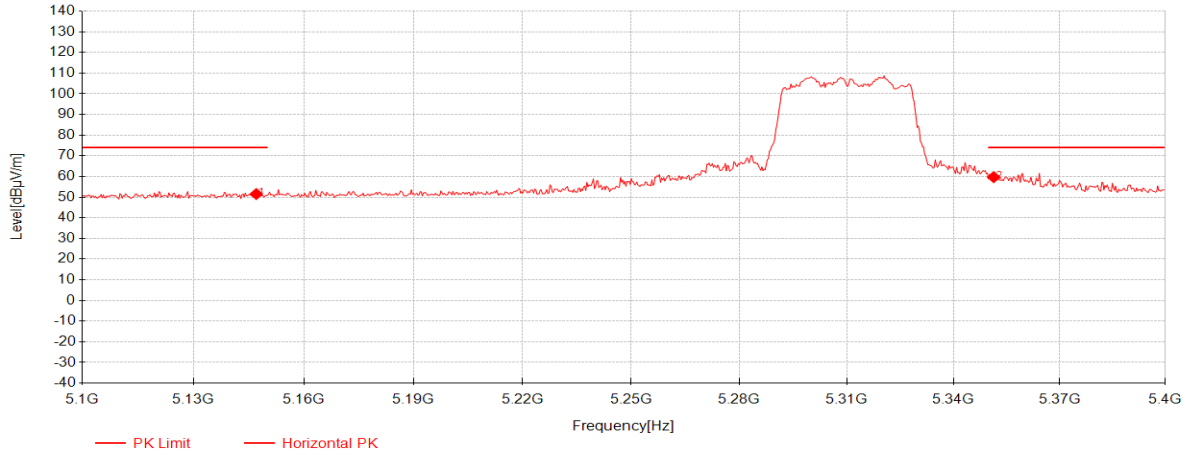


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5147.1	36.62	33.07	-18.19	51.50	74.00	22.50	Horizontal
2	5351.4	44.40	33.03	-17.75	59.68	74.00	14.32	Horizontal

11n(HT40)_TX_CH_62_Horizontal_Average

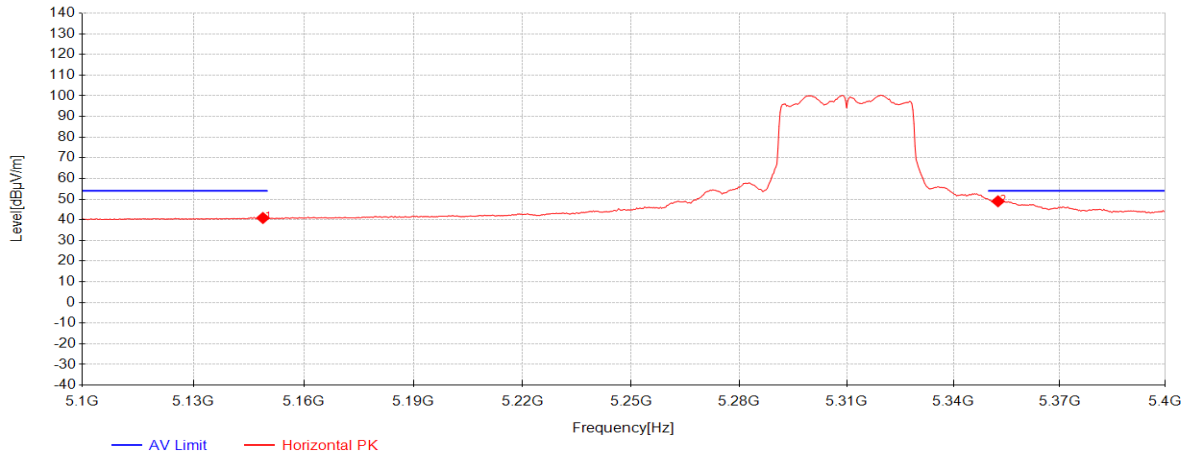


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	25.99	33.07	-18.18	40.88	54.00	13.12	Horizontal
2	5352.6	33.67	33.03	-17.75	48.95	54.00	5.05	Horizontal

11n(HT40)_TX_CH_62_Vetical_Peak

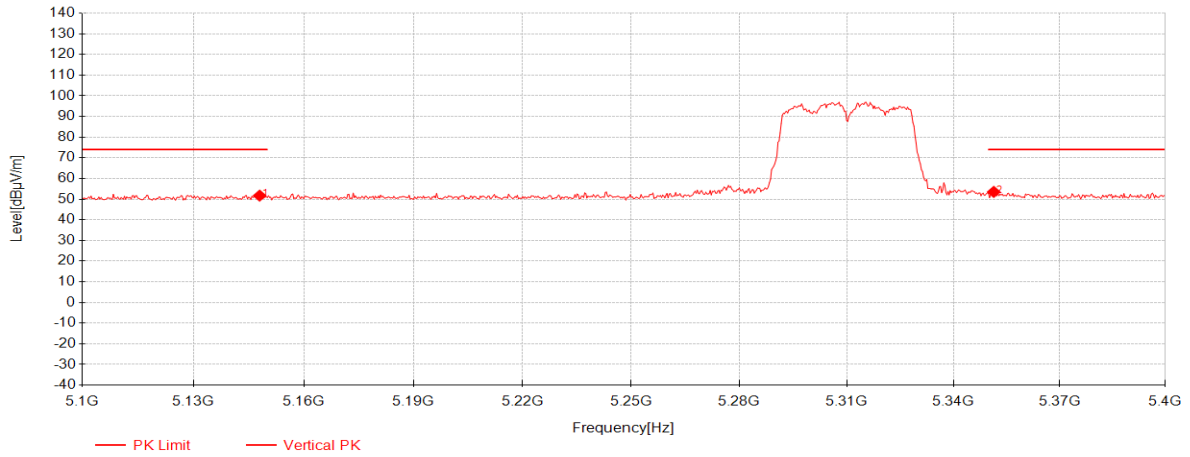


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148	36.81	33.07	-18.19	51.69	74.00	22.31	Vertical
2	5351.4	38.23	33.03	-17.75	53.51	74.00	20.49	Vertical

11n(HT40)_TX_CH_62_Vetical_Average

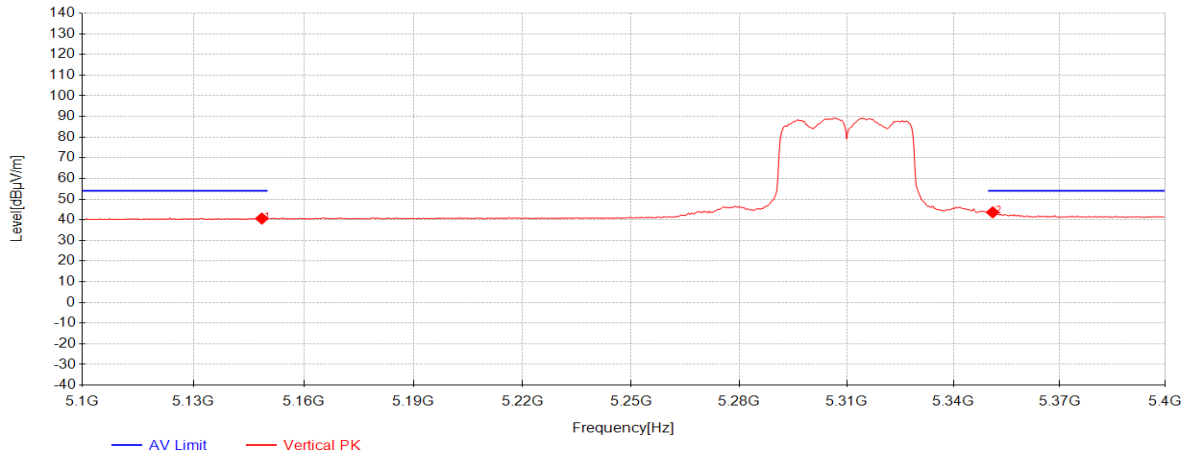


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.6	25.73	33.07	-18.18	40.62	54.00	13.38	Vertical
2	5351.1	28.34	33.03	-17.75	43.62	54.00	10.38	Vertical

11n(HT40)_TX_CH_102_Horizontal_Peak

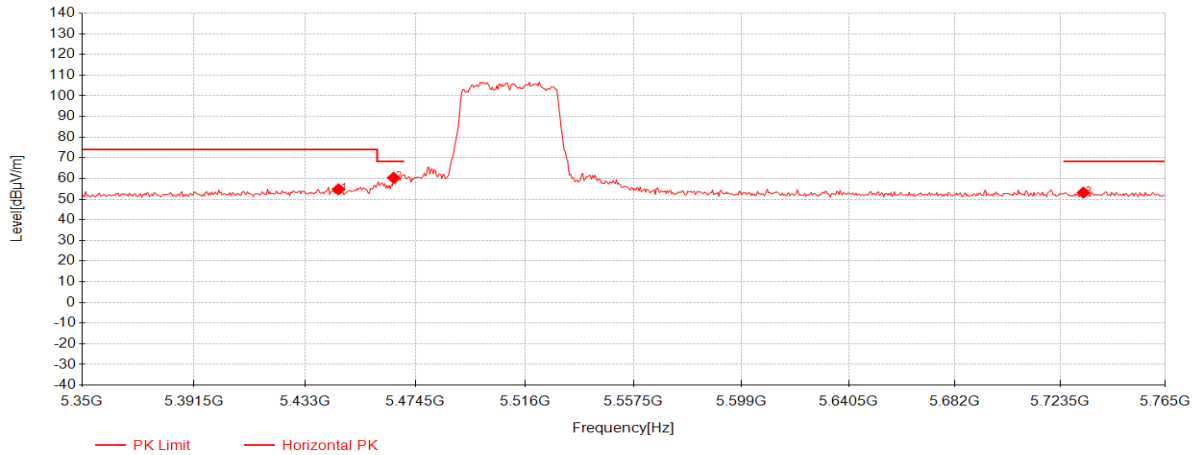


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.45	39.43	33.01	-17.68	54.76	74.00	19.24	Horizontal
2	5466.2	44.95	33.01	-17.62	60.34	68.20	7.86	Horizontal
3	5732.63	36.69	33.70	-17.23	53.16	68.20	15.04	Horizontal

11n(HT40)_TX_CH_102_Horizontal_Average

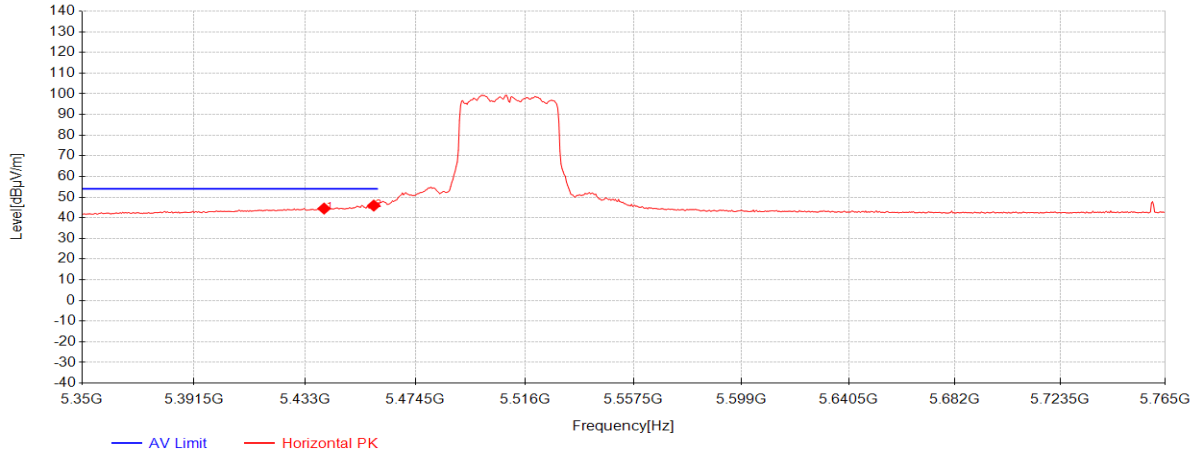


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5440.055	29.16	33.01	-17.70	44.47	54.00	9.53	Horizontal
2	5458.73	30.57	33.01	-17.64	45.93	54.00	8.07	Horizontal

11n(HT40)_TX_CH_102_Vertical_Peak

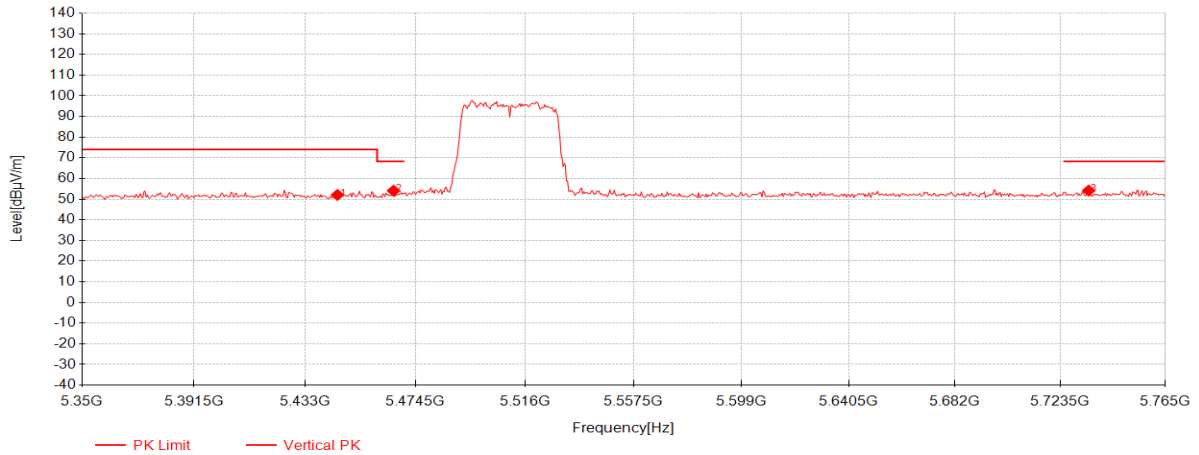


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.035	36.67	33.01	-17.68	52.00	74.00	22.00	Vertical
2	5466.2	38.68	33.01	-17.62	54.07	68.20	14.13	Vertical
3	5734.705	37.67	33.70	-17.22	54.15	68.20	14.05	Vertical

11n(HT40)_TX_CH_102_Vertical_Average

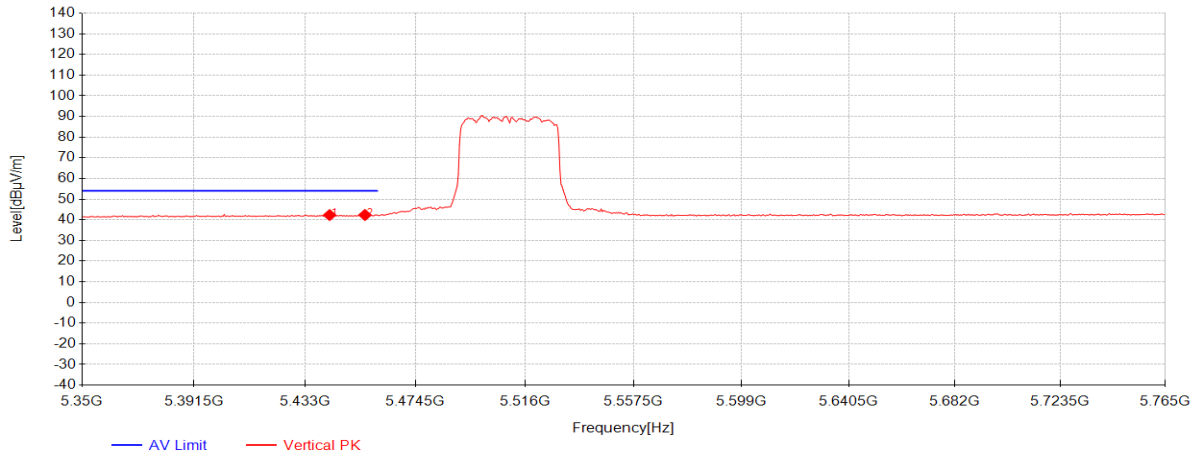


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5442.13	26.98	33.01	-17.69	42.30	54.00	11.70	Vertical
2	5455.41	26.97	33.01	-17.65	42.33	54.00	11.67	Vertical

11n(HT40)_TX_CH_134_Horizontal_Peak

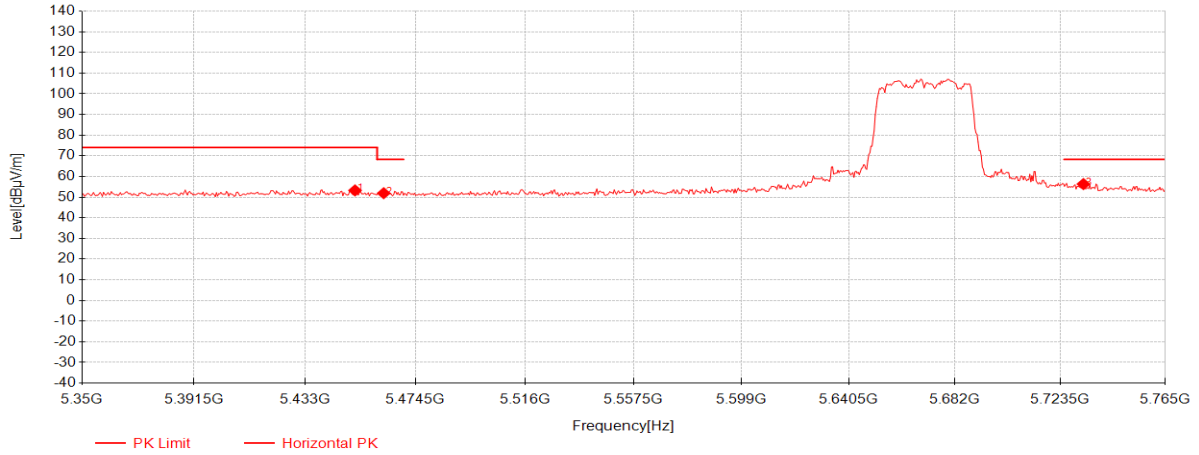


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5451.675	37.92	33.01	-17.66	53.26	74.00	20.74	Horizontal
2	5462.465	36.52	33.01	-17.63	51.89	68.20	16.31	Horizontal
3	5732.63	39.85	33.70	-17.23	56.32	68.20	11.88	Horizontal

11n(HT40)_TX_CH_134_Horizontal_Average

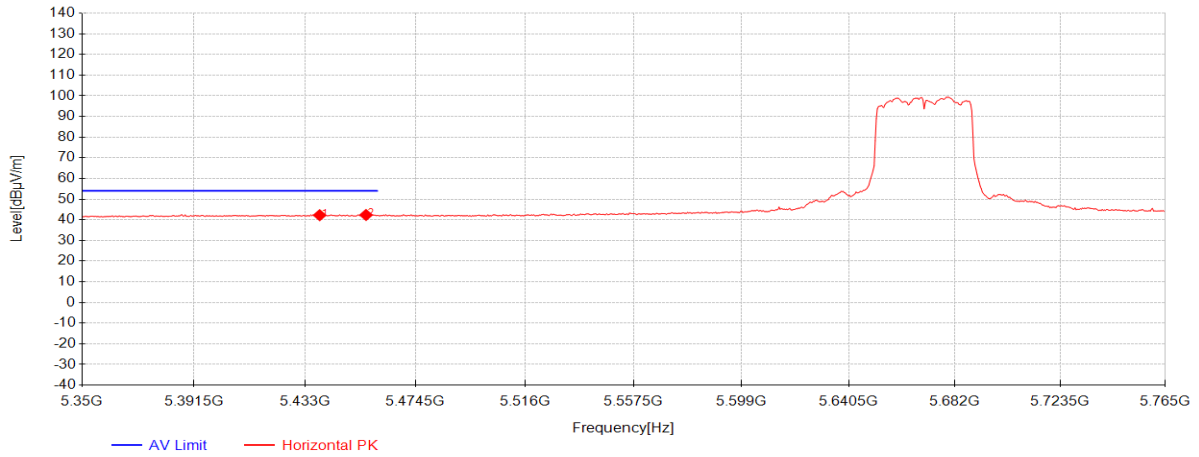


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5438.395	26.91	33.01	-17.70	42.22	54.00	11.78	Horizontal
2	5455.825	26.96	33.01	-17.65	42.32	54.00	11.68	Horizontal

11n(HT40)_TX_CH_134_Veritical_Peak

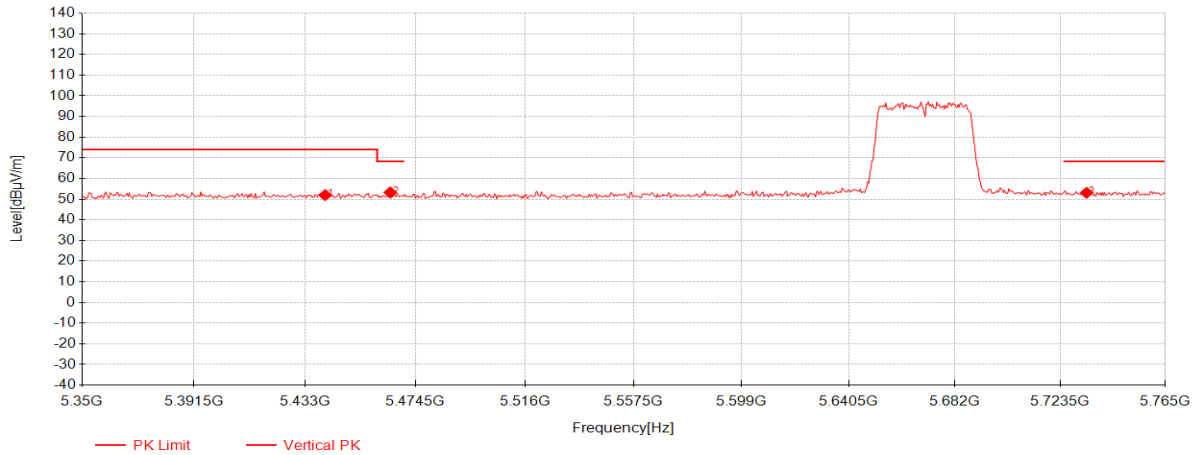


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5440.47	36.63	33.01	-17.70	51.94	74.00	22.06	Vertical
2	5464.955	37.85	33.01	-17.63	53.23	68.20	14.97	Vertical
3	5733.875	36.58	33.70	-17.22	53.06	68.20	15.14	Vertical

11n(HT40)_TX_CH_134_Veritical_Average

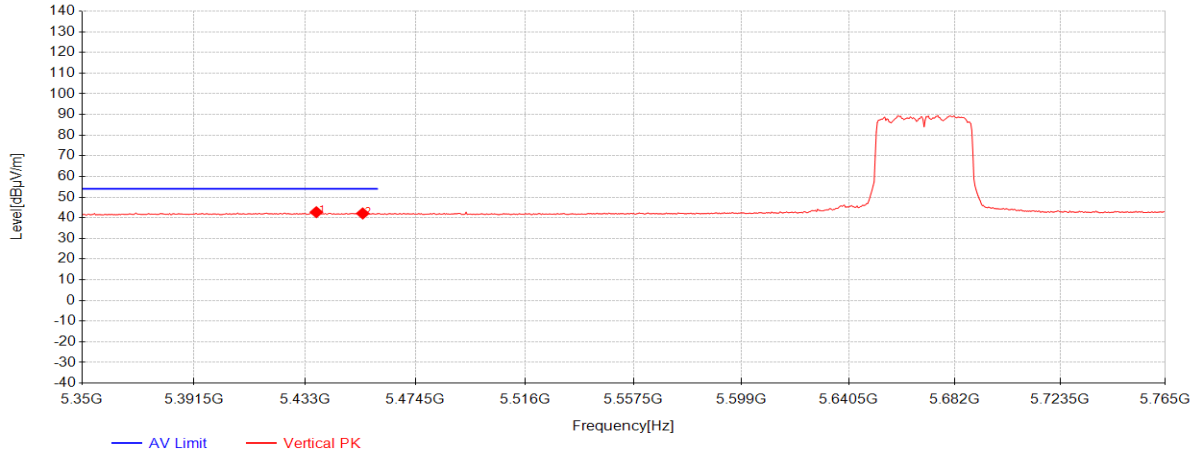


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5437.15	27.43	33.01	-17.71	42.73	54.00	11.27	Vertical
2	5454.58	26.74	33.01	-17.66	42.09	54.00	11.91	Vertical

11n(HT40)_TX_CH_151_Horizontal_Peak

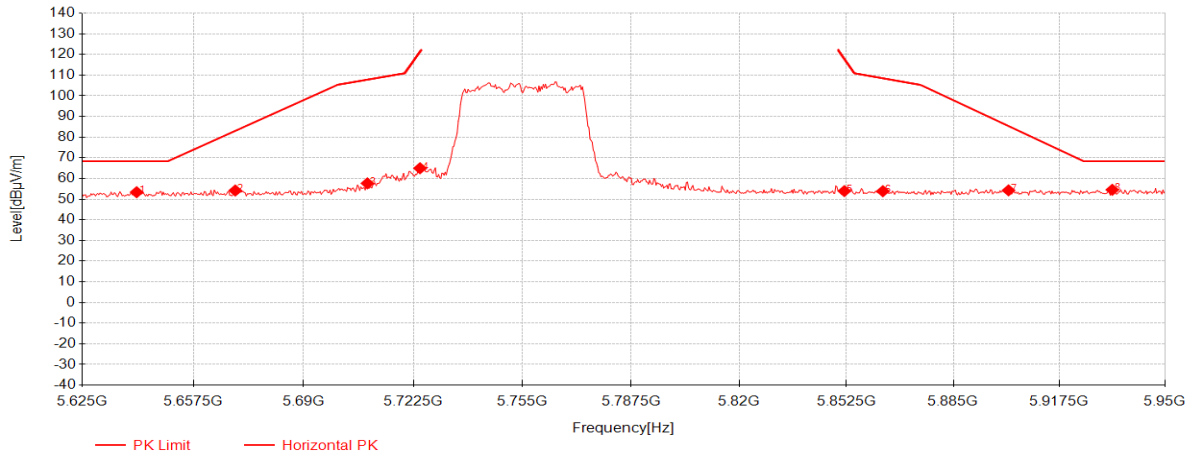


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5640.925	37.22	33.42	-17.27	53.37	68.30	14.93	Horizontal
2	5669.85	37.96	33.51	-17.30	54.17	83.03	28.86	Horizontal
3	5708.85	41.33	33.63	-17.30	57.65	107.78	50.13	Horizontal
4	5724.45	48.52	33.67	-17.25	64.94	121.05	56.11	Horizontal
5	5851.85	36.75	34.06	-16.91	53.89	118.08	64.19	Horizontal
6	5863.55	36.64	34.09	-16.89	53.84	108.50	54.66	Horizontal
7	5901.9	36.86	34.21	-16.82	54.25	85.36	31.11	Horizontal
8	5933.75	37.12	34.30	-16.91	54.51	68.30	13.79	Horizontal

11n(HT40)_TX_CH_151_Veritical_Peak

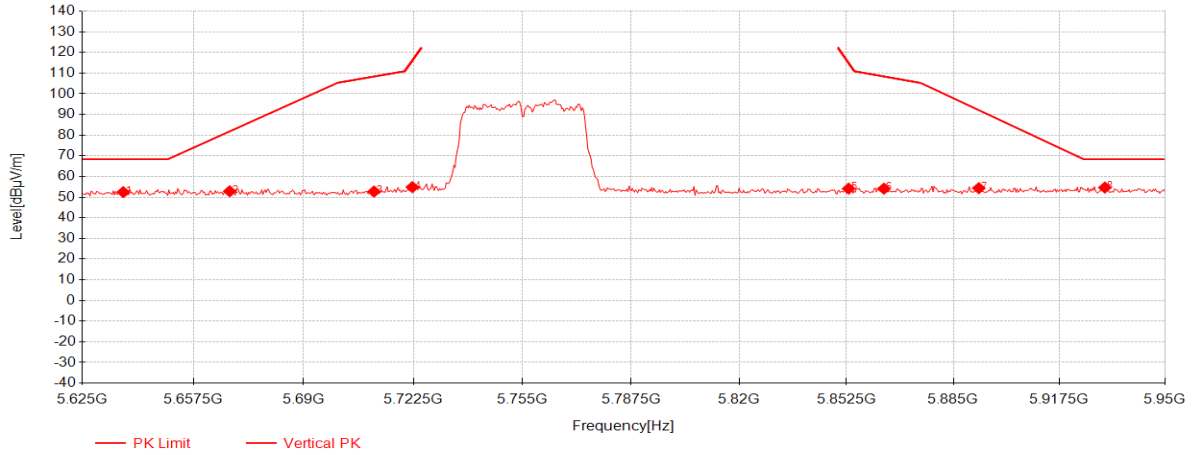


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5637.025	36.29	33.41	-17.27	52.43	68.30	15.87	Vertical
2	5668.225	36.62	33.50	-17.30	52.83	81.82	28.99	Vertical
3	5710.8	36.36	33.63	-17.30	52.70	108.33	55.63	Vertical
4	5722.175	38.43	33.67	-17.26	54.84	115.86	61.02	Vertical
5	5853.15	36.98	34.06	-16.91	54.13	115.12	60.99	Vertical
6	5863.875	36.89	34.09	-16.89	54.10	108.41	54.31	Vertical
7	5892.8	36.99	34.18	-16.83	54.34	92.09	37.75	Vertical
8	5931.475	37.24	34.29	-16.91	54.63	68.30	13.67	Vertical

11n(HT40)_TX_CH_159_Horizontal

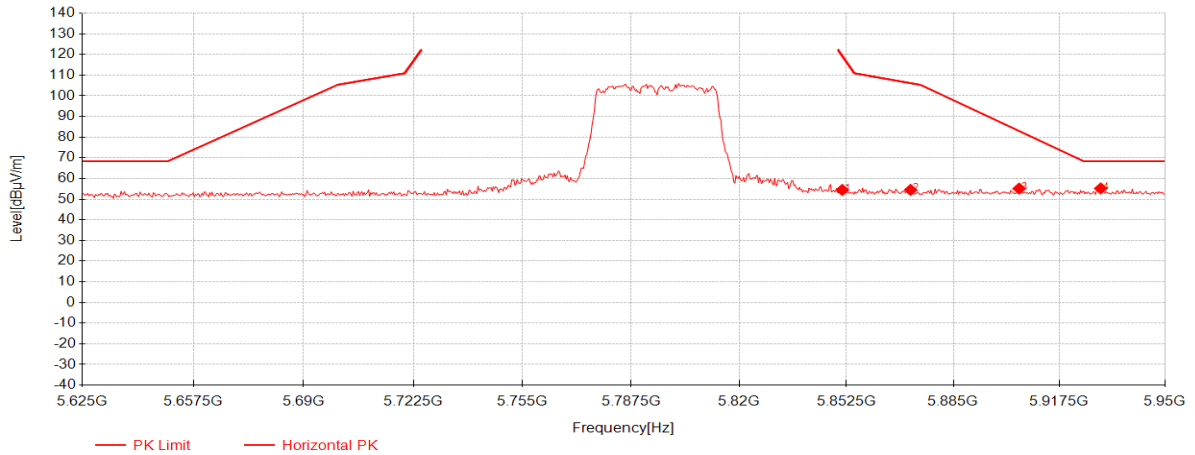


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.2	37.31	34.05	-16.91	54.45	119.56	65.11	Horizontal
2	5872	37.22	34.12	-16.87	54.47	106.14	51.67	Horizontal
3	5905.15	37.71	34.22	-16.83	55.10	82.95	27.85	Horizontal
4	5930.175	37.79	34.29	-16.90	55.18	68.30	13.12	Horizontal

11n(HT40)_TX_CH_159_Veritical

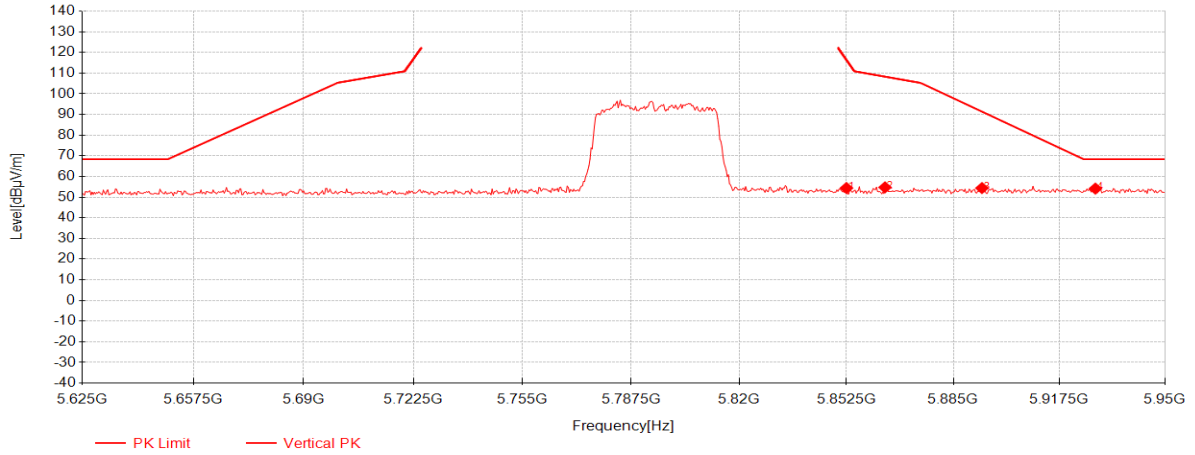


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5852.5	37.25	34.06	-16.91	54.40	116.60	62.20	Vertical
2	5864.2	37.52	34.09	-16.89	54.73	108.32	53.59	Vertical
3	5893.775	37.03	34.18	-16.82	54.39	91.37	36.98	Vertical
4	5928.55	36.73	34.29	-16.90	54.12	68.30	14.18	Vertical

11ac(VHT80)_TX_CH_42_Horizontal_Peak

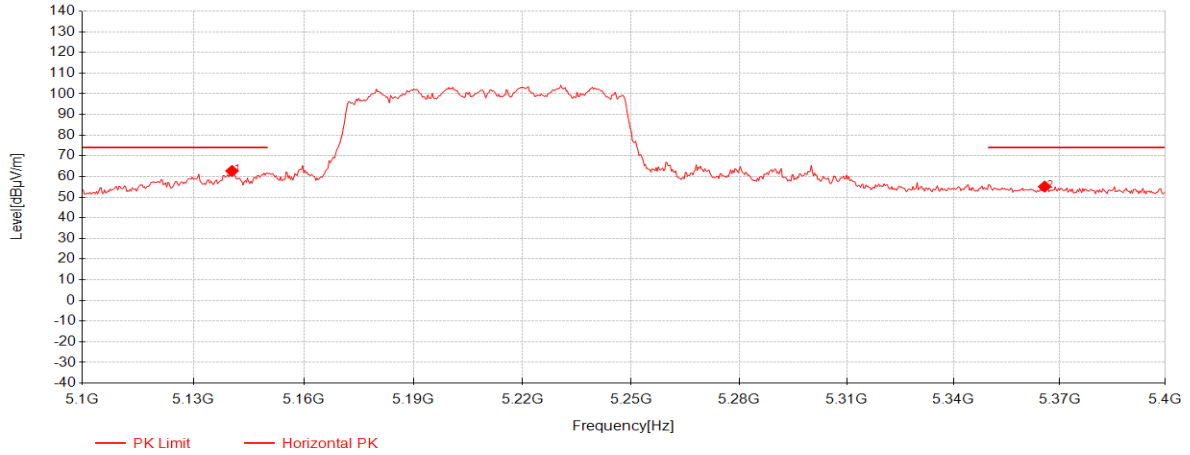


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5140.5	47.81	33.07	-18.21	62.67	74.00	11.33	Horizontal
2	5365.8	39.84	33.03	-17.77	55.09	74.00	18.91	Horizontal

11ac(VHT80)_TX_CH_42_Horizontal_Average

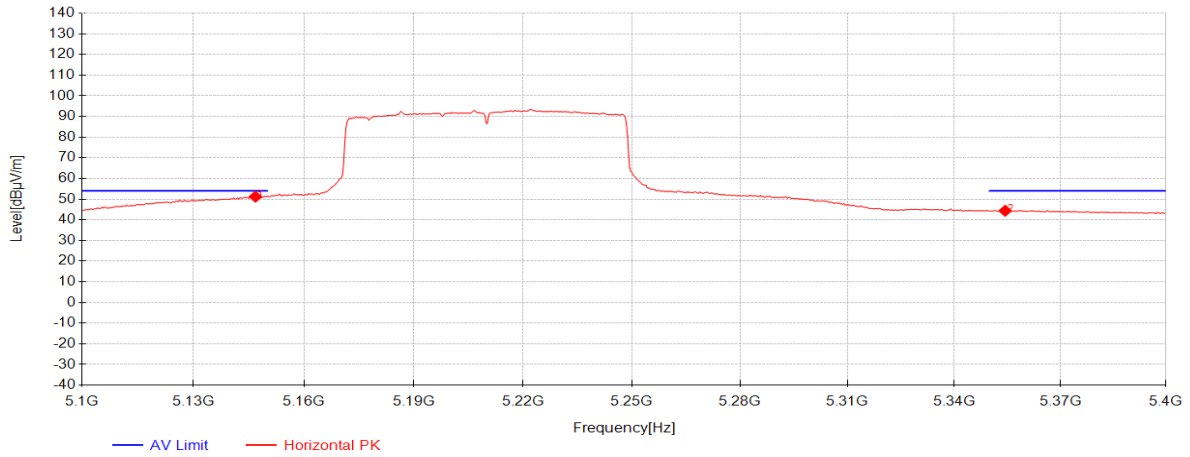


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.8	36.30	33.07	-18.19	51.18	54.00	2.82	Horizontal
2	5354.4	29.09	33.03	-17.76	44.36	54.00	9.64	Horizontal

11ac(VHT80)_TX_CH_42_Vetical_Peak

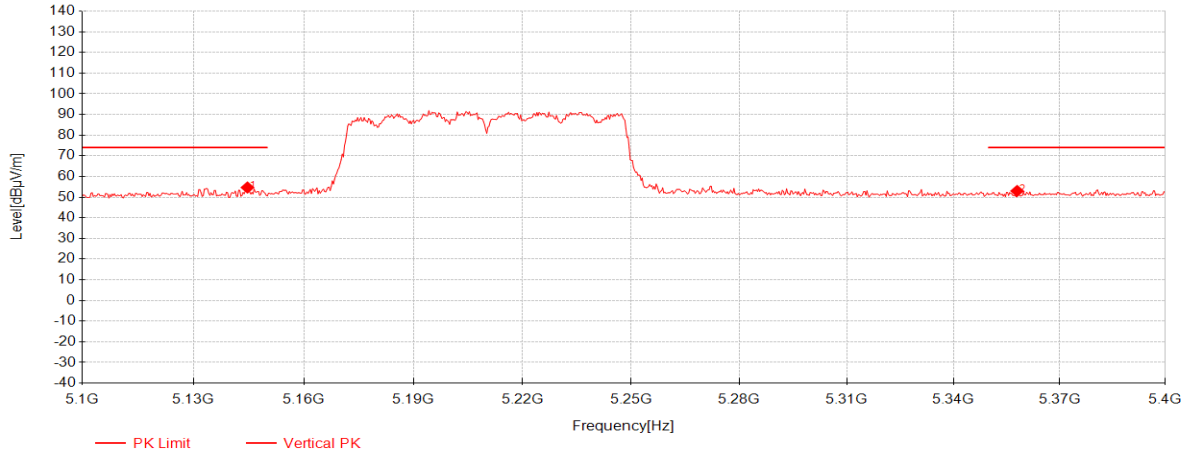


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5144.7	39.78	33.07	-18.20	54.66	74.00	19.34	Vertical
2	5358	37.72	33.03	-17.76	52.99	74.00	21.01	Vertical

11ac(VHT80)_TX_CH_42_Vertical_Average

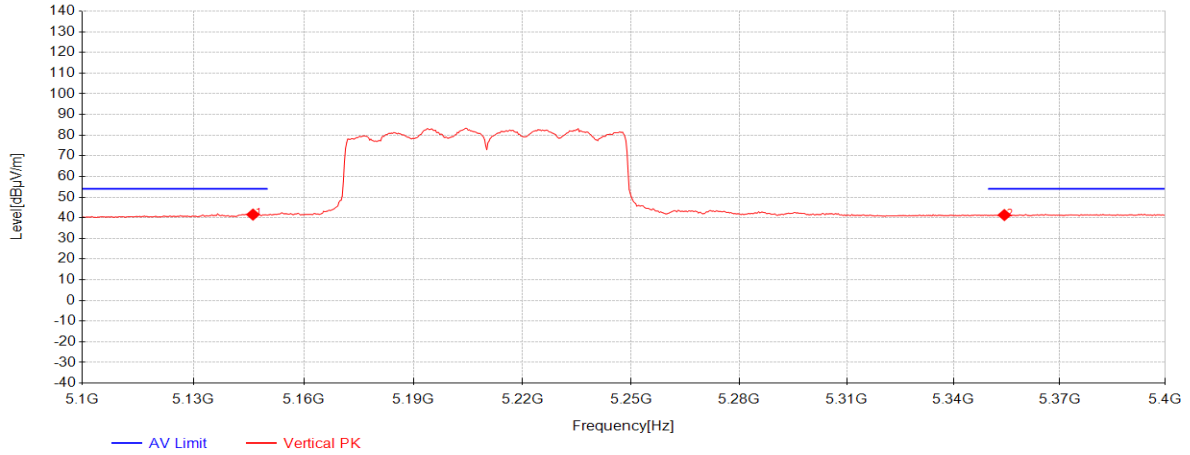


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.2	26.67	33.07	-18.19	41.55	54.00	12.45	Vertical
2	5354.4	26.06	33.03	-17.76	41.33	54.00	12.67	Vertical

11ac(VHT80)_TX_CH_58_Horizontal_Peak

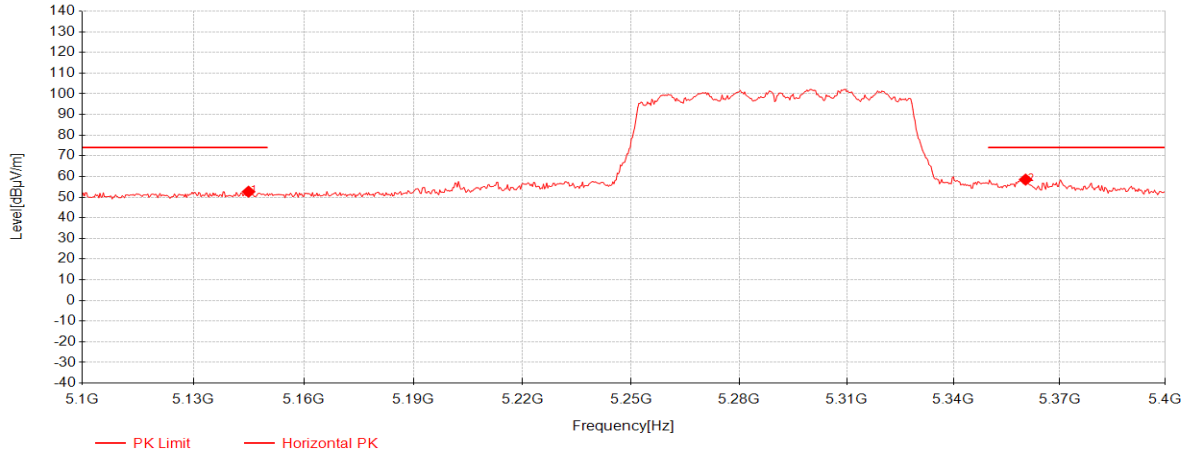


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145	37.76	33.07	-18.20	52.64	74.00	21.36	Horizontal
2	5360.4	43.23	33.03	-17.76	58.49	74.00	15.51	Horizontal

11ac(VHT80)_TX_CH_58_Horizontal_Average

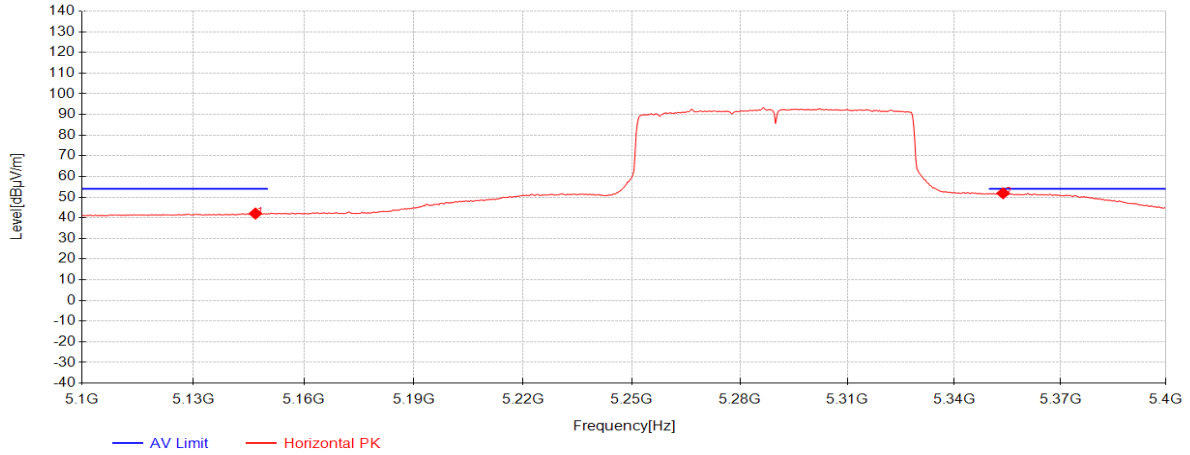


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.8	27.17	33.07	-18.19	42.05	54.00	11.95	Horizontal
2	5353.8	36.60	33.03	-17.76	51.87	54.00	2.13	Horizontal

11ac(VHT80)_TX_CH_58_Vetical_Peak

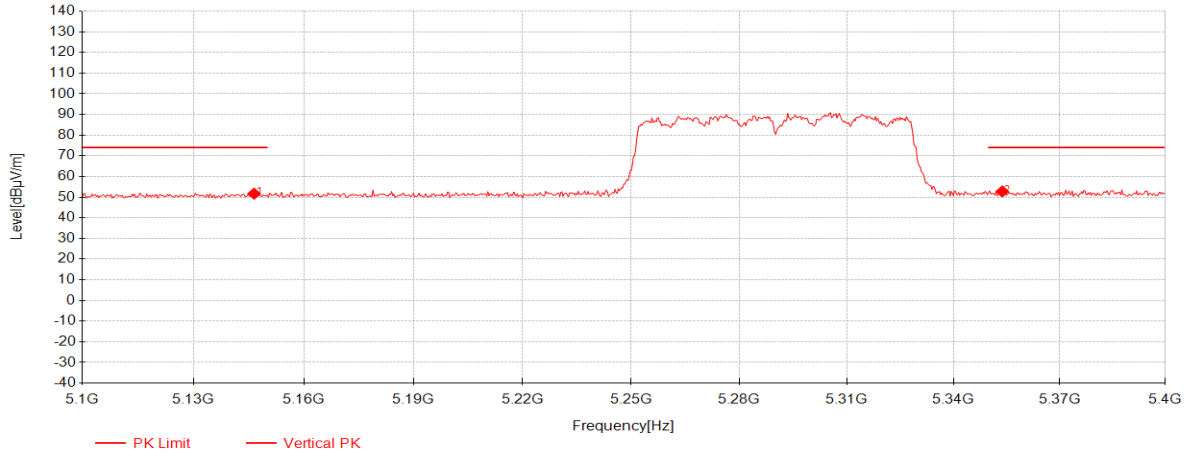


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.5	36.79	33.07	-18.19	51.67	74.00	22.33	Vertical
2	5353.8	37.49	33.03	-17.76	52.76	74.00	21.24	Vertical

11ac(VHT80)_TX_CH_58_Vetical_Average

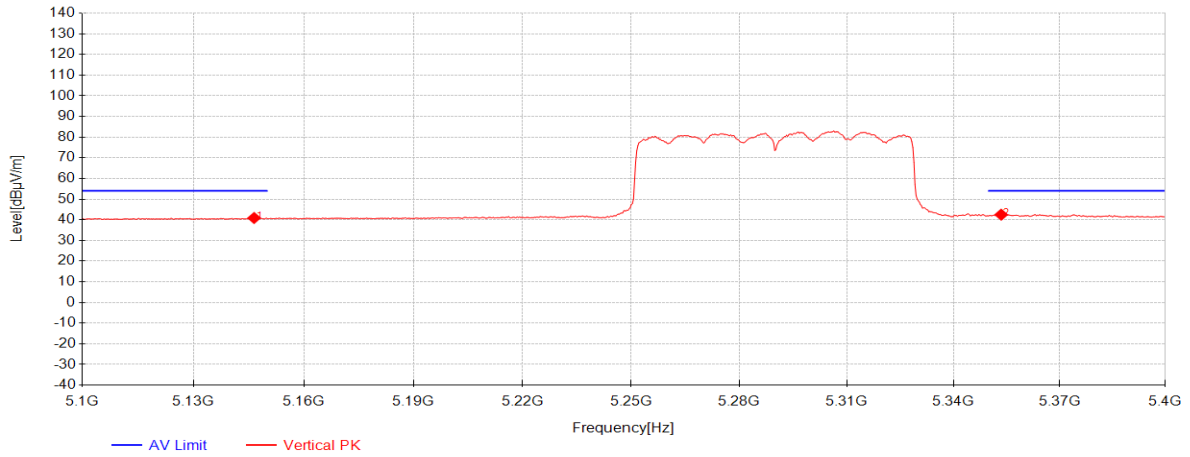


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.5	26.00	33.07	-18.19	40.88	54.00	13.12	Vertical
2	5353.5	27.20	33.03	-17.75	42.47	54.00	11.53	Vertical

11ac(VHT80)_TX_CH_106_Horizontal_Peak

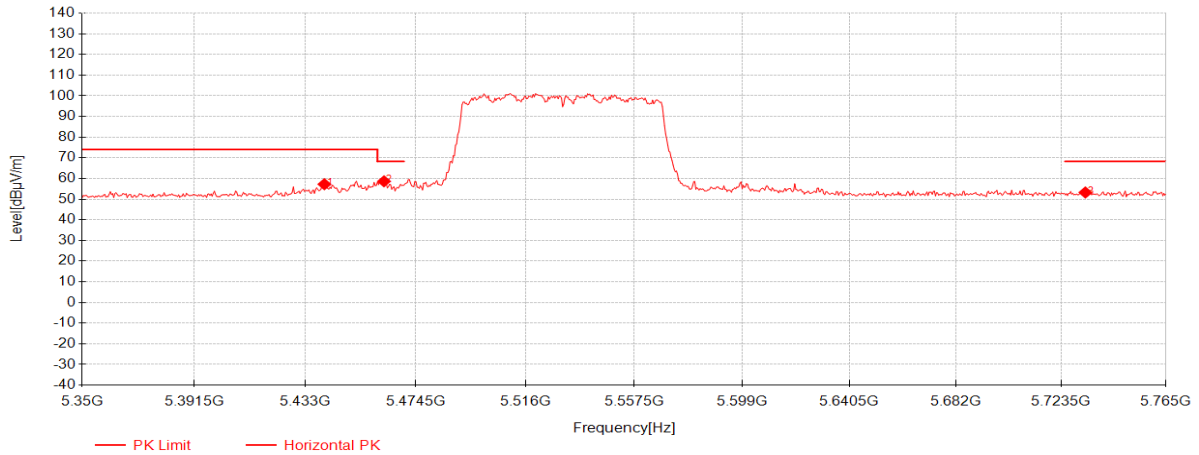


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5440.055	41.91	33.01	-17.70	57.22	74.00	16.78	Horizontal
2	5462.465	43.26	33.01	-17.63	58.63	68.20	9.57	Horizontal
3	5733.045	36.75	33.70	-17.23	53.22	68.20	14.98	Horizontal

11ac(VHT80)_TX_CH_106_Horizontal_Average

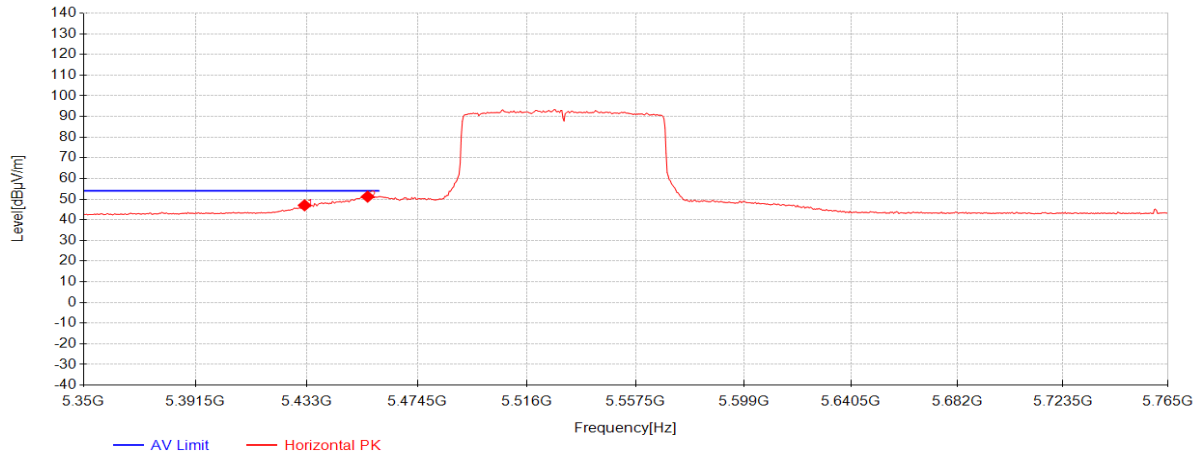


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5432.17	31.72	33.01	-17.72	47.01	54.00	6.99	Horizontal
2	5455.825	35.84	33.01	-17.65	51.20	54.00	2.80	Horizontal

11ac(VHT80)_TX_CH_106_Vertical_Peak

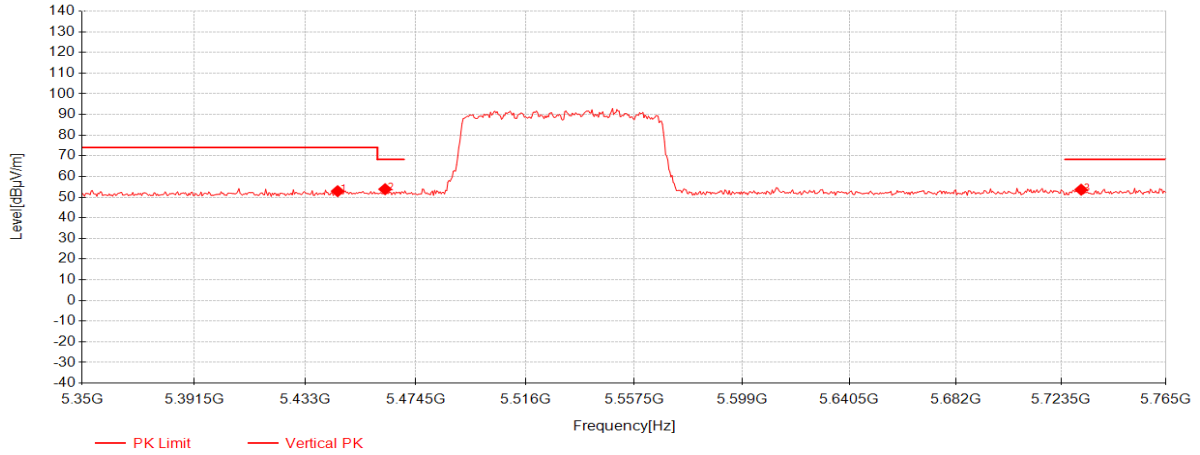


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.035	37.56	33.01	-17.68	52.89	74.00	21.11	Vertical
2	5462.88	38.45	33.01	-17.63	53.83	68.20	14.37	Vertical
3	5731.385	37.14	33.69	-17.23	53.60	68.20	14.60	Vertical

11ac(VHT80)_TX_CH_106_Veritical_Average

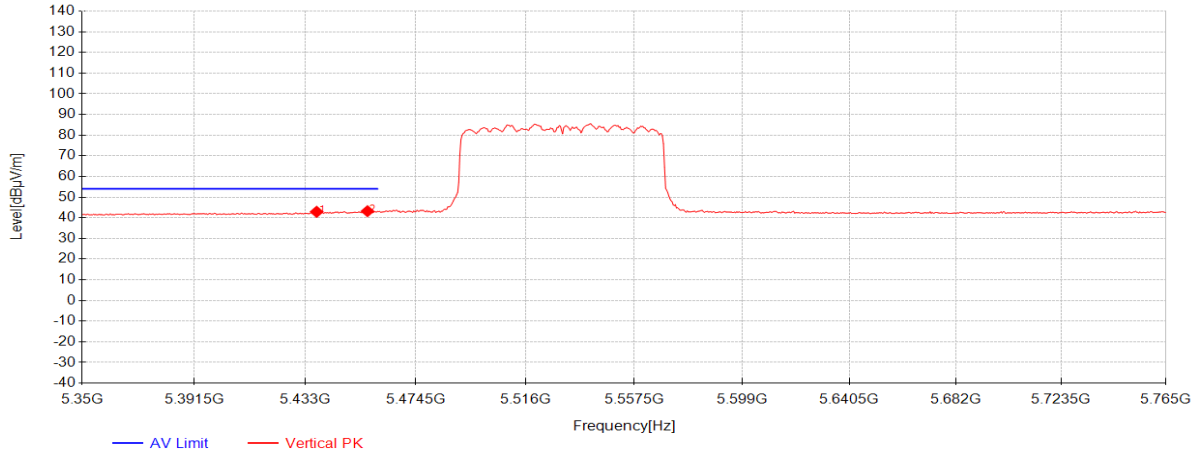


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5437.15	27.60	33.01	-17.71	42.90	54.00	11.10	Vertical
2	5456.24	27.83	33.01	-17.65	43.19	54.00	10.81	Vertical

11ac(VHT80)_TX_CH_155_Horizontal_Peak

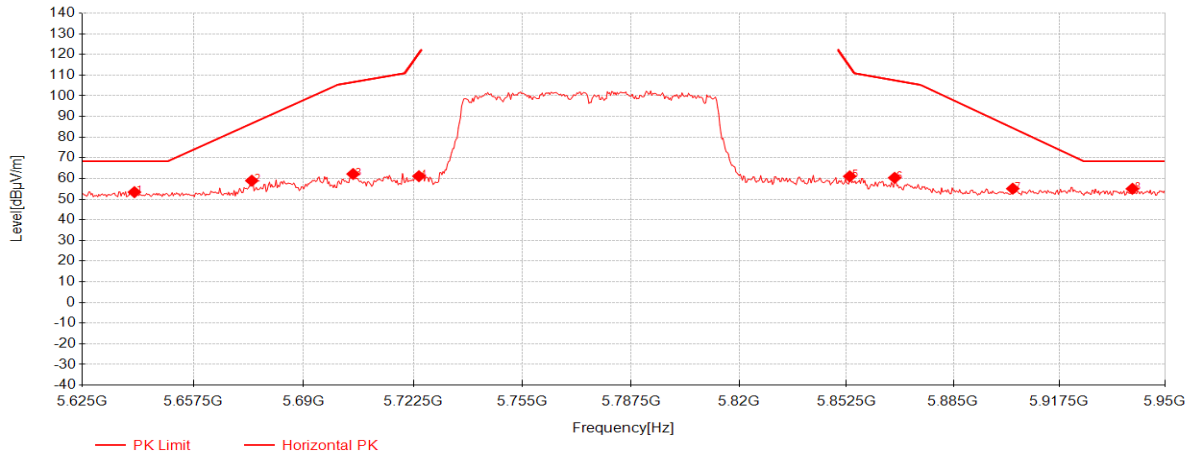


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5640.275	37.24	33.42	-17.27	53.39	68.30	14.91	Horizontal
2	5674.725	42.72	33.52	-17.30	58.94	86.64	27.70	Horizontal
3	5704.625	45.86	33.61	-17.32	62.16	106.60	44.44	Horizontal
4	5724.125	44.68	33.67	-17.26	61.10	120.31	59.21	Horizontal
5	5853.475	43.88	34.06	-16.91	61.03	114.38	53.35	Horizontal
6	5867.125	43.10	34.10	-16.88	60.32	107.50	47.18	Horizontal
7	5903.2	37.69	34.21	-16.82	55.08	84.39	29.31	Horizontal
8	5939.925	37.61	34.32	-16.93	55.00	68.30	13.30	Horizontal

11ac(VHT80)_TX_CH_155_Vetical_Peak

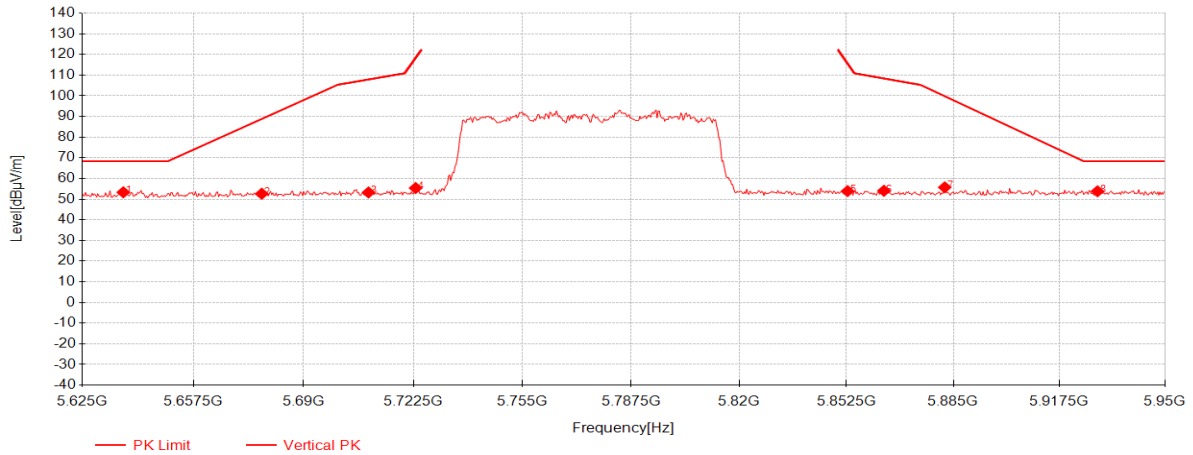


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5637.025	37.16	33.41	-17.27	53.30	68.30	15.00	Vertical
2	5677.65	36.39	33.53	-17.31	52.62	88.80	36.18	Vertical
3	5709.175	36.92	33.63	-17.30	53.25	107.87	54.62	Vertical
4	5723.15	38.96	33.67	-17.26	55.37	118.08	62.71	Vertical
5	5852.825	36.72	34.06	-16.91	53.87	115.86	61.99	Vertical
6	5863.875	36.83	34.09	-16.89	54.04	108.41	54.37	Vertical
7	5882.4	38.41	34.15	-16.85	55.71	99.80	44.09	Vertical
8	5929.2	36.41	34.29	-16.90	53.80	68.30	14.50	Vertical

11ax(HE20)_TX_CH_36_Horizontal_Peak

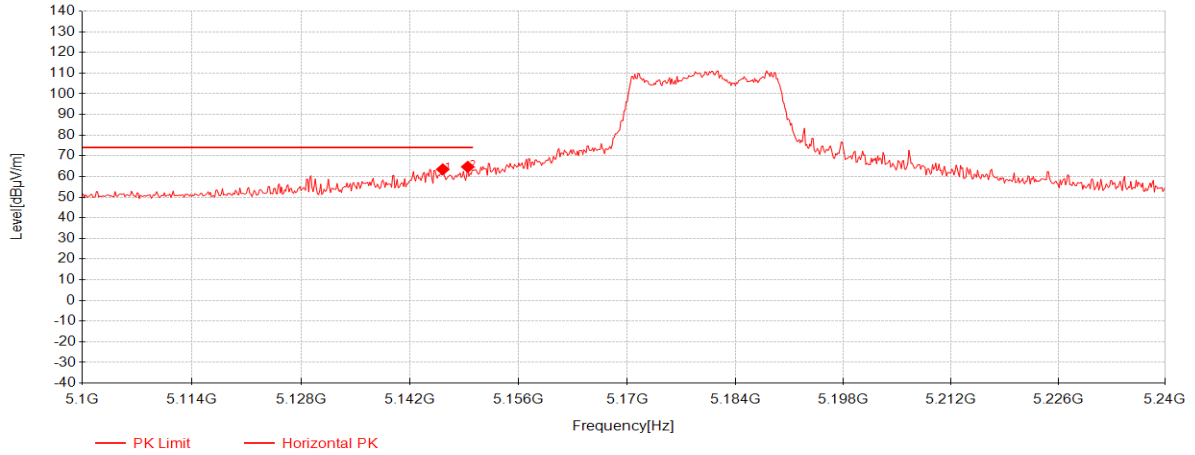


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.2	48.57	33.07	-18.19	63.45	74.00	10.55	Horizontal
2	5149.42	49.77	33.07	-18.18	64.66	74.00	9.34	Horizontal

11ax(HE20)_TX_CH_36_Horizontal_Average

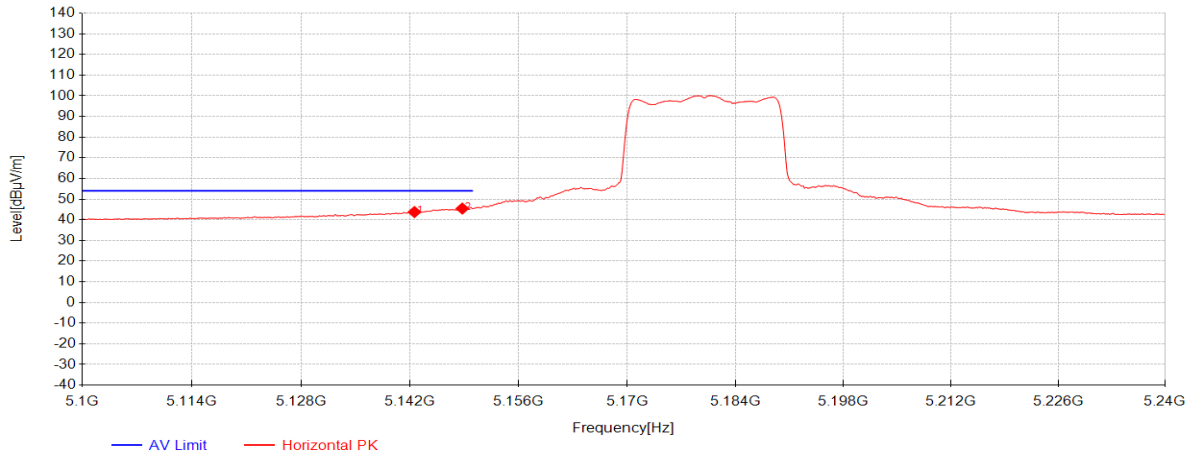


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5142.56	28.89	33.07	-18.20	43.76	54.00	10.24	Horizontal
2	5148.72	30.55	33.07	-18.18	45.44	54.00	8.56	Horizontal

11ax(HE20)_TX_CH_36_Vertical_Peak

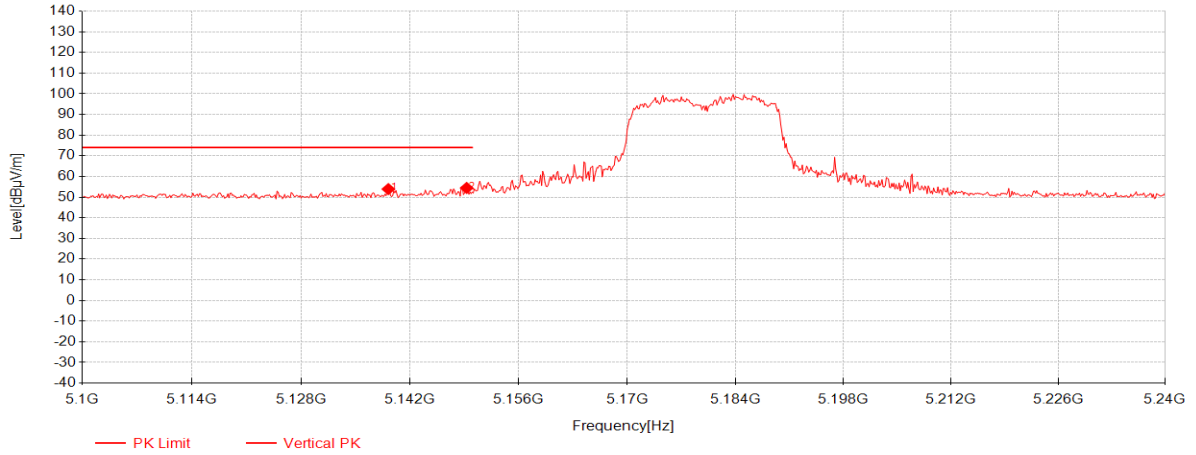


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5139.2	39.03	33.07	-18.21	53.89	74.00	20.11	Vertical
2	5149.28	39.56	33.07	-18.18	54.45	74.00	19.55	Vertical

11ax(HE20)_TX_CH_36_Veritical_Average

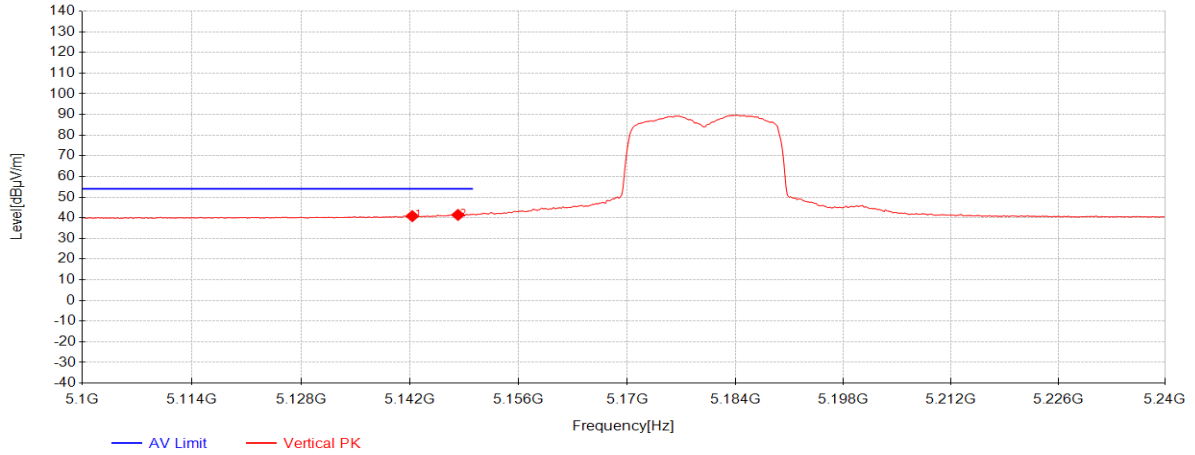


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5142.28	25.93	33.07	-18.20	40.80	54.00	13.20	Vertical
2	5148.16	26.50	33.07	-18.19	41.38	54.00	12.62	Vertical

11ax(HE20)_TX_CH_64_Horizontal_Peak

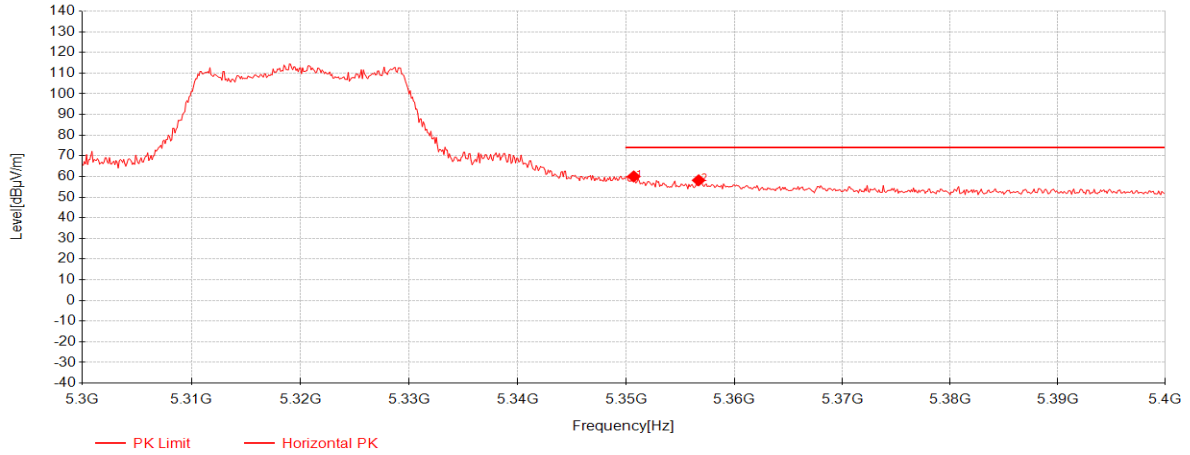


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.7	44.72	33.03	-17.75	60.00	74.00	14.00	Horizontal
2	5356.7	42.88	33.03	-17.76	58.15	74.00	15.85	Horizontal

11ax(HE20)_TX_CH_64_Horizontal_Average

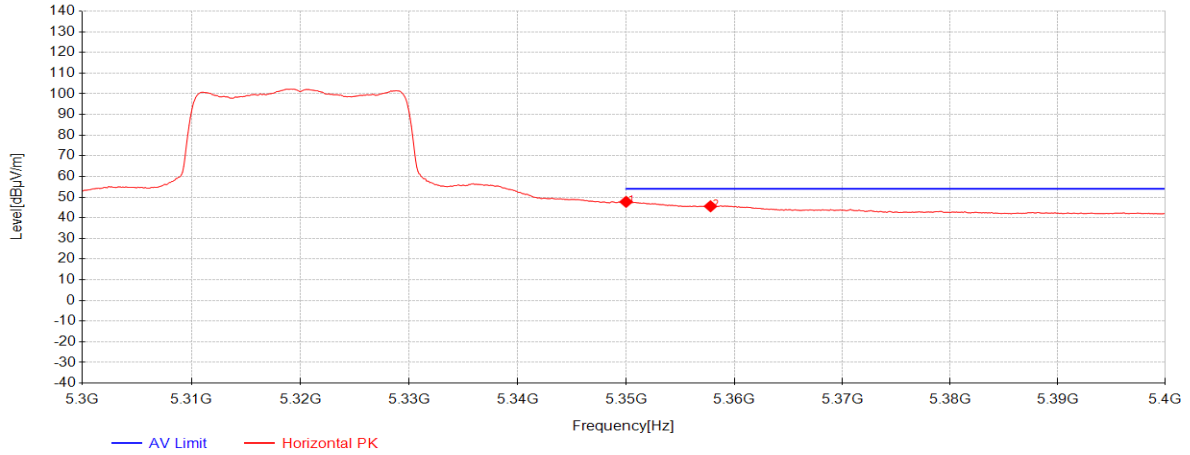


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350	32.44	33.03	-17.75	47.72	54.00	6.28	Horizontal
2	5357.8	30.31	33.03	-17.76	45.58	54.00	8.42	Horizontal

11ax(HE20)_TX_CH_64_Vertical_Peak

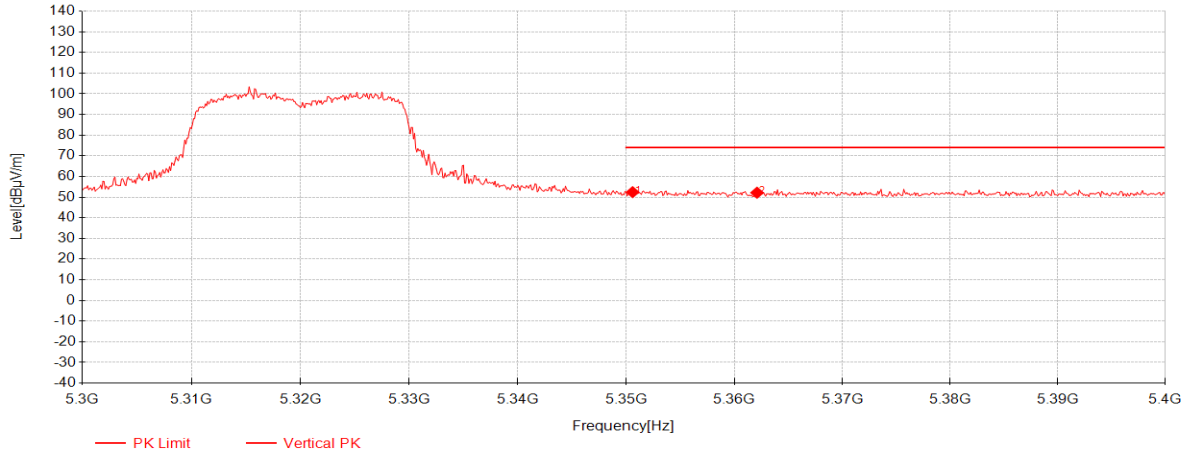


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.6	37.14	33.03	-17.75	52.42	74.00	21.58	Vertical
2	5362.1	36.88	33.03	-17.77	52.14	74.00	21.86	Vertical

11ax(HE20)_TX_CH_64_Veritical_Average

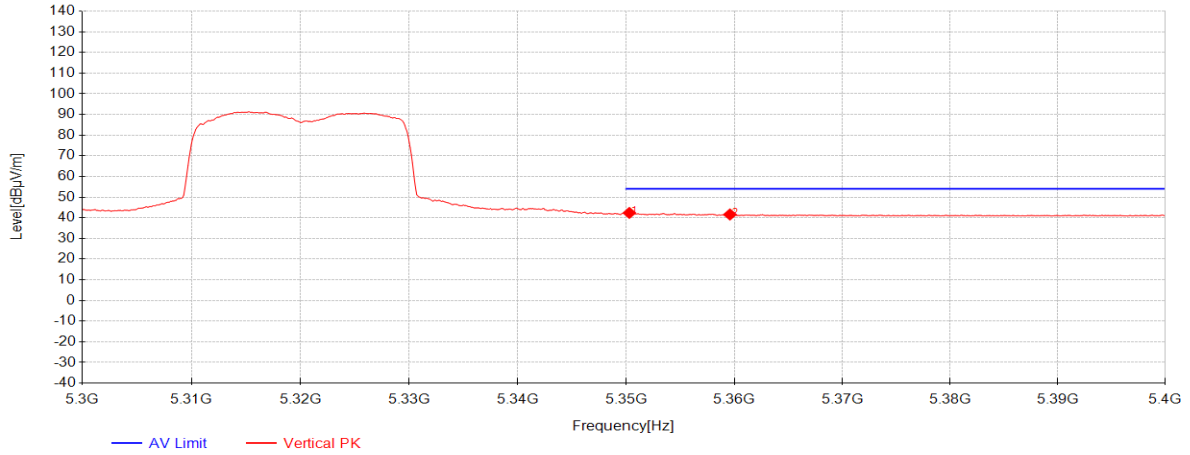


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.3	27.09	33.03	-17.75	42.37	54.00	11.63	Vertical
2	5359.6	26.34	33.03	-17.76	41.60	54.00	12.40	Vertical

11ax(HE20)_TX_CH_100_Horizontal_Peak

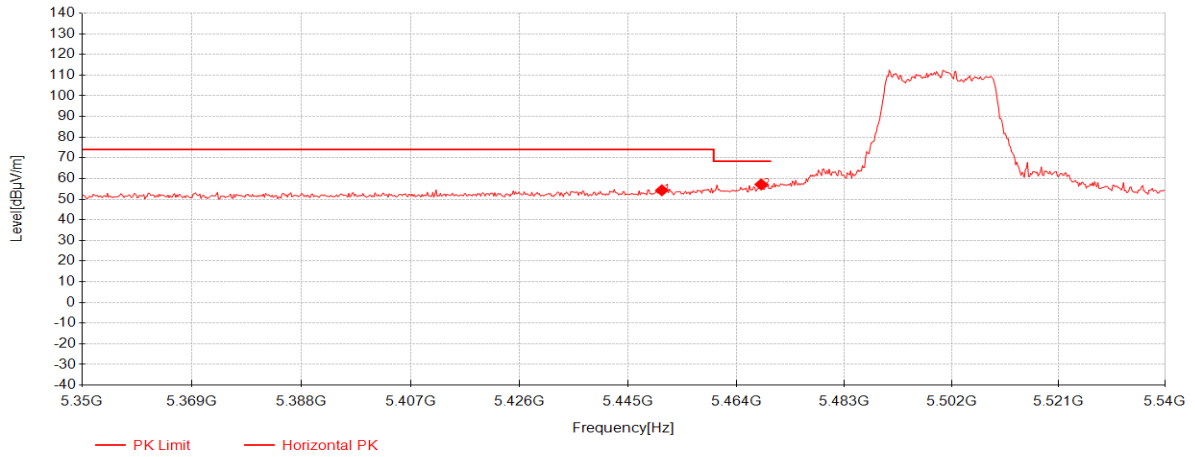


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5450.89	38.93	33.01	-17.67	54.27	74.00	19.73	Horizontal
2	5468.37	41.71	33.01	-17.61	57.10	68.30	11.20	Horizontal

11ax(HE20)_TX_CH_100_Horizontal_Average

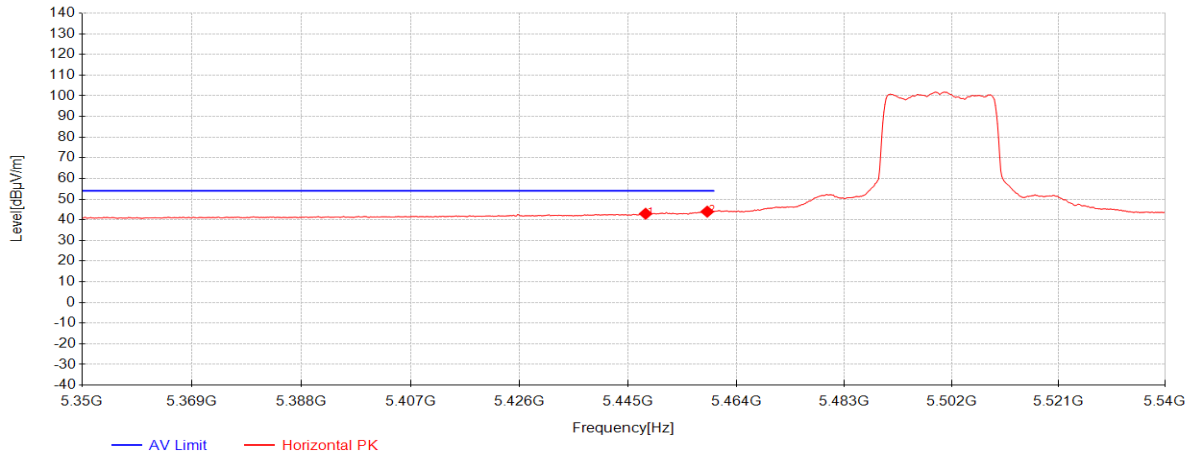


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5448.04	27.63	33.01	-17.68	42.96	54.00	11.04	Horizontal
2	5458.87	28.58	33.01	-17.64	43.94	54.00	10.06	Horizontal

11ax(HE20)_TX_CH_100_Vetical_Peak

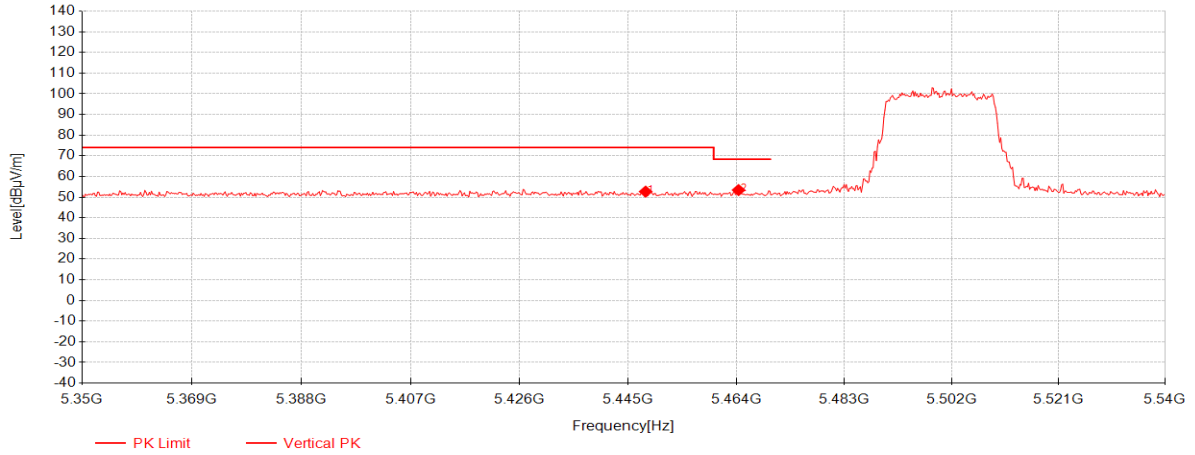


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5448.04	37.35	33.01	-17.68	52.68	74.00	21.32	Vertical
2	5464.38	38.04	33.01	-17.63	53.42	68.30	14.88	Vertical

11ax(HE20)_TX_CH_100_Veritical_Average

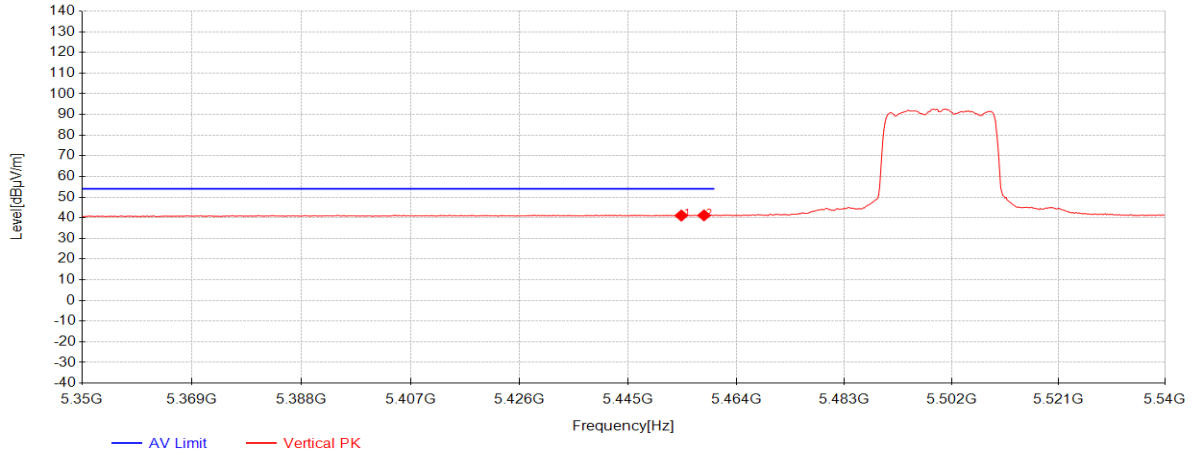


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5454.31	25.74	33.01	-17.66	41.09	54.00	12.91	Vertical
2	5458.3	25.81	33.01	-17.65	41.17	54.00	12.83	Vertical

11ax(HE20)_TX_CH_140_Horizontal_Peak

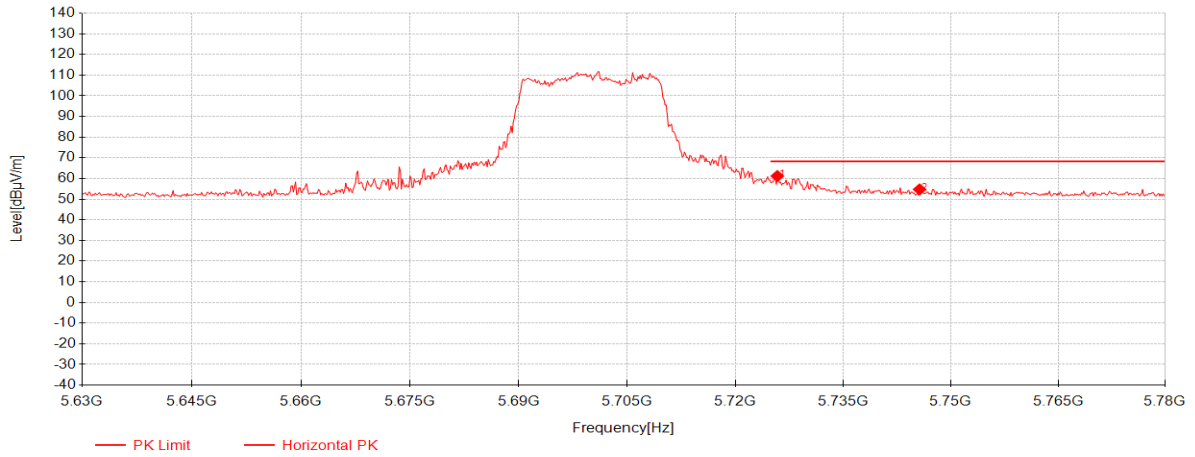


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.85	44.75	33.68	-17.25	61.18	68.20	7.02	Horizontal
2	5745.65	38.16	33.74	-17.19	54.71	68.20	13.49	Horizontal

11ax(HE20)_TX_CH_140_Vetical_Peak

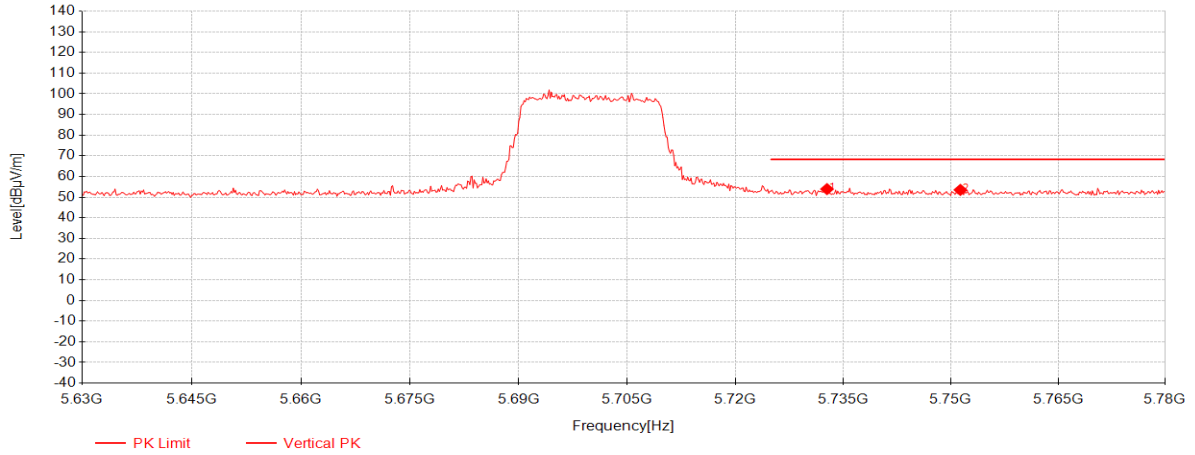


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5732.75	37.43	33.70	-17.23	53.90	68.20	14.30	Vertical
2	5751.35	36.93	33.75	-17.17	53.51	68.20	14.69	Vertical

11ax(HE20)_TX_CH_149_Horizontal_Peak

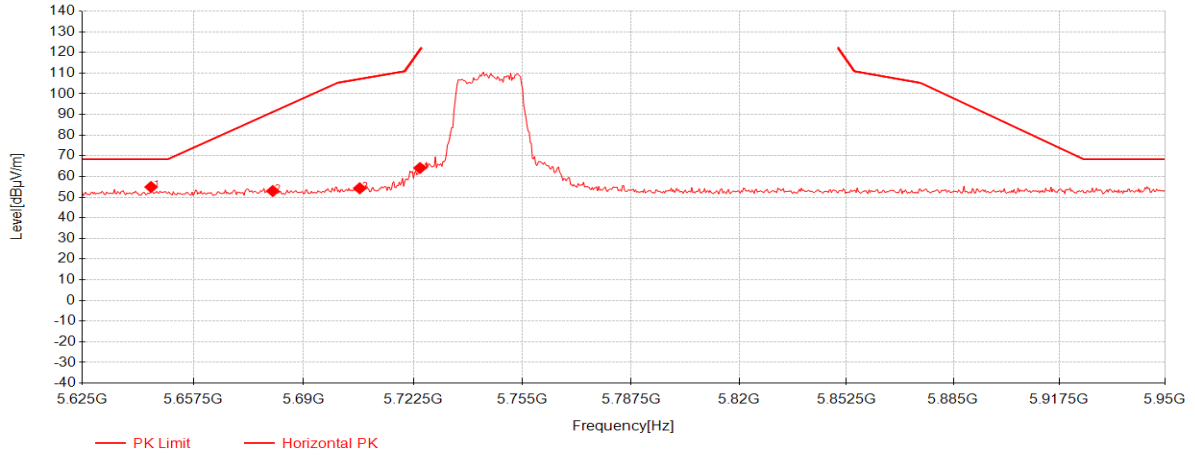


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5645.15	38.74	33.44	-17.28	54.90	68.30	13.40	Horizontal
2	5680.9	36.73	33.54	-17.31	52.96	91.20	38.24	Horizontal
3	5706.575	37.97	33.62	-17.31	54.28	107.14	52.86	Horizontal
4	5724.45	47.69	33.67	-17.25	64.11	121.05	56.94	Horizontal

11ax(HE20)_TX_CH_149_Vertical_Peak

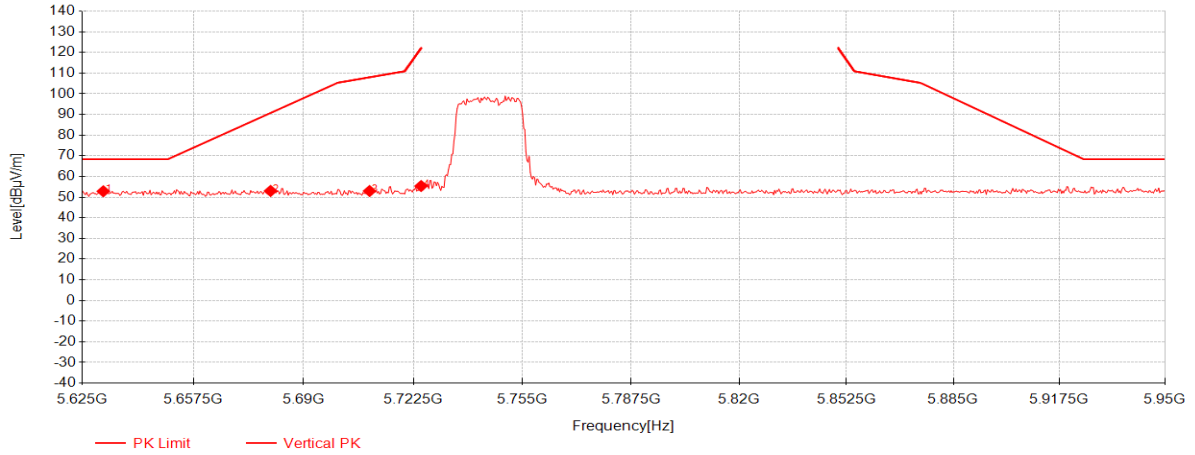


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5631.175	36.71	33.39	-17.26	52.84	68.30	15.46	Vertical
2	5680.25	36.78	33.54	-17.31	53.01	90.72	37.71	Vertical
3	5709.5	36.63	33.63	-17.30	52.96	107.96	55.00	Vertical
4	5724.775	38.95	33.67	-17.25	55.37	121.79	66.42	Vertical

11ax(HE20)_TX_CH_165_Horizontal_Peak

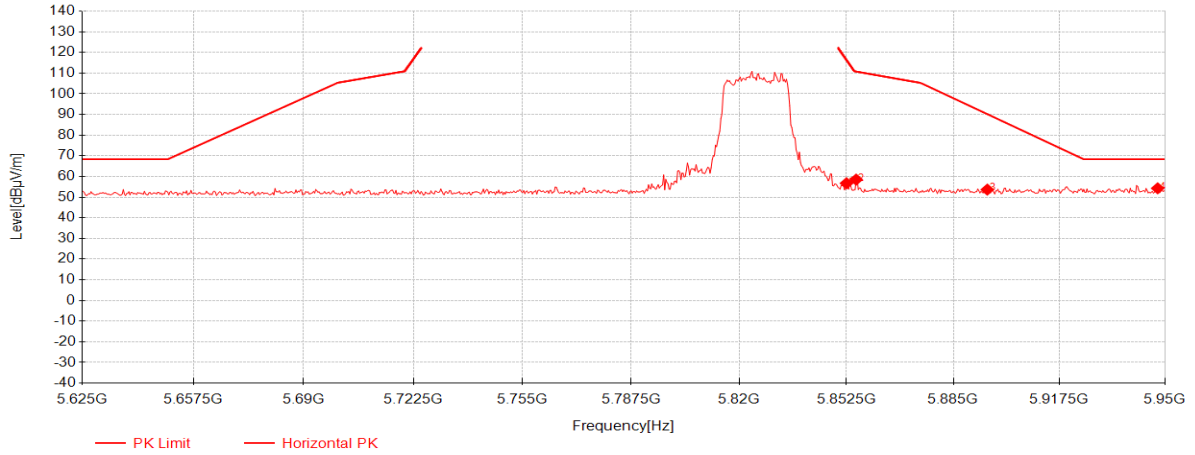


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5852.5	39.55	34.06	-16.91	56.70	116.60	59.90	Horizontal
2	5855.425	41.33	34.07	-16.90	58.49	110.78	52.29	Horizontal
3	5895.4	36.28	34.19	-16.82	53.65	90.17	36.52	Horizontal
4	5947.725	36.89	34.34	-16.96	54.28	68.30	14.02	Horizontal

11ax(HE20)_TX_CH_165_Vetical_Peak

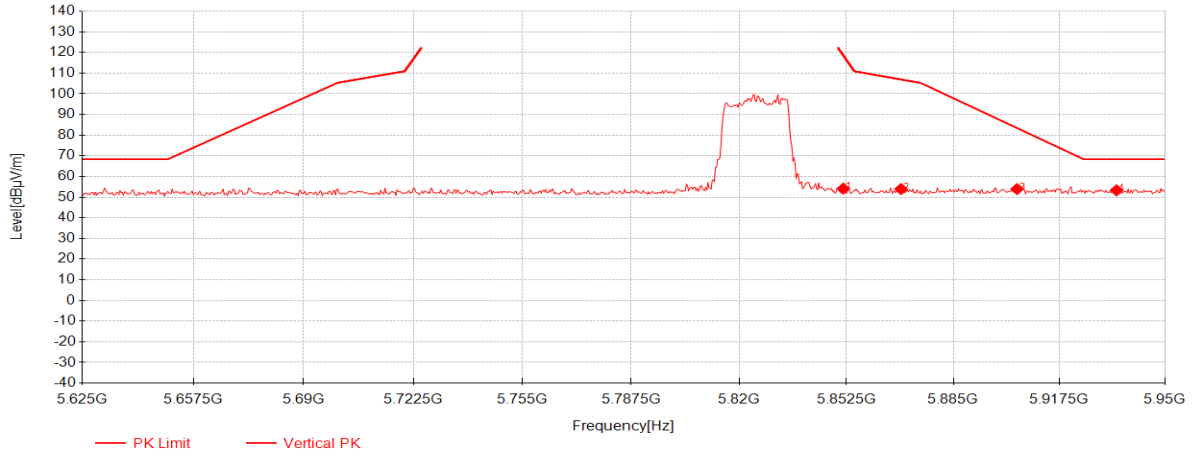


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.525	36.99	34.05	-16.91	54.13	118.82	64.69	Vertical
2	5869.075	36.66	34.11	-16.87	53.89	106.96	53.07	Vertical
3	5904.5	36.52	34.21	-16.82	53.91	83.43	29.52	Vertical
4	5935.05	35.91	34.31	-16.92	53.30	68.30	15.00	Vertical

11ax(HE40)_TX_CH_38_Horizontal_Peak

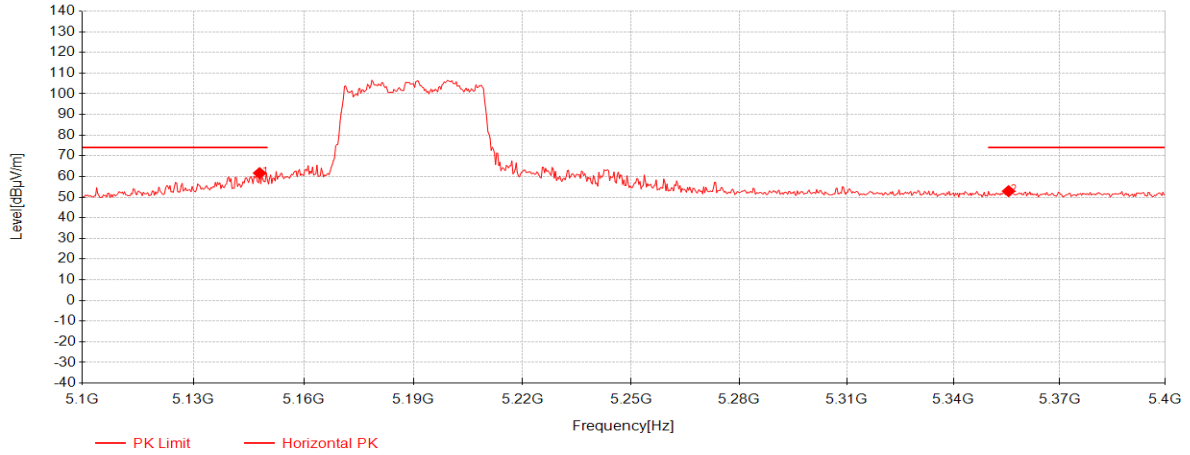


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148	46.75	33.07	-18.19	61.63	74.00	12.37	Horizontal
2	5355.6	37.62	33.03	-17.76	52.89	74.00	21.11	Horizontal

11ax(HE40)_TX_CH_38_Horizontal_Average

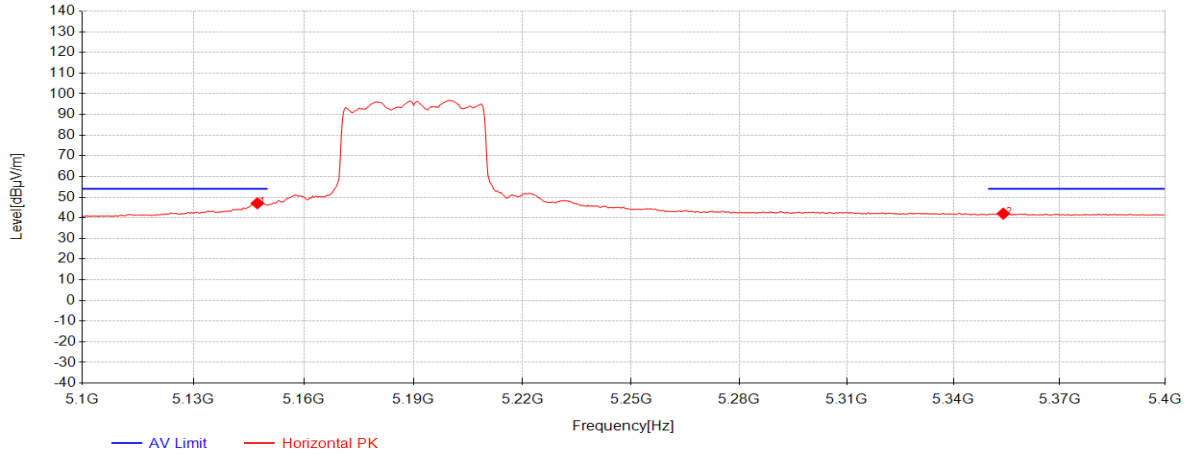


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5147.4	32.13	33.07	-18.19	47.01	54.00	6.99	Horizontal
2	5354.1	26.74	33.03	-17.76	42.01	54.00	11.99	Horizontal

11ax(HE40)_TX_CH_38_Veritical_Peak

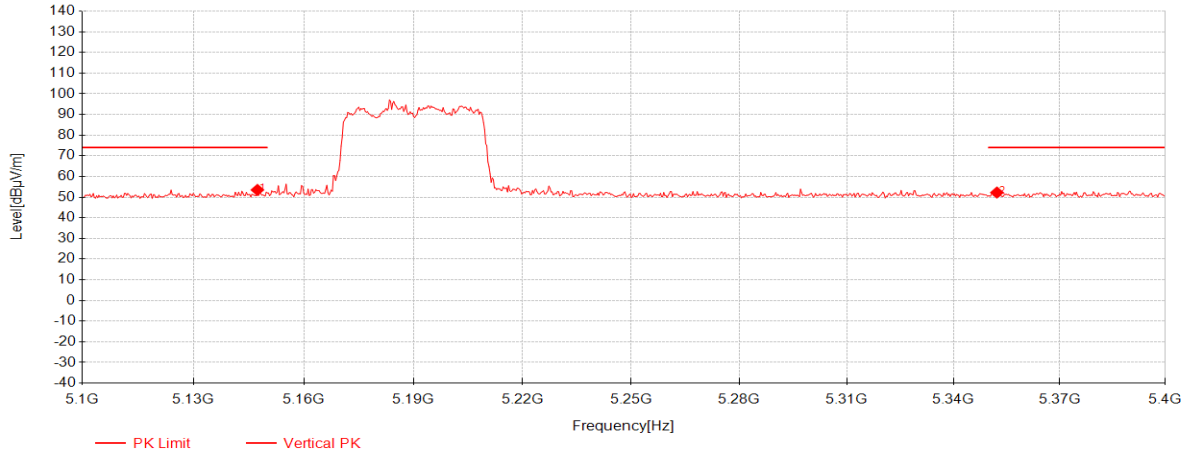


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5147.4	38.62	33.07	-18.19	53.50	74.00	20.50	Vertical
2	5352.3	36.95	33.03	-17.75	52.23	74.00	21.77	Vertical

11ax(HE40)_TX_CH_38_Veritical_Average

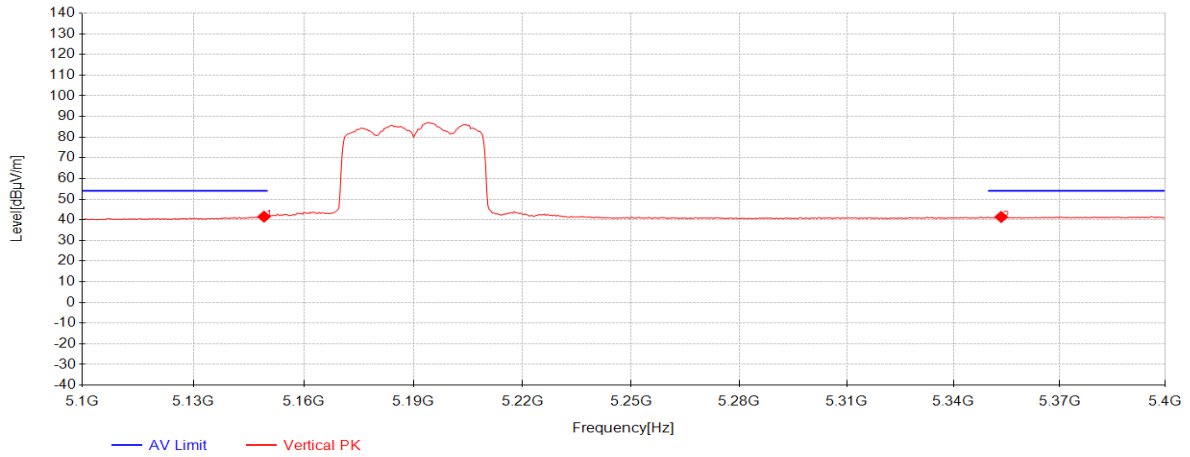


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.2	26.64	33.07	-18.18	41.53	54.00	12.47	Vertical
2	5353.5	26.09	33.03	-17.75	41.36	54.00	12.64	Vertical

11ax(HE40)_TX_CH_62_Horizontal_Peak

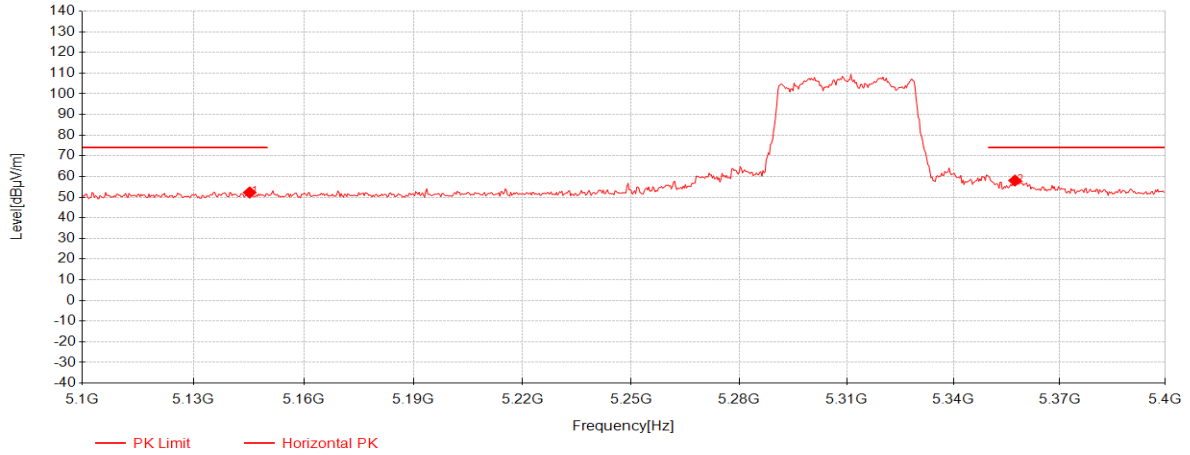


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145.3	37.37	33.07	-18.19	52.25	74.00	21.75	Horizontal
2	5357.4	42.77	33.03	-17.76	58.04	74.00	15.96	Horizontal

11ax(HE40)_TX_CH_62_Horizontal_Average

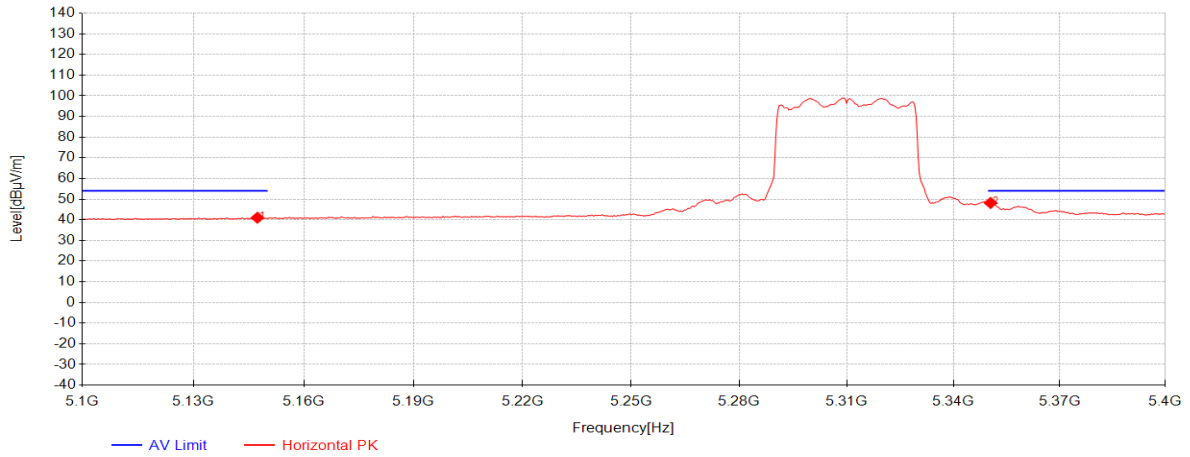


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5147.4	26.12	33.07	-18.19	41.00	54.00	13.00	Horizontal
2	5350.5	32.87	33.03	-17.75	48.15	54.00	5.85	Horizontal

11ax(HE40)_TX_CH_62_Vertical_Peak

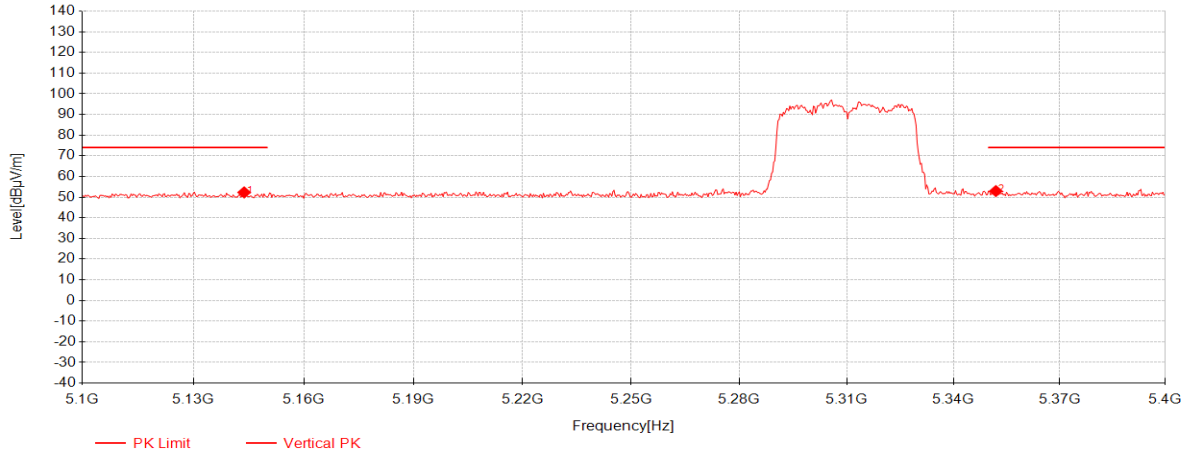


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.8	37.42	33.07	-18.20	52.29	74.00	21.71	Vertical
2	5352	37.67	33.03	-17.75	52.95	74.00	21.05	Vertical

11ax(HE40)_TX_CH_62_Veritical_Average

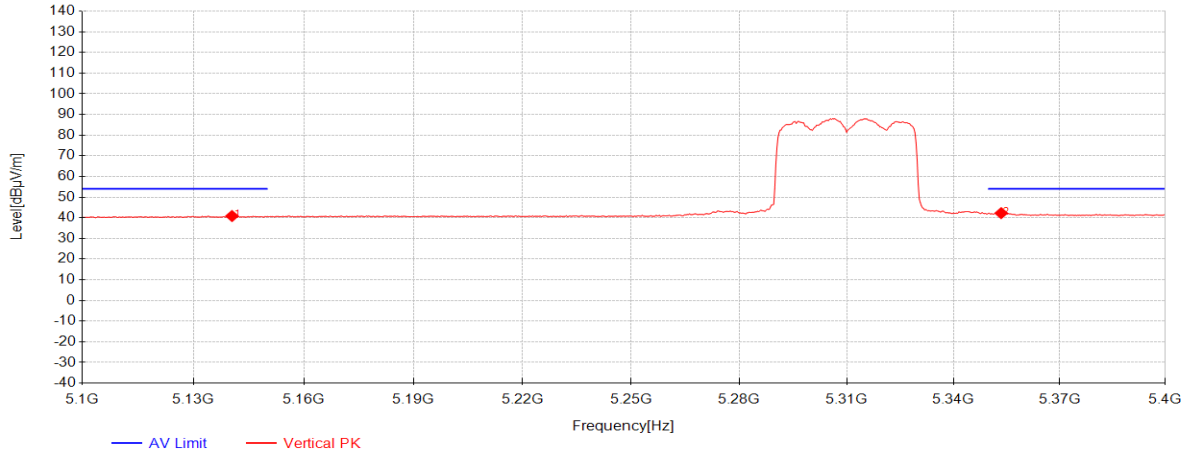


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5140.5	26.00	33.07	-18.21	40.86	54.00	13.14	Vertical
2	5353.5	26.98	33.03	-17.75	42.25	54.00	11.75	Vertical

11ax(HE40)_TX_CH_102_Horizontal_Peak

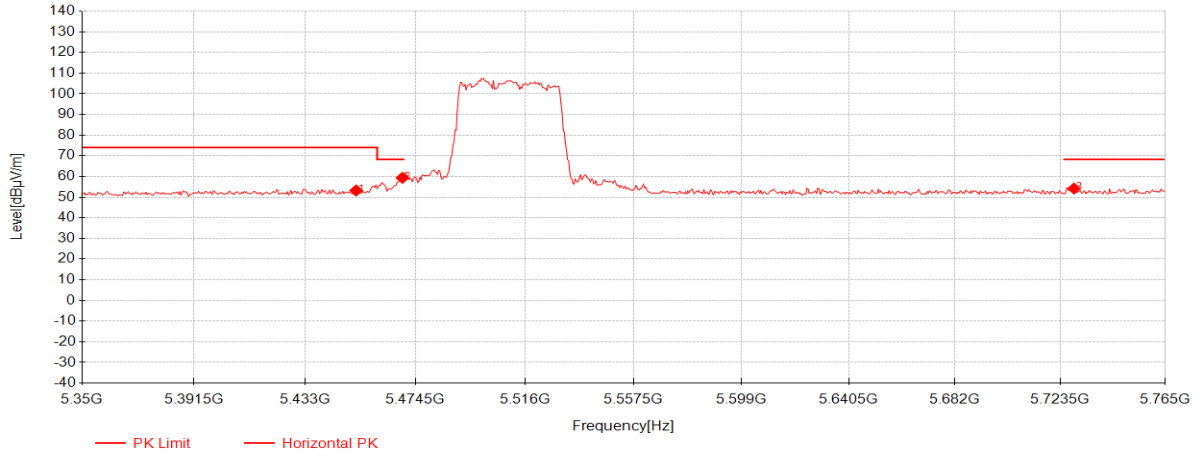


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5452.09	37.87	33.01	-17.66	53.22	74.00	20.78	Horizontal
2	5469.52	43.92	33.01	-17.61	59.31	68.20	8.89	Horizontal
3	5728.895	37.70	33.69	-17.24	54.15	68.20	14.05	Horizontal

11ax(HE40)_TX_CH_102_Horizontal_Average

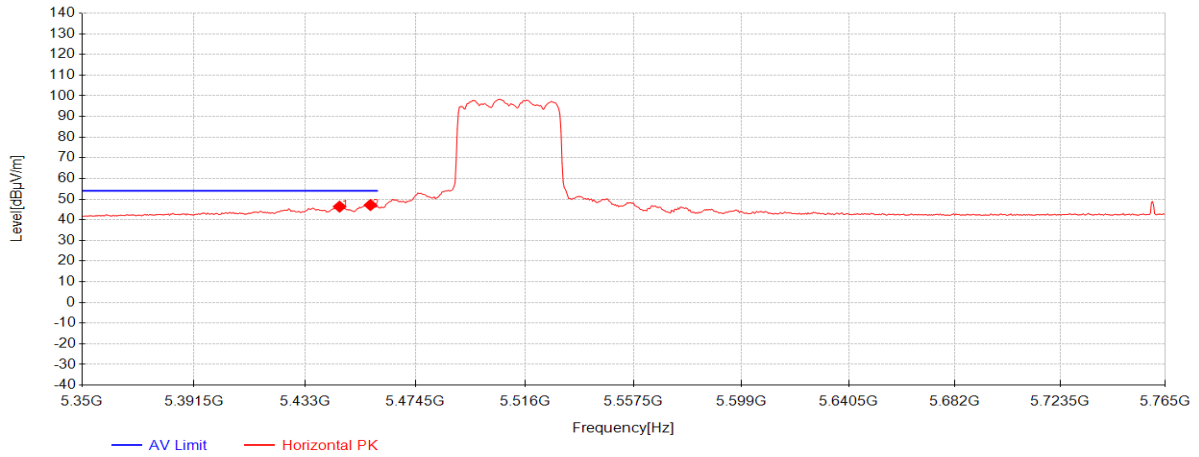


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.865	31.03	33.01	-17.68	46.36	54.00	7.64	Horizontal
2	5457.485	31.78	33.01	-17.65	47.14	54.00	6.86	Horizontal

11ax(HE40)_TX_CH_102_Vertical_Peak

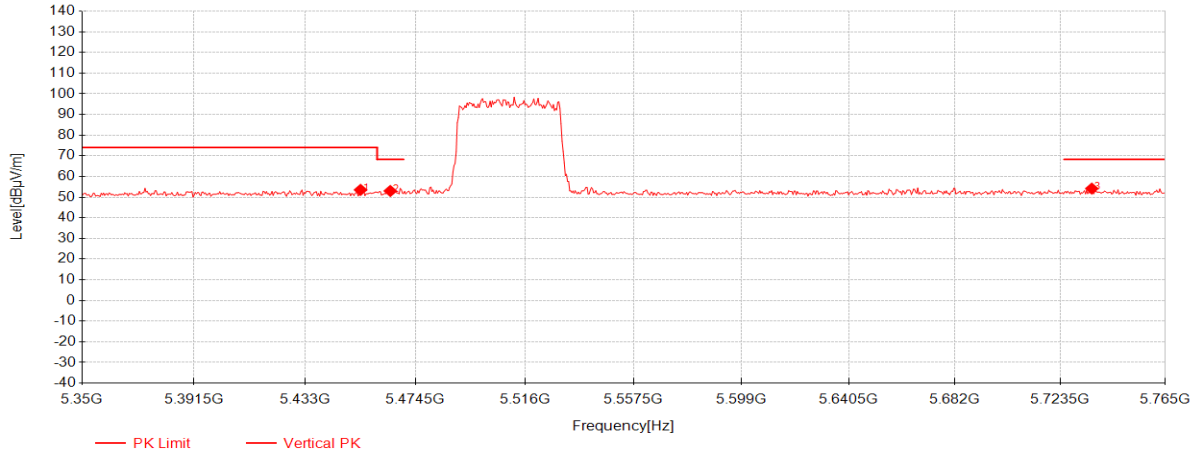


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5453.75	38.16	33.01	-17.66	53.51	74.00	20.49	Vertical
2	5464.955	37.61	33.01	-17.63	52.99	68.20	15.21	Vertical
3	5735.95	37.64	33.71	-17.22	54.13	68.20	14.07	Vertical

11ax(HE40)_TX_CH_102_Vertical_Average

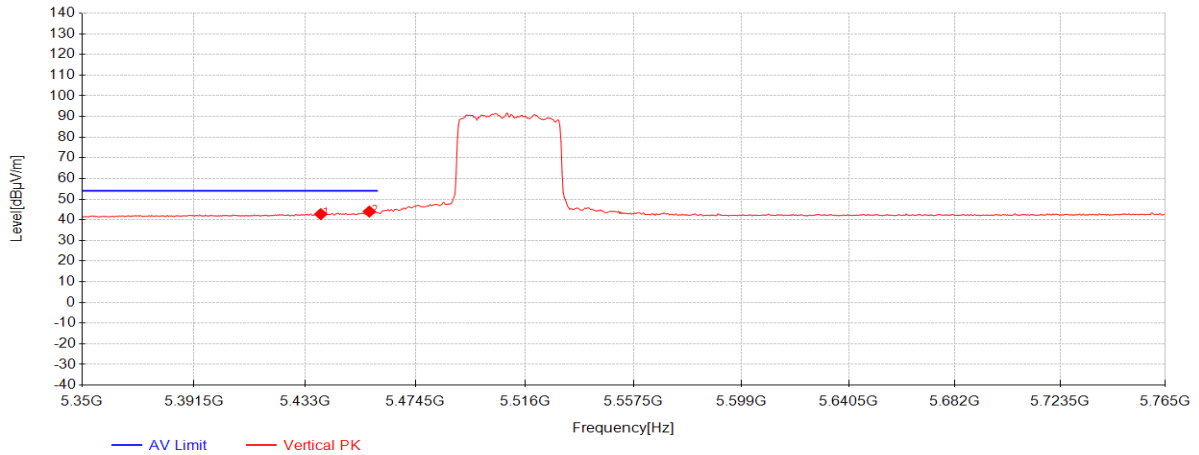


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5438.81	27.44	33.01	-17.70	42.75	54.00	11.25	Vertical
2	5457.07	28.61	33.01	-17.65	43.97	54.00	10.03	Vertical

11ax(HE40)_TX_CH_134_Horizontal_Peak

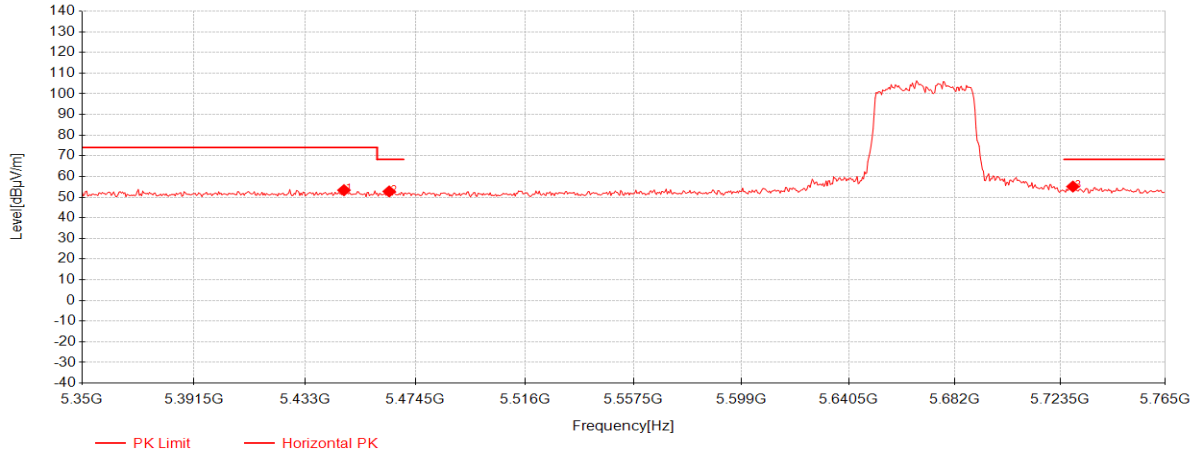


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.525	38.03	33.01	-17.68	53.36	74.00	20.64	Horizontal
2	5464.54	37.37	33.01	-17.63	52.75	68.20	15.45	Horizontal
3	5728.48	38.66	33.69	-17.24	55.10	68.20	13.10	Horizontal

11ax(HE40)_TX_CH_134_Horizontal_Average

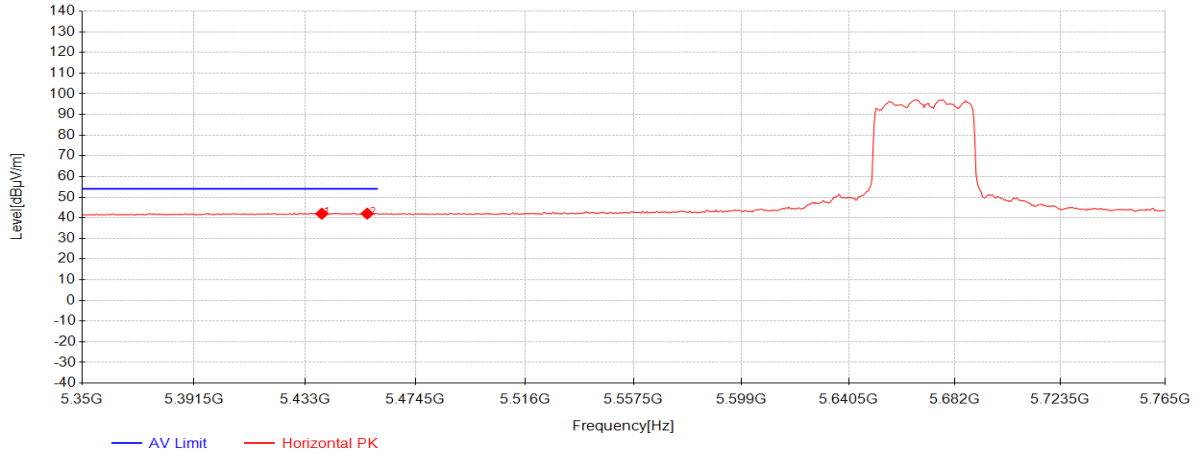


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5439.225	26.68	33.01	-17.70	41.99	54.00	12.01	Horizontal
2	5456.24	26.65	33.01	-17.65	42.01	54.00	11.99	Horizontal

11ax(HE40)_TX_CH_134_Vertical_Peak

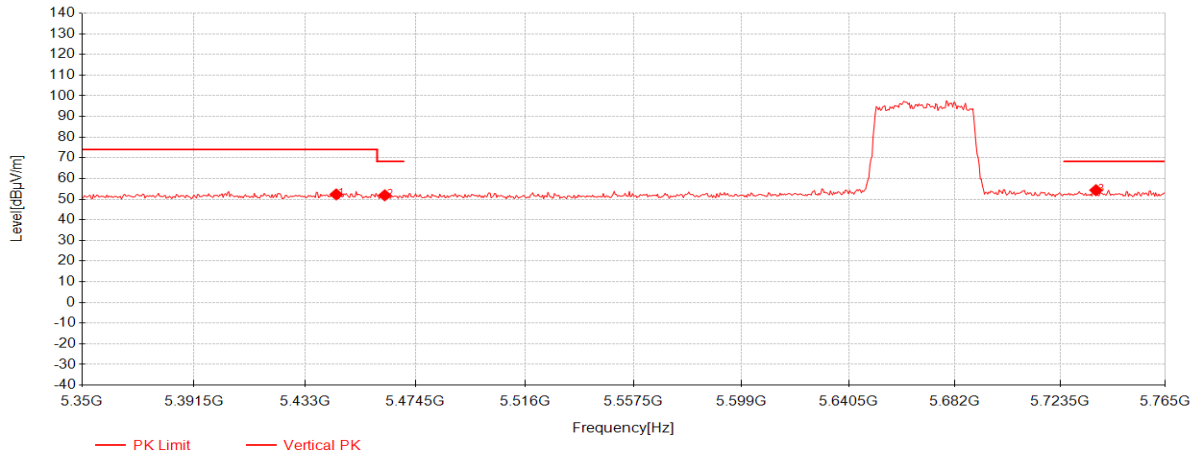


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.62	36.96	33.01	-17.69	52.28	74.00	21.72	Vertical
2	5462.88	36.47	33.01	-17.63	51.85	68.20	16.35	Vertical
3	5737.61	37.83	33.71	-17.21	54.33	68.20	13.87	Vertical

11ax(HE40)_TX_CH_134_Vetical_Average

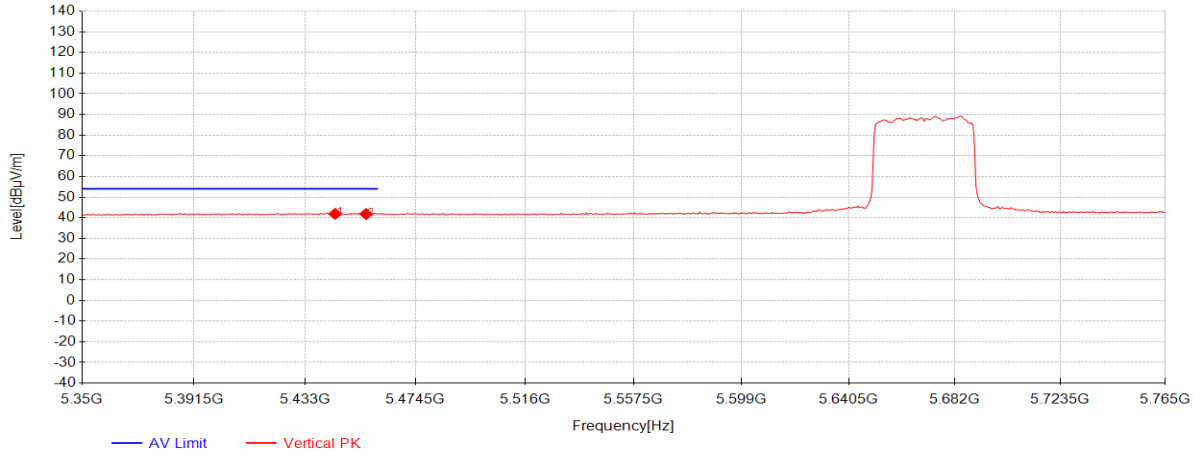


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.205	26.59	33.01	-17.69	41.91	54.00	12.09	Vertical
2	5455.825	26.48	33.01	-17.65	41.84	54.00	12.16	Vertical

11ax(HE40)_TX_CH_151_Horizontal_Peak

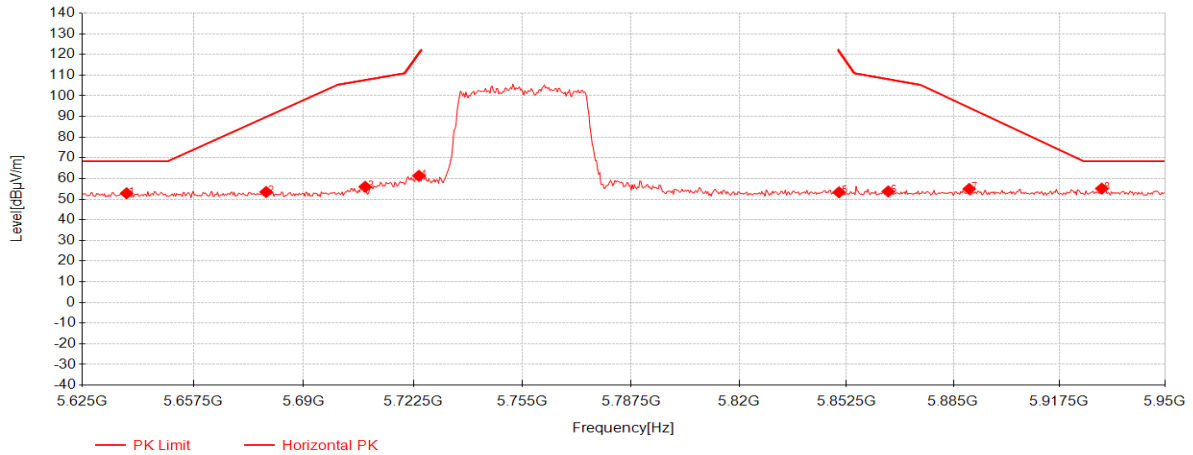


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5638	36.68	33.41	-17.27	52.83	68.30	15.47	Horizontal
2	5678.95	37.23	33.54	-17.31	53.46	89.76	36.30	Horizontal
3	5708.2	39.66	33.62	-17.30	55.98	107.60	51.62	Horizontal
4	5724.125	44.86	33.67	-17.26	61.28	120.31	59.03	Horizontal
5	5850.225	36.16	34.05	-16.91	53.30	121.79	68.49	Horizontal
6	5865.175	36.51	34.10	-16.88	53.72	108.05	54.33	Horizontal
7	5889.875	37.60	34.17	-16.83	54.94	94.26	39.32	Horizontal
8	5930.5	37.69	34.29	-16.90	55.08	68.30	13.22	Horizontal

11ax(HE40)_TX_CH_151_Vertical_Peak

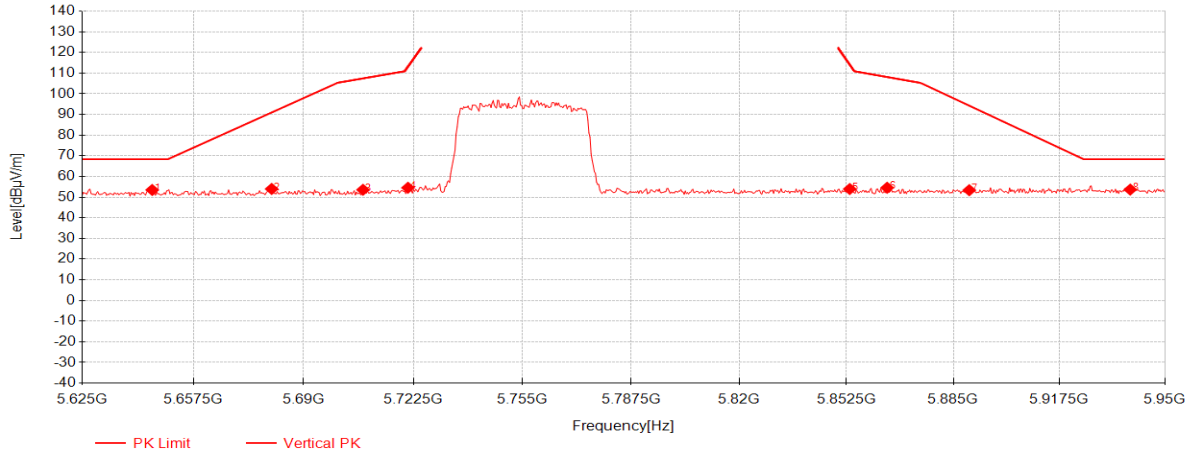


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5645.475	37.32	33.44	-17.28	53.48	68.30	14.82	Vertical
2	5680.575	37.74	33.54	-17.31	53.97	90.96	36.99	Vertical
3	5707.55	37.24	33.62	-17.31	53.56	107.42	53.86	Vertical
4	5720.875	38.14	33.66	-17.27	54.54	112.90	58.36	Vertical
5	5853.475	36.77	34.06	-16.91	53.92	114.38	60.46	Vertical
6	5864.85	37.32	34.09	-16.88	54.53	108.14	53.61	Vertical
7	5889.875	36.02	34.17	-16.83	53.36	94.26	40.90	Vertical
8	5939.275	36.26	34.32	-16.93	53.65	68.30	14.65	Vertical

11ax(HE40)_TX_CH_159_Horizontal_Peak

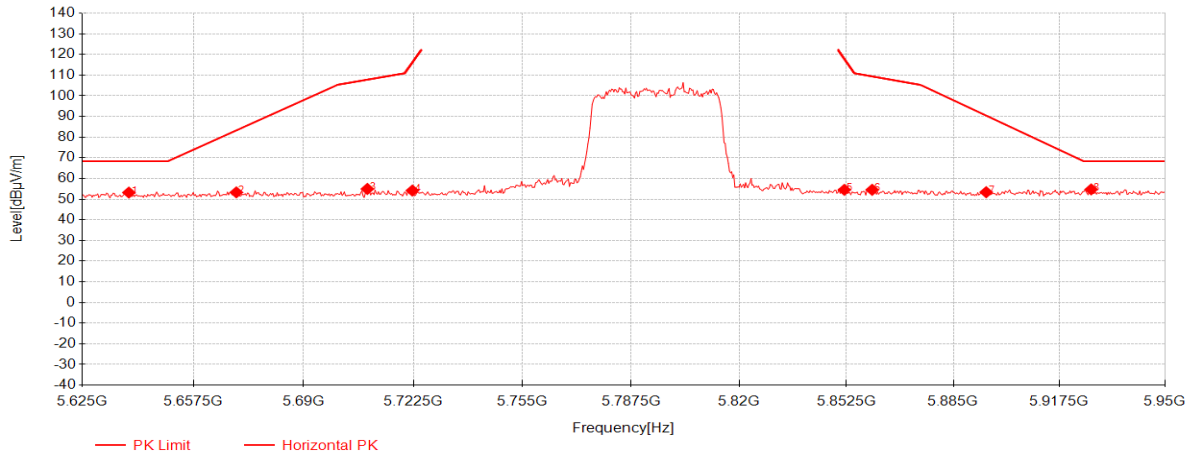


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5638.65	37.02	33.42	-17.27	53.17	68.30	15.13	Horizontal
2	5670.175	37.06	33.51	-17.30	53.27	83.27	30.00	Horizontal
3	5708.85	38.61	33.63	-17.30	54.93	107.78	52.85	Horizontal
4	5722.175	37.75	33.67	-17.26	54.16	115.86	61.70	Horizontal
5	5851.85	37.35	34.06	-16.91	54.49	118.08	63.59	Horizontal
6	5860.3	37.31	34.08	-16.89	54.50	109.41	54.91	Horizontal
7	5895.075	36.00	34.19	-16.82	53.36	90.41	37.05	Horizontal
8	5927.25	37.32	34.28	-16.89	54.71	68.30	13.59	Horizontal

11ax(HE40)_TX_CH_159_Vetical_Peak

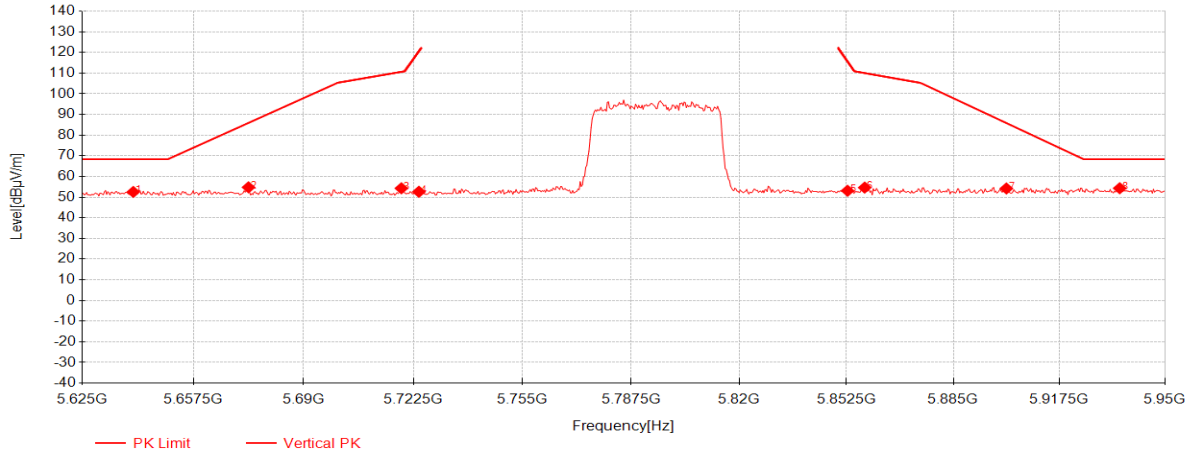


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.95	36.36	33.42	-17.27	52.51	68.30	15.79	Vertical
2	5673.75	38.52	33.52	-17.30	54.74	85.92	31.18	Vertical
3	5718.925	37.87	33.66	-17.27	54.26	110.60	56.34	Vertical
4	5724.125	36.18	33.67	-17.26	52.60	120.31	67.71	Vertical
5	5852.825	35.94	34.06	-16.91	53.09	115.86	62.77	Vertical
6	5858.025	37.44	34.07	-16.90	54.62	110.05	55.43	Vertical
7	5901.25	36.79	34.20	-16.81	54.18	85.84	31.66	Vertical
8	5936.025	36.90	34.31	-16.92	54.29	68.30	14.01	Vertical

11ax(HE80)_TX_CH_42_Horizontal_Peak

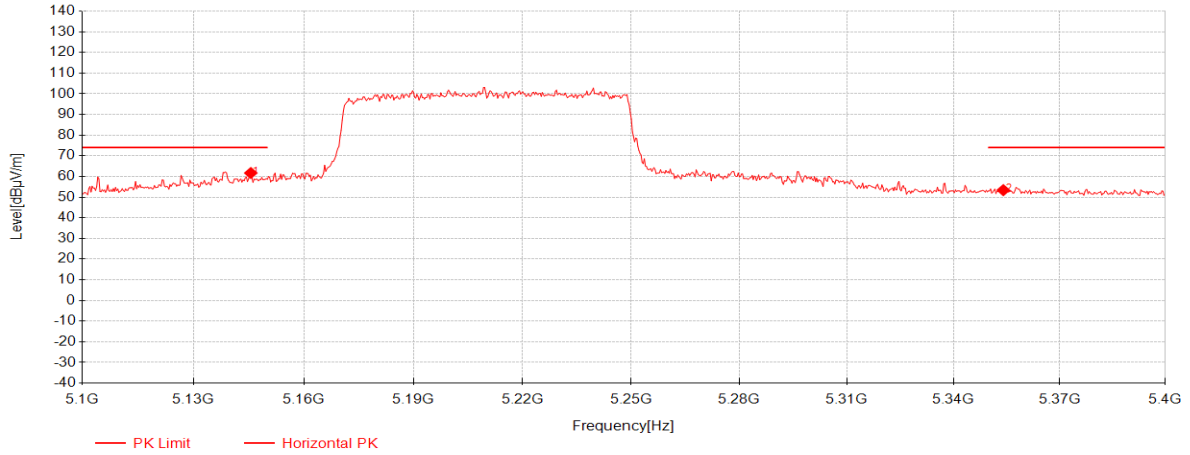


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145.6	46.80	33.07	-18.19	61.68	74.00	12.32	Horizontal
2	5354.1	38.12	33.03	-17.76	53.39	74.00	20.61	Horizontal

11ax(HE80)_TX_CH_42_Horizontal_Average

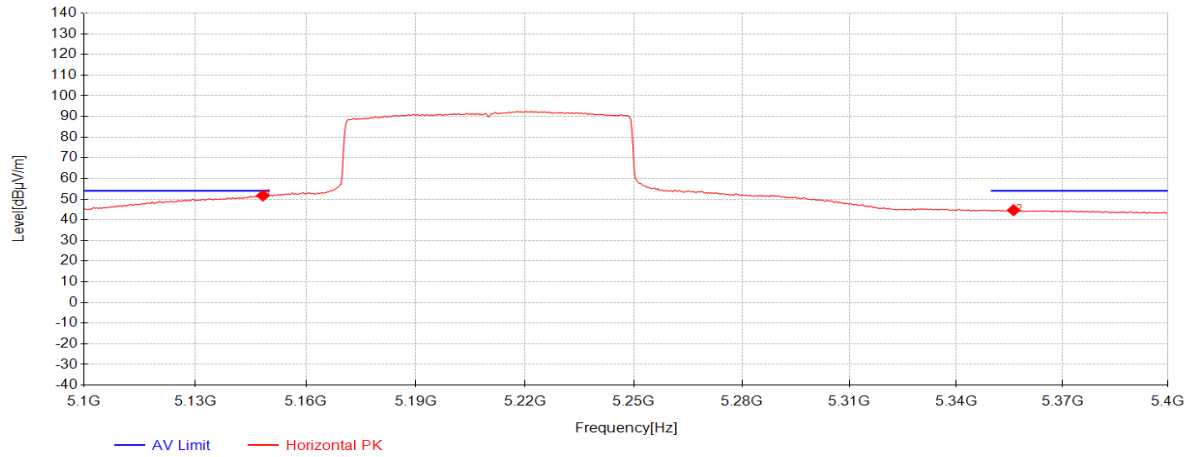


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.3	36.85	33.07	-18.19	51.74	54.00	2.26	Horizontal
2	5356.2	29.36	33.03	-17.76	44.63	54.00	9.37	Horizontal

11ax(HE80)_TX_CH_42_Vertical_Peak

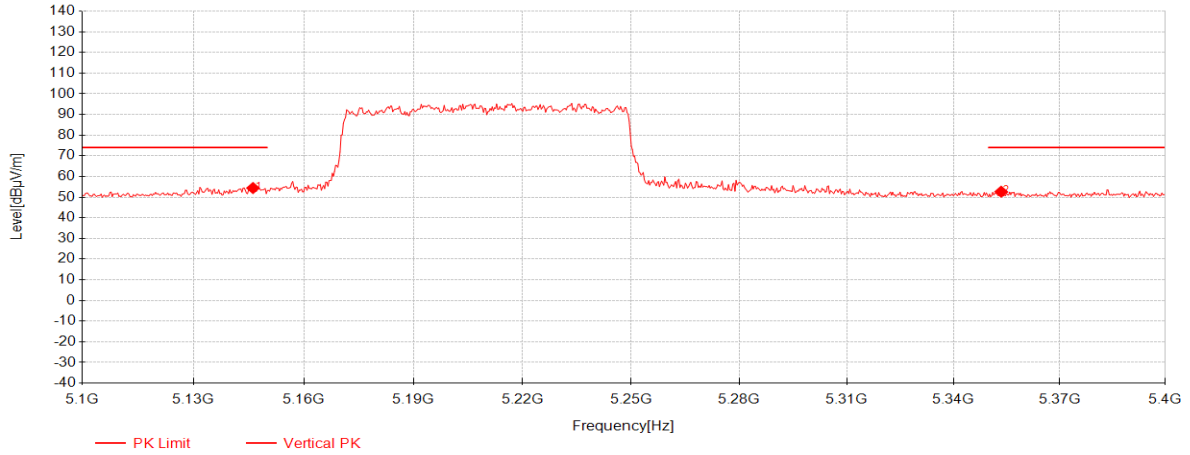


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.2	39.51	33.07	-18.19	54.39	74.00	19.61	Vertical
2	5353.5	37.37	33.03	-17.75	52.64	74.00	21.36	Vertical

11ax(HE80)_TX_CH_42_Veritical_Average

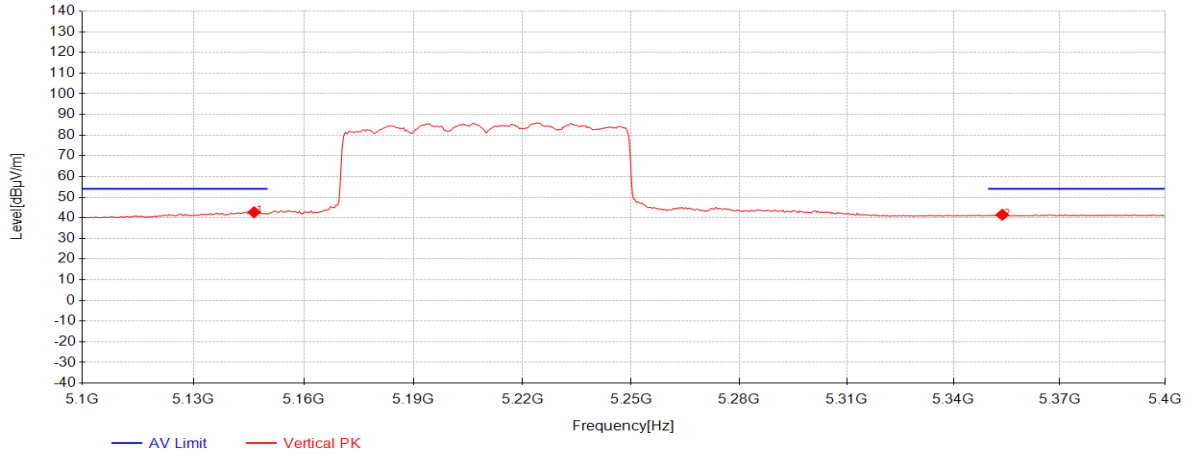


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.5	27.82	33.07	-18.19	42.70	54.00	11.30	Vertical
2	5353.8	26.18	33.03	-17.76	41.45	54.00	12.55	Vertical

11ax(HE80)_TX_CH_58_Horizontal_Peak

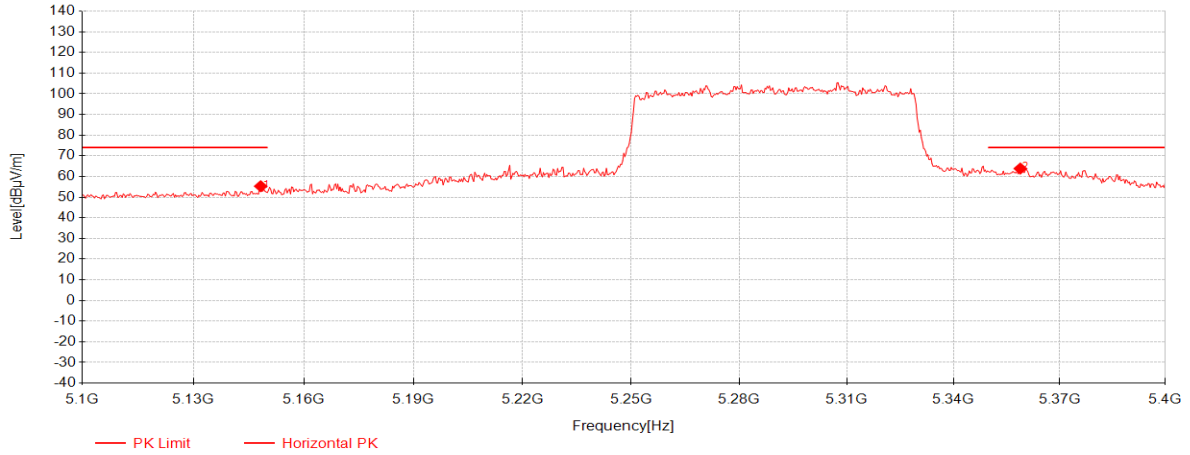


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.3	40.38	33.07	-18.19	55.27	74.00	18.73	Horizontal
2	5358.9	48.57	33.03	-17.76	63.84	74.00	10.16	Horizontal

11ax(HE80)_TX_CH_58_Horizontal_Average

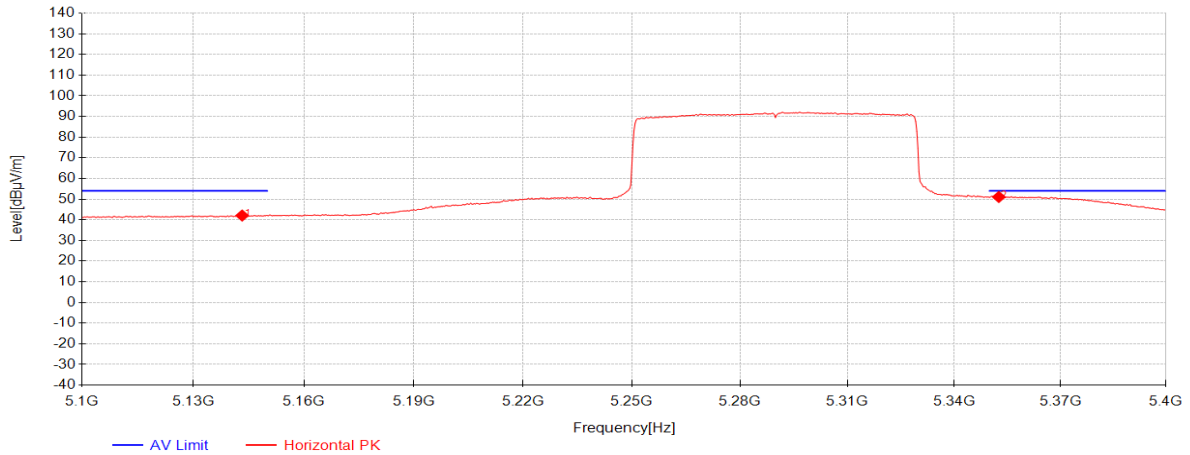


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.2	27.18	33.07	-18.20	42.05	54.00	11.95	Horizontal
2	5352.6	35.77	33.03	-17.75	51.05	54.00	2.95	Horizontal

11ax(HE80)_TX_CH_58_Vertical_Peak

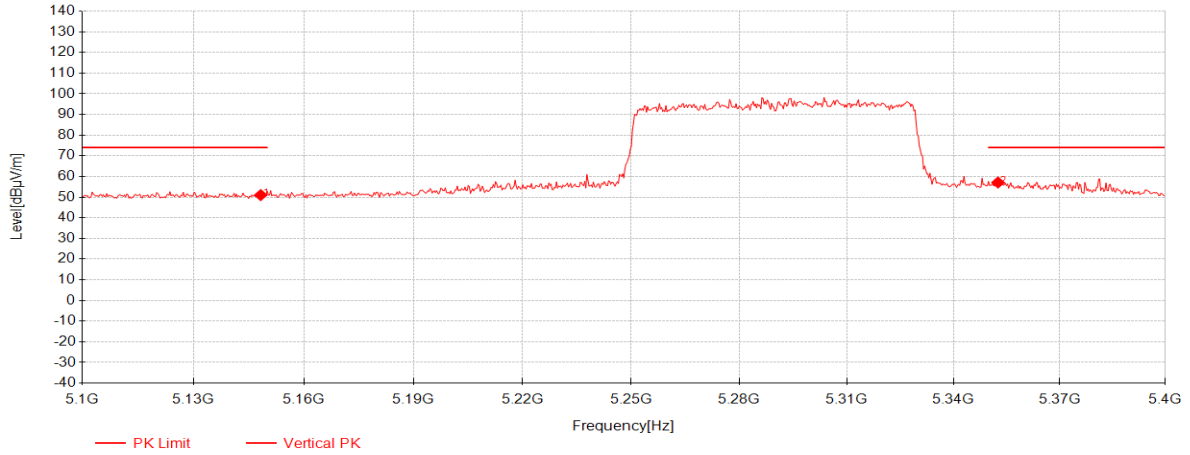


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.3	36.10	33.07	-18.19	50.99	74.00	23.01	Vertical
2	5352.6	41.80	33.03	-17.75	57.08	74.00	16.92	Vertical

11ax(HE80)_TX_CH_58_Veritical_Average

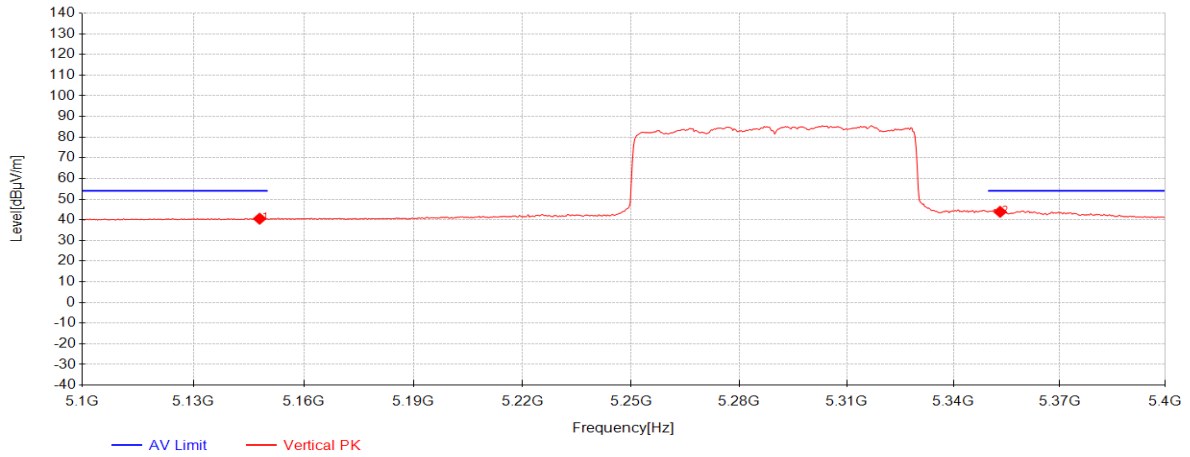


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148	25.64	33.07	-18.19	40.52	54.00	13.48	Vertical
2	5353.2	28.57	33.03	-17.75	43.84	54.00	10.16	Vertical

11ax(HE80)_TX_CH_106_Horizontal_Peak

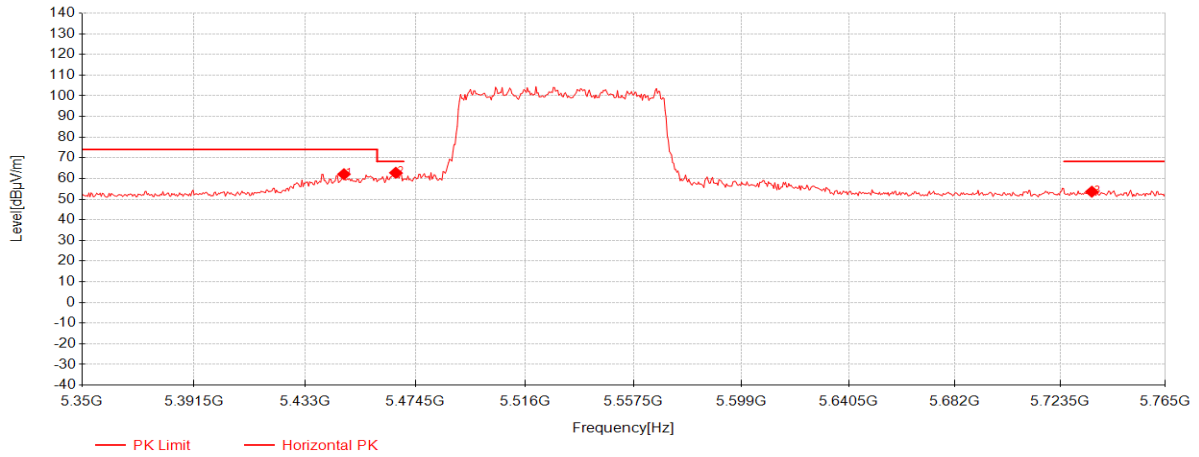


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.525	46.73	33.01	-17.68	62.06	74.00	11.94	Horizontal
2	5467.03	47.37	33.01	-17.62	62.76	68.20	5.44	Horizontal
3	5735.95	37.11	33.71	-17.22	53.60	68.20	14.60	Horizontal

11ax(HE80)_TX_CH_106_Horizontal_Average

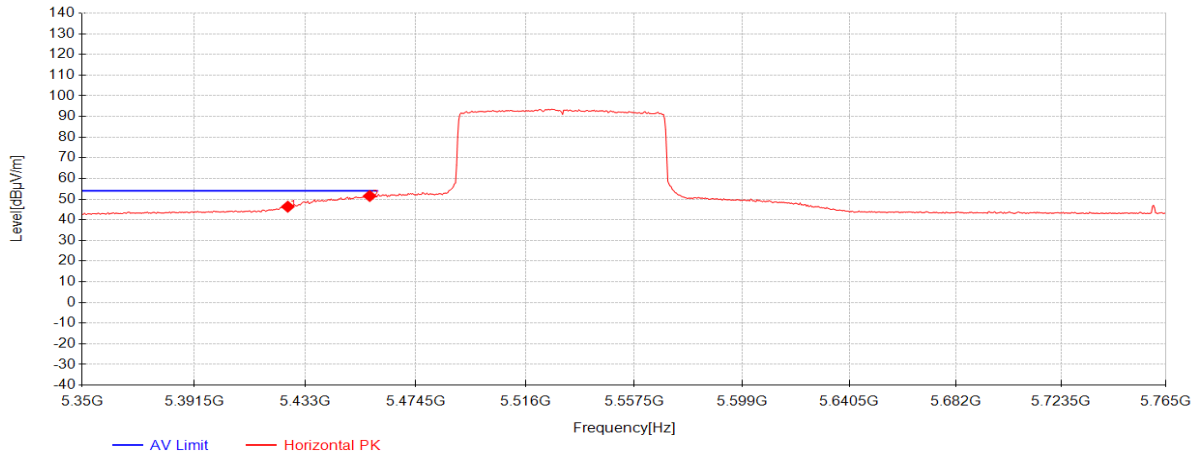


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5426.36	31.07	33.01	-17.74	46.34	54.00	7.66	Horizontal
2	5457.07	36.16	33.01	-17.65	51.52	54.00	2.48	Horizontal

11ax(HE80)_TX_CH_106_Vertical_Peak

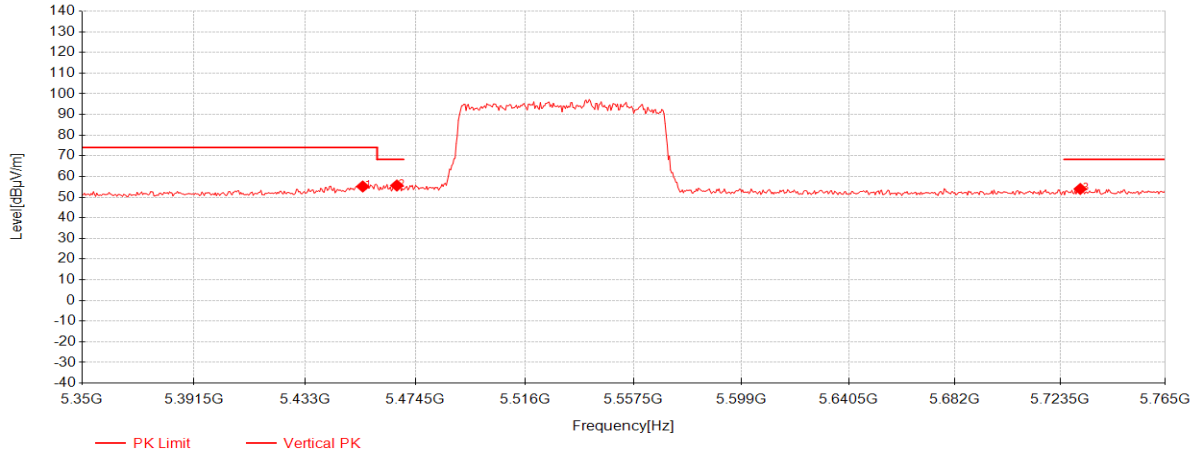


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5454.58	39.80	33.01	-17.66	55.15	74.00	18.85	Vertical
2	5467.445	40.23	33.01	-17.62	55.62	68.20	12.58	Vertical
3	5731.385	37.50	33.69	-17.23	53.96	68.20	14.24	Vertical

11ax(HE80)_TX_CH_106_Vetical_Average

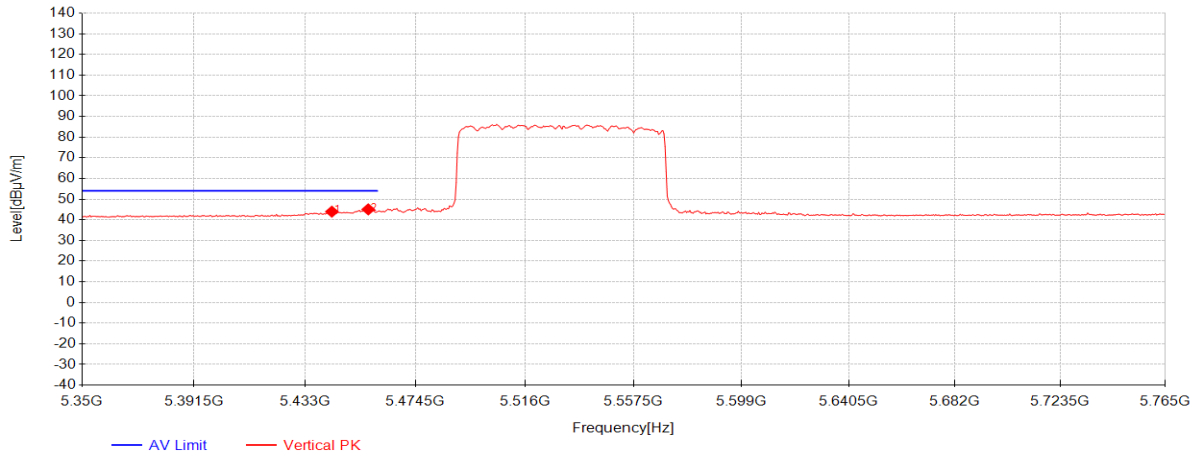


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5442.96	28.63	33.01	-17.69	43.95	54.00	10.05	Vertical
2	5456.655	29.69	33.01	-17.65	45.05	54.00	8.95	Vertical

11ax(HE80)_TX_CH_155_Horizontal_Peak

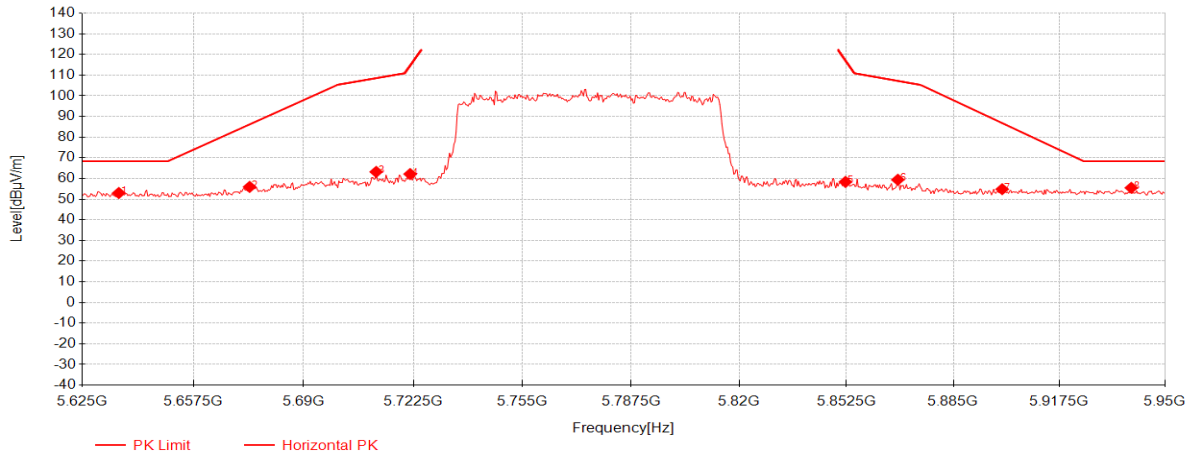


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5635.725	36.84	33.41	-17.27	52.98	68.30	15.32	Horizontal
2	5674.075	39.71	33.52	-17.30	55.93	86.16	30.23	Horizontal
3	5711.45	46.86	33.63	-17.29	63.20	108.51	45.31	Horizontal
4	5721.525	45.73	33.66	-17.26	62.13	114.38	52.25	Horizontal
5	5852.175	41.18	34.06	-16.91	58.33	117.34	59.01	Horizontal
6	5868.1	42.16	34.10	-16.88	59.39	107.23	47.84	Horizontal
7	5899.95	37.41	34.20	-16.81	54.80	86.80	32.00	Horizontal
8	5939.6	38.08	34.32	-16.93	55.47	68.30	12.83	Horizontal

11ax(HE80)_TX_CH_155_Vetical_Peak

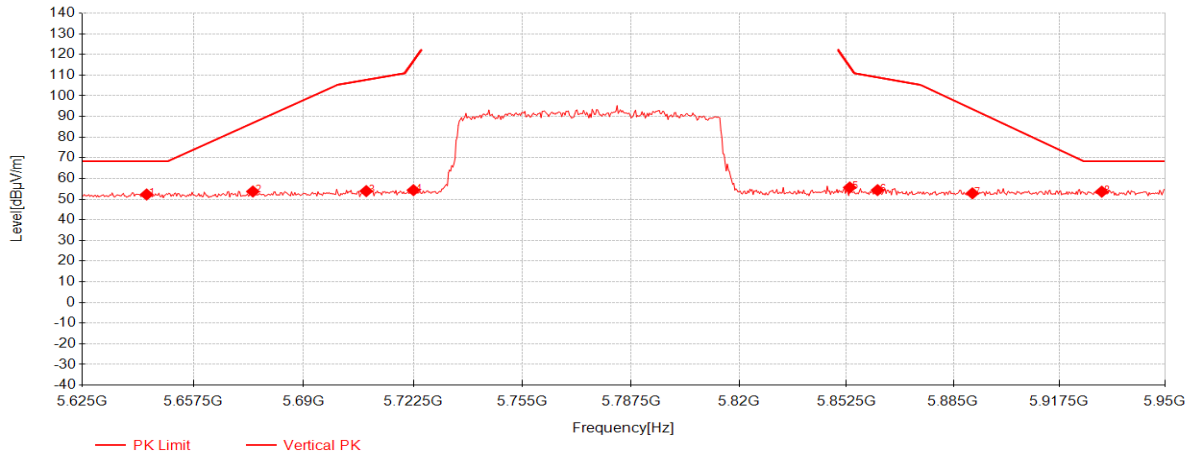


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5643.85	36.07	33.43	-17.27	52.23	68.30	16.07	Vertical
2	5675.05	37.47	33.53	-17.31	53.69	86.88	33.19	Vertical
3	5708.525	37.57	33.63	-17.30	53.89	107.69	53.80	Vertical
4	5722.5	37.92	33.67	-17.26	54.33	116.60	62.27	Vertical
5	5853.475	38.49	34.06	-16.91	55.64	114.38	58.74	Vertical
6	5861.925	37.16	34.09	-16.89	54.36	108.96	54.60	Vertical
7	5890.85	35.48	34.17	-16.83	52.82	93.54	40.72	Vertical
8	5930.5	36.22	34.29	-16.90	53.61	68.30	14.69	Vertical

11ax(HE160)_TX_CH_50_Horizontal_Peak

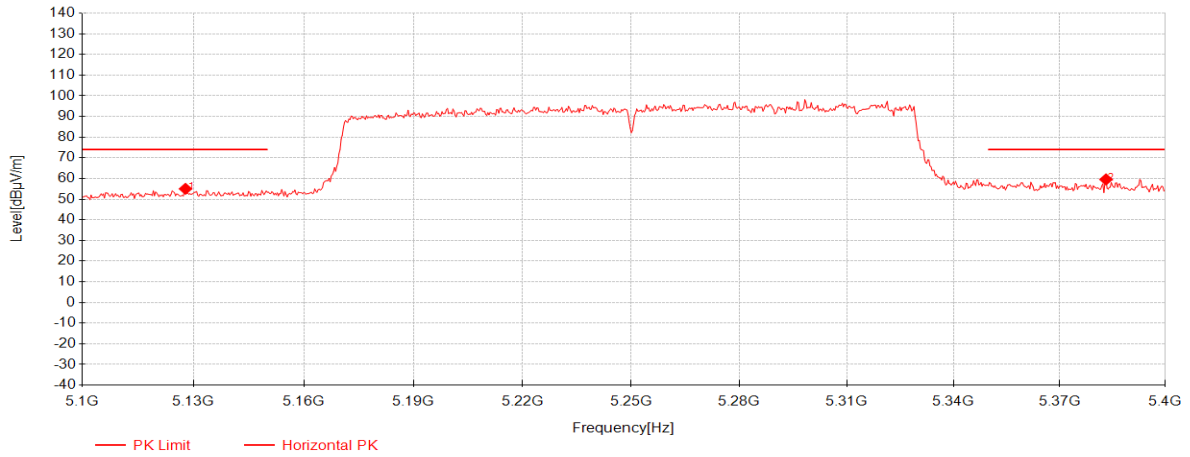


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5127.9	40.16	33.07	-18.25	54.99	74.00	19.01	Horizontal
2	5383.2	44.31	33.02	-17.80	59.54	74.00	14.46	Horizontal

11ax(HE160)_TX_CH_50_Horizontal_Average

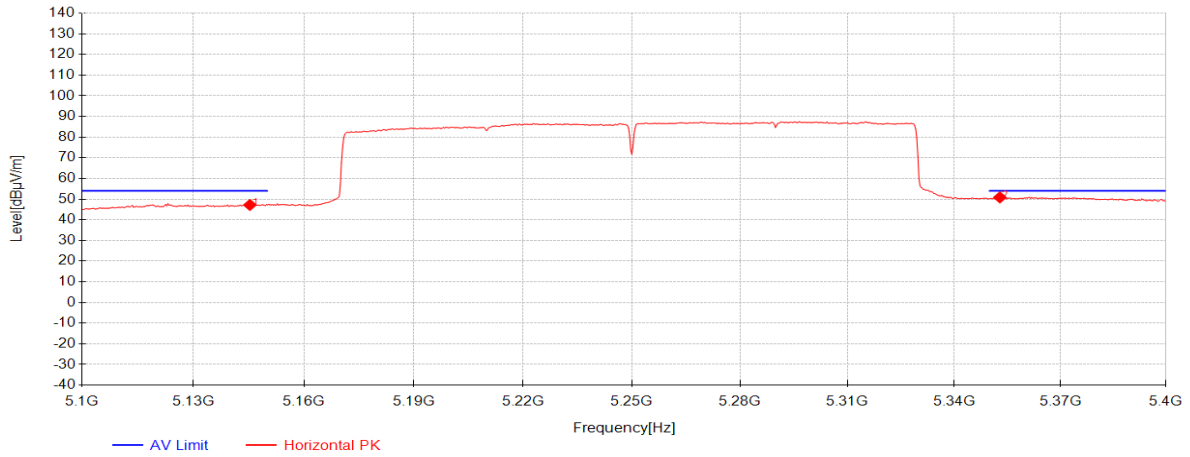


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145.3	32.30	33.07	-18.19	47.18	54.00	6.82	Horizontal
2	5352.9	35.55	33.03	-17.75	50.83	54.00	3.17	Horizontal

11ax(HE160)_TX_CH_50_Vetical_Peak

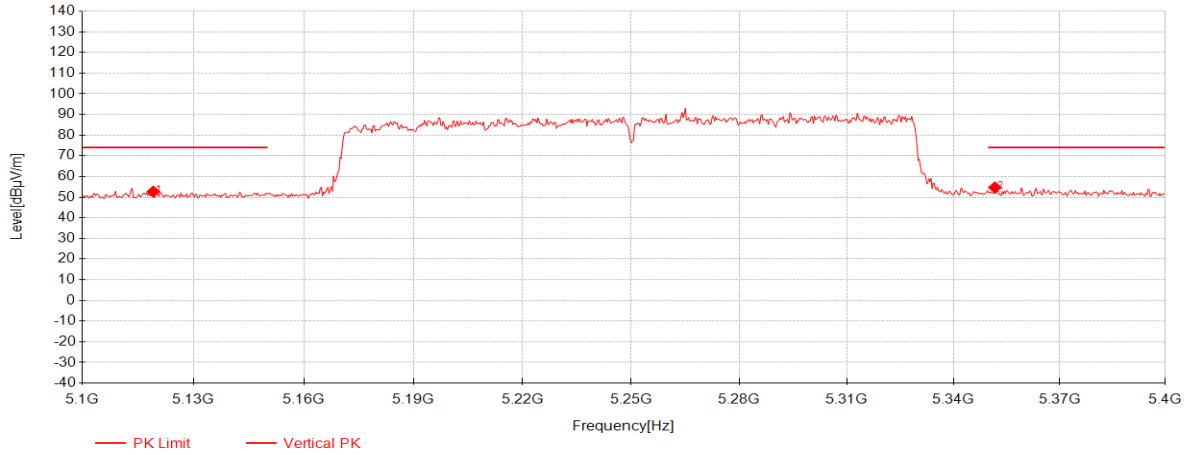


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5119.2	37.89	33.08	-18.27	52.69	74.00	21.31	Vertical
2	5351.7	39.40	33.03	-17.75	54.68	74.00	19.32	Vertical

11ax(HE160)_TX_CH_50_Vetical_Average

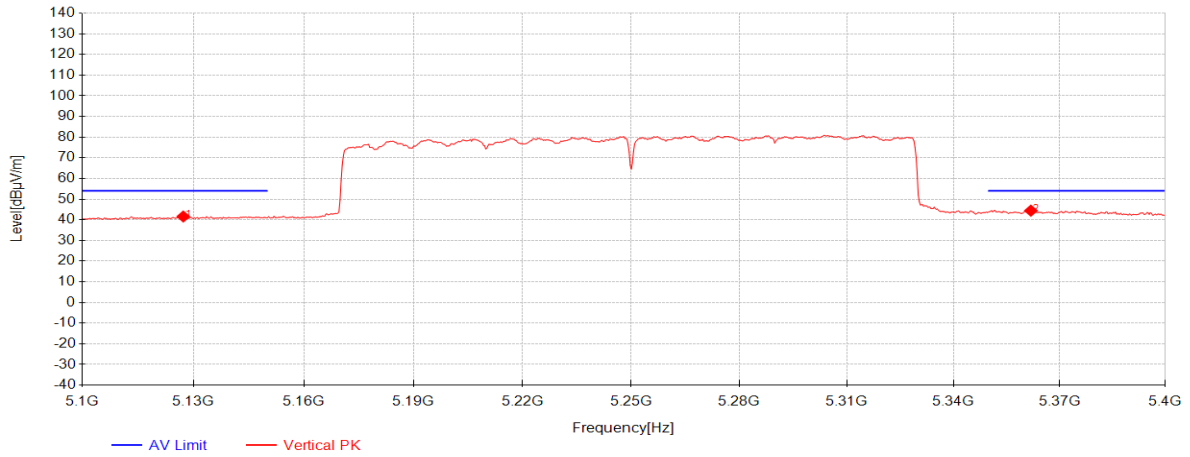


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5127.3	26.76	33.07	-18.25	41.59	54.00	12.41	Vertical
2	5361.9	29.17	33.03	-17.77	44.43	54.00	9.57	Vertical

11ax(HE160)_TX_CH_114_Horizontal_Peak

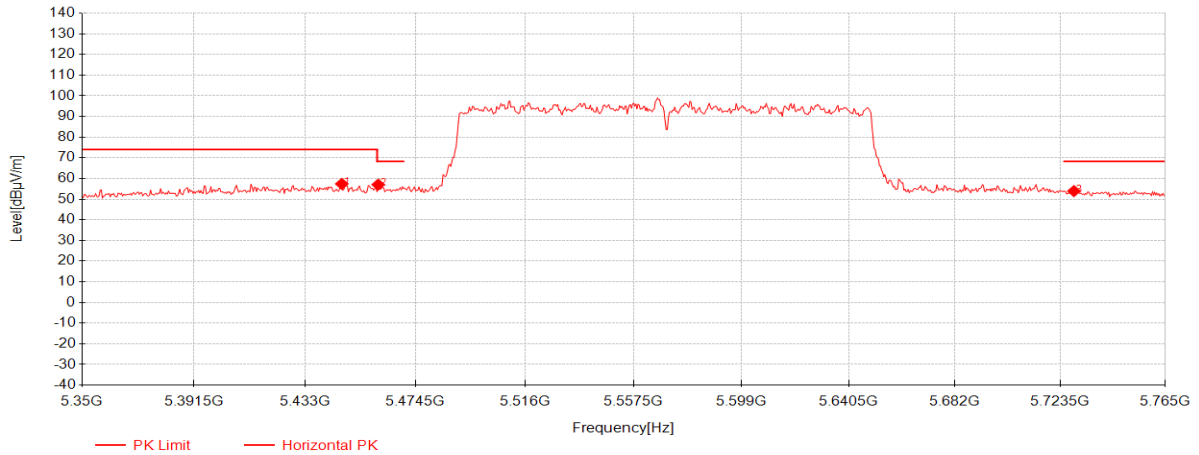


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5446.695	42.05	33.01	-17.68	57.38	74.00	16.62	Horizontal
2	5460.39	41.66	33.01	-17.64	57.03	68.20	11.17	Horizontal
3	5728.895	37.44	33.69	-17.24	53.89	68.20	14.31	Horizontal

11ax(HE160)_TX_CH_114_Horizontal_Average

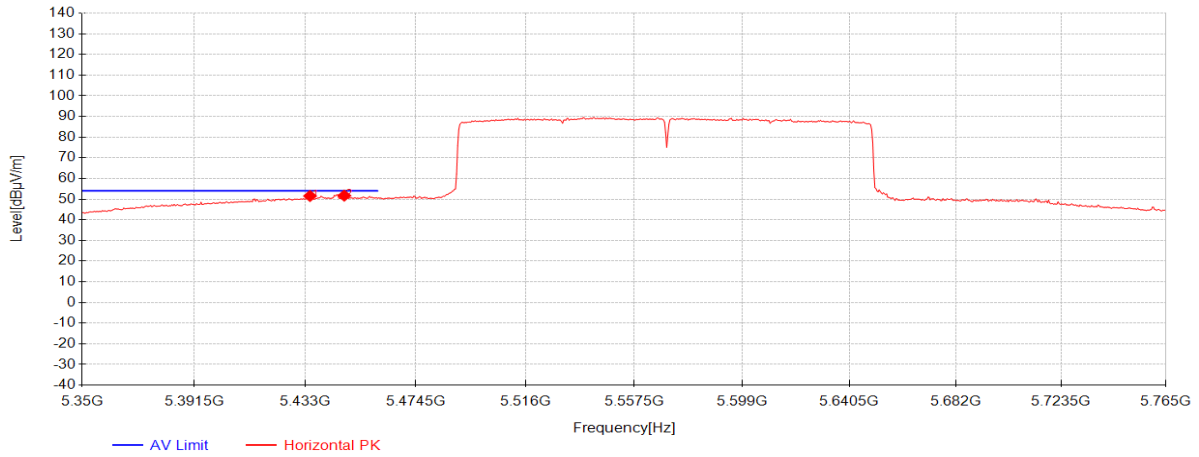


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5434.66	36.24	33.01	-17.72	51.54	54.00	2.46	Horizontal
2	5447.525	36.38	33.01	-17.68	51.71	54.00	2.29	Horizontal

11ax(HE160)_TX_CH_114_Vertical_Peak

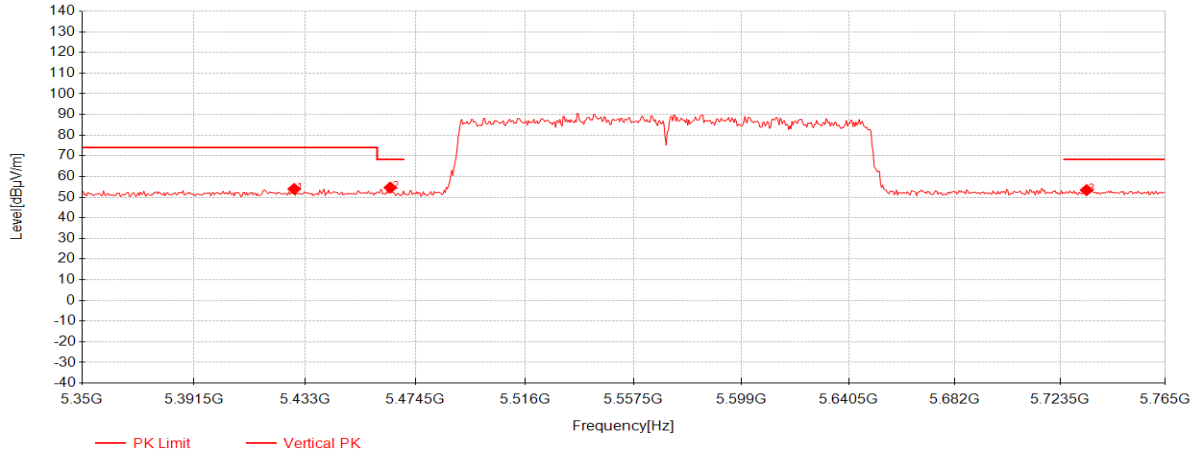


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5428.85	38.67	33.01	-17.73	53.95	74.00	20.05	Vertical
2	5464.955	39.24	33.01	-17.63	54.62	68.20	13.58	Vertical
3	5733.875	36.91	33.70	-17.22	53.39	68.20	14.81	Vertical

11ax(HE160)_TX_CH_114_Veritical_Average

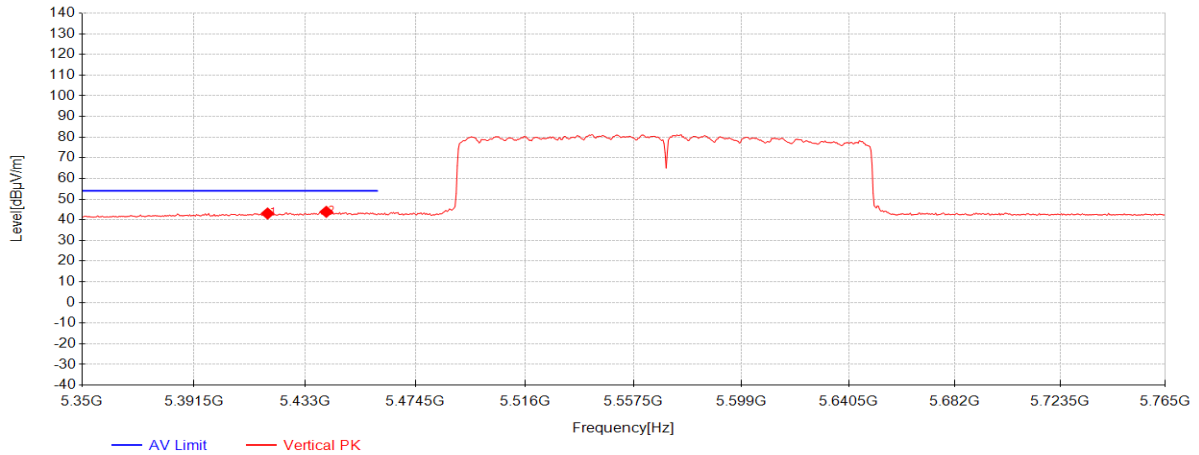


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5418.89	27.81	33.02	-17.76	43.06	54.00	10.94	Vertical
2	5440.885	28.55	33.01	-17.70	43.86	54.00	10.14	Vertical

11ax(HE20)_TX_RU26_Left_CH_36_Horizontal_Peak

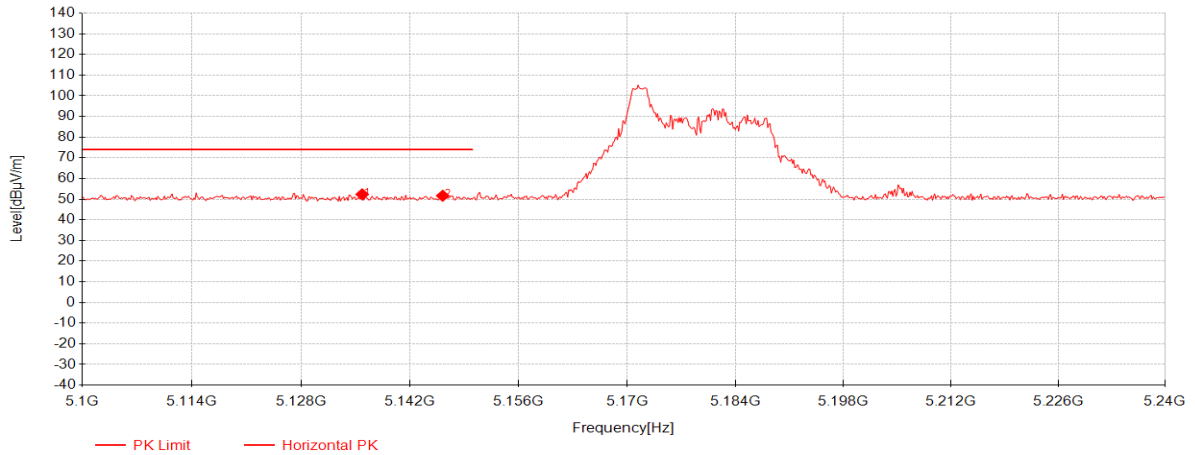


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5135.84	37.47	33.07	-18.22	52.32	74.00	21.68	Horizontal
2	5146.2	36.75	33.07	-18.19	51.63	74.00	22.37	Horizontal

11ax(HE20)_TX_RU26_Left_CH_36_Horizontal_Average

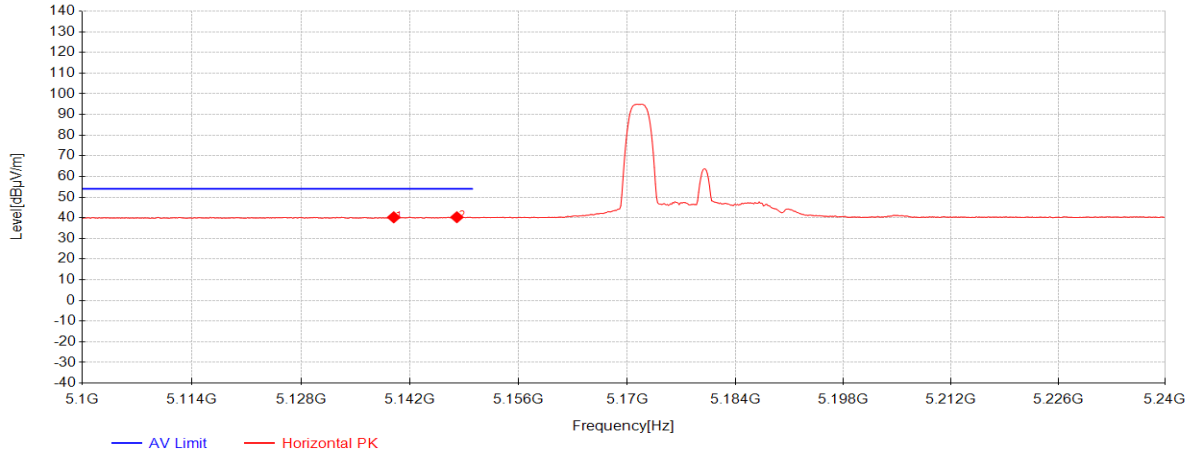


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5139.9	25.38	33.07	-18.21	40.24	54.00	13.76	Horizontal
2	5148.02	25.40	33.07	-18.19	40.28	54.00	13.72	Horizontal

11ax(HE20)_TX_RU26_Left_CH_36_Vertical_Peak

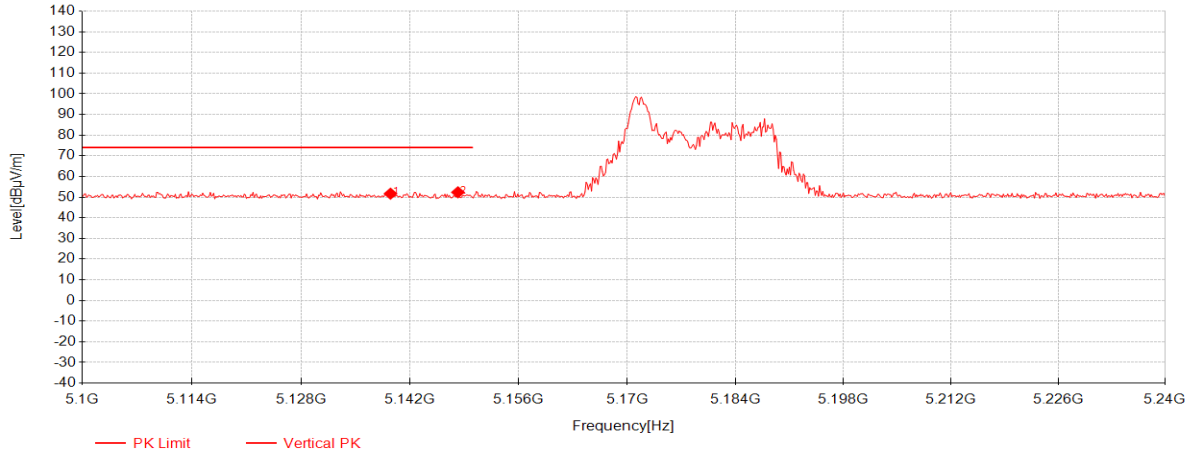


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5139.48	36.81	33.07	-18.21	51.67	74.00	22.33	Vertical
2	5148.16	37.46	33.07	-18.19	52.34	74.00	21.66	Vertical

11ax(HE20)_TX_RU26_Left_CH_36_Vertical_Average

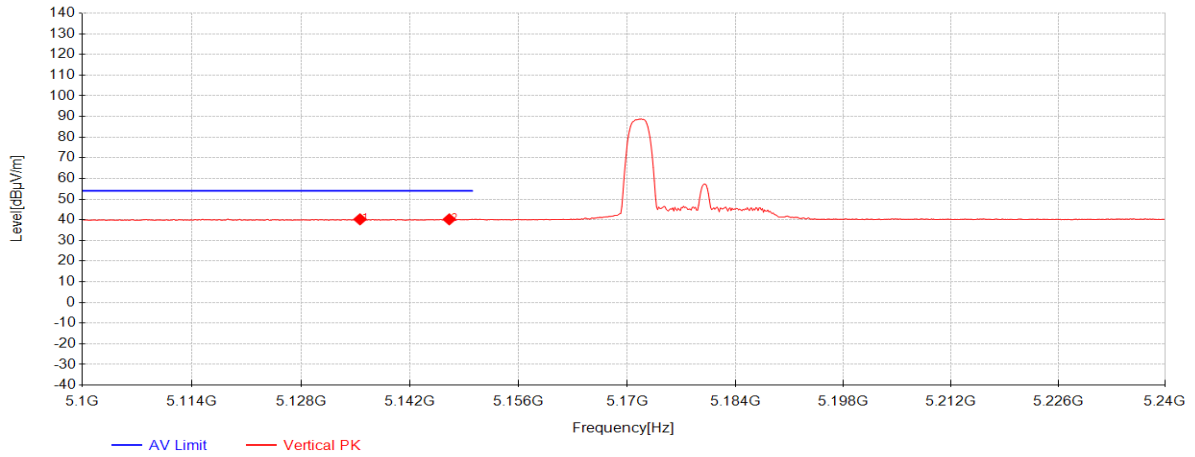


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5135.56	25.37	33.07	-18.22	40.22	54.00	13.78	Vertical
2	5147.04	25.33	33.07	-18.19	40.21	54.00	13.79	Vertical

11ax(HE20)_TX_RU26_Right_CH_64_Horizontal_Peak

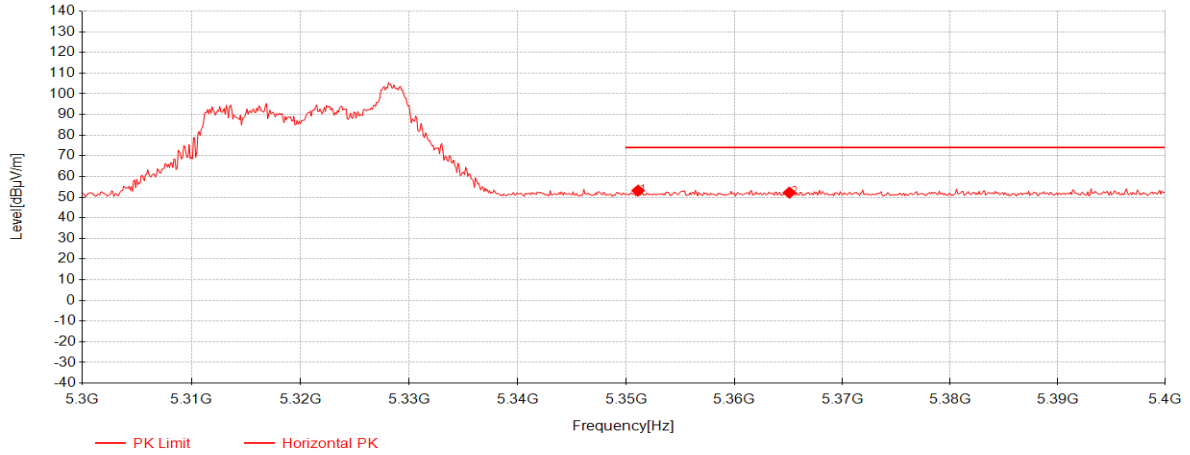


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.1	37.87	33.03	-17.75	53.15	74.00	20.85	Horizontal
2	5365.1	36.91	33.03	-17.77	52.17	74.00	21.83	Horizontal

11ax(HE20)_TX_RU26_Right_CH_64_Horizontal_Average

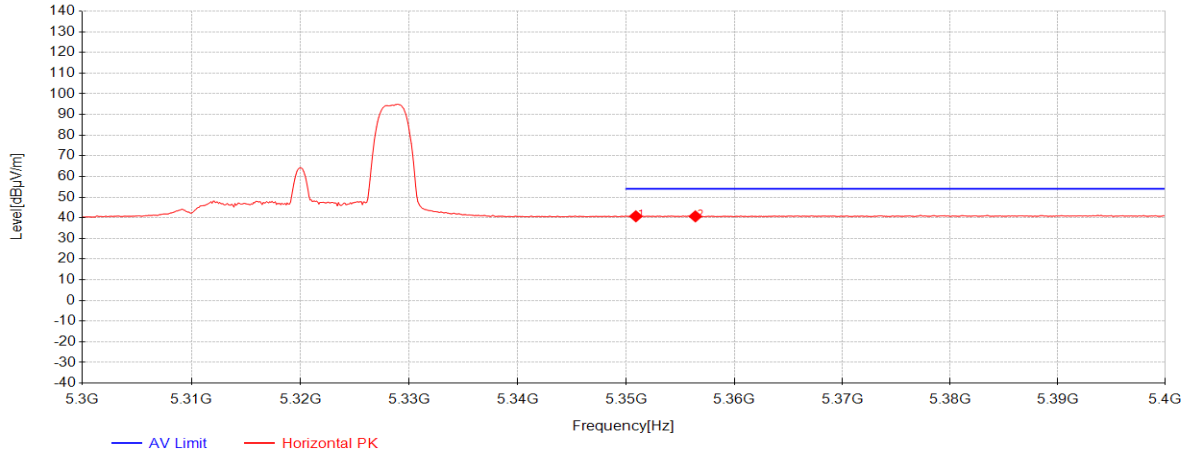


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.9	25.45	33.03	-17.75	40.73	54.00	13.27	Horizontal
2	5356.4	25.43	33.03	-17.76	40.70	54.00	13.30	Horizontal

11ax(HE20)_TX_RU26_Right_CH_64_Vertical_Peak

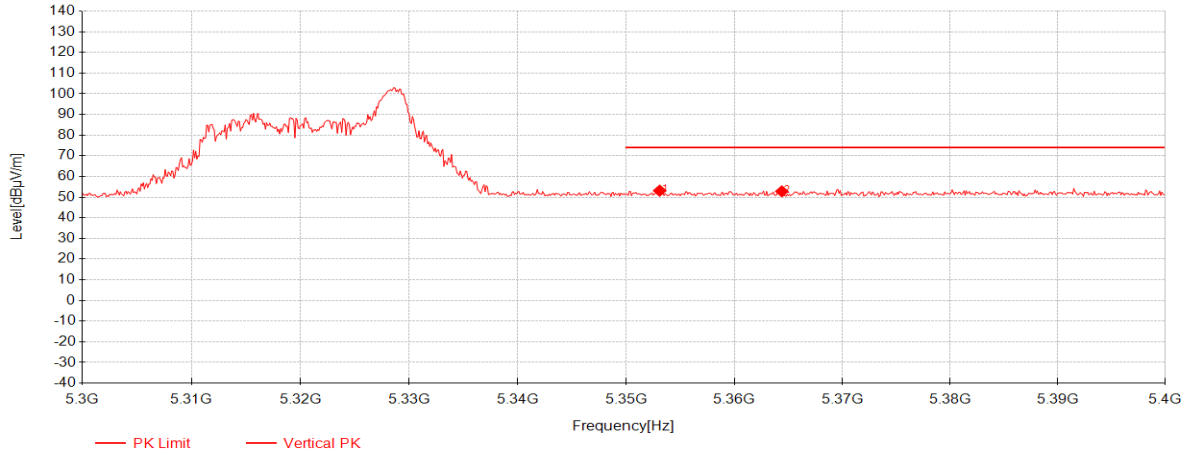


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5353.1	37.85	33.03	-17.75	53.13	74.00	20.87	Vertical
2	5364.4	37.53	33.03	-17.77	52.79	74.00	21.21	Vertical

11ax(HE20)_TX_RU26_Right_CH_64_Vertical_Average

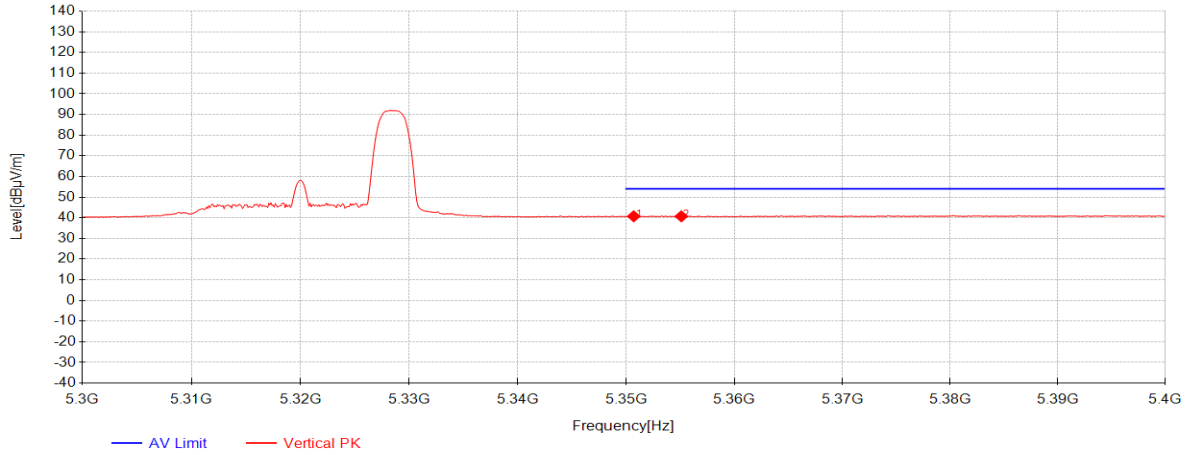


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.7	25.44	33.03	-17.75	40.72	54.00	13.28	Vertical
2	5355.1	25.44	33.03	-17.76	40.71	54.00	13.29	Vertical

11ax(HE20)_TX_RU26_Left_CH_100_Horizontal_Peak

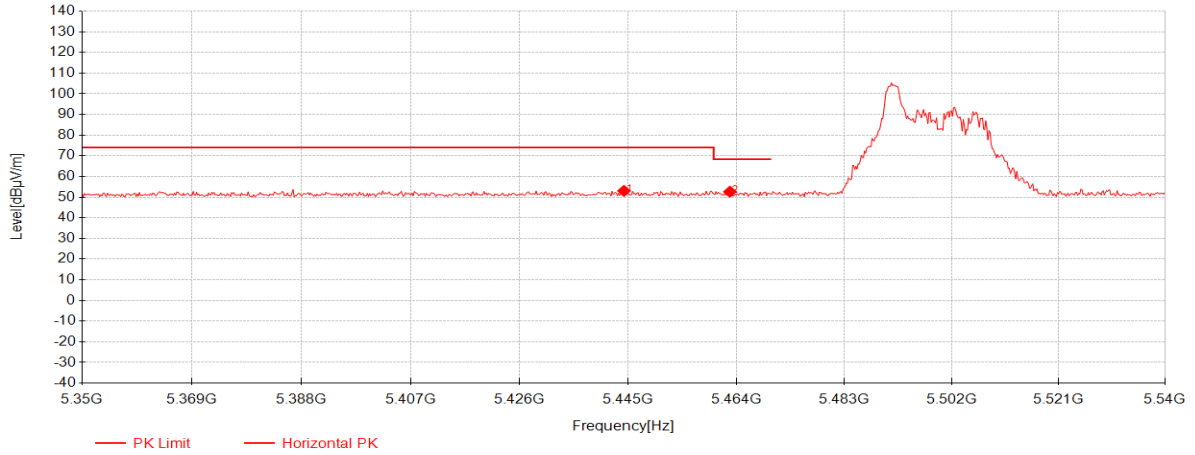


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.24	37.70	33.01	-17.69	53.02	74.00	20.98	Horizontal
2	5462.86	37.25	33.01	-17.63	52.63	68.30	15.67	Horizontal

11ax(HE20)_TX_RU26_Left_CH_100_Horizontal_Average

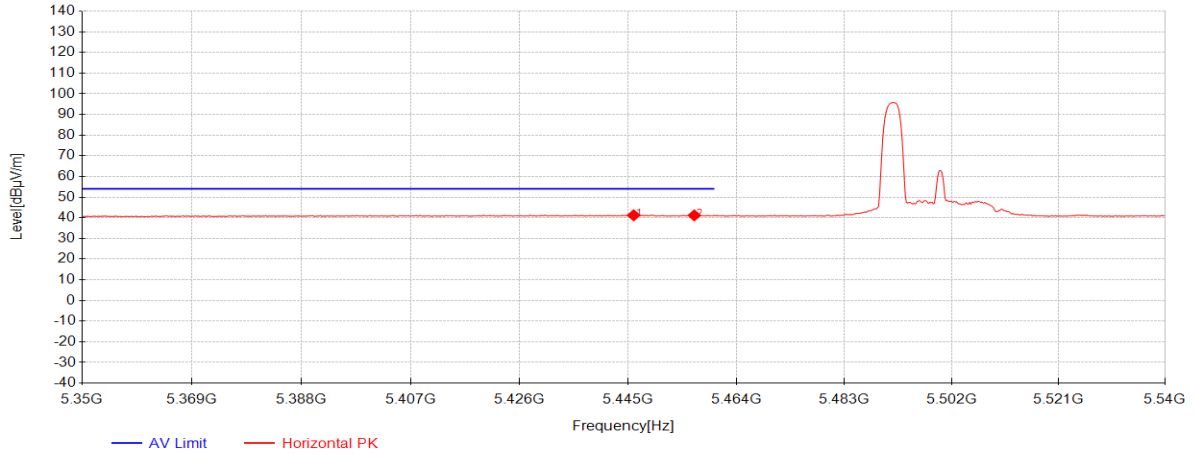


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.95	25.89	33.01	-17.68	41.22	54.00	12.78	Horizontal
2	5456.59	25.82	33.01	-17.65	41.18	54.00	12.82	Horizontal

11ax(HE20)_TX_RU26_Left_CH_100_Vertical_Peak

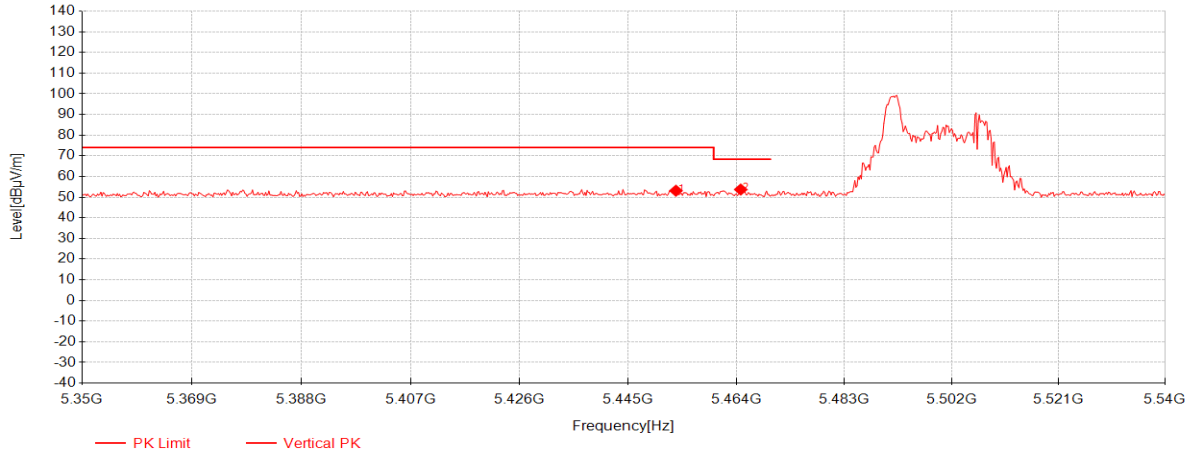


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5453.36	37.76	33.01	-17.66	53.11	74.00	20.89	Vertical
2	5464.76	38.30	33.01	-17.63	53.68	68.30	14.62	Vertical

11ax(HE20)_TX_RU26_Left_CH_100_Vertical_Average

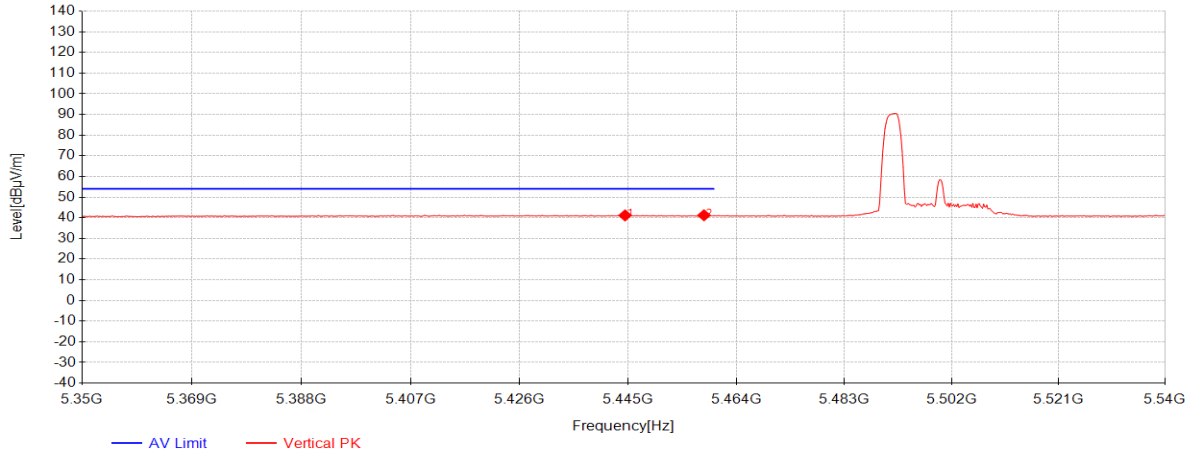


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.43	25.83	33.01	-17.69	41.15	54.00	12.85	Vertical
2	5458.3	25.86	33.01	-17.65	41.22	54.00	12.78	Vertical

11ax(HE20)_TX_RU26_Right_CH_140_Horizontal_Peak

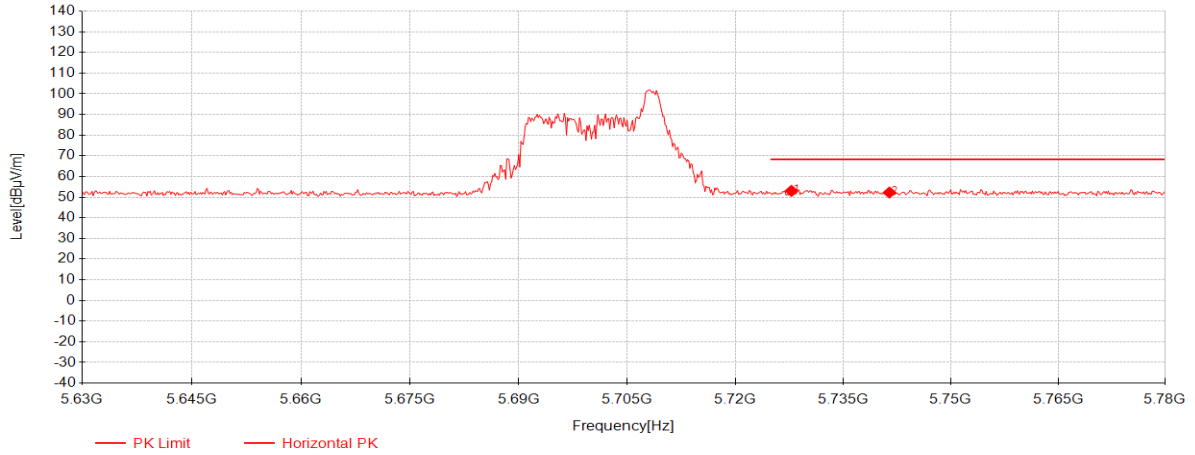


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5727.8	36.59	33.68	-17.24	53.03	68.20	15.17	Horizontal
2	5741.45	35.71	33.72	-17.20	52.23	68.20	15.97	Horizontal

11ax(HE20)_TX_RU26_Right_CH_140_Vertical_Peak

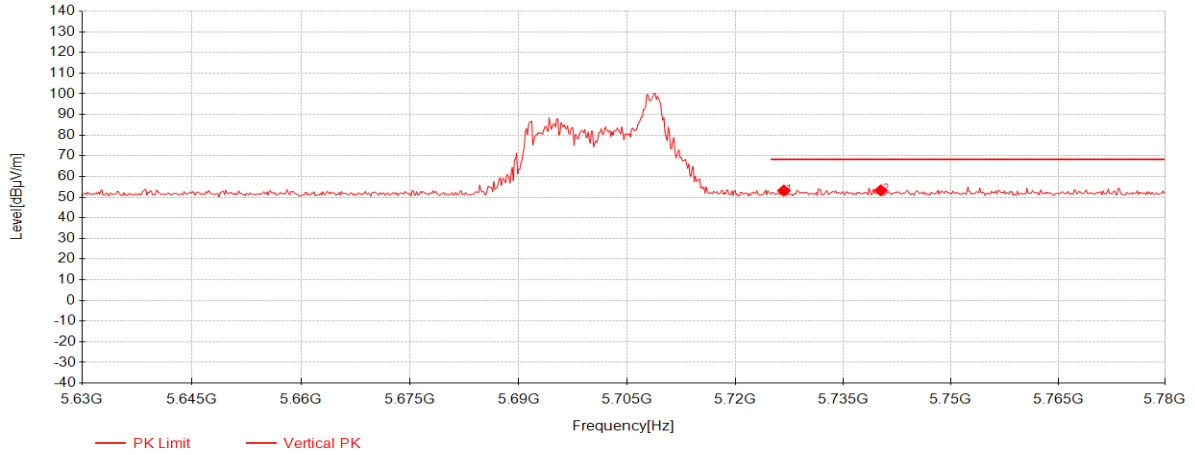


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726.75	36.75	33.68	-17.25	53.18	68.20	15.02	Vertical
2	5740.25	36.75	33.72	-17.21	53.27	68.20	14.93	Vertical

11ax(HE20)_TX_RU26_Left_CH_149_Horizontal_Peak

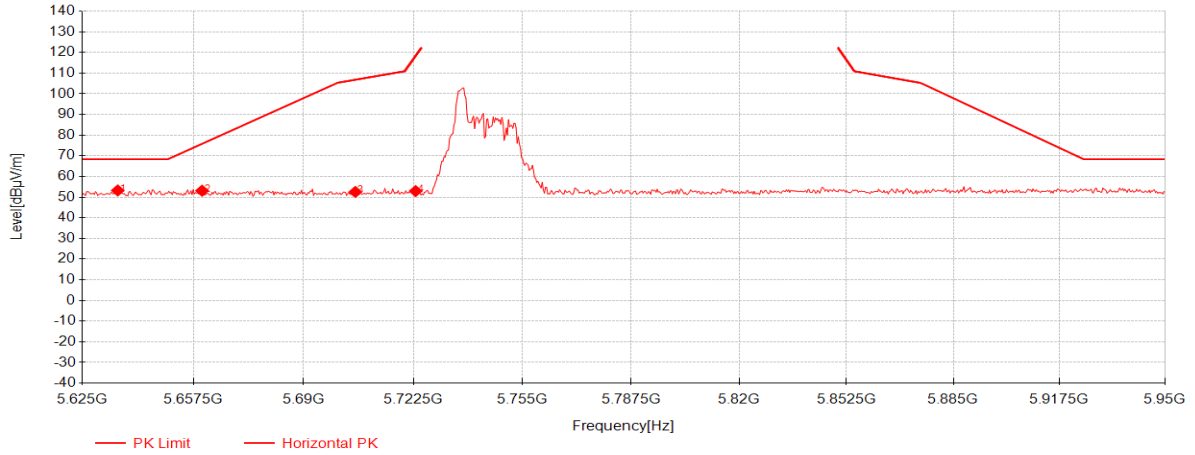


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5635.4	37.10	33.41	-17.27	53.24	68.30	15.06	Horizontal
2	5660.1	36.93	33.48	-17.29	53.12	75.80	22.68	Horizontal
3	5705.275	36.21	33.62	-17.31	52.51	106.78	54.27	Horizontal
4	5723.15	36.51	33.67	-17.26	52.92	118.08	65.16	Horizontal

11ax(HE20)_TX_RU26_Left_CH_149_Vertical_Peak

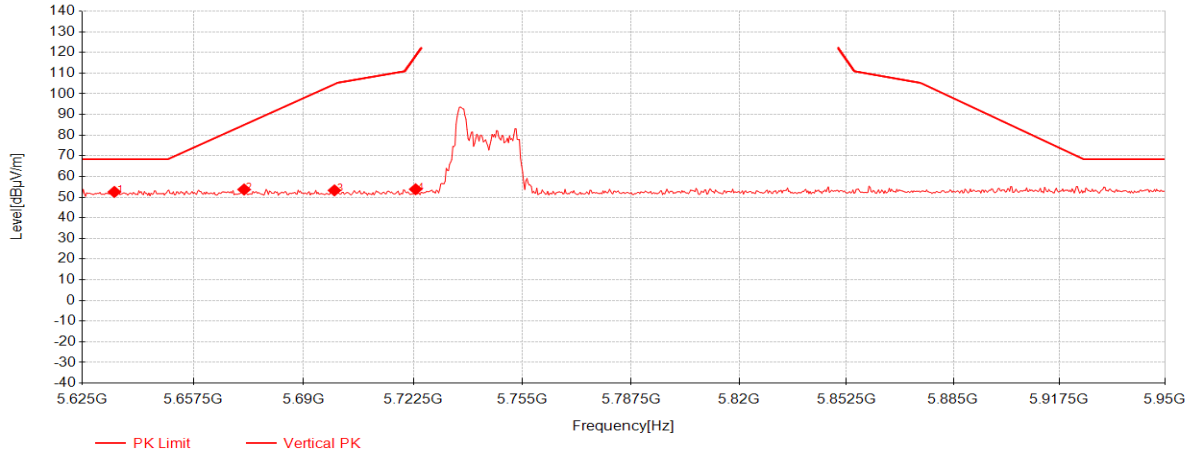


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5634.425	36.38	33.40	-17.26	52.52	68.30	15.78	Vertical
2	5672.45	37.49	33.52	-17.30	53.70	84.95	31.25	Vertical
3	5699.1	36.99	33.60	-17.33	53.26	104.64	51.38	Vertical
4	5723.15	37.41	33.67	-17.26	53.82	118.08	64.26	Vertical

11ax(HE20)_TX_RU26_Right_CH_165_Horizontal_Peak

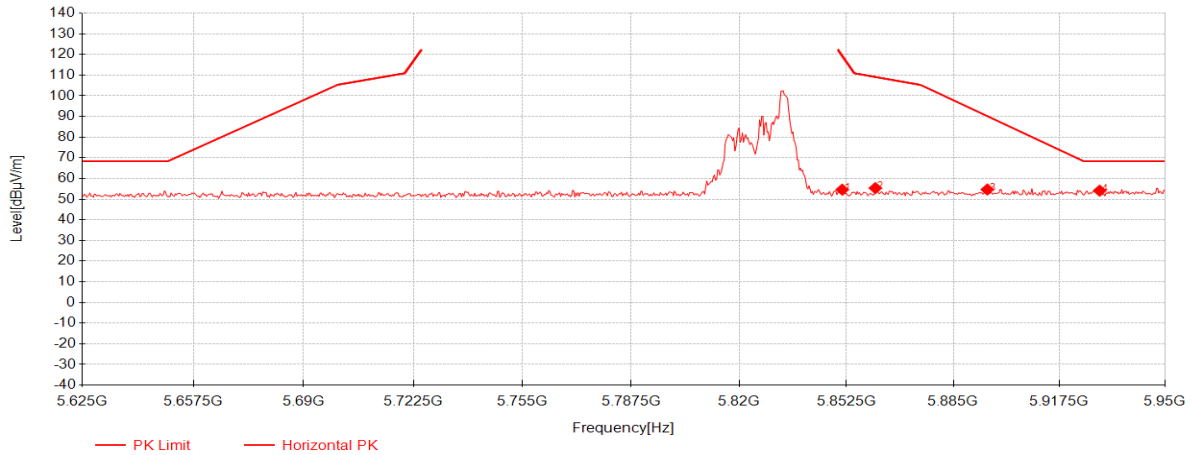

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.2	37.44	34.05	-16.91	54.58	119.56	64.98	Horizontal
2	5861.275	38.15	34.08	-16.89	55.34	109.14	53.80	Horizontal
3	5895.4	37.30	34.19	-16.82	54.67	90.17	35.50	Horizontal
4	5929.85	36.71	34.29	-16.90	54.10	68.30	14.20	Horizontal

11ax(HE20)_TX_RU26_Right_CH_165_Vetical_Peak

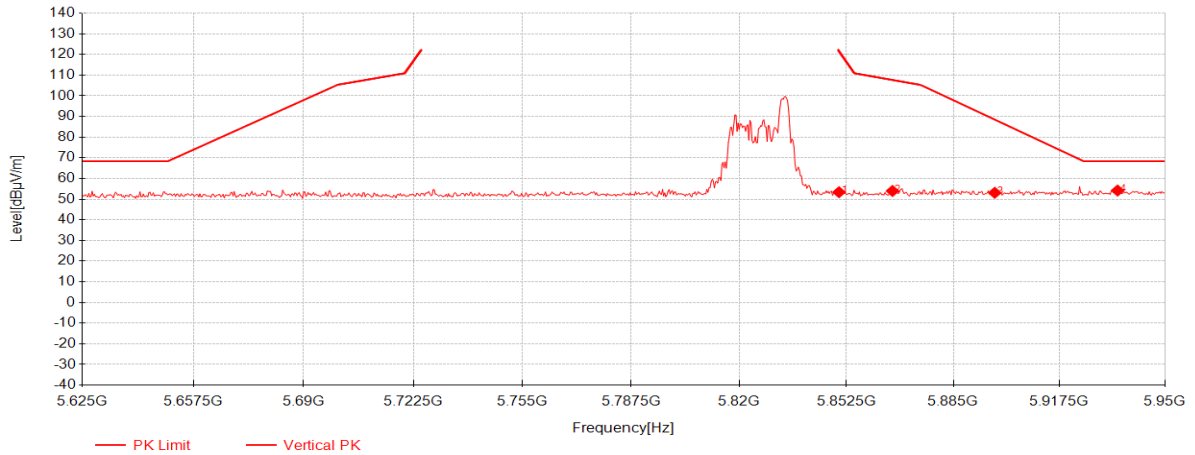

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.225	36.21	34.05	-16.91	53.35	121.79	68.44	Vertical
2	5866.475	36.73	34.10	-16.88	53.95	107.68	53.73	Vertical
3	5897.675	35.69	34.19	-16.81	53.07	88.48	35.41	Vertical
4	5935.375	36.76	34.31	-16.92	54.15	68.30	14.15	Vertical

7.4 Duty Cycle

Test Requirement ANSI C63.10 (2020) Section 12.2

Test Method: ANSI C63.10 (2020) Section 12.2

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C


Humidity: 52 % RH

Atmospheric Pressure: 1001 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

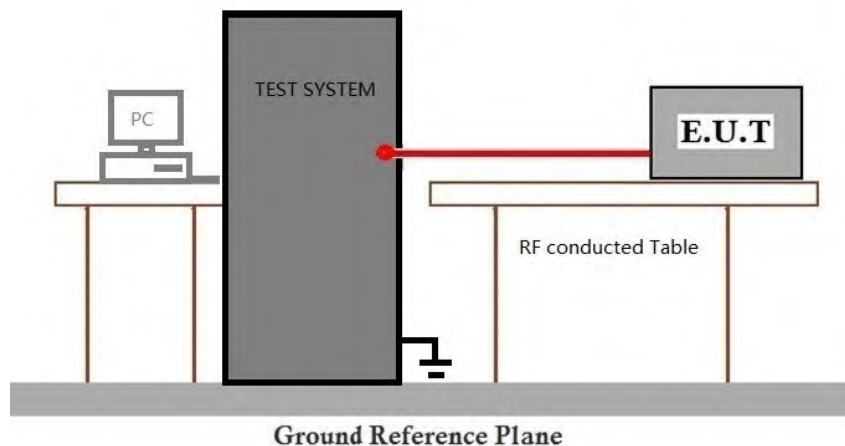

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 99% Bandwidth

Test Requirement ANSI C63.10 (2020) Section 12.5.3

Test Method: ANSI C63.10 (2020) Section 12.5.3

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C


Humidity: 52 % RH

Atmospheric Pressure: 1001 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

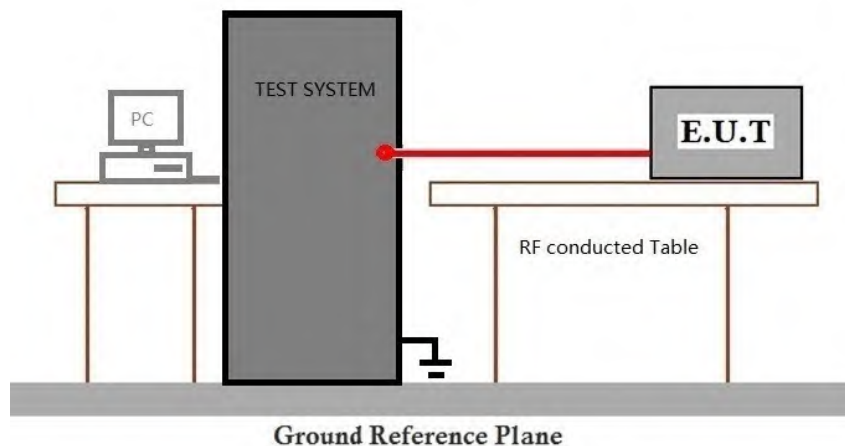

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 26dB Emission Bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.5.2

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C


Humidity: 52 % RH

Atmospheric Pressure: 1001 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

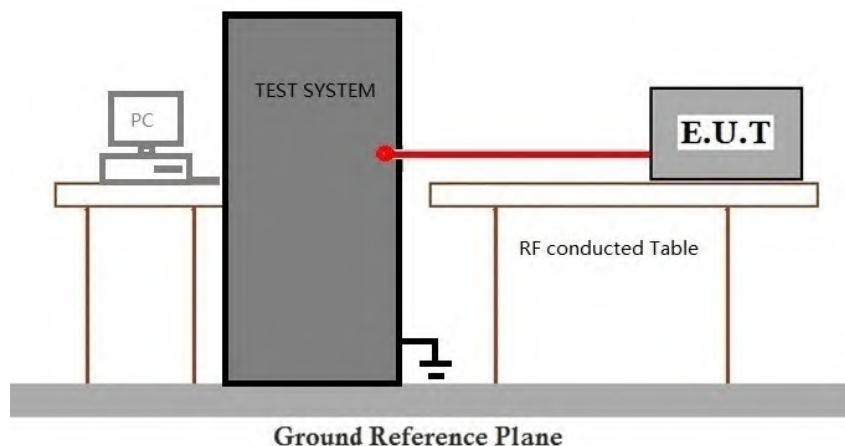

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Minimum 6 dB Bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10 (2020) Section 12.5.1

Limit:

Frequency band(MHz)	Limit
5725-5850	≥ 500 kHz

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C


Humidity: 52 % RH

Atmospheric Pressure: 1001 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	10	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

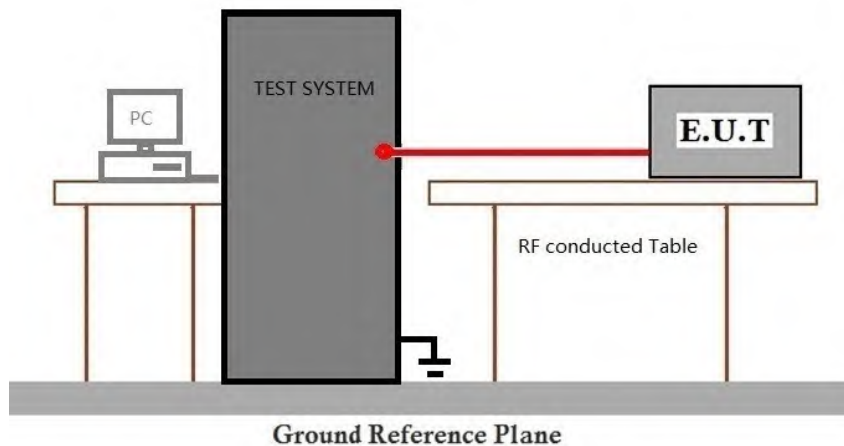

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.4

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C


Humidity: 52 % RH

Atmospheric Pressure: 1001 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

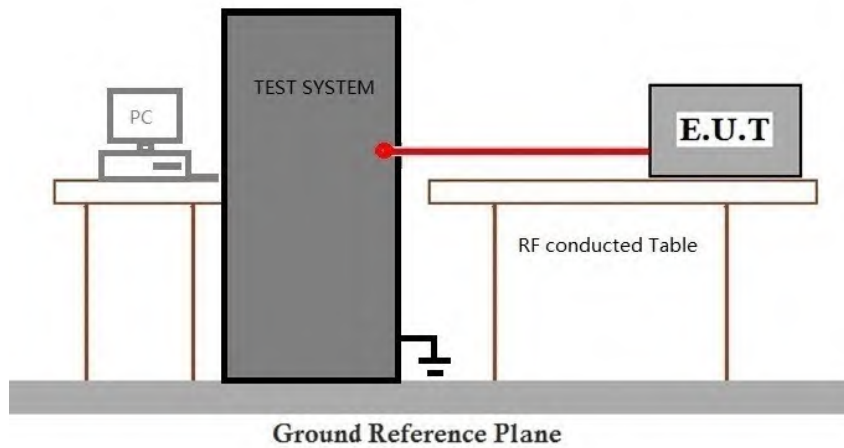

7.8.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

AV Output power Level = Reading level + Cable loss + DCCF

Please Refer to Appendix for Details

7.9 Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.6

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C


Humidity: 52 % RH

Atmospheric Pressure: 1001 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	07	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	08	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

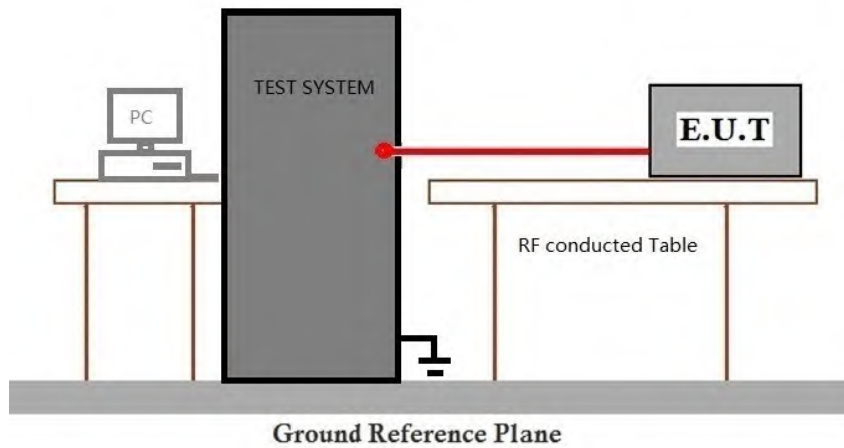

7.9.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details