

RSE Co-location Result			
Operating Mode	2	**Polarization**	Horizontal
Operating Function	Normal Link		

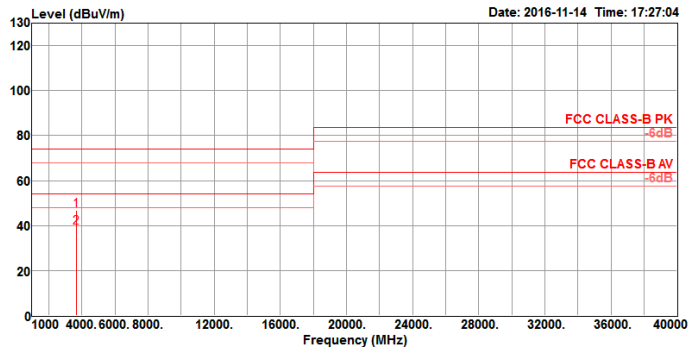

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3688.53	46.83	74.00	-27.17	44.03	7.33	29.06	33.59	133	200	Peak	HORIZONTAL
2	3690.16	39.01	54.00	-14.99	36.21	7.33	29.06	33.59	133	168	Average	HORIZONTAL

RSE Co-location Result			
Operating Mode	2	**Power Phase**	Vertical
Operating Function	Normal Link		

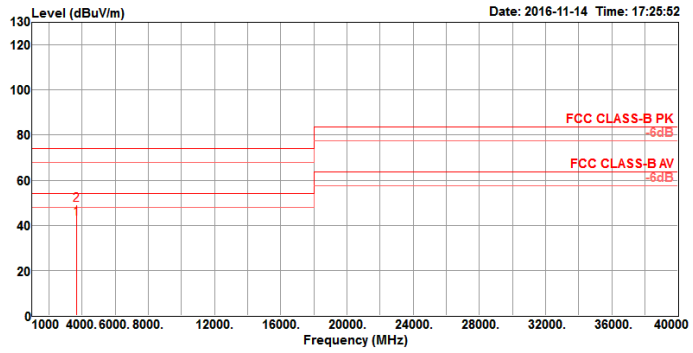

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3689.99	43.02	54.00	-10.98	40.22	7.33	29.06	33.59	121	204	Average	VERTICAL
2	3691.23	49.29	74.00	-24.71	46.48	7.33	29.06	33.58	121	204	Peak	VERTICAL