



427 West 12800 South
Draper, UT 84020

Test Report Attachment

FCC ID	SWX-U7PROXW
ISED ID	6545A-U7PROXW
Equipment Under Test	U7-Pro-XG-Wall
Test Report Serial Number	TR10520_01
Date of Tests	5, 8 September 2025
Report Issue Date	19 November 2025

Test Personnel

Testing performed by	Evan Hartzell
-----------------------------	---------------

Test Location

Testing was performed at the Unified Compliance Laboratory located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2026. This site has also been registered with Innovations, Science and Economic Development (ISED) department as was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2026. Unified Compliance Laboratory has been assigned Conformity Assessment Number US0223 by ISED and MRA US5037.



1 RF Conducted UNII-3

NOTE: The first channel contains the equipment setting table(s), if subsequent channels do not have an equipment setting table(s) then the equipment setting table(s) is the same as the first channel.

1.1 EHT Mode

1.1.1 Summary

Test	Frequency (MHz)	Nominal Bandwidth (MHz)	Result
Emission Bandwidth 26 dB	5745.000	20.000000	PASS
RF output power	5745.000	20.000000	PASS
Power Spectral Density	5745.000	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5745.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5745.000	20.000000	PASS
Tx Spurious Emission	5745.000	20.000000	PASS
Emission Bandwidth 26 dB	5775.000	20.000000	PASS
Power Spectral Density	5775.000	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5775.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5775.000	20.000000	PASS
Tx Spurious Emission	5775.000	20.000000	PASS
Emission Bandwidth 26 dB	5825.000	20.000000	PASS
Power Spectral Density	5825.000	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5825.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5825.000	20.000000	PASS
Tx Spurious Emission	5825.000	20.000000	PASS
Emission Bandwidth 26 dB	5755.000	40.000000	PASS
Power Spectral Density	5755.000	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5755.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5755.000	40.000000	PASS
Tx Spurious Emission	5755.000	40.000000	PASS
Emission Bandwidth 26 dB	5775.000	40.000000	PASS
Power Spectral Density	5775.000	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5775.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5775.000	40.000000	PASS
Tx Spurious Emission	5775.000	40.000000	PASS
Emission Bandwidth 26 dB	5795.000	40.000000	PASS
Power Spectral Density	5795.000	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5795.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5795.000	40.000000	PASS
Tx Spurious Emission	5795.000	40.000000	PASS
Emission Bandwidth 26 dB	5775.000	80.000000	PASS
Power Spectral Density	5775.000	80.000000	PASS
Minimum Emission Bandwidth 6 dB	5775.000	80.000000	PASS
Occupied Channel Bandwidth 99%	5775.000	80.000000	PASS
Tx Spurious Emission	5775.000	80.000000	PASS


Emission Bandwidth 26 dB (5745 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	54.400000	---	---	5717.650000	5772.050000

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	13.0	PASS

26 dB Bandwidth

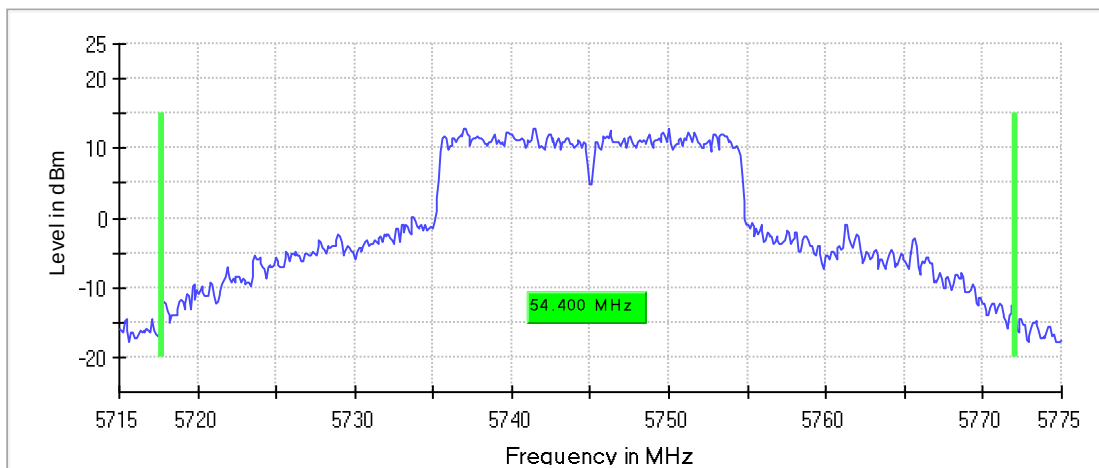

Bandwidth

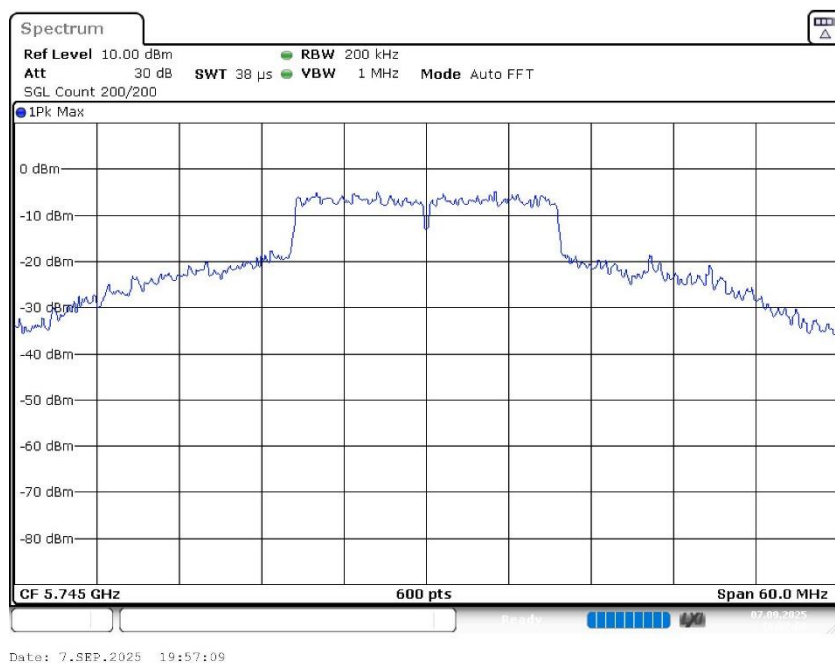

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.77500 GHz	5.77500 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	600	~ 600
SweepTime	37.969 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5745 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	27.1	30.0	27.1	99.707	PASS

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


Power Spectral Density (5745 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5736.287129	11.462	30.0	PASS

Ports

Port	State
1	used
2	used

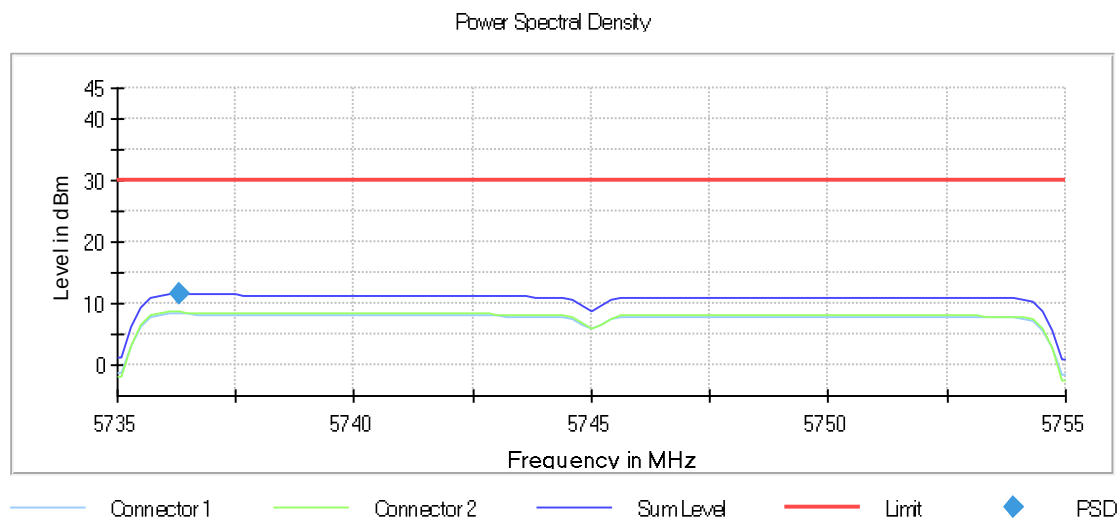

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.75500 GHz	5.75500 GHz
Span	20.000 MHz	20.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 80
Sweptime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
SweepType	FFT	AUTO
Preamp	off	off


Minimum Emission Bandwidth 6 dB (5745 MHz; 24.000 dBm; 20 MHz)

6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	19.150000	0.500000	---	5735.425000	5754.575000

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	11.2	PASS

6 dB Bandwidth

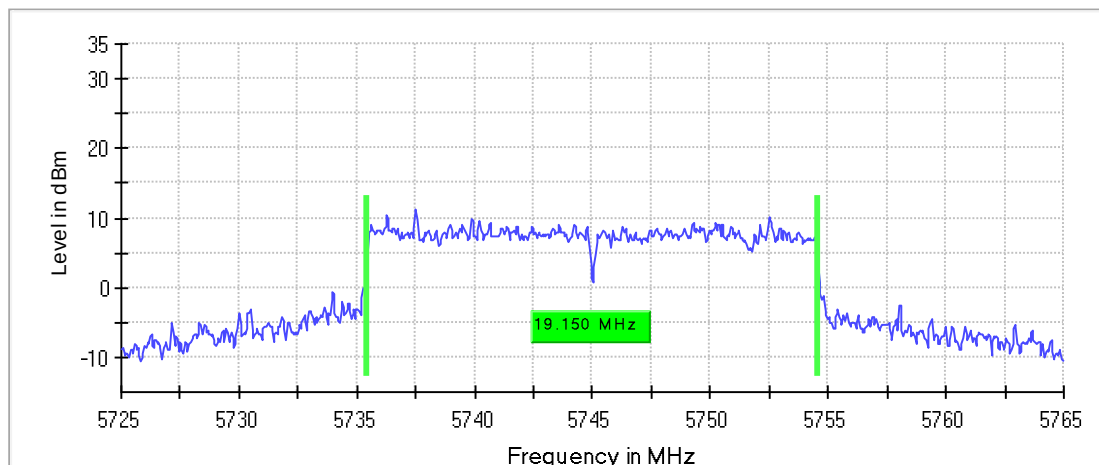

Bandwidth

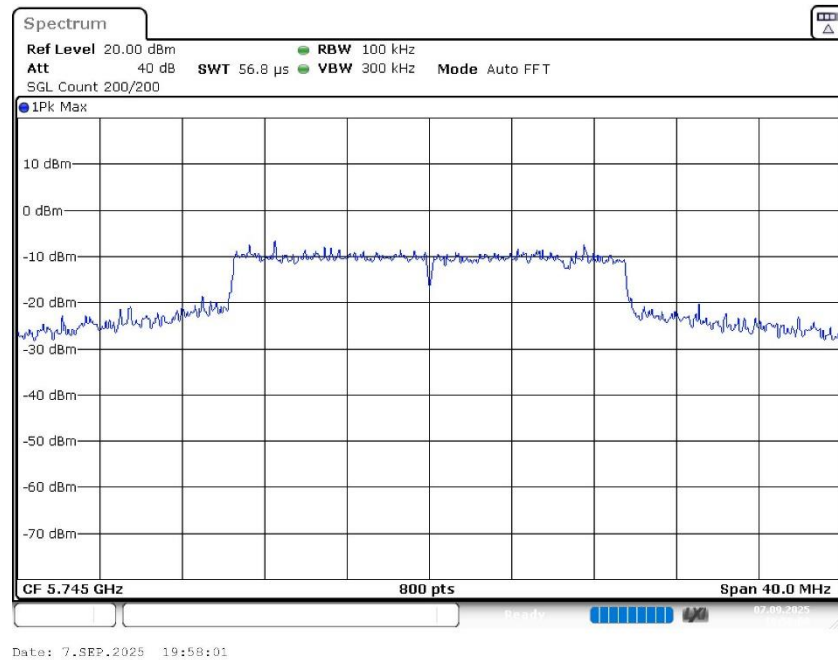

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	56.836 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off


Occupied Channel Bandwidth 99% (5745 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	30.500000	---	---	5729.375000	5759.875000

DUT Frequency (MHz)	Result
5745.000000	PASS

99 %Bandwidth

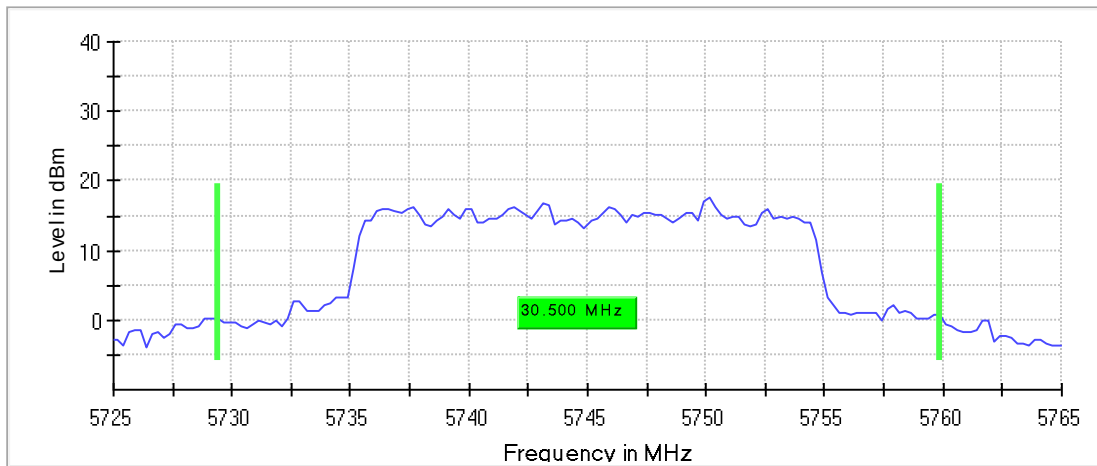

Bandwidth

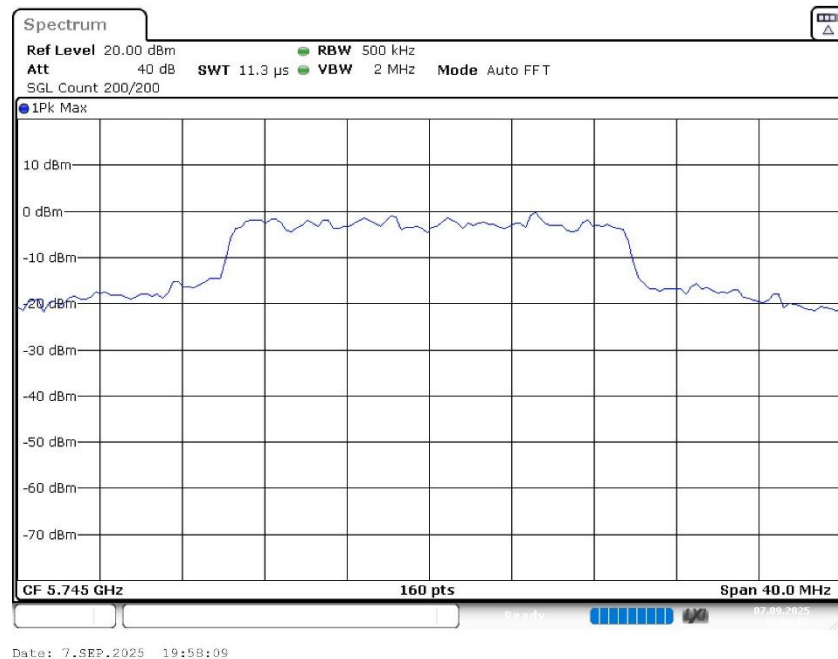

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
Sweptime	11.344 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm

Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5745 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5649.750000	-29.0	2.0	-27.0
5650.250000	-29.0	2.2	-26.8
5646.750000	-29.8	2.8	-27.0
5646.250000	-29.9	2.9	-27.0
5647.250000	-30.6	3.6	-27.0
5647.750000	-31.0	4.0	-27.0
5648.250000	-31.1	4.1	-27.0
5645.750000	-32.0	5.0	-27.0
5649.250000	-32.3	5.3	-27.0
5652.750000	-30.7	5.7	-25.0
5650.750000	-32.2	5.8	-26.4
5653.250000	-30.7	6.1	-24.6
5652.250000	-31.5	6.1	-25.3
5643.750000	-33.5	6.5	-27.0
5643.250000	-33.5	6.5	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

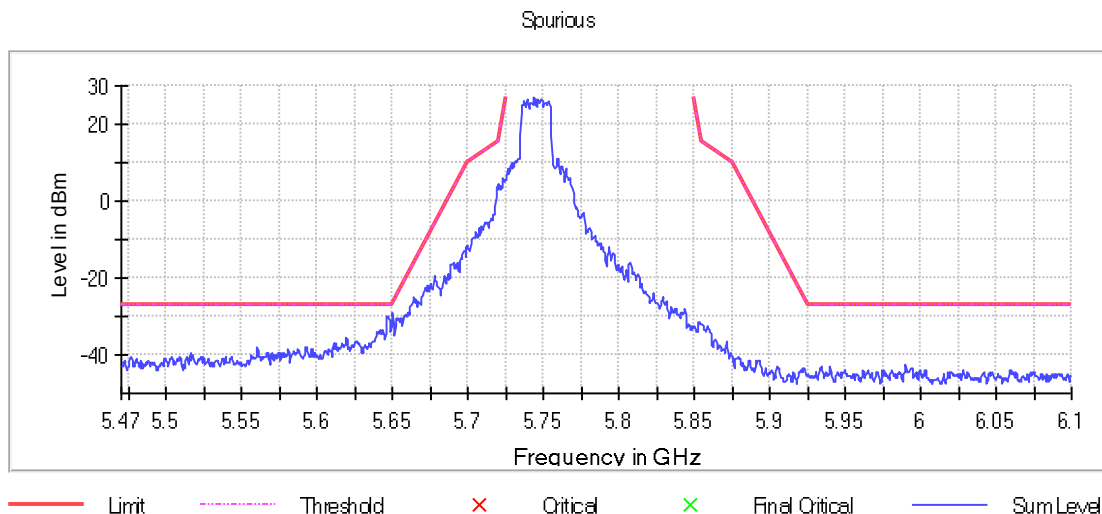

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	1260	~ 1260
SweepTime	85.781 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off


Emission Bandwidth 26 dB (5775 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	59.650000	---	---	5745.000000	5804.650000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	13.0	PASS

26 dB Bandwidth

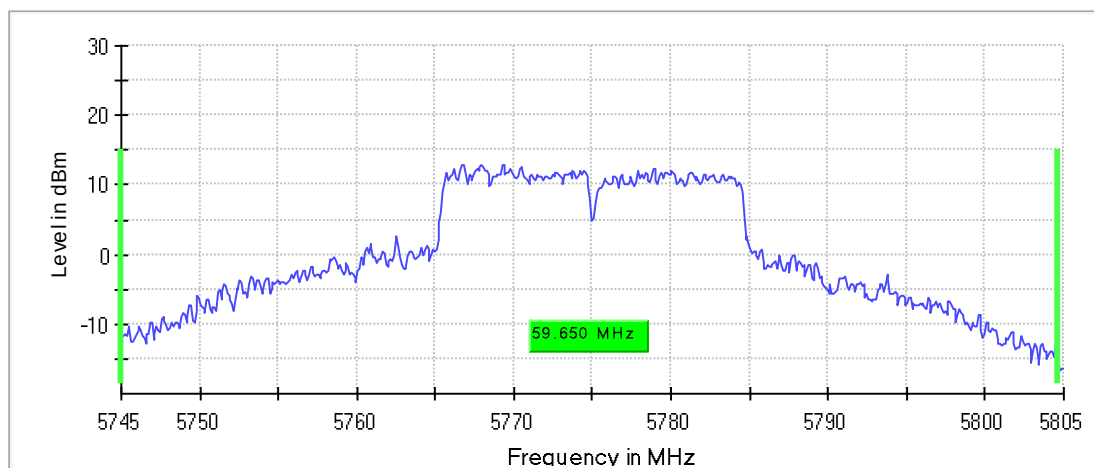

Bandwidth

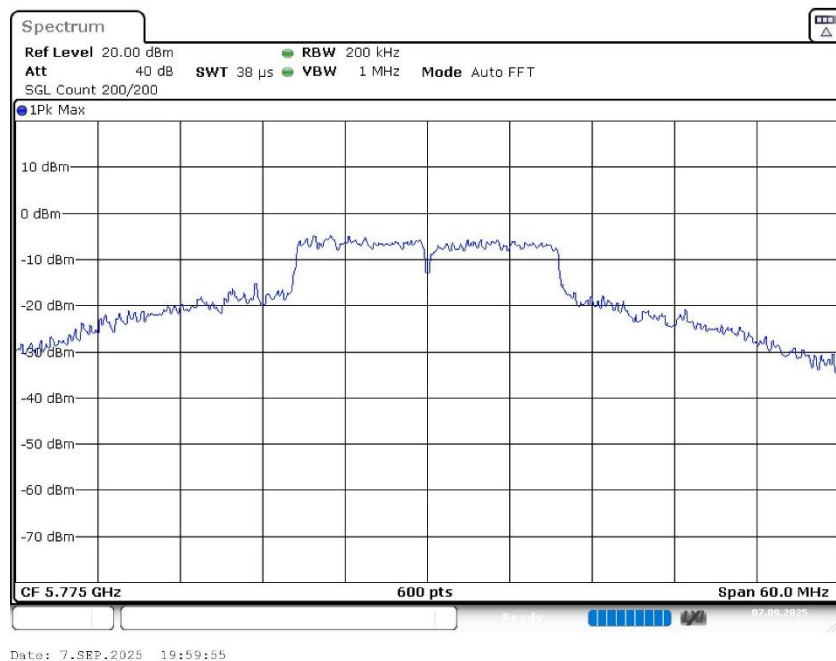

Date: 7.SEP.2025 19:59:55

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.74500 GHz	5.74500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	600	~ 600
Sweptime	37.969 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm

Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off


Power Spectral Density (5775 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5766.287129	11.397	30.0	PASS

Ports

Port	State
1	used
2	used

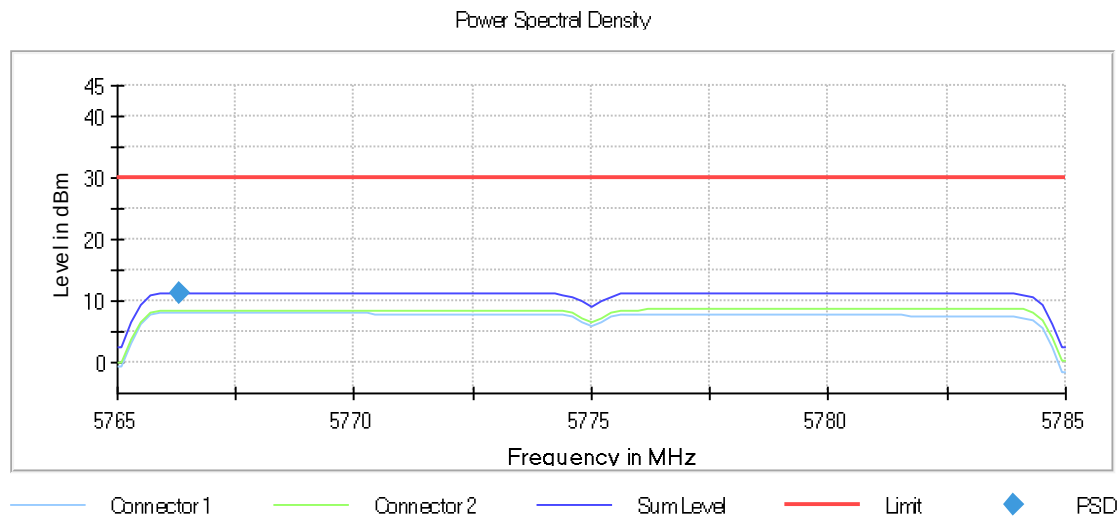

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.78500 GHz	5.78500 GHz
Span	20.000 MHz	20.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
Sweeptype	FFT	AUTO

Preamp	off	off
--------	-----	-----


Minimum Emission Bandwidth 6 dB (5775 MHz; 24.000 dBm; 20 MHz)

6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	19.150000	0.500000	---	5765.425000	5784.575000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	11.7	PASS

6 dB Bandwidth

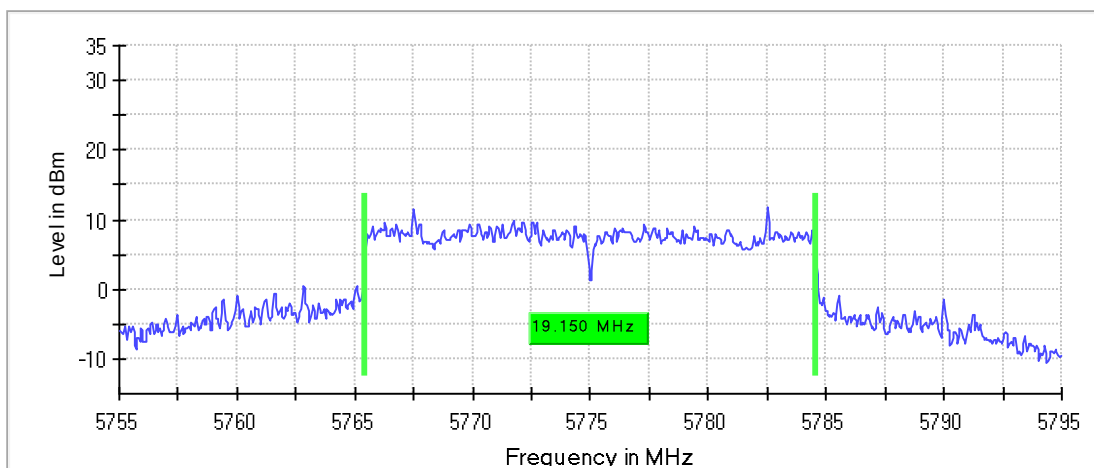

Bandwidth

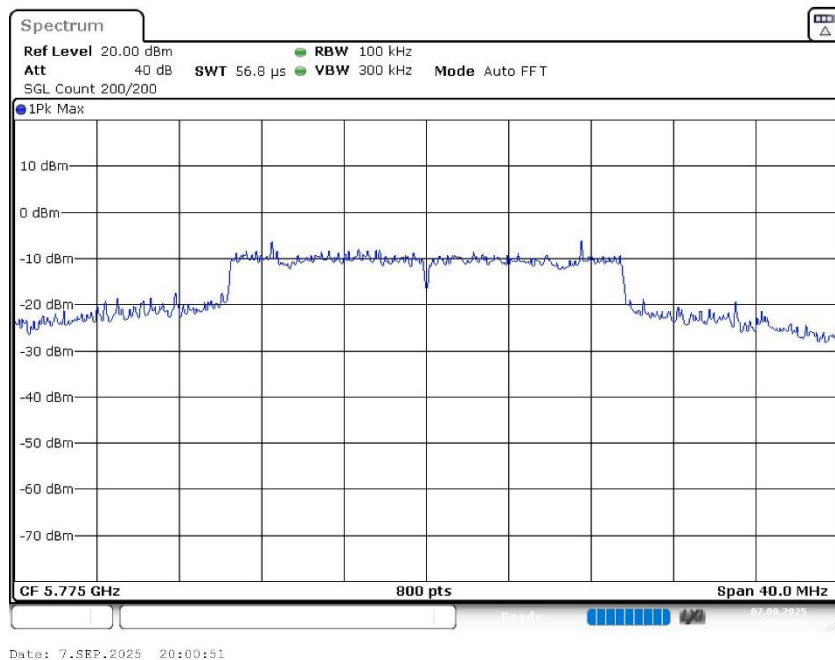

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	56.836 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5775 MHz; 24.000 dBm; 20 MHz)


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	32.500000	---	---	5758.125000	5790.625000

DUT Frequency (MHz)	Result
5775.000000	PASS

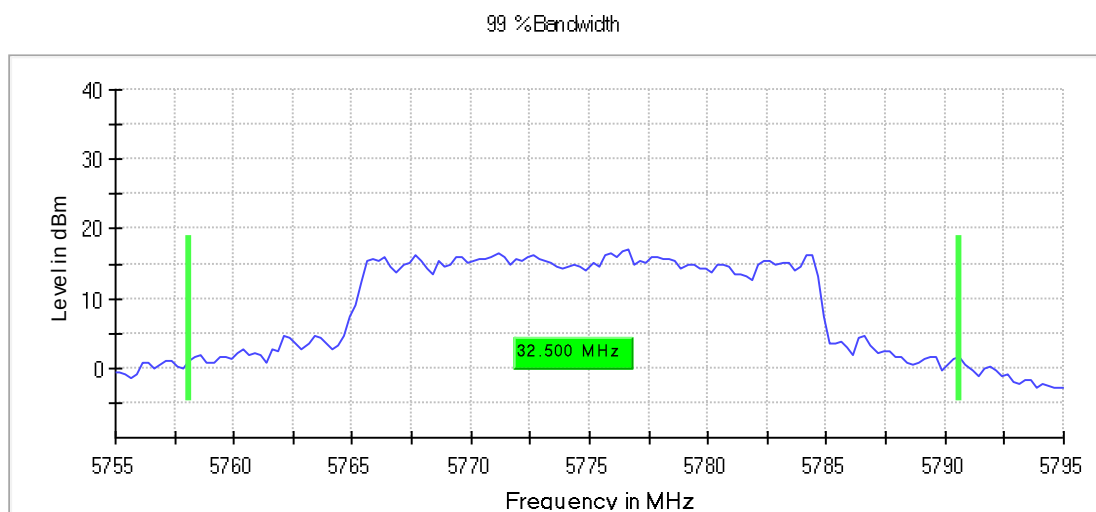

Bandwidth

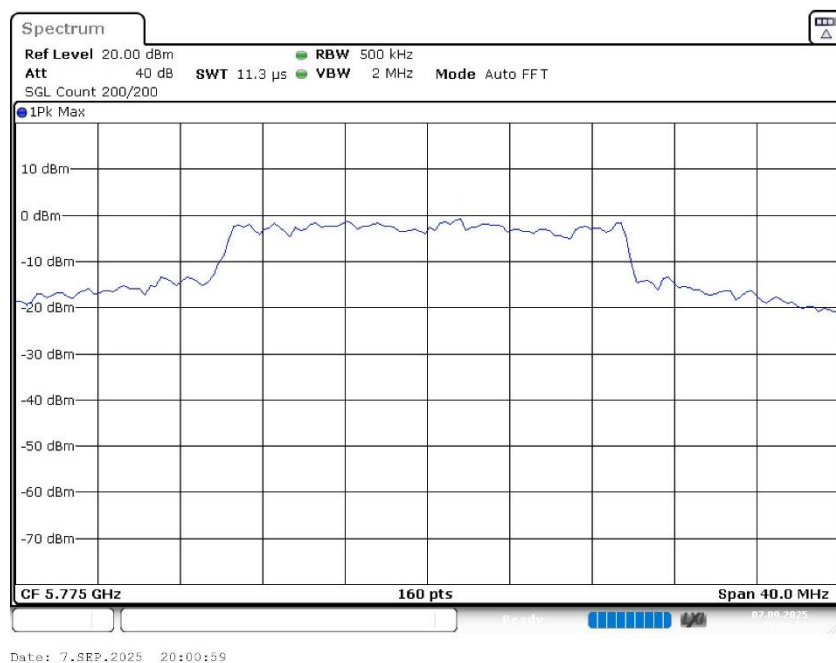

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
Sweptime	11.344 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm

Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5775 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5650.750000	-27.5	1.0	-26.4
5650.250000	-28.0	1.1	-26.8
5651.250000	-27.9	1.8	-26.1
5629.250000	-28.9	1.9	-27.0
5644.250000	-29.1	2.1	-27.0
5629.750000	-29.3	2.3	-27.0
5628.750000	-29.3	2.3	-27.0
5628.250000	-29.3	2.3	-27.0
5646.750000	-29.3	2.3	-27.0
5643.750000	-29.4	2.4	-27.0
5644.750000	-29.4	2.4	-27.0
5632.250000	-29.4	2.4	-27.0
5642.250000	-29.6	2.6	-27.0
5641.750000	-29.6	2.6	-27.0
5642.750000	-29.7	2.7	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

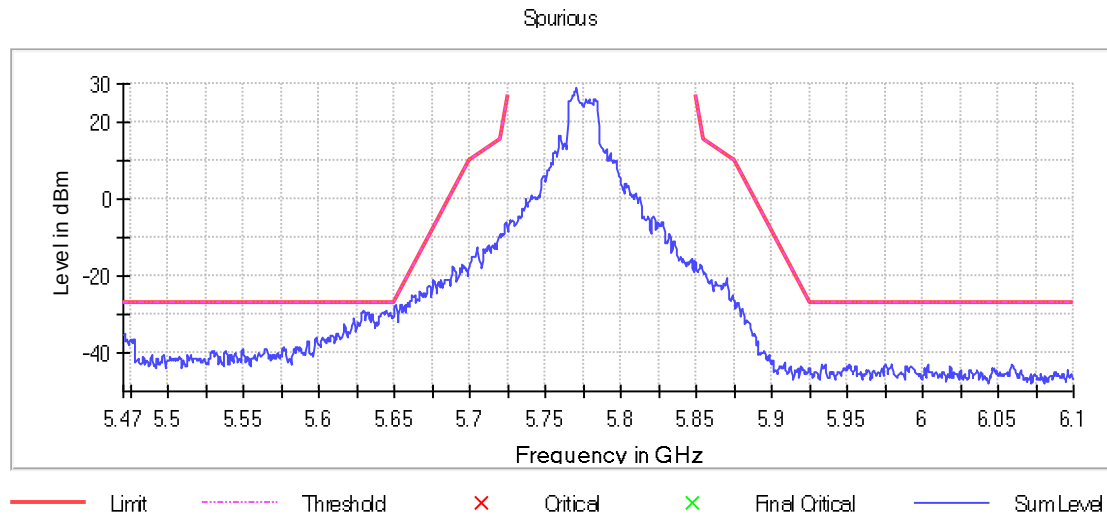

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	1260	~ 1260
SweepTime	85.781 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off


Emission Bandwidth 26 dB (5825 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	59.350000	---	---	5795.650000	5855.000000

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	12.8	PASS

26 dB Bandwidth

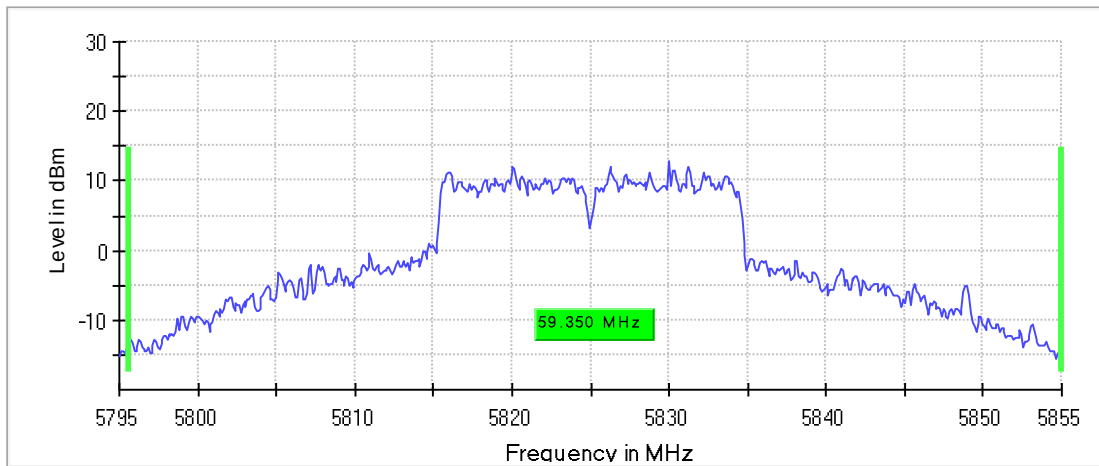

Bandwidth

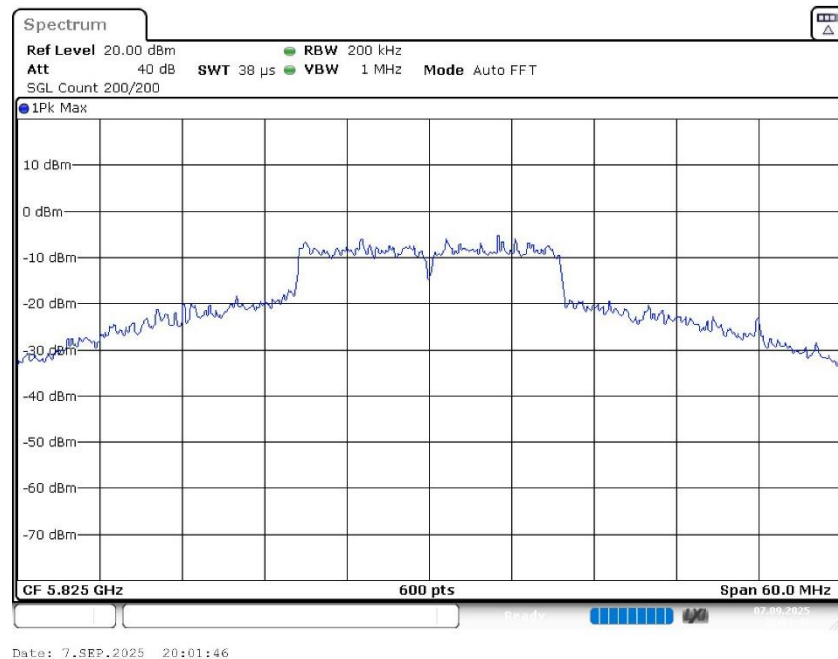

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.79500 GHz	5.79500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	600	~ 600
Sweeptime	37.969 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm

Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Power Spectral Density (5825 MHz; 24.000 dBm; 20 MHz)


Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5816.287129	10.247	30.0	PASS

Ports

Port	State
1	used
2	used

Power Spectral Density

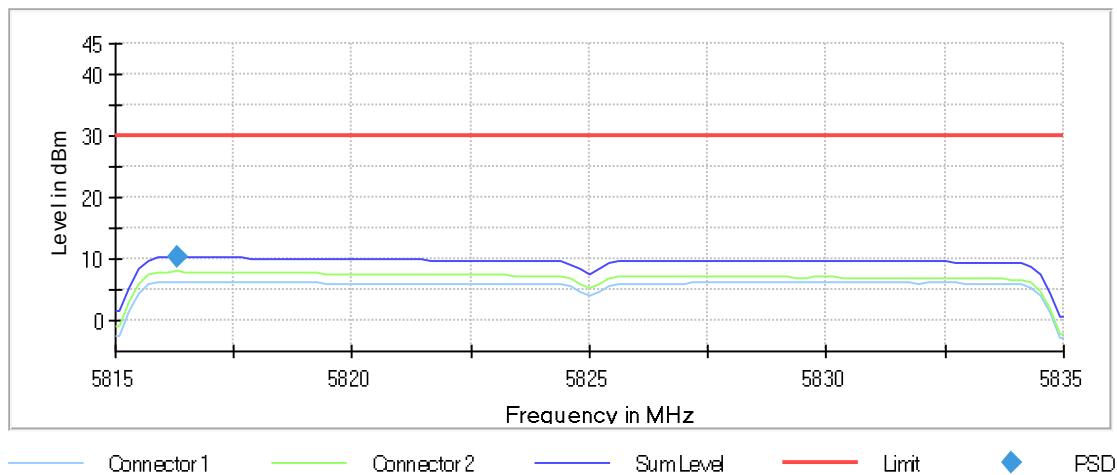

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.81500 GHz	5.81500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	20.000 MHz	20.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
Sweeptype	FFT	AUTO

Preamp	off	off
--------	-----	-----


Minimum Emission Bandwidth 6 dB (5825 MHz; 24.000 dBm; 20 MHz)

6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	19.300000	0.500000	---	5815.325000	5834.625000

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	8.6	PASS

6 dB Bandwidth

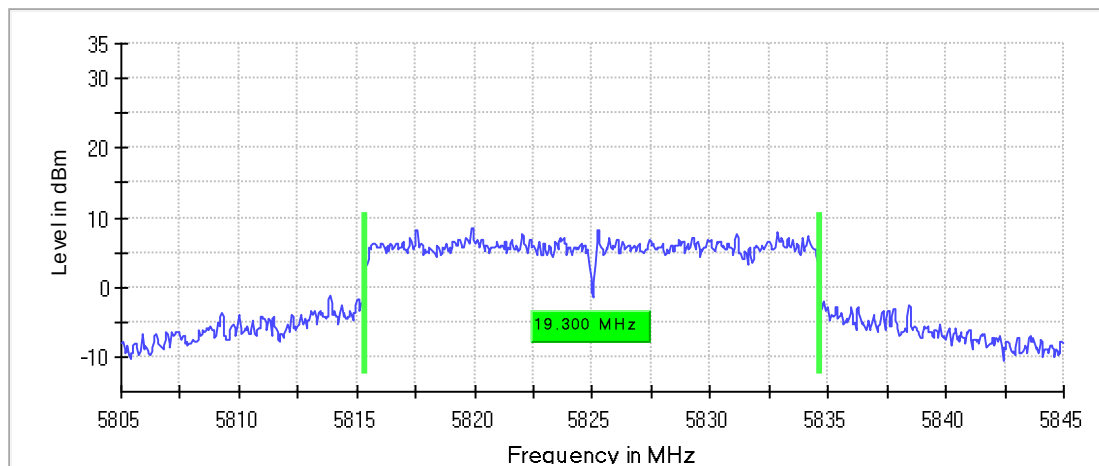

Bandwidth

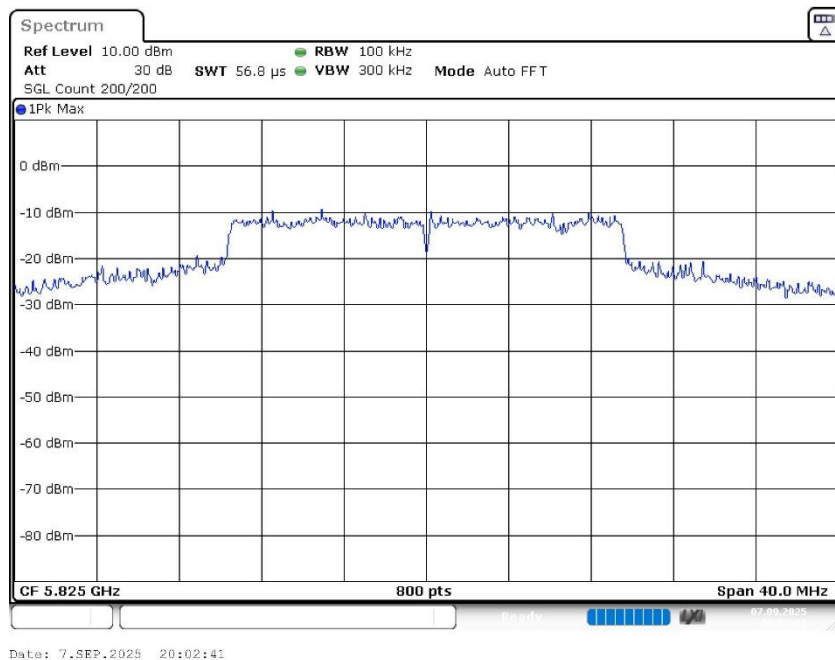

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	56.836 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off


Occupied Channel Bandwidth 99% (5825 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	33.750000	---	---	5808.125000	5841.875000

DUT Frequency (MHz)	Result
5825.000000	PASS

99 %Bandwidth

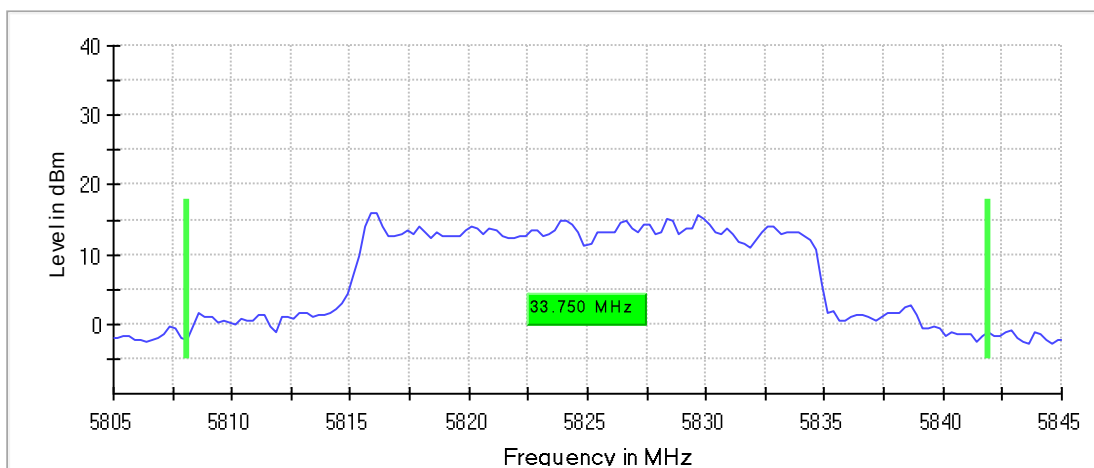

Bandwidth

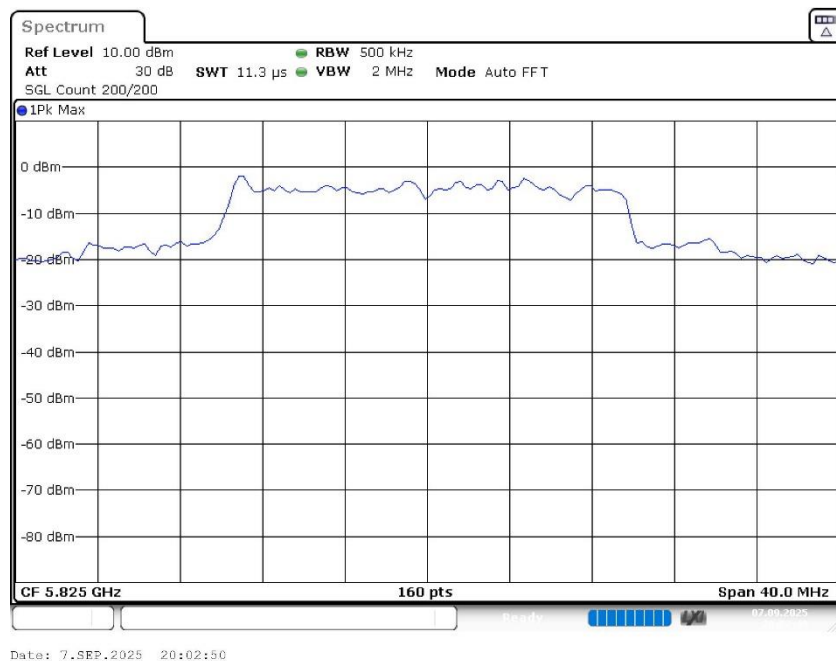

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
Sweptime	11.344 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm

Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5825 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5514.750000	-35.0	8.0	-27.0
5509.250000	-35.3	8.3	-27.0
5522.250000	-35.4	8.4	-27.0
5526.750000	-35.4	8.4	-27.0
5508.750000	-35.6	8.6	-27.0
5521.750000	-35.6	8.6	-27.0
5512.750000	-35.6	8.6	-27.0
5513.250000	-35.6	8.6	-27.0
5515.250000	-35.6	8.6	-27.0
5515.750000	-35.7	8.7	-27.0
5524.250000	-35.7	8.7	-27.0
5516.250000	-35.7	8.7	-27.0
5514.250000	-35.8	8.8	-27.0
5509.750000	-35.9	8.9	-27.0
5511.250000	-35.9	8.9	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

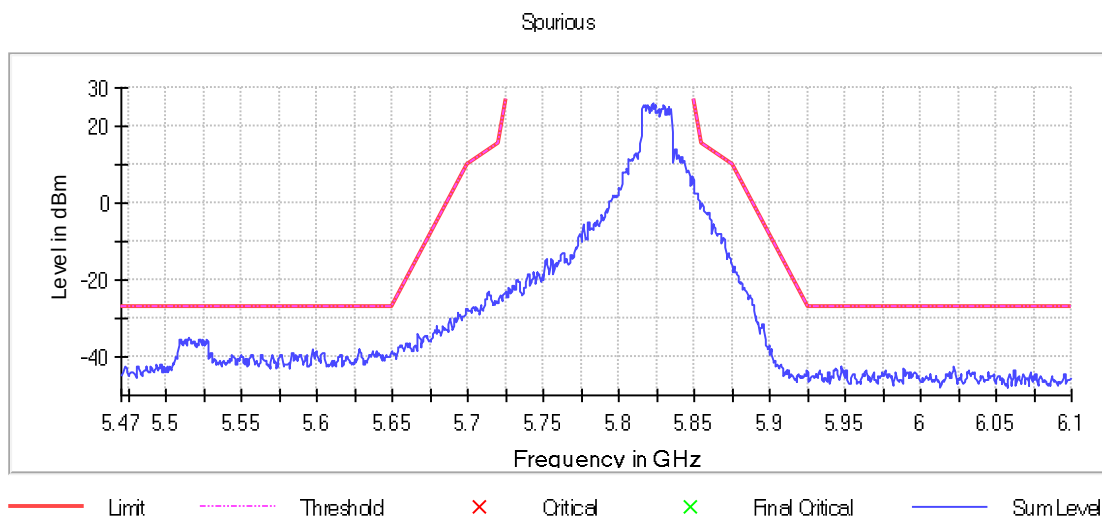

Pre Measurement 2


Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	1260	~ 1260
SweepTime	85.781 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5755 MHz; 24.000 dBm; 40 MHz)


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	77.700000	---	---	5713.825000	5791.525000

DUT Frequency (MHz)	Max Level (dBm)	Result
5755.000000	9.9	PASS

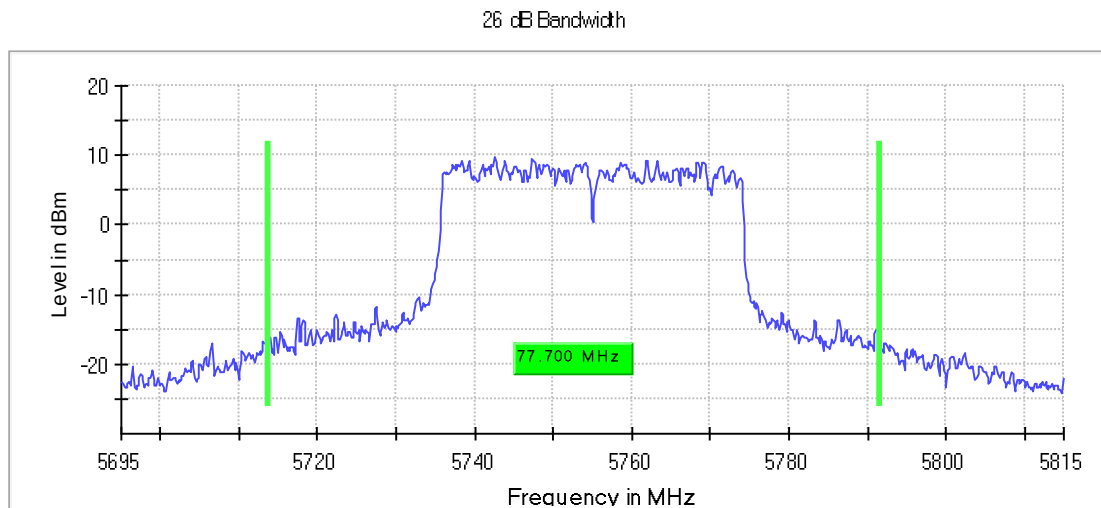

Bandwidth

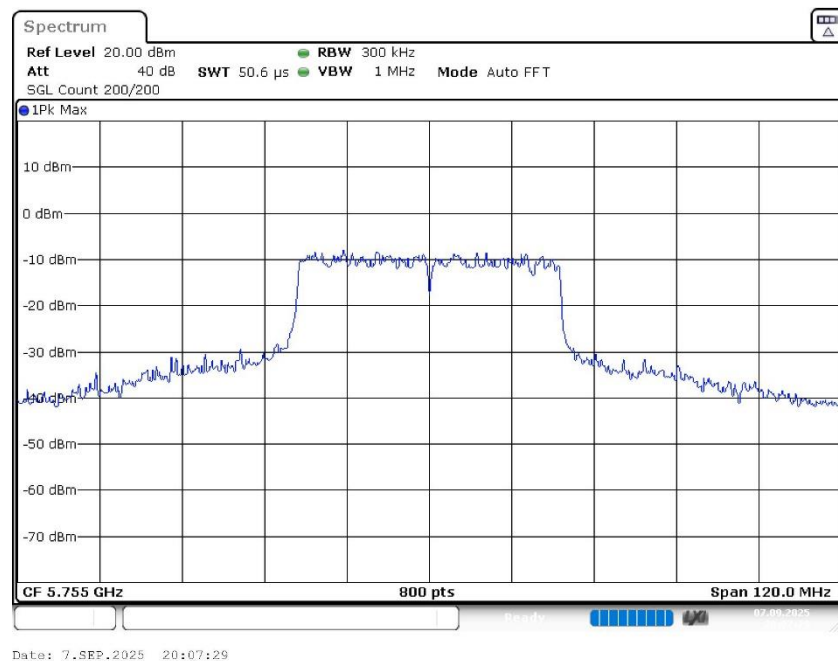

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.81500 GHz	5.81500 GHz
Span	120.000 MHz	120.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	800	~ 800
Sweptime	50.625 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm

Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Power Spectral Density (5755 MHz; 24.000 dBm; 40 MHz)


Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5755.000000	5736.625000	6.108	30.0	PASS

Ports

Port	State
1	used
2	used

Power Spectral Density

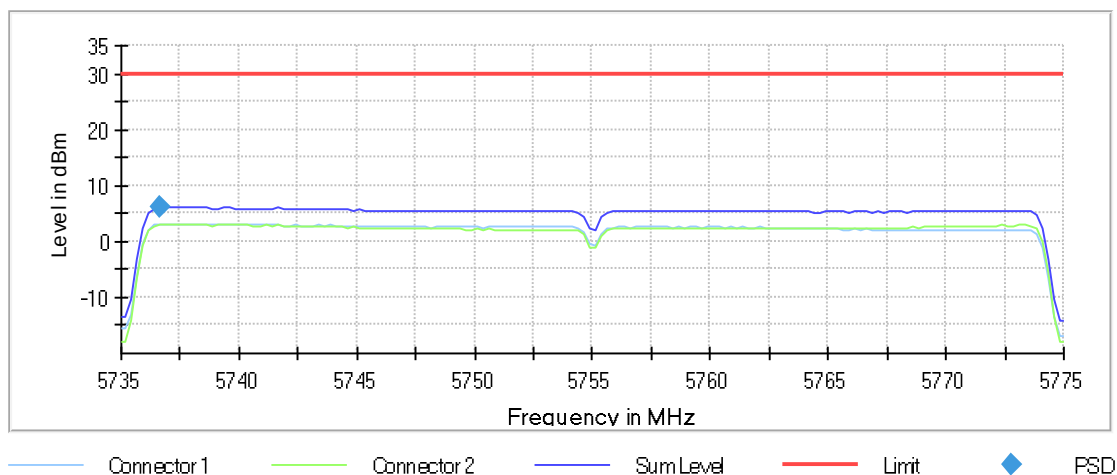

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.77500 GHz	5.77500 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
SweepTime	3.200 ms	3.200 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
Sweeptype	Sweep	AUTO

Preamp	off	off
--------	-----	-----


Minimum Emission Bandwidth 6 dB (5755 MHz; 24.000 dBm; 40 MHz)

6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	38.250000	0.500000	---	5735.875000	5774.125000

DUT Frequency (MHz)	Max Level (dBm)	Result
5755.000000	4.1	PASS

6 dB Bandwidth

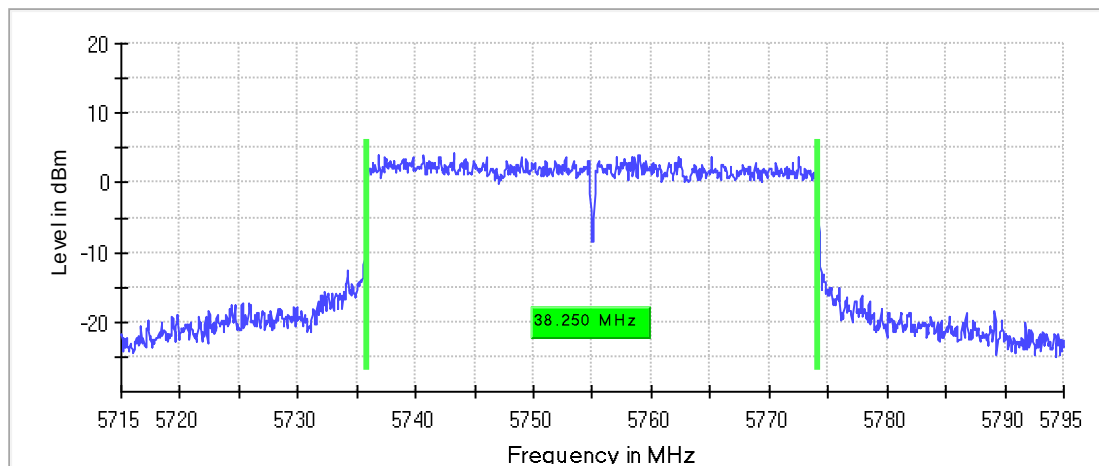

Bandwidth

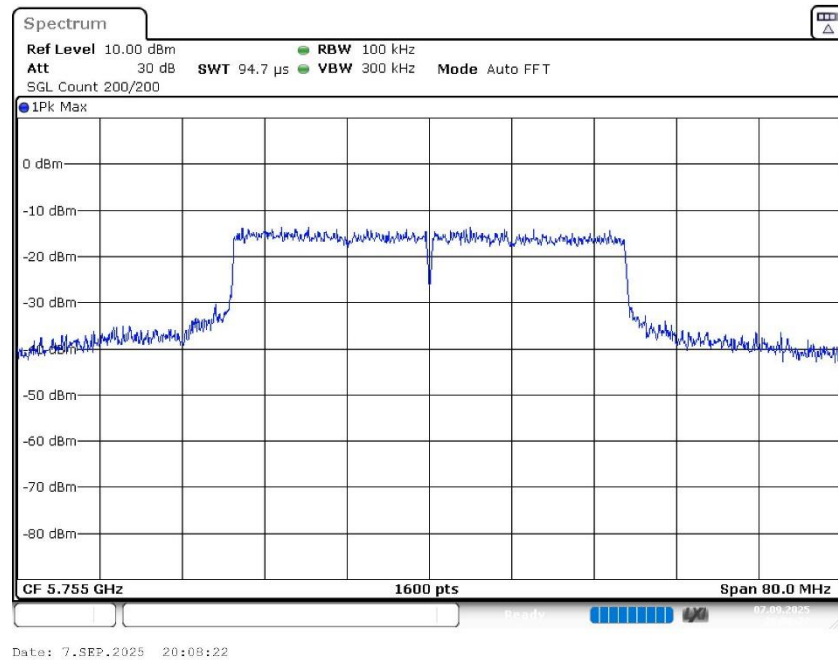

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
Sweeptime	94.727 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off


Occupied Channel Bandwidth 99% (5755 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	38.500000	---	---	5735.750000	5774.250000

DUT Frequency (MHz)	Result
5755.000000	PASS

99 %Bandwidth

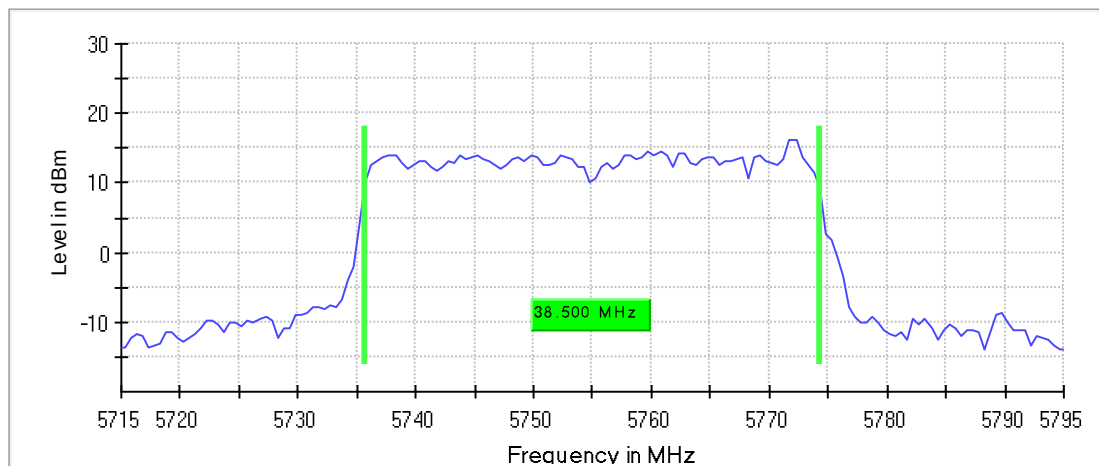

Bandwidth

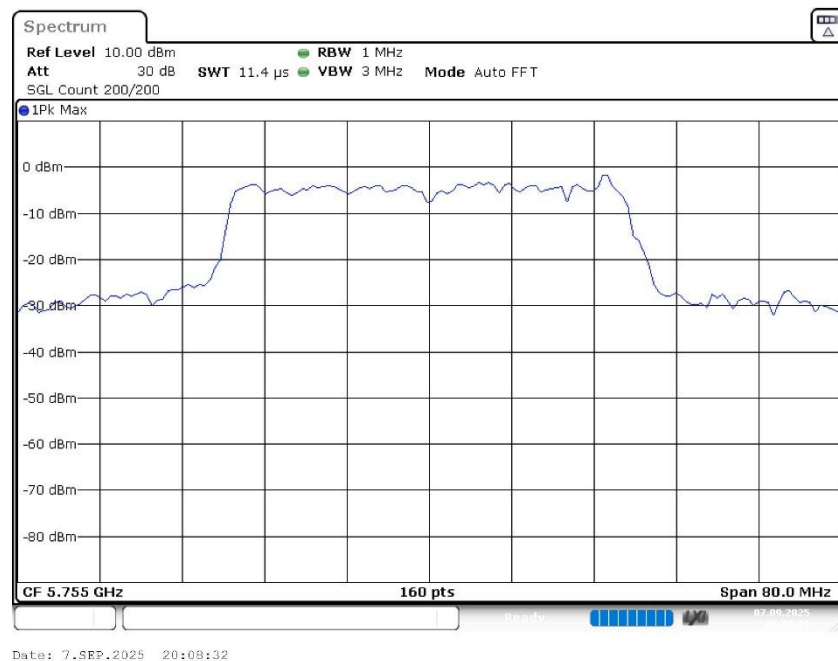

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	1.000 MHz	>= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160
Sweeptime	11.438 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm

Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5755 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Result
5755.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5652.750000	-28.7	3.7	-25.0
5650.750000	-30.5	4.1	-26.4
5653.750000	-28.4	4.2	-24.2
5653.250000	-28.8	4.2	-24.6
5651.250000	-30.5	4.4	-26.1
5654.250000	-28.4	4.5	-23.9
5644.250000	-32.0	5.0	-27.0
5643.750000	-32.1	5.1	-27.0
5650.250000	-32.1	5.3	-26.8
5644.750000	-32.3	5.3	-27.0
5654.750000	-29.0	5.5	-23.5
5639.250000	-32.5	5.5	-27.0
5652.250000	-30.9	5.6	-25.3
5638.750000	-32.7	5.7	-27.0
5645.250000	-32.8	5.8	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

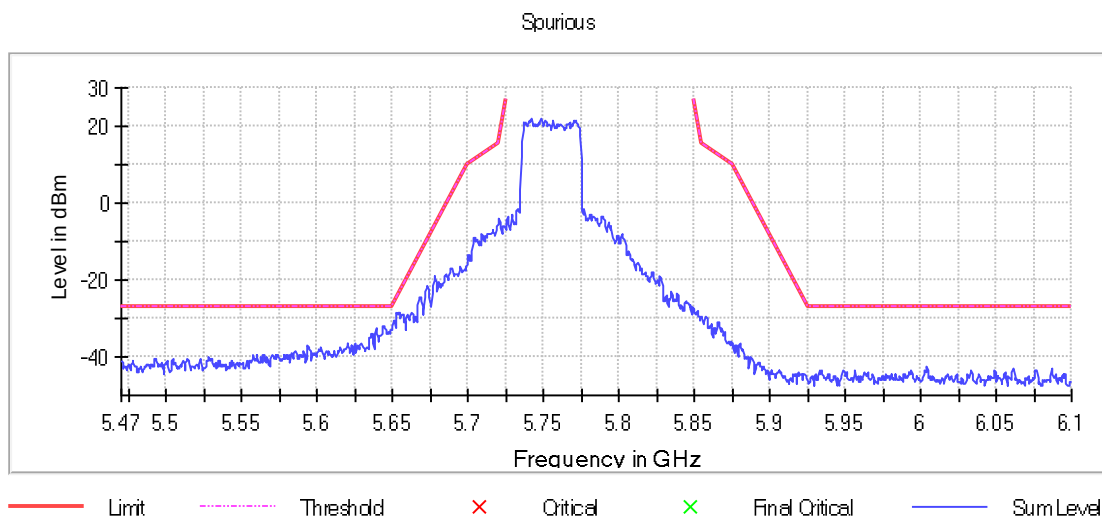

Pre Measurement 2


Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	1260	~ 1260
SweepTime	85.781 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5775 MHz; 24.000 dBm; 40 MHz)


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	84.600000	---	---	5728.125000	5812.725000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	10.0	PASS

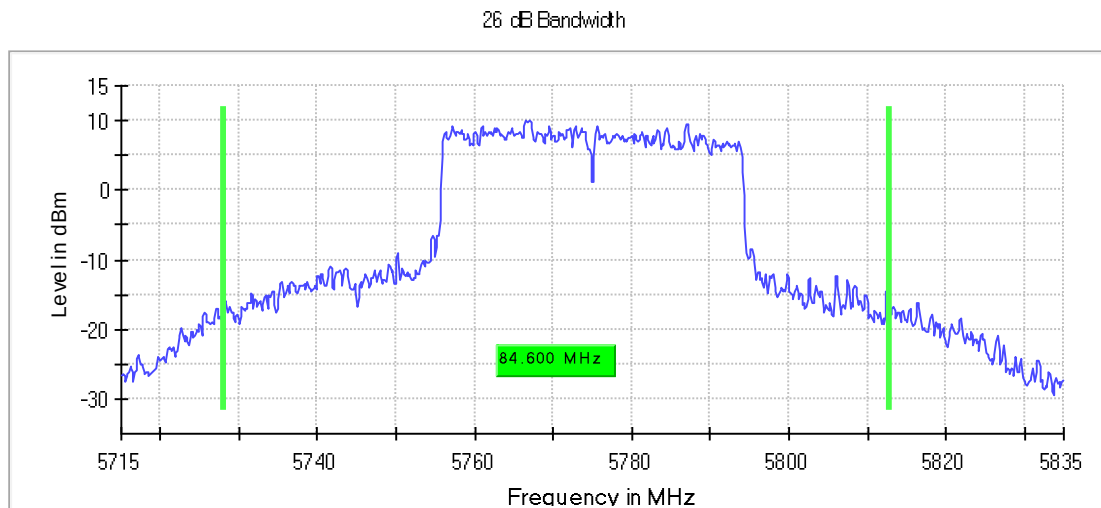

Bandwidth

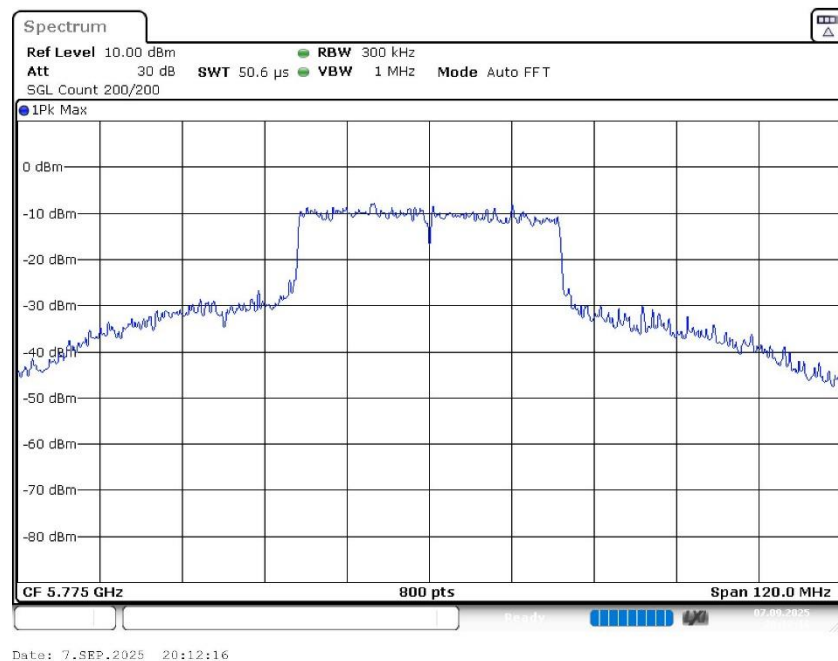

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	120.000 MHz	120.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	800	~ 800
Sweptime	50.625 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm

Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off


Power Spectral Density (5775 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5757.125000	6.019	30.0	PASS

Ports

Port	State
1	used
2	used

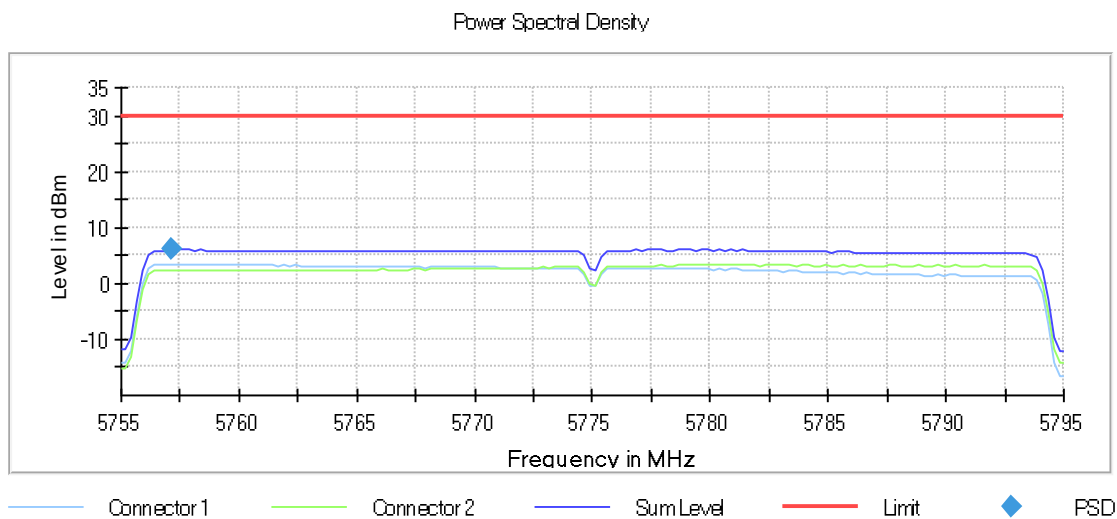


Minimum Emission Bandwidth 6 dB (5775 MHz; 24.000 dBm; 40 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	38.200000	0.500000	---	5755.875000	5794.075000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	4.5	PASS

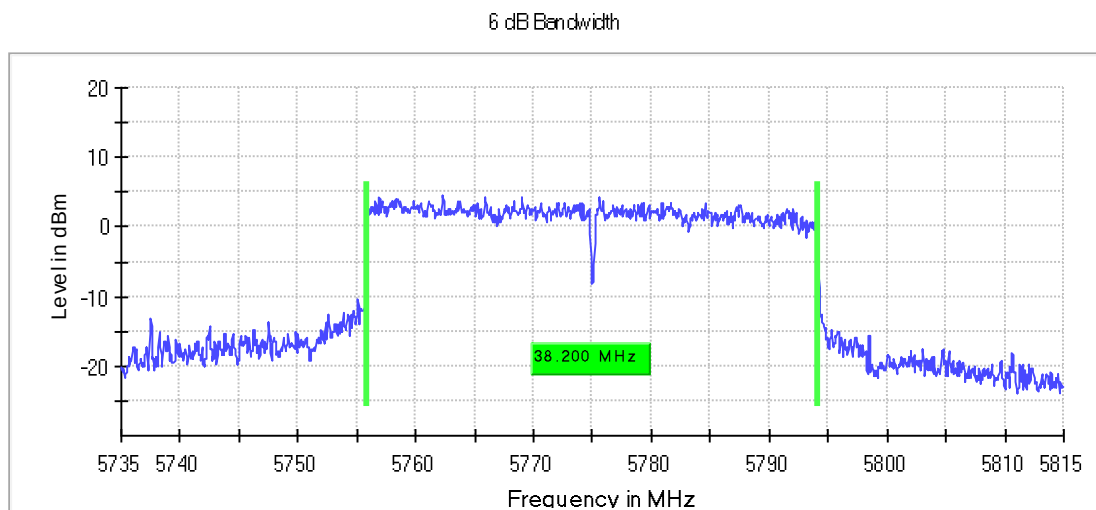

Bandwidth

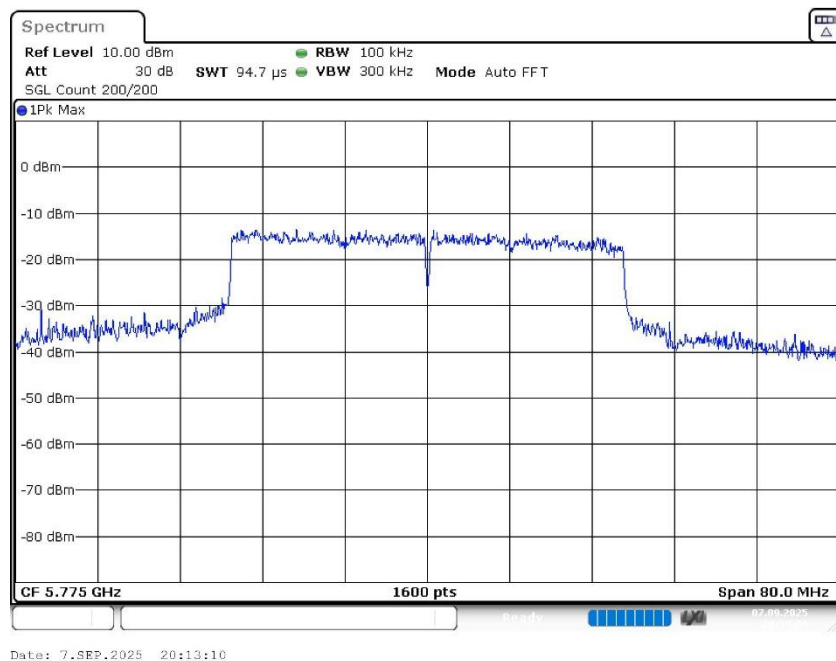

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.81500 GHz	5.81500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
Sweptime	94.727 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm

Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off


Occupied Channel Bandwidth 99% (5775 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	40.000000	---	---	5754.750000	5794.750000

DUT Frequency (MHz)	Result
5775.000000	PASS

99 % Bandwidth

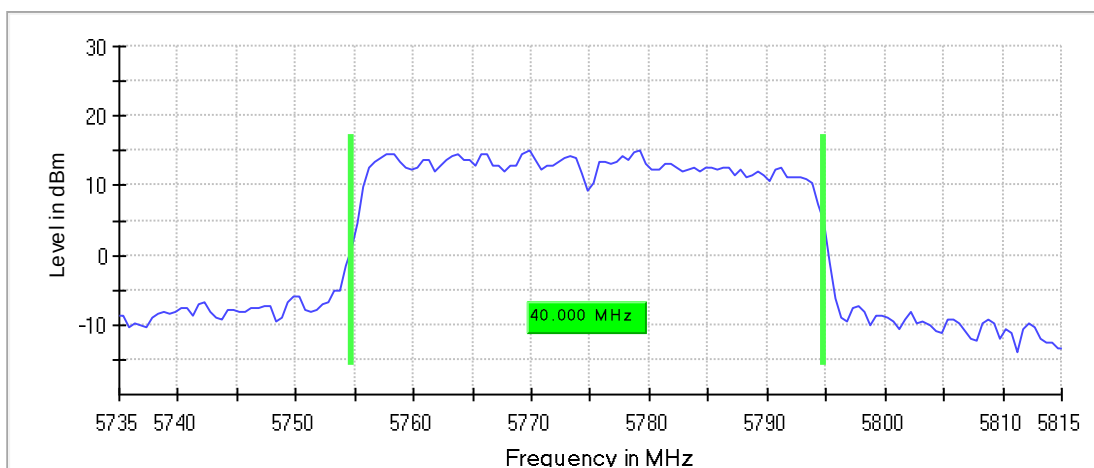

Bandwidth

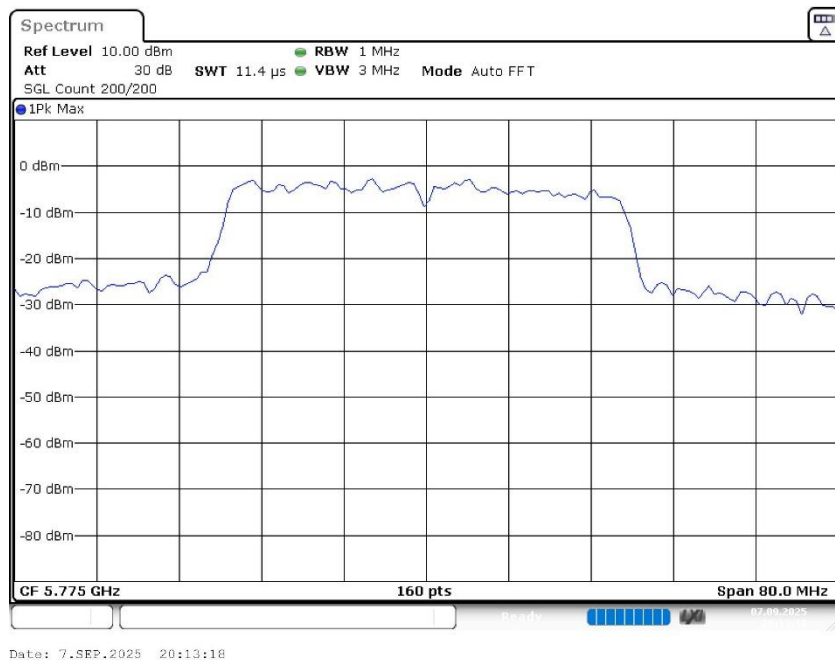

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.81500 GHz	5.81500 GHz
Span	80.000 MHz	80.000 MHz
RBW	1.000 MHz	>= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160
SweepTime	11.438 μs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5775 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5648.250000	-33.8	6.8	-27.0
5637.250000	-34.1	7.1	-27.0
5645.250000	-34.1	7.1	-27.0
5645.750000	-34.2	7.2	-27.0
5648.750000	-34.4	7.4	-27.0
5636.750000	-34.4	7.4	-27.0
5647.750000	-34.5	7.5	-27.0
5644.250000	-34.5	7.5	-27.0
5649.750000	-34.5	7.5	-27.0
5643.750000	-34.6	7.6	-27.0
5652.750000	-32.5	7.6	-25.0
5649.250000	-34.6	7.6	-27.0
5650.250000	-34.4	7.6	-26.8
5644.750000	-34.9	7.9	-27.0
5636.250000	-34.9	7.9	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

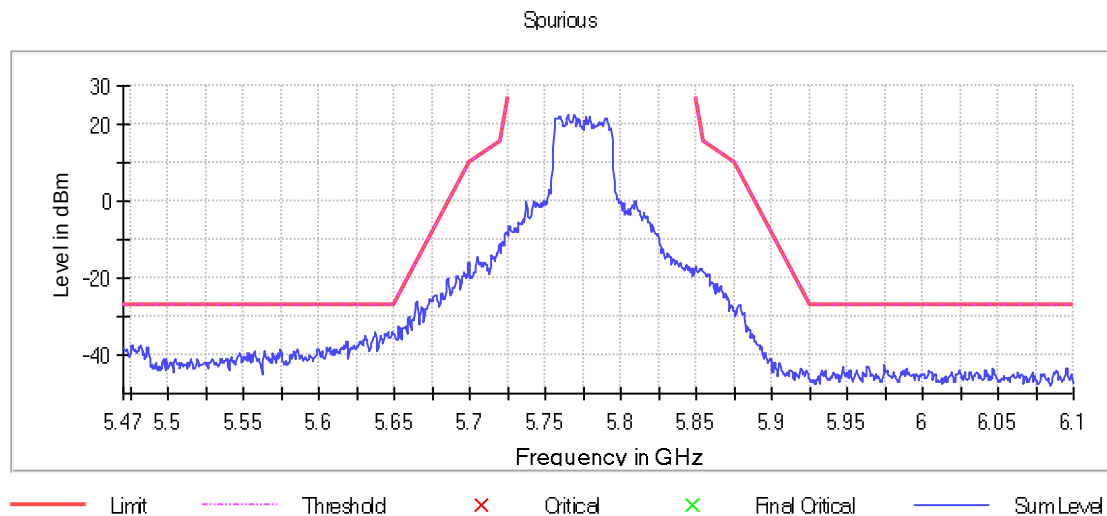

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1260	~ 1260
SweepTime	85.781 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold

Sweep type	FFT	AUTO
Preamp	off	off


Emission Bandwidth 26 dB (5795 MHz; 24.000 dBm; 40 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	92.700000	---	---	5745.275000	5837.975000

DUT Frequency (MHz)	Max Level (dBm)	Result
5795.000000	10.3	PASS

26 dB Bandwidth

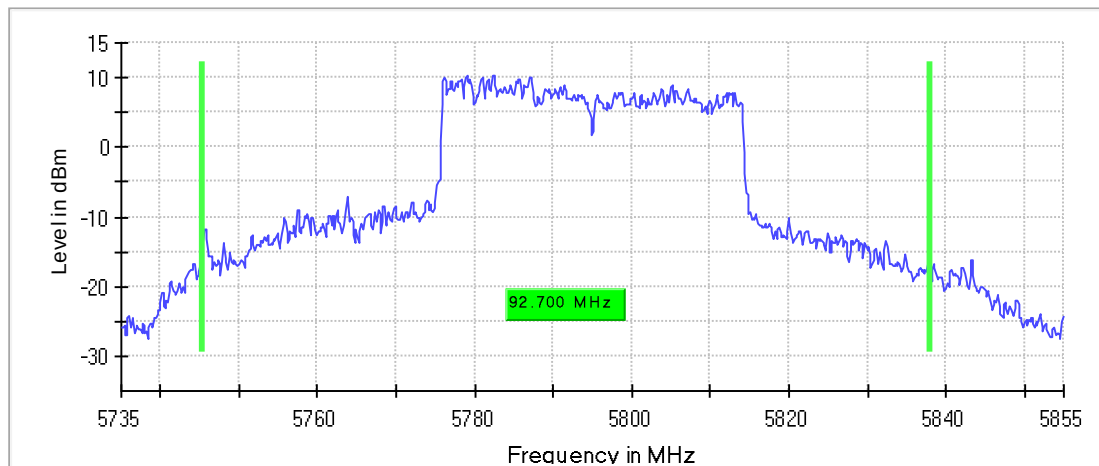

Bandwidth

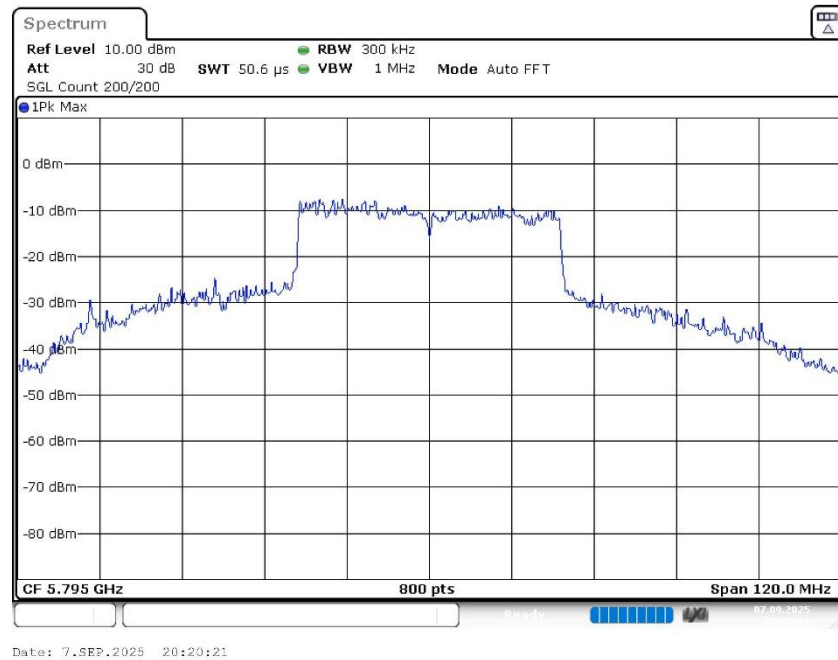

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	120.000 MHz	120.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	800	~ 800
SweepTime	50.625 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off


Power Spectral Density (5795 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5795.000000	5777.375000	7.353	30.0	PASS

Ports

Port	State
1	used
2	used

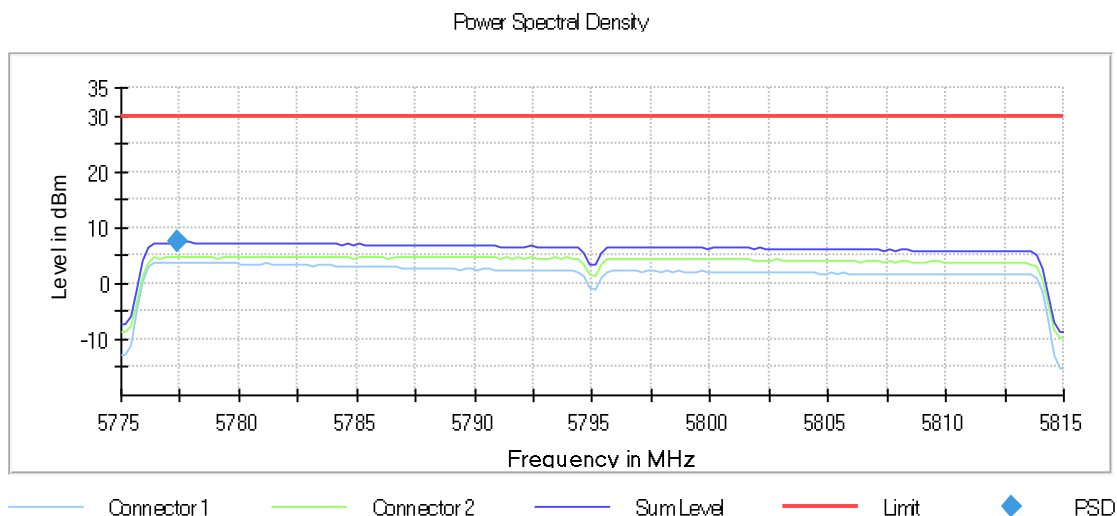

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77500 GHz	5.77500 GHz
Stop Frequency	5.81500 GHz	5.81500 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
SweepTime	3.200 ms	3.200 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
SweepType	Sweep	AUTO
Preamp	off	off

Minimum Emission Bandwidth 6 dB (5795 MHz; 24.000 dBm; 40 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	38.350000	0.500000	---	5775.775000	5814.125000

DUT Frequency (MHz)	Max Level (dBm)	Result
5795.000000	4.9	PASS

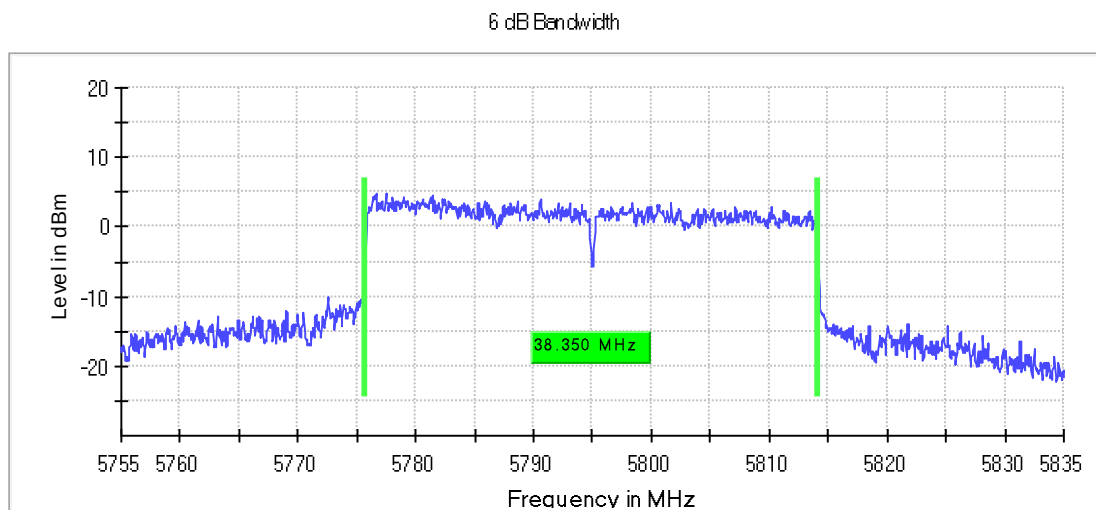

Bandwidth

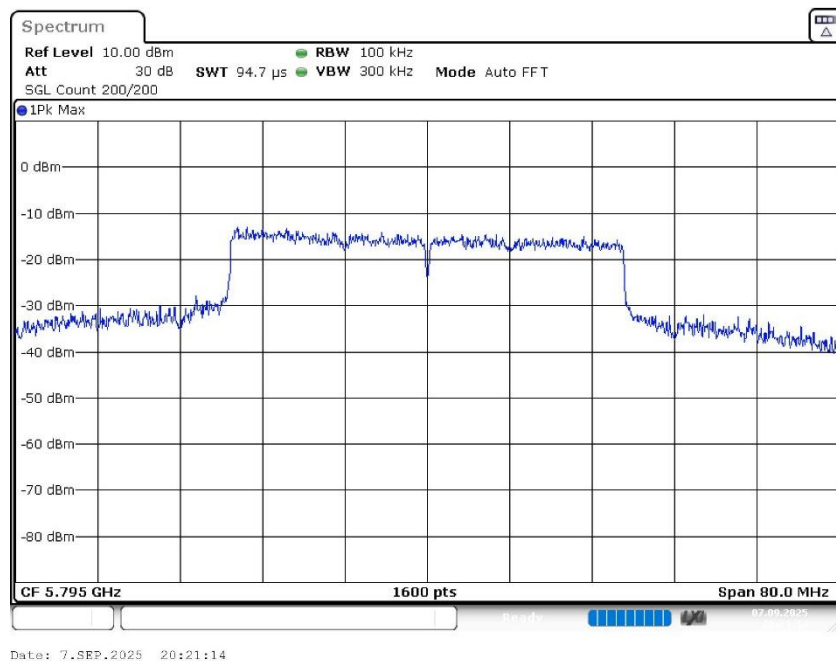

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
Sweptime	94.727 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm

Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off


Occupied Channel Bandwidth 99% (5795 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	44.000000	---	---	5770.750000	5814.750000

DUT Frequency (MHz)	Result
5795.000000	PASS

99 %Bandwidth

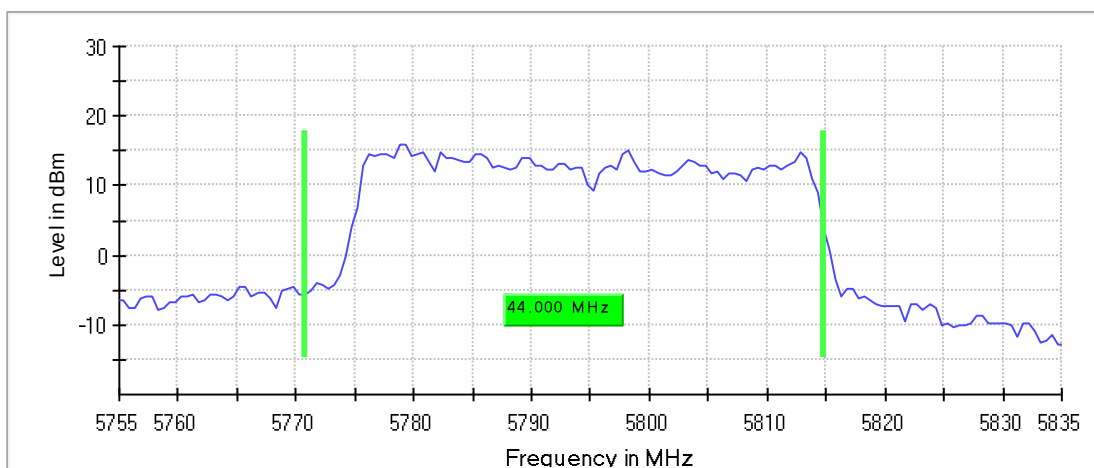

Bandwidth

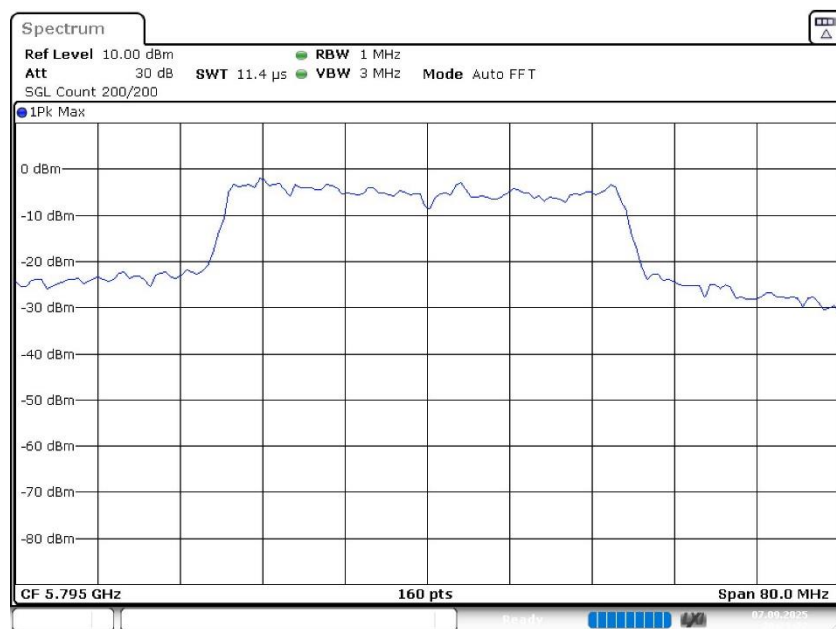

Date: 7.SEP.2025 20:21:23

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	1.000 MHz	≥ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	160	~ 160
SweepTime	11.438 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5795 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Result
5795.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5649.750000	-28.1	1.1	-27.0
5650.250000	-28.4	1.6	-26.8
5649.250000	-28.7	1.7	-27.0
5645.750000	-29.8	2.8	-27.0
5651.250000	-29.0	2.9	-26.1
5646.250000	-29.9	2.9	-27.0
5640.250000	-30.0	3.0	-27.0
5653.750000	-27.2	3.0	-24.2
5654.250000	-26.9	3.0	-23.9
5645.250000	-30.2	3.2	-27.0
5646.750000	-30.2	3.2	-27.0
5640.750000	-30.2	3.2	-27.0
5657.250000	-24.9	3.3	-21.6
5635.250000	-30.3	3.3	-27.0
5629.750000	-30.4	3.4	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

Spurious

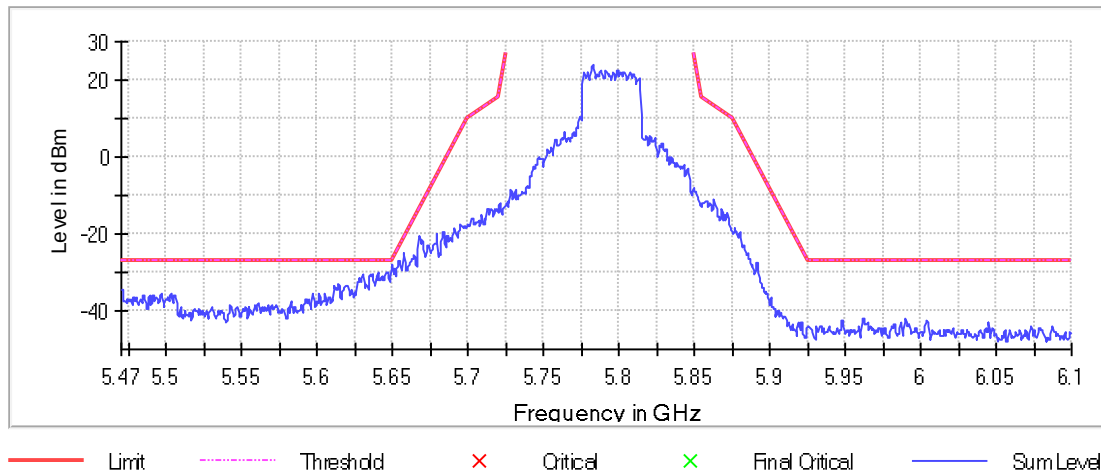

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1260	~ 1260
Sweeptime	85.781 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO

Preamp	off	off
--------	-----	-----


Emission Bandwidth 26 dB (5775 MHz; 24.000 dBm; 80 MHz)

26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	98.500000	---	---	5720.750000	5819.250000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	10.4	PASS

26 dB Bandwidth

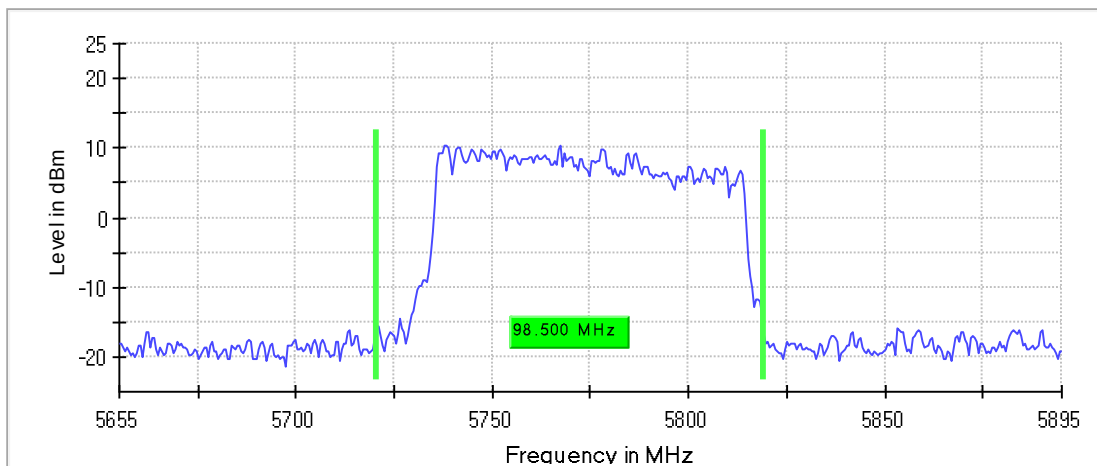

Bandwidth

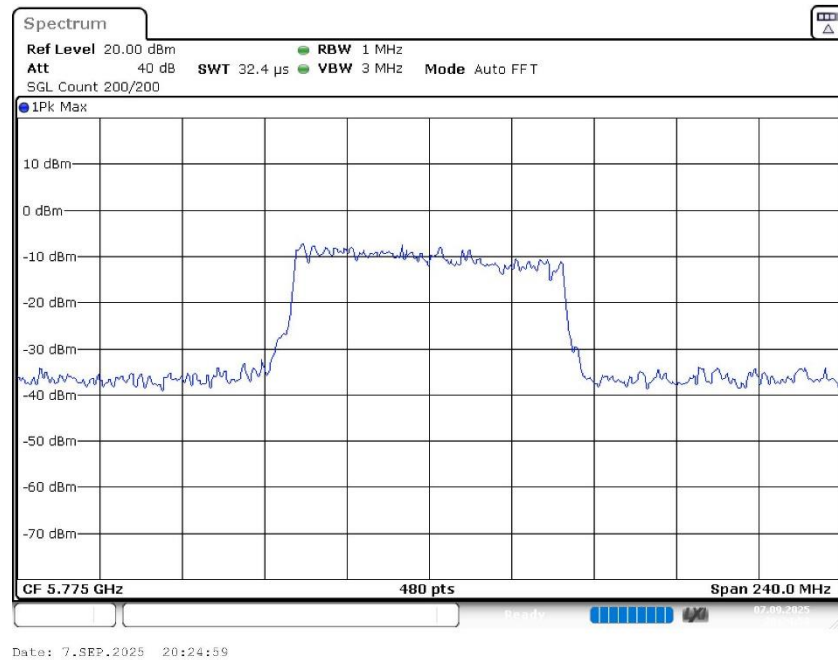

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.65500 GHz	5.65500 GHz
Stop Frequency	5.89500 GHz	5.89500 GHz
Span	240.000 MHz	240.000 MHz
RBW	1.000 MHz	~ 800.000 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	480	~ 480
Sweptime	32.406 μ s	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off


Power Spectral Density (5775 MHz; 24.000 dBm; 80 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5739.375000	1.065	30.0	PASS

Ports

Port	State
1	used
2	used

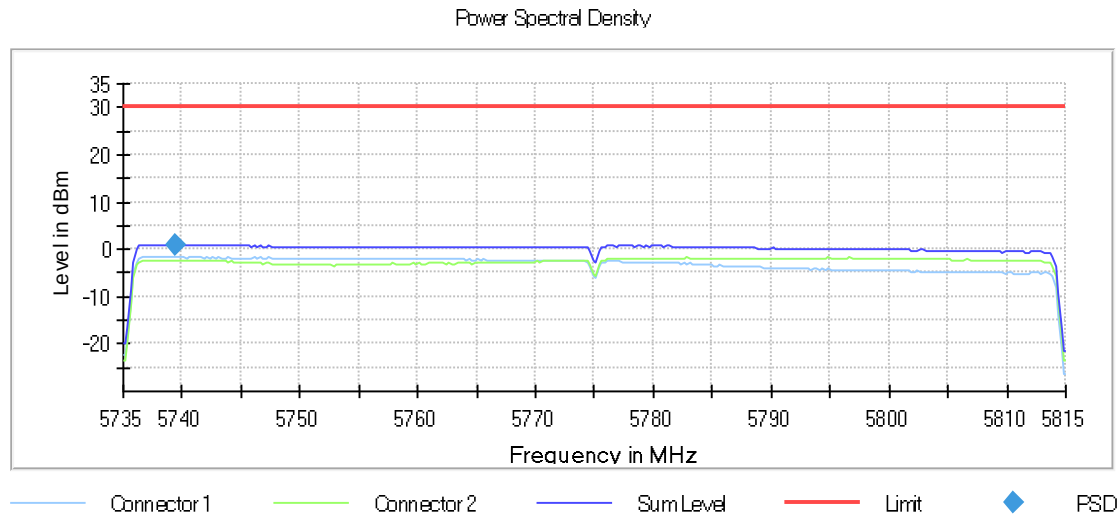

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73500 GHz	5.73500 GHz
Stop Frequency	5.81500 GHz	5.81500 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
SweepTime	6.400 ms	6.400 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
SweepType	Sweep	AUTO
Preamp	off	off

Minimum Emission Bandwidth 6 dB (5775 MHz; 24.000 dBm; 80 MHz)


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	78.200000	0.500000	---	5735.875000	5814.075000

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	0.2	PASS

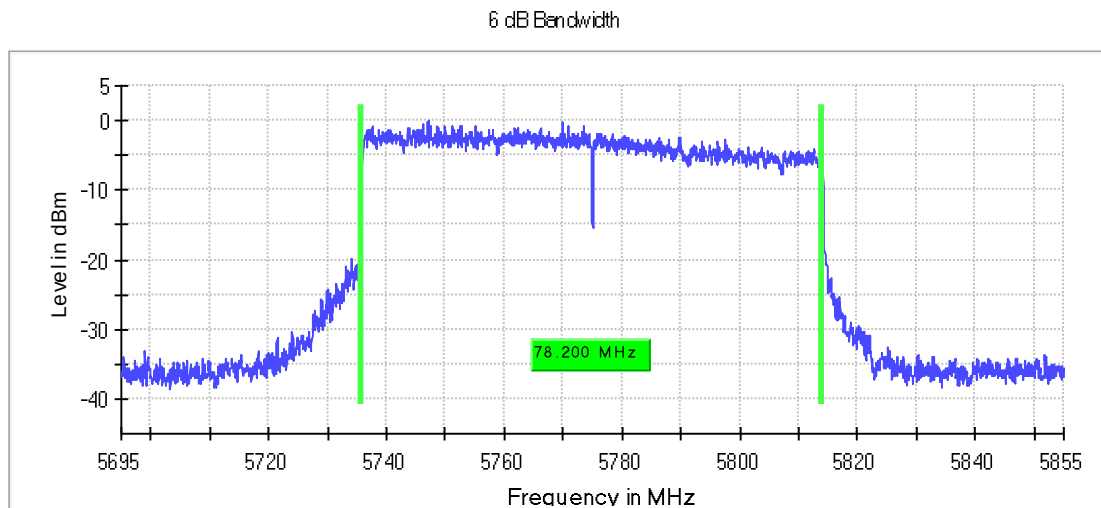

Bandwidth

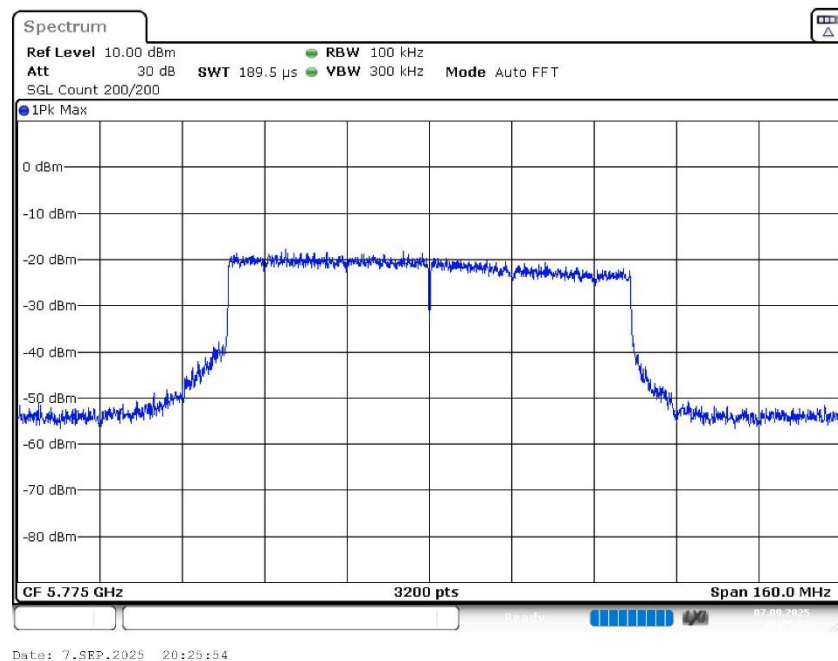

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	3200	~ 3200
Sweptime	189.453 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm

Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off


Occupied Channel Bandwidth 99% (5775 MHz; 24.000 dBm; 80 MHz)

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	79.000000	---	---	5735.500000	5814.500000

DUT Frequency (MHz)	Result
5775.000000	PASS

99 % Bandwidth

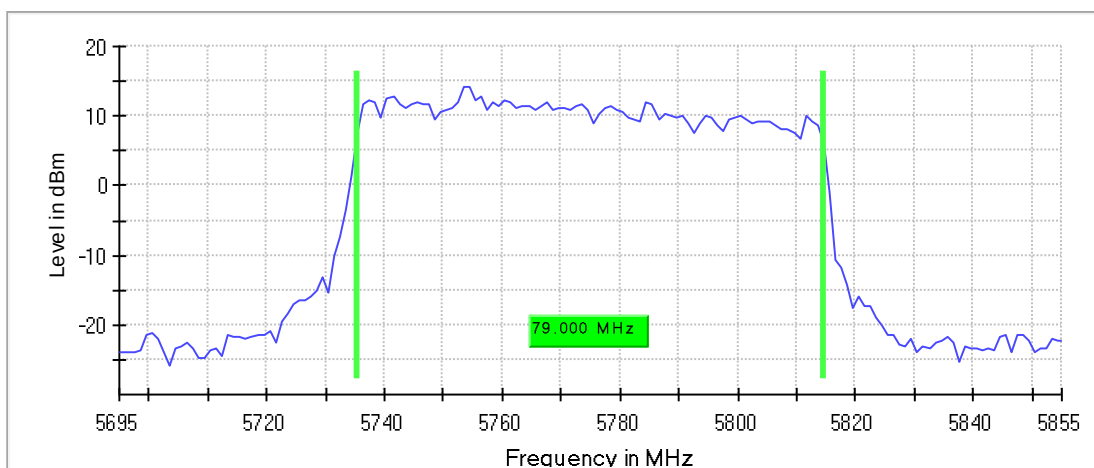

Bandwidth

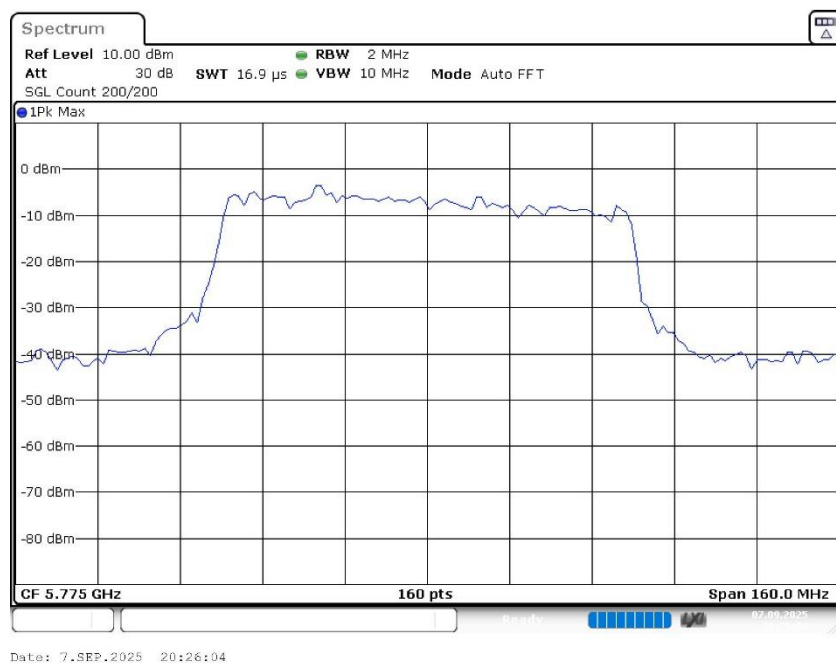

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	2.000 MHz	>= 2.000 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	160	~ 160
SweepTime	16.875 μs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5775 MHz; 24.000 dBm; 80 MHz)

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5649.250000	-27.5	0.5	-27.0
5649.750000	-27.6	0.6	-27.0
5648.750000	-28.1	1.1	-27.0
5647.250000	-28.5	1.5	-27.0
5646.750000	-28.6	1.6	-27.0
5653.250000	-26.6	2.0	-24.6
5650.250000	-28.9	2.1	-26.8
5653.750000	-26.3	2.1	-24.2
5647.750000	-29.2	2.2	-27.0
5650.750000	-28.8	2.3	-26.4
5644.250000	-29.4	2.4	-27.0
5648.250000	-29.6	2.6	-27.0
5643.750000	-29.6	2.6	-27.0
5645.250000	-30.0	3.0	-27.0
5646.250000	-30.1	3.1	-27.0

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
5470.000000	6100.000000	2	2

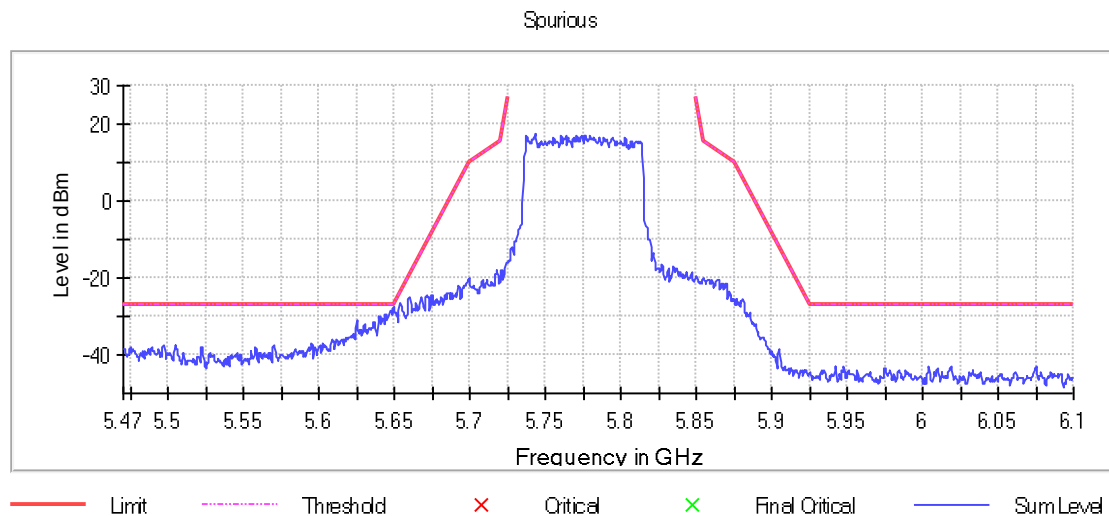

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	1260	~ 1260
SweepTime	85.781 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	20.000 dB	20.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

-- End of Report--