






Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	0.91	<=30	Pass
NVNT	1-DH5	2441	0.53	<=30	Pass
NVNT	1-DH5	2480	0.44	<=30	Pass
NVNT	2-DH5	2402	0.92	<=21	Pass
NVNT	2-DH5	2441	0.33	<=21	Pass
NVNT	2-DH5	2480	0.4	<=21	Pass
NVNT	3-DH5	2402	1.16	<=21	Pass
NVNT	3-DH5	2441	0.6	<=21	Pass
NVNT	3-DH5	2480	0.67	<=21	Pass



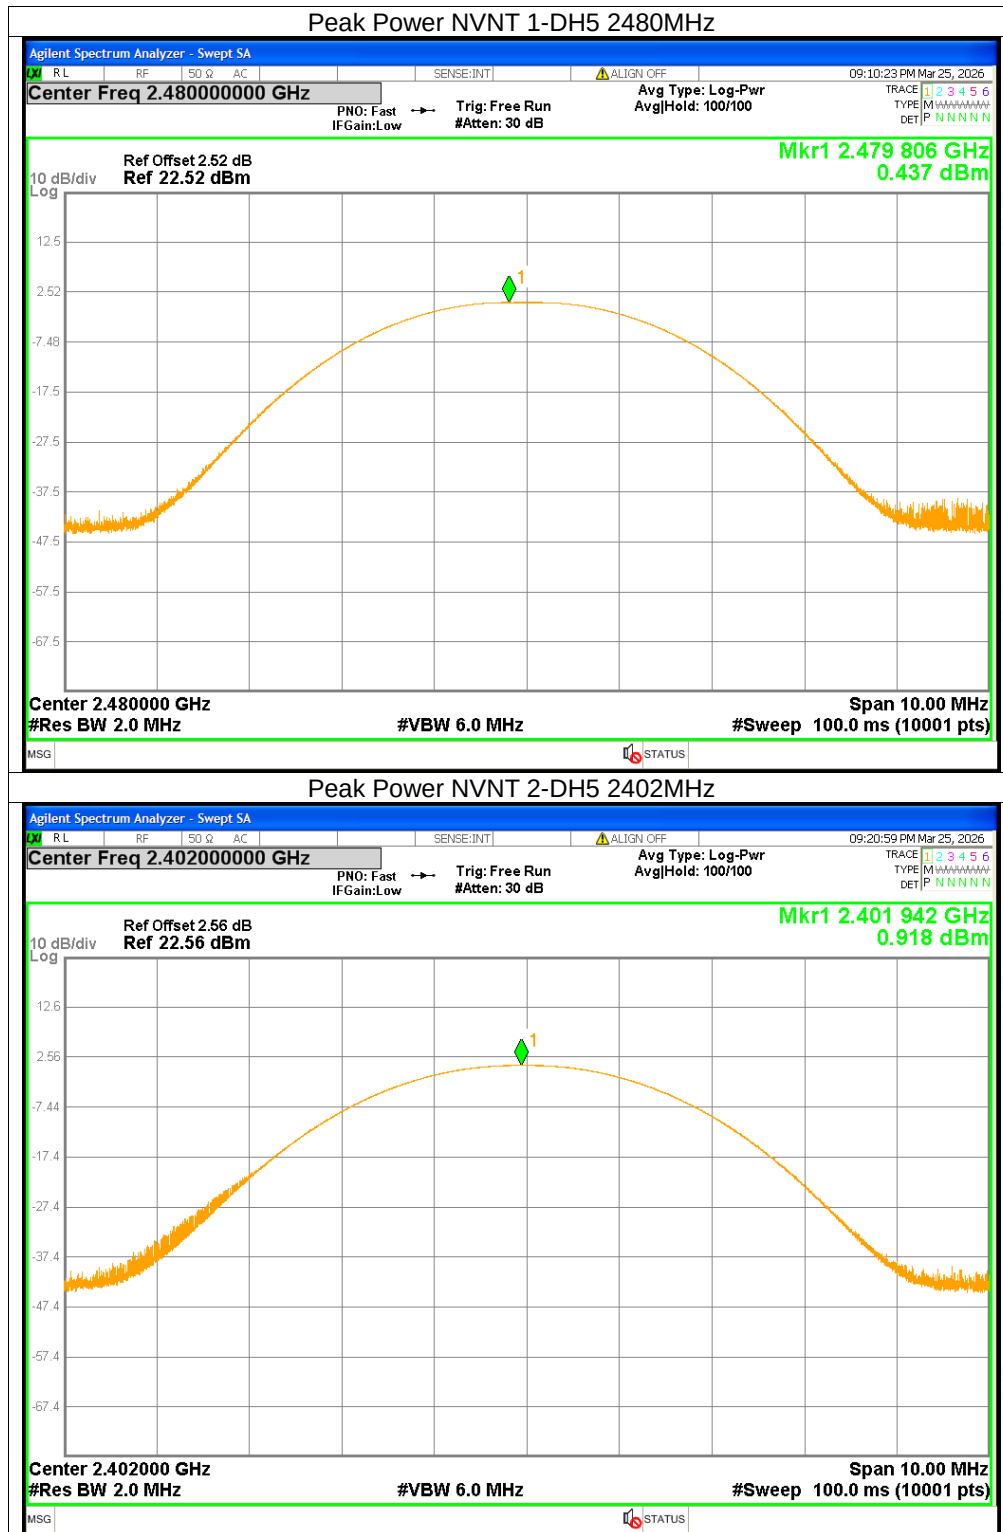

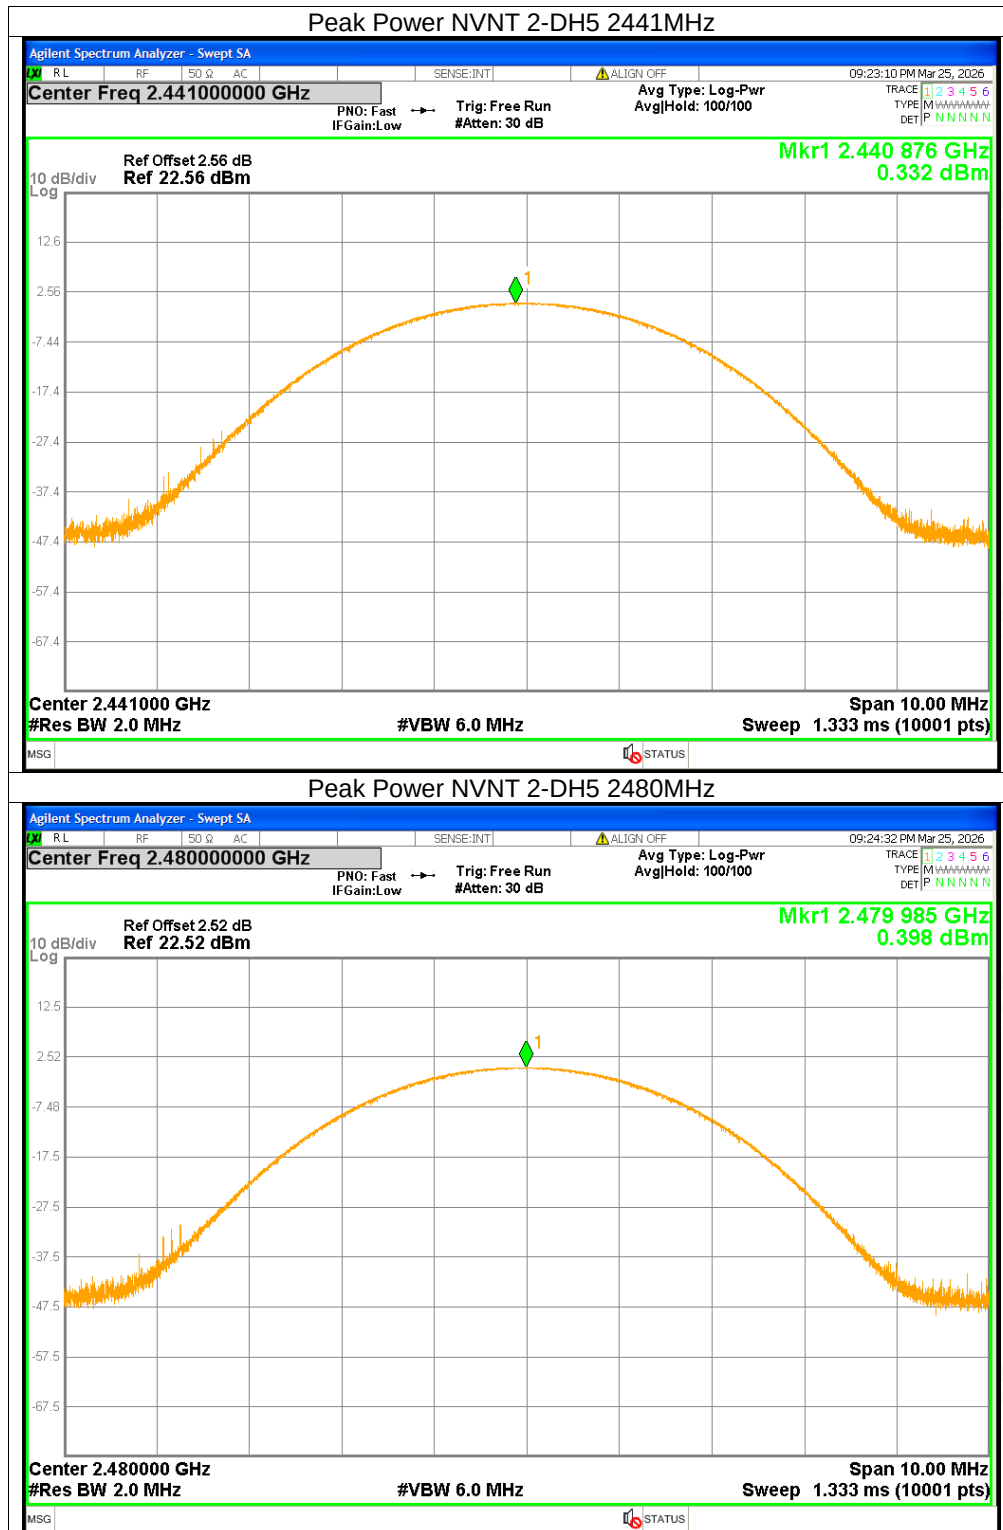


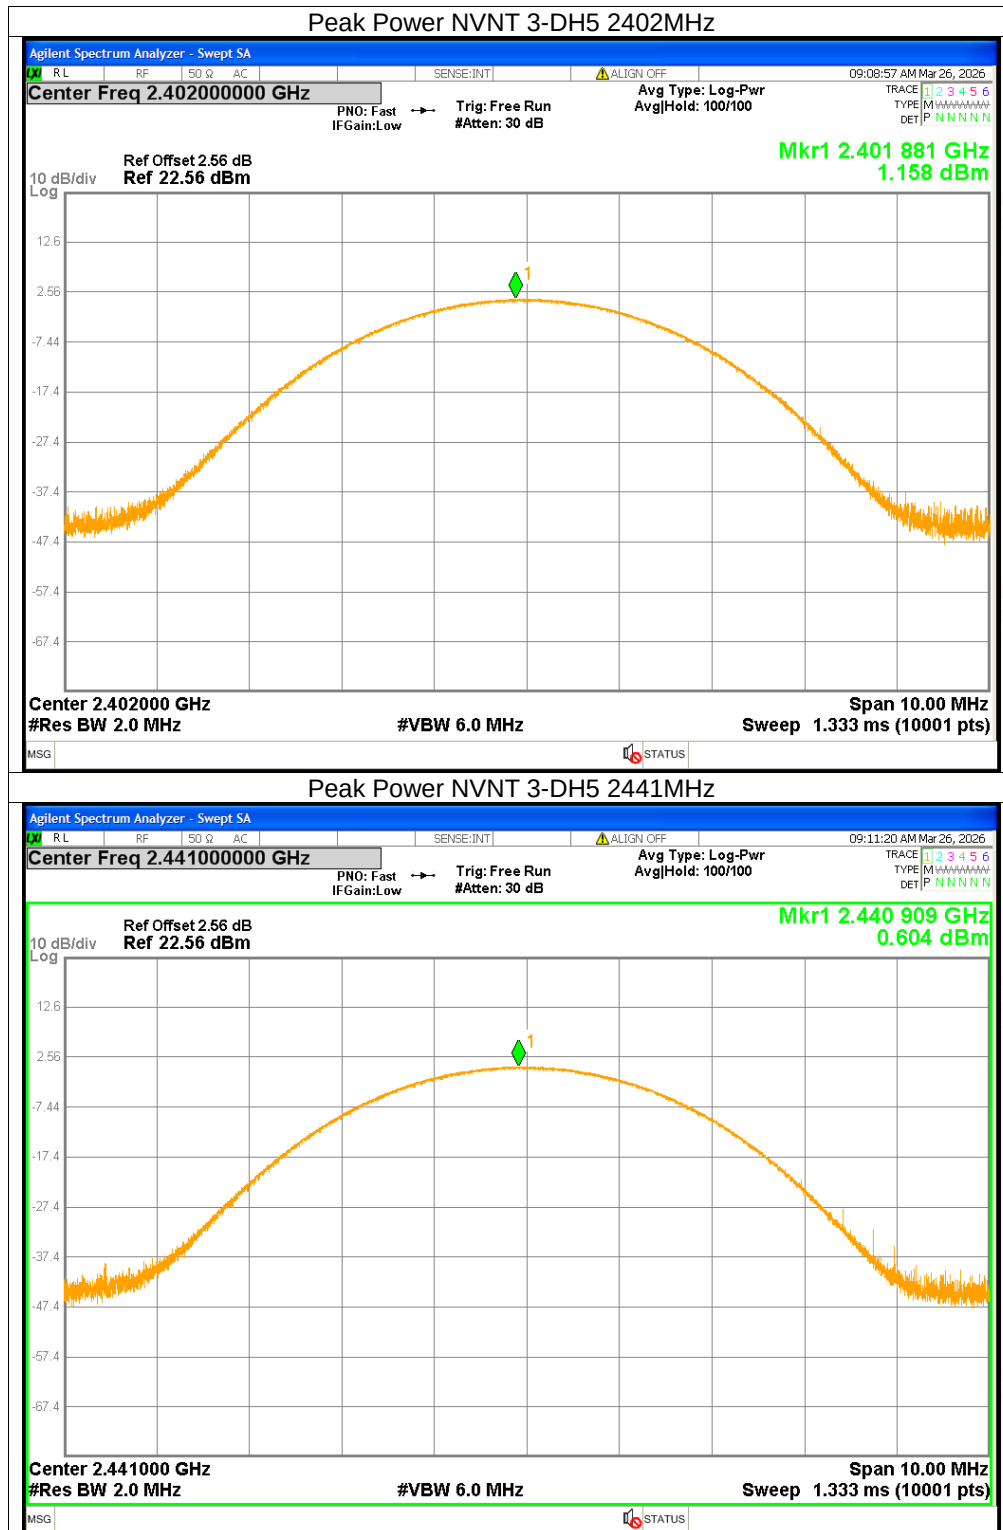


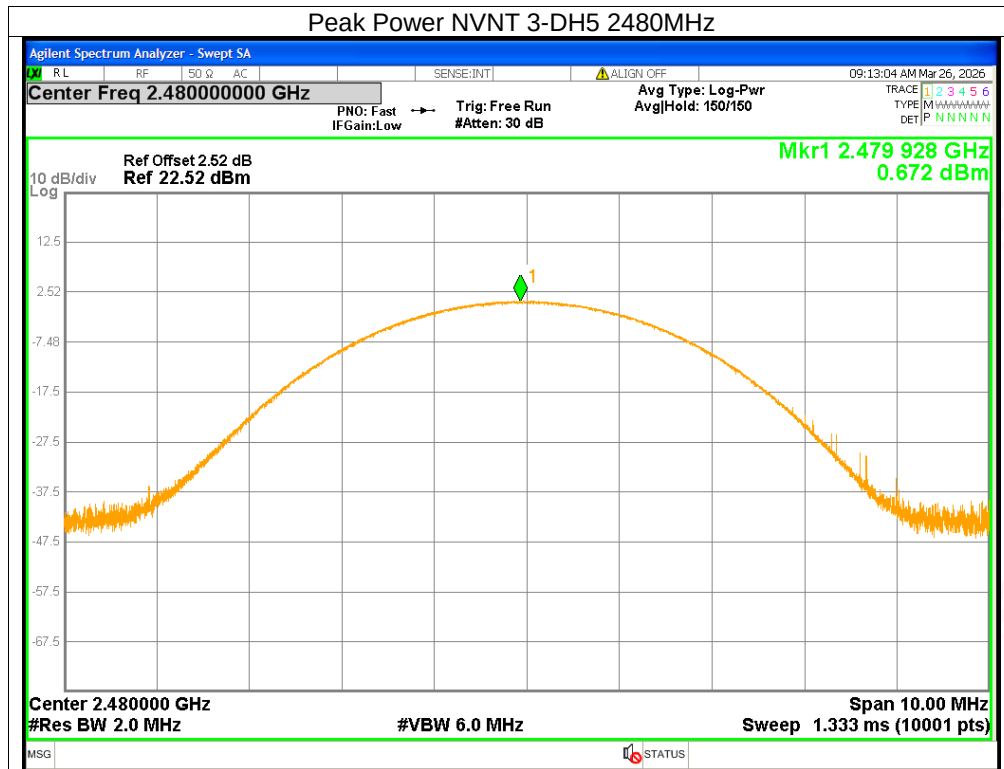



**-20dB Bandwidth**


Condition	Mode	Frequency (MHz)	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	0.9478	Pass
NVNT	1-DH5	2441	0.9574	Pass
NVNT	1-DH5	2480	0.9515	Pass
NVNT	2-DH5	2402	1.488	Pass
NVNT	2-DH5	2441	1.49	Pass
NVNT	2-DH5	2480	1.532	Pass
NVNT	3-DH5	2402	1.484	Pass
NVNT	3-DH5	2441	1.482	Pass
NVNT	3-DH5	2480	1.485	Pass

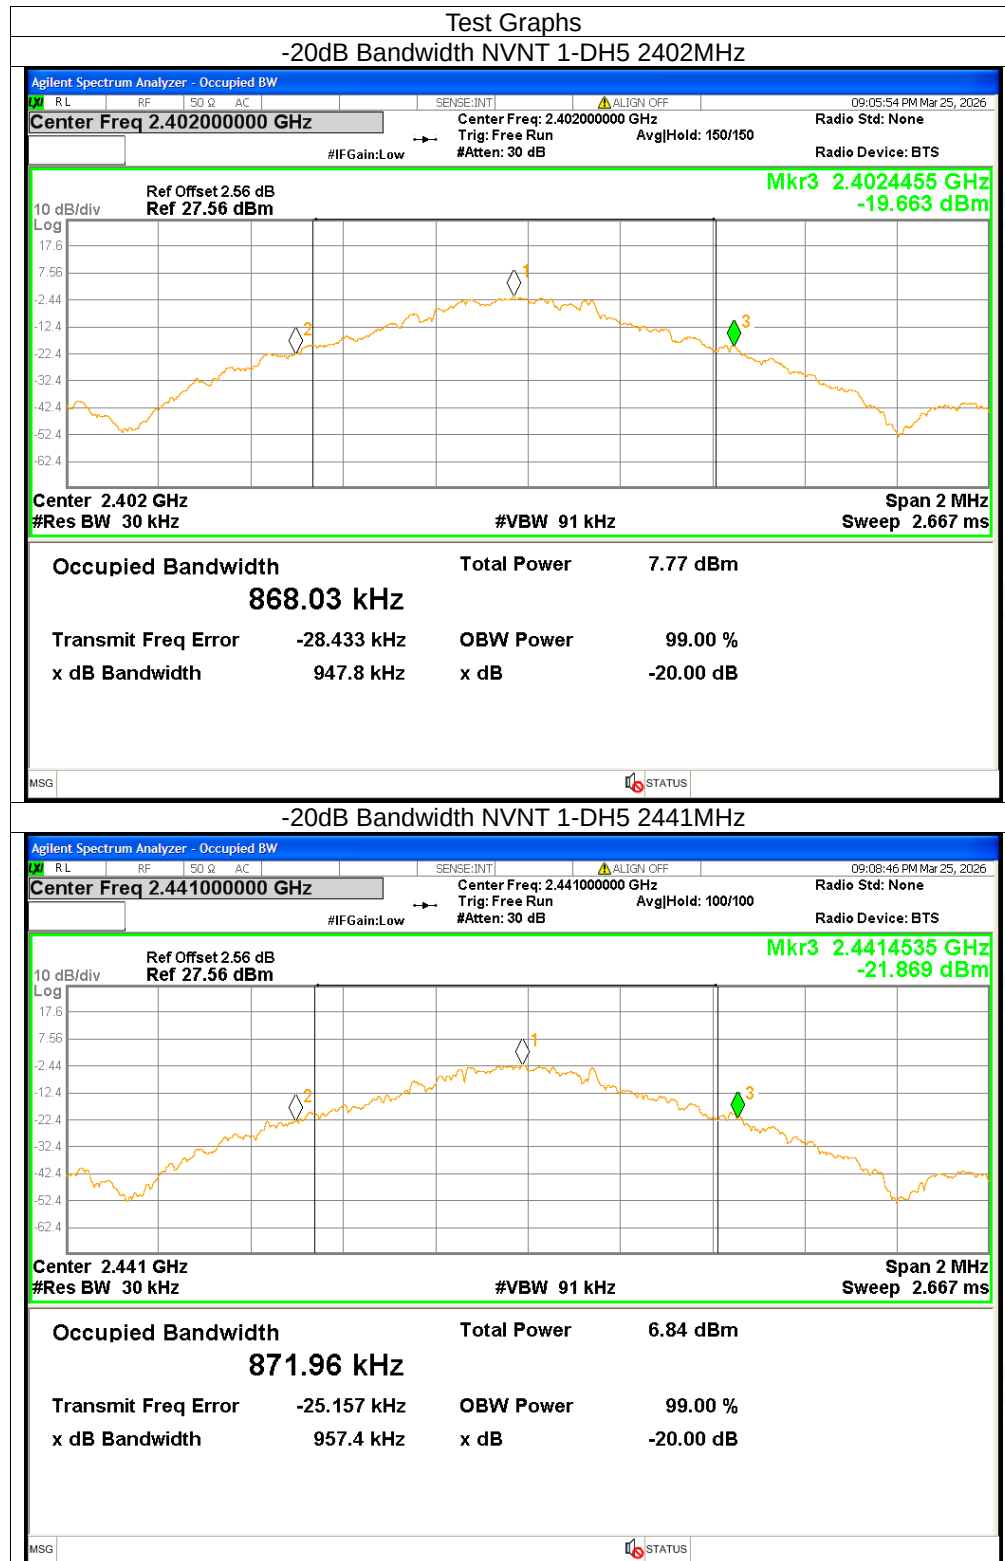

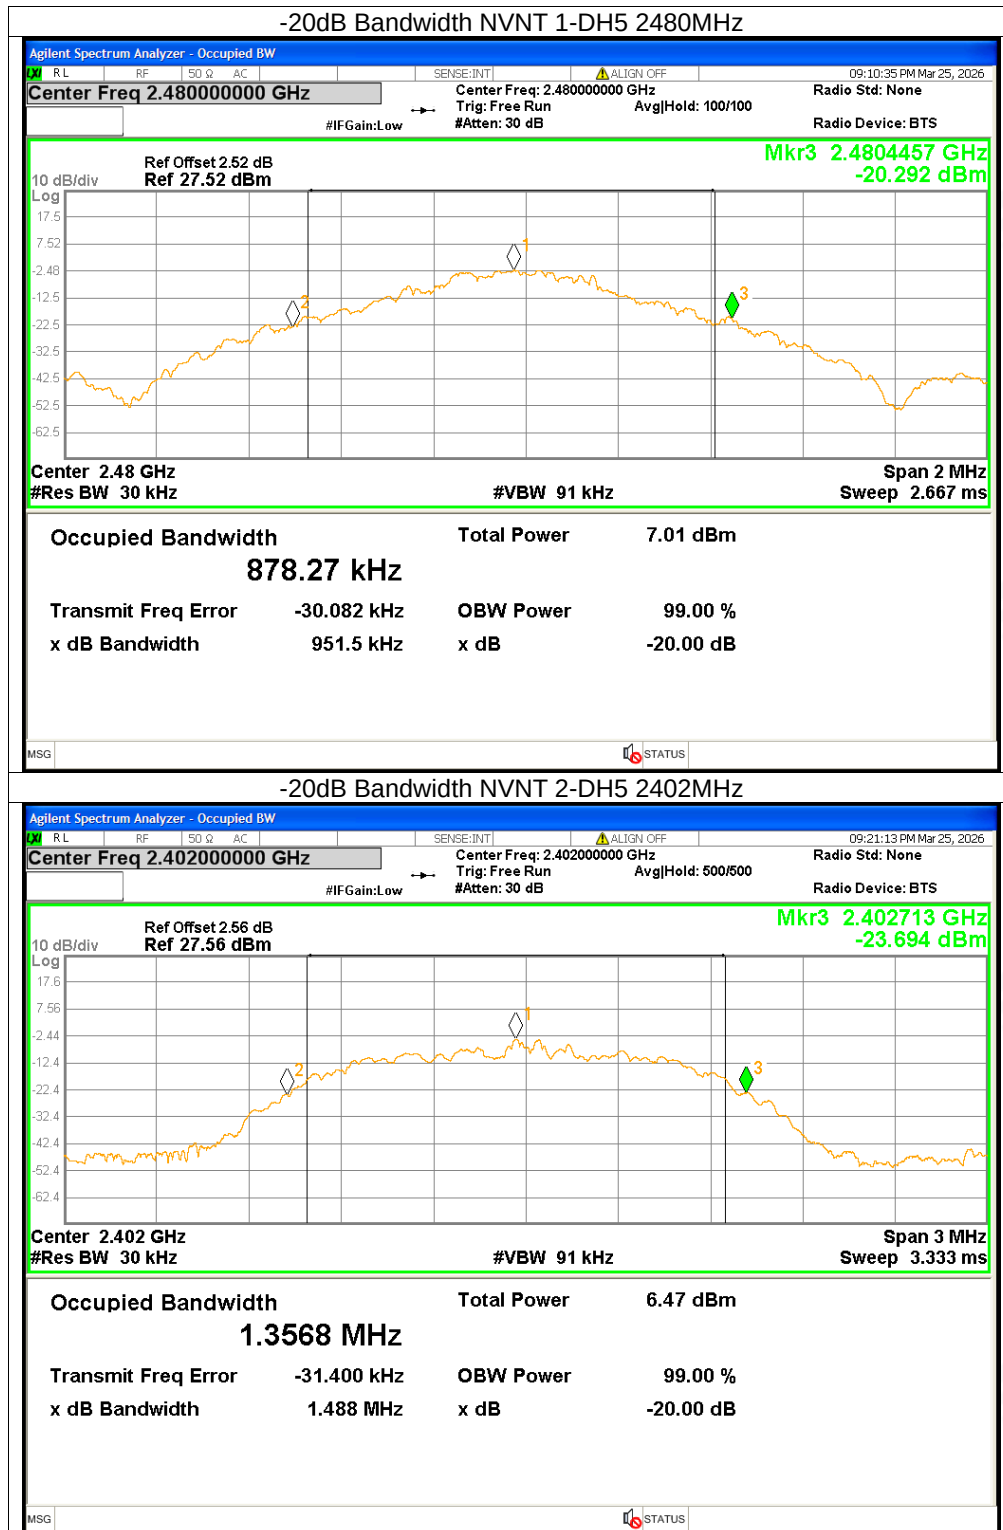

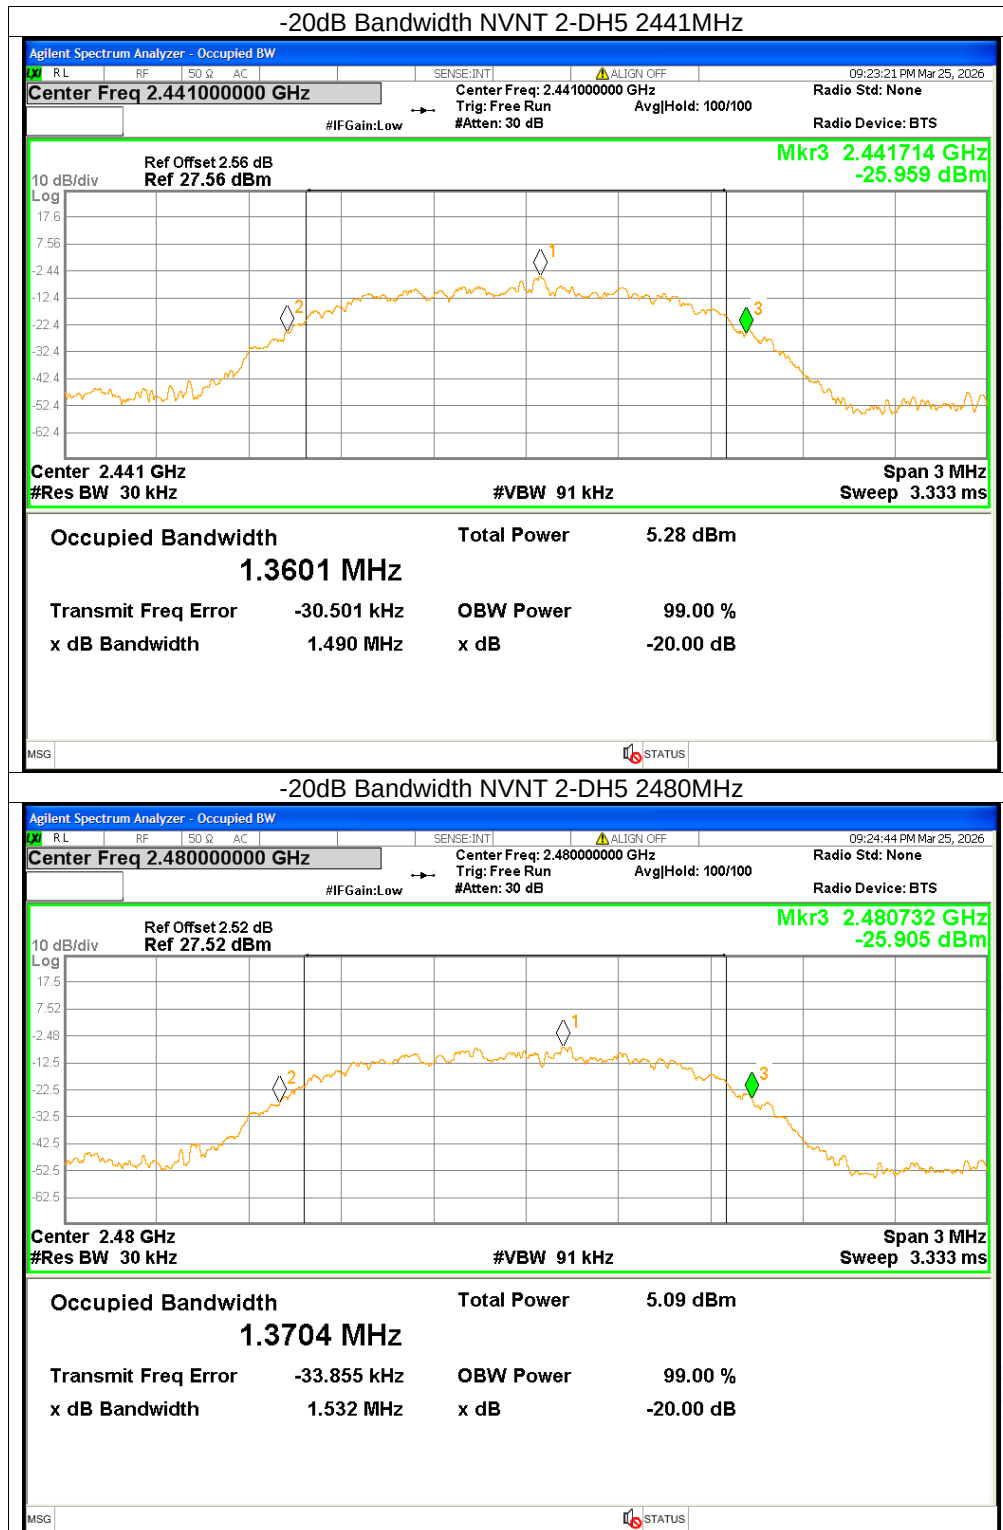

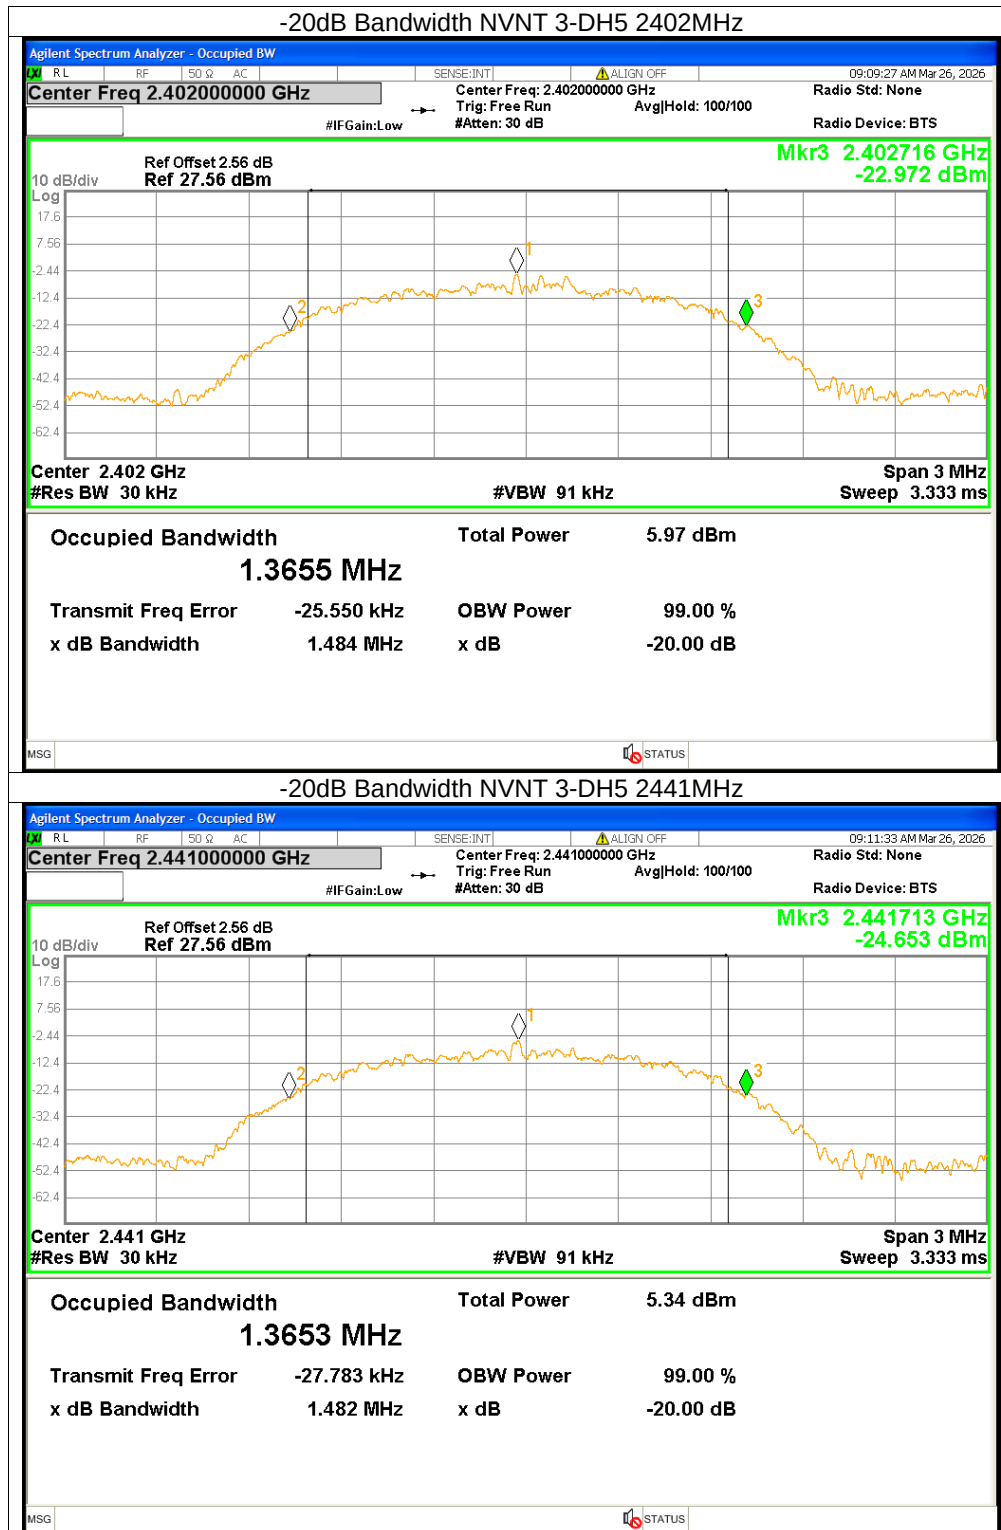


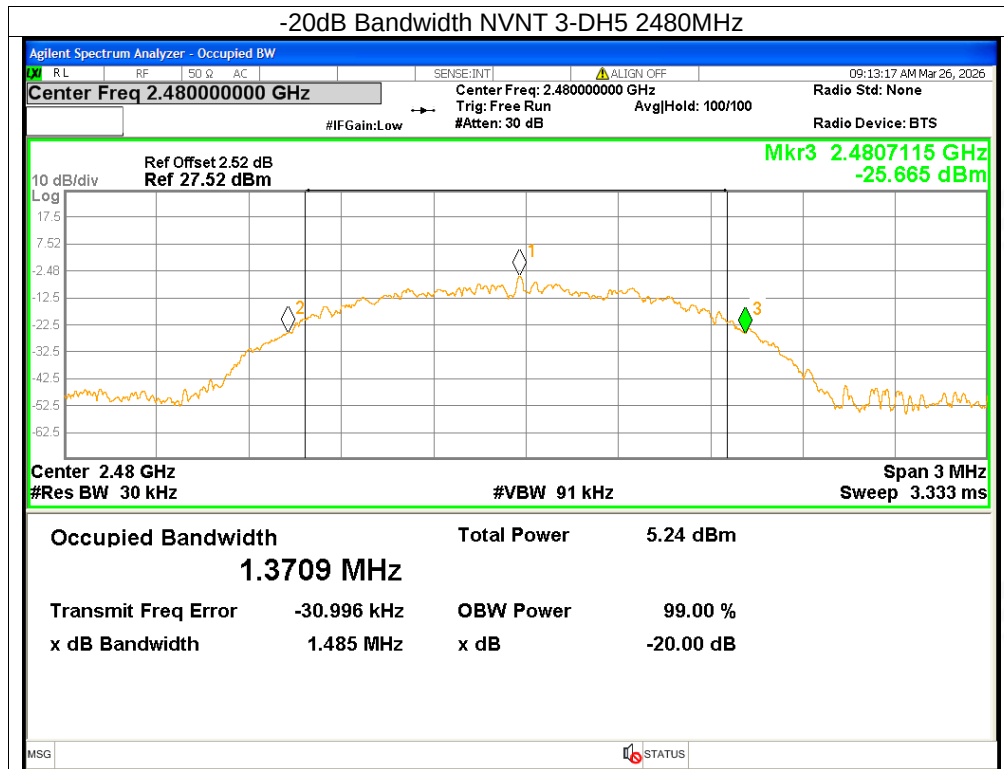






Carrier Frequencies Separation


Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	2401.801	2403.103	1.302	≥ 0.9478	Pass
NVNT	1-DH5	2440.792	2441.827	1.035	≥ 0.9574	Pass
NVNT	1-DH5	2478.798	2479.833	1.035	≥ 0.9515	Pass
NVNT	2-DH5	2401.828	2402.842	1.014	≥ 0.992	Pass
NVNT	2-DH5	2440.801	2442.088	1.287	≥ 0.993	Pass
NVNT	2-DH5	2478.801	2480.046	1.245	≥ 1.021	Pass
NVNT	3-DH5	2401.807	2403.082	1.275	≥ 0.989	Pass
NVNT	3-DH5	2440.828	2441.83	1.002	≥ 0.988	Pass
NVNT	3-DH5	2478.945	2480.097	1.152	≥ 0.99	Pass

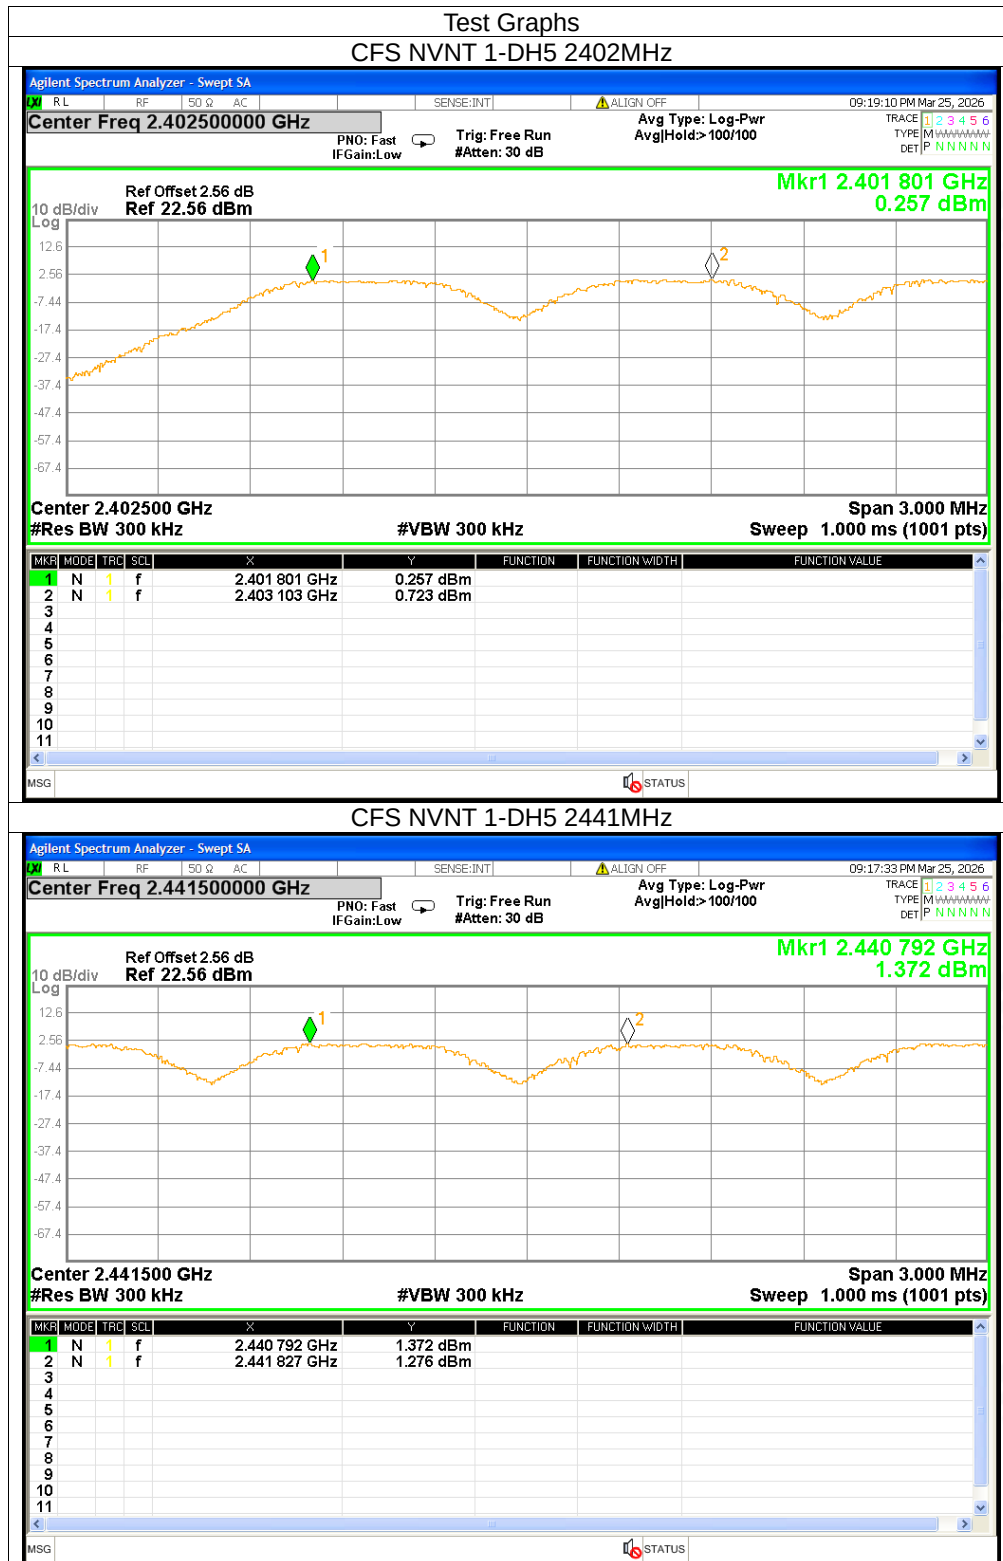

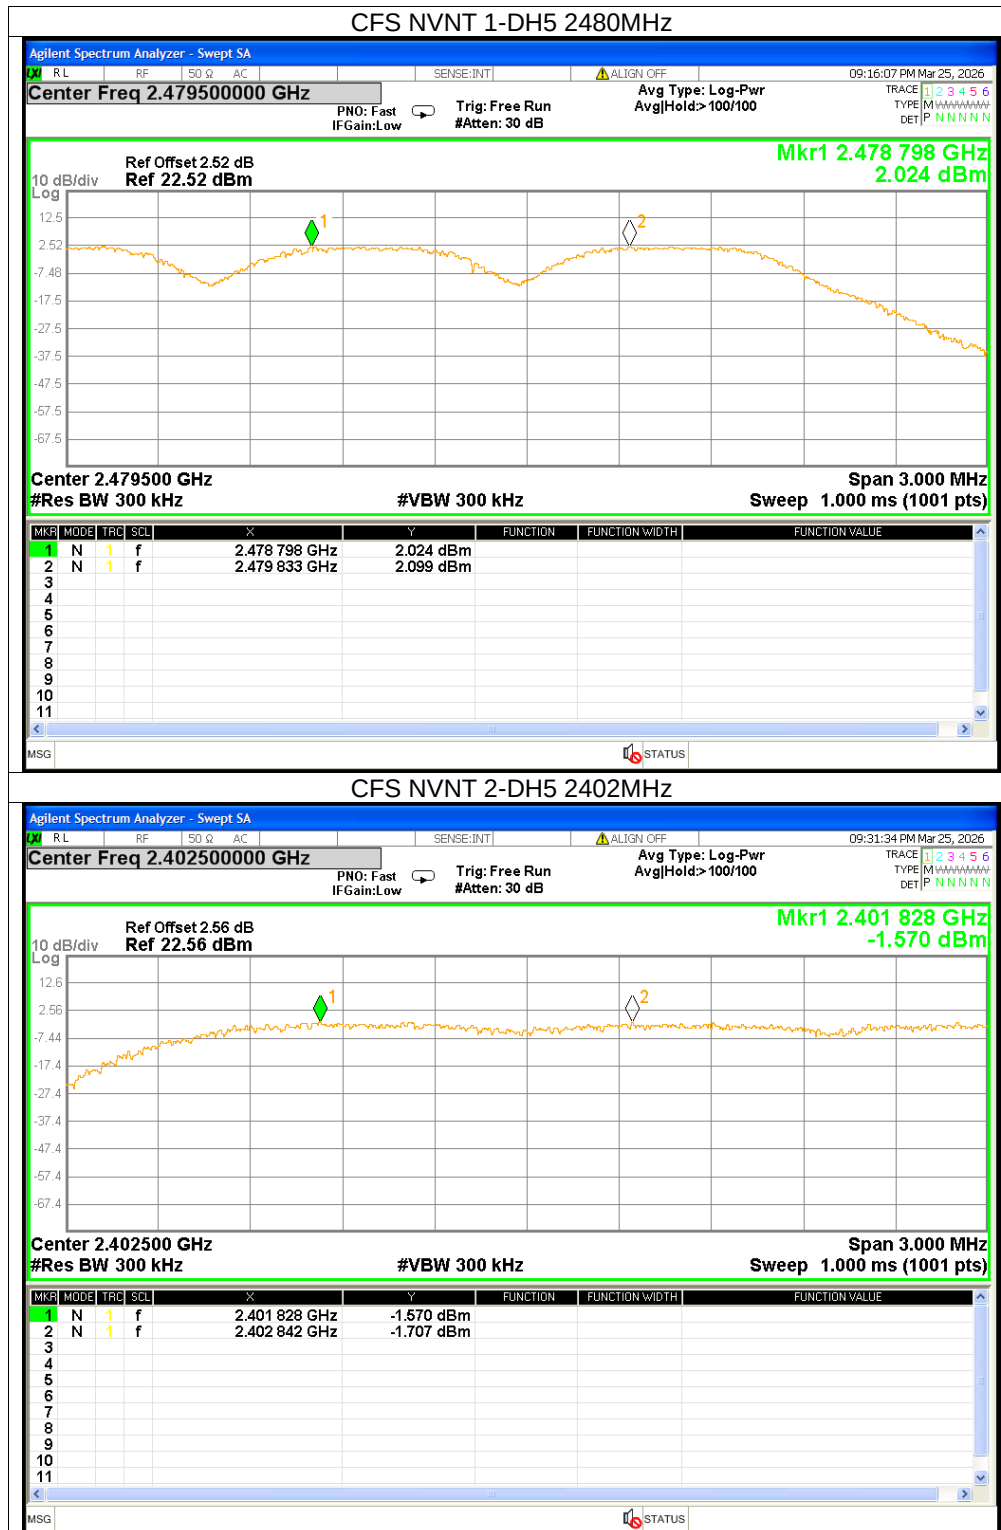

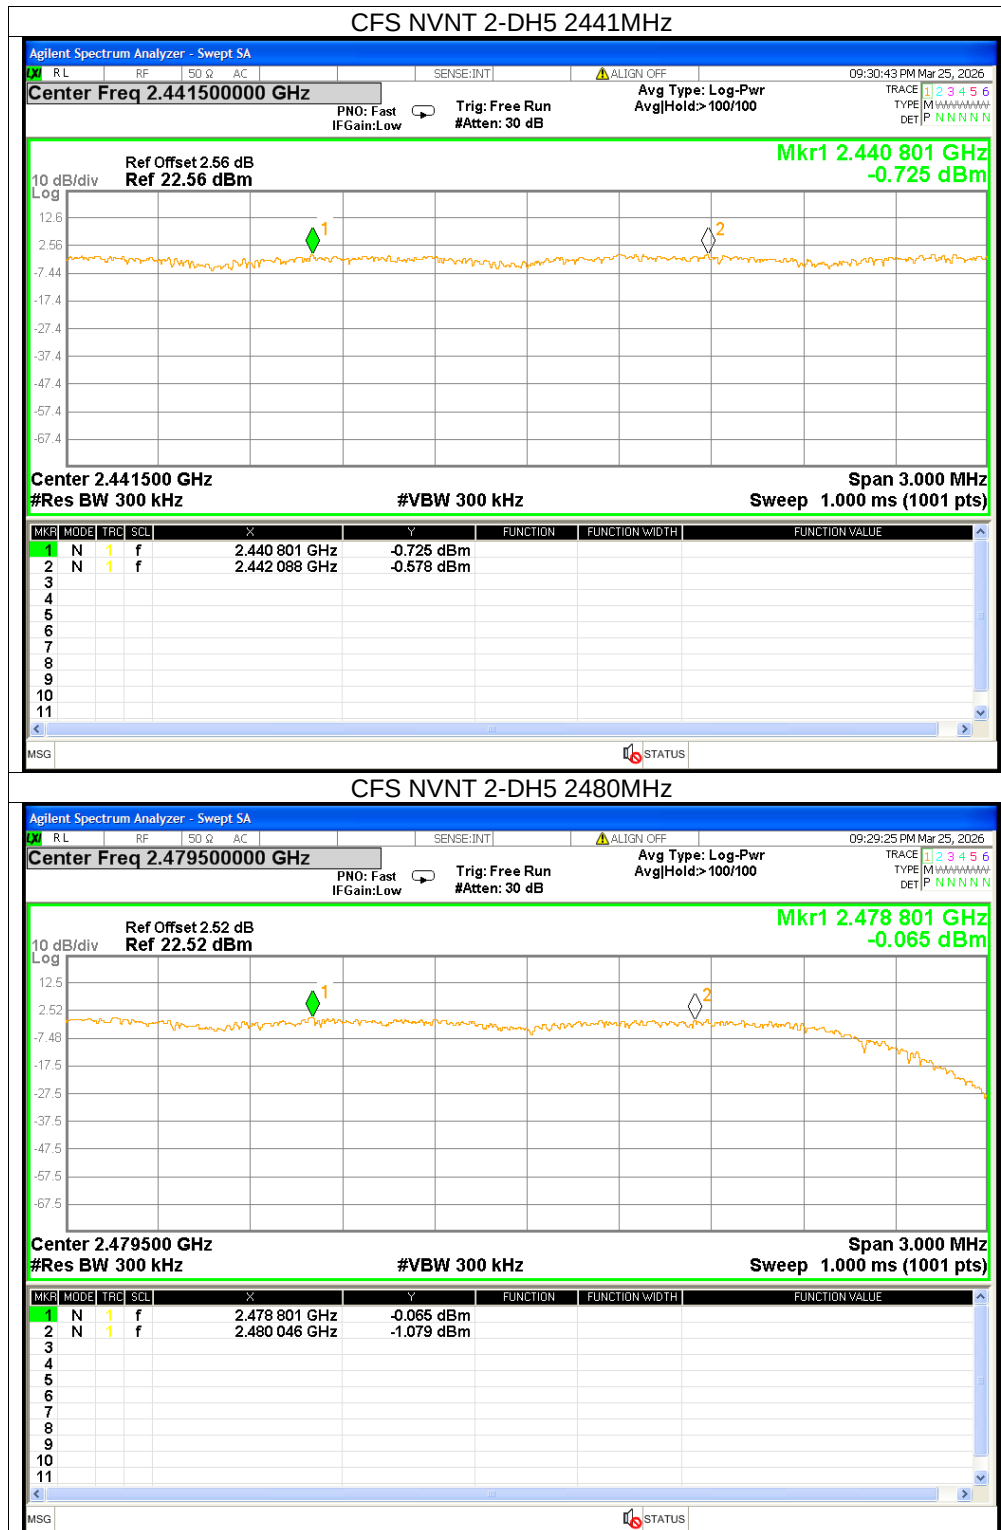

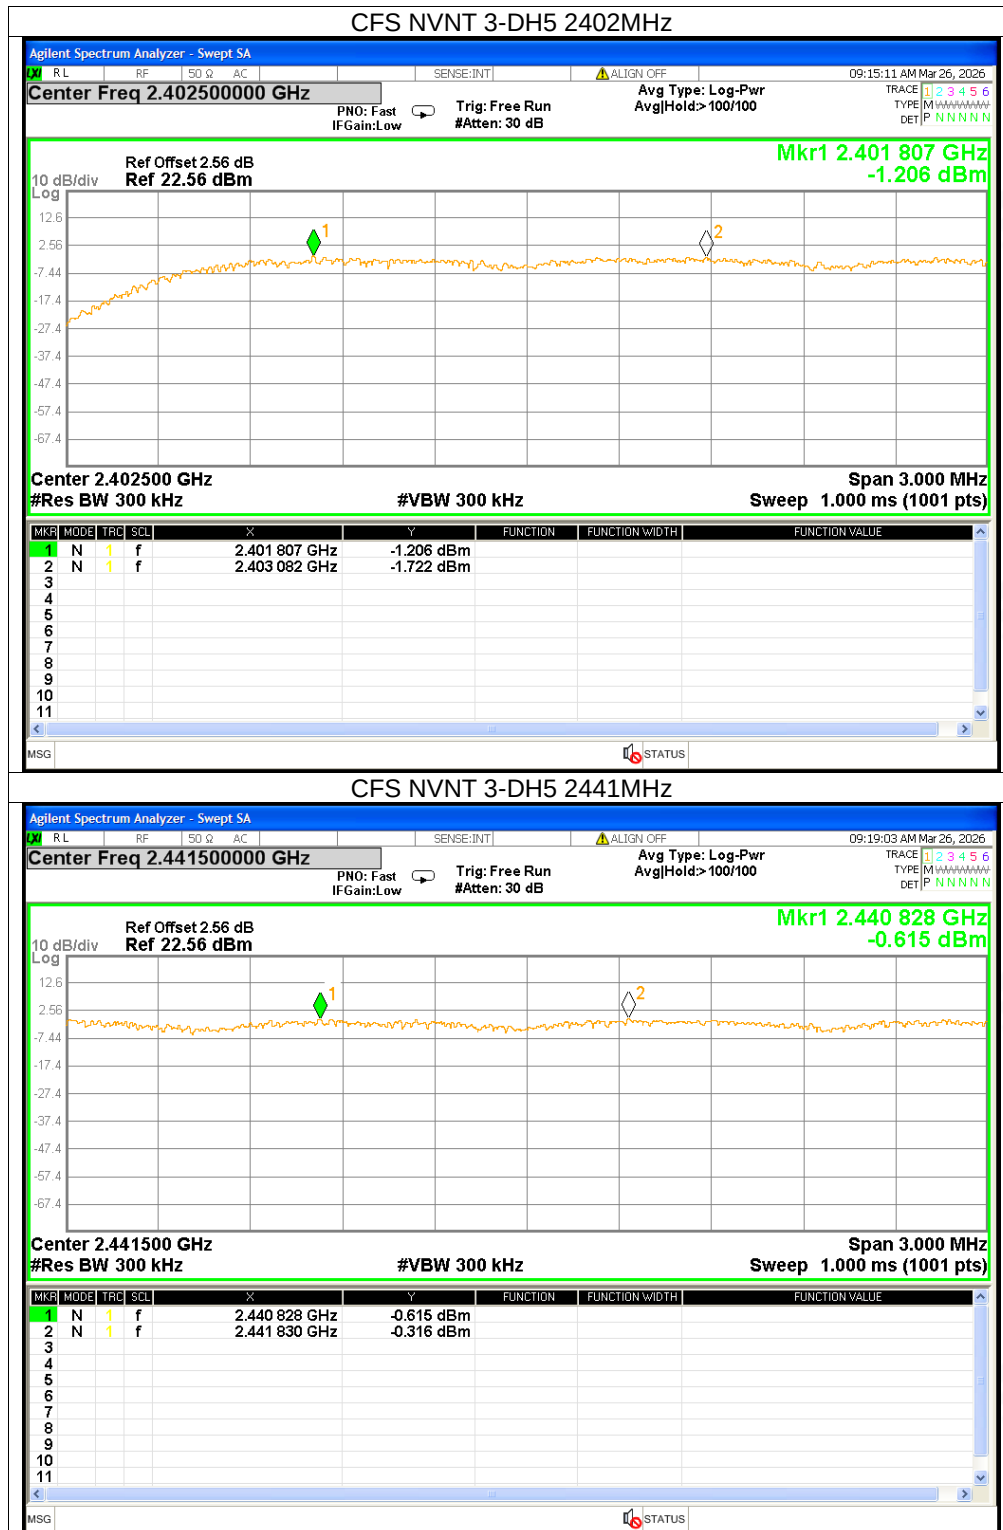


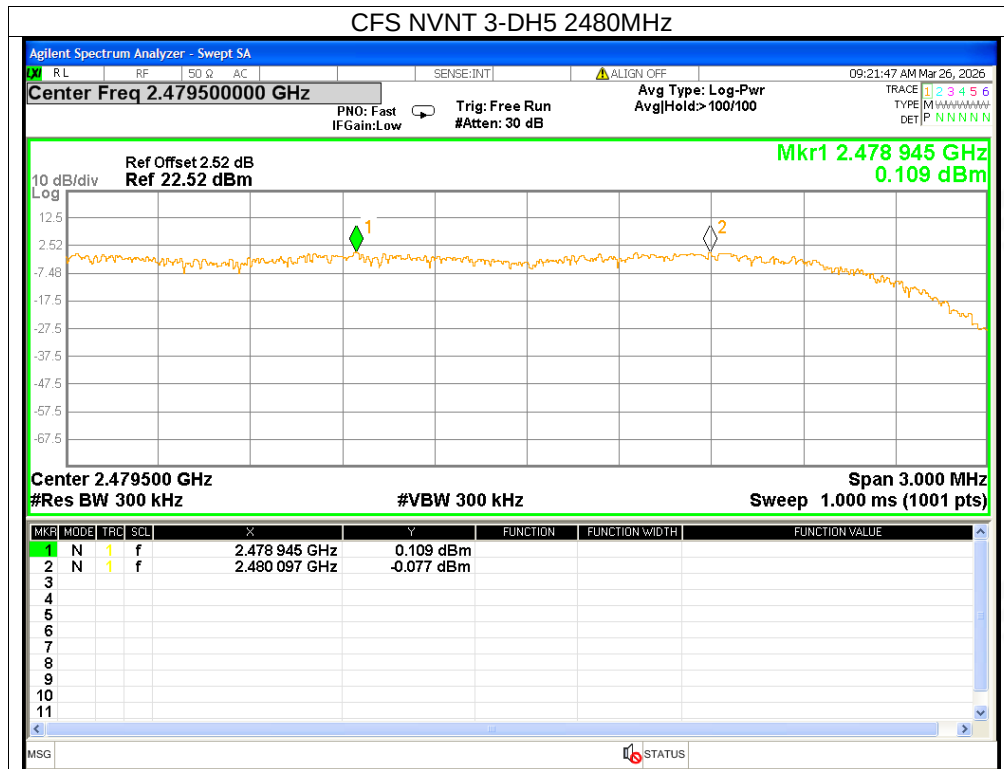




Number of Hopping Channel

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH5	79	≥ 15	Pass
NVNT	2-DH5	79	≥ 15	Pass
NVNT	3-DH5	79	≥ 15	Pass

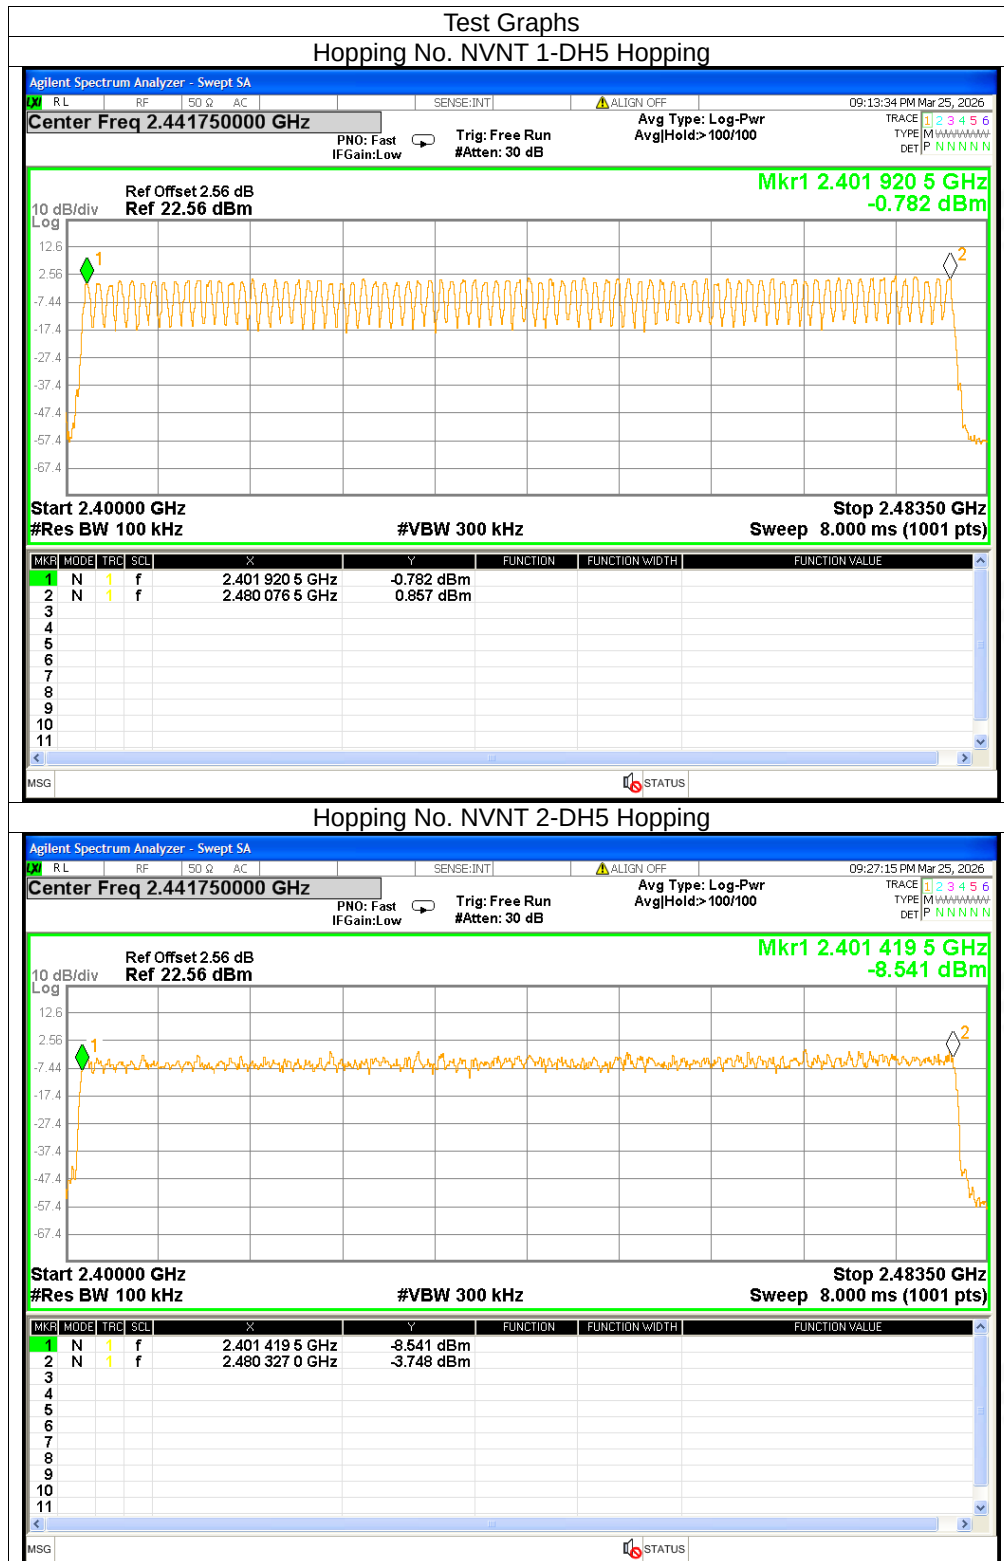

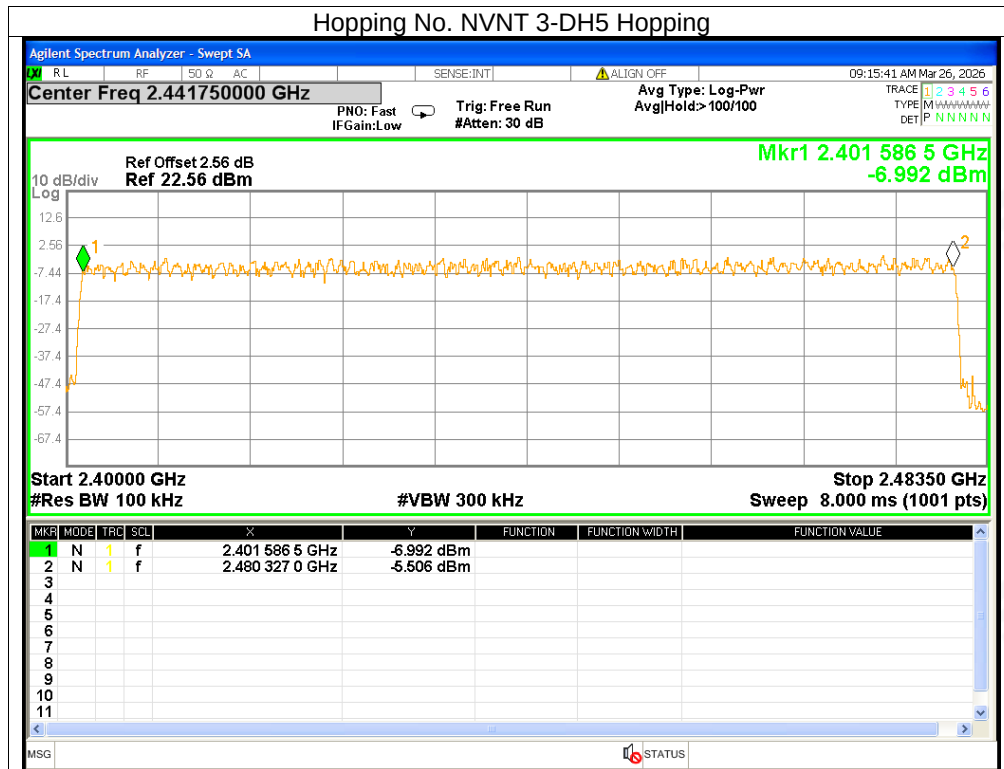






Band Edge


Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	No-Hopping	-55.28	≤ -20	Pass
NVNT	1-DH5	2480	No-Hopping	-41.52	≤ -20	Pass
NVNT	2-DH5	2402	No-Hopping	-53.82	≤ -20	Pass
NVNT	2-DH5	2480	No-Hopping	-46.32	≤ -20	Pass
NVNT	3-DH5	2402	No-Hopping	-55	≤ -20	Pass
NVNT	3-DH5	2480	No-Hopping	-52.81	≤ -20	Pass




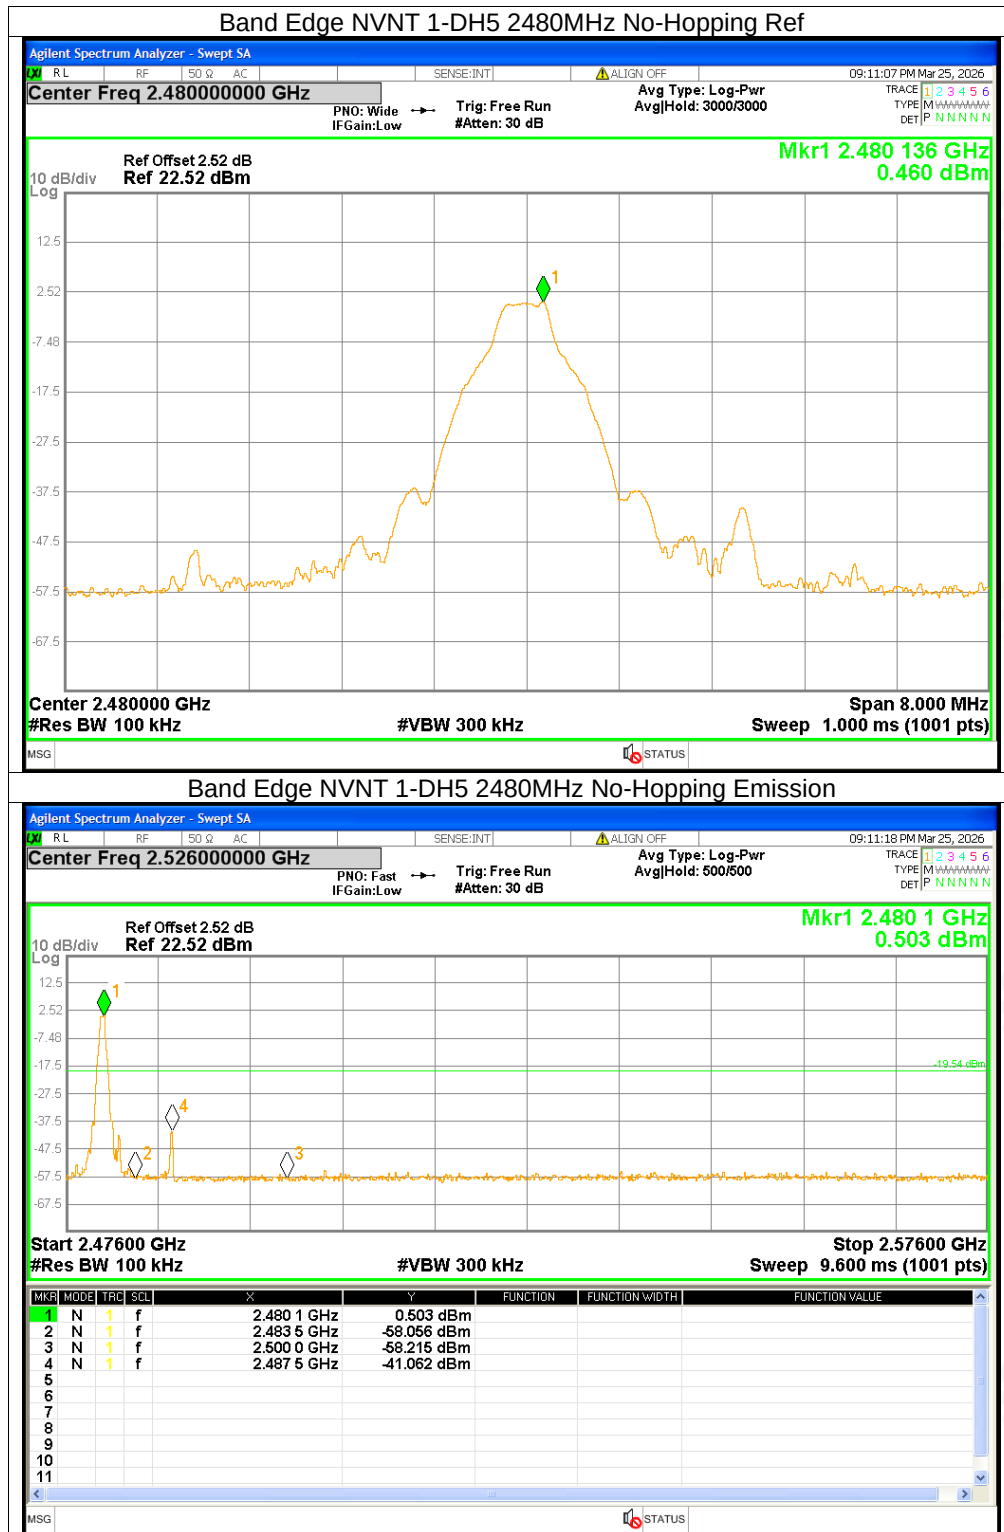

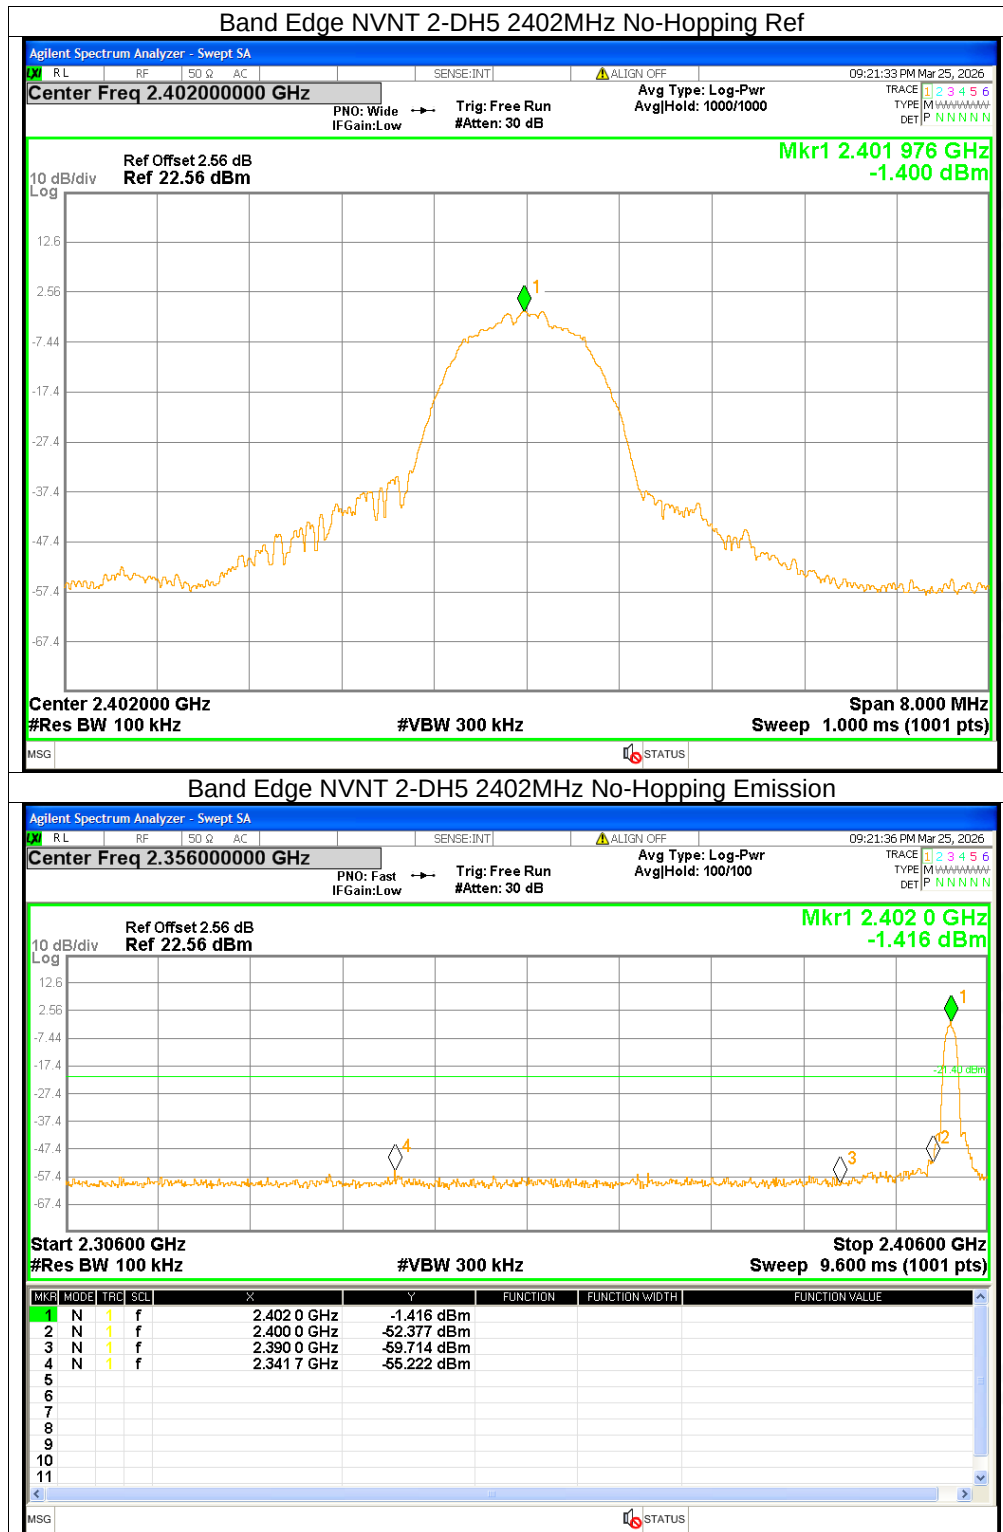

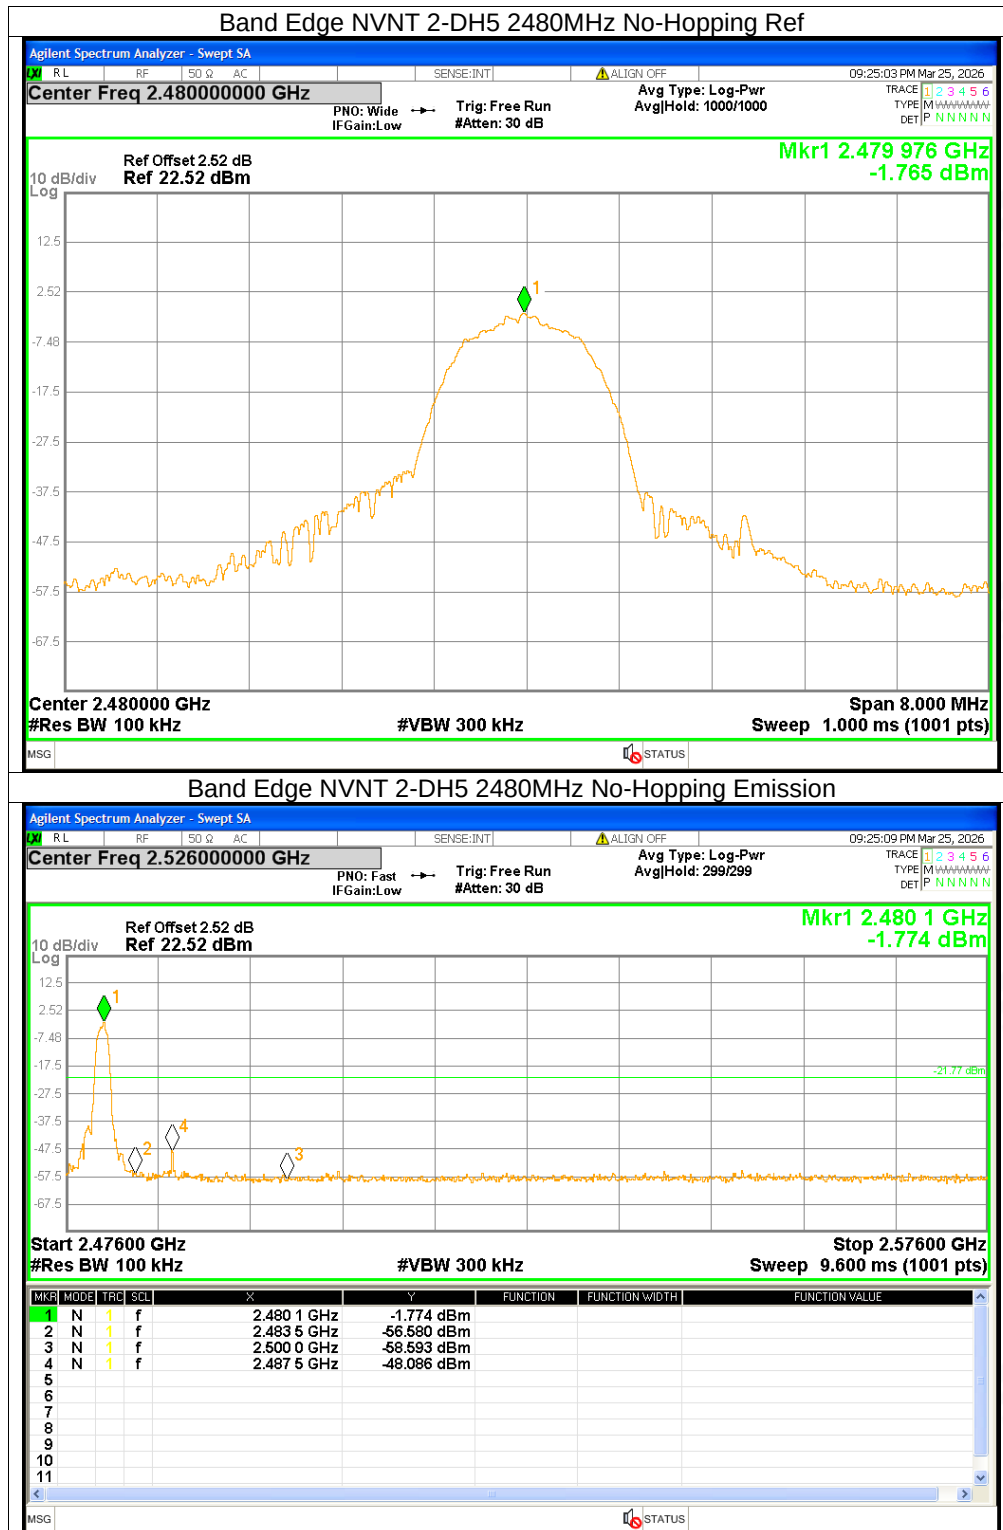

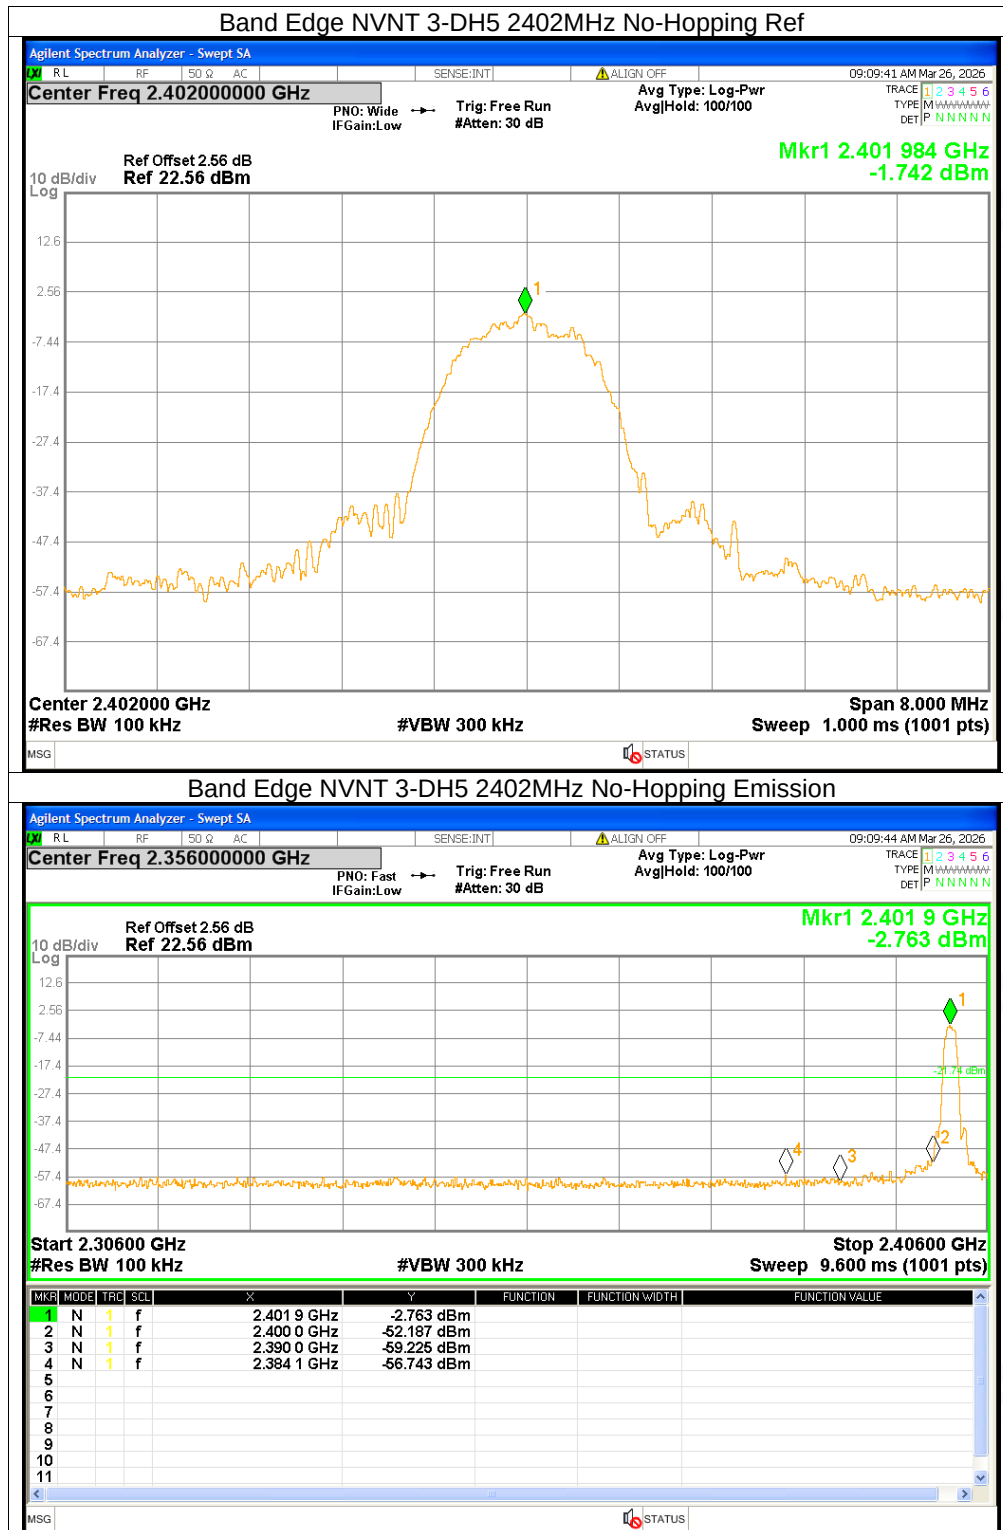

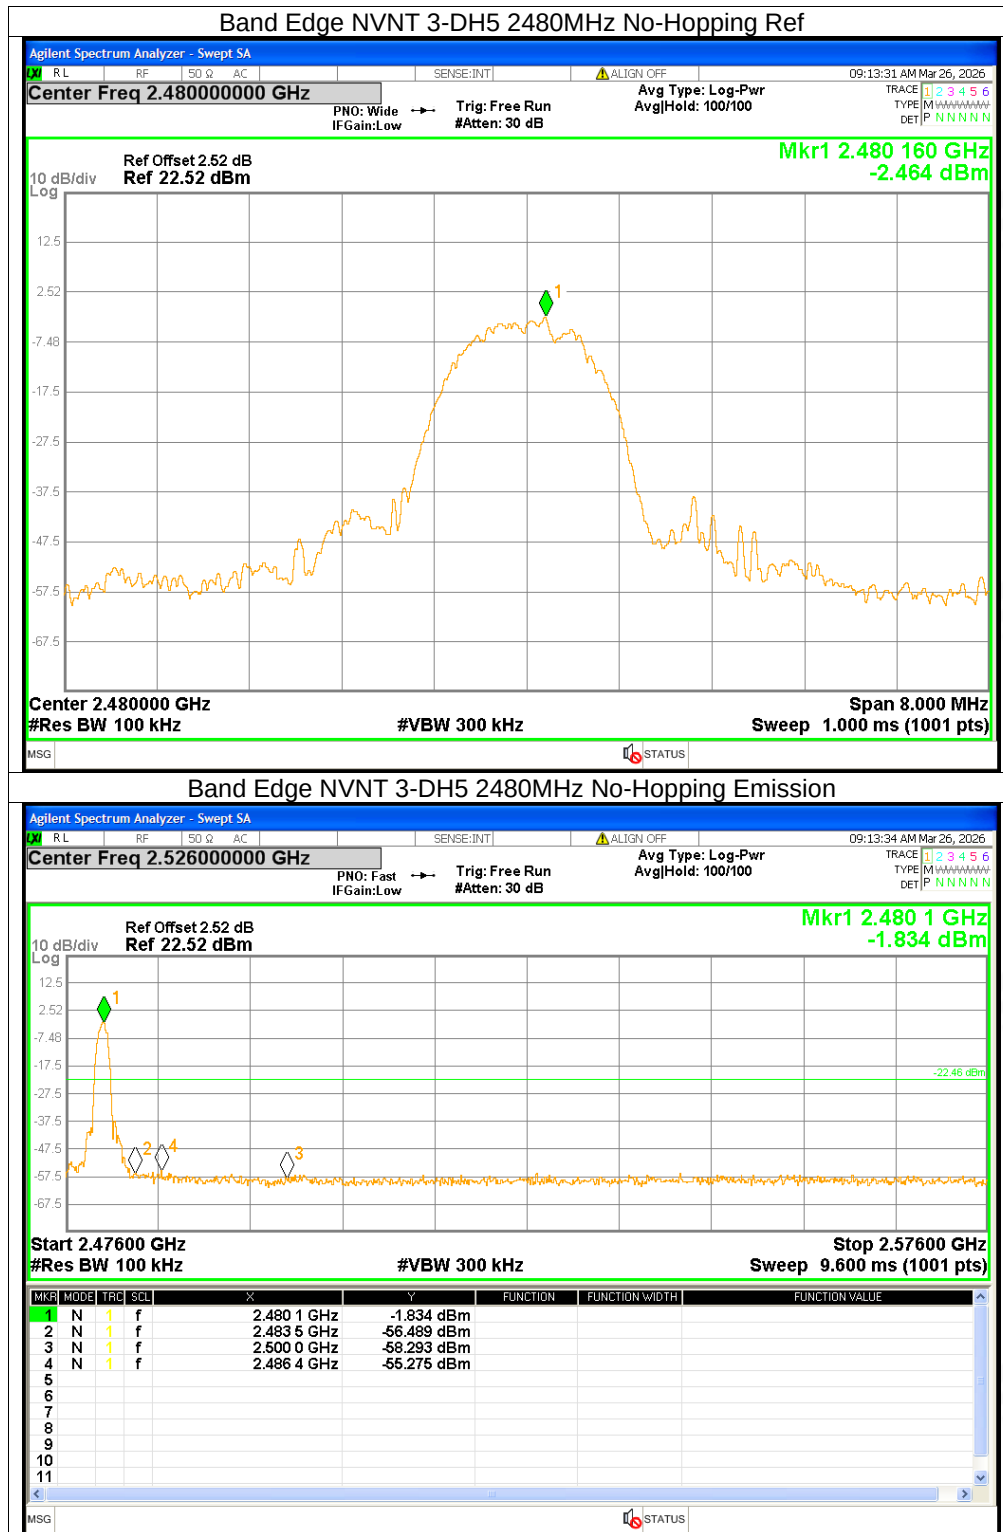




Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Hopping	-54.32	<=-20	Pass
NVNT	1-DH5	2480	Hopping	-57.62	<=-20	Pass
NVNT	2-DH5	2402	Hopping	-52.56	<=-20	Pass
NVNT	2-DH5	2480	Hopping	-48.69	<=-20	Pass
NVNT	3-DH5	2402	Hopping	-54.37	<=-20	Pass
NVNT	3-DH5	2480	Hopping	-51.27	<=-20	Pass






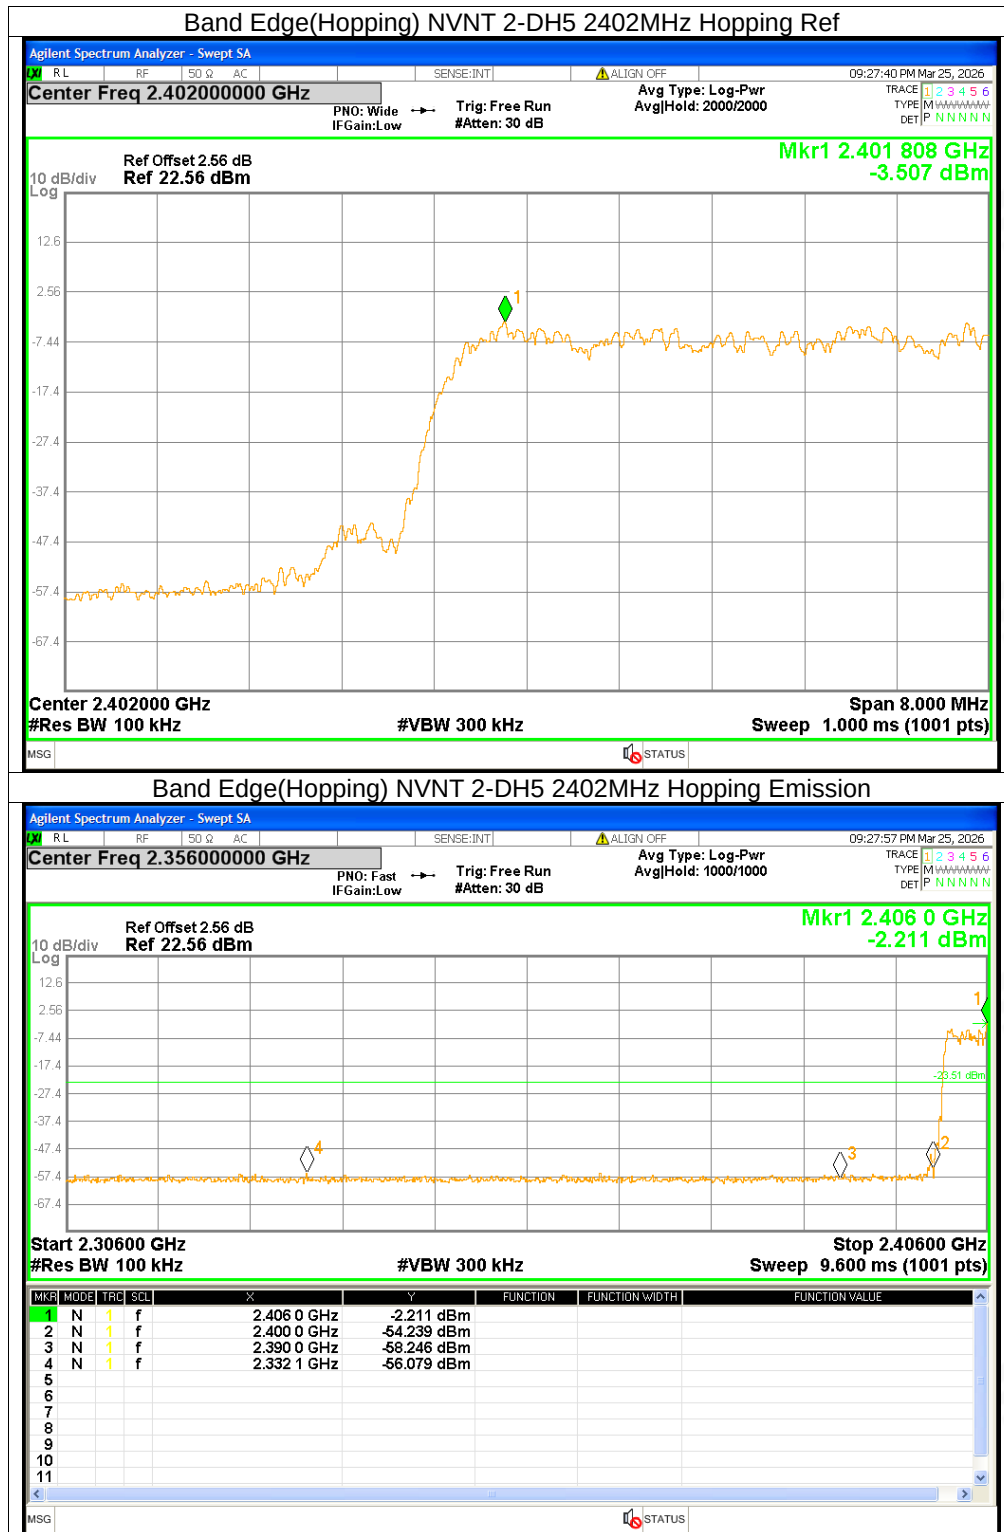



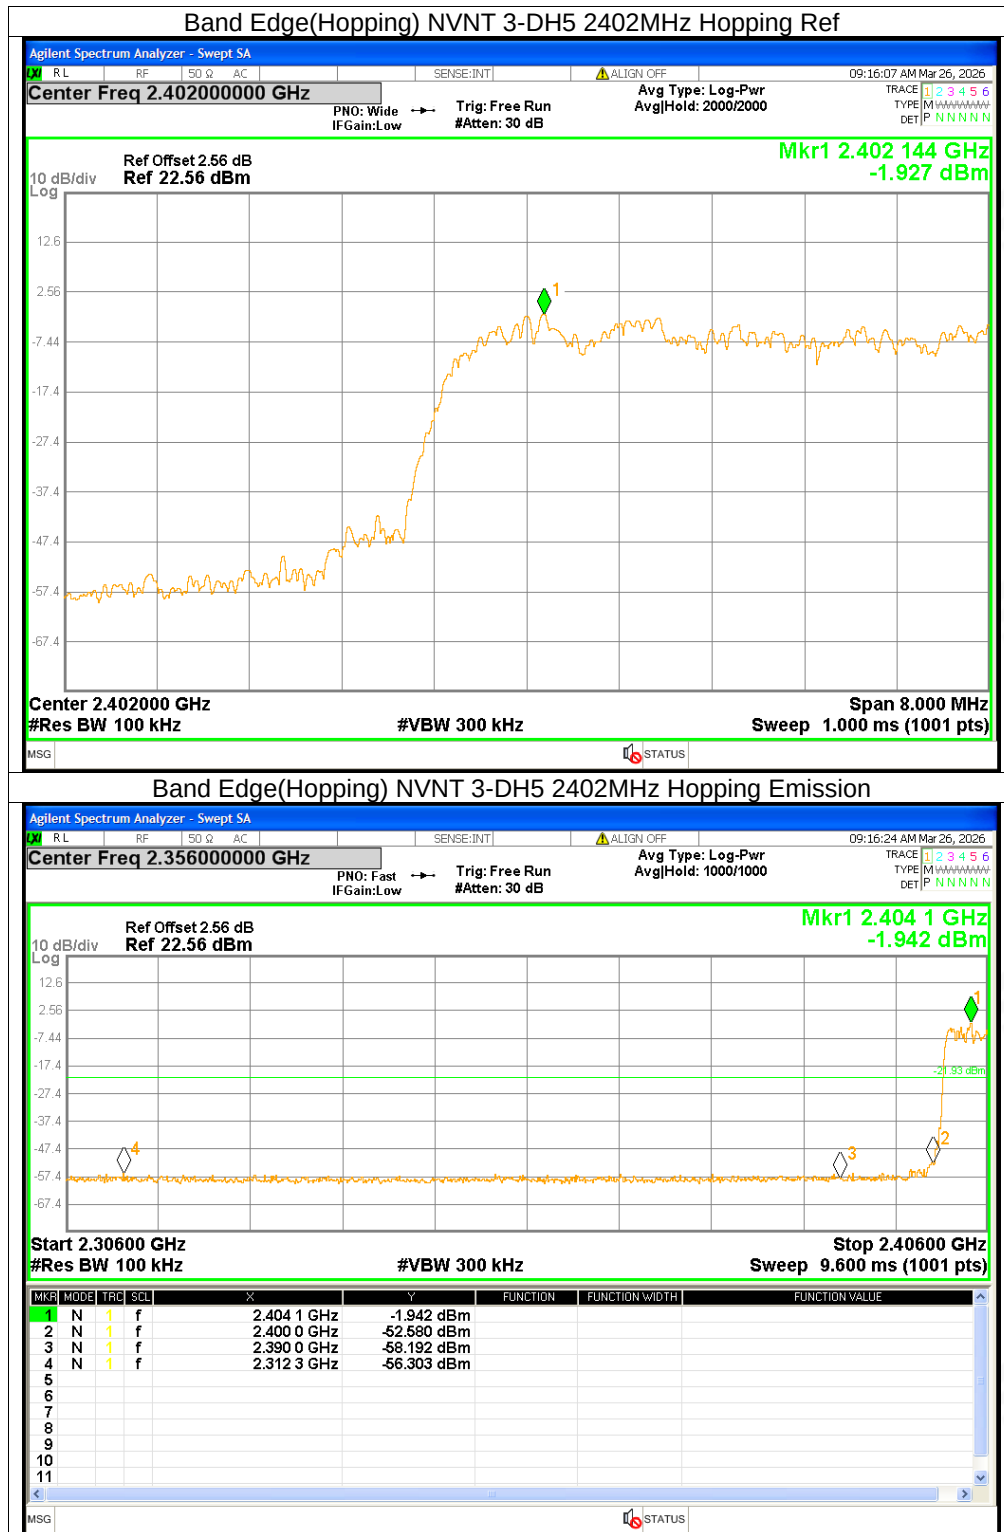


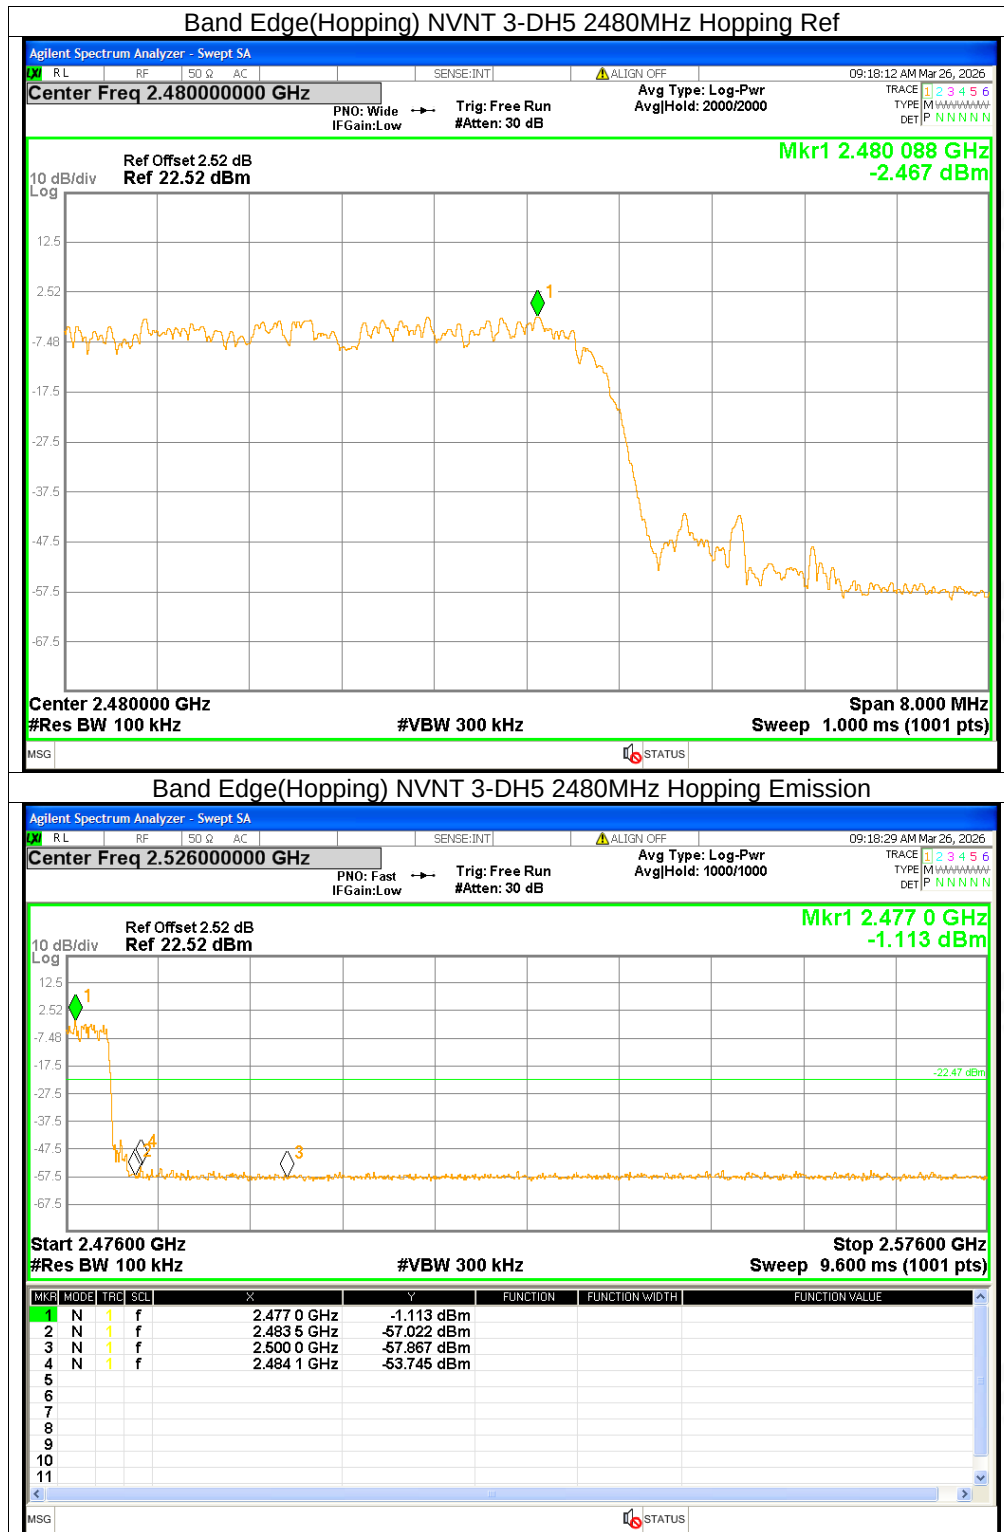






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	-41.02	<=-20	Pass
NVNT	1-DH5	2441	-39.11	<=-20	Pass
NVNT	1-DH5	2480	-40.59	<=-20	Pass
NVNT	2-DH5	2402	-38	<=-20	Pass
NVNT	2-DH5	2441	-38.03	<=-20	Pass
NVNT	2-DH5	2480	-38.41	<=-20	Pass
NVNT	3-DH5	2402	-38.23	<=-20	Pass
NVNT	3-DH5	2441	-38.36	<=-20	Pass
NVNT	3-DH5	2480	-36.52	<=-20	Pass

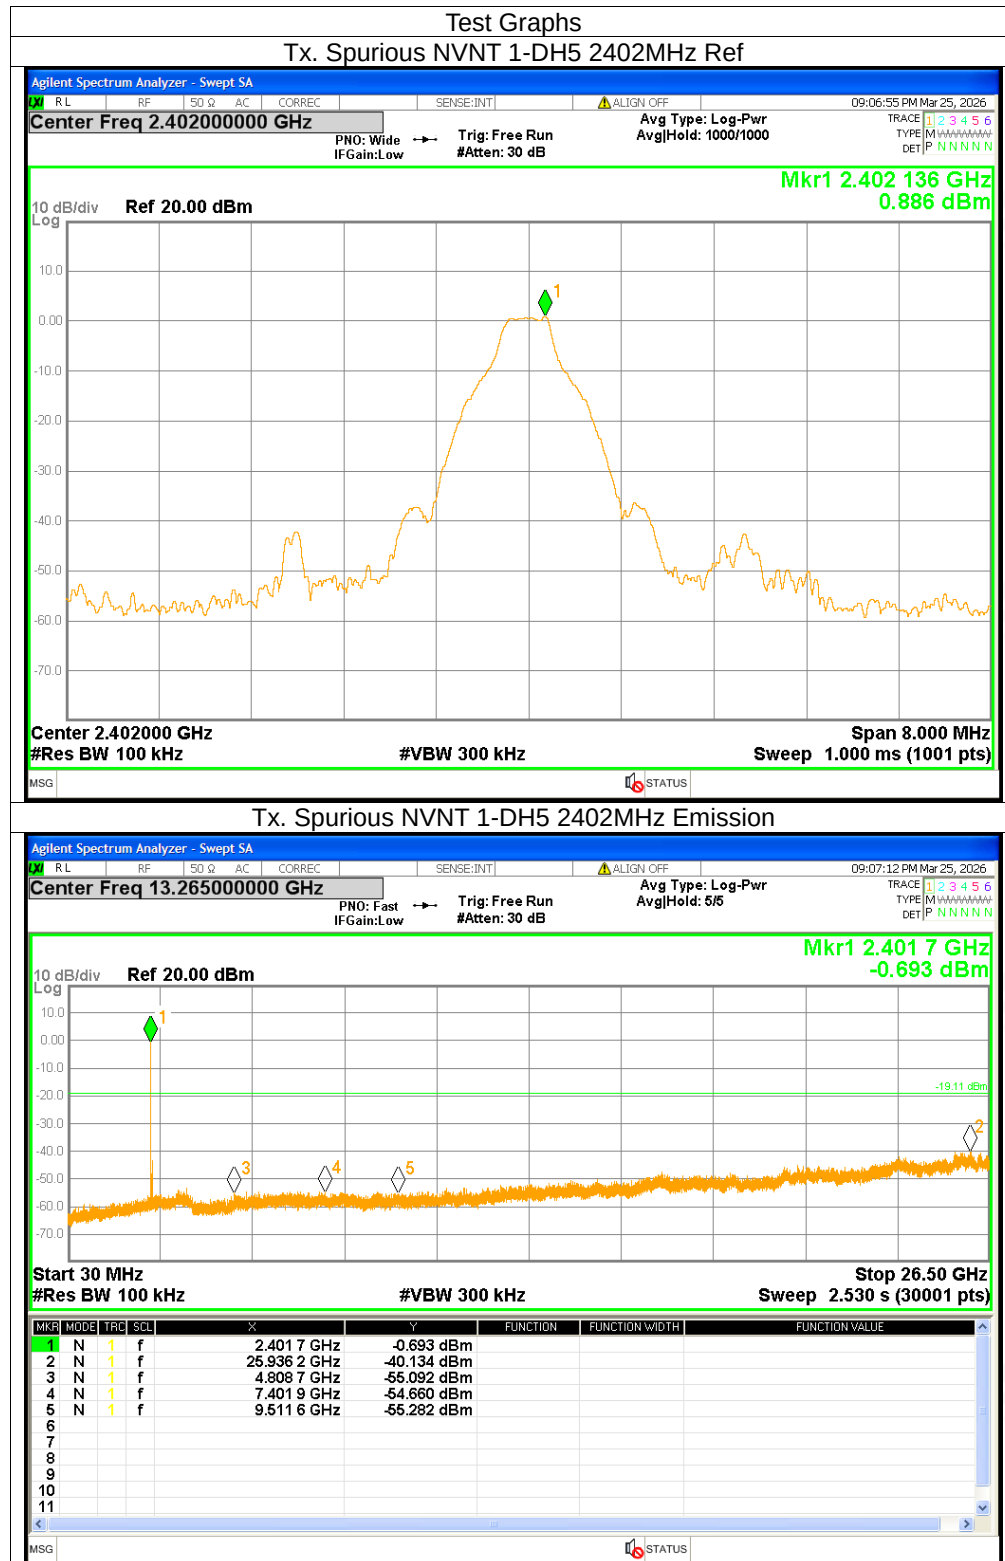


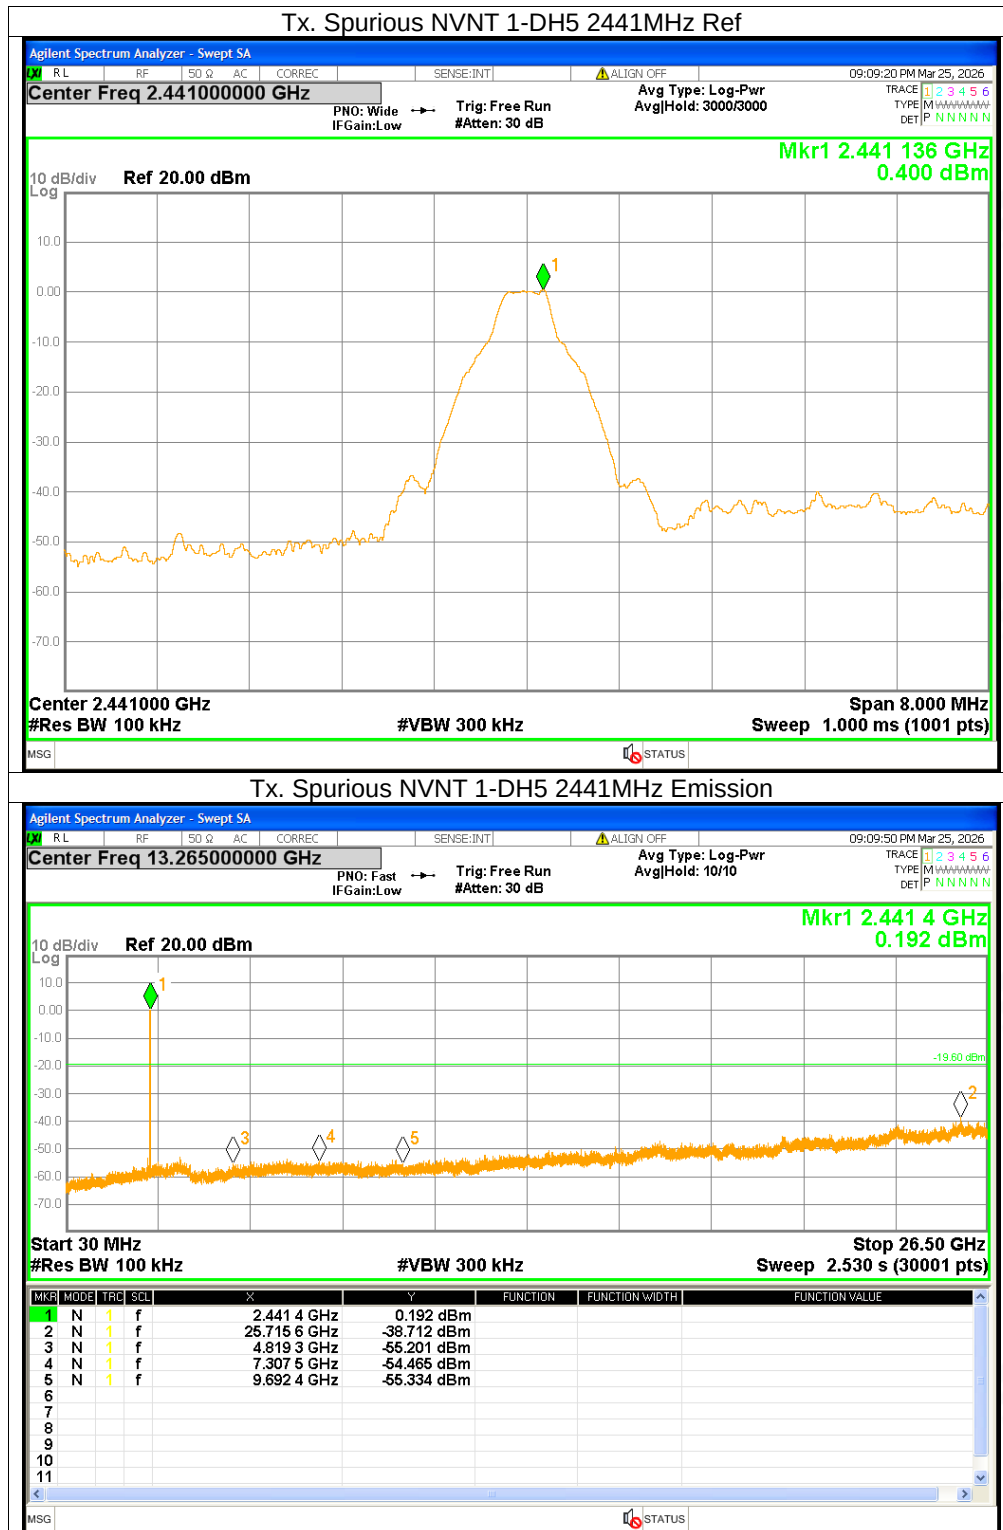


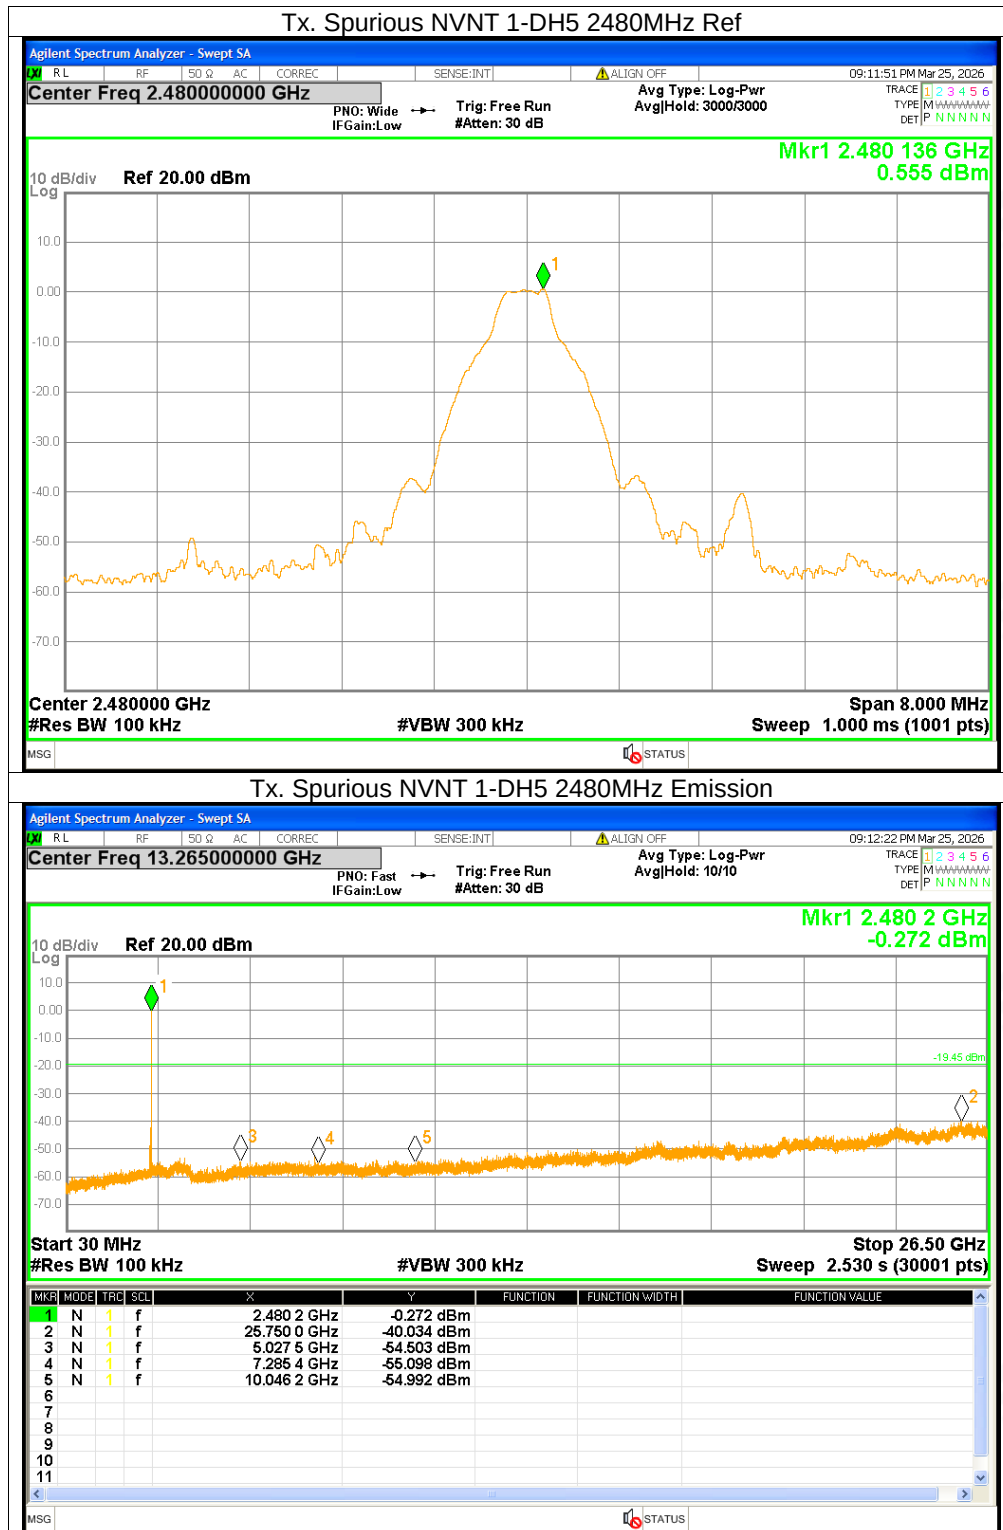


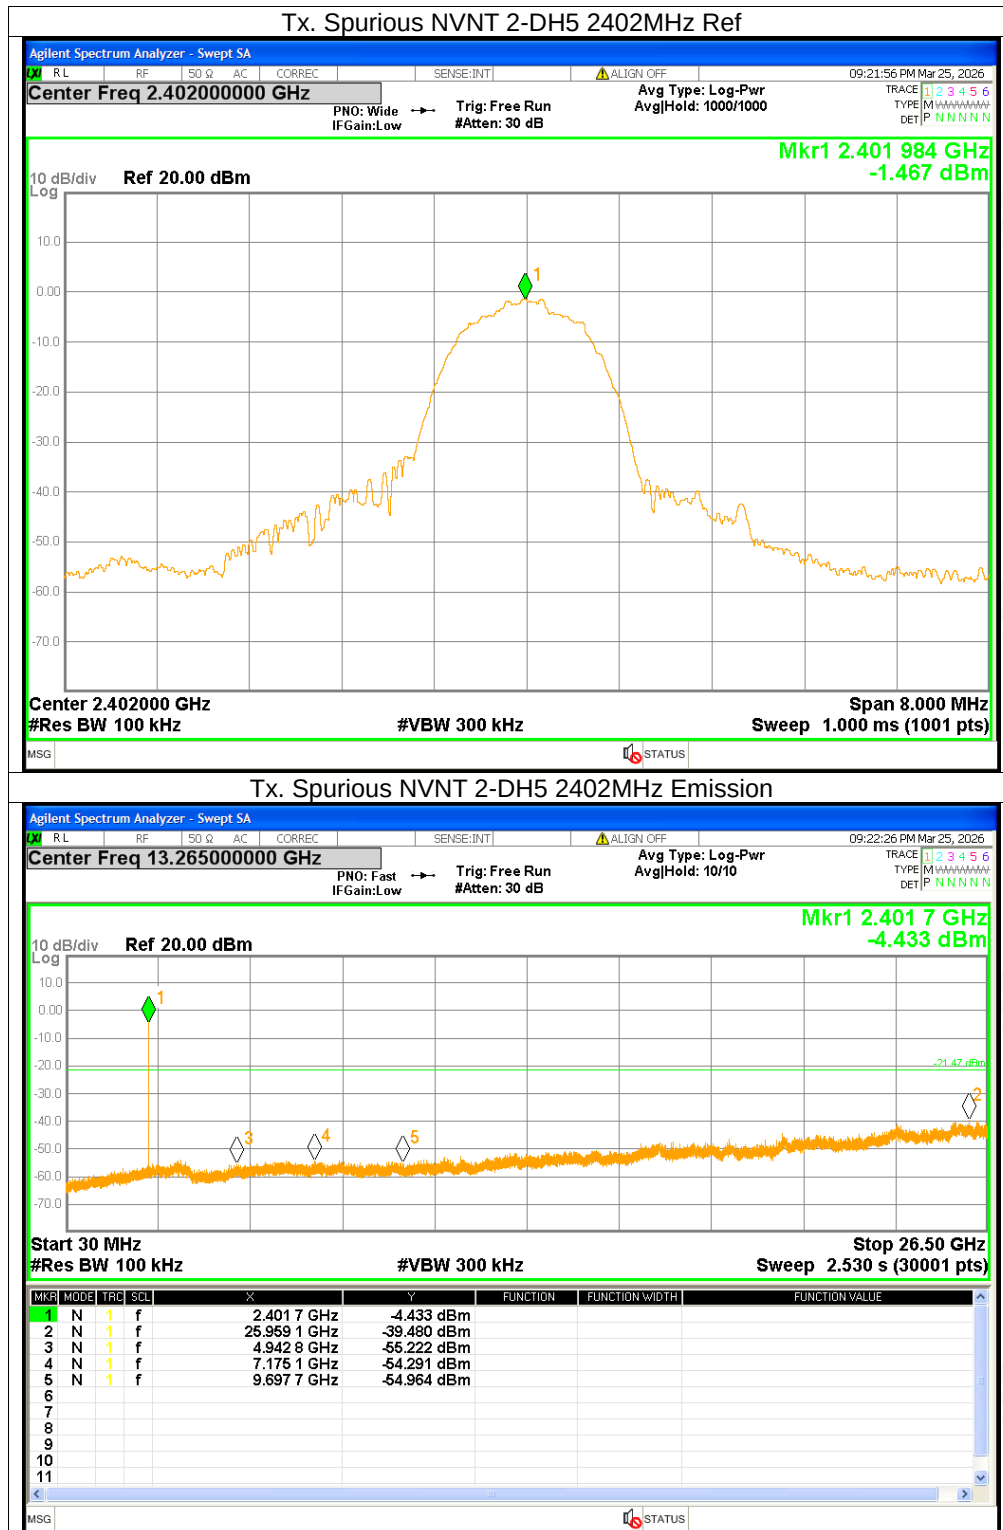


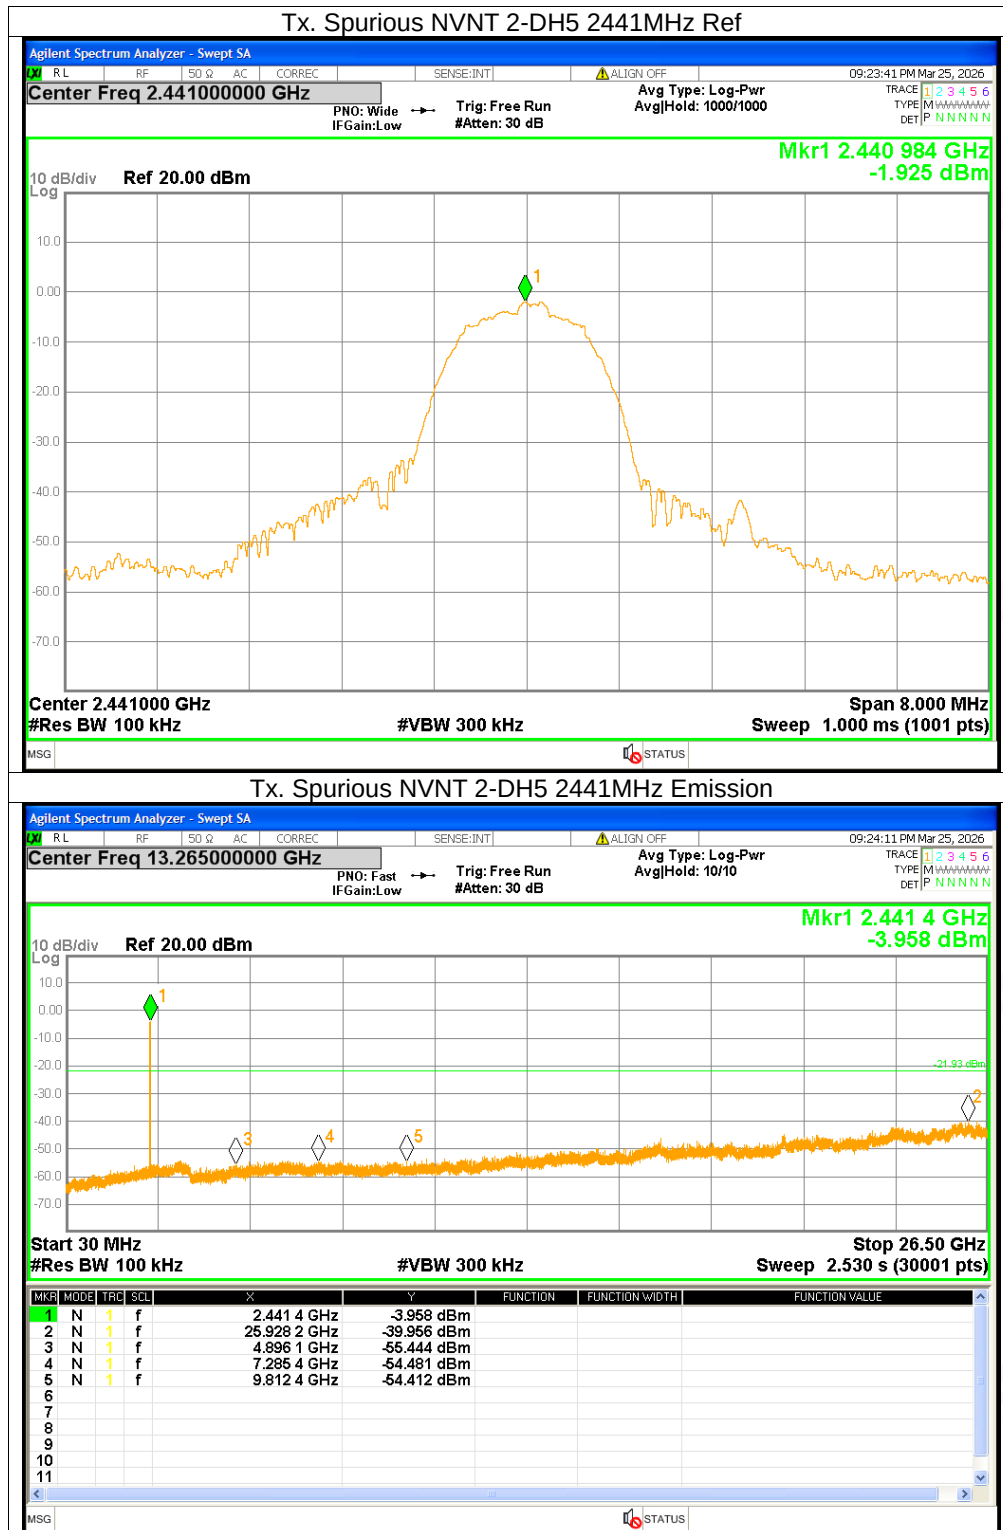

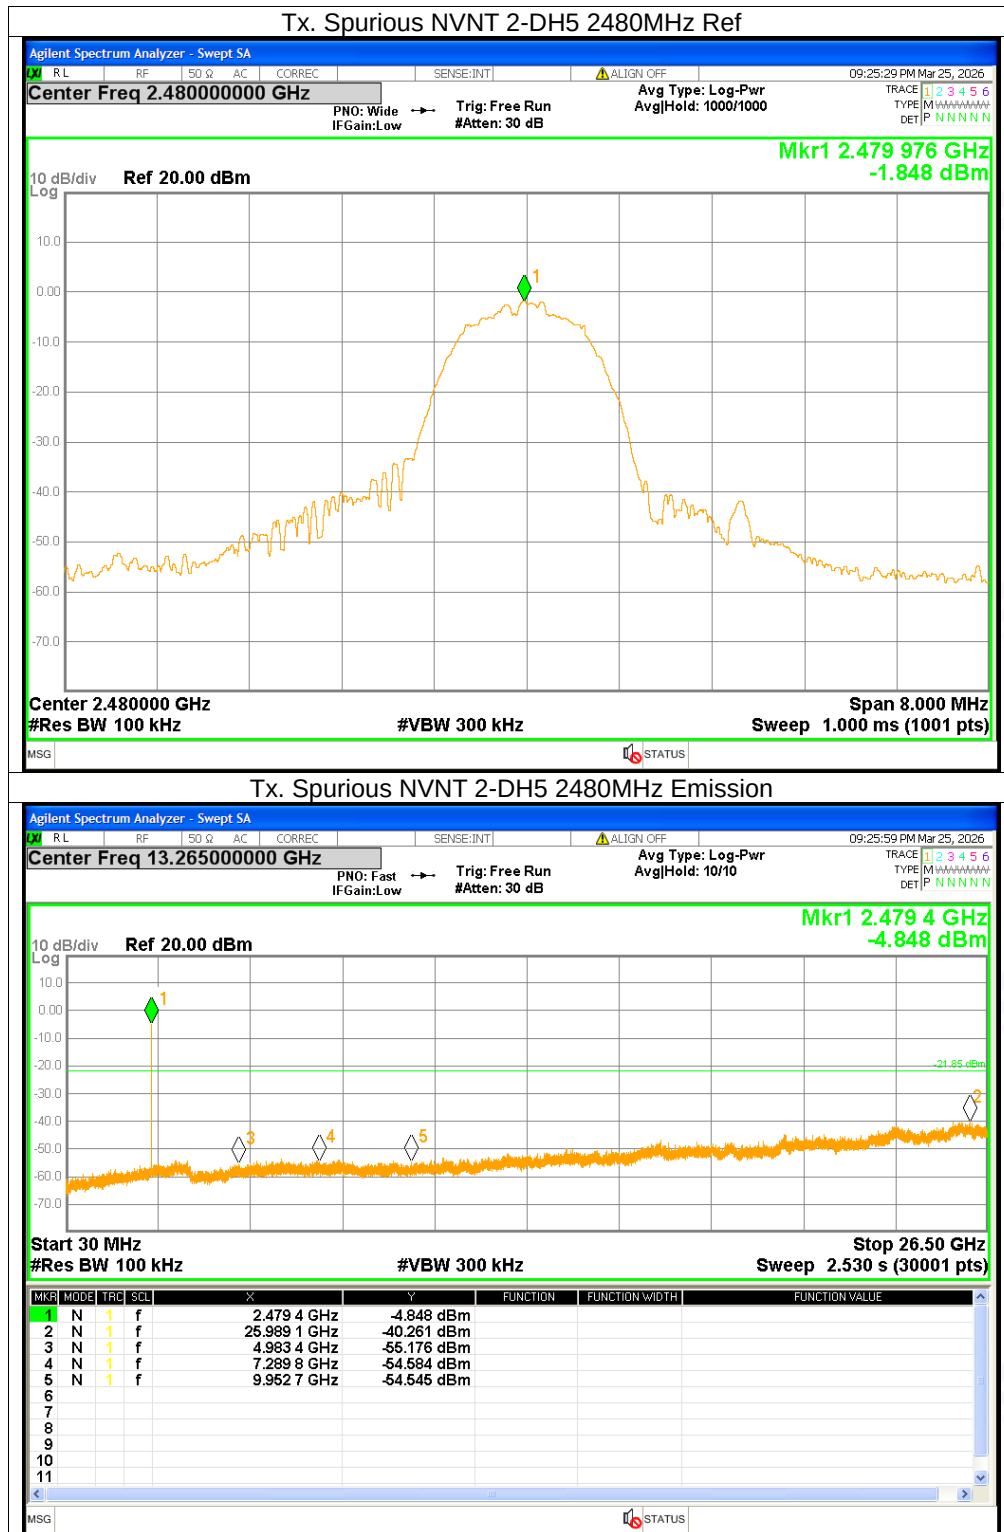

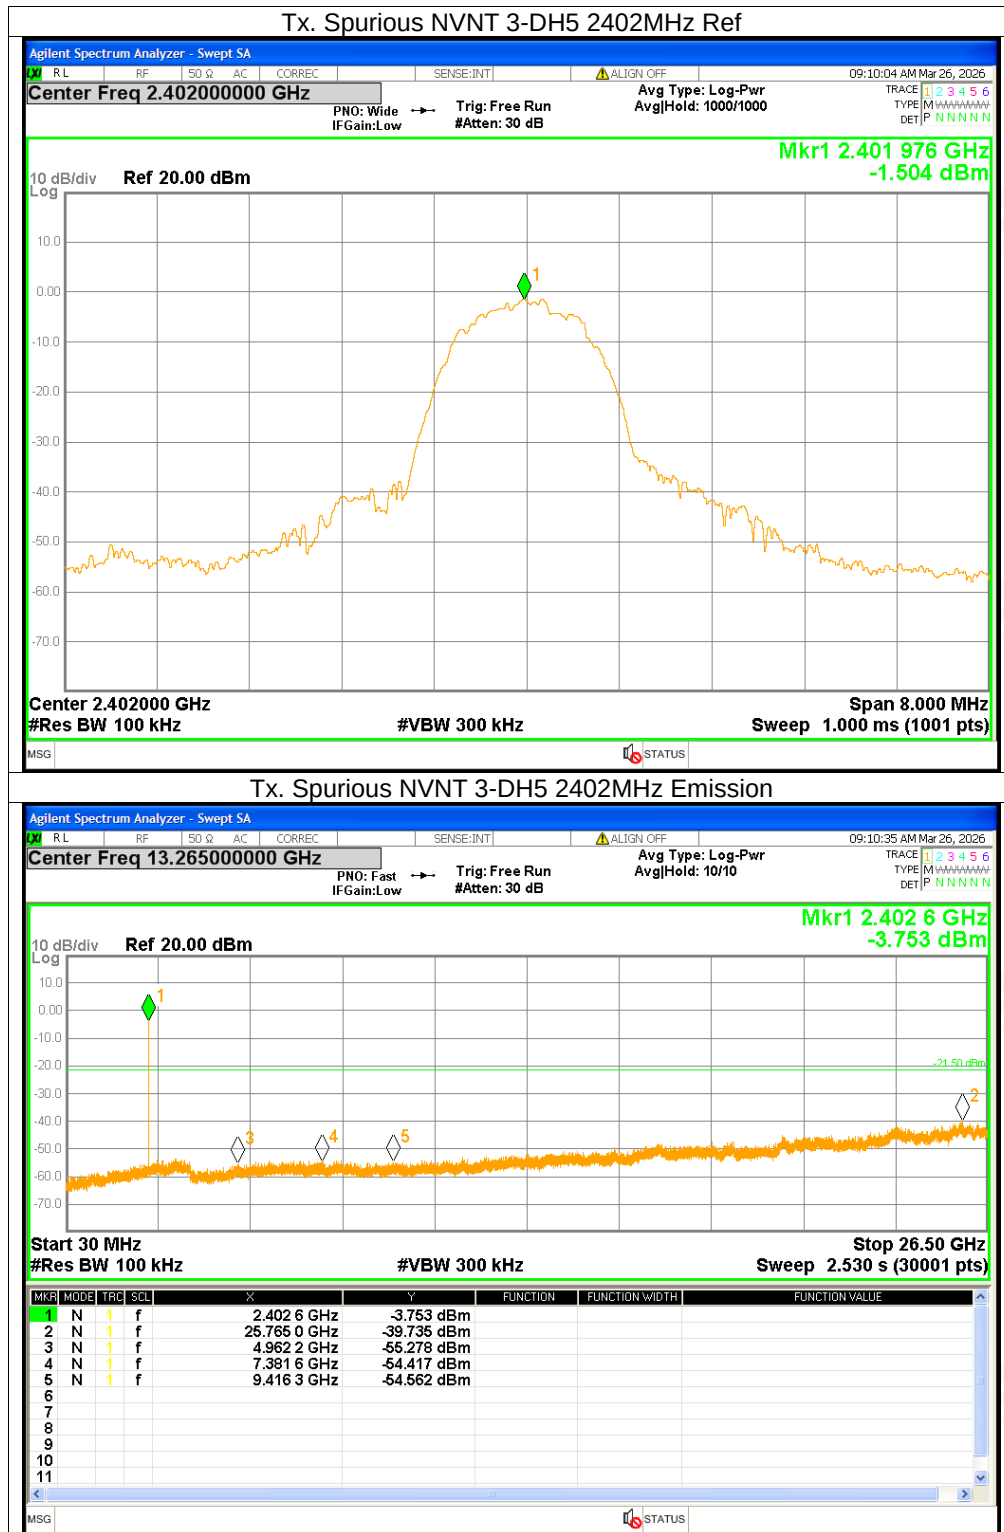

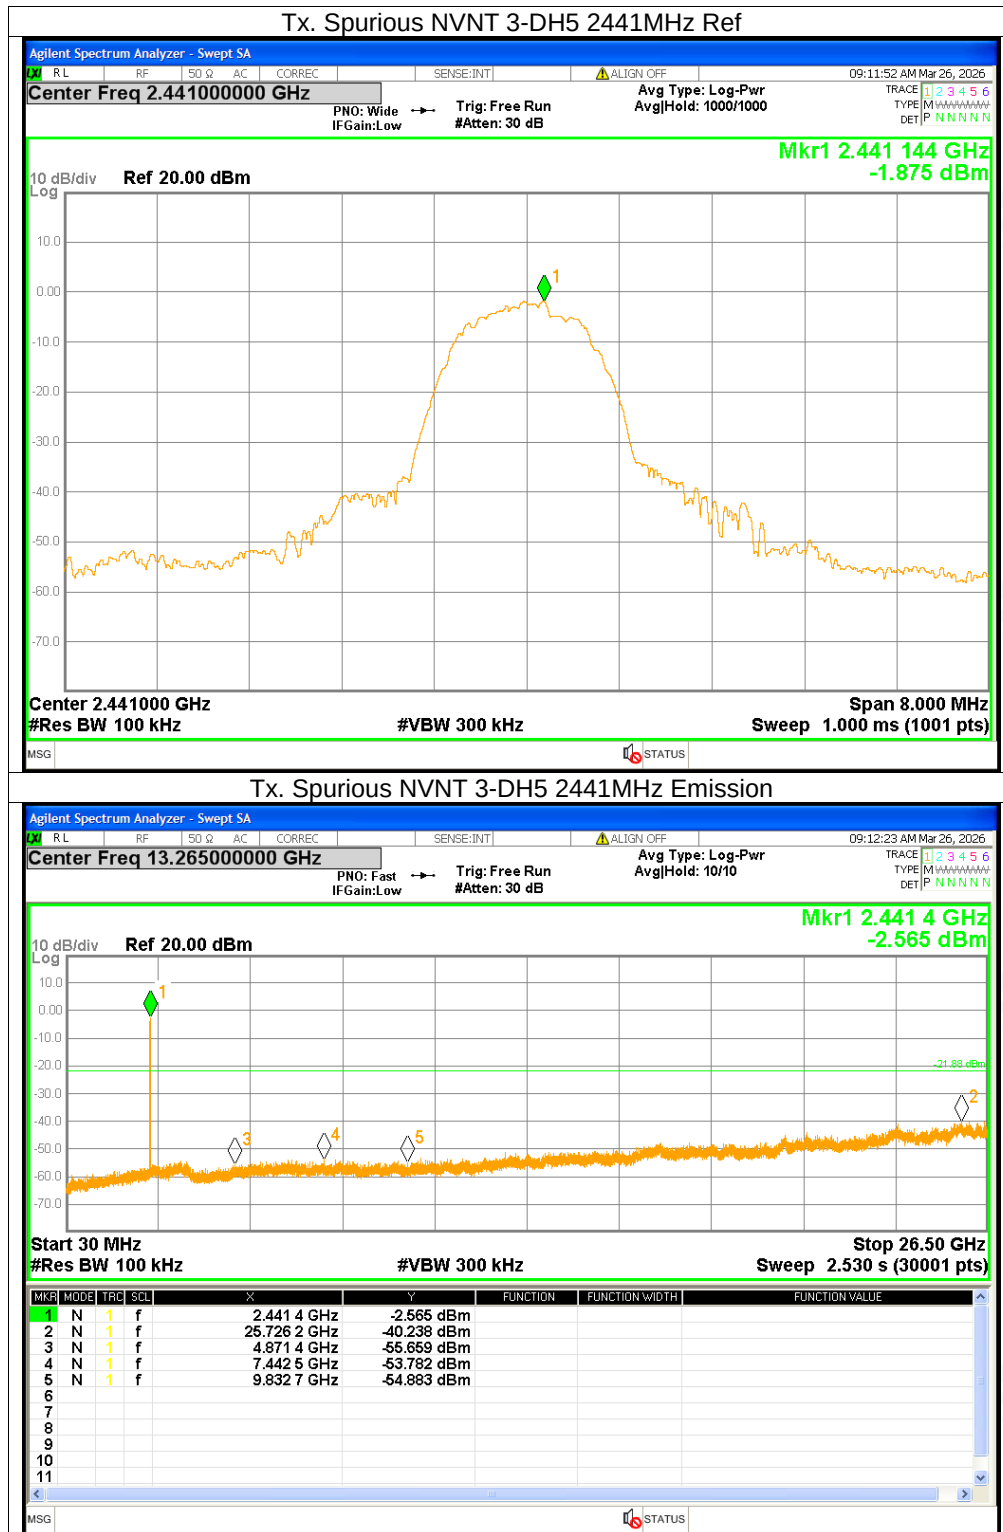

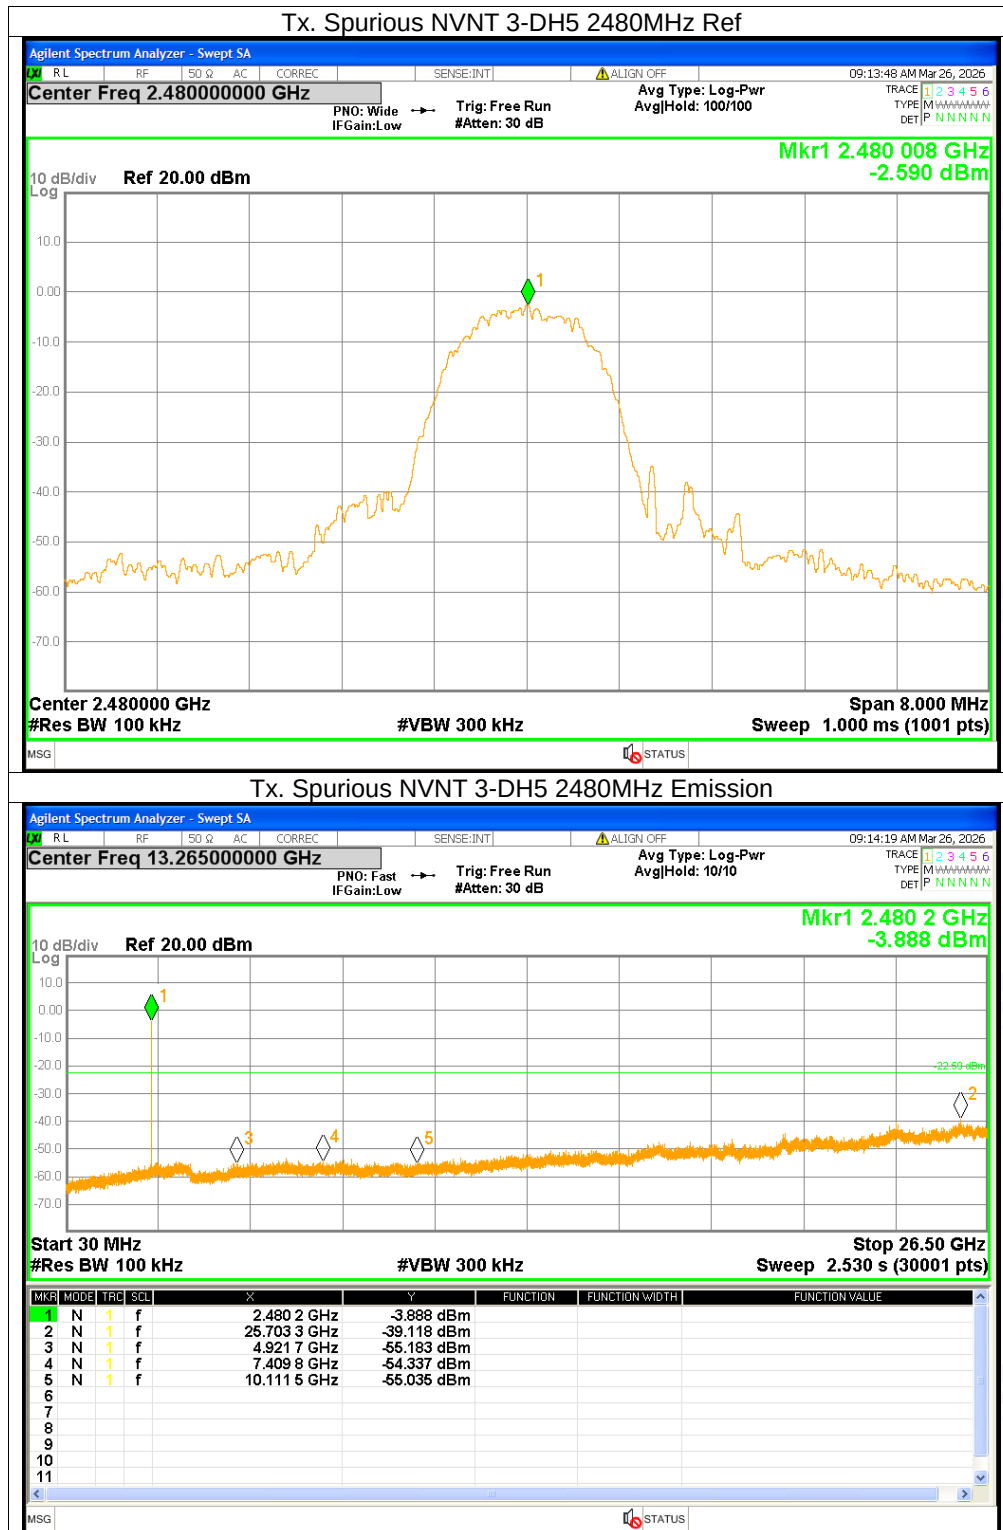



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※