

承认书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER): 立景 科 技 有 限 公 司

客户料号 (CUSTOMER P/N) :

品名 (DESCRIPTION): A11线圈/G50开槽+线面背胶 55mm DATE:2025/08/07

规格 (SPECIFICATION): 0.08*105*10TS REV.NO.:A0

鸿日昇威科技承认签核、盖章

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
品质	董晚红	吕惠	韦函满	
工程	何伟华	韦立红	韦立红	

备注:

深圳市立景科技承认签核、盖章

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
开发工程师				
采购				
品质				

备注:

深圳市鸿日昇威科技有限公司

HRSW ELECTRONICS CO.,LTD

ADD: 深圳市龙华新区观澜环观中路48号1栋2楼



TEL: +86-15112254520 FAX: +86-0755-28015170

page:1/2

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

2. SCHEMATICS:

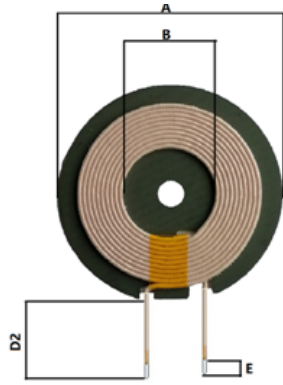

- 1.Coil on the magnetic sheet, the size of the disk 50mm, with a thickness of 0.8 ± 0.5 mm Open the L line duct.
- 2.The position of the coil outlet tape 1-2Ts;
- 3.Adhesive backing on the front of the coil

A	B	C	D2	E	H	Note	I
50±1	20±0.5	0.8±1	55±3	3.5±2.5	2.3MAX		

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	Silk wrapped wire $\varnothing 0.08*105$ strands 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q	HI-POT
TEST COND	Coil plus magnetic sheet	S-F	Individual coils		
	100KHz, 0.25V	AT 25°C	100KHz, 0.25V		
SPEC	6.5uH±10%	60mΩ Max	3.8uH±15%		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Silk-wrapped thread	Silk wrapped wire 0.08*105 shares	NANJINGJINNINGCO,LTD	
2	Lead-free tin strips	Lead-free tin strips	QIAODO	
3	magnetic disk	$\varnothing 50*0.8$ manganese-zinc hard magnetic sheet with L slot	TAIYI CO.,LTD	
4	glue	Yellow rubber 9999	LIANCHENG CO.,LTD	
5	High temperature adhesive paper	8mm wide high-temperature adhesive tape	CUDAK CO.,LTD	
6	Adhesive lining	Coil surface $\varnothing 48.5*0.1$	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G50 Slotted + Coil Front Adhesive 55mm
DRAWN BY	CHECKED BY		APPROVED BY
He Weihua	Wei Lihong		Wei Lihong