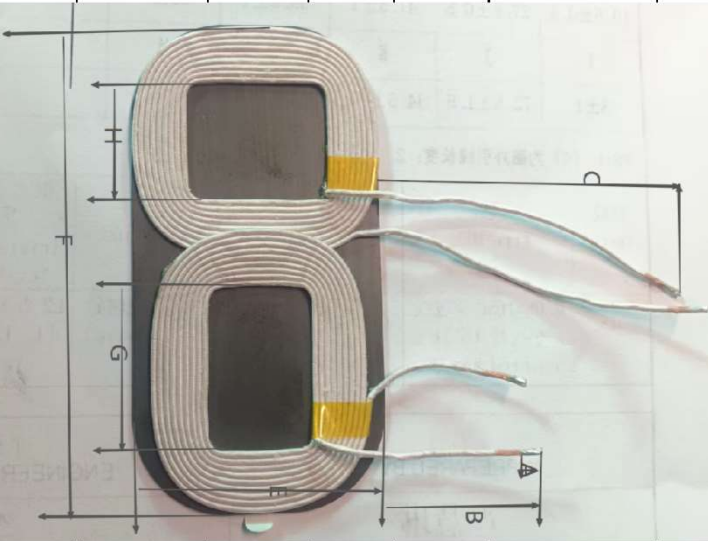


Product Specification										
客户名称		轩宏达电子有限公司								
料号		HBY20240627001-9T-L=60MML=25MM			规格编号		20251230001	版本	001	
◆、外形尺寸							(单位: mm)			
							A	3.0	±2	
							B	25.0	±2	
							C	60.0	±2	
							H	20	±1	
							E	46.0	±0.5	
							F	83.0	±0.5	
							G	27.0	±1	
							磁片厚度		0.8	±0.1
							总厚度		3.6	±0.5
										备注
(1)线径: 0.08*105P丝包线										
(2)绕线圈数:9TS										
(3)起尾线是否交叉: W1是;W2是										
(4)磁片底部贴双面胶										
			(5) 线圈居磁片中间位置贴							
◆、电气特性:										
参数	规格			测试条件		测试仪器				
L(W1)	6.8	±10%	μH	100KHz/1V		■TH1816B				
L(W2)	6.8	±10%	μH	100KHz/1V		■TH1817B				
DCR(W1)	41.8	Max	mΩ	@ 25℃		■CH-502BC				
DCR(W2)	44	Max	mΩ	@ 25℃		■CH-502BC				
◆、温度等级:										
操作温度		-40℃~ 125℃								
材料清单:										
序号	品名	材料规格		供应商		备注				
1	磁片	8346*0.8				PC40猛锌隔磁片				
2	铜线	0.08*105P				标配丙铜丝包线				
3	高温胶带	8MM				环保胶纸				
4	锡	107H				环保胶带				
5	胶	双面胶				千岛环保锡				
编制		审核			批准					