


M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11a / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 9:52:49

86.9 dBuV/m

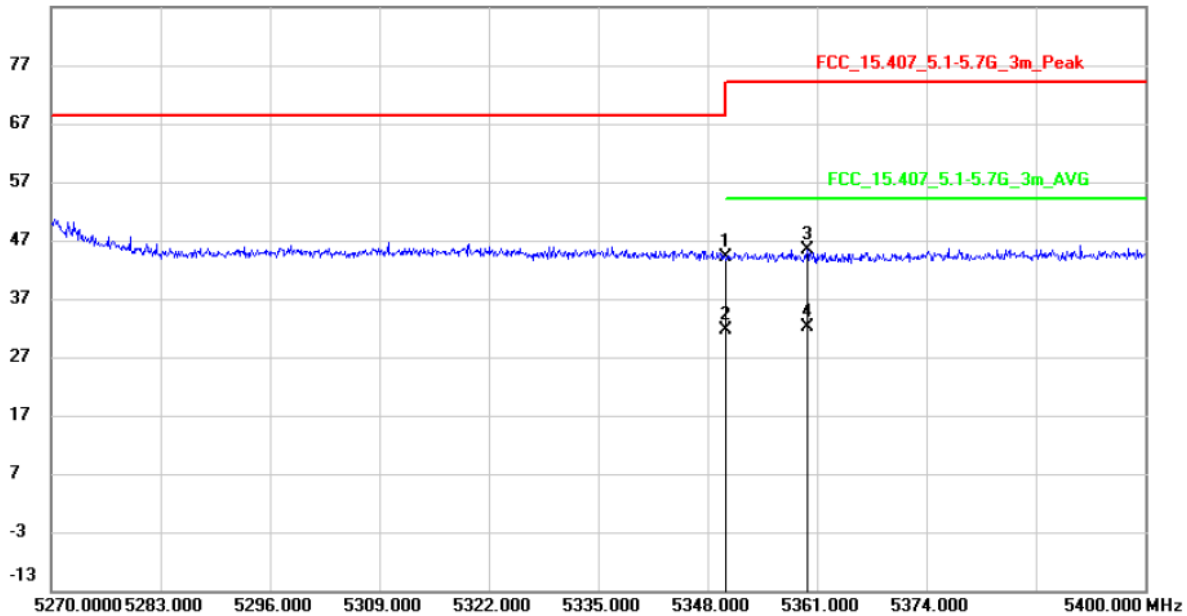


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5350.000	39.40	4.55	43.95	68.20	-24.25	peak
2		5350.000	26.91	4.55	31.46	54.00	-22.54	AVG
3		5359.830	40.77	4.56	45.33	74.00	-28.67	peak
4	*	5359.830	27.47	4.56	32.03	54.00	-21.97	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11a / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 9:45:38

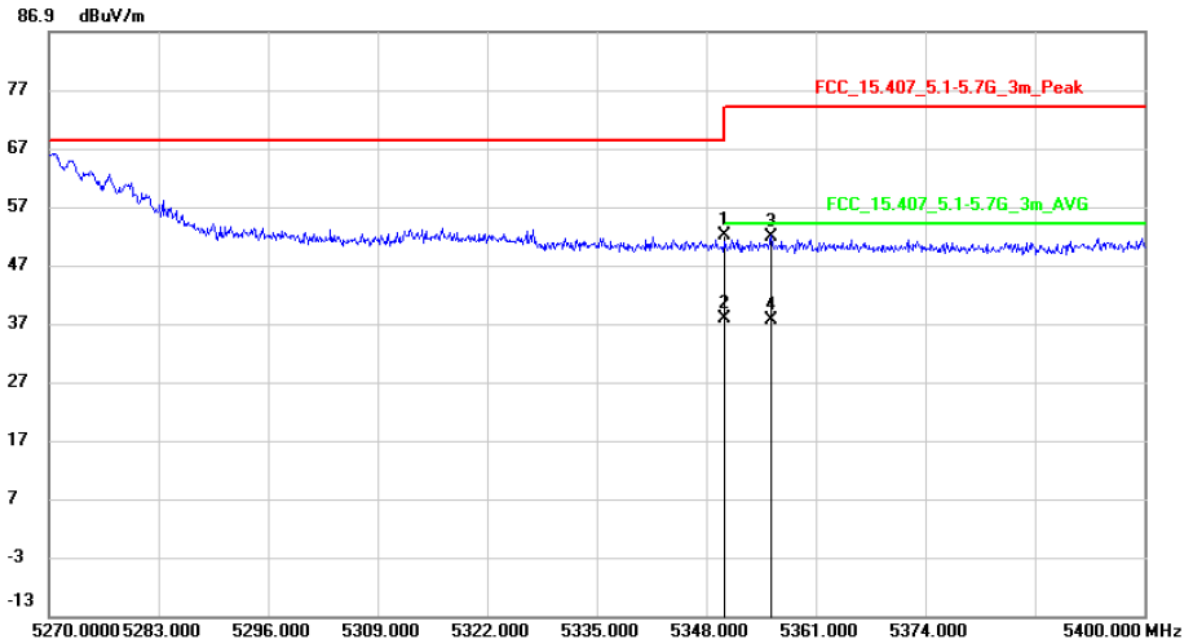

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5350.000	47.43	4.55	51.98	68.20	-16.22	peak	
2		5350.000	33.17	4.55	37.72	54.00	-16.28	AVG	
3		5355.670	47.28	4.55	51.83	74.00	-22.17	peak	
4		5355.670	33.01	4.55	37.56	54.00	-16.44	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT20) / Low Channel / U-NII-1	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 10:22:42

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

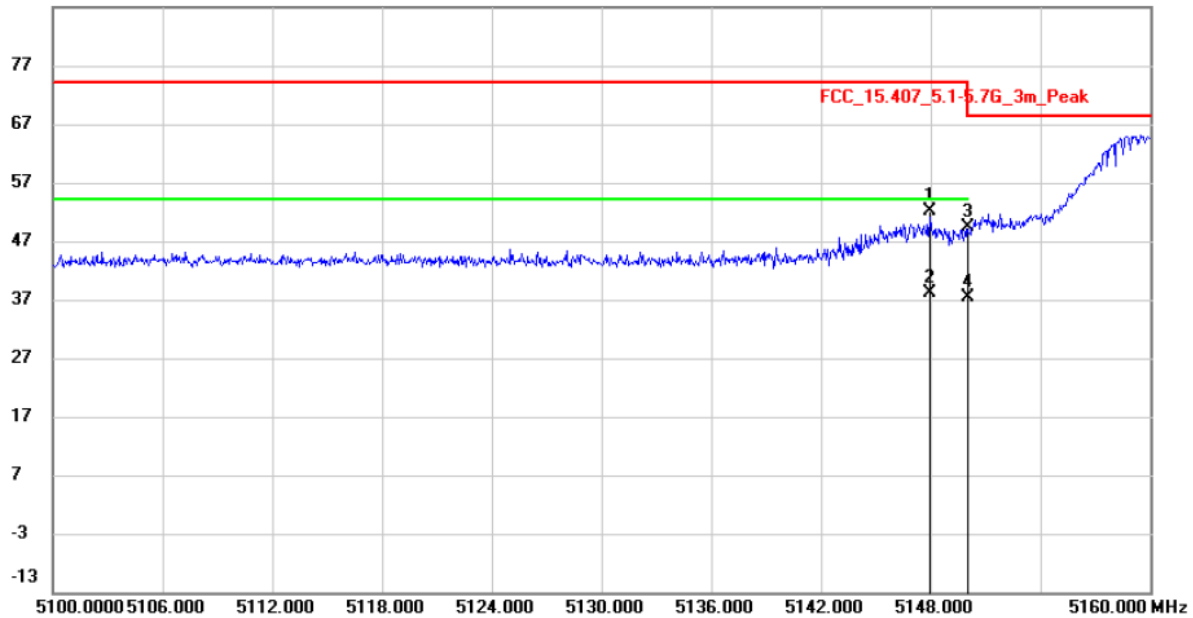

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5147.940	47.50	4.53	52.03	74.00	-21.97	peak	
2	*	5147.940	33.53	4.53	38.06	54.00	-15.94	AVG	
3		5150.000	44.82	4.53	49.35	68.20	-18.85	peak	
4		5150.000	32.85	4.53	37.38	54.00	-16.62	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT20) / Low Channel / U-NII-1	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 10:15:05

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

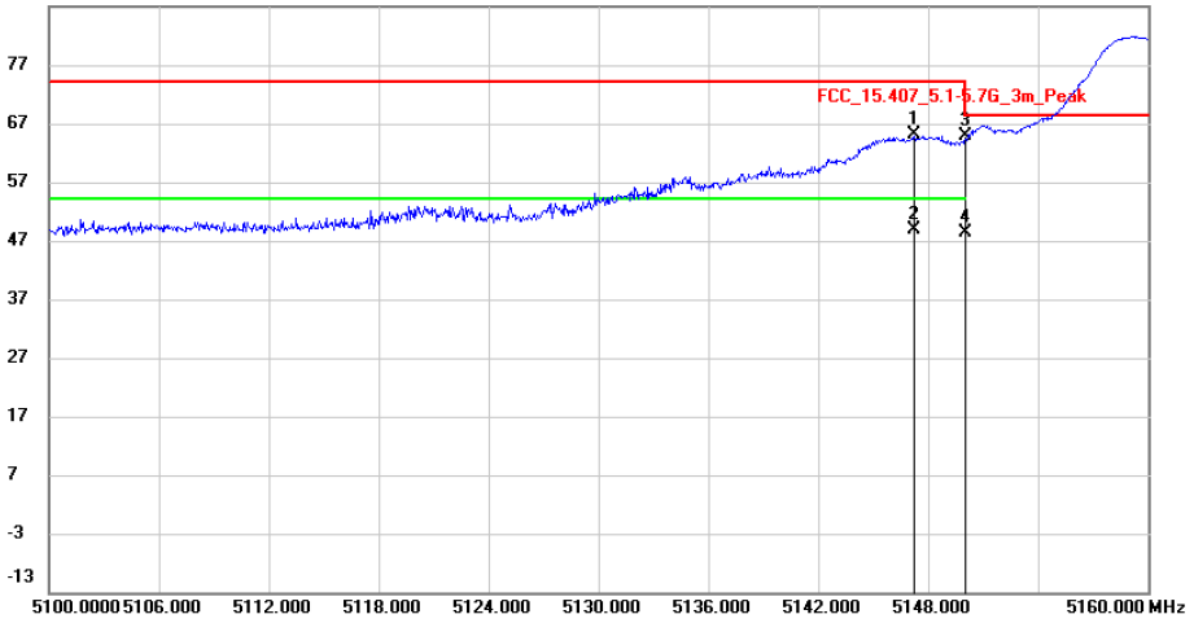


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5147.220	60.50	4.53	65.03	74.00	-8.97	peak	
2		5147.220	44.20	4.53	48.73	54.00	-5.27	AVG	
3	*	5150.000	60.35	4.53	64.88	68.20	-3.32	peak	
4		5150.000	43.64	4.53	48.17	54.00	-5.83	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT20) / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 10:00:36

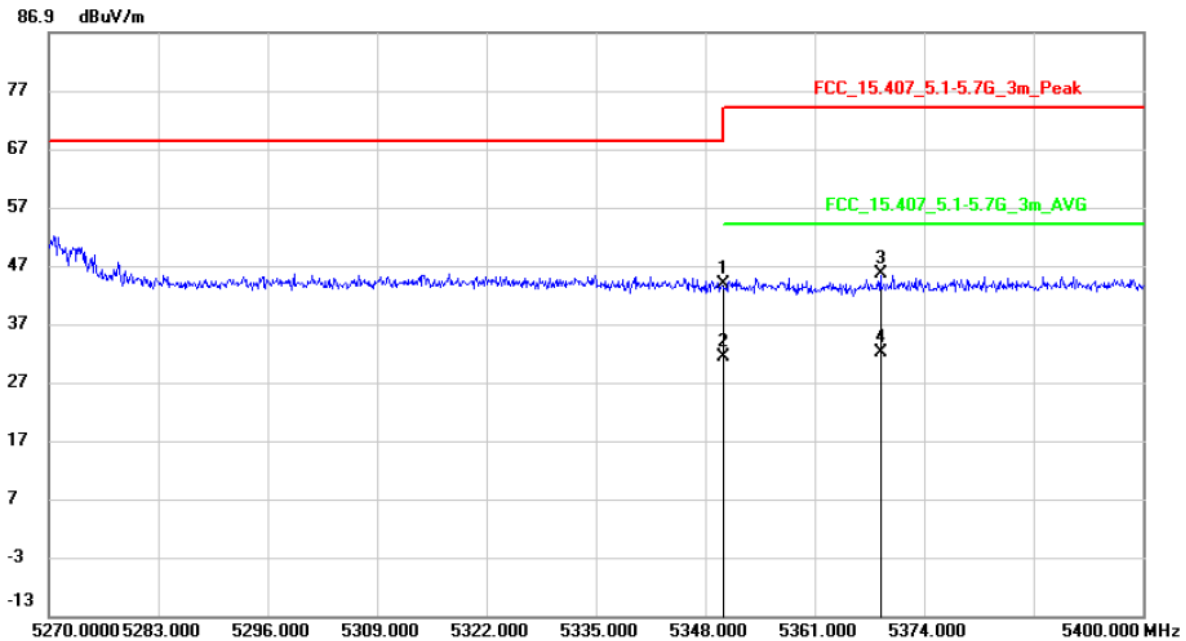


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	39.15	4.55	43.70	68.20	-24.50	peak	
2		5350.000	26.66	4.55	31.21	54.00	-22.79	AVG	
3		5368.800	41.00	4.56	45.56	74.00	-28.44	peak	
4	*	5368.800	27.52	4.56	32.08	54.00	-21.92	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT20) / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 10:07:17

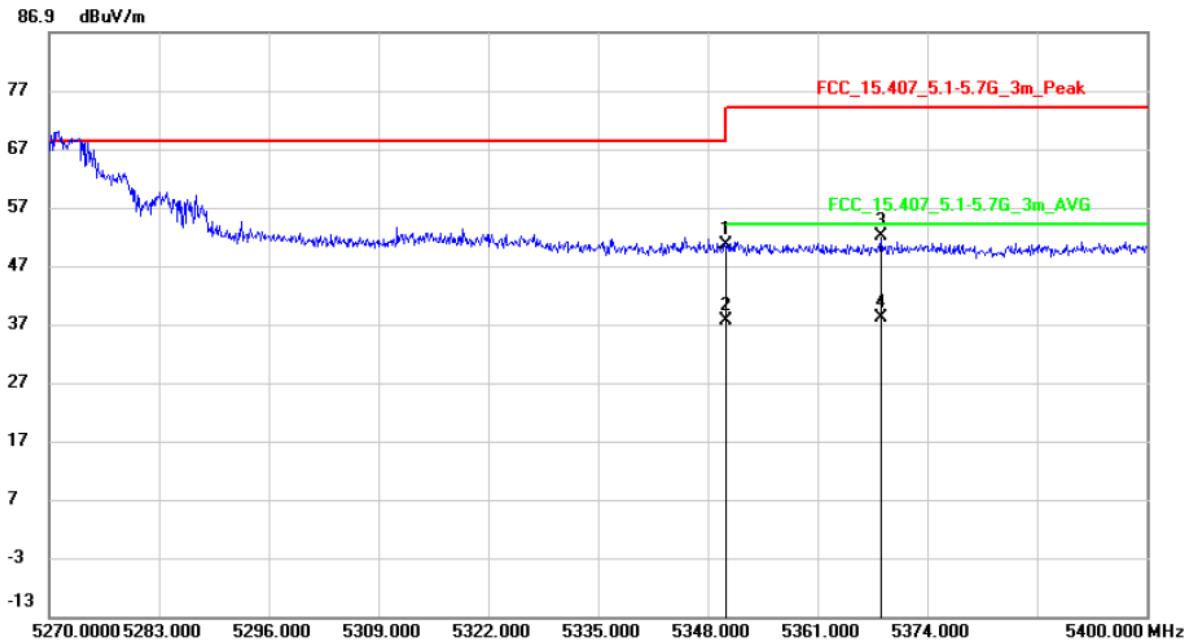

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	45.89	4.55	50.44	68.20	-17.76	peak	
2		5350.000	32.91	4.55	37.46	54.00	-16.54	AVG	
3		5368.540	47.47	4.56	52.03	74.00	-21.97	peak	
4	*	5368.540	33.46	4.56	38.02	54.00	-15.98	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11n(HT40) / Low Channel / U-NII-1	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 11:20:19

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

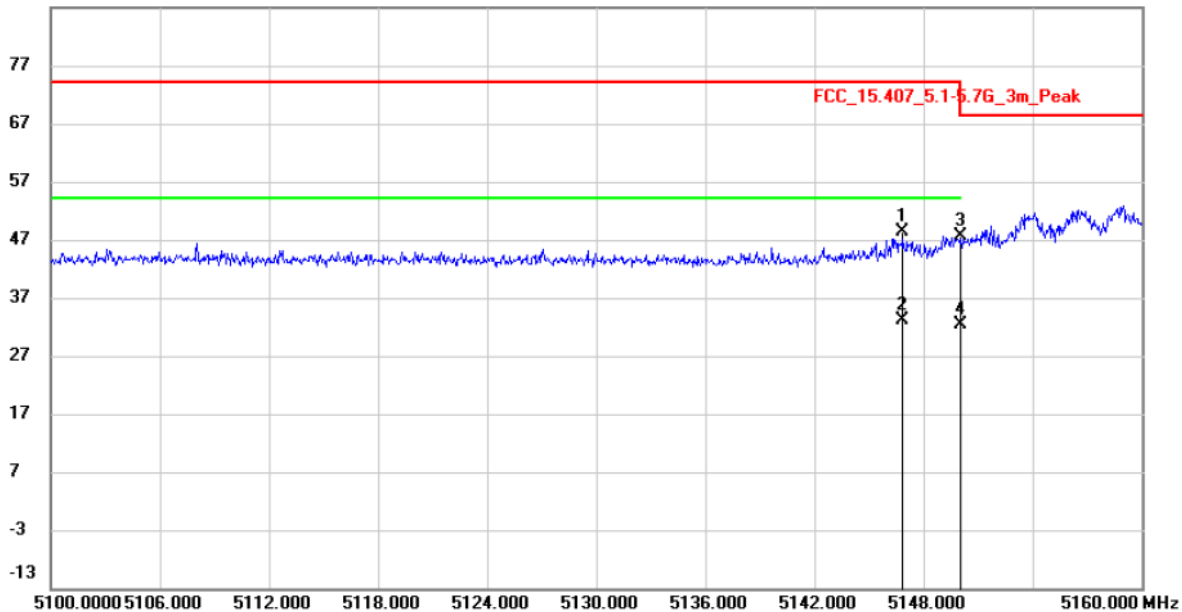

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5146.860	43.72	4.53	48.25	74.00	-25.75	peak
2		5146.860	28.41	4.53	32.94	54.00	-21.06	AVG
3	*	5150.000	42.99	4.53	47.52	68.20	-20.68	peak
4		5150.000	27.81	4.53	32.34	54.00	-21.66	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11n(HT40) / Low Channel / U-NII-1	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 11:12:29

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

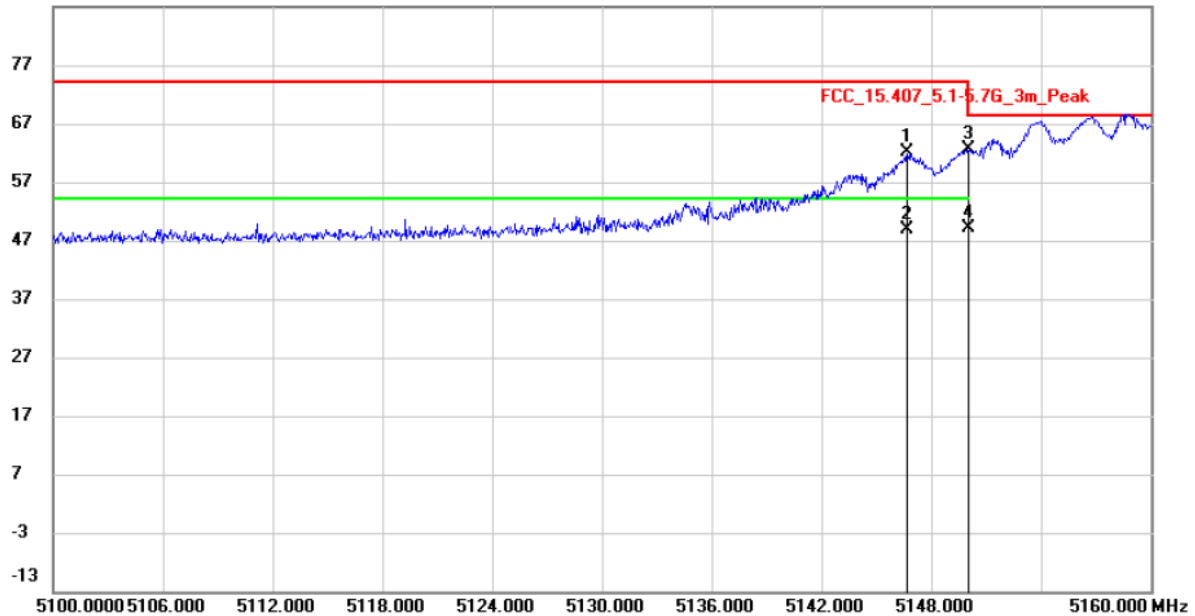


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.680	57.51	4.53	62.04	74.00	-11.96	peak	
2		5146.680	44.22	4.53	48.75	54.00	-5.25	AVG	
3		5150.000	57.99	4.53	62.52	68.20	-5.68	peak	
4	*	5150.000	44.43	4.53	48.96	54.00	-5.04	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT40) / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 10:57:23

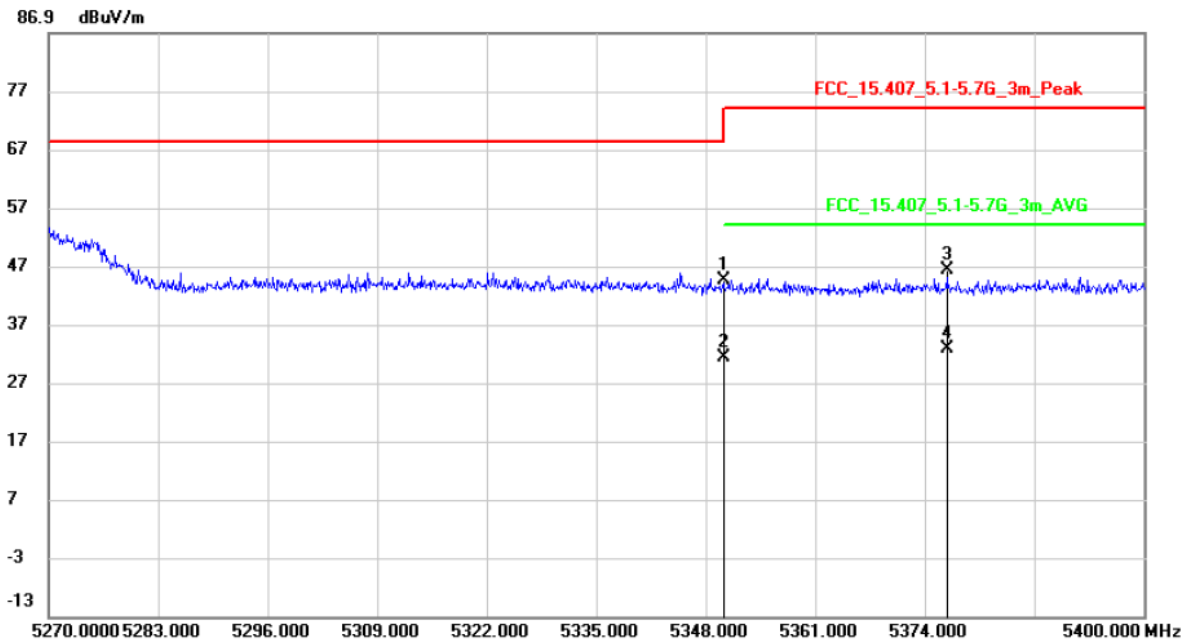


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	40.01	4.55	44.56	68.20	-23.64	peak	
2		5350.000	26.78	4.55	31.33	54.00	-22.67	AVG	
3		5376.600	41.66	4.55	46.21	74.00	-27.79	peak	
4	*	5376.600	28.18	4.55	32.73	54.00	-21.27	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT40) / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 11:04:18

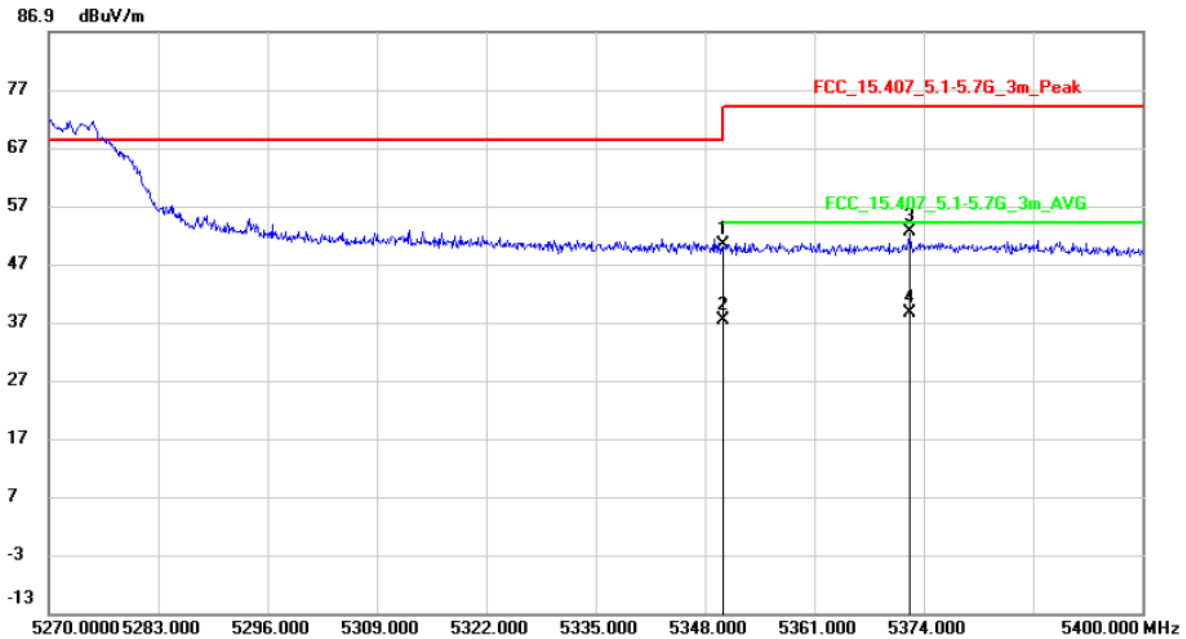

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		5350.000	45.76	4.55	50.31	68.20	-17.89	peak	
2		5350.000	32.78	4.55	37.33	54.00	-16.67	AVG	
3		5372.310	47.97	4.55	52.52	74.00	-21.48	peak	
4	*	5372.310	33.86	4.55	38.41	54.00	-15.59	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT20) / Low Channel / U-NII-1	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 10:29:57

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

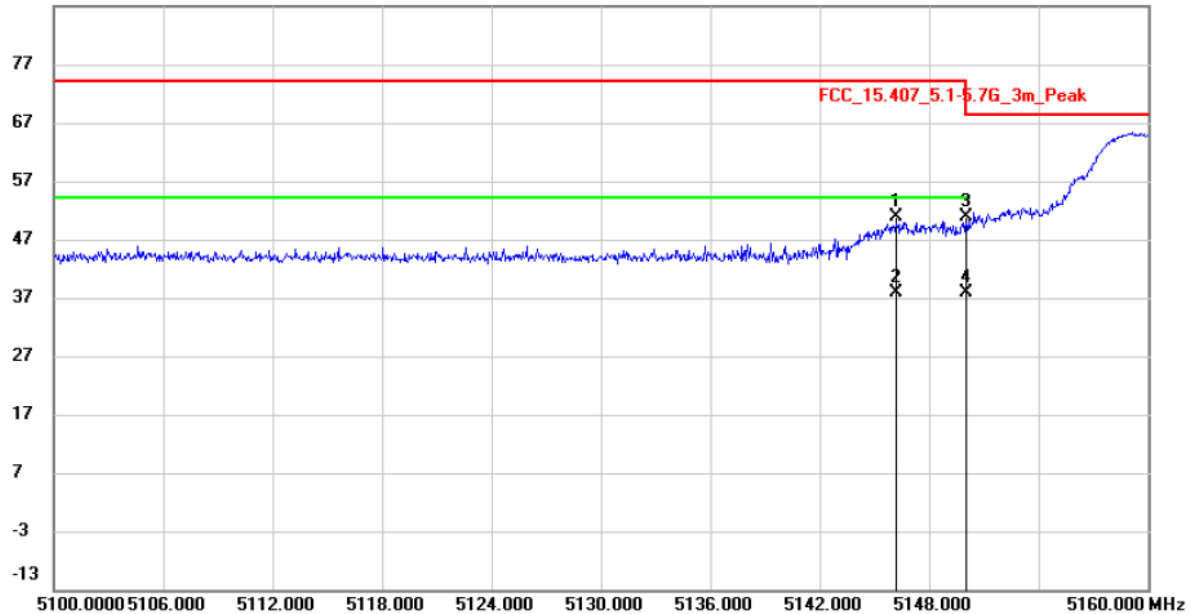

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5146.200	46.34	4.53	50.87	74.00	-23.13	peak
2	*	5146.200	33.30	4.53	37.83	54.00	-16.17	AVG
3		5150.000	46.16	4.53	50.69	68.20	-17.51	peak
4		5150.000	33.16	4.53	37.69	54.00	-16.31	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT20) / Low Channel / U-NII-1	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 10:35:53

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

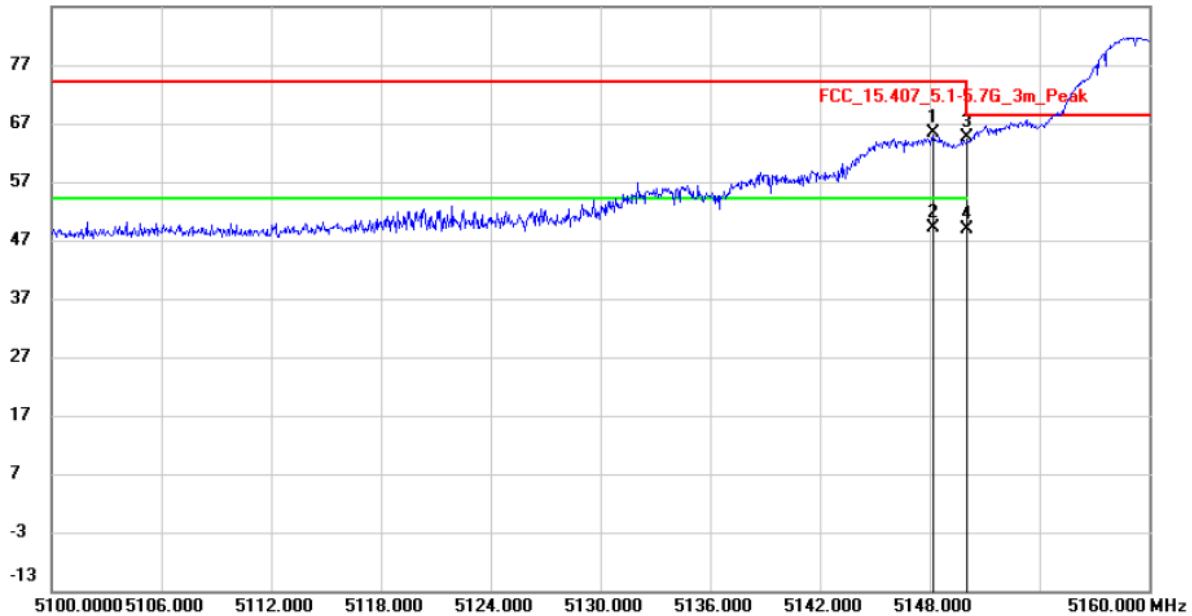


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.180	60.85	4.53	65.38	74.00	-8.62	peak	
2		5148.180	44.53	4.53	49.06	54.00	-4.94	AVG	
3	*	5150.000	60.07	4.53	64.60	68.20	-3.60	peak	
4		5150.000	44.13	4.53	48.66	54.00	-5.34	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT20) / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 10:50:26

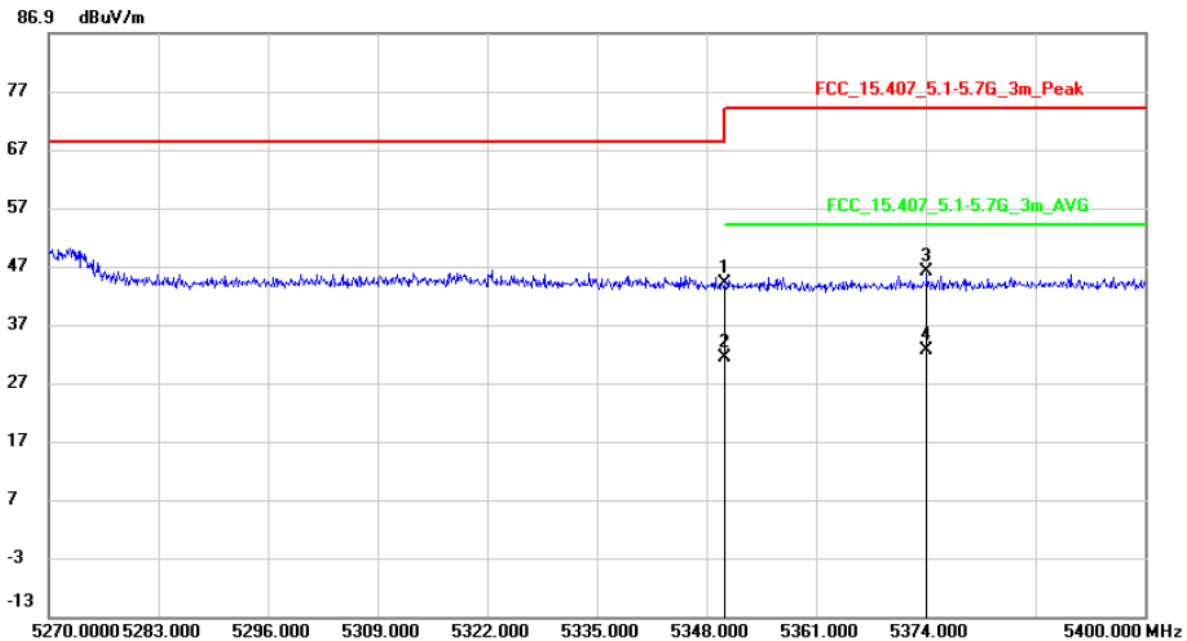


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	39.54	4.55	44.09	68.20	-24.11	peak	
2		5350.000	26.70	4.55	31.25	54.00	-22.75	AVG	
3		5374.130	41.48	4.55	46.03	74.00	-27.97	peak	
4	*	5374.130	27.90	4.55	32.45	54.00	-21.55	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT20) / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 10:42:28

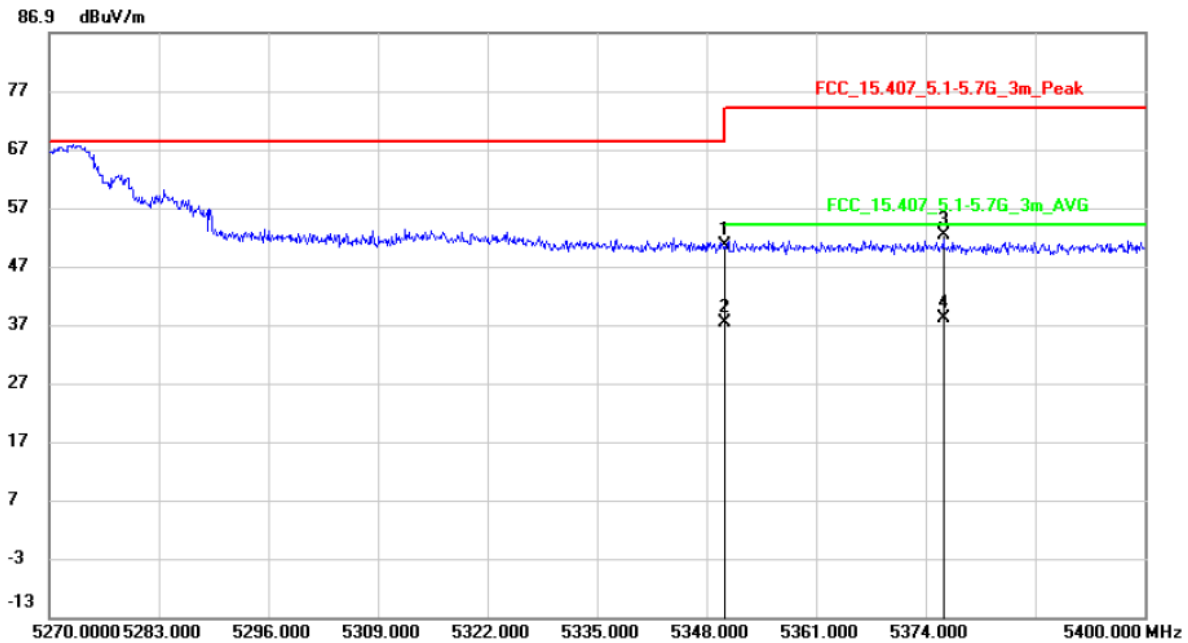

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	46.00	4.55	50.55	68.20	-17.65	peak	
2		5350.000	32.73	4.55	37.28	54.00	-16.72	AVG	
3		5376.080	47.75	4.55	52.30	74.00	-21.70	peak	
4	*	5376.080	33.48	4.55	38.03	54.00	-15.97	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT40) / Low Channel / U-NII-1	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 11:27:21

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

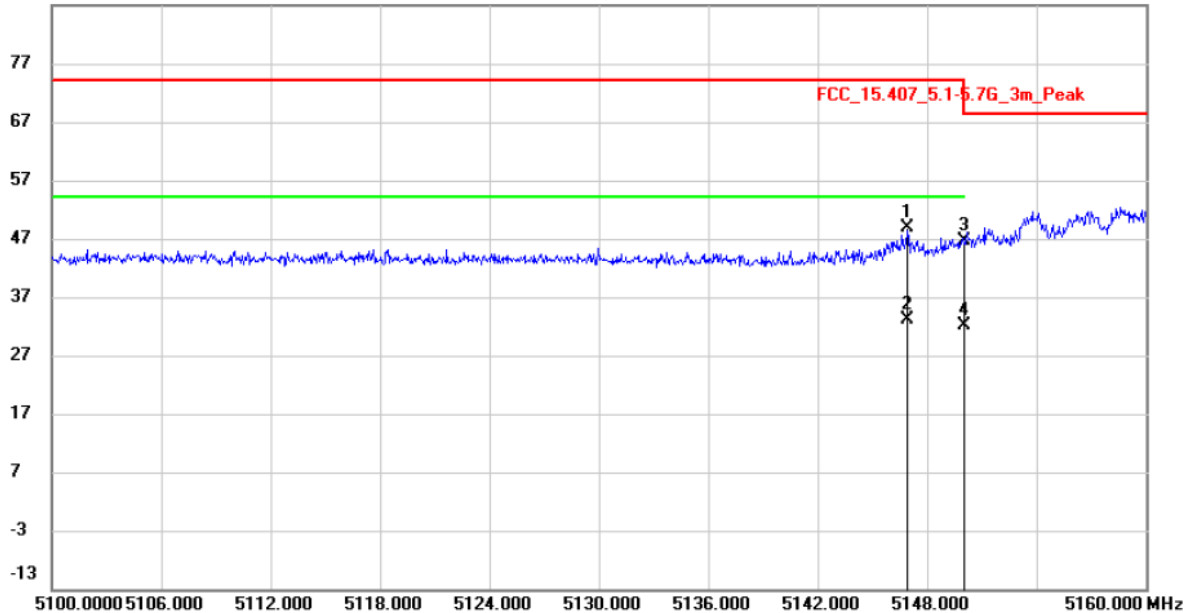


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5146.920	44.30	4.53	48.83	74.00	-25.17	peak
2	*	5146.920	28.49	4.53	33.02	54.00	-20.98	AVG
3		5150.000	41.97	4.53	46.50	68.20	-21.70	peak
4		5150.000	27.43	4.53	31.96	54.00	-22.04	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT40) / Low Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 11:34:14

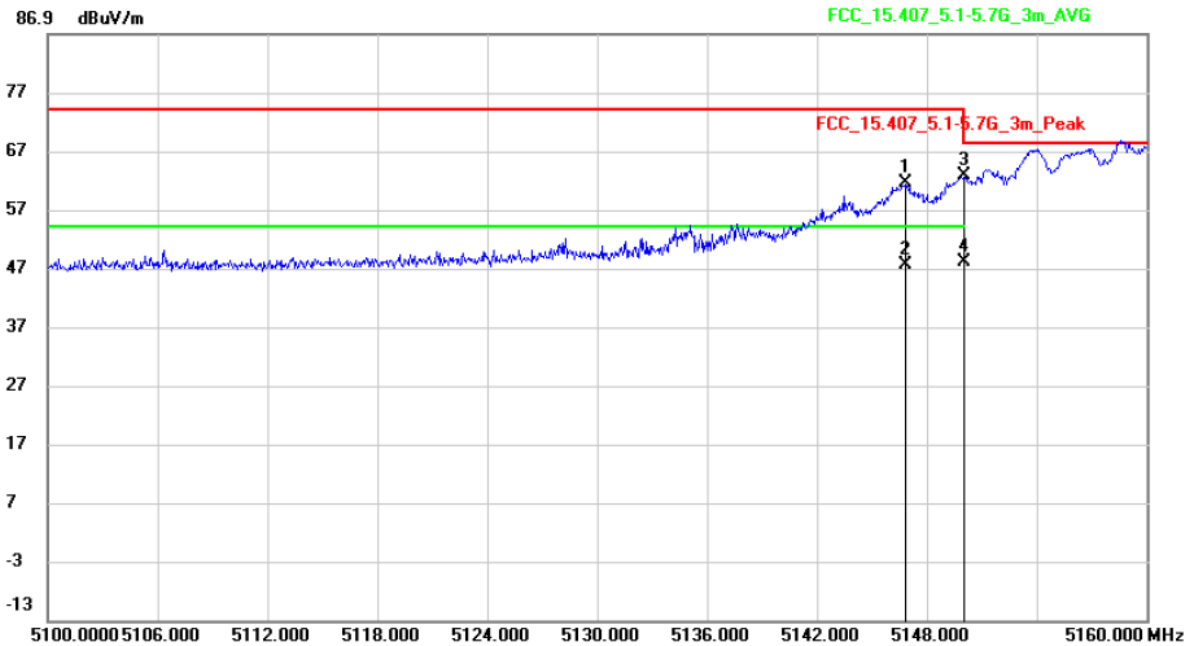


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.860	56.97	4.53	61.50	74.00	-12.50	peak	
2		5146.860	42.91	4.53	47.44	54.00	-6.56	AVG	
3	*	5150.000	58.20	4.53	62.73	68.20	-5.47	peak	
4		5150.000	43.43	4.53	47.96	54.00	-6.04	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT40) / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 11:50:04

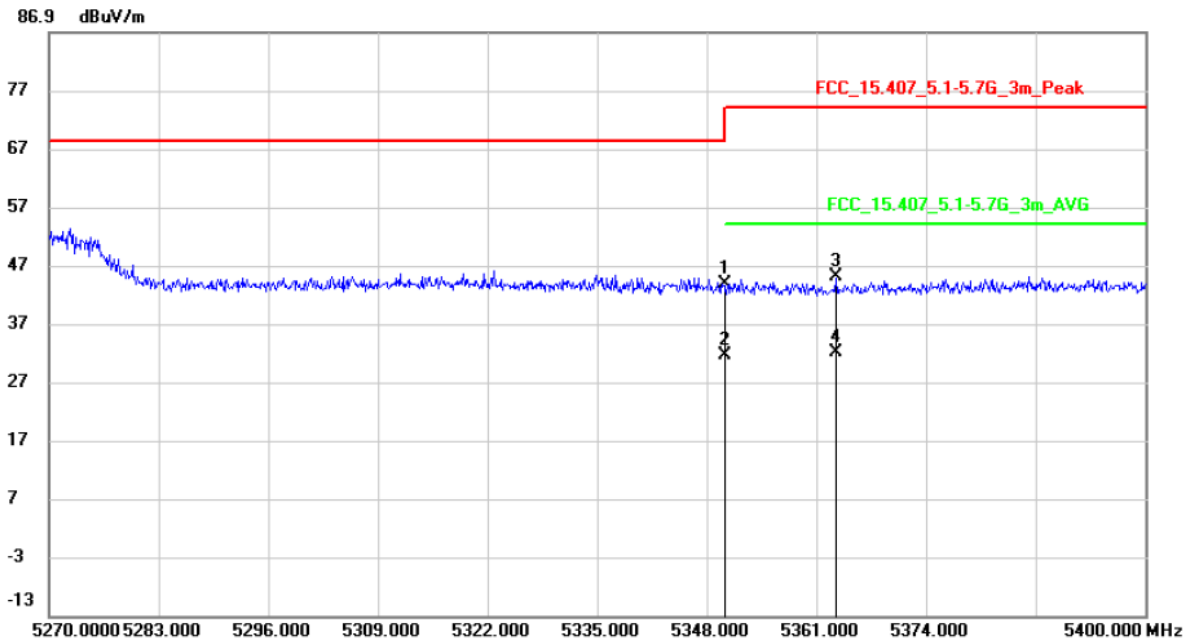

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5350.000	39.30	4.55	43.85	68.20	-24.35	peak
2		5350.000	26.90	4.55	31.45	54.00	-22.55	AVG
3		5363.340	40.47	4.56	45.03	74.00	-28.97	peak
4	*	5363.340	27.38	4.56	31.94	54.00	-22.06	AVG


M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT40) / High Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 11:42:13

86.9 dBuV/m

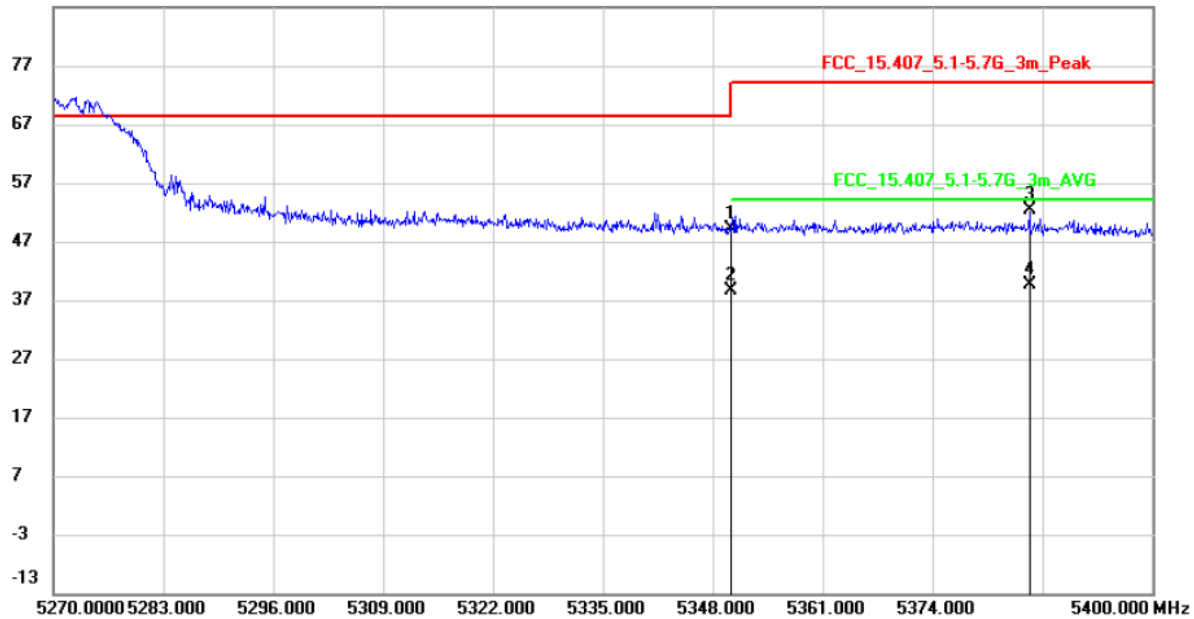

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	44.47	4.55	49.02	68.20	-19.18	peak	
2		5350.000	33.91	4.55	38.46	54.00	-15.54	AVG	
3		5385.440	47.78	4.55	52.33	74.00	-21.67	peak	
4	*	5385.440	34.90	4.55	39.45	54.00	-14.55	AVG	


M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT80) / Low Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 11:57:29

86.9 dBuV/m

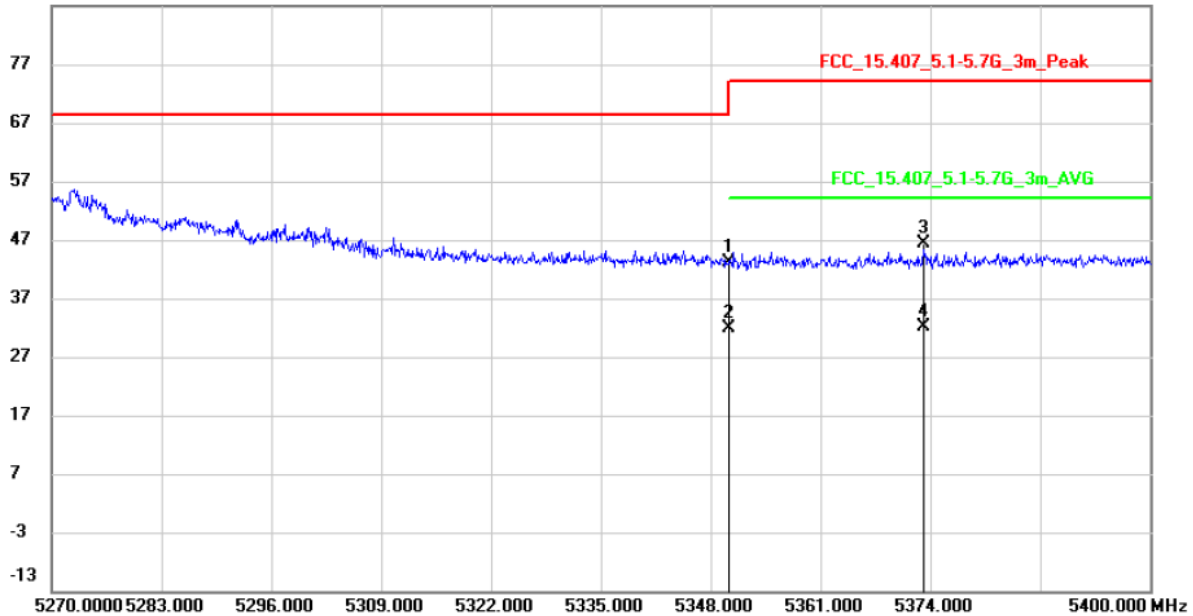


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		5350.000	38.47	4.55	43.02	68.20	-25.18	peak	
2		5350.000	27.14	4.55	31.69	54.00	-22.31	AVG	
3		5373.220	41.83	4.55	46.38	74.00	-27.62	peak	
4	*	5373.220	27.54	4.55	32.09	54.00	-21.91	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT80) / Low Channel / U-NII-1	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 12:04:21

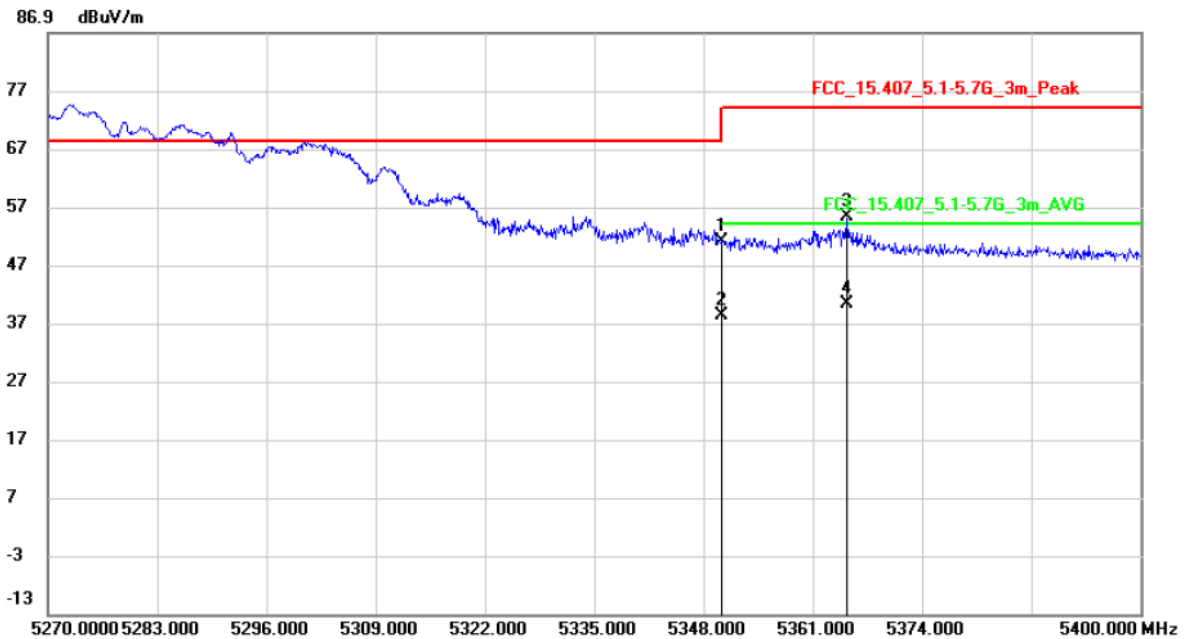

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	46.45	4.55	51.00	68.20	-17.20	peak	
2		5350.000	33.79	4.55	38.34	54.00	-15.66	AVG	
3		5365.030	50.66	4.55	55.21	74.00	-18.79	peak	
4	*	5365.030	35.83	4.55	40.38	54.00	-13.62	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT80) / High Channel / U-NII-1	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 12:13:12

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

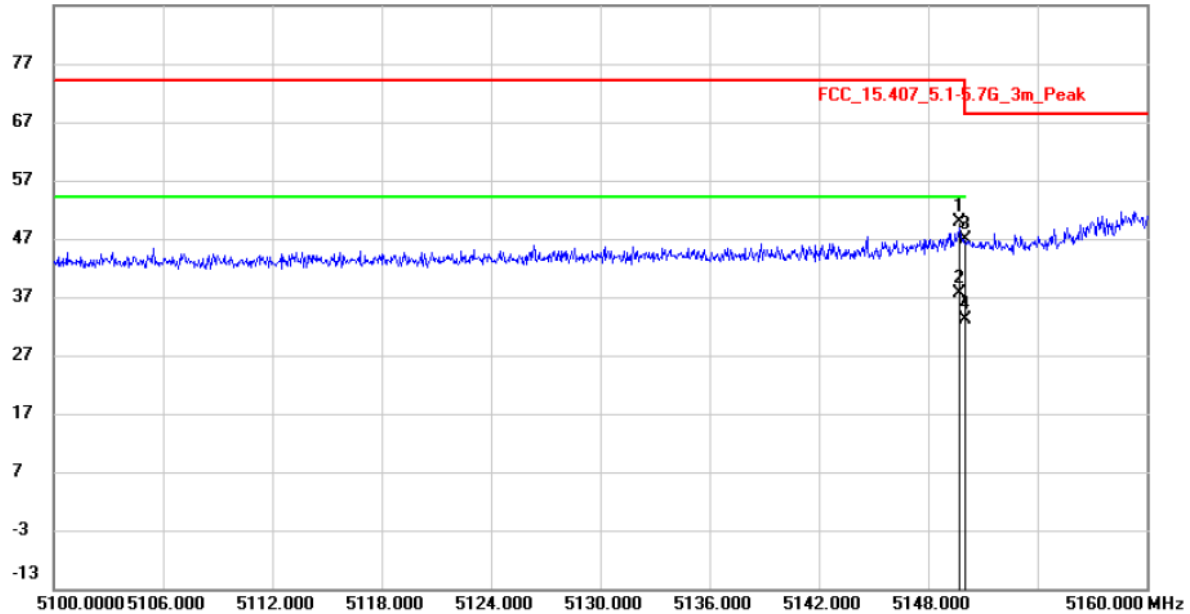

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5149.680	45.32	4.53	49.85	74.00	-24.15	peak
2	*	5149.680	32.91	4.53	37.44	54.00	-16.56	AVG
3		5150.000	42.20	4.53	46.73	68.20	-21.47	peak
4		5150.000	28.43	4.53	32.96	54.00	-21.04	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT80) / High Channel / U-NII-1	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 12:20:06

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

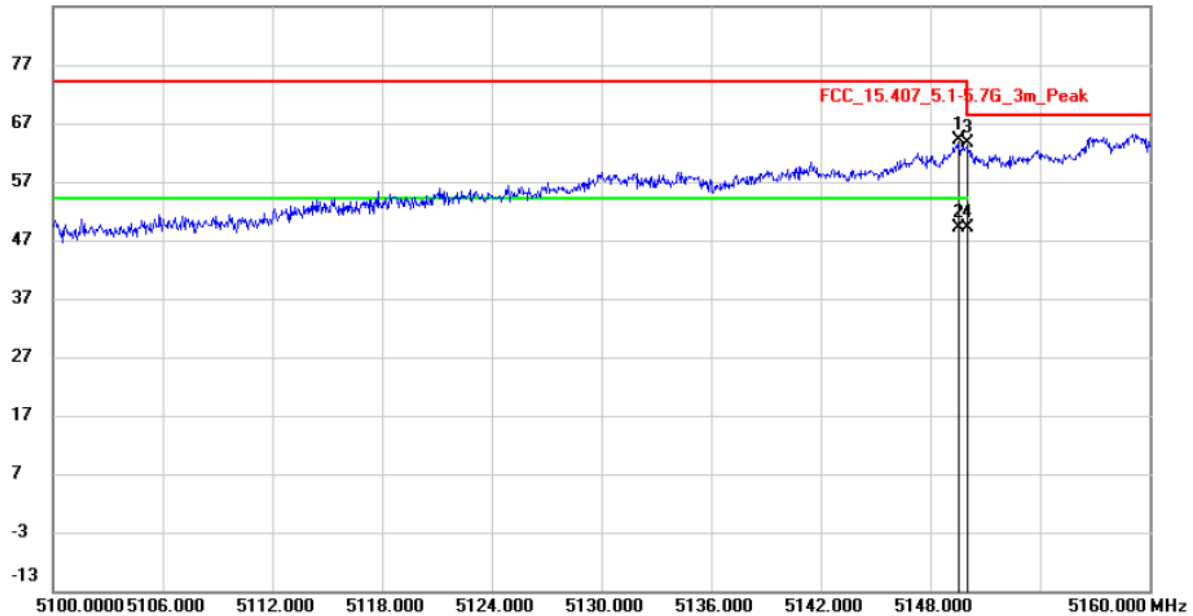


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5149.560	59.52	4.53	64.05	74.00	-9.95	peak
2		5149.560	44.51	4.53	49.04	54.00	-4.96	AVG
3	*	5150.000	59.01	4.53	63.54	68.20	-4.66	peak
4		5150.000	44.43	4.53	48.96	54.00	-5.04	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / Low Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 20:46:50

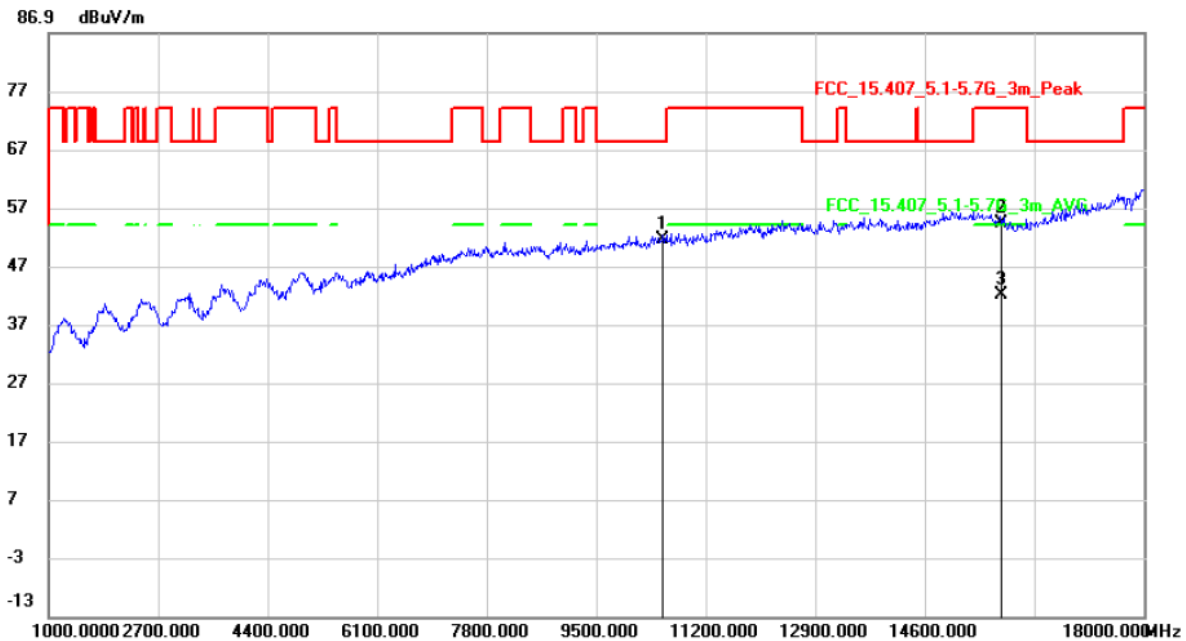


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		10520.000	39.58	12.06	51.64	68.20	-16.56	peak	
2		15780.000	40.02	14.34	54.36	74.00	-19.64	peak	
3	*	15780.000	27.64	14.34	41.98	54.00	-12.02	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11 a / Low Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 20:39:15

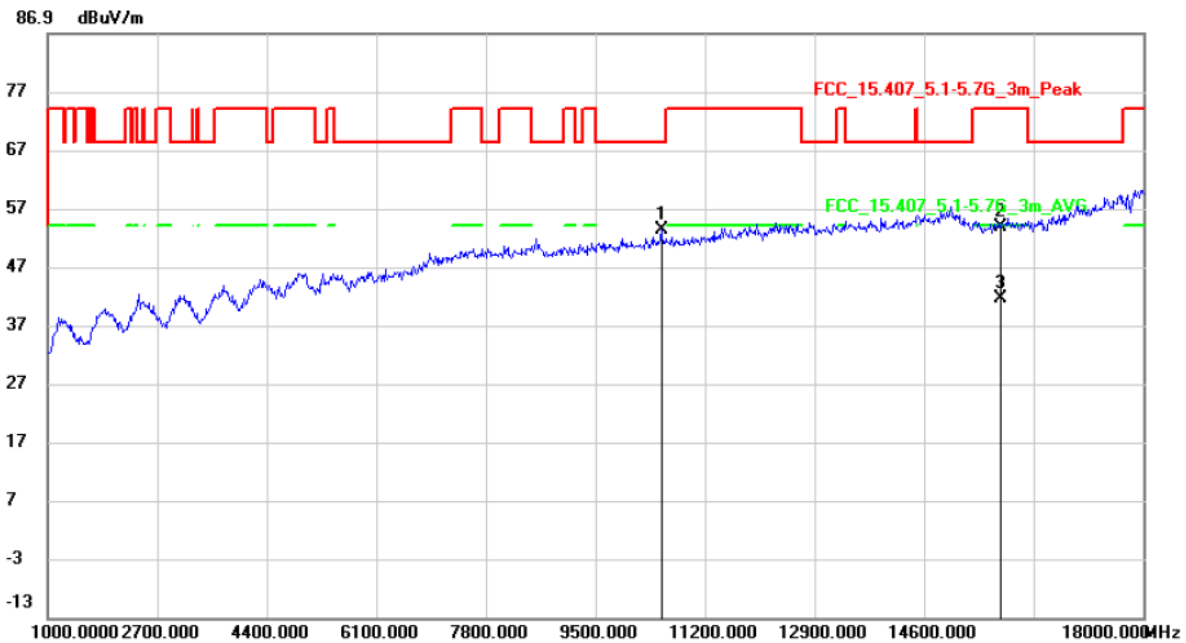


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		10520.000	41.11	12.06	53.17	68.20	-15.03	peak	
2		15780.000	40.12	13.66	53.78	74.00	-20.22	peak	
3	*	15780.000	27.78	13.66	41.44	54.00	-12.56	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11 a / Low Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2025/12/27

Time: 10:54:20

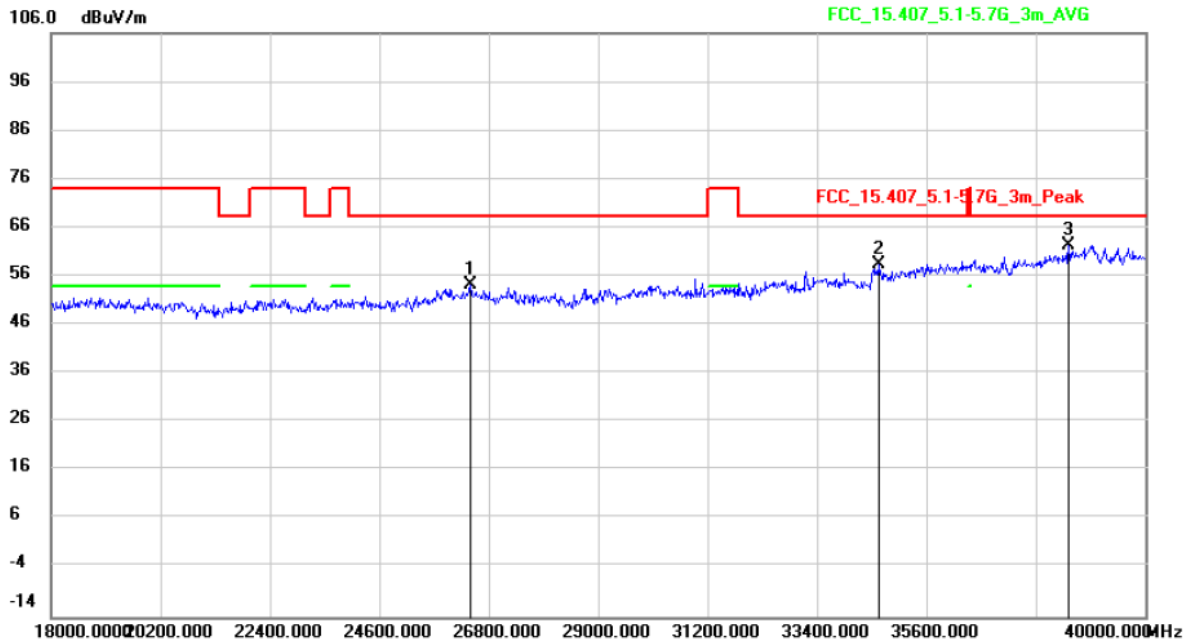


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		26426.000	47.18	7.20	54.38	68.20	-13.82	peak
2		34632.000	48.80	9.75	58.55	68.20	-9.65	peak
3	*	38460.000	48.99	13.47	62.46	68.20	-5.74	peak

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11 a / Low Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2025/12/27

Time: 11:01:43

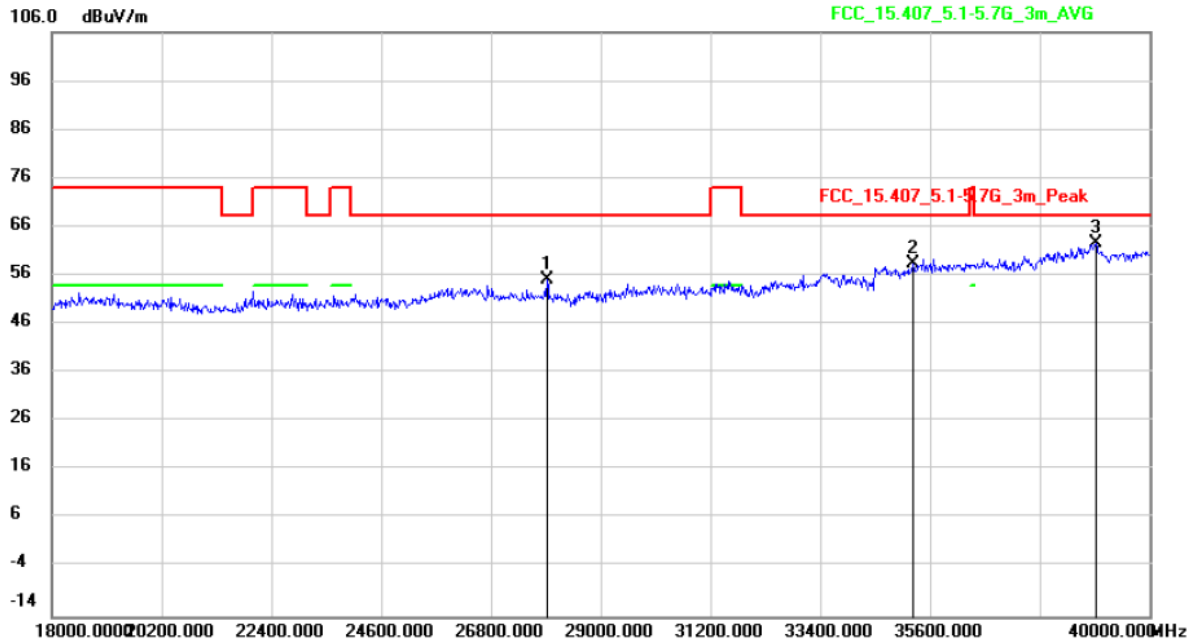


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	27922.000	48.07	7.01	55.08	68.20	-13.12	peak	
2	35270.000	48.38	9.94	58.32	68.20	-9.88	peak	
3 *	38922.000	50.02	12.64	62.66	68.20	-5.54	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / Middle Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 20:53:31

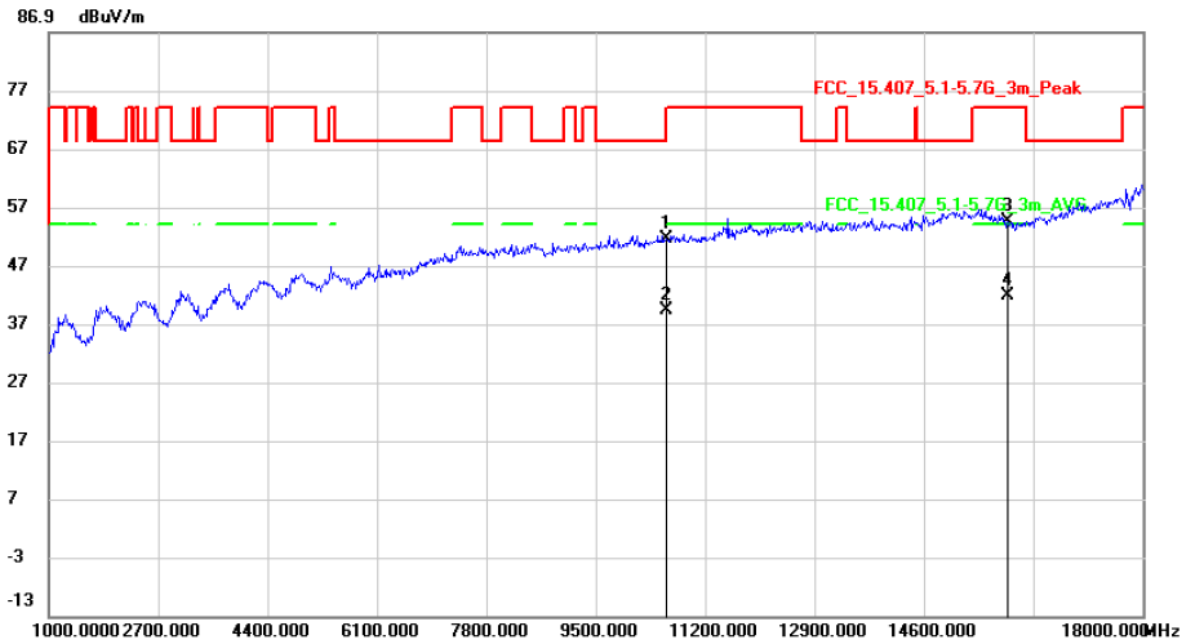


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.000	39.37	12.12	51.49	68.20	-16.71	peak	
2		10600.000	27.04	12.12	39.16	54.00	-14.84	AVG	
3		15900.000	40.82	13.78	54.60	74.00	-19.40	peak	
4	*	15900.000	27.99	13.78	41.77	54.00	-12.23	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11a / Middle Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 21:00:06

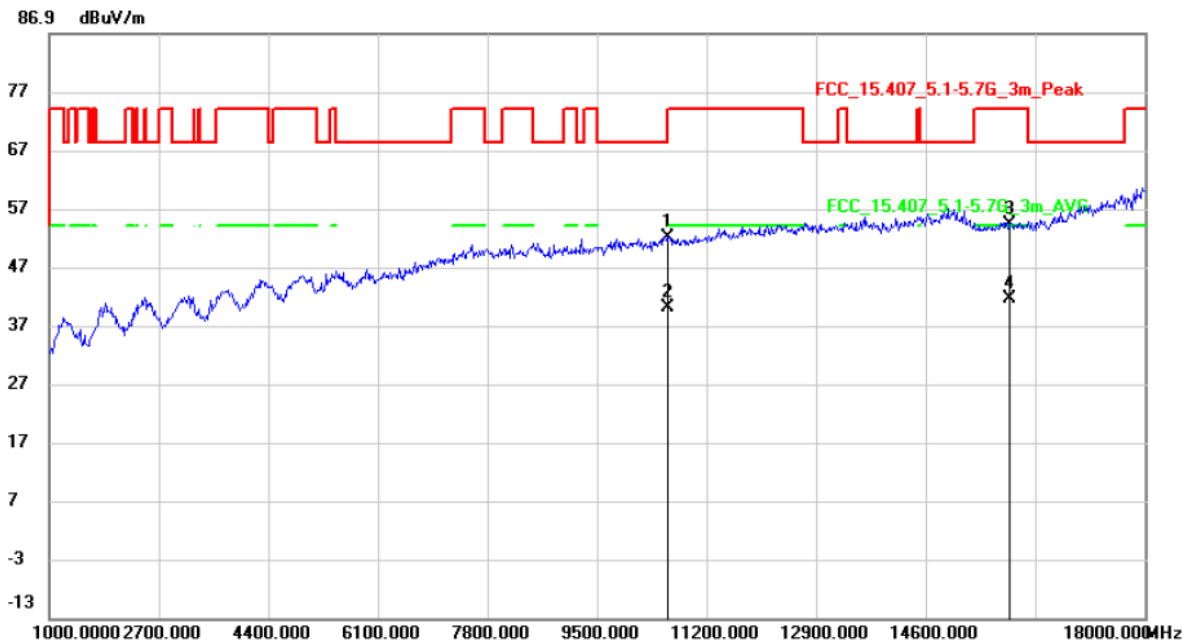


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.000	40.00	12.12	52.12	68.20	-16.08	peak	
2		10600.000	27.94	12.12	40.06	54.00	-13.94	AVG	
3		15900.000	40.38	13.82	54.20	74.00	-19.80	peak	
4	*	15900.000	27.80	13.82	41.62	54.00	-12.38	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / Middle Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2025/12/27

Time: 11:15:24

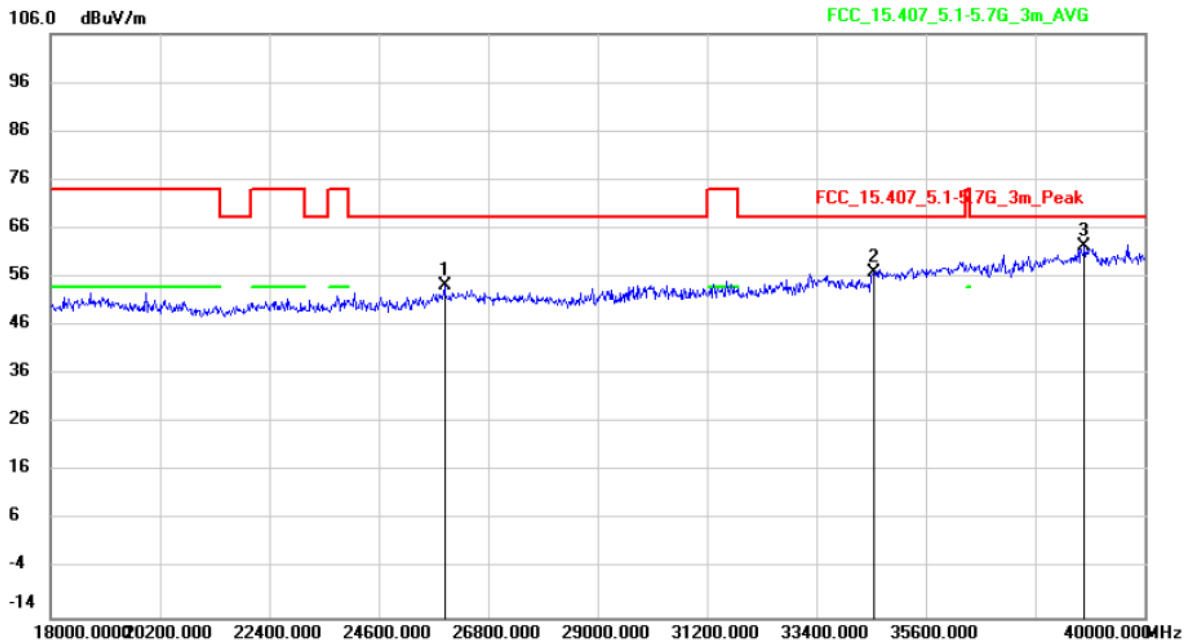

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		25920.000	47.28	6.91	54.19	68.20	-14.01	peak
2		34544.000	47.23	9.76	56.99	68.20	-11.21	peak
3	*	38790.000	49.34	12.91	62.25	68.20	-5.95	peak

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11a / Middle Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2025/12/27

Time: 11:08:54

106.0 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

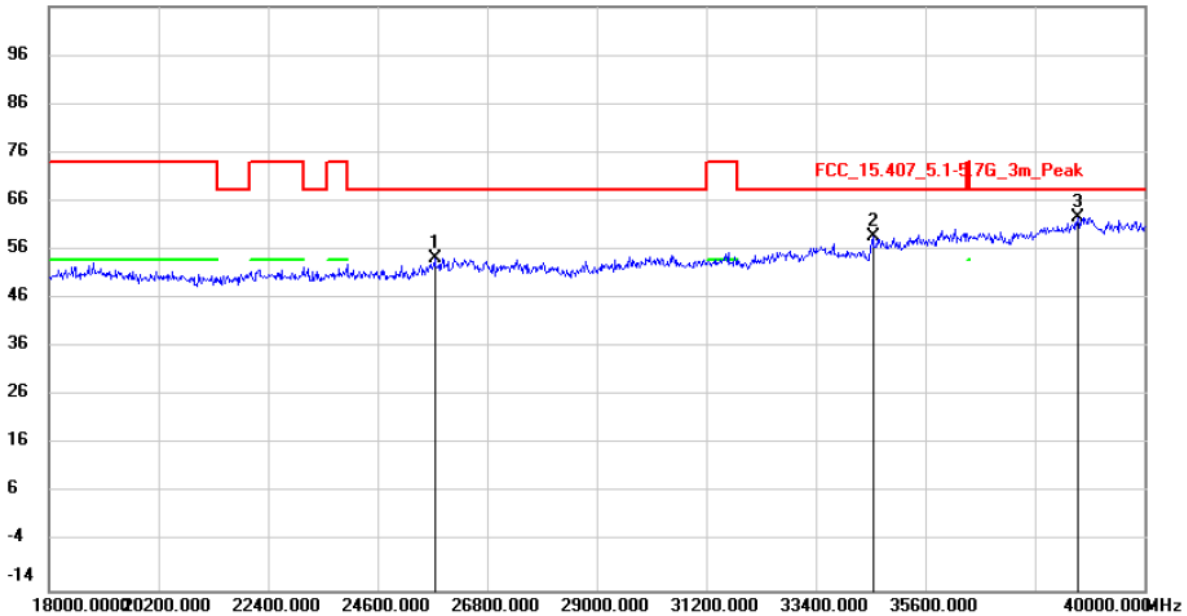


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		25744.000	47.69	6.64	54.33	68.20	-13.87	peak	
2		34544.000	48.87	9.76	58.63	68.20	-9.57	peak	
3	*	38658.000	49.52	13.17	62.69	68.20	-5.51	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 21:14:39

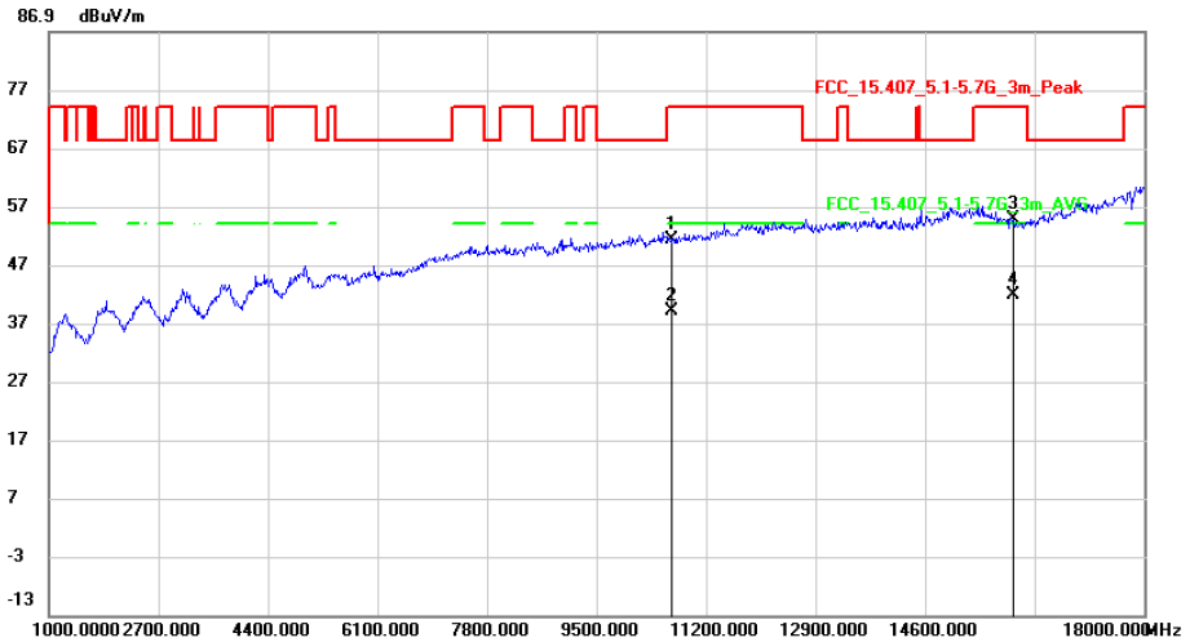


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.000	39.20	12.14	51.34	74.00	-22.66	peak	
2		10640.000	26.93	12.14	39.07	54.00	-14.93	AVG	
3		15960.000	41.19	13.50	54.69	74.00	-19.31	peak	
4	*	15960.000	28.28	13.50	41.78	54.00	-12.22	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11a / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 21:07:27

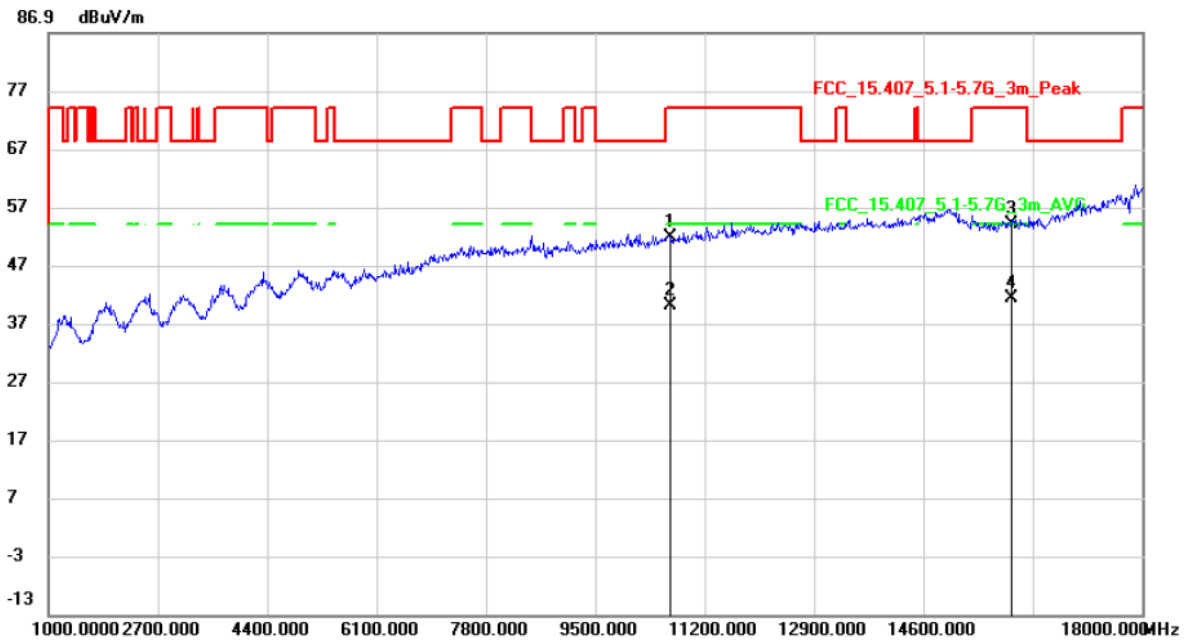


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.000	39.69	12.14	51.83	74.00	-22.17	peak	
2		10640.000	27.92	12.14	40.06	54.00	-13.94	AVG	
3		15960.000	40.06	13.90	53.96	74.00	-20.04	peak	
4	*	15960.000	27.32	13.90	41.22	54.00	-12.78	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2025/12/27

Time: 11:22:29

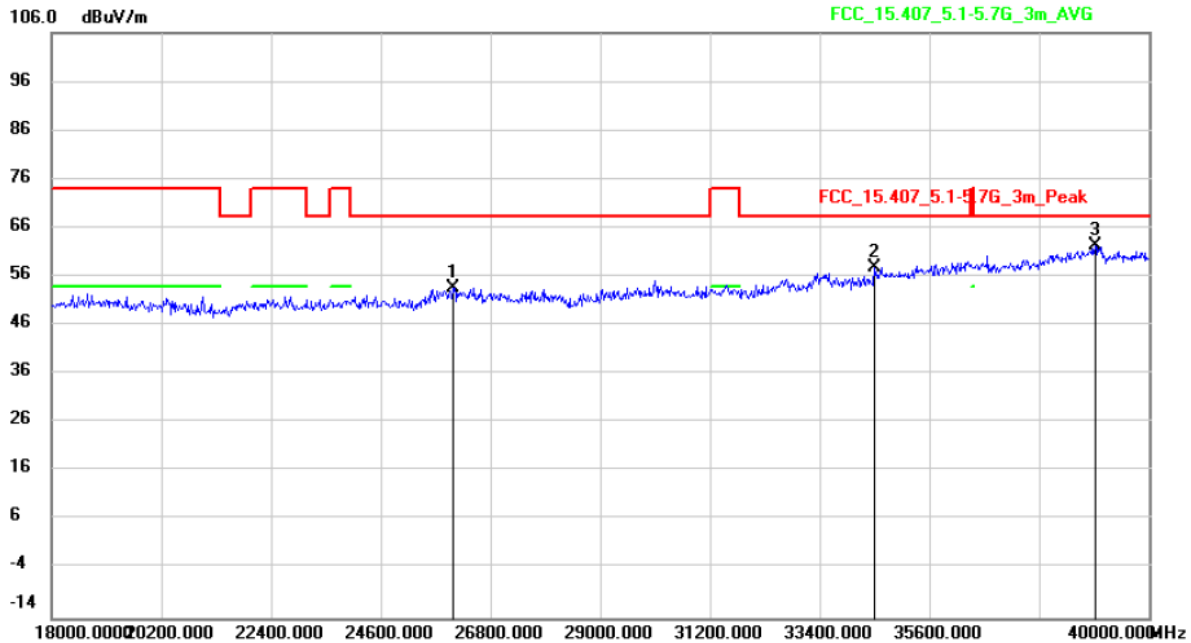


M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11a / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2025/12/27

Time: 11:29:01

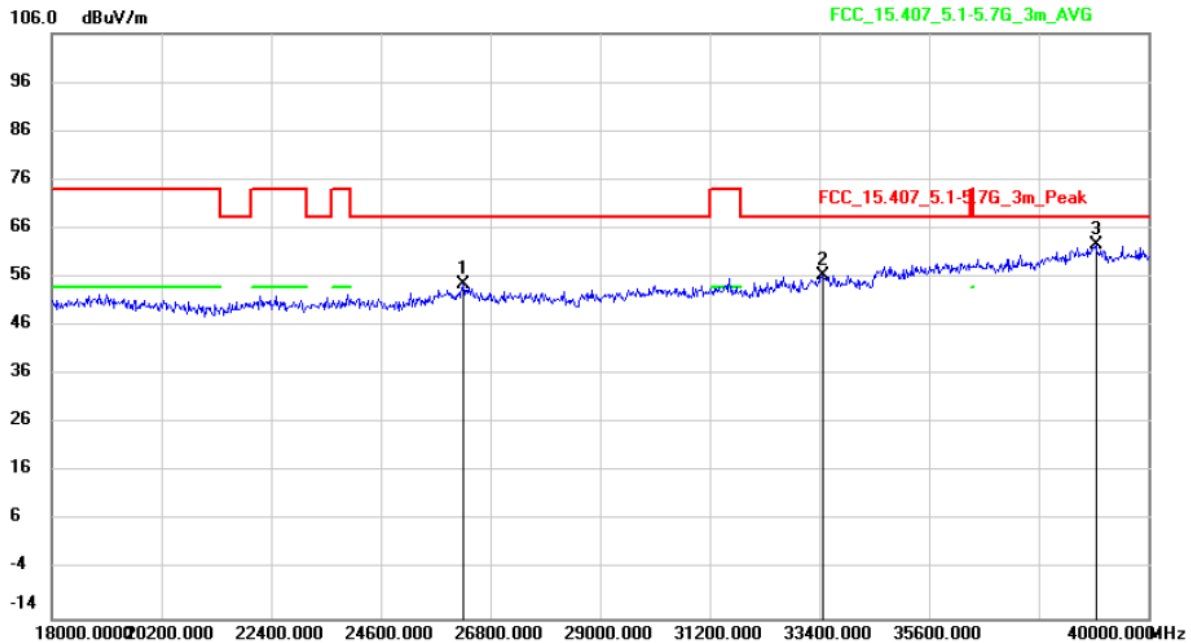

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		26250.000	47.44	7.13	54.57	68.20	-13.63	peak	
2		33466.000	46.02	10.21	56.23	68.20	-11.97	peak	
3	*	38944.000	49.95	12.59	62.54	68.20	-5.66	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11a / Low Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 12:30:11

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

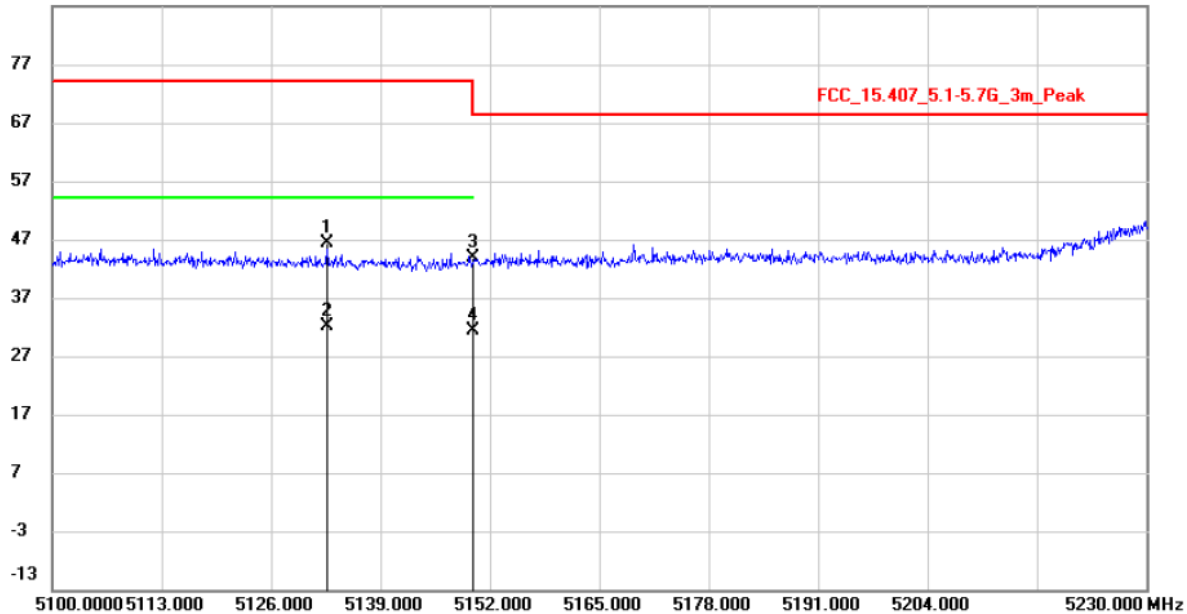


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5132.630	41.71	4.52	46.23	74.00	-27.77	peak
2	*	5132.630	27.55	4.52	32.07	54.00	-21.93	AVG
3		5150.000	39.15	4.53	43.68	68.20	-24.52	peak
4		5150.000	26.72	4.53	31.25	54.00	-22.75	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11a / Low Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 12:37:00

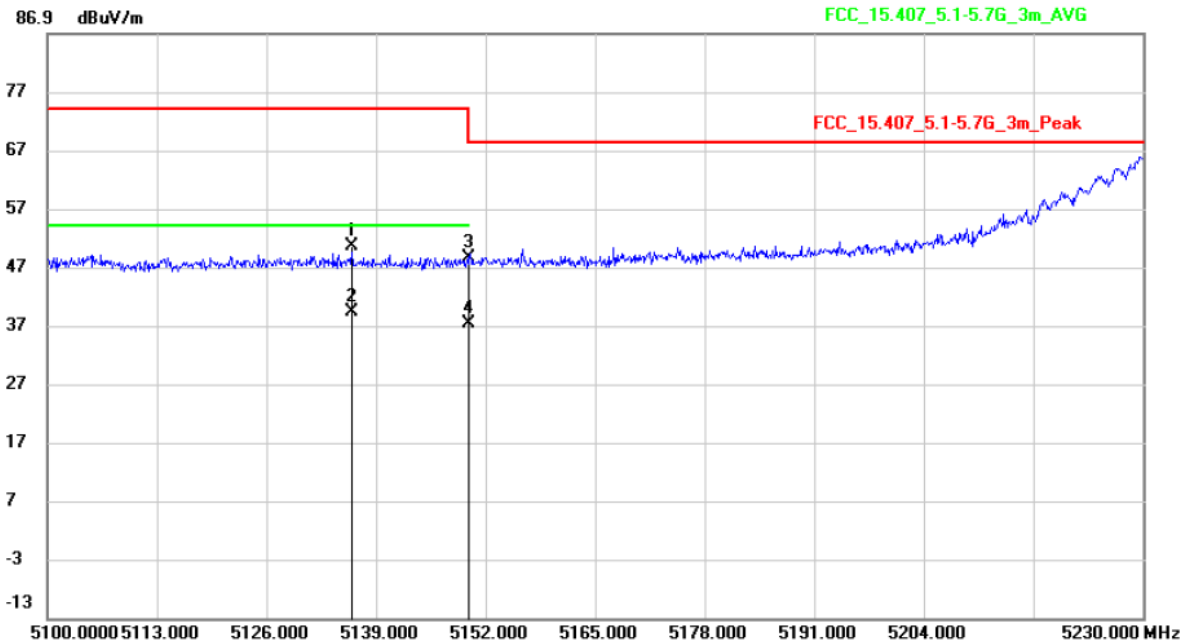


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5136.140	46.00	4.51	50.51	74.00	-23.49	peak	
2	*	5136.140	34.82	4.51	39.33	54.00	-14.67	AVG	
3		5150.000	43.91	4.53	48.44	68.20	-19.76	peak	
4		5150.000	32.71	4.53	37.24	54.00	-16.76	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11a / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 12:52:50

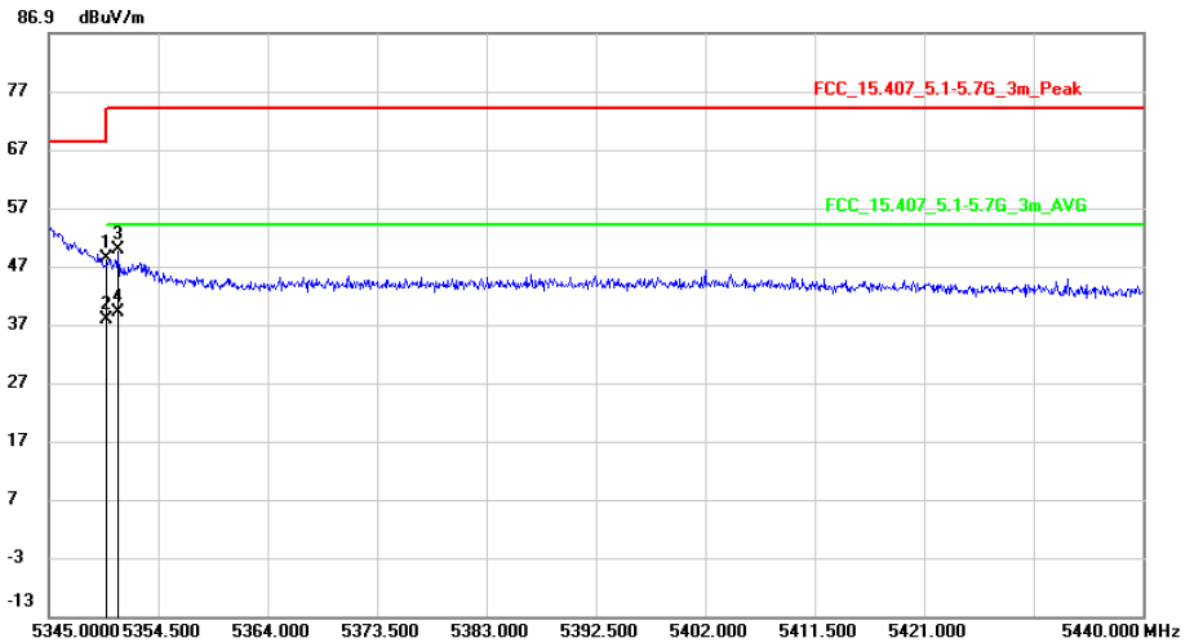


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	43.76	4.55	48.31	68.20	-19.89	peak	
2		5350.000	33.20	4.55	37.75	54.00	-16.25	AVG	
3		5350.985	45.23	4.55	49.78	74.00	-24.22	peak	
4	*	5350.985	34.41	4.55	38.96	54.00	-15.04	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11a / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 12:45:00

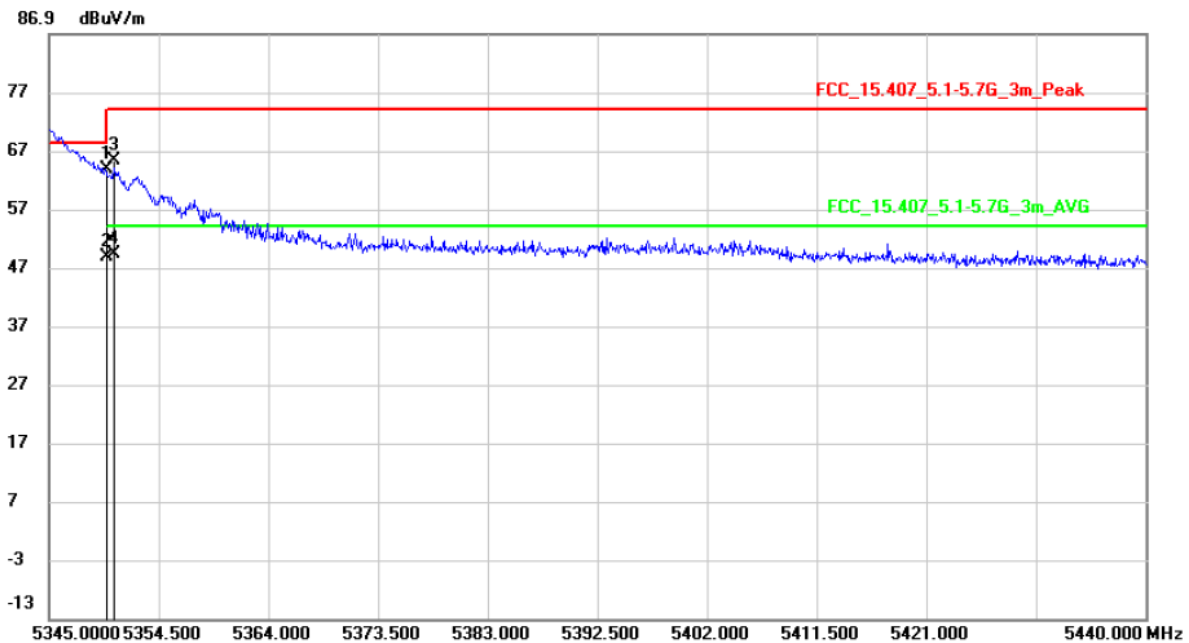

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1	*	5350.000	59.29	4.55	63.84	68.20	-4.36	peak
2		5350.000	44.30	4.55	48.85	54.00	-5.15	AVG
3		5350.605	60.77	4.55	65.32	74.00	-8.68	peak
4		5350.605	44.81	4.55	49.36	54.00	-4.64	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT20) / Low Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 13:22:45

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

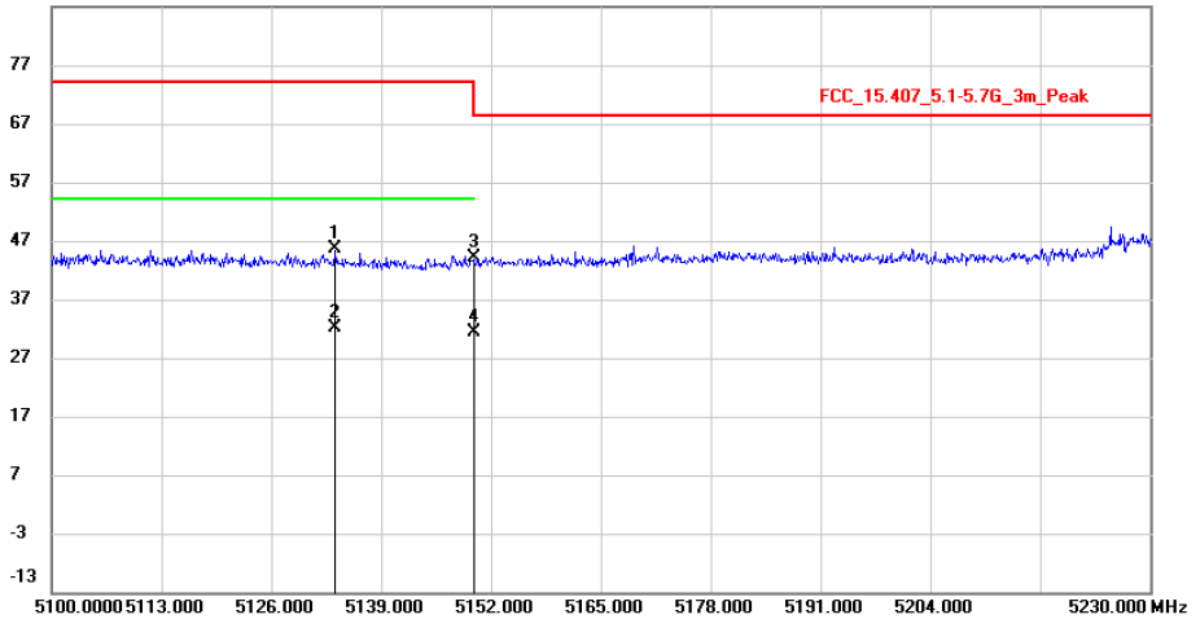

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT20) / Low Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 13:15:02

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

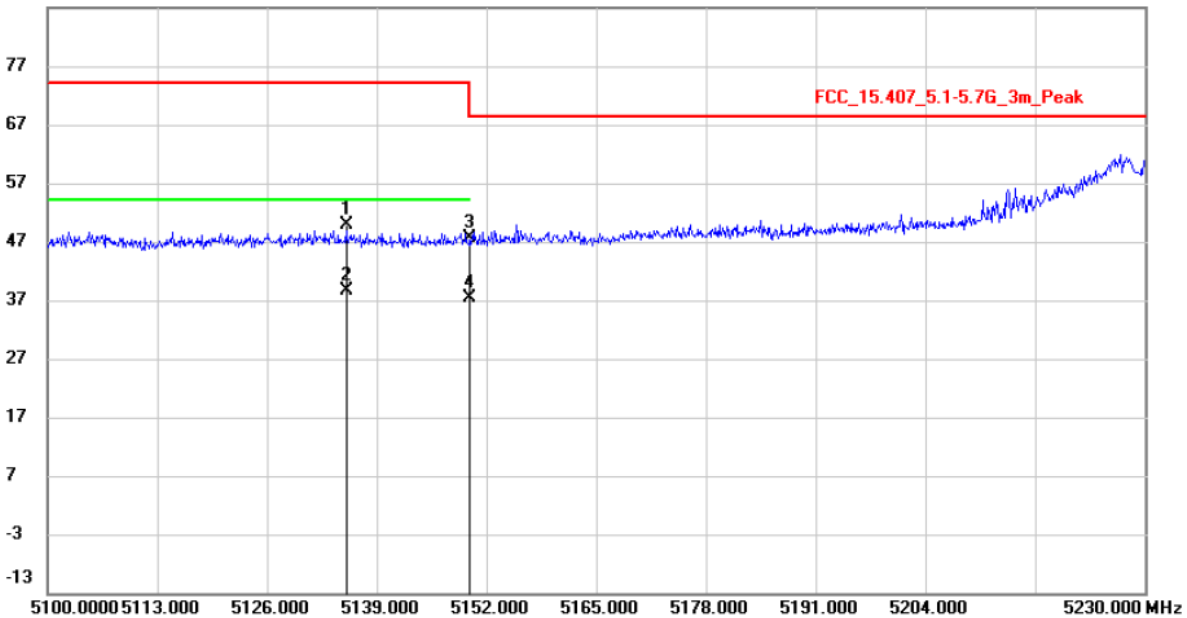


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	5135.360	45.30	4.52	49.82	74.00	-24.18	peak	
2 *	5135.360	33.96	4.52	38.48	54.00	-15.52	AVG	
3	5150.000	43.03	4.53	47.56	68.20	-20.64	peak	
4	5150.000	32.80	4.53	37.33	54.00	-16.67	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT20) / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 13:00:44

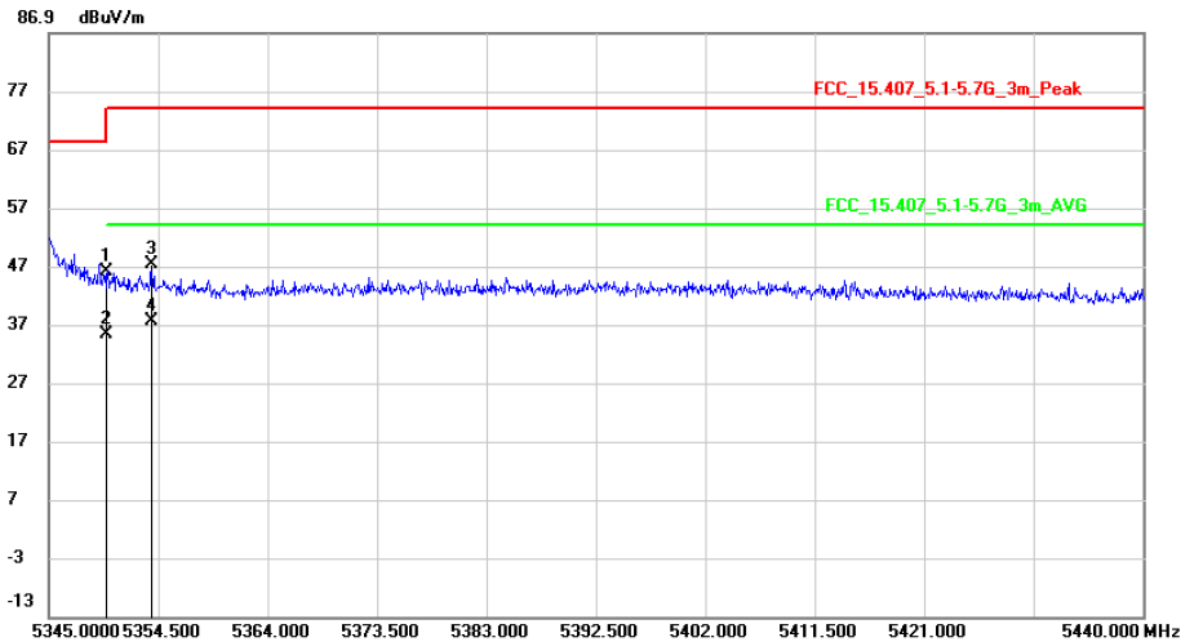


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	41.48	4.55	46.03	68.20	-22.17	peak	
2		5350.000	30.69	4.55	35.24	54.00	-18.76	AVG	
3		5353.930	42.80	4.55	47.35	74.00	-26.65	peak	
4	*	5353.930	32.89	4.55	37.44	54.00	-16.56	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT20) / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 13:08:12

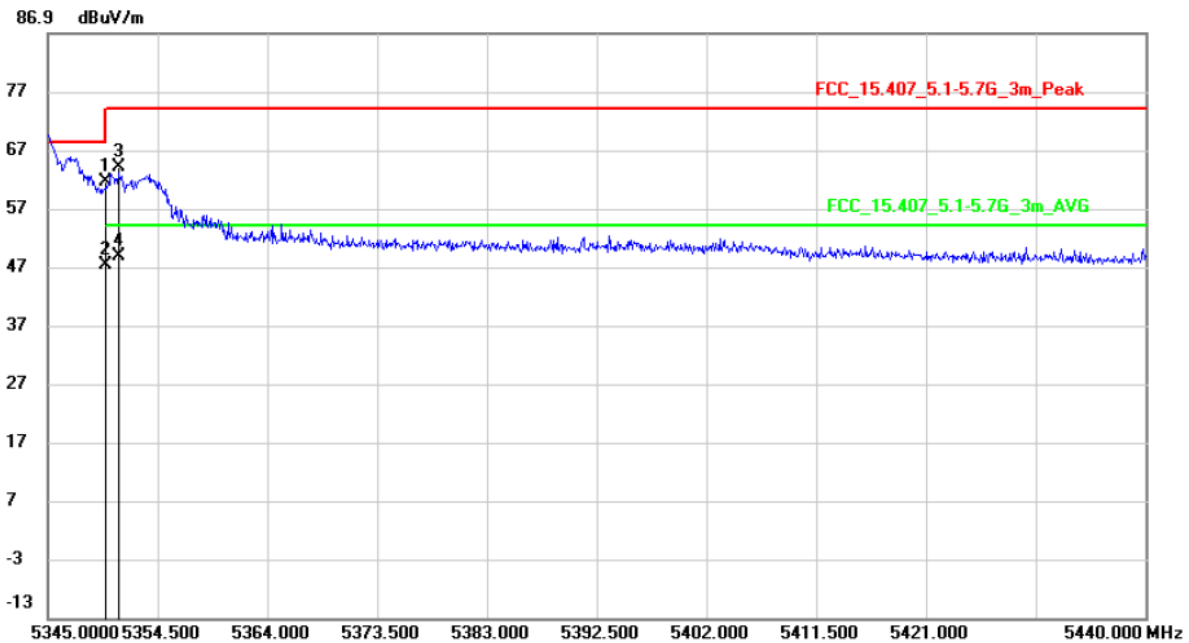

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	56.97	4.55	61.52	68.20	-6.68	peak	
2		5350.000	42.70	4.55	47.25	54.00	-6.75	AVG	
3		5351.080	59.45	4.55	64.00	74.00	-10.00	peak	
4	*	5351.080	44.30	4.55	48.85	54.00	-5.15	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11n(HT40) / Low Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 14:23:48

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

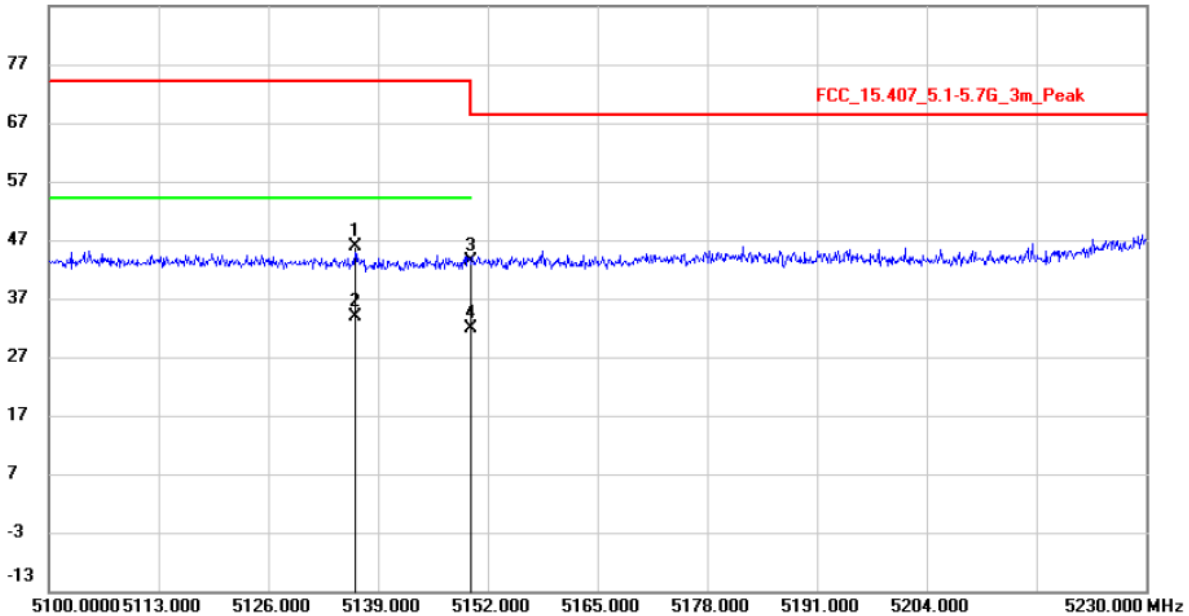

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5136.270	41.29	4.51	45.80	74.00	-28.20	peak
2	*	5136.270	29.21	4.51	33.72	54.00	-20.28	AVG
3		5150.000	38.65	4.53	43.18	68.20	-25.02	peak
4		5150.000	27.17	4.53	31.70	54.00	-22.30	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11n(HT40) / Low Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 14:15:54

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

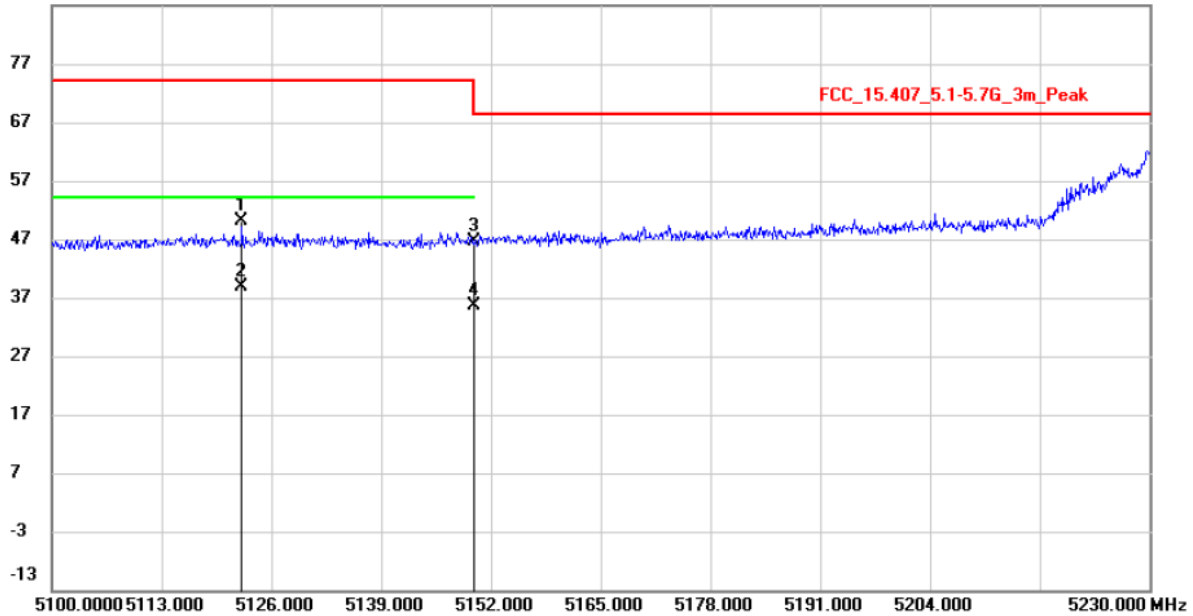


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5122.490	45.52	4.51	50.03	74.00	-23.97	peak	
2	*	5122.490	34.25	4.51	38.76	54.00	-15.24	AVG	
3		5150.000	41.99	4.53	46.52	68.20	-21.68	peak	
4		5150.000	30.91	4.53	35.44	54.00	-18.56	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT40) / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 14:00:59

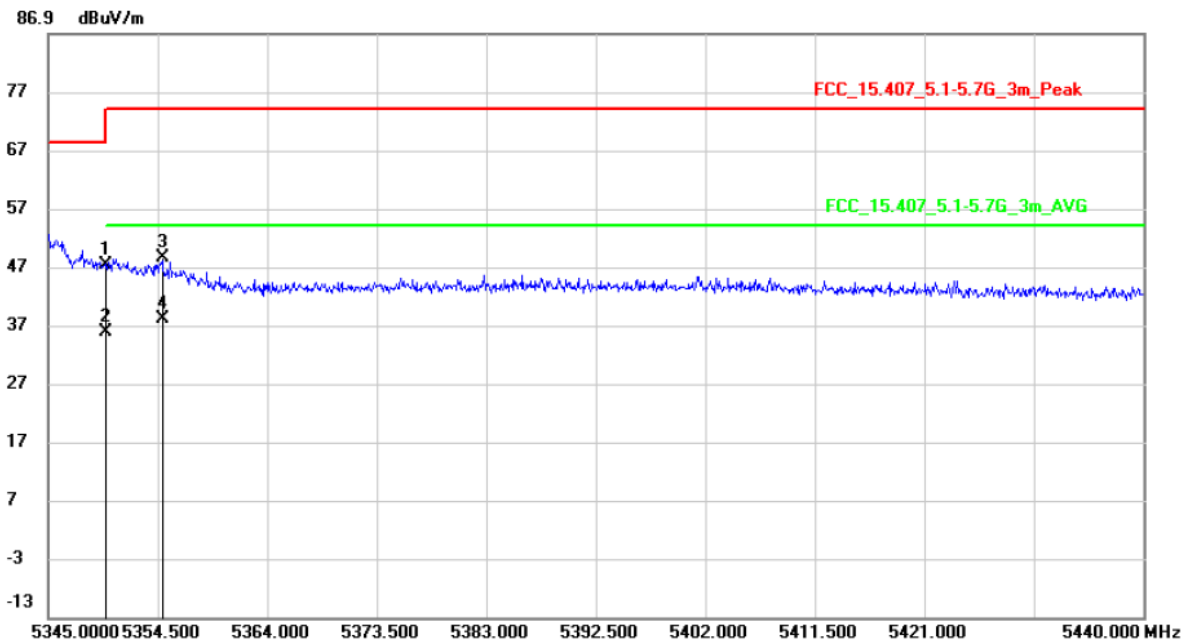


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5350.000	42.78	4.55	47.33	68.20	-20.87	peak
2		5350.000	31.13	4.55	35.68	54.00	-18.32	AVG
3		5354.880	43.97	4.56	48.53	74.00	-25.47	peak
4	*	5354.880	33.47	4.56	38.03	54.00	-15.97	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 n(HT40) / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 14:07:56

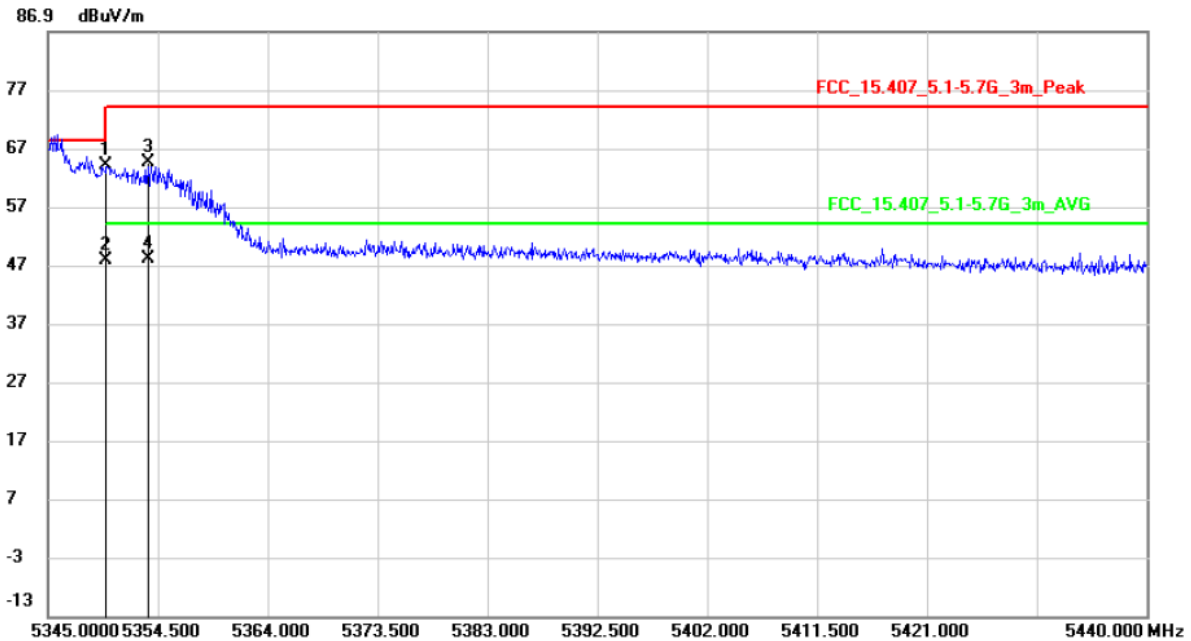

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5350.000	59.55	4.55	64.10	68.20	-4.10	peak	
2		5350.000	43.21	4.55	47.76	54.00	-6.24	AVG	
3		5353.645	59.97	4.55	64.52	74.00	-9.48	peak	
4		5353.645	43.46	4.55	48.01	54.00	-5.99	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT20) / Low Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 13:30:57

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

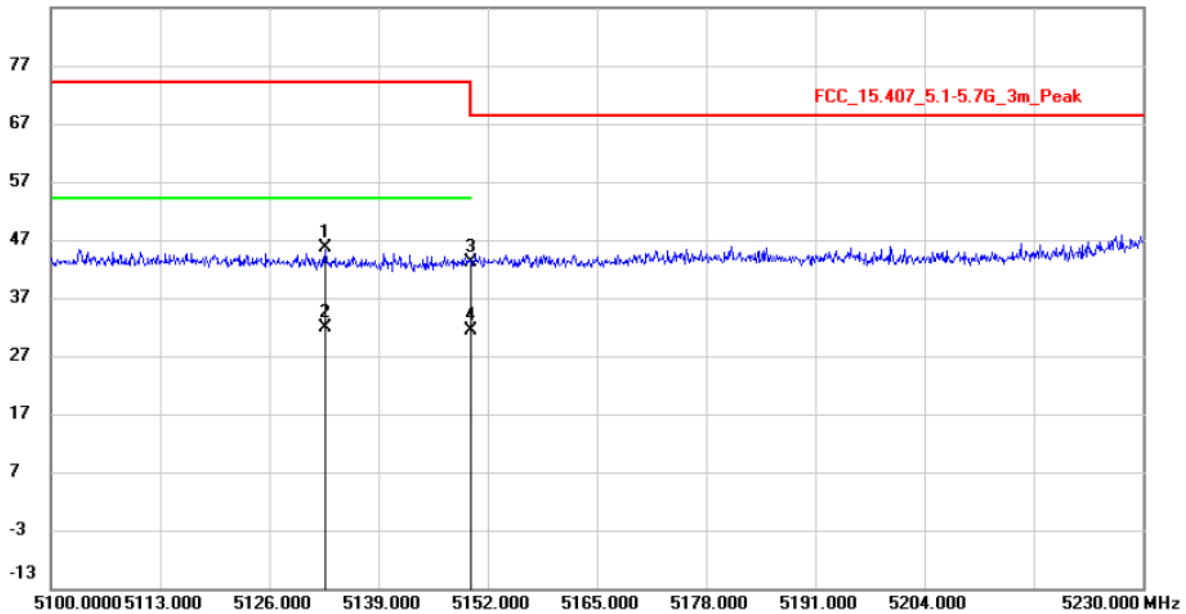

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5132.630	41.04	4.52	45.56	74.00	-28.44	peak
2	*	5132.630	27.35	4.52	31.87	54.00	-22.13	AVG
3		5150.000	38.52	4.53	43.05	68.20	-25.15	peak
4		5150.000	26.81	4.53	31.34	54.00	-22.66	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT20) / Low Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 13:37:10

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

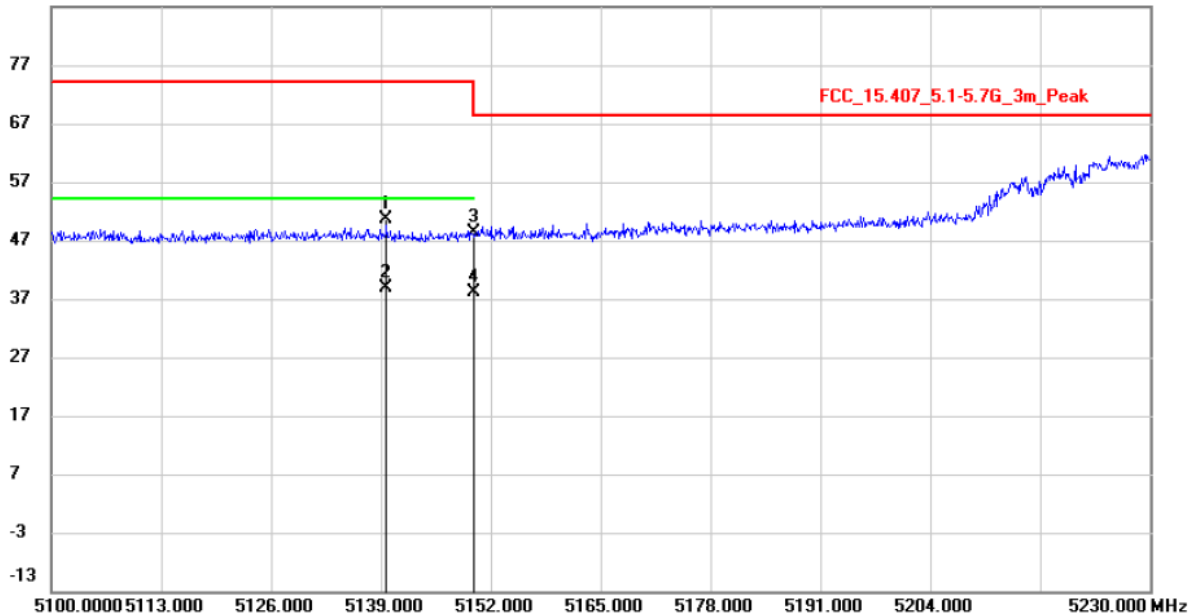


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5139.650	46.11	4.51	50.62	74.00	-23.38	peak	
2	*	5139.650	34.34	4.51	38.85	54.00	-15.15	AVG	
3		5150.000	43.82	4.53	48.35	68.20	-19.85	peak	
4		5150.000	33.59	4.53	38.12	54.00	-15.88	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT20) / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 13:52:18

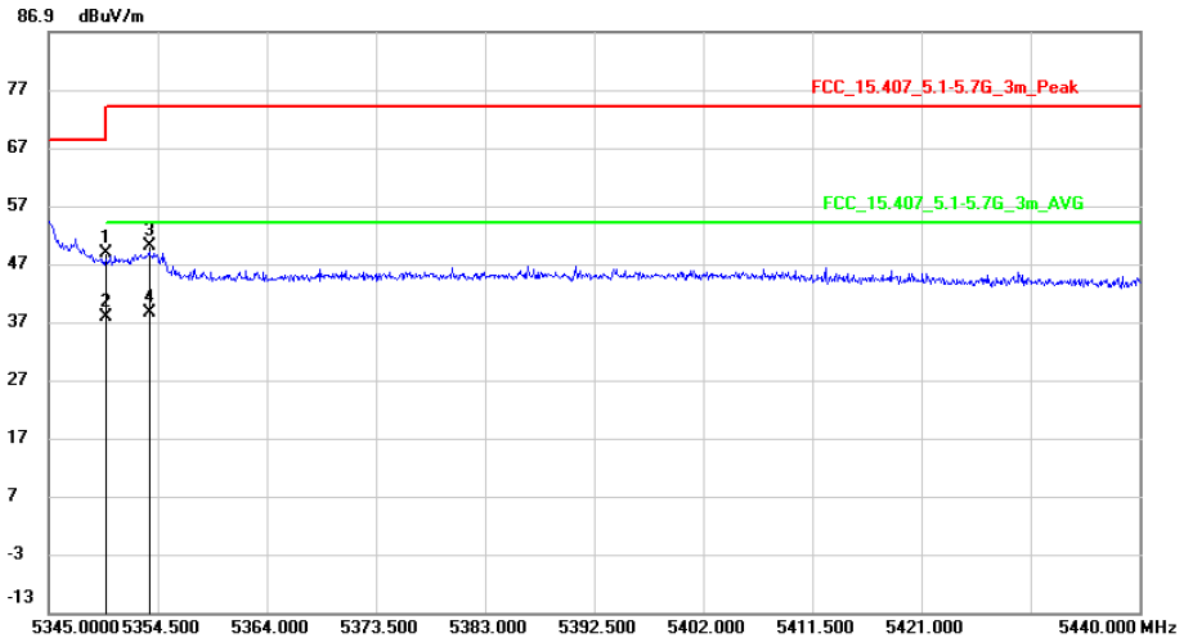

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5350.000	44.25	4.55	48.80	68.20	-19.40	peak
2		5350.000	33.25	4.55	37.80	54.00	-16.20	AVG
3		5353.740	45.57	4.55	50.12	74.00	-23.88	peak
4	*	5353.740	34.10	4.55	38.65	54.00	-15.35	AVG


M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT20) / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 13:45:33

86.9 dBuV/m

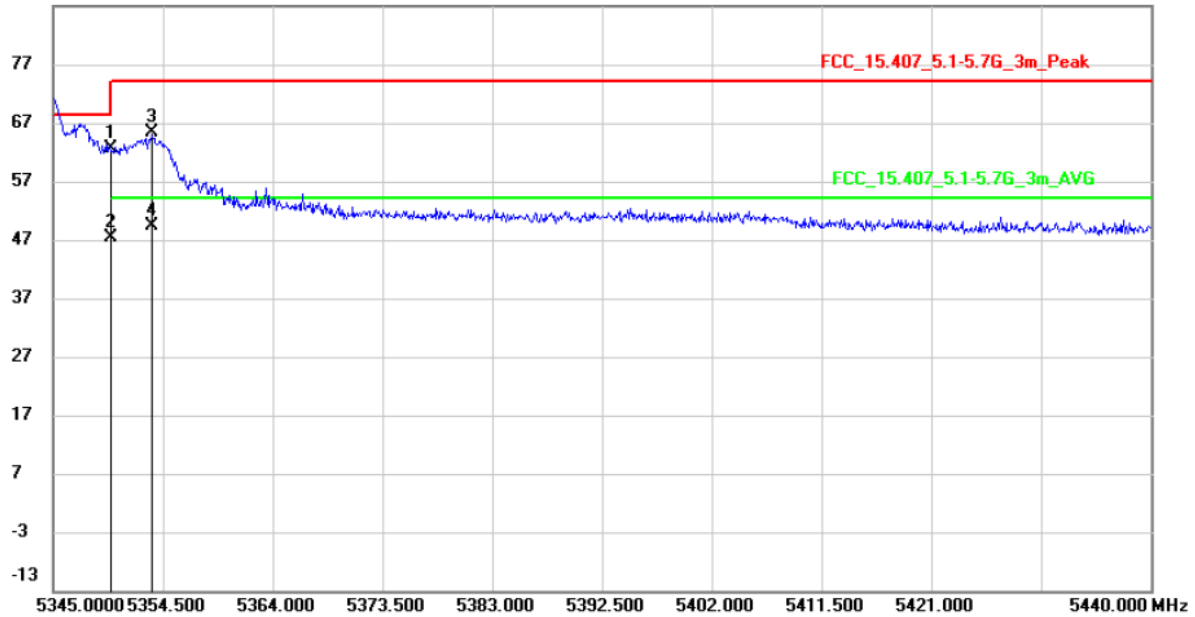

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	57.95	4.55	62.50	68.20	-5.70	peak	
2		5350.000	42.78	4.55	47.33	54.00	-6.67	AVG	
3		5353.550	60.66	4.55	65.21	74.00	-8.79	peak	
4	*	5353.550	44.80	4.55	49.35	54.00	-4.65	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT40) / Low Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 14:30:40

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

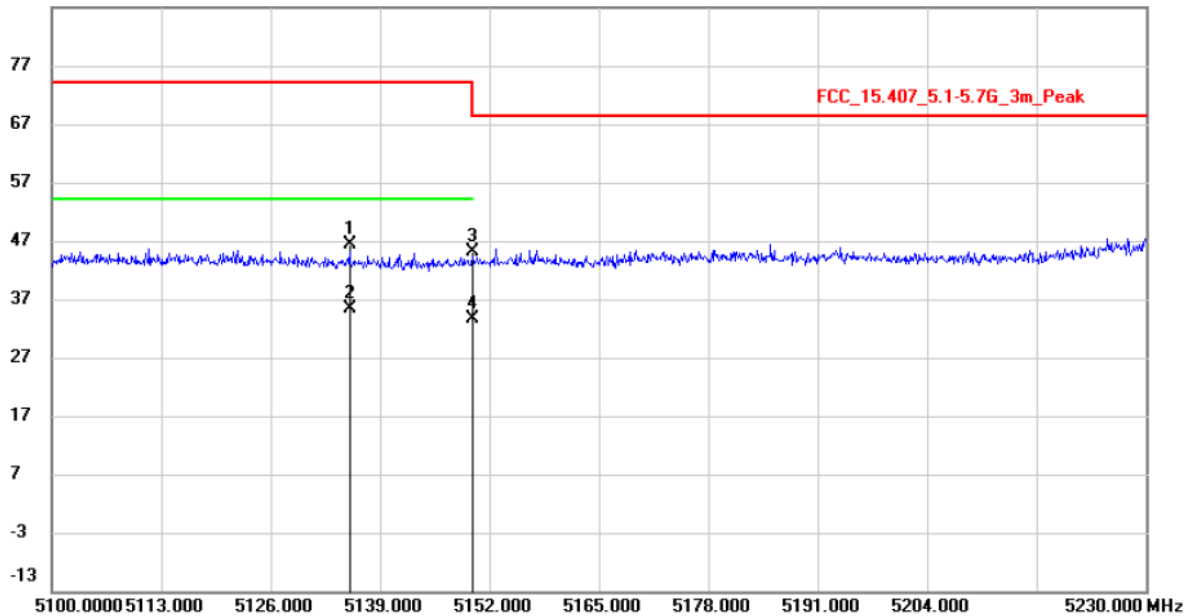


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5135.360	41.73	4.52	46.25	74.00	-27.75	peak
2	*	5135.360	30.65	4.52	35.17	54.00	-18.83	AVG
3		5150.000	40.47	4.53	45.00	68.20	-23.20	peak
4		5150.000	28.92	4.53	33.45	54.00	-20.55	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT40) / Low Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 14:37:12

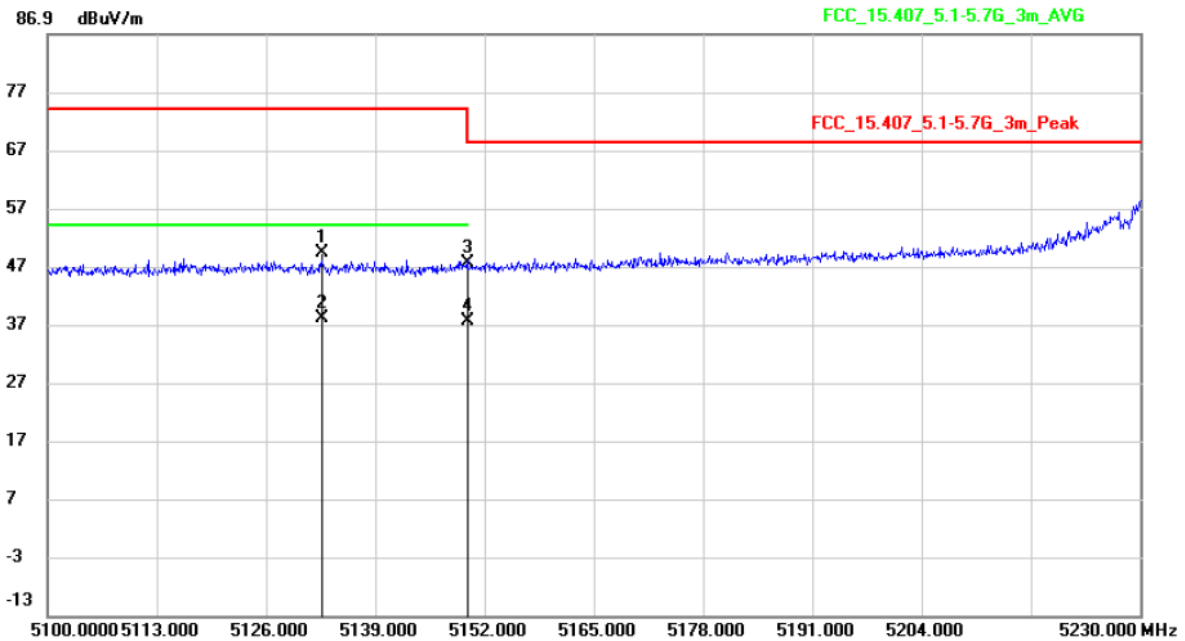

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5132.630	44.68	4.52	49.20	74.00	-24.80	peak	
2	*	5132.630	33.58	4.52	38.10	54.00	-15.90	AVG	
3		5150.000	43.00	4.53	47.53	68.20	-20.67	peak	
4		5150.000	32.91	4.53	37.44	54.00	-16.56	AVG	


M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT40) / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 14:50:40

86.9 dBuV/m

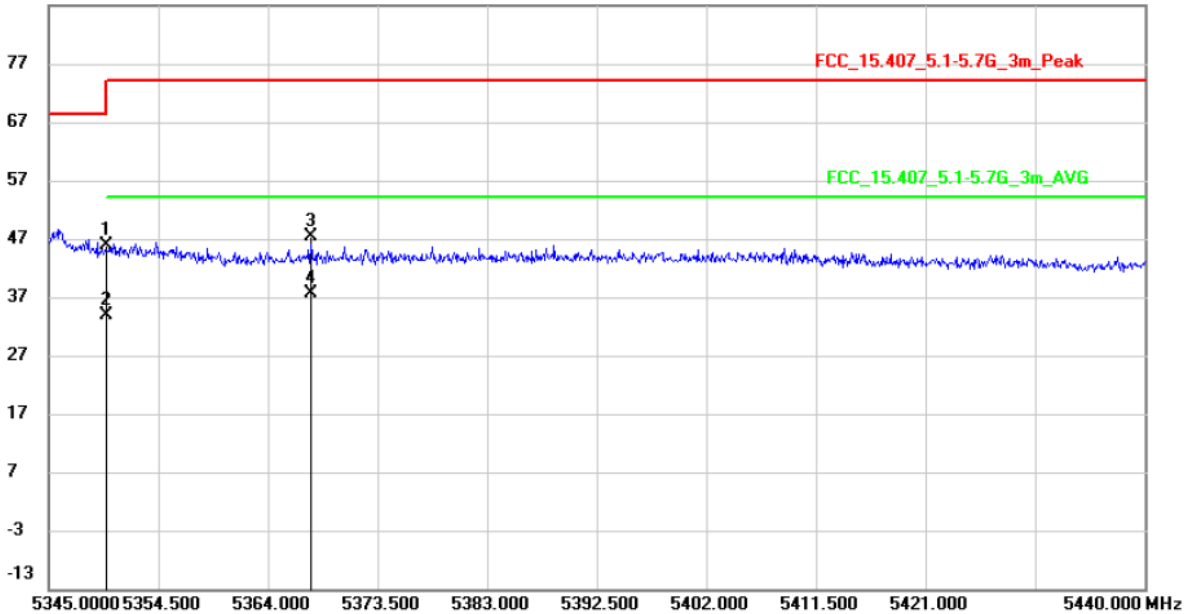


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	41.28	4.55	45.83	68.20	-22.37	peak	
2		5350.000	29.23	4.55	33.78	54.00	-20.22	AVG	
3		5367.705	42.70	4.55	47.25	74.00	-26.75	peak	
4	*	5367.705	32.95	4.55	37.50	54.00	-16.50	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT40) / High Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 14:43:39

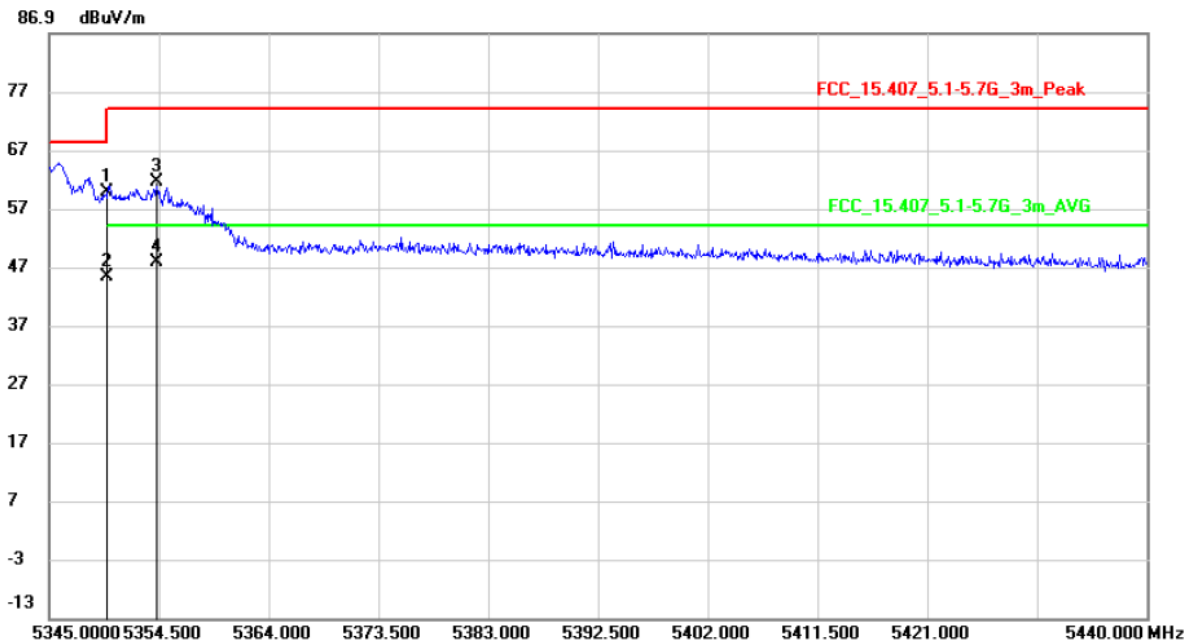


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5350.000	55.19	4.55	59.74	68.20	-8.46	peak	
2		5350.000	40.79	4.55	45.34	54.00	-8.66	AVG	
3		5354.310	57.04	4.56	61.60	74.00	-12.40	peak	
4	*	5354.310	43.16	4.56	47.72	54.00	-6.28	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT80) / Low Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 14:57:09

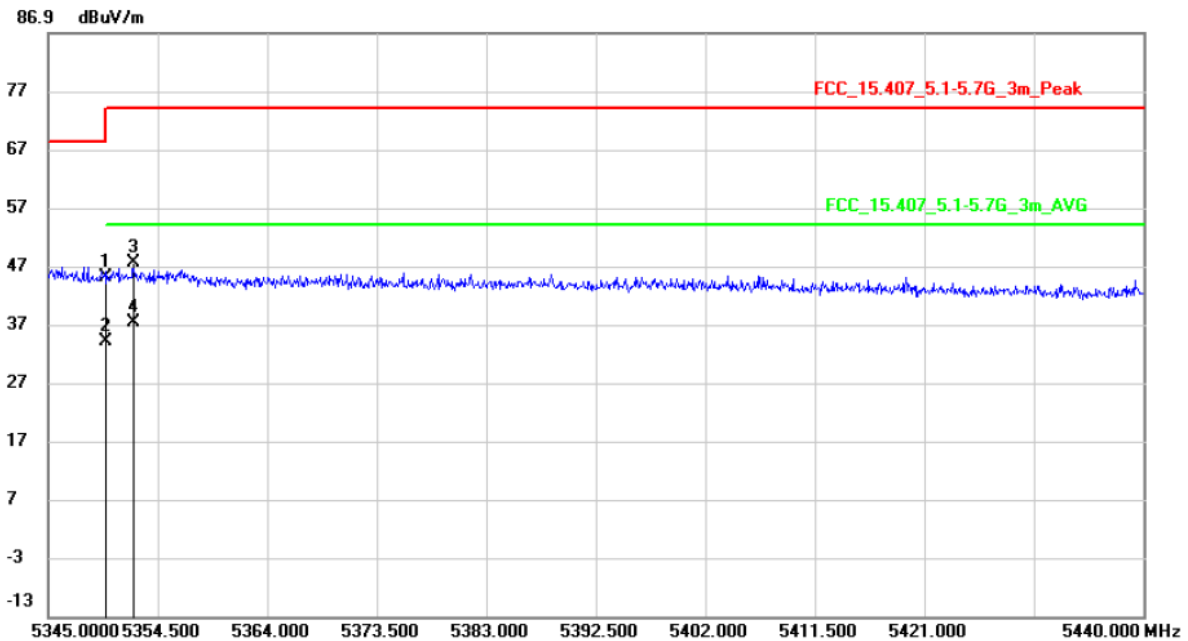


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5350.000	40.52	4.55	45.07	68.20	-23.13	peak
2		5350.000	29.45	4.55	34.00	54.00	-20.00	AVG
3		5352.410	42.97	4.55	47.52	74.00	-26.48	peak
4	*	5352.410	32.79	4.55	37.34	54.00	-16.66	AVG

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11ac(VHT80) / Low Channel / U-NII-2A	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 15:04:53

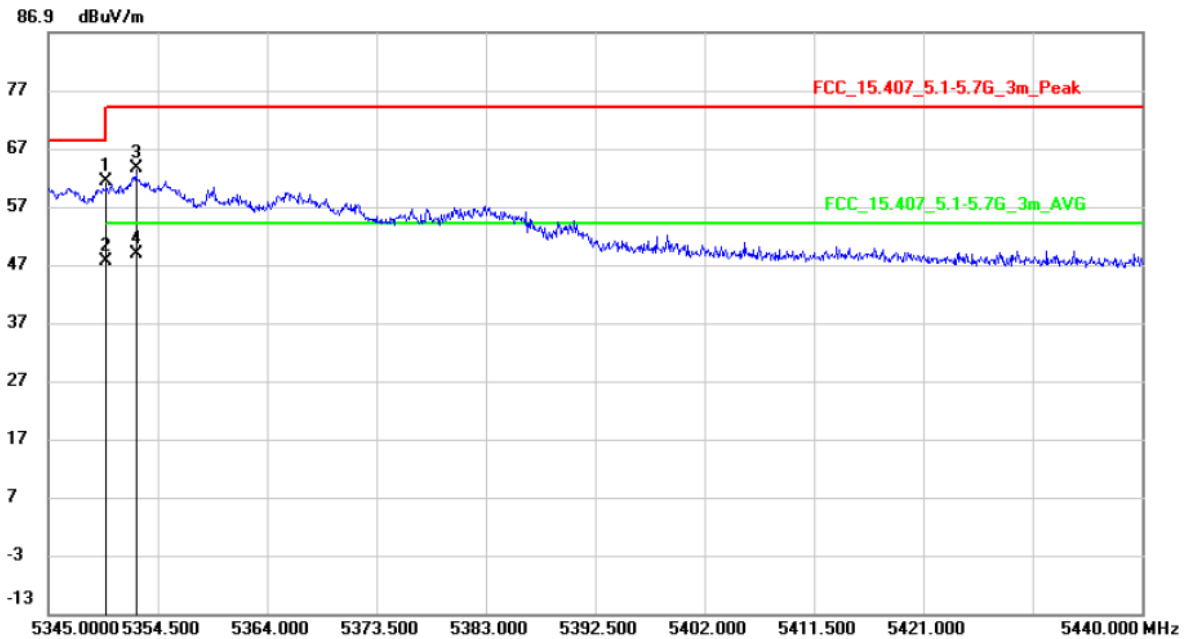

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	5350.000	56.75	4.55	61.30	68.20	-6.90	peak	
2	5350.000	42.99	4.55	47.54	54.00	-6.46	AVG	
3	5352.600	59.03	4.55	63.58	74.00	-10.42	peak	
4 *	5352.600	44.27	4.55	48.82	54.00	-5.18	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT80) / High Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 15:18:48

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

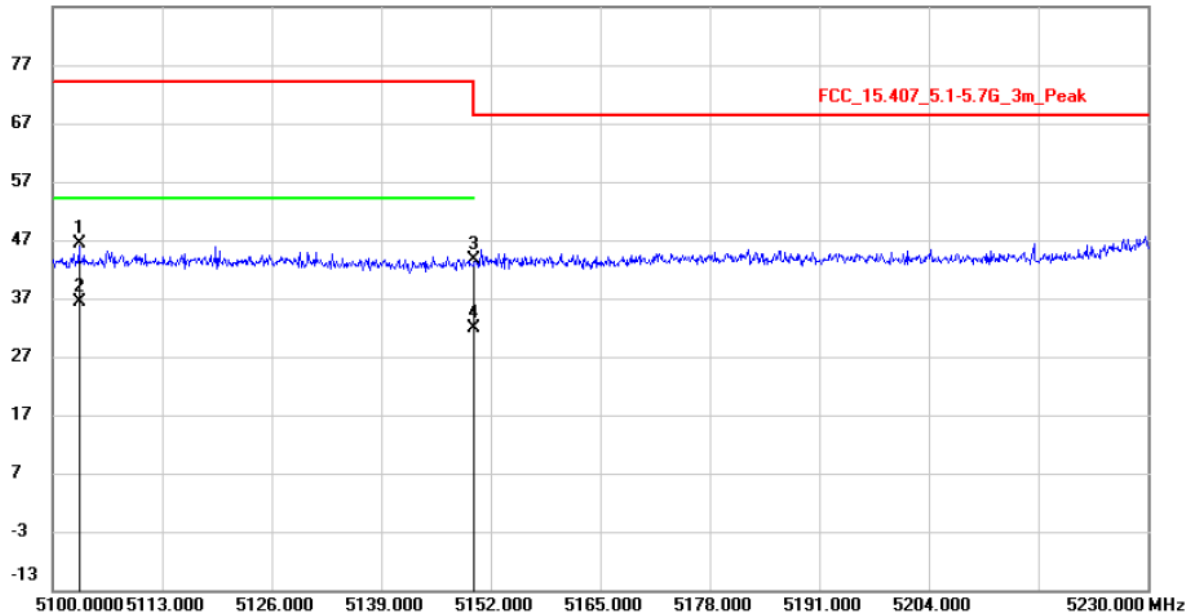

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5103.120	41.76	4.49	46.25	74.00	-27.75	peak	
2	*	5103.120	31.84	4.49	36.33	54.00	-17.67	AVG	
3		5150.000	38.97	4.53	43.50	68.20	-24.70	peak	
4		5150.000	27.22	4.53	31.75	54.00	-22.25	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: Band Edge IEEE 802.11 ac(VHT80) / High Channel / U-NII-2A	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 15:11:42

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

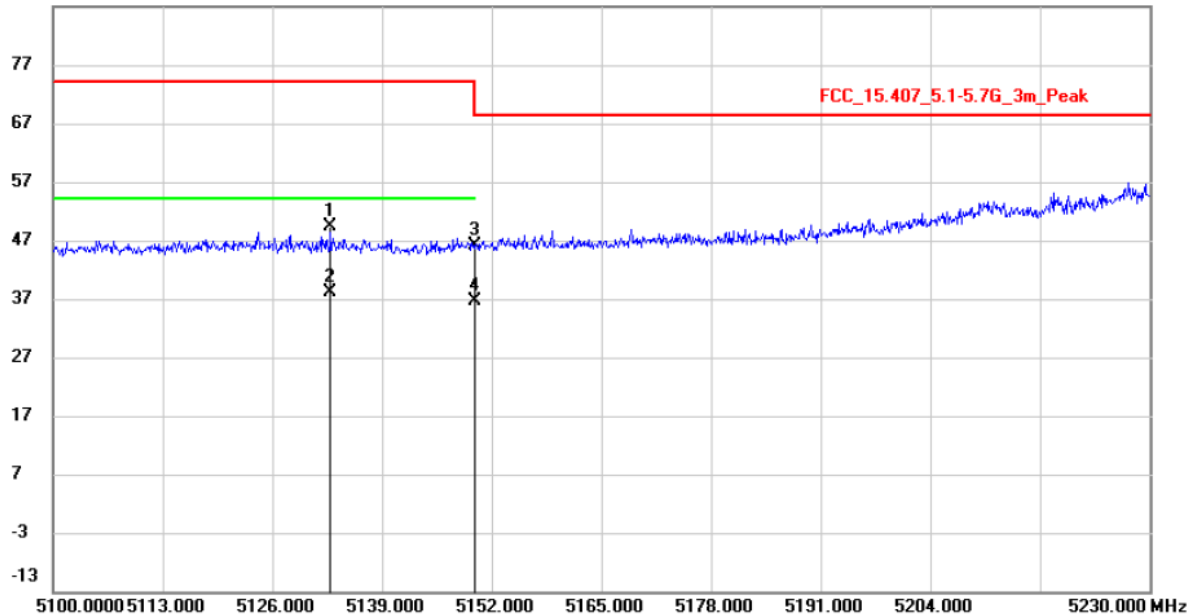


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5132.890	44.76	4.52	49.28	74.00	-24.72	peak	
2	*	5132.890	33.52	4.52	38.04	54.00	-15.96	AVG	
3		5150.000	41.50	4.53	46.03	68.20	-22.17	peak	
4		5150.000	31.89	4.53	36.42	54.00	-17.58	AVG	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / Low Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 21:21:26

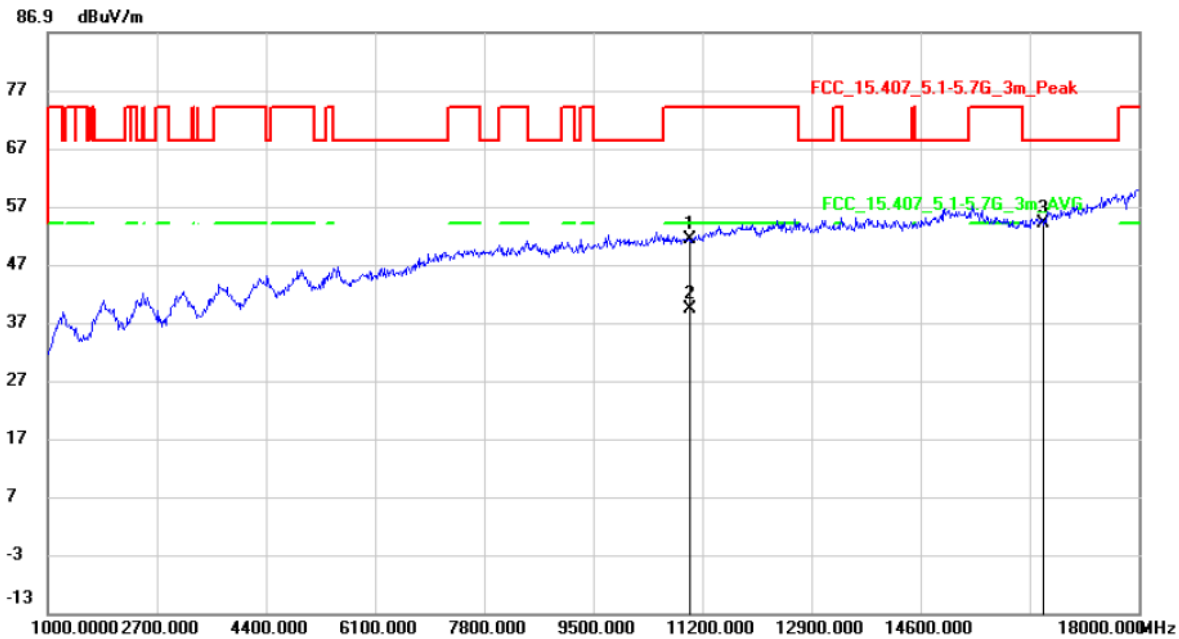

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.000	38.91	12.39	51.30	74.00	-22.70	peak	
2		11000.000	26.90	12.39	39.29	54.00	-14.71	AVG	
3	*	16500.000	39.61	14.54	54.15	68.20	-14.05	peak	


M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11 a / Low Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 21:28:57

86.9 dBuV/m

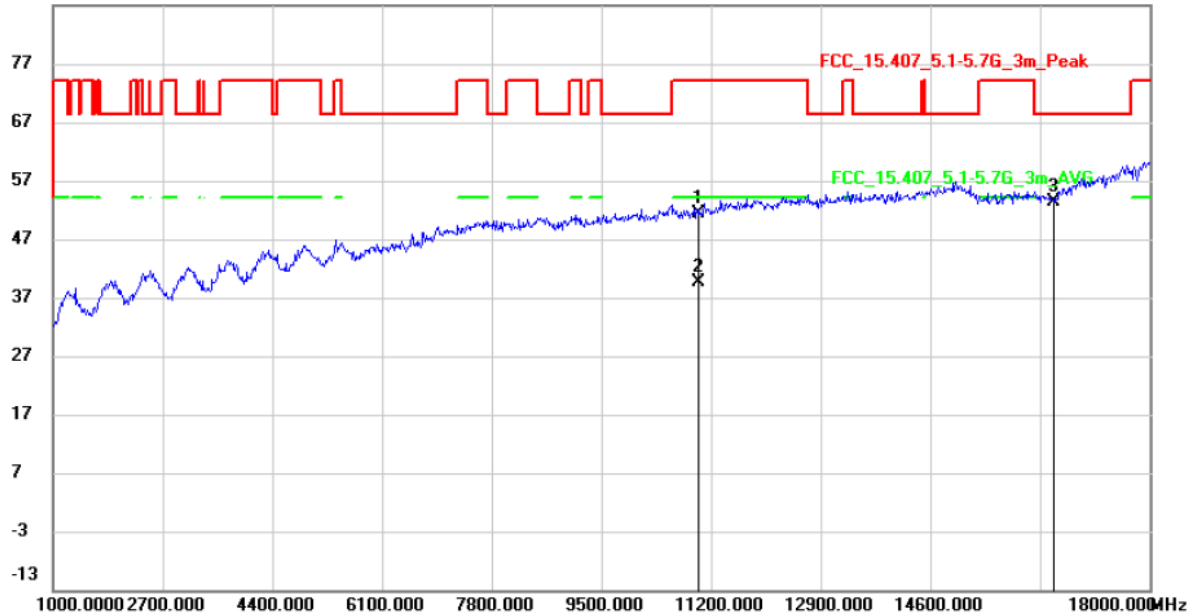


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.000	38.99	12.39	51.38	74.00	-22.62	peak	
2	*	11000.000	27.07	12.39	39.46	54.00	-14.54	AVG	
3		16500.000	39.34	13.99	53.33	68.20	-14.87	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11 a / Low Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2025/12/27

Time: 11:36:08

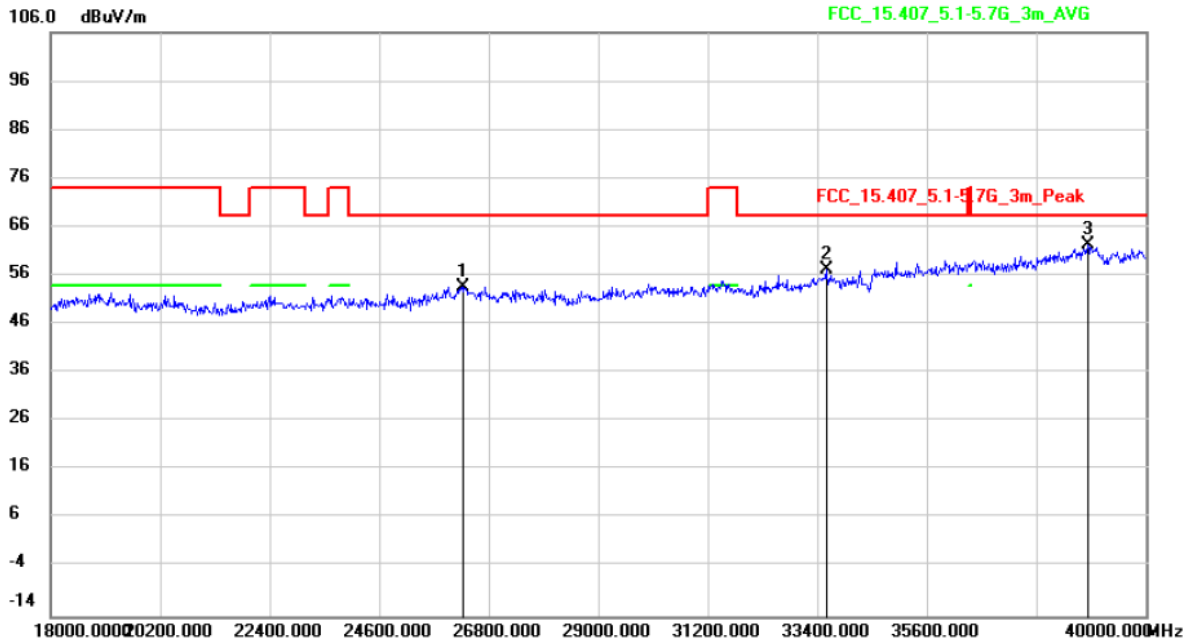

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		26294.000	46.46	7.14	53.60	68.20	-14.60	peak
2		33576.000	46.94	10.33	57.27	68.20	-10.93	peak
3	*	38834.000	49.56	12.82	62.38	68.20	-5.82	peak

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11 a / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2025/12/27

Time: 11:43:47

106.0 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

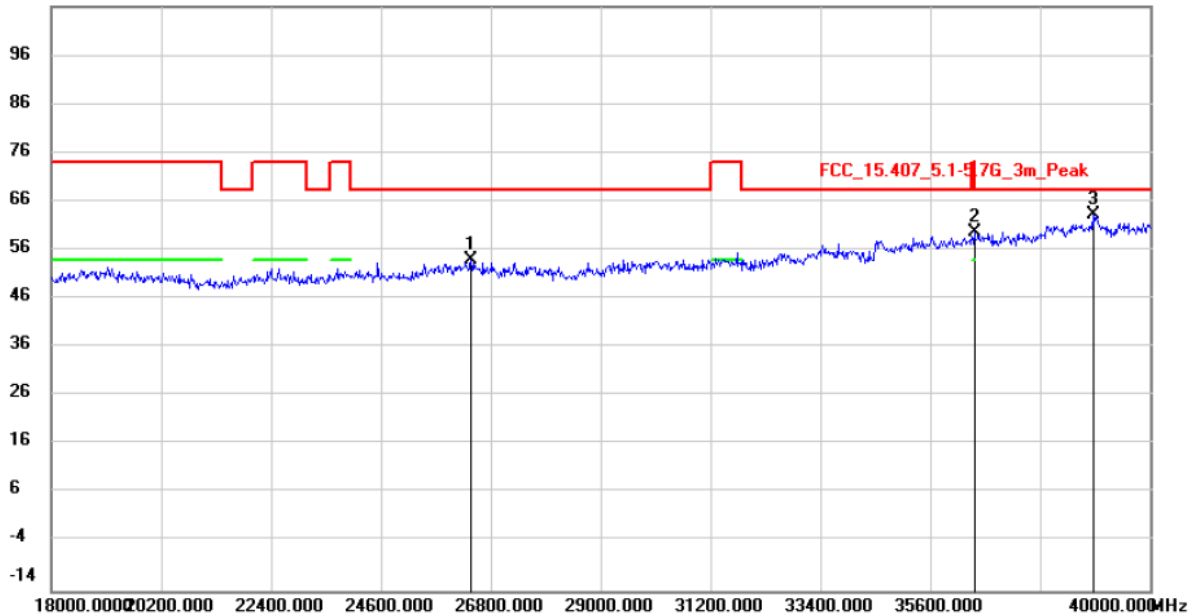


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		26404.000	46.84	7.18	54.02	68.20	-14.18	peak	
2		36480.000	48.34	11.24	59.58	74.00	-14.42	peak	
3	*	38856.000	50.37	12.78	63.15	68.20	-5.05	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / Middle Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 21:42:38

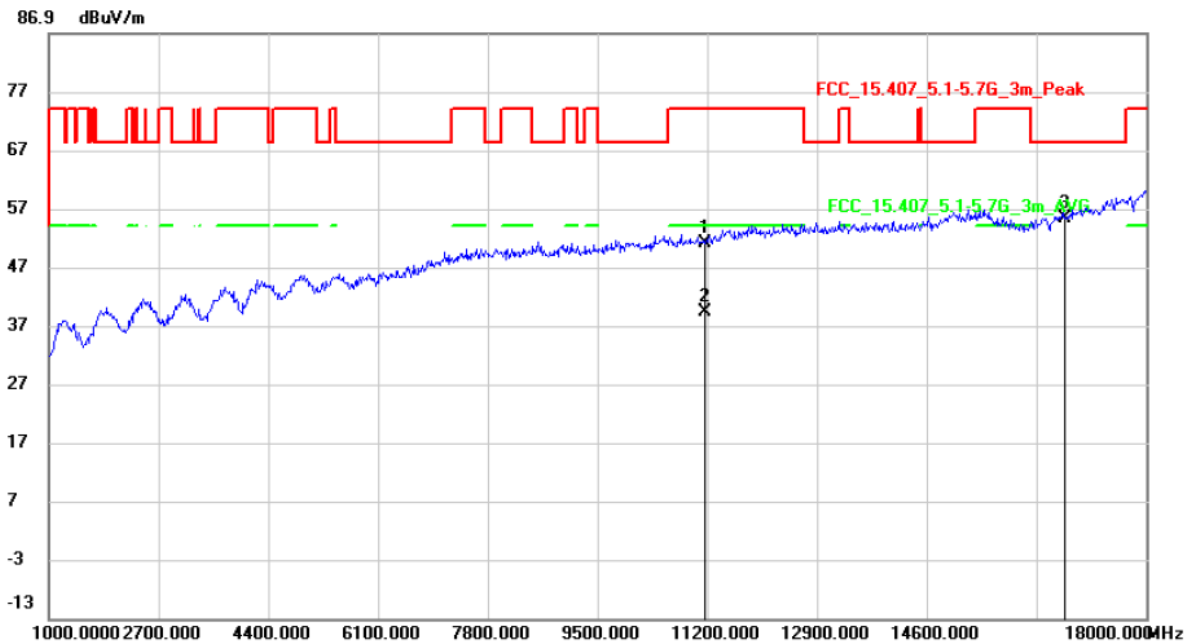


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.000	38.34	12.75	51.09	74.00	-22.91	peak	
2		11160.000	26.48	12.75	39.23	54.00	-14.77	AVG	
3	*	16740.000	39.70	15.49	55.19	68.20	-13.01	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11a / Middle Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 21:35:12

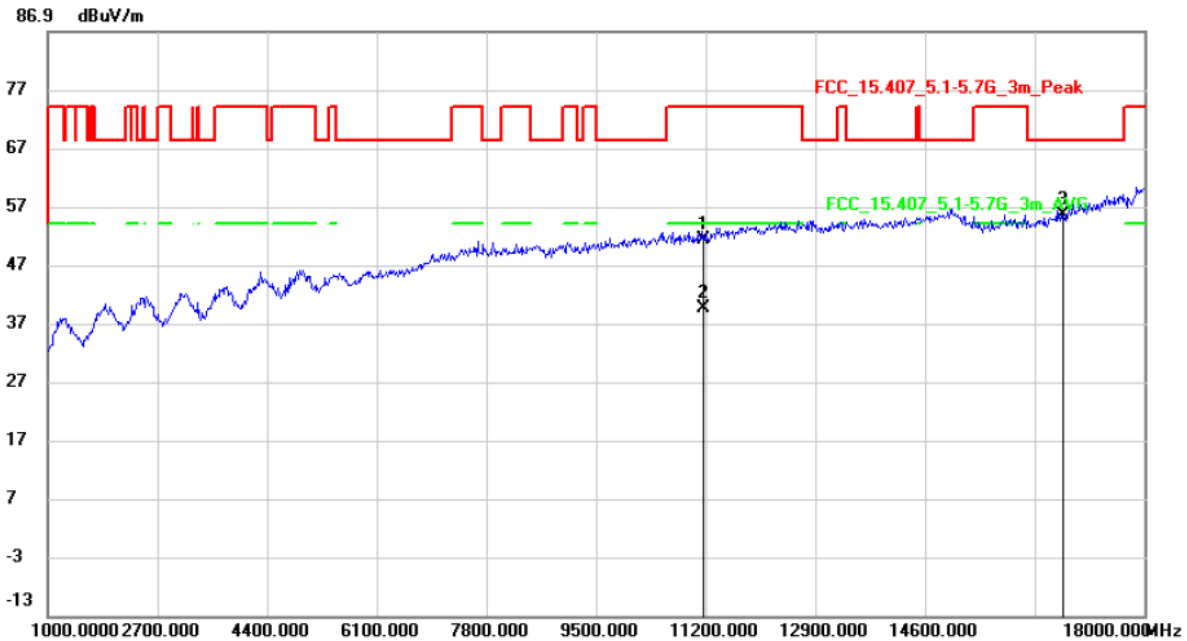

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.000	38.65	12.75	51.40	74.00	-22.60	peak	
2		11160.000	26.81	12.75	39.56	54.00	-14.44	AVG	
3	*	16740.000	40.23	15.21	55.44	68.20	-12.76	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / Middle Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2025/12/27

Time: 11:57:13

106.0 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

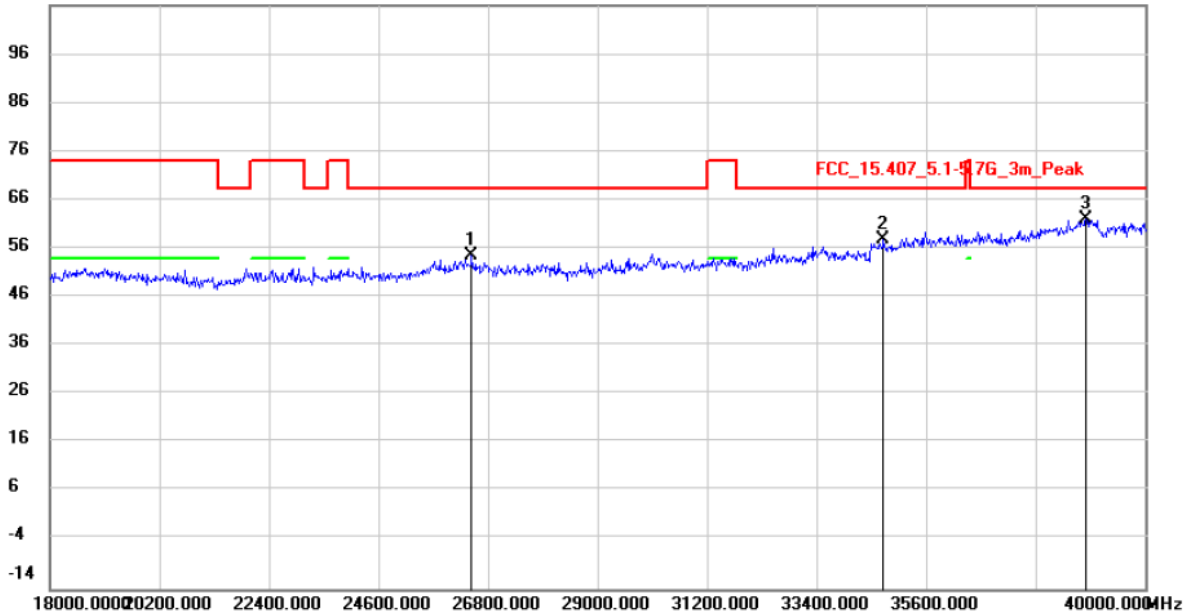


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		26470.000	47.31	7.20	54.51	68.20	-13.69	peak	
2		34742.000	47.97	9.74	57.71	68.20	-10.49	peak	
3	*	38812.000	49.11	12.87	61.98	68.20	-6.22	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11a / Middle Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2025/12/27

Time: 11:50:53

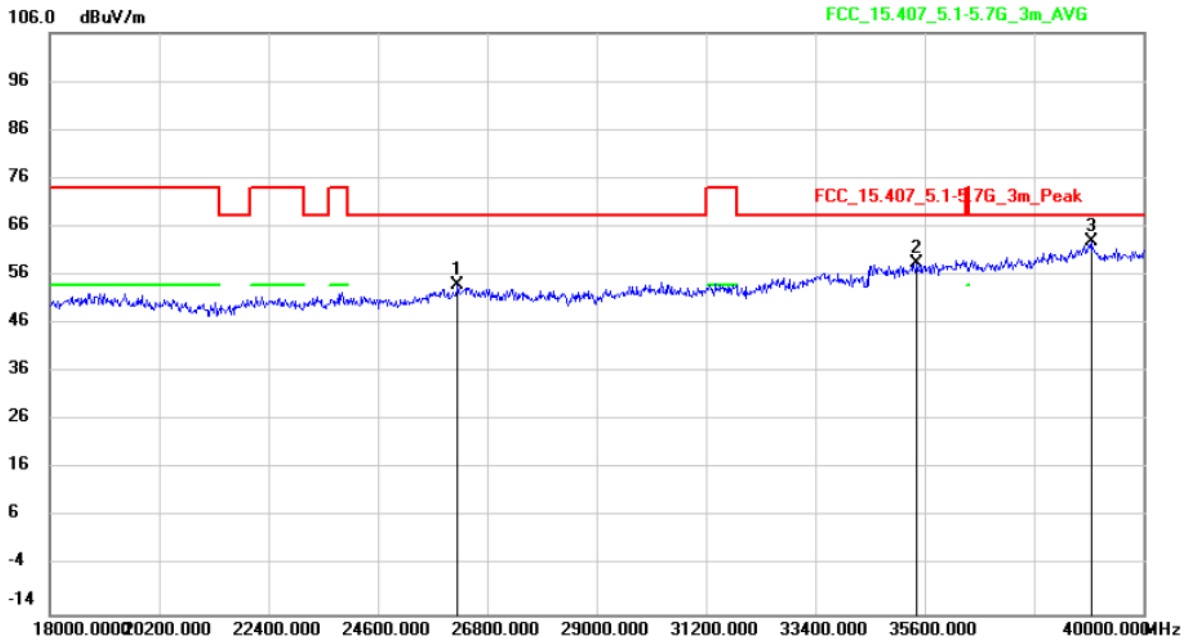


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		26206.000	46.87	7.11	53.98	68.20	-14.22	peak	
2		35446.000	48.48	10.09	58.57	68.20	-9.63	peak	
3	*	38944.000	50.35	12.59	62.94	68.20	-5.26	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / High Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 21:49:47

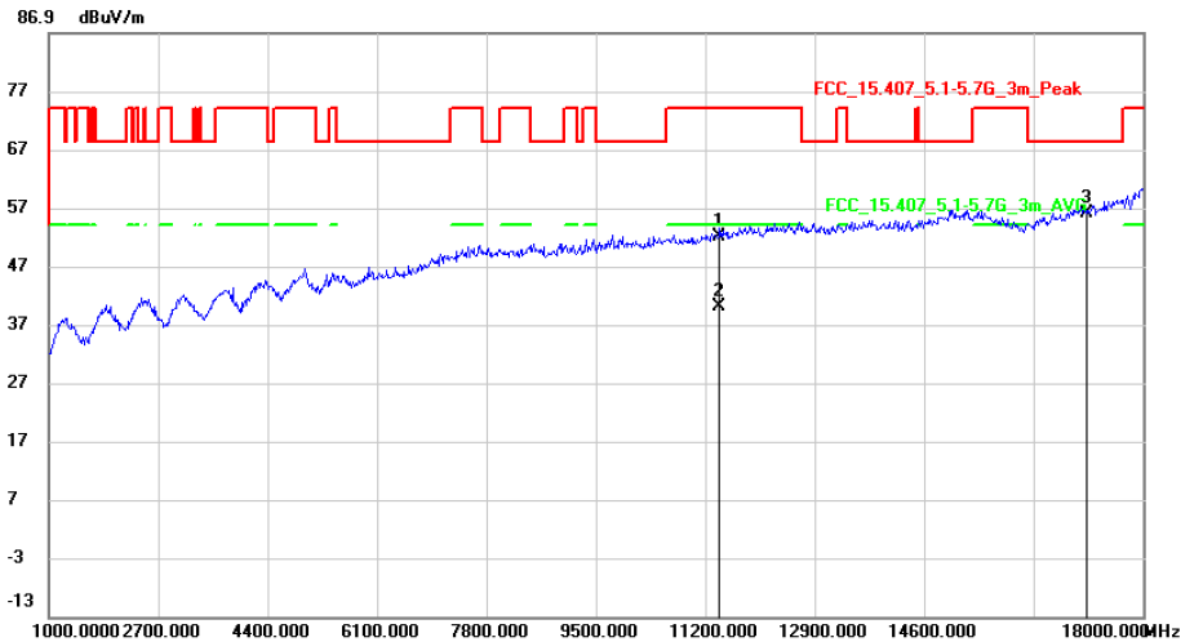


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.000	38.77	13.30	52.07	74.00	-21.93	peak	
2		11400.000	26.83	13.30	40.13	54.00	-13.87	AVG	
3	*	17100.000	39.18	16.91	56.09	68.20	-12.11	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11a / High Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/10

Time: 21:56:57

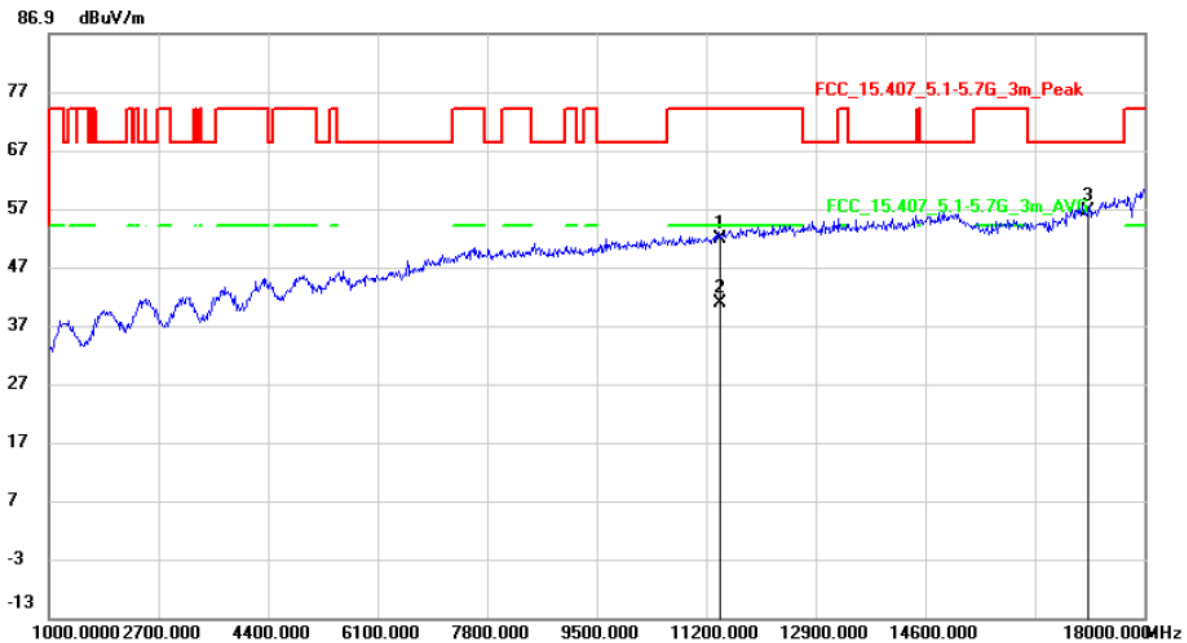


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.000	38.38	13.30	51.68	74.00	-22.32	peak	
2		11400.000	27.47	13.30	40.77	54.00	-13.23	AVG	
3	*	17100.000	39.59	16.91	56.50	68.20	-11.70	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: PK, AVG
Test Mode: IEEE 802.11a / High Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2025/12/27

Time: 12:04:18

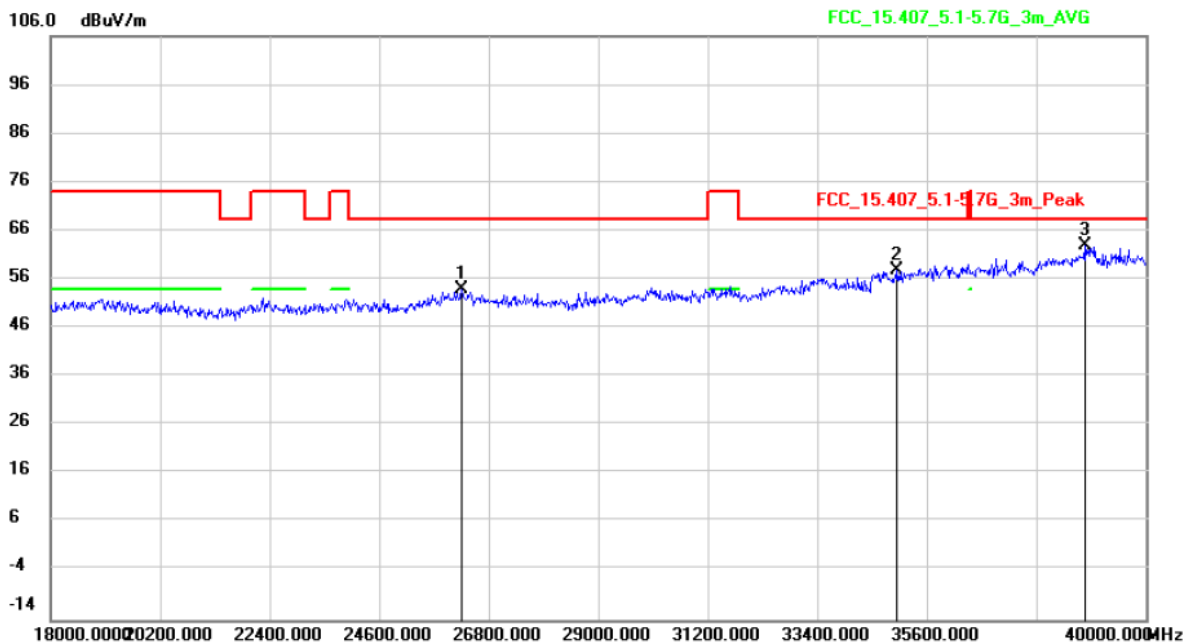


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		26250.000	46.82	7.13	53.95	68.20	-14.25	peak
2		35006.000	48.24	9.73	57.97	68.20	-10.23	peak
3	*	38768.000	49.85	12.96	62.81	68.20	-5.39	peak

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: PK, AVG
Test Mode: IEEE 802.11a / High Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2025/12/27

Time: 12:11:58

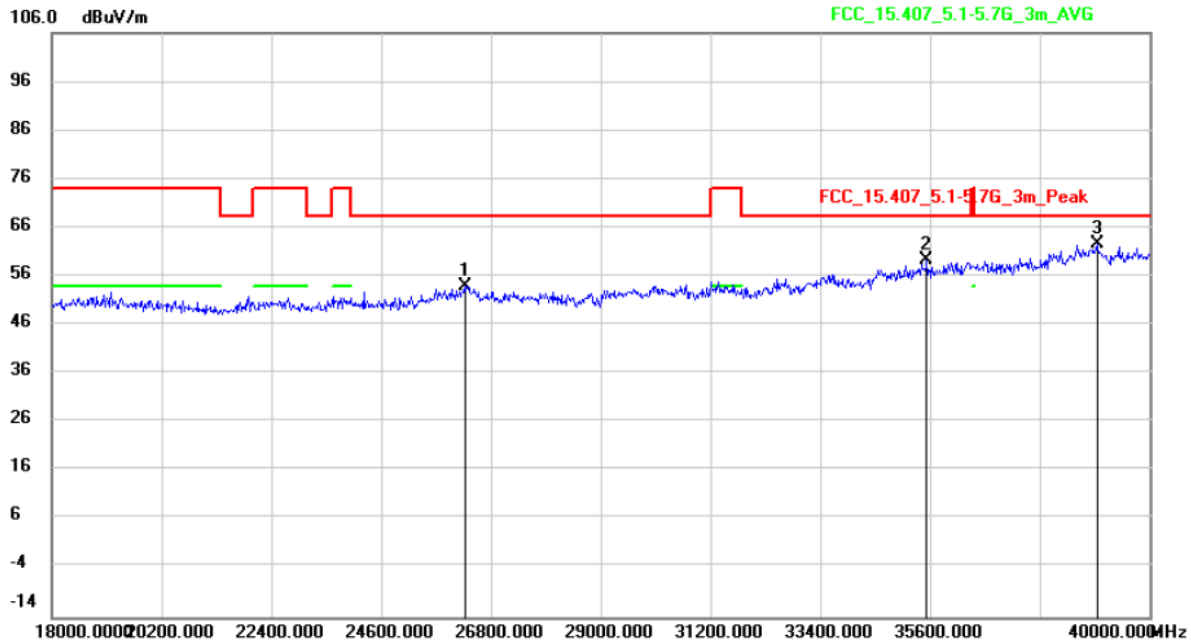

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		26272.000	46.76	7.13	53.89	68.20	-14.31	peak
2		35534.000	49.10	10.18	59.28	68.20	-8.92	peak
3	*	38944.000	50.15	12.59	62.74	68.20	-5.46	peak

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11a / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 15:30:16

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

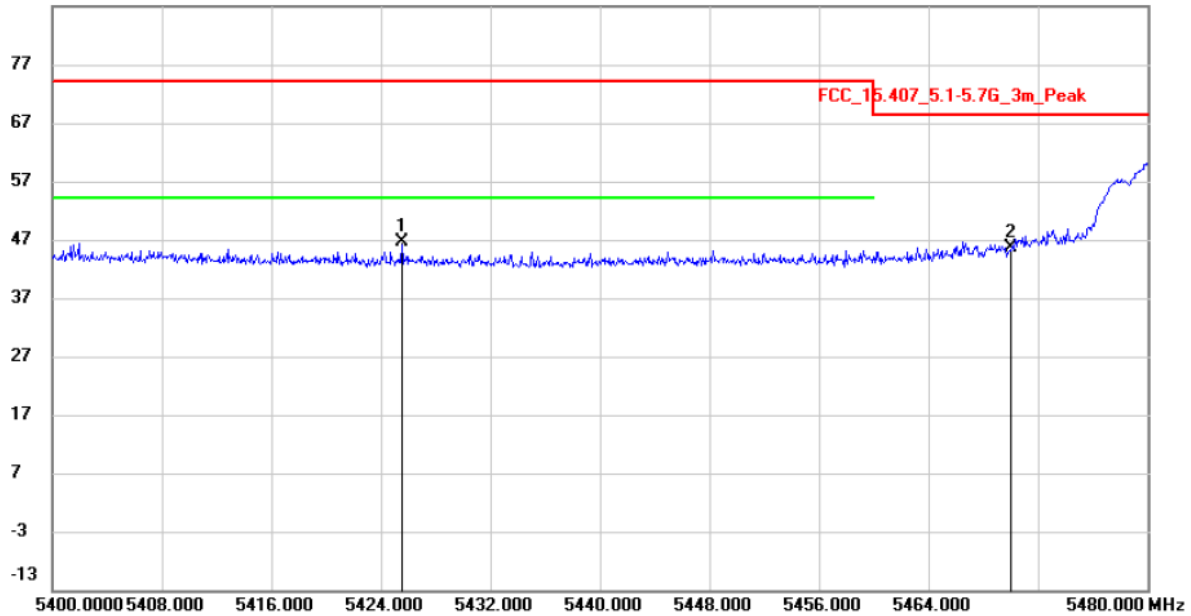

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5425.520	41.95	4.55	46.50	74.00	-27.50	peak
2	*	5470.000	40.97	4.53	45.50	68.20	-22.70	peak

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11a / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 15:37:50

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

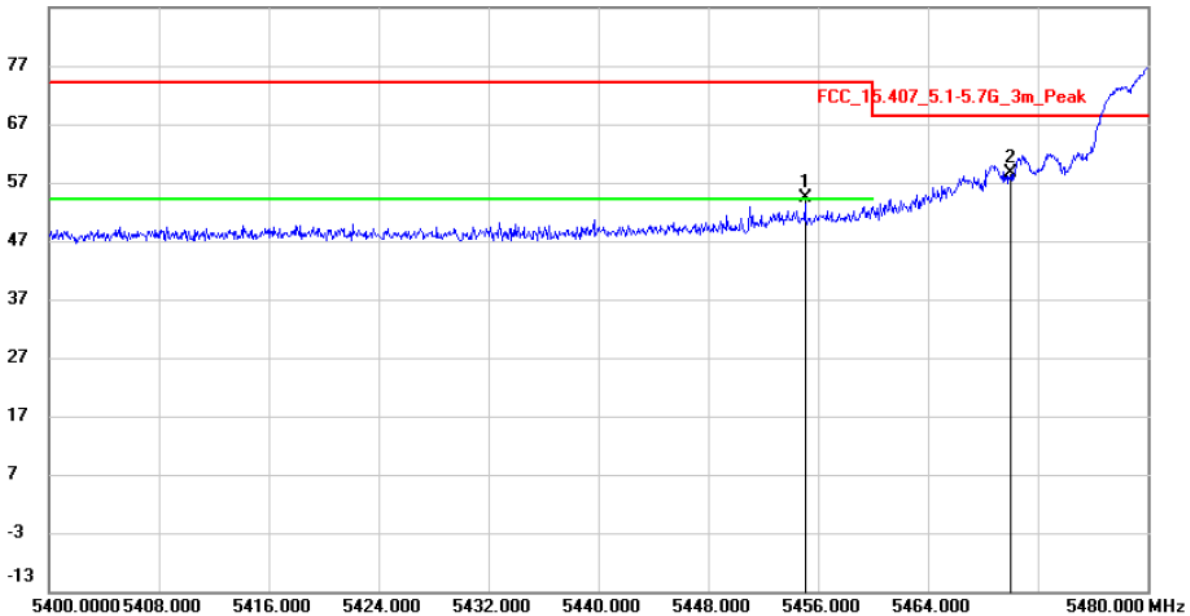

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5455.040	49.62	4.54	54.16	74.00	-19.84	peak	
2	*	5470.000	53.92	4.53	58.45	68.20	-9.75	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11a / High Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 15:42:07

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

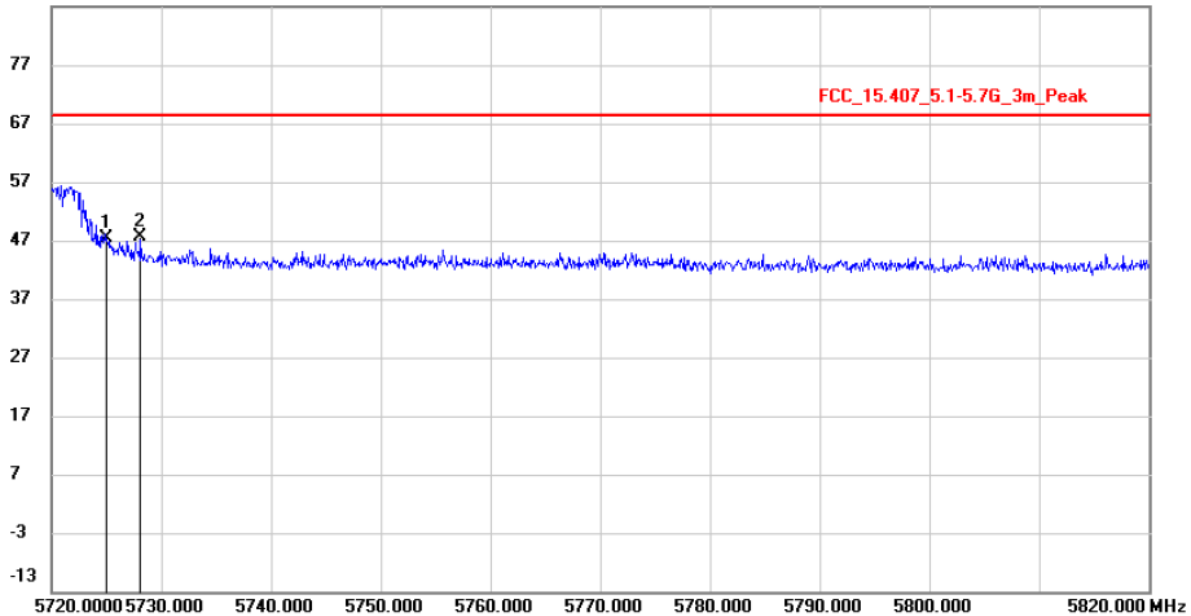


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5725.000	42.43	4.92	47.35	68.20	-20.85	peak	
2	*	5728.100	42.60	4.92	47.52	68.20	-20.68	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11a / High Channel / U-NII-2C	Distance: 3m

Radiated Emission Measurement

Date: 2026/4/18

Time: 15:50:54

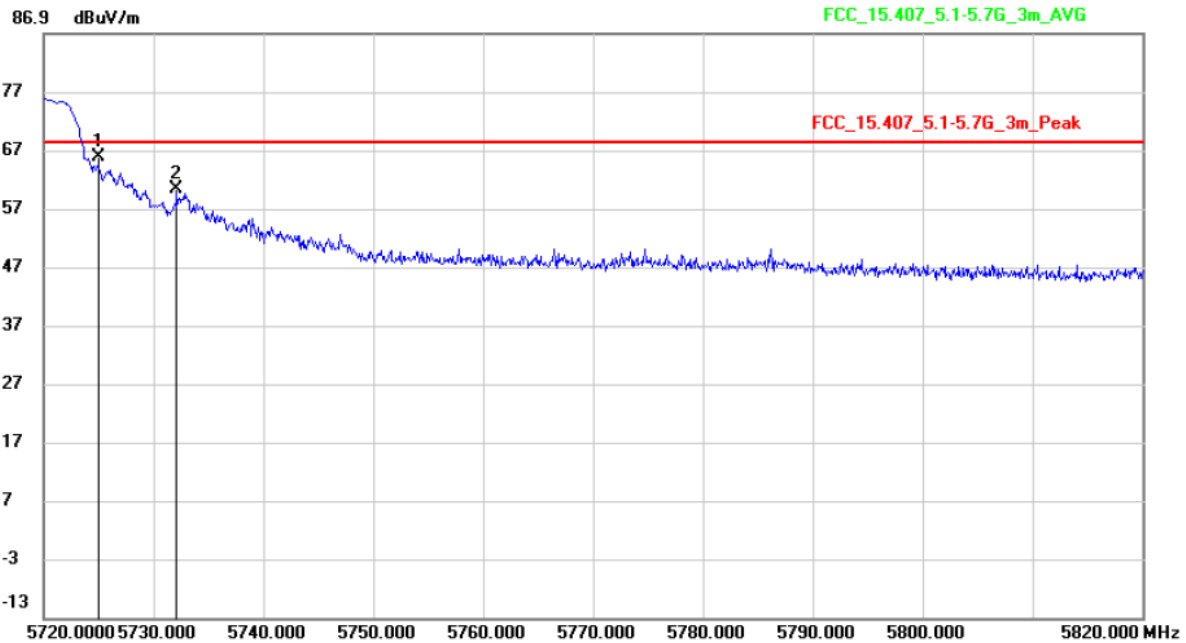

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	60.80	4.92	65.72	68.20	-2.48	peak	
2		5732.100	55.40	4.92	60.32	68.20	-7.88	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11 n(HT20) / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 16:11:40

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

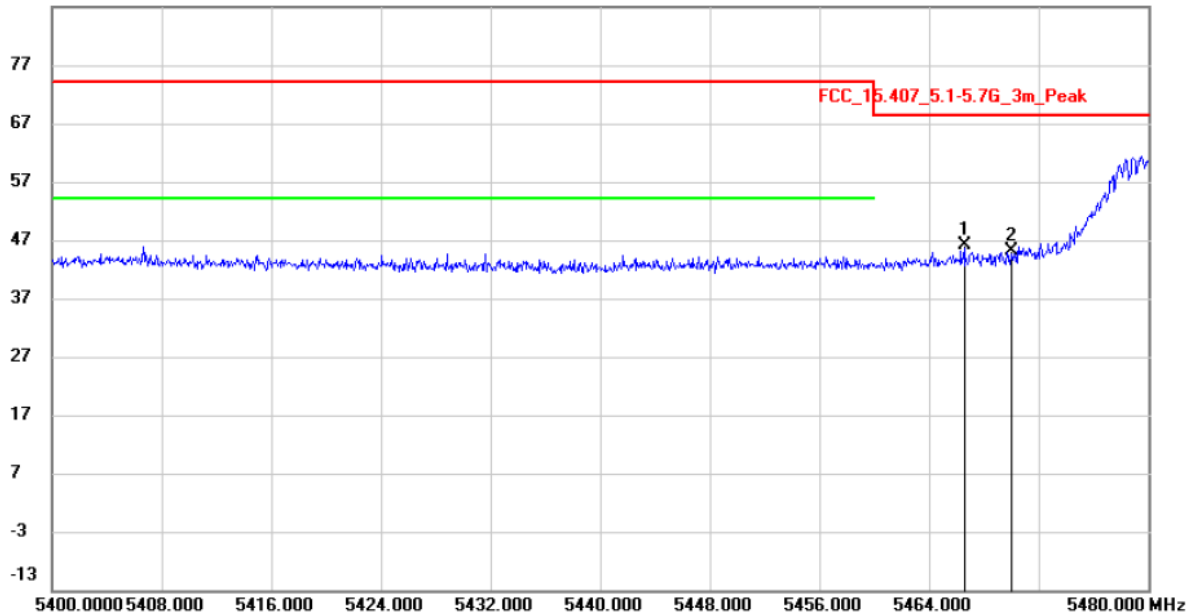

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	5466.560	41.54	4.53	46.07	68.20	-22.13	peak	
2		5470.000	40.49	4.53	45.02	68.20	-23.18	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11 n(HT20) / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 16:19:33

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

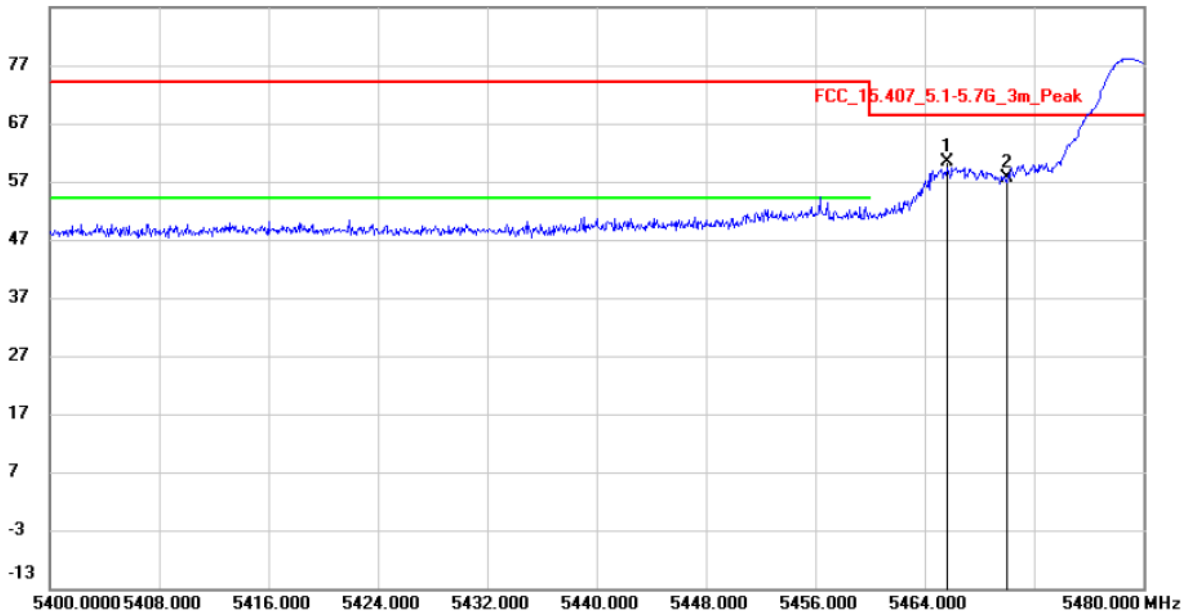

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5465.680	55.68	4.53	60.21	68.20	-7.99	peak	
2		5470.000	52.99	4.53	57.52	68.20	-10.68	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11 n(HT20) / High Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 16:04:11

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

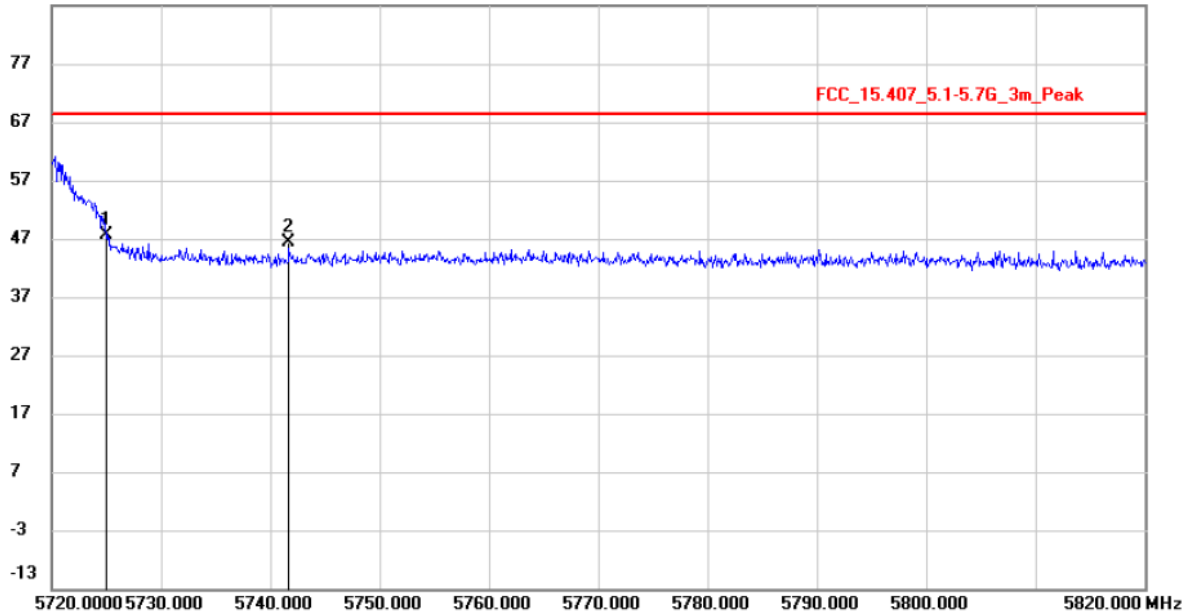

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1	*	5725.000	42.58	4.92	47.50	68.20	-20.70	peak
2		5741.700	41.35	4.95	46.30	68.20	-21.90	peak

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11 n(HT20) / High Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 15:57:32

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

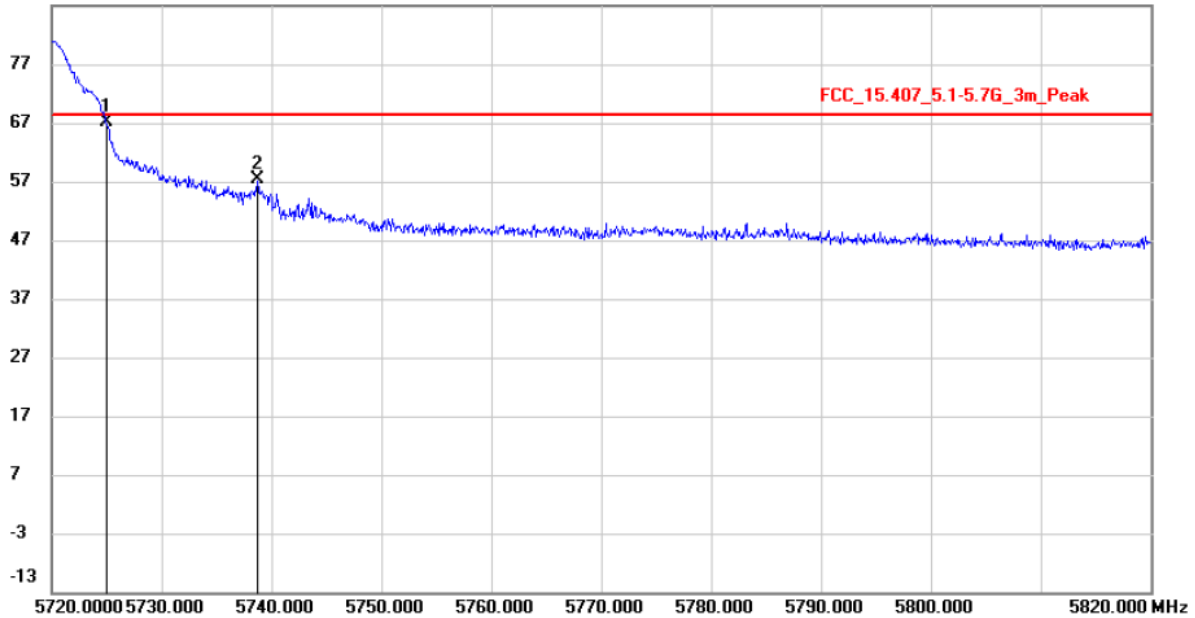

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	62.08	4.92	67.00	68.20	-1.20	peak	
2		5738.700	52.40	4.94	57.34	68.20	-10.86	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11n(HT40) / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 17:18:38

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

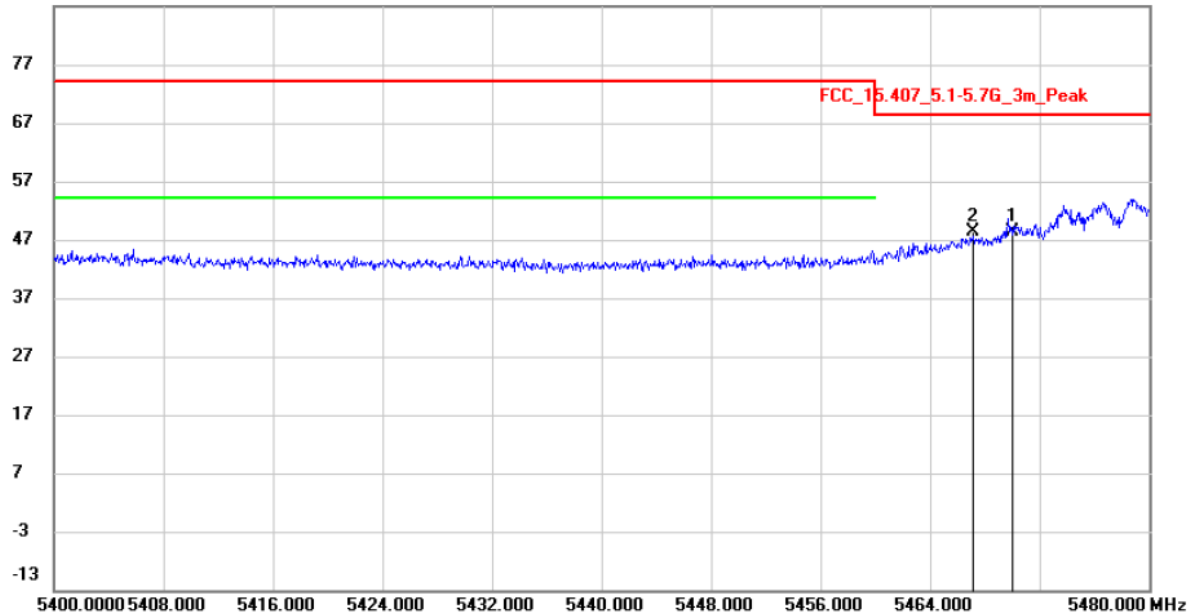

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5470.000	43.67	4.53	48.20	68.20	-20.00	peak	
2	*	5467.120	43.77	4.53	48.30	68.20	-19.90	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11n(HT40) / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 17:25:13

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

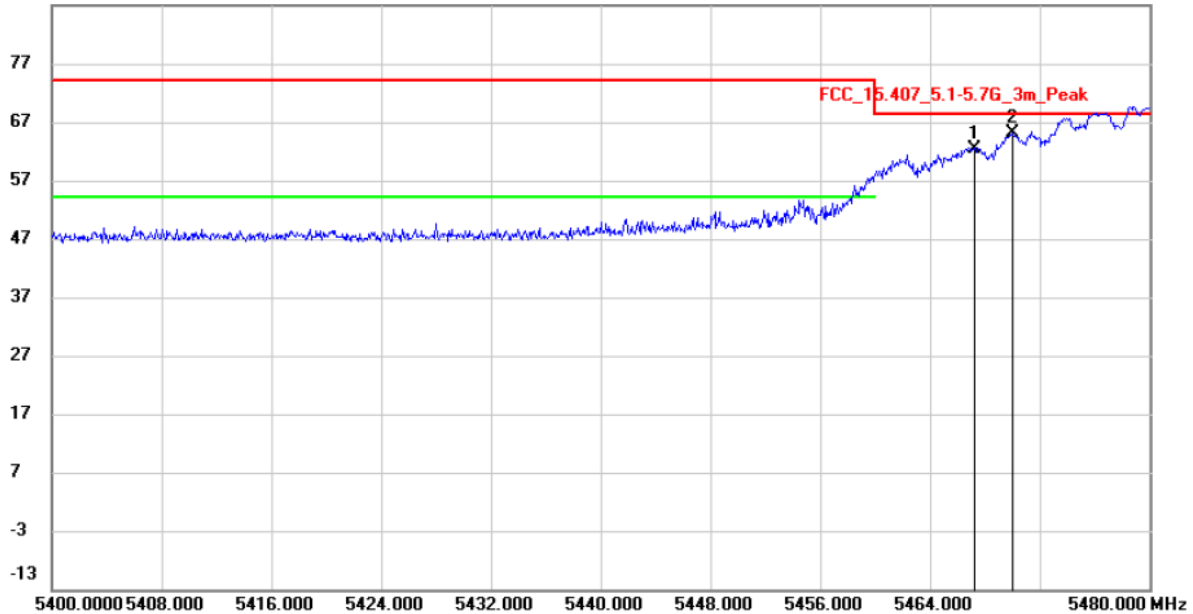

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5467.280	57.77	4.53	62.30	68.20	-5.90	peak	
2	*	5470.000	60.57	4.53	65.10	68.20	-3.10	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11 n(HT40) / High Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 17:11:57

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

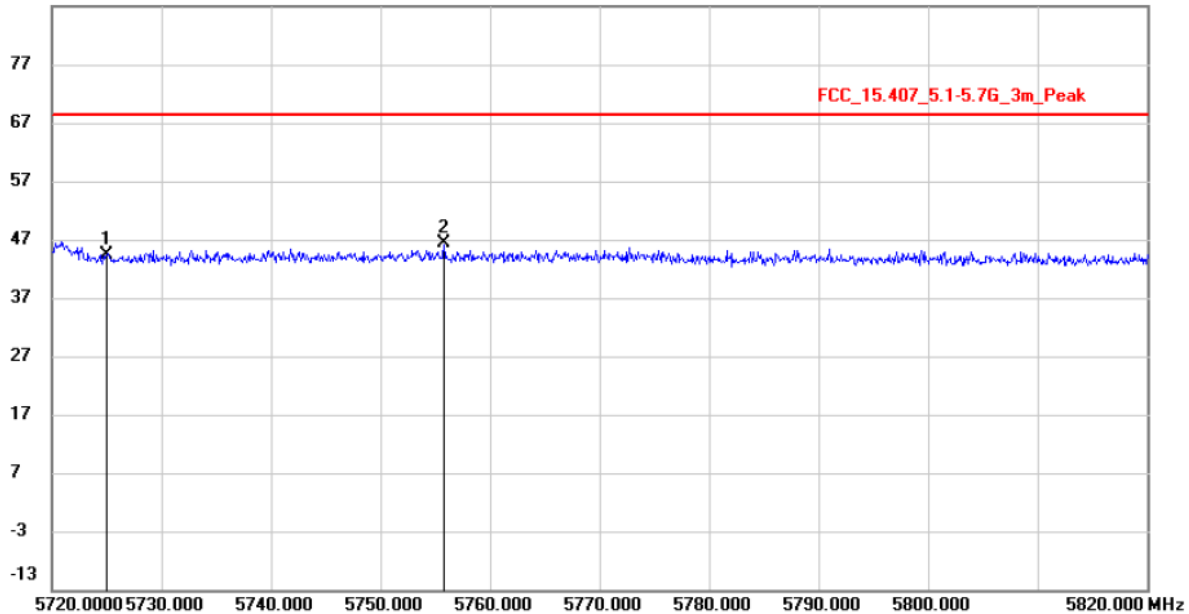

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5725.000	39.44	4.92	44.36	68.20	-23.84	peak
2	*	5755.800	41.29	4.96	46.25	68.20	-21.95	peak

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11 n(HT40) / High Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 16:54:07

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

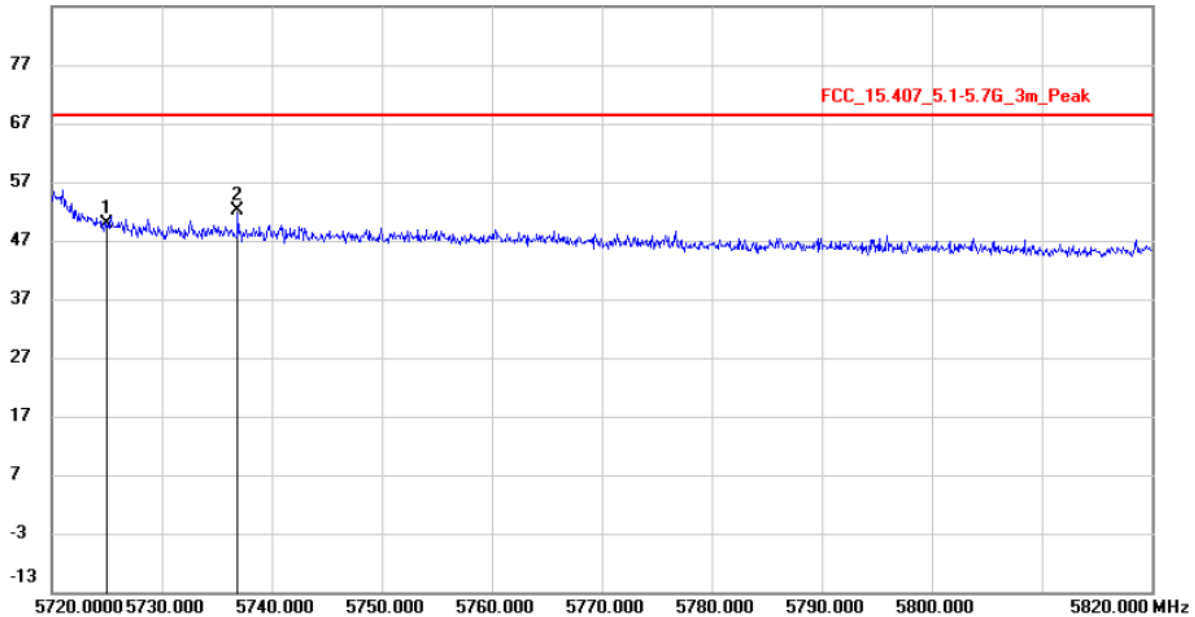

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5725.000	44.93	4.92	49.85	68.20	-18.35	peak	
2	*	5736.900	47.09	4.94	52.03	68.20	-16.17	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11ac(VHT20) / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 16:33:14

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

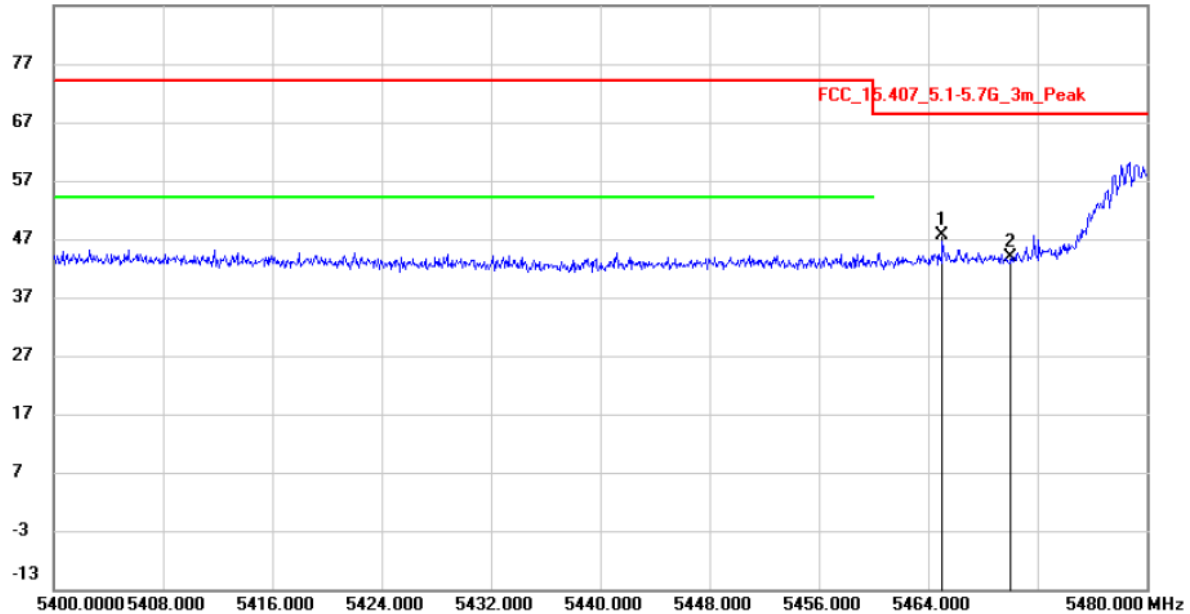

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5465.040	43.00	4.52	47.52	68.20	-20.68	peak	
2		5470.000	39.35	4.53	43.88	68.20	-24.32	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11ac(VHT20) / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 16:25:23

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

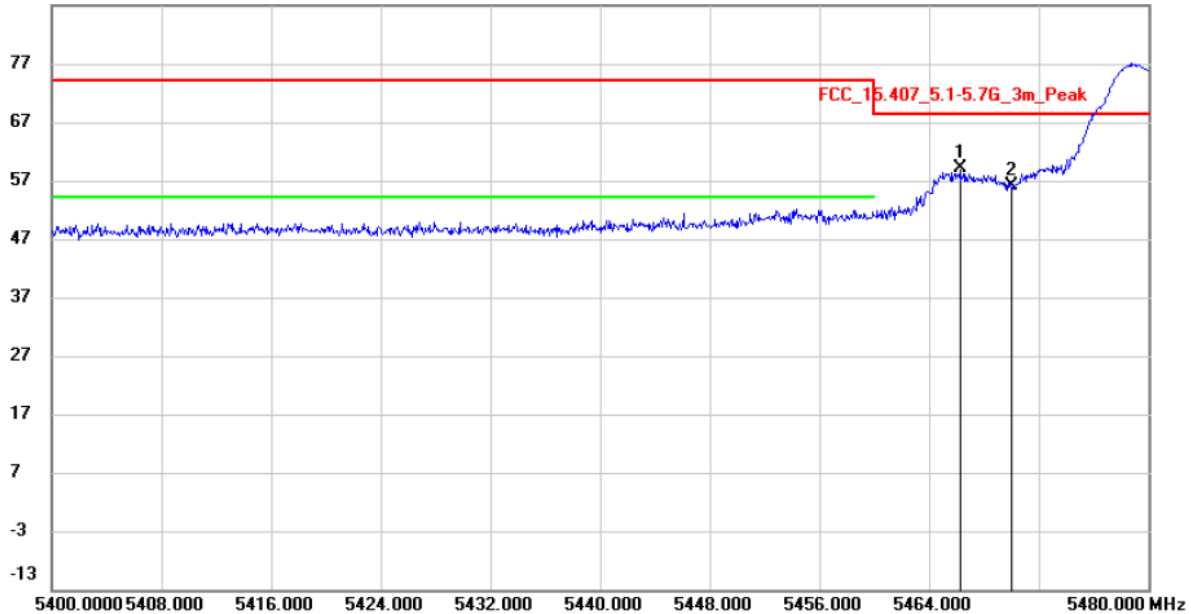

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5466.320	54.49	4.53	59.02	68.20	-9.18	peak	
2		5470.000	51.55	4.53	56.08	68.20	-12.12	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11 ac(VHT20) / High Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 16:40:49

86.9 dBuV/m

FCC_15.407_5.1-5.76_3m_AVG

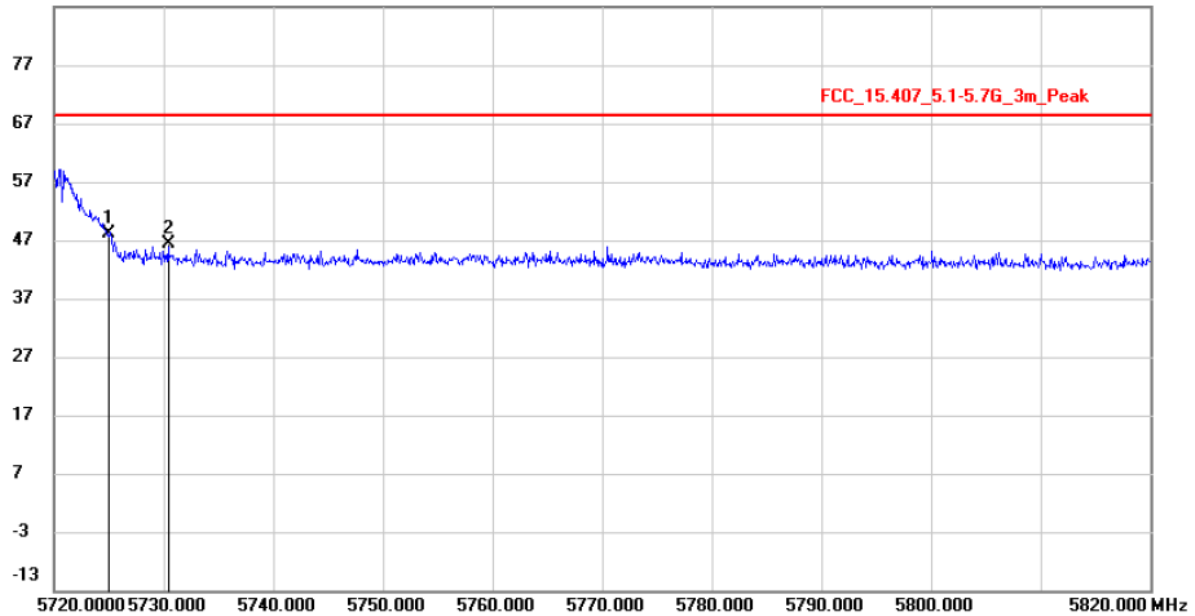

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	5725.000	43.08	4.92	48.00	68.20	-20.20	peak	
2		5730.400	41.33	4.92	46.25	68.20	-21.95	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11 ac(VHT20) / High Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 16:47:00

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

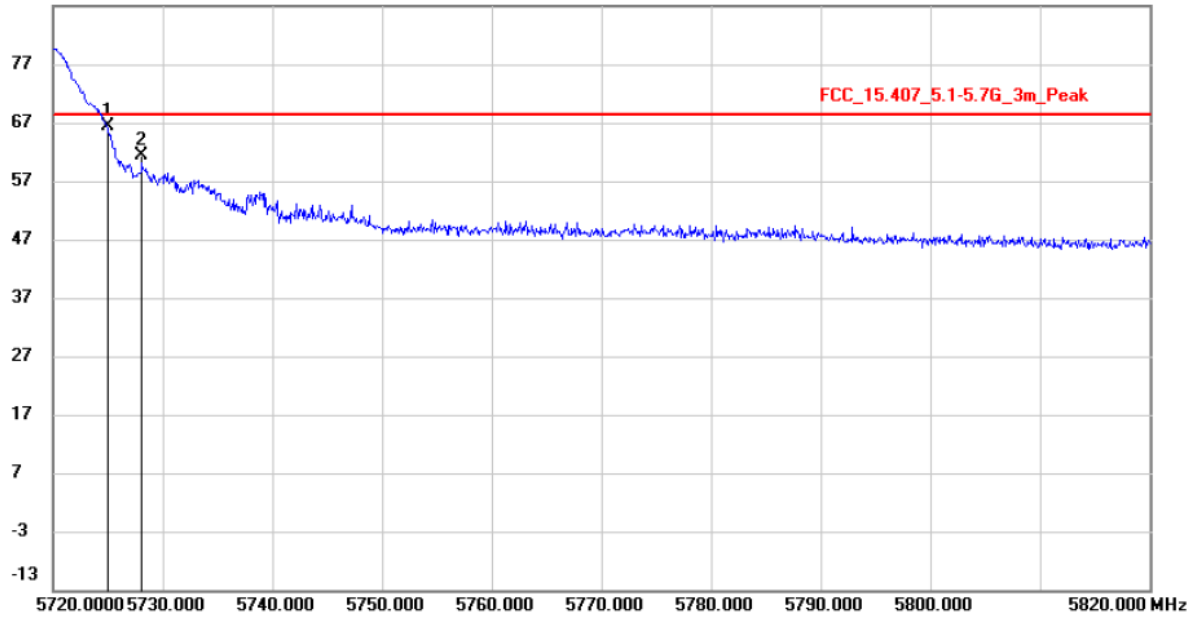

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.000	61.41	4.92	66.33	68.20	-1.87	peak	
2		5728.100	56.33	4.92	61.25	68.20	-6.95	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11ac(VHT40) / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 17:33:19

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

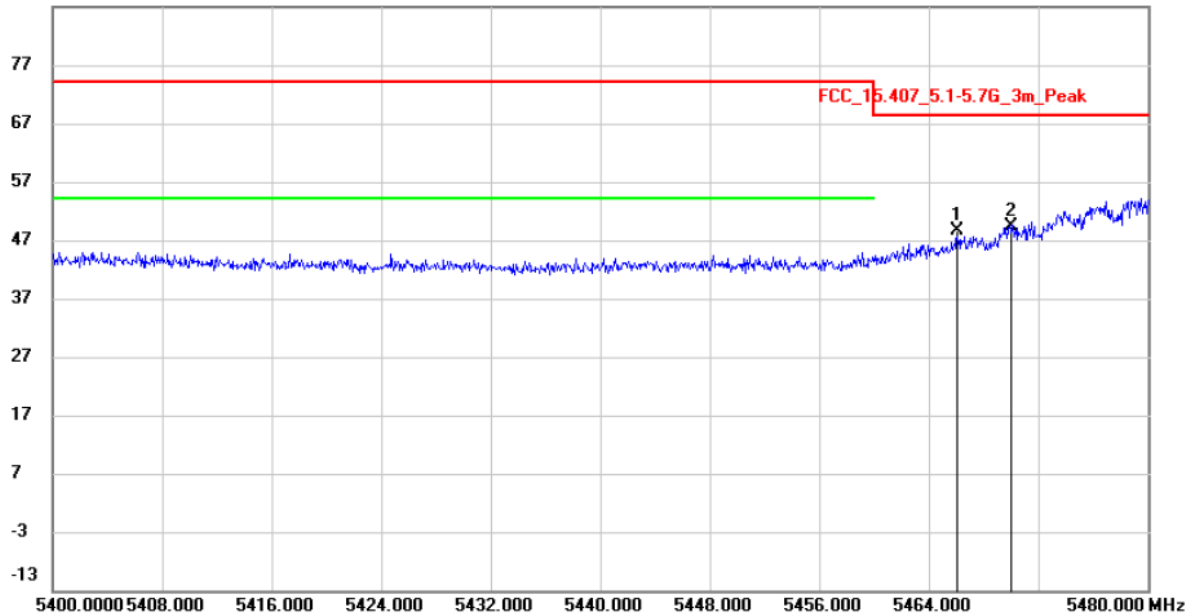

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5466.080	44.07	4.53	48.60	68.20	-19.60	peak	
2	*	5470.000	44.67	4.53	49.20	68.20	-19.00	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11ac(VHT40) / Low Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 17:40:11

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

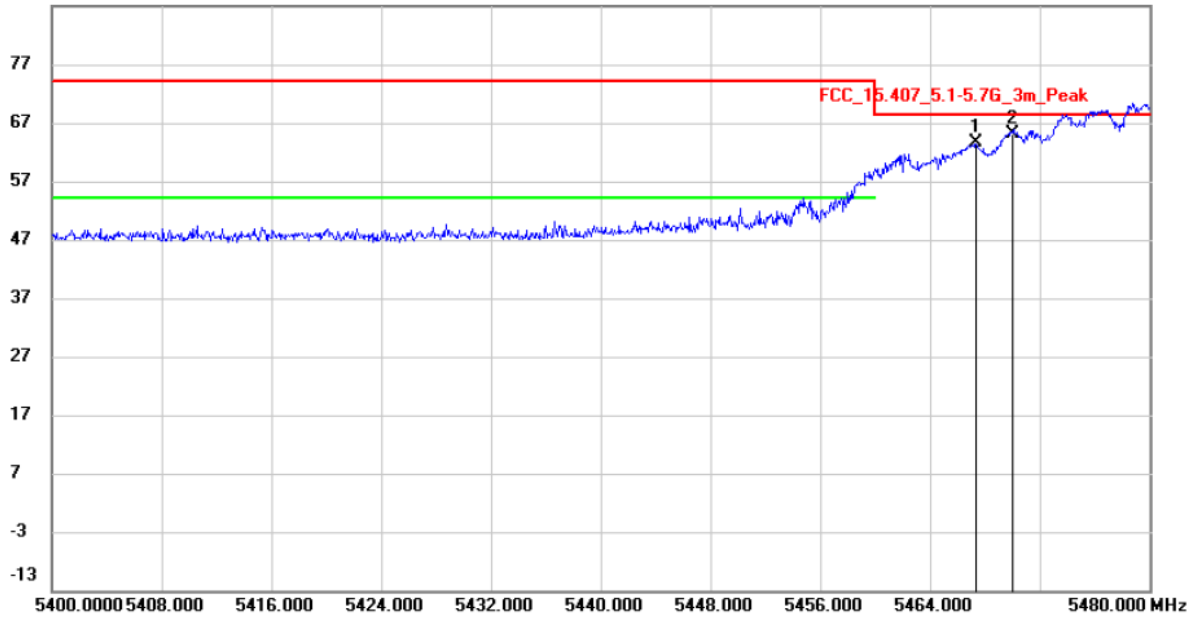

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5467.360	58.97	4.53	63.50	68.20	-4.70	peak	
2	*	5470.000	60.62	4.53	65.15	68.20	-3.05	peak	

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Horizontal	Detector: Peak
Test Mode: Band Edge IEEE 802.11 ac(VHT40) / High Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 17:48:42

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

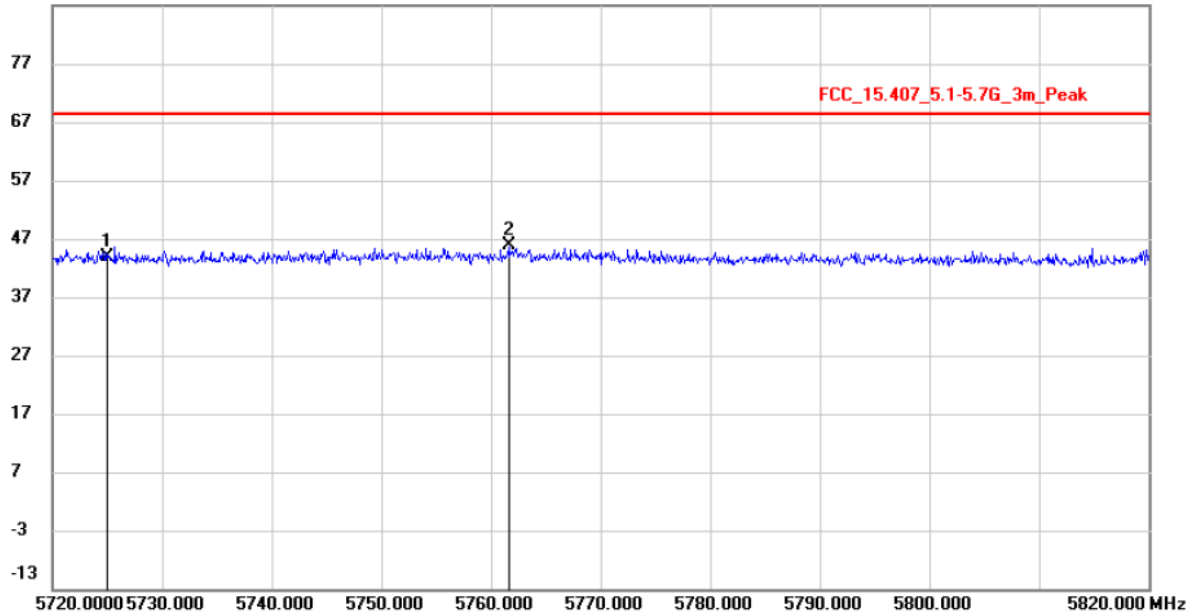

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector Comment
1		5725.000	38.83	4.92	43.75	68.20	-24.45	peak
2	*	5761.600	40.85	4.97	45.82	68.20	-22.38	peak

M/N: iDSD PHANTOM	Testing Voltage: AC 120V / 60Hz
Polarization: Vertical	Detector: Peak
Test Mode: Band Edge IEEE 802.11 ac(VHT40) / High Channel / U-NII-2C	Distance: 3m


Radiated Emission Measurement

Date: 2026/4/18

Time: 17:55:58

86.9 dBuV/m

FCC_15.407_5.1-5.7G_3m_AVG

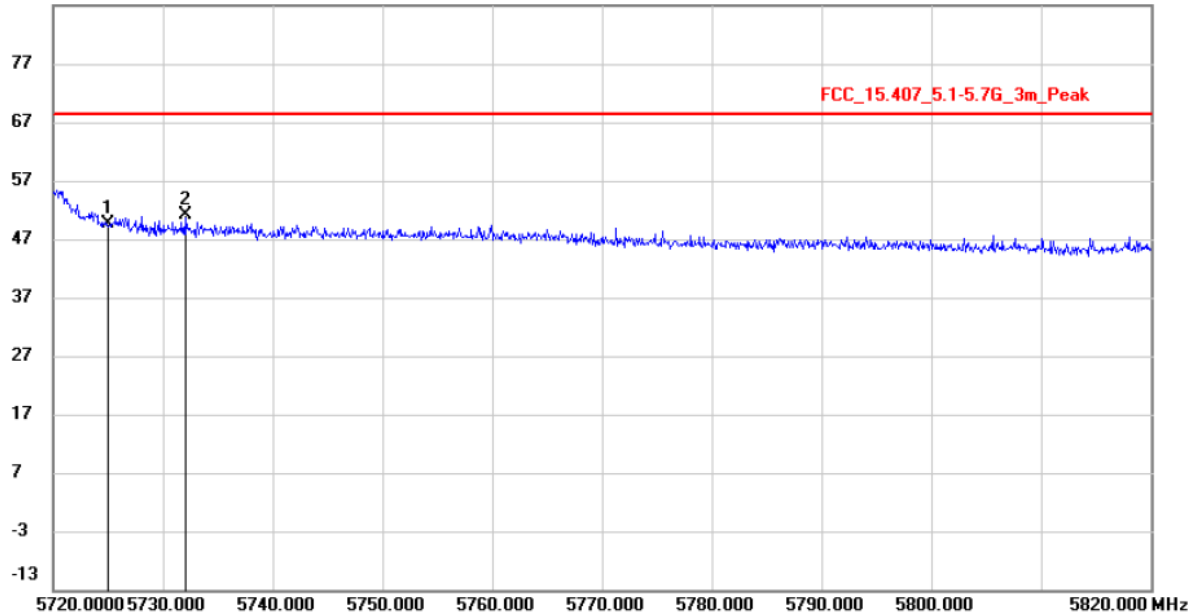

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		5725.000	44.58	4.92	49.50	68.20	-18.70	peak	
2	*	5732.000	46.08	4.92	51.00	68.20	-17.20	peak	