



SPECIFICATIONS SHEET

CUSTOMER :	_____
	murphy
DESCRIPTION :	_____
	Y. 019. 0035
CUSTOMER P/N :	_____
PART NUMBER :	_____
DATE OF APPLICATION :	_____
	2024-4-30

CLASSIFICATION OF SPEC. PRESENTATION. (Tick the relevant box "√")

- ☐ New application
- √ New part is added to accepted specification
- ☐ Revision of accepted specification

ACCEPTANCE STAMP (

APPROVAL BY	CHECK BY	PREPARE BY
Zhao ziqi		Chen jun

ADDRESS : 3rd Floor, No. 181, Mingyue 2nd Road, Shiwang Town, Boluo County, Huizhou city

TELEPHONE : 0752-6668681

E-MAIL : 839689578@qq.com

Huizhou Qitai Electronic Technology Co., LTD					
History For Revised Specification					
CUSTOMER P/N :		murphy			
		PART NUMBER :		Y. 019. 0035	
Item	DESCRIPTION (Content Or Reason For Changed)			Rev.	Cust Rev.
1	Initial Release	A0		2024-4-30	Chen jun
APPROVED BY		CHECKED BY	PREPARED BY	DATE	PAGE
Zhao ziqi			Chen jun	2024-4-30	1 of 3

Specification


CUSTOMER P/N :

Moffi

PART NUMBER :

Y. 019. 0035

1. DIMENSIONS (Unit: mm)

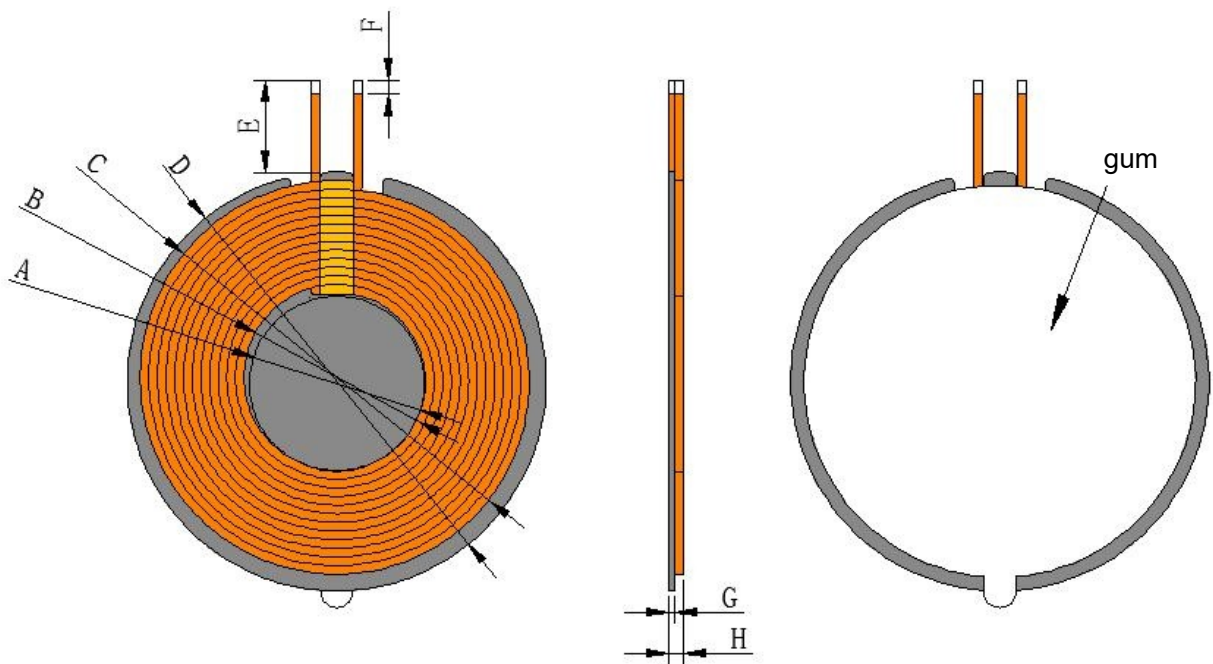

A	B	C	D	E	F	G	H
19.4±0.3	20.5±0.5	39.5±1	42-42.5	10±1	2±1	0.65±0.1	1.7max

- 1. The backing tape is white double-sided tape.
- 2. The coil fitting position is centered.
- 3. The total thickness does not include release paper.

APPROVED BY	CHECKED BY	PREPARED BY	DATE	PAGE
Zhao ziqi		Chen jun	2024-4-30	2 of 3

Huizhou Qitai Electronic Technology Co., LTD

Specification	CUSTOMER P/N :	Moffi
	PART NUMBER :	Y. 019. 0035

2. WINDING DETAILS Coil1

Turns	Wire Dia	Wdg. Type Spred/Close	Wdg.Direction	Intersect Yes/Not
11TS	0.08*75P _{Hot air self-adhesive wire}	(Close)	Reverse winding	Yes)

3.ELECTRICAL CHARACTERISTICS:

TEMPERATURE:25±10 , ℃ RELATIVE HUMIDITY:65±10%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
Coil 1					
1.	IND	S-F	7.8uh ± 10%	100kHz/V	UC2906A
2.	Q	S-F	60Min	100kHz/V	UC2906A
3.	DCR	S-F	55m Ω Max	100kHz/V	UC2906A

APPROVED BY	CHECKED BY	PREPARED BY	DATE	PAGE
Zhao ziqi		Chen jun	2024-4-30	3 of 3