

Appendix: Bluetooth LE

Contents

Contents	2
1. Duty Cycle	4
1.1 Test Result	4
1.1.1 Ant1	4
1.2 Test Graph	5
1.2.1 Ant1	5
2. Bandwidth	8
2.1 Test Result	8
2.1.1 OBW	8
2.1.2 6dB BW	8
2.2 Test Graph	9
2.2.1 OBW	9
2.2.2 6dB BW	12
3. Maximum Conducted Output Power	15
3.1 Test Result	15
3.1.1 Power	15
3.2 Test Graph	16
3.2.1 Power	16
4. Maximum Power Spectral Density	19
4.1 Test Result	19
4.1.1 PSD	19
4.2 Test Graph	20
4.2.1 PSD	20
5. Unwanted Emissions In Non-restricted Frequency Bands	23

5.1 Test Result23

 5.1.1 Ref23

 5.1.2 CSE23

5.2 Test Graph24

 5.2.1 Ref24

 5.2.2 CSE27

1. Duty Cycle


1.1 Test Result


1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.412	1.191	34.59	4.61	0.01
		2440	0.412	1.191	34.59	4.61	0.01
		2480	0.413	1.192	34.65	4.60	0.03

1.2 Test Graph

1.2.1 Ant1

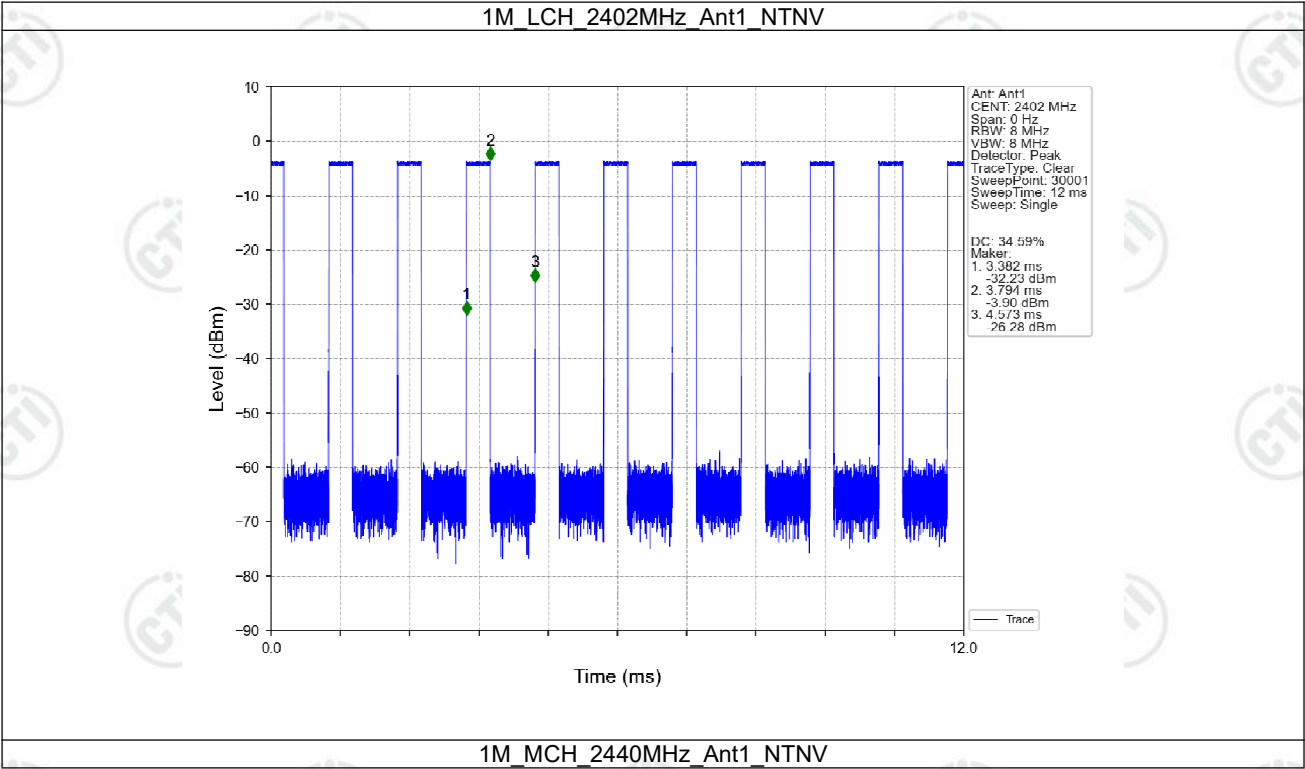

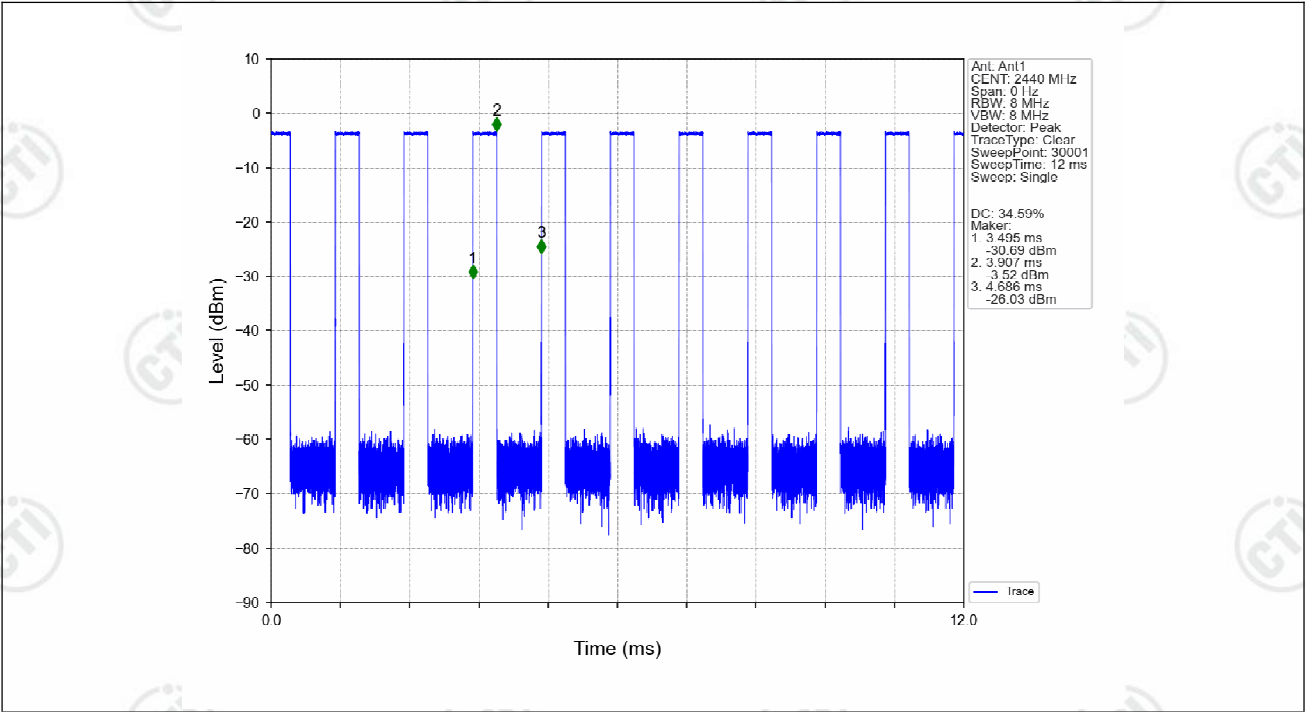

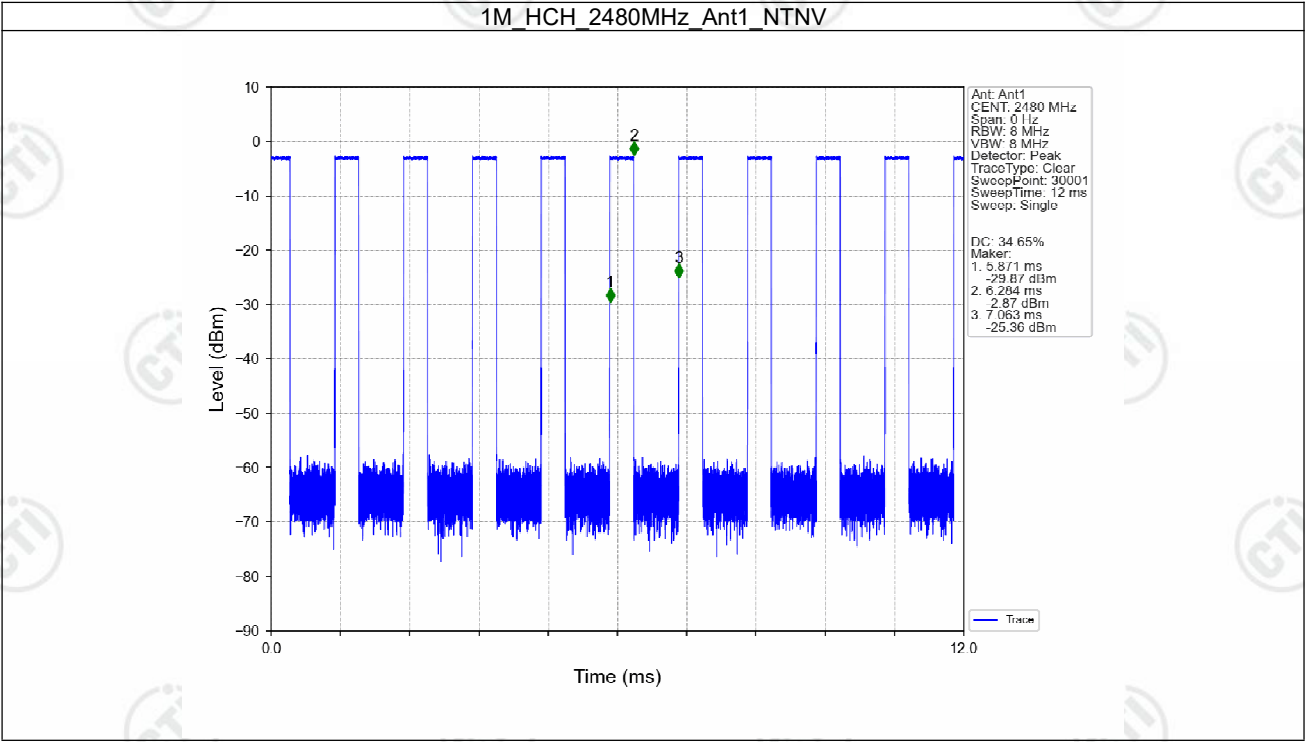

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.030	/	Pass
		2440	1	1.031	/	Pass
		2480	1	1.031	/	Pass


2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.669	≥ 0.5	Pass
		2440	1	0.682	≥ 0.5	Pass
		2480	1	0.685	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

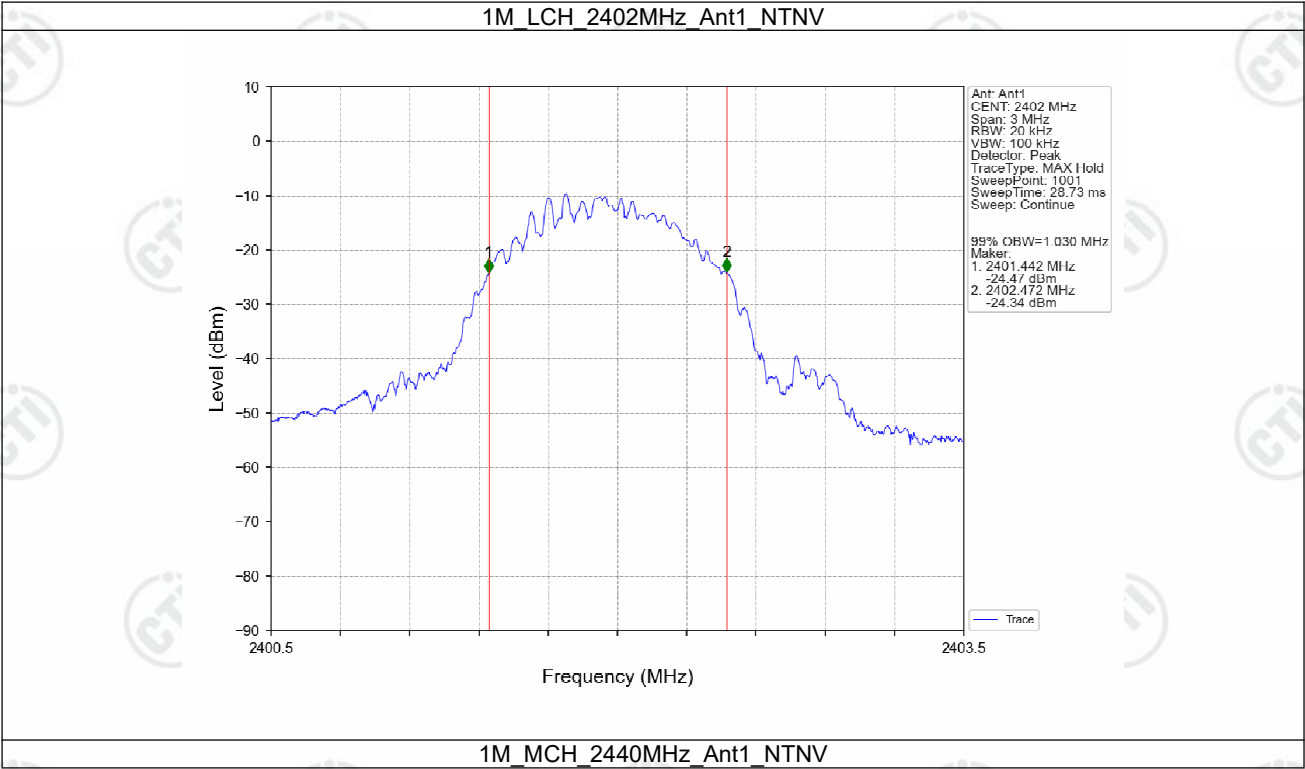


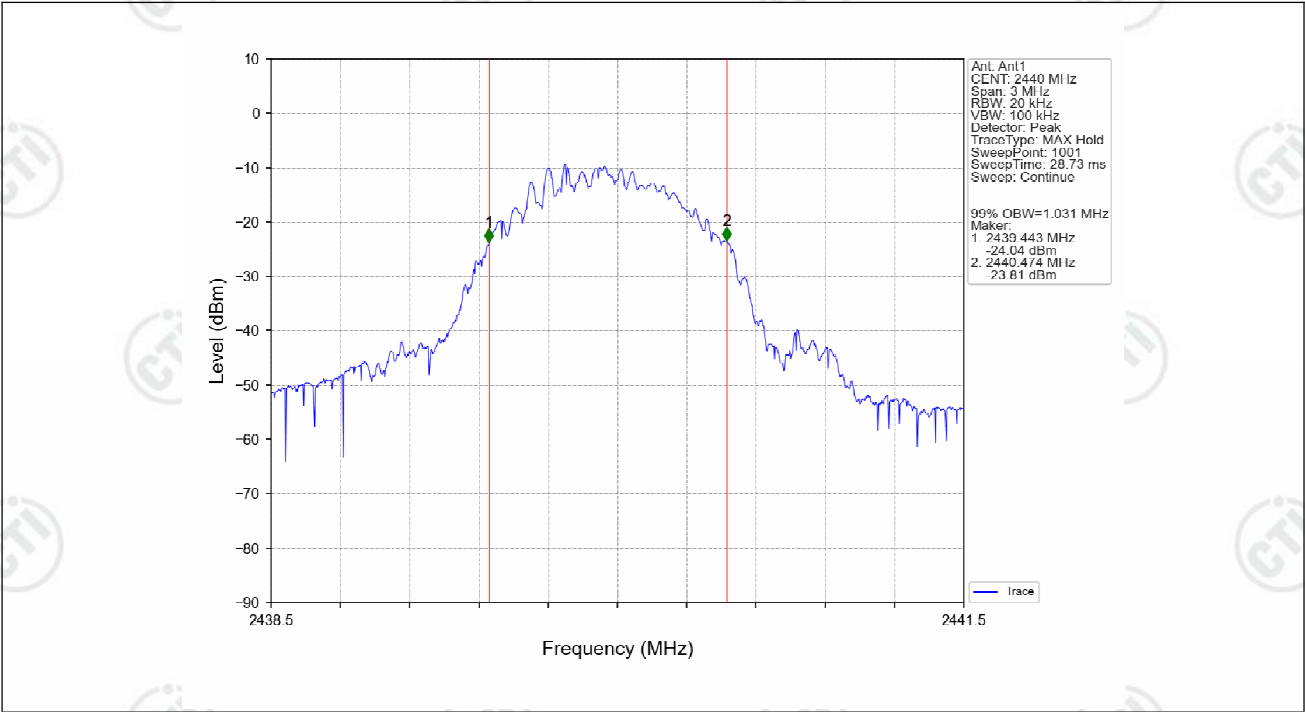


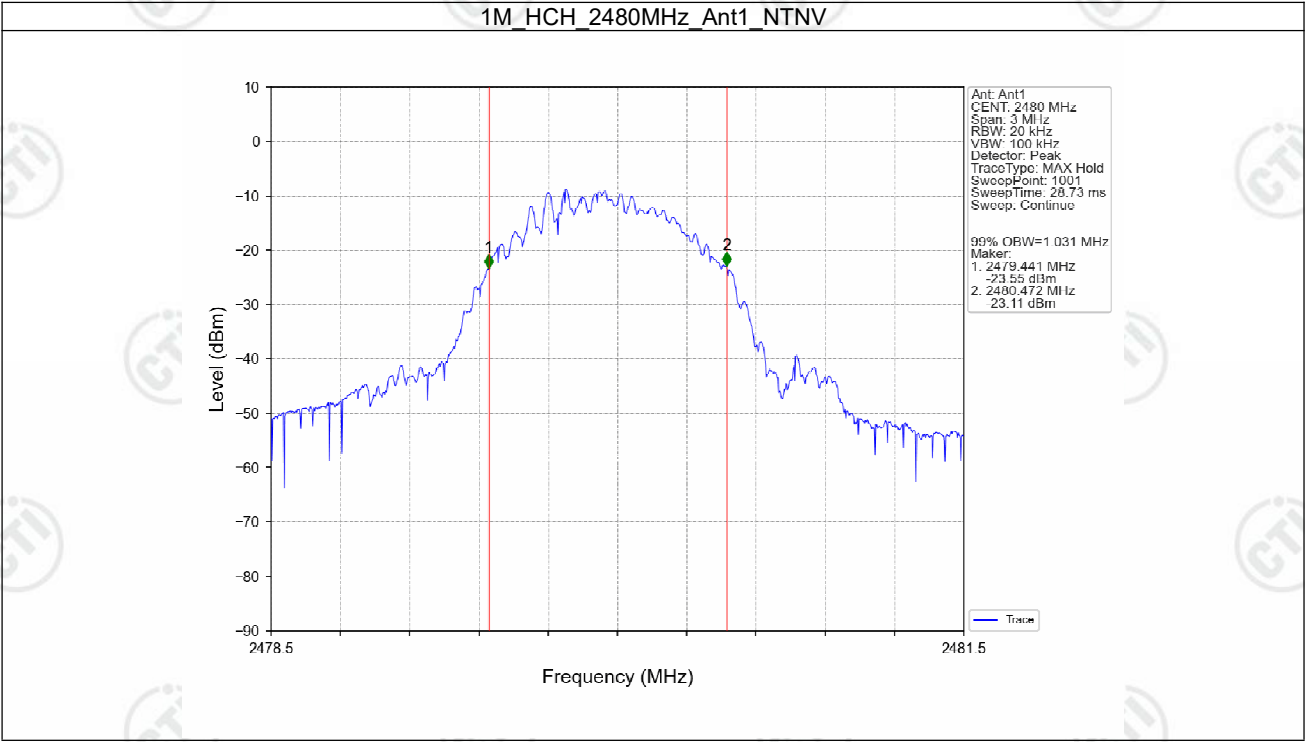

2.2.2 6dB BW

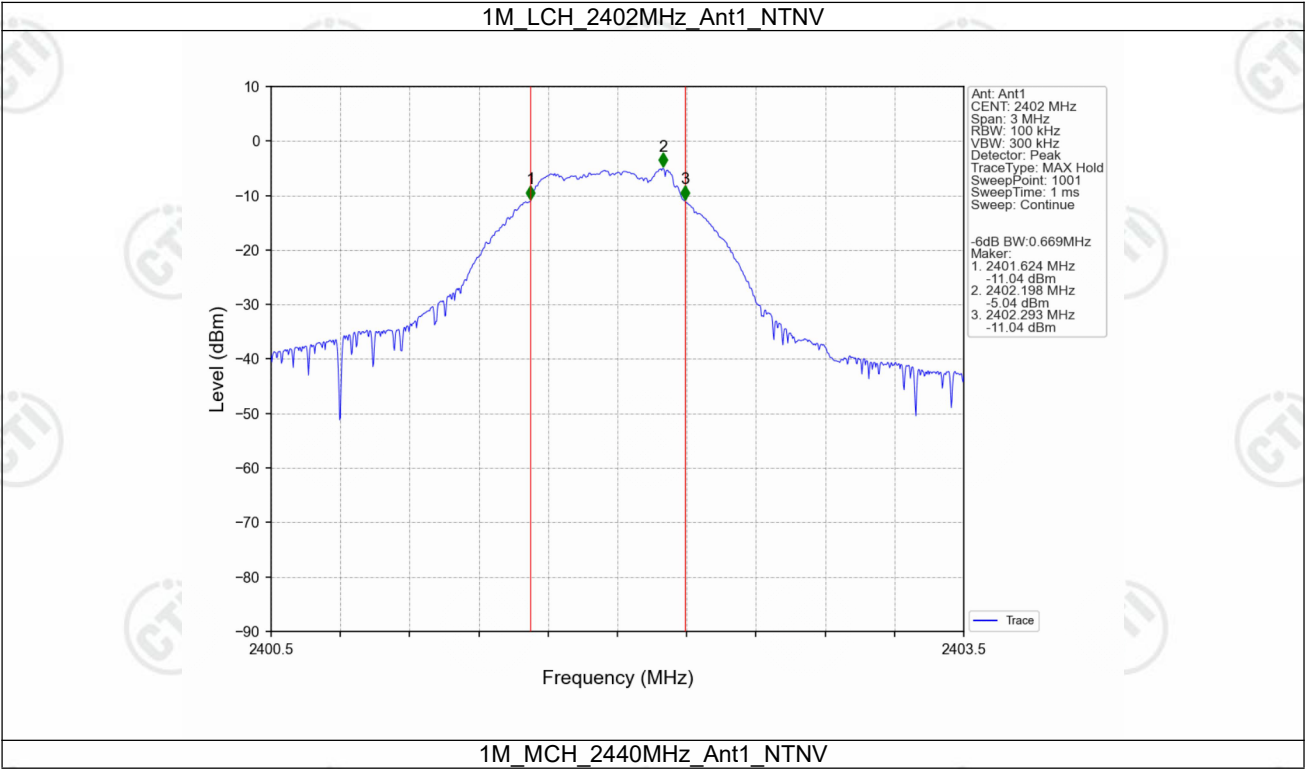

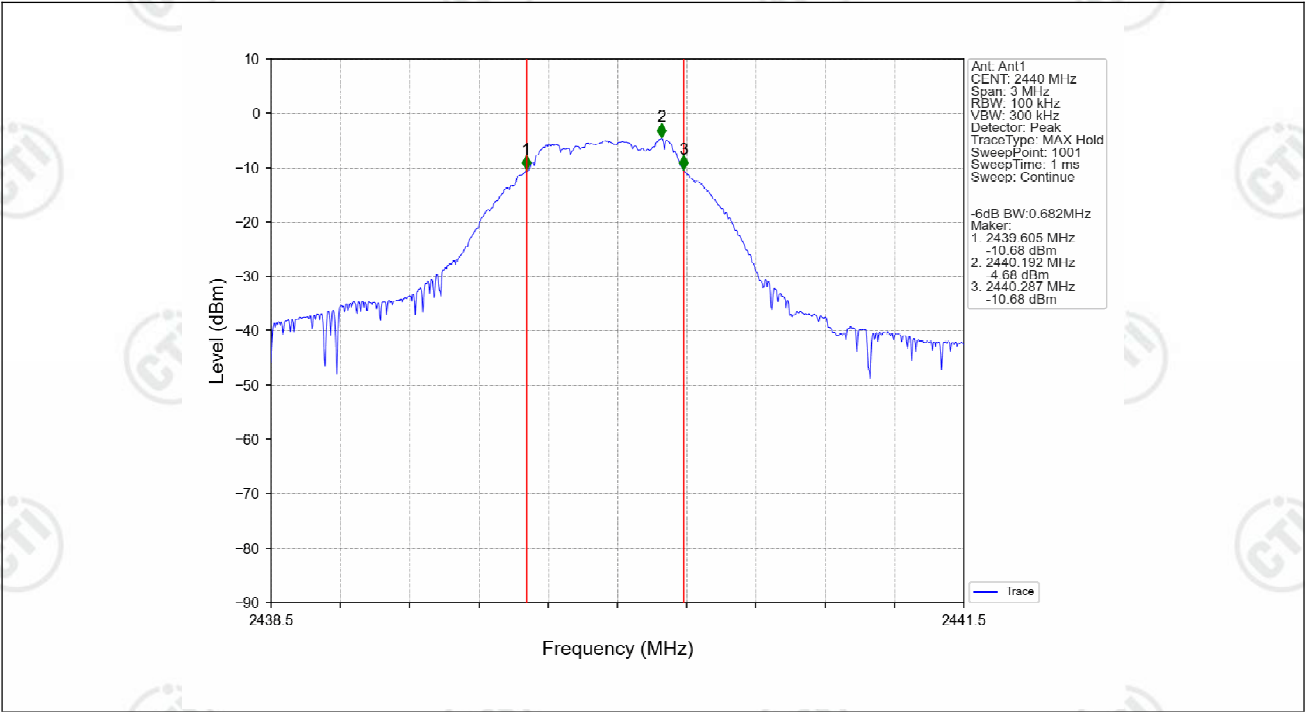

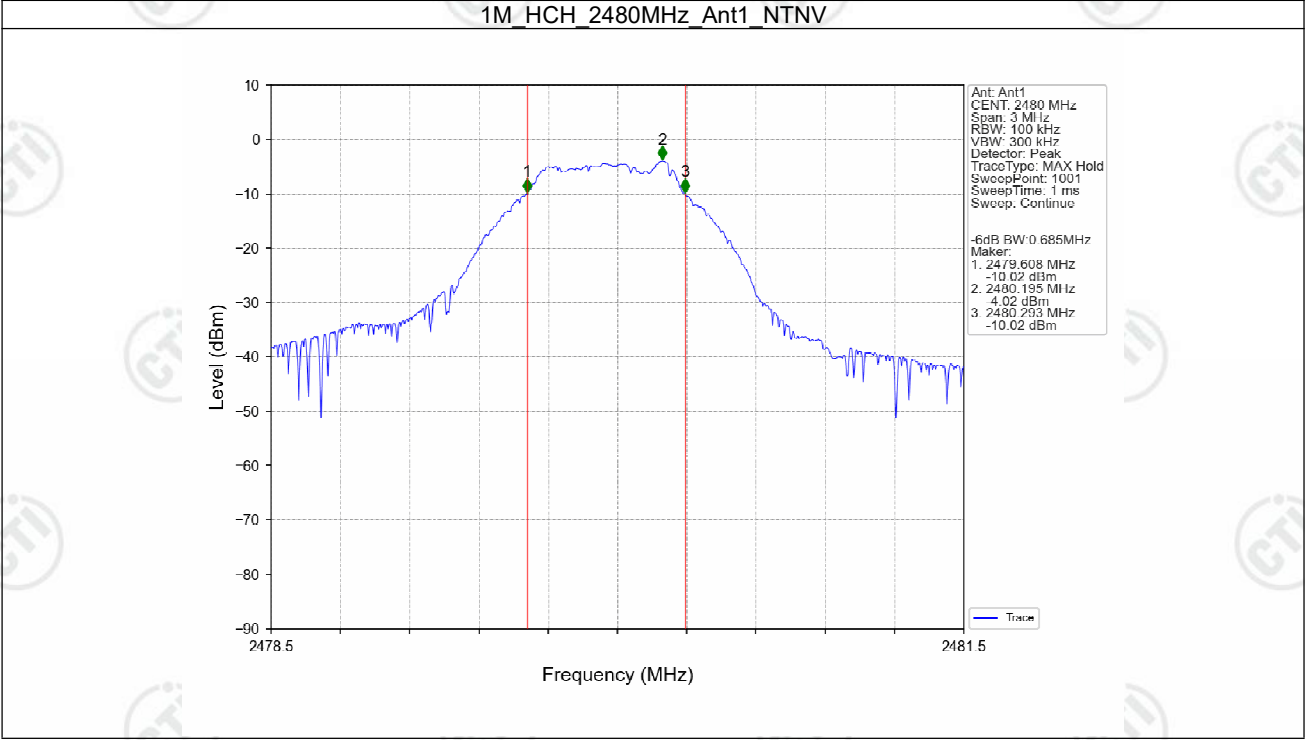

3. Maximum Conducted Output Power


3.1 Test Result


3.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-4.04	<=30	Pass
		2440	-3.66	<=30	Pass
		2480	-2.99	<=30	Pass
Note1: Antenna Gain: Ant1: 2.58dBi;					

3.2 Test Graph

3.2.1 Power

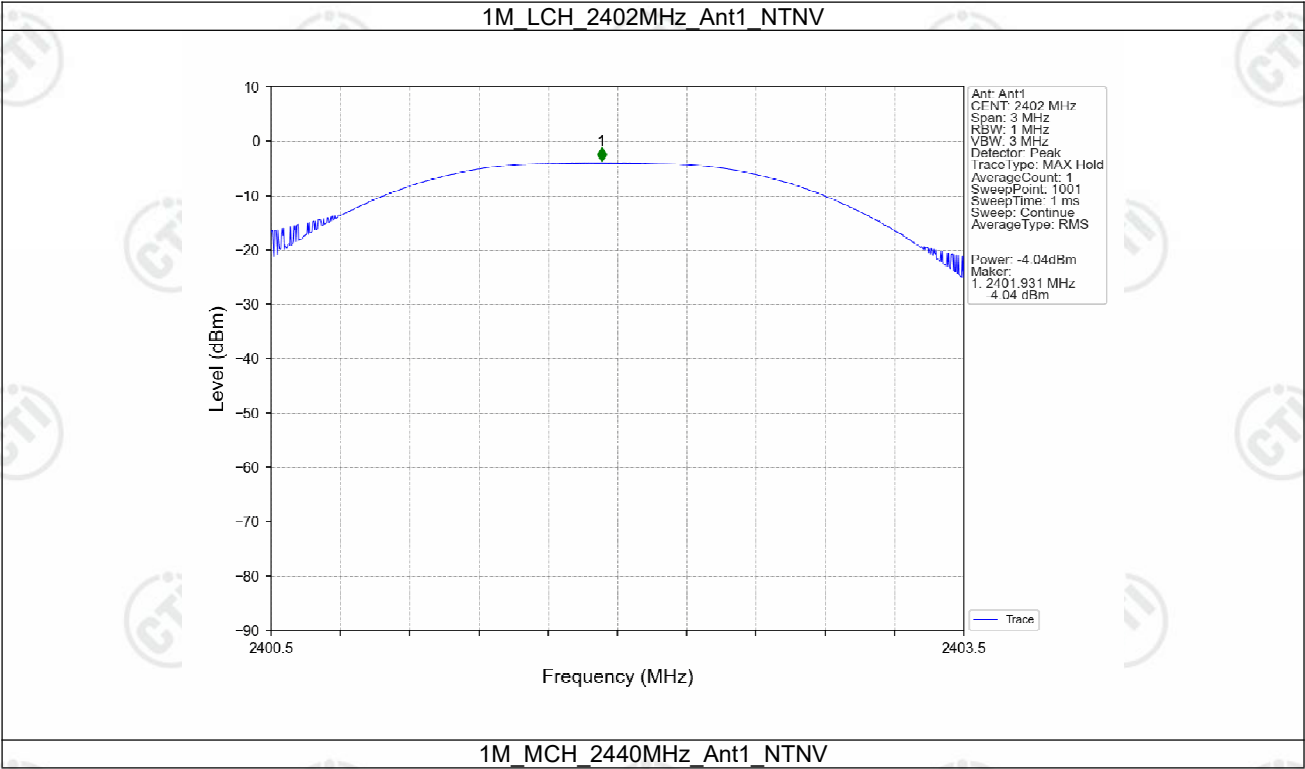

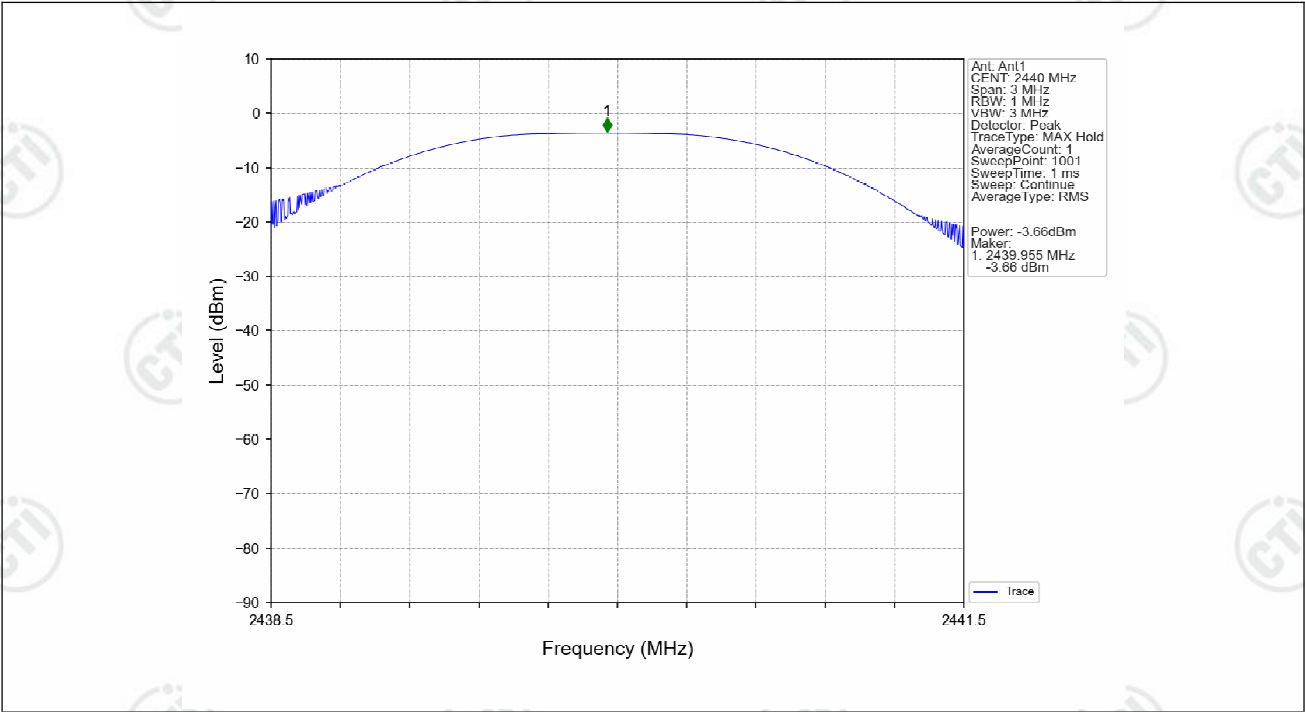

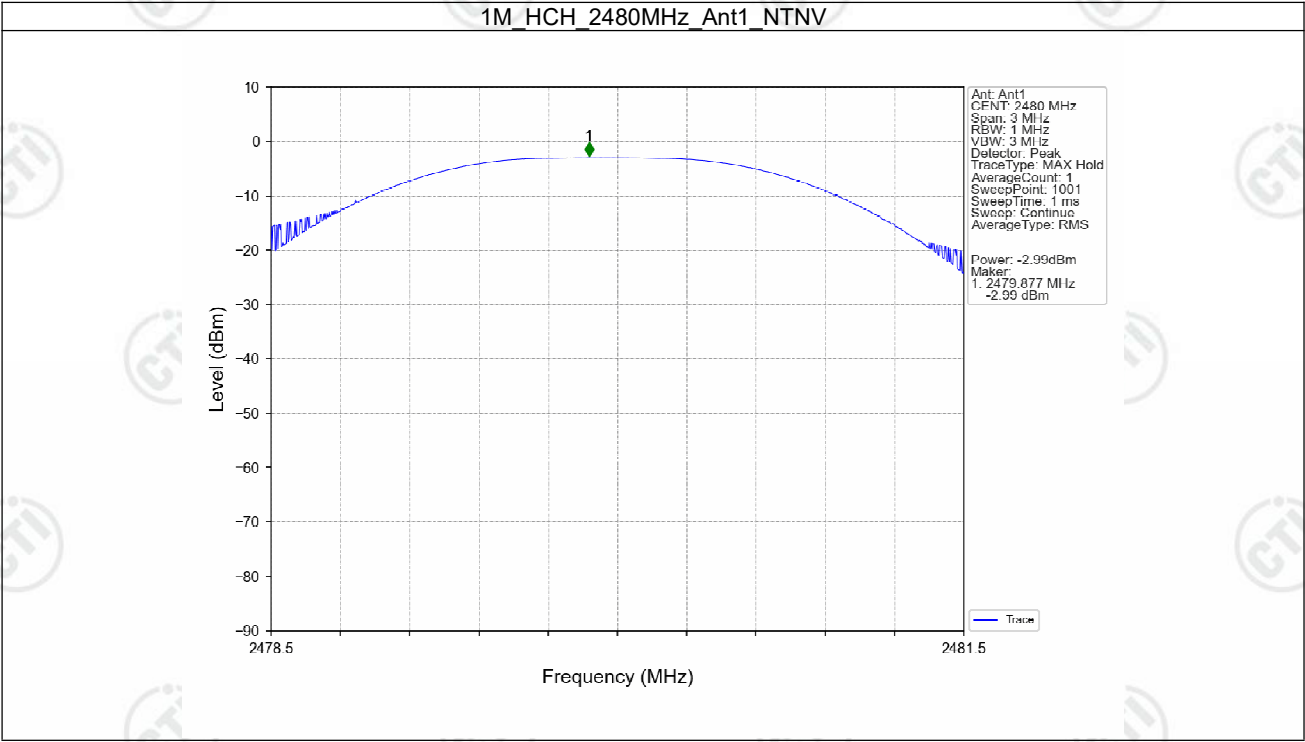

4. Maximum Power Spectral Density


4.1 Test Result


4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD		Verdict
			ANT1	Limit(dBm/3kHz)	
1M	SISO	2402	-19.26dBm/3kHz	<=8	Pass
		2440	-18.71dBm/3kHz	<=8	Pass
		2480	-18.15dBm/3kHz	<=8	Pass
Note1: Antenna Gain: Ant1: 2.58dBi;					

4.2 Test Graph

4.2.1 PSD

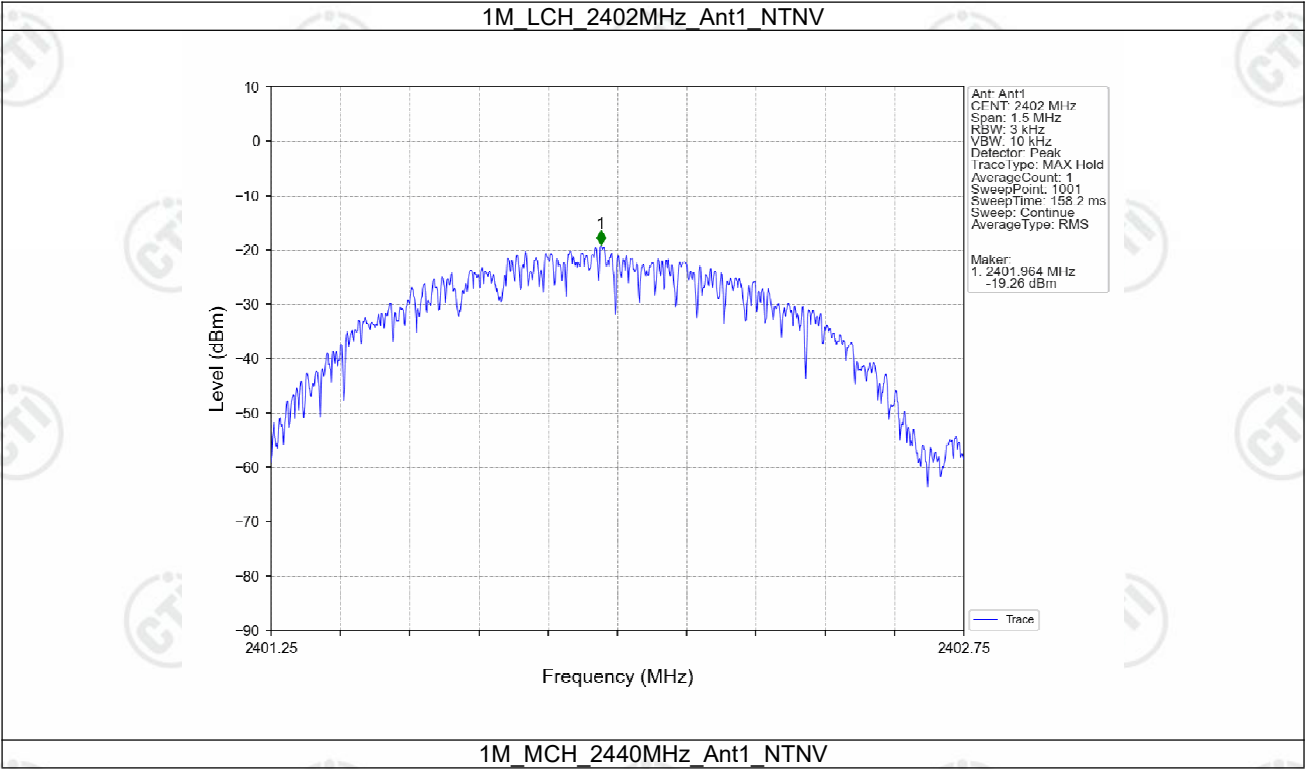

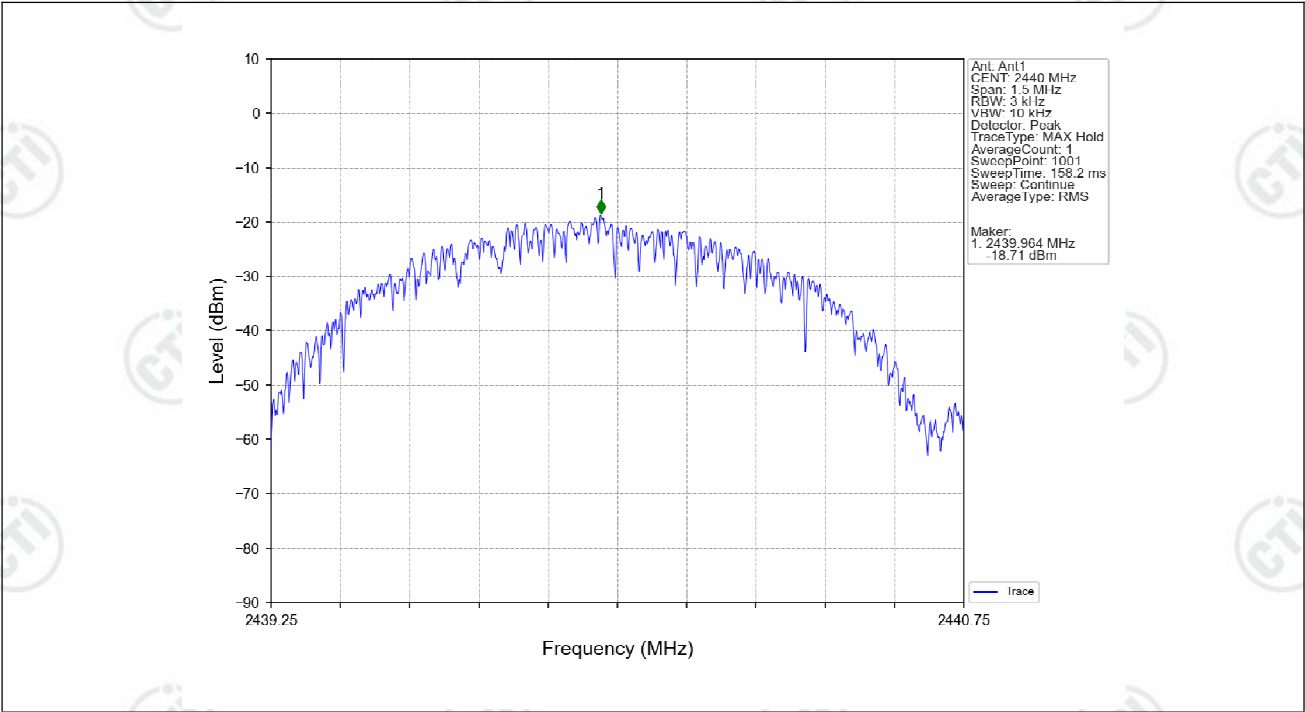

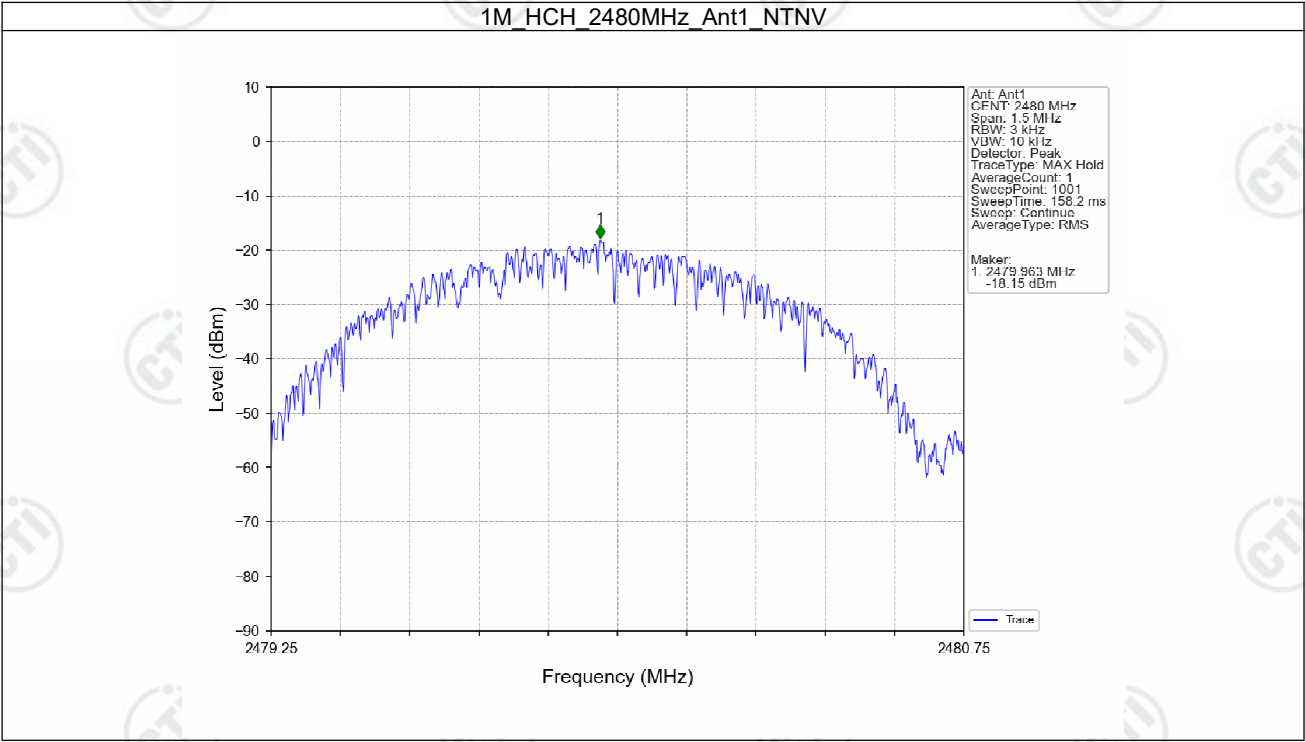

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-5.10
		2440	1	-4.74
		2480	1	-4.14


5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-5.10	-25.10	Pass
		2440	1	-5.10	-25.10	Pass
		2480	1	-5.10	-25.10	Pass

5.2 Test Graph


5.2.1 Ref

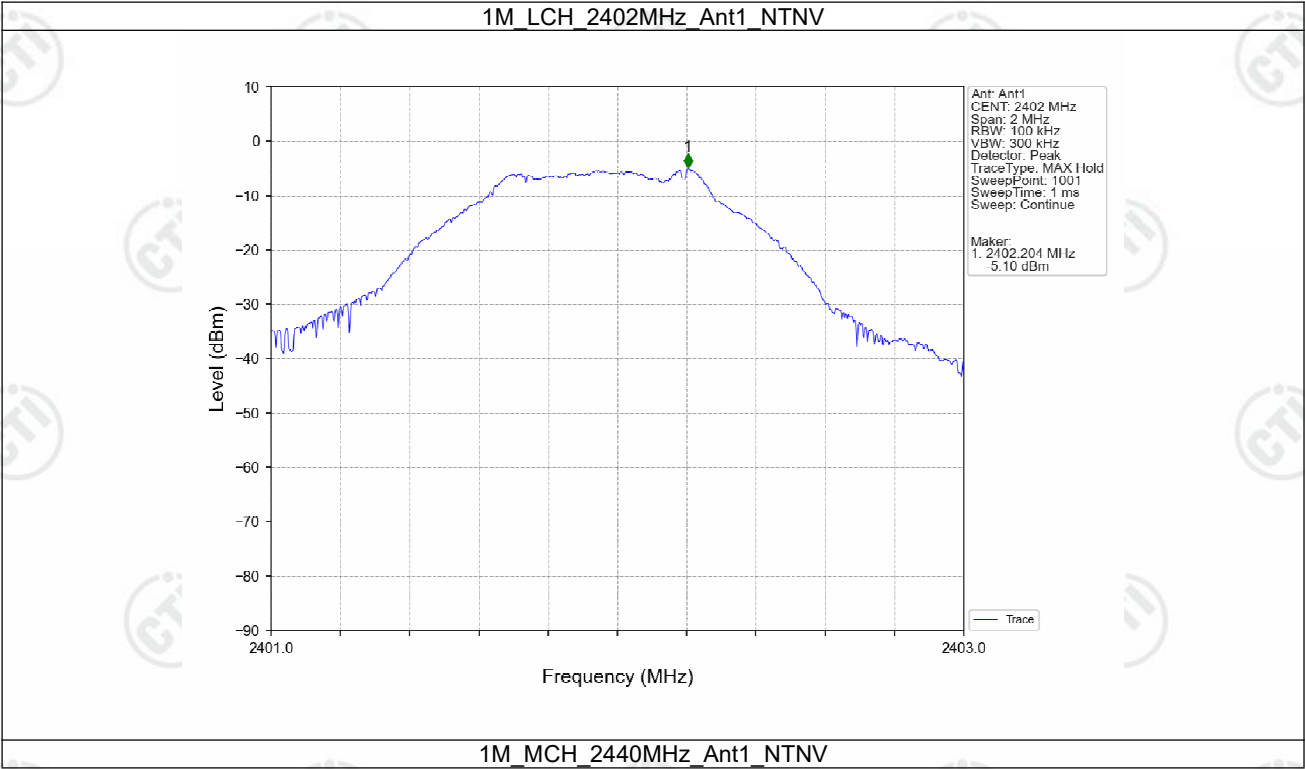


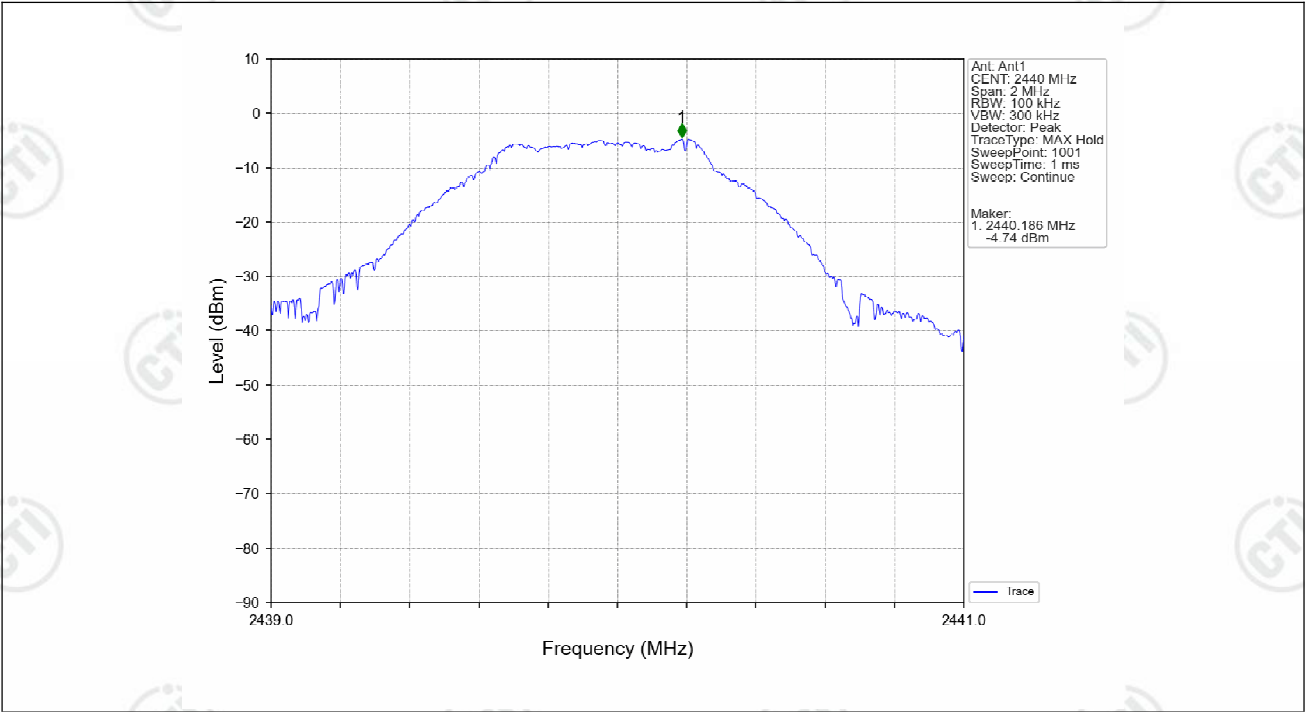


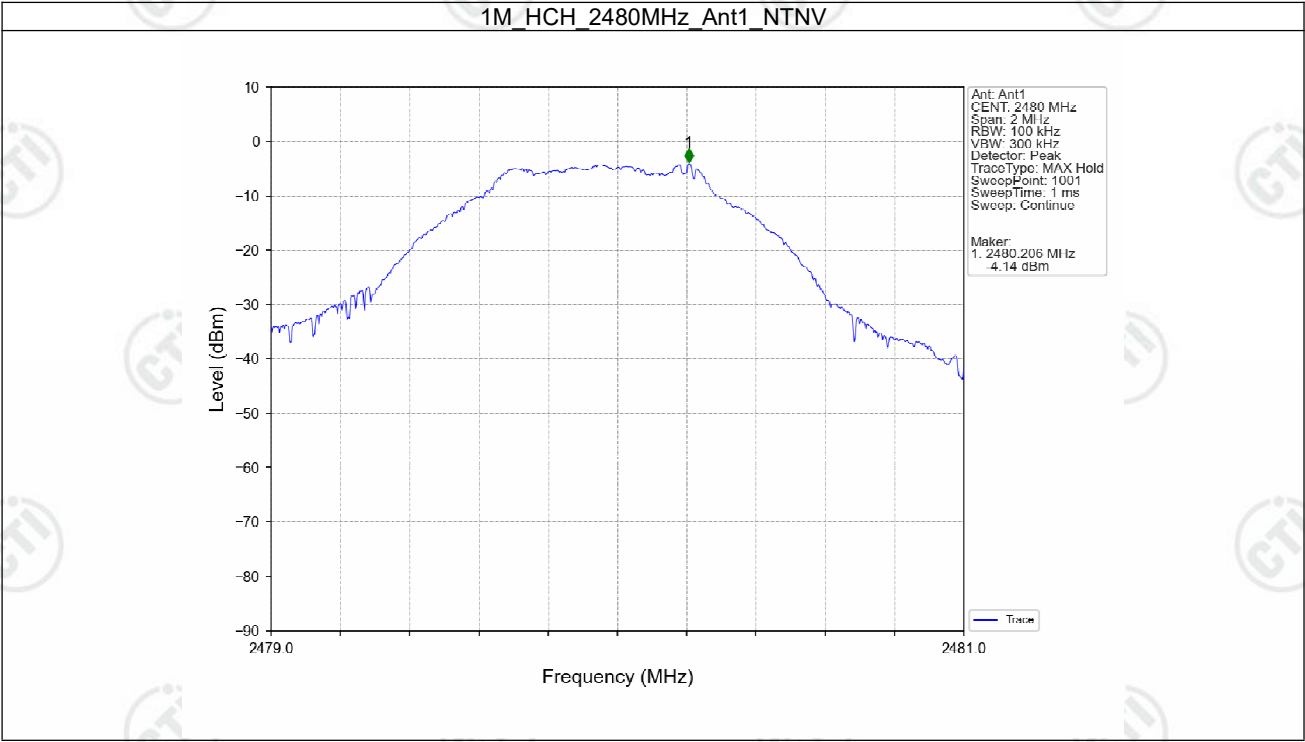


5.2.2 CSE

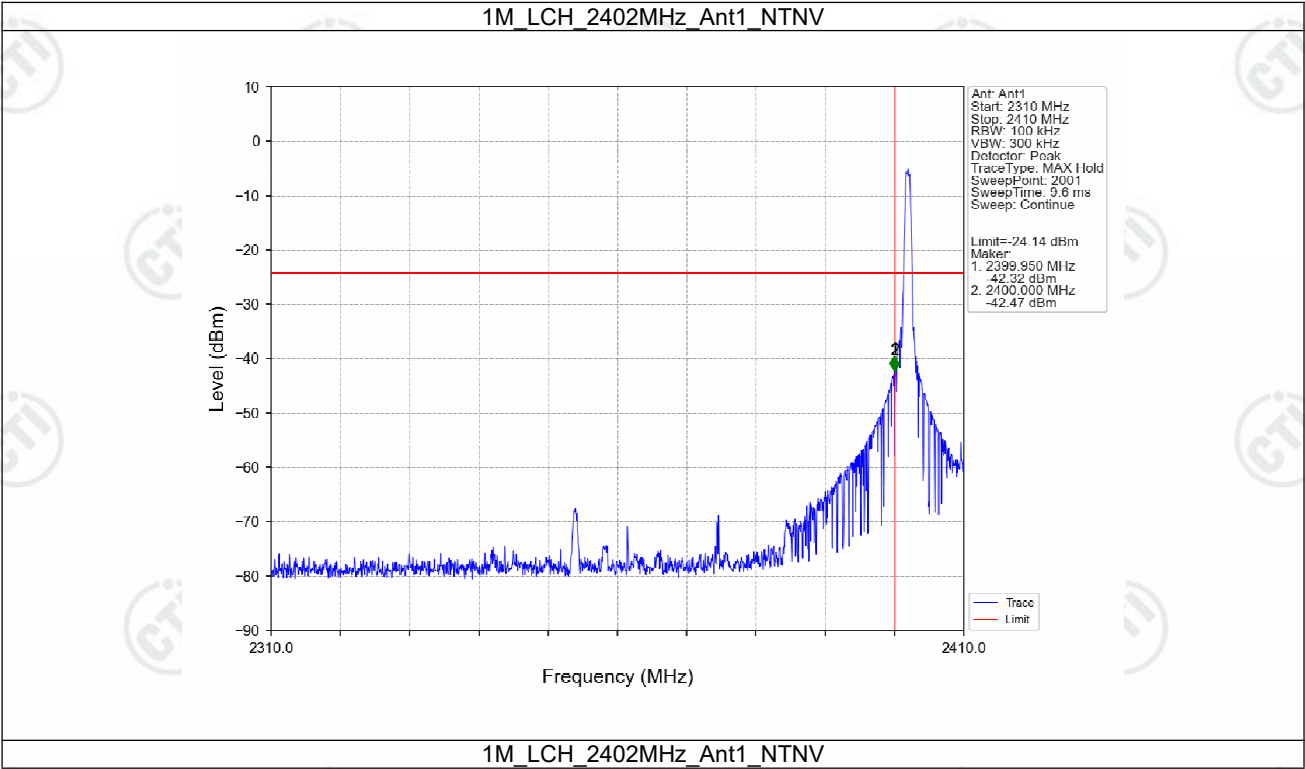

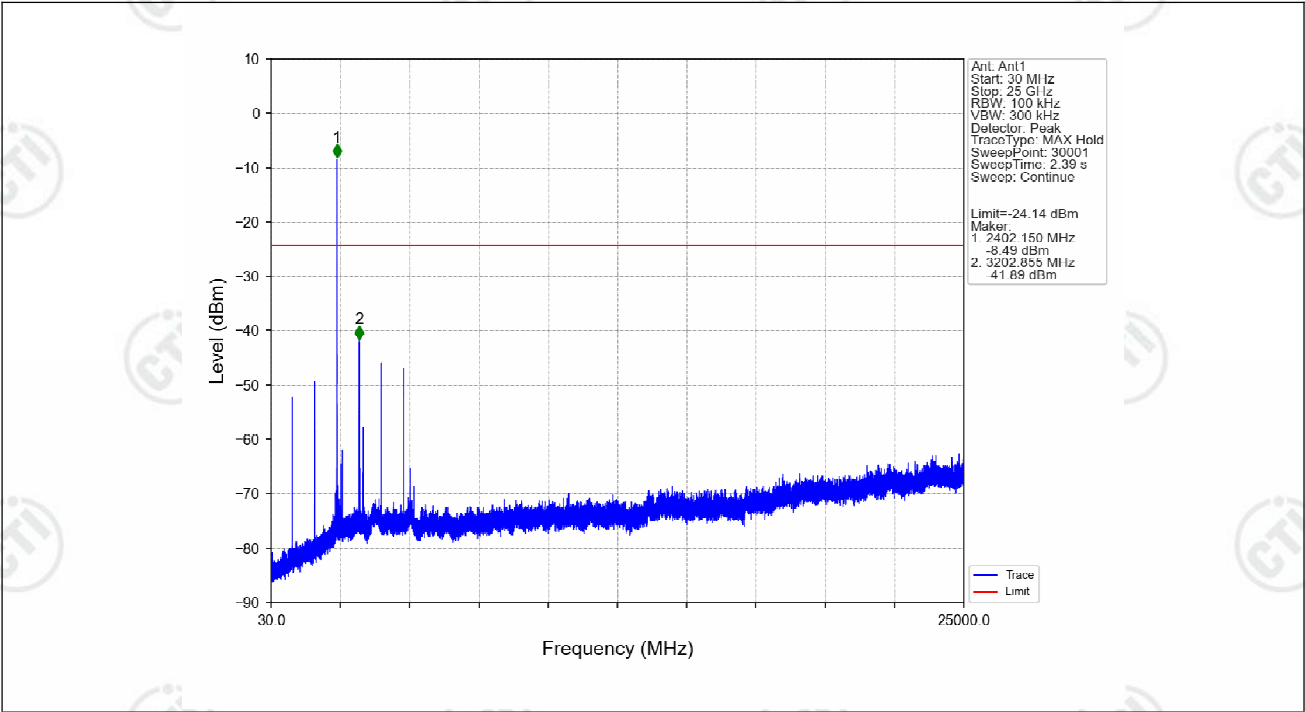

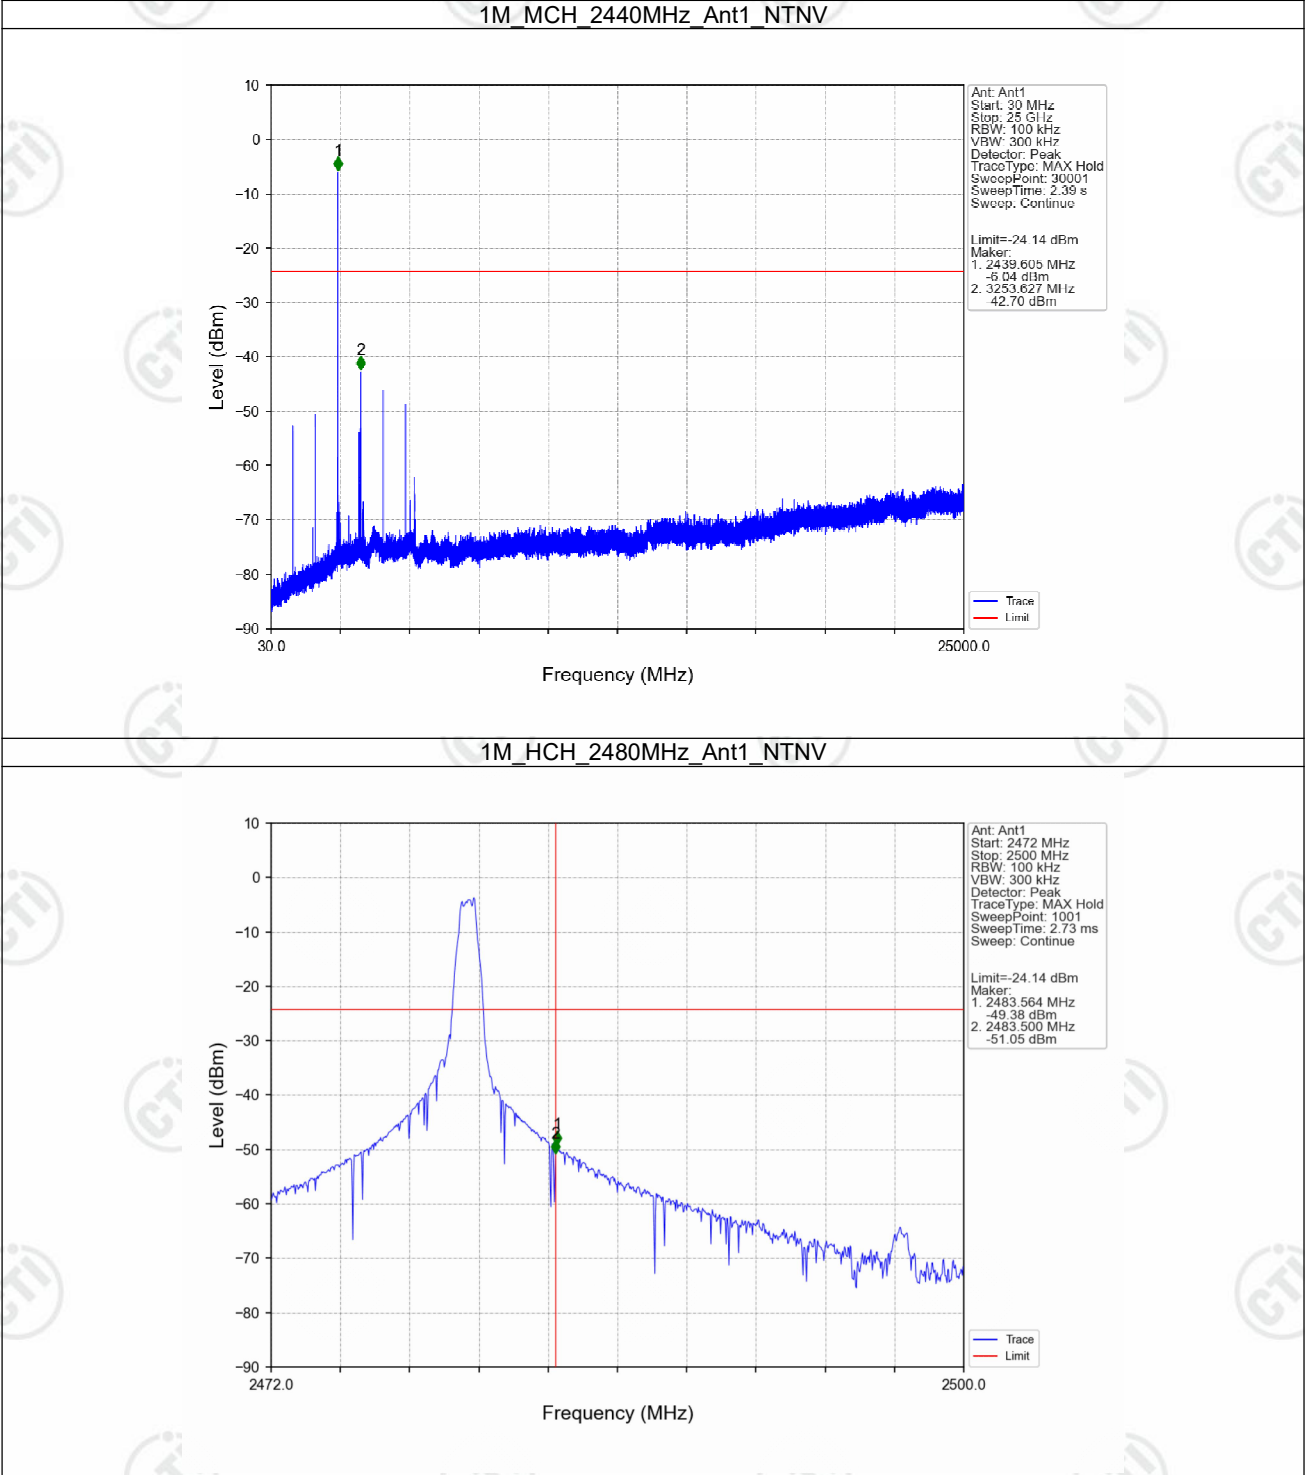

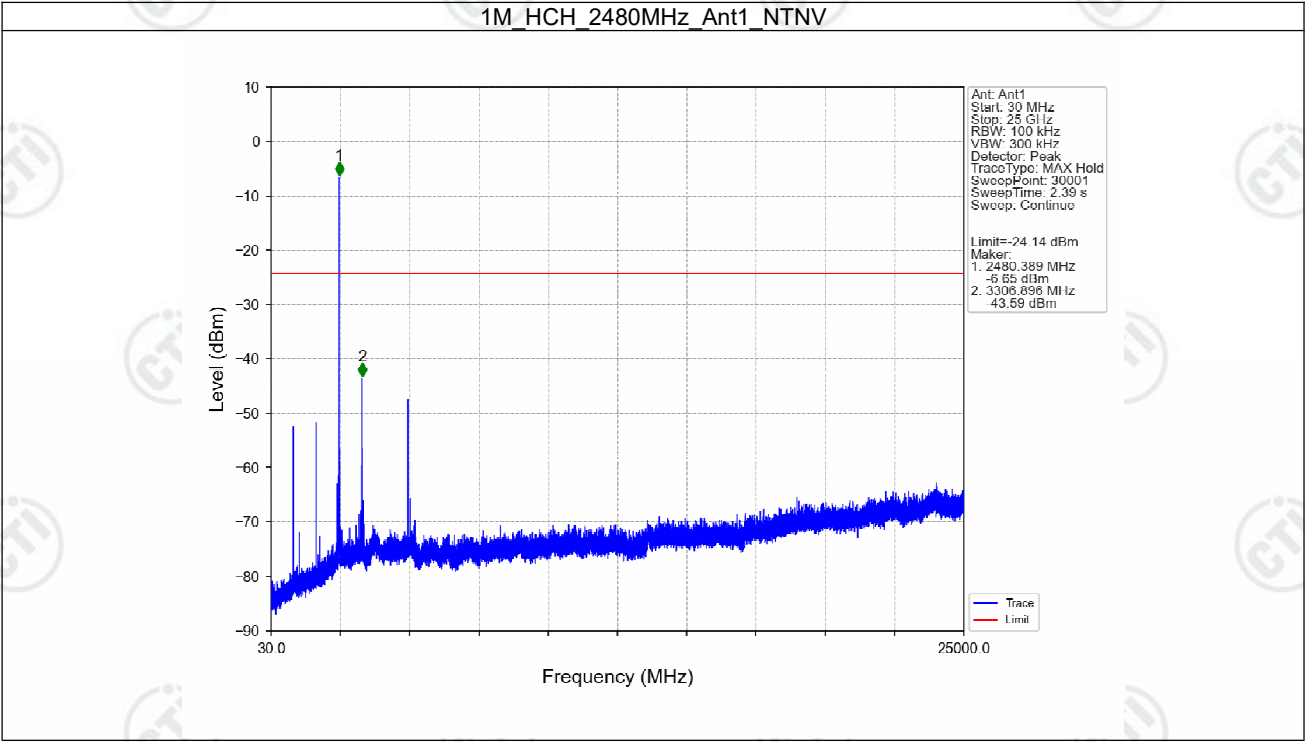

*** End of Report ***