

Prüfbericht-Nr.: Test report no.:	CN23JYNK 001	Auftrags-Nr.: Order no.:	168454745	Seite 1 von 23 Page 1 of 23
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-12-01	
Auftraggeber: Client:	Shenzhen Typhur Technology Co., Ltd. Prince Plaza 2201-2206, 51 Taizi Road, Shuiwan Community, Zhaoshang Street, Nanshan District, Shenzhen, Guangdong, China			
Prüfgegenstand: Test item:	2.4GHz Wi-Fi & BT IoT Module			
Bezeichnung / Typ-Nr.: Identification / Type no.:	WT1000R			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 RSS-247 Issue 3 August 2023 RSS-Gen Issue 5 February 2021			
Wareneingangsdatum: Date of sample receipt:	2023-12-01	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A003612973-001~002			
Prüfzeitraum: Testing period:	2023-12-04 - 2023-12-20			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	 Lin Lin		genehmigt von: authorized by:	 Hardy Suo
Datum: Date:	2024-05-31		Ausstellungsdatum: Issue date:	2024-05-31
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: 2A6RN-WT1000R IC: 28517-WT1000R, HVIN: WT1000R Note: This report based on the original wireless module (FCC ID: 2A6RN-WT1000 and IC: 28517-WT1000) to updated the bluetooth mode firmware and the other are same as original one, since these changed, re-test all test items of Bluetooth mode and spot check the WiFi output peak power.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

V05

Prüfbericht-Nr.: CN23JYNK 001
Test report no.:

Seite 2 von 23
Page 2 of 23

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 99% BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	8
3	GENERAL PRODUCT INFORMATION	9
3.1	PRODUCT FUNCTION AND INTENDED USE.....	9
3.2	RATINGS AND SYSTEM DETAILS	9
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	10
3.5	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	12
5	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>15</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>17</i>
5.1.4	<i>6dB Bandwidth</i>	<i>18</i>
5.1.5	<i>99% Bandwidth</i>	<i>19</i>
5.1.6	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>20</i>
5.1.7	<i>Radiated Spurious Emission</i>	<i>21</i>
5.1.8	<i>Conducted Emission on AC Mains.....</i>	<i>22</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	23
7	LIST OF TABLES.....	23

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of Bluetooth LE & Conducted Emission

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen 518110, Guangdong, China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2024-09-21
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2024-09-21
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2024-09-21
DC power supply	Keysight	E3642A	MY61276100	2024-09-21
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2024-09-21
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2024-09-21
Test Software	Tonscend	JS1120-3	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLY23JMF	N/A
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2024-07-25
Signal Analyzer	R&S	FSV 40	101439	2024-07-25
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2024-07-25
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2024-07-25
Amplifier	R&S	SCU-18F	180070	2024-07-25
Amplifier	R&S	SCU40A	100475	2024-07-25
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-08-06
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-08-27

Prüfbericht - Nr.: CN23JYNK 001
Test Report No.:

Seite 7 von 23

Page 7 of 23

Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-08-06
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2024-07-30
Artificial Mains Network	R&S	ENV216	102333	2024-07-31
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	±4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen 518110, Guangdong, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The product is 2.4GHz Wi-Fi & BT IoT Module which supports 2.4GHz Band Wi-Fi and Bluetooth low energy functions.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	2.4GHz Wi-Fi & BT IoT Module
Type Designation	WT1000R
FCC ID	2A6RN-WT1000R
IC	28517-WT1000R
HVIN	WT1000R
Operating Voltage	3 to 3.6Vdc
Technical Specification of Bluetooth LE	
Operating Frequency	2402-2480MHz
Type of Modulation	GFSK
Data Rate	1Mbps, 2Mbps
Channel Number	40 channels
Channel Separation	2MHz
Antenna Type	Integral Antenna
Antenna Number	1
Antenna Gain	2.2 dBi (Provided by the Client)
The type of wideband data transmission equipment	Non-FHSS
Technical Specification of 2.4GHz Wi-Fi	
Operating Frequency	2412 - 2462MHz for 802.11b/g/n(HT20) 2422 - 2452MHz for 802.11n(HT40)
Type of Modulation	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
Data Rate	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n
Channel Number	11 channels for 802.11b/g/n(HT20) 7 channels for 802.11n(HT40)
Channel Separation	5 MHz
Antenna Type	Integral Antenna
Antenna Number	1
Antenna Gain	2.2 dBi (Provided by the Client)

The type of wideband data
 transmission equipment

DTS

Table 4: RF Channel and Frequency of Bluetooth Low Energy

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.3 Independent Operation Modes

The basic operation modes are:

A. On, Bluetooth transmitting mode

- 1) Low Channel
- 2) Middle Channel
- 3) High Channel

B. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- ID Label and Location Info
- Schematics
- Operation Description
- Block Diagram
- PCB Layout

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model WT1000R in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
Adapter	Chengguo	CD212	N/A	DC 5V, 3A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

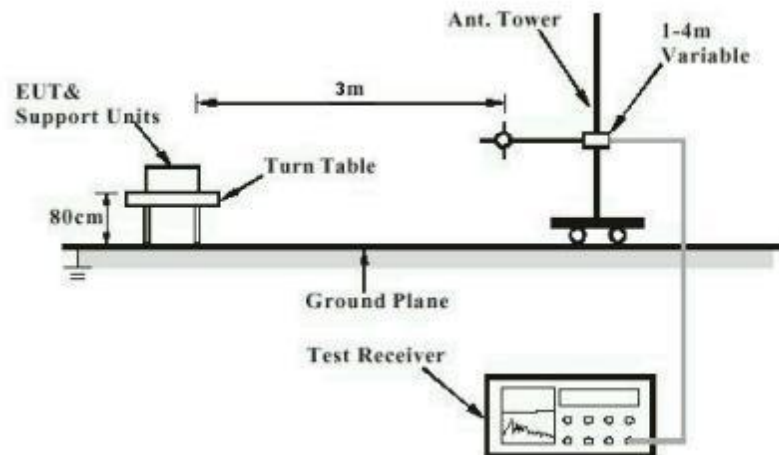


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

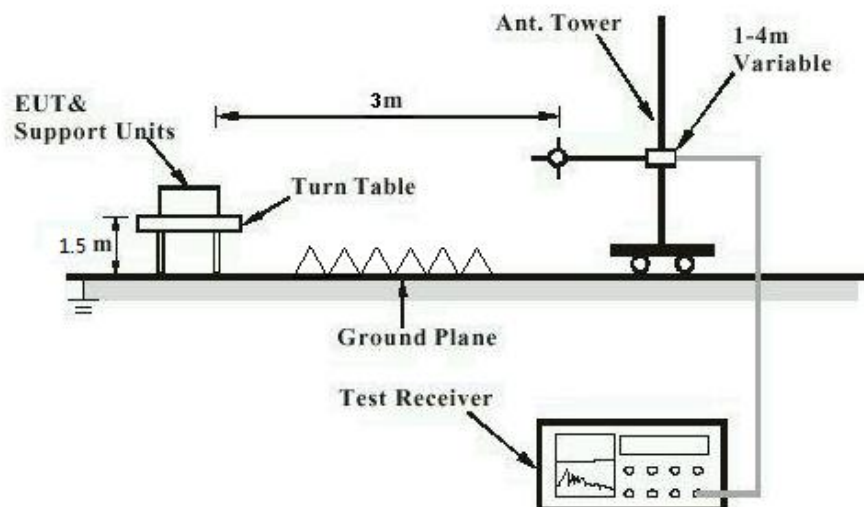


Diagram of Measurement Configuration for Mains Conduction Measurement


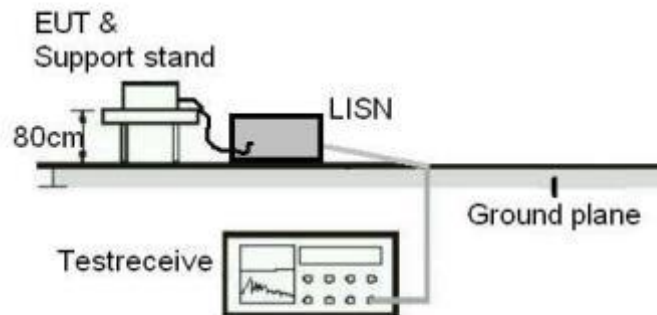


Diagram of Measurement Configuration for Conducted Transmitter Measurement

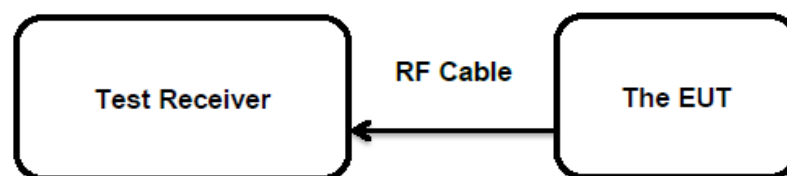

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Section 6.8

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 2.2dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 2.2 dBi

Table 7: Test Result of Maximum Peak Conducted Output Power (WiFi mode)

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	18.41	-		30.00	-	2.33	-	20.74	-	36.00	-	Pass
11b	1Mbps	1	6	2437	15.73	-		30.00	-	2.33	-	18.06	-	36.00	-	Pass
11b	1Mbps	1	11	2462	16.93	-		30.00	-	2.33	-	19.26	-	36.00	-	Pass
11g	6Mbps	1	1	2412	23.28	-		30.00	-	2.33	-	25.61	-	36.00	-	Pass
11g	6Mbps	1	6	2437	25.11	-		30.00	-	2.33	-	27.44	-	36.00	-	Pass
11g	6Mbps	1	11	2462	23.78	-		30.00	-	2.33	-	26.11	-	36.00	-	Pass
HT20	MCS0	1	1	2412	23.44	-		30.00	-	2.33	-	25.77	-	36.00	-	Pass
HT20	MCS0	1	6	2437	24.55	-		30.00	-	2.33	-	26.88	-	36.00	-	Pass
HT20	MCS0	1	11	2462	23.45	-		30.00	-	2.33	-	25.78	-	36.00	-	Pass
HT40	MCS0	1	3	2422	23.31	-		30.00	-	2.33	-	25.64	-	36.00	-	Pass
HT40	MCS0	1	6	2437	24.10	-		30.00	-	2.33	-	26.43	-	36.00	-	Pass
HT40	MCS0	1	9	2452	24.02	-		30.00	-	2.33	-	26.35	-	36.00	-	Pass

Note: Above test data refer to wireless module test report FR1D1609B and CR1D1609BTX as issued by Sporton International Inc.(Kunshan).

Table 8: Test Result of Maximum Peak Conducted Output Power (WiFi mode spot check Peak Conducted Output Power)

Test Mode	Test Channel (MHz)	Measured Peak Power (dBm)
11B	2412	18.69
	2437	15.43
	2462	16.77
11G	2412	23.17
	2437	24.94
	2462	23.61
11N20	2412	23.28
	2437	23.79
	2462	23.31
11N40	2422	22.83
	2437	23.52
	2452	23.18

Prüfbericht - Nr.: CN23JYNK 001

Test Report No.:

Seite 17 von 23

Page 17 of 23

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(e) RSS-247 Section 5.2(b)
Basic standard	: ANSI C63.10: 2013
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-12-18
Input voltage	: 3Vdc
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.3 °C
Relative humidity	: 36 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23JYNK 001
Test Report No.:Seite 18 von 23
Page 18 of 23

5.1.4 6dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)(2) RSS-247 Section 5.2(a)
Basic standard	:	ANSI C63.10: 2013
Limits	:	> 500 KHz
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2023-12-18
Input voltage	:	3Vdc
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.3 °C
Relative humidity	:	36 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23JYNK 001
Test Report No.:

Seite 19 von 23
Page 19 of 23

5.1.5 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	: RSS-Gen Clause 6.7
Basic standard	: ANSI C63.10: 2013
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-12-18
Input voltage	: 3Vdc
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.3 °C
Relative humidity	: 36 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23JYNK 001

Test Report No.:

Seite 20 von 23

Page 20 of 23

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Section 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-12-18
Input voltage	: 3Vdc
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.3 °C
Relative humidity	: 36 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23JYNK 001

Test Report No.:

Seite 21 von 23

Page 21 of 23

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 RSS-247 Section 3.3
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Section 8.9 & 8.10
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2023-12-19
Input voltage	: 3Vdc
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23JYNK 001
Test Report No.:Seite 22 von 23
Page 22 of 23

5.1.8 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a) RSS-Gen Section 8.8
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a) RSS-Gen Table 4
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-12-20
Input voltage	: AC 120V, 60Hz
Operation mode	: B
Earthing	: Not connected
Ambient temperature	: 22 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT	9
Table 4: RF Channel and Frequency of Bluetooth Low Energy.....	10
Table 5: List of Accessories and Auxiliary Equipment.....	11
Table 6: Test Result of Maximum Peak Conducted Output Power.....	15
Table 7: Test Result of Maximum Peak Conducted Output Power (WiFi mode).....	16
Table 8: Test Result of Maximum Peak Conducted Output Power (WiFi mode spot check Peak Conducted Output Power).....	16