



ELEMENT SUWON
13, Heungdeok 1-ro, Giheung-gu, Yongin-si,
Gyeonggi-do, 16954 South Korea
Tel. 031.660.7319 / Fax 031.660.7318
<http://www.element.com>

MEASUREMENT REPORT

FCC Part 15C NFC

Applicant Name:

BH EVS CO., LTD.
35, Magokjungang 8-ro 3-gil
Gangseo-gu, Seoul,
07793 Republic of Korea

Date of Testing:

10/28/2025 – 1/21/2026

Test Report Issue Date:

2/20/2026

Test Site/Location:

Element Lab., Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1K2510300010-03.2A6WX

FCC:

2A6WXWCSKD12A

APPLICANT:

BH EVS CO., LTD.

Application Type:

Certification

Model:

WCSKD12A

EUT Type:

Wireless Charger

Frequency:

13.56MHz

FCC Classification:

Low Power Communications Device Transmitter (DXX)

FCC Rule Part(s):

Part 15 Subpart C (15.225)

Test Procedure(s):

ANSI C63.10-2020 + Cor.1:2023 + C63.10a:2024 +
Errata to C63.10a:2024

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Prepared by

Reviewed by

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 1 of 29

TABLE OF CONTENTS

1.0	Introduction	3
1.1	Scope.....	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TEST	5
3.1	Evaluation Procedure.....	5
3.2	Radiated Emissions	5
3.3	Environmental Conditions	5
4.0	ANTENNA REQUIREMENTS	6
5.0	MEASUREMENT UNCERTAINTY	7
6.0	TEST EQUIPMENT CALIBRATION DATA.....	8
7.0	TEST DATA	9
7.1	Summary	9
7.2	Occupied Bandwidth Measurement	10
7.3	In-Band Radiated Spurious Emission Measurements.....	12
7.4	Radiated Spurious Emission Measurements, Out-of-Band.....	15
7.5	Frequency Stability Test Data.....	24
8.0	CONCLUSION	29

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 2 of 29

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory(ies) indicated in Section 1.3 below. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISED: 26168

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 3 of 29

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **BH EVS Charger ID: 2A6WXWCSKD12A**. The EUT is designed to operate with a DC input voltage of 14 VDC. The test data contained in this report pertains only to the emissions due to the NFC transmitter of the EUT.

2.2 Device Capabilities

This device contains the following capabilities:

NFC, WPT

2.3 Test Configuration

The EUT was set to continuously transmit at 13.56MHz. This was performed using manufacturer software loaded on the phone to allow for continuous transmission. This device was tested in accordance with the guidance of ANSI C63.10-2020. See Section 3.2 of this test report for a description of the radiated emissions test setup.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 4 of 29

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2020) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 5 of 29

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the EUT are **permanently attached**.
- This unit was tested while powered by an DC power source.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 6 of 29

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Radiated Disturbance (<1GHz)	4.10

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 7 of 29

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	2025-05-23	Annual	2026-05-22	MY49432391
Com-Power	AL-130R	Active Loop Antenna	2024-10-10	Biennial	2026-10-09	10160045
ESPEC	SH-242	Environmental Chamber	2025-09-17	Annual	2026-09-16	93011064
Rohde & Schwarz	ESW	EMI Test Receiver	2025-09-15	Annual	2026-09-14	103550
Rohde & Schwarz	FSW	SIGNAL & SPECTRUM Analyzer	2025-09-15	Annual	2026-09-14	103295
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	2025-06-05	Biennial	2025-06-04	9162-217

Table 6-1. Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 8 of 29

7.0 TEST DATA

7.1 Summary

Company Name: BH EVS CO., LTD.
 FCC: 2A6WXWCSKD12A
 FCC Classification: Low Power Communications Device Transmitter (DXX)
 Frequencies Examined: 13.56MHz

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	NA	Conducted	Pass	Section 7.2
15.209	Out-of-Band Emissions	Emissions must meet the radiated limits detailed in 15.209	Radiated	PASS	Section 7.3

Table 7-1. Summary of Test Results

Note:

This unit was tested while powered by a DC power source.

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 9 of 29

7.2 Occupied Bandwidth Measurement

§2.1049

Test Overview and Limit

The occupied bandwidth is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequency.

Test Procedure Used

ANSI C63.10-2020 – Section 6.9.3

Test Settings

1. Spectrum analyzer frequency is set to the nominal EUT channel center frequency.
2. RBW = 1 – 5% OBW
3. VBW $\geq 3 \times$ RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. Using the 99% power bandwidth function of the instrument and report the measured bandwidth.

Test Notes

None.

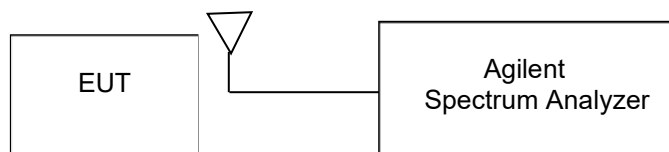


Figure 7-1. Test Instrument & Measurement Setup

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 10 of 29

Frequency	Occupied Bandwidth
13.56MHz	1.537kHz

Table 7-2. Occupied Bandwidth Measurement



Plot 7-1. Occupied Bandwidth Plot

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 11 of 29

7.3 In-Band Radiated Spurious Emission Measurements

§15.225(a)(b)(c)

Test Overview and Limit

The EUT was tested from 13.110 – 14.010 MHz. All in-band radiated spurious emissions are measured with a spectrum analyzer connected to a loop antenna while the EUT is operating at appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All in-band emissions appearing in a restricted band as specified in Section 15.225 of the Title 47 CFR must not exceed the limits shown in Table 7-.

Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
13.553-13.567 MHz	15,848	30
13.410-13.553 MHz and 13.567-13.710 MHz	334	30
13.110-13.410 MHz and 13.710-14.010 MHz	106	30

Table 7-3. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Section 6.4.7

Test Settings

1. RBW = 9kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 12 of 29

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

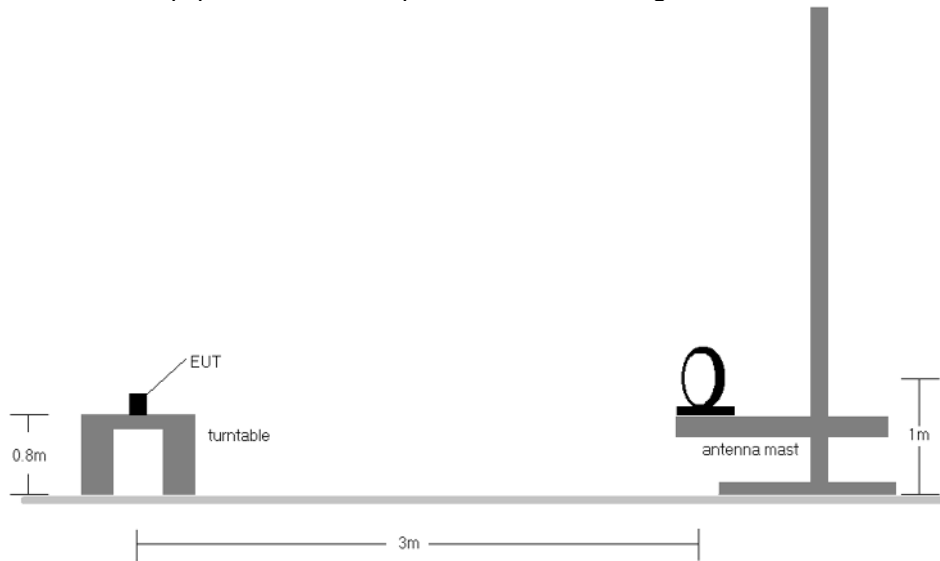


Figure 7-2. Radiated Test Setup

Test Notes:

1. All emissions lying in restricted bands specified in §15.225 and RSS-210 are below the limit shown in Table 7-.
2. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.
3. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
4. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2). Extrapolation Factor = $20 \log_{10}(30/3)^2 = 40\text{dB}$.
5. The spectrum was investigated from 9kHz up to 30MHz using the loop antenna. Only the emissions shown in the table below were found to be significant.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculation

- Field Strength Level $[\text{dB}\mu\text{V/m}] = \text{Analyzer Level} [\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- $\text{AFCL} [\text{dB/m}] = \text{Antenna Factor} [\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- Margin $[\text{dB}] = \text{Field Strength Level} [\text{dB}\mu\text{V/m}] - \text{Limit} [\text{dB}\mu\text{V/m}]$

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 13 of 29



In-Band Radiated Spurious Emission Measurements

§15.225(a)(b)(c)

Frequency: 13.56MHz

Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	3m Field Strength [dBµV/m]	30m Field Strength [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]	Margin [dB]
13.139	X	100	234	-79.12	13.27	41.15	1.15	106.00	40.51	-39.35
13.284	X	100	234	-80.28	13.25	39.97	-0.03	106.00	40.51	-40.54
13.410	X	100	234	-77.87	13.23	42.36	2.36	106.00	40.51	-38.15
13.546	X	100	234	-68.43	13.21	51.78	11.78	334.00	50.47	-38.70
13.557	X	100	234	-68.09	13.21	52.12	12.12	15848.00	84.00	-71.88
13.572	X	100	234	-68.50	13.20	51.70	11.70	334.00	50.47	-38.77
13.718	X	100	234	-78.93	13.18	41.25	1.25	106.00	40.51	-39.26

Table 7-4. In-Band Radiated Measurements – DCB LED

Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	3m Field Strength [dBµV/m]	30m Field Strength [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]	Margin [dB]
13.143	X	100	234	-79.22	13.27	41.05	1.05	106.00	40.51	-39.45
13.226	X	100	234	-79.34	13.26	40.92	0.92	106.00	40.51	-39.59
13.389	X	100	234	-78.65	13.23	41.58	1.58	106.00	40.51	-38.92
13.547	X	100	234	-69.28	13.21	50.93	10.93	334.00	50.47	-39.55
13.562	X	100	234	-68.67	13.20	51.53	11.53	15848.00	84.00	-72.46
13.579	X	100	234	-69.37	13.20	50.83	10.83	334.00	50.47	-39.64
13.718	X	100	234	-79.00	13.18	41.18	1.18	106.00	40.51	-39.33

Table 7-5. In-Band Radiated Measurements – DCB

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 14 of 29

7.4 Radiated Spurious Emission Measurements, Out-of-Band

§15.209 §15.225(d)

Test Overview and Limit

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110 – 14.010 MHz.

All out-of-band emissions appearing in a restricted band as specified in Section 15.225 of the Title 47 CFR must not exceed the limits shown in Table 7 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-6. Radiated Limits – Out of band

Test Procedures Used

ANSI C63.10-2020 – Section 6.5.4

Test Settings

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 9kHz for emissions below 30MHz and 100kHz for emissions between 30MHz and 1GHz
3. VBW ≥ 3 x RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: 2A6WXXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 15 of 29

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

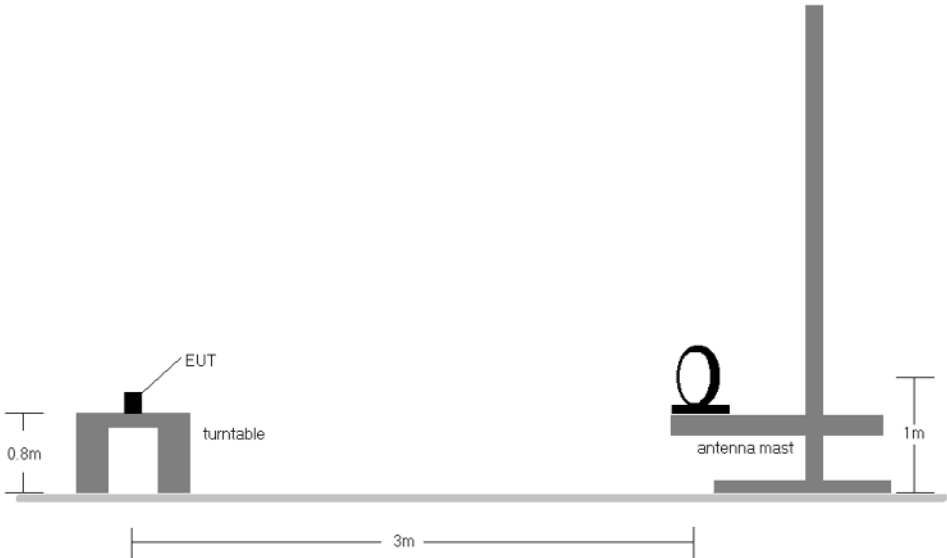


Figure 7-3. Radiated Test Setup < 30MHz

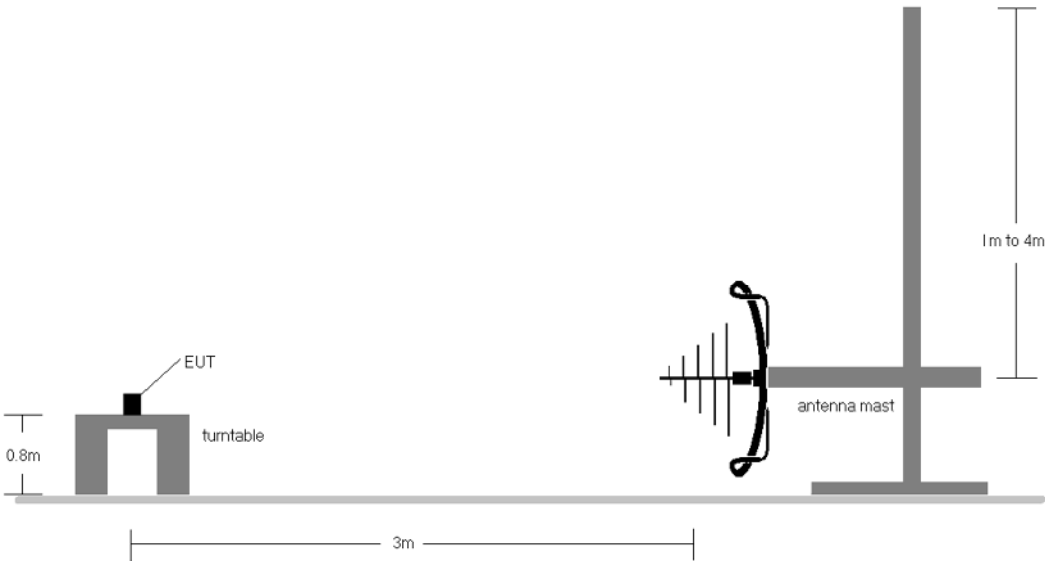


Figure 7-4. Radiated Test Setup > 30MHz

FCC ID: 2A6WXWCSKD12A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 16 of 29	

Test Notes:

1. A loop antenna was used to investigate emissions below 30MHz.
2. Both Vertical and Horizontal polarities of the receive antenna were evaluated with the worst case emissions being reported. Below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
5. No spurious emissions levels were found to be greater than the level of the fundamental.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.


Sample Calculation

- Field Strength Level $_{[dB_{\mu V/m}]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB_{\mu V/m}]} - \text{Limit}_{[dB_{\mu V/m}]}$


FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 17 of 29

Radiated Spurious Emission Measurements, Out-of-Band


§15.209 §15.225(d)

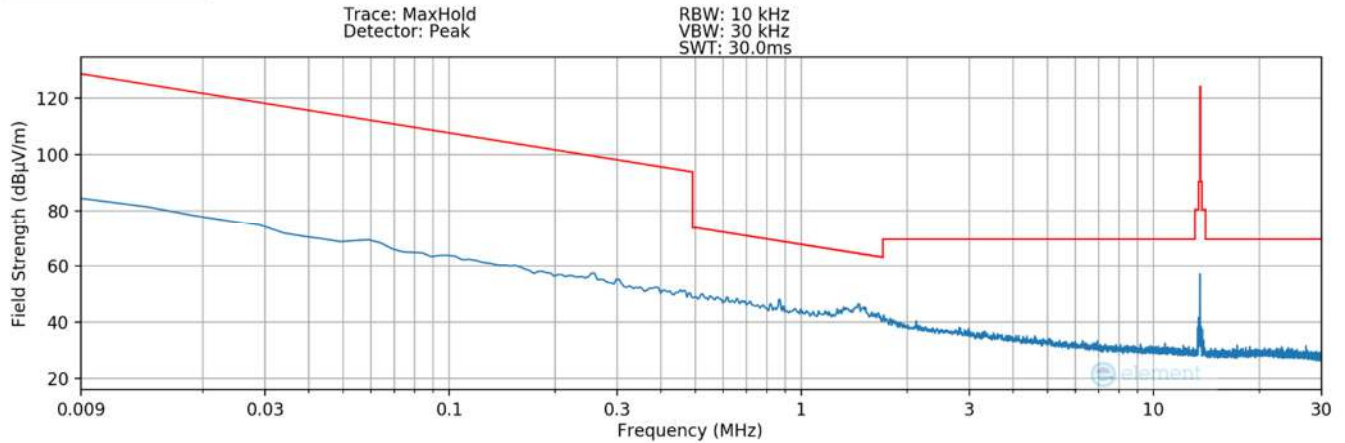

Plot 7-2. Radiated Spurious Plot 9kHz – 30MHz (Pol. X) – DCB LED

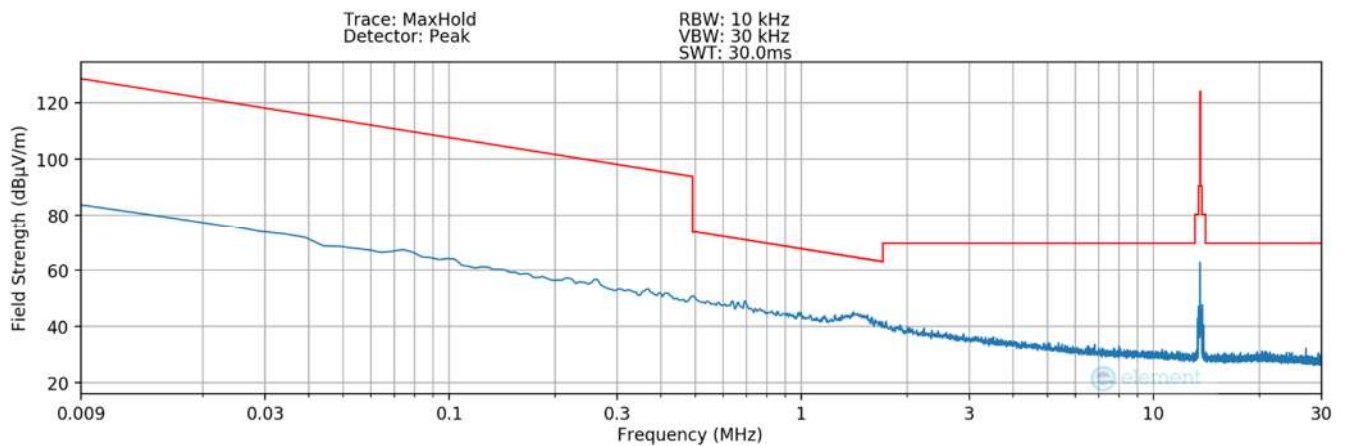


Plot 7-3. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y) – DCB LED

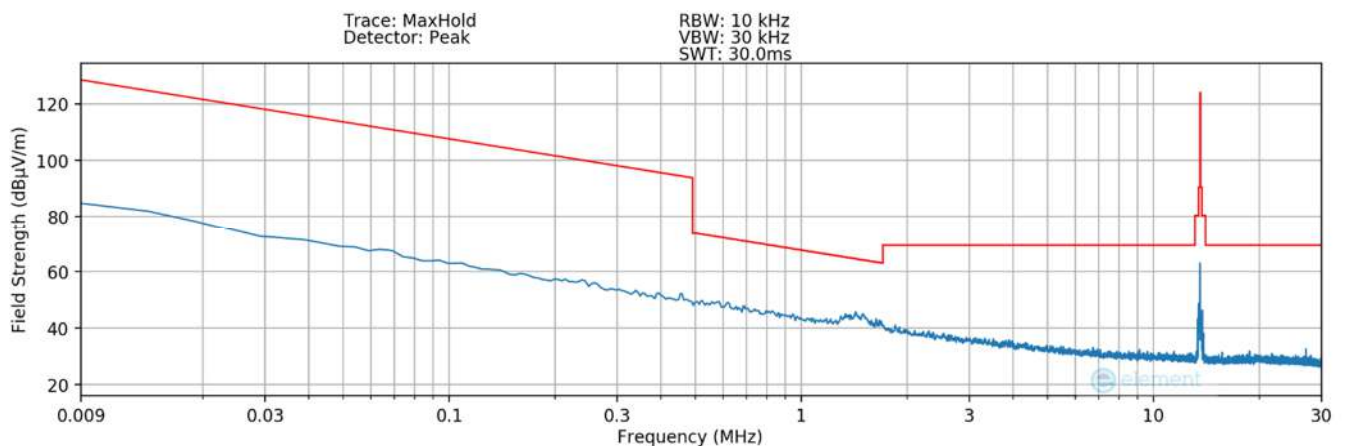

Plot 7-4. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z) – DCB LED

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 18 of 29

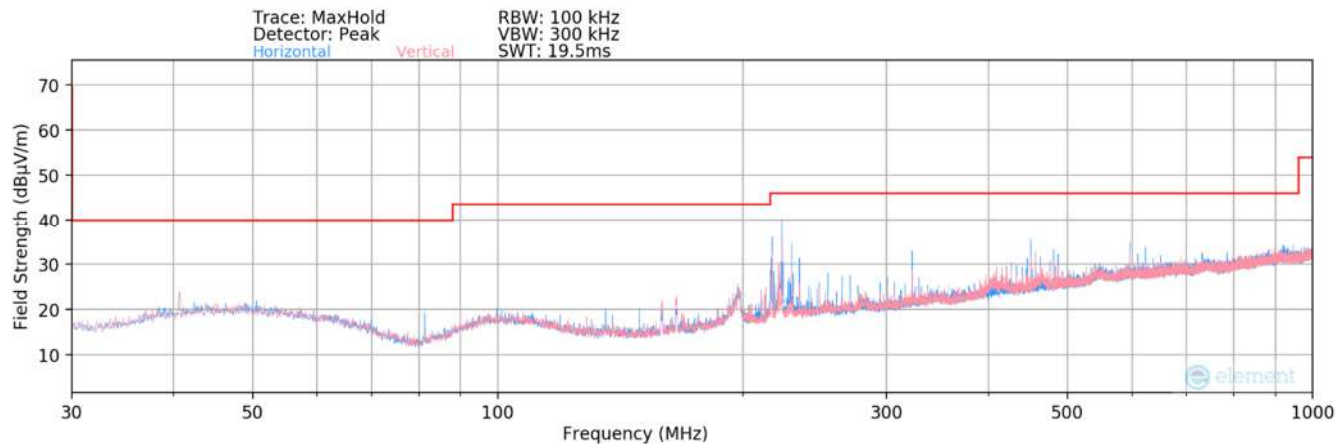

Plot 7-5. Radiated Spurious Plot 30MHz – 1GHz – DCB LED

FCC ID: 2A6WXWCSKD12A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger		Page 19 of 29



Radiated Spurious Emission Measurements, Out-of-Band §15.209 §15.225(d)


Tx Frequency 13.56MHz

Measurement Distance: 3 Meters


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	3m Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
27.12	H	-	-	-82.59	11.50	35.91	69.54	-33.63
40.68	H	154	230	-102.44	19.75	24.31	40.00	-15.69
54.24	H	-	-	-106.24	19.98	20.74	40.00	-19.26
67.80	H	-	-	-105.77	17.18	18.41	40.00	-21.59
81.36	H	137	218	-99.72	13.85	21.13	40.00	-18.87
94.92	H	-	-	-113.15	18.05	11.90	43.52	-31.62
108.48	H	-	-	-113.41	18.07	11.66	43.52	-31.86

Table 7-7. Radiated Measurements – DCB LED


FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 20 of 29

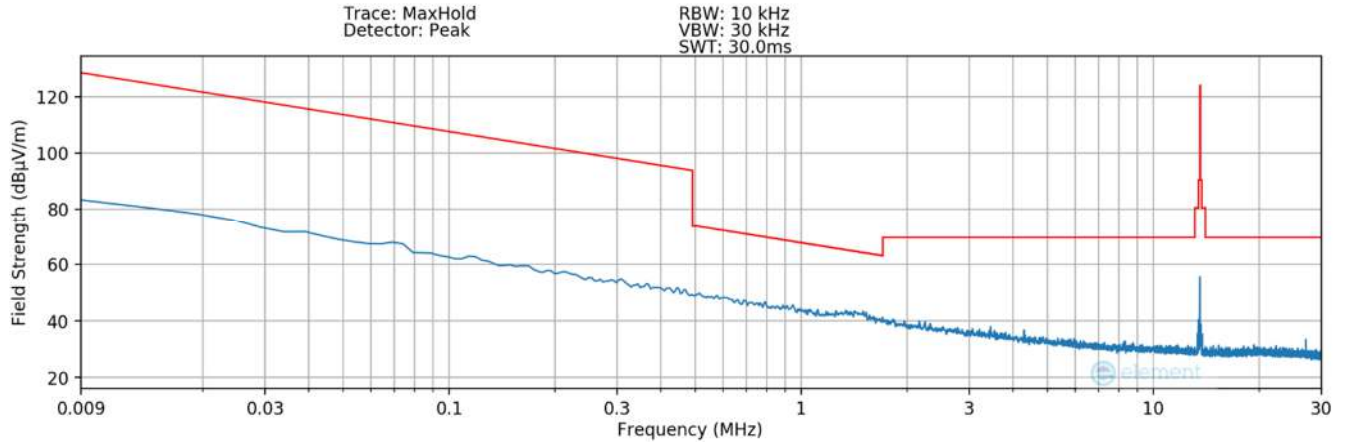

Plot 7-6. Radiated Spurious Plot 9kHz – 30MHz (Pol. X) – DCB

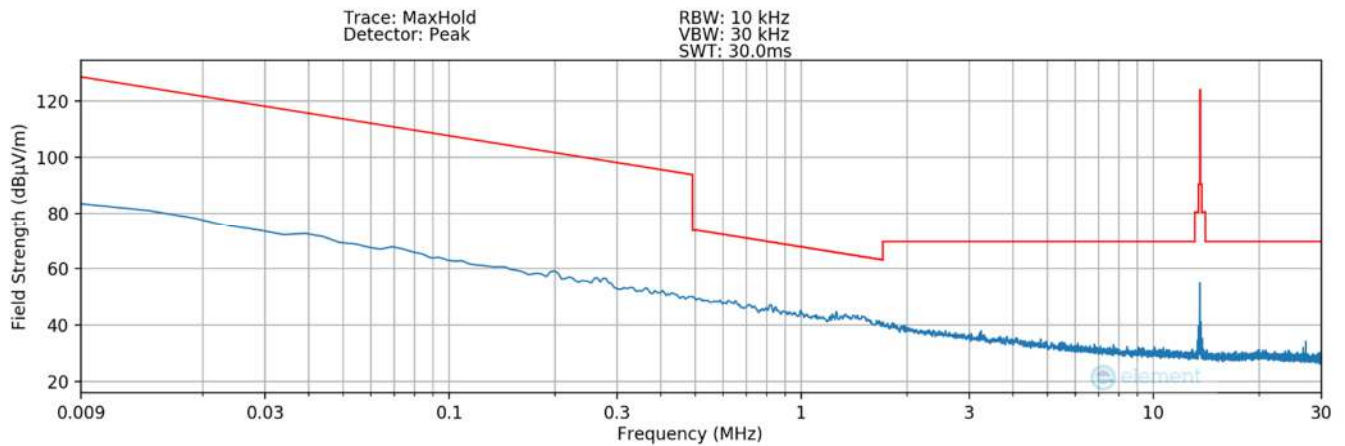


Plot 7-7. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y) – DCB

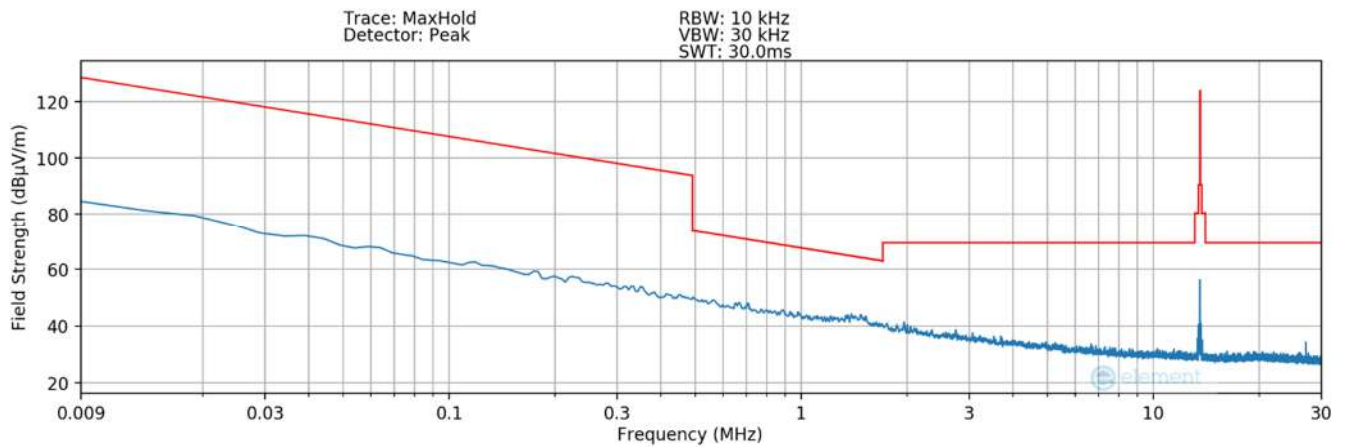

Plot 7-8. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z) – DCB

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 21 of 29

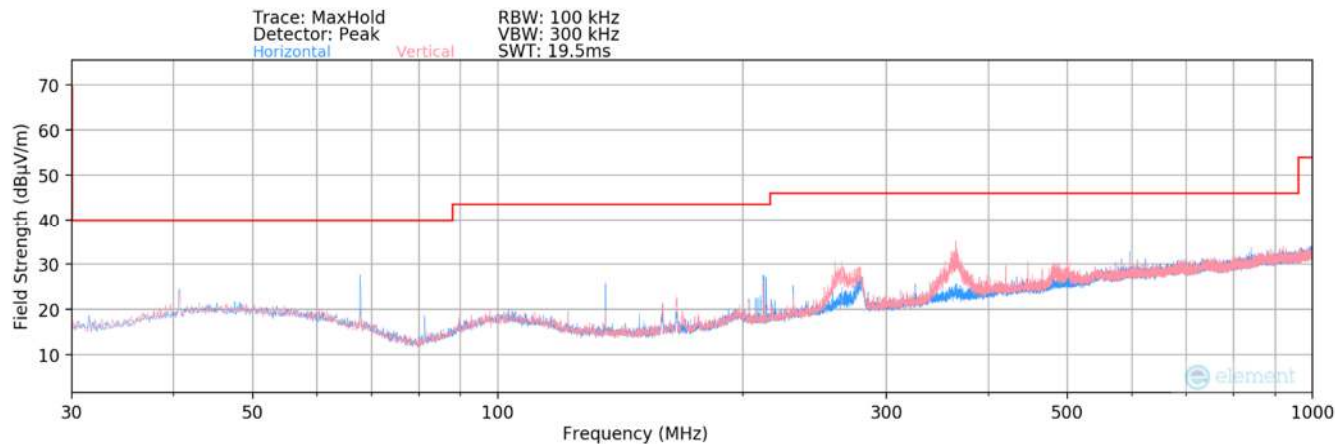

Plot 7-9. Radiated Spurious Plot 30MHz – 1GHz – DCB

FCC ID: 2A6WXWCSKD12A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger		Page 22 of 29



Radiated Spurious Emission Measurements, Out-of-Band §15.209 §15.225(d)

Tx Frequency 13.56MHz

Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	3m Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
27.12	H	-	-	-82.17	11.50	36.33	69.54	-33.21
40.68	H	109	180	-101.73	19.75	25.02	40.00	-14.98
54.24	H	-	-	-107.34	19.98	19.64	40.00	-20.36
67.80	H	105	174	-97.57	17.18	26.61	40.00	-13.39
81.36	H	100	173	-100.69	13.85	20.16	40.00	-19.84
94.92	H	-	-	-105.71	18.05	19.34	43.52	-24.18
108.48	H	-	-	-105.83	18.07	19.24	43.52	-24.28

Table 7-8. Radiated Measurements – DCB

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 23 of 29



7.5 Frequency Stability Test Data

§15.225; RSS-210 (B.6)

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.10-2020. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -20°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 15.225, the frequency stability of the transmitter shall be maintained within $\pm 0.01\%$ of the center frequency.

Test Procedure Used

ANSI C63.10-2020 – Section 6.8

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -20°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None.

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 24 of 29

Frequency Stability Test Data

§15.225; RSS-210 (B.6)

OPERATING FREQUENCY: 13,560,000 Hz

REFERENCE VOLTAGE: 14.00 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	14.00	+ 20 (Ref)	13,559,773	227	0.0016740
100 %		- 30	13,560,128	-128	-0.0009440
100 %		- 20	13,560,075	-75	-0.0005531
100 %		- 10	13,560,574	-574	-0.0042330
100 %		0	13,560,075	-75	-0.0005531
100 %		+ 10	13,560,073	-73	-0.0005383
100 %		+ 20	13,559,773	227	0.0016740
100 %		+ 30	13,559,779	221	0.0016298
100 %		+ 40	13,559,738	262	0.0019322
100 %		+ 50	13,559,732	268	0.0019764
85 %	11.90	+ 20	13,559,745	255	0.0018805
115 %	16.10	+ 20	13,559,767	233	0.0017183

Table 7-9. Frequency Stability Test Data – DCB LED

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 25 of 29

Frequency Stability Test Data

§15.225; RSS-210 (B.6)

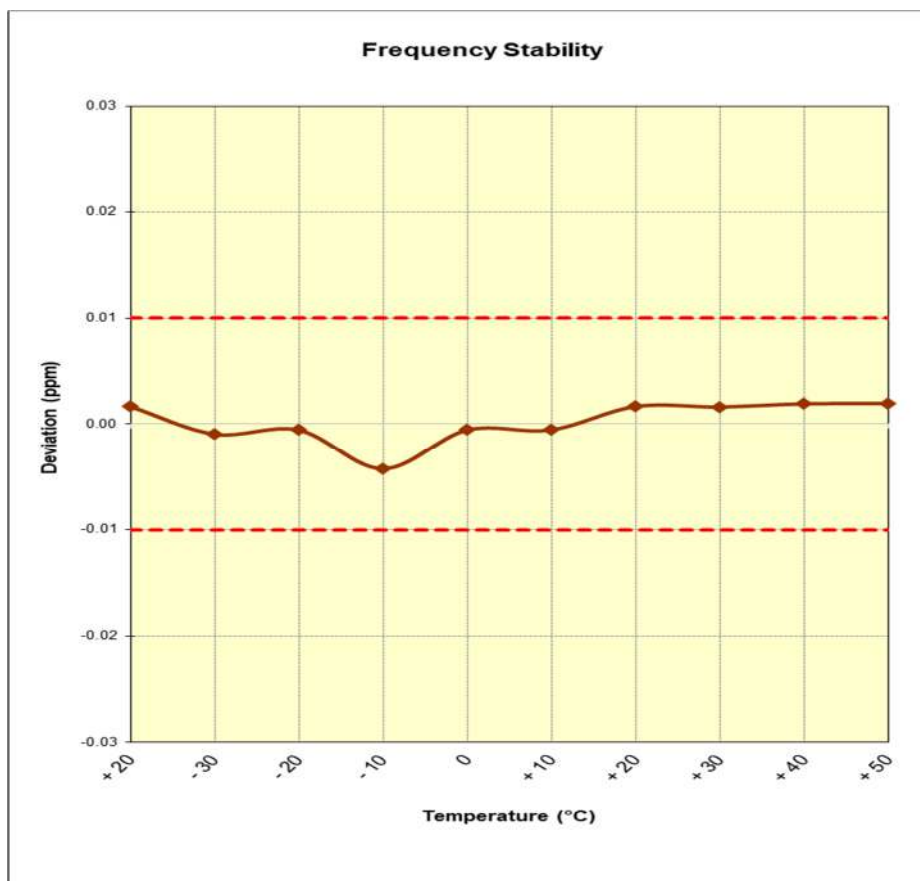


Figure 7-5. Frequency Stability Plot – DCB LED

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 26 of 29



Frequency Stability Test Data

§15.225; RSS-210 (B.6)

OPERATING FREQUENCY: 13,560,000 Hz

REFERENCE VOLTAGE: 14.00 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	14.00	+ 20 (Ref)	13,560,061	-61	0.0000000
100 %		- 30	13,560,080	-80	-0.0005900
100 %		- 20	13,560,118	-118	-0.0008702
100 %		- 10	13,560,081	-81	-0.0005973
100 %		0	13,560,079	-79	-0.0005826
100 %		+ 10	13,560,001	-1	-0.0000074
100 %		+ 20	13,560,061	-61	-0.0004499
100 %		+ 30	13,560,087	-87	-0.0006416
100 %		+ 40	13,560,074	-74	-0.0005457
100 %		+ 50	13,560,056	-56	-0.0004130
85 %	11.90	+ 20	13,560,055	-55	-0.0004056
115 %	16.10	+ 20	13,560,062	-62	-0.0004572

Table 7-10. Frequency Stability Test Data – DCB

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 27 of 29

Frequency Stability Test Data

§15.225; RSS-210 (B.6)

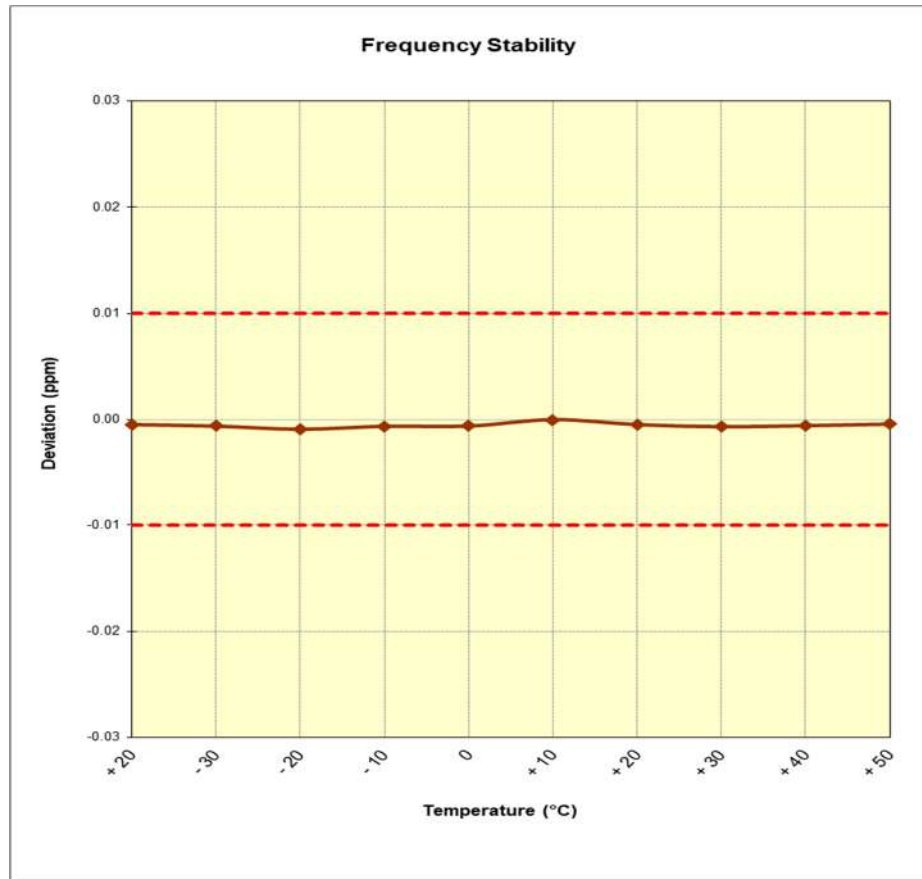


Figure 7-6. Frequency Stability Plot – DCB

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 28 of 29

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **BH EVS Wireless Charger FCC ID: 2A6WXWCSKD12A** has been tested to show compliance with Part 15 Subpart C (15.225) of the FCC Rules.

FCC ID: 2A6WXWCSKD12A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1K2510300010-01.2A6WX	Test Dates: 10/28/2025 – 1/21/2026	EUT Type: Wireless Charger	Page 29 of 29