

RF Test Data for Bluetooth(BDR+EDR) (Conducted Measurements)


General Description of EUT	
Product Name:	Projector
Test Model:	M9
Sample ID:	202207-0331-5-2#
Environmental Conditions	
Temperature:	25℃
Relative Humidity:	55%
Test Voltage:	AC 120V
Test Engineer:	Huang jian ping
Note: For a more detailed features description, please refer to the report TBR-C-202207-0331-81	



Contents



1. Duty Cycle	3
2. Maximum Conducted Output Power	9
3. -20dB Bandwidth	15
4. Occupied Channel Bandwidth	21
5. Band Edge	27
6. Band Edge(Hopping)	34
7. Conducted RF Spurious Emission	41
8. Restrict Band	51
9. Carrier Frequencies Separation	58
10. Number of Hopping Channel	61
11. Dwell Time	64



1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH1	2402	Ant1	30.4	5.17	2.63
NVNT	1-DH1	2441	Ant1	30.4	5.17	2.63
NVNT	1-DH1	2480	Ant1	30.4	5.17	2.63
NVNT	2-DH1	2402	Ant1	30.4	5.17	2.63
NVNT	2-DH1	2441	Ant1	31.2	5.06	2.56
NVNT	2-DH1	2480	Ant1	31.2	5.06	2.56
NVNT	3-DH1	2402	Ant1	31.2	5.06	2.56
NVNT	3-DH1	2441	Ant1	31.2	5.06	2.56
NVNT	3-DH1	2480	Ant1	31.2	5.06	2.56

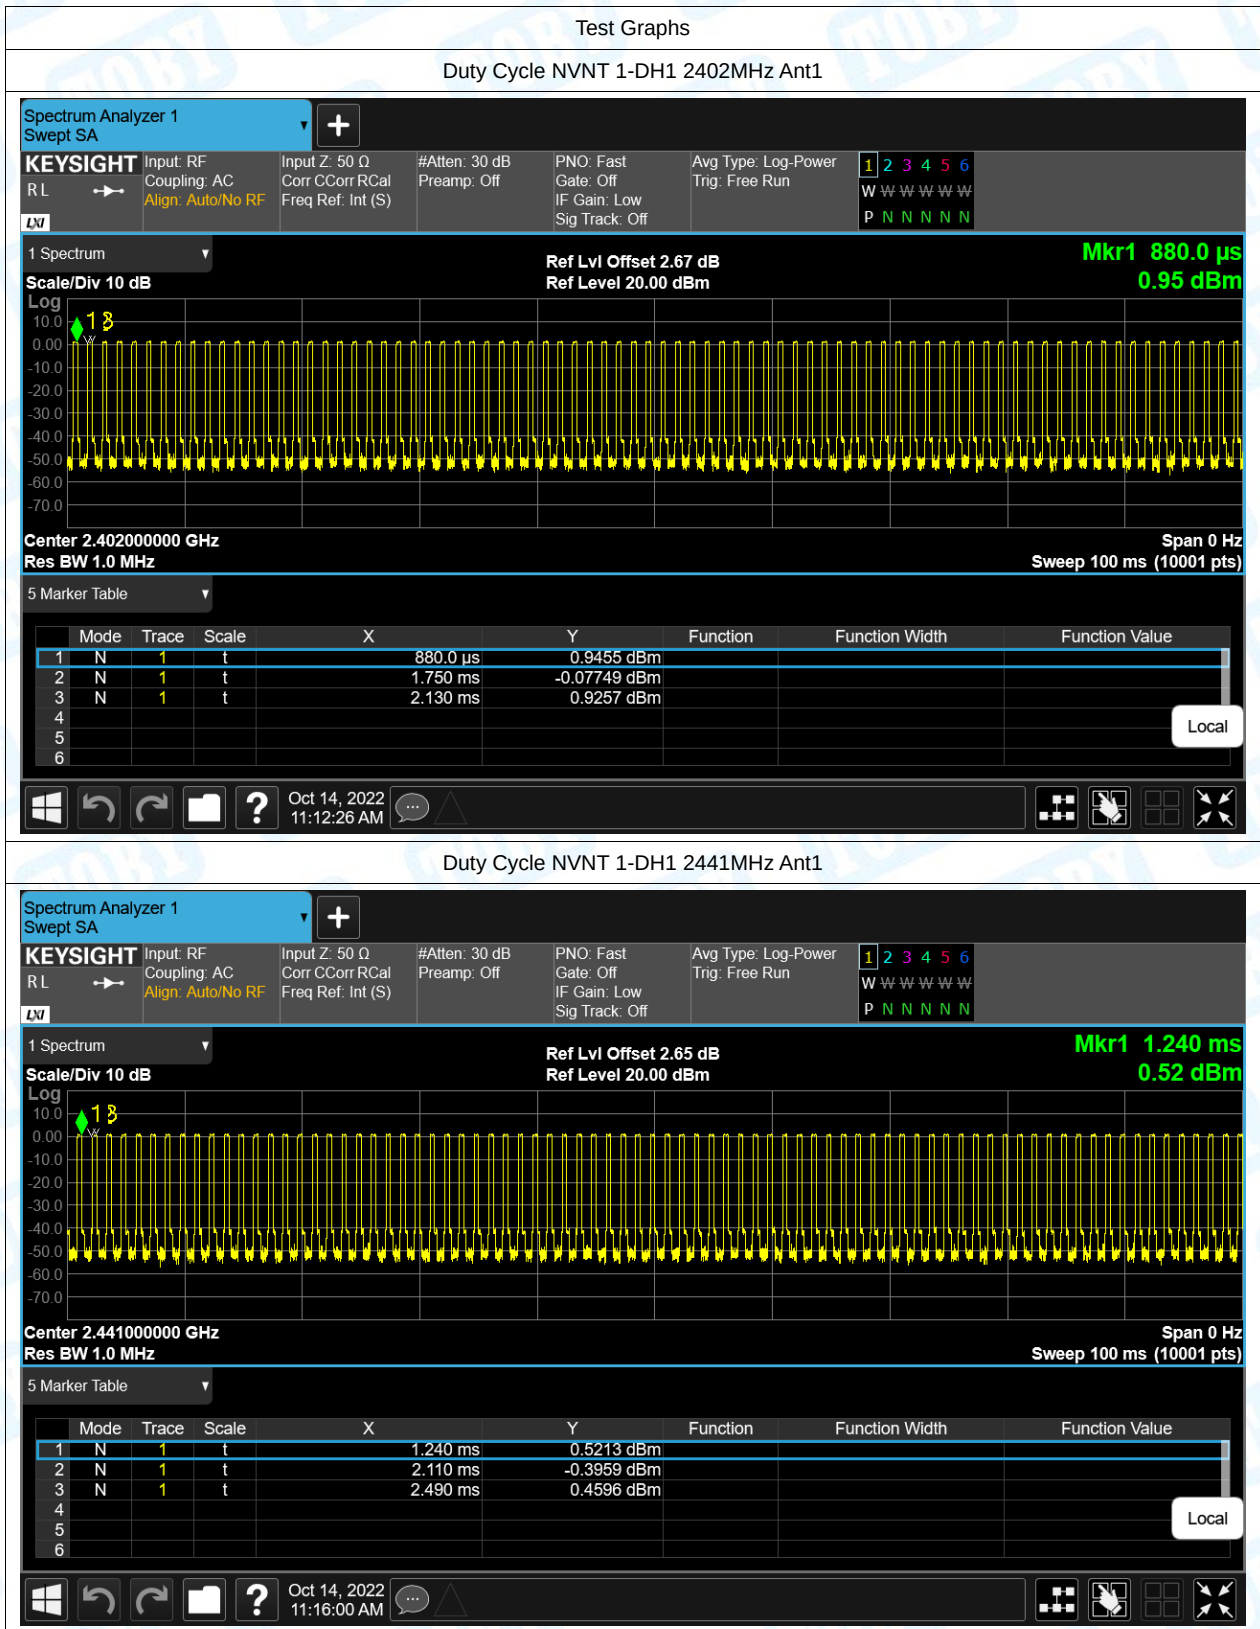

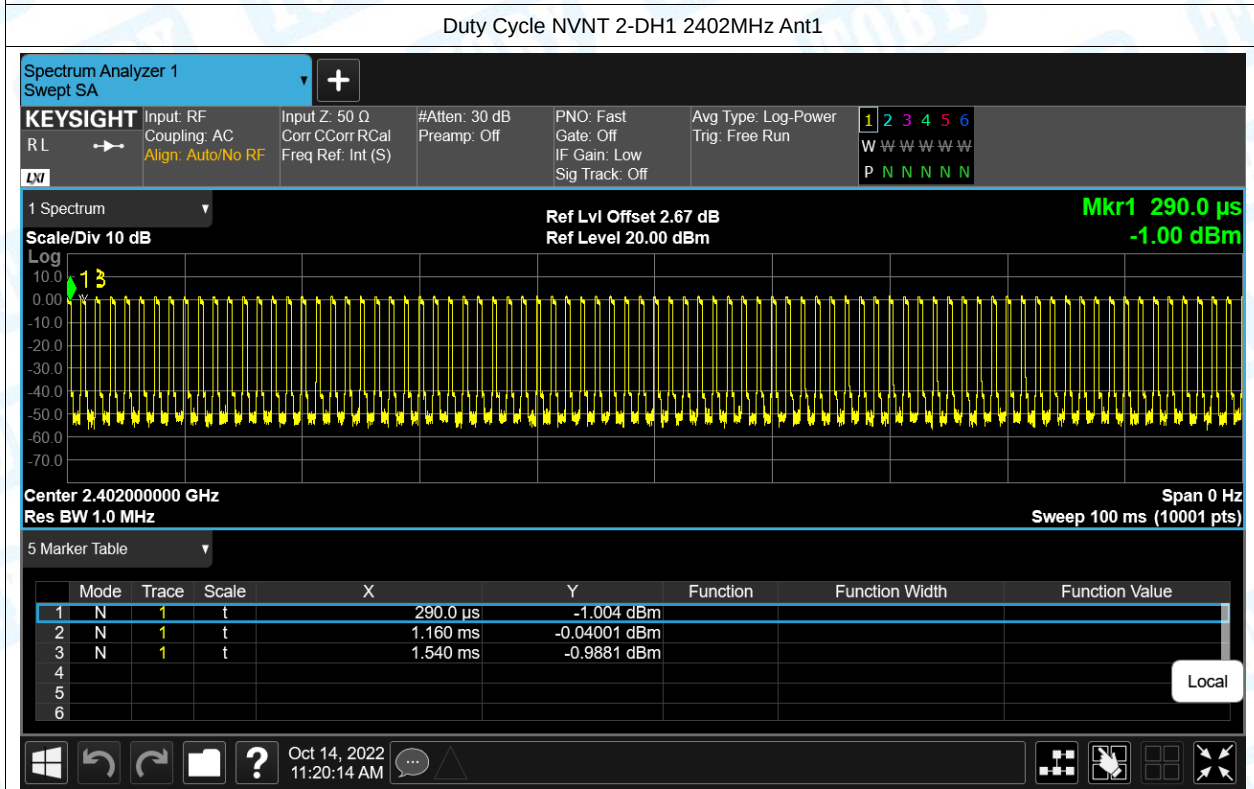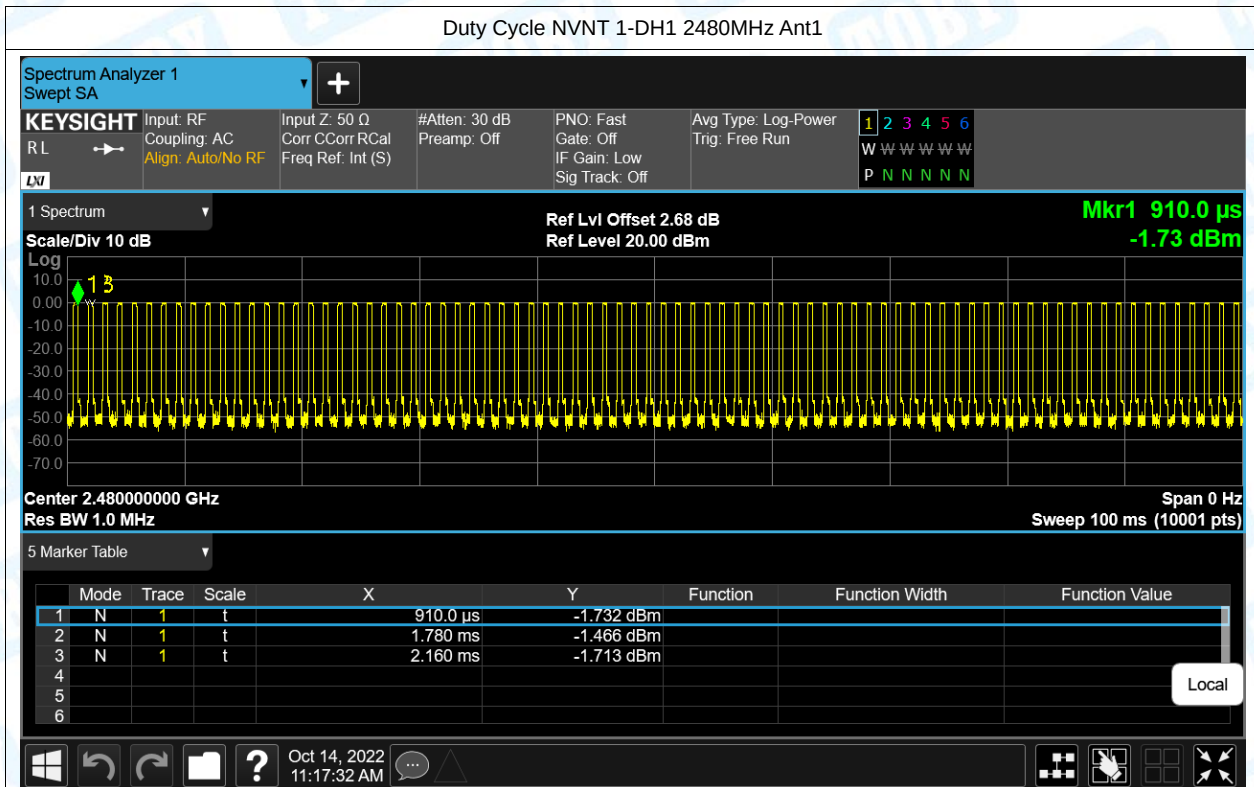

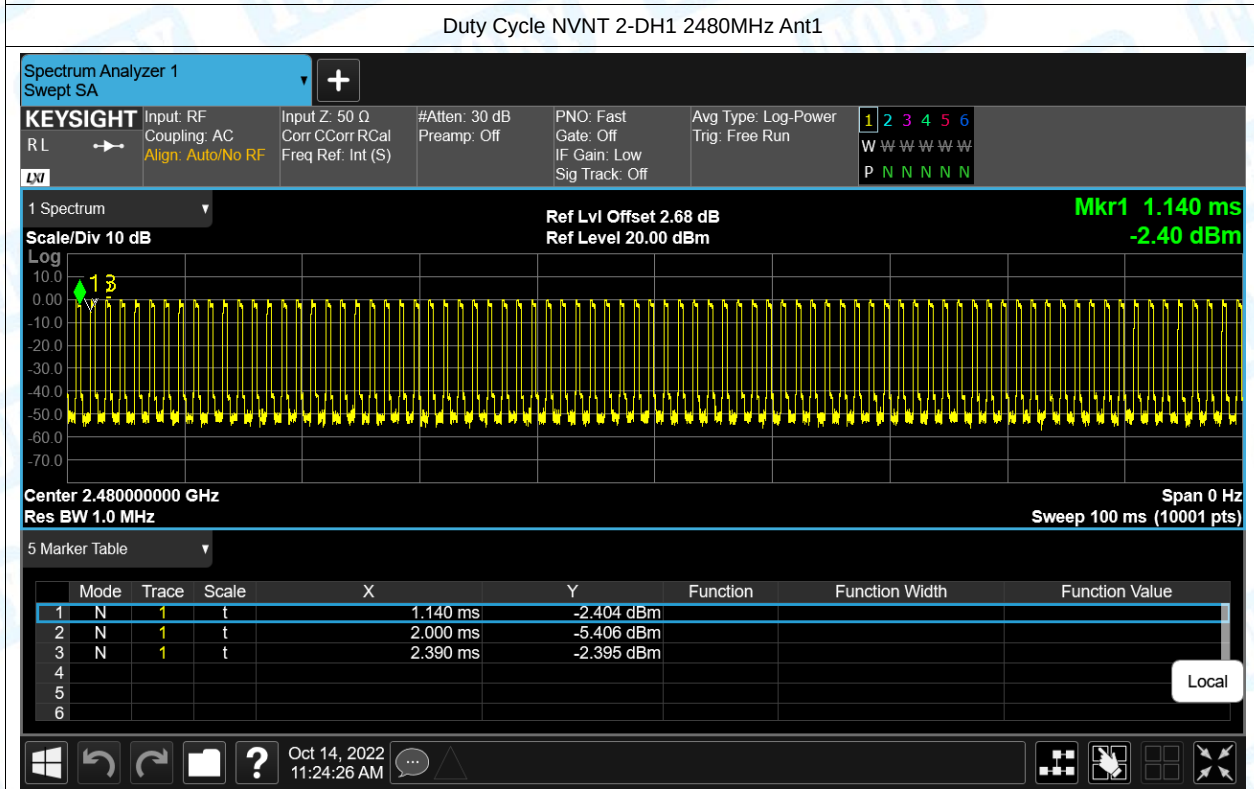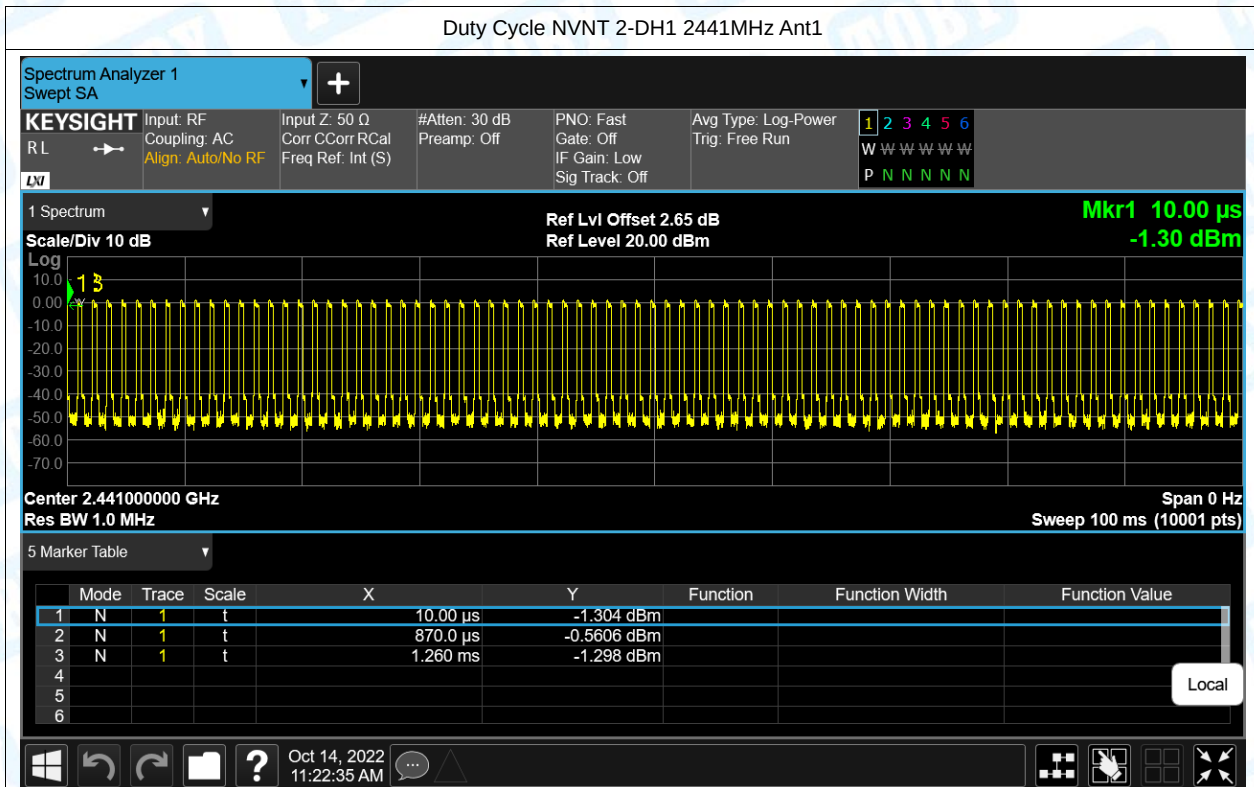

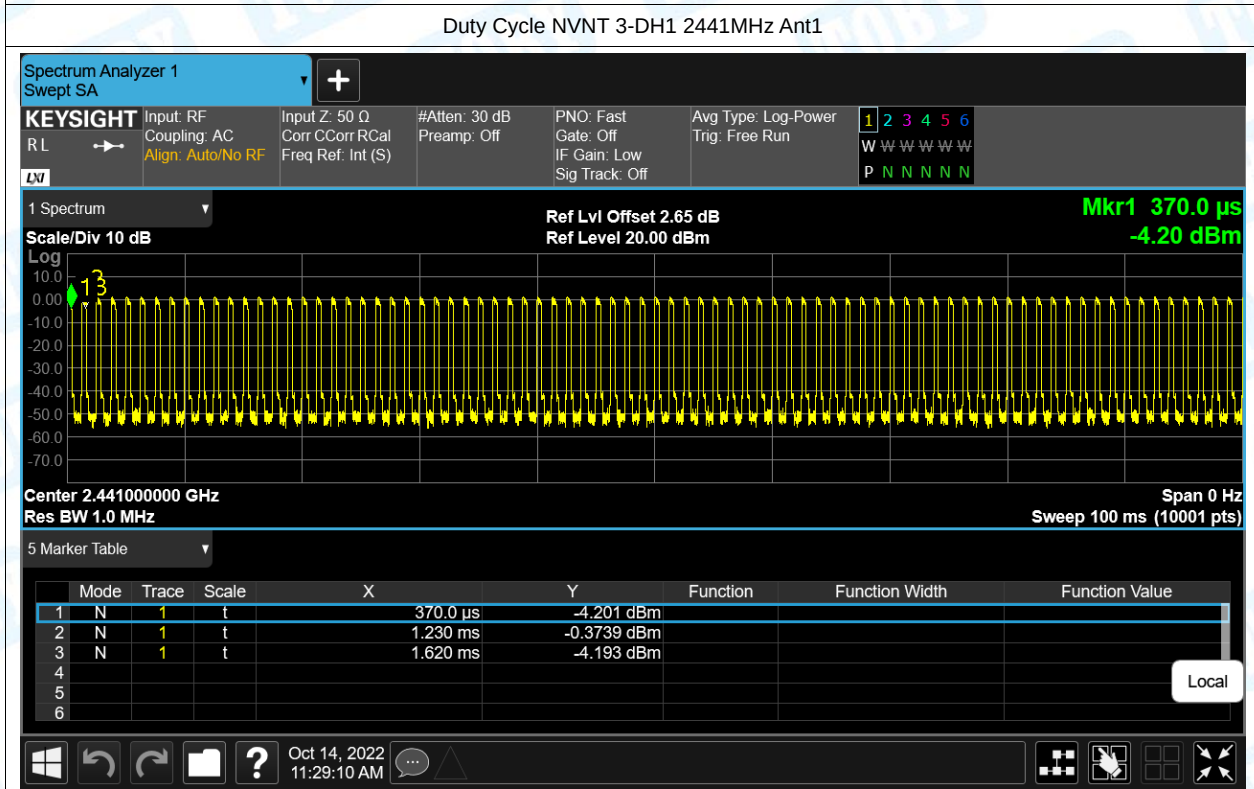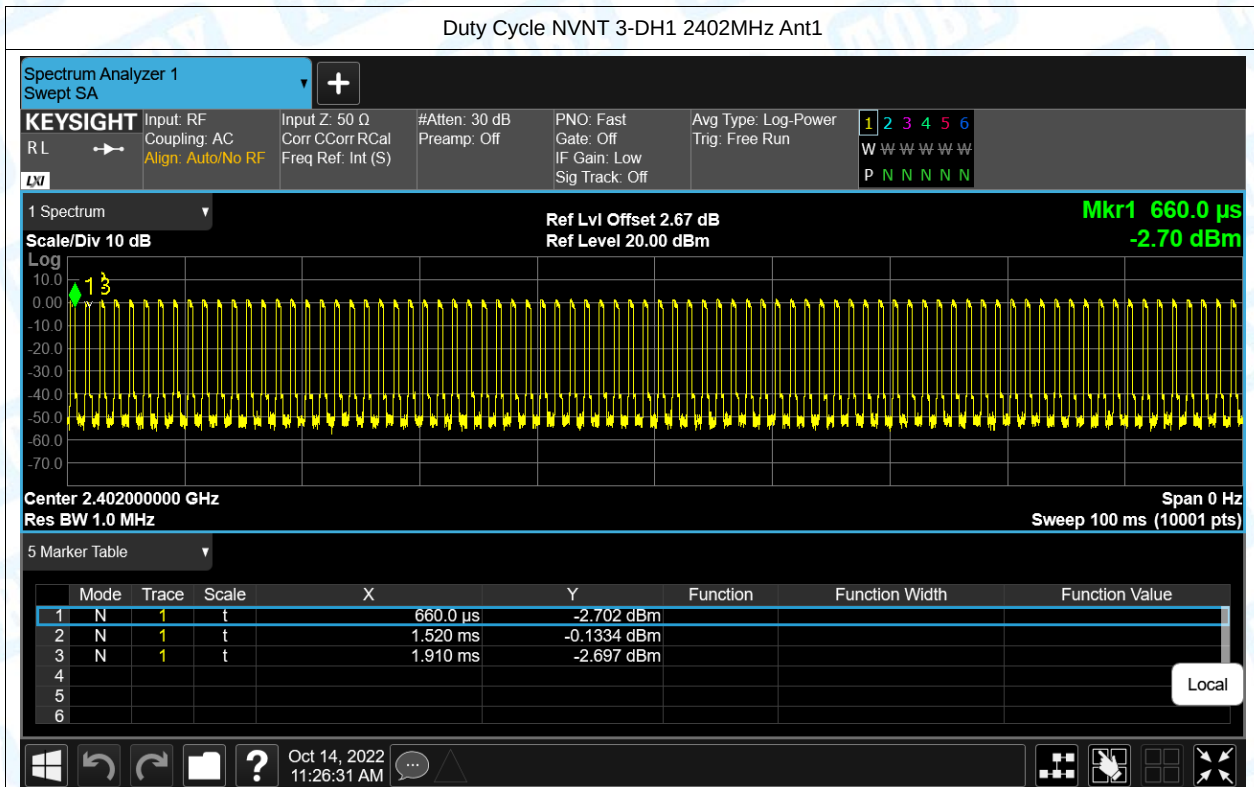

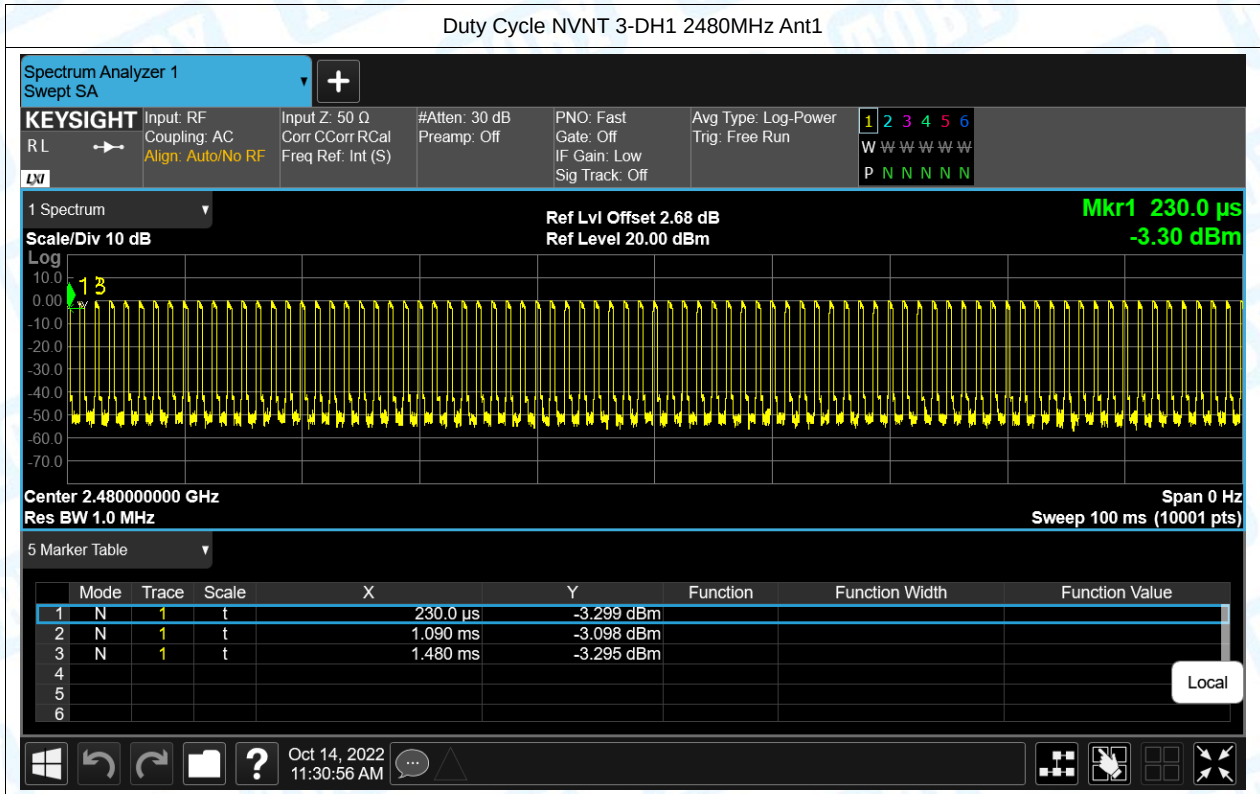


2. Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	1.502	21	Pass
NVNT	1-DH1	2441	Ant1	1.156	21	Pass
NVNT	1-DH1	2480	Ant1	0.035	21	Pass
NVNT	2-DH1	2402	Ant1	1.501	21	Pass
NVNT	2-DH1	2441	Ant1	1.155	21	Pass
NVNT	2-DH1	2480	Ant1	0.05	21	Pass
NVNT	3-DH1	2402	Ant1	1.53	21	Pass
NVNT	3-DH1	2441	Ant1	1.197	21	Pass
NVNT	3-DH1	2480	Ant1	0.018	21	Pass


Test Graphs



Power NVNT 1-DH1 2402MHz Ant1

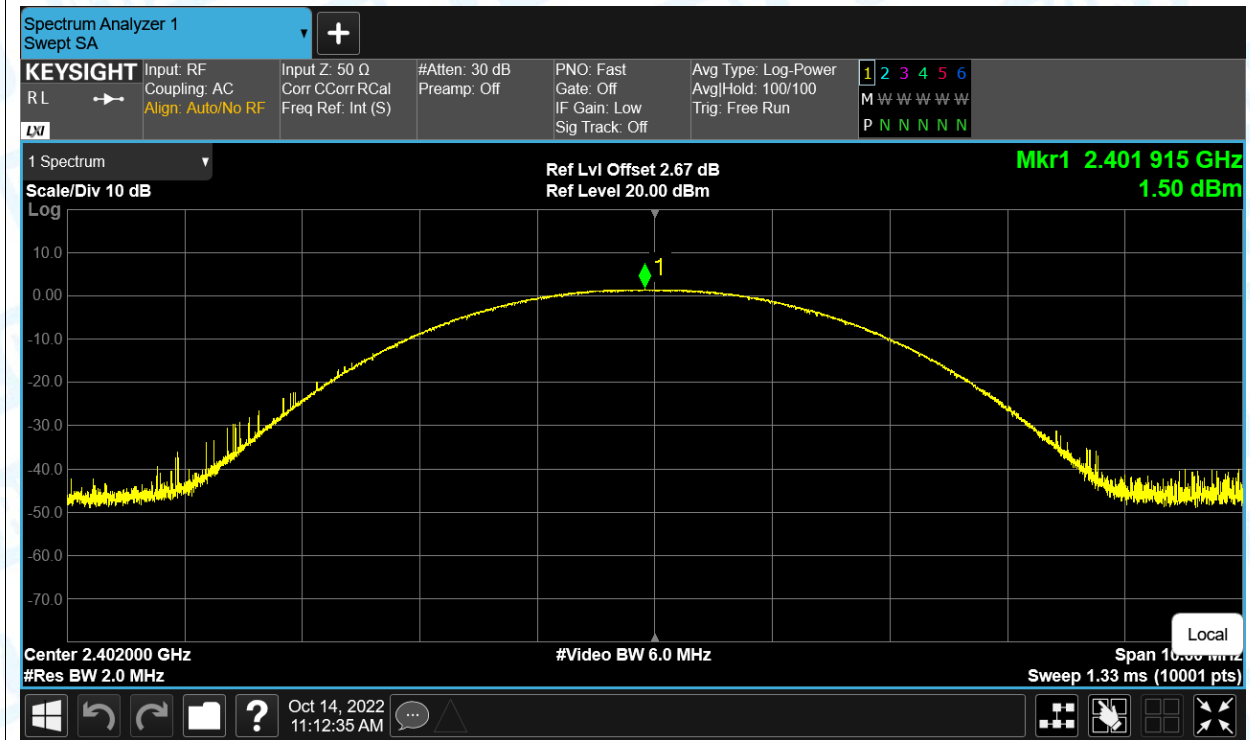


Power NVNT 1-DH1 2441MHz Ant1

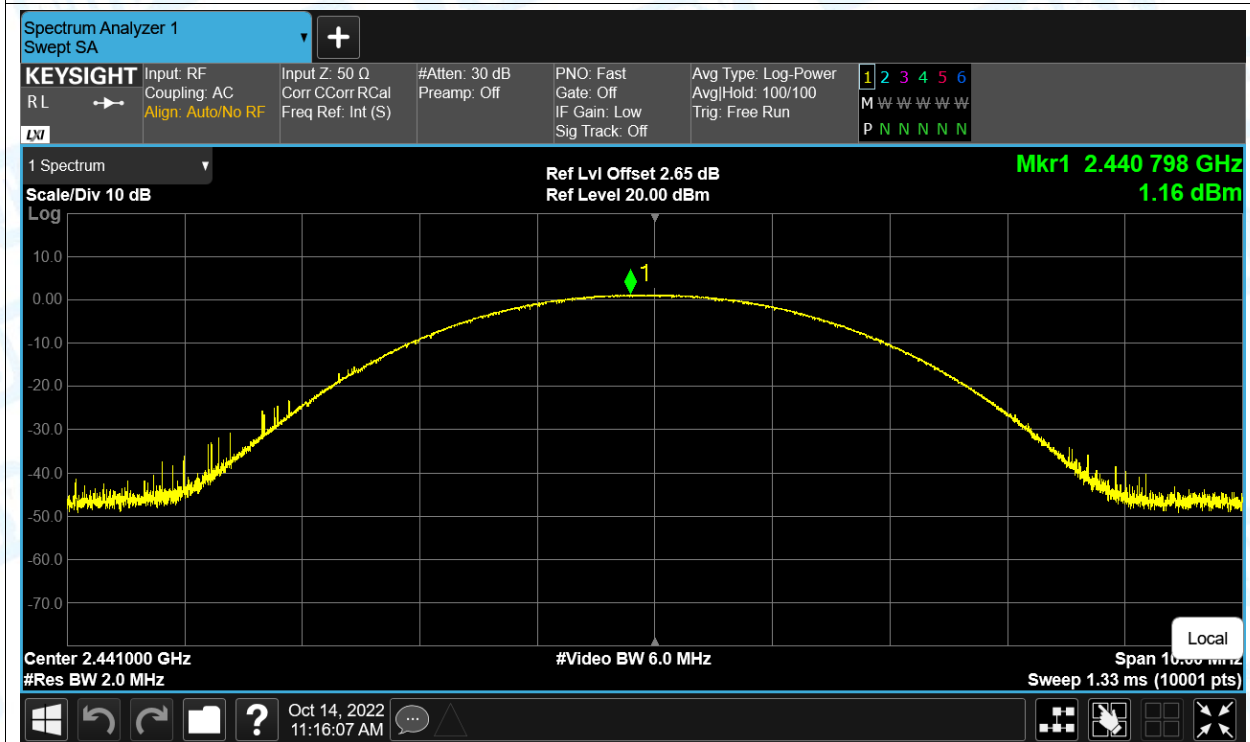

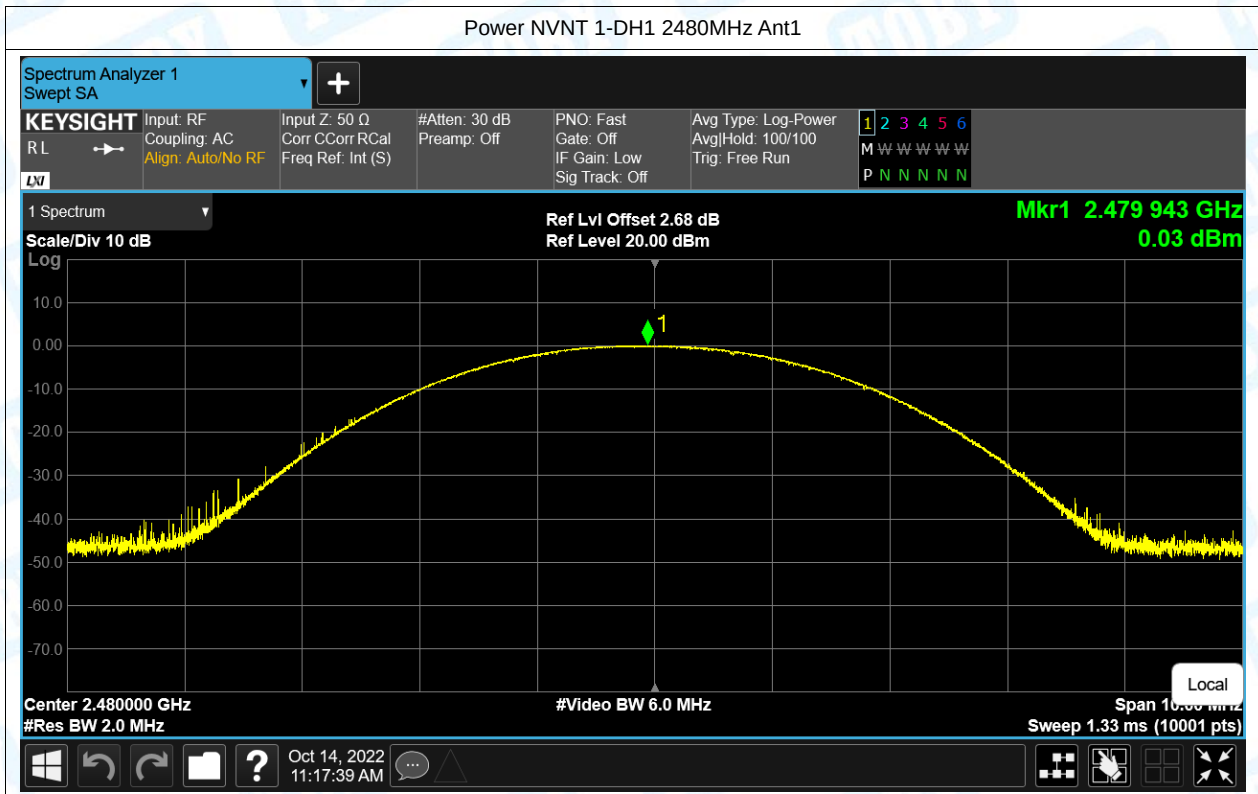

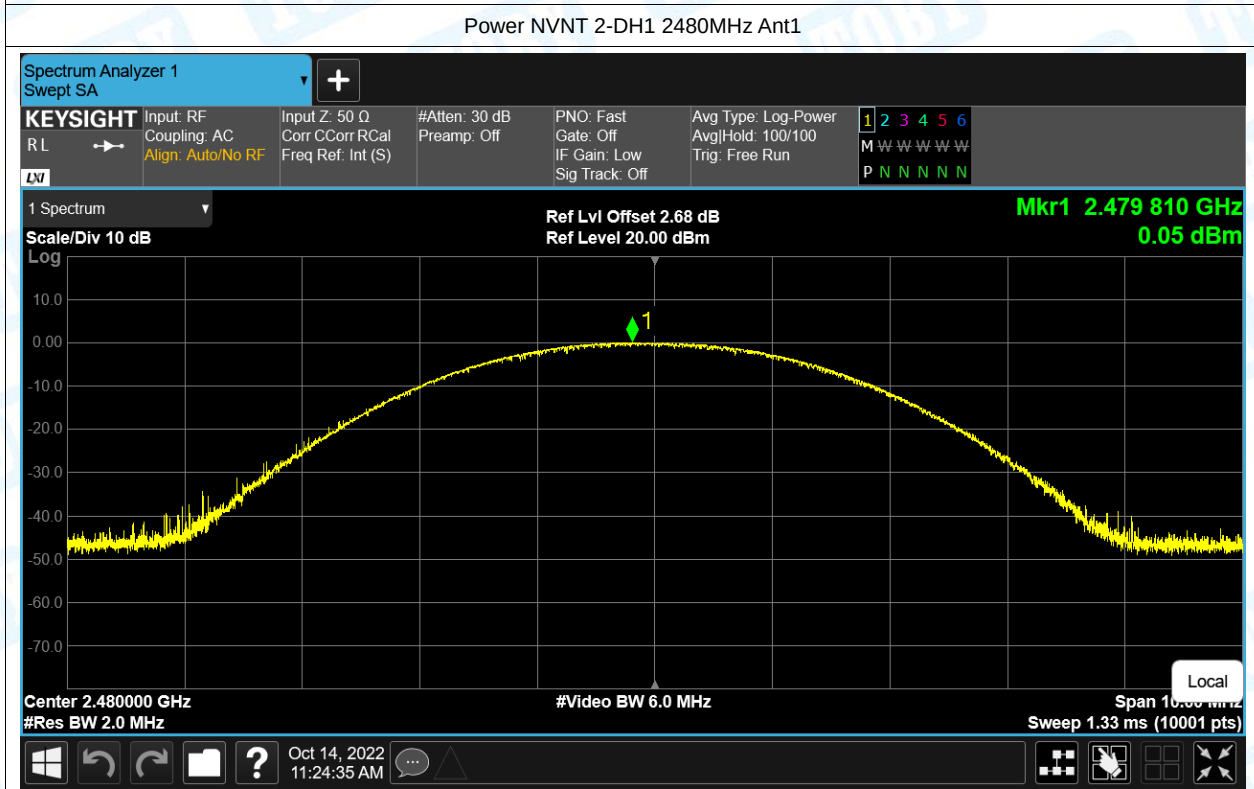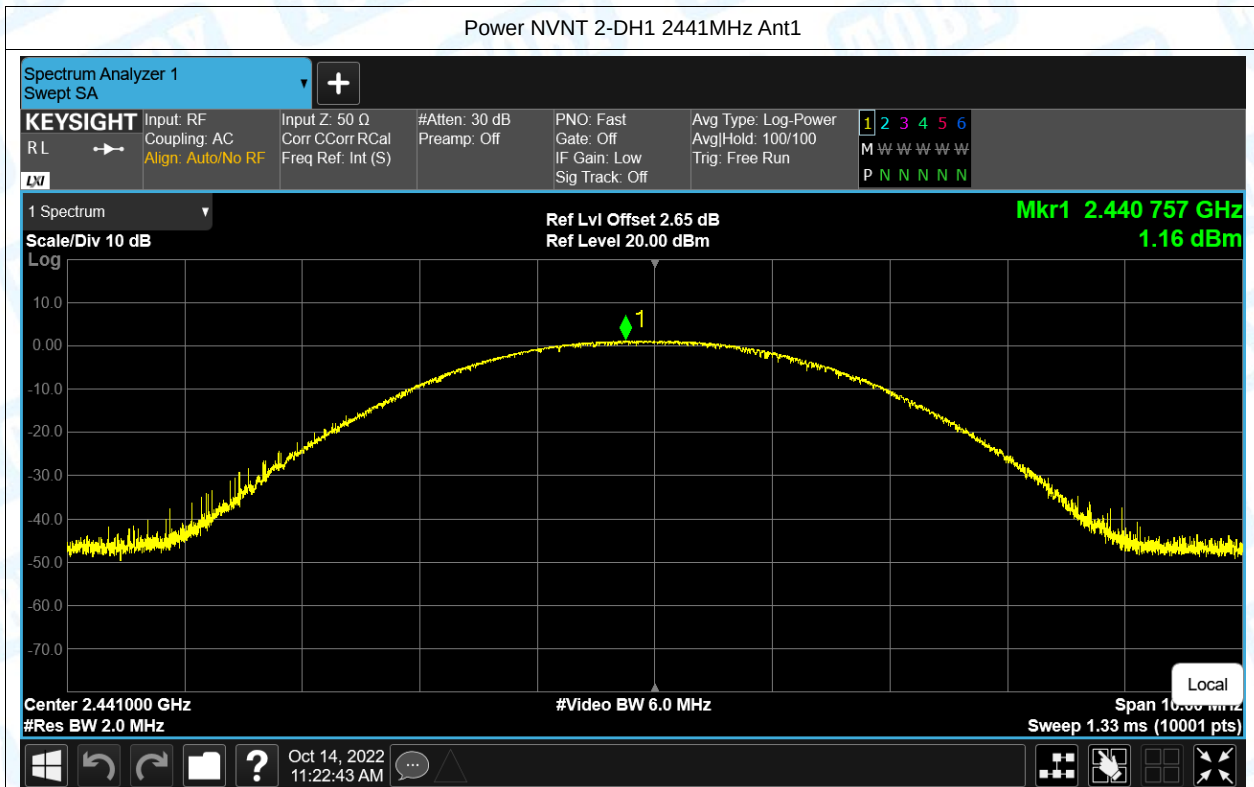

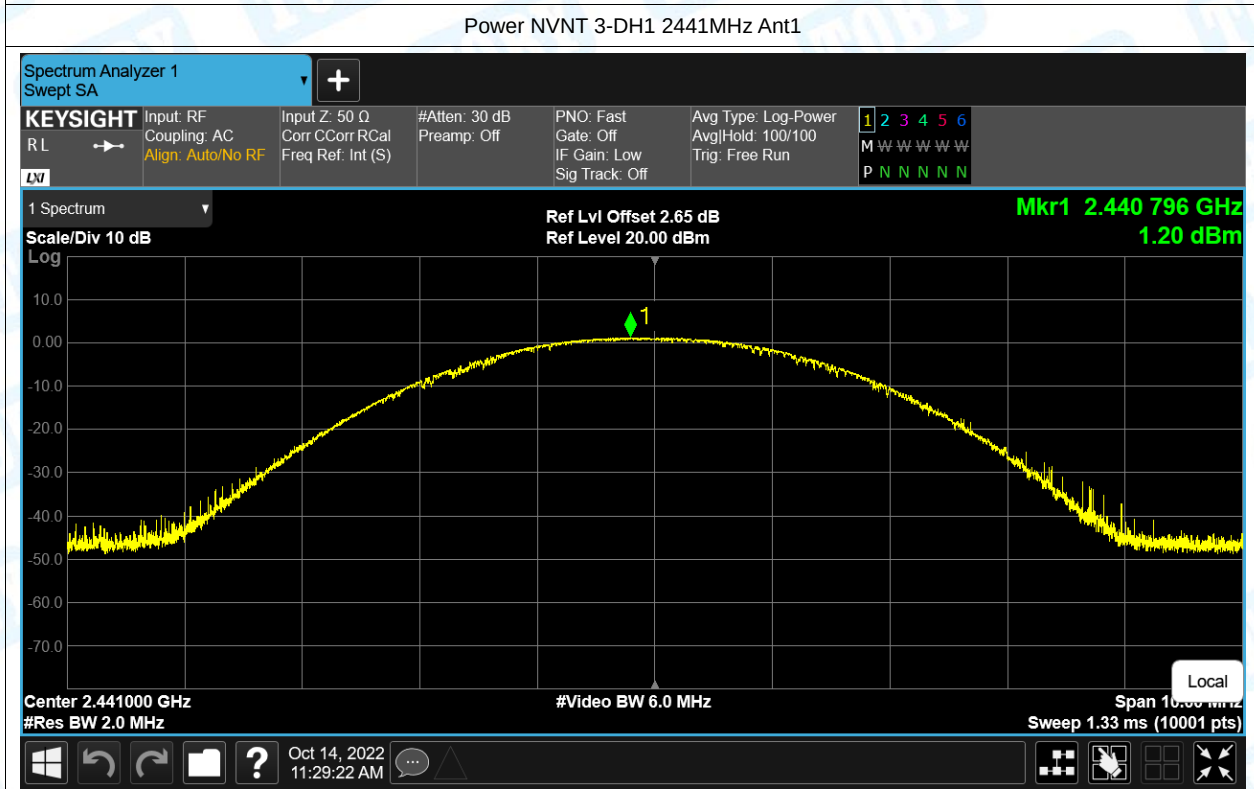



3. -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	2/3 *20dB BW (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	1.01	0.673	Pass
NVNT	1-DH1	2441	Ant1	1	0.667	Pass
NVNT	1-DH1	2480	Ant1	1.05	0.700	Pass
NVNT	2-DH1	2402	Ant1	1.3	0.867	Pass
NVNT	2-DH1	2441	Ant1	1.28	0.853	Pass
NVNT	2-DH1	2480	Ant1	1.29	0.860	Pass
NVNT	3-DH1	2402	Ant1	1.26	0.840	Pass
NVNT	3-DH1	2441	Ant1	1.28	0.853	Pass
NVNT	3-DH1	2480	Ant1	1.28	0.853	Pass

Test Graphs


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1




-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1




-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

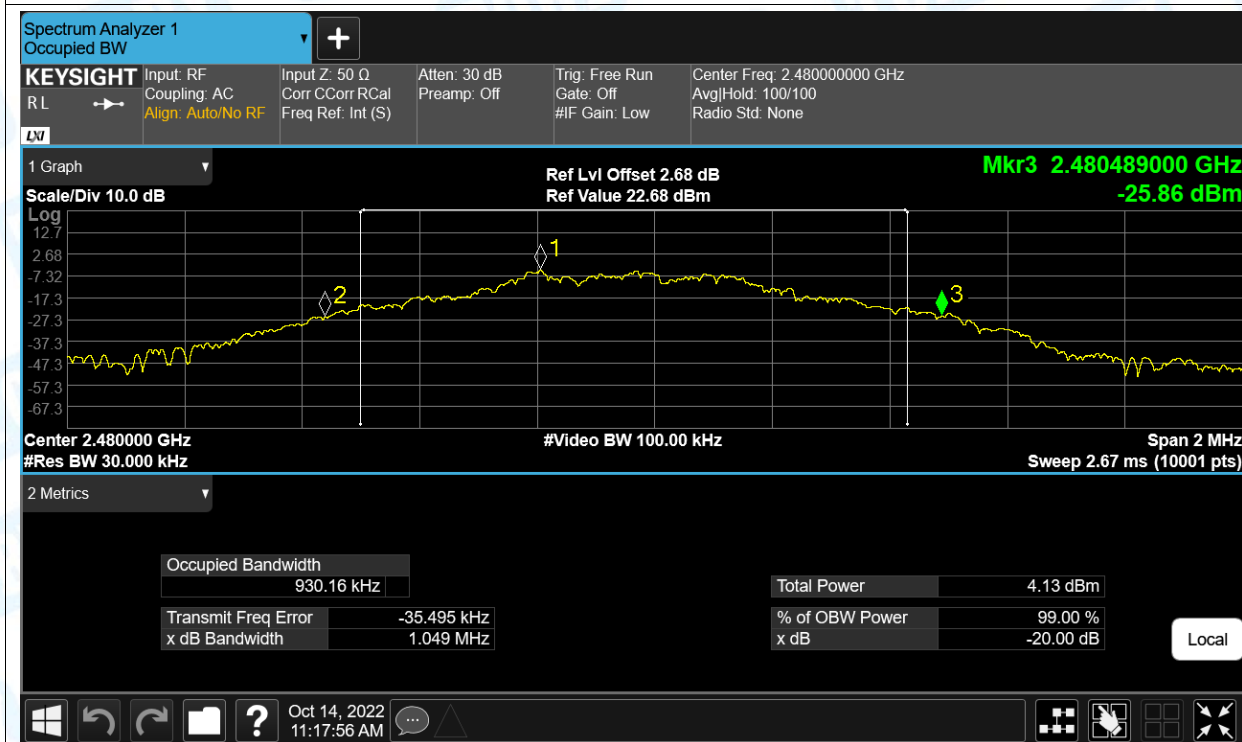


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

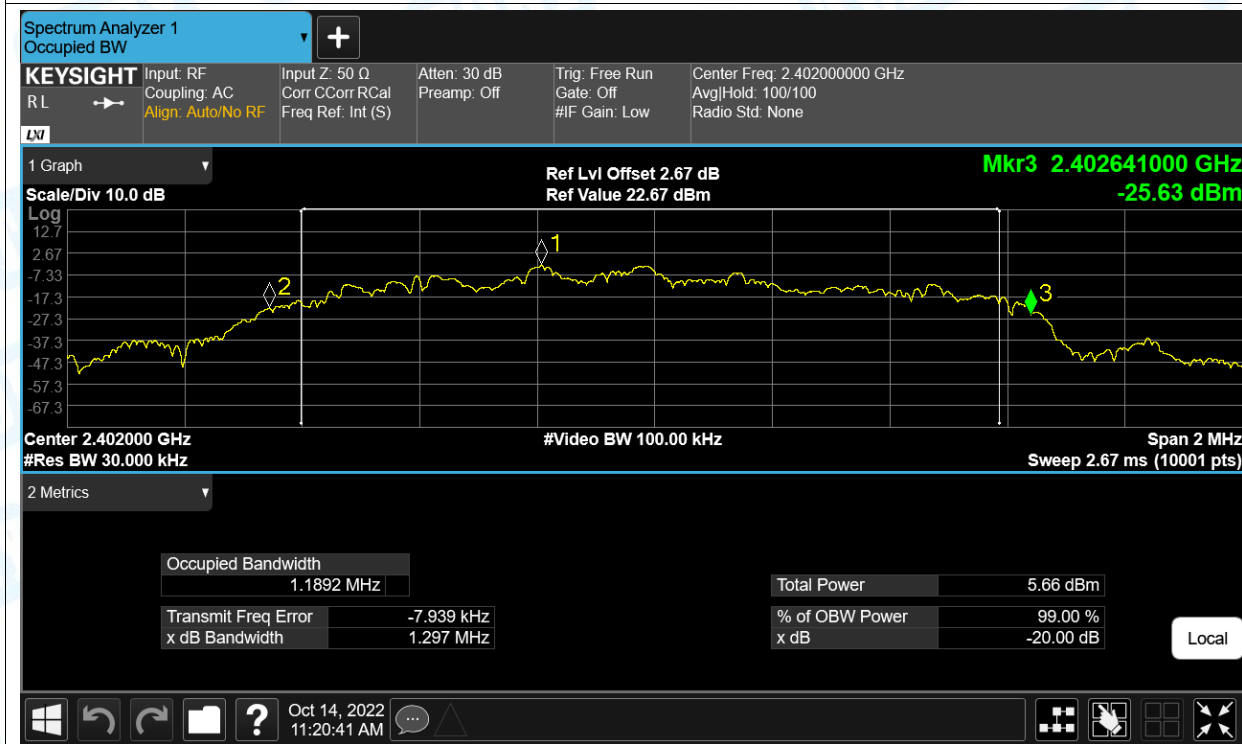


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

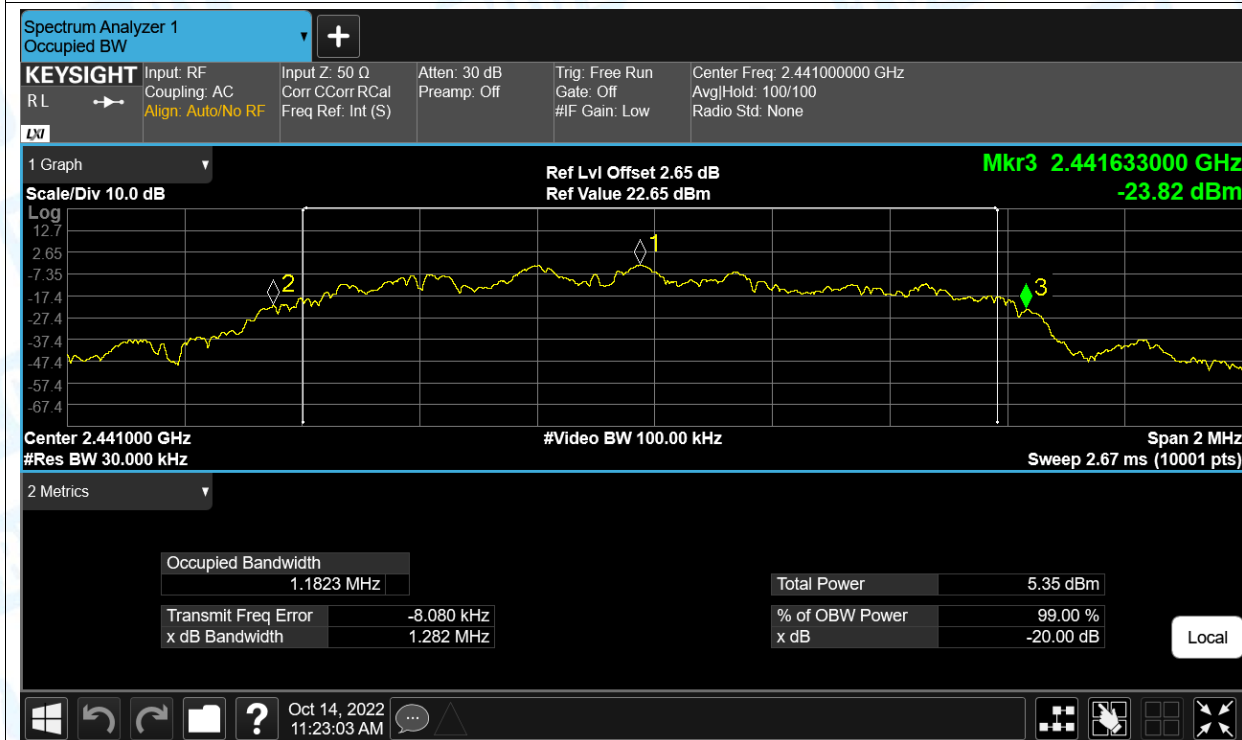


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

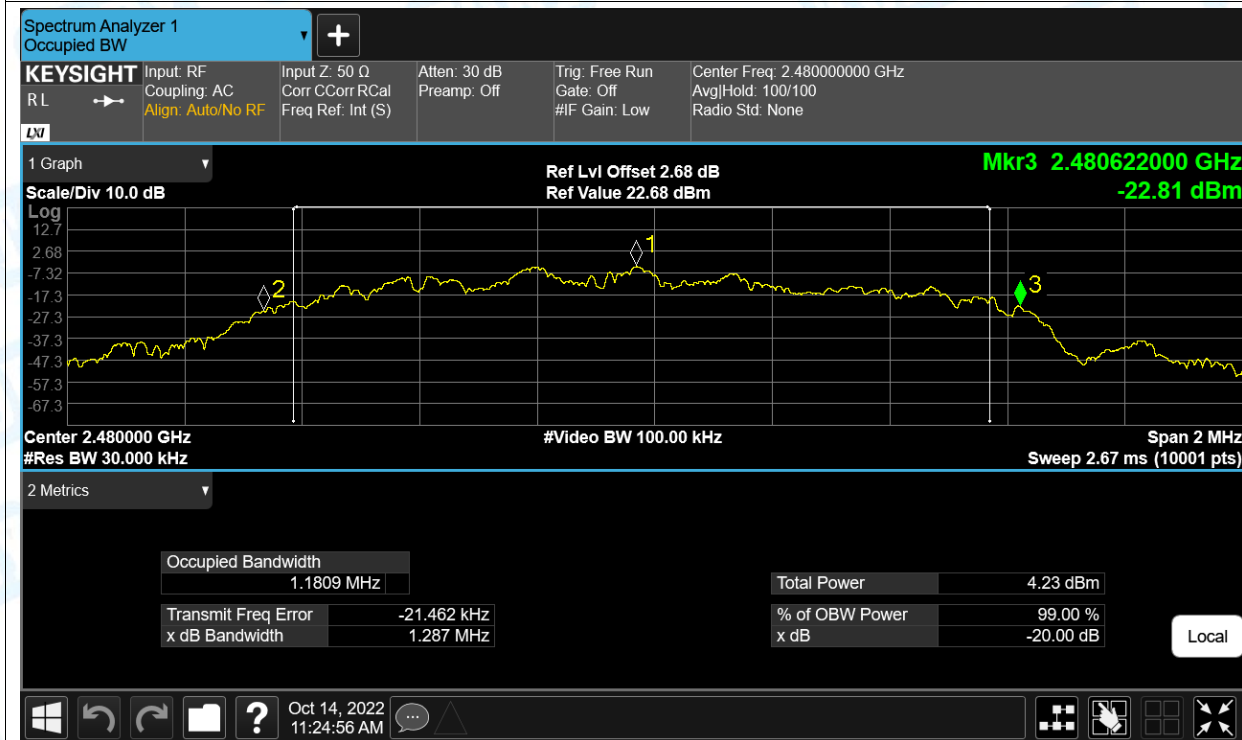


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

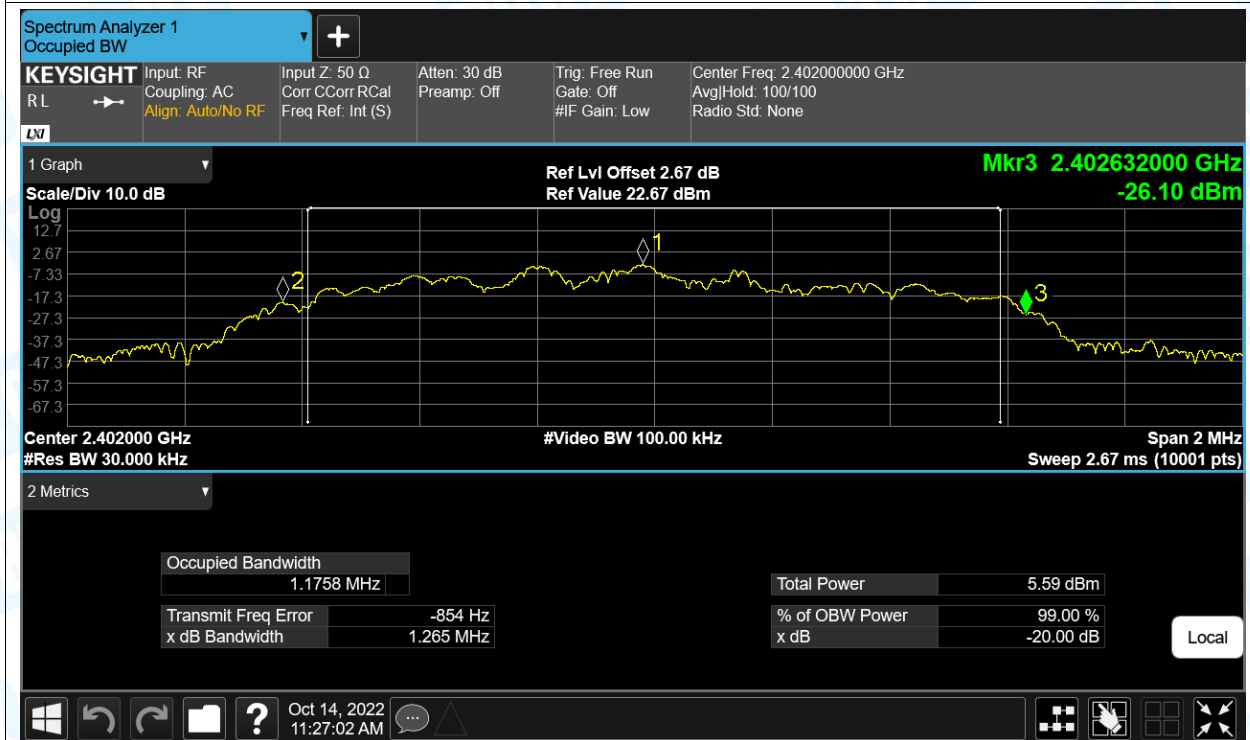

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

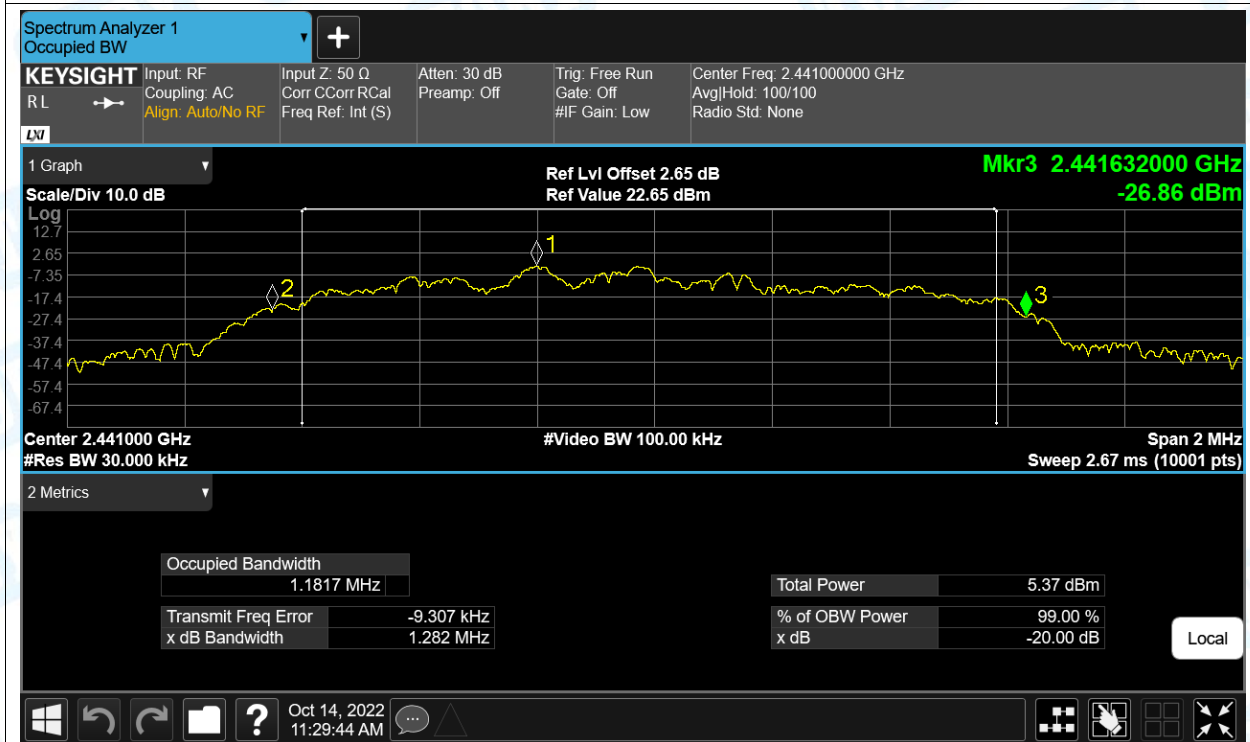

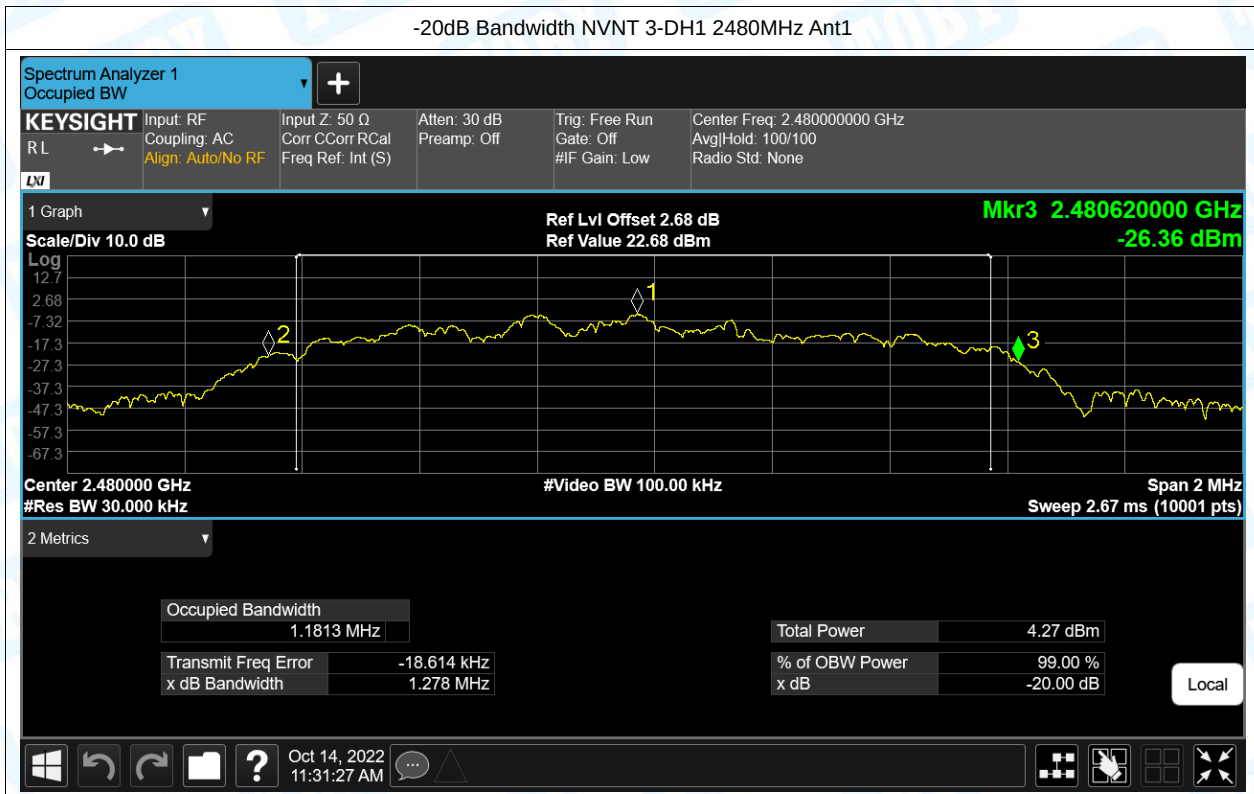

4. Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.899
NVNT	1-DH1	2441	Ant1	0.926
NVNT	1-DH1	2480	Ant1	0.916
NVNT	2-DH1	2402	Ant1	1.194
NVNT	2-DH1	2441	Ant1	1.19
NVNT	2-DH1	2480	Ant1	1.197
NVNT	3-DH1	2402	Ant1	1.183
NVNT	3-DH1	2441	Ant1	1.186
NVNT	3-DH1	2480	Ant1	1.174

Test Graphs


OBW NVNT 1-DH1 2402MHz Ant1




OBW NVNT 1-DH1 2441MHz Ant1




OBW NVNT 1-DH1 2480MHz Ant1

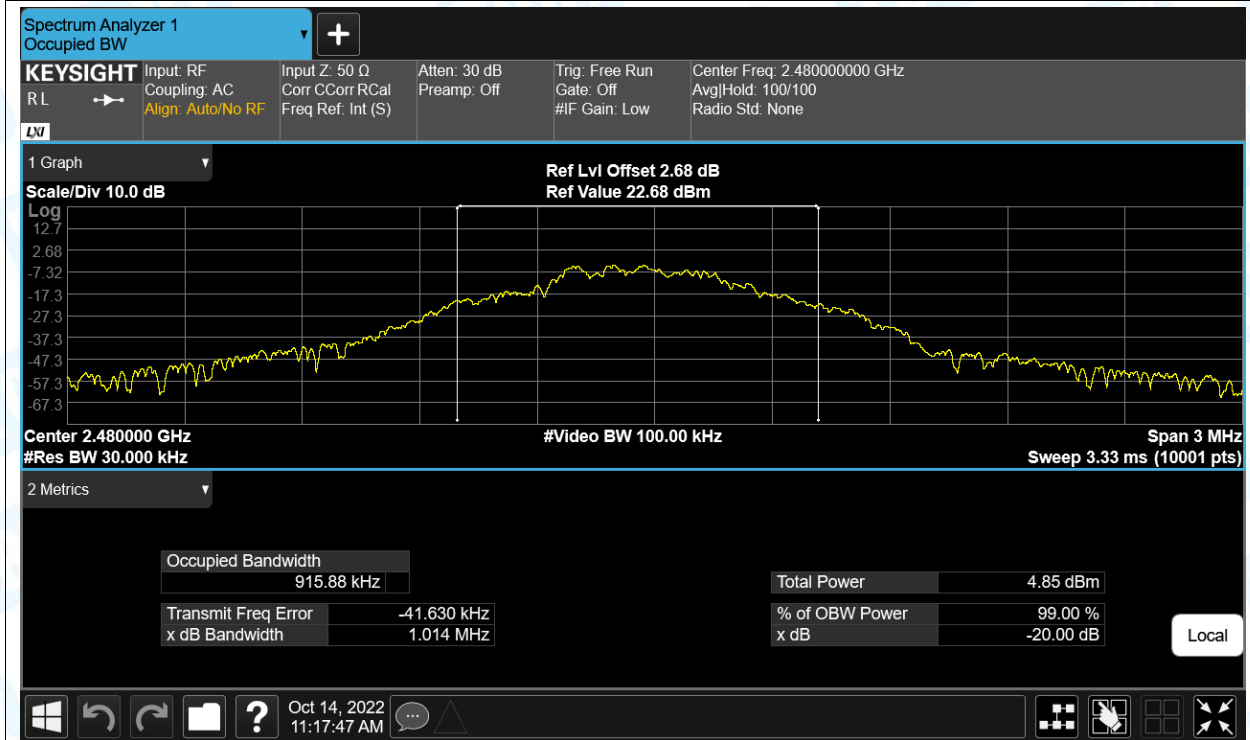


OBW NVNT 2-DH1 2402MHz Ant1

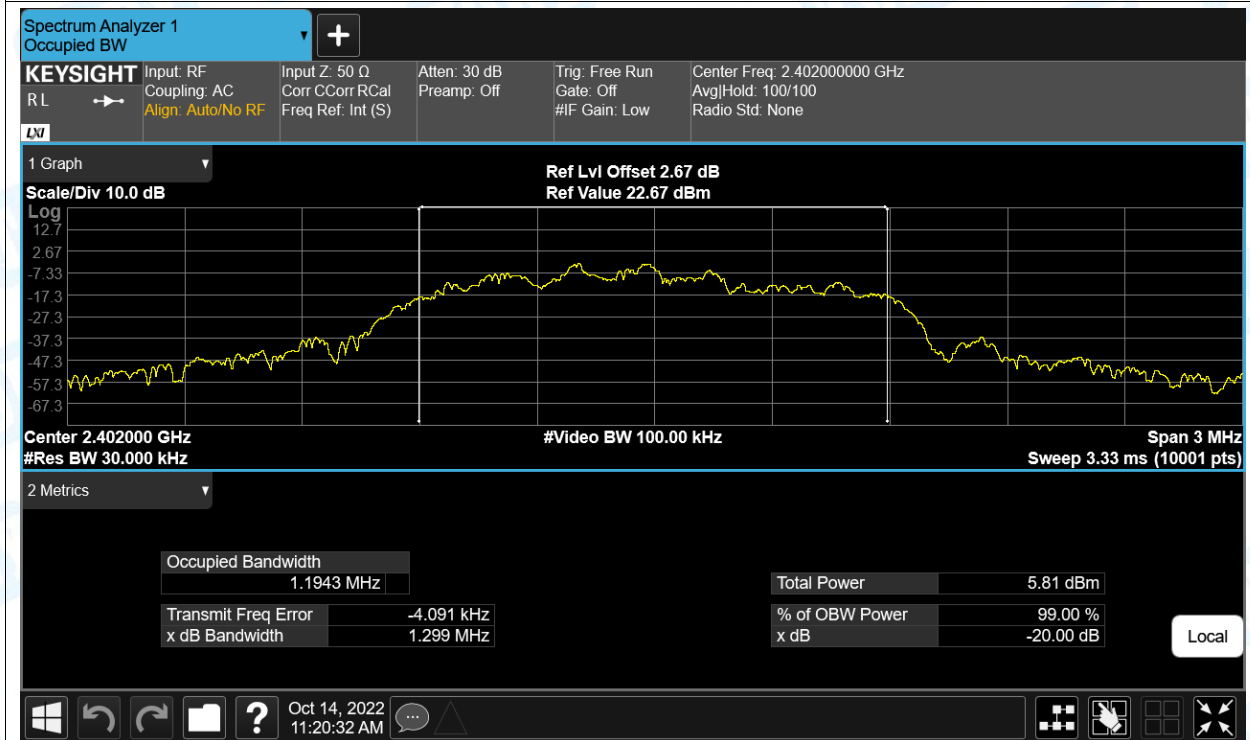


OBW NVNT 2-DH1 2441MHz Ant1

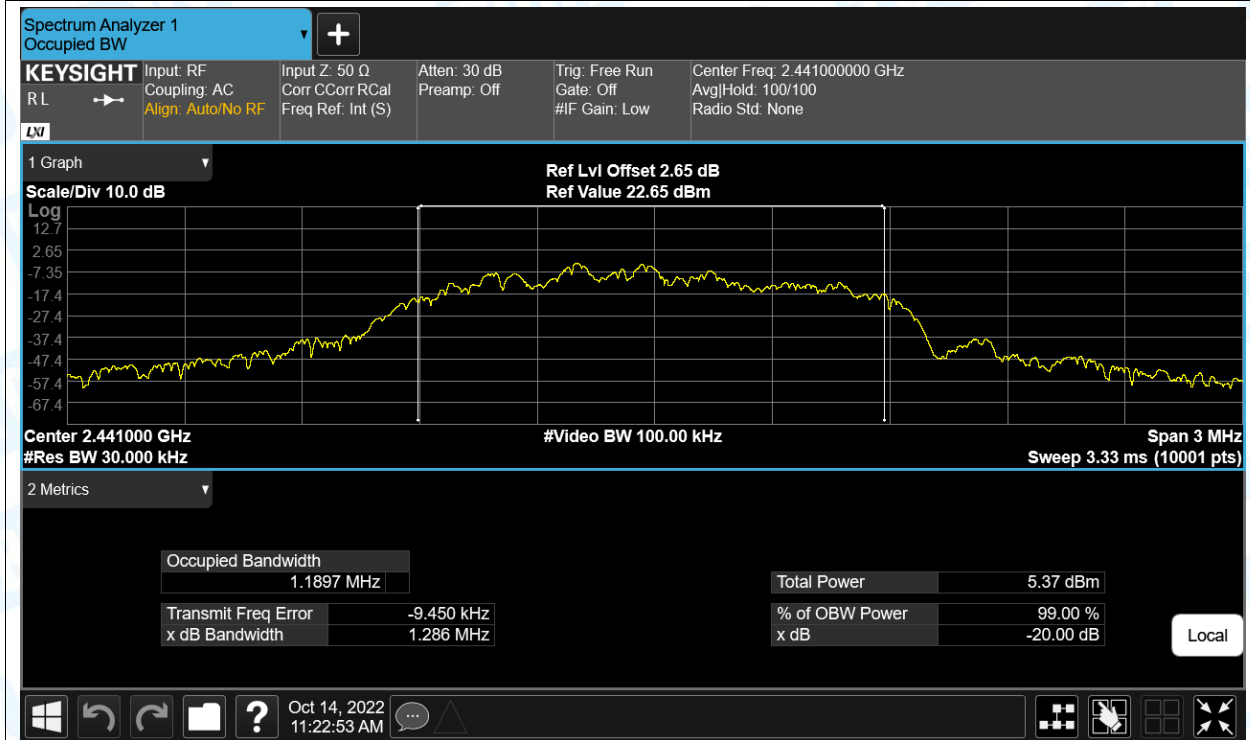


OBW NVNT 2-DH1 2480MHz Ant1

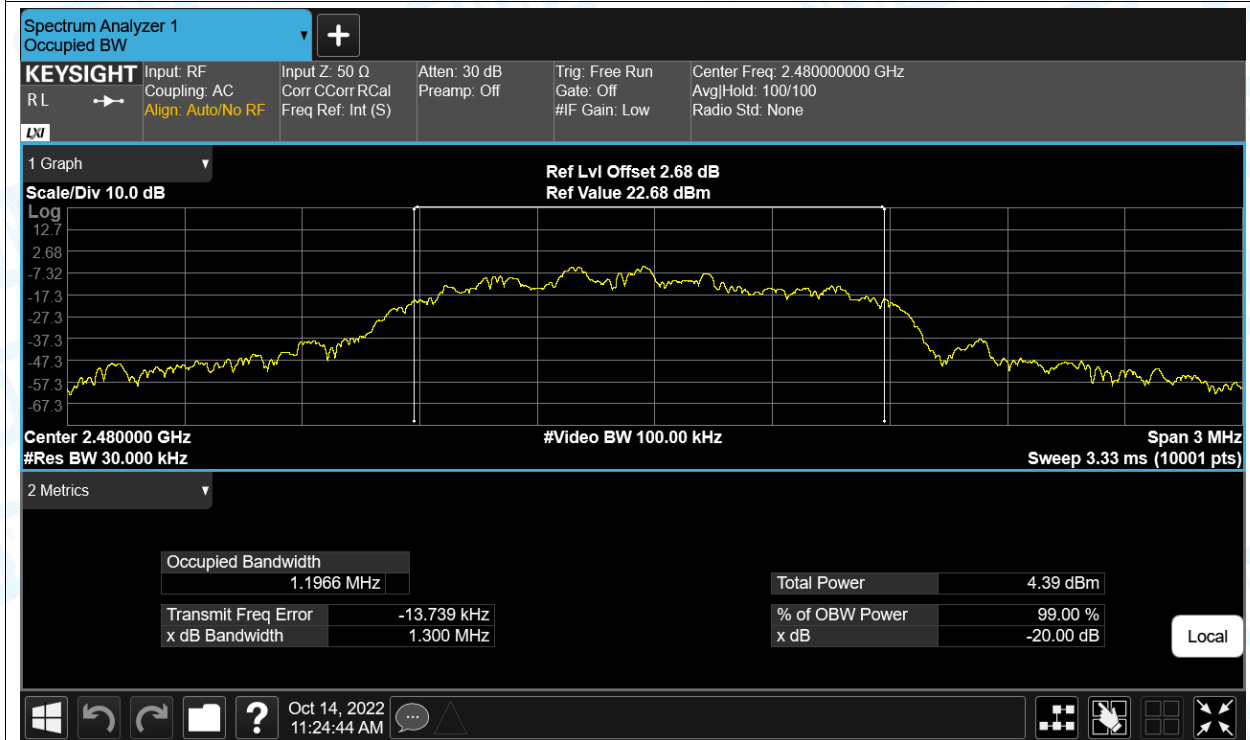


OBW NVNT 3-DH1 2402MHz Ant1

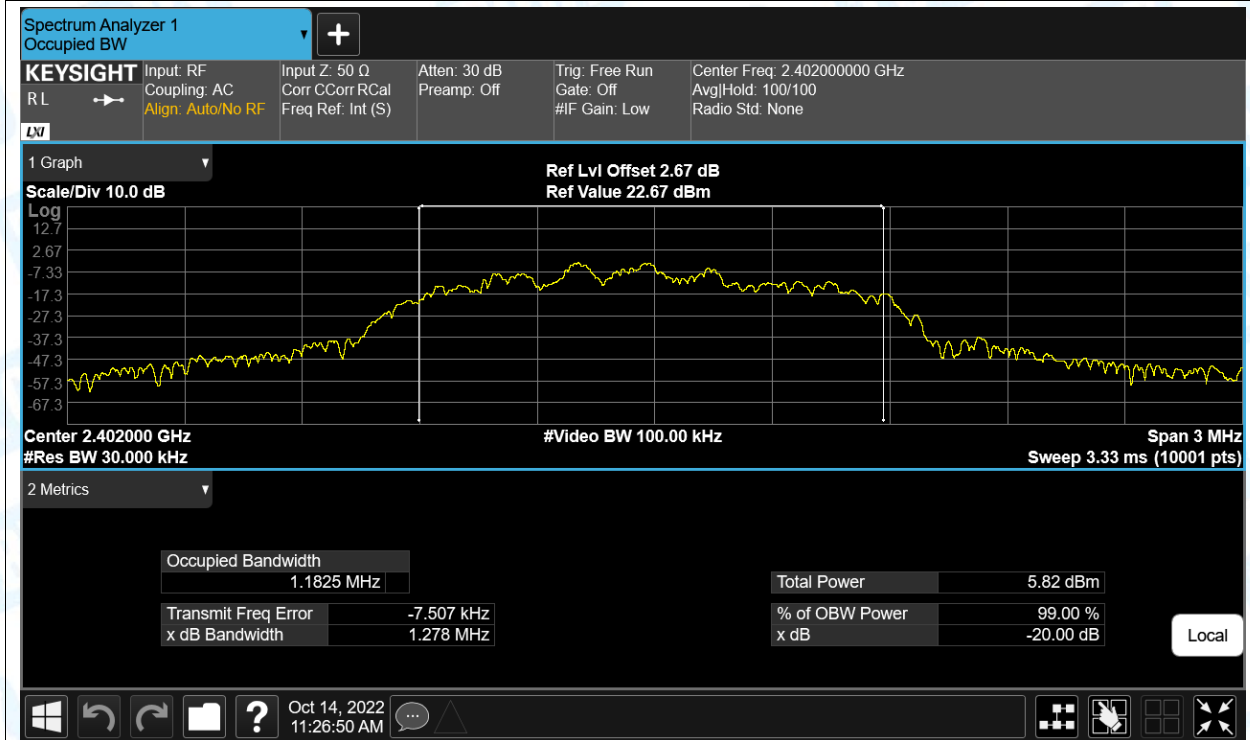


OBW NVNT 3-DH1 2441MHz Ant1


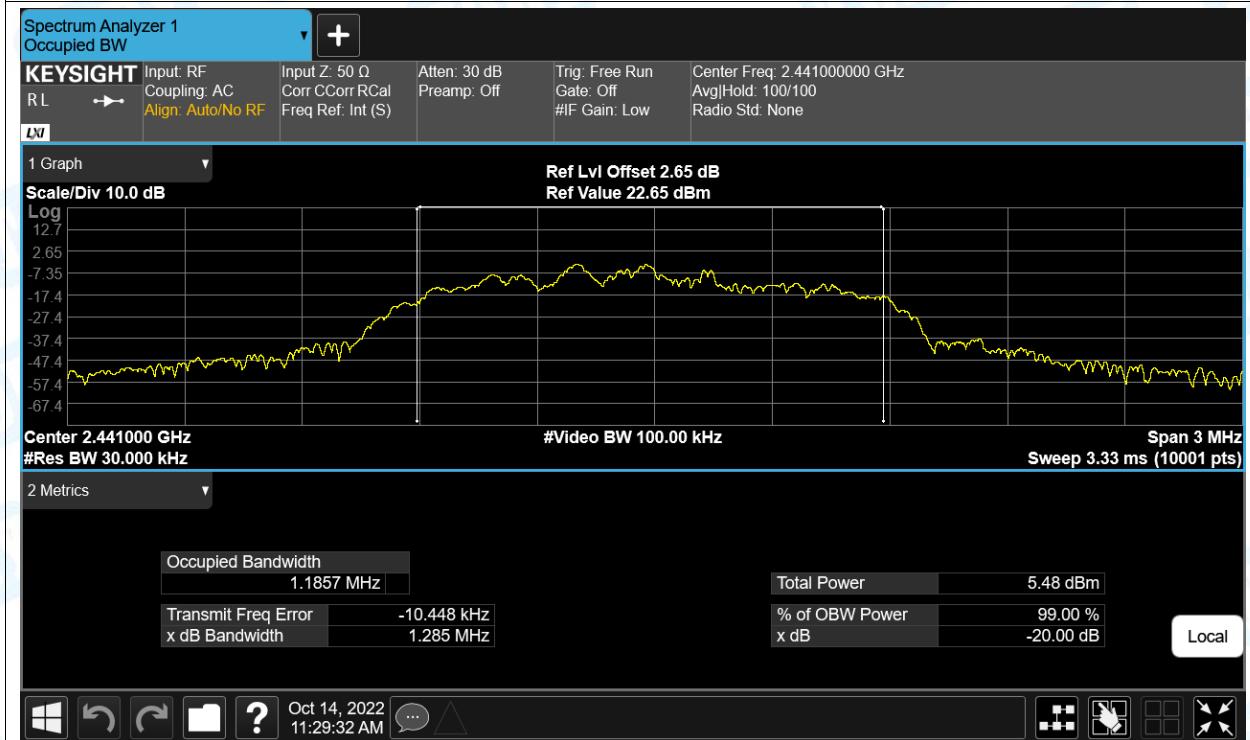



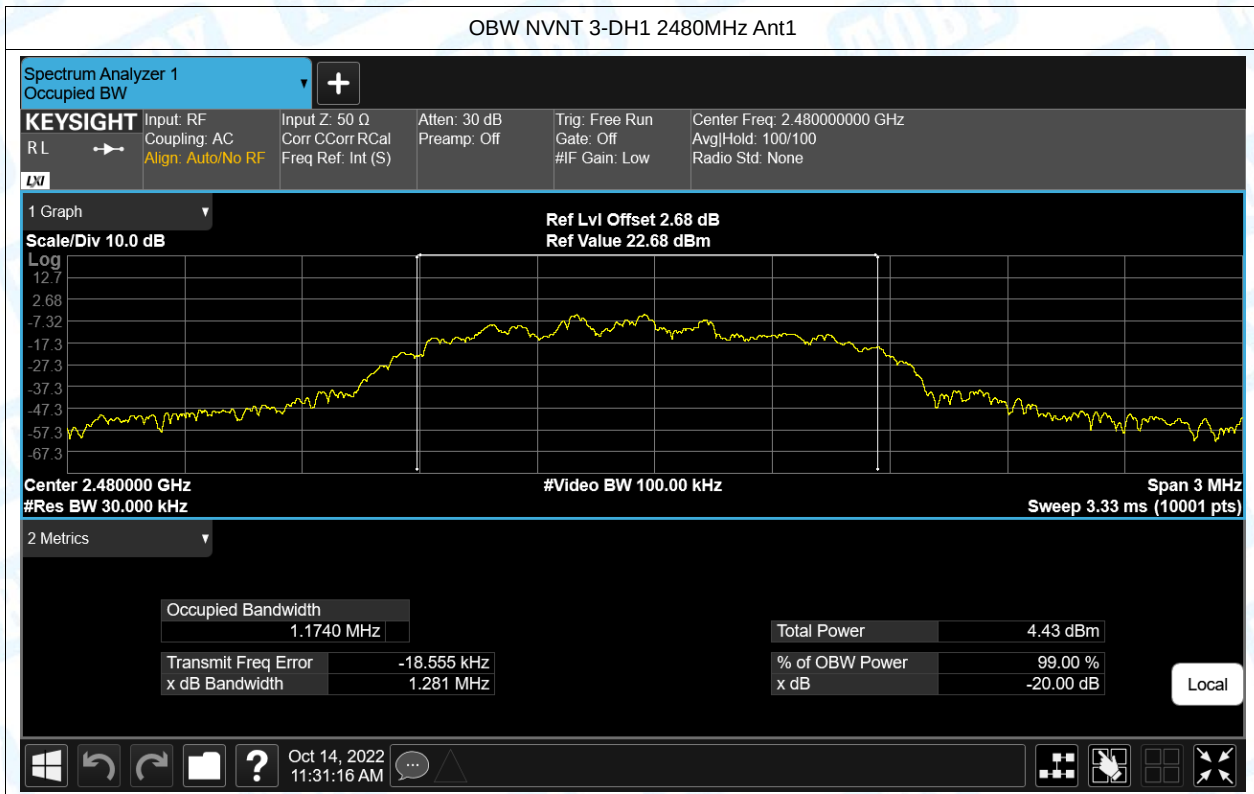




5. Band Edge



Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-54.42	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-55.38	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-54.42	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-54	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-54.39	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-55.7	-20	Pass


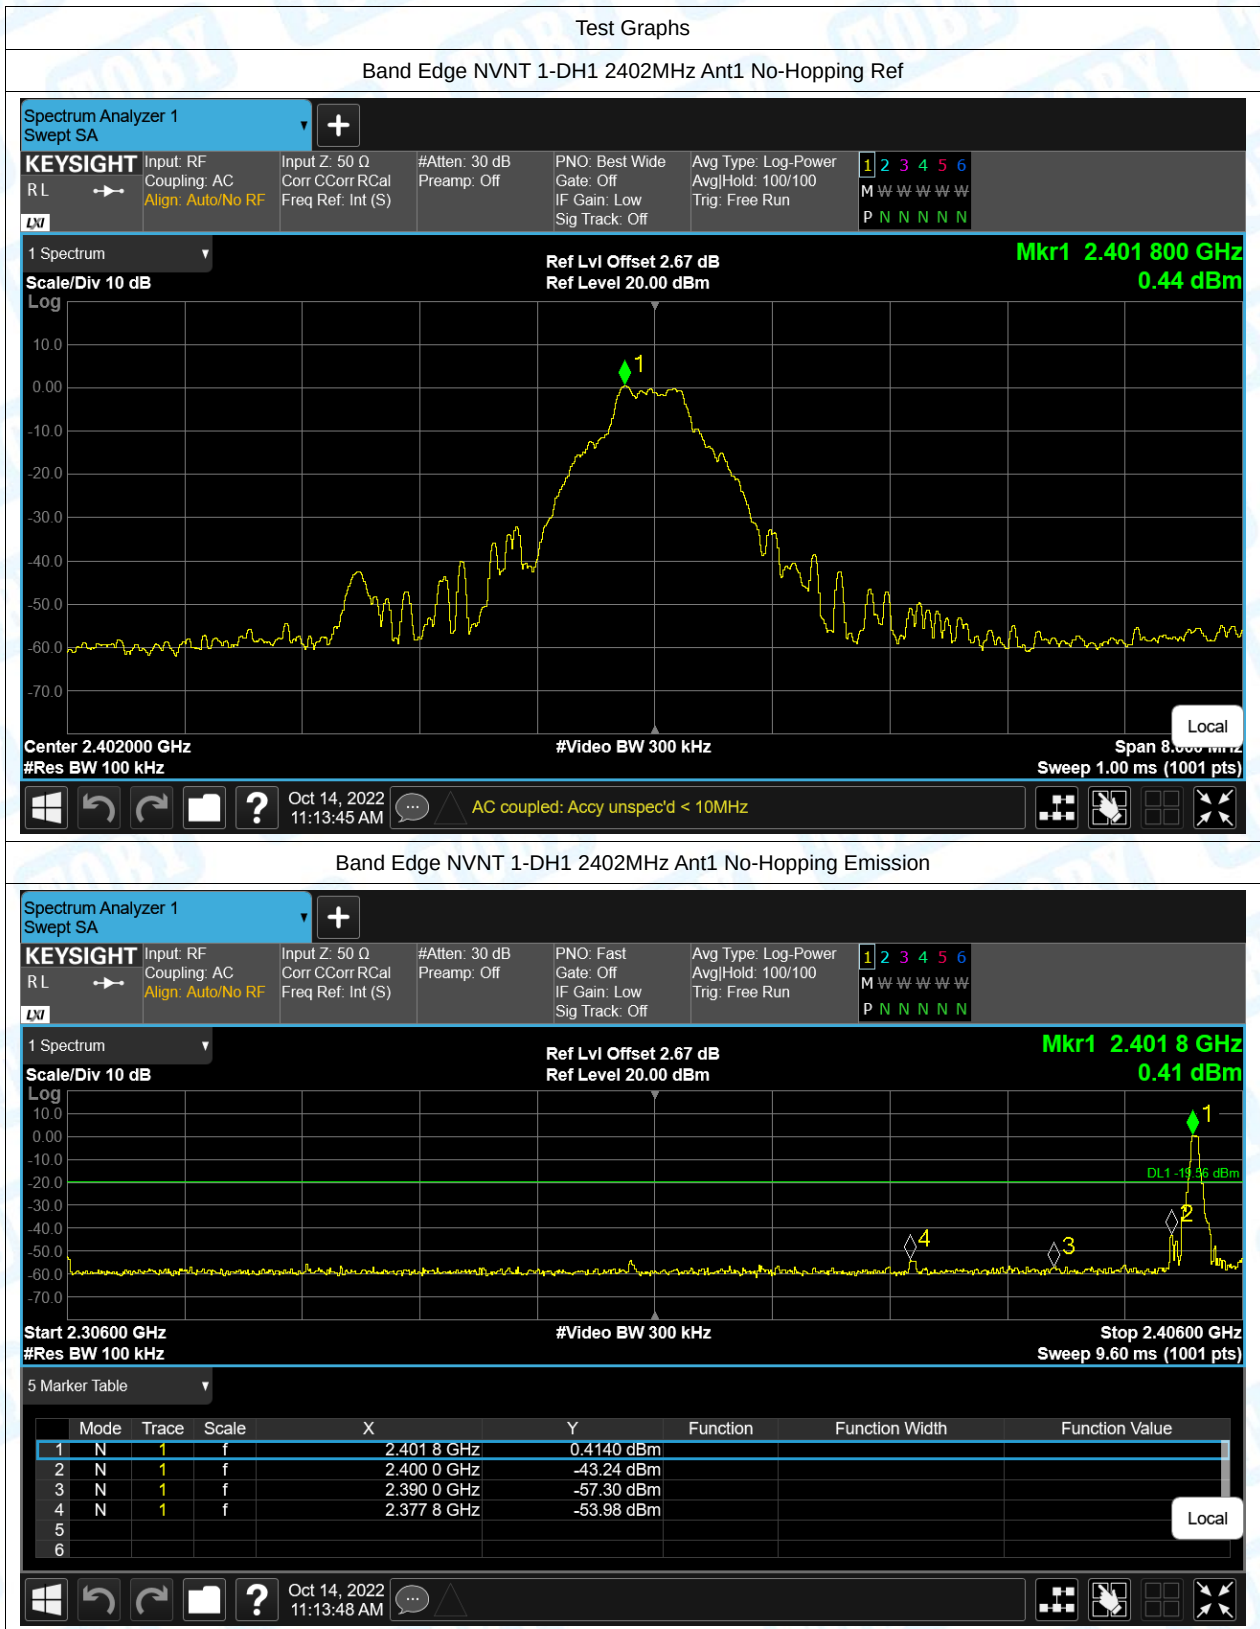


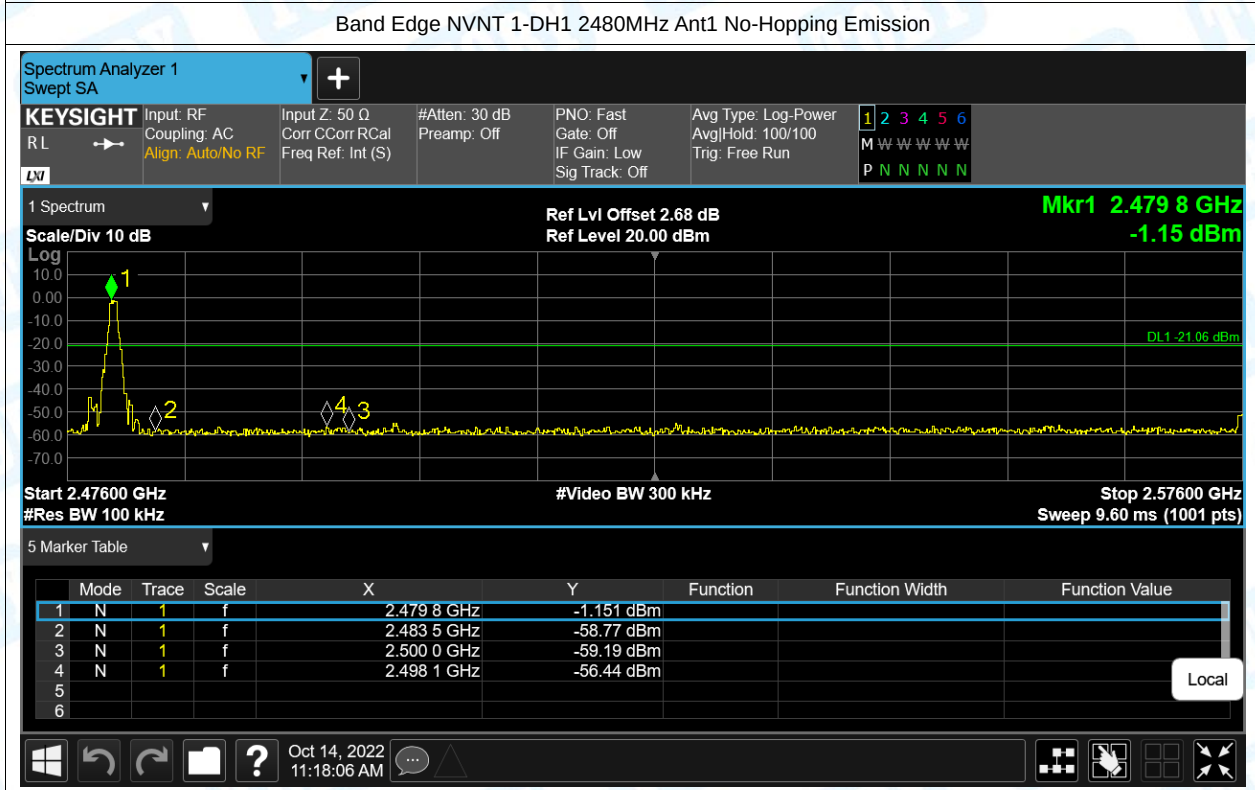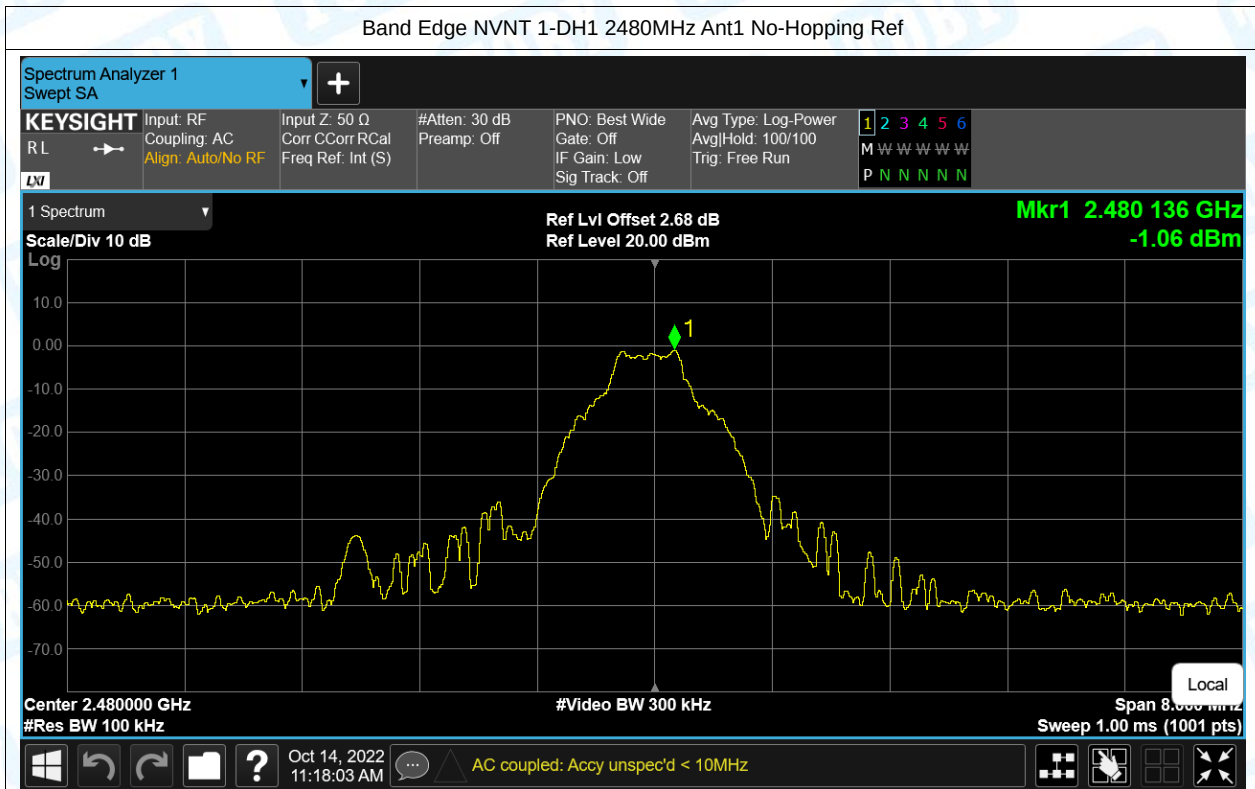

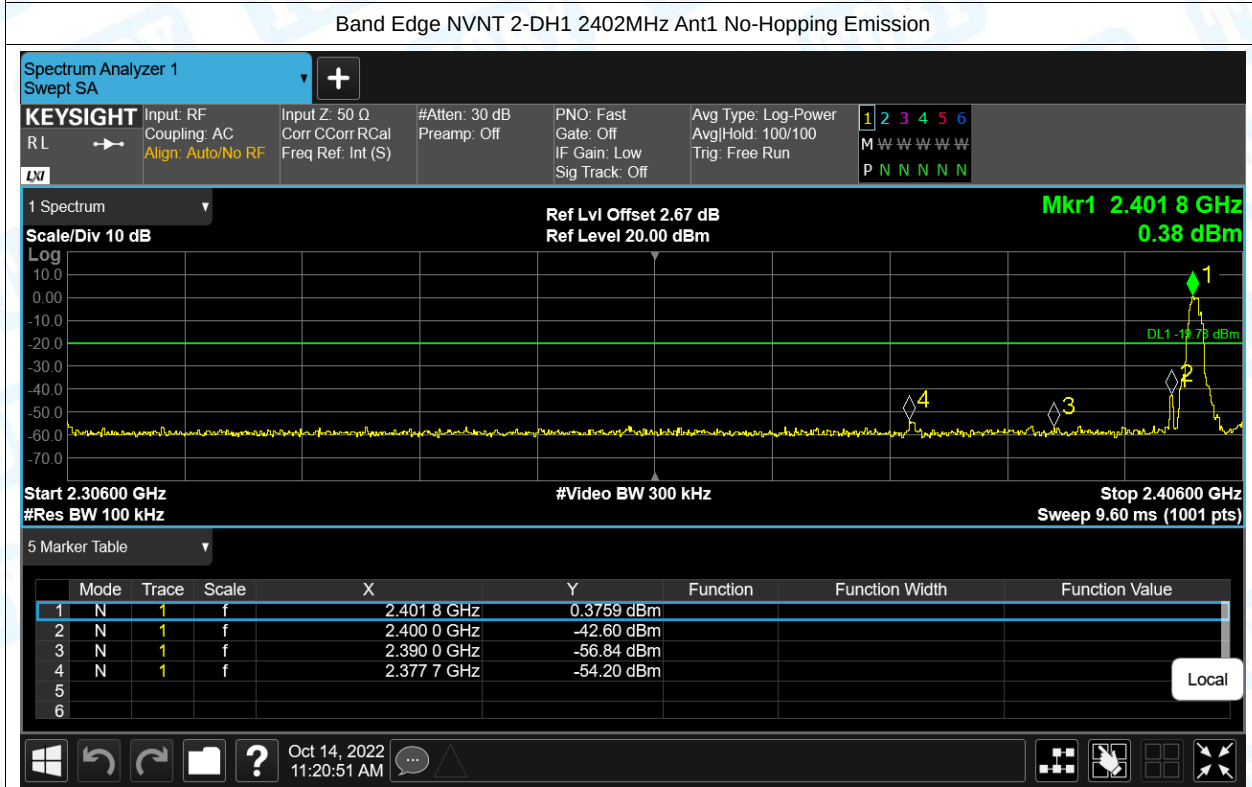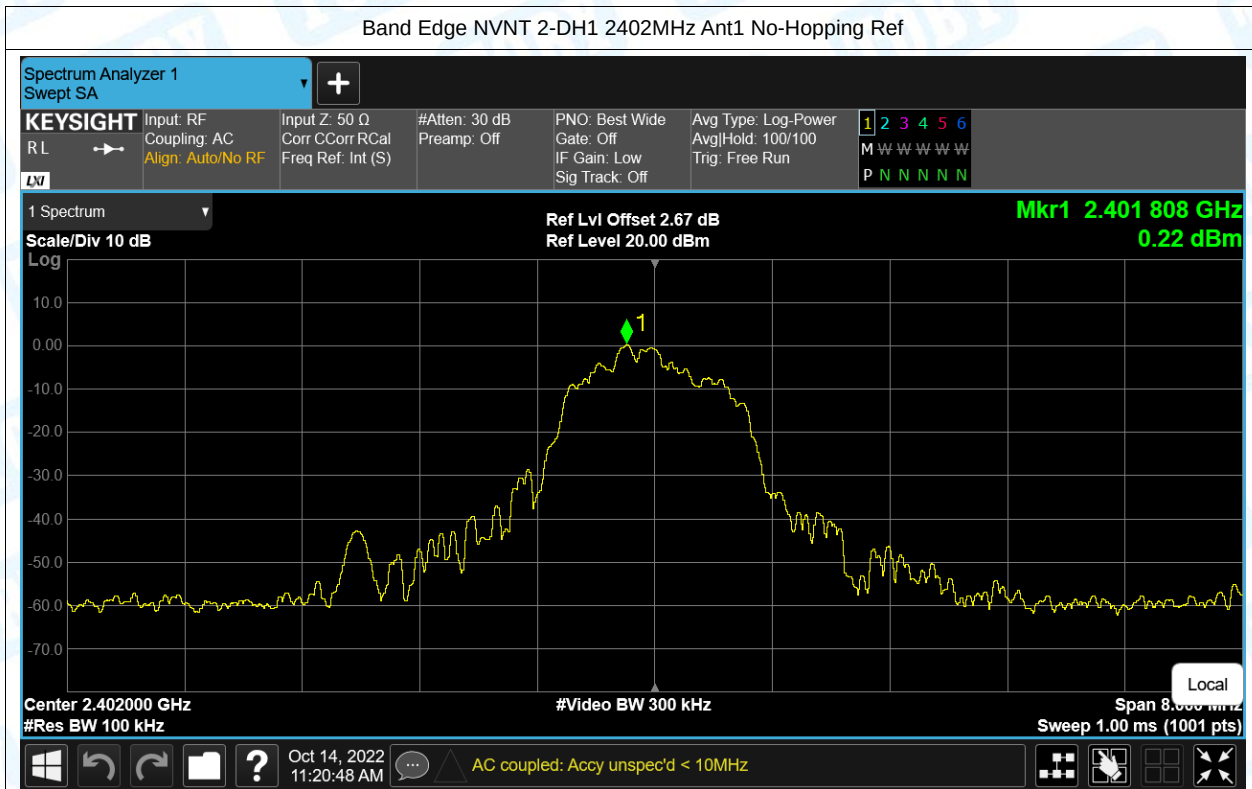

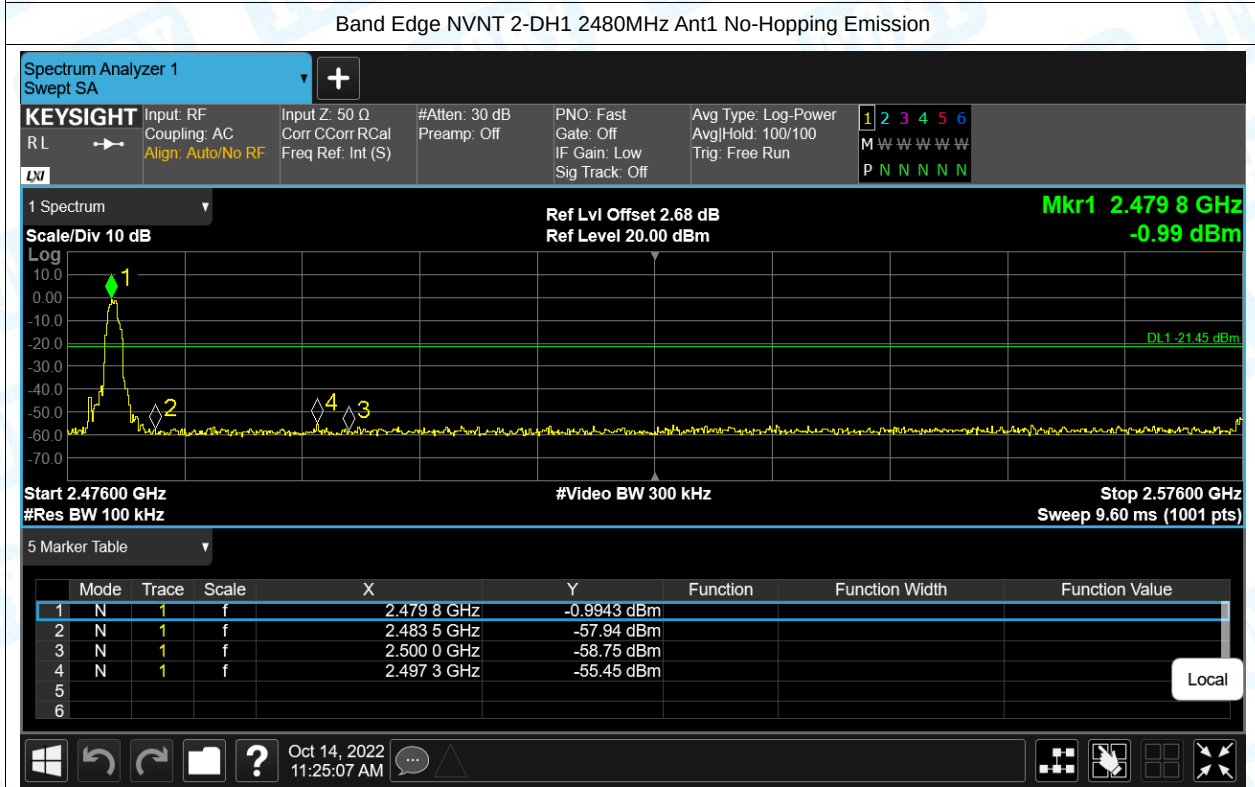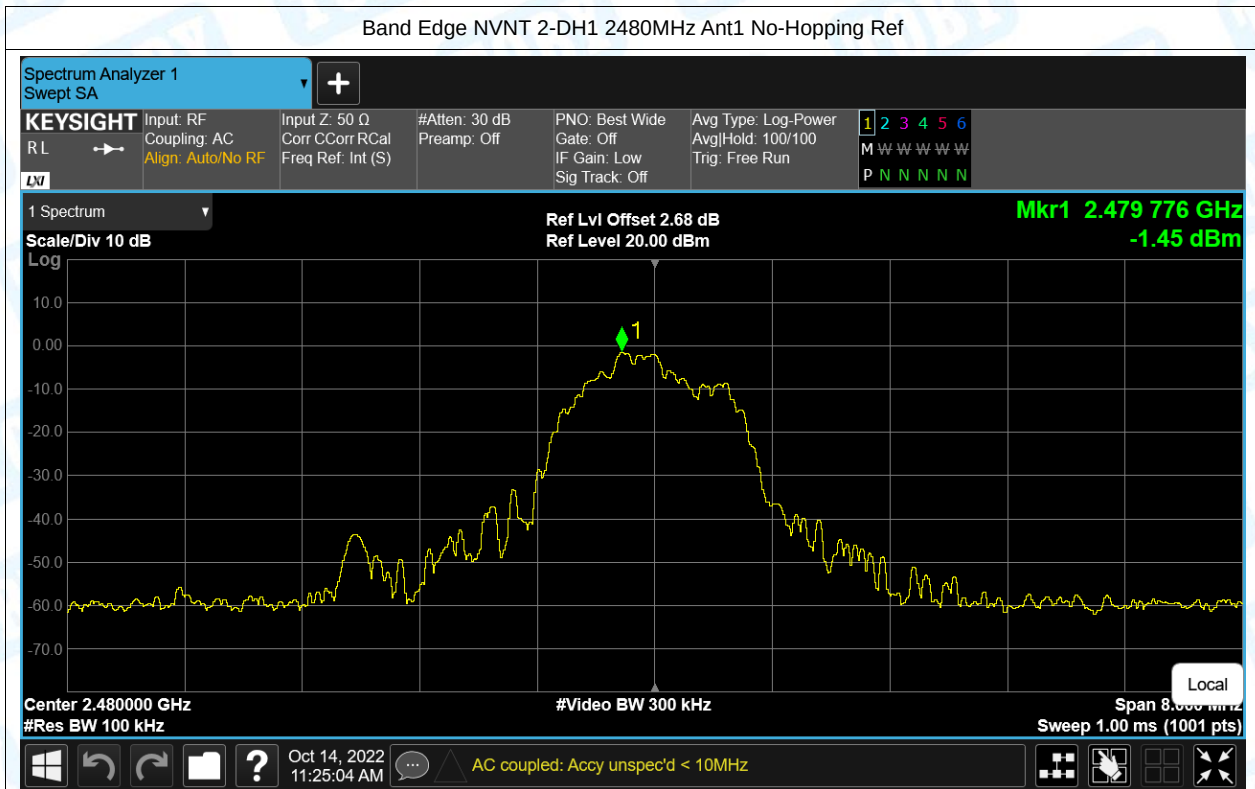

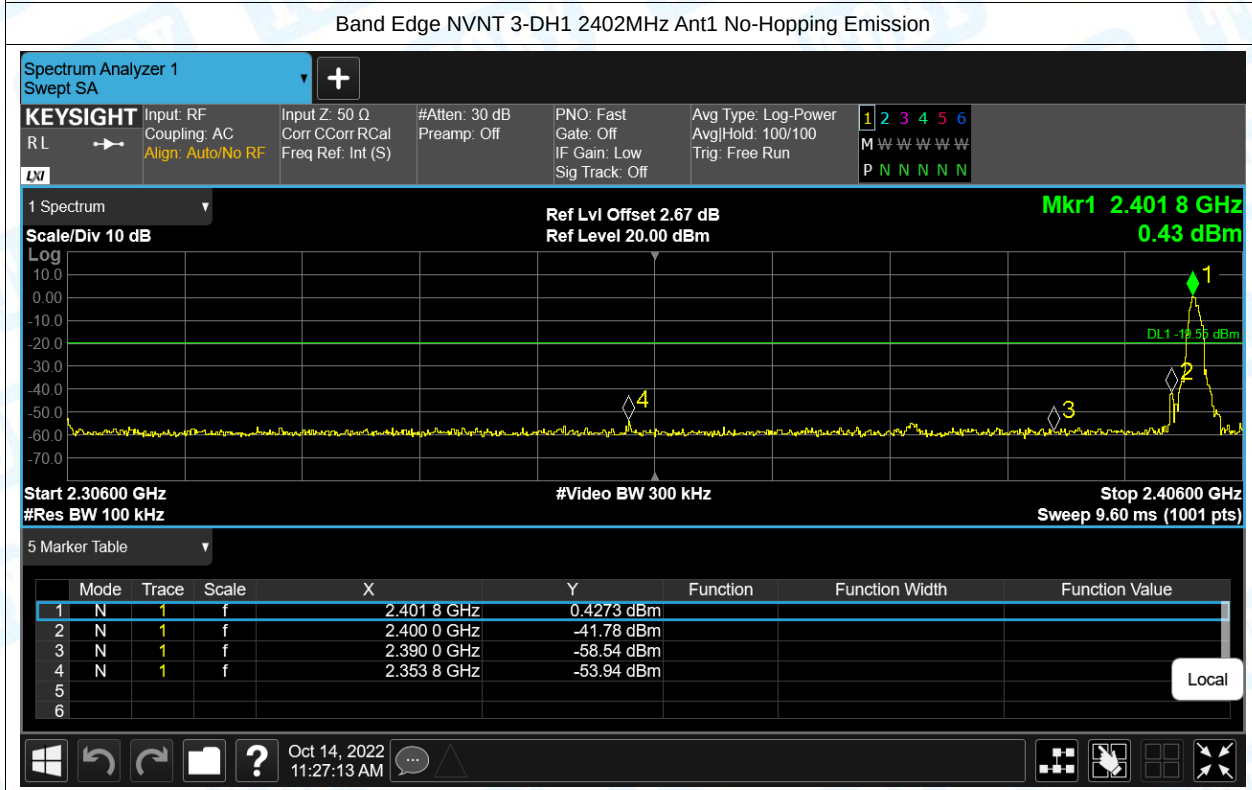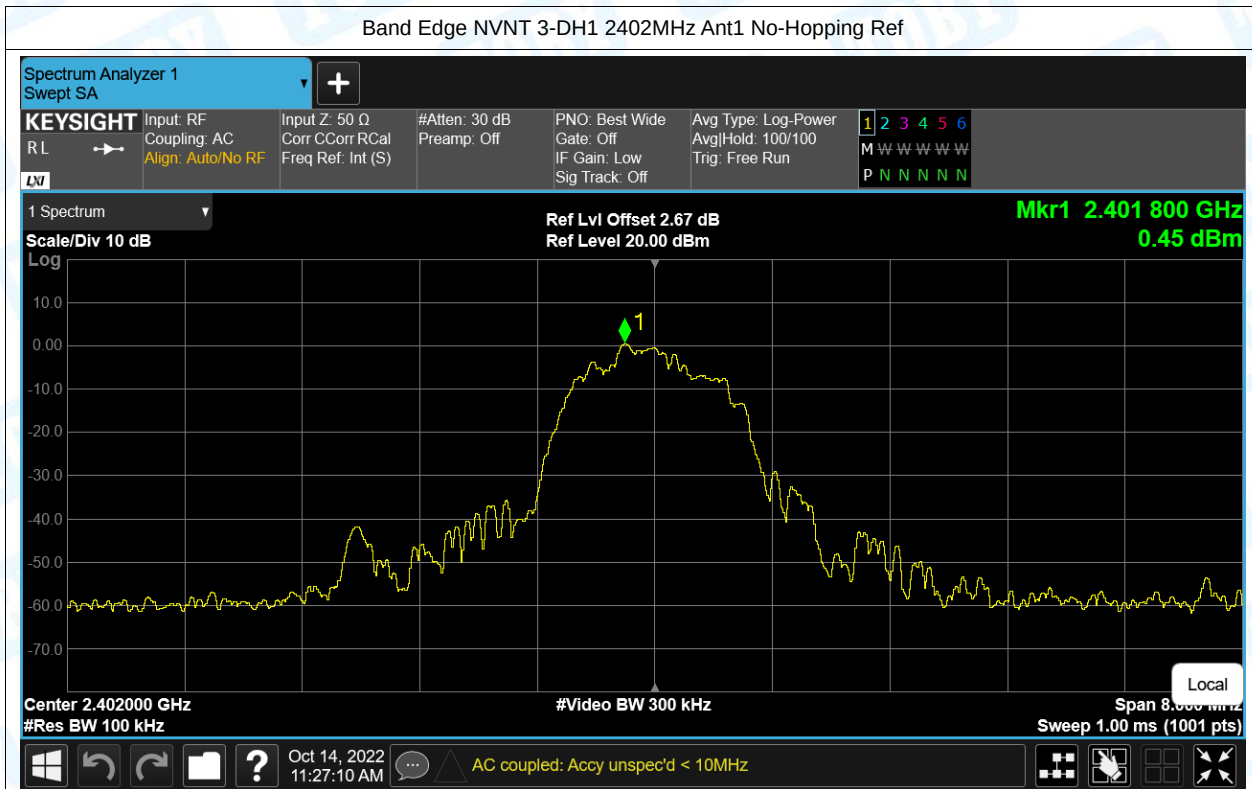

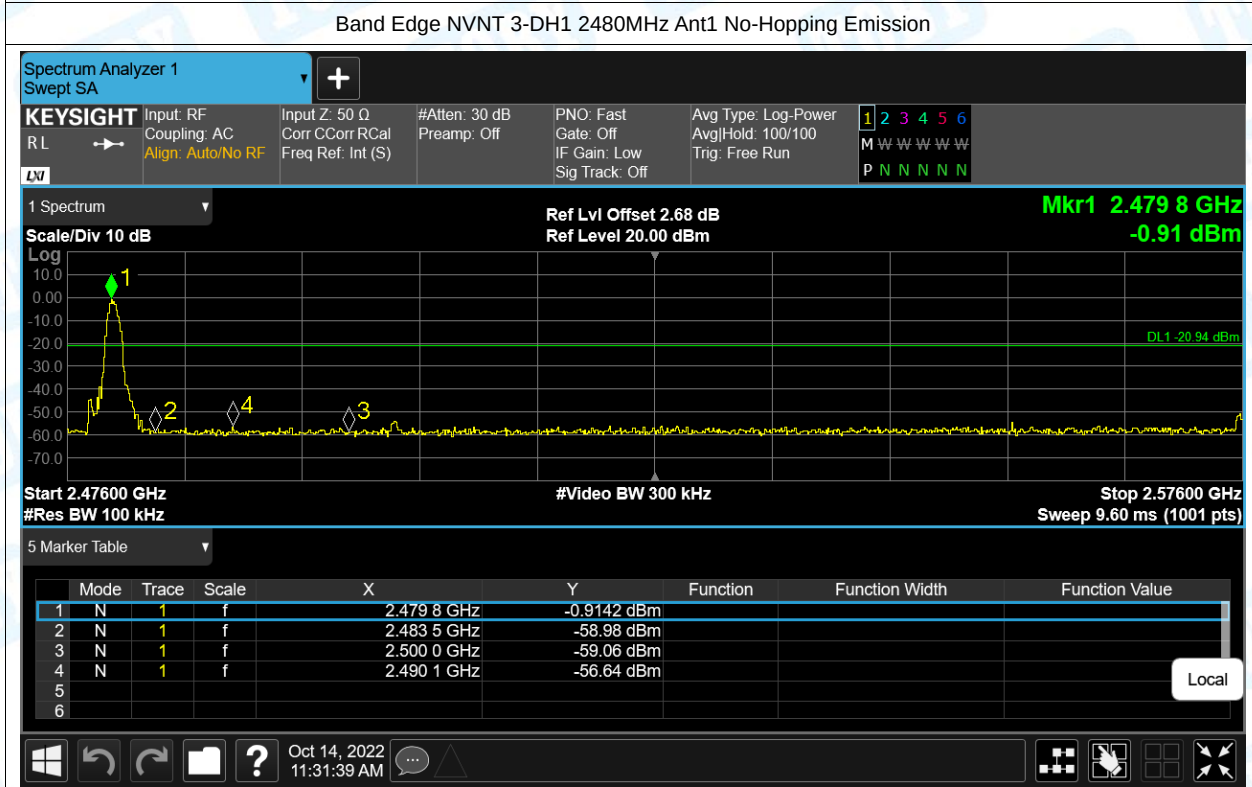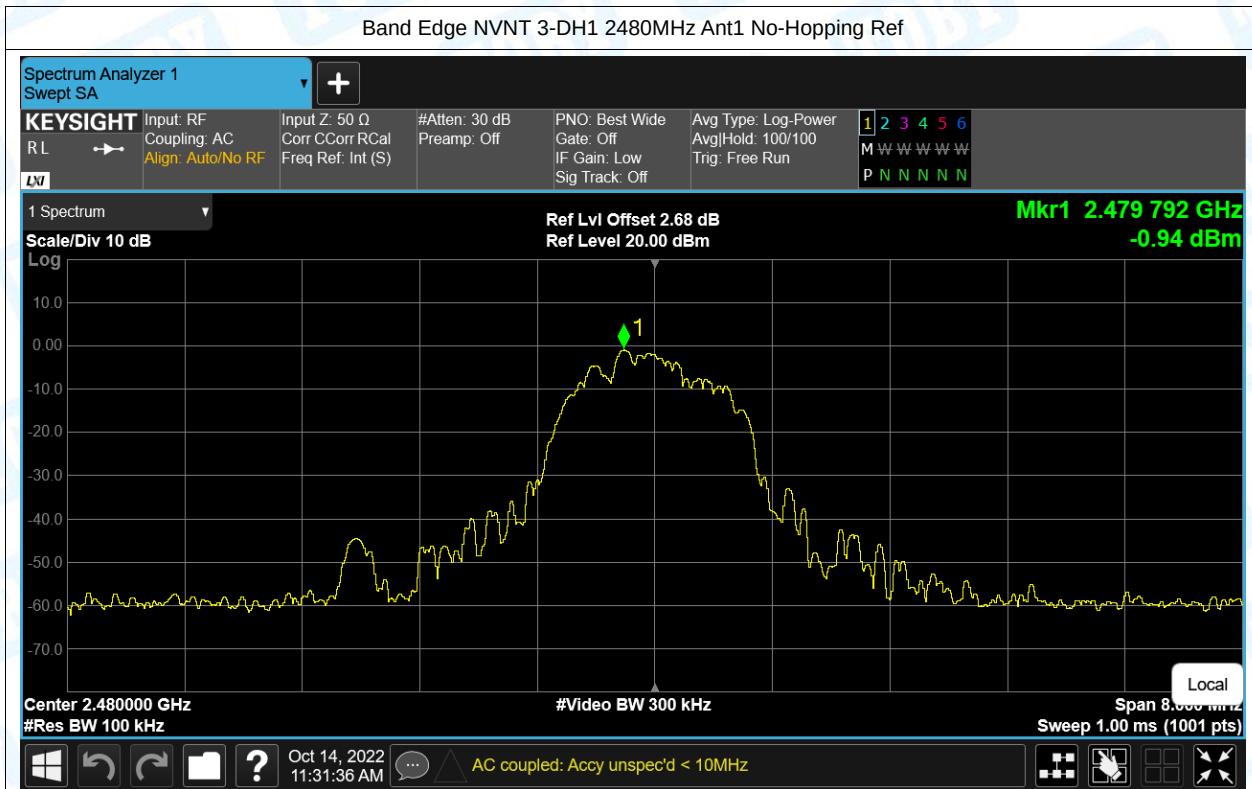

6. Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-50.16	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-47.1	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-50.37	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-45.71	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-49.89	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-46.96	-20	Pass



