

## EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

BLE-Horizontal-TX

### Test result

Project Number: Certification

Test Time: 2026-04-27\_14.58.42

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906


Work Addition: TX

Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

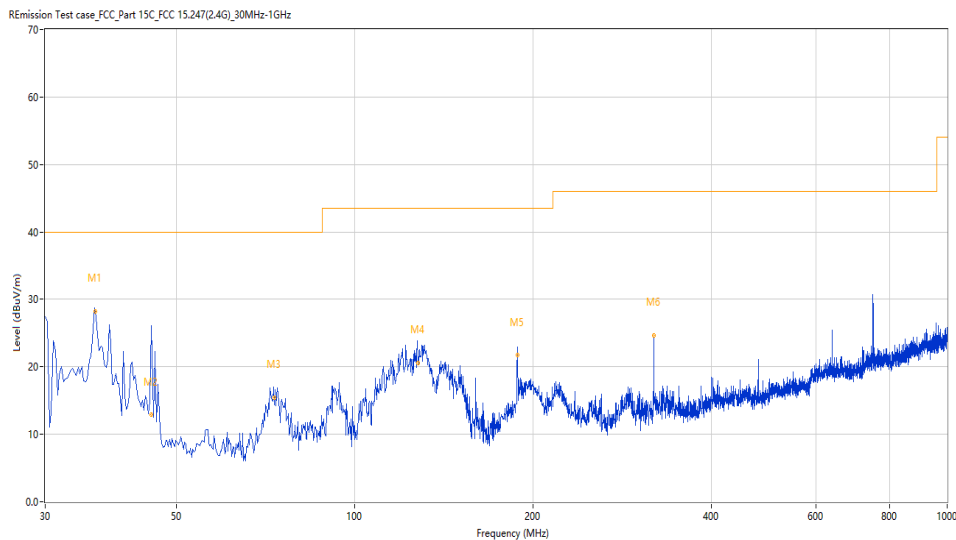

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 36.491          | 36.39            | -26.27        | 40.0           | 3.61        | Peak     | 327.80         | 154         | Horizontal | Pass    |
| 1*  | 36.491          | 28.27            | -26.27        | 40.0           | 11.73       | QP       | 327.80         | 154         | Horizontal | Pass    |
| 2   | 45.360          | 27.85            | -23.85        | 40.0           | 12.15       | Peak     | 230.40         | 150         | Horizontal | Pass    |
| 2*  | 45.360          | 12.91            | -23.85        | 40.0           | 27.09       | QP       | 230.40         | 150         | Horizontal | Pass    |
| 3   | 73.075          | 20.52            | -29.37        | 40.0           | 19.48       | Peak     | 83.80          | 277         | Horizontal | Pass    |
| 3*  | 73.075          | 15.42            | -29.37        | 40.0           | 24.58       | QP       | 83.80          | 277         | Horizontal | Pass    |
| 4   | 127.690         | 25.72            | -27.89        | 43.5           | 17.78       | Peak     | 24.30          | 184         | Horizontal | Pass    |
| 4*  | 127.690         | 20.60            | -27.89        | 43.5           | 22.90       | QP       | 24.30          | 184         | Horizontal | Pass    |
| 5   | 188.204         | 24.24            | -25.93        | 43.5           | 19.26       | Peak     | 45.10          | 106         | Horizontal | Pass    |
| 5*  | 188.204         | 21.79            | -25.93        | 43.5           | 21.71       | QP       | 45.10          | 106         | Horizontal | Pass    |
| 6   | 319.997         | 27.39            | -21.57        | 46.0           | 18.61       | Peak     | 95.00          | 116         | Horizontal | Pass    |
| 6*  | 319.997         | 24.63            | -21.57        | 46.0           | 21.37       | QP       | 95.00          | 116         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_14.47.40

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

R emission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_30MHz-1GHz

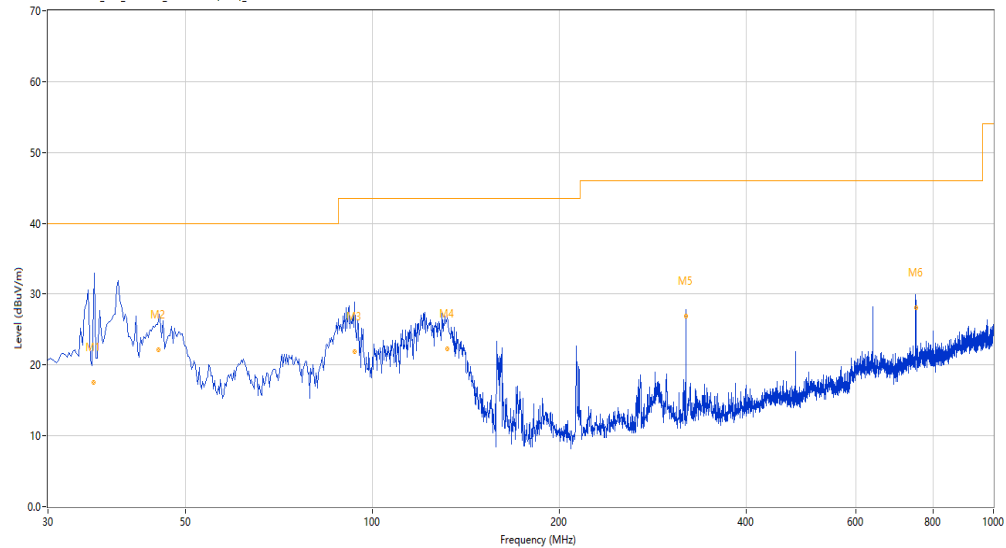

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 35.554          | 30.70            | -26.50        | 40.0           | 9.30        | Peak     | 1.70           | 100         | Vertical | Pass    |
| 1*  | 35.554          | 17.48            | -26.50        | 40.0           | 22.52       | QP       | 1.70           | 100         | Vertical | Pass    |
| 2   | 45.236          | 29.57            | -23.85        | 40.0           | 10.43       | Peak     | 1.70           | 154         | Vertical | Pass    |
| 2*  | 45.236          | 22.14            | -23.85        | 40.0           | 17.86       | QP       | 1.70           | 154         | Vertical | Pass    |
| 3   | 93.629          | 28.40            | -26.43        | 43.5           | 15.10       | Peak     | 287.50         | 100         | Vertical | Pass    |
| 3*  | 93.629          | 21.92            | -26.43        | 43.5           | 21.58       | QP       | 287.50         | 100         | Vertical | Pass    |
| 4   | 131.845         | 27.22            | -28.22        | 43.5           | 16.28       | Peak     | 8.50           | 101         | Vertical | Pass    |
| 4*  | 131.845         | 22.25            | -28.22        | 43.5           | 21.25       | QP       | 8.50           | 101         | Vertical | Pass    |
| 5   | 319.997         | 28.67            | -21.57        | 46.0           | 17.33       | Peak     | 348.90         | 110         | Vertical | Pass    |
| 5*  | 319.997         | 26.94            | -21.57        | 46.0           | 19.06       | QP       | 348.90         | 110         | Vertical | Pass    |
| 6   | 749.991         | 32.57            | -11.08        | 46.0           | 13.43       | Peak     | 165.60         | 299         | Vertical | Pass    |
| 6*  | 749.991         | 28.08            | -11.08        | 46.0           | 17.92       | QP       | 165.60         | 299         | Vertical | Pass    |

1-18G

BLE-Low channel-Horizontal-TX

## Test result

Project Number: Certification

Test Time: 2026-04-27\_11.15.33

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-7GHz RSE

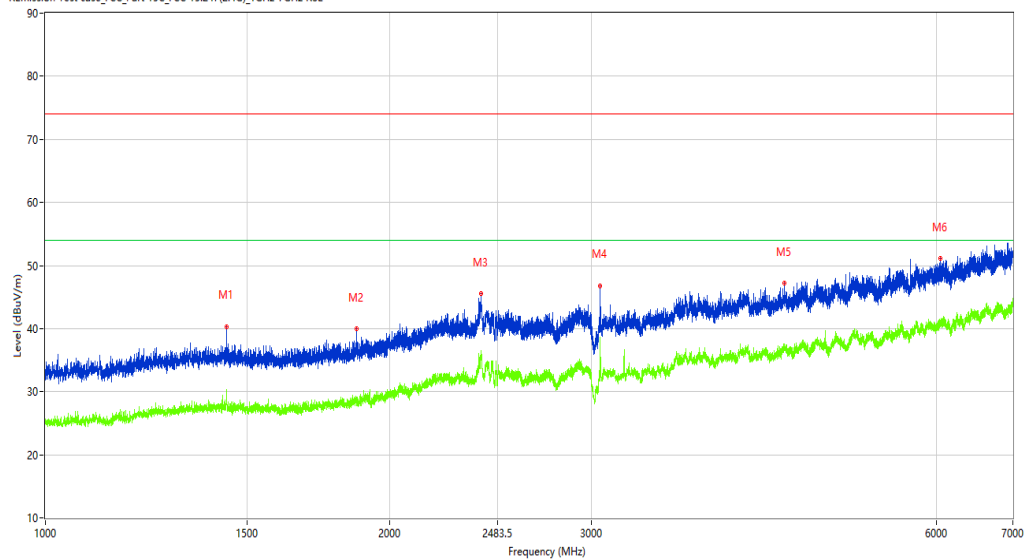

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1440.500        | 40.35            | -13.52        | 74.0           | 33.65       | Peak     | 360.00         | 100         | Horizontal | Pass    |
| 1** | 1440.500        | 29.70            | -13.52        | 54.0           | 24.30       | AV       | 360.00         | 100         | Horizontal | Pass    |
| 2   | 1868.750        | 40.03            | -12.37        | 74.0           | 33.97       | Peak     | 90.40          | 100         | Horizontal | Pass    |
| 2** | 1868.750        | 28.30            | -12.37        | 54.0           | 25.70       | AV       | 90.40          | 100         | Horizontal | Pass    |
| 3   | 2402.750        | 45.60            | -4.78         | 74.0           | 28.40       | Peak     | 174.20         | 100         | Horizontal | Pass    |
| 3** | 2402.750        | 35.83            | -4.78         | 54.0           | 18.17       | AV       | 174.20         | 100         | Horizontal | Pass    |
| 4   | 3050.000        | 46.83            | -4.72         | 74.0           | 27.17       | Peak     | 0.00           | 100         | Horizontal | Pass    |
| 4** | 3050.000        | 38.67            | -4.72         | 54.0           | 15.33       | AV       | 0.00           | 100         | Horizontal | Pass    |
| 5   | 4419.000        | 47.24            | -1.53         | 74.0           | 26.76       | Peak     | 301.20         | 100         | Horizontal | Pass    |
| 5** | 4419.000        | 37.62            | -1.53         | 54.0           | 16.38       | AV       | 301.20         | 100         | Horizontal | Pass    |
| 6   | 6054.500        | 51.15            | 1.95          | 74.0           | 22.85       | Peak     | 36.00          | 100         | Horizontal | Pass    |
| 6** | 6054.500        | 41.40            | 1.95          | 54.0           | 12.60       | AV       | 36.00          | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_09:55:29

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906


Work Addition: TX

Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

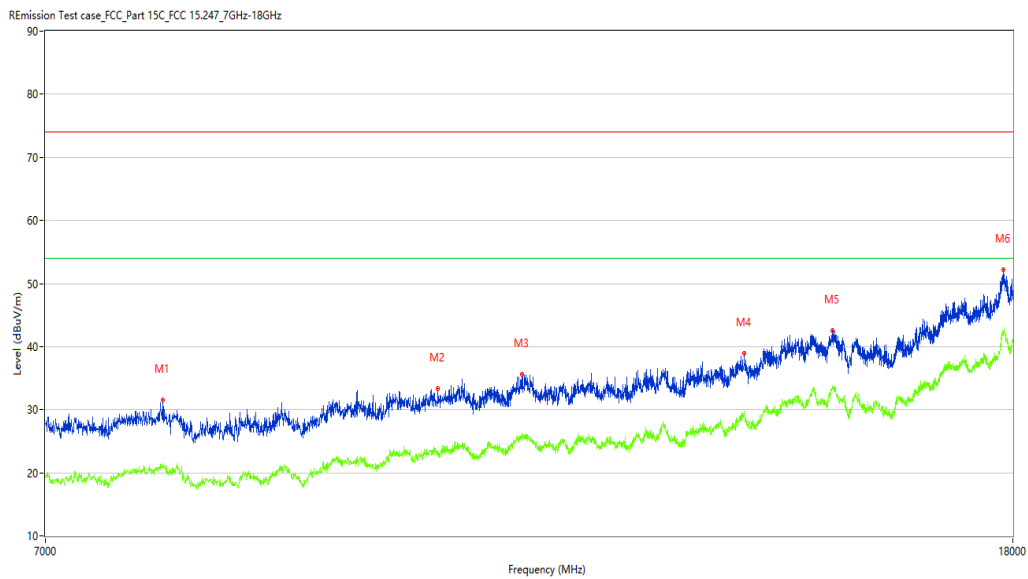

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 7847.000        | 31.51            | 0.97          | 74.0           | 42.49       | Peak     | 48.10          | 100         | Horizontal | Pass    |
| 1** | 7847.000        | 20.86            | 0.97          | 54.0           | 33.14       | AV       | 48.10          | 100         | Horizontal | Pass    |
| 2   | 10269.750       | 33.39            | 3.12          | 74.0           | 40.61       | Peak     | 350.20         | 100         | Horizontal | Pass    |
| 2** | 10269.750       | 23.44            | 3.12          | 54.0           | 30.56       | AV       | 350.20         | 100         | Horizontal | Pass    |
| 3   | 11149.750       | 35.59            | 3.72          | 74.0           | 38.41       | Peak     | 167.10         | 100         | Horizontal | Pass    |
| 3** | 11149.750       | 26.23            | 3.72          | 54.0           | 27.77       | AV       | 167.10         | 100         | Horizontal | Pass    |
| 4   | 13847.500       | 38.91            | 7.37          | 74.0           | 35.09       | Peak     | 0.00           | 100         | Horizontal | Pass    |
| 4** | 13847.500       | 29.67            | 7.37          | 54.0           | 24.33       | AV       | 0.00           | 100         | Horizontal | Pass    |
| 5   | 15096.001       | 42.56            | 10.41         | 74.0           | 31.44       | Peak     | 112.40         | 100         | Horizontal | Pass    |
| 5** | 15096.001       | 33.56            | 10.41         | 54.0           | 20.44       | AV       | 112.40         | 100         | Horizontal | Pass    |
| 6   | 17835.000       | 52.17            | 18.63         | 74.0           | 21.83       | Peak     | 167.10         | 100         | Horizontal | Pass    |
| 6** | 17835.000       | 42.00            | 18.63         | 54.0           | 12.00       | AV       | 167.10         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_13.55.39

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-7GHz RSE

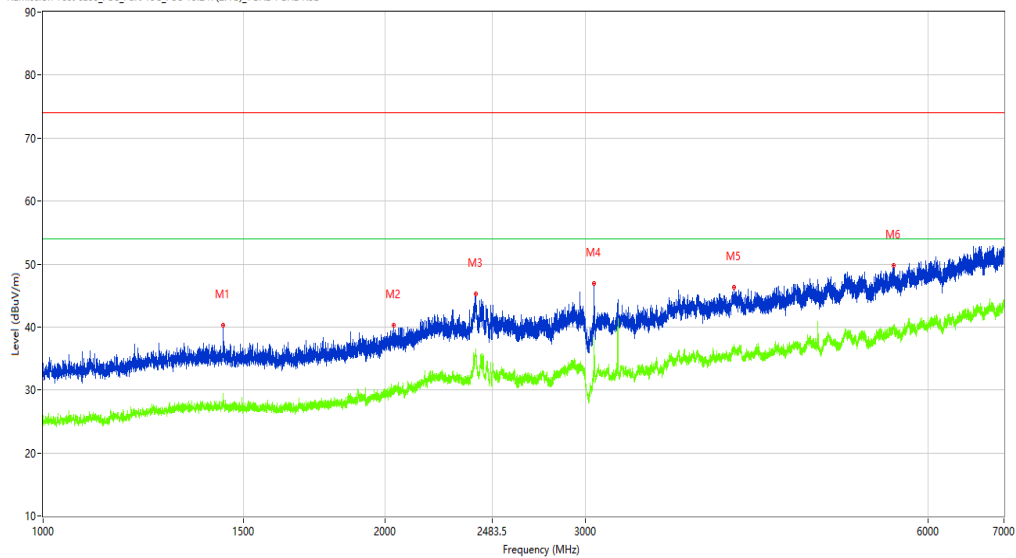

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1440.000        | 40.23            | -13.52        | 74.0           | 33.77       | Peak     | 159.70         | 100         | Vertical | Pass    |
| 1** | 1440.000        | 29.45            | -13.52        | 54.0           | 24.55       | AV       | 159.70         | 100         | Vertical | Pass    |
| 2   | 2035.000        | 40.27            | -10.91        | 74.0           | 33.73       | Peak     | 74.10          | 100         | Vertical | Pass    |
| 2** | 2035.000        | 30.10            | -10.91        | 54.0           | 23.90       | AV       | 74.10          | 100         | Vertical | Pass    |
| 3   | 2402.750        | 45.30            | -4.78         | 74.0           | 28.70       | Peak     | 74.10          | 100         | Vertical | Pass    |
| 3** | 2402.750        | 35.66            | -4.78         | 54.0           | 18.34       | AV       | 74.10          | 100         | Vertical | Pass    |
| 4   | 3050.000        | 46.86            | -4.72         | 74.0           | 27.14       | Peak     | 93.20          | 100         | Vertical | Pass    |
| 4** | 3050.000        | 38.33            | -4.72         | 54.0           | 15.67       | AV       | 93.20          | 100         | Vertical | Pass    |
| 5   | 4051.000        | 46.30            | -1.74         | 74.0           | 27.70       | Peak     | 288.60         | 100         | Vertical | Pass    |
| 5** | 4051.000        | 35.99            | -1.74         | 54.0           | 18.01       | AV       | 288.60         | 100         | Vertical | Pass    |
| 6   | 5599.000        | 49.75            | 1.16          | 74.0           | 24.25       | Peak     | 160.20         | 100         | Vertical | Pass    |
| 6** | 5599.000        | 39.85            | 1.16          | 54.0           | 14.15       | AV       | 160.20         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_09.47.58

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906


Work Addition: TX

Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

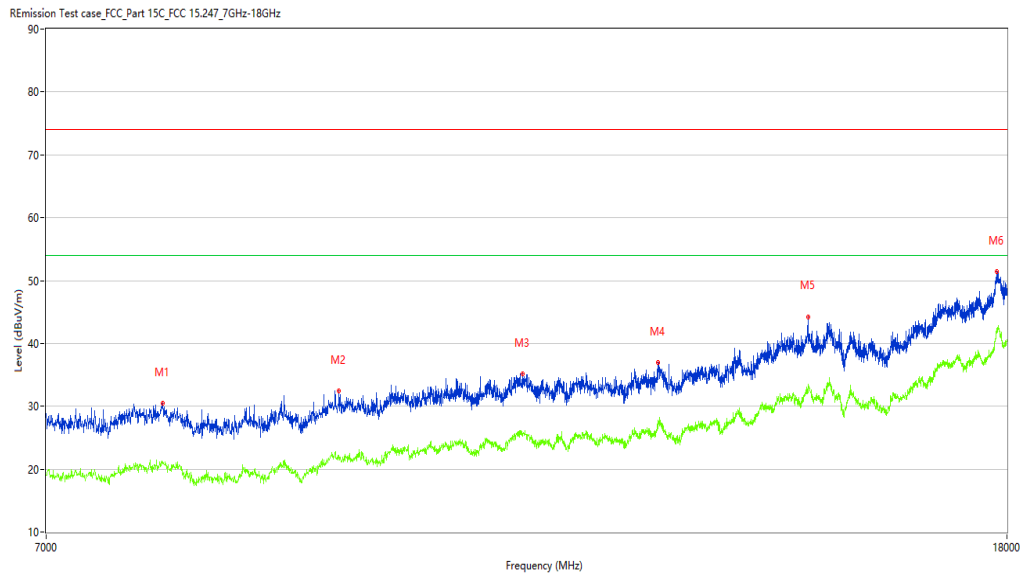

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 7847.000        | 30.50            | 0.97          | 74.0           | 43.50       | Peak     | 2.30           | 100         | Vertical | Pass    |
| 1** | 7847.000        | 21.12            | 0.97          | 54.0           | 32.88       | AV       | 2.30           | 100         | Vertical | Pass    |
| 2   | 9334.750        | 32.49            | 1.58          | 74.0           | 41.51       | Peak     | 179.00         | 100         | Vertical | Pass    |
| 2** | 9334.750        | 22.27            | 1.58          | 54.0           | 31.73       | AV       | 179.00         | 100         | Vertical | Pass    |
| 3   | 11182.750       | 35.18            | 3.81          | 74.0           | 38.82       | Peak     | 179.00         | 100         | Vertical | Pass    |
| 3** | 11182.750       | 25.66            | 3.81          | 54.0           | 28.34       | AV       | 179.00         | 100         | Vertical | Pass    |
| 4   | 12769.500       | 36.97            | 5.52          | 74.0           | 37.03       | Peak     | 247.60         | 100         | Vertical | Pass    |
| 4** | 12769.500       | 27.73            | 5.52          | 54.0           | 26.27       | AV       | 247.60         | 100         | Vertical | Pass    |
| 5   | 14804.500       | 44.26            | 11.83         | 74.0           | 29.74       | Peak     | 119.10         | 100         | Vertical | Pass    |
| 5** | 14804.500       | 33.35            | 11.83         | 54.0           | 20.65       | AV       | 119.10         | 100         | Vertical | Pass    |
| 6   | 17818.499       | 51.48            | 18.29         | 74.0           | 22.52       | Peak     | 247.60         | 100         | Vertical | Pass    |
| 6** | 17818.499       | 42.10            | 18.29         | 54.0           | 11.90       | AV       | 247.60         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_11.12.19

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-7GHz RSE

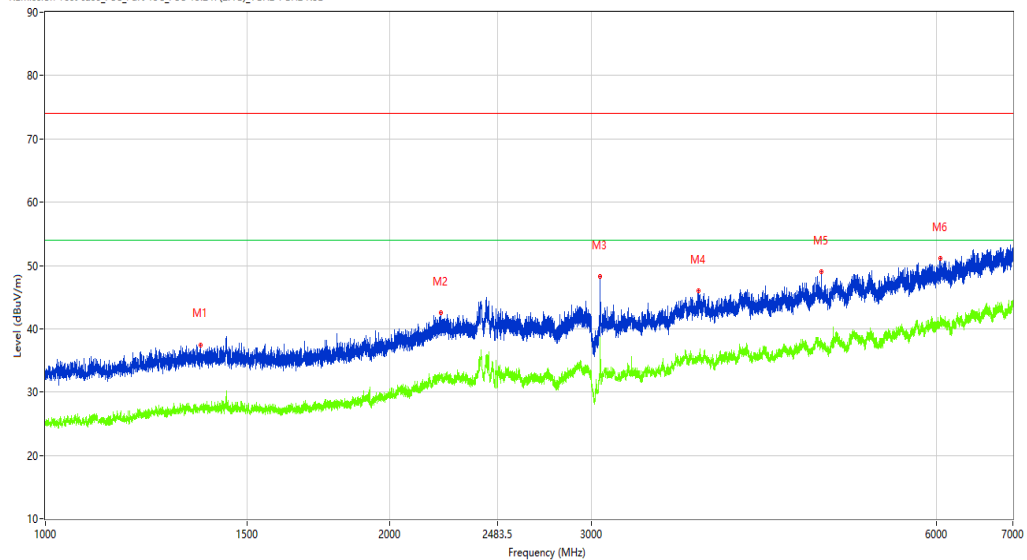

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1365.500        | 37.48            | -13.41        | 74.0           | 36.52       | Peak     | 160.10         | 100         | Horizontal | Pass    |
| 1** | 1365.500        | 27.65            | -13.41        | 54.0           | 26.35       | AV       | 160.10         | 100         | Horizontal | Pass    |
| 2   | 2216.750        | 42.54            | -8.51         | 74.0           | 31.46       | Peak     | 197.70         | 100         | Horizontal | Pass    |
| 2** | 2216.750        | 32.17            | -8.51         | 54.0           | 21.83       | AV       | 197.70         | 100         | Horizontal | Pass    |
| 3   | 3050.000        | 48.19            | -4.72         | 74.0           | 25.81       | Peak     | 270.40         | 100         | Horizontal | Pass    |
| 3** | 3050.000        | 38.55            | -4.72         | 54.0           | 15.45       | AV       | 270.40         | 100         | Horizontal | Pass    |
| 4   | 3722.000        | 45.95            | -2.62         | 74.0           | 28.05       | Peak     | 270.40         | 100         | Horizontal | Pass    |
| 4** | 3722.000        | 35.53            | -2.62         | 54.0           | 18.47       | AV       | 270.40         | 100         | Horizontal | Pass    |
| 5   | 4760.000        | 48.96            | -0.69         | 74.0           | 25.04       | Peak     | 262.20         | 100         | Horizontal | Pass    |
| 5** | 4760.000        | 37.63            | -0.69         | 54.0           | 16.37       | AV       | 262.20         | 100         | Horizontal | Pass    |
| 6   | 6048.000        | 51.13            | 1.96          | 74.0           | 22.87       | Peak     | 71.70          | 100         | Horizontal | Pass    |
| 6** | 6048.000        | 40.80            | 1.96          | 54.0           | 13.20       | AV       | 71.70          | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_09.54.09

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247.7GHz-18GHz

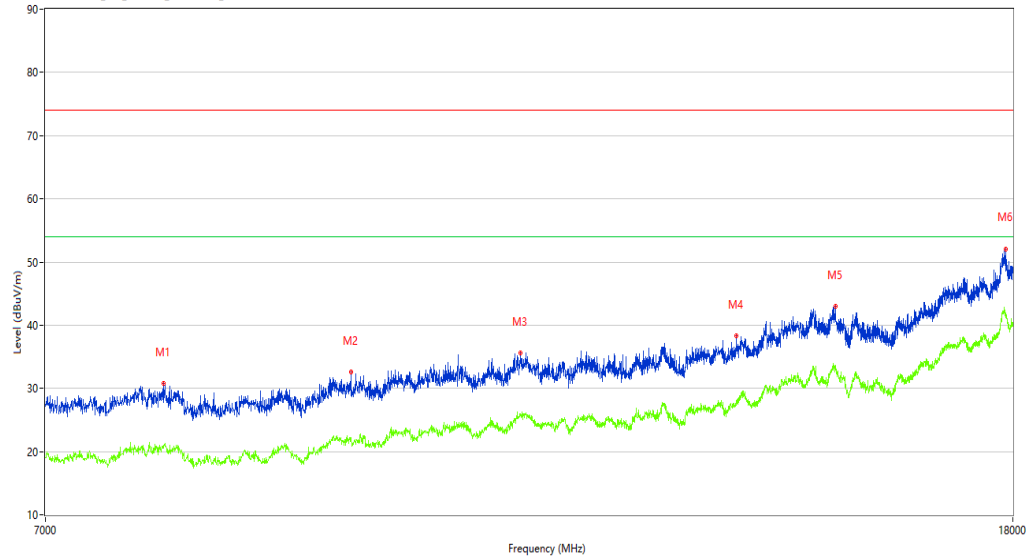

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 7855.250        | 30.82            | 1.03          | 74.0           | 43.18       | Peak     | 192.80         | 100         | Horizontal | Pass    |
| 1** | 7855.250        | 21.00            | 1.03          | 54.0           | 33.00       | AV       | 192.80         | 100         | Horizontal | Pass    |
| 2   | 9431.000        | 32.62            | 1.72          | 74.0           | 41.38       | Peak     | 360.00         | 100         | Horizontal | Pass    |
| 2** | 9431.000        | 21.93            | 1.72          | 54.0           | 32.07       | AV       | 360.00         | 100         | Horizontal | Pass    |
| 3   | 11133.250       | 35.61            | 4.03          | 74.0           | 38.39       | Peak     | 360.00         | 100         | Horizontal | Pass    |
| 3** | 11133.250       | 25.61            | 4.03          | 54.0           | 28.39       | AV       | 360.00         | 100         | Horizontal | Pass    |
| 4   | 13743.000       | 38.28            | 7.06          | 74.0           | 35.72       | Peak     | 135.90         | 100         | Horizontal | Pass    |
| 4** | 13743.000       | 27.64            | 7.06          | 54.0           | 26.36       | AV       | 135.90         | 100         | Horizontal | Pass    |
| 5   | 15140.000       | 43.01            | 9.18          | 74.0           | 30.99       | Peak     | 69.30          | 100         | Horizontal | Pass    |
| 5** | 15140.000       | 33.60            | 9.18          | 54.0           | 20.40       | AV       | 69.30          | 100         | Horizontal | Pass    |
| 6   | 17878.999       | 52.09            | 18.31         | 74.0           | 21.91       | Peak     | 135.90         | 100         | Horizontal | Pass    |
| 6** | 17878.999       | 41.81            | 18.31         | 54.0           | 12.19       | AV       | 135.90         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_13.52.10

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-7GHz RSE

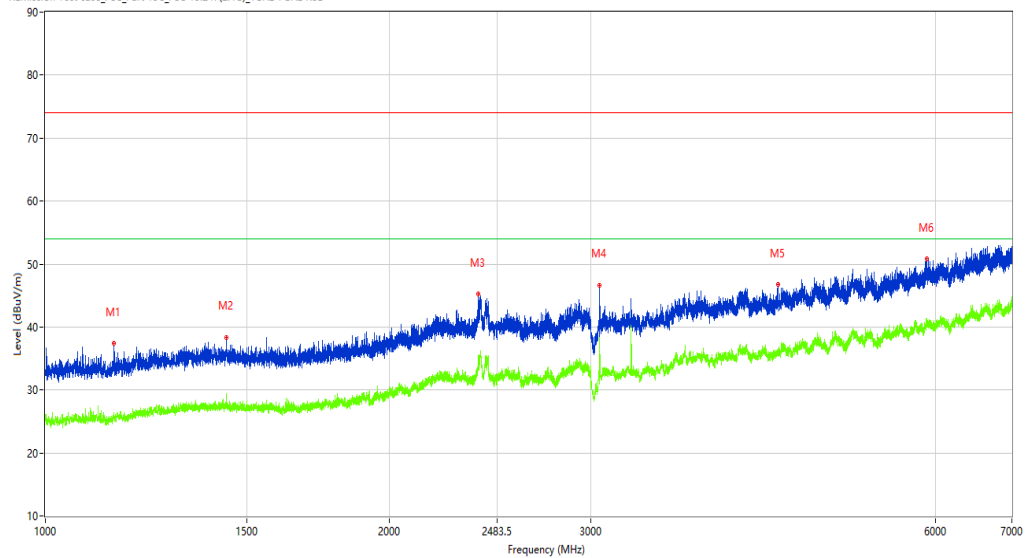

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1148.500        | 37.42            | -14.85        | 74.0           | 36.58       | Peak     | 47.00          | 100         | Vertical | Pass    |
| 1** | 1148.500        | 26.18            | -14.85        | 54.0           | 27.82       | AV       | 47.00          | 100         | Vertical | Pass    |
| 2   | 1439.000        | 38.38            | -13.52        | 74.0           | 35.62       | Peak     | 176.50         | 100         | Vertical | Pass    |
| 2** | 1439.000        | 28.10            | -13.52        | 54.0           | 25.90       | AV       | 176.50         | 100         | Vertical | Pass    |
| 3   | 2392.250        | 45.22            | -4.72         | 74.0           | 28.78       | Peak     | 0.00           | 100         | Vertical | Pass    |
| 3** | 2392.250        | 35.40            | -4.72         | 54.0           | 18.60       | AV       | 0.00           | 100         | Vertical | Pass    |
| 4   | 3050.000        | 46.66            | -4.72         | 74.0           | 27.34       | Peak     | 67.20          | 100         | Vertical | Pass    |
| 4** | 3050.000        | 38.33            | -4.72         | 54.0           | 15.67       | AV       | 67.20          | 100         | Vertical | Pass    |
| 5   | 4372.500        | 46.78            | -2.21         | 74.0           | 27.22       | Peak     | 191.10         | 100         | Vertical | Pass    |
| 5** | 4372.500        | 35.93            | -2.21         | 54.0           | 18.07       | AV       | 191.10         | 100         | Vertical | Pass    |
| 6   | 5898.000        | 50.84            | 1.41          | 74.0           | 23.16       | Peak     | 159.50         | 100         | Vertical | Pass    |
| 6** | 5898.000        | 41.32            | 1.41          | 54.0           | 12.68       | AV       | 159.50         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_09.49.35

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247\_7GHz-18GHz

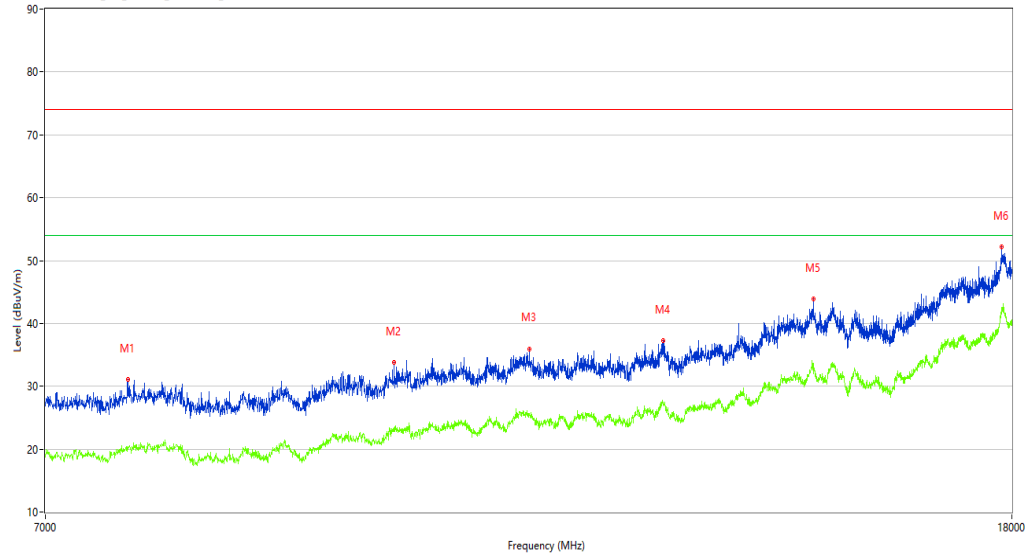

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 7591.250        | 31.03            | -0.02         | 74.0           | 42.97       | Peak     | 0.00           | 100         | Vertical | Pass    |
| 1** | 7591.250        | 20.28            | -0.02         | 54.0           | 33.72       | AV       | 0.00           | 100         | Vertical | Pass    |
| 2   | 9840.750        | 33.82            | 2.85          | 74.0           | 40.18       | Peak     | 170.50         | 100         | Vertical | Pass    |
| 2** | 9840.750        | 23.43            | 2.85          | 54.0           | 30.57       | AV       | 170.50         | 100         | Vertical | Pass    |
| 3   | 11232.250       | 35.97            | 4.13          | 74.0           | 38.03       | Peak     | 0.00           | 100         | Vertical | Pass    |
| 3** | 11232.250       | 25.70            | 4.13          | 54.0           | 28.30       | AV       | 0.00           | 100         | Vertical | Pass    |
| 4   | 12799.750       | 37.26            | 5.87          | 74.0           | 36.74       | Peak     | 288.00         | 100         | Vertical | Pass    |
| 4** | 12799.750       | 27.49            | 5.87          | 54.0           | 26.51       | AV       | 288.00         | 100         | Vertical | Pass    |
| 5   | 14826.500       | 43.87            | 11.45         | 74.0           | 30.13       | Peak     | 0.00           | 100         | Vertical | Pass    |
| 5** | 14826.500       | 33.65            | 11.45         | 54.0           | 20.35       | AV       | 0.00           | 100         | Vertical | Pass    |
| 6   | 17824.000       | 52.11            | 18.38         | 74.0           | 21.89       | Peak     | 288.00         | 100         | Vertical | Pass    |
| 6** | 17824.000       | 42.28            | 18.38         | 54.0           | 11.72       | AV       | 288.00         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_11.08.17

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-7GHz RSE

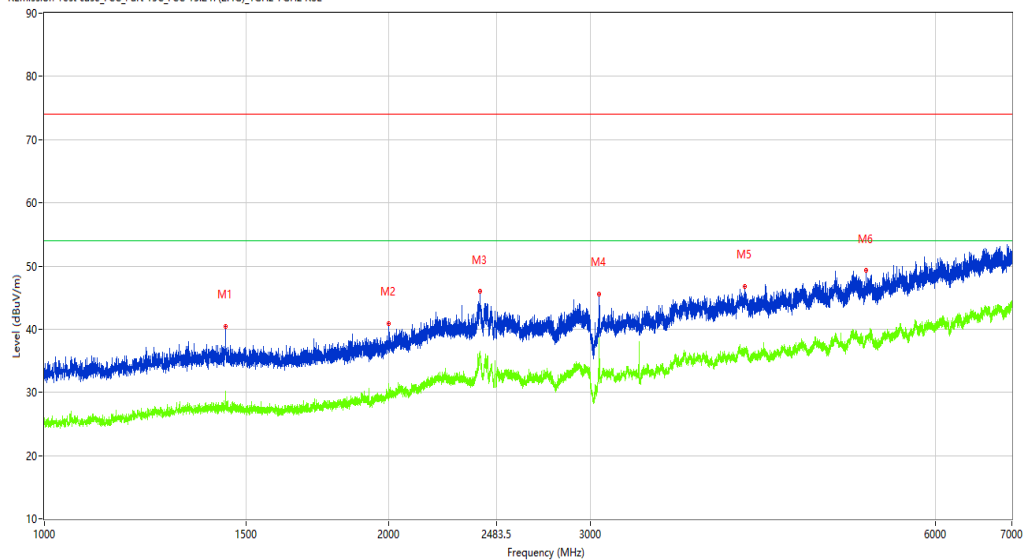

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1440.000        | 40.49            | -13.52        | 74.0           | 33.51       | Peak     | 3.00           | 100         | Horizontal | Pass    |
| 1** | 1440.000        | 30.24            | -13.52        | 54.0           | 23.76       | AV       | 3.00           | 100         | Horizontal | Pass    |
| 2   | 1998.000        | 40.95            | -11.68        | 74.0           | 33.05       | Peak     | 360.00         | 100         | Horizontal | Pass    |
| 2** | 1998.000        | 31.36            | -11.68        | 54.0           | 22.64       | AV       | 360.00         | 100         | Horizontal | Pass    |
| 3   | 2401.500        | 45.99            | -4.78         | 74.0           | 28.01       | Peak     | 17.50          | 100         | Horizontal | Pass    |
| 3** | 2401.500        | 36.04            | -4.78         | 54.0           | 17.96       | AV       | 17.50          | 100         | Horizontal | Pass    |
| 4   | 3050.000        | 45.61            | -4.72         | 74.0           | 28.39       | Peak     | 151.20         | 100         | Horizontal | Pass    |
| 4** | 3050.000        | 38.45            | -4.72         | 54.0           | 15.55       | AV       | 151.20         | 100         | Horizontal | Pass    |
| 5   | 4093.500        | 46.82            | -1.36         | 74.0           | 27.18       | Peak     | 58.60          | 100         | Horizontal | Pass    |
| 5** | 4093.500        | 36.14            | -1.36         | 54.0           | 17.86       | AV       | 58.60          | 100         | Horizontal | Pass    |
| 6   | 5218.500        | 49.28            | -0.11         | 74.0           | 24.72       | Peak     | 255.40         | 100         | Horizontal | Pass    |
| 6** | 5218.500        | 38.78            | -0.11         | 54.0           | 15.22       | AV       | 255.40         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_09.52.30

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906


Work Addition: TX

Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

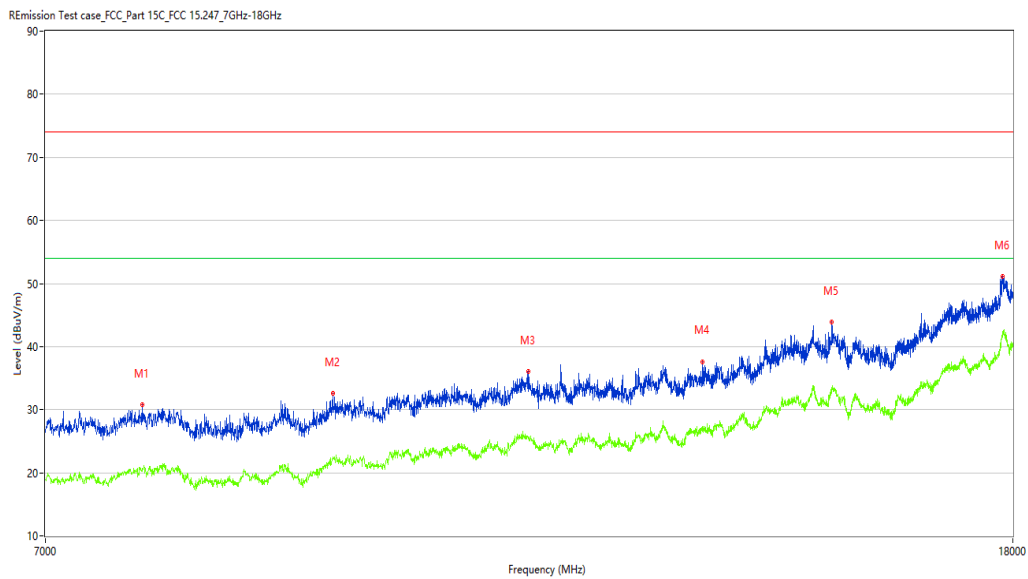

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 7693.000        | 30.77            | 0.90          | 74.0           | 43.23       | Peak     | 254.50         | 100         | Horizontal | Pass    |
| 1** | 7693.000        | 20.75            | 0.90          | 54.0           | 33.25       | AV       | 254.50         | 100         | Horizontal | Pass    |
| 2   | 9266.000        | 32.57            | 1.48          | 74.0           | 41.43       | Peak     | 254.50         | 100         | Horizontal | Pass    |
| 2** | 9266.000        | 22.47            | 1.48          | 54.0           | 31.53       | AV       | 254.50         | 100         | Horizontal | Pass    |
| 3   | 11215.750       | 36.03            | 4.18          | 74.0           | 37.97       | Peak     | 119.50         | 100         | Horizontal | Pass    |
| 3** | 11215.750       | 25.62            | 4.18          | 54.0           | 28.38       | AV       | 119.50         | 100         | Horizontal | Pass    |
| 4   | 13294.750       | 37.63            | 6.15          | 74.0           | 36.37       | Peak     | 0.00           | 100         | Horizontal | Pass    |
| 4** | 13294.750       | 27.35            | 6.15          | 54.0           | 26.65       | AV       | 0.00           | 100         | Horizontal | Pass    |
| 5   | 15082.250       | 43.88            | 10.53         | 74.0           | 30.12       | Peak     | 254.50         | 100         | Horizontal | Pass    |
| 5** | 15082.250       | 33.47            | 10.53         | 54.0           | 20.53       | AV       | 254.50         | 100         | Horizontal | Pass    |
| 6   | 17826.750       | 51.08            | 18.38         | 74.0           | 22.92       | Peak     | 360.00         | 100         | Horizontal | Pass    |
| 6** | 17826.750       | 42.41            | 18.38         | 54.0           | 11.59       | AV       | 360.00         | 100         | Horizontal | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_13.49.15

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_1GHz-7GHz RSE

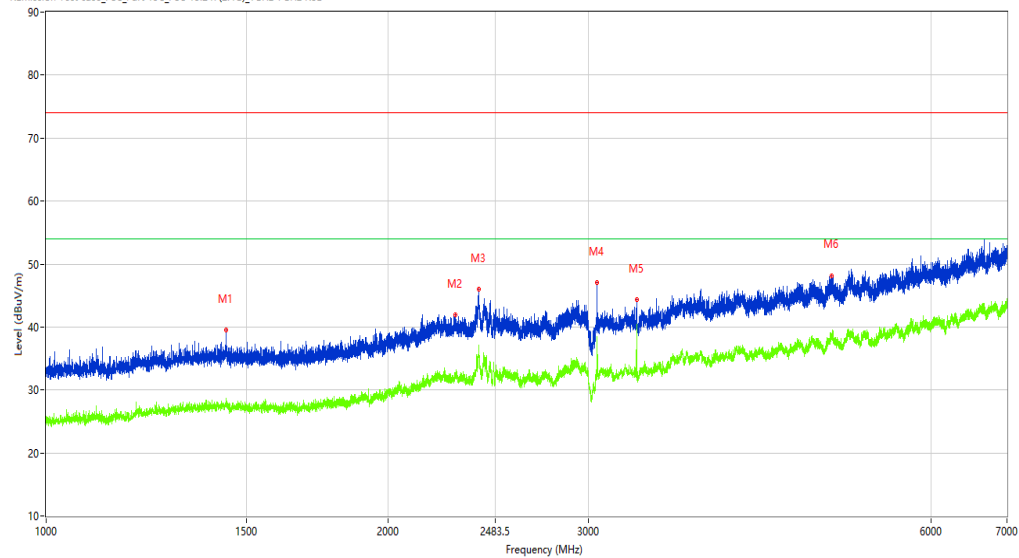

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1440.250        | 39.56            | -13.52        | 74.0           | 34.44       | Peak     | 150.40         | 100         | Vertical | Pass    |
| 1** | 1440.250        | 28.42            | -13.52        | 54.0           | 25.58       | AV       | 150.40         | 100         | Vertical | Pass    |
| 2   | 2290.750        | 41.95            | -8.44         | 74.0           | 32.05       | Peak     | 159.70         | 100         | Vertical | Pass    |
| 2** | 2290.750        | 32.61            | -8.44         | 54.0           | 21.39       | AV       | 159.70         | 100         | Vertical | Pass    |
| 3   | 2400.750        | 45.96            | -4.78         | 74.0           | 28.04       | Peak     | 360.00         | 100         | Vertical | Pass    |
| 3** | 2400.750        | 35.50            | -4.78         | 54.0           | 18.50       | AV       | 360.00         | 100         | Vertical | Pass    |
| 4   | 3050.000        | 47.07            | -4.72         | 74.0           | 26.93       | Peak     | 360.00         | 100         | Vertical | Pass    |
| 4** | 3050.000        | 38.53            | -4.72         | 54.0           | 15.47       | AV       | 360.00         | 100         | Vertical | Pass    |
| 5   | 3306.500        | 44.30            | -5.93         | 74.0           | 29.70       | Peak     | 301.30         | 100         | Vertical | Pass    |
| 5** | 3306.500        | 40.44            | -5.93         | 54.0           | 13.56       | AV       | 301.30         | 100         | Vertical | Pass    |
| 6   | 4905.500        | 48.17            | -0.01         | 74.0           | 25.83       | Peak     | 360.00         | 100         | Vertical | Pass    |
| 6** | 4905.500        | 38.87            | -0.01         | 54.0           | 15.13       | AV       | 360.00         | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_09.51.08

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906


Work Addition: TX

Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

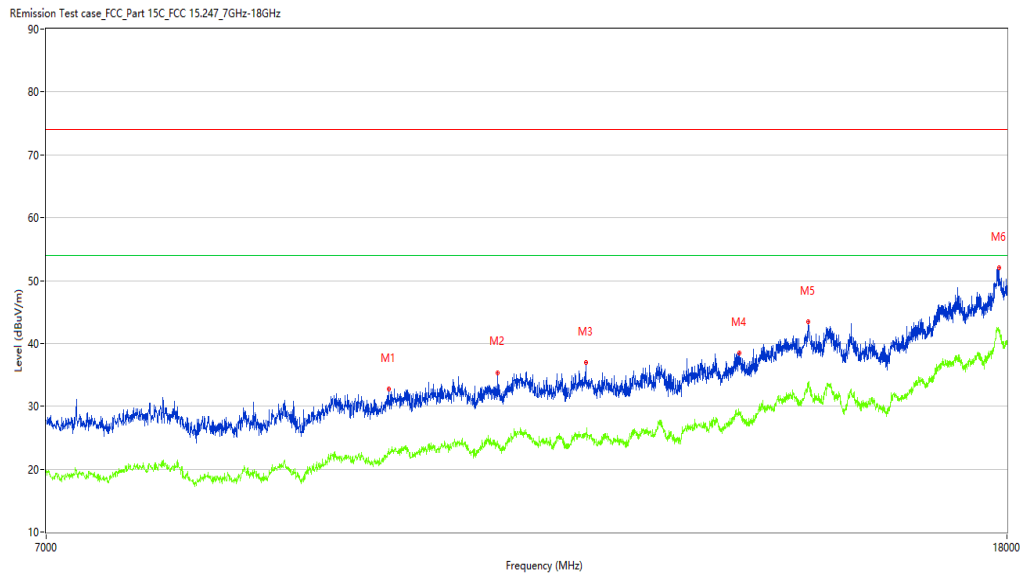

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 9802.250        | 32.75            | 3.22          | 74.0           | 41.25       | Peak     | 360.00         | 100         | Vertical | Pass    |
| 1** | 9802.250        | 23.25            | 3.22          | 54.0           | 30.75       | AV       | 360.00         | 100         | Vertical | Pass    |
| 2   | 10913.250       | 35.37            | 4.15          | 74.0           | 38.63       | Peak     | 107.20         | 100         | Vertical | Pass    |
| 2** | 10913.250       | 24.41            | 4.15          | 54.0           | 29.59       | AV       | 107.20         | 100         | Vertical | Pass    |
| 3   | 11900.500       | 36.98            | 4.43          | 74.0           | 37.02       | Peak     | 0.20           | 100         | Vertical | Pass    |
| 3** | 11900.500       | 25.52            | 4.43          | 54.0           | 28.48       | AV       | 0.20           | 100         | Vertical | Pass    |
| 4   | 13836.500       | 38.47            | 7.54          | 74.0           | 35.53       | Peak     | 183.90         | 100         | Vertical | Pass    |
| 4** | 13836.500       | 29.03            | 7.54          | 54.0           | 24.97       | AV       | 183.90         | 100         | Vertical | Pass    |
| 5   | 14810.000       | 43.43            | 11.98         | 74.0           | 30.57       | Peak     | 360.00         | 100         | Vertical | Pass    |
| 5** | 14810.000       | 33.66            | 11.98         | 54.0           | 20.34       | AV       | 360.00         | 100         | Vertical | Pass    |
| 6   | 17856.999       | 52.04            | 18.58         | 74.0           | 21.96       | Peak     | 51.40          | 100         | Vertical | Pass    |
| 6** | 17856.999       | 42.19            | 18.58         | 54.0           | 11.81       | AV       | 51.40          | 100         | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_11.02.10

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_bandedge 2400

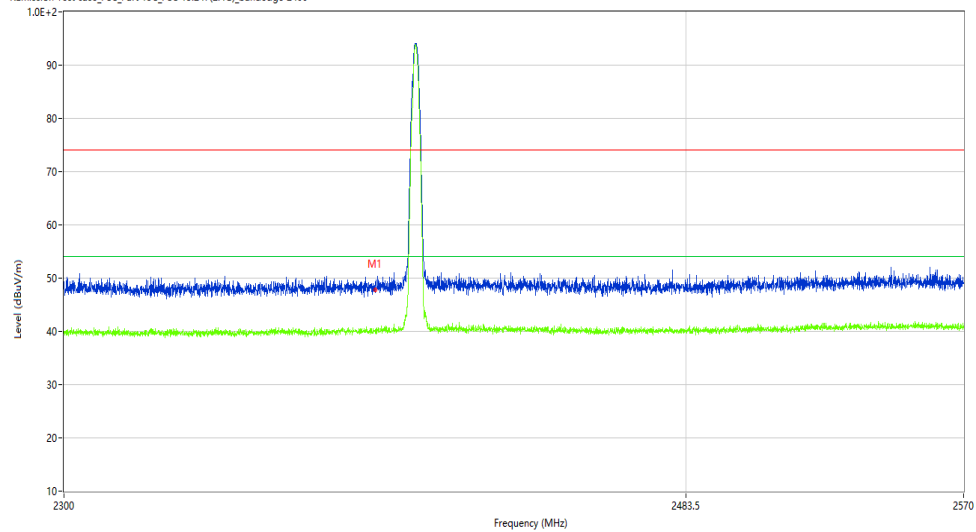

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 47.95            | -10.58        | 74.0           | 26.05       | Peak     | 112.76         | 100         | H       | Pass    |
| 1** | 2390.000        | 40.22            | -10.58        | 54.0           | 13.78       | AV       | 112.76         | 100         | H       | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_13.46.15

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(Z.4G)\_bandedge 2400

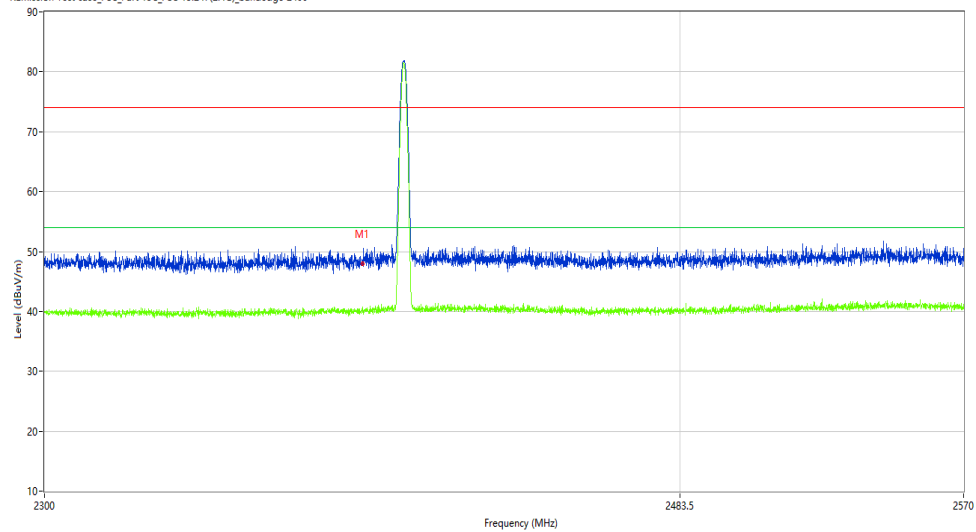

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|---------|---------|
| 1   | 2390.000        | 48.16            | -10.58        | 74.0           | 25.84       | Peak     | 56.36          | 100         | V       | Pass    |
| 1** | 2390.000        | 40.15            | -10.58        | 54.0           | 13.85       | AV       | 56.36          | 100         | V       | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_11.06.10

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(Z.4G)\_bandedge 2400

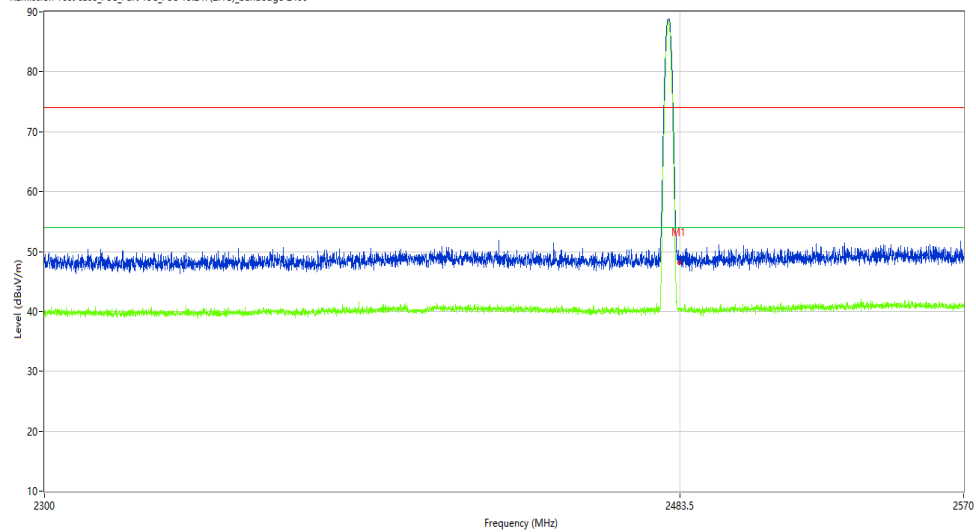

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 48.18            | -10.56        | 74.0           | 25.82       | Peak     | 172.28         | 100         | H       | Pass    |
| 1** | 2483.500        | 40.21            | -10.56        | 54.0           | 13.79       | AV       | 172.28         | 100         | H       | Pass    |

# Test result

Project Number: Certification

Test Time: 2026-04-27\_13.47.44

EUT Name: PETKIT PUROBOT MAX 3  
SELF-CLEANING CAT LITTER BOX

Test Engineer: SDC

Manufacturer: PETKIT

Test Standard: FCC

Model: P9906

Work Addition: TX


Temp.(oC): 19.5

Load: Full load

Hum.: 50%

Remark: DR-RSE01-E26040056-01#02

REmission Test case\_FCC\_Part 15C\_FCC 15.247(2.4G)\_bandedge 2400

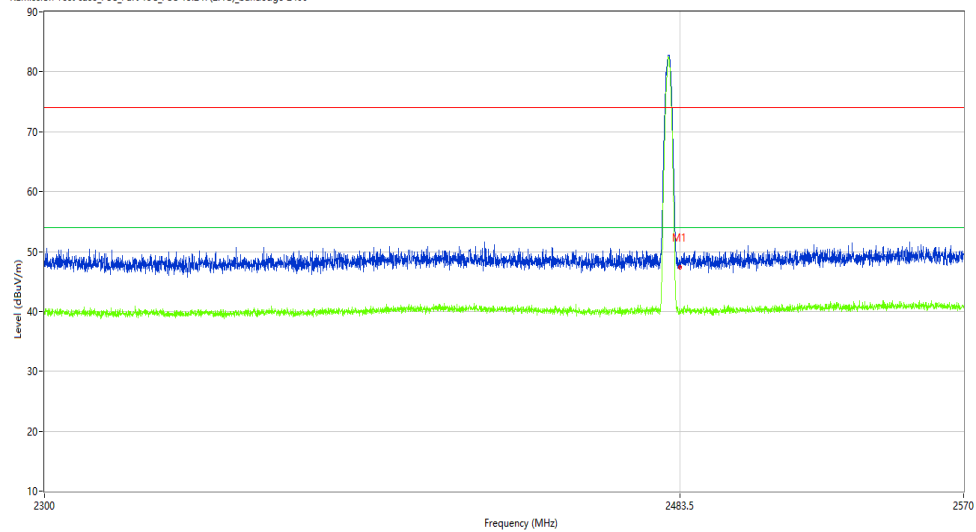

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB/m) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna | Verdict |
|-----|-----------------|------------------|---------------|----------------|-------------|----------|----------------|-------------|---------|---------|
| 1   | 2483.500        | 46.87            | -10.56        | 74.0           | 27.13       | Peak     | 360.00         | 100         | V       | Pass    |
| 1** | 2483.500        | 39.54            | -10.56        | 54.0           | 14.46       | AV       | 360.00         | 100         | V       | Pass    |