

MT009S08LH/C

902 - 928 MHz 8.5 dBic LHCP Reader Antenna



Wireless Edge

Antenna Solutions

An MTI Company

Electrical

Regulatory Compliance	RoHS, CE 0682
Frequency	902-928 MHz
Gain	8.0 ± 0.5 dBic Linear Gain 6.5 dBi max
VSWR	1.3:1 typ, 1.5:1 max
3 dB Beam Width	Azimuth: 65° typ Elevation: 65° typ
Polarization	LHCP Left Hand Circular Polarization
Axial Ratio	2 dB typ 4 dB max
F/B Ratio	18 dB typ
Input Power	6 W max
Impedance	50 Ω

Mechanical

Dimensions	260.5 x 260.5 x 13
Weight	0.55 kg max
Interface	SMA Female

Environmental

Test	Standard	Duration	Temperature	Notes
Low Temperature	IEC 68-2-1	72 h	-30 °C	
High Temperature	IEC 68-2-2	72 h	+75 °C	
Temp. Cycling	IEC 68-2-14	1 h	-45 °C +70 °C	3 Cycles
Vibration	IEC 60721-3-4	30 min/axis		Random 4M3
Shock Mechanical	IEC 60721-3-4			4M3
Humidity	ETSI EN300-2-4 T4.1E	144 h		95%
Water Tightness	IEC 529			IP54
Wind Load Survival:				17.8 kg
Front Thrust				1.4 kg
Side Thrust				

This document and the information contained in it are proprietary and confidential to MTI. No person is allowed to copy reprint reproduce or publish any part of this document nor disclose its contents to others nor make any use of it nor allow or assist others to make any use of it, unless by the prior written express authorization of MTI and then only to the extent authorized.

11 Hamelacha st. Afek Industrial Park, Rosh-Ha'Ayin 4809121 | Tel. +972.3.9008900 | Fax. +972.3.9008901

902 - 928 MHz 8.5 dBic LHCP Reader Antenna




Wireless Edge


Antenna Solutions

An MCI Company

Azimuth Radiation Pattern (2D):

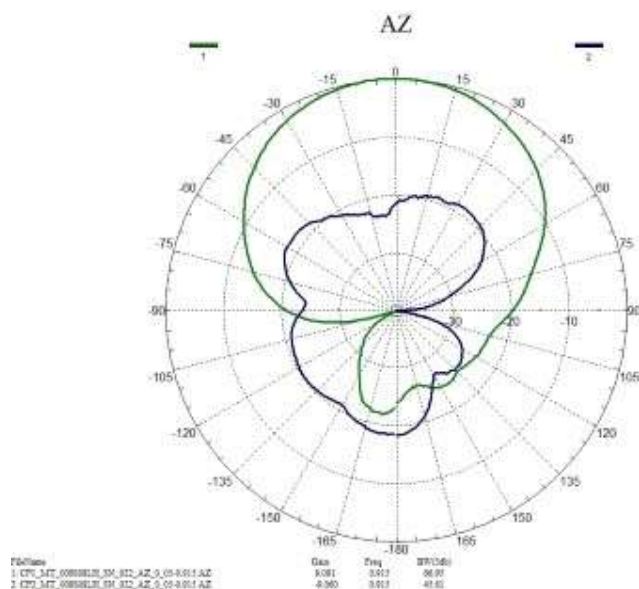

Elevation Radiation Pattern (2D):

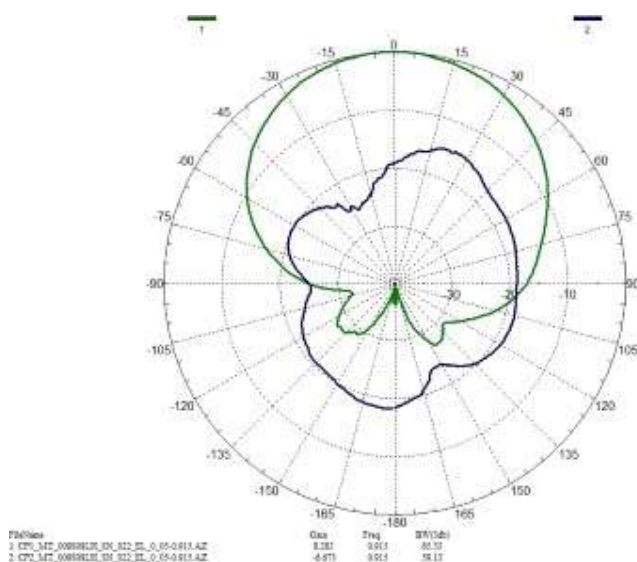

This document and the information contained in it are proprietary and confidential to MTI. No person is allowed to copy reprint reproduce or publish any part of this document nor disclose its contents to others nor make any use of it nor allow or assist others to make any use of it, unless by the prior written express authorization of MTI and then only to the extent authorized.

11 Hamelacha st. Afek Industrial Park, Rosh-Ha'Ayin 4809121 | Tel. +972.3.9008900 | Fax. +972.3.9008901