
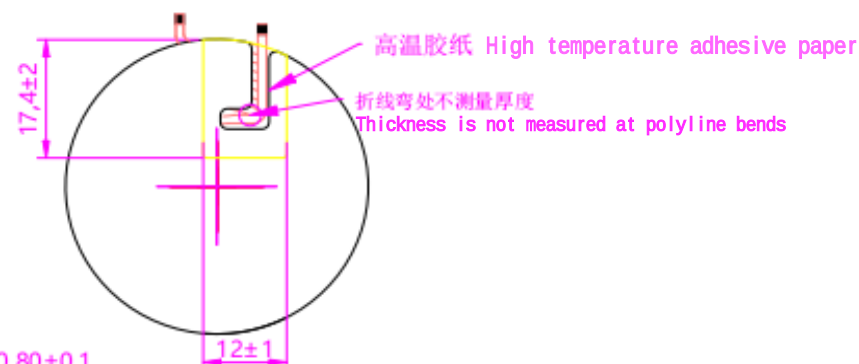


	文件名称 file name	文件编号 document number	PWS001
	样品承认书	版本/Rev.	A1
		页码/page	共 5 页
SAMPLE SPECIFICATION FOR APPROVAL			
物料名称 Part Name	WPC-W-P-TX-CF-032 无线充电发射线圈		
PWS料号 Part Number			
供应商料号 Supplier material number	WPC-W-P-TX-CF-032		
(供应商)猪草微 (深圳) 电子有限公司 (Supplier) Powerweed Electronic Co., Ltd			
制作 (prepared by)	审核 (Checked)	核准 (签章) (Approved)	
唐振宇	/	聂伙强	
(客户) 长芽科技 (深圳) 有限公司 (Customer) Acenew technolongy(Shenzhen) limited company			
承认 (PM) Admit (PM)	审核 (研发) Checked (RD)	审核 (品质) Checked (QA)	核准 (Approved)

Reversion	Engineering Change Description	Date	Owner
A0	正式发行 Official release	2020/11/17	MZY
A1	修改左边出线长度 Modify the length of the left exit	2021/04/08	MZY

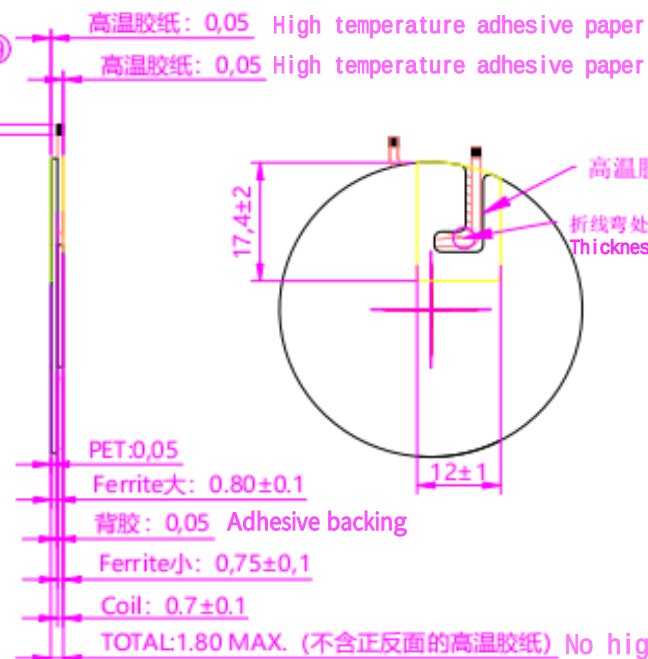


COIL+FERRITE Ls : 6.7uH ±5%
DCR: 55mΩ MAX.
Q: >60

SELECT	V				CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE					
SPEC. CLASS	A	B	C	D		DRAWING	MZV	SIZE	A4	WPC-W-P-TX-CF-032
4-8mm	0.05	0.1	0.1	0.2						
8-25mm	0.08	0.15	0.15	0.3		DESIGNED	Ricky			
25-80mm	0.12	0.2	0.25	0.4						
80-125mm	0.25	0.3	0.4	0.5		APPROVED	Youqing.He			
ANGLE	0.5									
MATERIAL:	SEE NOTE				 3RD ANGLE	PART No.: 180080400202		DWG.No.: MTS100041050		
FINISH:	SEE NOTE					UNIT	MM	SCALE:	1 : 1	SHEET 1 OF 1

样品检验报告		Document number/文件编号：PWS001						
		F. A. Inspection Report						
Client./客户：		Part Name./品名：WPC-W-P-TX-CF-032						
Part No./品号：		Date./日期：2020.10.29						
Visual Inspection/外观检查								
ITEM/ 检查项目	SPECIFICATION/ 规格	Check Data /检验结果					Judge/ 判定	Inspection Equipment 检验设备
		No. 1	No. 2	No. 3	No. 4	No. 5		
logo/标识	clear/清晰	OK	OK	OK	OK	OK	✓	目视/visual
protection/防护	good/良好	OK	OK	OK	OK	OK	✓	目视/visual
other/其它	OK	OK	OK	OK	OK	OK	✓	目视/visual
RELATIVE SPEC/相关尺寸								
ITEM/ 检查项目	SPECIFICATION/ 规格	Check Data /检验结果					Judge/ 判定	Inspection Equipment 检验设备
		No. 1	No. 2	No. 3	No. 4	No. 5		
①	42±0.5mm	41.98	42.14	42.1	42.13	42.1	✓	卡尺/caliper
②	21.5±0.5mm	21.36	21.28	21.32	21.26	21.33	✓	卡尺/caliper
③	43.5±0.5mm	43.33	43.34	43.36	43.3	43.34	✓	卡尺/caliper
④	18±0.5mm	17.86	17.85	17.95	17.81	17.88	✓	卡尺/caliper
⑤	8.49±0.3mm	8.53	8.62	8.44	8.51	8.55	✓	卡尺/caliper
⑥	3.0±0.3mm	2.98	2.99	2.97	2.98	2.99	✓	卡尺/caliper
⑦	2.5±0.3mm	2.53	2.55	2.52	2.55	2.53	✓	卡尺/caliper
⑧	4.0±0.5 mm	3.74	3.66	3.62	3.77	3.75	✓	卡尺/caliper
铁氧体到线头 Ferrite to thrum	4.5±0.5 mm	4.48	4.36	4.42	4.37	4.65	✓	卡尺/caliper
⑨	2.0 mm Max	1.2	1.14	1.22	1.32	1.1	✓	卡尺/caliper
线头呈外八型 Thrum	12~14mm	12.35	11.87	12.36	13.68	12.69	✓	卡尺/caliper
⑩	1.8 mm Max	1.76	1.77	1.76	1.76	1.77	✓	卡尺/caliper
CHARACTERISTIC/特性								
ITEM/ 检查项目	SPECIFICATION/ 规格	Check Data /检验结果					Judge/ 判定	Inspection Equipment 检验设备
		No. 1	No. 2	No. 3	No. 4	No. 5		
Inductance/电感 @ 100KHz/1V	6.7±5%uH	6.7	6.69	6.72	6.7	6.77	✓	1062A
DCR @ 20℃ 100KHz/1V	55mΩ Max	47.19	47.09	47.43	47.86	47.32	✓	DC resistance tester
Q值	60 Min	72.1	71.75	72.33	71.87	72.07		1062A
Others Item/其他项目								
ITEM/ 检查项目	SPECIFICATION/ 规格	Check Data /检验结果					Judge/ 判定	Inspection Equipment 检验设备
		No. 1	No. 2	No. 3	No. 4	No. 5		
REMARK/备注：								
DRAWING/图面： 有 ☒ 无 ☐								
ENVIRONMENT DOC./环保资料： 有 ☒ 无 ☐								
Result Judge/结果判定： OK/合格 ☒ NG/不合格 ☐								
生产/Production： 邓维华 工程/Eng.： 成浩 品保/QA： 彭云								

样品 sample

品名/ product name WPC-W-P-TX-CF-032

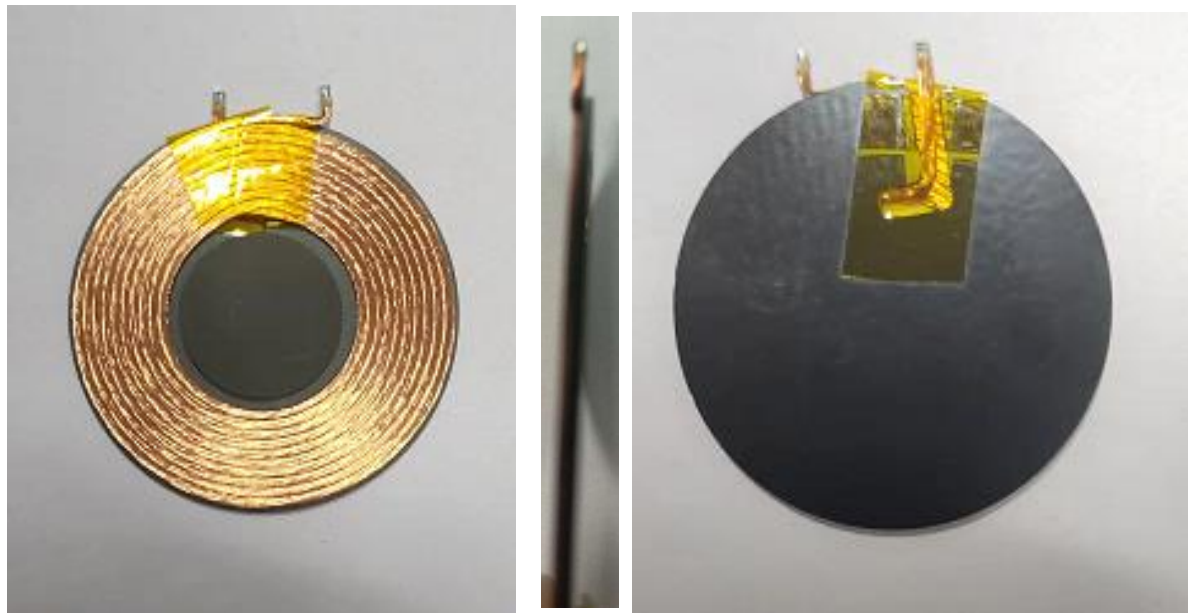

尺寸确认/Size:

备 注Remark

外观确认/Appearance:

备 注Remark

颜色确认/Color:

备 注Remark