



Duty Cycle


Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	92.01	0.36	0.48
NVNT	BLE 1M	2440	88.01	0.55	0.48
NVNT	BLE 1M	2480	88.01	0.55	0.48
NVNT	BLE 2M	2402	96.00	0.18	0.43
NVNT	BLE 2M	2440	96.00	0.18	0.43
NVNT	BLE 2M	2480	96.00	0.18	0.91


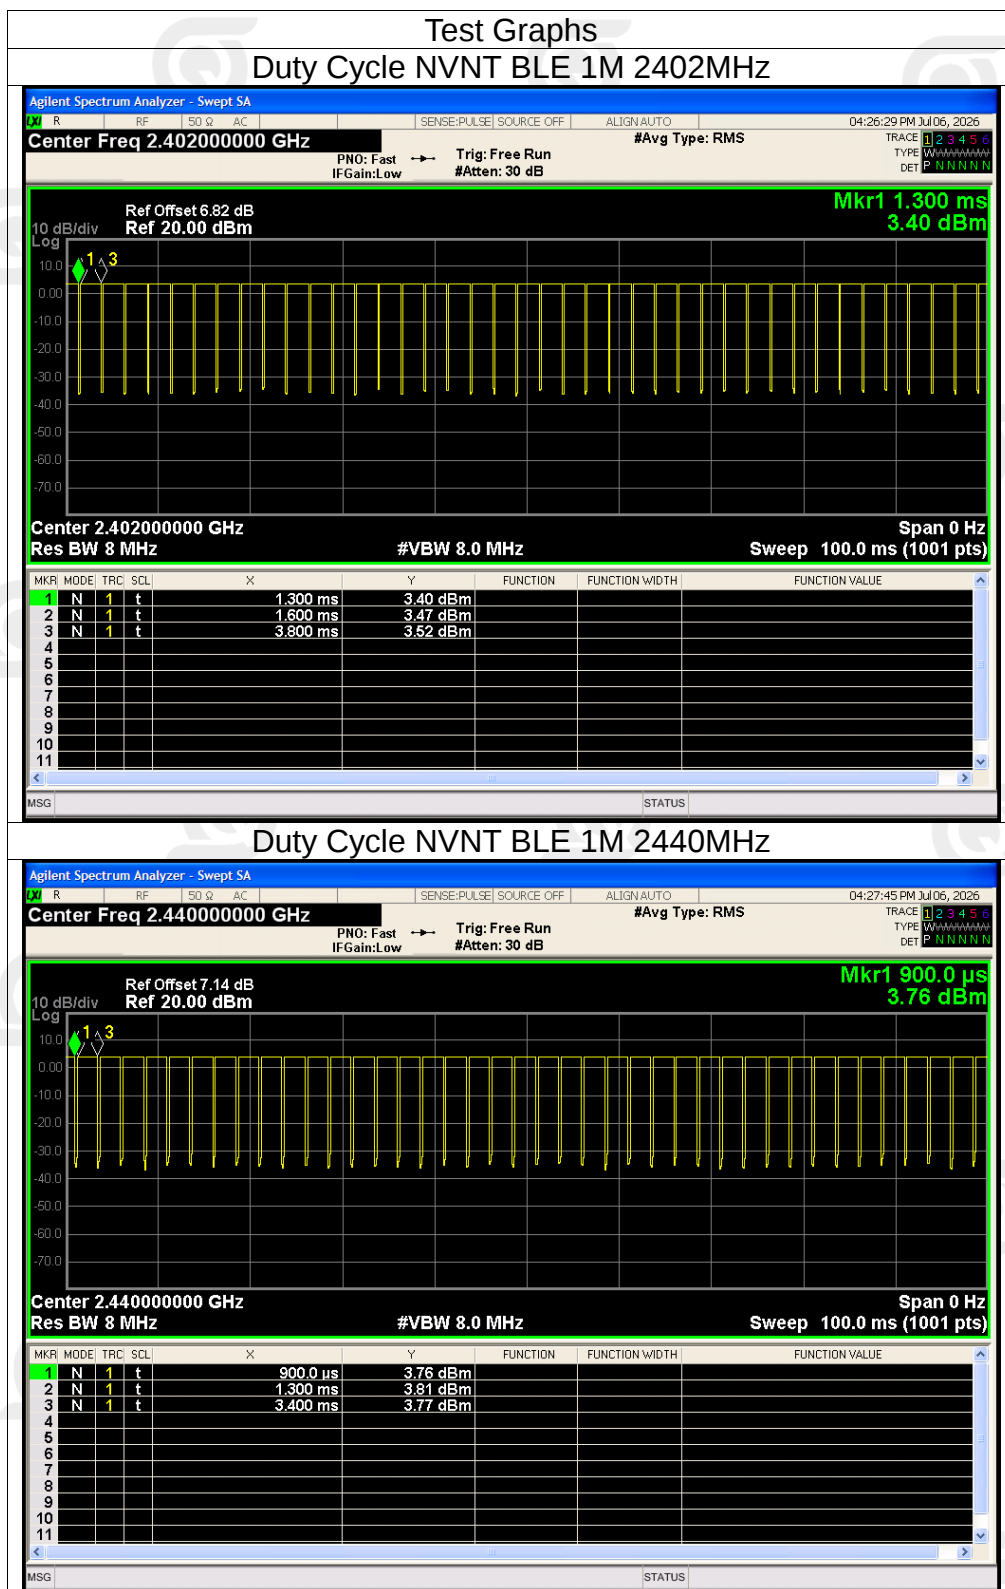


Duty Cycle NVNT BLE 1M 2480MHz

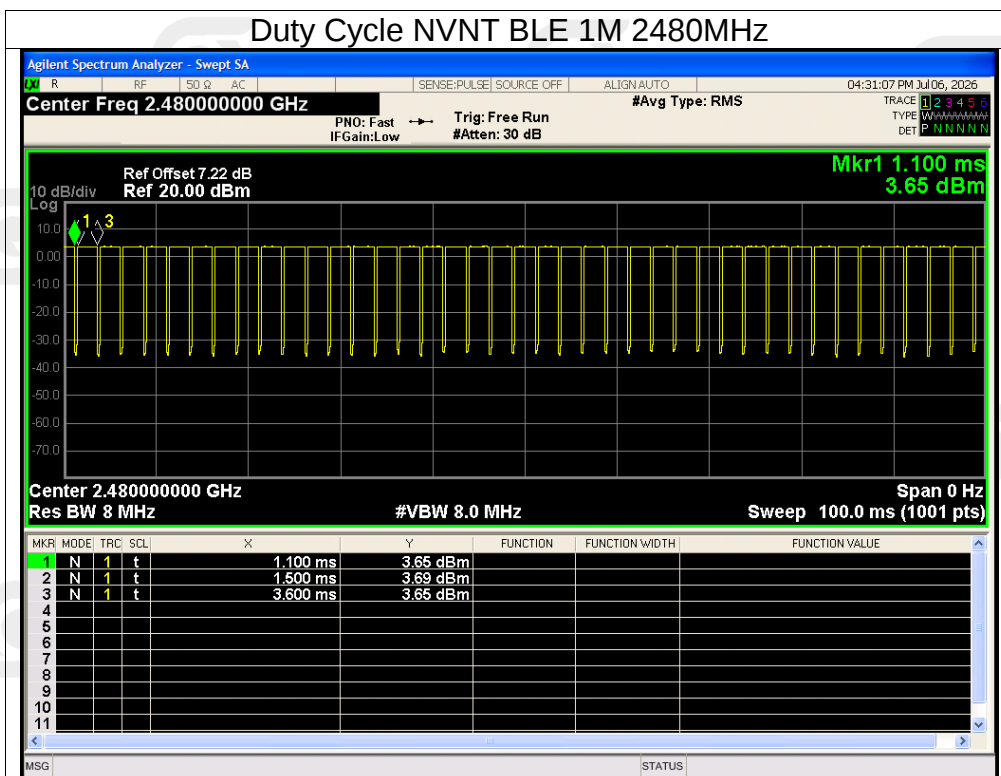


Duty Cycle NVNT BLE 2M 2402MHz


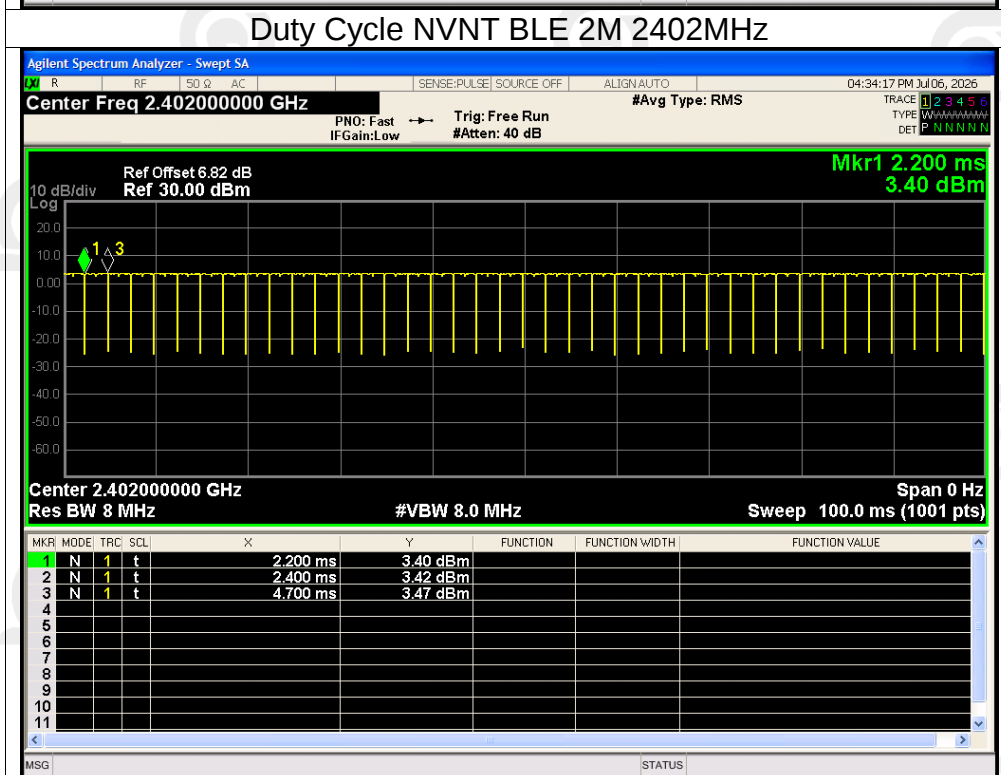


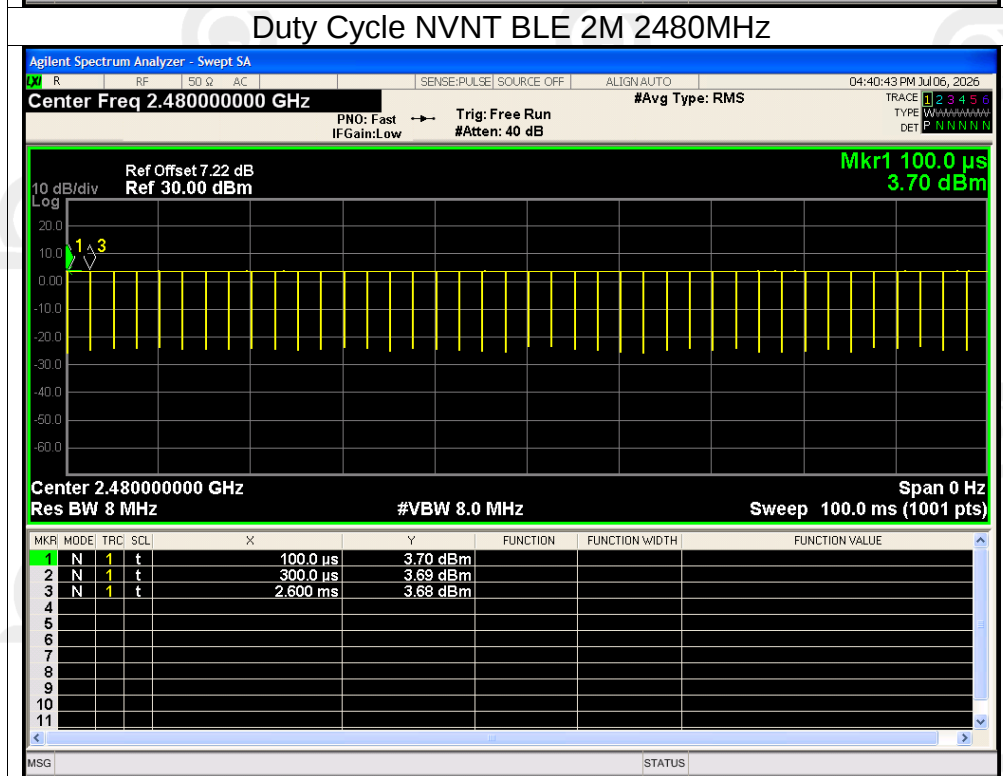
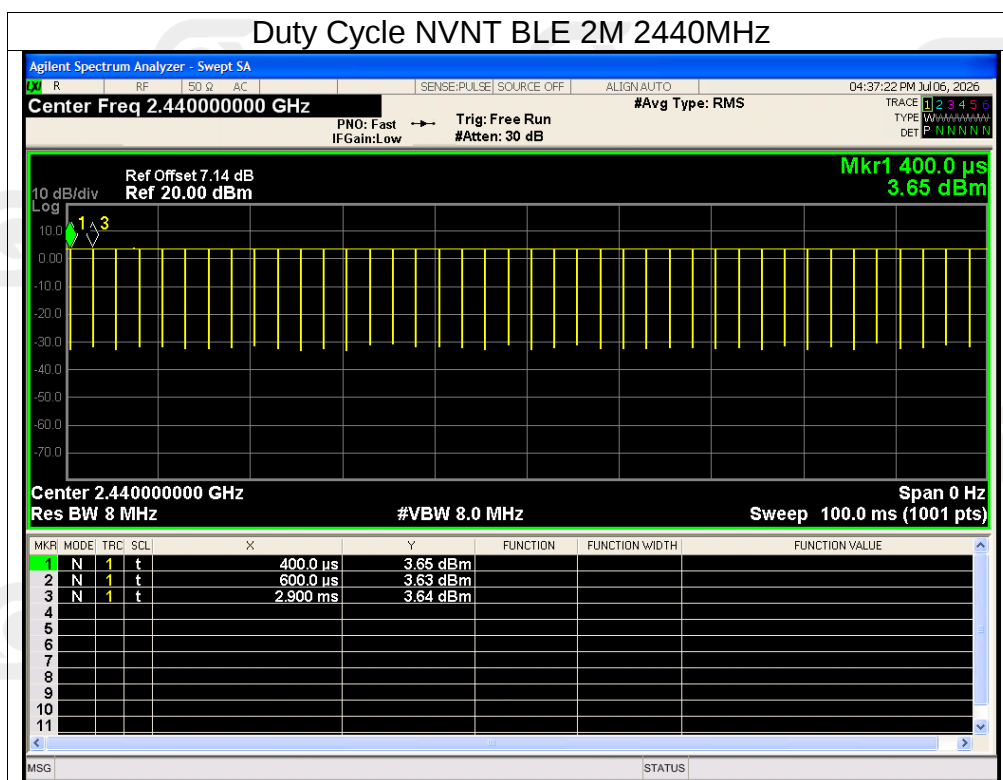


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	3.46	30	Pass
NVNT	BLE 1M	2440	3.79	30	Pass
NVNT	BLE 1M	2480	3.71	30	Pass
NVNT	BLE 2M	2402	3.29	30	Pass
NVNT	BLE 2M	2440	3.58	30	Pass
NVNT	BLE 2M	2480	3.57	30	Pass

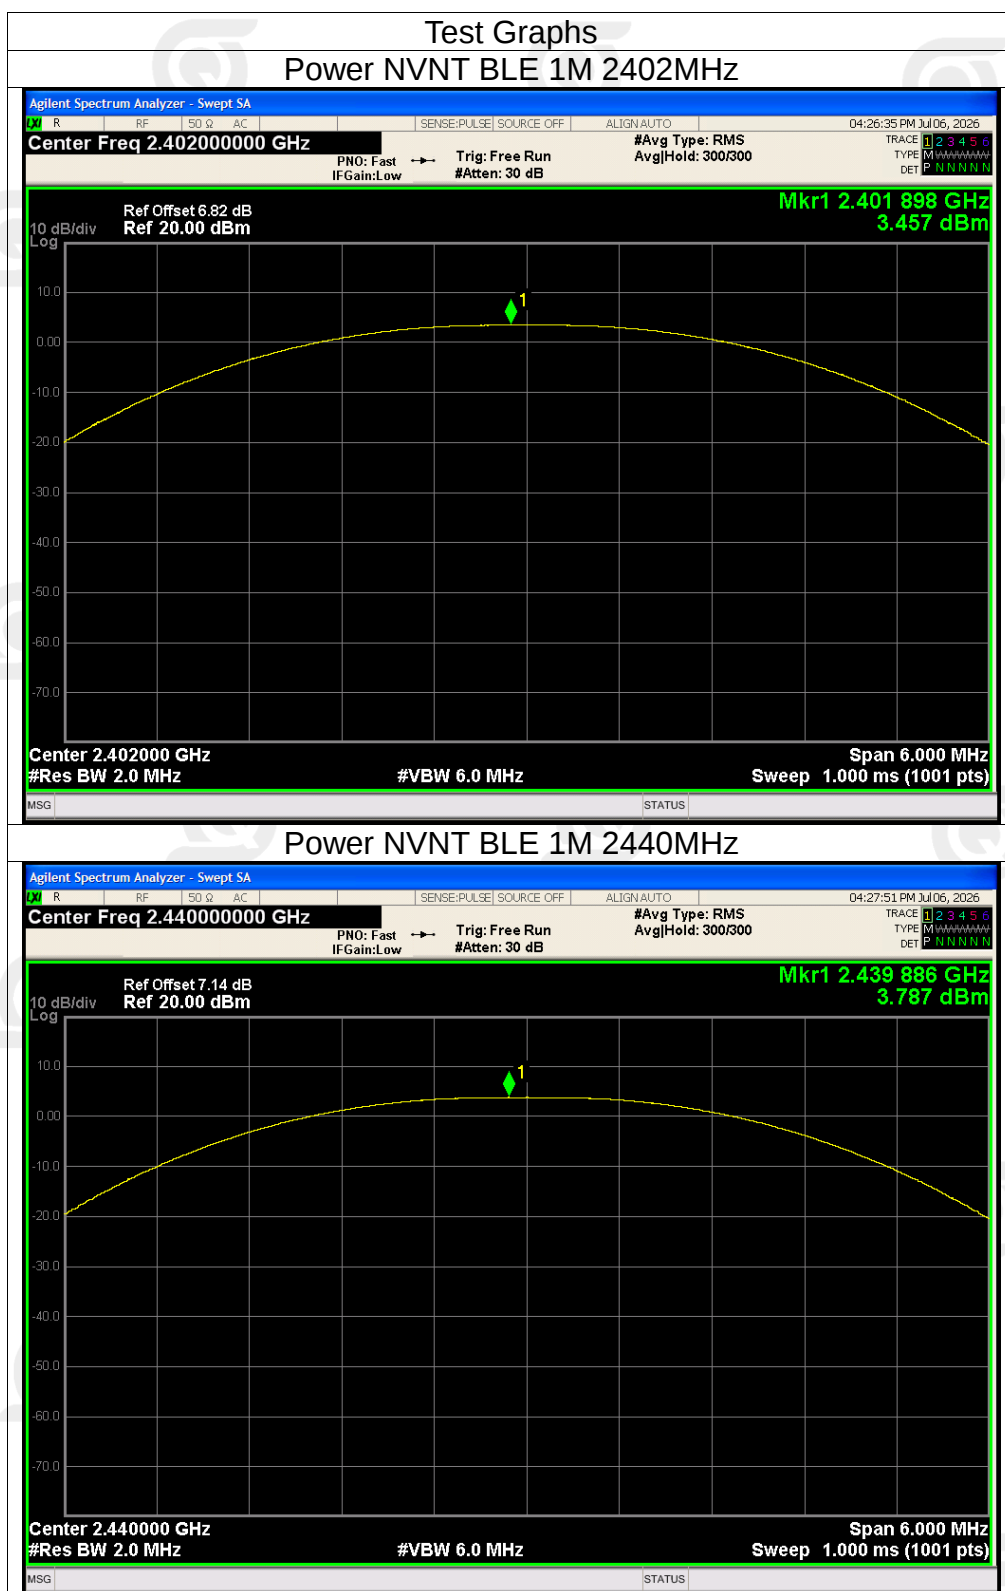

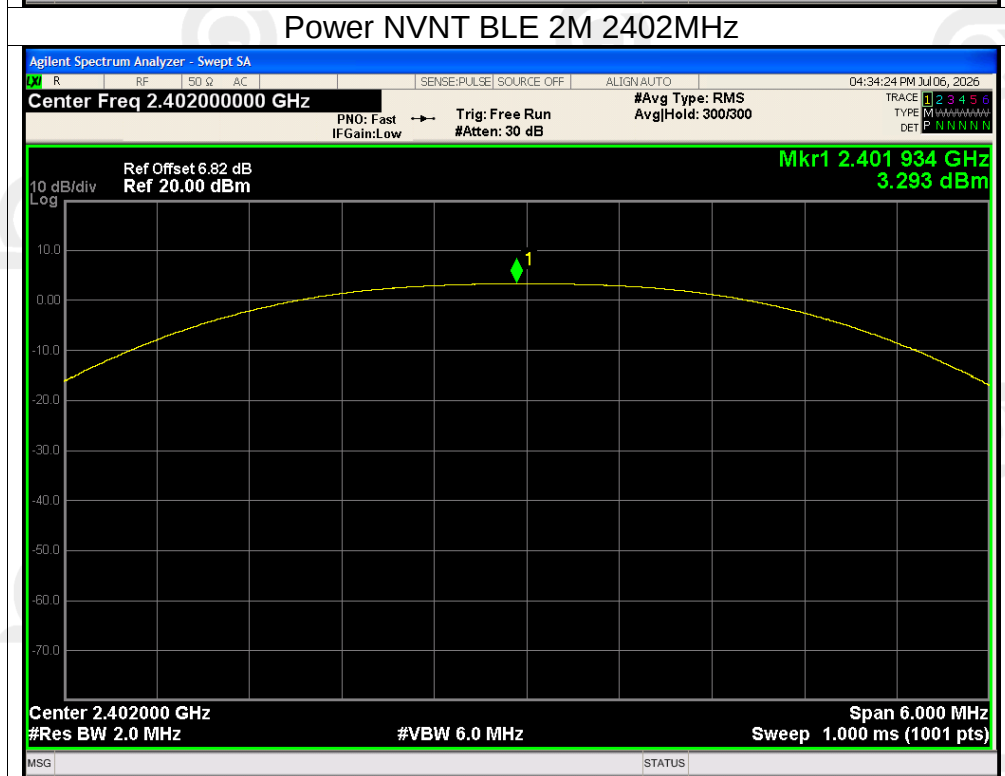
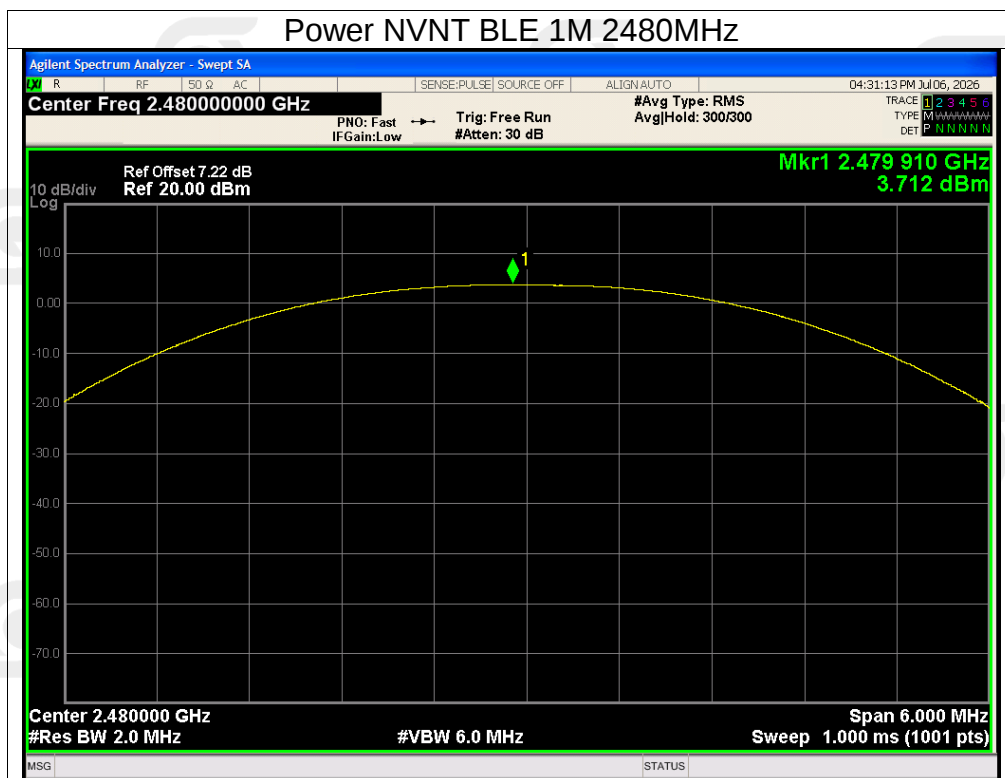


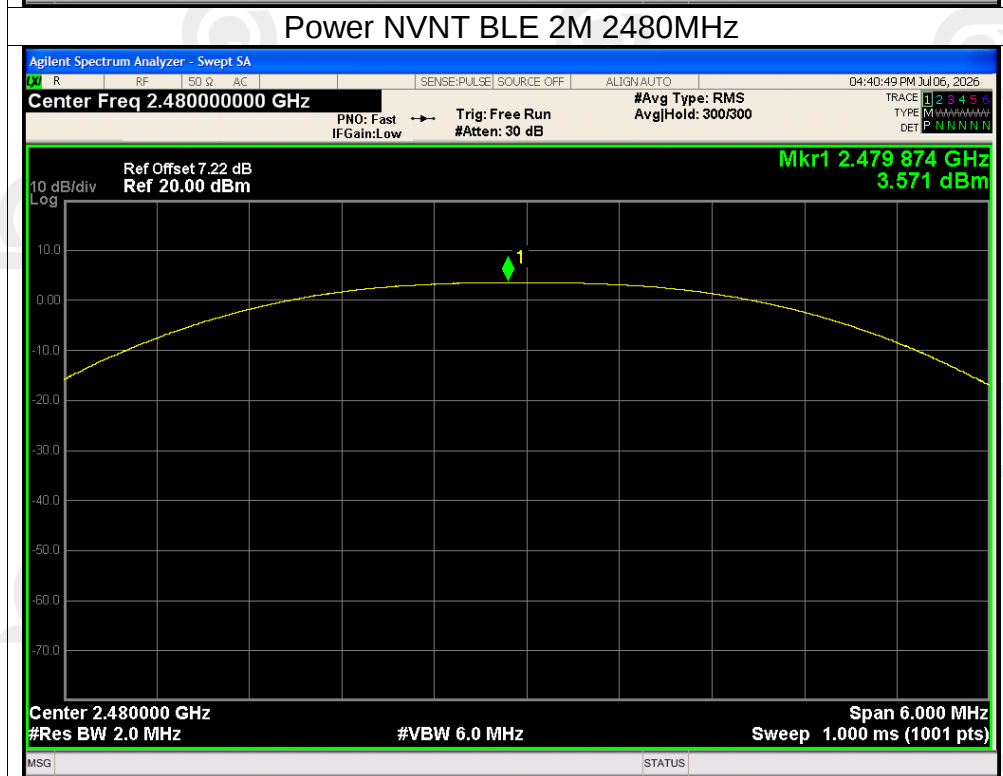
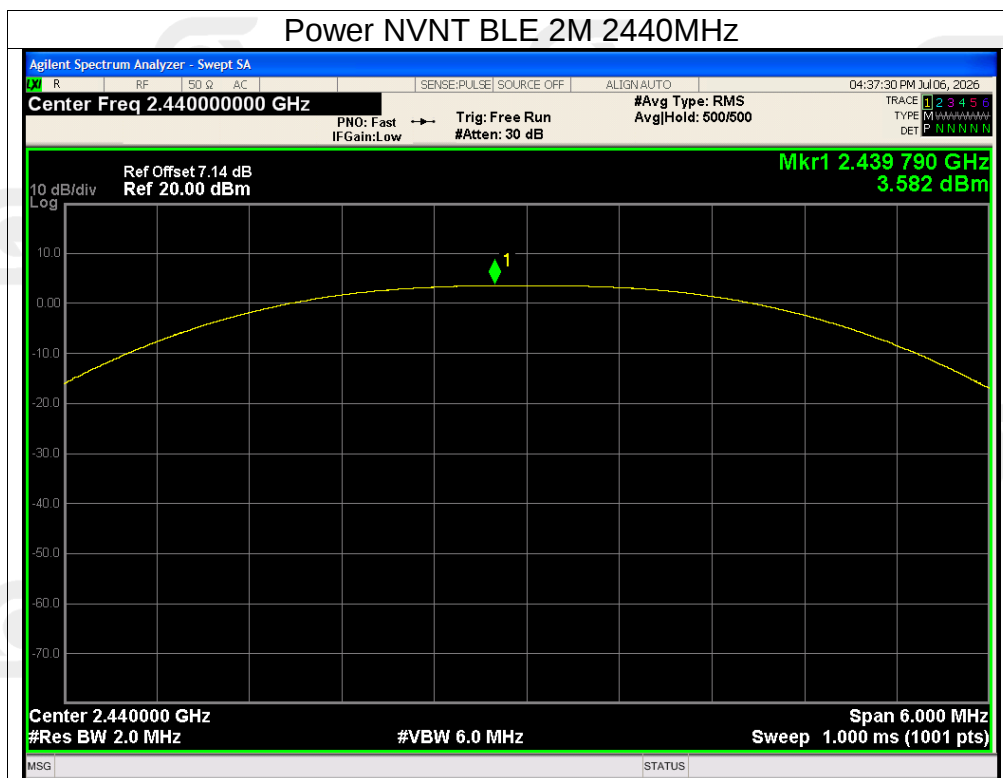


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.667	0.5	Pass
NVNT	BLE 1M	2440	0.671	0.5	Pass
NVNT	BLE 1M	2480	0.659	0.5	Pass
NVNT	BLE 2M	2402	1.155	0.5	Pass
NVNT	BLE 2M	2440	1.157	0.5	Pass
NVNT	BLE 2M	2480	1.141	0.5	Pass




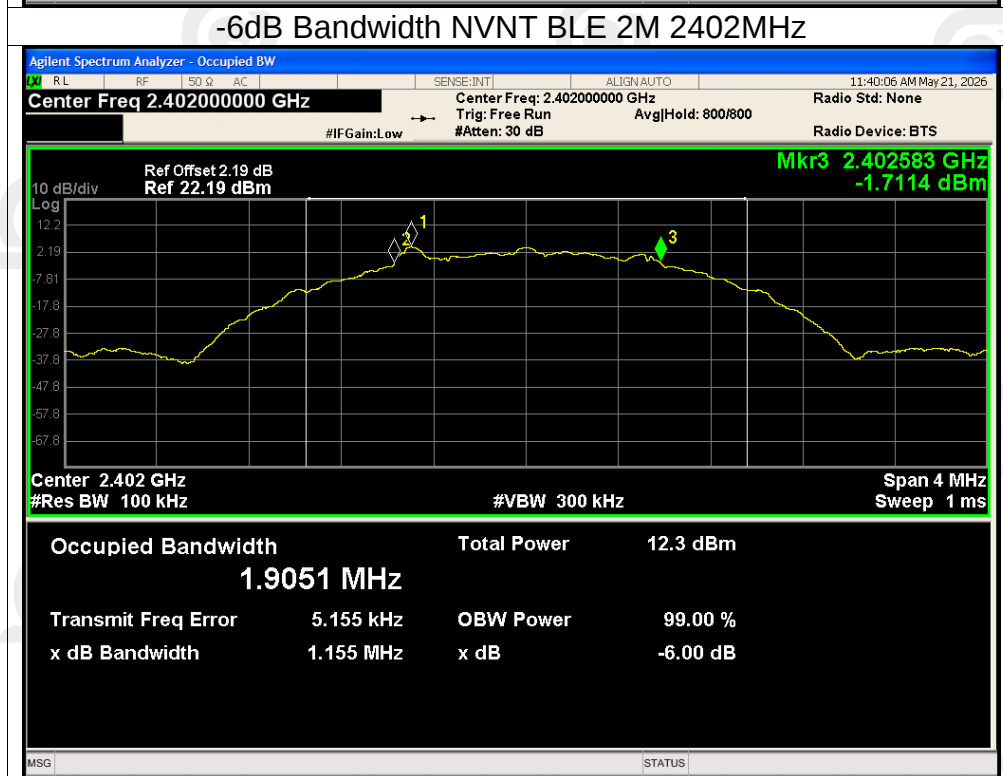
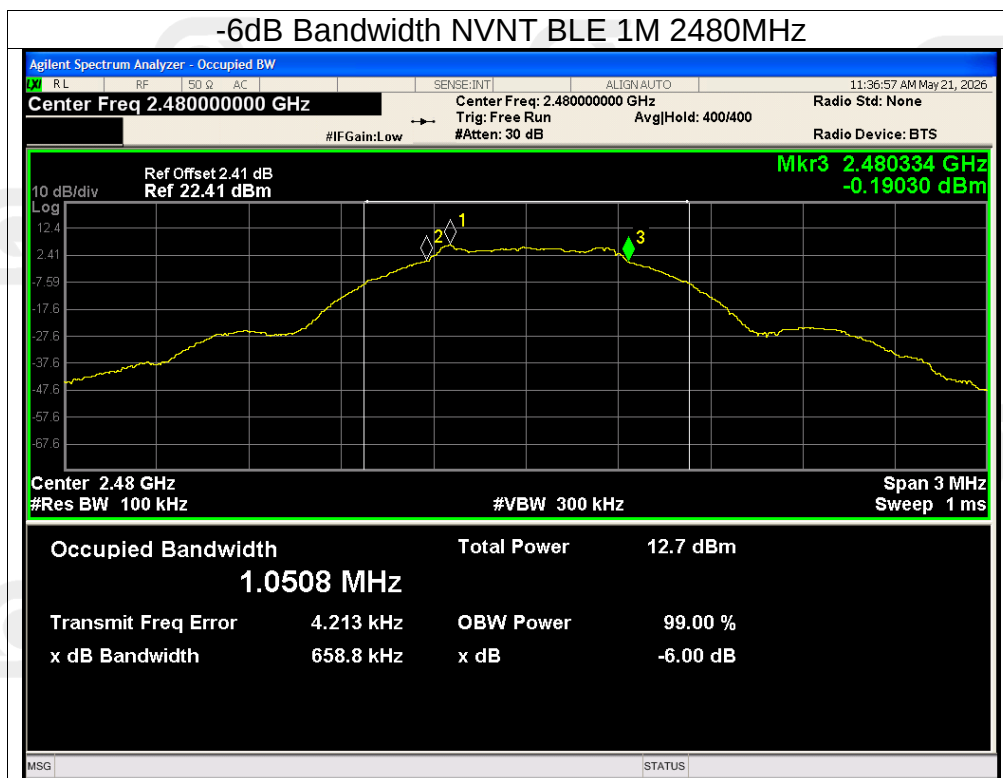


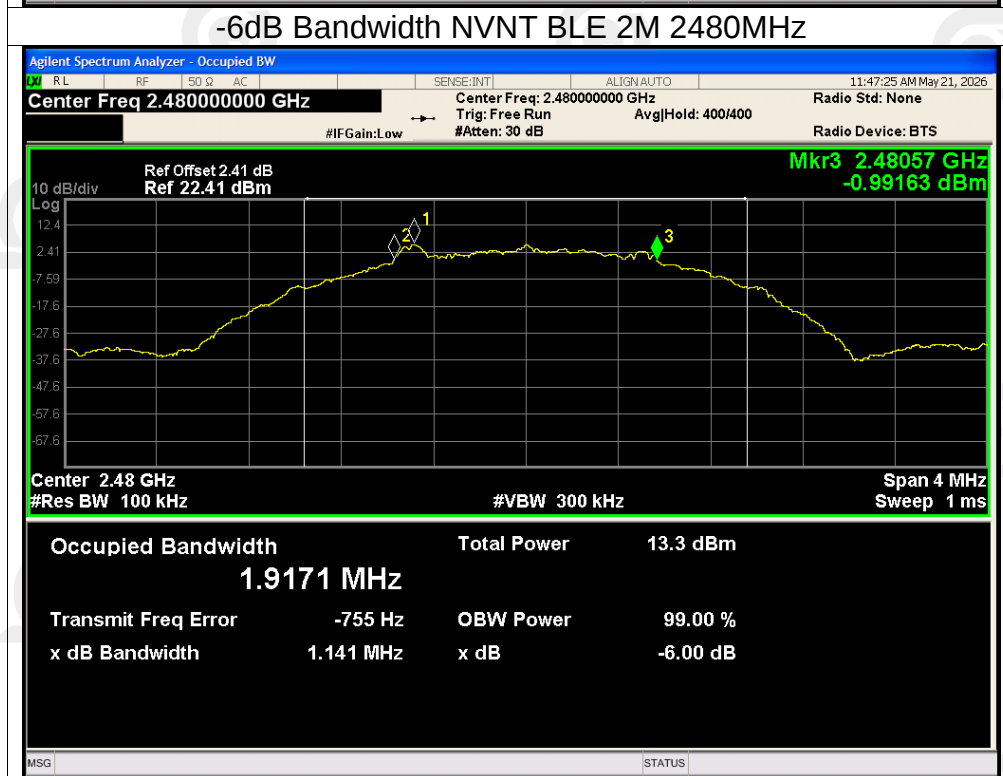
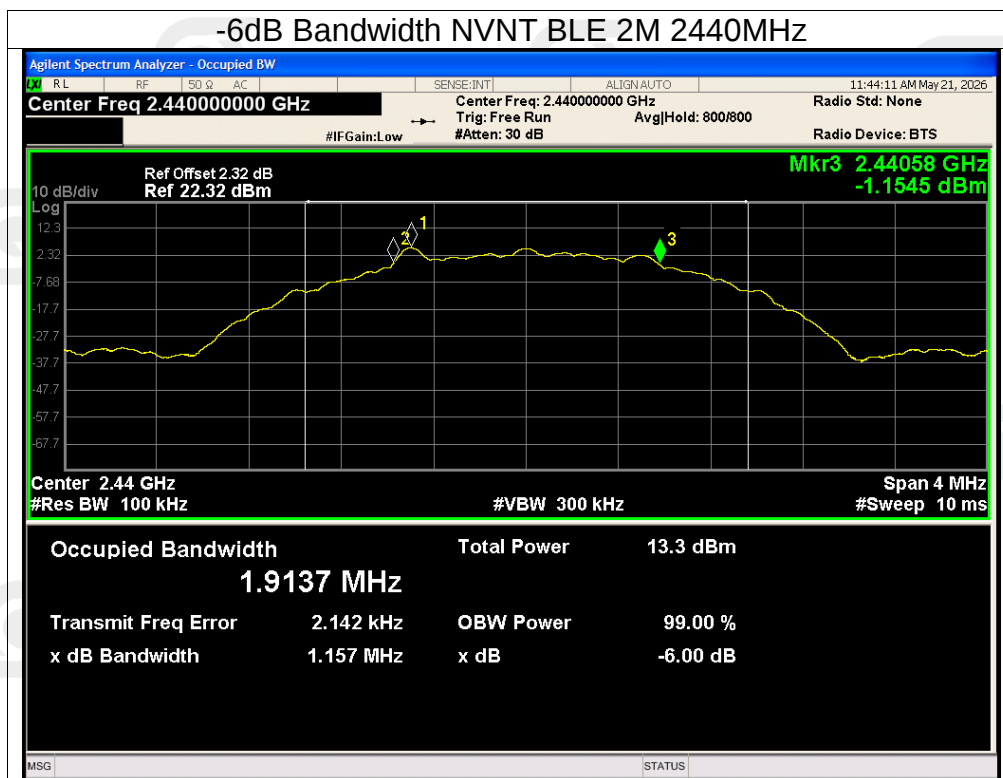


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-12.23	8	Pass
NVNT	BLE 1M	2440	-12.49	8	Pass
NVNT	BLE 1M	2480	-11.99	8	Pass
NVNT	BLE 2M	2402	-15.05	8	Pass
NVNT	BLE 2M	2440	-14.94	8	Pass
NVNT	BLE 2M	2480	-15.07	8	Pass

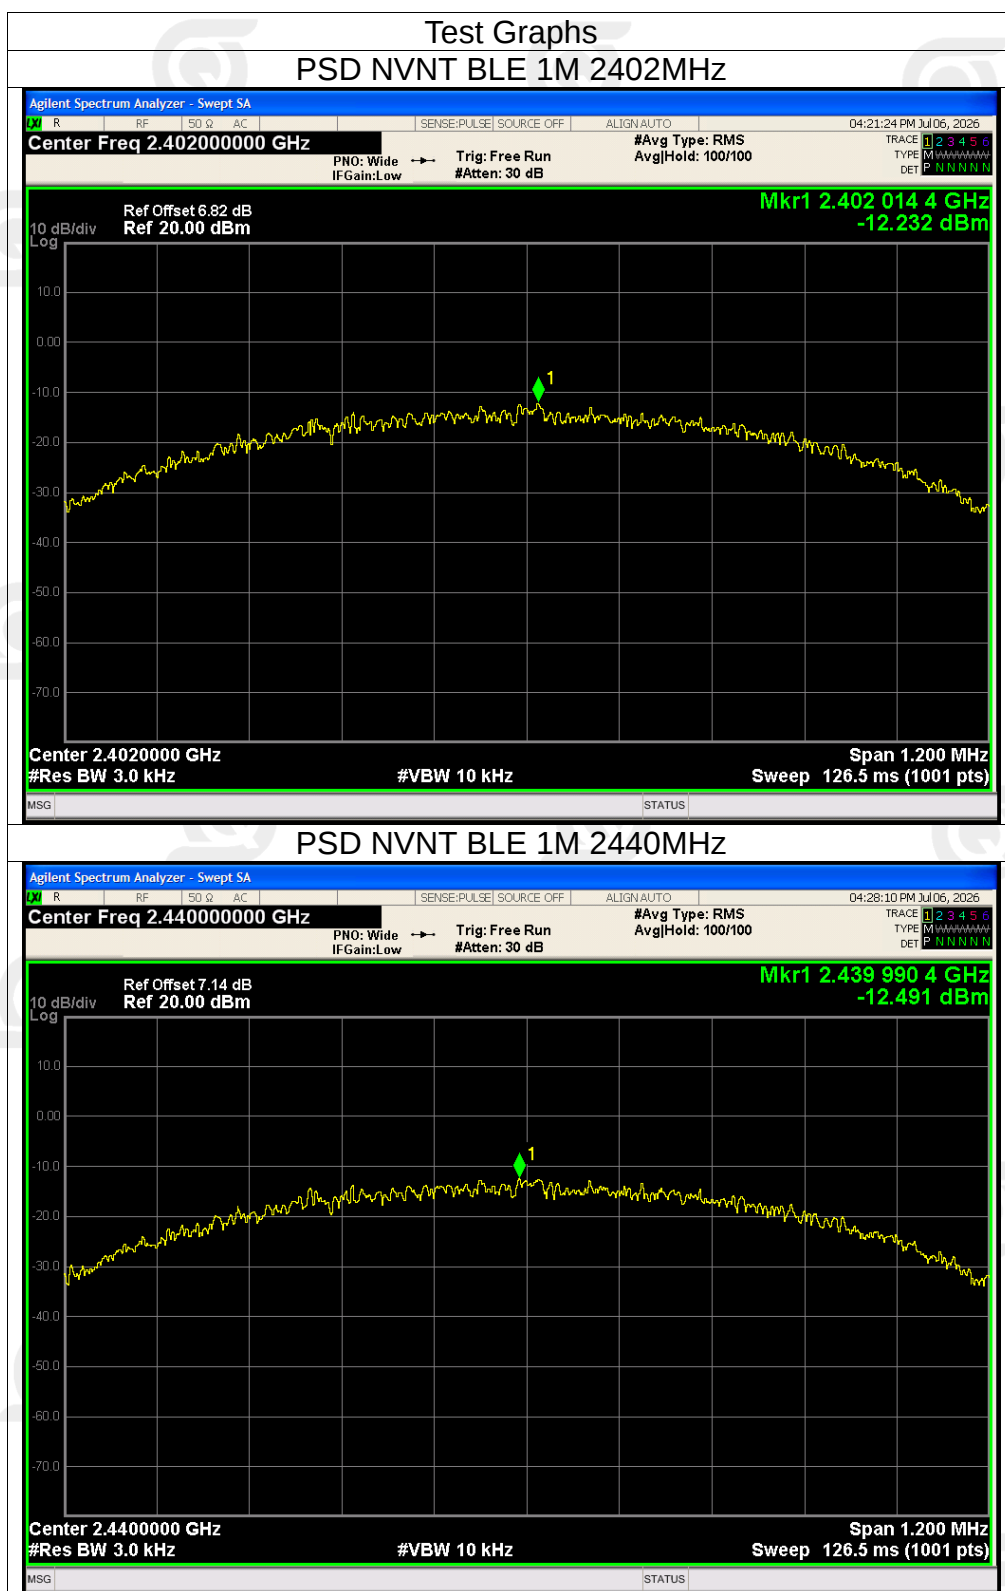


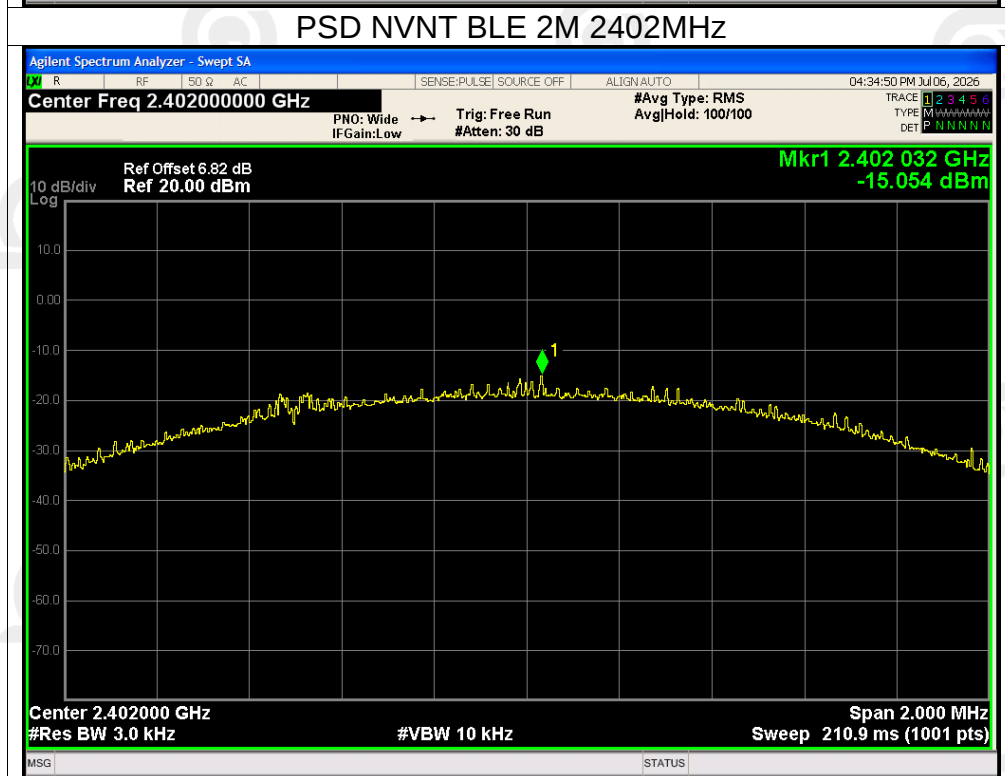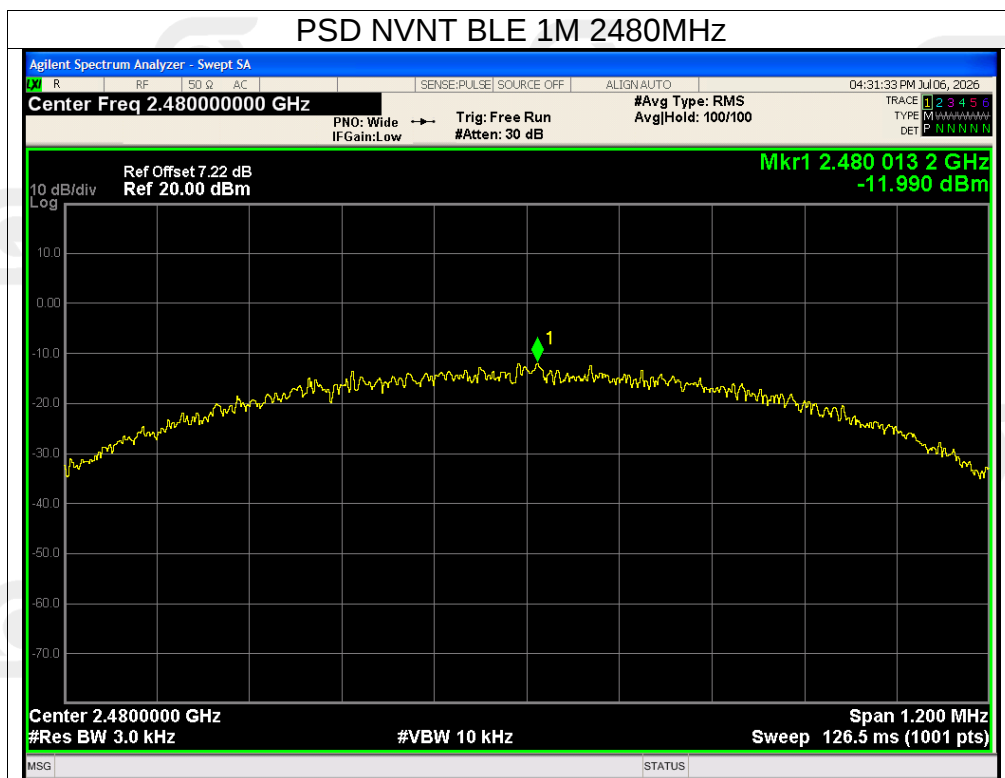

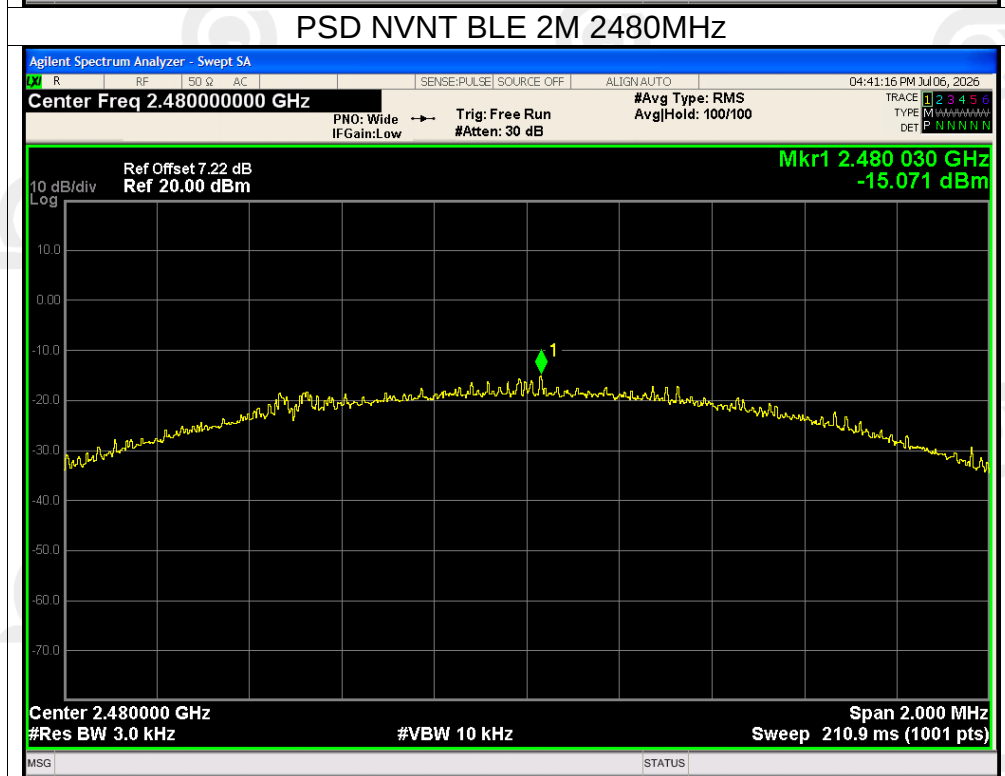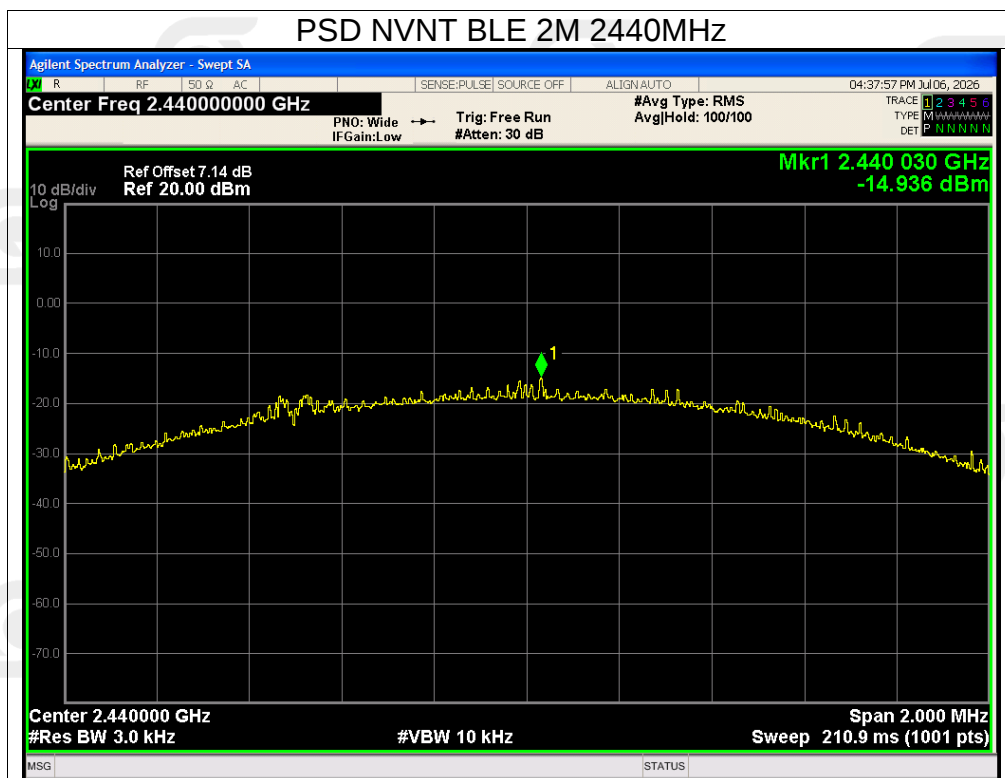


Band Edge


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-53.71	-20	Pass
NVNT	BLE 1M	2480	-53.87	-20	Pass
NVNT	BLE 2M	2402	-52.97	-20	Pass
NVNT	BLE 2M	2480	-53.62	-20	Pass

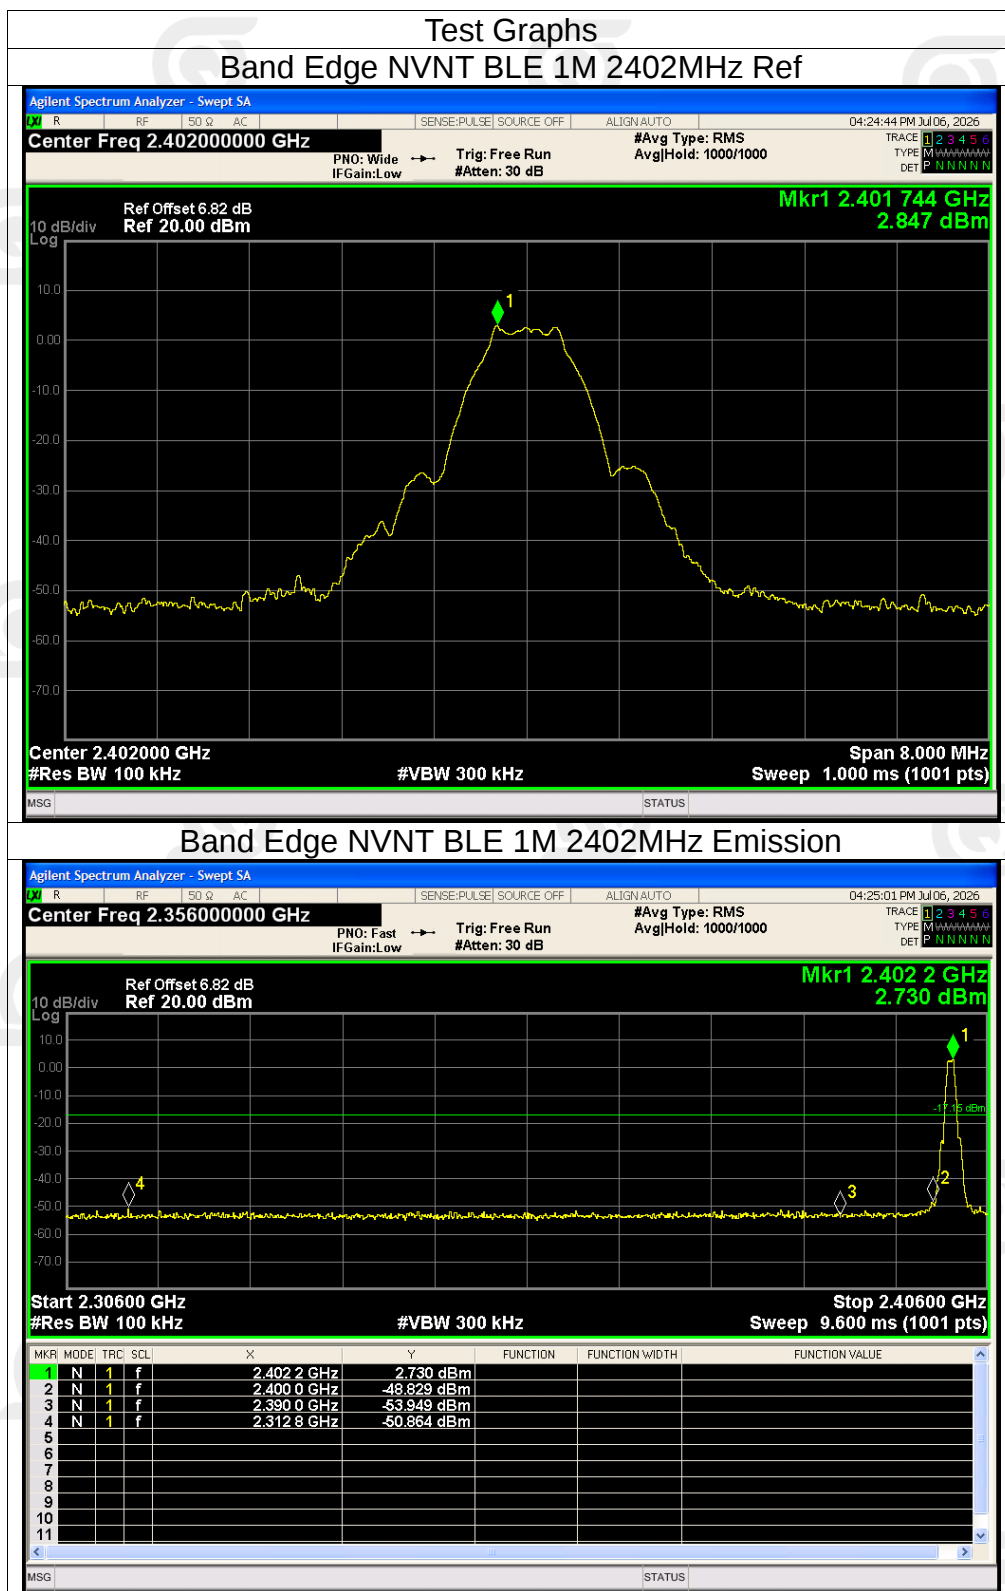



Band Edge NVNT BLE 1M 2480MHz Ref

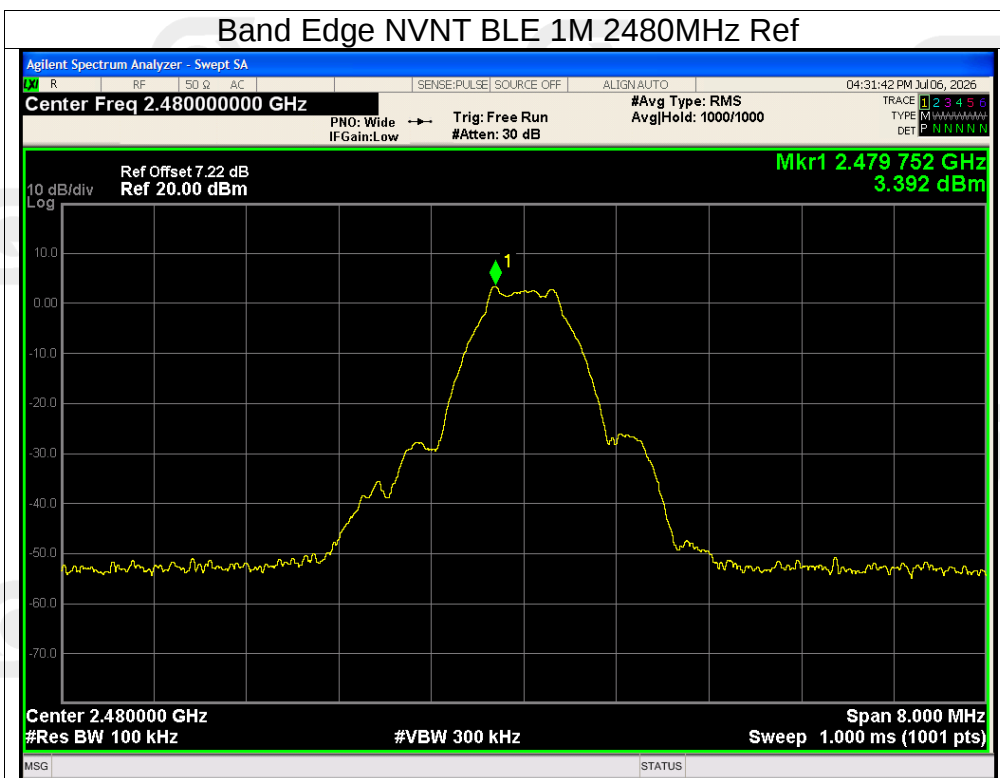

Band Edge NVNT BLE 1M 2480MHz Emission

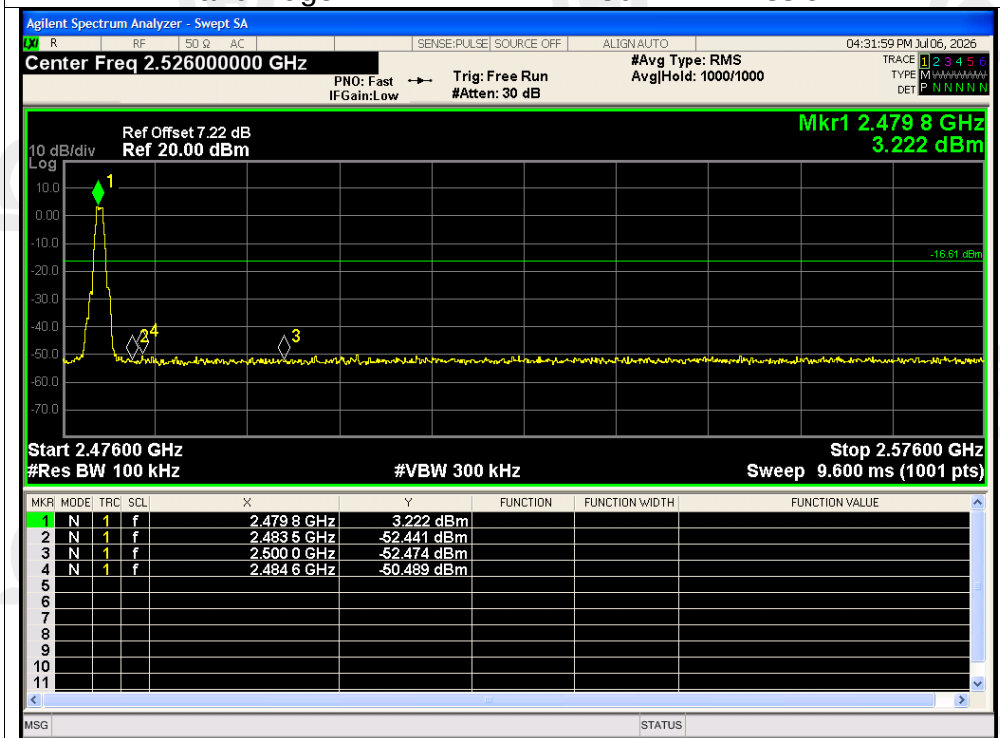

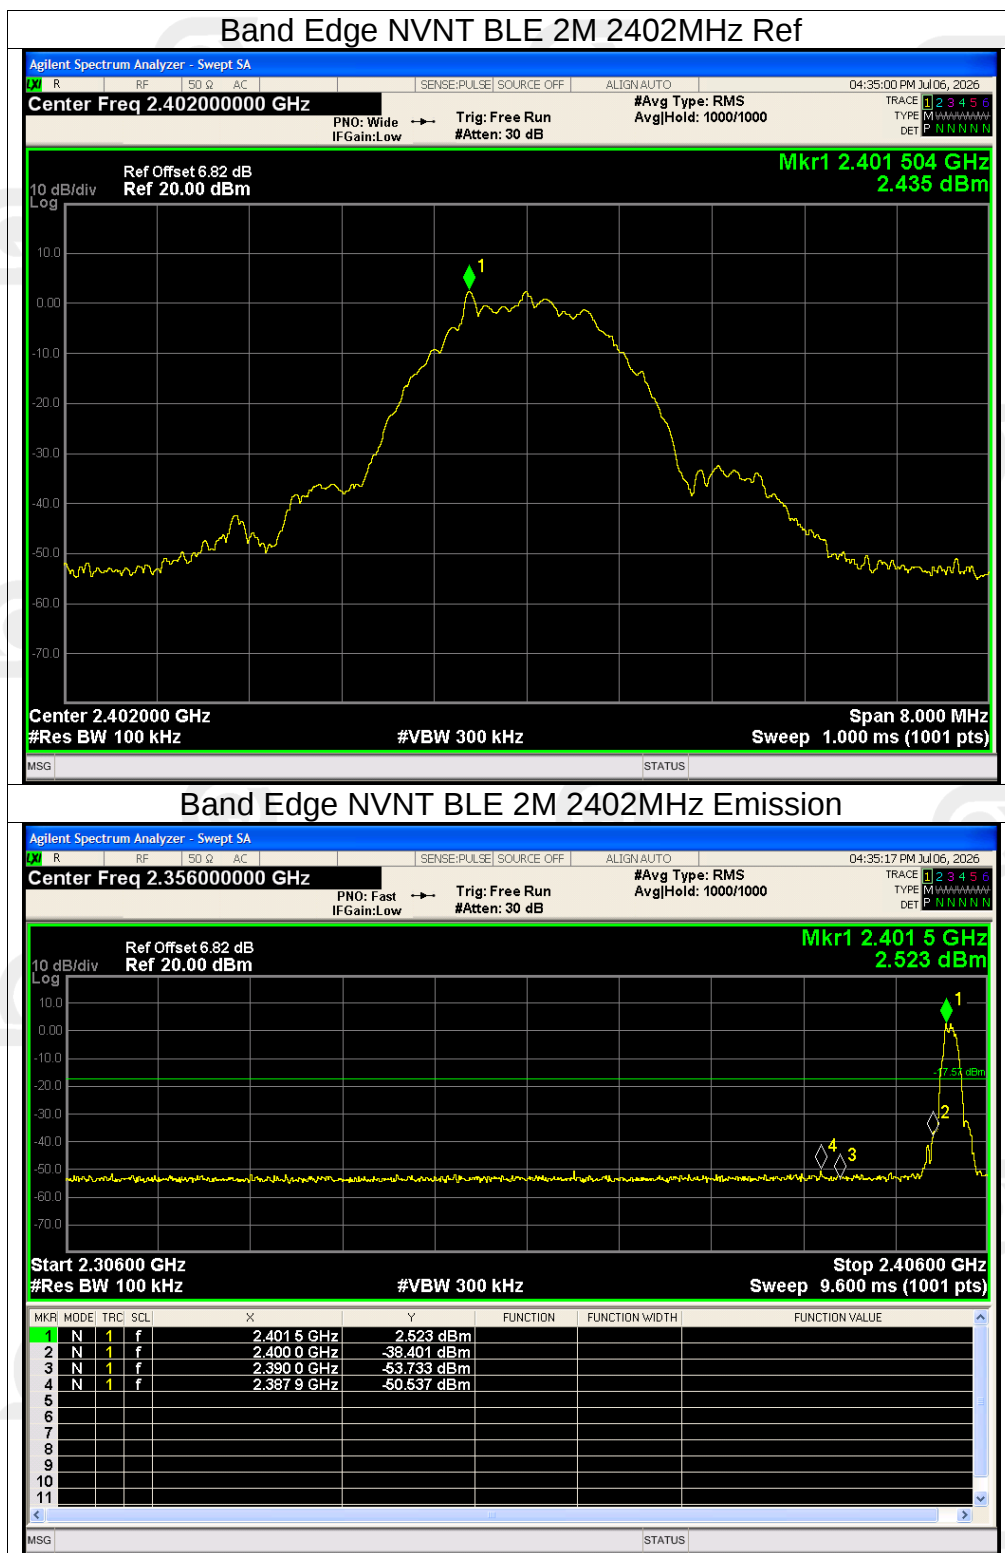

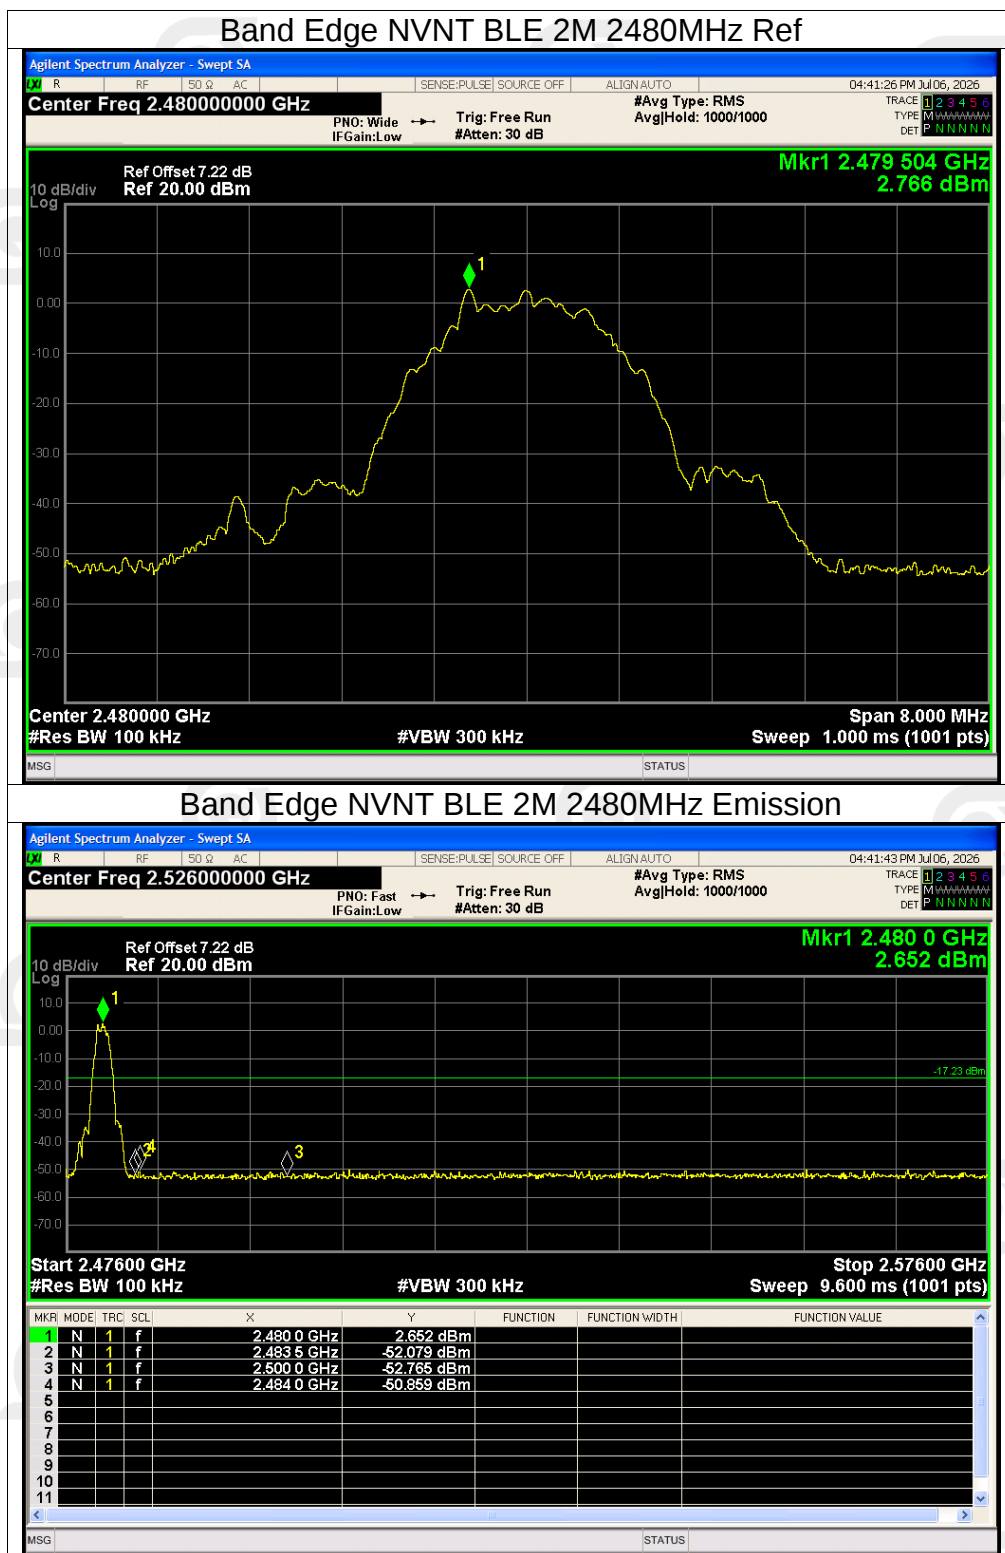


Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-41.20	-20	Pass
NVNT	BLE 1M	2440	-41.54	-20	Pass
NVNT	BLE 1M	2480	-41.83	-20	Pass
NVNT	BLE 2M	2402	-41.37	-20	Pass
NVNT	BLE 2M	2440	-41.18	-20	Pass
NVNT	BLE 2M	2480	-41.42	-20	Pass



Test Graphs



Tx. Spurious NVNT BLE 1M 2402MHz Ref


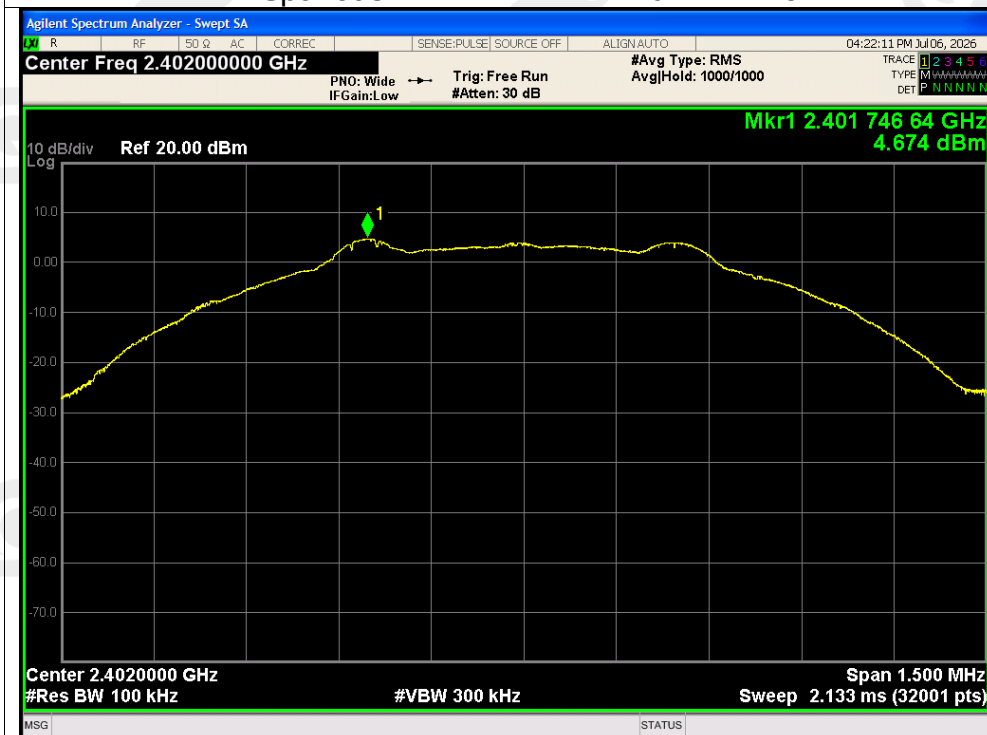




Tx. Spurious NVNT BLE 1M 2402MHz Emission


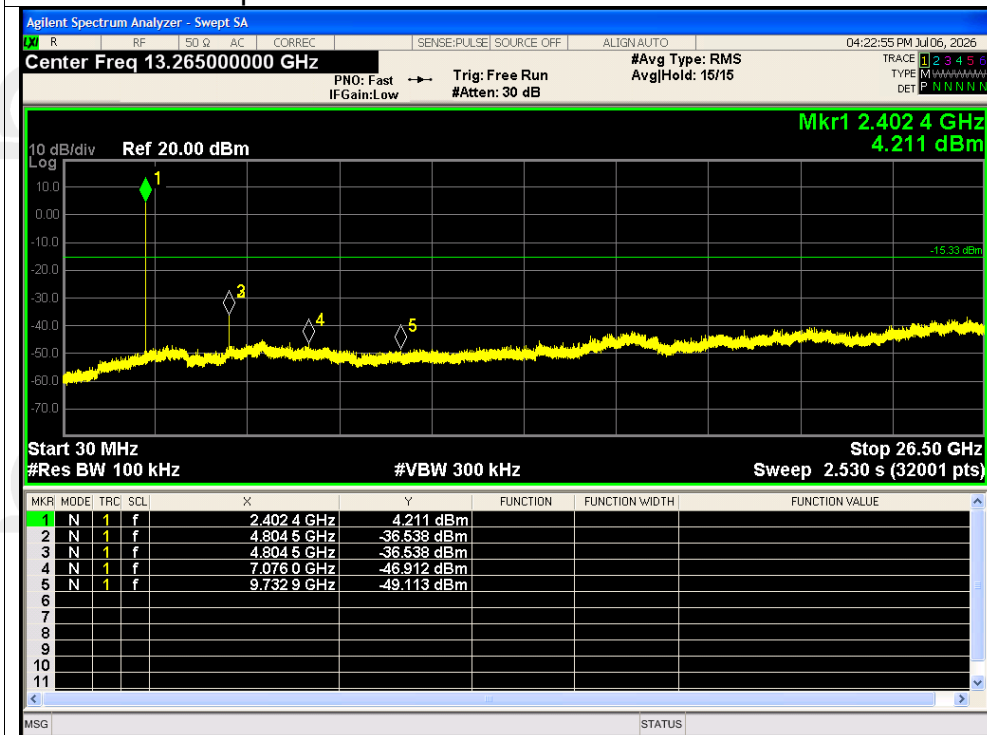


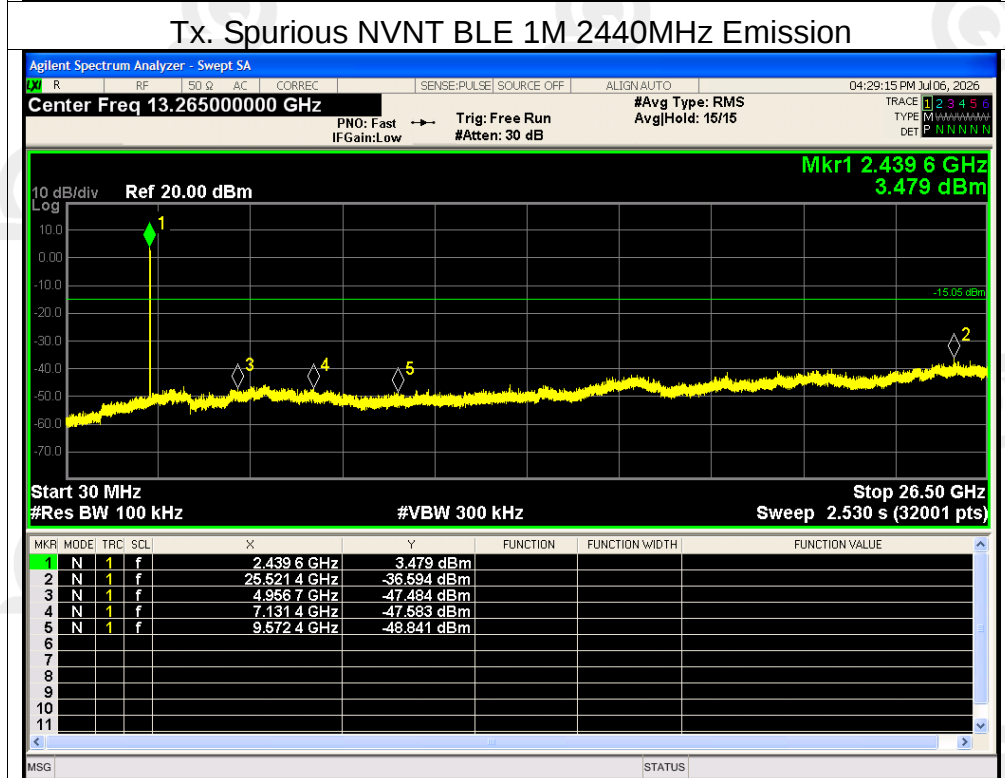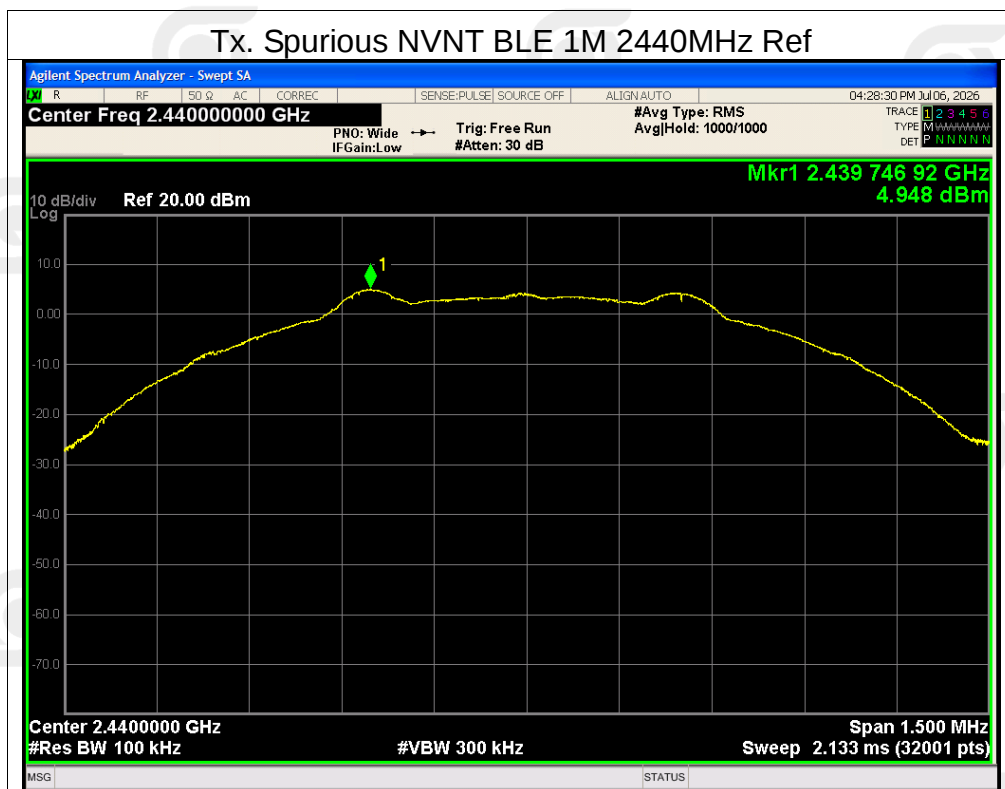

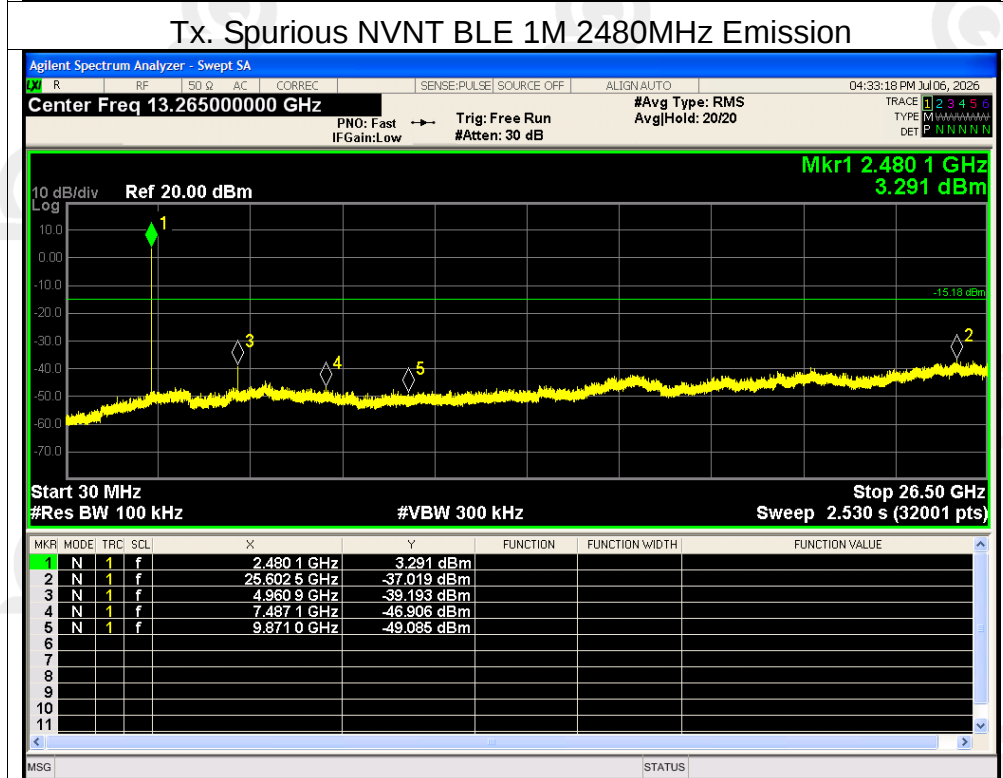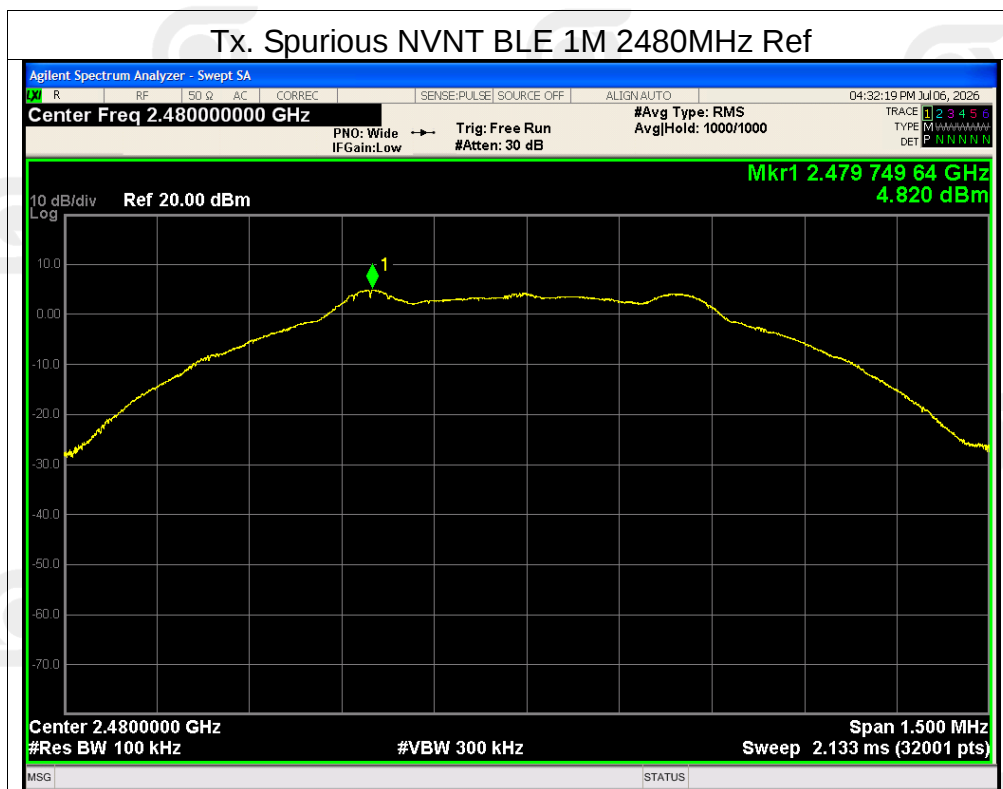

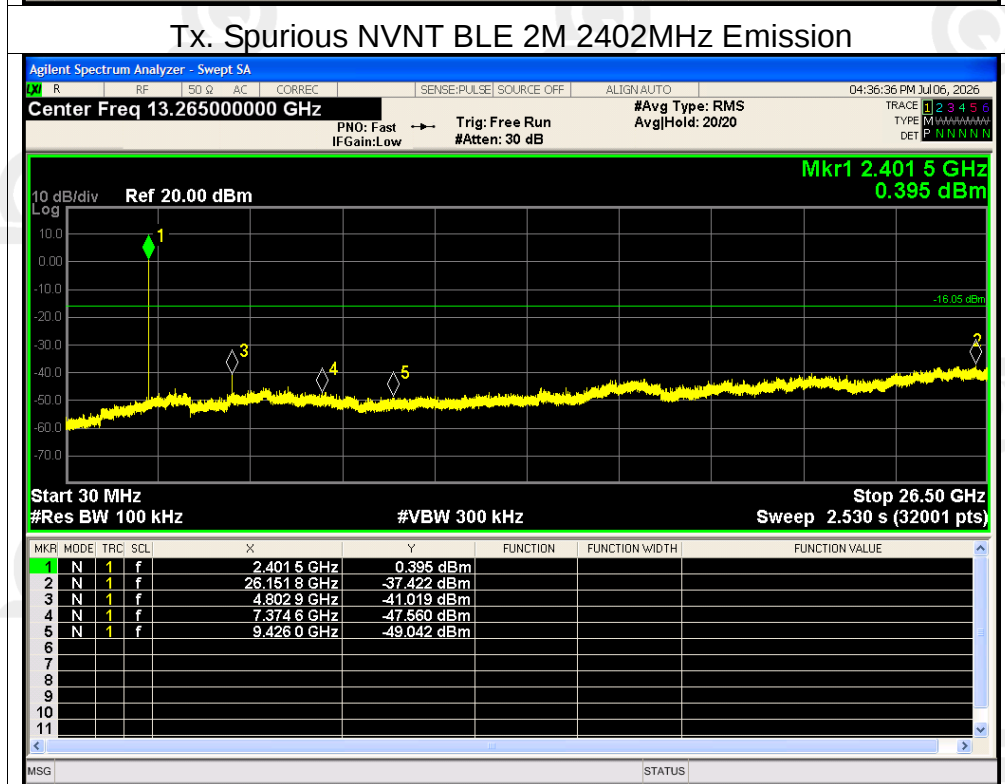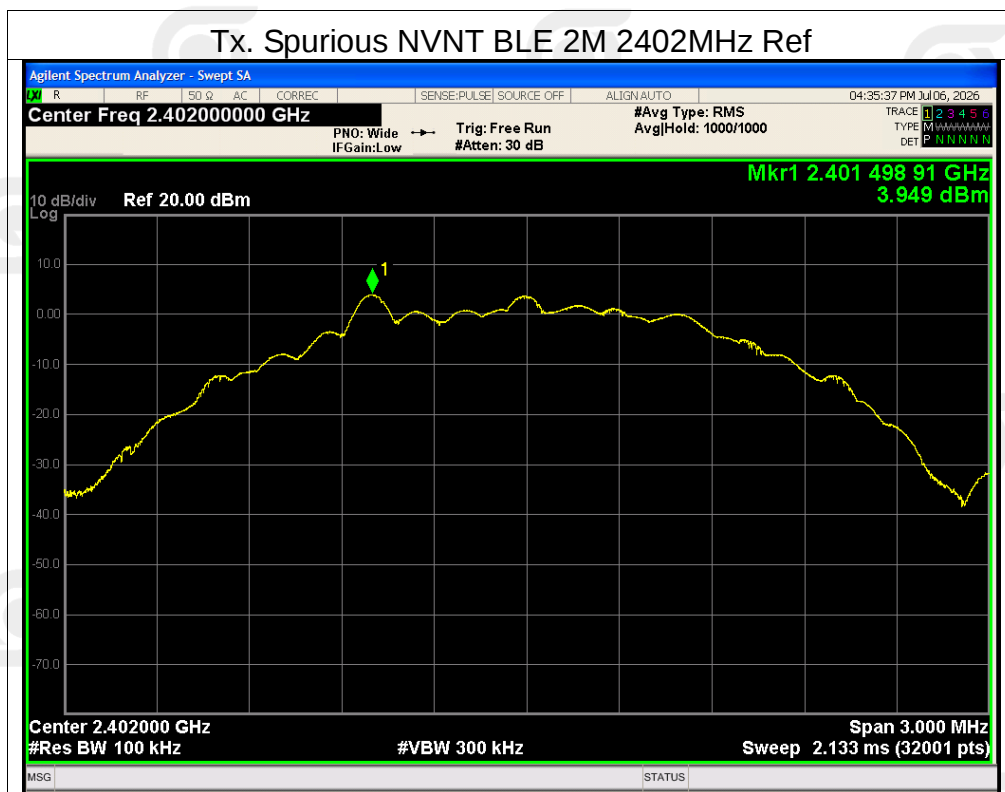

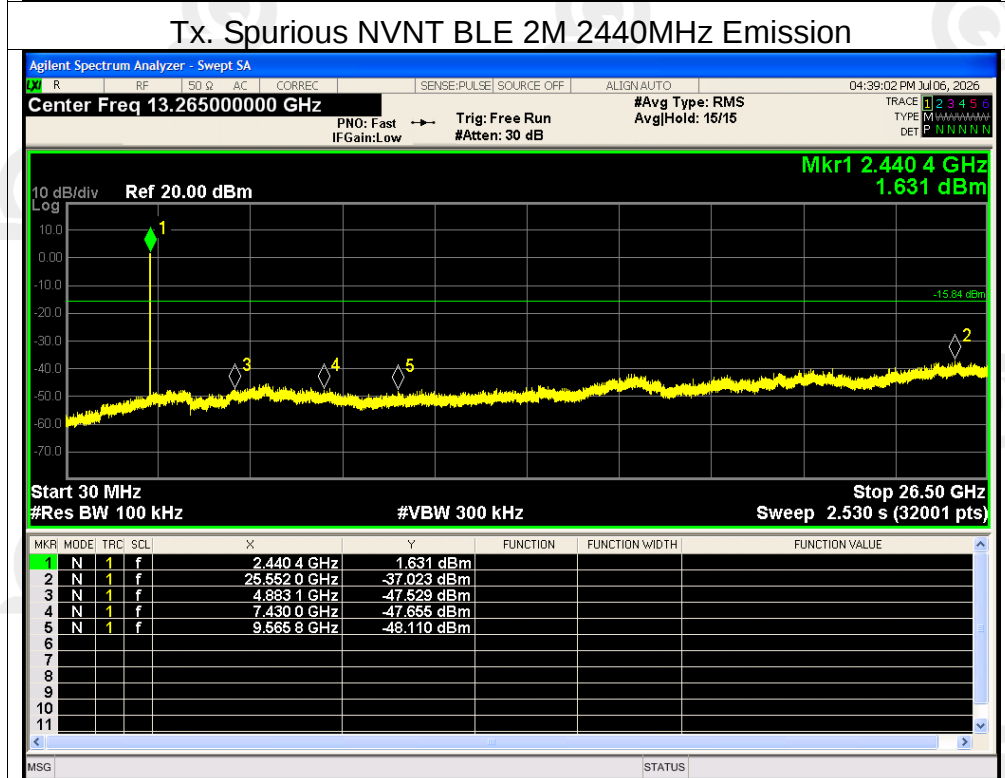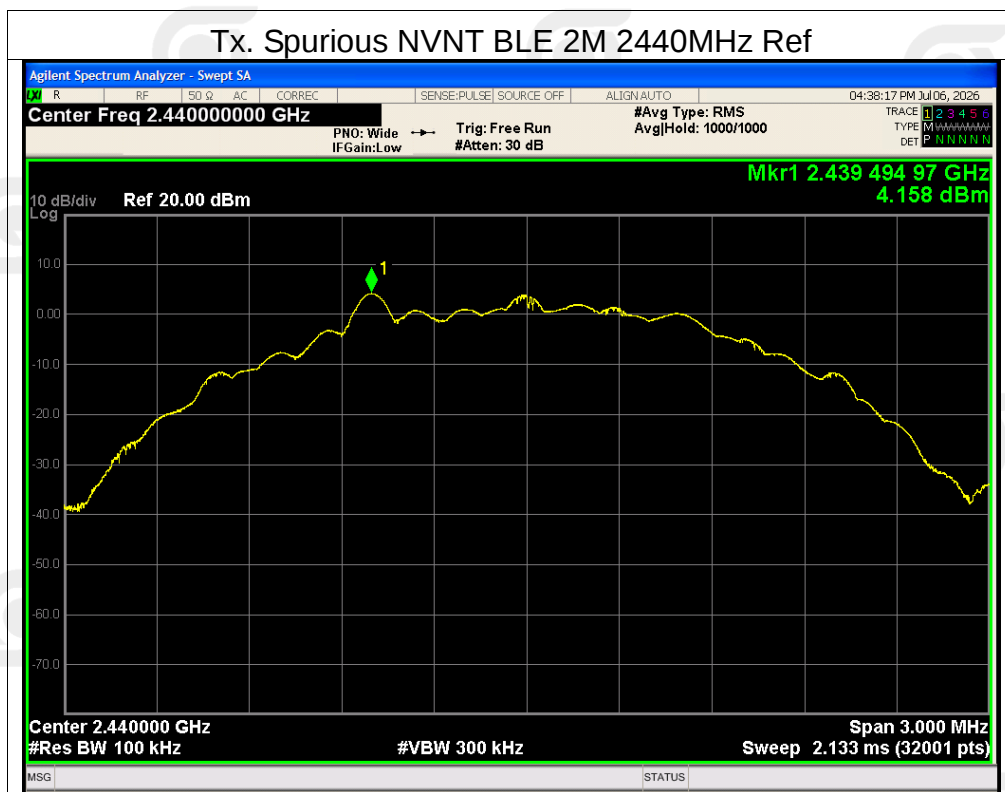

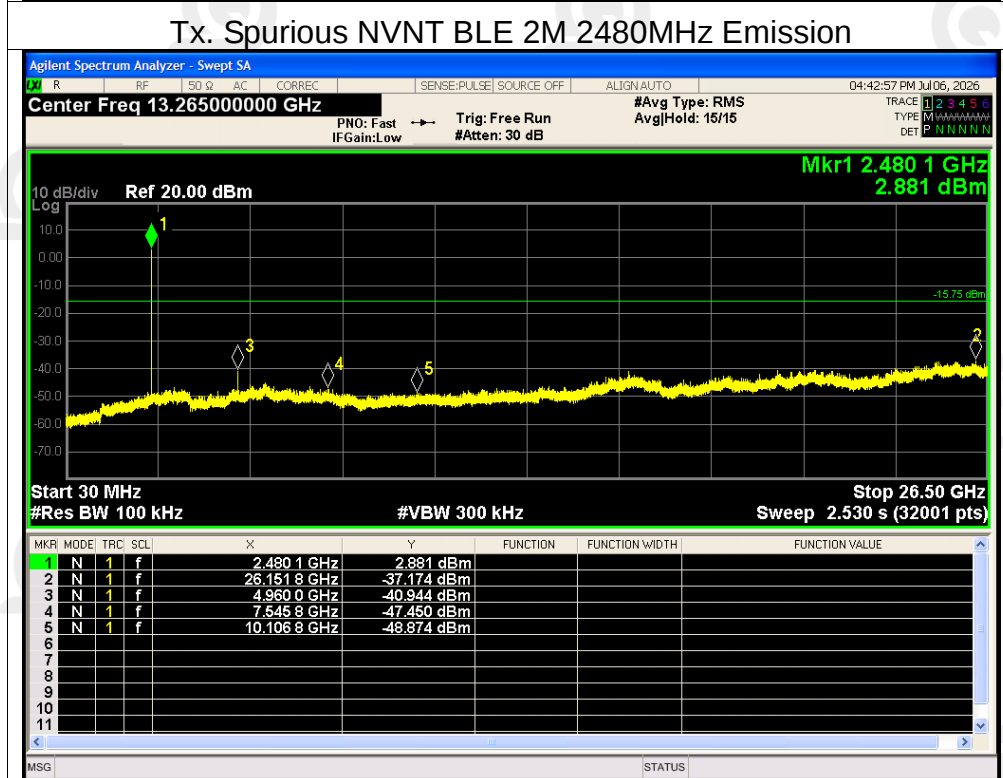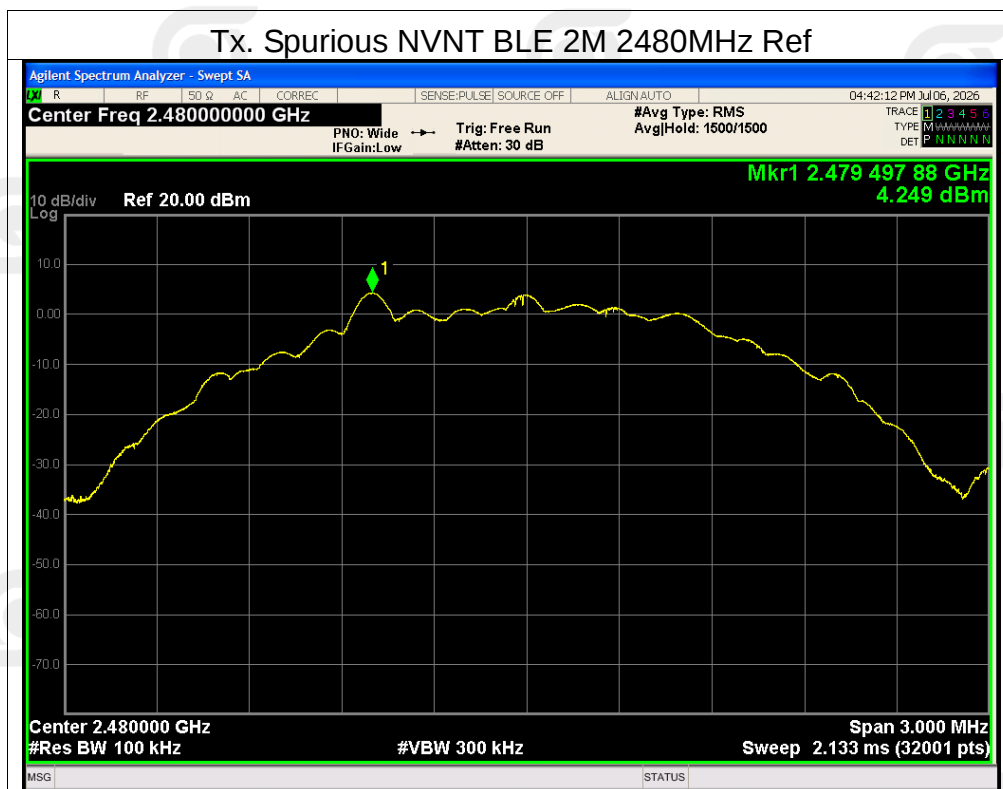

▶▶▶ END ◀◀◀