






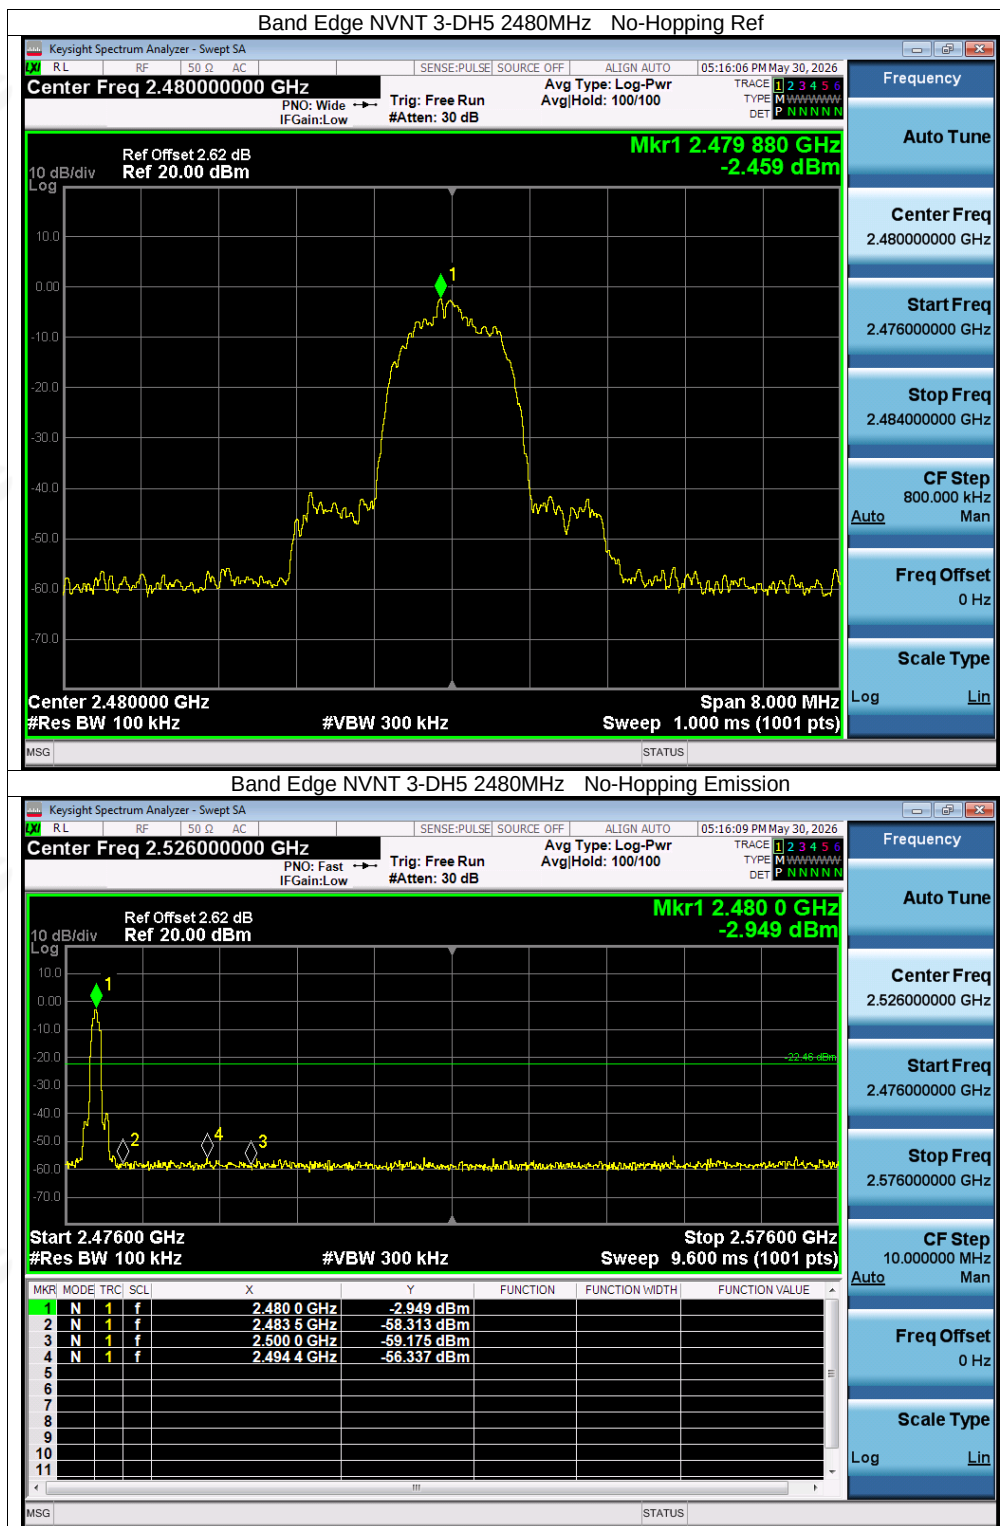

Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Hopping	-36.78	-20	Pass
NVNT	1-DH5	2480	Hopping	-54.96	-20	Pass
NVNT	2-DH5	2402	Hopping	-57.57	-20	Pass
NVNT	2-DH5	2480	Hopping	-52.16	-20	Pass
NVNT	3-DH5	2402	Hopping	-44.06	-20	Pass
NVNT	3-DH5	2480	Hopping	-53.25	-20	Pass

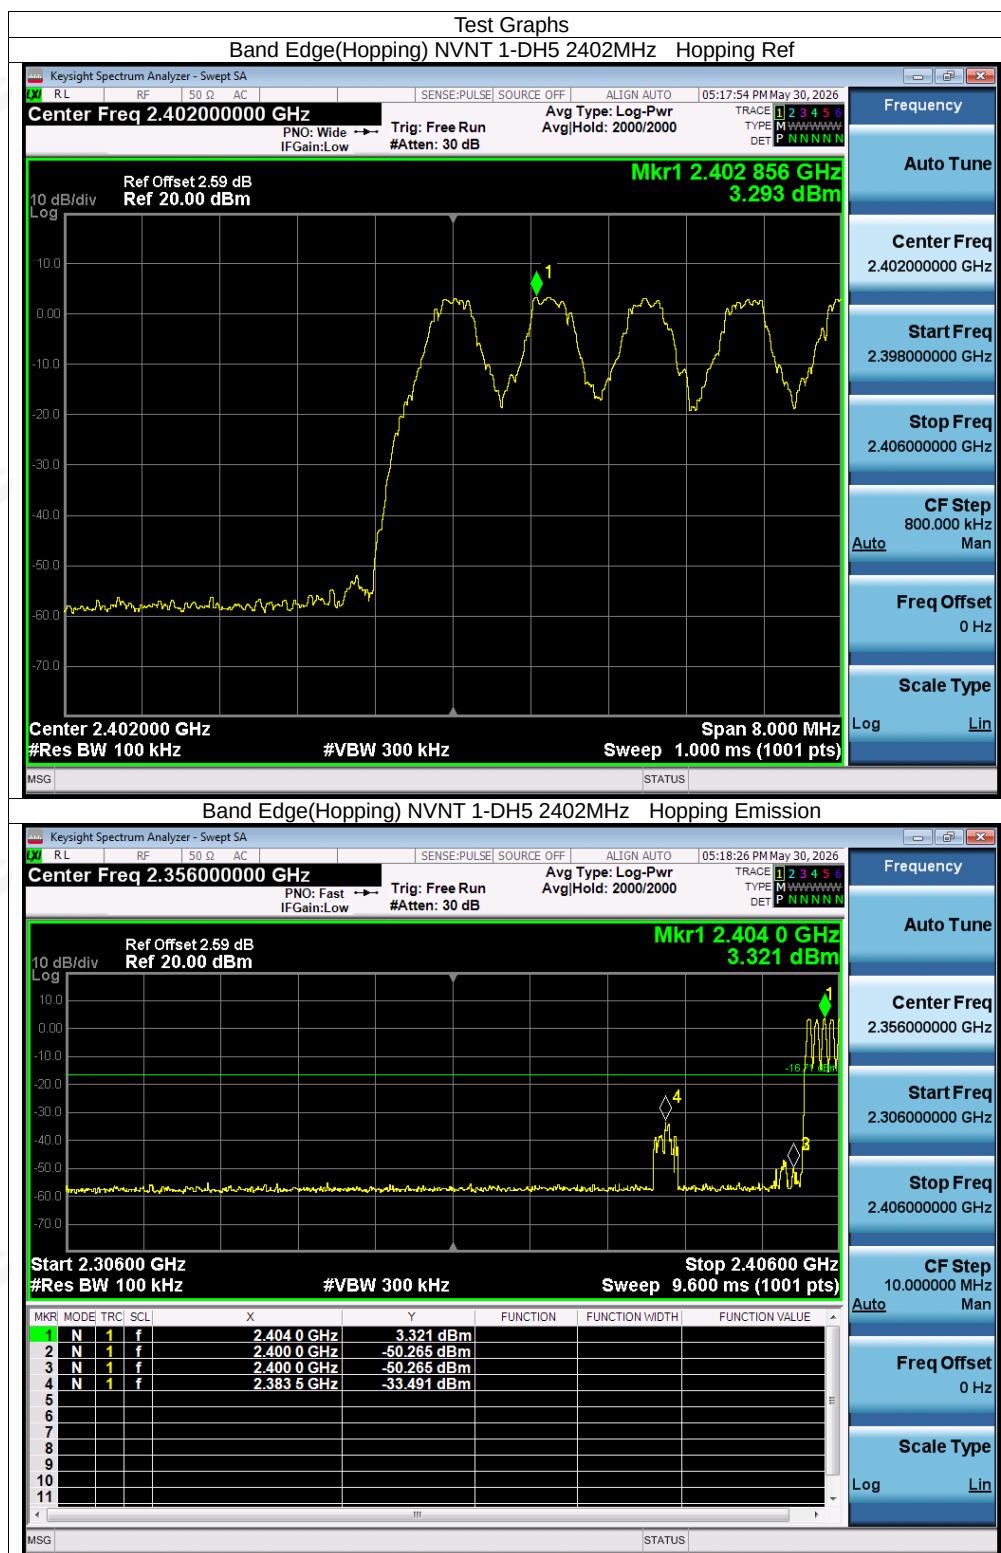

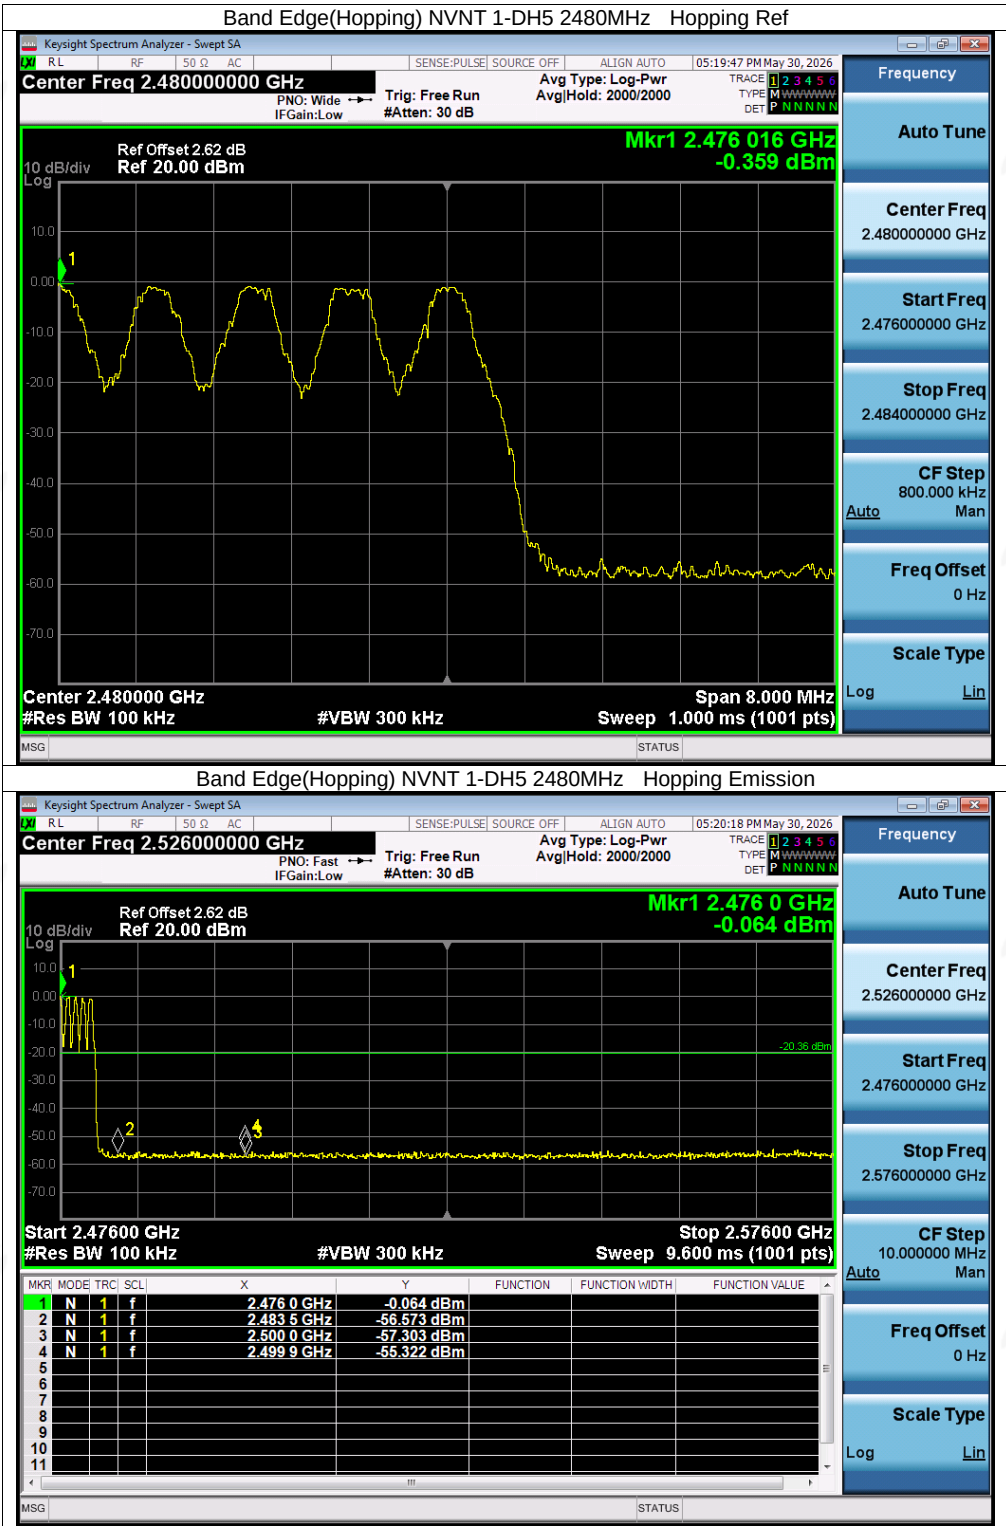















Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	-43.48	-20	Pass
NVNT	1-DH5	2441	-41.06	-20	Pass
NVNT	1-DH5	2480	-39.64	-20	Pass
NVNT	2-DH5	2402	-42.69	-20	Pass
NVNT	2-DH5	2441	-39.13	-20	Pass
NVNT	2-DH5	2480	-37.87	-20	Pass
NVNT	3-DH5	2402	-42.3	-20	Pass
NVNT	3-DH5	2441	-40.81	-20	Pass
NVNT	3-DH5	2480	-38.81	-20	Pass

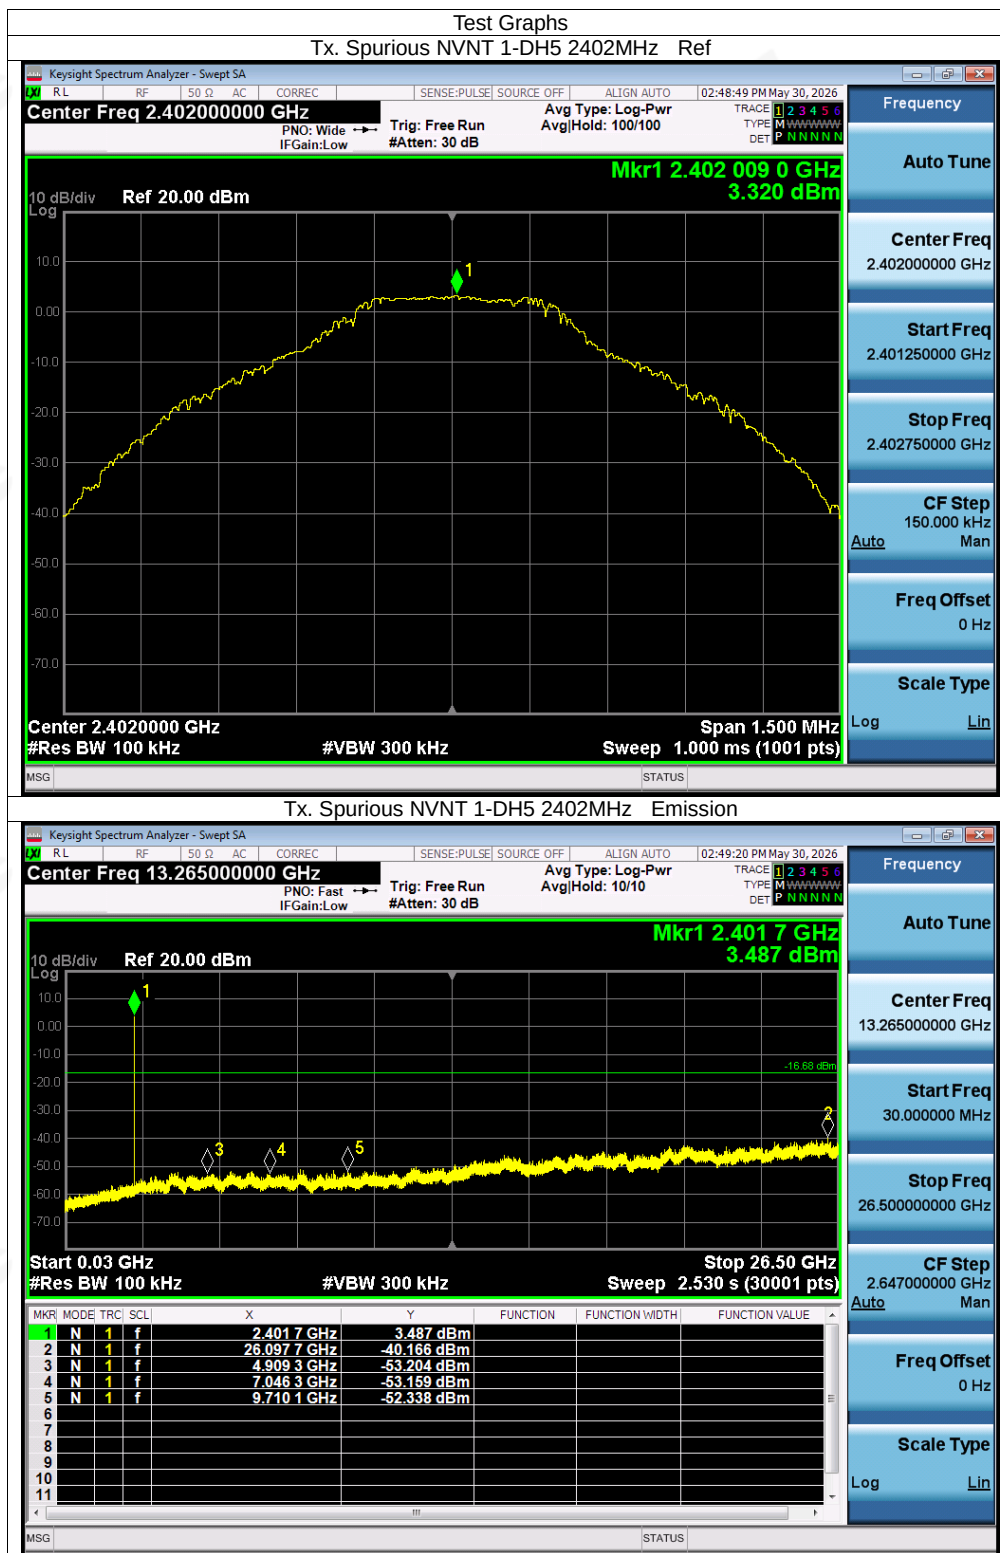


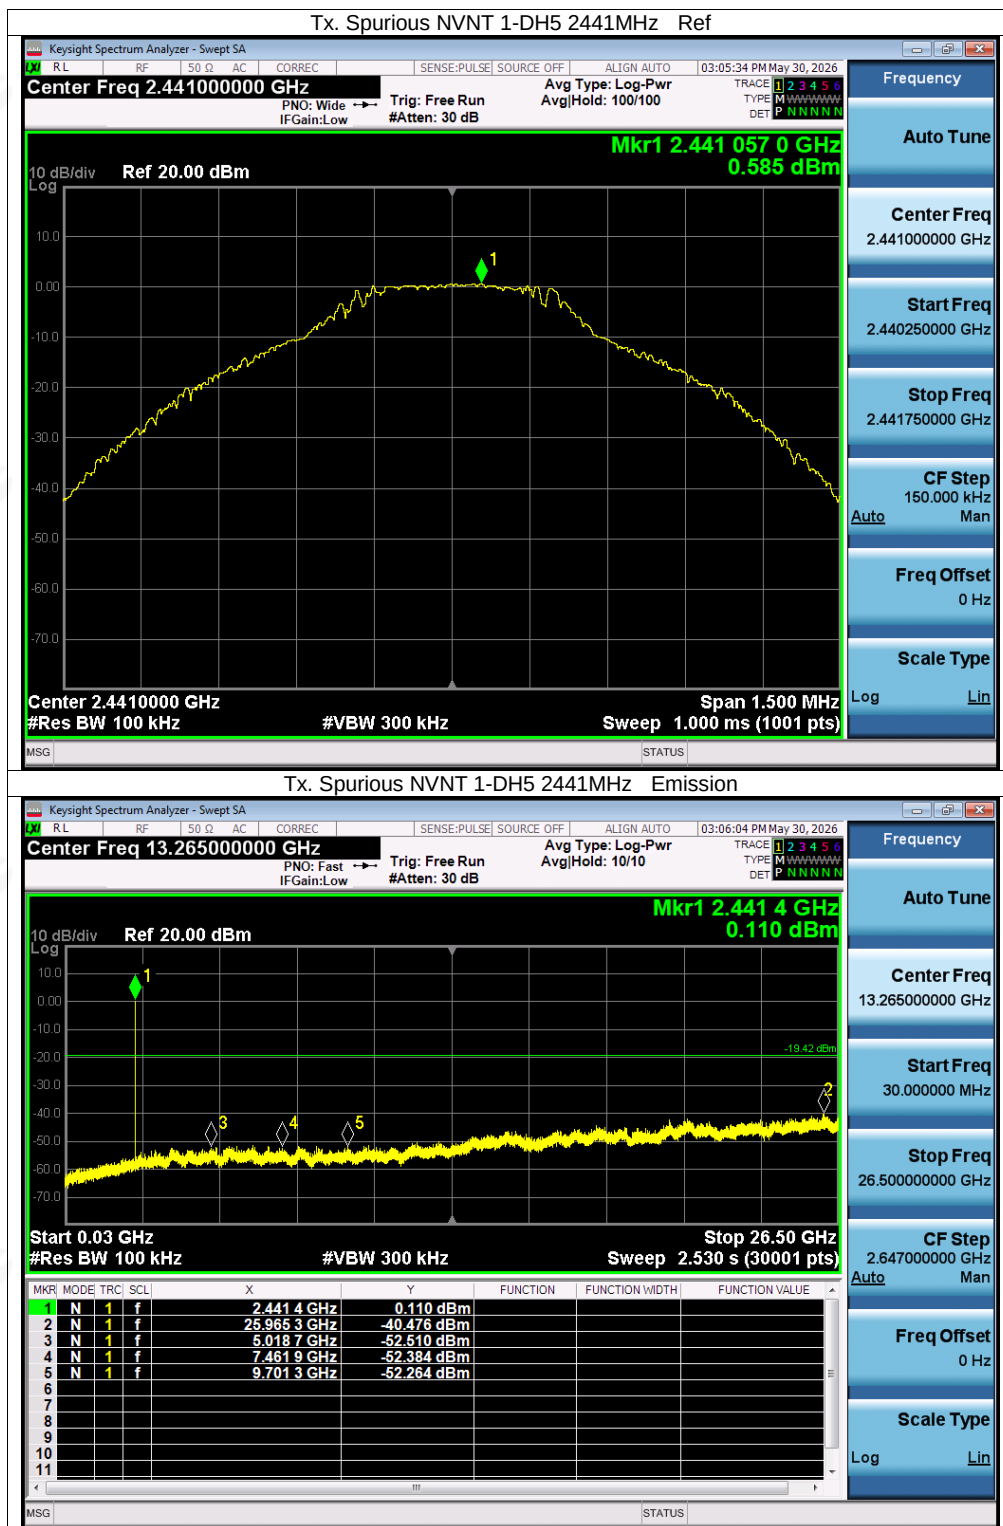


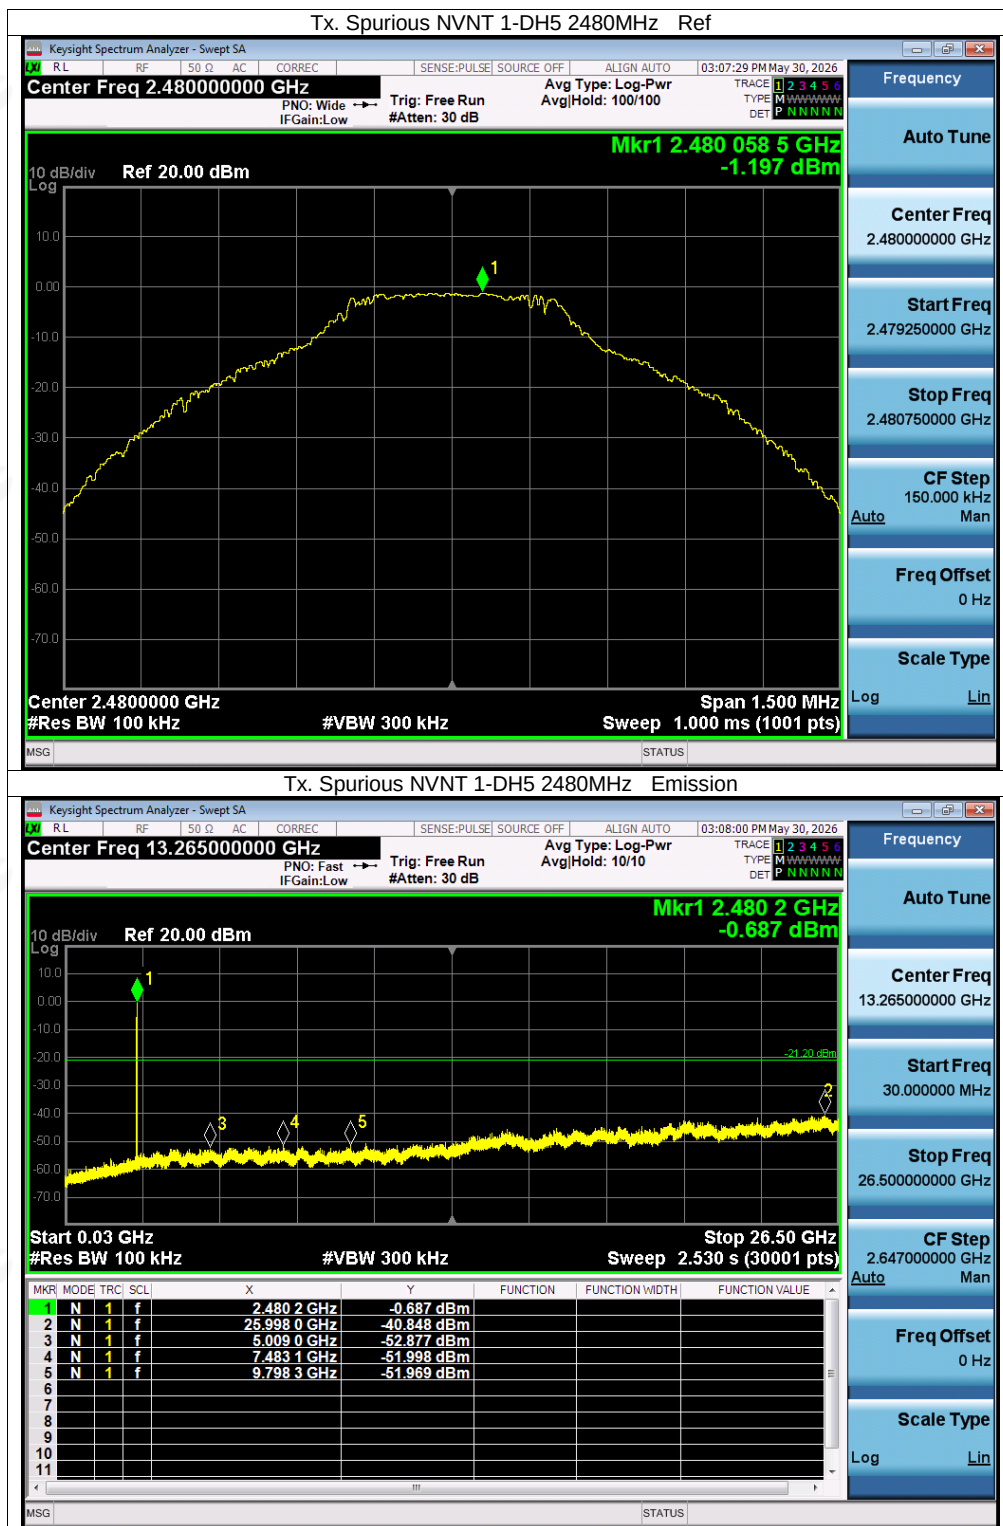


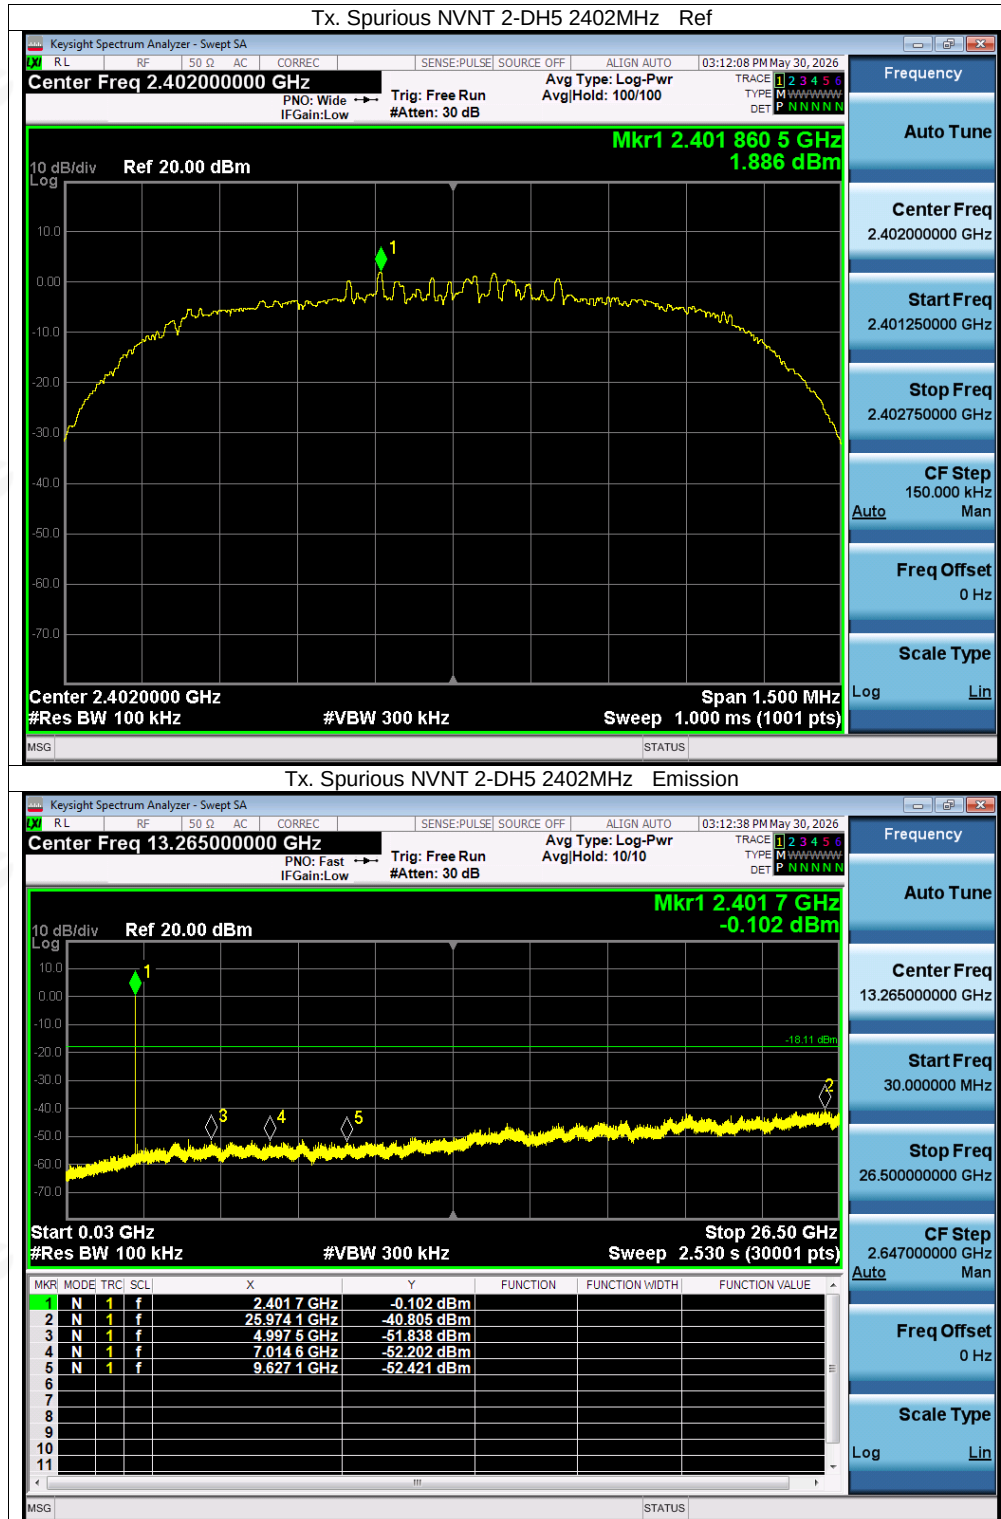


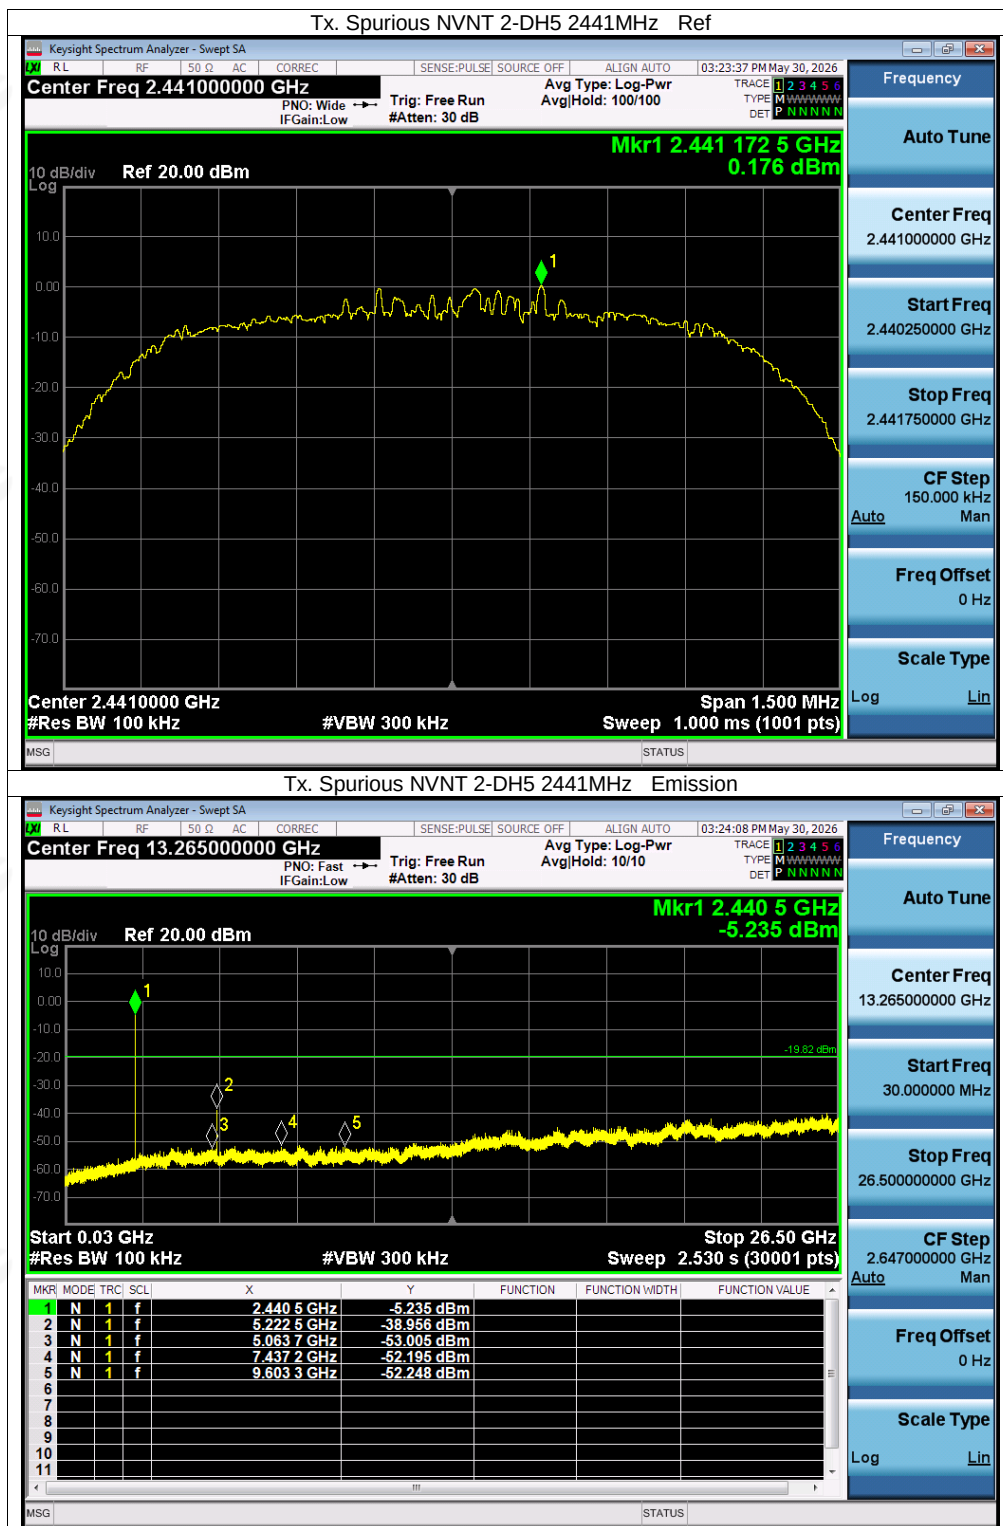

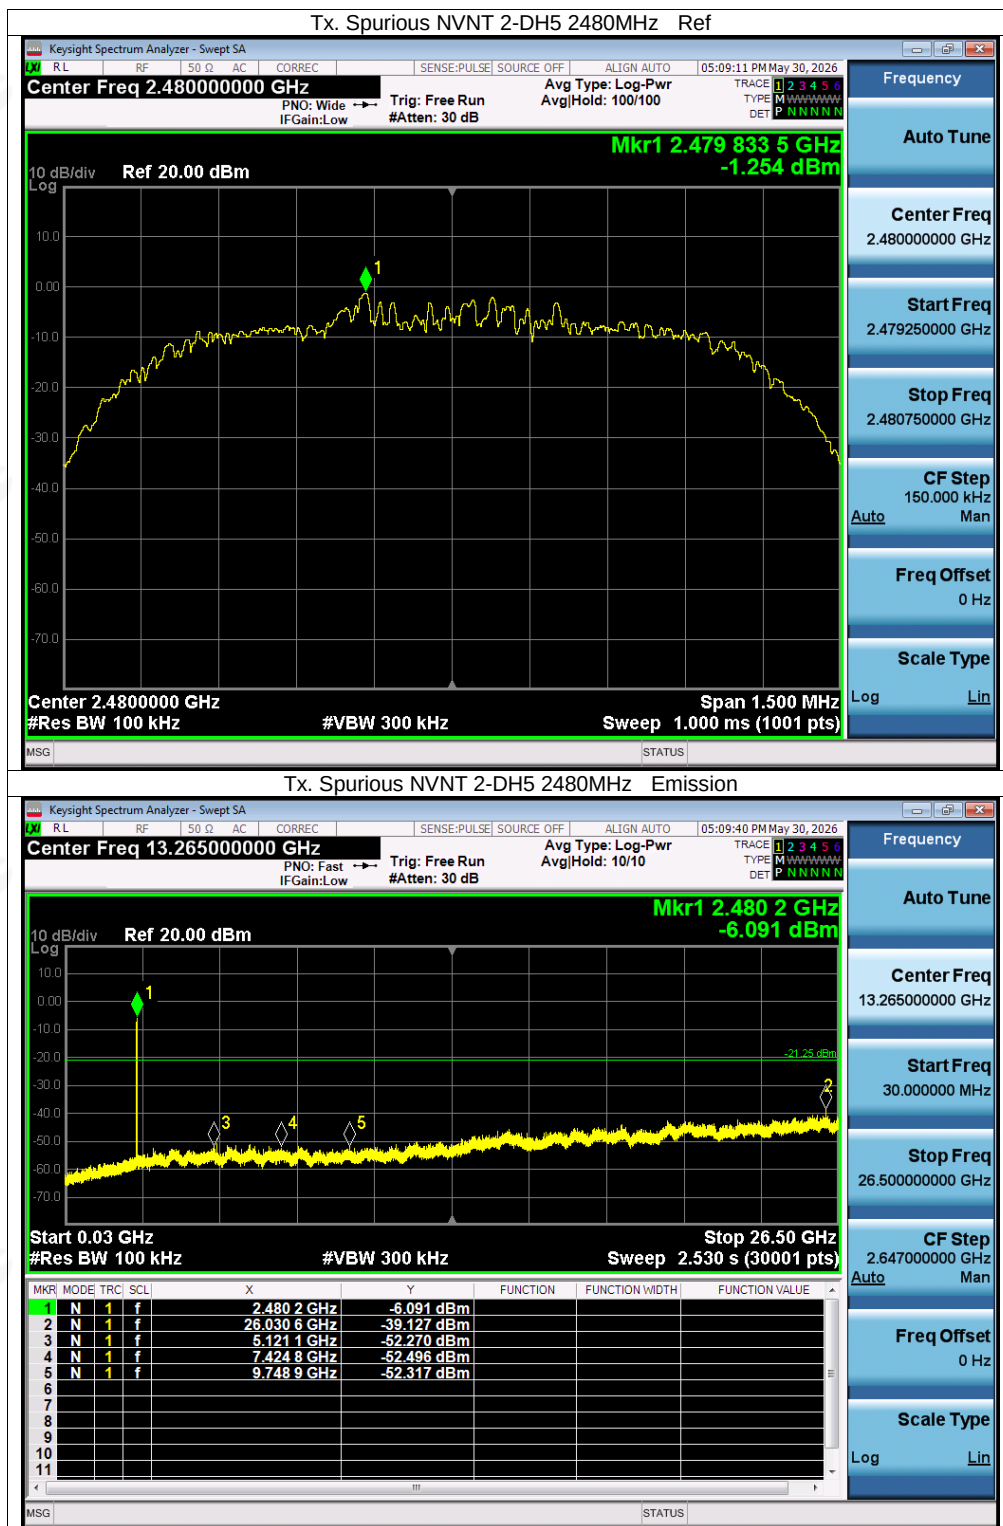

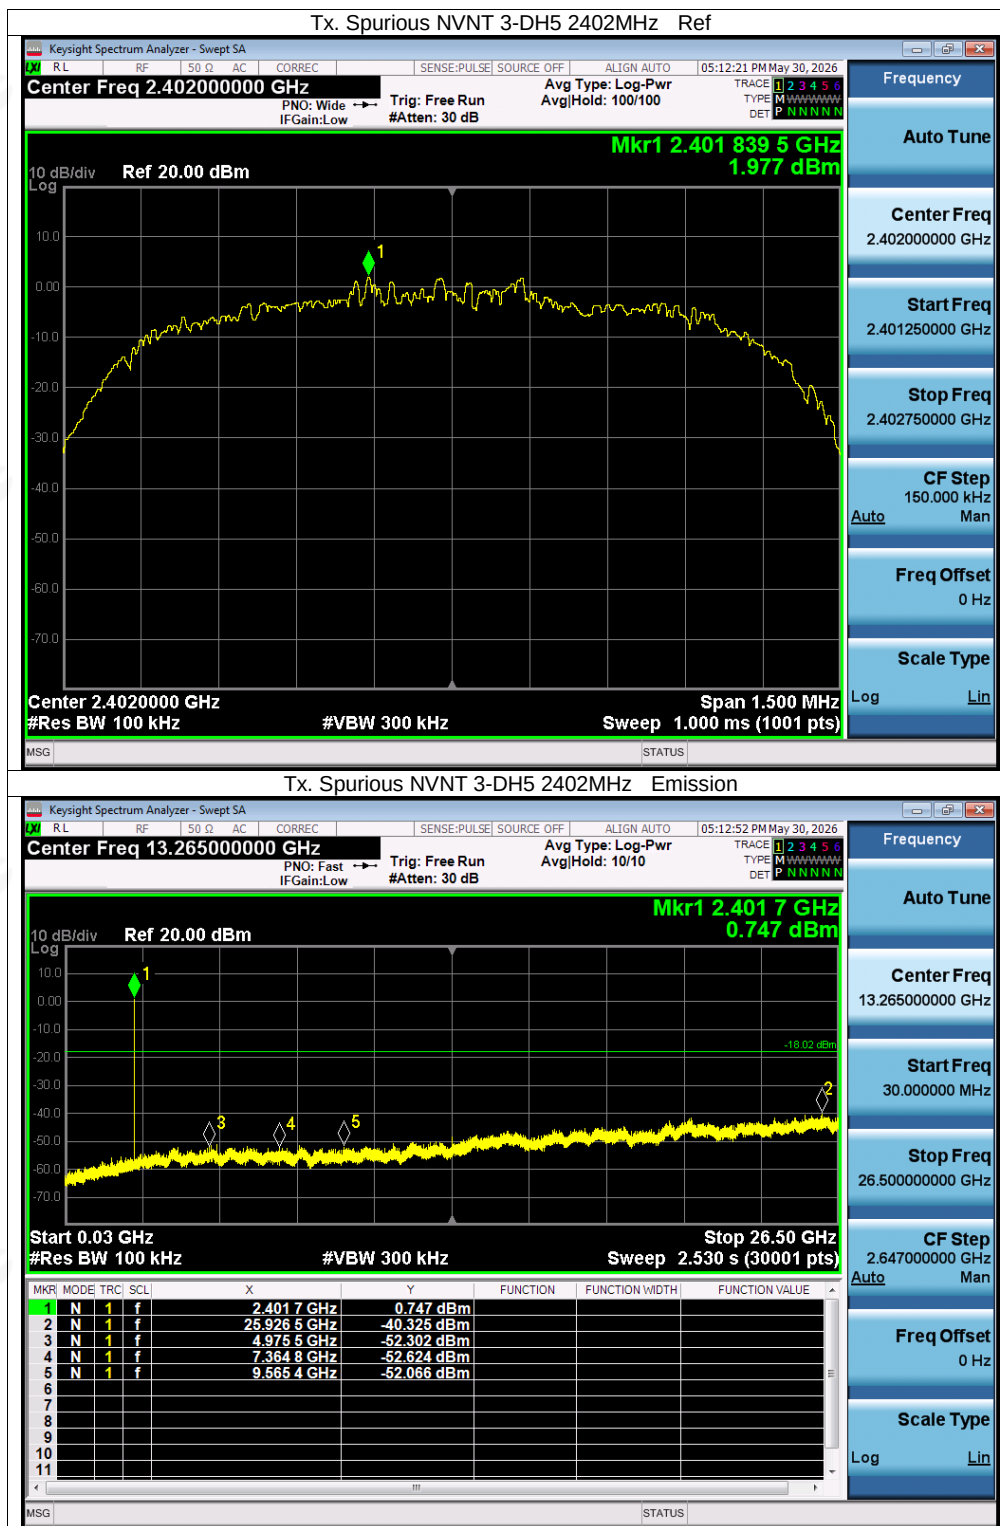

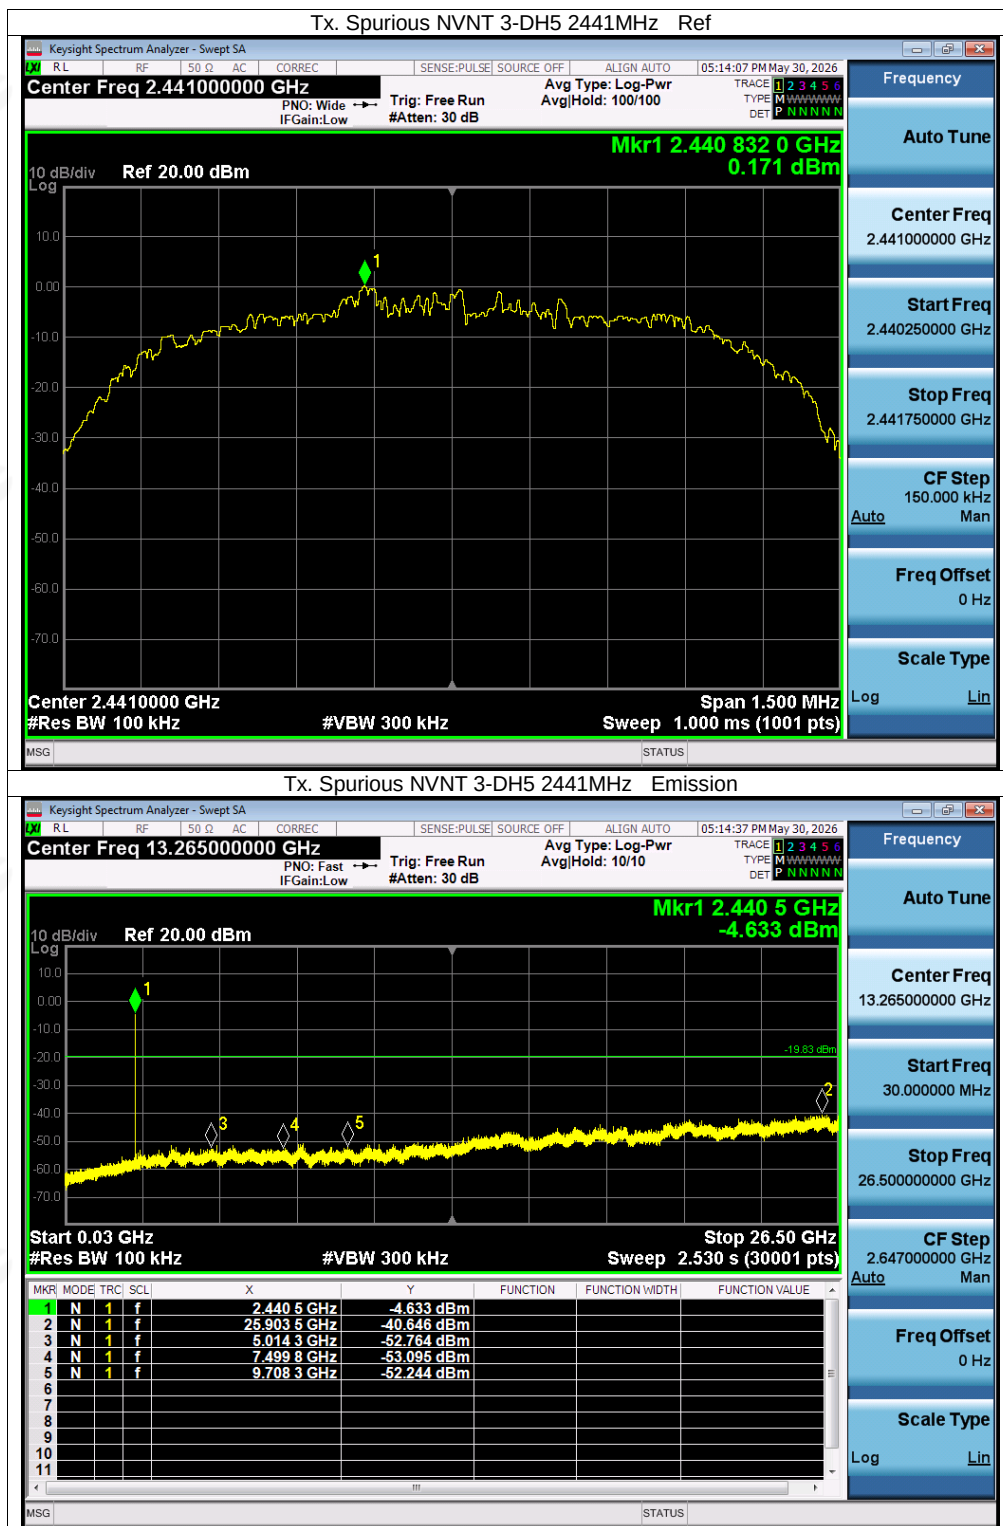


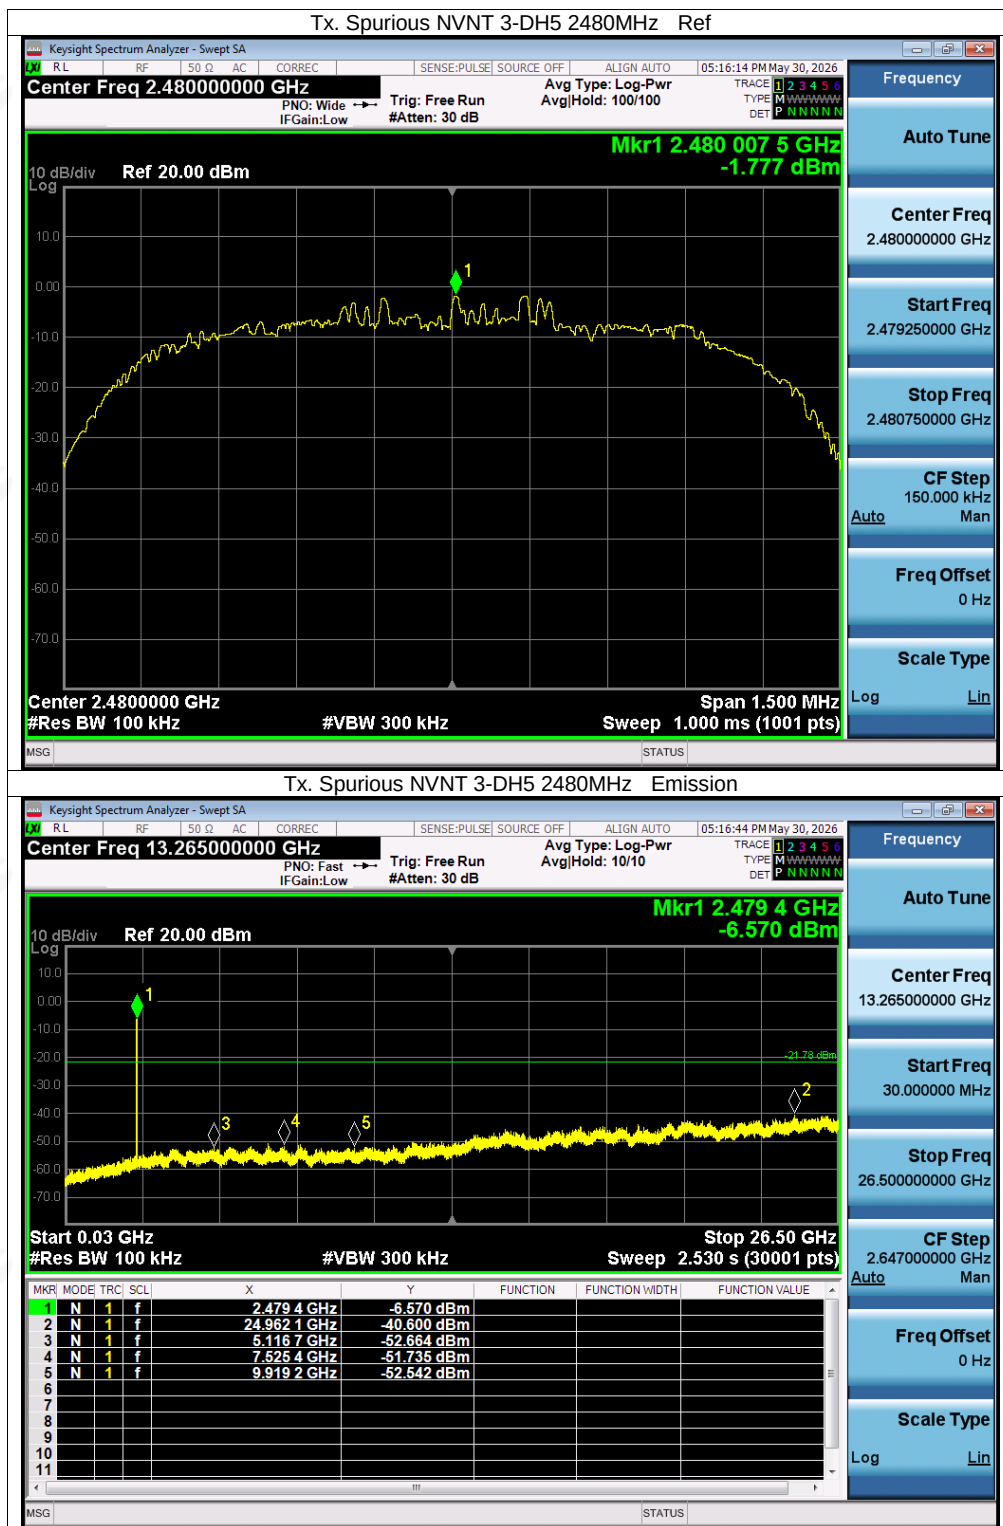




Number of Hopping Channel

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH5	79	15	Pass
NVNT	2-DH5	79	15	Pass
NVNT	3-DH5	79	15	Pass

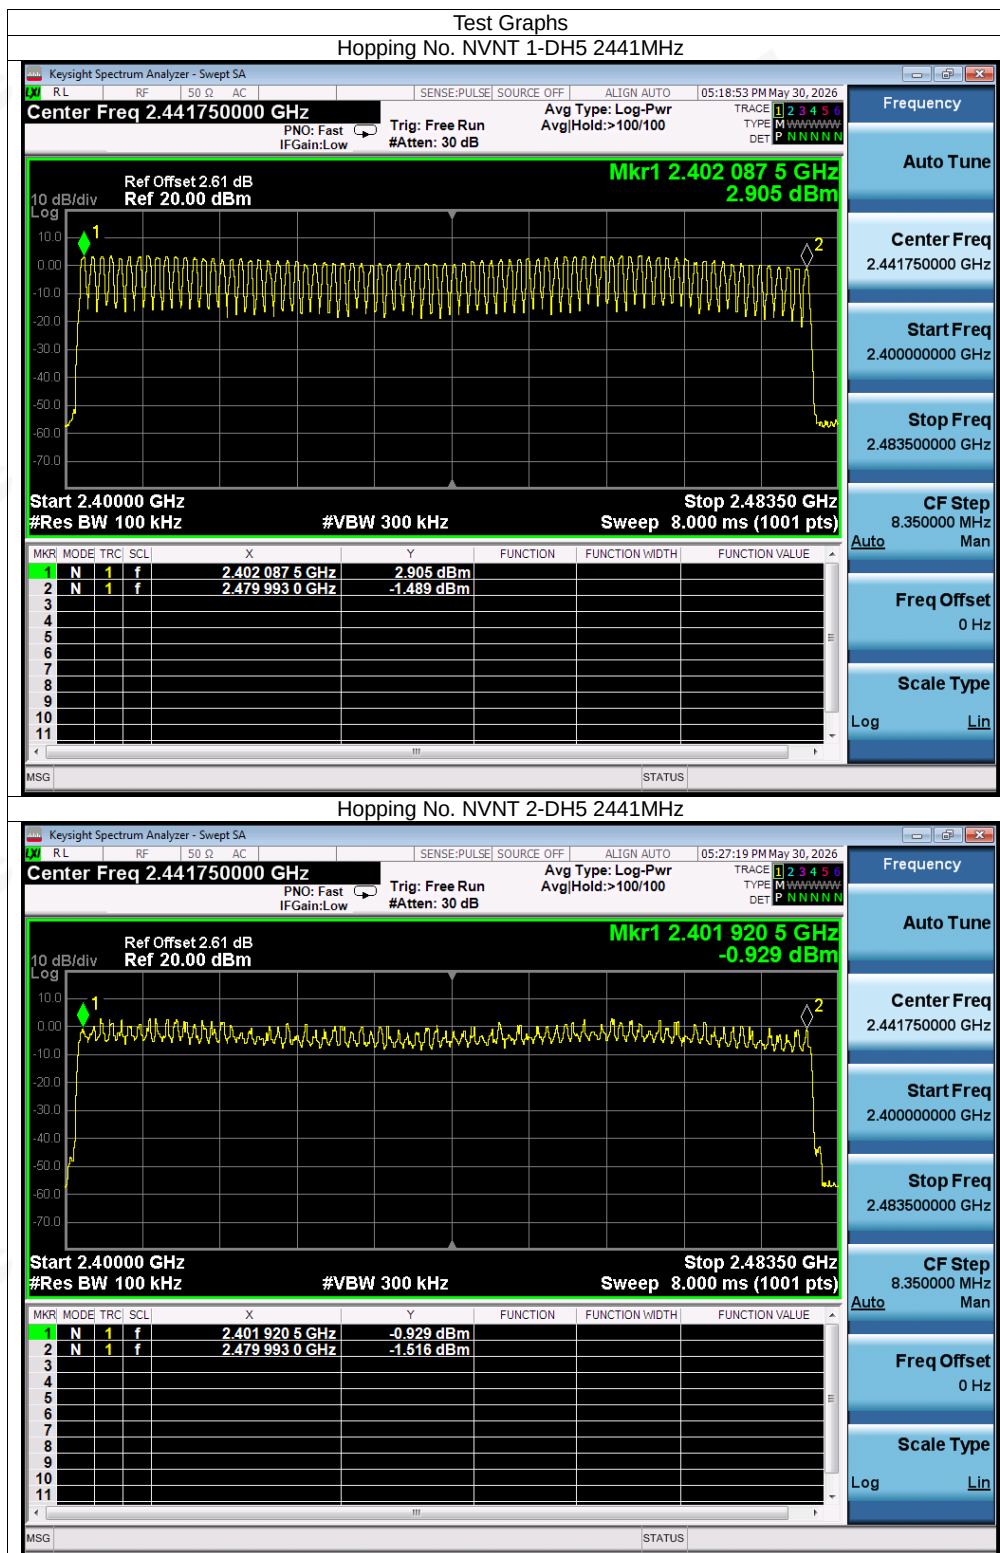

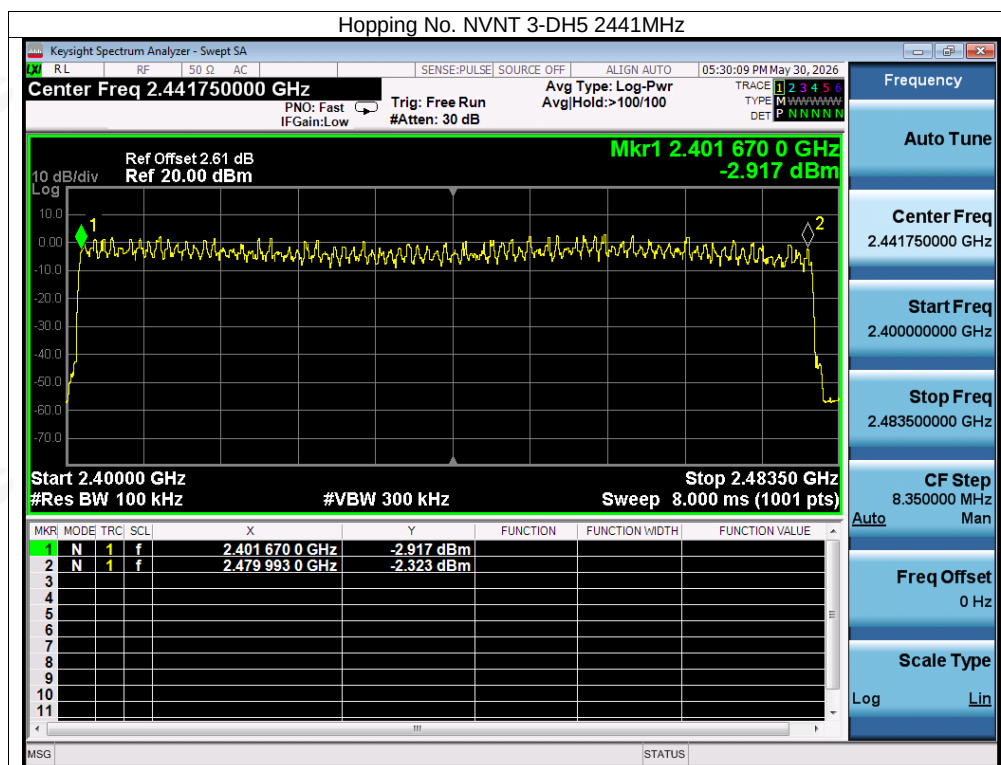



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※