

OSCAL

PowerMax 3600 PE Portable Power Station User manual V1.0



User Manual



1. Please keep the portable power station and accessories dry and away from fire.
2. Do not disassemble or collide the product and do not operate the product connection according to the instructions.
3. Do not get caught in rain or water. If it happens, stop using the product immediately.
4. Please recycle and dispose of the product according to local laws and regulations.
5. Children and special groups may use the product under the supervision of a guardian.
6. Do not cover or block the cooler when using the product.
7. This device is primarily intended for use in non-residential environments and complies with CLASS-A standards.
8. Warning: Operating this device in a residential environment may cause radio interference.

Dear customer,

if you are in any problems with our products, Please feel free to contact us by scan the code or Email us to get professional worry-free technical support & Customer Service immediately

We always do our best to maintain the interests of each customer and hope you get the most benefit from us!

Sehr geehrter Kunde,

wenn Sie irgendwelche Probleme mit unseren Produkten haben, kontaktieren Sie uns bitte, indem Sie den Code scannen oder uns eine E-Mail schicken, um sofort professionelle und sorgenfreie technische Unterstützung zu erhalten & Kundenservice.

Wir tun immer unser Bestes, um die Interessen eines jeden Kunden zu wahren und hoffen, dass Sie den größten Nutzen aus uns ziehen!

Gentile Cliente,

Se hai domande sui nostri prodotti, non esitare a contattarci scansionando il codice QR o inviando un'e-mail per ottenere immediatamente supporto tecnico e servizio clienti professionale.

Facciamo sempre del nostro meglio per mantenere gli interessi di ogni cliente e speriamo che tu possa ottenere il massimo beneficio da noi!

Cher client,

si vous avez aucun problème avec nos produits, n'hésitez pas à nous contacter en scannant le code ou nous envoyant un courriel pour obtenir un soutien technique professionnel & Service client immédiatement.

Nous faisons toujours de notre mieux pour maintenir l'intérêt de nos clients et espérons que vous obtiendrez le plus d'avantages de nous!

Estimado cliente,

Si usted está en cualquier problema con nuestros productos, por favor sienta libre de enterarnos en contacto con nosotros por la exploración del QR código o del email nuestro para conseguir profesional soporte técnica preocupación-libre & servicio al cliente inmediatamente.

Siempre hacemos todo lo posible para mantener intereses de cada cliente y esperamos que obtenga el máximo beneficio de nosotros

当社の製品に何か問題がございましたら、コードをスキャンしてお気軽にお問い合わせください、或は、メールでお問い合わせください

お客様の利益を守るために最善を尽くし、お客様によりよいサービスを提供して力を尽くします！

Scan the QR code below to get FREE-technical support

Scannen sie den QR code unten, um KOSTENLOSEN technischen support zu erhalten

Scansiona il codice QR sotto per ottenere supporto tecnico GRATUITO

Scannez le code QR ci-dessous pour bénéficier d'un soutien technique gratuite.

Escanee el siguiente código QR para obtener asistencia técnica GRATUITA

以下の QR コードをスキャンして、無料の技術サポートを受けられます




afterservice@oscal.hk

English text.....1-12
日本語テキスト.....13-24
Текст на русском.....25-36
Texte en français.....37-48
Texto en español.....49-60
Deutscher Text.....61-72
Testo in italiano.....73-84
Texto em português.....85-96
Tekst polski.....97-108


PowerMax 3600 PE (EU) (AU)

European standard products are only suitable for 210-240V~ voltage input and output#

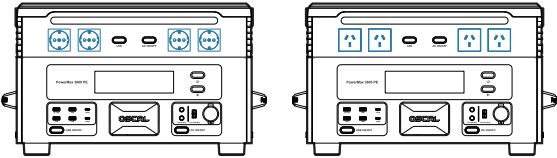

PowerMax 3600 PE (US) (JP)

US and Japanese standard products are only suitable for 100-120V~ voltage input and output#



www.oscal.hk

Manufacturer:Shenzhen Doke Communication Co.,Ltd

Address: 1301-1302, 13th Floor, Block B, WeiDongLong Business Building, Meilong Road 2113, Longhua District, ShenZhen, P. R. C

FCC ID:2A98M-PM3600PE

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception,which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC 's RF Exposure guidelines, This equipment should be installed and operated with minimum distance 20cm between the radiator and your body: Use only the supplied antenna.


Package Contents

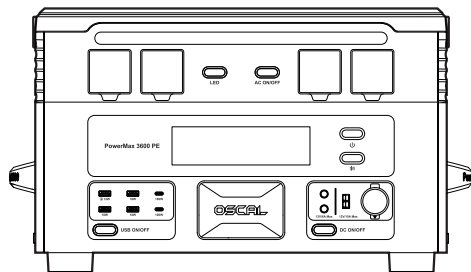


PowerMax 3600 PE



User Manual




APP Manual




Power cord



Product Warranty Card




Solar charging cable



Vehicle charging cable

Product Introduction

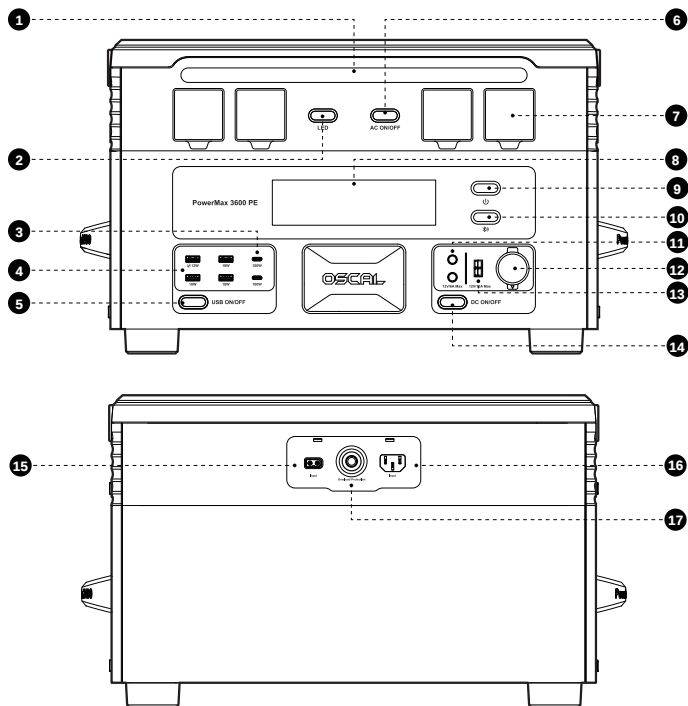


- 1. LED lamp
- 2. LED lamp switch
- 3. USB-C output port *2
- 4. USB-A output port *4
- 5. USB outputting switch
- 6. AC output switch

- 7. AC output socket *4
- 8. Display screen
- 9. Control switch
- 10. APP Bluetooth/WiFi link switch
- 11. DC5521 output port *2
- 12. Cigarette lighter output port


- 13. Anderson output port
- 14. DC output switch
- 15. Solar energy/vehicle charging input port
- 16. AC input port
- 17. Overcurrent protector

Display screen functions

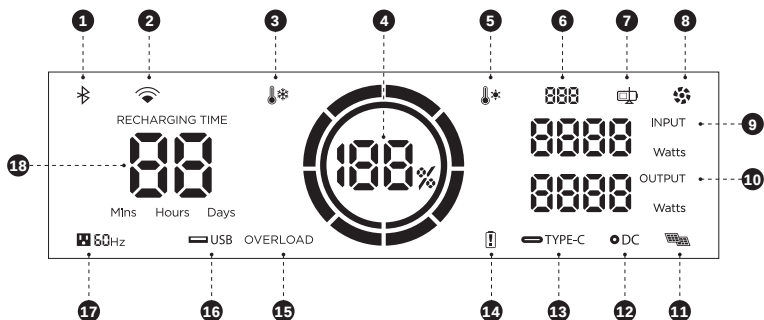


1		Bluetooth connection	10	OUTPUT	Output power
2		WIFI connection	11		Solar panel DC charging
3		Low-temperature warning	12	DC	DC output
4		Battery level percentage	13	TYPE-C	USB-C output
5		High-temperature warning	14		Battery pack fault
6		Error code	15	OVERLOAD	Output overload warning
7		Charging status indicator	16	USB	USB-A output
8		Fan status	17		AC output
9	INPUT	Input power	18		Remaining charge / discharge time


Product On/Off

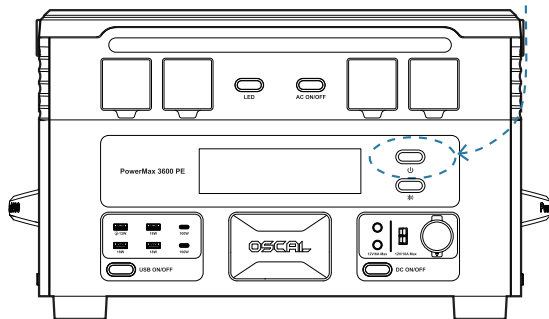





Power On




Power Off




Button Introduction

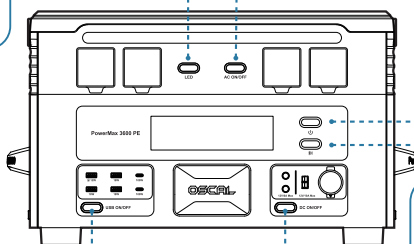


Powering Devices

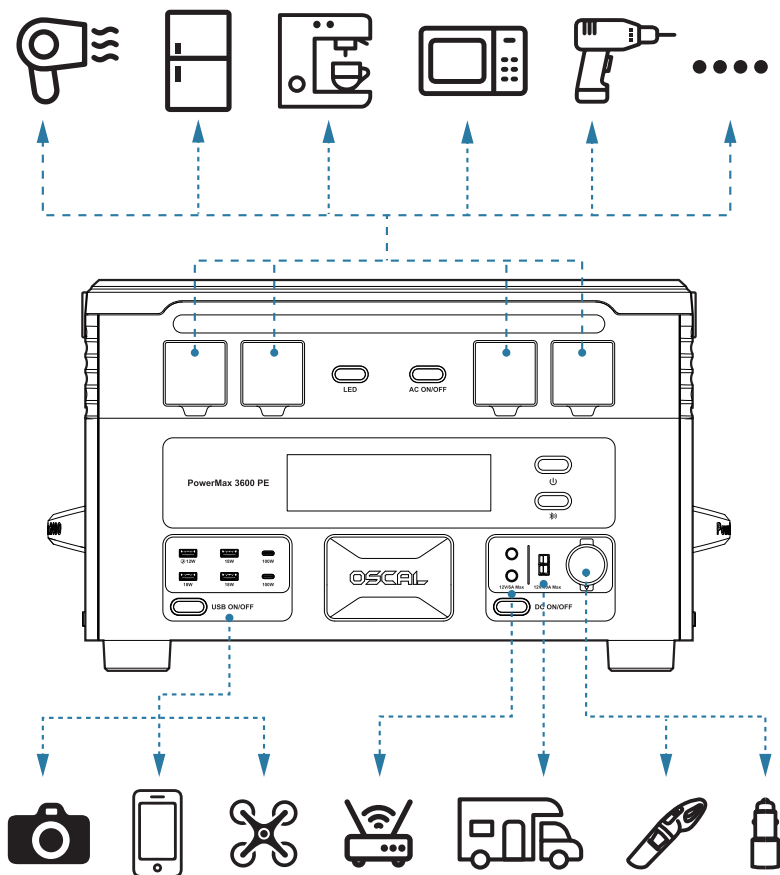


PowerMax 3600 PE Charging

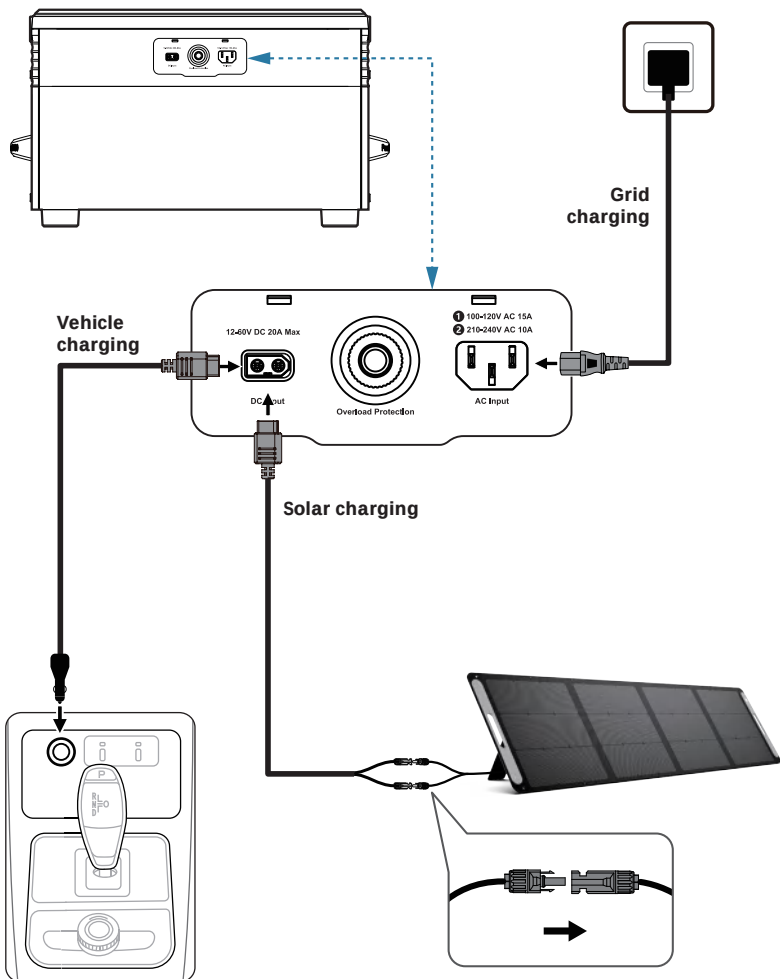

Schematic Diagram: Series Connection of Photovoltaic Panels

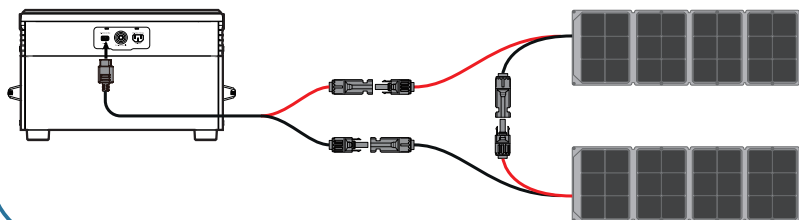

Schematic Diagram: Parallel Connection of Photovoltaic Panels

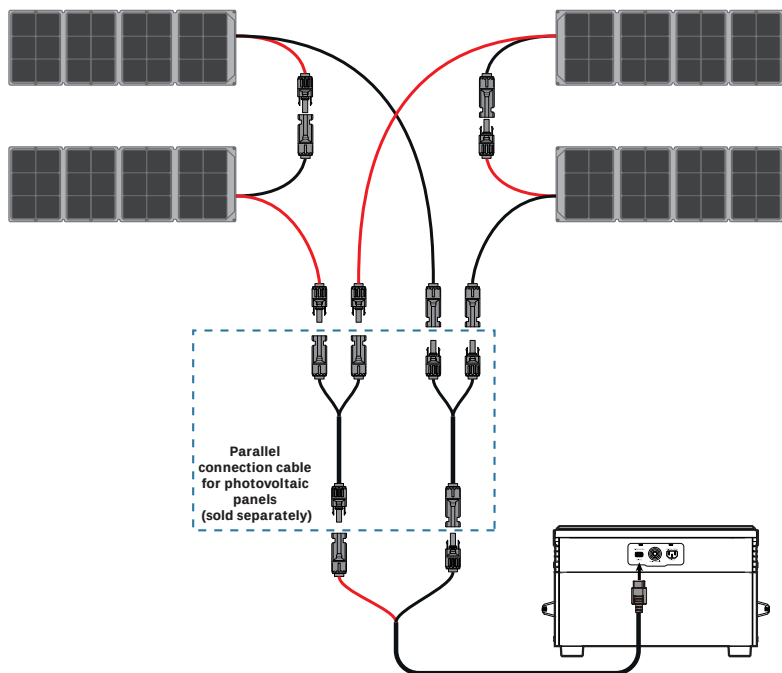

Parameter Specifications

Basic Information

Net weight	Approx. 24.80kg
Dimensions (L×W×H)	530×300×302mm
Capacity	2016Wh
WIFI	Frequency range: 2400-2483.5MHz
Bluetooth	Frequency range: 2400-2483.5MHz

Output Specifications

AC output (×4)	Pure sine wave, 3600W in total, 120V ^① , 230V ^② (50/60Hz)
USB-A	5V ^① ---2.4A, max 12W
USB-A fast charging (×3)	5V ^① ---3A, 9V ^① ---2A, 12V ^① ---1.5A (constant voltage), max power 18W each, 54W in total
USB-C fast charging (×2)	5/9/12/15/---3A, 20V ^① ---5A, Max power 100W each, 100W in total
Vehicle charging output	12V ^① ---10A, ,Shared power 120W
DC5521 (×2)	12V ^① ---6A, max power 72W
Anderson port	12V ^① ---10A, ,Shared power 120W

Input Specifications

AC input power	Max power 1500W
AC input voltage	100-120V ^① ~15A, 210-240V ^② ~10A, 50Hz/60Hz
Solar charging input	12-60V ^① --- 20A Max, 1600W Max
Vehicle charging input	12V/24V ^① ---8A, max power 192W
AC+Solar	Max power 1600W

Battery Specifications

Cell material	LFP (LiFePO4)
Cycle life	More than 80% capacity remaining after 3500 cycles
Protection type	High-temperature protection, low-temperature protection, overdischarge protection, overcharge protection, overload protection, short-circuit protection, overcurrent protection, overvoltage protection, undervoltage protection, excessive voltage difference protection.

Operation Temperature

Charging temperature 0°C~45°C

Discharging temperature -10°C~45°C

Storage temperature -10°C~45°C (ideally 20°C~30°C)

Other Specifications

Solar panel Optional, 200W/400W solar panel, sold separately

Power cord(US) 15A125~ cETLus 5015849 SJTO 3x1.65mm² (15AWG)x1.8m 105°C 300V

① This marking parameter is only applicable to US and Japanese version products.

② This marking parameter is only applicable to European version products.



1. Vehicle charging is facilitated by means of an Anderson-style power connection, with a max power of 120W.

2. The maximum input voltage for solar charging can reach 150V DC.



Safety Instructions

1. It is recommended to use original components or parts. If replacement is required, please contact the official OSCAL sales channel for purchase information.
2. Charging, discharging, and recharging the device once every six months is recommended. In addition, do not leave the device with a completely drained battery for a long time.
3. Do not allow the Product to come into contact with any liquid, and do not immerse the Product in water or get it wet. Do not use the Product in a rainy or humid environment.
4. Do not use the Product in strong electrostatic or magnetic-field environments.
5. Do not disassemble the Product in any way or puncture it with sharp objects.
6. Do not insert pins, wires, or other metal objects into the enclosure, sockets, or controls of the Product so as not to cause short circuiting.
7. Do not use the Product near heat sources (such as fire sources or hot furnaces).
8. Strictly abide by the ambient temperature specified in the User Manual when using the Product. If the temperature of the use environment is too high, the battery may catch fire or even explode. If the temperature is too low, the Product performance will be significantly reduced and the Product may even stop running.
9. Do not place heavy objects on top of the Product.
10. Do not forcibly block the fan during use.
11. Please avoid impact, fall, and violent vibration. In case of serious external impact, please immediately turn off the power and stop use. Please secure the Product during transportation to avoid vibration and impact.
12. If the Product accidentally falls into water during use, please place it in a safe open area and keep away from it until it dries completely. The dried Product cannot be used again and should be disposed of according to the below section titled "Disposal". If the Product catches fire, please use fire extinguishing equipment in the following recommended order: water or water mist, sand, fire blanket, dry powder, CO₂ (carbon dioxide) fire extinguisher.
13. If dirt enters a product port, use a dry cloth to clean it.
14. Please place the Product on a stable surface to prevent damage caused by tipping. If the Product is seriously damaged after tipping, shut it down immediately, put the battery in an open area away from combustible materials or people, and dispose of it in accordance with local laws and regulations.
15. Please keep the Product away from children and pets.
16. Store the Product in a dry and well ventilated area.
17. In a humid environment (seaside, waterside, etc.), it is recommended to use the Product in a moisture-proof bag to avoid immersion in water. If water enters the Product, do not use it or

turn on. Ensure that anti-electric shock measures have been taken before touching it. Please put it in a safe and waterproof open area, and contact customer service or a licensed professional immediately.

18. Using the Product to supply power to personal safety-related medical emergency devices is not recommended, including but not limited to hospital version CPAP (Continuous Positive Airway Pressure) machines, ECMO (Extracorporeal Membrane Oxygenation) artificial lungs, etc. In addition, home version CPAP machines can be used normally in a home environment and generally do not require continuous professional monitoring. For questions about the usage restrictions of a particular device, please consult the device manufacturer, and adhere to the doctor's advice. If the Product is used with general medical devices, please give attention to the battery status and ensure that the battery does not run out.

19. A power supply product inevitably generates electromagnetic fields when used, which may affect the normal operation of implantable medical devices or personal medical devices, such as pacemakers, cochlear implants, hearing AIDS, defibrillators, etc. If using such medical devices, please consult the manufacturer for restrictions on their use to ensure that the Product is operated at an adequately safe distance from such medical devices (e.g., pacemakers, cochlear implants, hearing AIDS, defibrillators, etc.).

20. When the power supply product is connected to a refrigerator in its normal operating mode, it may automatically turn off due to power fluctuations from the refrigerator. If medicines, vaccines, or other high-value items are stored in the refrigerator, setting the AC output to "Never Turn Off" through the APP is recommended when connecting the Product to ensure continuous power supply. Users are encouraged to give attention to the power consumption of the power supply product.



Using the Product in residential areas may cause disturbances.

Disposal

1. If possible, make sure to completely discharge the battery of the Product before placing the Product in the designated battery recycling bin. The Product contains a battery, which is considered a hazardous chemical substance. Disposal of the Product in a general-use trash receptacle is strictly prohibited. For relevant details, please refer to your local battery recycling and disposal laws and regulations.
2. If the battery cannot be completely discharged due to the fault of the Product itself, please contact a professional battery recycling company for further processing, instead of disposing of the battery directly in the battery recycling bin.
3. When an over-discharged battery cannot be activated, please dispose of it as specified.

UPS Function

The Product supports UPS (Uninterrupted Power Supply) functionality. When you connect the AC input port of the Product to the grid with the AC charging cable, an appliance can draw power from the AC output port of the Product to operate (at this time the AC power comes from the grid, not the battery). When the grid experiences a sudden power failure, the Product can automatically switch to its battery-powered mode within 10ms.



The UPS functionality of the Product is not that of a professional UPS function and does not support switching in 0ms. Do not connect to devices with high uninterrupted power supply requirements (such as data servers and workstations), or test repeatedly to confirm compatibility before use. Furthermore, it is recommended to use only one device with UPS requirements during use. Do not use multiple devices at the same time to avoid triggering the overload protection features of the Product. OSCAL is not liable for any failure of the device to operate correctly or any loss of data due to failure to follow the instructions.

Error Code and Solution

Error code	Error type	Solution
001	Battery overvoltage	Automatically recovers after charging ceases for a period of time or after discharging
002	Battery undervoltage	Recovers after charging with mains power
007	Battery charging temperature low	Automatically recovers after reaching an appropriate temperature
008	Battery charging temperature high	Automatically recovers after reaching an appropriate temperature
009	Battery discharging temperature low	Automatically recovers after reaching an appropriate temperature
010	Battery discharging temperature high	Automatically recovers after reaching an appropriate temperature
011	BMS Mos tube temperature high	Automatically recovers after stopping charging/discharging for a period of time
012	BMS Mos damaged	Automatically recovers after stopping charging/discharging for a period of time
013	The voltage of the cell unit is too high.	Automatically recovers after stopping charging
014	The voltage of the cell unit is too low.	Automatically recovers after charge
015	The pressure difference of the cell unit is too large.	Contact the after-sales service
016	MPPT running fault	Check the light intensity and cable connection
017	MPPT temperature too high	Automatically recovers after stopping charging for a period of time
020	PCS communication interrupted	Contact the after-sales service
025	Output short circuit	Disconnect the load and turn on AC switch. If the problem is persistent, contact the after-sales service
026	The AC output voltage is too low or too high.	Automatically recovers after charge and discharge
027	The temperature of the inverter radiator is too high	Automatically recovers after a period of time
028	Battery overvoltage / Battery undervoltage / Undervoltage shutdown	Automatically recovers after charge and discharge
030	Overload	Check the load, reduce the load power, and turn on again

APP



Scan the QR code to download the Smart Life app

Disclaimer

Before use, please read and fully understand the contents of the User Manual of the Product to ensure correct use. After reading, please store the User Manual in a safe place for future reference. Failure to operate the Product properly may cause serious injury to yourself or others, or result in damage to the Product and property damage. By using the Product, you confirm your understanding, acknowledgment, and acceptance of all the terms and conditions of this document. The user bears complete liability for his/her own actions and all consequences arising therefrom. OSCAL is not liable for any damages caused by the user's failure to use the Product in accordance with the User Manual.

Within the scope of laws and regulations, OSCAL reserves the right to the final interpretation of this document and all related product documents. The contents of the User Manual are subject to change, revision, or termination without prior notice. Please visit OSCAL's official website for the latest product information.