

产品承认书

SPECIFICATION

客户 Customer	厦门宏发
客户料号 Customer Part Number	54300002500
产品编号 Part Number	F0117009
产品描述 Product Description	门把手天线 (不带开关)
版本号 Edition	A0

供应商 Supplier			客户 Customer
批准 Approval	审核 Check	制作 Design	批准 Approval
Celica	赵孟进	张一辰	

客户确认后请寄回一份


Please return one copy after approved



NEWIC ELECTRONIC Co.,Ltd

	产品编号 Part Number	产品描述 Description	版本 Edition
	F0117009	门把手天线 (不带开关)	A0
	客户料号(/描述)Customer part Number(/Description)	日期 Date	页数 Pages
	54300002500	2024/5/9	2 / 3

1. Dimensions(unit: mm)

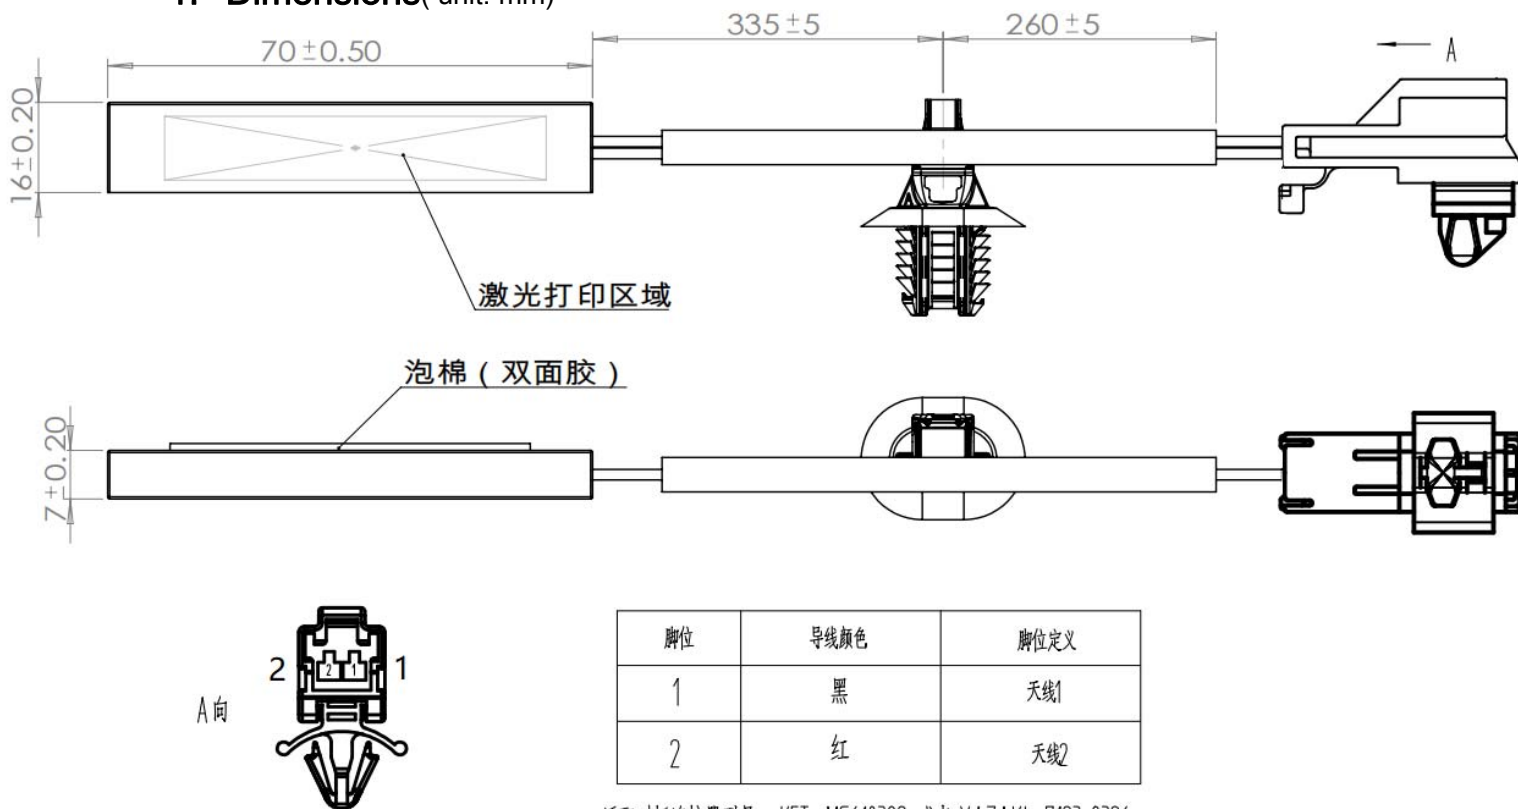


适配对插连接器型号: KET:MG610392 或者 YAZAKI :7123-8326

Notes:

- 1.未注尺寸按 3d 数模 ;
- 2.胶壳 KET MG620393 , 卡扣 MG 630418-5 ;
推荐线卡型号 T50ROSFTOVALU/海尔曼 ;
泡棉尺寸 $52 \times 10 \times 1$ mm ;

2. Electrical Diagram

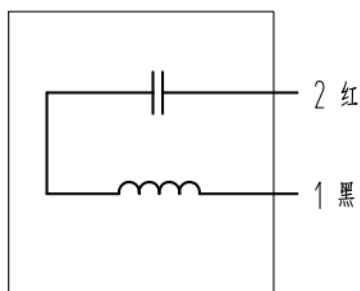

NOTES

All rights reserved. Any re using and re-producing of this document without permission is prohibited.



	产品编号 Part Number	产品描述 Description	版本 Edition
	F0117009	门把手天线 (不带开关)	A0
	客户料号(/描述)Customer part Number(/Description)	日期 Date	页数 Pages
	54300002500	2024/5/9	3 / 3

3. Electrical Parameters

序号	描述	参数
1	Rs (ESR)	6Ω max ▲ TBD
2	Inductance L	491uH±3% ▲
3	Resonant Freq.	125KHz±4% ▲

Note: Rs/L/f measured with LCR meter @f=125KHz/1Vac/25° C

4. Reliability Parameters

Q (coil)	≥125 TBD
I _{antenna-peak}	1A max
Ingress Protection Rating	IP6K5 (天线本体满足 , 不含接插件)
C	3.3nF±5%
Working Temperature	-40 °C ->+85 °C
Storage Temperature	-40 °C -> +85 °C

5. Printing Information

Notes : 下述为临时打印内容 NEWIC F0117009 YYMMDDXXXX

6. Editions

Editions	Date	Updating detail	Made by
A0	2024/5/9	第一版 Original edition	张一辰

NOTES	
All rights reserved. Any re using and re-producing of this document without permission is prohibited.	