


## U2622 BT ANT SPEC

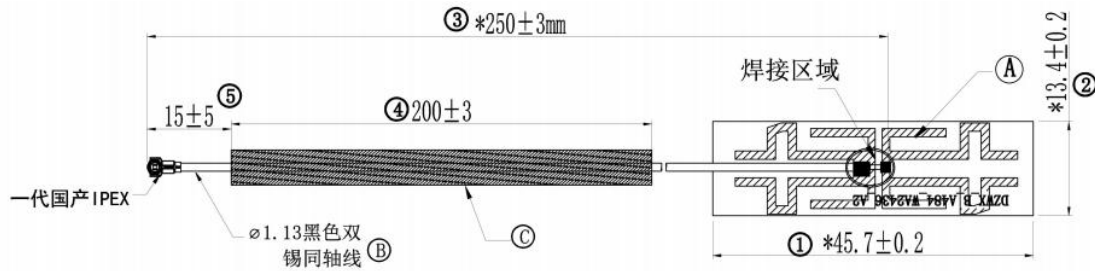

Type: FPC ANT


Length: 45.7mm Width: 13.4mm

Technology: PI,Electrolytic copper,and coaxial line

Manufacturer of Antenna: Shenzhen Daze Wireless Technology Co., Ltd


Address of antenna manufacturer: Room 306, Building 2, Fenda  
Technology Park Phase II, Baoyuan Community, Shiyan Street, Bao'an District,  
Shenzhen China.

## BT ANT SWR & Return Loss(2.4G)

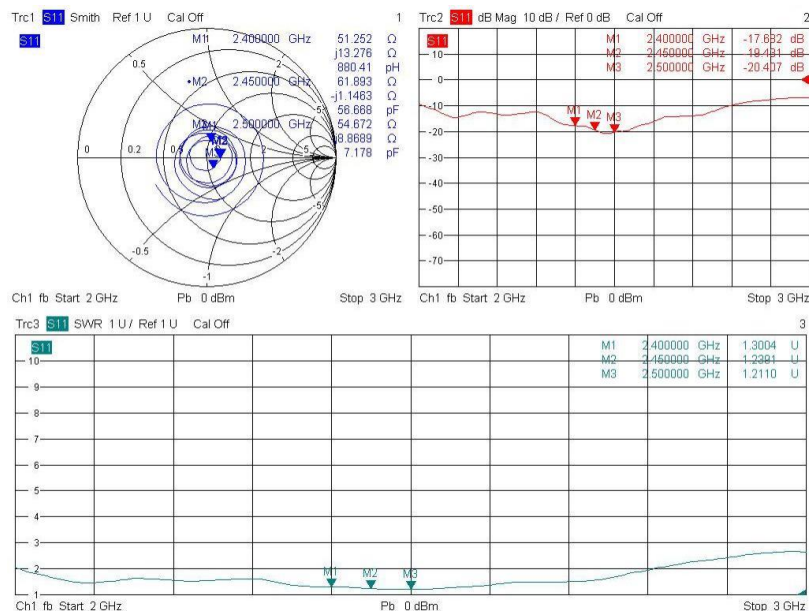


## BT Efficiency & Gain

| Frequency(MHz) | Efficiency(%) | Gain(dBi) |
|----------------|---------------|-----------|
| 2400 MHz       | 63.79         | 4.12      |
| 2410 MHz       | 62.50         | 4.11      |
| 2420 MHz       | 61.29         | 3.88      |
| 2430 MHz       | 62.83         | 3.39      |
| 2440 MHz       | 63.59         | 3.36      |
| 2450 MHz       | 63.21         | 3.46      |
| 2460 MHz       | 66.17         | 3.68      |
| 2470 MHz       | 67.14         | 3.80      |
| 2480 MHz       | 66.05         | 3.80      |
| 2490 MHz       | 65.08         | 3.56      |
| 2500 MHz       | 68.12         | 3.68      |

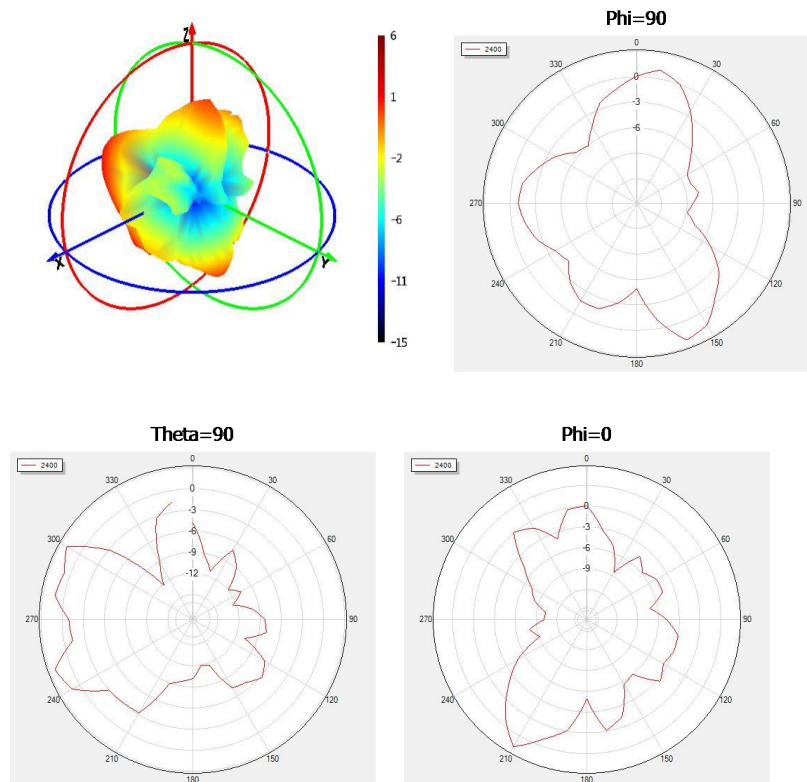

## U2622 LE TX ANT SPEC

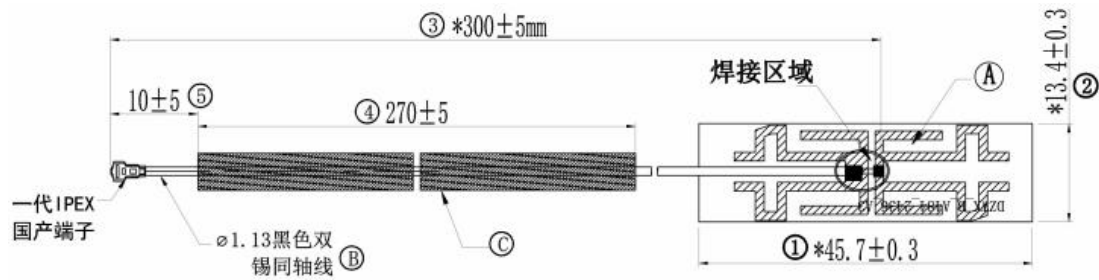

Type: FPC ANT


Length: 45.7mm Width: 13.4mm

Technology: PI, Electrolytic copper, and coaxial line

Manufacturer of Antenna: Shenzhen Daze Wireless Technology Co., Ltd

Address of antenna manufacturer: Room 306, Building 2, Fenda Technology Park Phase II, Baoyuan Community, Shiyan Street, Bao'an District, Shenzhen China.

## BT ANT SWR & Return Loss(2.4G)

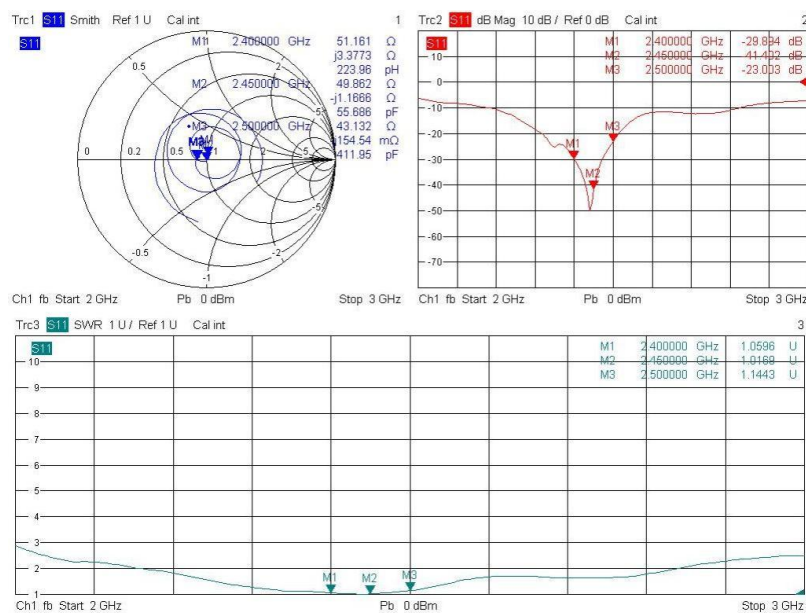

### BT Efficiency & Gain

| Frequency(MHz) | Efficiency(%) | Gain(dBi) |
|----------------|---------------|-----------|
| 2400           | 74.00         | 3.79      |
| 2410           | 69.21         | 3.30      |
| 2420           | 67.85         | 3.21      |
| 2430           | 70.15         | 3.69      |
| 2440           | 69.44         | 3.83      |
| 2450           | 66.69         | 4.03      |
| 2460           | 69.02         | 4.42      |
| 2470           | 66.91         | 4.15      |
| 2480           | 64.00         | 3.98      |
| 2490           | 62.66         | 3.76      |
| 2500           | 64.88         | 3.98      |

