




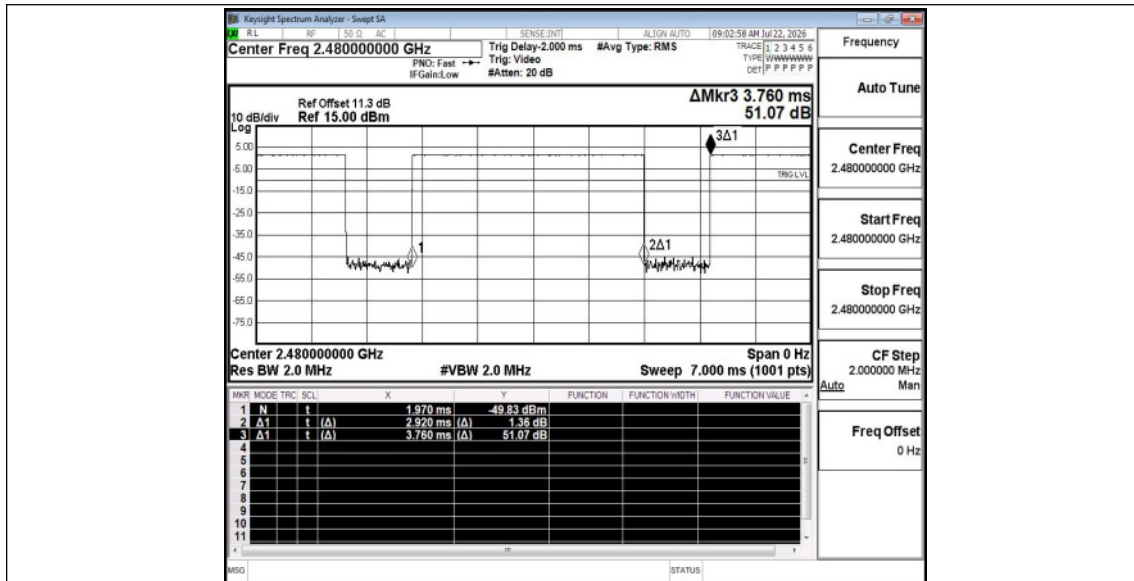



2DH5_Ant1_2402

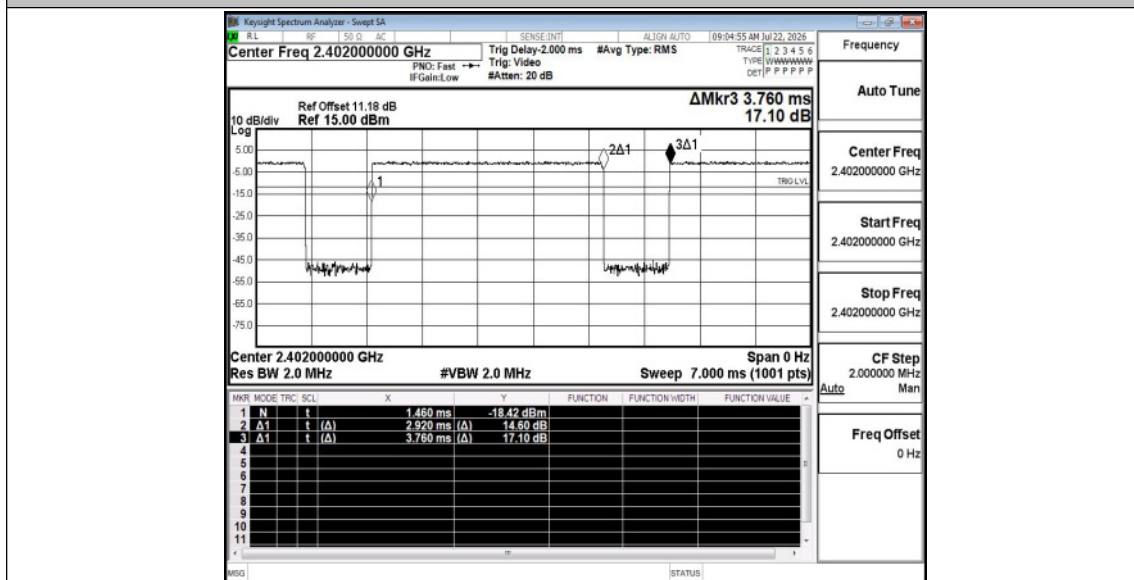

2DH5_Ant1_2441

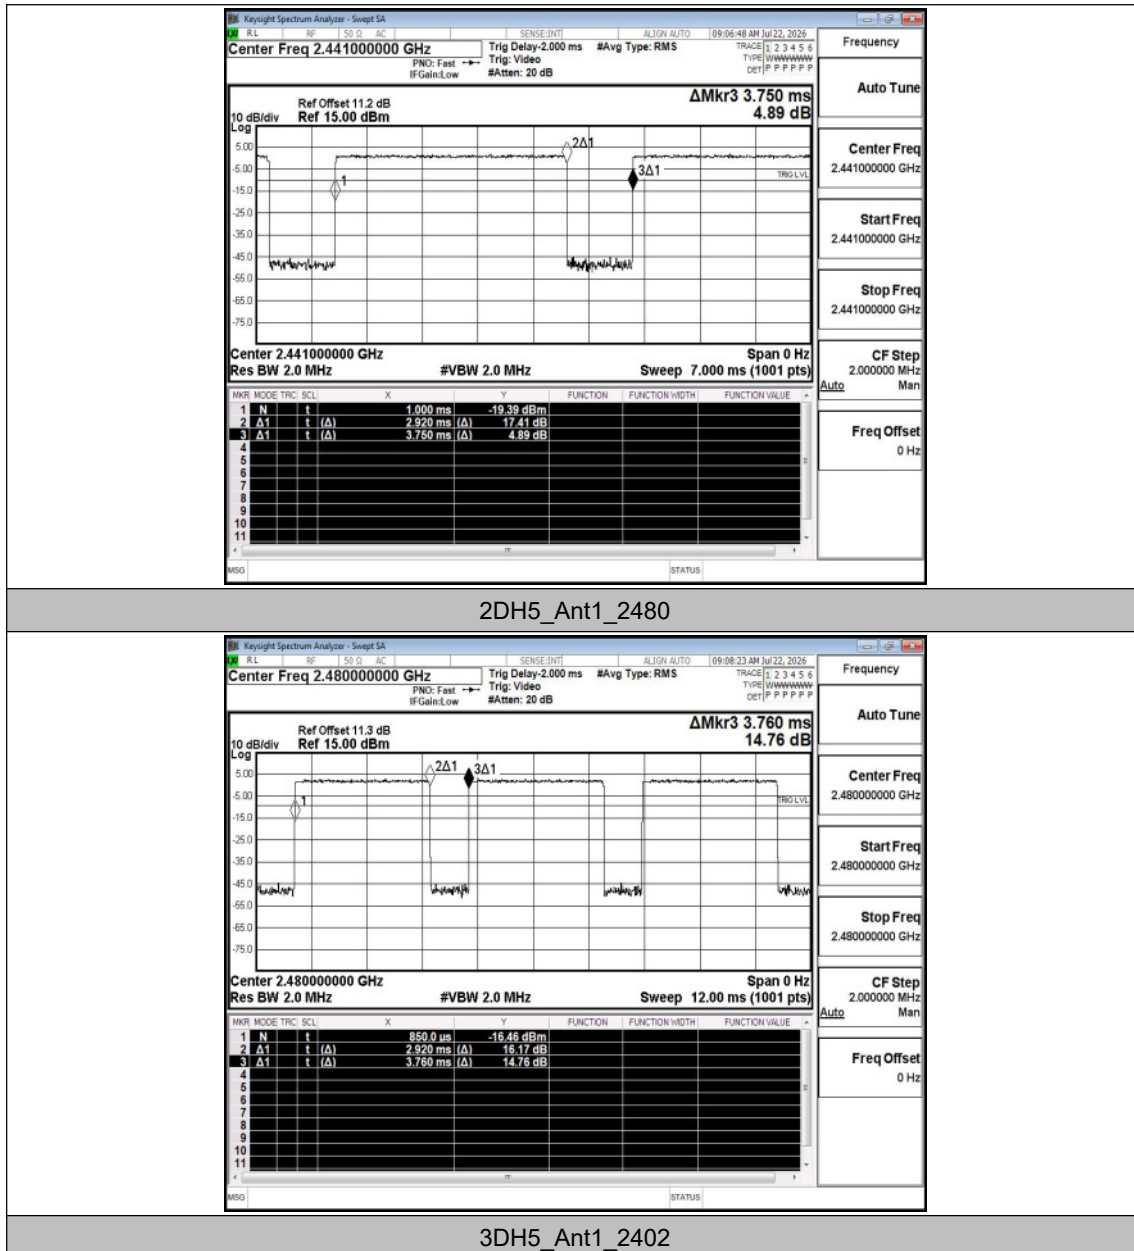

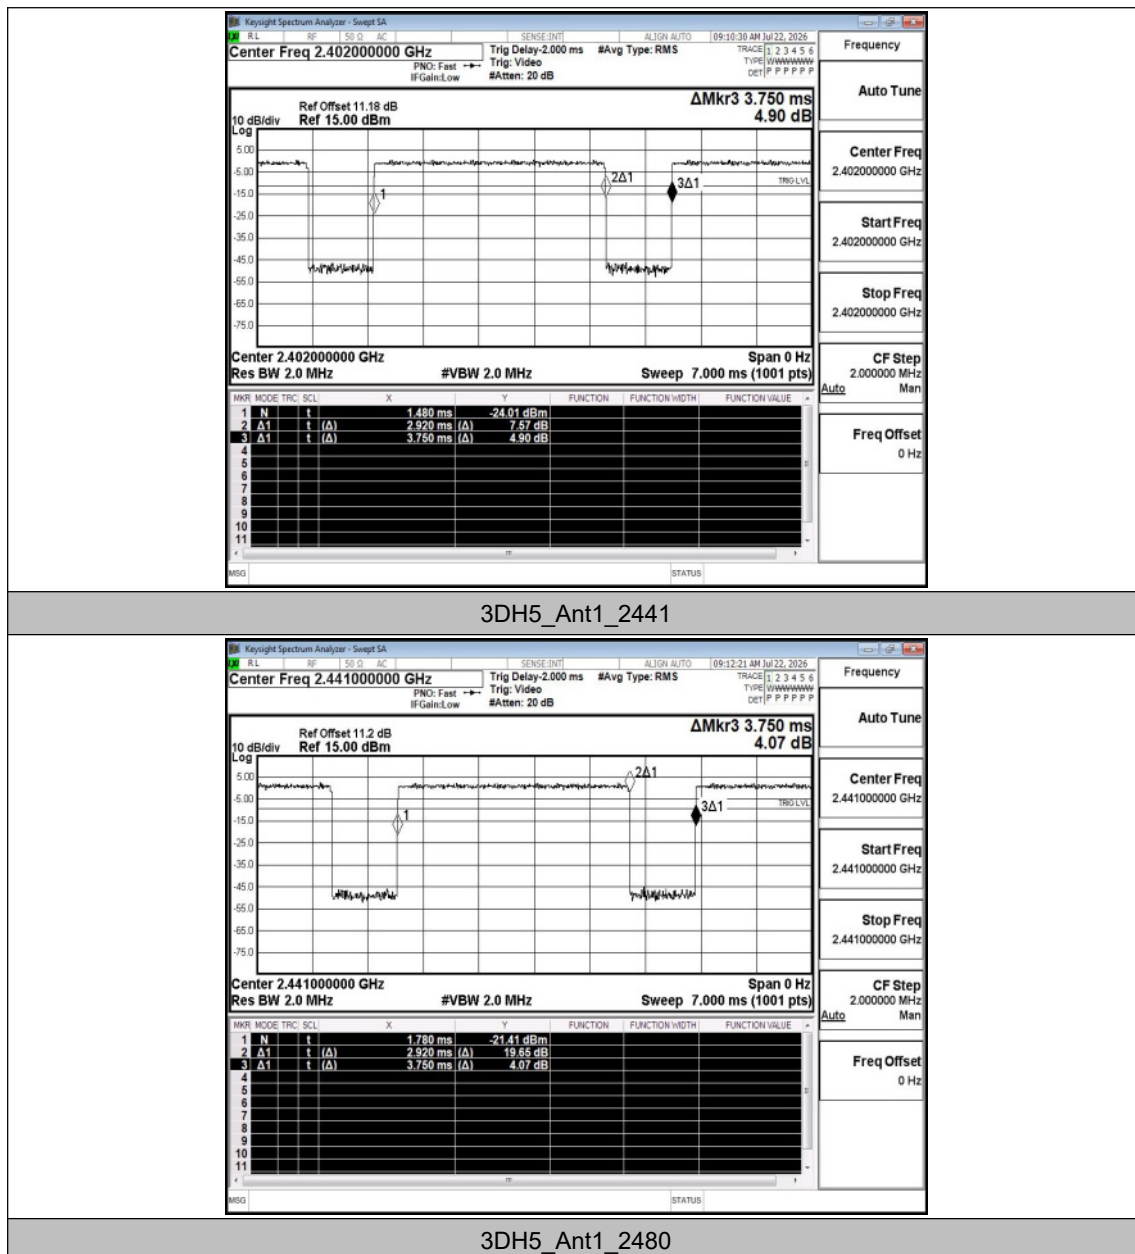

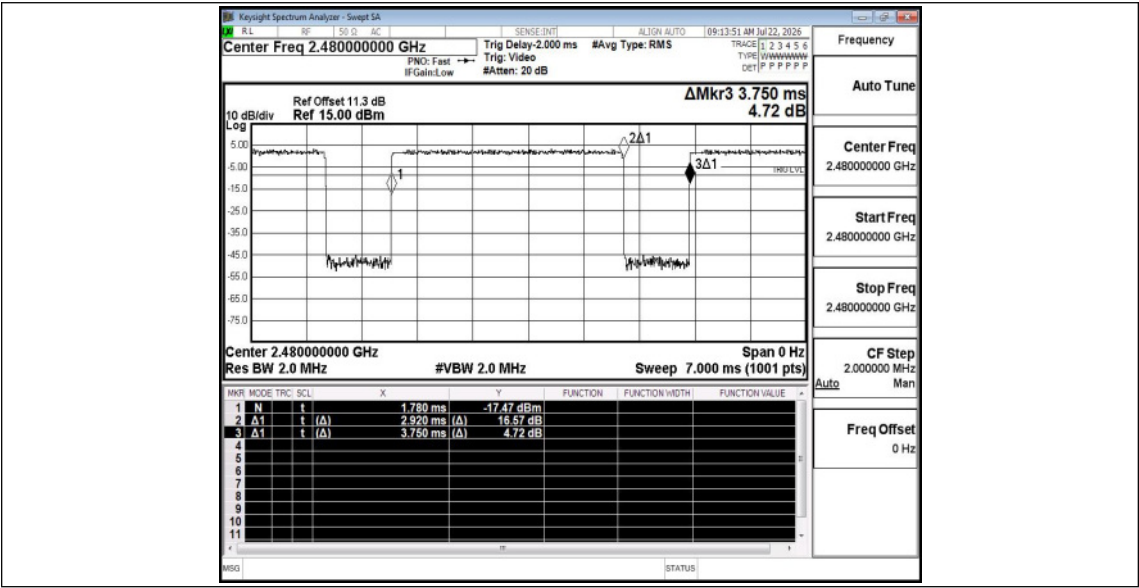

A.9 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq (MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Gain [dBi]	DC Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
DH5	Ant1	Low	2402	AV	2310.000	-62.49	≤-44.30	2.00	1.10	35.81	≤54	PASS
				AV	2316.590	-60.96	≤-44.30	2.00	1.10	37.34	≤54	PASS
				AV	2390.000	-61.54	≤-44.30	2.00	1.10	36.76	≤54	PASS
				Peak	2310.000	-56.21	≤-23.20	2.00	0.00	40.99	≤74	PASS
				Peak	2320.160	-51.33	≤-23.20	2.00	0.00	45.87	≤74	PASS
				Peak	2390.000	-54.71	≤-23.20	2.00	0.00	42.49	≤74	PASS
		High	2480	AV	2483.500	-59.26	≤-44.30	2.00	1.10	39.04	≤54	PASS
				AV	2484.000	-59.23	≤-44.30	2.00	1.10	39.07	≤54	PASS
				AV	2500.000	-61.24	≤-44.30	2.00	1.10	37.06	≤54	PASS
				Peak	2483.500	-49.24	≤-23.20	2.00	0.00	47.96	≤74	PASS
				Peak	2483.520	-49.24	≤-23.20	2.00	0.00	47.96	≤74	PASS
				Peak	2500.000	-53.94	≤-23.20	2.00	0.00	43.26	≤74	PASS
		Low	Hop_2402	Peak	2310.000	-53.51	≤-23.20	2.00	0.00	43.69	≤74	PASS
				Peak	2351.555	-50.64	≤-23.20	2.00	0.00	46.56	≤74	PASS
				Peak	2390.000	-54.93	≤-23.20	2.00	0.00	42.27	≤74	PASS
		High	Hop_2480	Peak	2483.500	-52.54	≤-23.20	2.00	0.00	44.66	≤74	PASS
				Peak	2499.840	-50.33	≤-23.20	2.00	0.00	46.87	≤74	PASS
				Peak	2500.000	-53.65	≤-23.20	2.00	0.00	43.55	≤74	PASS
2DH5	Ant1	Low	2402	AV	2310.000	-61.85	≤-44.30	2.00	1.10	36.45	≤54	PASS
				AV	2320.265	-60.91	≤-44.30	2.00	1.10	37.39	≤54	PASS
				AV	2390.000	-61.48	≤-44.30	2.00	1.10	36.82	≤54	PASS
				Peak	2310.000	-52.27	≤-23.20	2.00	0.00	44.93	≤74	PASS
				Peak	2320.685	-50.13	≤-23.20	2.00	0.00	47.07	≤74	PASS
				Peak	2390.000	-53.77	≤-23.20	2.00	0.00	43.43	≤74	PASS
		High	2480	AV	2483.500	-58.87	≤-44.30	2.00	1.10	39.43	≤54	PASS
				AV	2483.520	-58.87	≤-44.30	2.00	1.10	39.43	≤54	PASS
				AV	2500.000	-61.32	≤-44.30	2.00	1.10	36.98	≤54	PASS
				Peak	2483.500	-51.57	≤-23.20	2.00	0.00	45.63	≤74	PASS
				Peak	2484.000	-38.48	≤-23.20	2.00	0.00	58.72	≤74	PASS
				Peak	2500.000	-53.09	≤-23.20	2.00	0.00	44.11	≤74	PASS
		Low	Hop_2402	Peak	2310.000	-53.47	≤-23.20	2.00	0.00	43.73	≤74	PASS
				Peak	2360.375	-51.15	≤-23.20	2.00	0.00	46.05	≤74	PASS
				Peak	2390.000	-53.89	≤-23.20	2.00	0.00	43.31	≤74	PASS
		High	Hop_2480	Peak	2483.500	-53.53	≤-23.20	2.00	0.00	43.67	≤74	PASS

				Peak	2488.880	-50.48	≤-23.20	2.00	0.00	46.72	≤74	PASS
				Peak	2500.000	-52.8	≤-23.20	2.00	0.00	44.40	≤74	PASS
3DH5	Ant1	Low	2402	AV	2310.000	-61.82	≤-44.29	2.00	1.09	36.47	≤54	PASS
				AV	2334.230	-60.76	≤-44.29	2.00	1.09	37.53	≤54	PASS
				AV	2390.000	-61.99	≤-44.29	2.00	1.09	36.30	≤54	PASS
				Peak	2310.000	-53.66	≤-23.20	2.00	0.00	43.54	≤74	PASS
				Peak	2373.185	-50.74	≤-23.20	2.00	0.00	46.46	≤74	PASS
				Peak	2390.000	-53.92	≤-23.20	2.00	0.00	43.28	≤74	PASS
		High	2480	AV	2483.500	-59.3	≤-44.29	2.00	1.09	38.99	≤54	PASS
				AV	2483.920	-59.14	≤-44.29	2.00	1.09	39.15	≤54	PASS
				AV	2500.000	-61.34	≤-44.29	2.00	1.09	36.95	≤54	PASS
				Peak	2483.500	-49.33	≤-23.20	2.00	0.00	47.87	≤74	PASS
				Peak	2483.920	-40.54	≤-23.20	2.00	0.00	56.66	≤74	PASS
				Peak	2500.000	-52.94	≤-23.20	2.00	0.00	44.26	≤74	PASS
		Low	Hop_2402	Peak	2310.000	-53.47	≤-23.20	2.00	0.00	43.73	≤74	PASS
				Peak	2379.275	-50.78	≤-23.20	2.00	0.00	46.42	≤74	PASS
				Peak	2390.000	-54.82	≤-23.20	2.00	0.00	42.38	≤74	PASS
		High	Hop_2480	Peak	2483.500	-51.81	≤-23.20	2.00	0.00	45.39	≤74	PASS
				Peak	2499.360	-50.72	≤-23.20	2.00	0.00	46.48	≤74	PASS
				Peak	2500.000	-52.7	≤-23.20	2.00	0.00	44.50	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

