

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



Dongguan Jinzan Intelligent Technology Co., Ltd.

Product Specification Sheet

PRODUCT SPECIFICATION

Dongguan Haineng Electronics Co., Ltd.

CUSTOMER: _____

H281410000357

CUST P/N: _____

J30-000758-001

K C P/N: _____

21.46*39.3*0.08*80P*11TS*7MM

D E S E : _____

2025.09.19

D A T E : _____

A.2

VERSION : _____

ACCEPTANCE STAMP

PREPARED BY	MERCHANDISER	ENGINEER CHECKED BY	APPROVED BY
Wang Zhenwei			

Address: No. 138, Gaolong West Road,
Gaobu Town, Dongguan City, Guangdong Province
Tel: 86-076986018114 Fax: 86-076986015646
Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

[illegible]

ENGINEER CHECKED BY

Li Jin

FilNo: KC-JZ-09-008

[Http://www.jzcoil.com](http://www.jzcoil.com)

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification


CUST P/N

H281410000357

KC DESE

21.46*39.3*0.08*80P*11TS*7MM

1. OVERALL DIMENSIONS OF PRODUCTS:

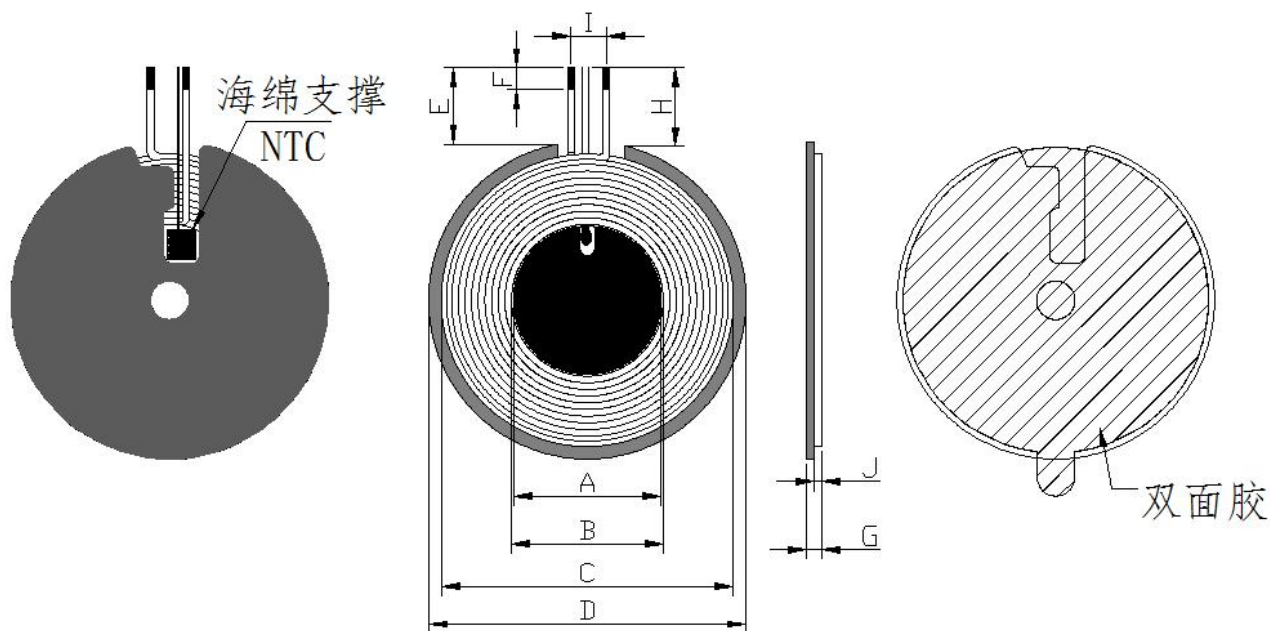

Uni):mm)

A	B	C	D	E	F	G	J	H(NTC)	I
20±0.5	21.46±0.5	39.3±0.5	42.9±0.5	7±1	3±1	2.4MAX	1.0±0.1	7±2	4±1

PS:1. (E)、(H) The length of the outer lead of the magnetic chip); 2. (The thickness is measured at 2.05MAX in the middle area, excluding release paper, and the highest point does not exceed 2.4MAX). 3. (Outlet fixing point)

Turns	Wire Dia.	Wdg. Type Spred/Close	Wdg. Direction	Intersect Yes/Not	Coil Positive/Anti Paste
11TS	0.08*80P Stranded wire	Close	(Anticlockwise)	Yes	Anti/-Paste

All materials must comply with ROHS standards

2. ELECTRICAL CHARACTERISTICS:

PREPARED BY

ENGINEER CHECKED BY

Wang Zhenwei

Li Jin

Address: No. 138, Gaolong West Road, Gaobu Town, Dongguan City, Guangdong Province

Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

File No: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification

CUST P/N

H281410000357

KC DESE

21.46*39.3*0.08*80P*11TS*7MM

TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, RELATIVE HUMIDITY: $65 \pm 10\%$

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND	S-F	Add a magnet to the coil: 8.4 $\mu\text{H} \pm 10\%$	100kHz/1V	LCZ METER 1062
2	DCR	S-F	Resistance value: 62m Ω MAX	/	LCZ METER 1062

3. BILL OF MATERIAIS:

NO.	Material name	Description	Material Code	Vendor code
1	wire rod	0.08*80P Hot Air Twisted Wire	JX-2U-F-0025	ZY
2	ferrite	(G42.9*5.2*0.8H with holes and grooves (deep grooves))	GCP-T-00512	LX
3	double-sided tape	Round double-sided adhesive tape 41.3*0.08H without holes and grooves with hand tear (Crown DS10G))	SMJ-T-0087	HWD
4	magnetic sheet	Round 20*0.8H, no holes, with grooves	GCP-T-00376	LX
5	double-sided tape	Round ordinary double-sided tape 18 * 0.08, no holes or grooves, with hand tear function)	SMJ-T-0010	MYS
6	glue	JS-E7202 (Thicken) White glue	E7202W	HZY
7	tin	Eco-friendly lead-free soldering wire tin	Lead-free high-temperat ure solder wire	XC

PREPARED BY

ENGINEER CHECKED BY

Wang Zhenwei

Li Jin

Address: No. 138, Gaolong West Road, Gaobu Town, Dongguan City, Guangdong Province

Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification

CUST P/N

H281410000357

KC DESE

21.46*39.3*0.08*80P*11TS*7MM

8

NTC thermistor

Enamelled wire 0.28 red 100K B=3950
1% total length 22, solder 3 ± 1 ,
match head 1.3MAX

GCP-T-00518

/

9

sponge glue

Small rectangular sponge pad, length 4 *
width 3.8 * height 1.0 cm, single-sided
adhesive

SMJ-EVA-0106

/

PREPARED BY

ENGINEER CHECKED BY

Wang Zhenwei**Li Jin**

Address: No. 138, Gaolong West Road, Gaobu Town, Dongguan City, Guangdong Province

Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

FilNo: KC-JZ-09-008