

"High Frequency Ceramic Solutions"

915 MHz Antenna

P/N 0915AT43A0026

Detail Specification: 11/26/12

Page 1 of 3

Recommended Application ISM

General Specifications


Part Number	0915AT43A0026	Input Power	2W max.
Frequency (MHz)	902 - 928 Mhz	Operating Temperature	-40 to +85°C
Peak Gain (XZ-total)	-1.0 dBi typ.	Operating Temperature	+5~+35°C, Humidity 45~75%RH
Average Gain (XZ-total)	-4.0 dBi typ.		
Return Loss	8.5 dB max.	Reel Quantity	1,000
Impedance	50 Ω		

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 0915AT43A0026S
		T & R	Suffix = E	eg. 0915AT43A0026E
		100% Tin	Suffix = E or S	eg. 0915AT43A0026(E or S)
	Termination style	Tin / Lead	Please Consult Factory	


Mechanical Dimensions

	In	mm
L	0.276 ± 0.008	7.00 ± 0.20
W	0.079 ± 0.008	2.00 ± 0.20
T	0.031 ± +.004/-0.008	0.80 ± +0.1/-0.2
a	0.020 ± 0.012	0.50 ± 0.30

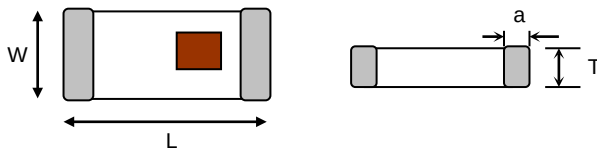

Terminal Configuration

No.	Function
1	NC
2	Feeding Point



Mounting Considerations


Mount these devices with brown mark facing up. Units: mm

* Line width should be designed to provide 50 Ω impedance matching characteristics.

With Matching Circuit

Matching

JTI P/N for Matching Circuit:**
Inductor (4.7nH): L-07C4N7SV6T
Inductor (10nH): L-07C10NJV6T
Cap (0.5pF): 500R07S0R5BV4T

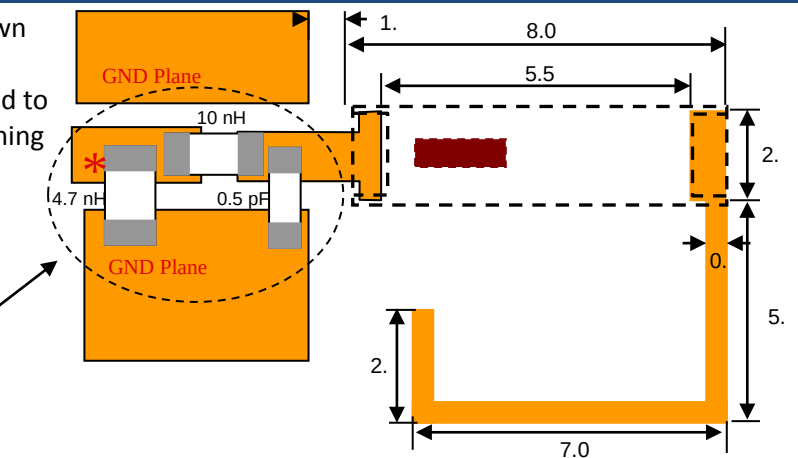

**matching circuit and component values will depend on PCB layout, thickness, material, et

"High Frequency Ceramic Solutions"

915 MHz Antenna

Detail Specification: 11/26/12


P/N 0915AT43A0026

Page 2 of 3


Recommended Application ISN

Mounting Considerations

Test Board

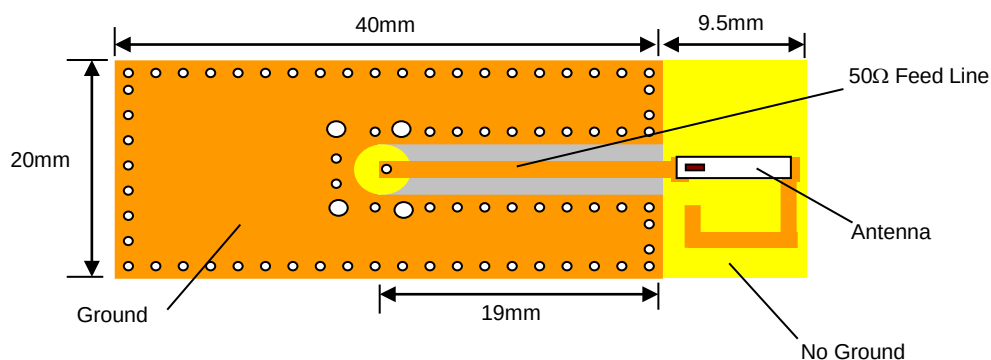

Return Loss (with matching)

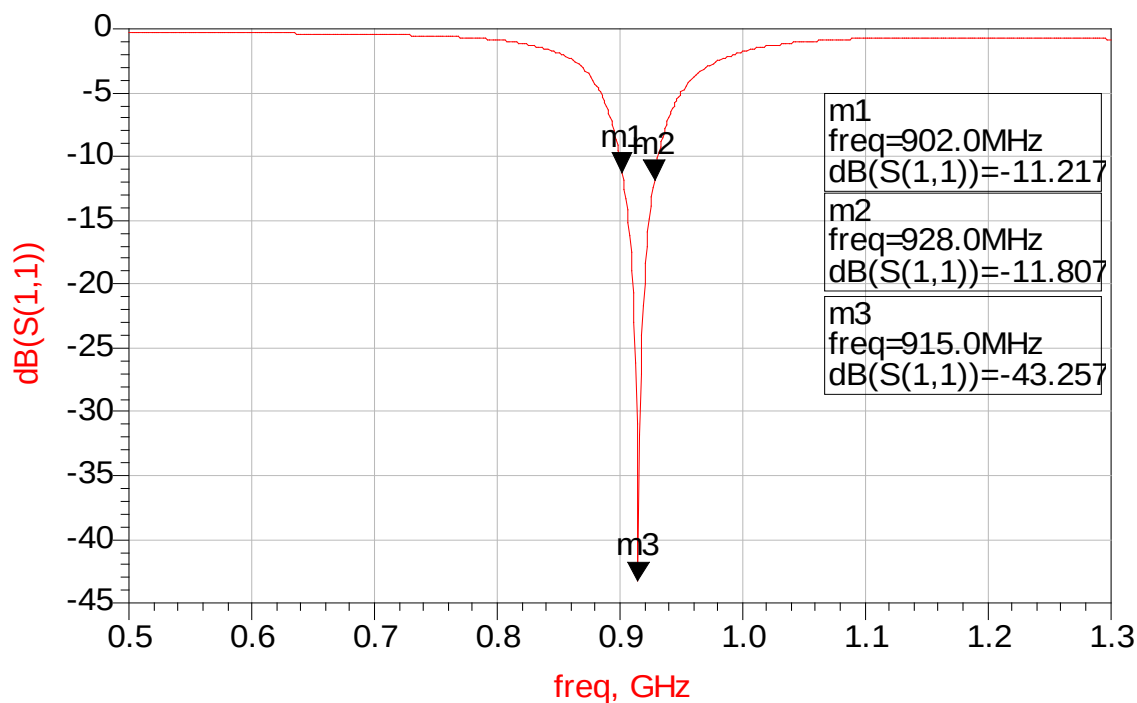

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 1.2

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

915 MHz Antenna

Detail Specification: 11/26/12


P/N 0915AT43A0026

Page 3 of 3



Recommended Application ISM

Typical Electrical Characteristics (T=25°C)



Typical Radiation Patterns

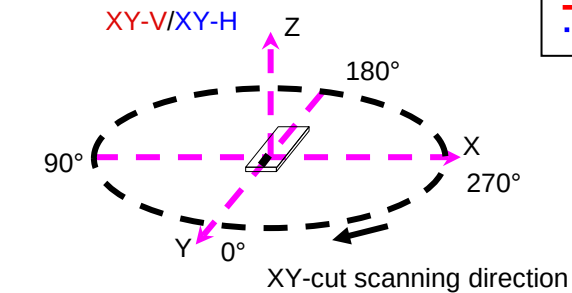


XY cut @915MHz
— Vertical
... Horizontal

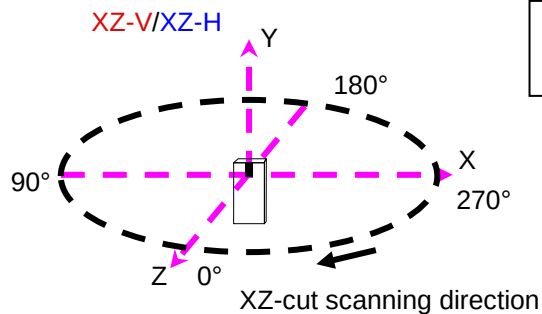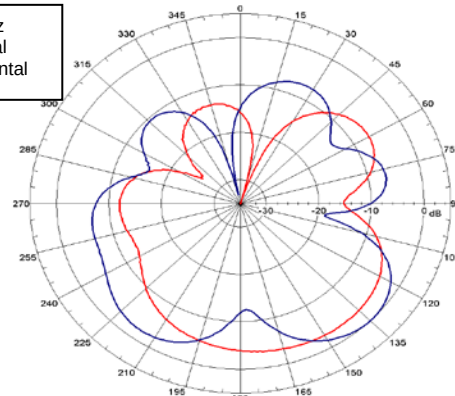

XZ cut @915MHz
— Vertical
... Horizontal

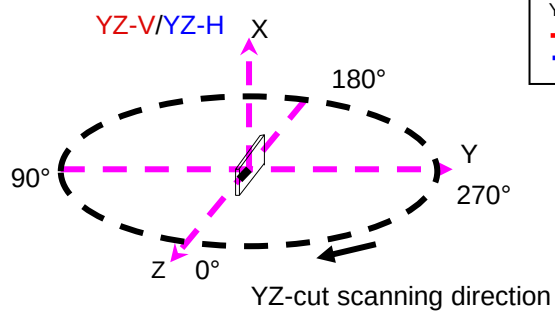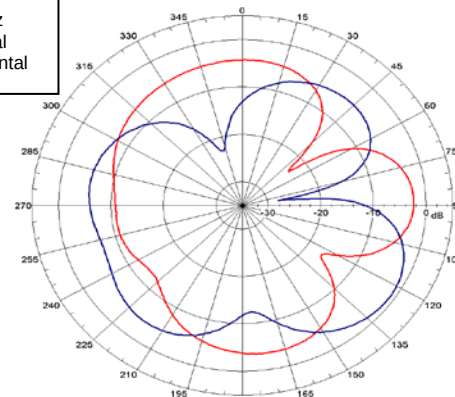

YZ cut @915MHz
— Vertical
... Horizontal

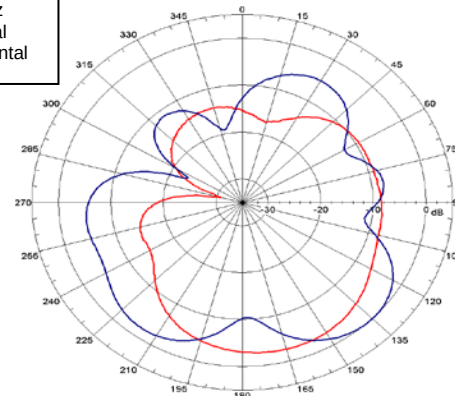

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.