

FCC Radio Test Report

FCC ID: 2AAEJS96

Report No. : TB-FCC139446

Applicant : SHENZHEN SEELONG TECHNOLOGY COMPANY LTD

Equipment Under Test (EUT)

EUT Name : Bluetooth headset

Model No. : S96

Serial No. : S91A S91B, S91C, S95, S95L, S96L, N95, N99, BH-320, S98A, S98B, S98C, S98L

Brand Name : HABALA

Receipt Date : 2014-01-15

Test Date : 2014-01-16 to 2014-01-24

Issue Date : 2014-02-07

Standards : FCC Part 15, Subpart C(15.247)

Test Method : ANSI C63.4:2003

Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC requirements

Test/Witness Engineer : *IVAN SU*

Approved& Authorized : *Long Li.*

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	4
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test)	4
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units	6
1.5 Description of Test Mode.....	6
1.6 Description of Test Software Setting	7
1.7 Test Facility.....	8
2. TEST SUMMARY.....	9
3. CONDUCTED EMISSION TEST	10
3.1 Test Standard and Limit.....	10
3.2 Test Setup.....	10
3.3 Test Procedure.....	10
3.4 Test Equipment Used.....	11
3.5 EUT Operating Mode	11
3.6 Test Data.....	11
4. RADIATED EMISSION TEST	14
4.1 Test Standard and Limit.....	14
4.2 Test Setup.....	15
4.3 Test Procedure.....	16
4.4 EUT Operating Condition	16
4.5 Test Equipment	16
5. RESTRICTED BANDS REQUIREMENT	26
5.1 Test Standard and Limit.....	26
5.2 Test Setup.....	26
5.3 Test Procedure.....	26
5.4 EUT Operating Condition	27
5.5 Test Equipment	27
6. NUMBER OF HOPPING CHANNEL	34
6.1 Test Standard and Limit.....	34
6.2 Test Setup.....	34
6.3 Test Procedure.....	34
6.4 EUT Operating Condition	34
6.5 Test Equipment	34
6.6 Test Data.....	34
7. AVERAGE TIME OF OCCUPANCY.....	37
7.1 Test Standard and Limit.....	37
7.2 Test Setup.....	37
7.3 Test Procedure.....	37

7.4 EUT Operating Condition	37
7.5 Test Equipment	37
7.6 Test Data.....	38
8. CHANNEL SEPARATION AND BANDWIDTH TEST	42
8.1 Test Standard and Limit.....	42
8.2 Test Setup.....	42
8.3 Test Procedure.....	42
8.4 EUT Operating Condition	42
8.5 Test Equipment	43
8.6 Test Data.....	43
9. PEAK OUTPUT POWER TEST.....	51
9.1 Test Standard and Limit.....	51
9.2 Test Setup.....	51
9.3 Test Procedure.....	51
9.4 EUT Operating Condition	51
9.5 Test Equipment	51
9.6 Test Data.....	51
10. ANTENNA CONDUCTED SPURIOUS EMISSION.....	56
10.1 Test Standard and Limit	56
10.2 Test Setup.....	56
10.3 Test Procedure.....	56
10.4 EUT Operating Condition	57
10.5 Test Equipment.....	57
10.6 Test Data.....	57
11. ANTENNA REQUIREMENT.....	64
11.1 Standard Requirement.....	64
11.2 Antenna Connected Construction	64
11.2 Result.....	64

1. General Information About EUT

1.1 Client Information

Applicant : SHENZHEN SEELONG TECHNOLOGY COMPANY LTD
Address : 2F, #6, Meitai Industrial Park, Guanguang Road, Guanlan Town, Bao'an District, Shenzhen, China
Manufacturer : SHENZHEN SEELONG TECHNOLOGY COMPANY LTD
Address : 2F, #6, Meitai Industrial Park, Guanguang Road, Guanlan Town, Bao'an District, Shenzhen, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Bluetooth headset	
Models No.	:	S96, S91A S91B, S91C, S95, S95L, S96L, N95, N99, BH-320, S98A, S98B, S98C, S98L	
Model Difference	:	The different models are identical in schematic, structure and critical component, the only different is the appearance.	
Product Description	:	Operation Frequency: Bluetooth:2402~2480MHz	
		Number of Channel:	Bluetooth:79Channels see note (2)
		Max Peak Output Power:	GFSK: -1.39 dBm Conducted Power
		Antenna Gain:	0 dBi PCB Antenna
		Modulation Type:	GFSK 1Mbps(1 Mbps) π /4-DQPSK(2 Mbps) 8-DPSK(3 Mbps)
Power Supply	:	DC Voltage supplied from Host System by USB cable DC power by Li-ion Battery	
Power Rating	:	DC 5.0V by USB cable DC 3.7V Li-ion Battery	
Connecting I/O Port(S)	:	Please refer to the User's Manual	

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) This Test Report is FCC Part 15.247 for Bluetooth, and test procedure in accordance with Public Notice: DA 00-705.
- (3) Channel List:


Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456

01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		


(4) The Antenna information about the equipment is provided by the applicant.

1.3 Block Diagram Showing the Configuration of System Tested

USB Charging and Keeping TX Mode

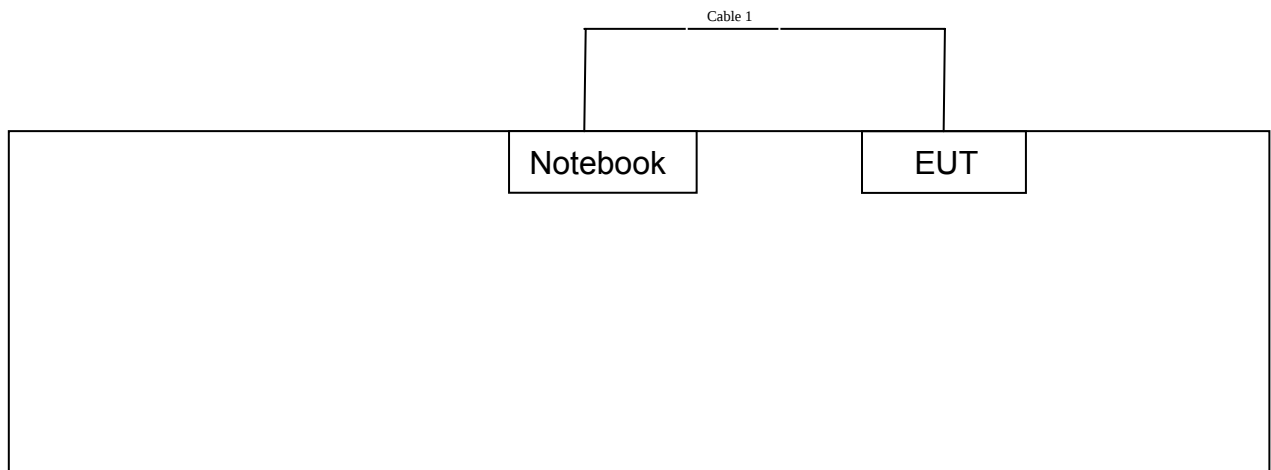

TX Mode

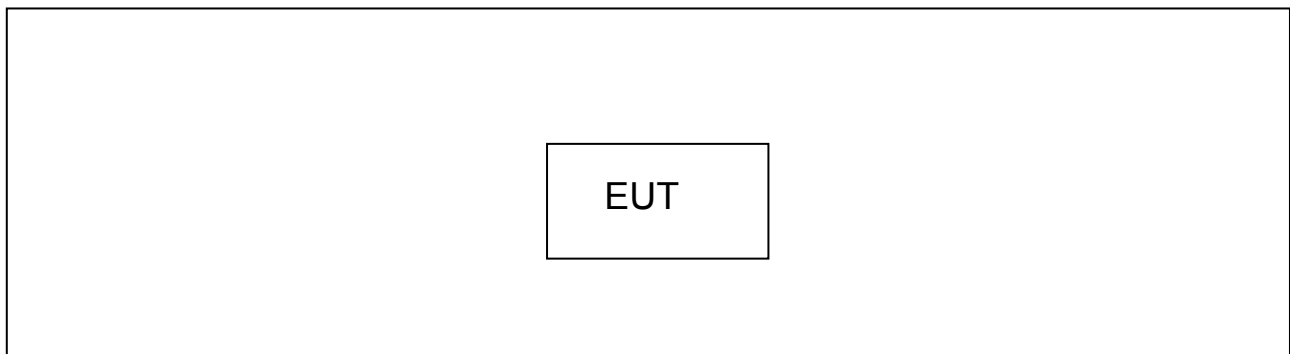

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/DOC	Manufacturer	Used “√”
Notebook	B470A2450	DOC	Lenovo	√
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	NO	NO	0.5M	Accessories

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test

system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	USB Charging and Keeping TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	USB Charging and Keeping TX Mode
Mode 2	TX Mode(GFSK) Channel 00/39/78
Mode 3	TX Mode($\pi/4$ -DQPSK) Channel 00/39/78
Mode 4	TX Mode(8-DPSK) Channel 00/39/78
Mode 5	Hopping Mode(GFSK)
Mode 6	Hopping Mode($\pi/4$ -DQPSK)
Mode 7	Hopping Mode(8-DPSK)

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test mode above.
According to ANSI C63.4 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:
TX Mode: GFSK (1 Mbps)
TX Mode: 8-DPSK (3 Mbps)
- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

Test Software Version	Test Program: RF Control Kit v1.0.exe		
Frequency	2402 MHz	2441MHz	2480 MHz
1 Mbps	03	03	03
3 Mbps	03	03	03

1.7 Test Facility

The tests were performed at:

Shenzhen Certification Technology Service Co., Ltd

2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen, 518126, China

Tel: 86-755-86375552 Fax: 86-755-26736857

At the time of testing, the Laboratory is accredited. It is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 197647.

The test report was fulfilled by Shenzhen Toby Technology Co., Ltd. Shenzhen Toby Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements results.

2. Test Summary

FCC Part 15 Subpart C(15.247)			
Standard Section	Test Item	Judgment	Remark
15.203	Antenna Requirement	PASS	N/A
15.207	Conducted Emission	PASS	N/A
15.205	Restricted Bands	PASS	N/A
15.247(a)(1)	Hopping Channel Separation	PASS	N/A
15.247(a)(1)	Dwell Time	PASS	N/A
15.247(b)(1)	Peak Output Power	PASS	N/A
15.247(b)(1)	Number of Hopping Frequency	PASS	N/A
15.247(c)	Radiated Spurious Emission	PASS	N/A
15.247(c)	Antenna Conducted Spurious Emission	PASS	N/A
15.247(a)	20dB Bandwidth	PASS	N/A
Note: N/A is an abbreviation for Not Applicable.			

3. Conducted Emission Test

3.1 Test Standard and Limit

3.1.1 Test Standard

FCC Part 15.207

3.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) *Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.2 Test Setup

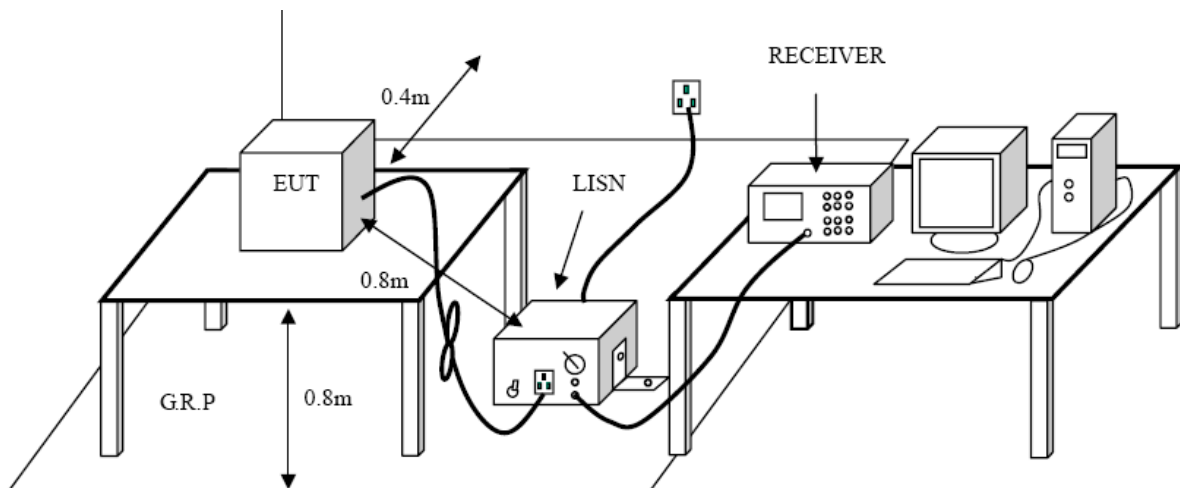

3.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

3.4 Test Equipment Used

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	100321	2013-08-10	2014-08-09
50ΩCoaxial Switch	Anritsu	MP59B	X10321	2013-08-10	2014-08-09
L.I.S.N	Rohde & Schwarz	ENV216	101131	2013-08-10	2014-08-09
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	2013-08-10	2014-08-09


3.5 EUT Operating Mode

Please refer to the description of test mode.

3.6 Test Data


Please see the next page.

E.U.T :	Bluetooth headset	Model Name :	S96
Temperature :	25°C	Relative Humidity :	52 %
Terminal	Line		
Test Voltage :	AC 120 V/60Hz		
Test Mode :	USB Charging and Keeping TX Mode		

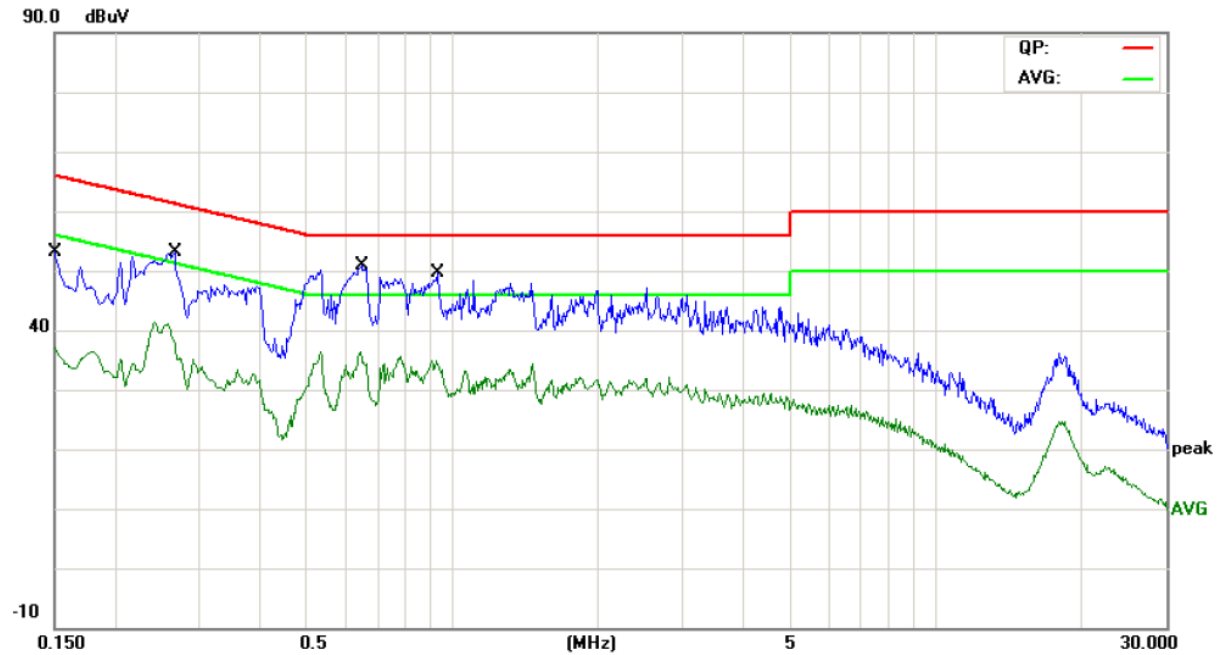

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	40.40	9.92	50.32	65.99	-15.67	QP	
2		0.1500	27.13	9.92	37.05	55.99	-18.94	AVG	
3		0.2660	39.73	10.02	49.75	61.24	-11.49	QP	
4		0.2660	27.23	10.02	37.25	51.24	-13.99	AVG	
5	*	0.6500	36.94	10.09	47.03	56.00	-8.97	QP	
6		0.6500	24.96	10.09	35.05	46.00	-10.95	AVG	
7		0.9300	35.08	10.07	45.15	56.00	-10.85	QP	
8		0.9300	23.97	10.07	34.04	46.00	-11.96	AVG	

E.U.T :	Bluetooth headset	Model Name :	S96
Temperature :	25°C	Relative Humidity :	52 %
Terminal	Neutral		
Test Voltage :	AC 120 V/60Hz		
Test Mode :	USB Charging and Keeping TX Mode		

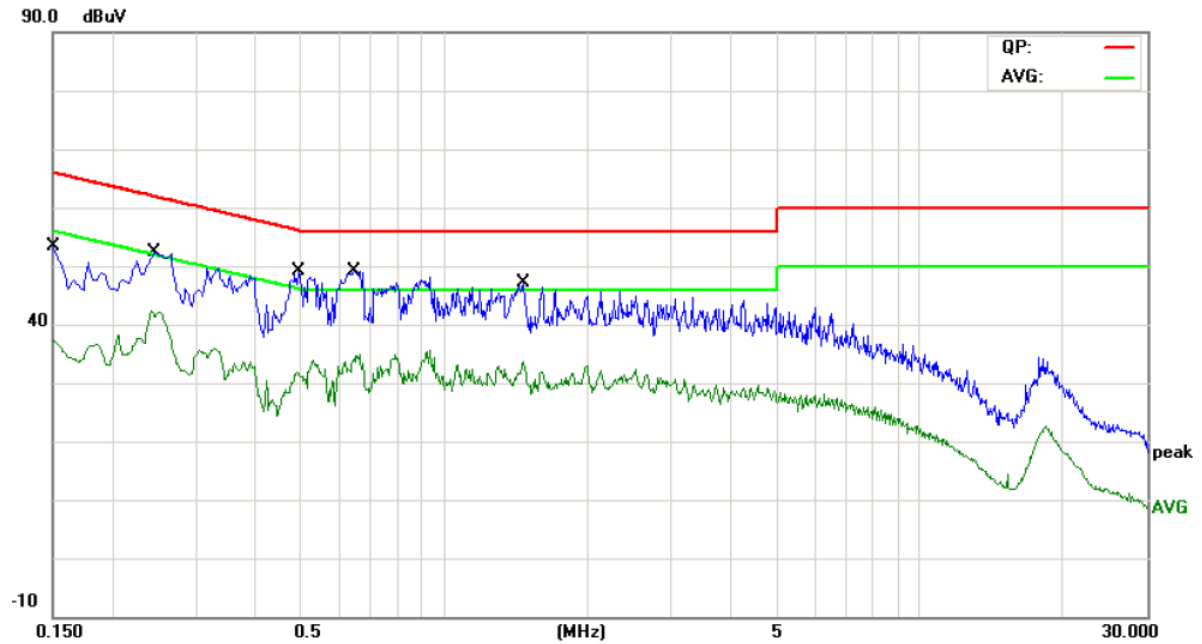

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1500	38.21	10.12	48.33	65.99	-17.66	QP	
2	0.1500	29.14	10.12	39.26	55.99	-16.73	AVG	
3	0.2460	39.32	10.10	49.42	61.89	-12.47	QP	
4	0.2460	30.09	10.10	40.19	51.89	-11.70	AVG	
5	0.4940	29.20	10.02	39.22	56.10	-16.88	QP	
6	0.4940	19.82	10.02	29.84	46.10	-16.26	AVG	
7 *	0.6460	34.78	10.02	44.80	56.00	-11.20	QP	
8	0.6460	22.49	10.02	32.51	46.00	-13.49	AVG	
9	1.4660	30.96	10.11	41.07	56.00	-14.93	QP	
10	1.4660	22.29	10.11	32.40	46.00	-13.60	AVG	

4. Radiated Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard

FCC Part 15.209

4.1.2 Test Limit

Radiated Emission Limit (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Emission Limit (Above 1000MHz)


Frequency (MHz)	Class B (dBuV/m)(at 3m)	
	Peak	Average
Above 1000	74	54

Note:


(1) The tighter limit applies at the band edges.

(2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


4.2 Test Setup

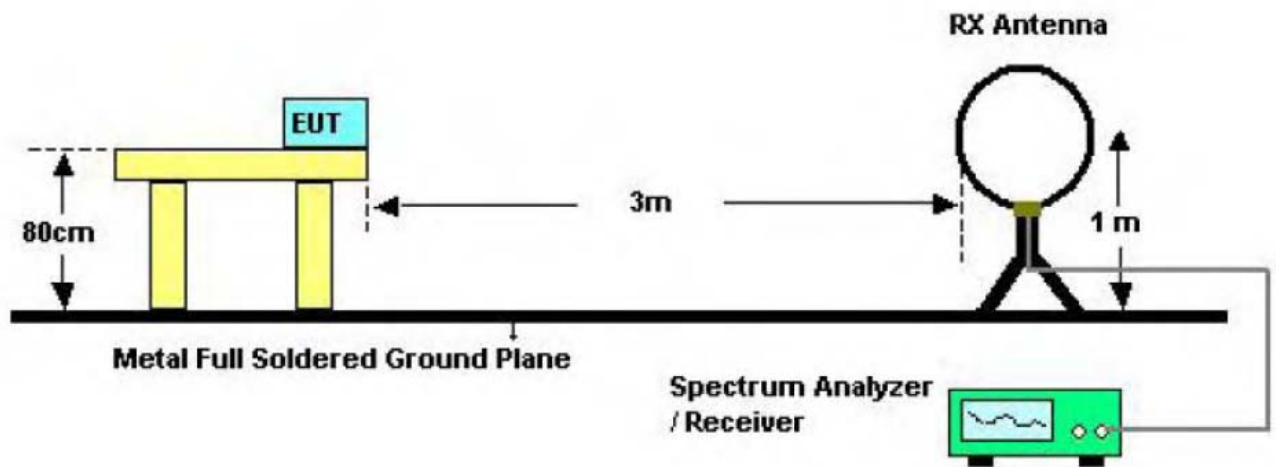

Bellow 30MHz Test Setup

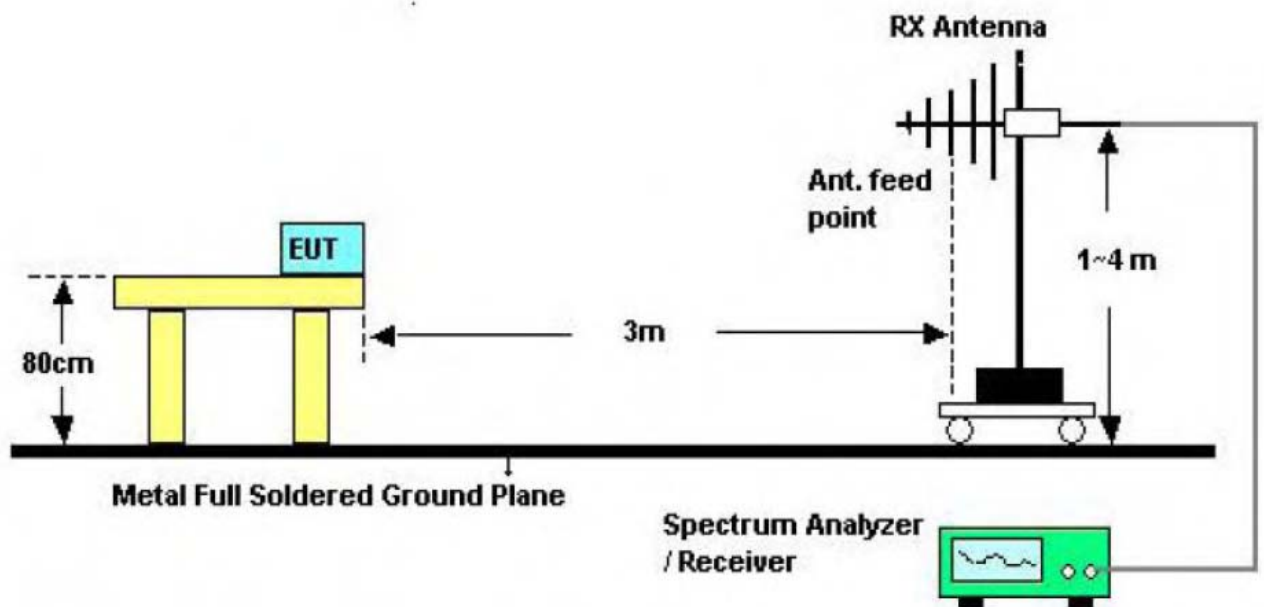

Bellow 1000MHz Test Setup

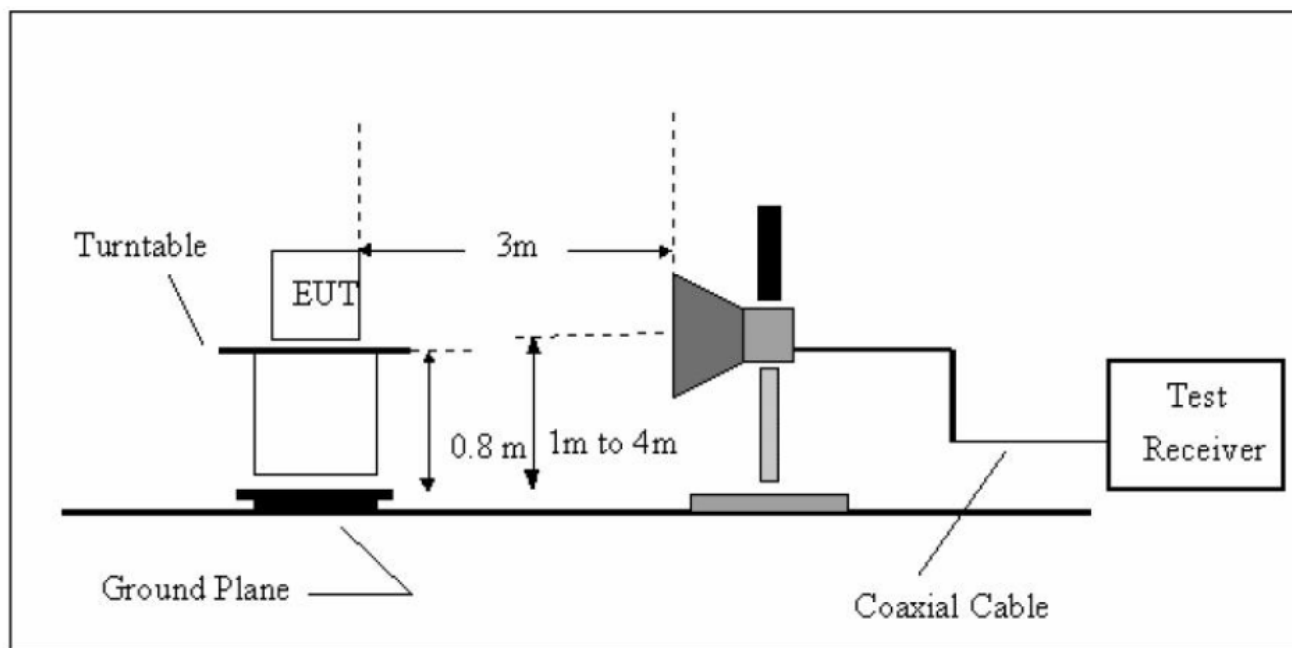

Above 1GHz Test Setup

4.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (3) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (4) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (5) For the actual test configuration, please see the test setup photo.

4.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power in TX mode.

4.5 Test Equipment

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	ROHDE& SCHWARZ	FSP30	DE25181	2013-12-30	2014-12-29

Spectrum Analyzer	Agilent	E4407B	MY49510055	2013-12-30	2014-12-29
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	101165	2013-12-30	2014-12-29
Bilog Antenna	SCHWARZBECK	VULB9168	9168-438	2013-02-12	2014-02-11
Horn Antenna	SCHWARZBECK	BBHA 9120D	BBHA9120D	2013-02-12	2014-02-11
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170D	2013-02-12	2014-02-11
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2013-02-12	2014-02-11
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	2013-10-28	2014-10-27
Pre-amplifier	Quietek	AP-180C	CHM-0602012	2013-10-28	2014-10-27

4.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Test data please refer the following pages.

Operation Mode: USB Charging and
Keeping TX Mode

Test Date : Jan. 17, 2014

Frequency Range: 30~1000MHz


Temperature : 28 °C

Measured Distance: 3m

Humidity : 65 %

Ant. Pol. Horizontal

Test Voltage: DC 5V

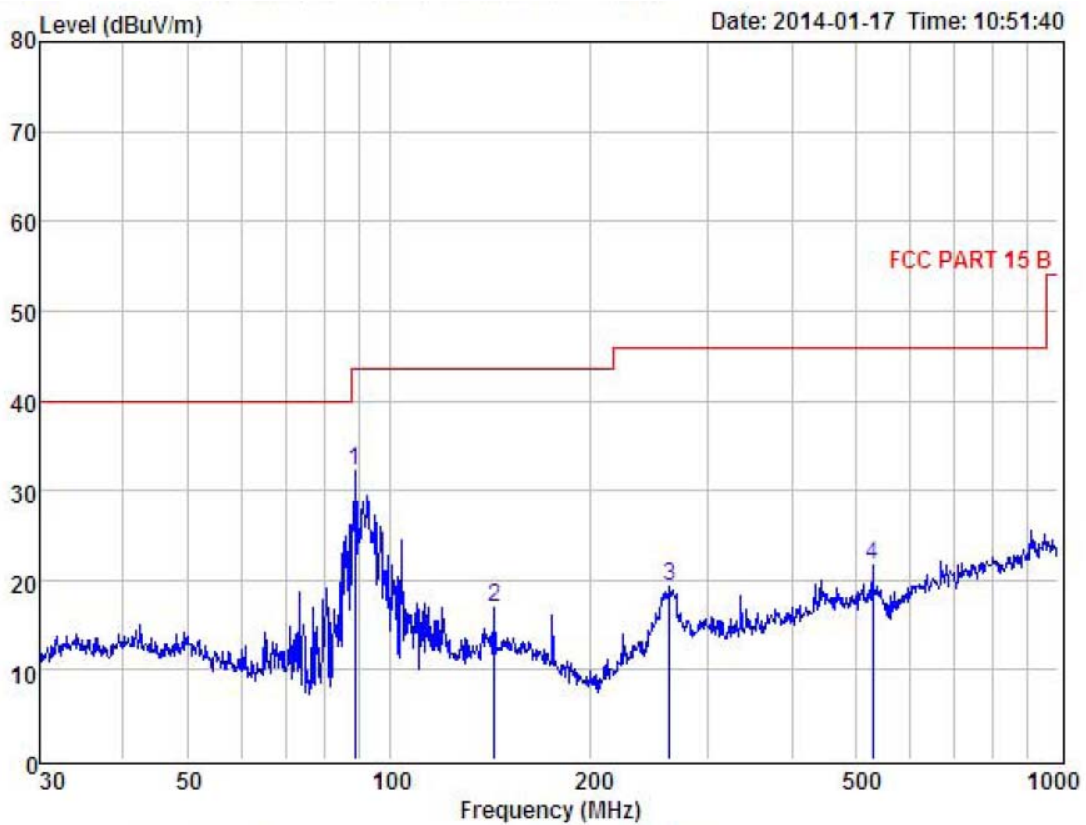

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	88.96	49.12	9.44	26.82	0.33	32.07	43.50	-11.43	Peak
2	143.83	29.64	13.77	26.90	0.38	16.89	43.50	-26.61	Peak
3	262.90	30.85	11.90	24.13	0.73	19.35	46.00	-26.65	Peak
4	528.25	28.31	17.03	24.68	1.07	21.73	46.00	-24.27	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

Operation Mode: USB Charging and
Keeping TX Mode

Test Date : Jan. 17, 2014

Frequency Range: 30~1000MHz


Temperature : 28 °C

Measured Distance: 3m

Humidity : 65 %

Ant. Pol. Vertical

Test Voltage: DC 5V

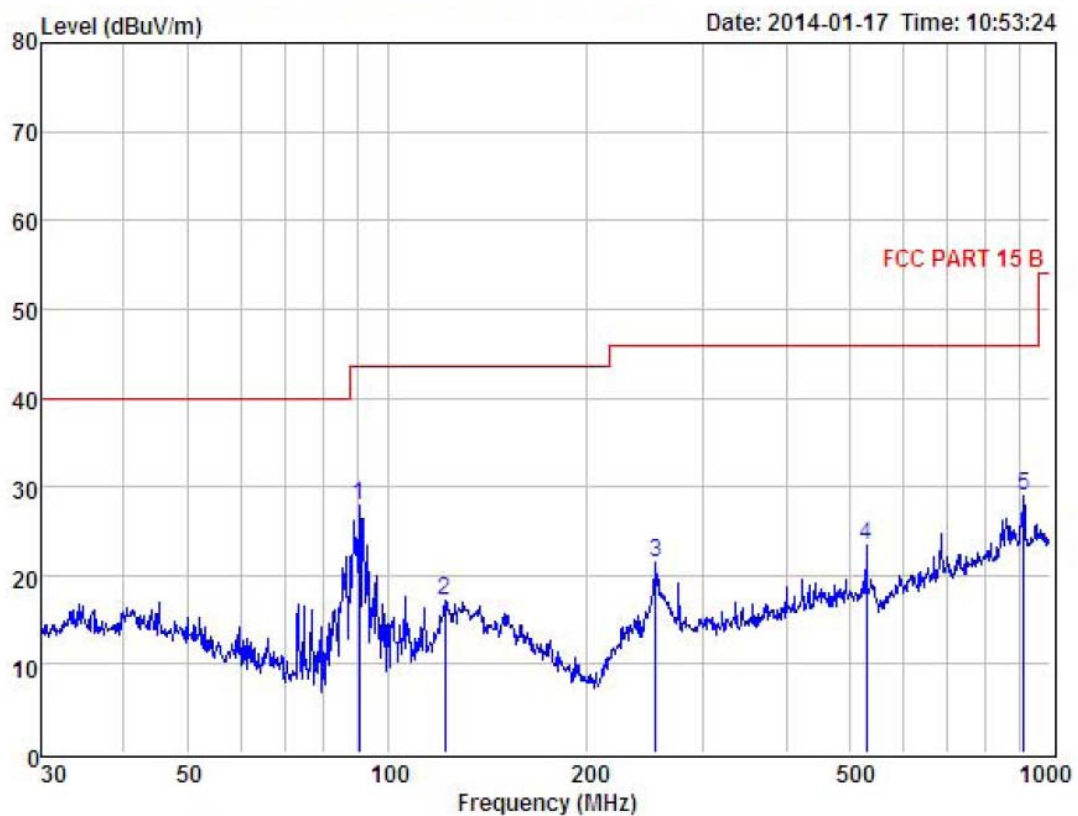

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamplifier Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	90.54	44.86	9.58	26.82	0.34	27.96	43.50	-15.54	Peak
2	121.98	31.27	12.35	26.88	0.43	17.17	43.50	-26.33	Peak
3	253.84	33.32	11.65	24.12	0.57	21.42	46.00	-24.58	Peak
4	528.25	29.94	17.03	24.68	1.07	23.36	46.00	-22.64	Peak
5	912.86	31.22	21.82	25.64	1.62	29.02	46.00	-16.98	Peak

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

Operation Mode:	TX 2402MHz (1Mbps)	Test Date :	Jan. 17, 2014
Frequency Range:	1-25GHz	Temperature :	28 °C
Measured Distance:	3m	Humidity :	65 %
Test Voltage:	DC 3.7V		

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBuV/m)		Limit3m (dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804.170	V	49.62	42.30	74.00	54.00	24.38	11.70
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
4804.170	H	51.08	44.13	74.00	54.00	22.92	9.87
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--

Other harmonics emissions are lower than 20dB below the allowable limit.

Note:

- (1) All Readings are Peak Value and AV.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode:	TX 2441MHz (1 Mbps)	Test Date :	Jan. 17, 2014
Frequency Range:	1-25GHz	Temperature :	28 °C
Measured Distance:	3m	Humidity :	65 %
Test Voltage:	DC 3.7V		

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBUV/m)		Limit3m (dBUV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882.210	V	49.39	42.34	74.00	54.00	24.61	11.66
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
4882.210	H	51.87	44.50	74.00	54.00	22.13	9.50
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--

Other harmonics emissions are lower than 20dB below the allowable limit.

Note:

- (1) All Readings are Peak Value and AV.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode:	TX 2480MHz (1 Mbps)	Test Date :	Jan. 17, 2014
Frequency Range:	1-25GHz	Temperature :	28 °C
Measured Distance:	3m	Humidity :	65 %
Test Voltage:	DC 3.7V		

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBuV/m)		Limit3m (dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960.100	V	49.60	42.04	74.00	54.00	24.40	11.96
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
4960.100	H	51.57	43.89	74.00	54.00	22.43	10.11
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--

Other harmonics emissions are lower than 20dB below the allowable limit.

Note:

- (1) All Readings are Peak Value and AV.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode:	TX 2402MHz (3 Mbps)	Test Date :	Jan. 17, 2014
Frequency Range:	1-25GHz	Temperature :	28 °C
Measured Distance:	3m	Humidity :	65 %
Test Voltage:	DC 3.7V		

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBuV/m)		Limit3m (dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804.210	V	46.88	39.24	74.00	54.00	27.12	14.76
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
4804.210	H	49.05	41.37	74.00	54.00	24.95	12.63
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--

Other harmonics emissions are lower than 20dB below the allowable limit.

Note:

- (1) All Readings are Peak Value and AV.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode:	TX 2441MHz (3 Mbps)	Test Date :	Jan. 17, 2014
Frequency Range:	1-25GHz	Temperature :	28 °C
Measured Distance:	3m	Humidity :	65 %
Test Voltage:	DC 3.7V		

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBUV/m)		Limit3m (dBUV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882.170	V	46.30	38.77	74.00	54.00	27.70	15.23
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
4882.170	H	48.86	41.15	74.00	54.00	25.14	12.85
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--

Other harmonics emissions are lower than 20dB below the allowable limit.

Note:

- (1) All Readings are Peak Value and AV.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode:	TX 2480MHz (3 Mbps)	Test Date :	Jan. 17, 2014
Frequency Range:	1-25GHz	Temperature :	28 °C
Measured Distance:	3m	Humidity :	65 %
Test Voltage:	DC 3.7V		

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBuV/m)		Limit3m (dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960.160	V	46.27	38.40	74.00	54.00	27.73	15.60
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
--	V	--	--	74.00	54.00	--	--
4960.160	H	48.76	40.85	74.00	54.00	25.24	13.15
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--
--	H	--	--	74.00	54.00	--	--

Other harmonics emissions are lower than 20dB below the allowable limit.

Note:

- (1) All Readings are Peak Value and AV.
- (2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5. Restricted Bands Requirement

5.1 Test Standard and Limit

5.1.1 Test Standard


FCC Part 15.209

FCC Part 15.205

5.1.2 Test Limit

Restricted Frequency Band (MHz)	Class B (dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54
Note: All restriction bands have been tested, only the worst case is reported.		

5.2 Test Setup

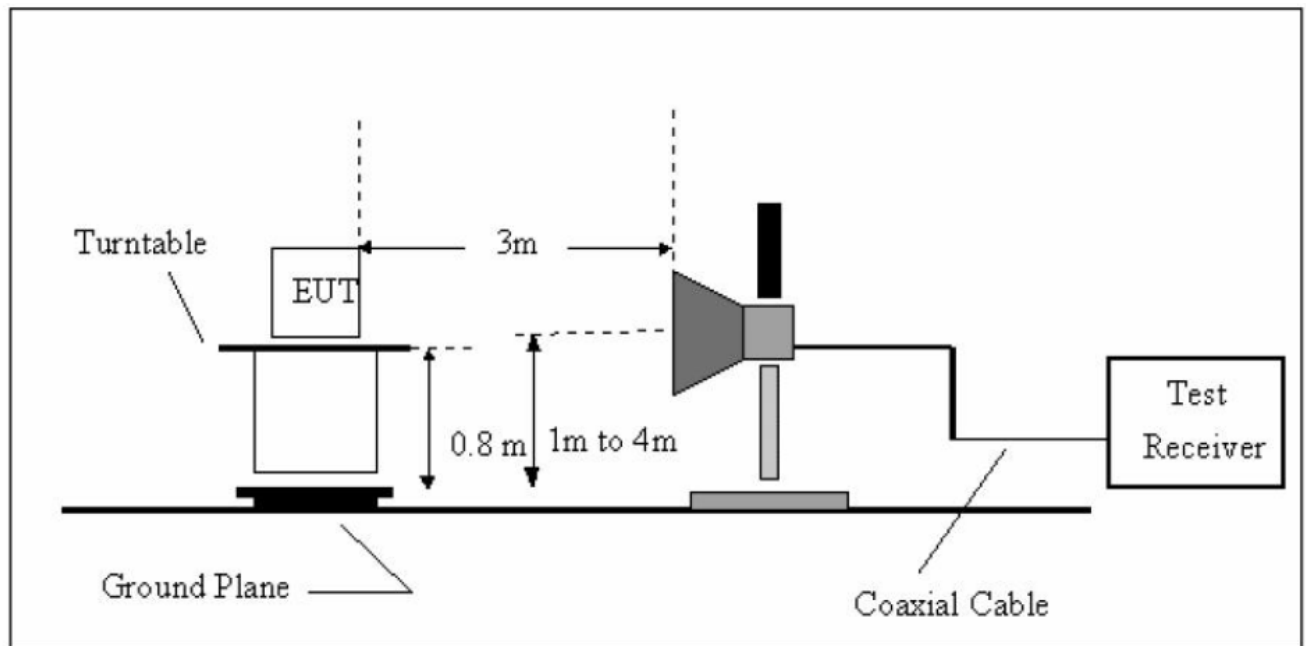

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (3) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked

and then Quasi Peak detector mode re-measured.

- (4) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (5) For the actual test configuration, please see the test setup photo.

5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

5.5 Test Equipment

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	ROHDE& SCHWARZ	FSP30	DE25181	2013-12-30	2014-12-29
Spectrum Analyzer	Agilent	E4407B	MY49510055	2013-12-30	2014-12-29
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	101165	2013-12-30	2014-12-29
Bilog Antenna	SCHWARZBECK	VULB9168	9168-438	2013-02-12	2014-02-11
Horn Antenna	SCHWARZBECK	BBHA 9120D	BBHA9120D	2013-02-12	2014-02-11
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170D	2013-02-12	2014-02-11
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2013-02-12	2014-02-11
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	2013-10-28	2014-10-27
Pre-amplifier	Quietek	AP-180C	CHM-0602012	2013-10-28	2014-10-27

5.6 Test Data

All restriction bands have been tested, only the worst case is reported.

Spectrum Detector: PK
Temperature : 28 °C

Test Date : Jan. 20, 2014
Humidity : 65 %


GFSK Mode

1. Radiated Emission test

Test Mode	Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
			PEAK	AV	PEAK	AV
TX 2402 MHz	2390.0	H	51.74	42.32	74.00	54.00
	2390.0	V	49.07	40.14	74.00	54.00
TX 2480 MHz	2483.5	H	52.95	48.20	74.00	54.00
	2483.5	V	51.34	46.89	74.00	54.00


Note: During testing the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

GFSK TX 2402MHz Mode

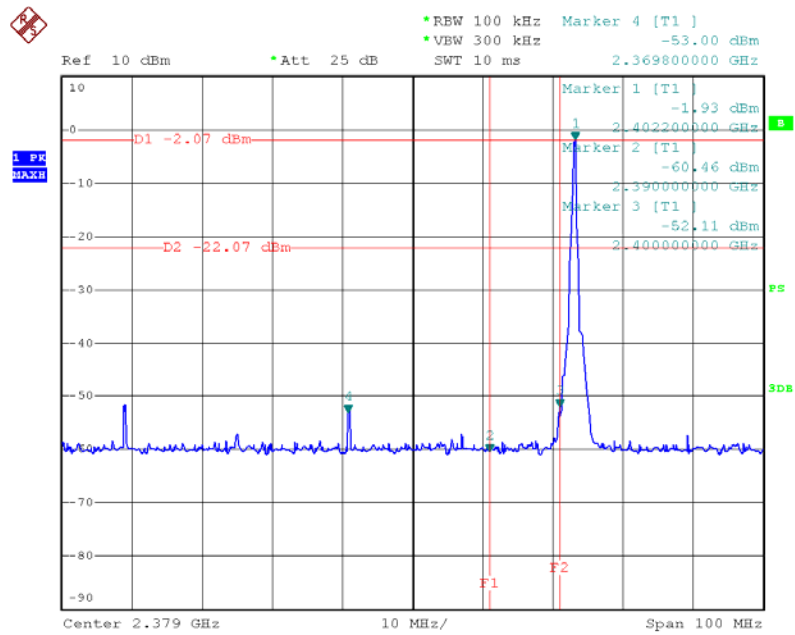


Date: 20.JAN.2014 15:32:46

GFSK TX 2480MHz Mode

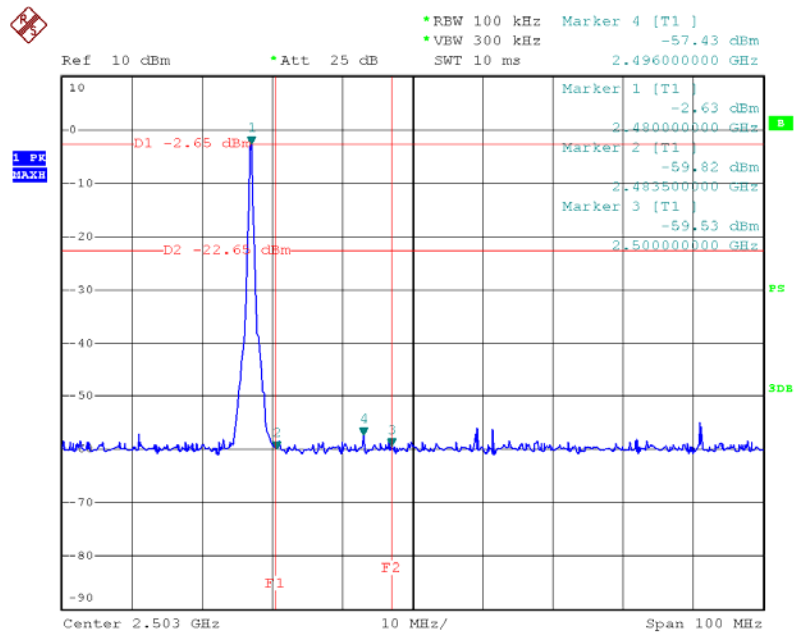


Date: 20.JAN.2014 15:31:35

GFSK Hopping TX Mode

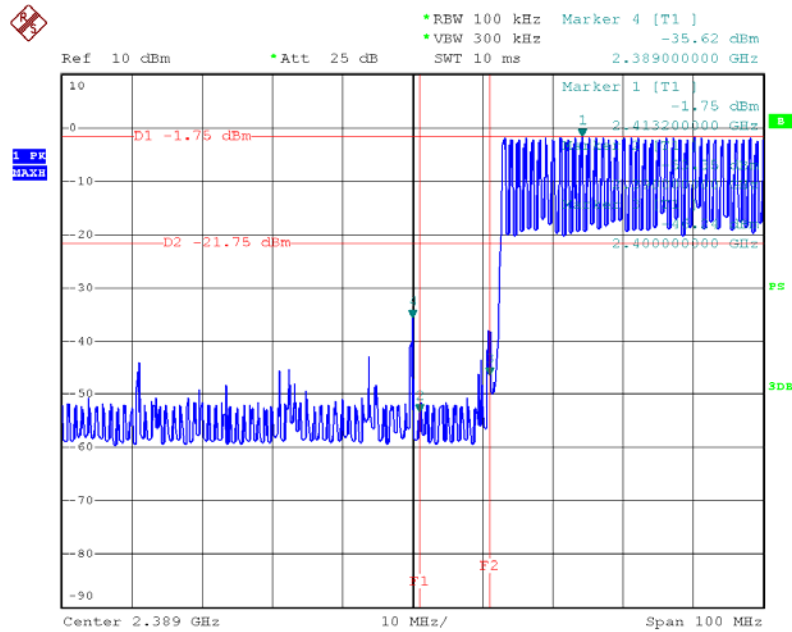

Date: 20.JAN.2014 16:05:02

GFSK Hopping TX Mode

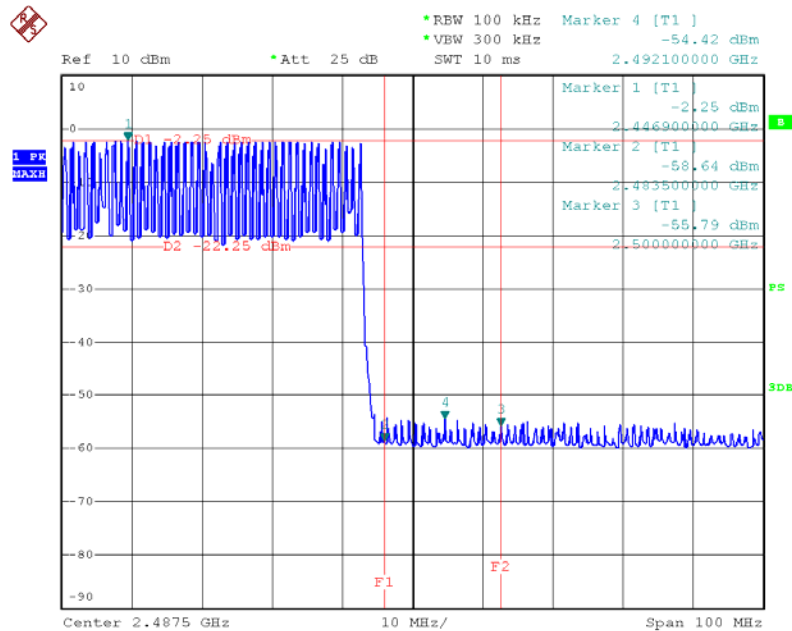

Date: 20.JAN.2014 16:08:44

Spectrum Detector: PK
Temperature : 28 °C

Test Date : Jan. 20, 2014
Humidity : 65 %


8-DPSK Mode

1. Radiated emission test

Test Mode	Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
			PEAK	AV	PEAK	AV
TX 2402 MHz	2390.0	H	51.06	40.89	74.00	54.00
	2390.0	V	49.50	40.75	74.00	54.00
TX 2480 MHz	2483.5	H	53.75	48.86	74.00	54.00
	2483.5	V	51.78	47.29	74.00	54.00


Note: During testing the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

8-DPSK TX 2402MHz Mode

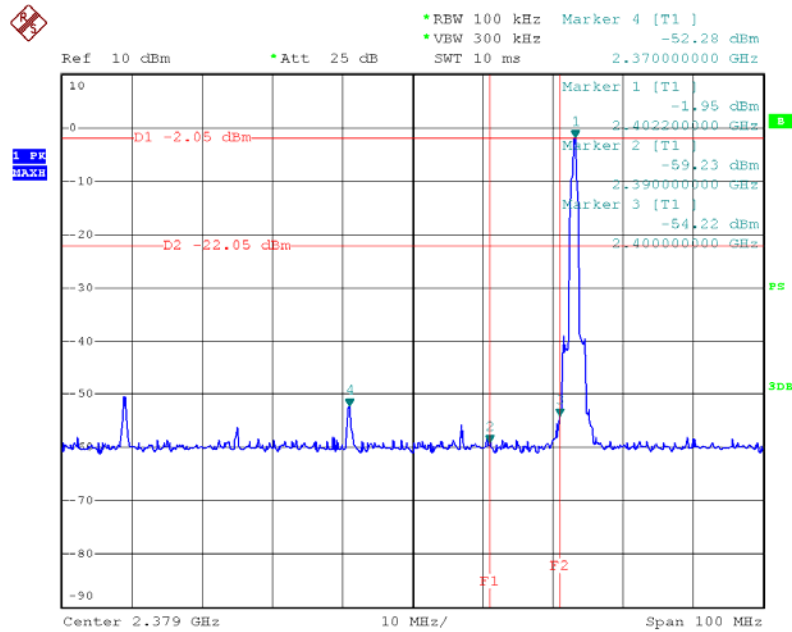


Date: 20.JAN.2014 15:33:57

8-DPSK TX 2480MHz Mode

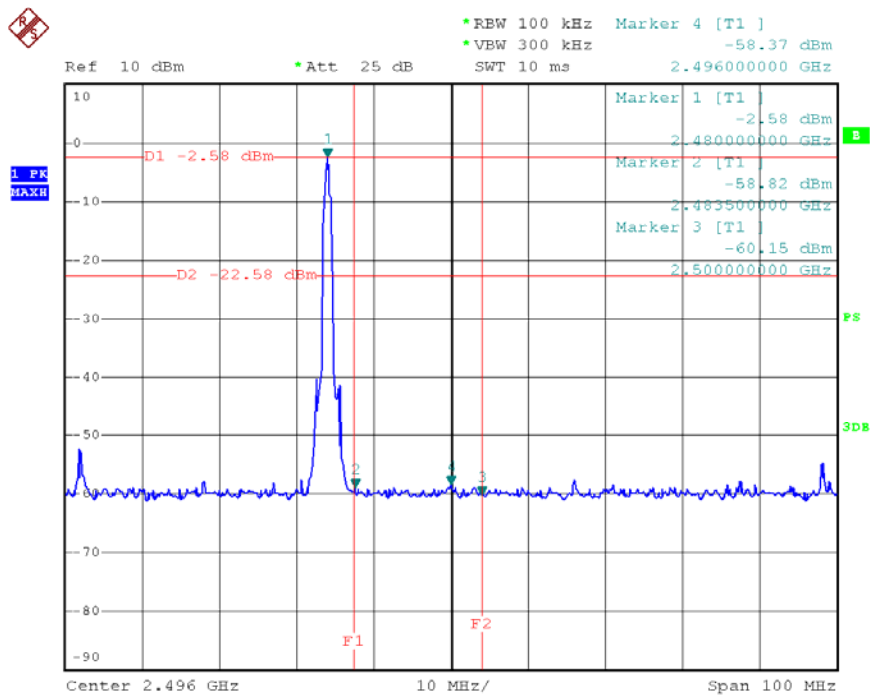


Date: 20.JAN.2014 15:40:15

8-DPSK Hopping TX Mode

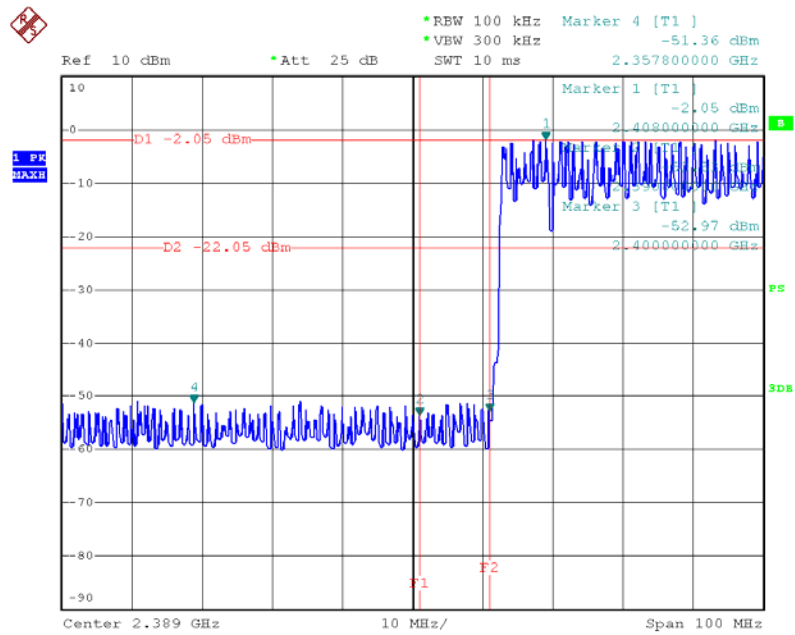

Date: 20.JAN.2014 15:44:15

8-DPSK Hopping TX Mode

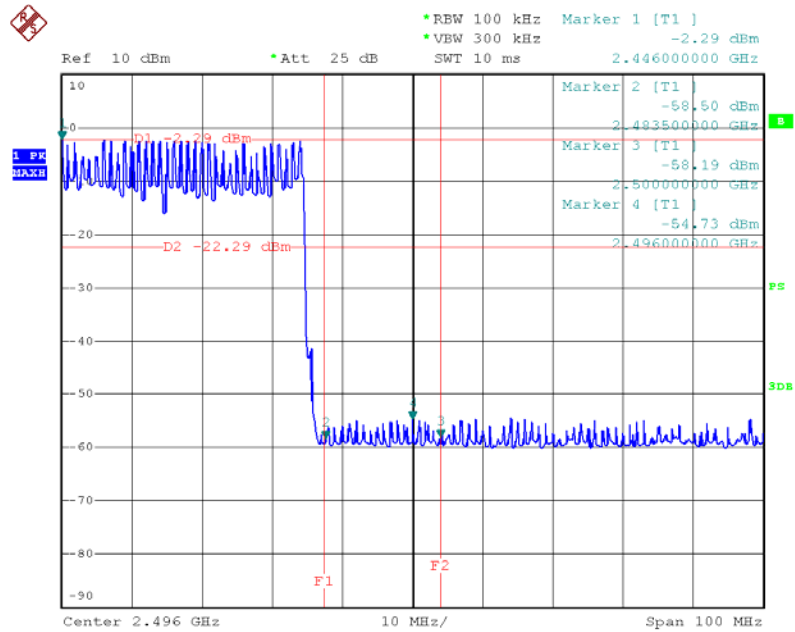

Date: 20.JAN.2014 15:42:07

6. Number of Hopping Channel


6.1 Test Standard and Limit

6.1.1 Test Standard
FCC Part 15.247 (a)(1)

6.1.2 Test Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

6.2 Test Setup



6.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.

6.4 EUT Operating Condition


The EUT was set to the Hopping Mode by the Customer.

6.5 Test Equipment

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	ROHDE& SCHWARZ	FSP30	DE25181	2013-12-30	2014-12-29


6.6 Test Data

1 Mbps		
Hopping Channel Frequency Range	Quantity of Hopping Channel	Limit
2402~2480	79	>15

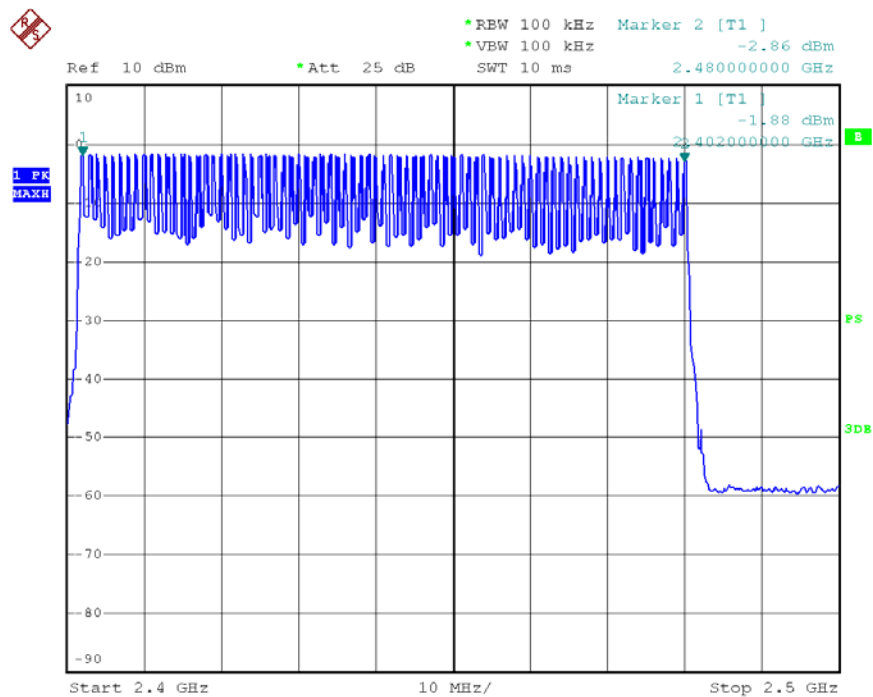

Date: 22.JAN.2014 16:02:55

3 Mbps		
Hopping Channel Frequency Range	Quantity of Hopping Channel	Limit
2402~2480	79	>15

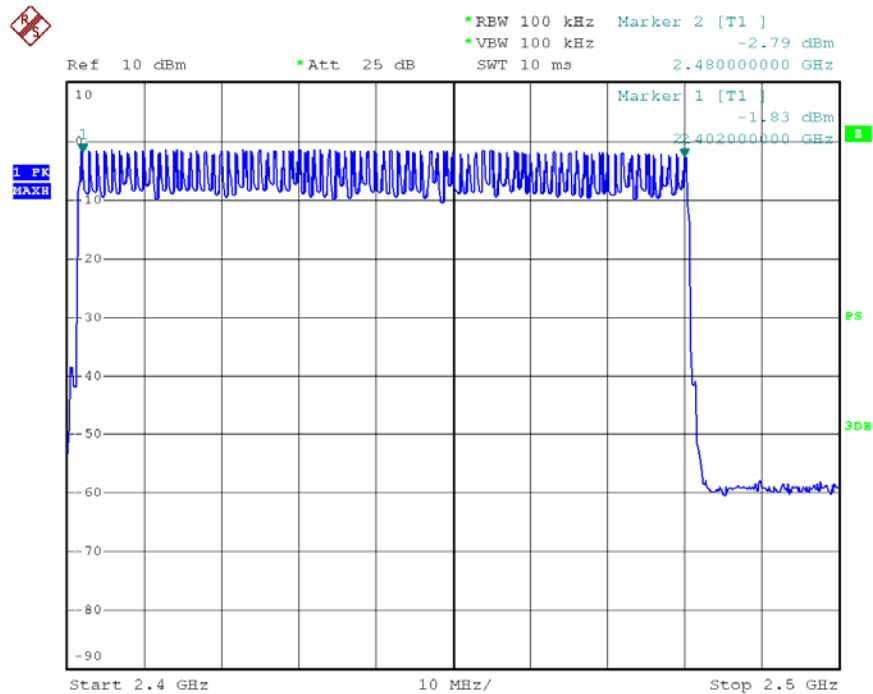

Date: 22.JAN.2014 15:51:34

7. Average Time of Occupancy


7.1 Test Standard and Limit

5.1.1 Test Standard
FCC Part 15.247 (a)(1)

5.1.2 Test Limit

Section	Test Item	Limit
15.247(a)(1)/ RSS-210 Annex 8(A8.1d)	Average Time of Occupancy	0.4 sec

7.2 Test Setup



7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=1MHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

7.4 EUT Operating Condition


The EUT was set to the Hopping Mode by the Customer.

7.5 Test Equipment


Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	ROHDE& SCHWARZ	FSP30	DE25181	2013-12-30	2014-12-29

7.6 Test Data

Please refer the following test data of the worst mode.

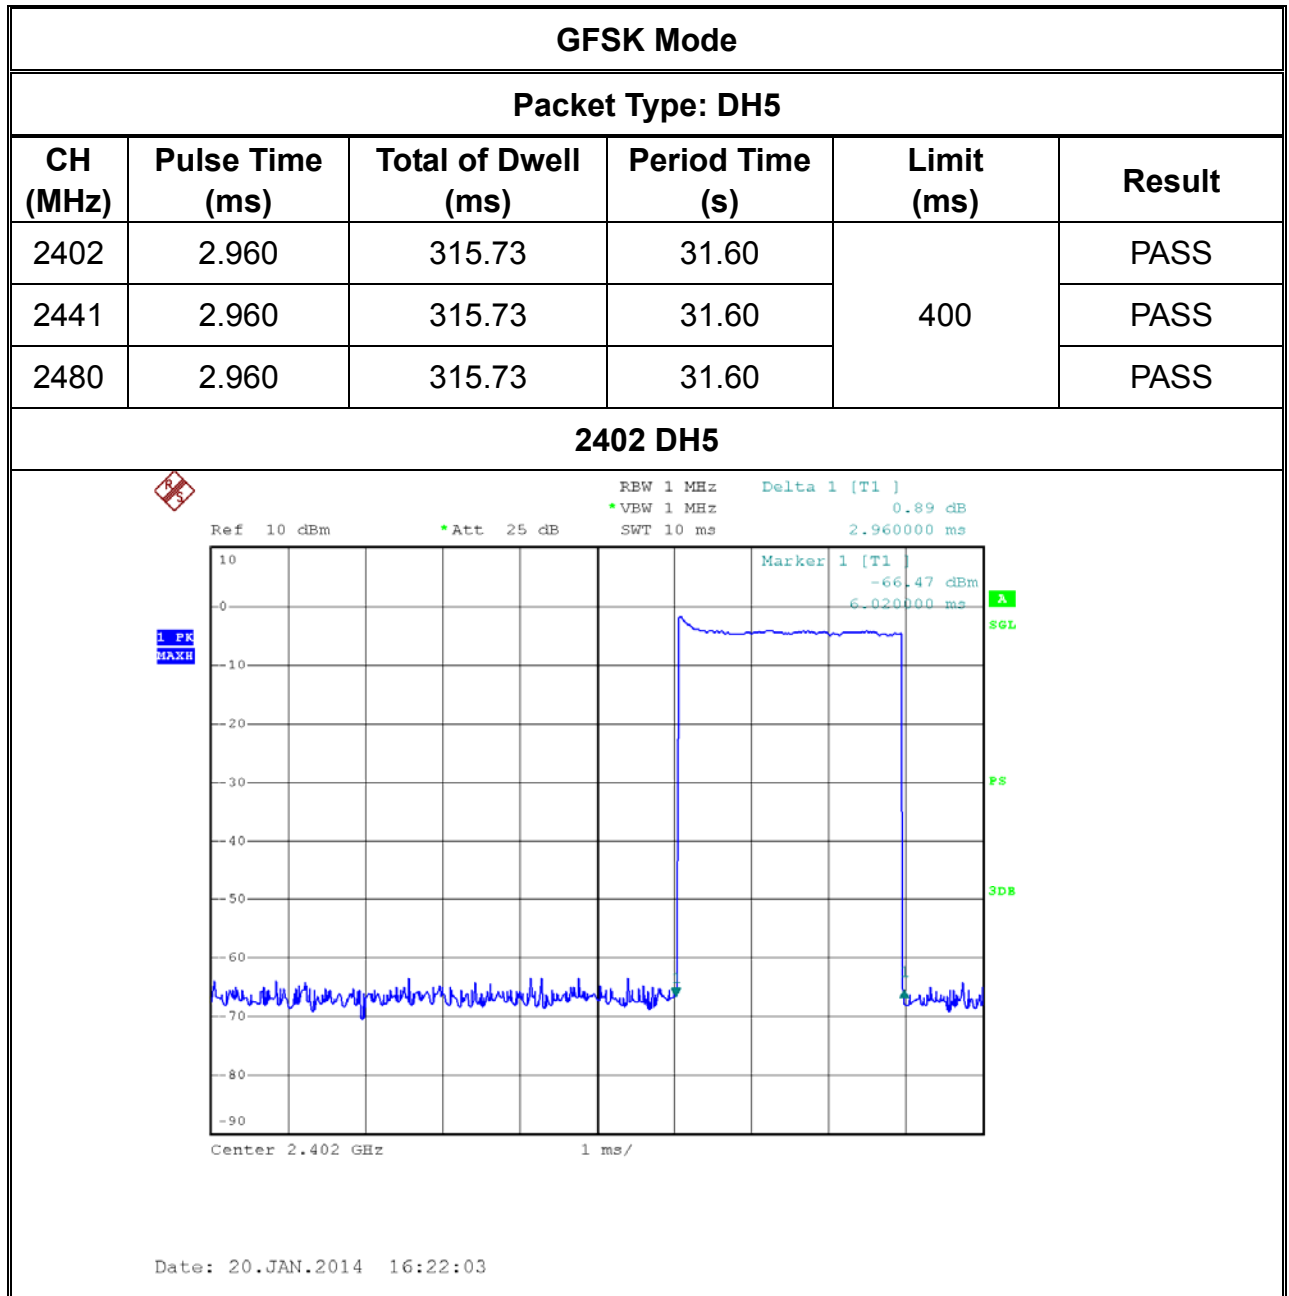


2441 DH5

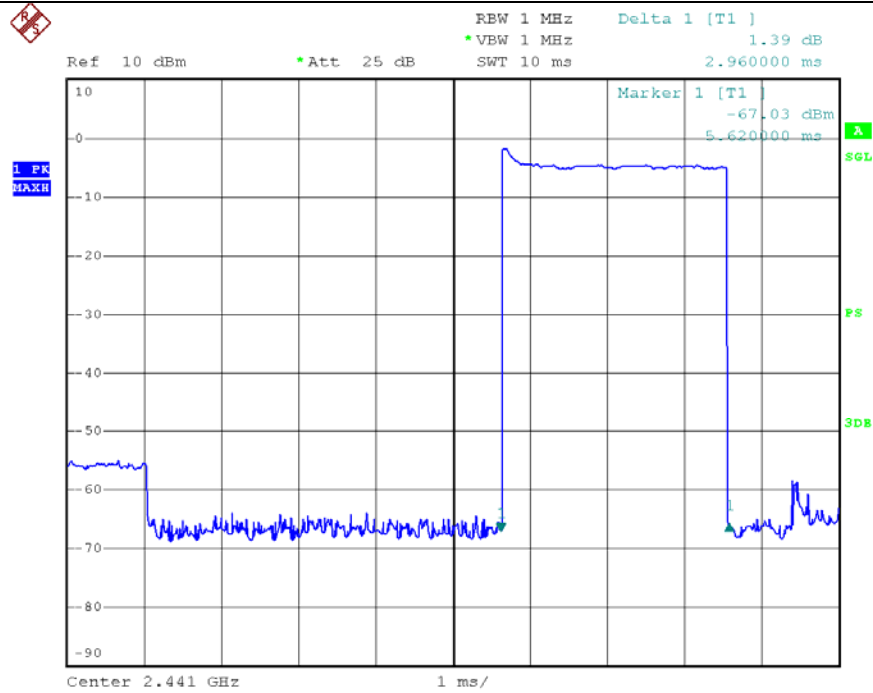


Date: 20.JAN.2014 16:21:36


2480 DH5

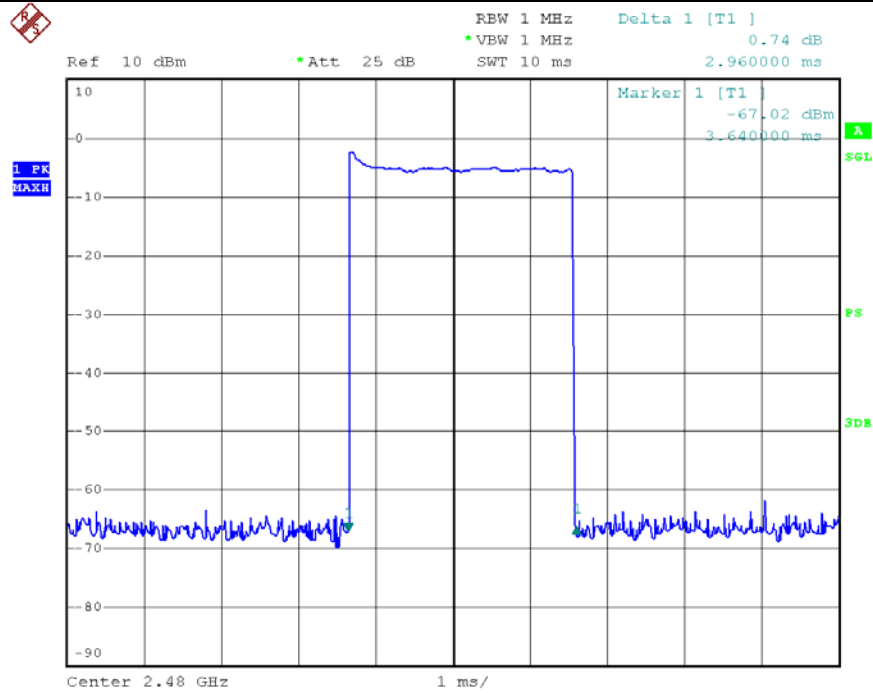

Date: 20.JAN.2014 16:21:03

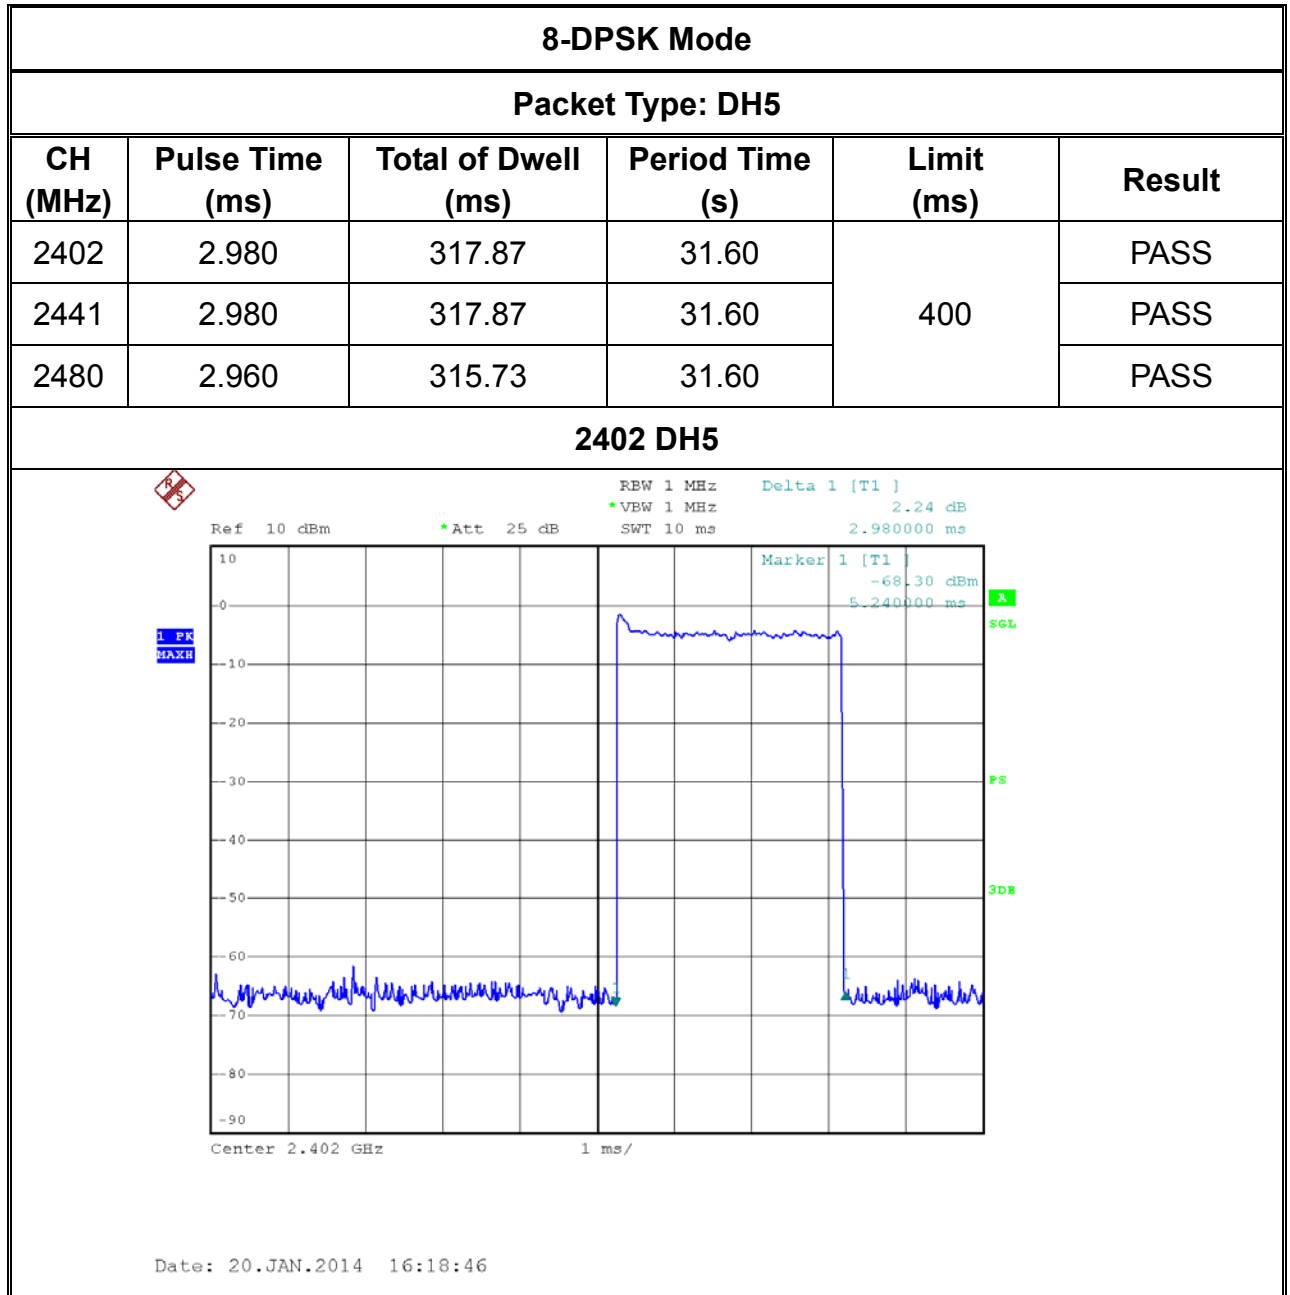


2441 DH5

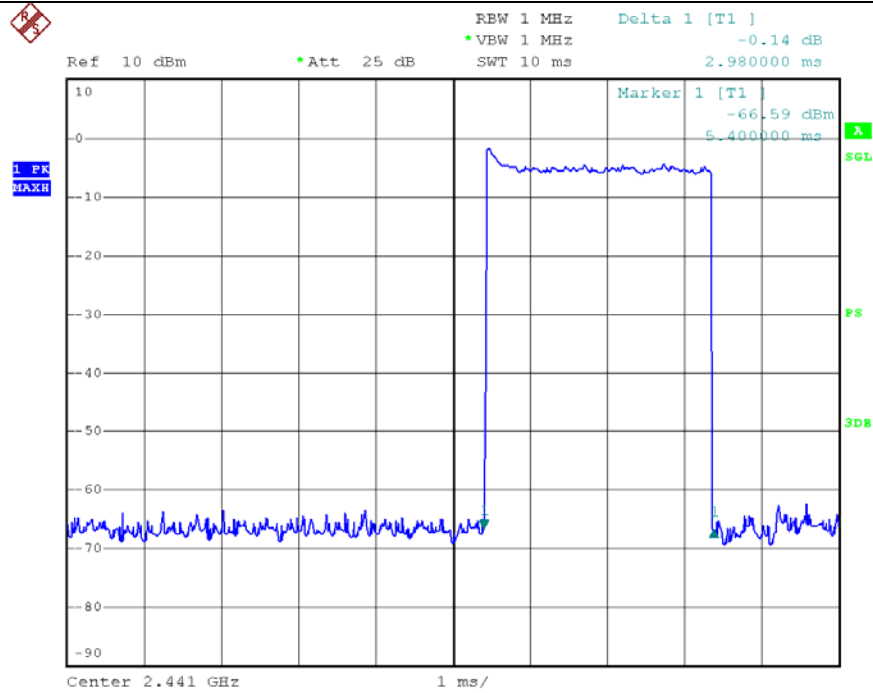

Date: 20.JAN.2014 16:20:01

2480 DH5

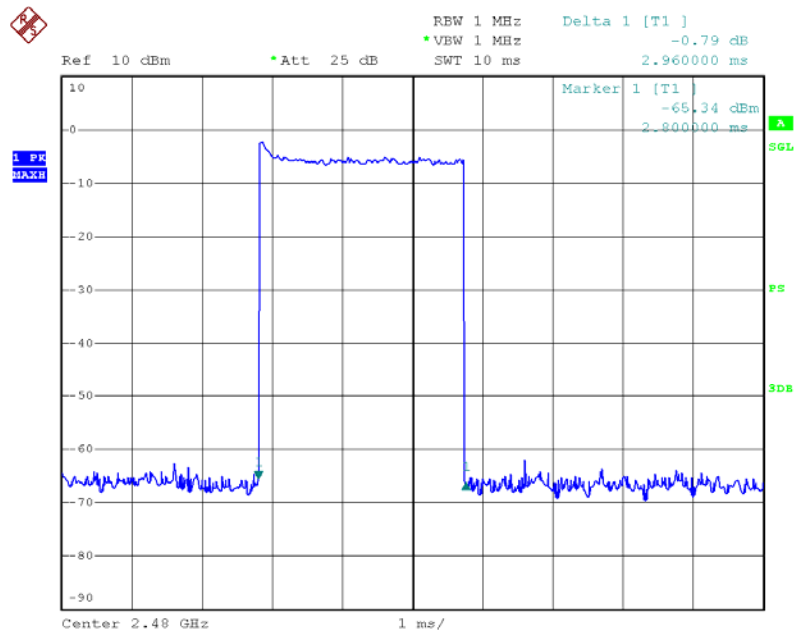

Date: 20.JAN.2014 16:20:25

8. Channel Separation and Bandwidth Test

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.247

8.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	≤ 1 MHz (20dB bandwidth)	2400~2483.5
Channel Separation	>25 KHz or $>$ two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

8.2 Test Setup



8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Channel Separation: RBW=30 kHz, VBW=100 kHz.
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

8.4 EUT Operating Condition

The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.


8.5 Test Equipment

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	ROHDE& SCHWARZ	FSP30	DE25181	2013-12-30	2014-12-29

8.6 Test Data


1 Mbps			
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	Read Value*2/3 (kHz)
2402	780.00	702.00	468.00
2441	780.00	726.00	484.00
2480	786.00	708.00	472.00

2402 MHz

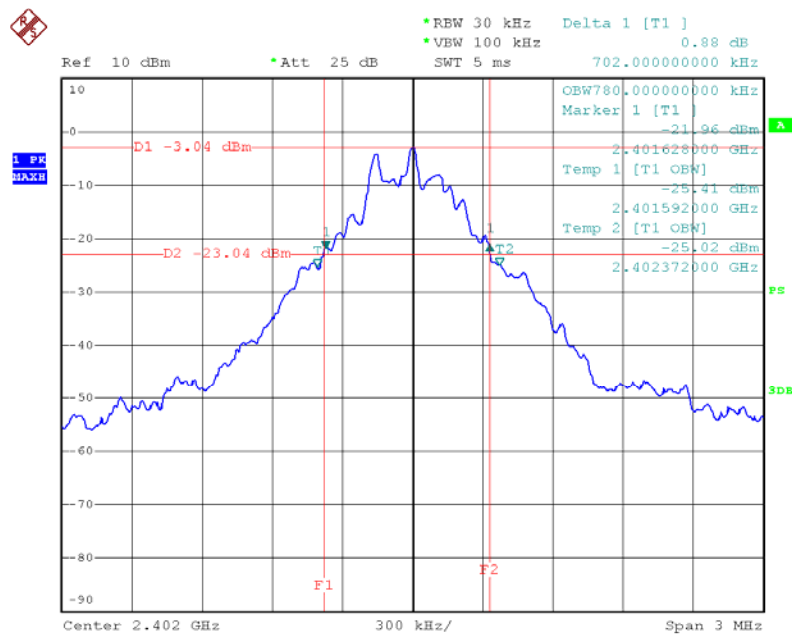


Date: 20.JAN.2014 15:25:13

2441 MHz

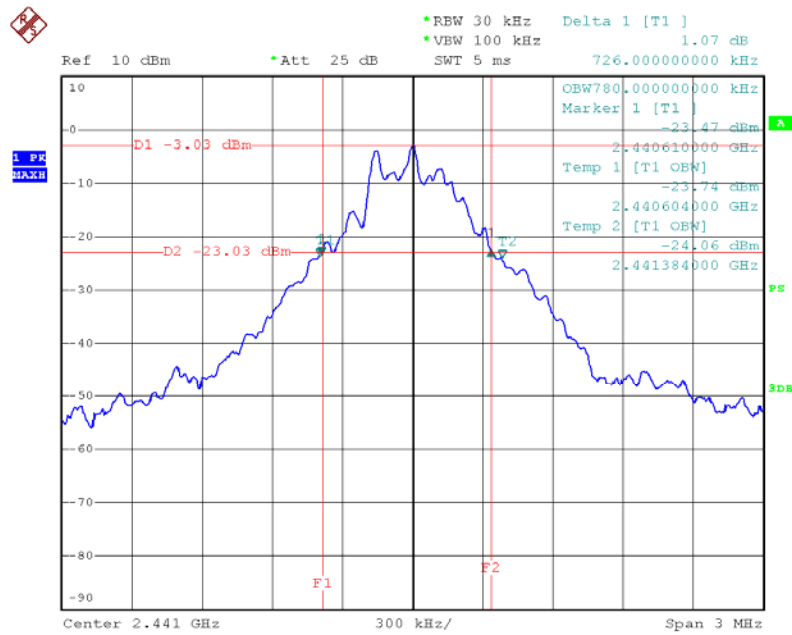

Date: 20.JAN.2014 15:28:50


2480 MHz

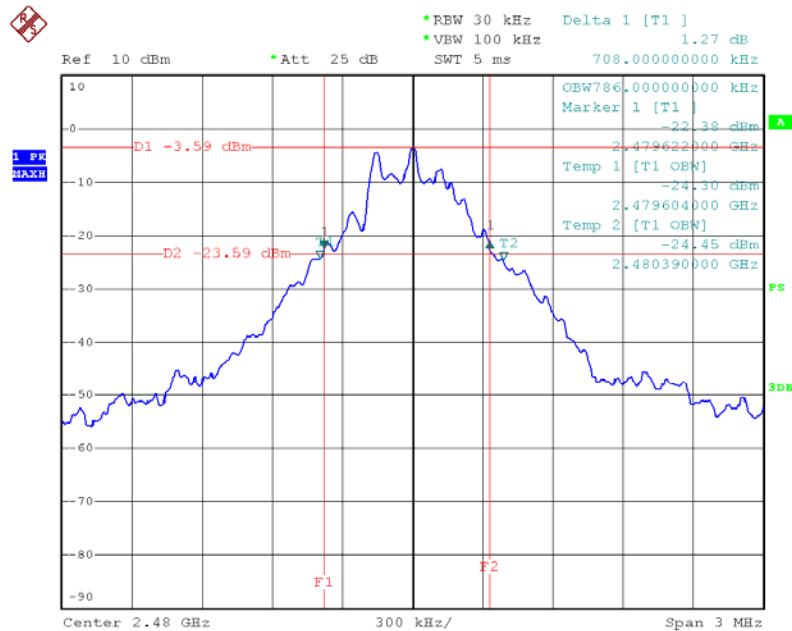

Date: 20.JAN.2014 15:29:54


1 Mbps			
Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)
CH 00	2402	1002.00	>468.00 kHz
CH 39	2441	1020.00	>484.00 kHz
CH 78	2480	1008.00	>472.00 kHz

2402 MHz

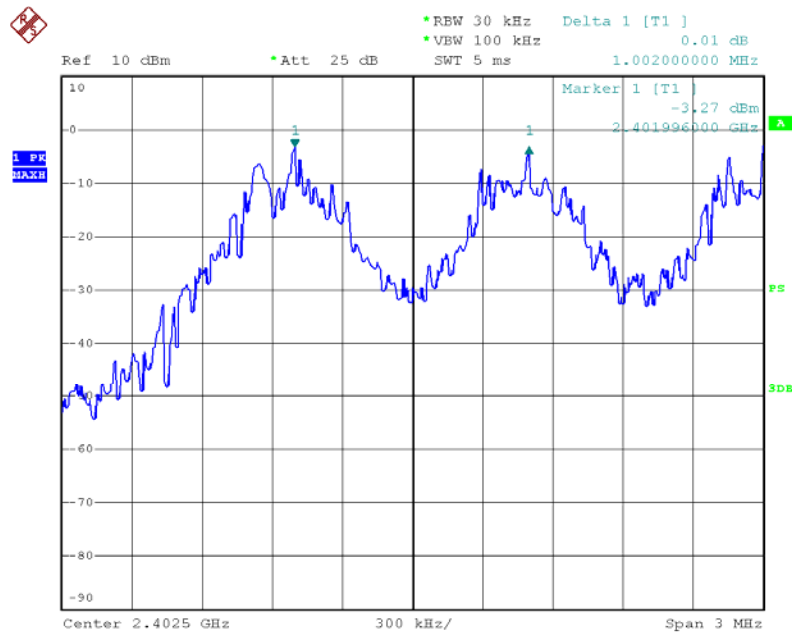


Date: 20.JAN.2014 15:56:54

2441 MHz

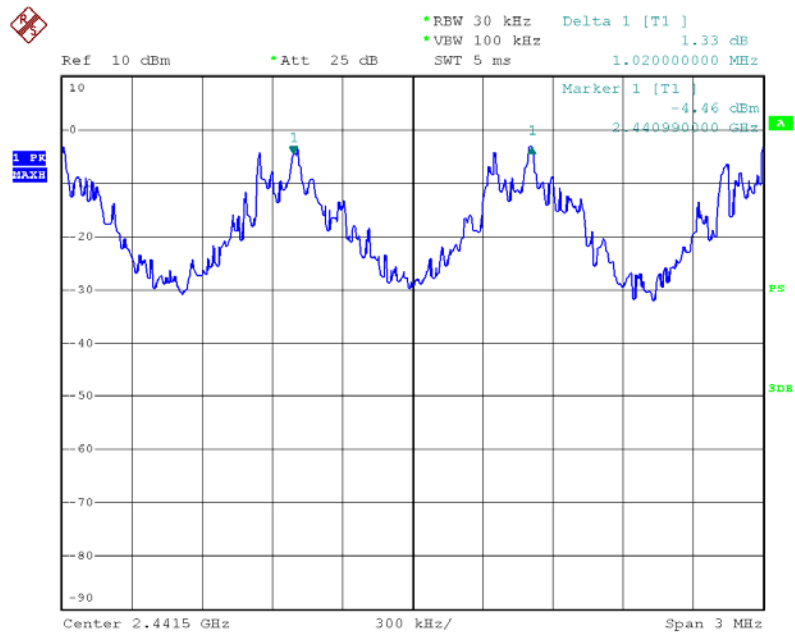

Date: 20.JAN.2014 15:55:51


2480 MHz

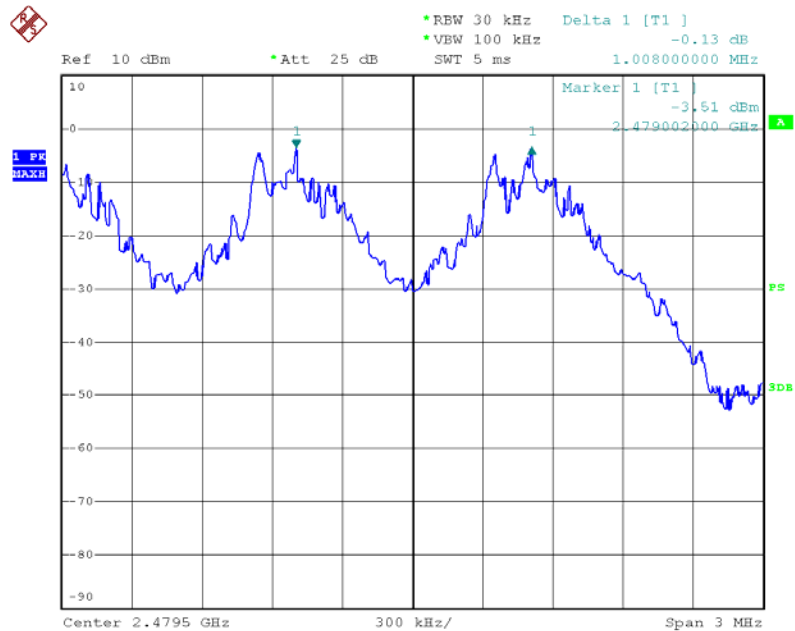

Date: 20.JAN.2014 15:54:26


3 Mbps			
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	Read Value*2/3 (kHz)
2402	1110.00	1182.00	788.00
2441	1110.00	1176.00	784.00
2480	1110.00	1176.00	784.00

2402 MHz

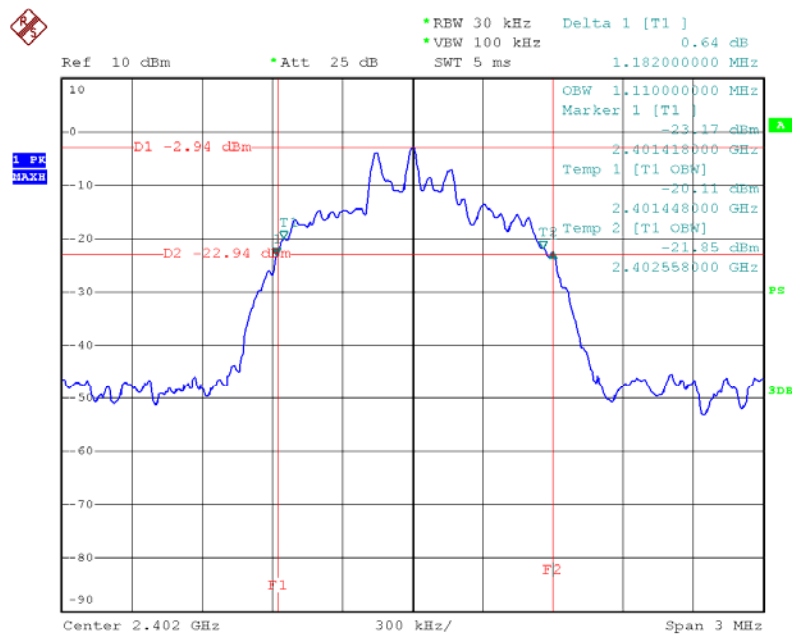


Date: 20.JAN.2014 15:34:52

2441 MHz

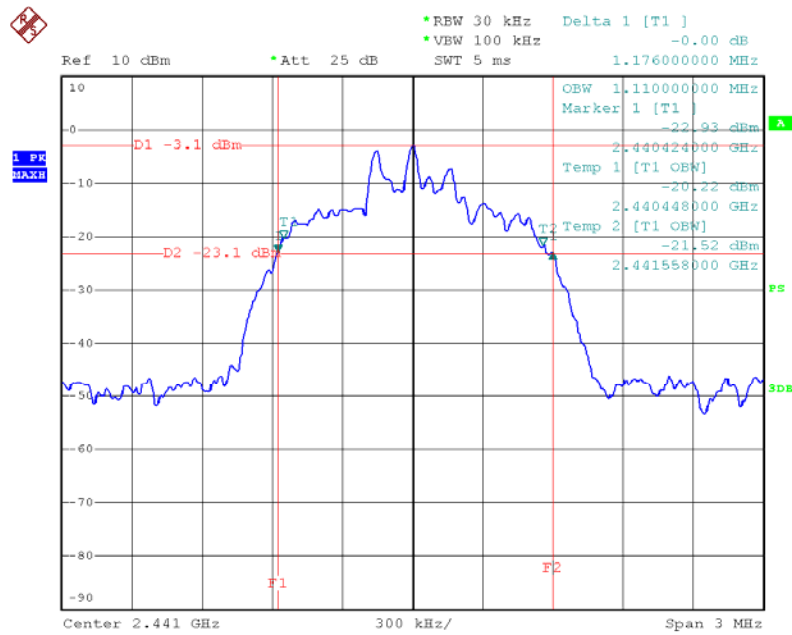

Date: 20.JAN.2014 15:37:31


2480 MHz

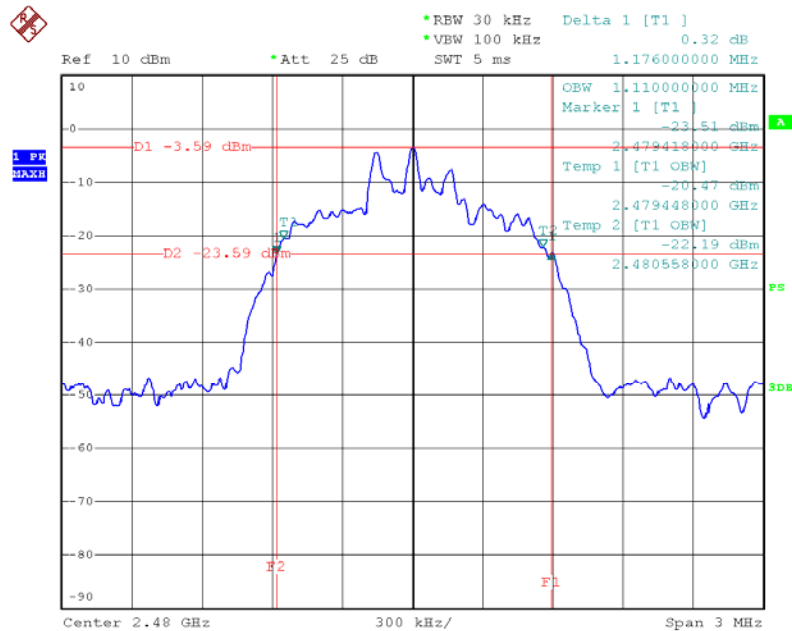

Date: 20.JAN.2014 15:38:32


3 Mbps			
Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)
CH 00	2402	1014.00	>788.00 kHz
CH 39	2441	996.00	>784.00 kHz
CH 78	2480	1014.00	>784.00 kHz

2402 MHz

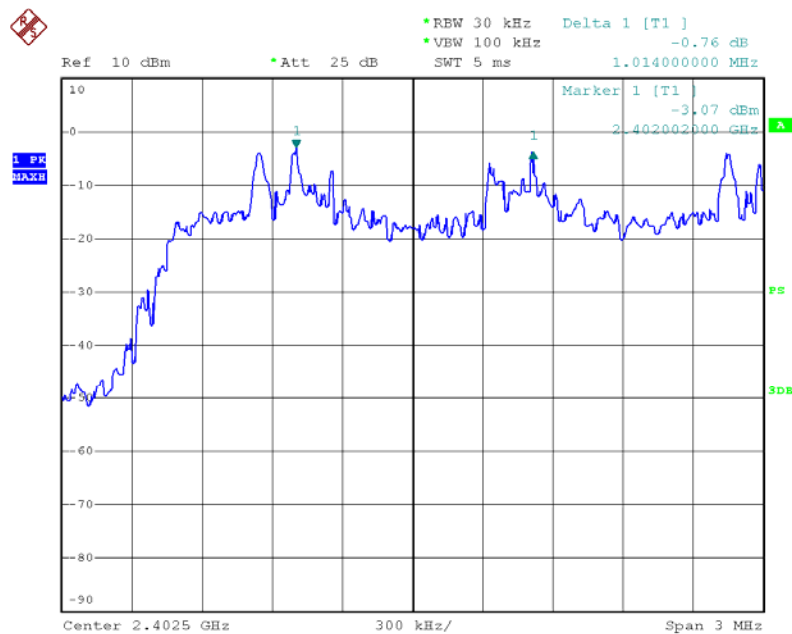


Date: 20.JAN.2014 15:46:23

2441 MHz

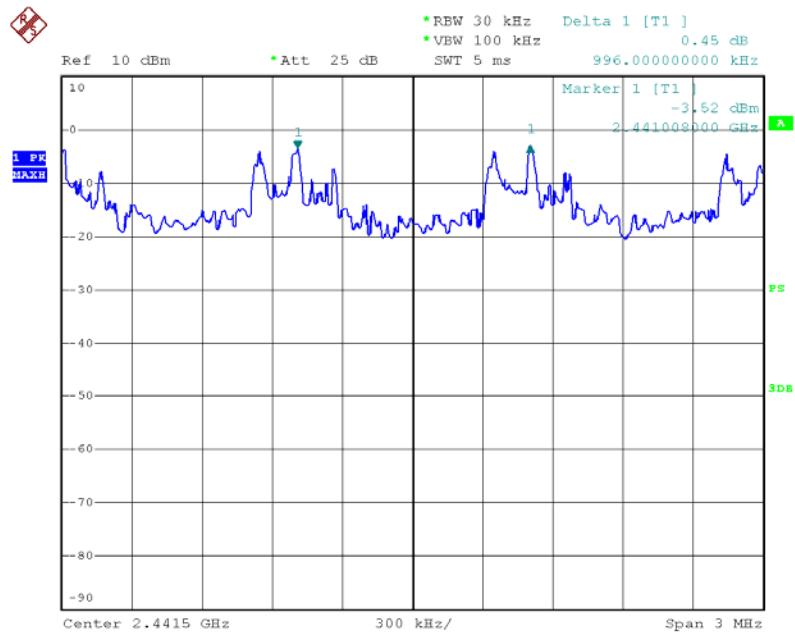

Date: 20.JAN.2014 15:48:35

2480 MHz

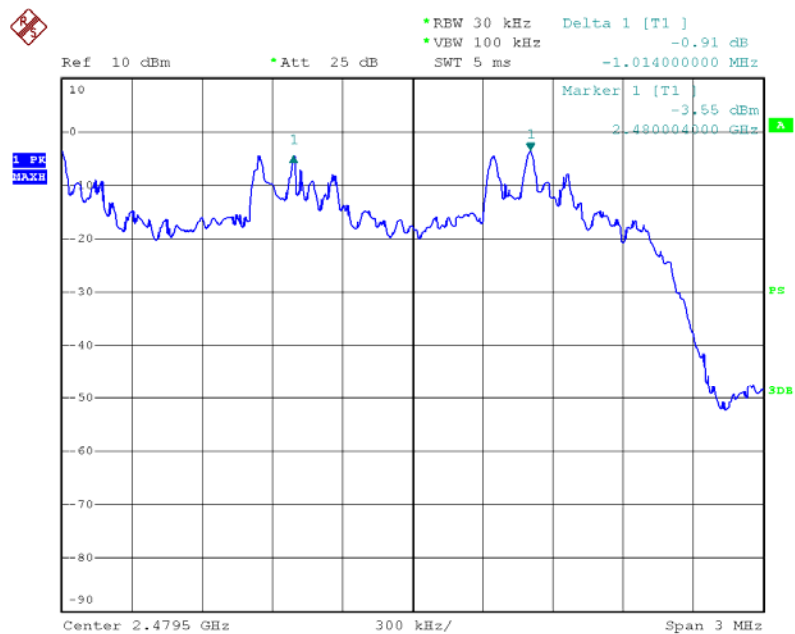

Date: 20.JAN.2014 15:52:46

9. Peak Output Power Test

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.247 (b) (1)

9.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

9.2 Test Setup



9.3 Test Procedure

(1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

(2) Spectrum Setting:

Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.

RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

9.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.


9.5 Test Equipment

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	ROHDE& SCHWARZ	FSP30	DE25181	2013-12-30	2014-12-29

8.6 Test Data


1 Mbps			
Channel number	Channel frequency (MHz)	Test Result (dBm)	Limit
CH 00	2402	-1.43	1W(30dBm)
CH 39	2441	-1.55	1W(30dBm)
CH 78	2480	-2.00	1W(30dBm))

2402 Power

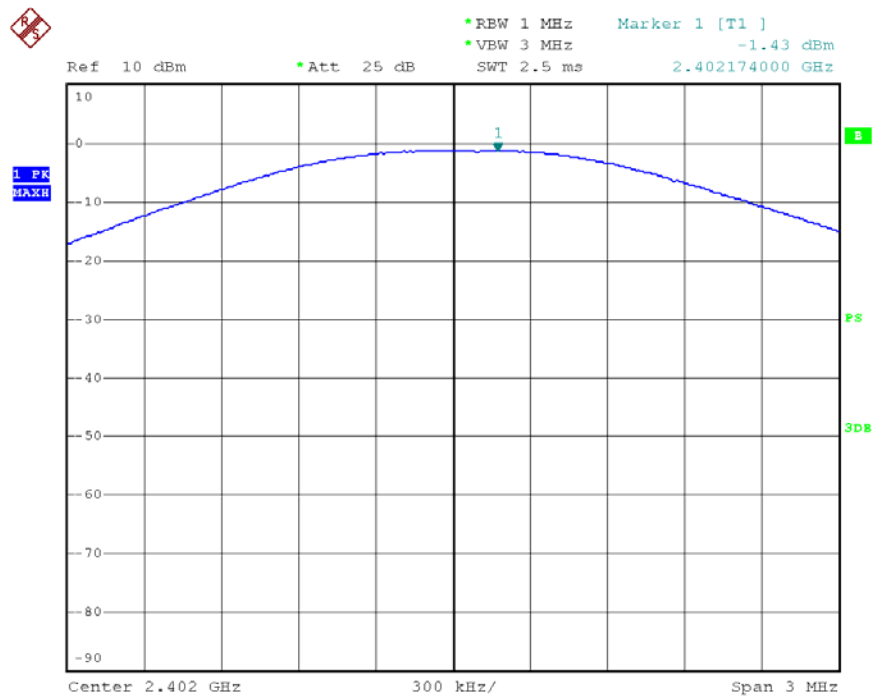


Date: 20.JAN.2014 15:27:13

2441 Power

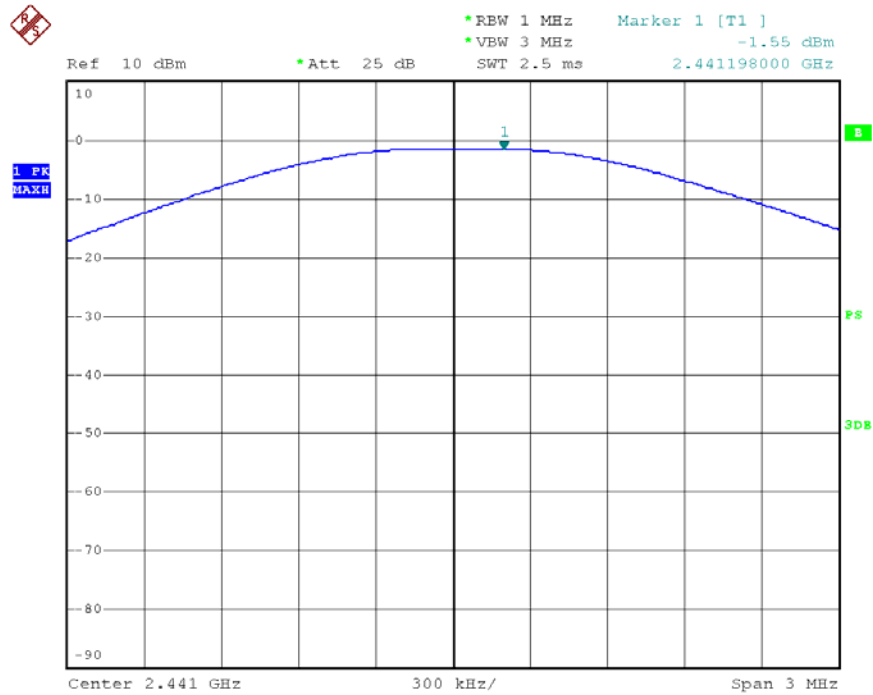

Date: 20.JAN.2014 15:28:00


2480 Power

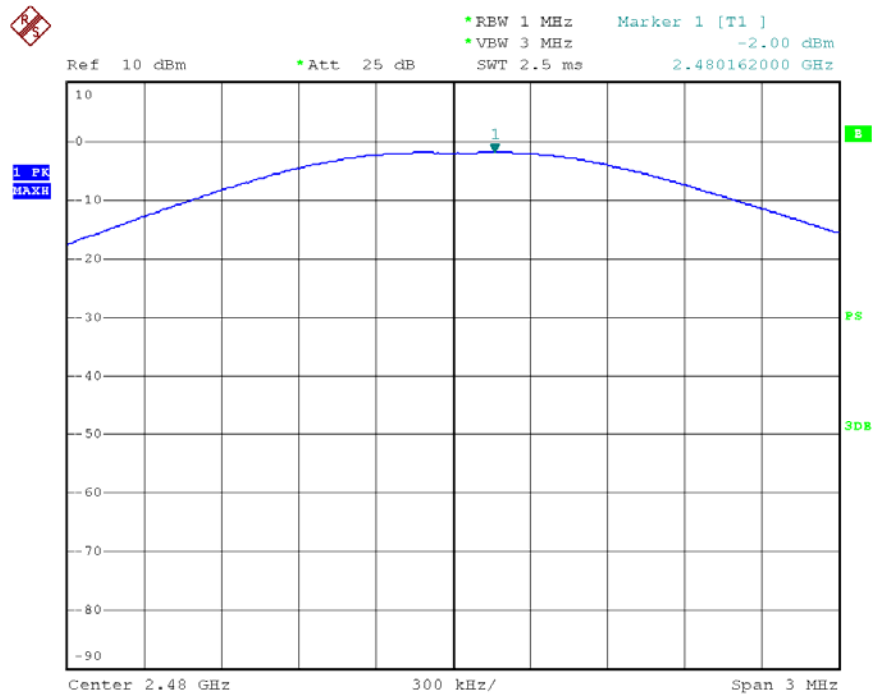

Date: 20.JAN.2014 15:30:22


3 Mbps			
Channel number	Channel frequency (MHz)	Test Result (dBm)	Limit
CH 00	2402	-1.39	1W(30dBm)
CH 39	2441	-1.45	1W(30dBm)
CH 78	2480	-1.84	1W(30dBm)

2402 Power

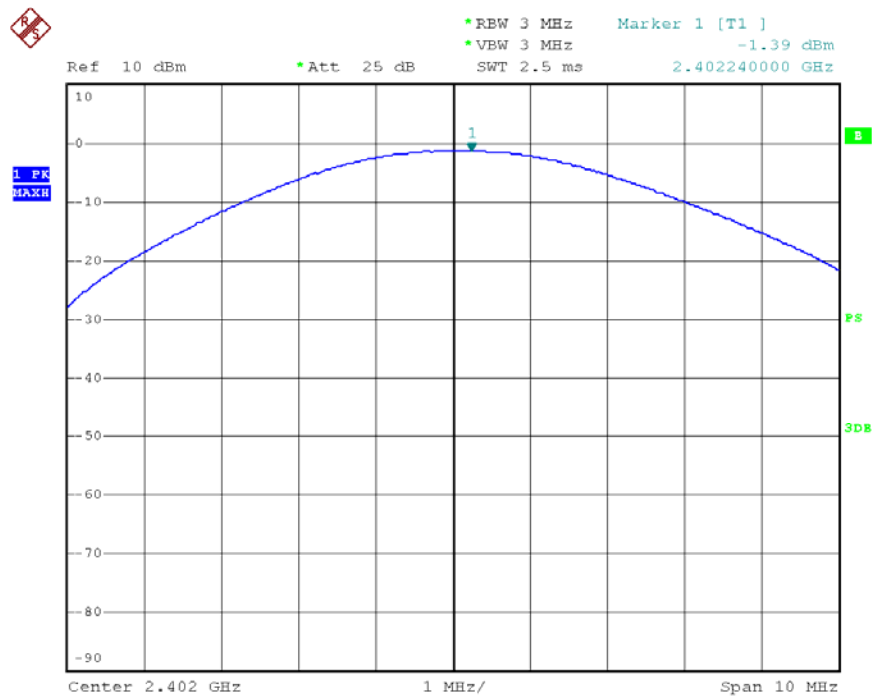


Date: 20.JAN.2014 15:36:00

2441 Power

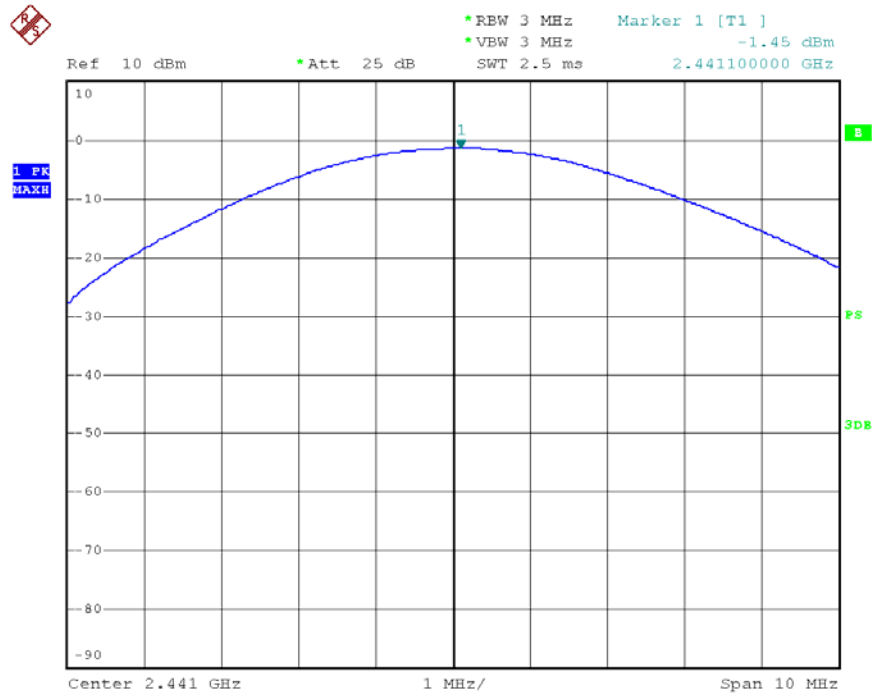

Date: 20.JAN.2014 15:36:34

2480 Power

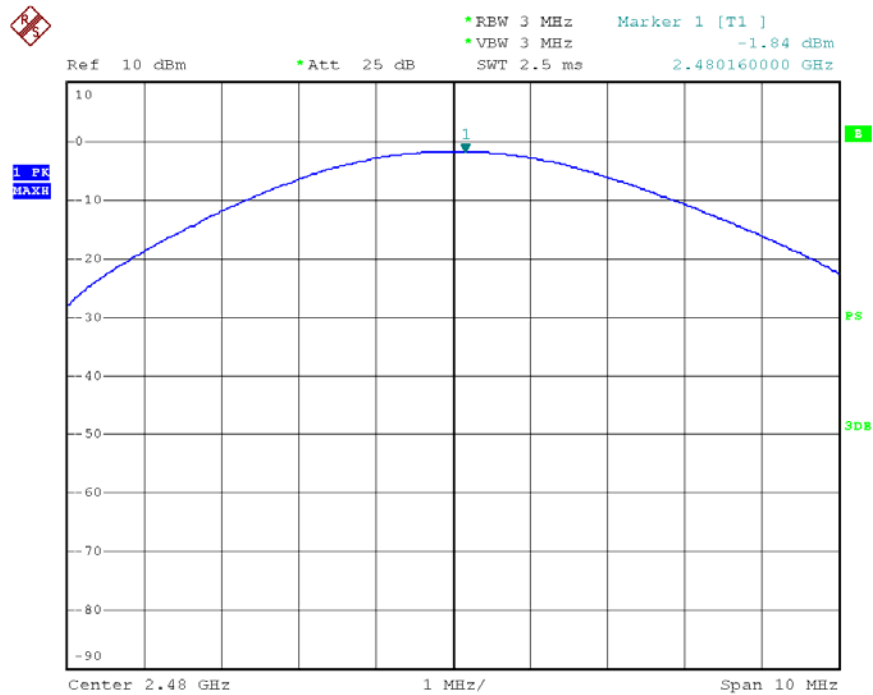

Date: 20.JAN.2014 15:39:01

10. Antenna Conducted Spurious Emission

10.1 Test Standard and Limit

10.1.1 Test Standard


FCC Part 15.247 (d)

10.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above~960	500	3

10.2 Test Setup



10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
 RBW=100 KHz, VBW=300 KHz.
 Frequency range: from 30MHz to 25 GHz

10.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.


10.5 Test Equipment

Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	ROHDE& SCHWARZ	FSP30	DE25181	2013-12-30	2014-12-29

10.6 Test Data


TX CH 00 2402MHz (1 Mbps)

Above 1 GHz

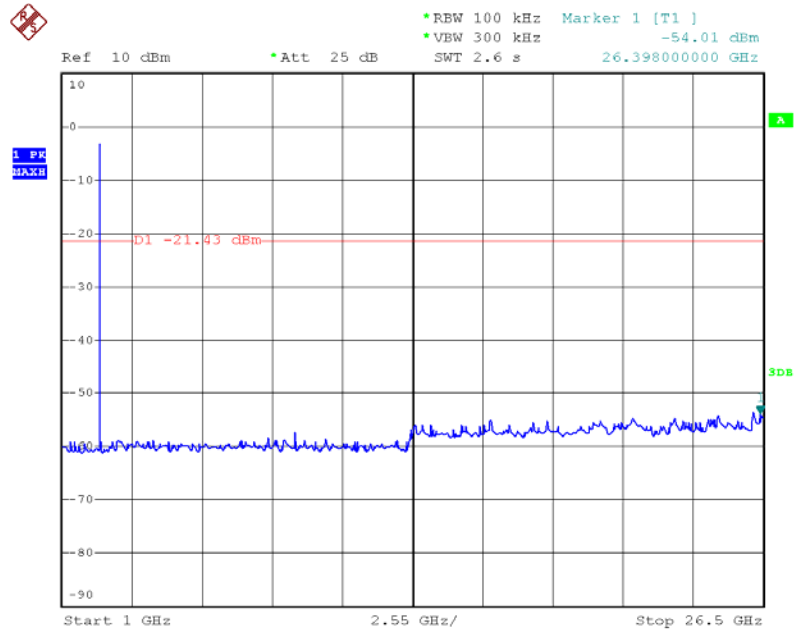

Date: 20.JAN.2014 16:23:08


Bellow 1 GHz

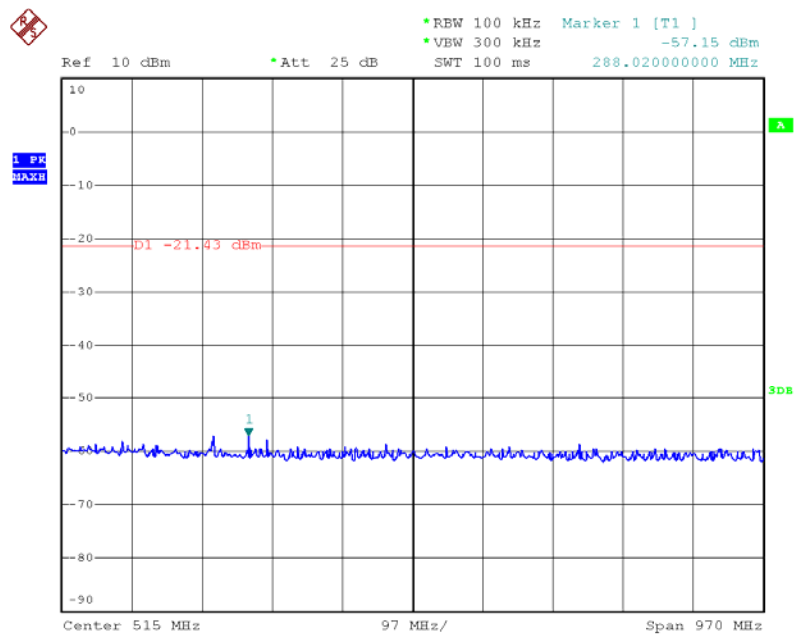

Date: 20.JAN.2014 16:33:28


TX CH 39 2441MHz (1 Mbps)

Above 1 GHz

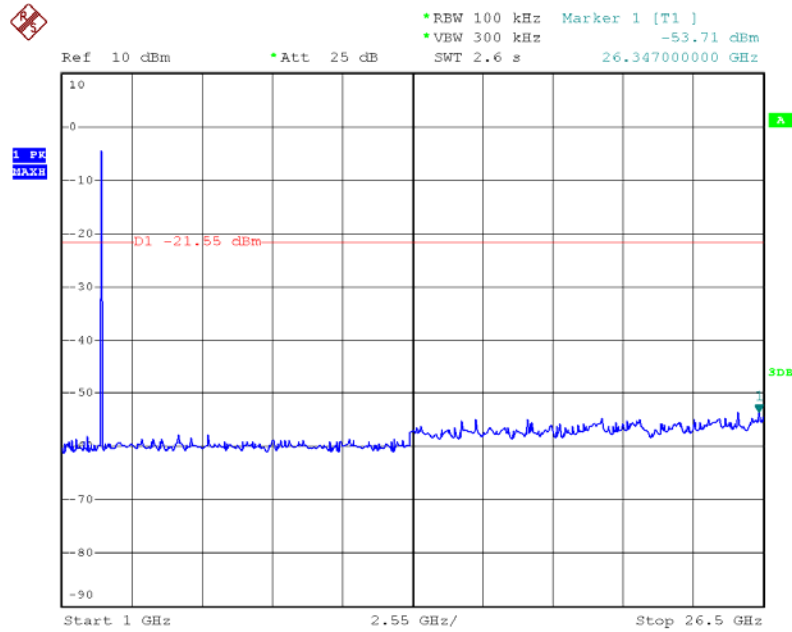

Date: 20.JAN.2014 16:24:34


Bellow 1 GHz

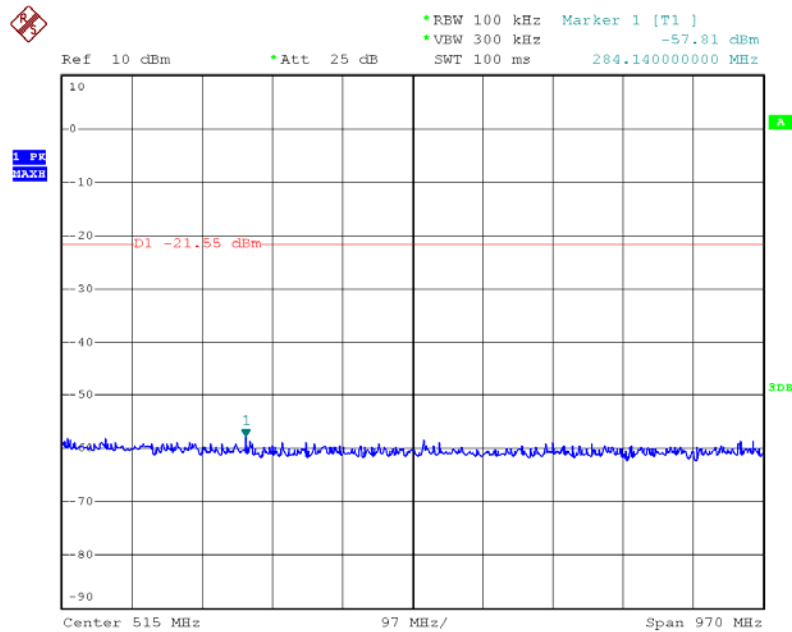

Date: 20.JAN.2014 16:33:04


TX CH 78 2480MHz (1 Mbps)

Above 1 GHz

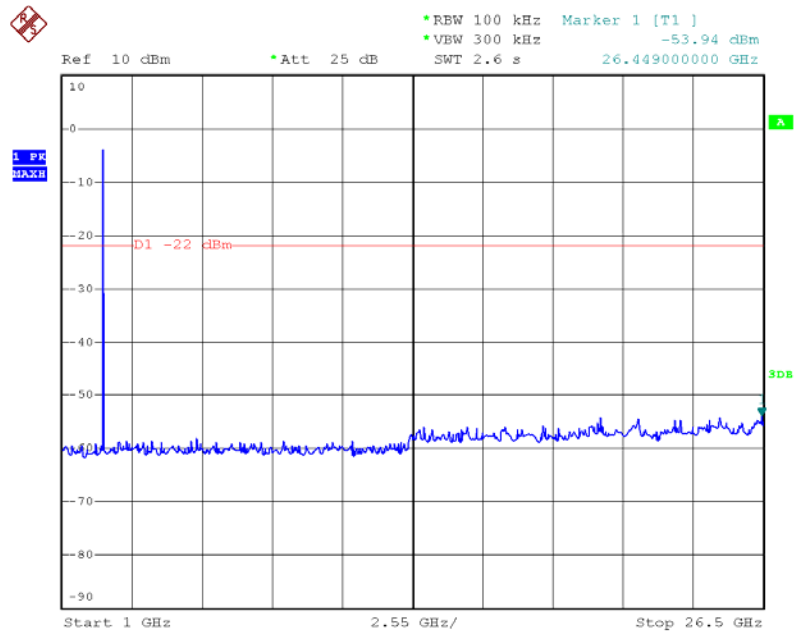

Date: 20.JAN.2014 16:26:16


Bellow 1 GHz

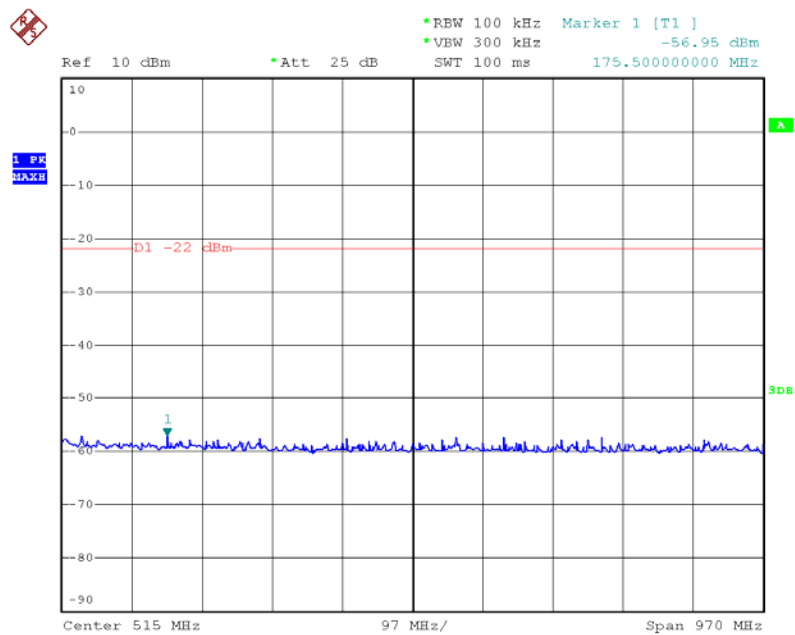

Date: 20.JAN.2014 16:32:32


TX CH 00 2402MHz (3 Mbps)

Above 1 GHz

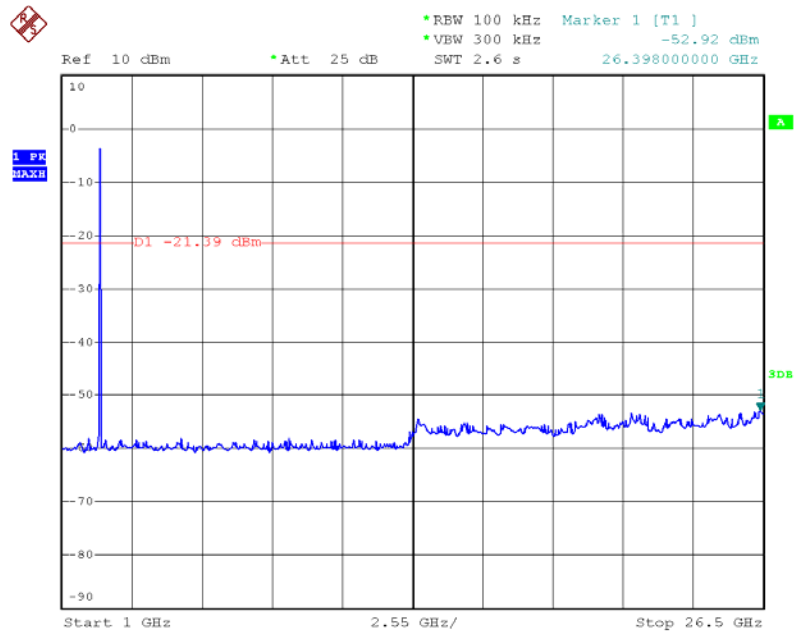

Date: 20.JAN.2014 16:28:38


Bellow 1 GHz

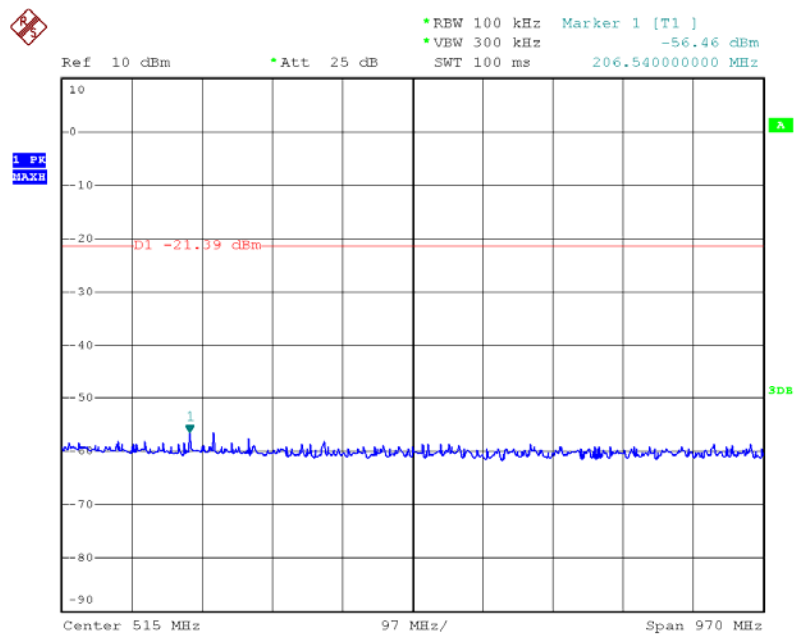

Date: 20.JAN.2014 16:34:15


TX CH 39 2441MHz (3 Mbps)

Above 1 GHz

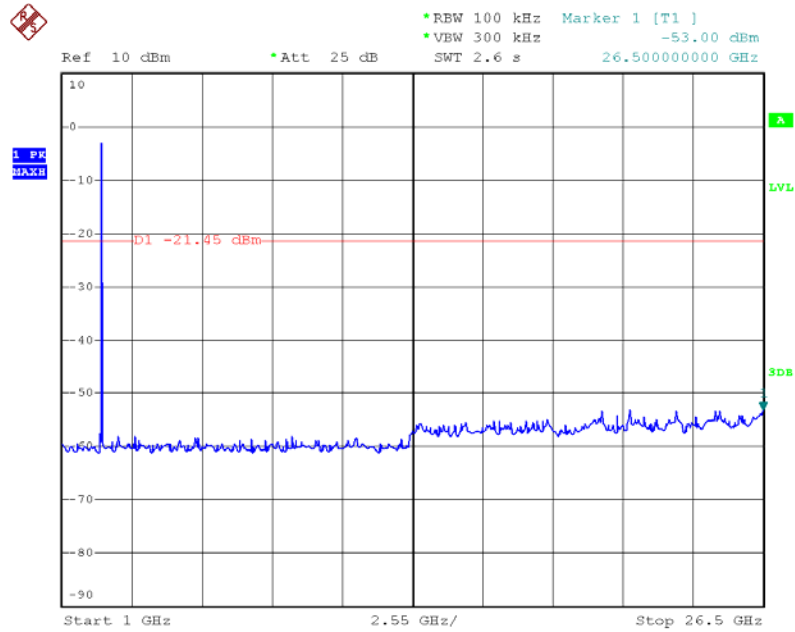

Date: 20.JAN.2014 16:31:36


Bellow 1 GHz

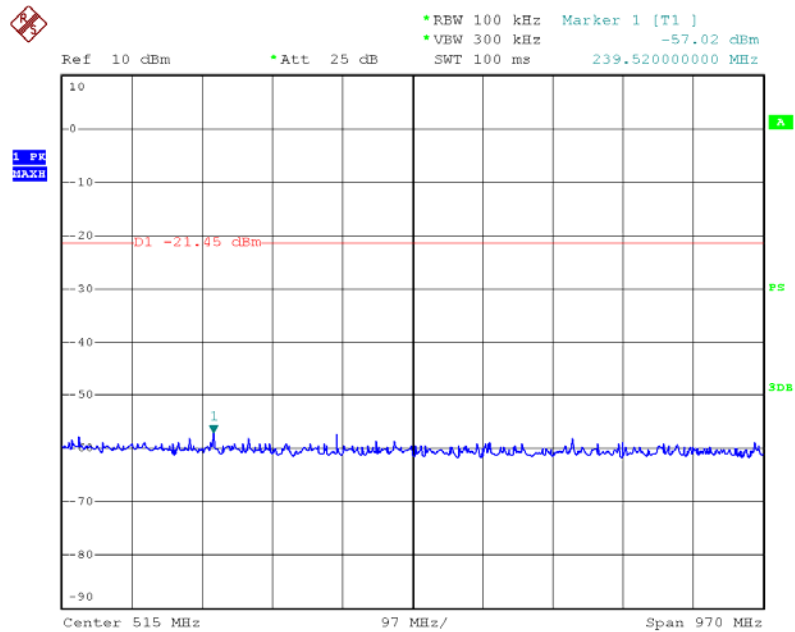

Date: 20.JAN.2014 16:34:39


TX CH 78 2480MHz (3 Mbps)

Above 1 GHz

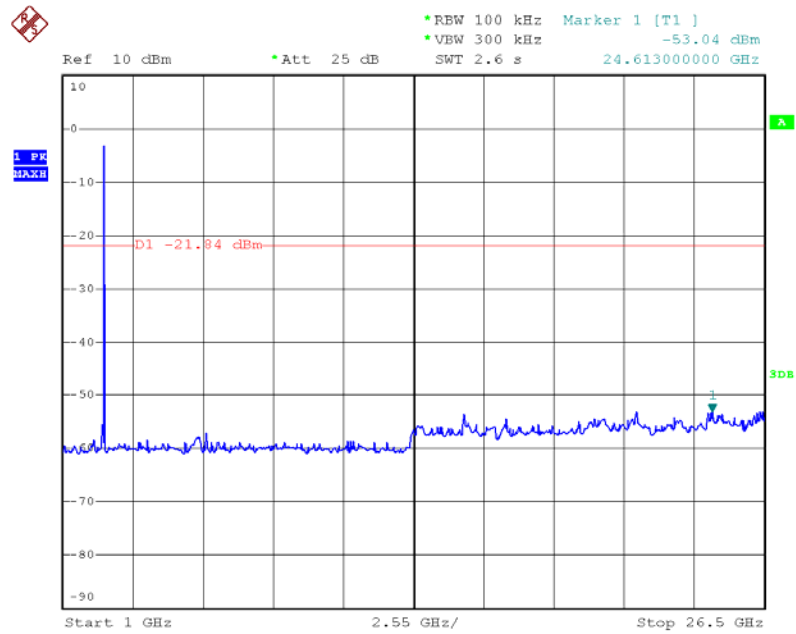

Date: 20.JAN.2014 16:38:51

Bellow 1 GHz

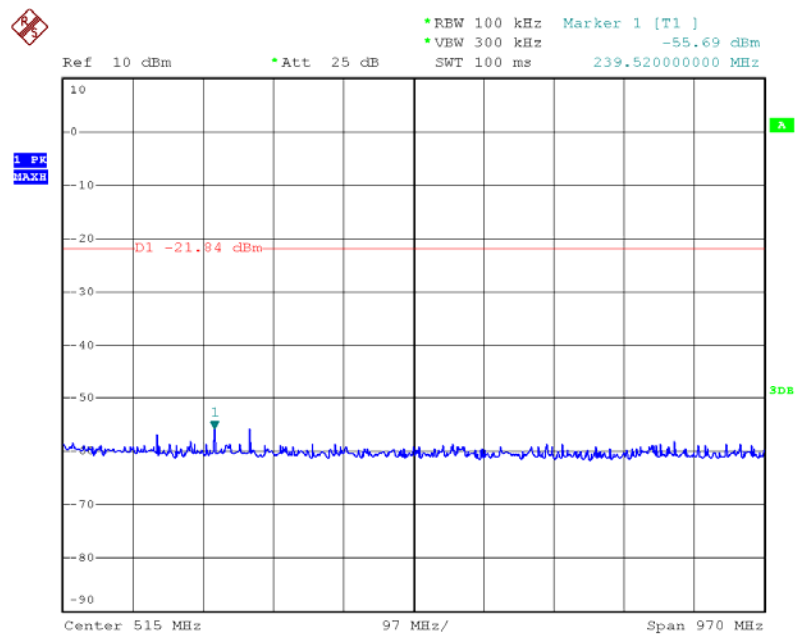

Date: 20.JAN.2014 16:55:05

11. Antenna Requirement

11.1 Standard Requirement

11.1.1 Standard

FCC Part 15.203

11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 0 dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

11.2 Result

The EUT antenna is a PCB Antenna. It complies with the standard requirement.