

TEST REPORT

Reference No. : WTS17S0476293E
FCC ID..... : 2AANE-BE200
Applicant : Advance Bright Limited
Address : Room 1206, Tower 2, Silvercord, 30 Canton Road, Tsim Sha Tsui,
Kowloon HongKong China
Manufacturer : Fu Yuan Electronics Shenzhen Co., Ltd
Address : Minzhu 99 Industrial City, Shajing Western Industrial Park, Ban An
District, Shenzhen, China
Product Name : Air Twins
Model No. : BE200
Brand Name 
Standards : FCC CFR47 Part 15 Section 15.247:2016
Date of Receipt sample : Apr. 13, 2017
Date of Test : Apr. 14 – 20, 2017
Date of Issue : May 02, 2017
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400


Tested by:



Henry.Yu / Test Engineer

Approved by:





Philo Zhong / Manager

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 DESCRIPTION OF E.U.T.	5
4.4 CHANNEL LIST	5
4.5 TEST MODE	6
4.6 TEST FACILITY	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 DESCRIPTION OF SUPPORT UNITS	8
5.3 MEASUREMENT UNCERTAINTY	8
5.4 TEST EQUIPMENT CALIBRATION	8
6 TEST SUMMARY	9
7 CONDUCTED EMISSION	10
2.1 E.U.T. OPERATION	10
2.2 EUT SETUP	10
2.3 MEASUREMENT DESCRIPTION	10
2.4 CONDUCTED EMISSION TEST RESULT	11
8 RADIATED EMISSIONS.....	13
8.1 EUT OPERATION.....	13
8.2 TEST SETUP	14
8.3 SPECTRUM ANALYZER SETUP	15
8.4 TEST PROCEDURE	16
8.5 SUMMARY OF TEST RESULTS	17
9 BAND EDGE MEASUREMENT	20
9.1 TEST SETUP	20
9.2 TEST PROCEDURE	20
9.3 TEST RESULT:	21
10 BANDWIDTH MEASUREMENT.....	27
10.1 TEST SETUP	27
10.2 TEST PROCEDURE:.....	27
10.3 TEST RESULT:	27
11 MAXIMUM PEAK OUTPUT POWER	33
11.1 TEST SETUP	33
11.2 TEST PROCEDURE:.....	33
11.3 TEST RESULT:	33
12 HOPPING CHANNEL SEPARATION	39
12.1 TEST SETUP	39
12.2 TEST PROCEDURE:.....	39
12.3 TEST RESULT:	40

13	NUMBER OF HOPPING FREQUENCY	45
13.1	TEST SETUP	45
13.2	TEST PROCEDURE:	45
13.3	TEST RESULT:	45
14	DWELL TIME	47
14.1	TEST SETUP	47
14.2	TEST PROCEDURE:	47
14.3	TEST RESULT:	47
15	ANTENNA REQUIREMENT	54
16	SAR EVALUATION	55
16.1	REQUIREMENTS	55
16.2	THE PROCEDURES / LIMIT	55
17	PHOTOGRAPHS – BE200 TEST SETUP PHOTOS	56
17.1	PHOTOGRAPH – CONDUCTED EMISSION	56
17.2	PHOTOGRAPH-RADIATED EMISSIONS	56
18	PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	63
18.1	MODEL BE200 – EXTERNAL PHOTOS	63
18.2	MODEL BE200 – INTERNAL PHOTOS	70

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS17S0476293E	Apr. 13, 2017	Apr. 14 – 20, 2017	Apr. 21, 2017	Original	-	Replaced
WTS17S0476293E V1	Apr. 13, 2017	Apr. 14 – 28, 2017	May 02, 2017	Revision 1	Add AC Line Conducted Emissions test result and test setup photos	Valid

4 General Information

4.1 General Description of E.U.T.

Product Name	: Air Twins
Model No.	: BE200
Model Description	: N/A
Operation Frequency	: 2402-2480MHz, 79 Channels in total
The Lowest Oscillator	: 16MHz
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Antenna installation	: Integrated Antenna
Antenna Gain	: 0dBi

4.2 Details of E.U.T.

Technical Data:	Power case: Input Voltage: 5VDC/1A; Output Voltage: 5VDC/1.5A; Battery Capacity:3.7V, 2800mAh Earbuds:3.6V powered by battery(LIR1254); 5VDC charging by Power case
------------------------	--

4.3 Description of E.U.T.

The EUT (right) is one of a pair of earbuds for left and right ears, with Bluetooth Radio. It has an integral battery, microphone and antenna. The rechargeable battery is not user accessible. It can charge via bottom contacts and charge case. It is designed to work in conjunction with the left earbud.

4.4 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Table 1 Tests carried out under FCC part 15.247

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

Table 2 Tests carried out under FCC part 15.207&15.209

Test Item	Test Mode1	Test Mode2	Test Mode3*
AC Line Conducted Emissions	N/A	N/A	Charging + discharging under BT mode
Radiated Emissions	BT Transmitting	Charging by Power case under BT mode	Charging + discharging under BT mode
Note: “*” show the worst case mode which were recorded in this report.			

4.6 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A-1, October 15, 2015

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	Apr. 29, 2016	Apr. 28, 2017
2	Amplifier	Agilent	8447D	2944A10178	Jan. 12, 2017	Jan. 11, 2018
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	0703	Oct. 17, 2016	Oct. 16, 2017
4	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr. 07, 2017	Apr. 06, 2018
5	SHF-EHF Horn, 15-40GHz	SCHWARZBECK	BBHA 9170	BBHA9170582	Aug. 13, 2016	Aug. 12, 2017
	Broadband Preamplifier	SCHWARZBECK	BBV 9719	18-26.5GHz	Aug. 13, 2016	Aug. 12, 2017
5	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12, 2016	Sep.11, 2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr. 07, 2017	Apr. 06, 2018
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr. 07, 2017	Apr. 06, 2018
8	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	Apr. 07, 2017	Apr. 06, 2018
Conducted Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESCI	101155	Sep.12, 2016	Sep.11, 2017
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.12, 2016	Sep.11, 2017
3	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.12, 2016	Sep.11, 2017
4	Cable	Laplace	RF300	-	Sep.12, 2016	Sep.11, 2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Apr. 06, 2017	Apr. 05, 2018
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr. 07, 2017	Apr. 06, 2018
3	Amplifier	ANRITSU	MH648A	M43381	Apr. 07, 2017	Apr. 06, 2018
4	Cable	HUBER+SUHNER	CBL2	525178	Apr. 07, 2017	Apr. 06, 2018
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.12, 2016	Sep.11, 2017

2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.12, 2016	Sep.11, 2017
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.12, 2016	Sep.11, 2017

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Computer	ACER	Aspire E1-570G	-

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Test Summary

Test Items	Test Requirement	Result
AC Line Conducted Emissions	15.207	C
Radiated Emissions	15.205(a) 15.209 15.247(d)	C
Band edge	15.247(d) 15.205(a)	C
Bandwidth	15.247(a)(1)	C
Maximum Peak Output Power	15.247(b)(1)	C
Frequency Separation	15.247(a)(1)	C
Number of Hopping Frequency	15.247(a)(1)(iii)	C
Dwell time	15.247(a)(1)(iii)	C
Antenna Requirement	15.203	C
SAR	1.1307(b)(1)	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

2.1 E.U.T. Operation

Operating Environment :


Temperature:	25.5 °C
Humidity:	51 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

Refer to section 4.5.

2.2 EUT Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

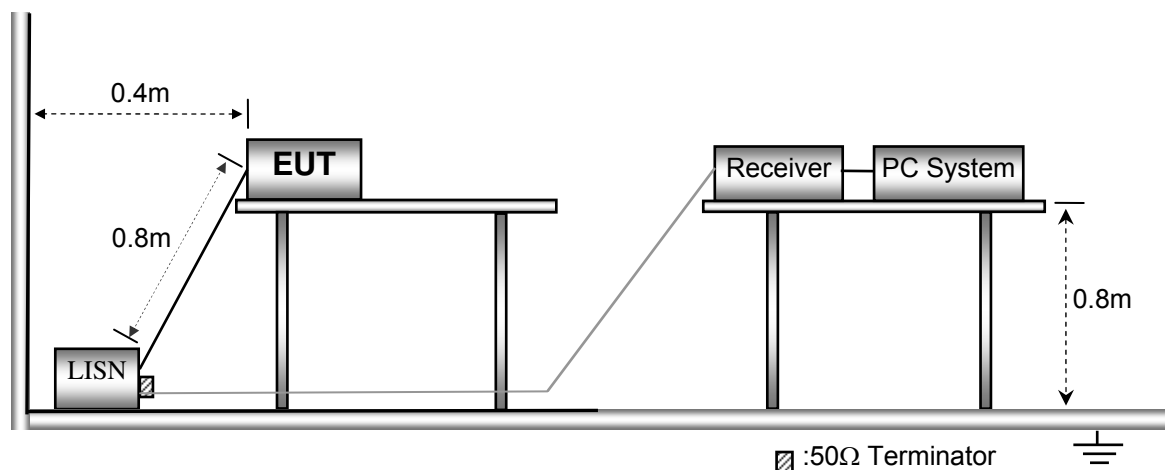


2.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

2.4 Conducted Emission Test Result

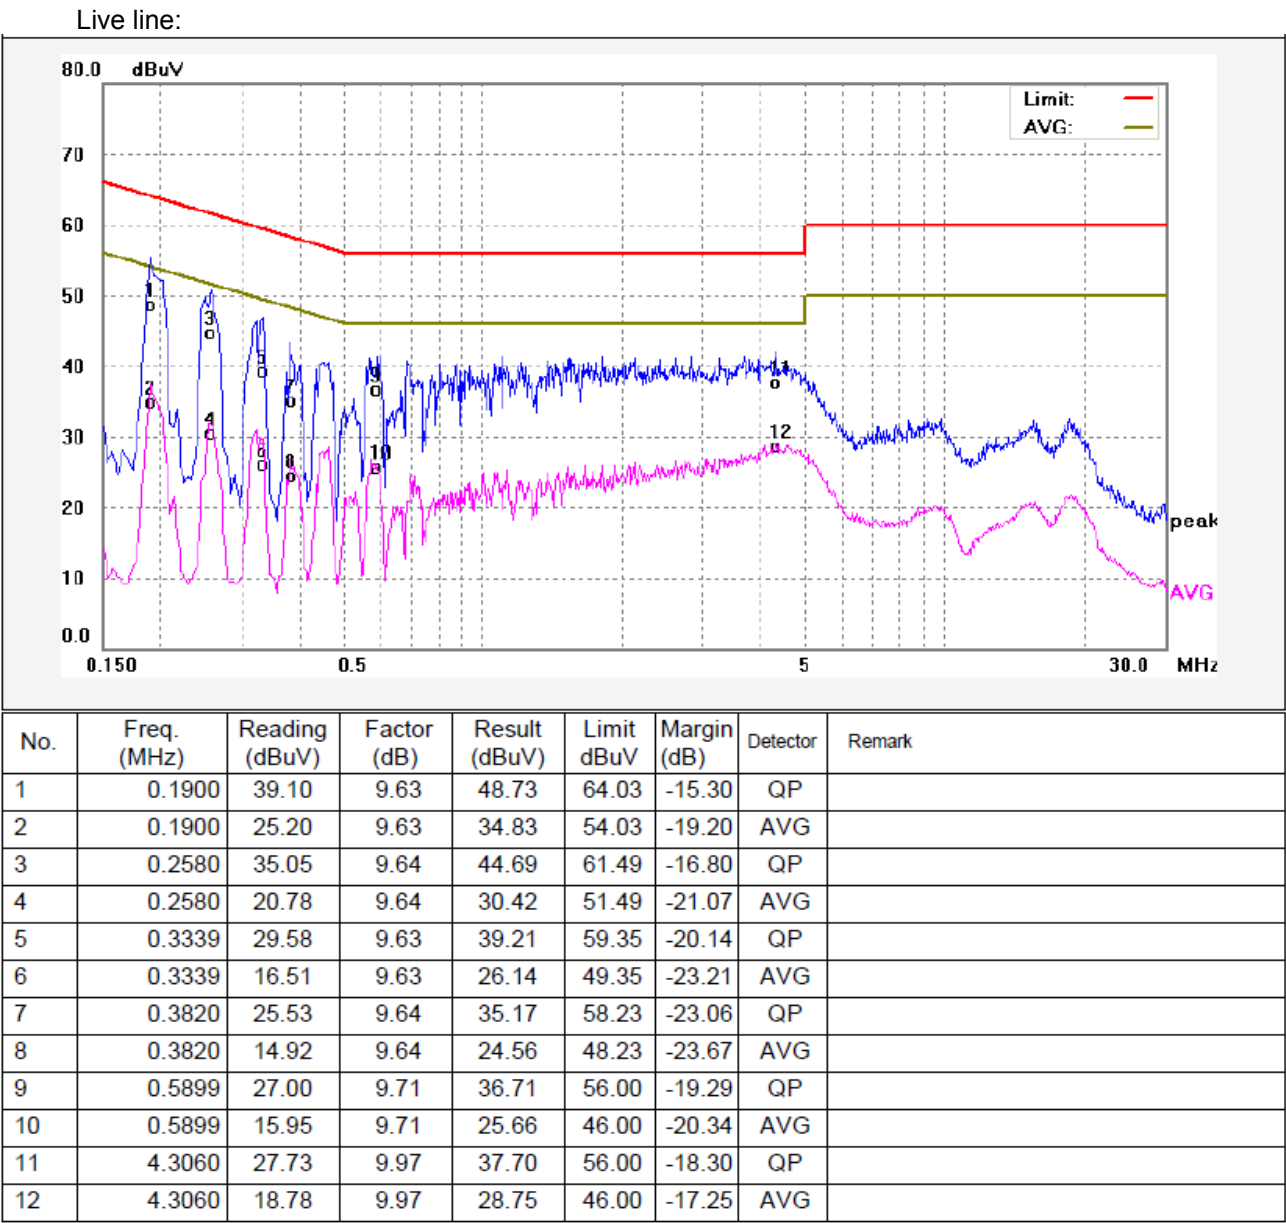

Neutral line:

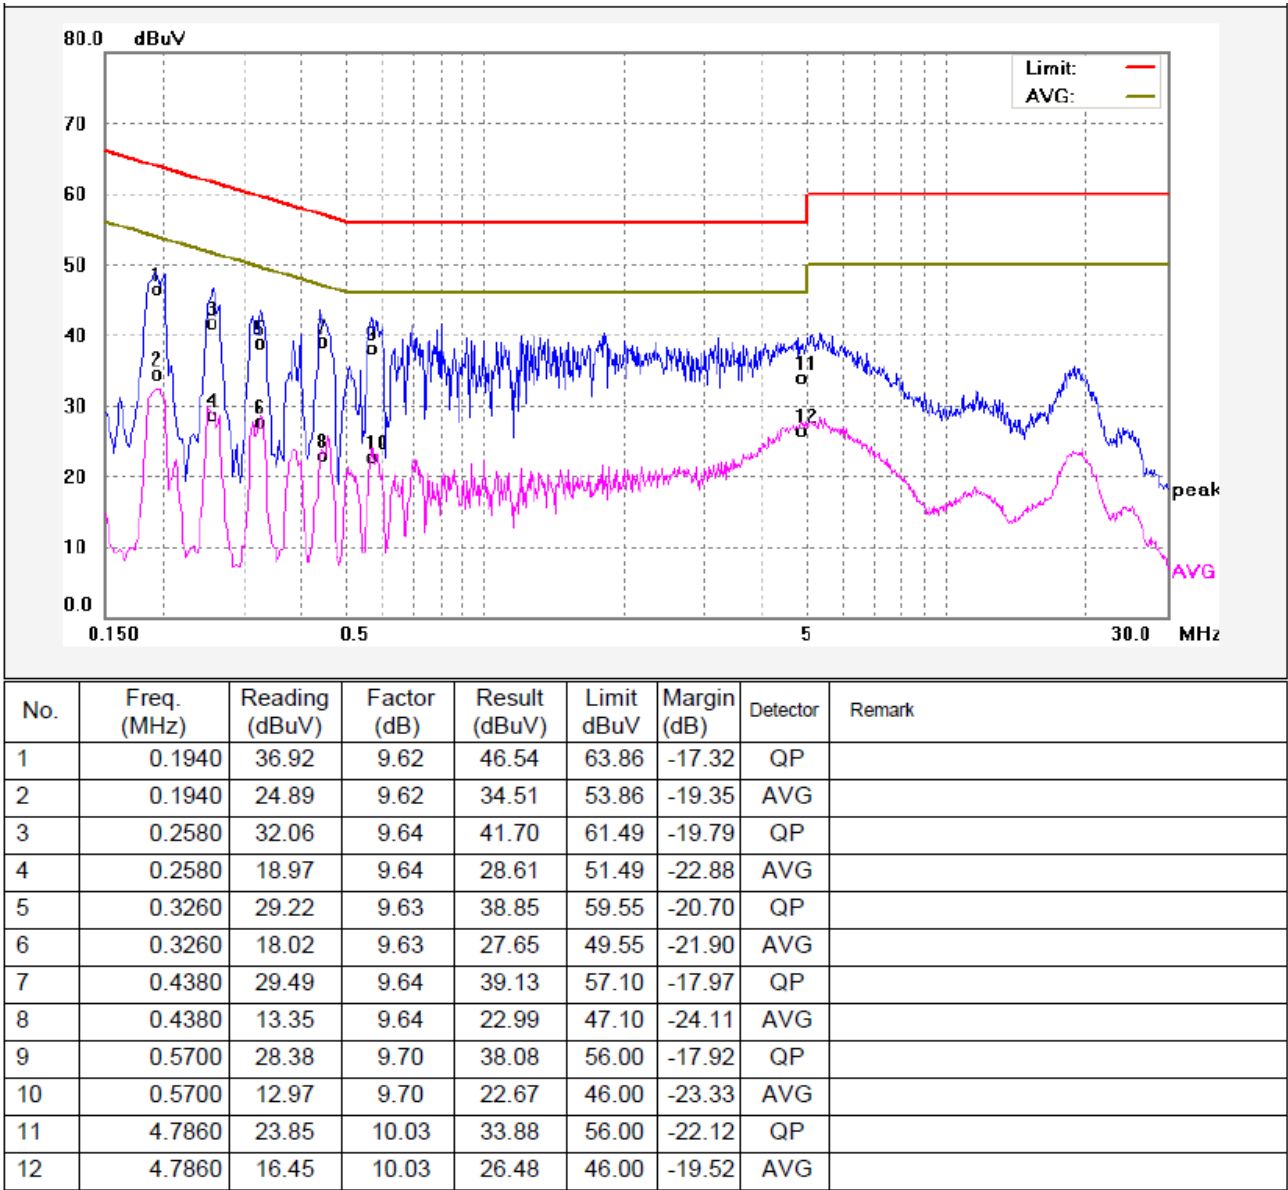

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013;ANSI C63.4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

Refer to section 4.5.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

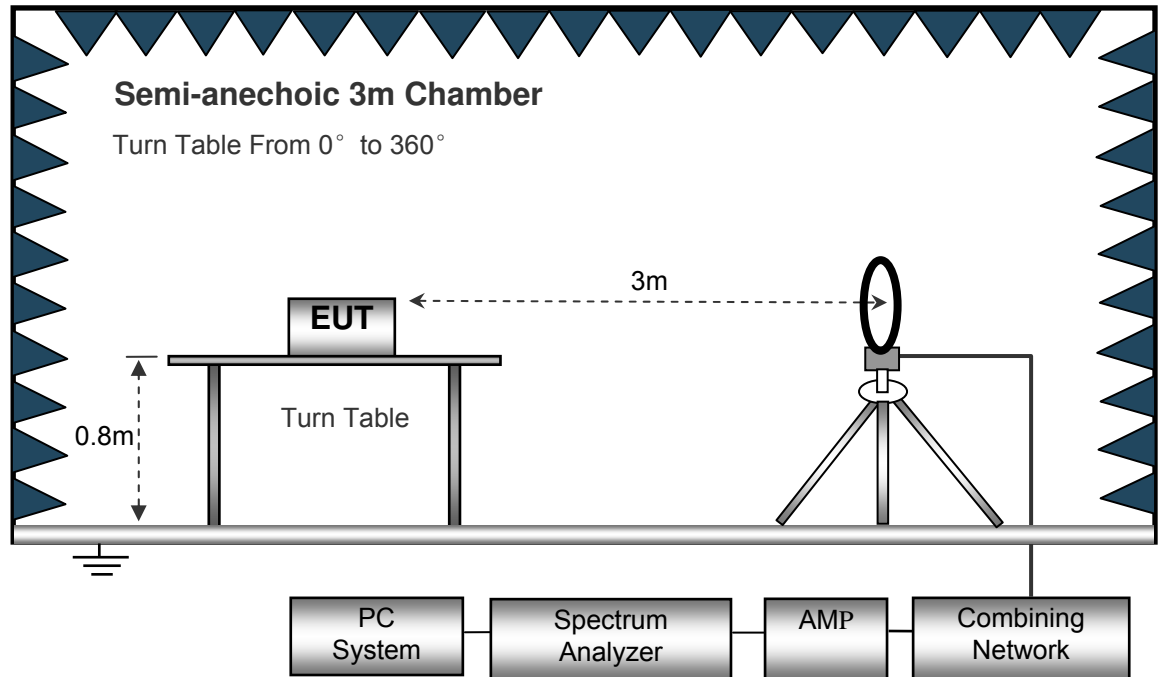

The test setup for emission measurement from 30 MHz to 1 GHz.

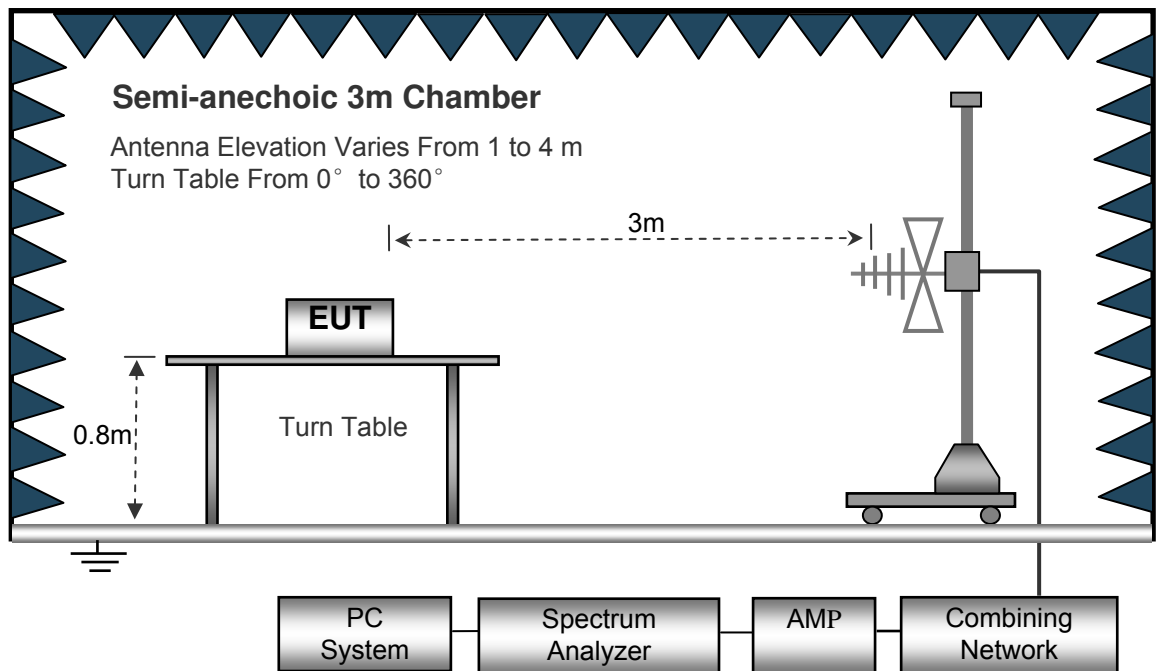

The test setup for emission measurement above 1 GHz.

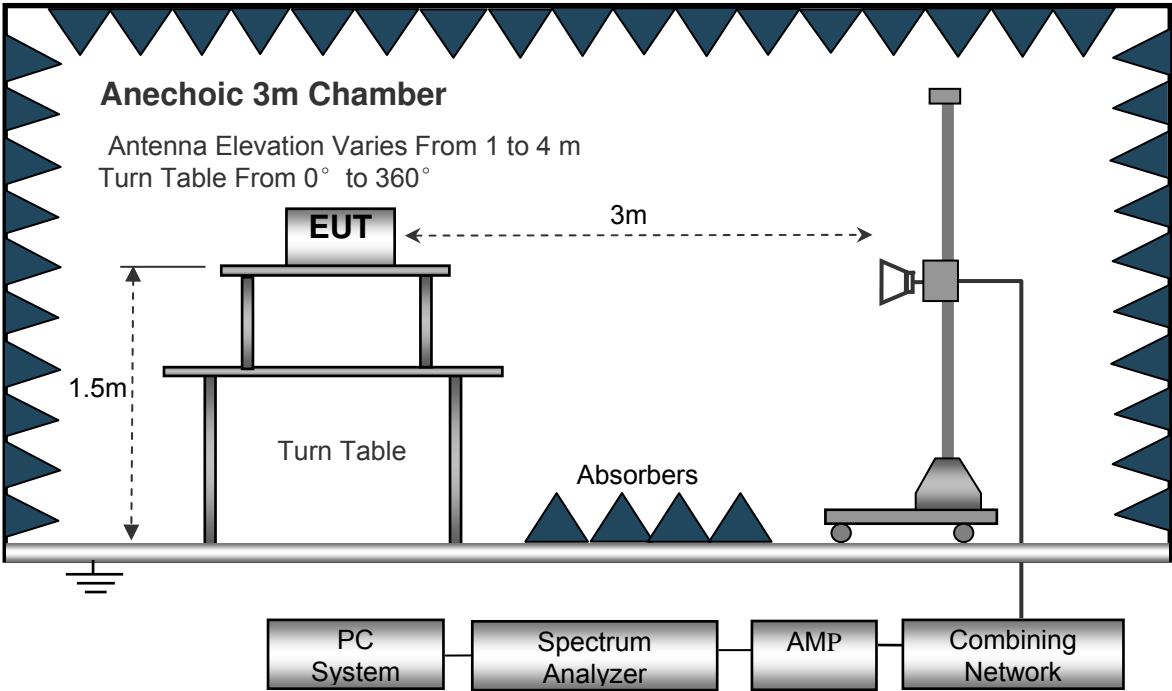

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8.5 Summary of Test Results

Test Frequency : 16MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel 2402MHz									
166.07	30.57	QP	314	1.6	H	-13.22	17.35	43.53	-26.18
166.07	34.57	QP	71	1.0	V	-13.22	21.35	43.53	-22.18
4804.00	46.84	PK	44	1.2	V	-1.06	45.78	74.00	-28.22
4804.00	43.21	Ave	44	1.2	V	-1.06	42.15	54.00	-11.85
7206.00	41.23	PK	209	1.4	H	1.33	42.56	74.00	-31.44
7206.00	39.64	Ave	209	1.4	H	1.33	40.97	54.00	-13.03
2328.16	45.34	PK	167	1.1	V	-12.47	32.87	74.00	-41.13
2328.16	39.97	Ave	167	1.1	V	-12.47	27.50	54.00	-26.50
2372.82	43.72	PK	324	1.9	H	-14.21	29.51	74.00	-44.49
2372.82	38.99	Ave	324	1.9	H	-14.21	24.78	54.00	-29.22
2495.62	43.43	PK	173	1.3	V	-13.20	30.23	74.00	-43.77
2495.62	38.47	Ave	173	1.3	V	-13.20	25.27	54.00	-28.73

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel 2441MHz									
166.07	31.24	QP	15	1.7	H	-13.22	18.02	43.53	-25.51
166.07	35.68	QP	54	1.5	V	-13.22	22.46	43.53	-21.07
4882.00	54.74	PK	71	1.1	V	-0.62	54.12	74.00	-19.88
4882.00	41.10	Ave	71	1.1	V	-0.62	40.48	54.00	-13.52
7323.00	50.04	PK	335	1.6	H	2.21	52.25	74.00	-21.75
7323.00	43.28	Ave	335	1.6	H	2.21	45.49	54.00	-8.51
2337.34	46.84	PK	73	1.7	V	-13.19	33.65	74.00	-40.35
2337.34	39.85	Ave	73	1.7	V	-13.19	26.66	54.00	-27.34
2362.73	44.22	PK	16	1.9	H	-13.14	31.08	74.00	-42.92
2362.73	38.42	Ave	16	1.9	H	-13.14	25.28	54.00	-28.72
2484.72	42.84	PK	93	2.0	V	-13.08	29.76	74.00	-44.24
2484.72	38.21	Ave	93	2.0	V	-13.08	25.13	54.00	-28.87

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel 2480MHz									
166.07	29.68	QP	193	1.8	H	-13.22	16.46	43.53	-27.07
166.07	34.82	QP	287	1.5	V	-13.22	21.60	43.53	-21.93
4960.00	51.77	PK	305	1.8	V	-0.24	51.53	74.00	-22.47
4960.00	40.08	Ave	305	1.8	V	-0.24	39.84	54.00	-14.16
7440.00	51.25	PK	74	1.2	H	2.84	54.09	74.00	-19.91
7440.00	44.85	Ave	74	1.2	H	2.84	47.69	54.00	-6.31
2333.21	45.51	PK	32	1.2	V	-13.19	32.32	74.00	-41.68
2333.21	37.60	Ave	32	1.2	V	-13.19	24.41	54.00	-29.59
2385.27	44.00	PK	162	1.0	H	-13.14	30.86	74.00	-43.14
2385.27	36.74	Ave	162	1.0	H	-13.14	23.60	54.00	-30.40
2486.11	42.31	PK	211	1.5	V	-13.08	29.23	74.00	-44.77
2486.11	38.48	Ave	211	1.5	V	-13.08	25.40	54.00	-28.60


Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported

9 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

9.1 Test Setup







9.2 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold



9.3 Test Result:



Test plots

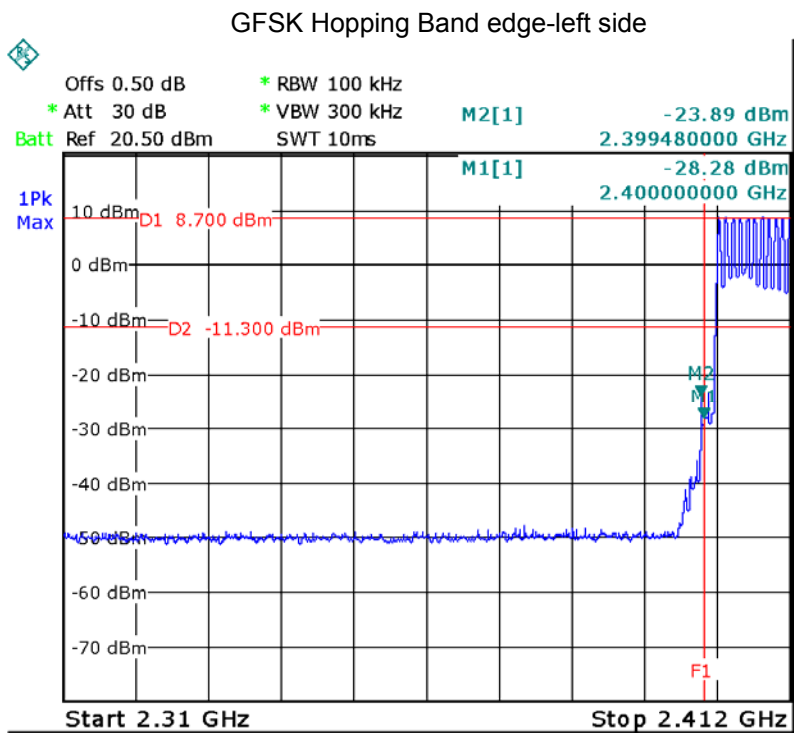
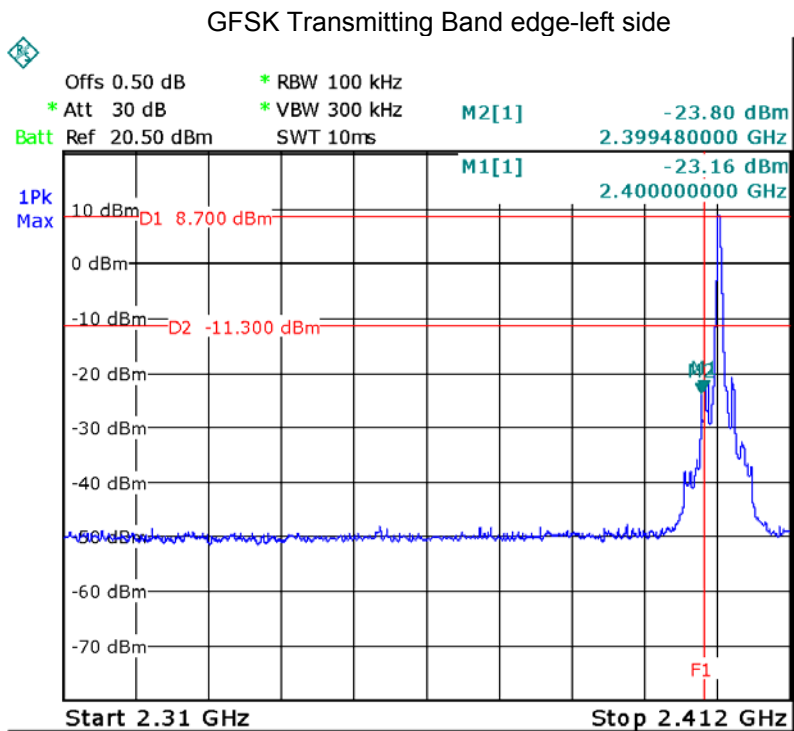


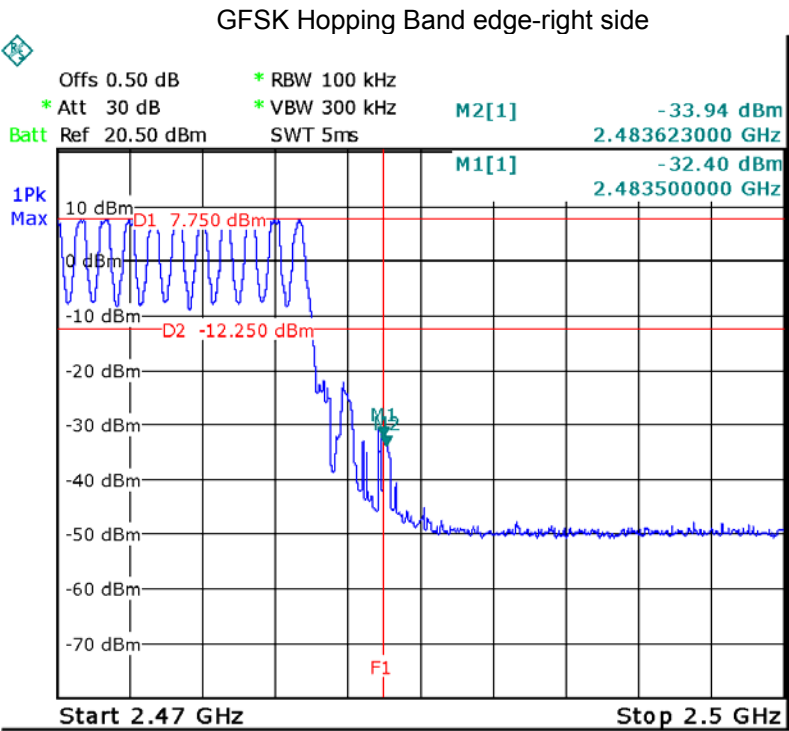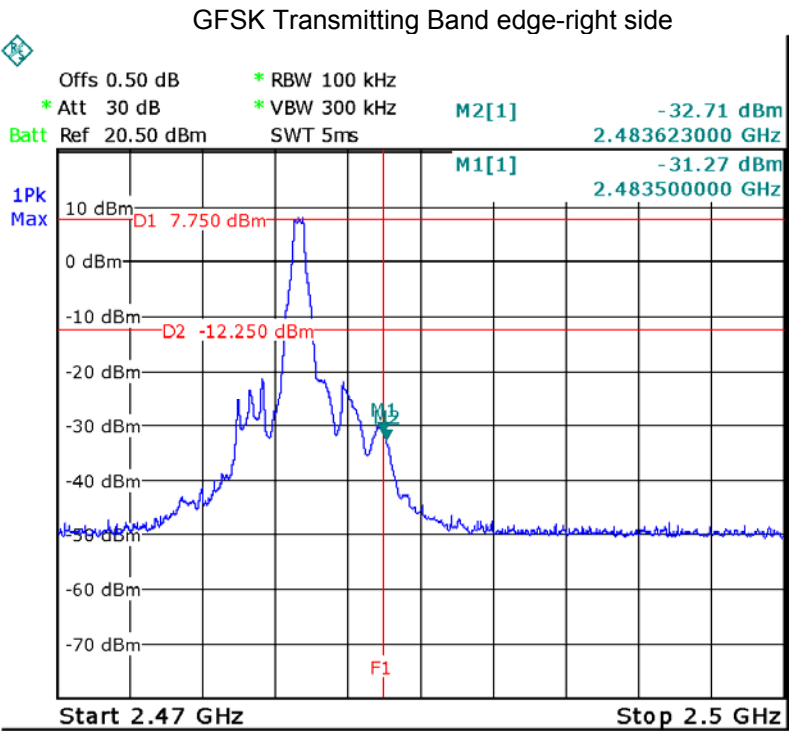

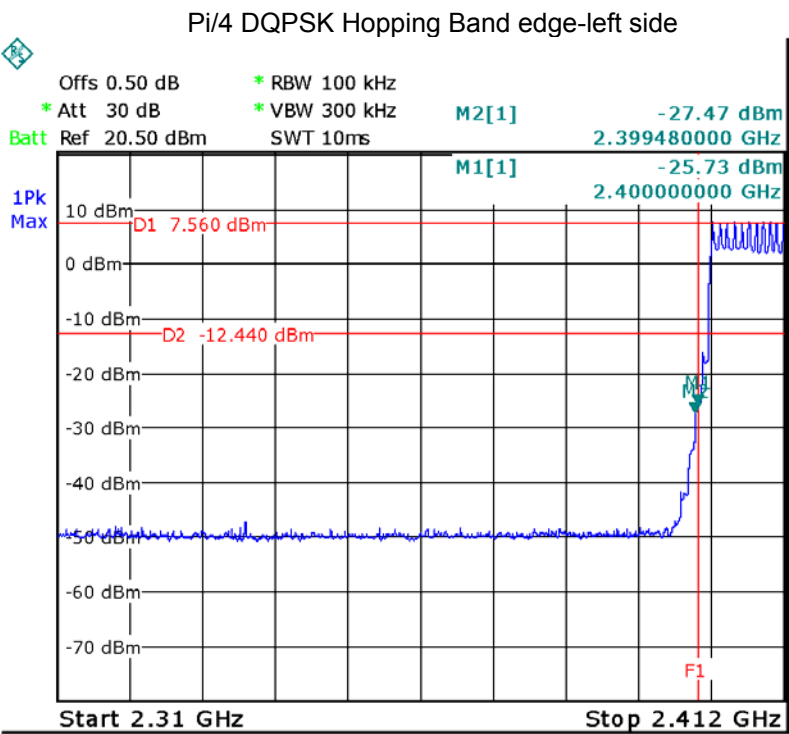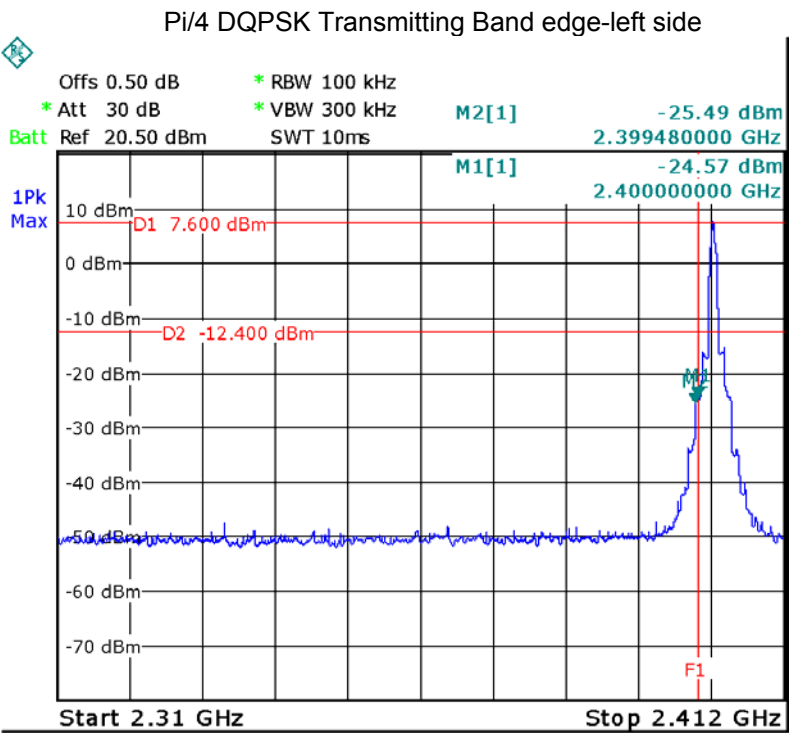

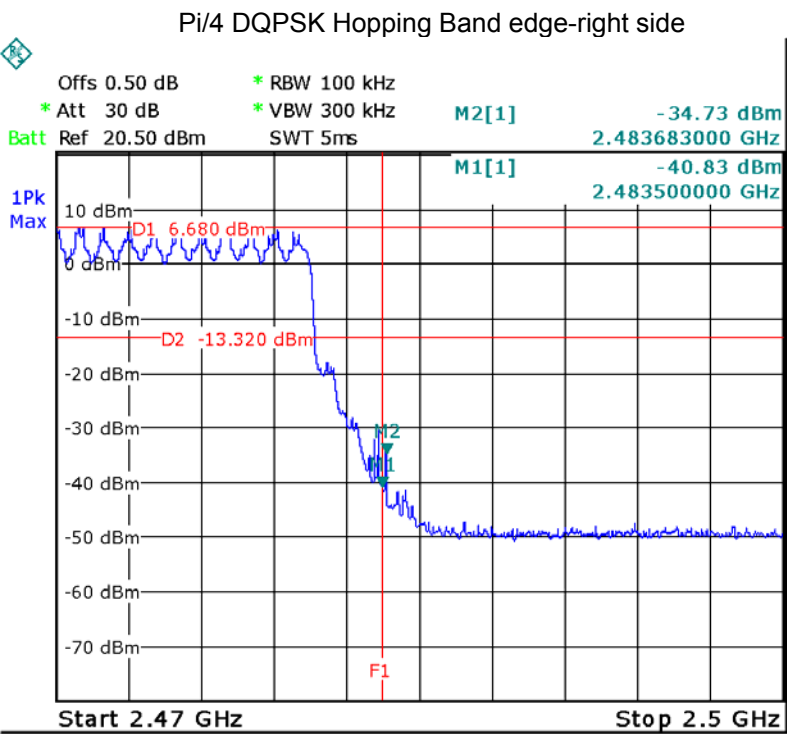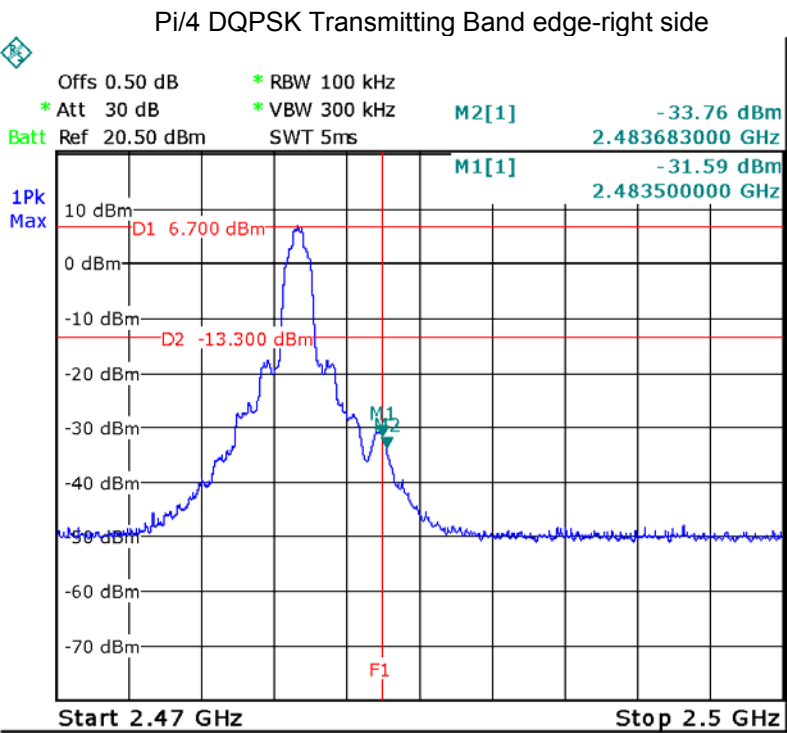

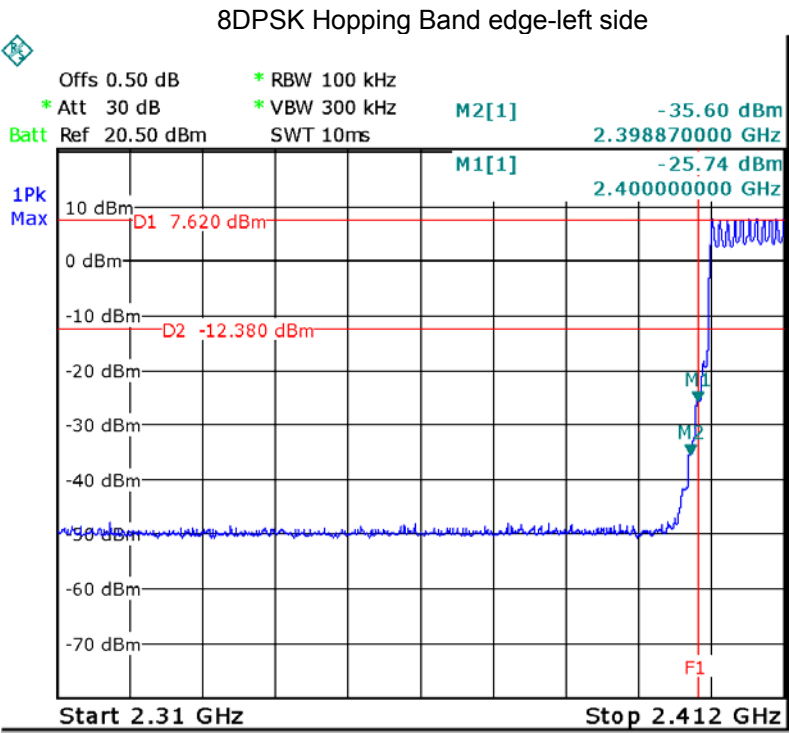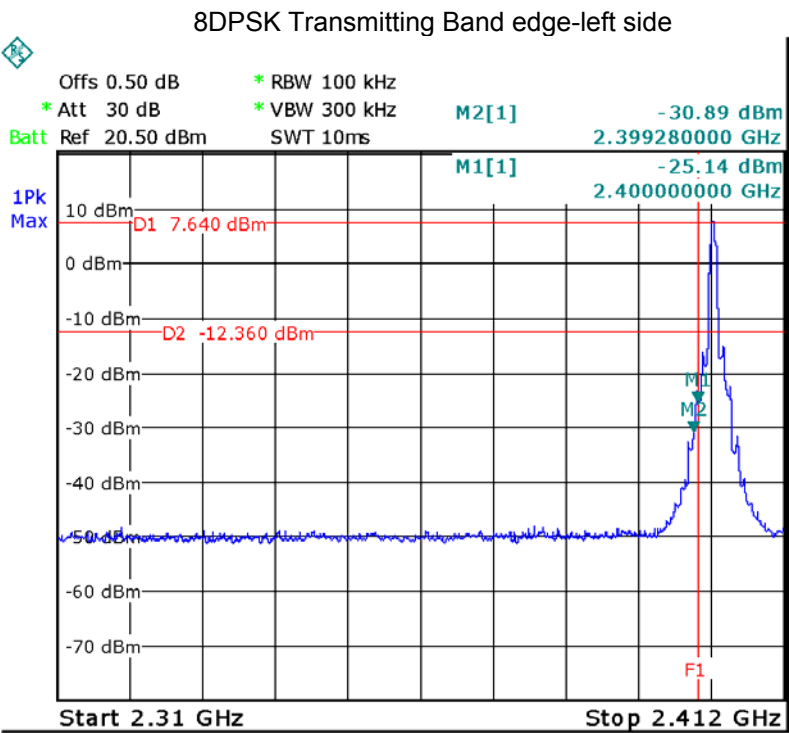


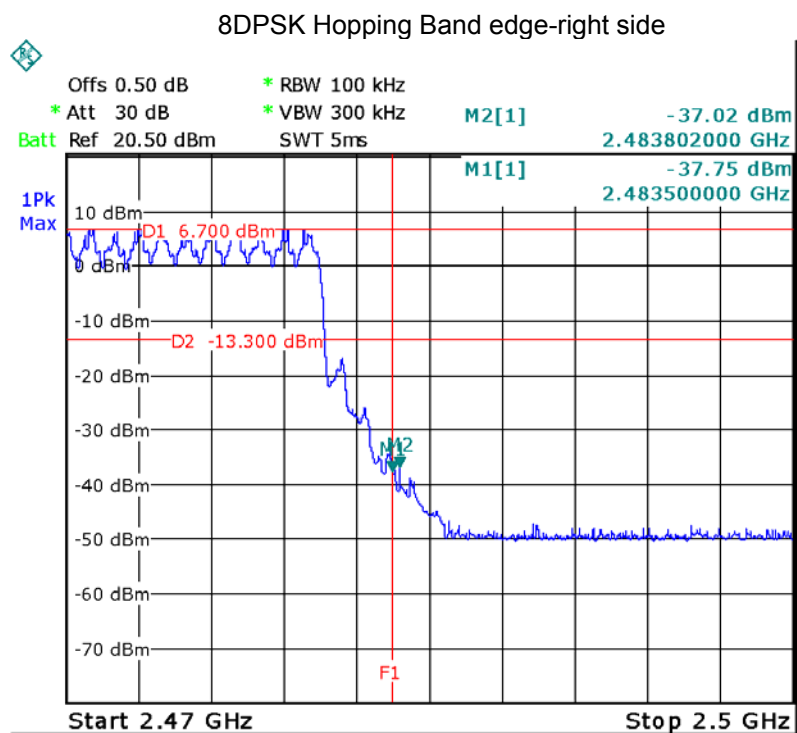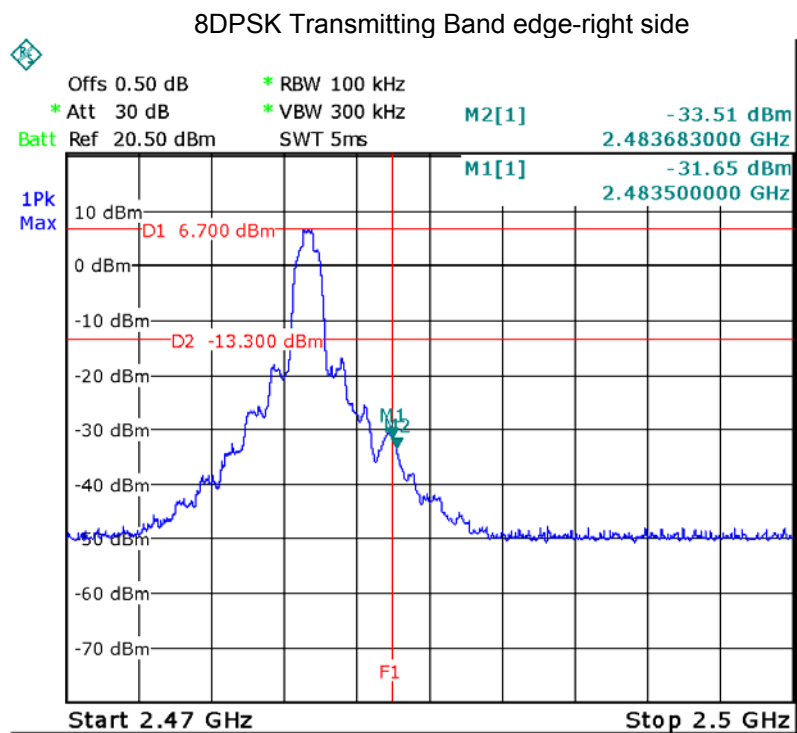

10 Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: C63.10: 2013
Test Mode: Test in fixing operating frequency at low, Middle, high channel.

10.1 Test Setup



10.2 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz


10.3 Test Result:

Modulation	Test Channel	20dB Bandwidth(MHz)
GFSK	Low	0.934
	Middle	0.934
	High	0.934
Pi/4DQPSK	Low	1.252
	Middle	1.252
	High	1.252
8DPSK	Low	1.270
	Middle	1.287
	High	1.287


Test result plot as follows:


Modulation: GFSK

Low Channel

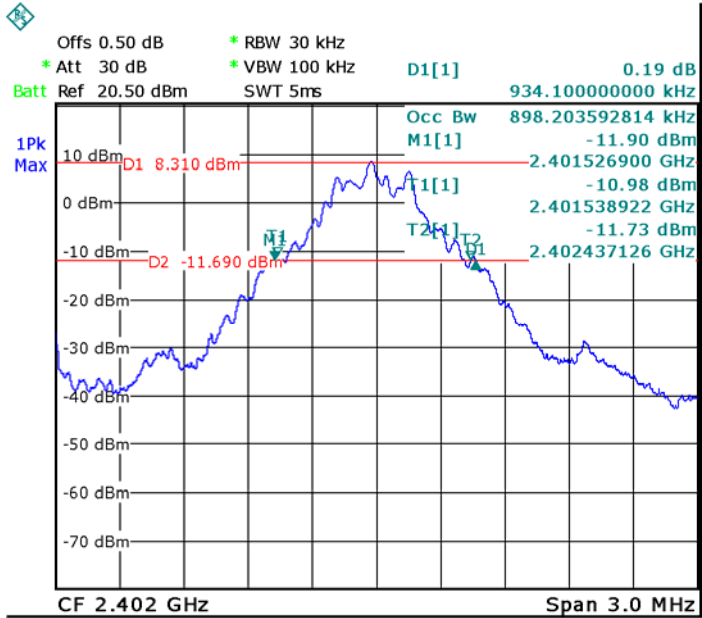




Middle Channel

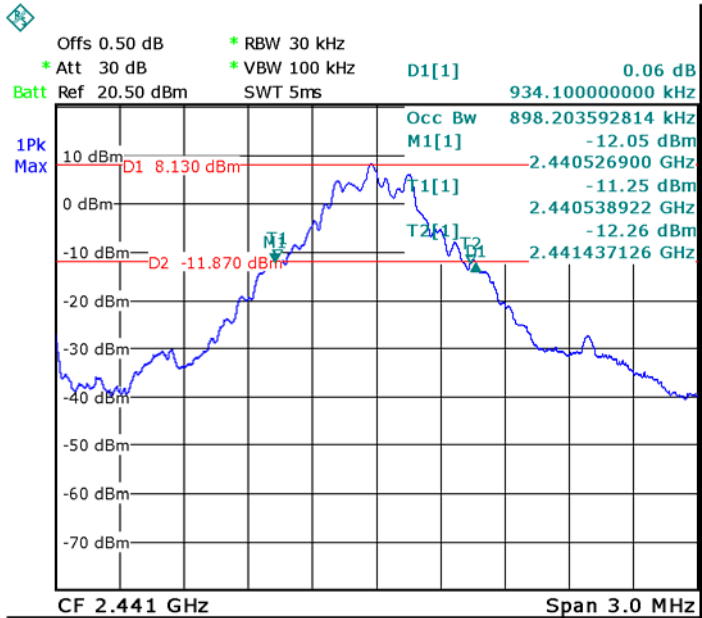

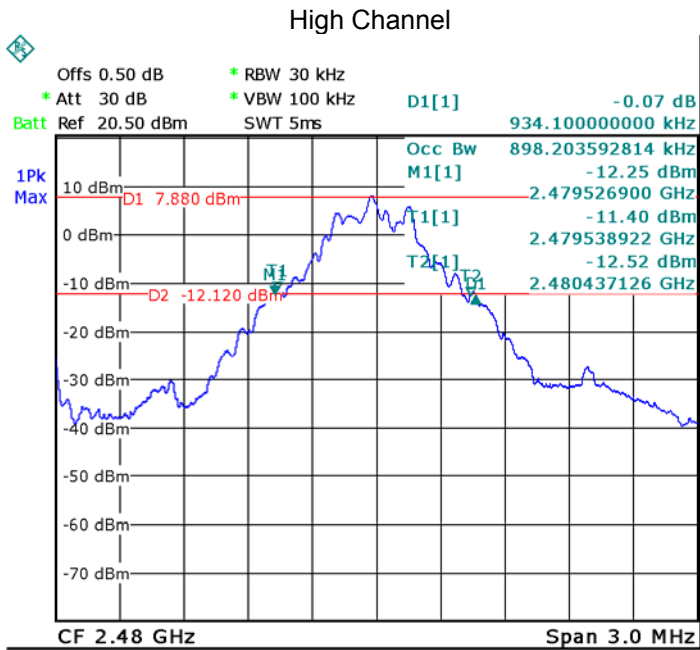


Modulation: Pi/4DQPSK

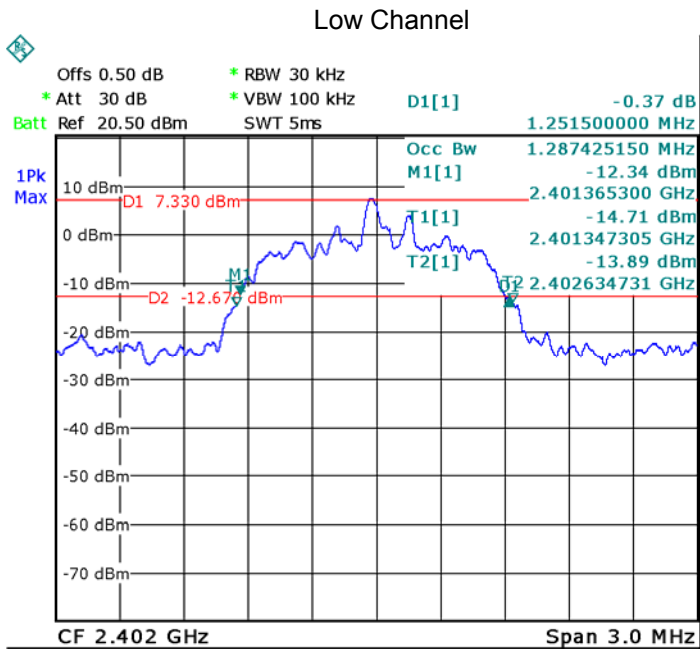

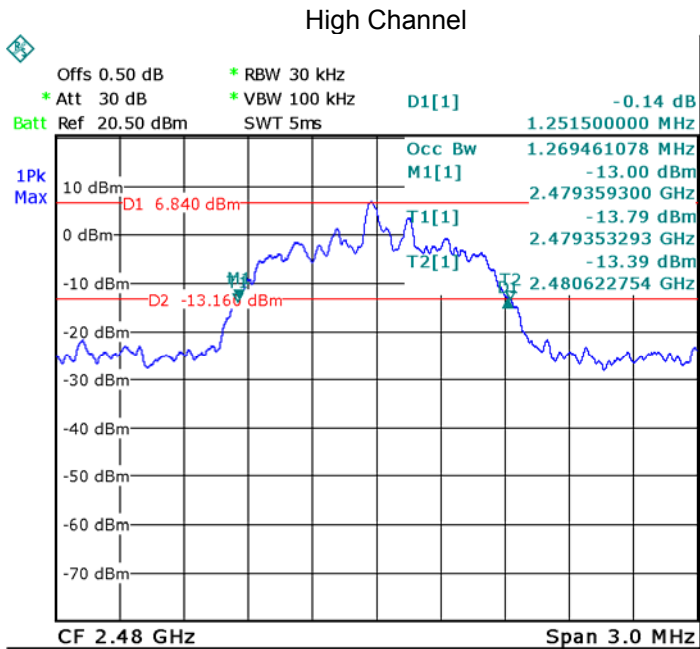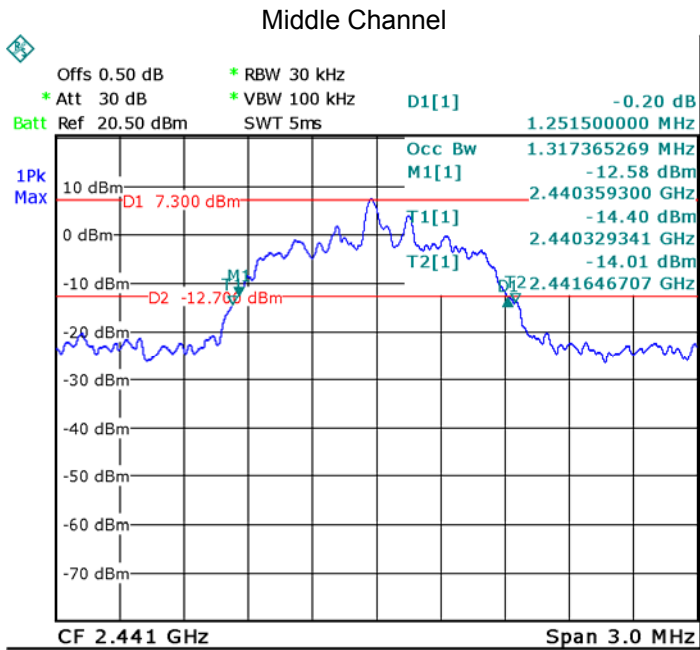



Modulation: 8DPSK

Low Channel

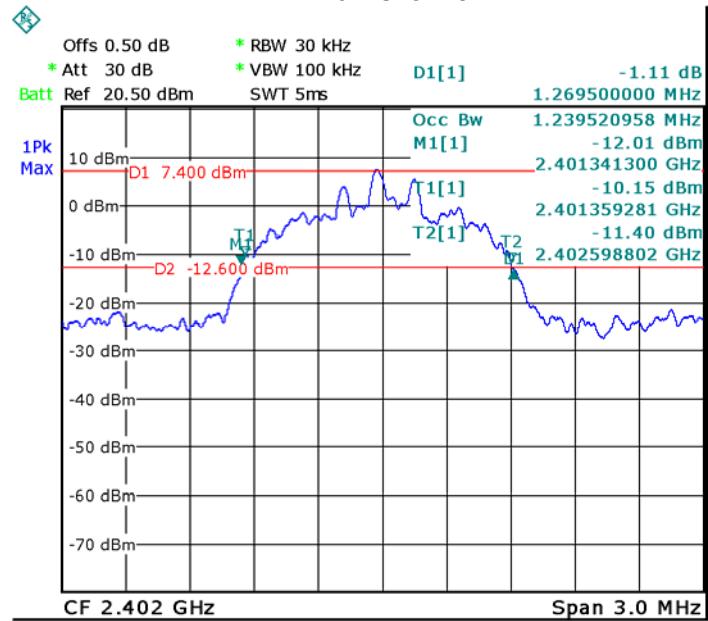

Middle Channel

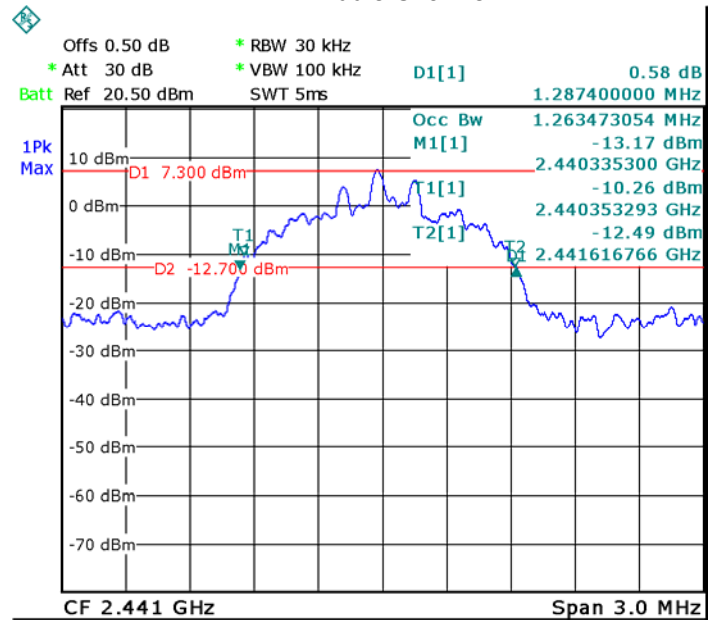


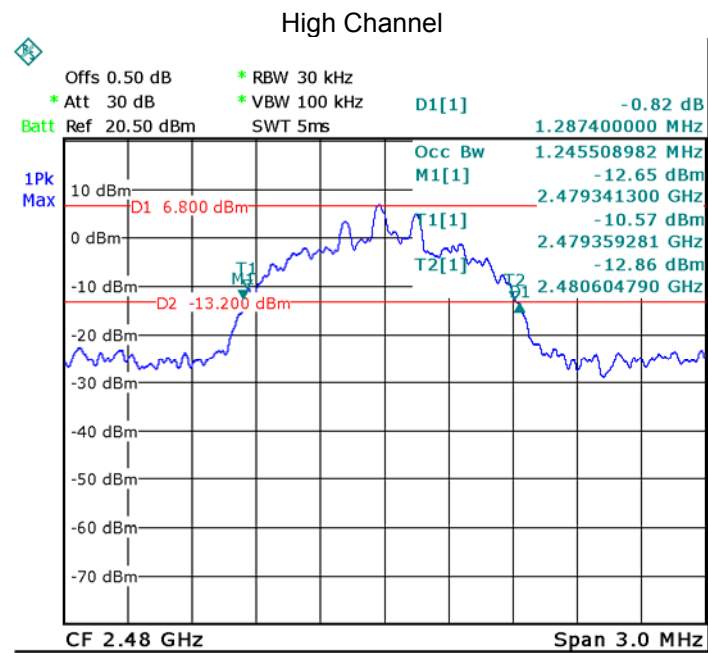

11 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

11.1 Test Setup



11.2 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


11.3 Test Result:

Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		Low Channel	Middle Channel	High Channel	
GFSK	1Mbps	8.56	8.02	7.79	20.97
4* π 4DQPSK	2Mbps	8.01	7.55	7.25	20.97
8DPSK	3Mbps	8.12	7.69	7.41	20.97


Test result plot as follows:


Modulation: GFSK

Low Channel

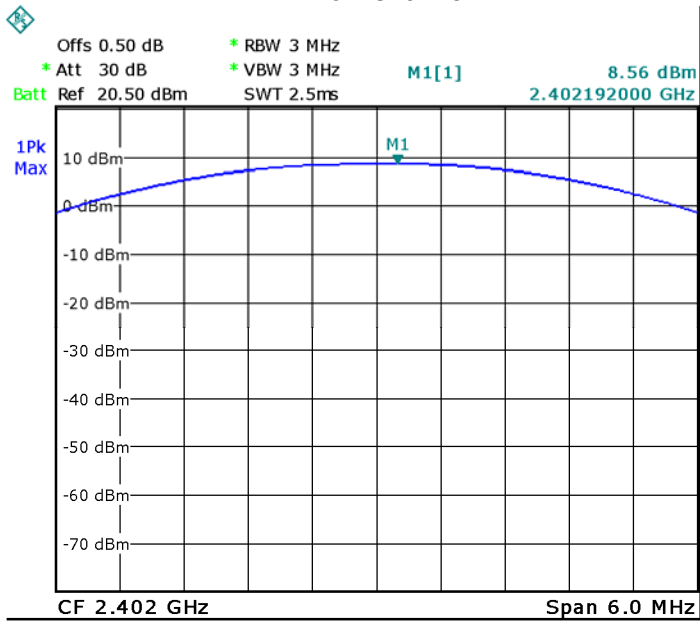




Middle Channel

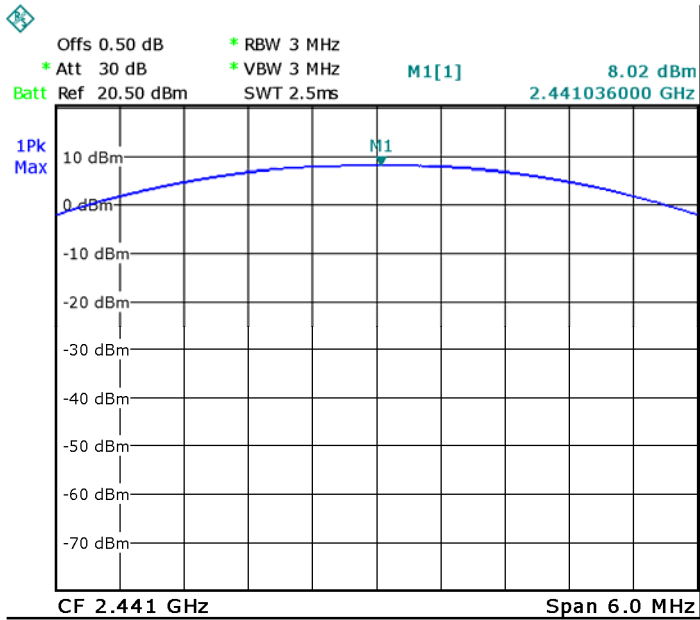

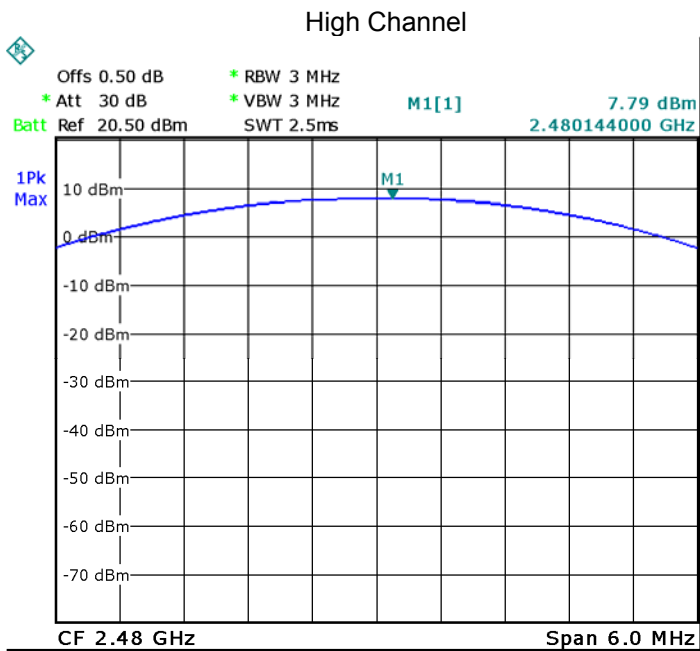


Modulation: Pi/4DQPSK

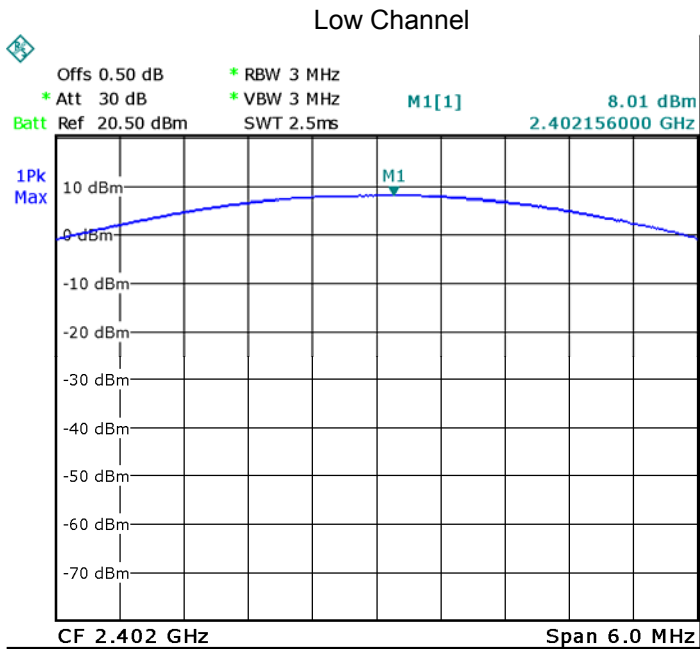

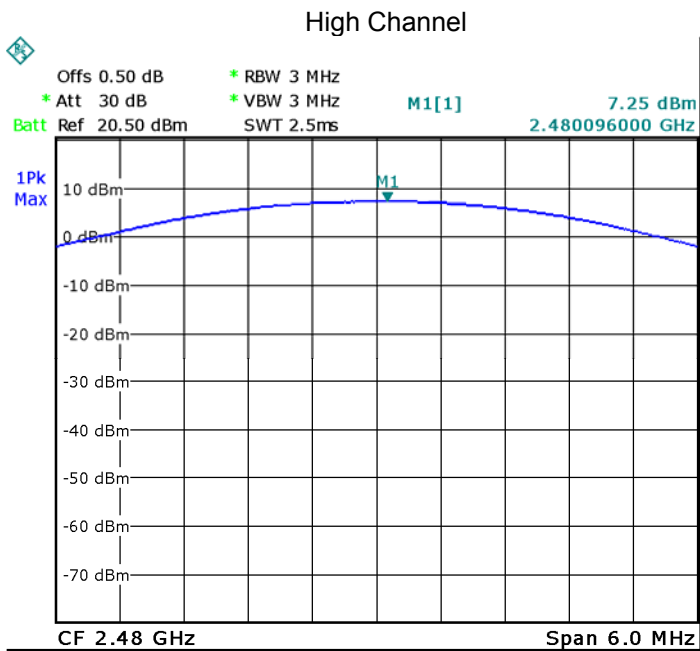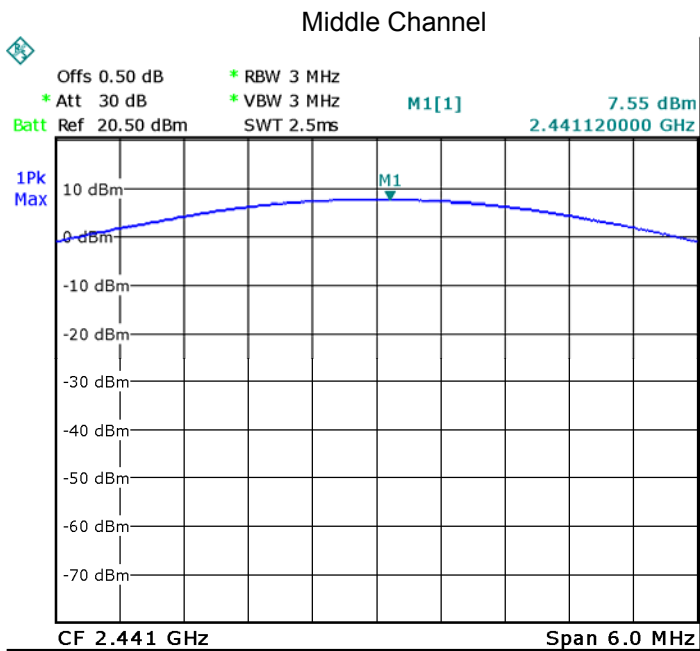



Modulation: 8DPSK

Low Channel

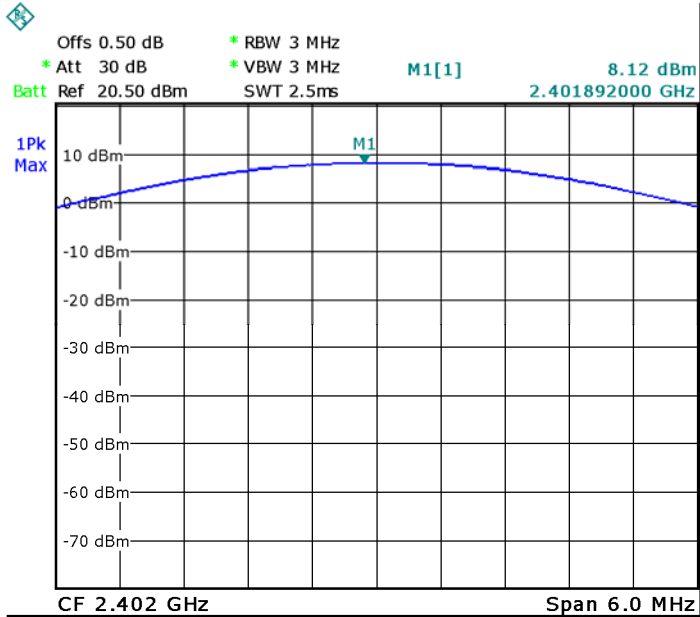

Middle Channel

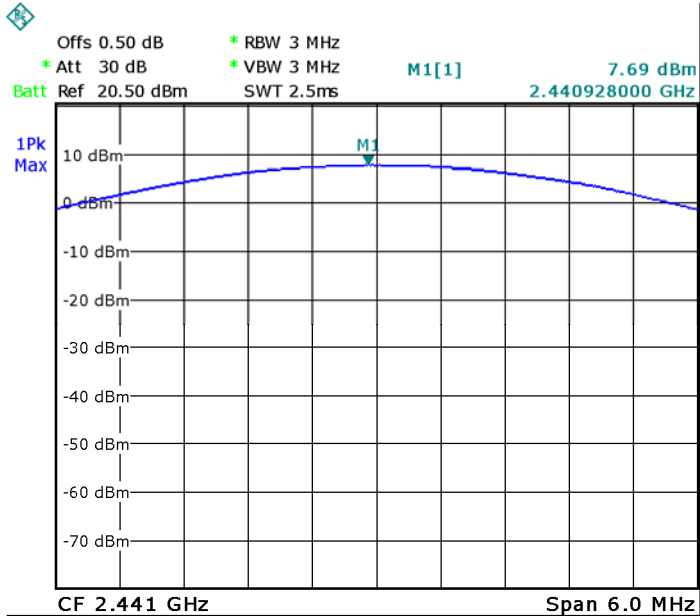


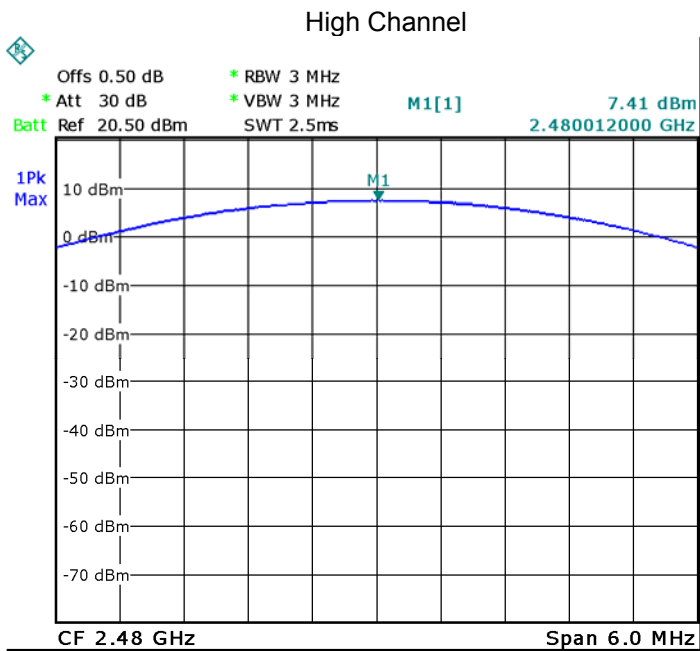

12 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

12.1 Test Setup




12.2 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.3 Test Result:

Modulation	Test Channel	Separation (MHz)
GFSK	Low	1.000
	Middle	1.000
	High	1.000
Pi/4DQPSK	Low	1.000
	Middle	1.000
	High	1.000
8DPSK	Low	1.000
	Middle	1.000
	High	1.000


Test result plot as follows:

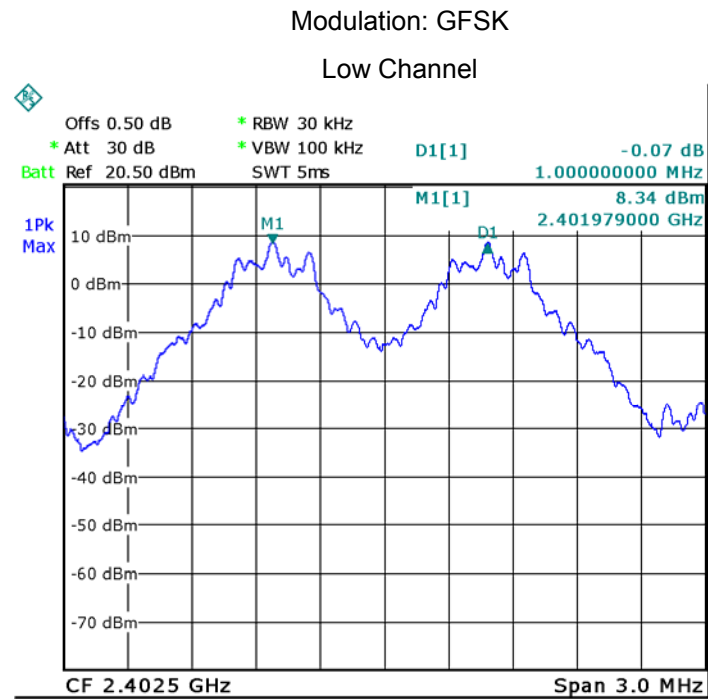

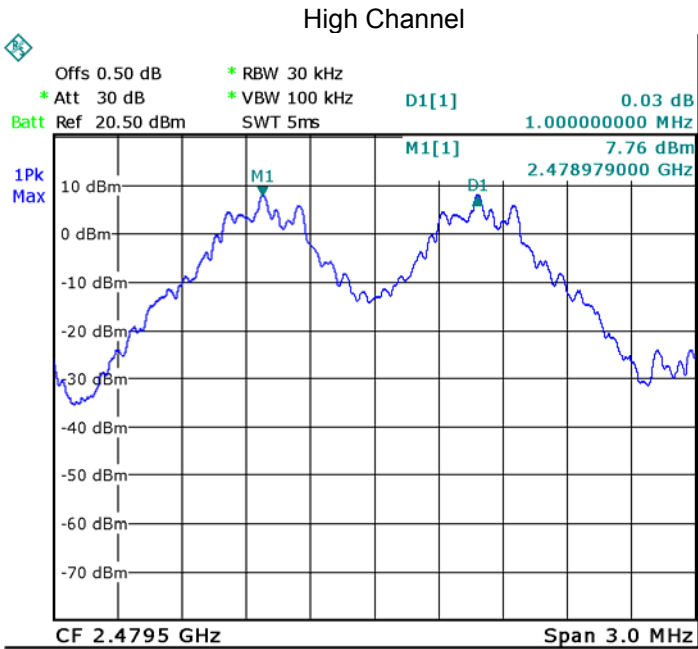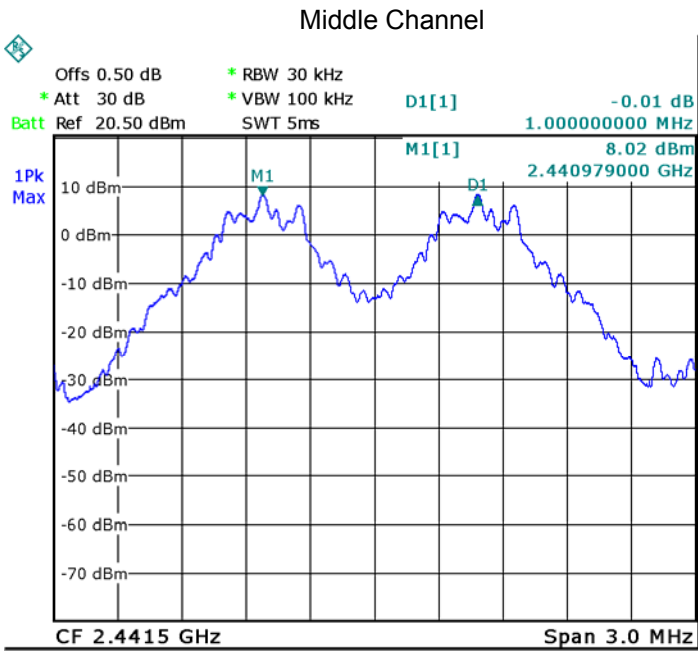



Modulation: Pi/4DQPSK

Low Channel

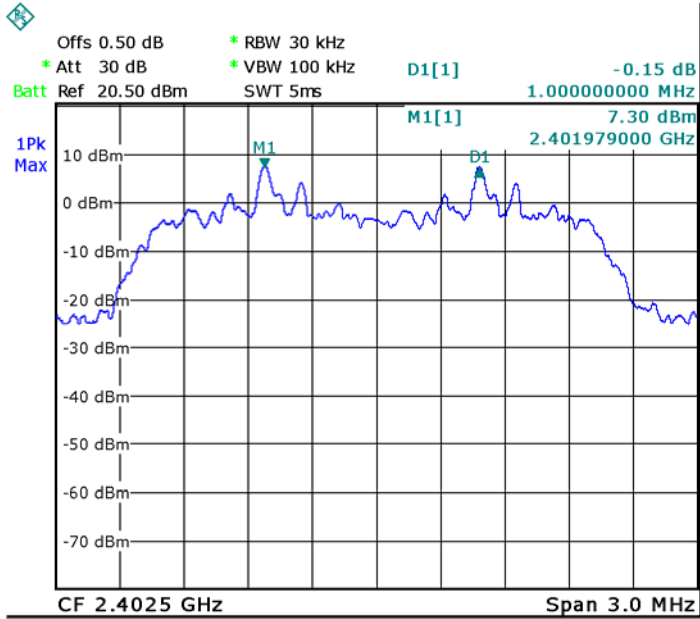




Middle Channel

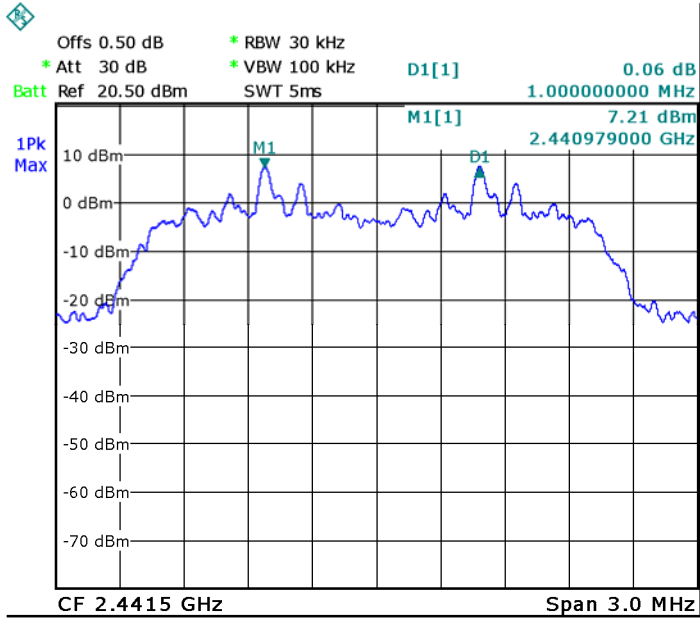

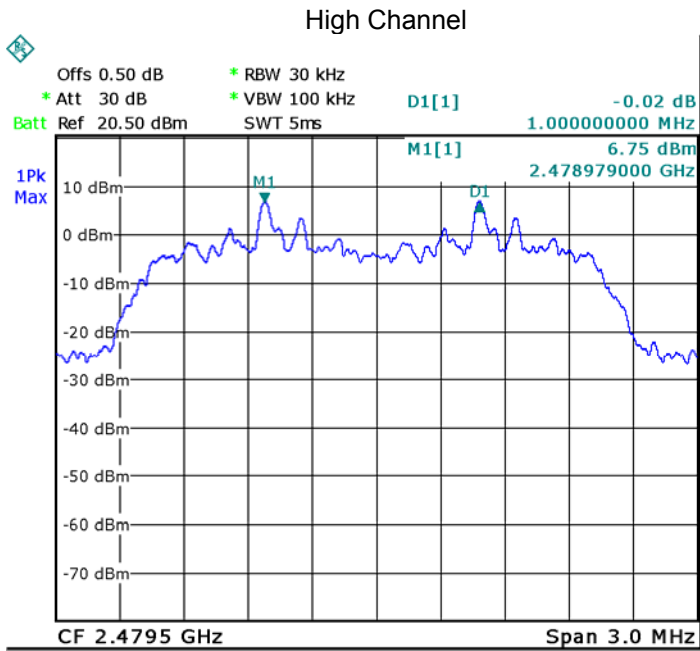

Modulation: 8DPSK

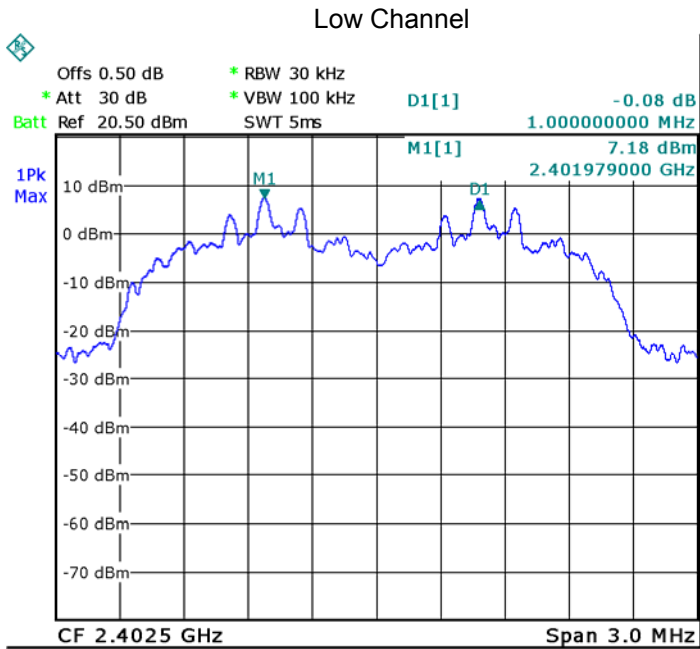


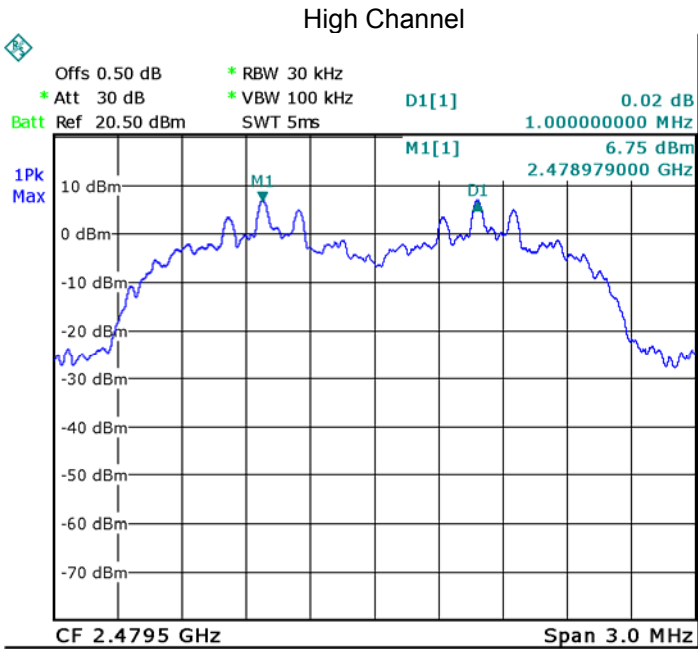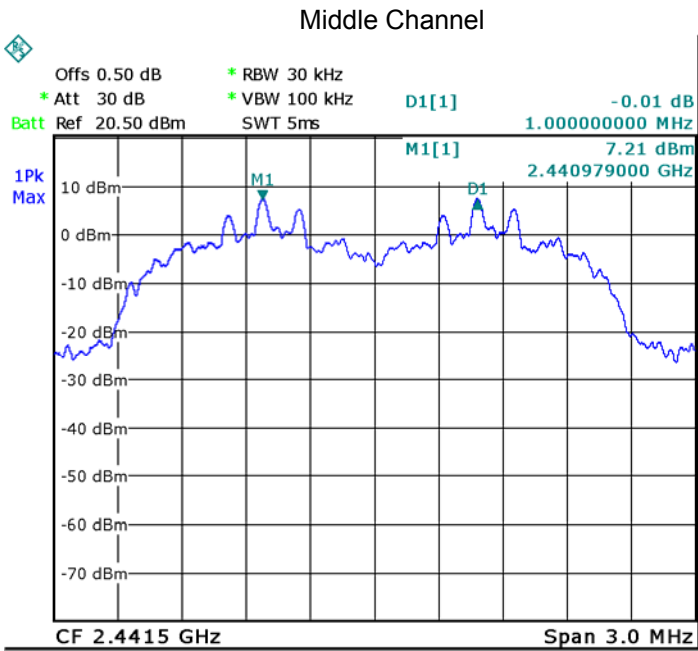

13 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Setup






13.2 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

13.3 Test Result:

Total Channels are 79 Channels.

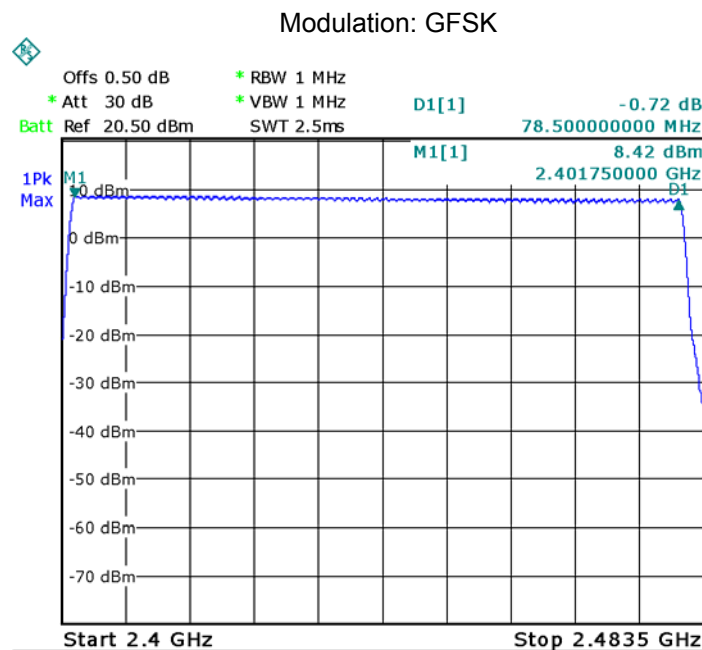


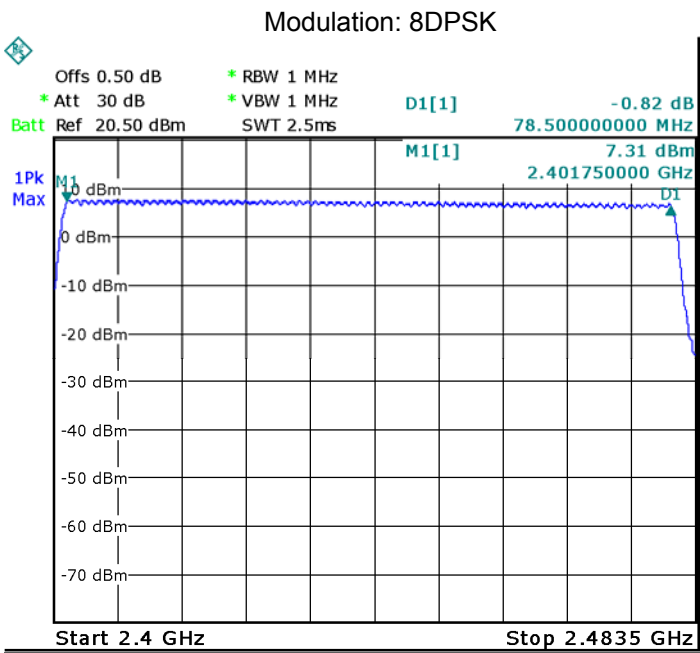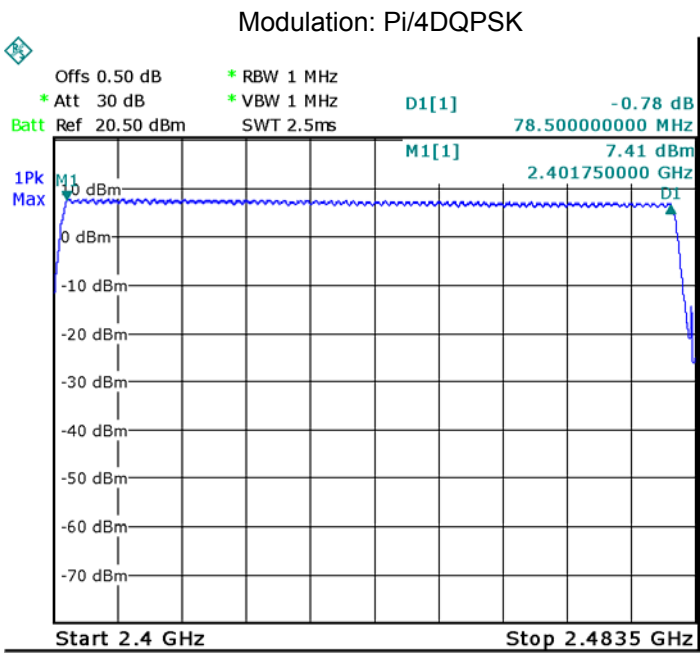

14 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Setup



14.2 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.3 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$


DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.928	0.312	0.4
		middle	2.928	0.312	0.4
		High	2.928	0.312	0.4
Pi/4DQPSK	DH5	Low	2.936	0.313	0.4
		middle	2.936	0.313	0.4
		High	2.936	0.313	0.4
8DPSK	DH5	Low	2.936	0.313	0.4
		middle	2.936	0.313	0.4
		High	2.936	0.313	0.4


Modulation: GFSK
Data Packet:
DH5.Low channel

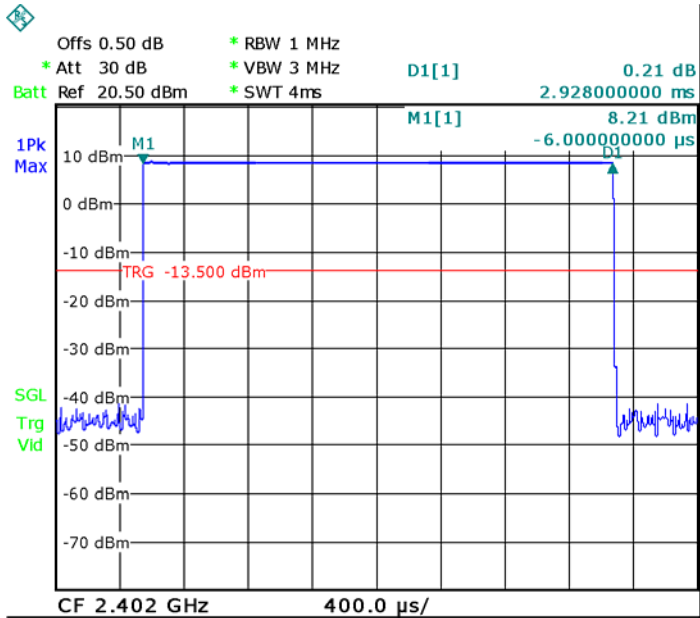


Data Packet:
DH5.Middle channel

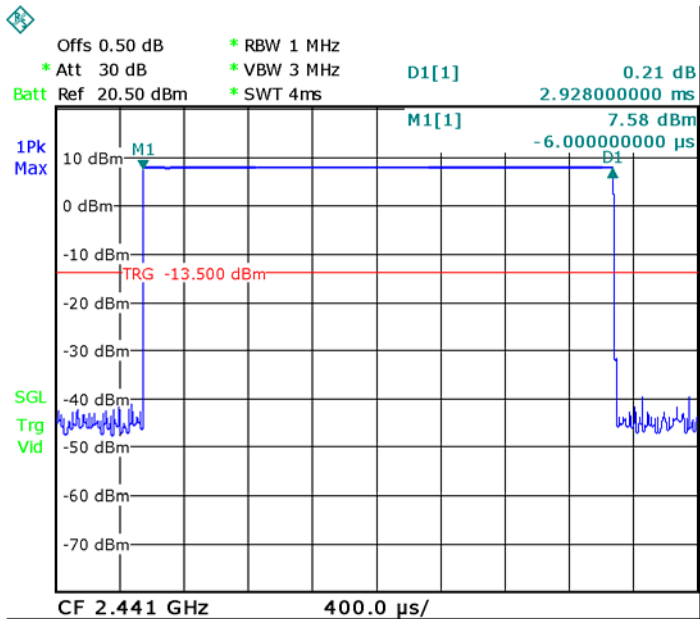


Data Packet:
DH5,High channel

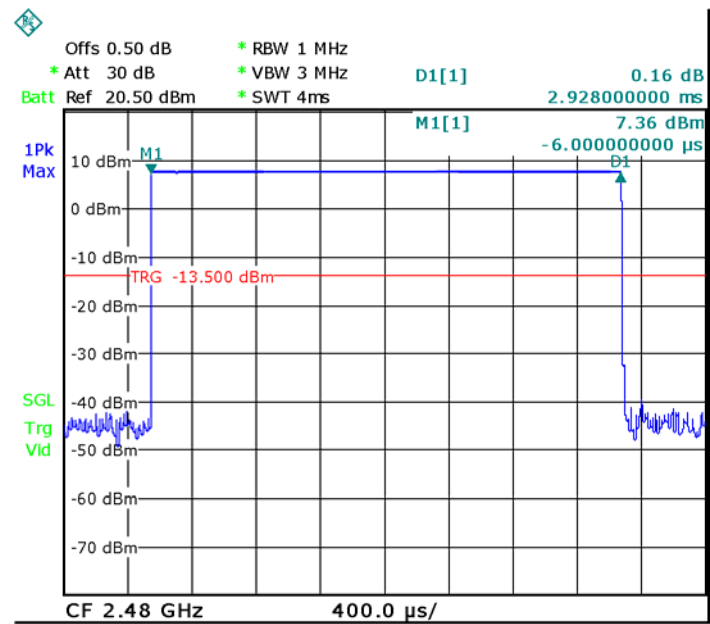


Pi/4DQPSK
Data Packet:
DH5,Low channel

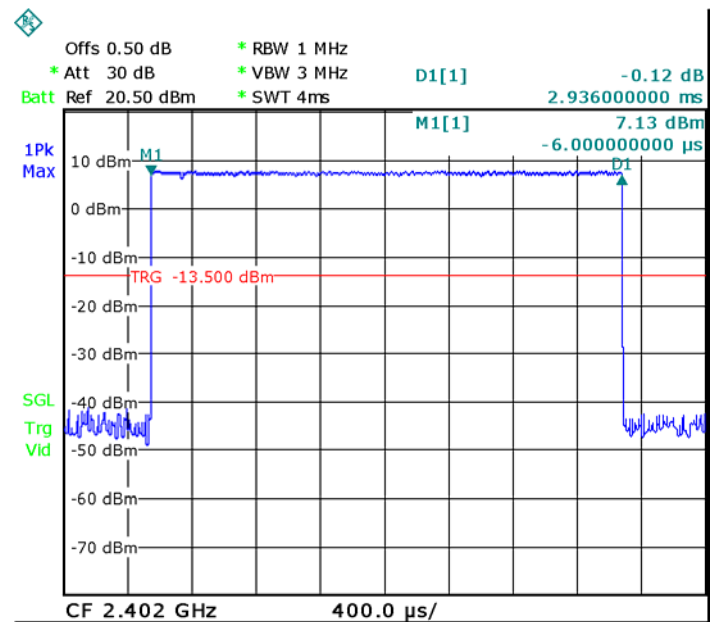


Data Packet:
DH5, Middle channel

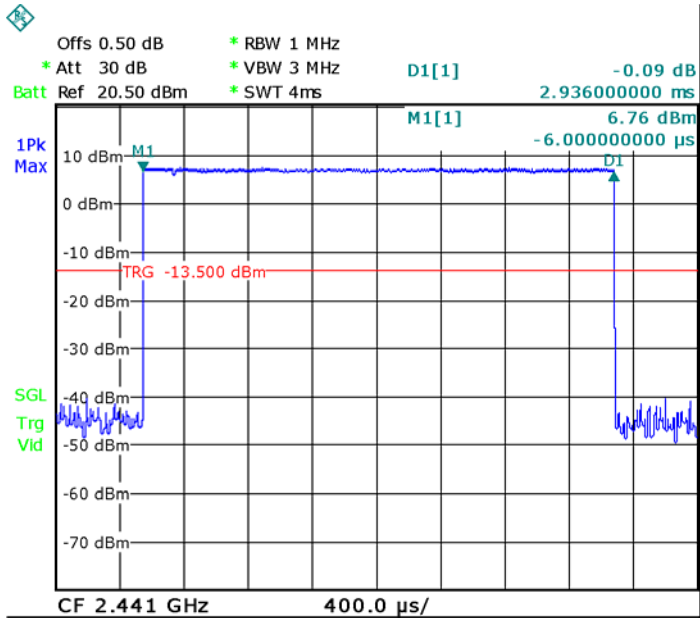


Data Packet:
DH5, High channel

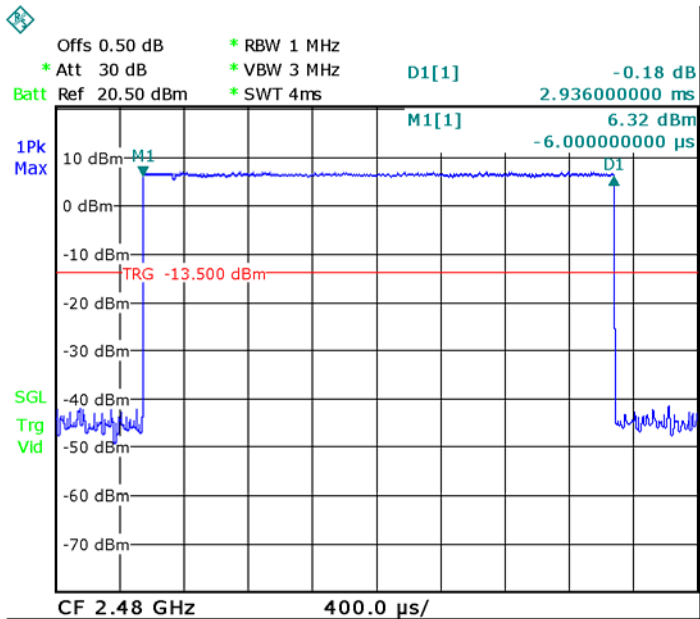


8DPSK
Data Packet:
DH5, Low channel

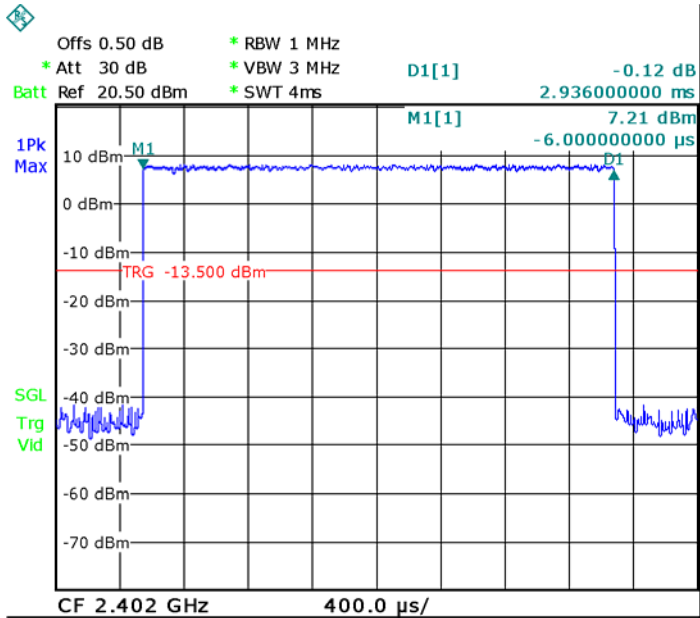

Data Packet:
DH5, Middle channel

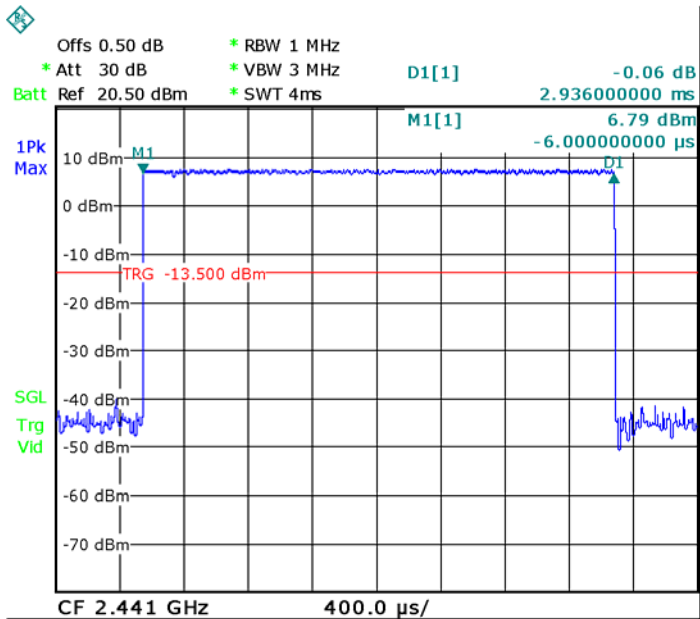

Data Packet:
DH5, High channel

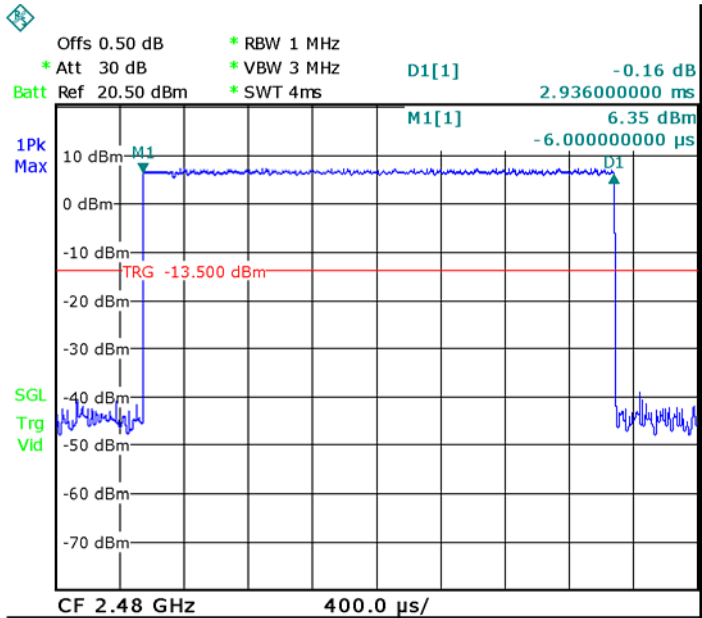

15 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one Integrated Antenna, the gain is 0dBi. meets the requirements of FCC 15.203.



16 SAR Evaluation

Test Requirement: FCC Part 1.1307

Evaluation Method FCC Part2.1093 & KDB 447498 D01 General RF Exposure Guidance v06

16.1 Requirements

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

16.2 The procedures / limit

Conducted Peak power(dBm)	Conducted Peak power(mW)	Source-based time-averaged maximum conducted output power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds(mW)	Result
8.56	7.18	7.18	5	10	Compliance

Remark: Max. duty factor is 100%

Calculation formula: Source-based time-averaged maximum conducted output power(mW) = Conducted peak power(mW)*Duty factor

For frequency in 2.402GHz: SAR Test Exclusion Thresholds $\leq 3.0 / [\sqrt{f(\text{GHz})}] * (\text{min. test separation distance, mm}) = 3.0 / (\sqrt{2.402}) * 5 = 9.679 \text{ mW} \approx 10 \text{ mW}$

For frequency in 2.480GHz: SAR Test Exclusion Thresholds $\leq 3.0 / [\sqrt{f(\text{GHz})}] * (\text{min. test separation distance, mm}) = 3.0 / (\sqrt{2.480}) * 5 = 9.525 \text{ mW} \approx 10 \text{ mW}$

Result: Compliance

No SAR measurement is required.

17 Photographs – BE200 Test Setup Photos

17.1 Photograph – Conducted Emission

Test Setup at Test Site 2#


Charging + discharging




17.2 Photograph-Radiated Emissions

Test Frequency below to 30MHz at Test Site 2#


BT Transmitting

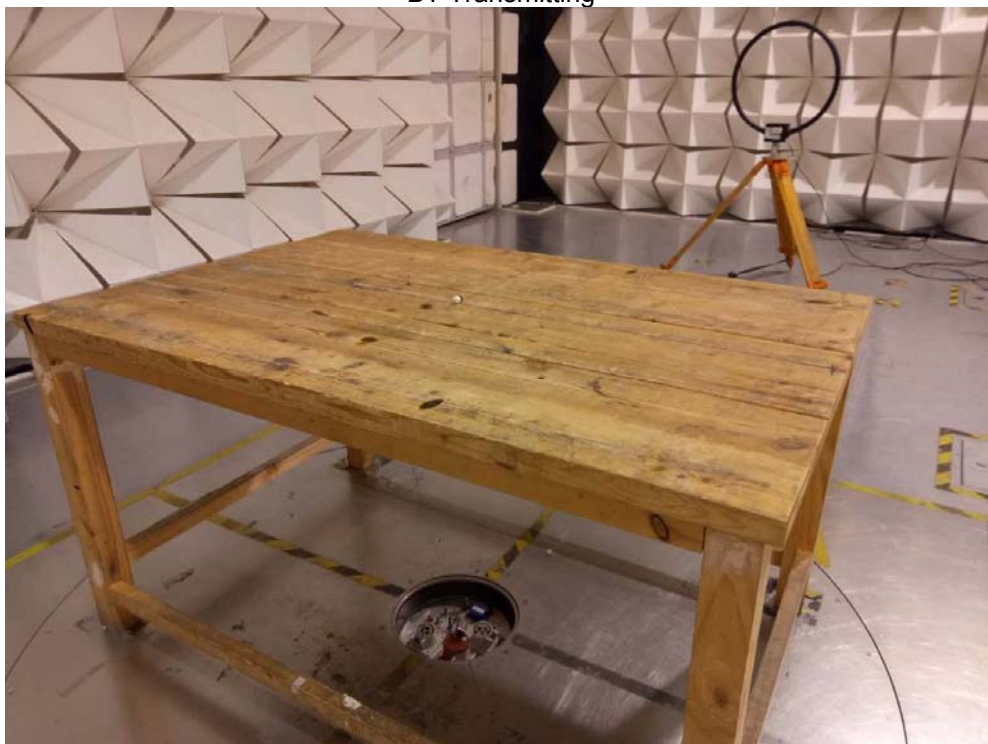

Charging by Power Case

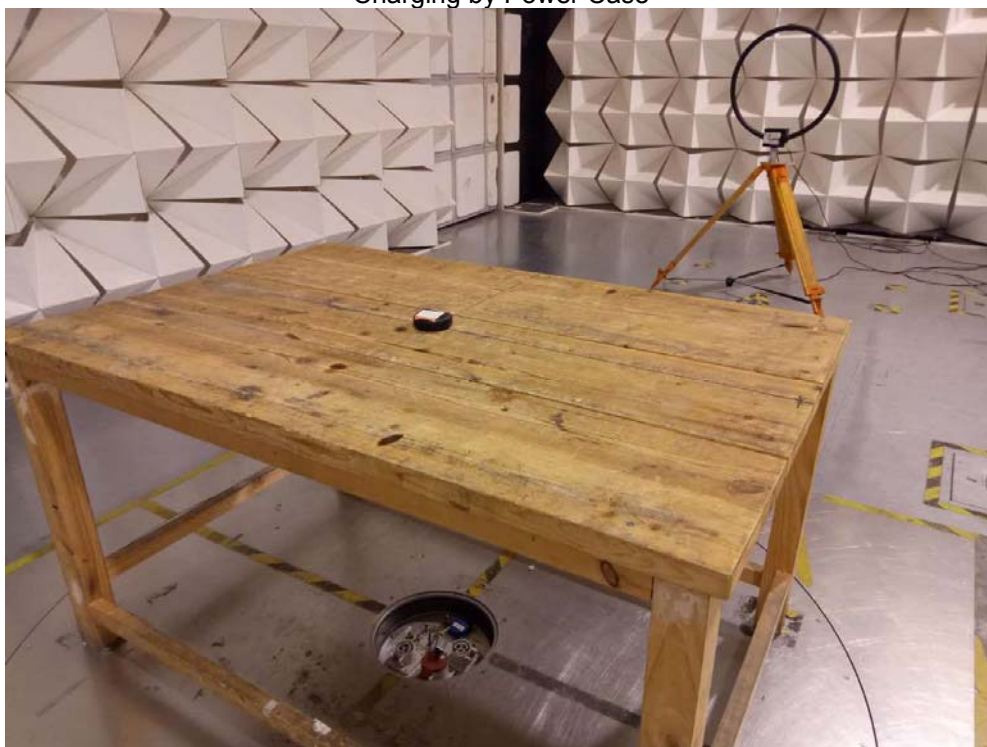


Charging + discharging

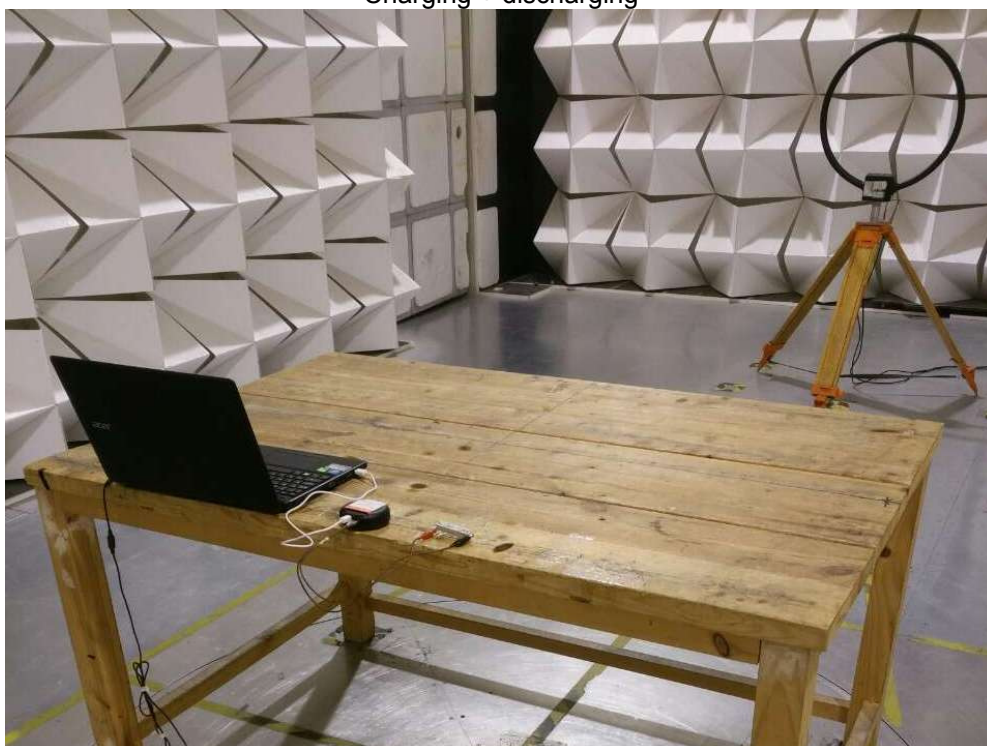

Test Frequency 30MHz to 1000MHz at Test Site 2#


BT Transmitting

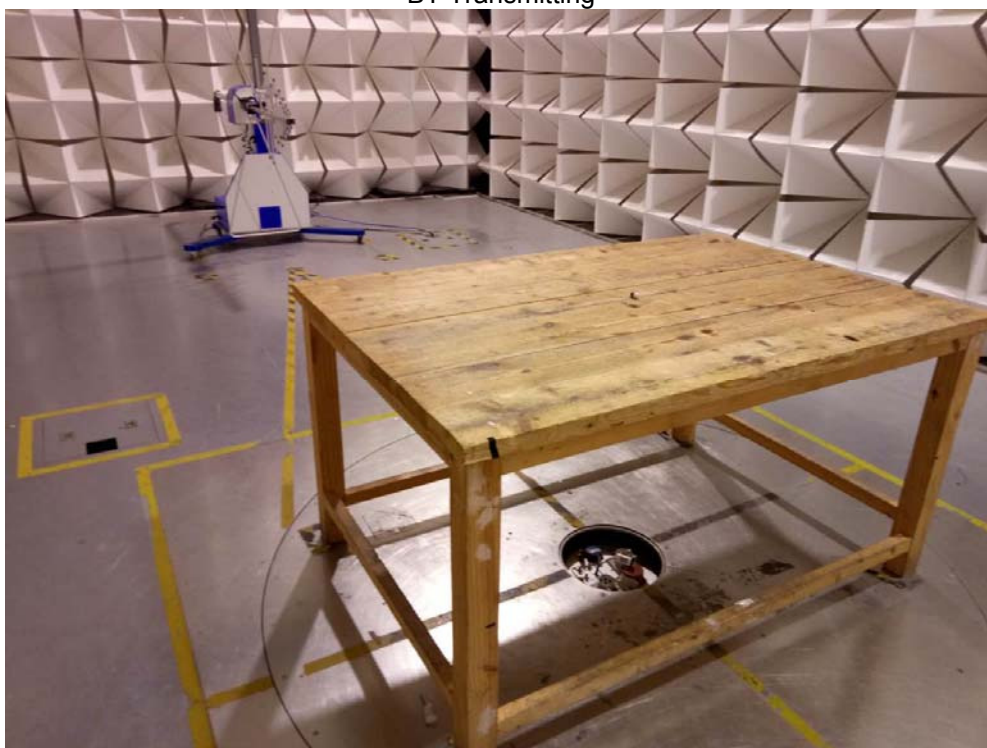

Charging by Power Case



Charging + discharging

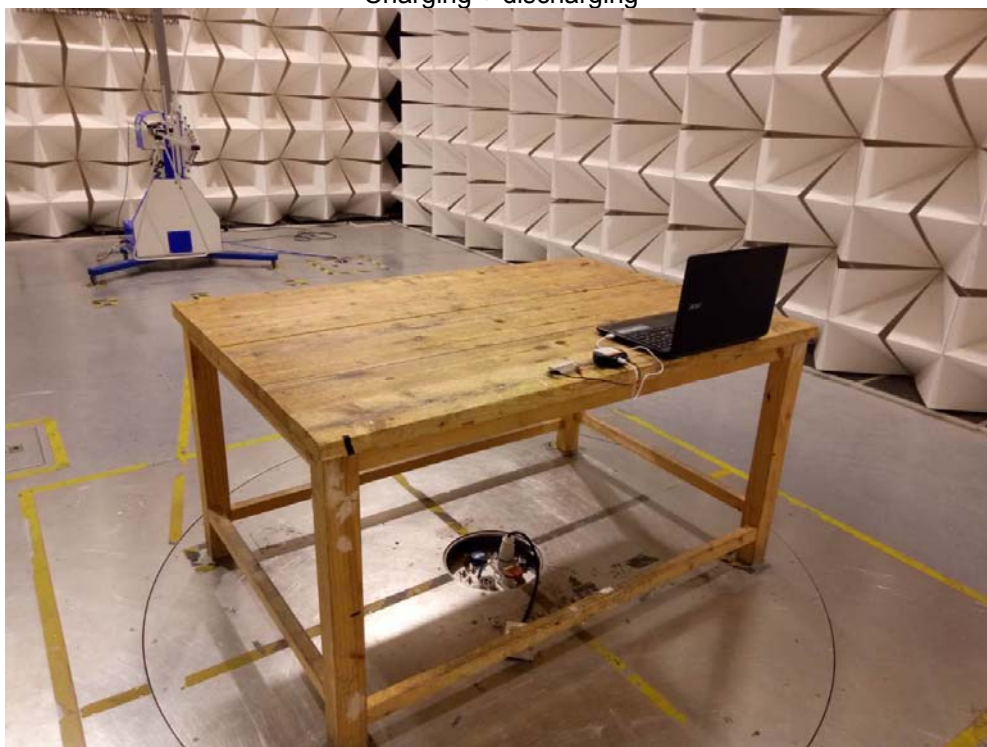

Test Frequency Above 1GHz Test Site 1#

BT Transmitting





Charging by Power Case





Charging + discharging





18 Photographs – Constructional Details


18.1 Model BE200 – External Photos










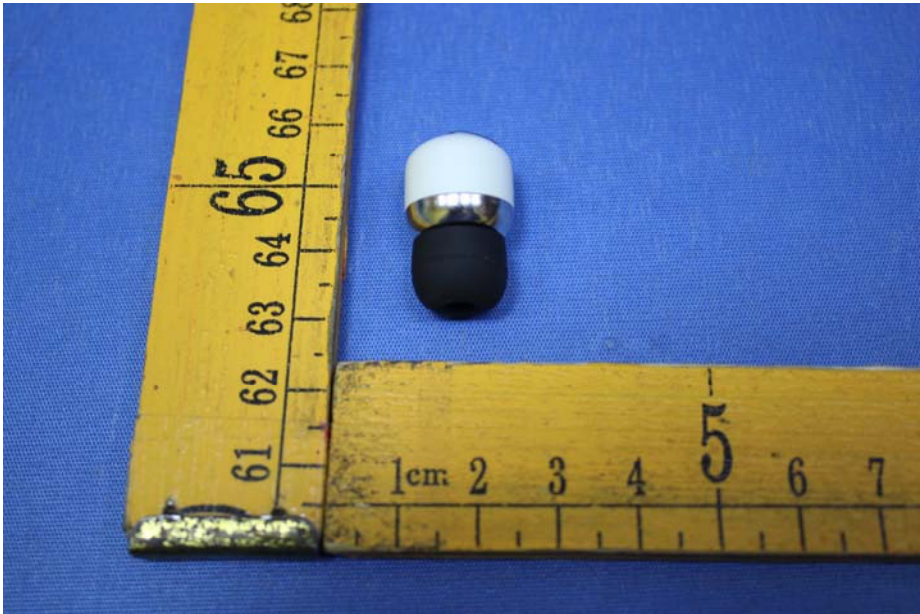





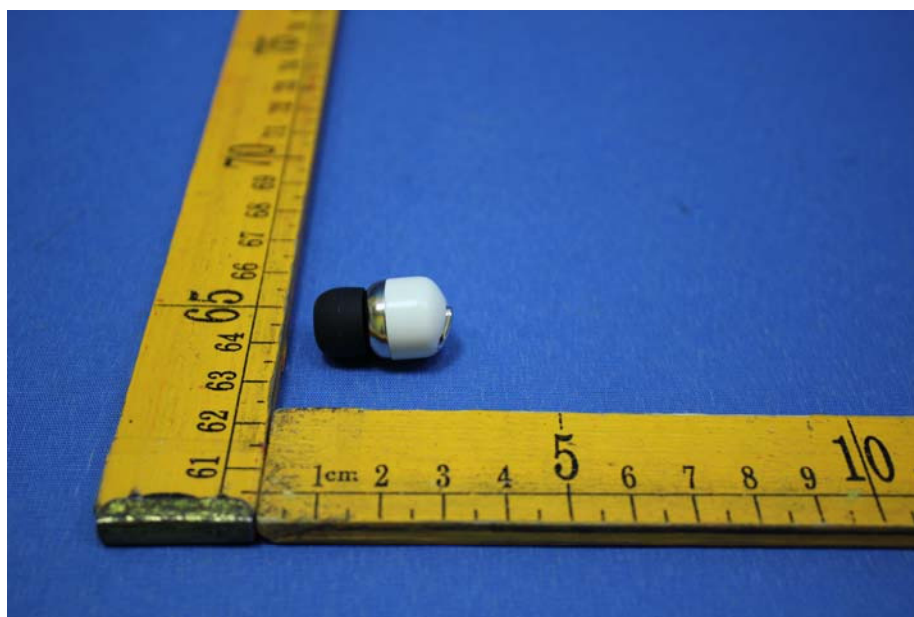


18.2 Model BE200 – Internal Photos

Power case

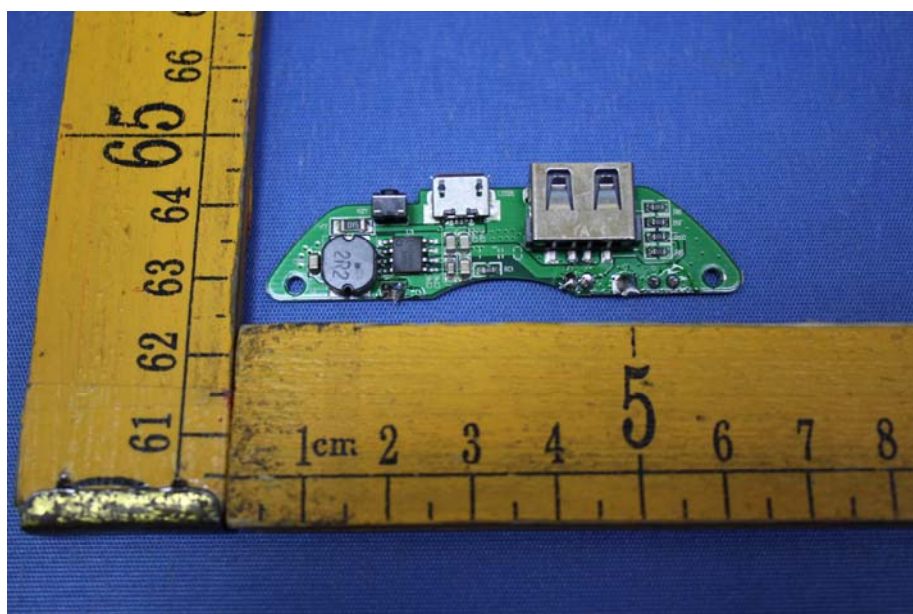


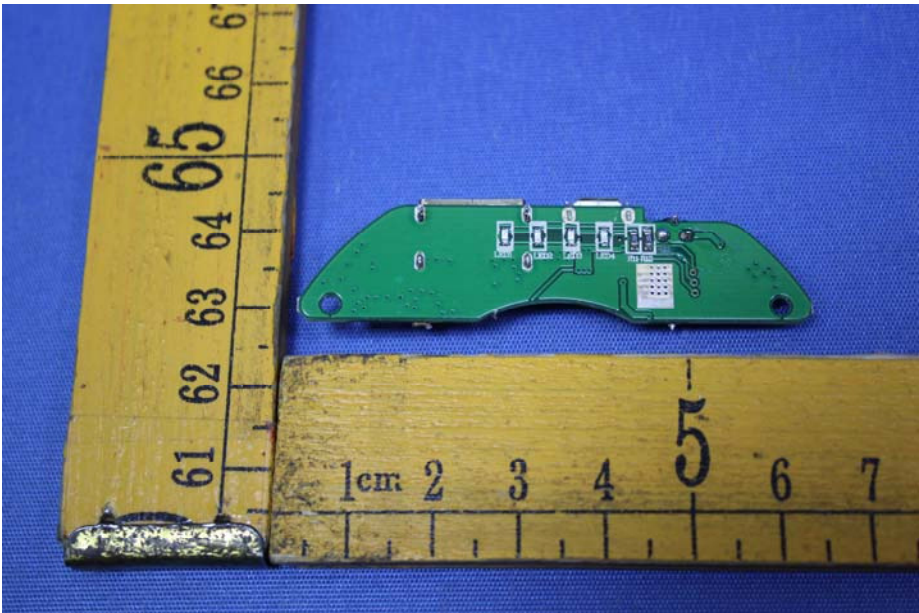



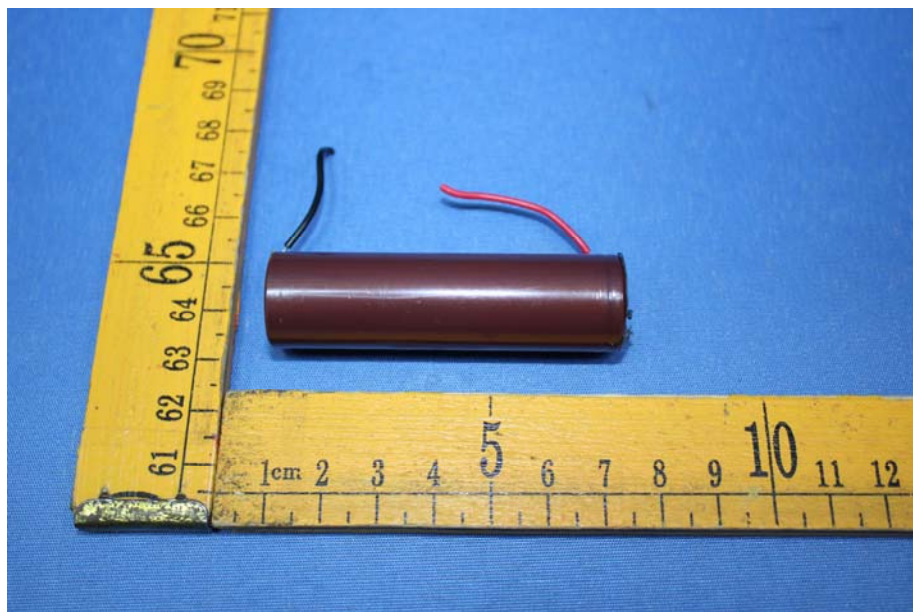



Earbud





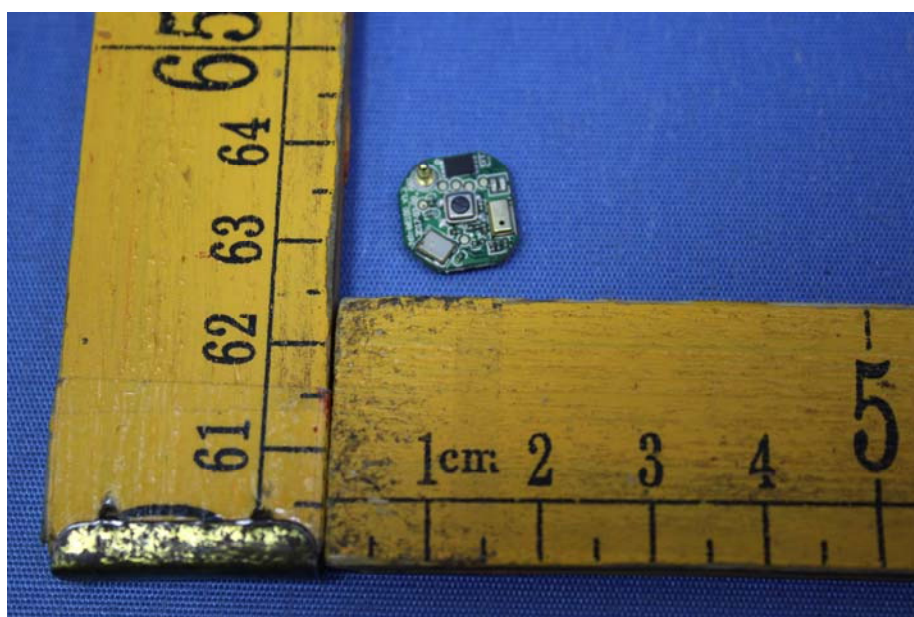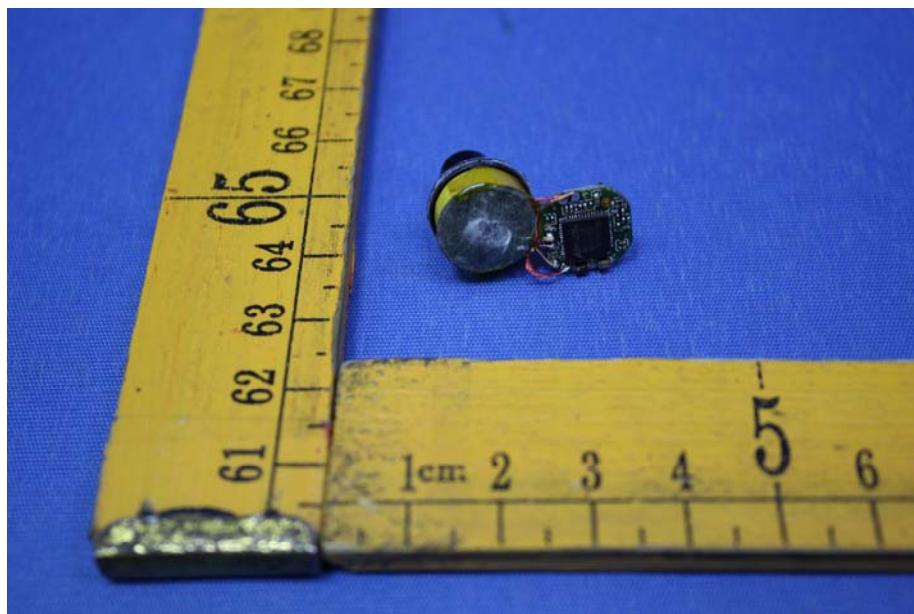

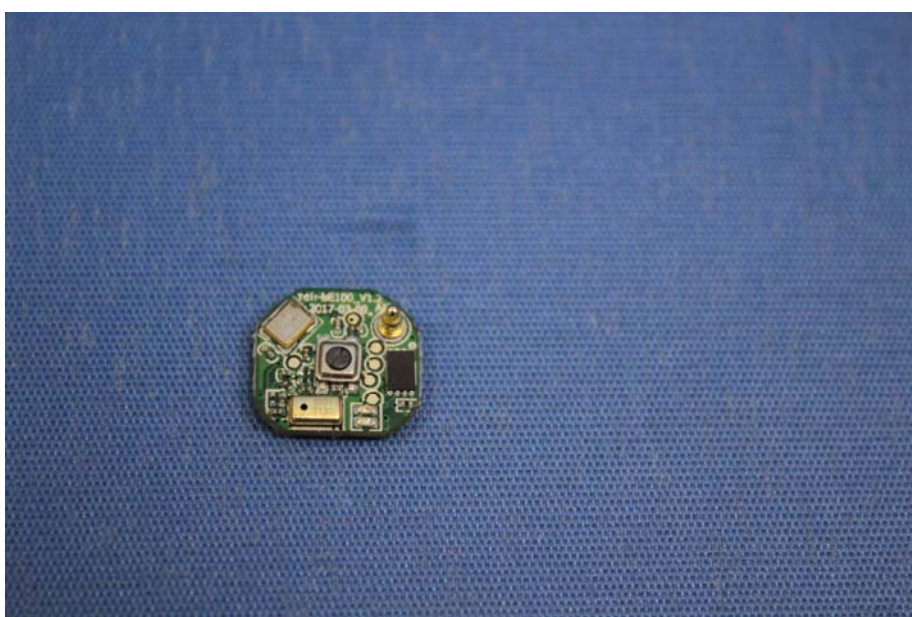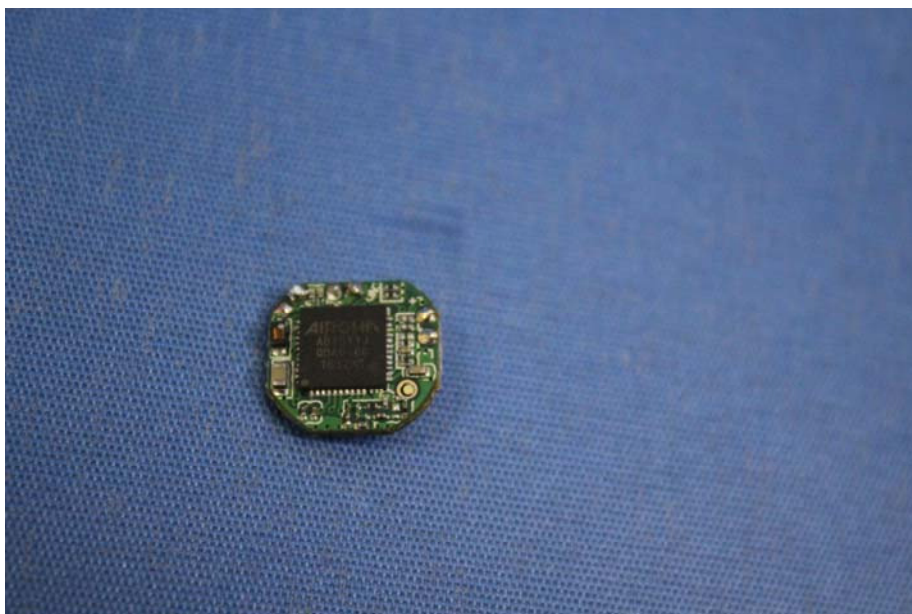

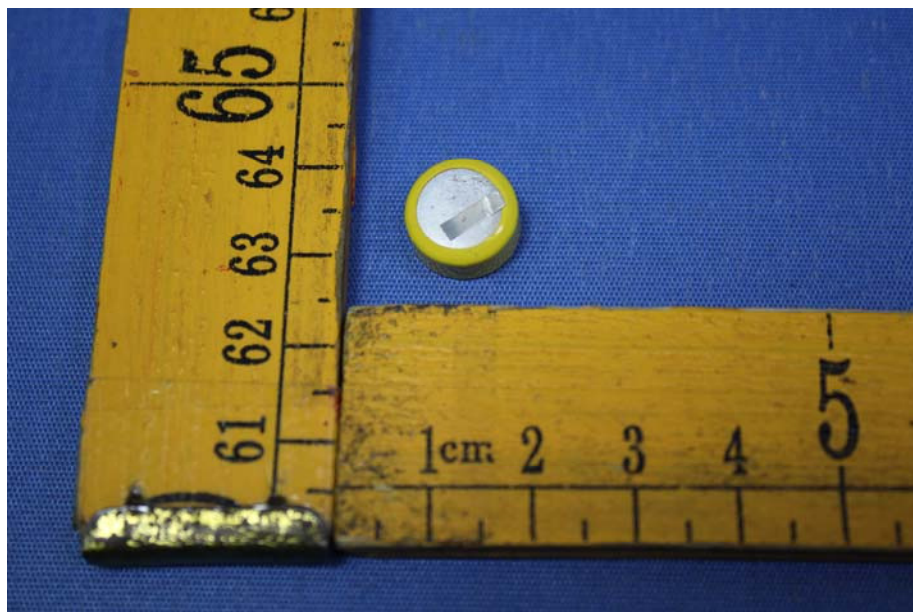

=====End of Report=====