

FCC ID TEST REPORT

for

iSilicone I Bluetooth Speaker

Model: CQZ407-B

FCC ID: 2AAPLCQZ407-B

Prepared for:

Sure Wave (HongKong) Limited

A-703, Building 2, TianAn Cyber Park, Huangge North Road,
Longgang District, Shenzhen 518172, P.R. China

Prepared by:

Shenzhen TCT Testing Technology Co.,Ltd

1F, Building 1, Yibaolai Industrial Park, Qiaotou Village, Fuyong Town,
Baoan District, Shenzhen, Guangdong, China

TEL: +86-0755-27673339

FAX: +86-0755-27673332

Report Number: TCT141217E002

Date of Test: Dec. 18-Dec. 29, 2014

Date of Report: Dec. 30, 2014

The results detailed in this test report relate only to the specific sample(s) tested. It is the Application's responsibility to ensure that all production units are manufactured with equivalent EMC characteristics. This report is not to be reproduced except in full, without written approval from TCT Testing Technology.

Table of Contents

1.0 General Details	3
1.1 Test Lab Details	3
1.2 Applicant Details	3
1.3 Description of EUT	4
1.4 Statement	4
1.5 Test Engineer	4
2.0 Test equipments and Associated Equipment used during the test.	5
2.1 Test Equipments	5
2.2 AE used during the test	5
3.0 Technical Details	6
3.1 Summary of test results	6
3.2 Test Standards	6
4.0 EUT Modification	6
5.0 Measurement Uncertainty (95% confidence levels, k=2)	6
6.0 Power Line Conducted Emission Test	7
7.0 20dB Bandwidth Measurement	11
8.0 Maximum Peak Output Power	15
9.0 Carrier Frequency Separation	19
10.0 Number of Hopping Channels	23
11.0 Time of Occupancy (Dwell Time)	25
12.0 Band edge Measurement	29
13.0 Spurious Emission Test	34
14.0 Antenna Requirement	43

1.0 General Details

1.1 Test Lab Details

Name :	Shenzhen Tongce Testing Lab
Address:	1F, Leinu Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China
Telephone:	13410377511
Fax:	--

The test facility is recognized, certified, or accredited by the following organizations:

FCC Registration Number: 572331

Shenzhen TCT Testing Technology Co., Ltd., Shenzhen EMC Laboratory: Shenzhen Tongce Testing Lab
The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.
Registration Number: 572331

Industry Canada (IC)

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing
Registration Number IC: 10668A-1

1.2 Applicant Details

Applicant:	Sure Wave (HongKong) Limited
Address:	A-703, Building 2, TianAn Cyber Park, Huangge North Road, Longgang District, Shenzhen 518172, P.R. China
Telephone:	86-755-22157741
Fax:	86-75588157700

Manufacturer:	Sure Wave (HongKong) Limited
Address:	A-703, Building 2, TianAn Cyber Park, Huangge North Road, Longgang District, Shenzhen 518172, P.R. China
Telephone:	86-755-22157741
Fax:	86-75588157700

1.3 Description of EUT

Product:	iSilicone I Bluetooth Speaker
Model No.:	CQZ407-B
Additional Model No.:	N/A
Brand Name	N/A
BT Version	V2.1
Rating:	DC 3.7V via Battery or DC 5V via USB line
Modulation Type:	GFSK, Pi/4 DQPSK
Transfer Data Rate	1/2 Mbps
Channel number:	79
Channel spacing:	1 MHz
Operation Frequency:	2402~2480MHz
Antenna Designation:	A PCB antenna, and the maximum antenna gain is 0dBi.

1.4 Statement

N/A

1.5 Test Engineer

The sample tested by *Beryl Zhao*

Printed name: Beryl Zhao

2.0 Test equipments and Associated Equipment used during the test.

2.1 Test Equipments

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESVD	100008	Sep. 17, 2014	Sep.16 , 2015
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	Sep. 17, 2014	Sep.16 , 2015
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep. 17, 2014	Sep. 16, 2015
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 17, 2014	Sep.16 , 2015
Pre-amplifier	HP	8447D	2727A05017	Sep. 17, 2014	Sep.16 , 2015
Loop antenna	ZHINAN	ZN30900A	12024	Dec. 15, 2014	Dec.14 , 2015
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 17, 2014	Sep.16 , 2015
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 17, 2014	Sep.16 , 2015
EMI Test Receiver	R&S	ESCS30	100139	Sep. 17, 2014	Sep.16 , 2015
LISN-1	AFJ	LS16C	16010947251	Sep. 17, 2014	Sep.16 , 2015
LISN-2	Schwarzbeck	NSLK 8126	8126453	Sep. 17, 2014	Sep.16 , 2015

2.2 AE used during the test

Equipment type	Manufacturer	Model
Notebook	Lenovo	G485
N/A		
N/A		
N/A		

3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications

Requirement	CFR 47 Section	Result
Power Line Conducted Emission Test	15.207(a)	PASS
20dB Channel Bandwidth	15.247 (a)(1), 15.215(c)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Carrier Frequency Separation	15.247 (a)(1)	PASS
Number of Hopping Channels	15.247(a)(iii)	PASS
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS
Band edge Measurement, Spurious Emission Test	15.247 (d), 15.205 (a), 15.209 (a)	PASS
Antenna Requirement	15.203	PASS

3.2 Test Standards

FCC Part 15:2013 Subpart C, Paragraph 15.247

FCC Public Notice DA 00-705-Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

4.0 EUT Modification

No modification by Shenzhen TCT Testing Technology Co., Ltd

5.0 Measurement Uncertainty (95% confidence levels, k=2)


No.	Item	MU
1.	Radio Frequency	$\pm 1 \times 10^{-9}$
2.	Temperature	$\pm 0.1^{\circ}\text{C}$
3.	Humidity	$\pm 1.0\%$
4.	RF power, conducted	$\pm 0.34\text{dB}$
5.	RF power density, conducted	$\pm 1.45\text{dB}$
6.	Spurious emissions, conducted	$\pm 3.70\text{dB}$
7.	All emissions, radiated	$\pm 4.50\text{dB}$

Note: 1) Low channel: 2402MHz, Middle channel: 2441MHz, High channel: 2480MHz

2) The EUT is a portable device, and measurements were conducted in all three axis (X, Y, Z), and the worst case (X axis) was submitted only.

6.0 Power Line Conducted Emission Test

6.1 Schematics of the test

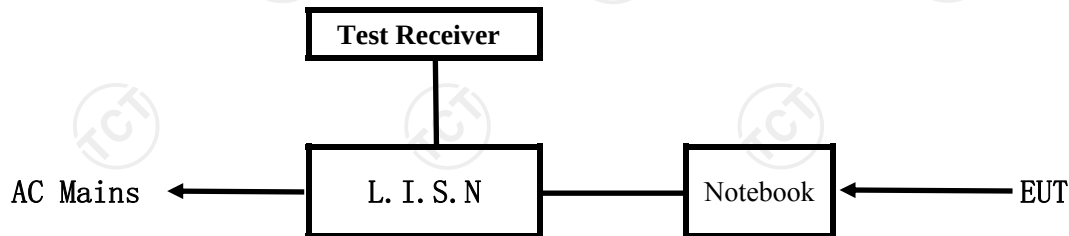


EUT: Equipment Under Test

6.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009 and ANSI C63.4-2003. The Frequency spectrum from 0.15MHz to 30MHz was investigated.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

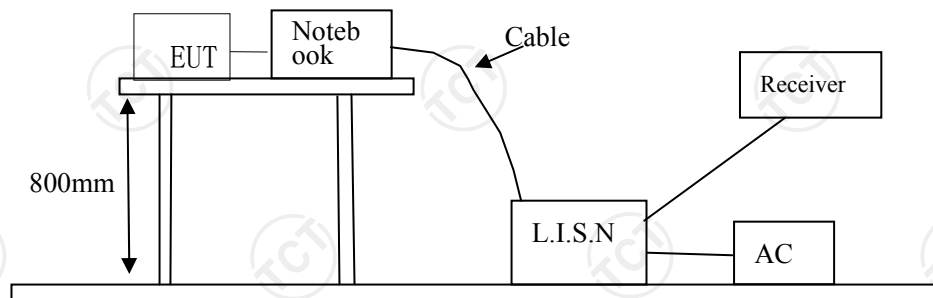

6.3 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2009 and ANSI C63.4-2003

- 1) Setup the EUT and simulators as shown on the following
- 2) Enable AF signal and confirm EUT active to normal condition

6.4 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
EMI Test Receiver	R&S	ESCS30	100139	Sep. 17, 2014	Sep.16 , 2015
LISN-1	AFJ	LS16C	16010222119	Sep. 17, 2014	Sep.16 , 2015
LISN-2	Schwarzbeck	NSLK 8126	8126453	Sep. 17, 2014	Sep.16 , 2015

6.5 Conducted Emission Limit

Frequency(MHz)	Class A Limits (dB μ V)		Class B Limits (dB μ V)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1) *Decreasing linearly with logarithm of frequency.
2) The tighter limit shall apply at the transition frequencies

6.6 Photo documentation of the test set-up

Please refer to the Document Setup photo

6.7 Test specification:

Environmental conditions: Temperature: 26° C Humidity: 51% Atmospheric pressure: 103kPa

Frequency range: 0.15 MHz – 30 MHz

The test was carried out in the following operation mode(s):

- Charging+Tx mode


6.8 Test result

Min. limit margin 9.40dB at 0.1891MHz

The requirements are FULFILLED

Remarks:

A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

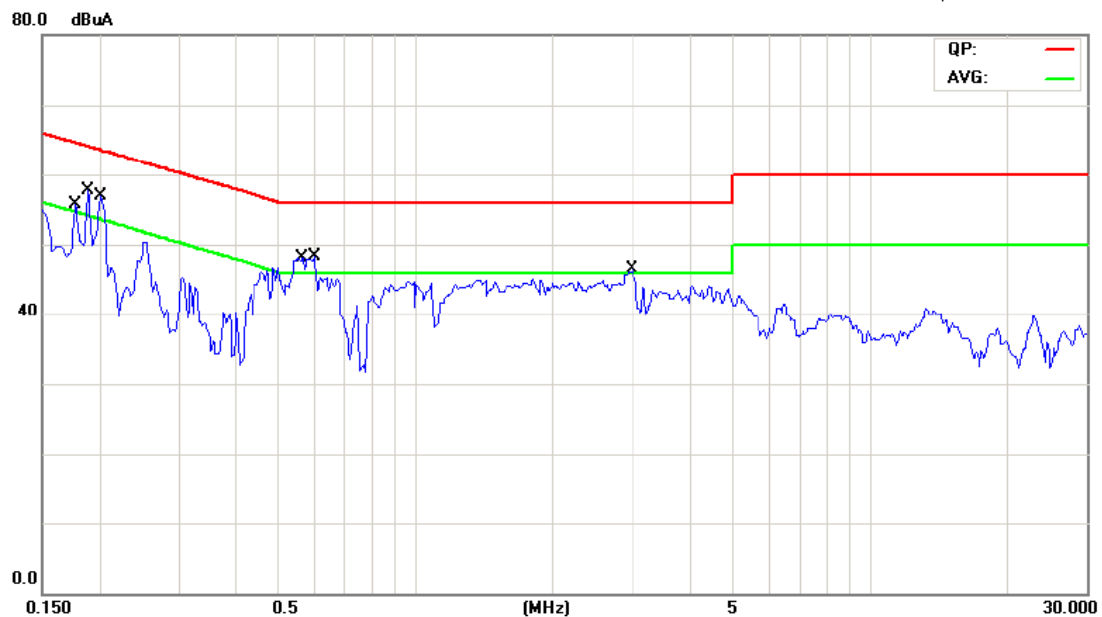

Site Chamber #1

Phase: **L1**

Temperature: 23 (C)


Limit: FCC PART15 Conduction(QP)

Power:

Humidity: 51 %

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		0.1773	40.20	11.48	51.68	64.61	-12.93	QP	
2		0.1773	22.39	11.48	33.87	54.61	-20.74	AVG	
3	*	0.1891	43.20	11.47	54.67	64.07	-9.40	QP	
4		0.1891	31.02	11.47	42.49	54.07	-11.58	AVG	
5		0.2008	41.22	11.46	52.68	63.57	-10.89	QP	
6		0.2008	25.96	11.46	37.42	53.57	-16.15	AVG	
7		0.5641	34.58	11.27	45.85	56.00	-10.15	QP	
8		0.5641	18.74	11.27	30.01	46.00	-15.99	AVG	
9		0.5953	33.02	11.25	44.27	56.00	-11.73	QP	
10		0.5953	14.61	11.25	25.86	46.00	-20.14	AVG	
11		2.9977	28.49	11.32	39.81	56.00	-16.19	QP	
12		2.9977	13.07	11.32	24.39	46.00	-21.61	AVG	

B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

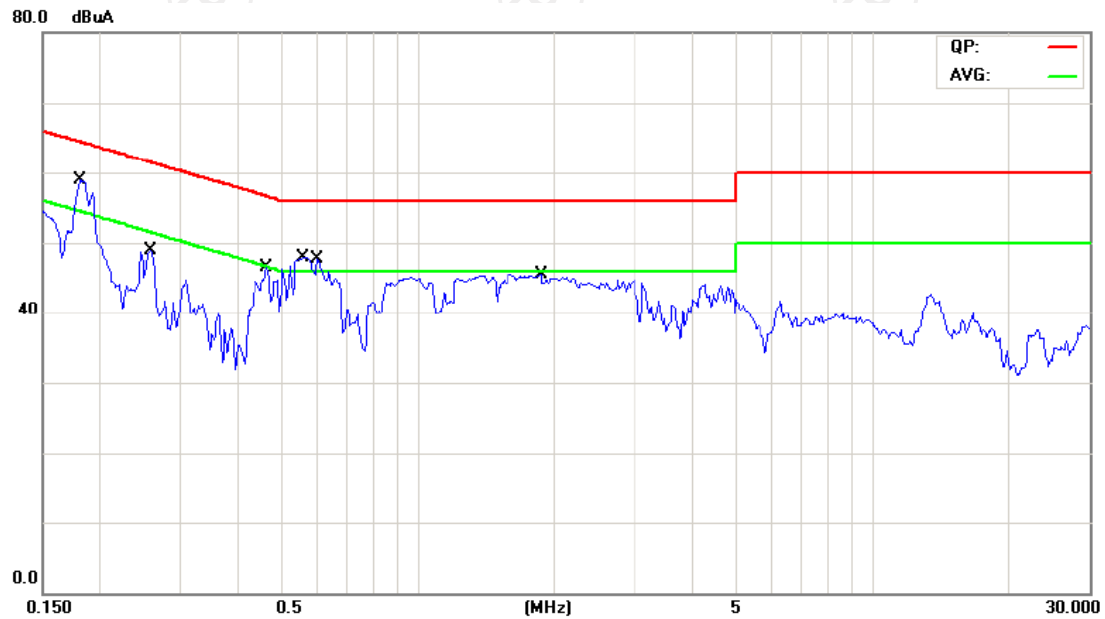

Site Chamber #1

Phase: **N**

Temperature: 23 (C)

Limit: FCC PART15 Conduction(QP)

Power:

Humidity: 51 %

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1	*	0.1812	43.17	11.50	54.67	64.43	-9.76	QP	
2		0.1812	28.47	11.50	39.97	54.43	-14.46	AVG	
3		0.2594	34.25	11.45	45.70	61.45	-15.75	QP	
4		0.2594	18.81	11.45	30.26	51.45	-21.19	AVG	
5		0.4664	31.29	11.33	42.62	56.58	-13.96	QP	
6		0.4664	15.51	11.33	26.84	46.58	-19.74	AVG	
7		0.5602	34.78	11.28	46.06	56.00	-9.94	QP	
8		0.5602	19.48	11.28	30.76	46.00	-15.24	AVG	
9		0.6031	31.80	11.26	43.06	56.00	-12.94	QP	
10		0.6031	17.49	11.26	28.75	46.00	-17.25	AVG	
11		1.8766	28.50	11.63	40.13	56.00	-15.87	QP	
12		1.8766	12.30	11.63	23.93	46.00	-22.07	AVG	

7.0 20dB Bandwidth Measurement

7.1 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep. 17, 2014	Sep. 16, 2015

7.2 Test Specification:

Environmental conditions: Temperature 23° C Humidity: 51% Atmospheric pressure: 103kPa

7.3 Limit


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.4 Test Result:

Modulation Type	Channel number	20dB Bandwidth (kHz)	Limit (kHz)	Conclusion
GFSK	Low	1000.0	---	PASS
	Middle	1000.0	---	PASS
	High	1000.0	---	PASS
Pi/4 DQPSK	Low	1375.0	---	PASS
	Middle	1375.0	---	PASS
	High	1370.2	---	PASS


Modulation: GFSK

Low channel

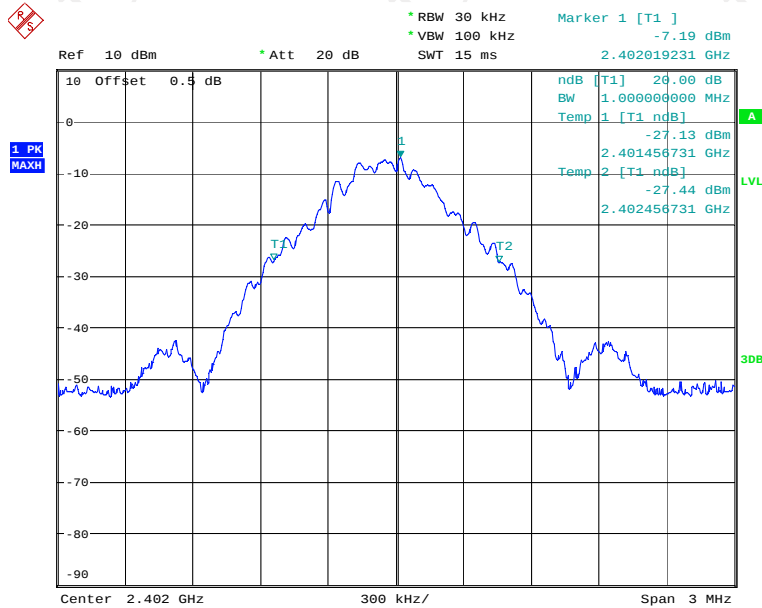


Date: 29.DEC.2014 13:08:37

Middle channel

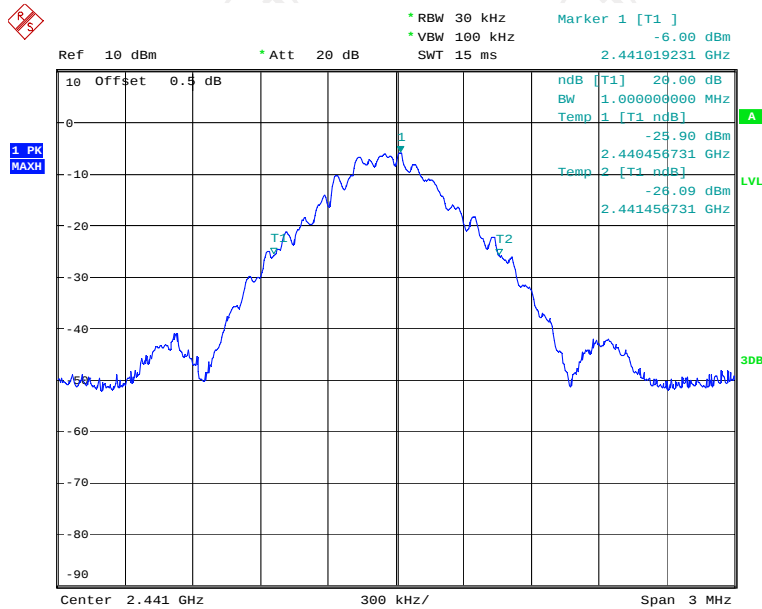

Date: 29.DEC.2014 13:09:10


High channel

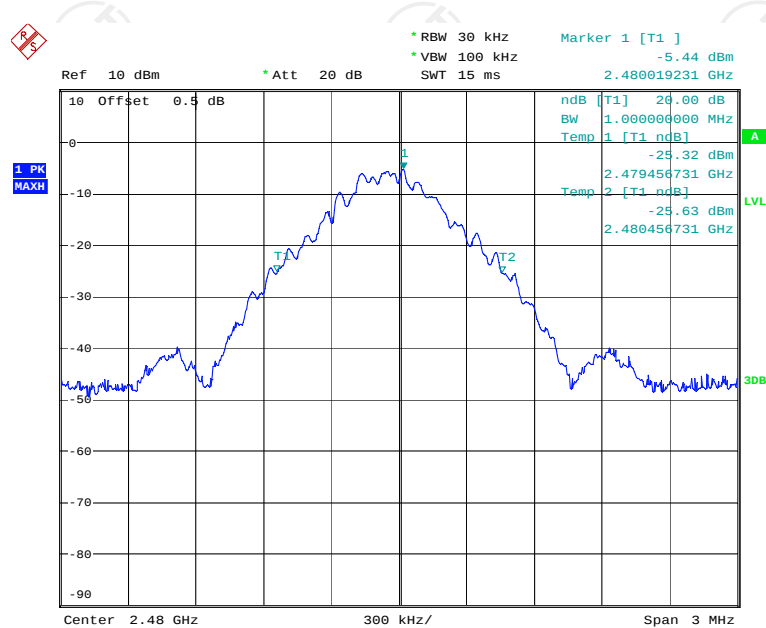

Date: 29.DEC.2014 13:10:46


Modulation: Pi/4DQPSK

Low channel

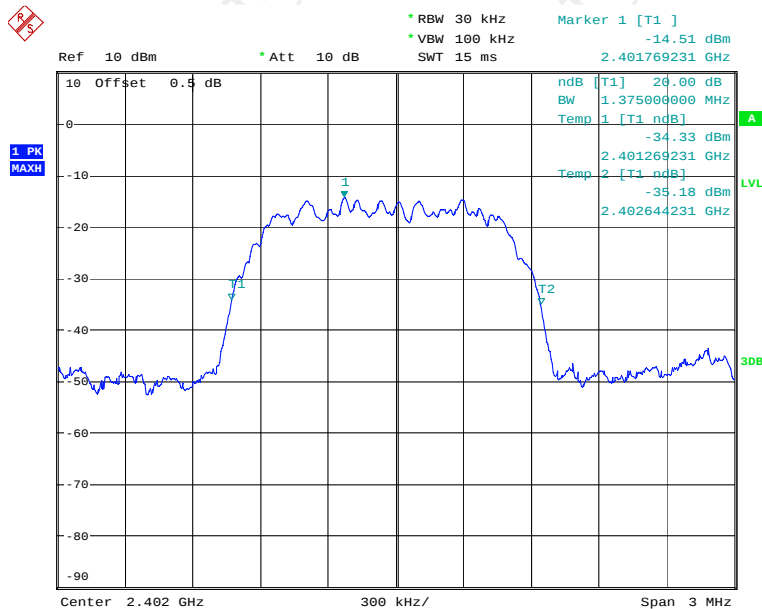


Date: 29.DEC.2014 14:39:08

Middle channel

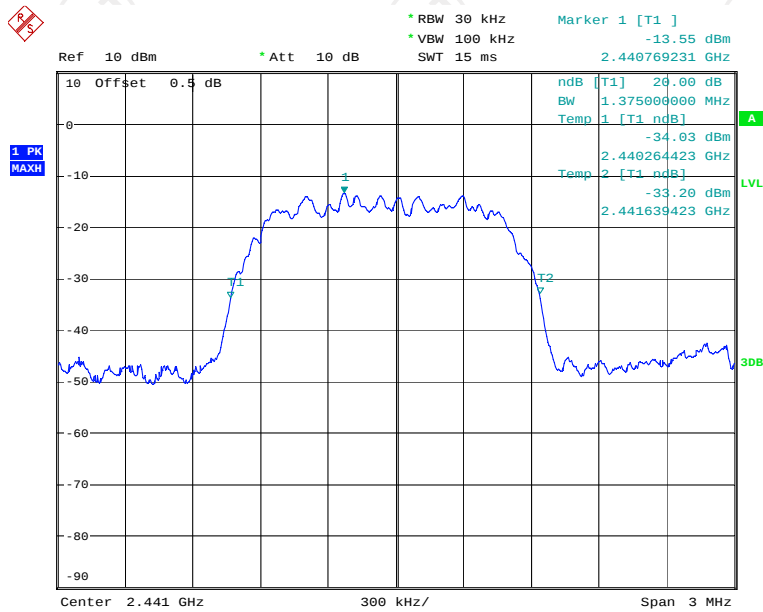

Date: 29.DEC.2014 14:43:22

High channel

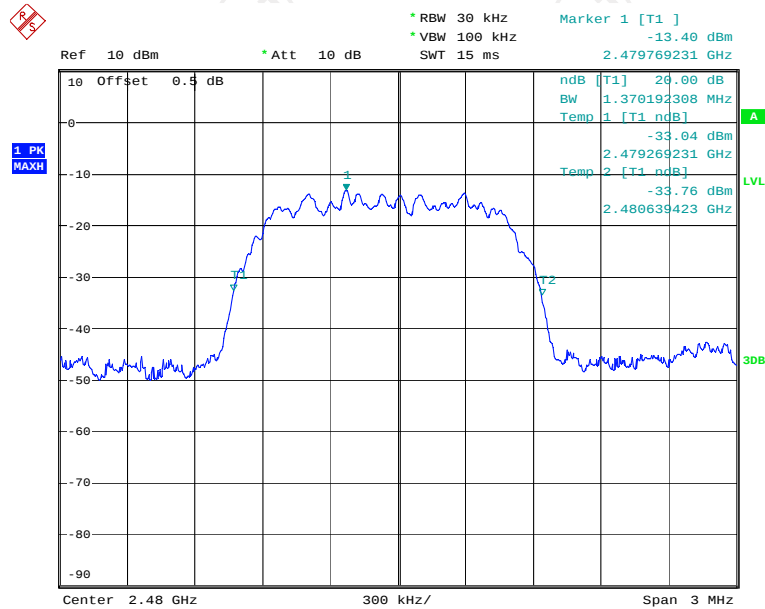

Date: 29.DEC.2014 14:48:44

8.0 Maximum Peak Output Power

8.1 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep. 17, 2014	Sep. 16, 2015

8.2 Test specification:

Environmental conditions: Temperature 23° C Humidity: 51% Atmospheric pressure: 103kPa

8.3 Test Procedure

- 1) Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2) Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centred on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3) Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4) Repeat above procedures until all frequencies measured were complete.

8.4 Limits


According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band: 0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.5 Test Result

Modulation Type	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (mW)	Peak Power Limit (dBm)	Pass/ Fail
GFSK	2402	-4.13	125	20.97	Pass
	2441	-2.90	125	20.97	Pass
	2480	-2.21	125	20.97	Pass
Pi/4 DQPSK	2402	-5.76	125	20.97	Pass
	2441	-4.93	125	20.97	Pass
	2480	-4.63	125	20.97	Pass


Modulation: GFSK

Low channel

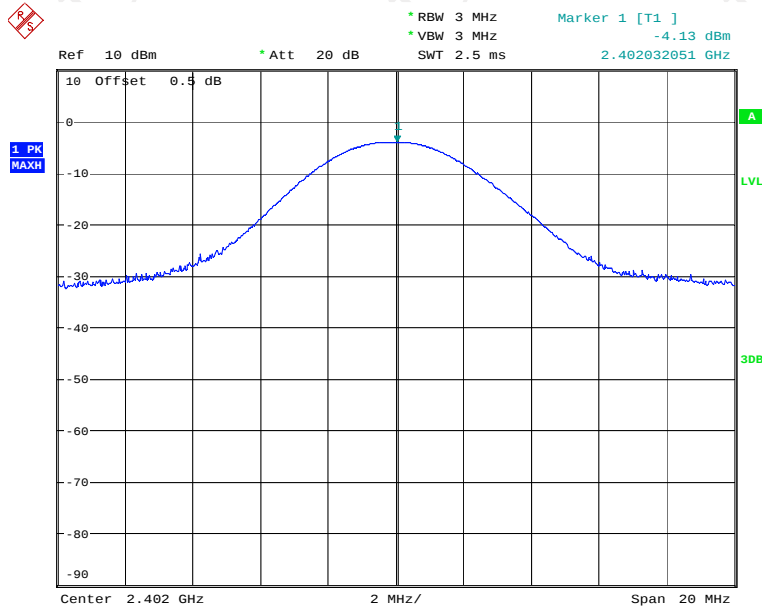


Date: 29.DEC.2014 13:07:49

Middle channel

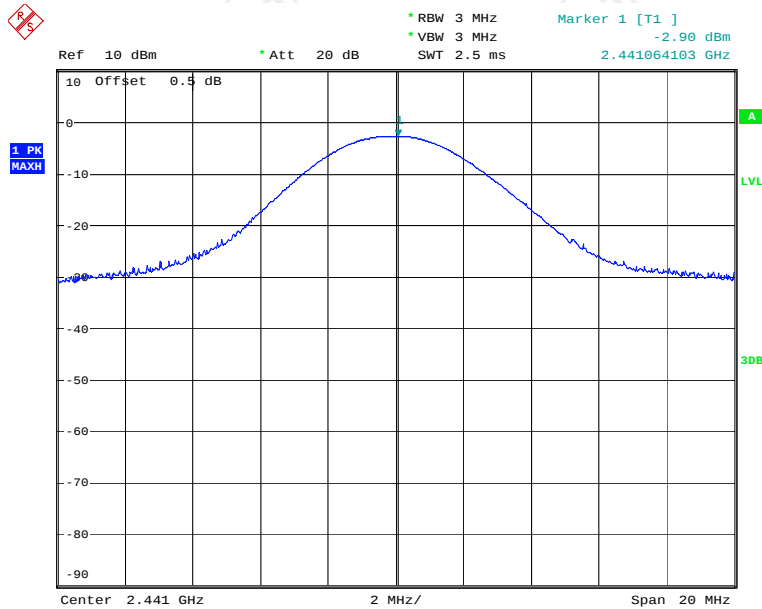

Date: 29.DEC.2014 13:09:46


High channel

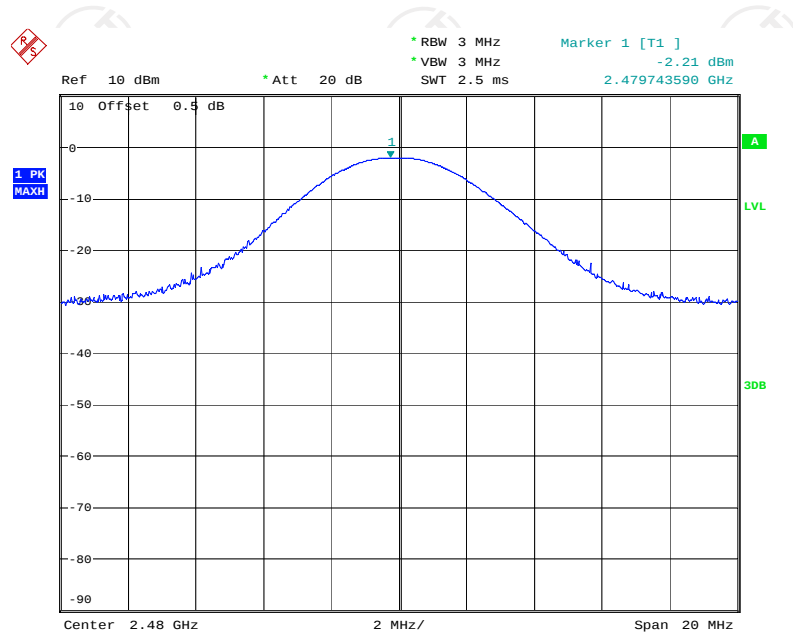

Date: 29.DEC.2014 13:10:14


Modulation: Pi/4 DQPSK

Low channel

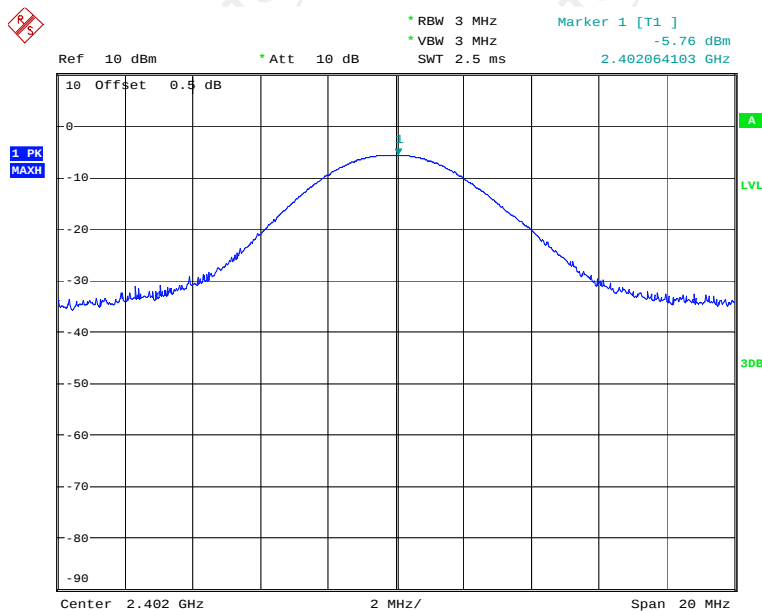


Date: 29.DEC.2014 14:39:43

Middle channel

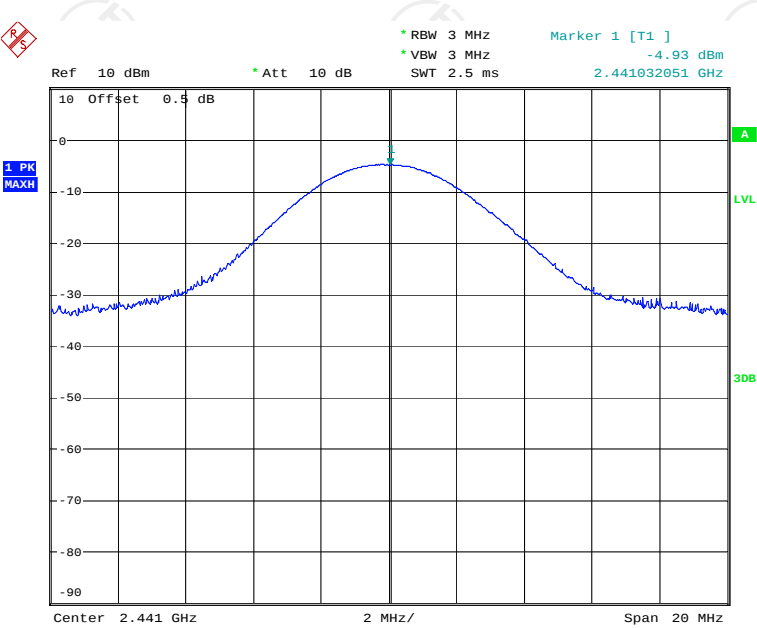

Date: 29.DEC.2014 14:45:02

High channel

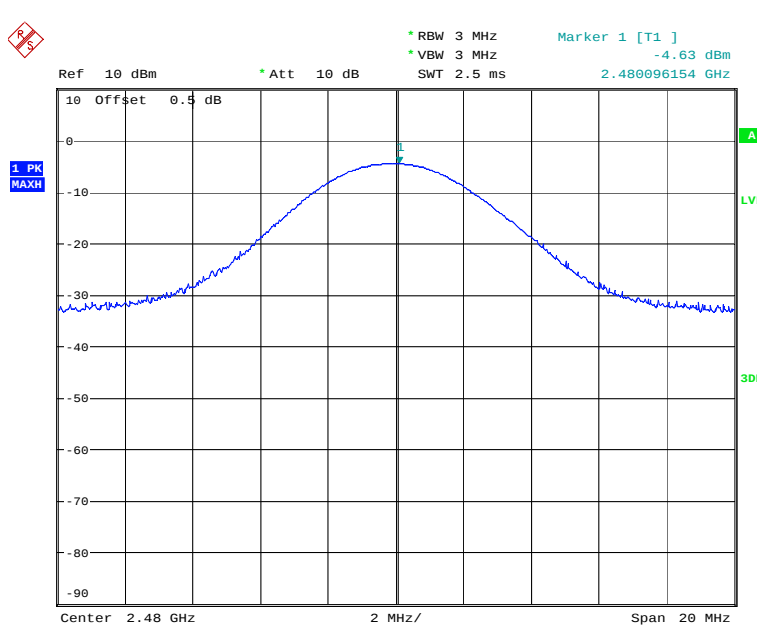

Date: 29.DEC.2014 14:50:40

9.0 Carrier Frequency Separation

9.1 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep. 17, 2014	Sep. 16, 2015

9.2 Test specification:

Environmental conditions: Temperature 23° C Humidity: 51% Atmospheric pressure: 103kPa

9.3 Test Procedure

1. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span; Video (or Average) Bandwidth (VBW) $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold
2. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
3. Repeat above procedures until all frequencies measured were complete.

9.4 Limits

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


9.5 Test Result

Modulation Type	Channel number	Carrier Frequency Separation	Limit	Pass/ Fail
GFSK	Low	1.000MHz	$\geq$ 25 kHz or two-thirds 20 dB bandwidth	Pass
	Middle	1.005MHz		Pass
	High	1.058MHz		Pass
Pi/4 DQPSK	Low	1.000MHz	$\geq$ 25 kHz or two-thirds 20 dB bandwidth	Pass
	Middle	1.014MHz		Pass
	High	1.014MHz		Pass

Note: Two-thirds 20 dB bandwidth: GFSK: 666.7 kHz; Pi/4 DQPSK: 916.7


Modulation: GFSK

Low channel

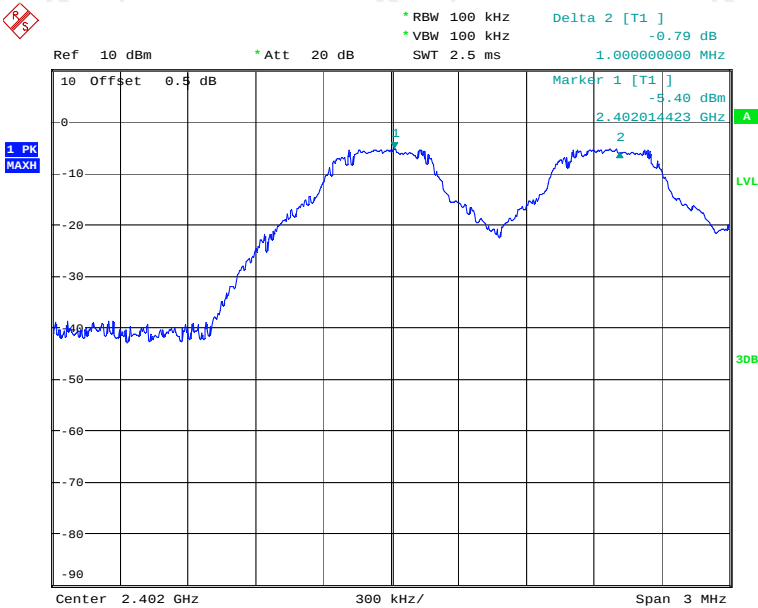


Date: 29.DEC.2014 13:20:41

Middle channel

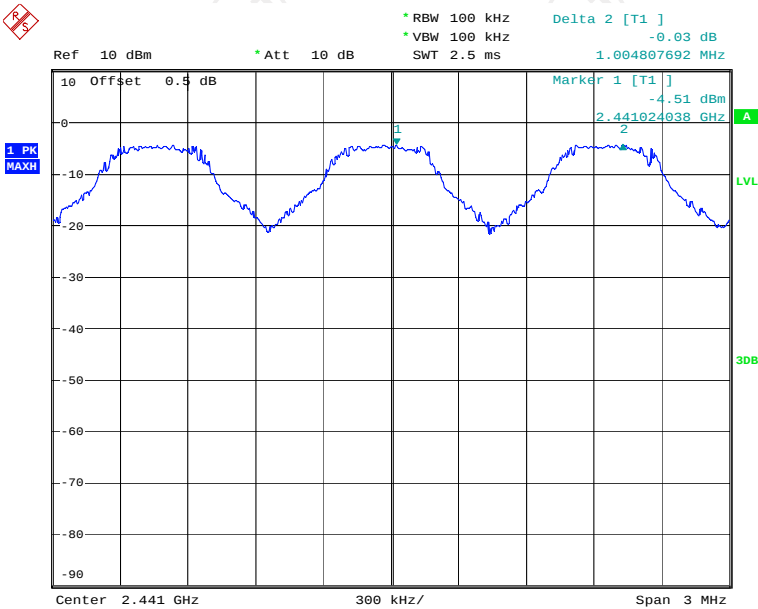

Date: 29.DEC.2014 14:06:41


High channel

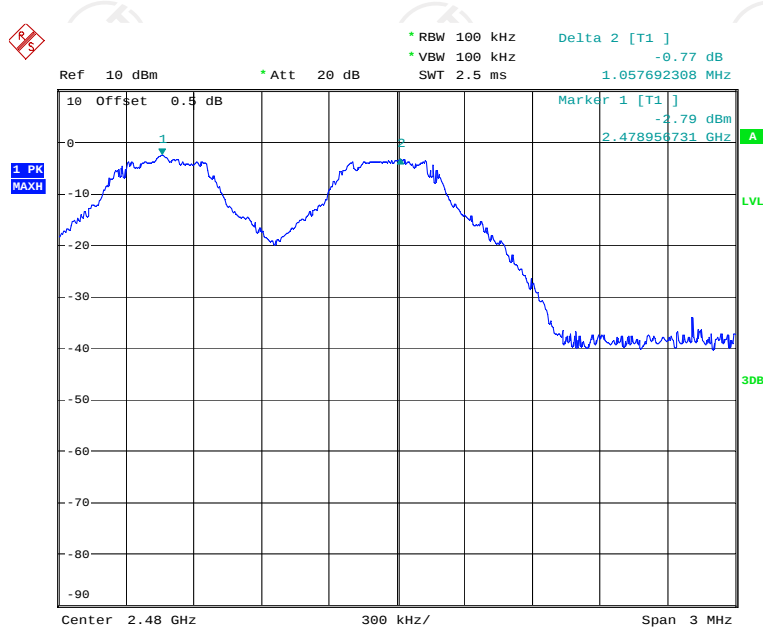

Date: 29.DEC.2014 13:19:34


Modulation: Pi/4 DQPSK

Low channel

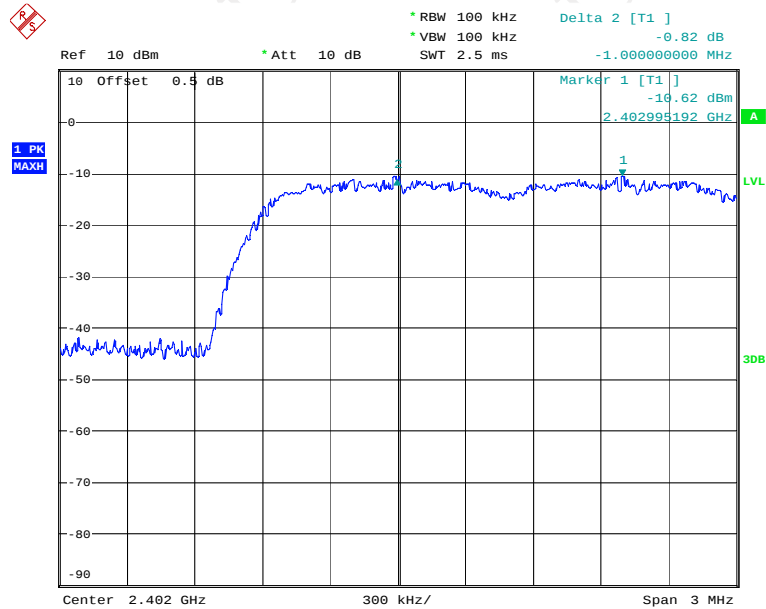


Date: 29.DEC.2014 14:25:13

Middle channel

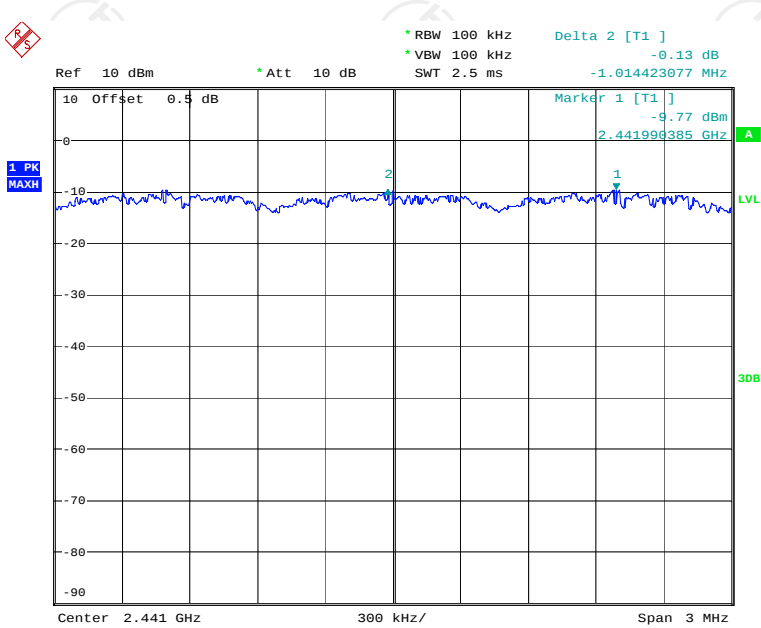

Date: 29.DEC.2014 14:26:02

High channel

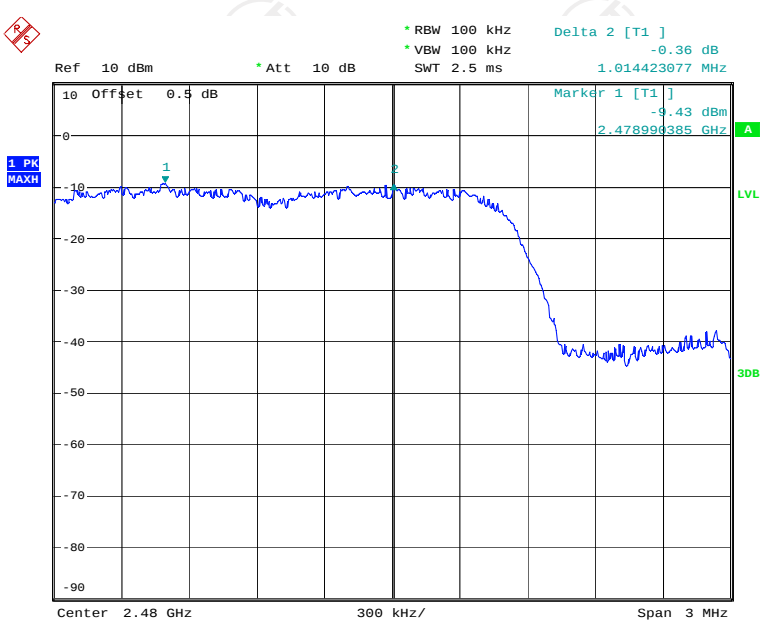

Date: 29.DEC.2014 14:24:09

10.0 Number of Hopping Channels

10.1 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep. 17, 2014	Sep. 16, 2015

10.2 Test specification:

Environmental conditions: Temperature 22° C Humidity: 51% Atmospheric pressure: 103kPa

10.3 Test Procedure

Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold


10.4 Limits

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

10.5 Test Result


Modulation Type	Operating Frequency	Number of hopping channels	Limit	Pass/ Fail
GFSK	2402-2480MHz	79	≥ 15	Pass
Pi/4 DQPSK	2402-2480MHz	79	≥ 15	Pass

Modulation Type: GFSK

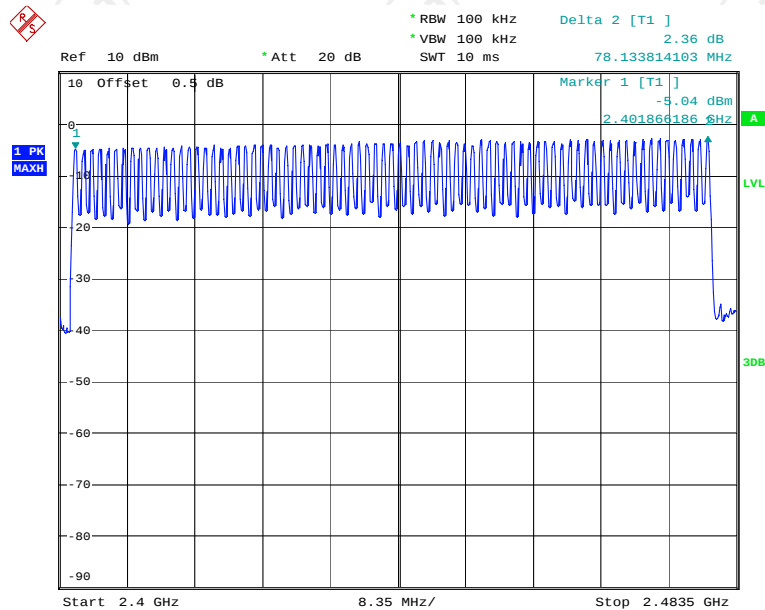

Date: 29.DEC.2014 13:24:04

Modulation Type: Pi/4 DQPSK

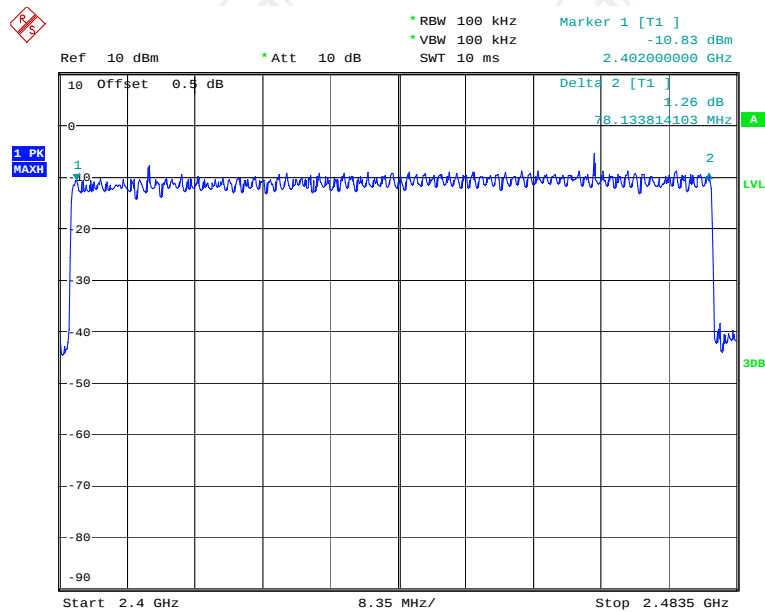

Date: 29.DEC.2014 15:20:59

11.0 Time of Occupancy (Dwell Time)

11.1 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep. 17, 2014	Sep. 16, 2015

11.2 Test specification:

Environmental conditions: Temperature 22° C Humidity: 52% Atmospheric pressure: 103kPa

11.3 Test Procedure

Span = zero span, centred on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Detector function = peak;

Sweep = as necessary to capture the entire dwell time per hopping channel; Trace = max hold

Measure the dwell time using the marker-delta function.

Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

11.4 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.5 Test Result

Modulation Type	Packet	Reading (ms)	Hopping Rate	Actual (s)	Limit (s)
GFSK	DH1	0.456	800hop/s	0.1459	0.4
	DH3	1.714	400hop/s	0.2742	0.4
	DH5	2.964	266.667hop/s	0.3162	0.4
Pi/4 DQPSK	2-DH1	0.449	800hop/s	0.1437	0.4
	2-DH3	1.719	400hop/s	0.2750	0.4
	2-DH5	2.977	266.667hop/s	0.3175	0.4


Note: 1) The measurements were conducted in High, Middle, Low channel. The Low channel could represent the character of the other channels, so the low channel measurement was submitted in the report only.

2) Actual = Reading $\times$ (Hopping rate / Number of channels) $\times$ Test period


3) The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. So the EUT makes worst case 266.667 hops per second with 79 channels, and the DH5 is the worst case.

Modulation Type: GFSK


Packet Type: DH1

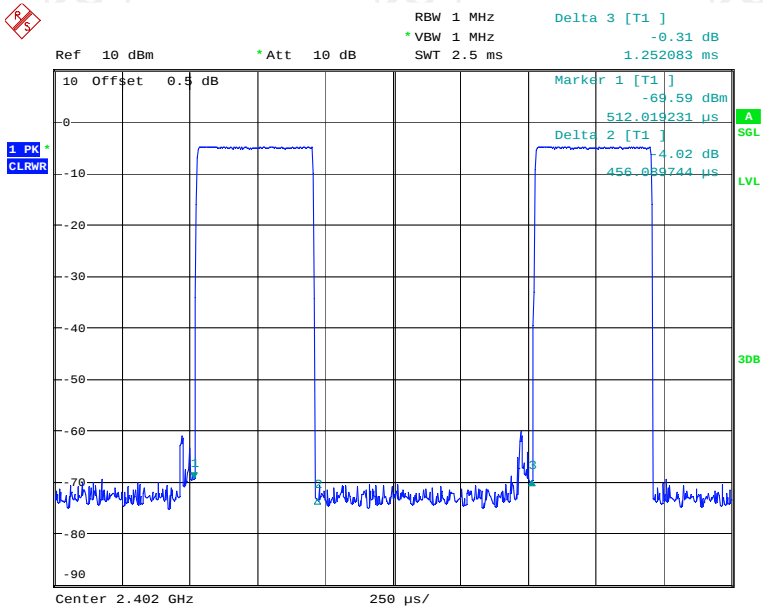

Packet Type: DH3

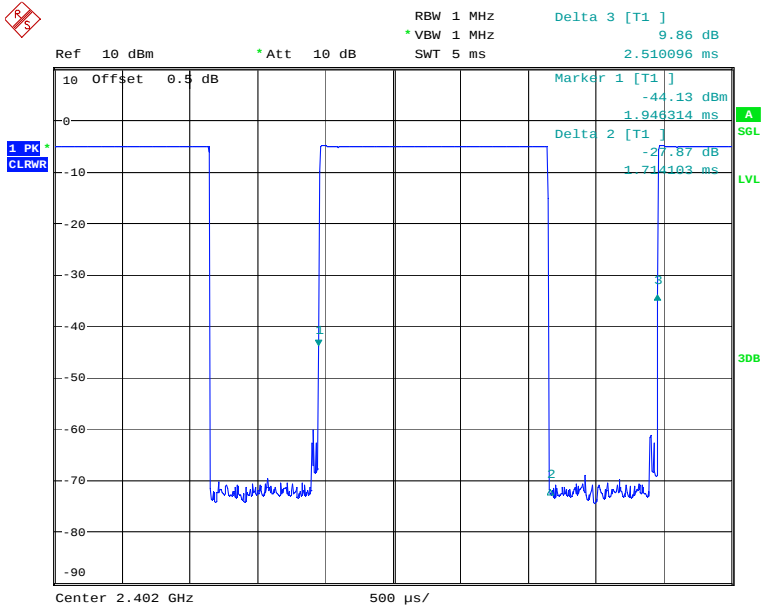


Packet Type: DH5

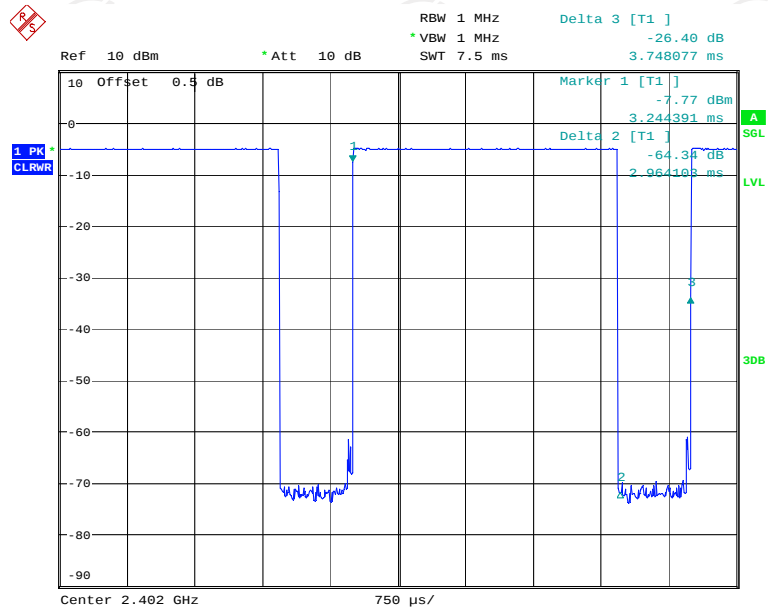


Modulation Type: Pi/4 DQPSK


Packet Type: 2-DH1

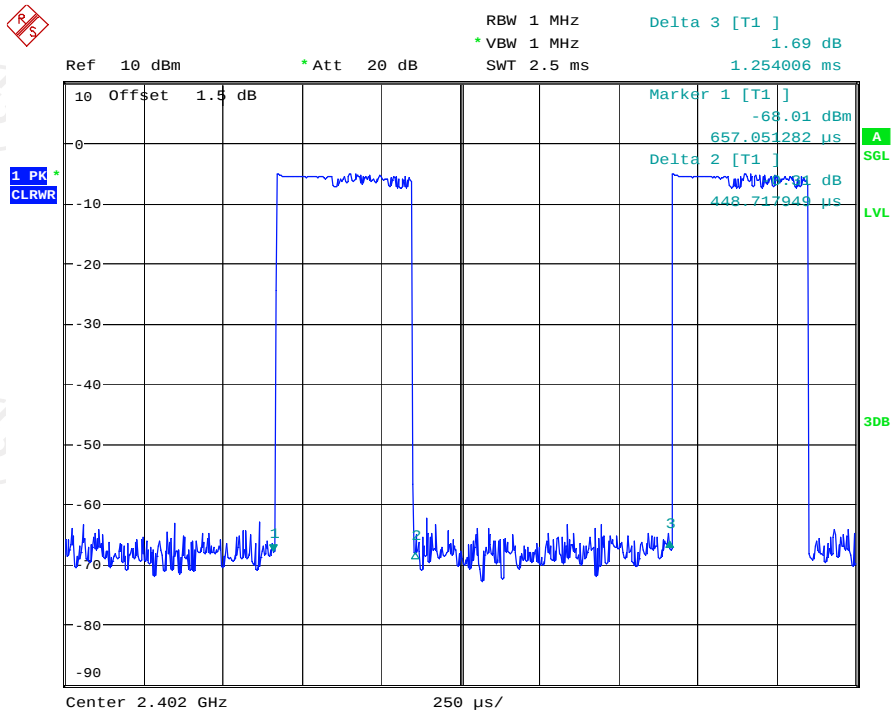

Packet Type: 2-DH3

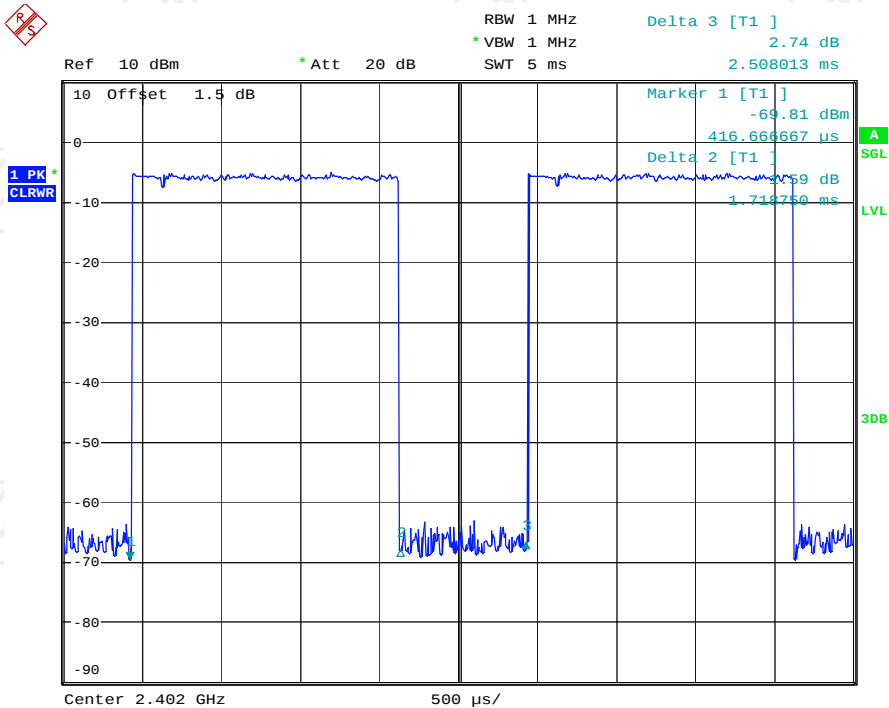

Packet Type: 2-DH5

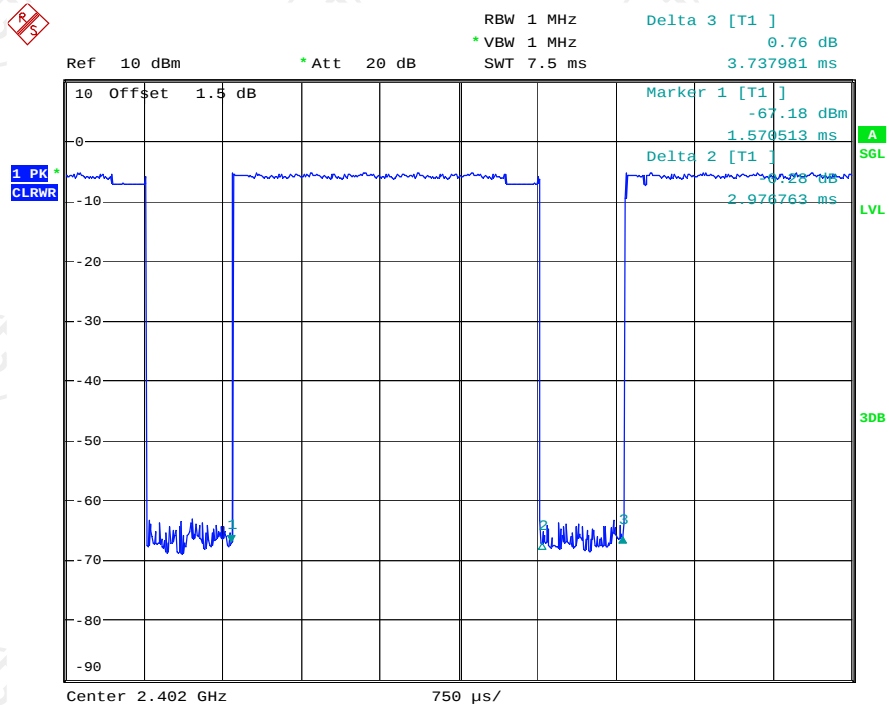

12.0 Band edge Measurement

12.1 Test Equipment

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSU3	1166.1660.03	Sep. 17, 2014	Sep. 16, 2015

12.2 Test specification:

Environmental conditions: Temperature 22° C Humidity: 52% Atmospheric pressure: 103kPa

12.3 Test Procedure

For band edge test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measure method is used
For signals allocated in the restricted bands above and below the 2.4-2.483GHz, a radiated measurement is made
(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz
and PK detector)


12.4 Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).


Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

Modulation: GFSK


EUT operation mode: Keep transmitting in low channel

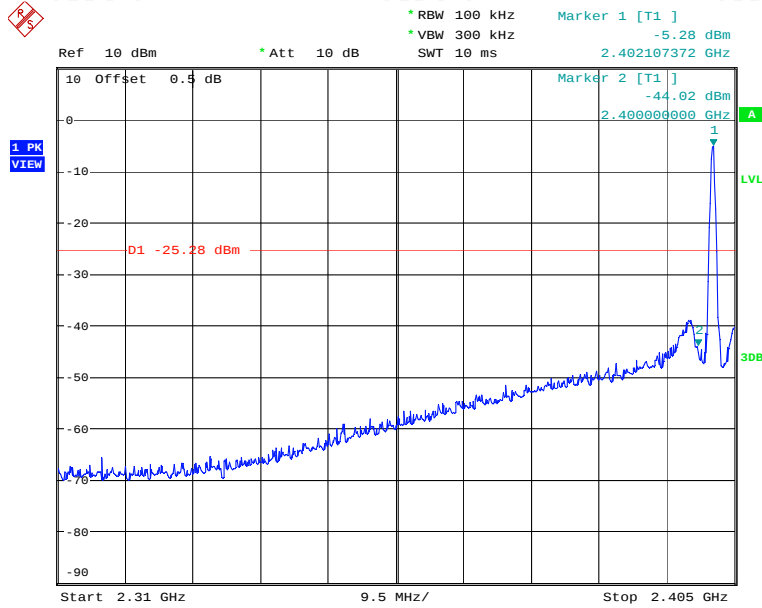


EUT operation mode: Keep transmitting in high channel

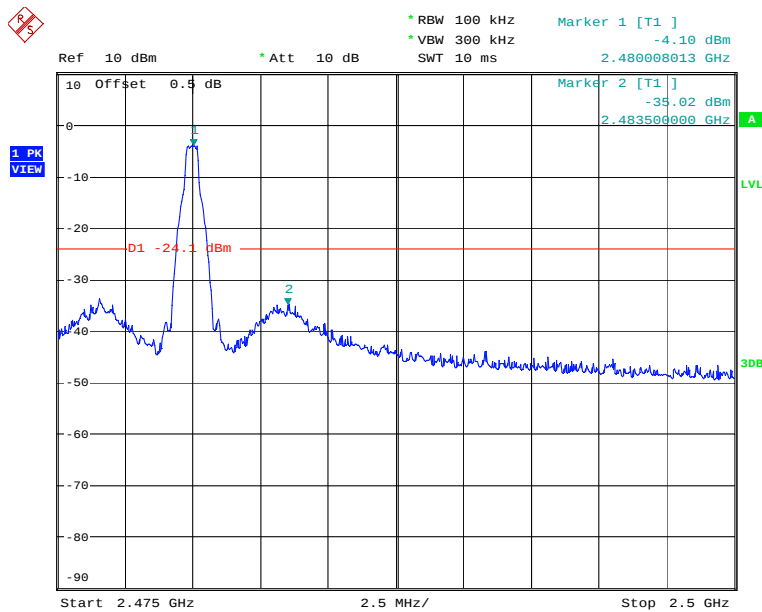

EUT operation mode: Keep hopping

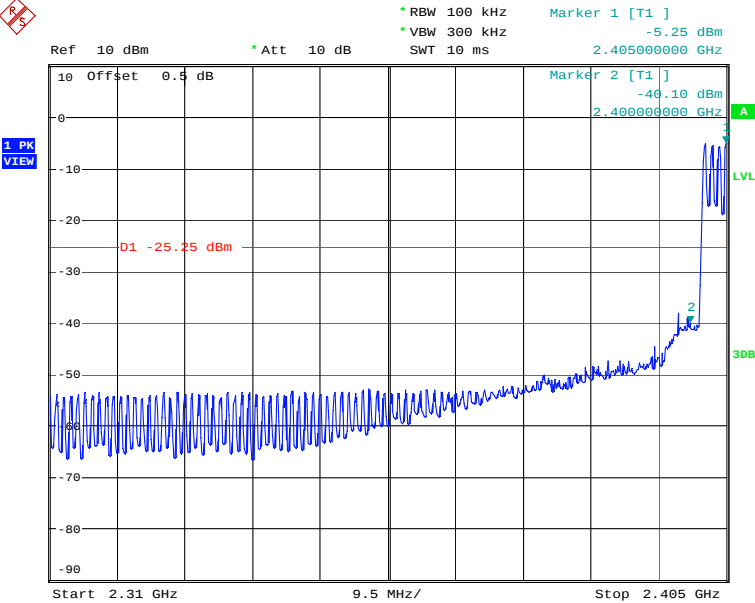


EUT operation mode: Keep hopping

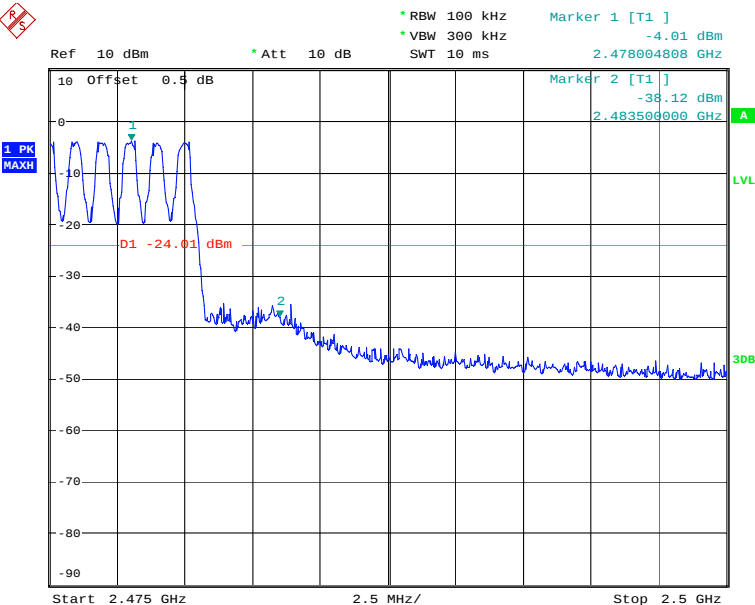


Modulation: Pi/4 DQPSK


EUT operation mode: Keep transmitting in low channel

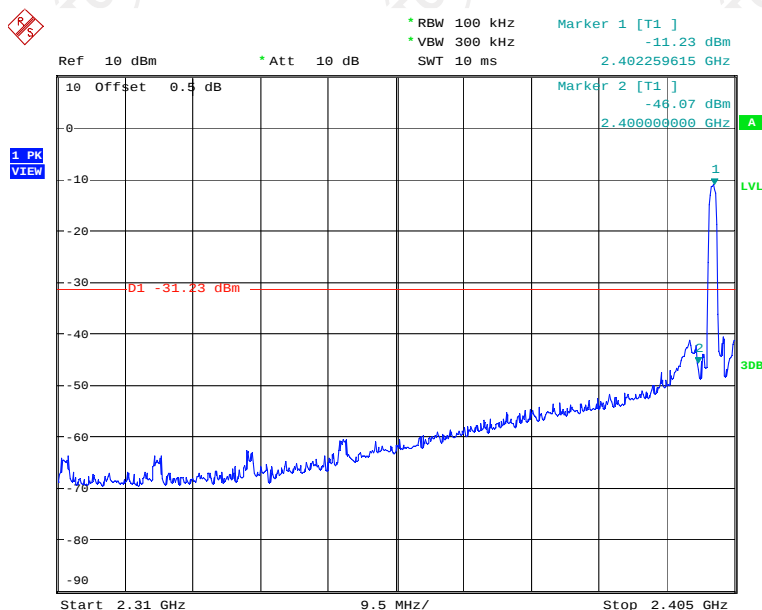


EUT operation mode: Keep transmitting in high channel

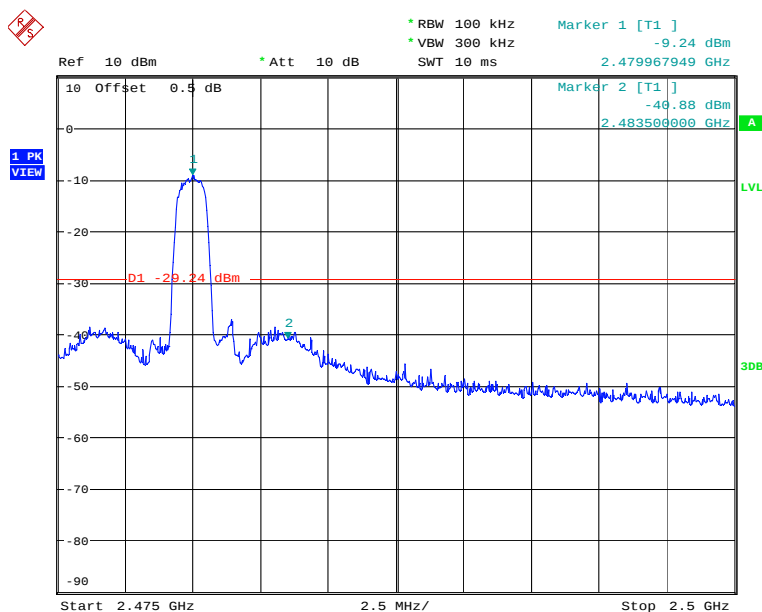

EUT operation mode: Keep hopping

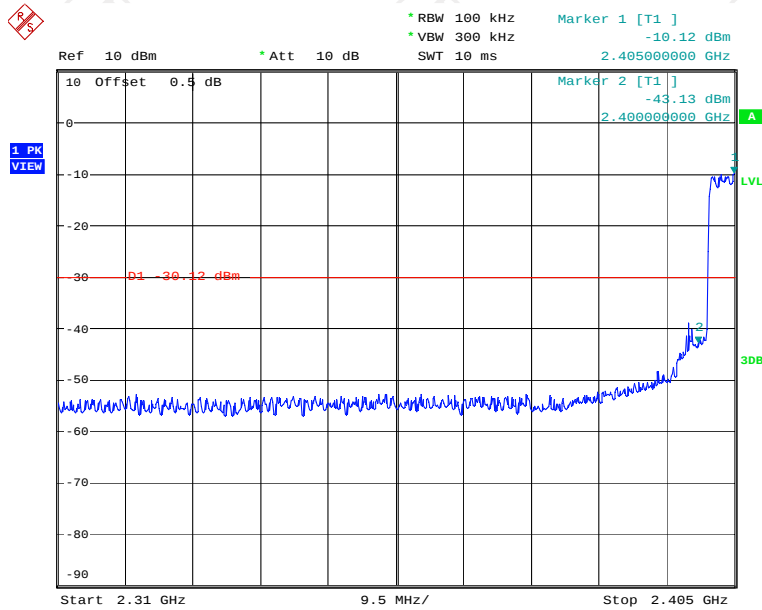

EUT operation mode: Keep hopping

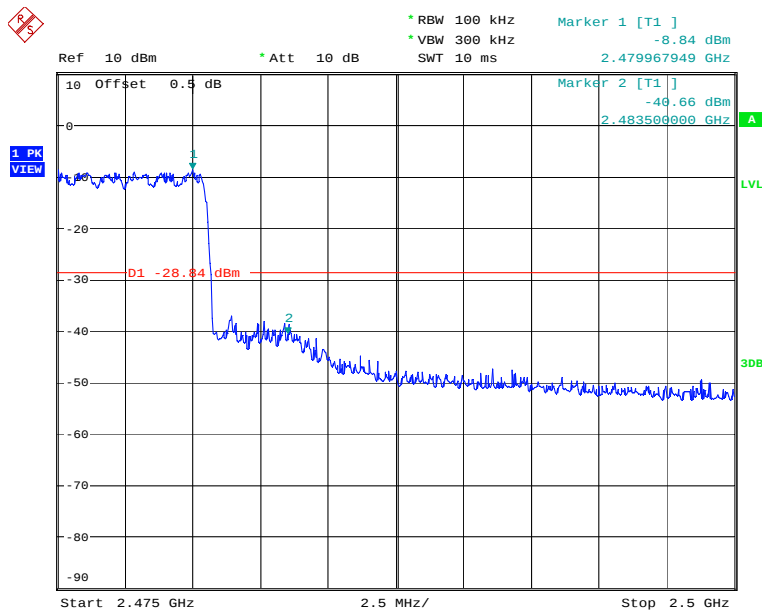


13.0 Spurious Emission Test

13.1 Radiated emissions


13.1.1 Test Method and test Procedure:

- 1) The EUT was tested according to ANSI C63.10 –2009 and ANSI C63.4-2003.
- 2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2009 and ANSI C63.4-2003.
- 3) The frequency spectrum from 9 kHz to 25 GHz was investigated. All readings from 9 kHz to 30 MHz are quasi-peak values with a resolution bandwidth of 9 kHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- 4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- 5) The antenna polarization: Vertical polarization and Horizontal polarization.


13.1.2 Block diagram of Test setup

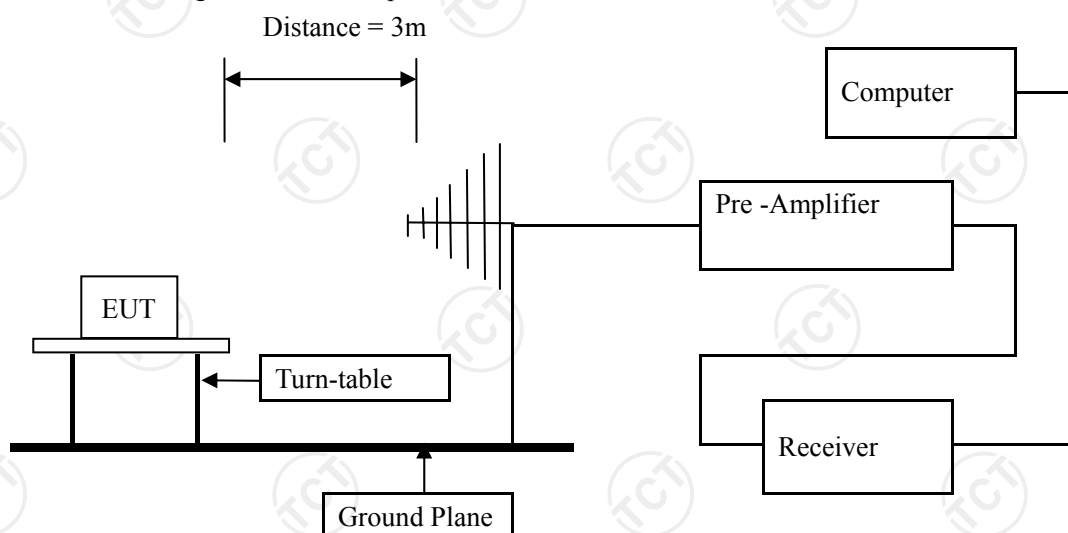

Block diagram of Test setup for frequency below 30MHz

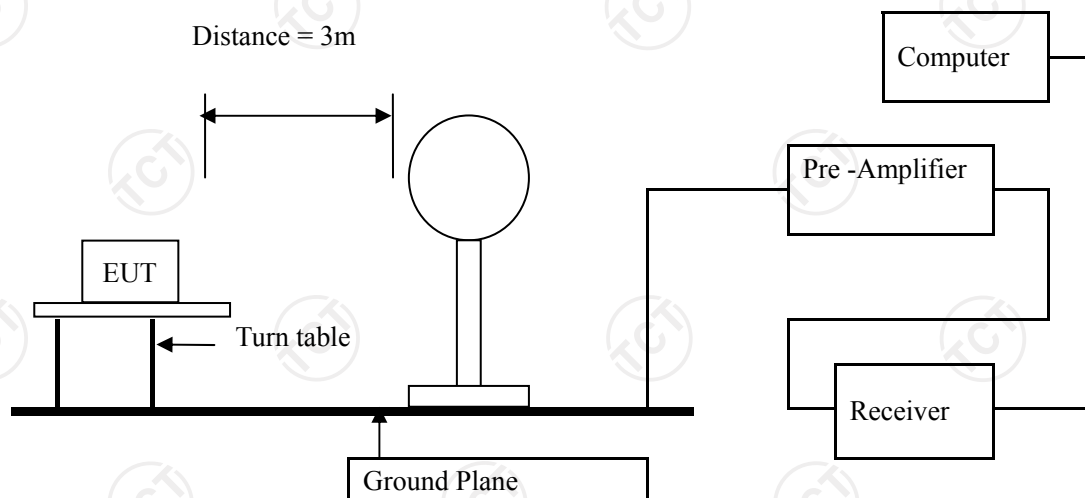

Block diagram of Test setup for frequency above 1GHz

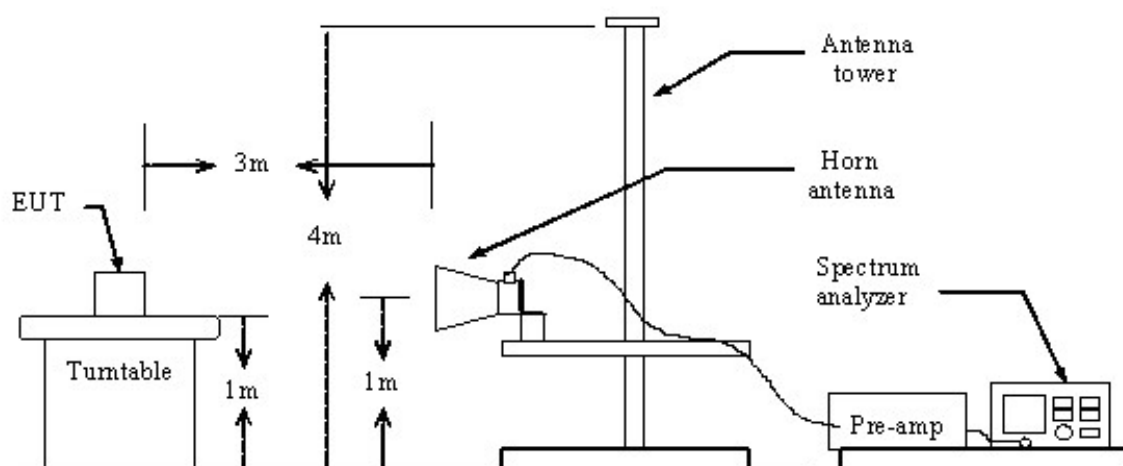

13.1.3 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2009 and ANSI C63.4-2003.

13.1.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	$20\log 2400/F$ (kHz) + 80
0.490-1.705	3	$20\log 24000/F$ (kHz) + 40
1.705-30	3	$20\log 30$ + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:
- 1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
 - 2) In the Above Table, the tighter limit applies at the band edges.
 - 3) Distance refers to the distance in meters between the measuring instrument antenna and the EUT
 - 4) This is a handheld device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
 - 5) All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz. As to 1G-25G, the final emission level got using PK and AV detector.
 - 6) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula $Ld1 = Ld2 * (d2/d1)$

13.1.5 Photo documentation of the test set-up

Please refer to the Document Setup photo

13.1.6 Test Equipment:

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESVD	100008	Sep. 17, 2014	Sep.16 , 2015
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	Sep. 17, 2014	Sep.16 , 2015
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 17, 2014	Sep.16 , 2015
Pre-amplifier	HP	8447D	2727A05017	Sep. 17, 2014	Sep.16 , 2015
Loop antenna	ZHINAN	ZN30900A	12024	Dec. 15, 2014	Dec.14 , 2015
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 17, 2014	Sep.16 , 2015
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 17, 2014	Sep.16 , 2015

13.1.7 Test specification:

Environmental conditions: Temperature 26° C Humidity: 55% Atmospheric pressure: 103kPa

13.1.8 Test result

Pass

A Radiated Emission (9 kHz---30 MHz)

Note: 1) Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor
 2) The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Result: Pass

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--


B General Radiated Emissions Data

Radiated Emission In Horizontal (30MHz----1000MHz)

Please refer to following diagram for individual

Test mode: Tx mode

High channel: 2480 MHz

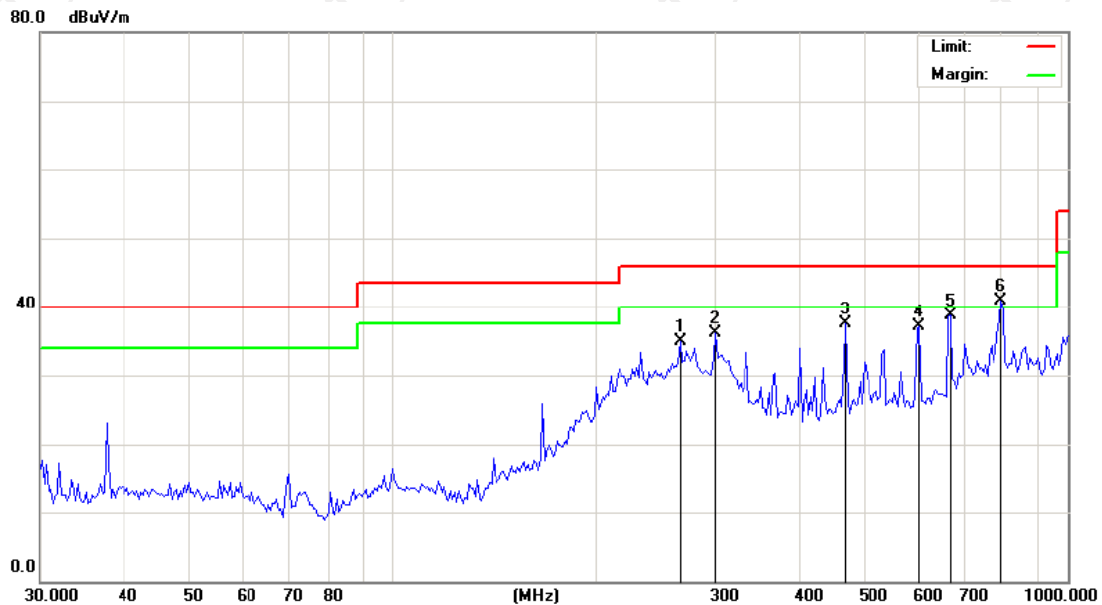


Site: Polarization: **Horizontal** Temperature: 23
Limit: FCC Part 15B Class B RE_3 m Power: Humidity: 52 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		266.8395	44.30	-9.38	34.92	46.00	-11.08	peak		0
2		300.6988	44.39	-8.25	36.14	46.00	-9.86	peak		0
3		468.1650	41.48	-3.99	37.49	46.00	-8.51	peak		0
4		602.9287	39.05	-1.87	37.18	46.00	-8.82	peak		0
5		669.9523	39.20	-0.49	38.71	46.00	-7.29	peak		0
6	*	798.6205	39.48	1.44	40.92	46.00	-5.08	peak		0

Radiated Emission In Vertical (30MHz----1000MHz)

Please refer to following diagram for individual
High channel: 2480 MHz

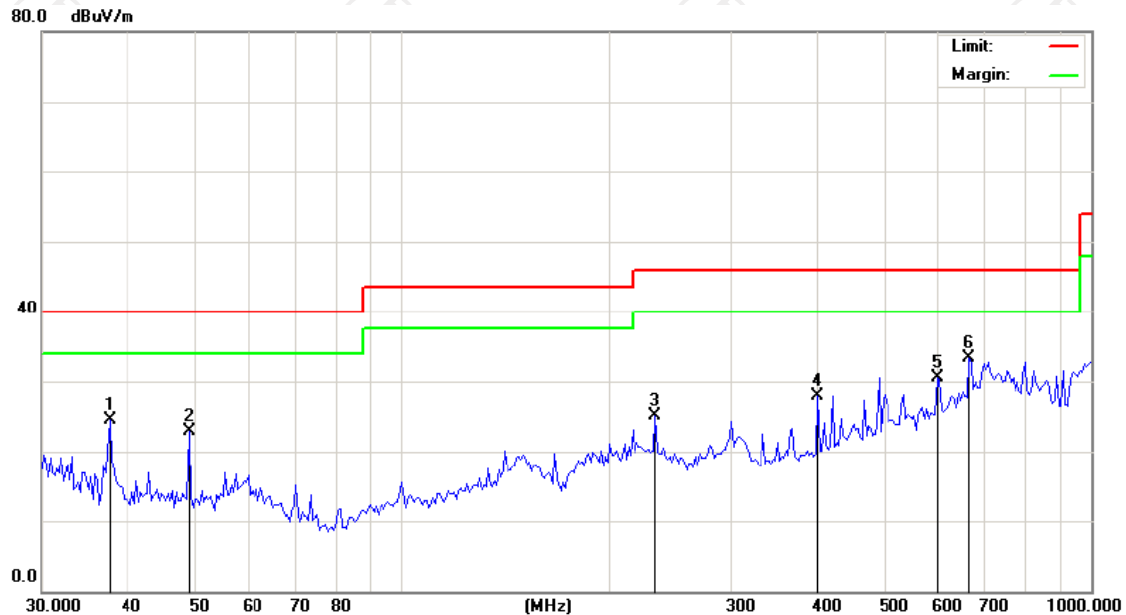

Site: Polarization: **Vertical** Temperature: 23
Limit: FCC Part 15B Class B RE_3 m Power: Humidity: 52 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		37.5648	37.27	-12.78	24.49	40.00	-15.51	peak	0	
2		49.0627	34.91	-12.08	22.83	40.00	-17.17	peak	0	
3		233.4881	35.64	-10.53	25.11	46.00	-20.89	peak	0	
4		401.1050	34.06	-6.16	27.90	46.00	-18.10	peak	0	
5		598.7067	32.53	-1.95	30.58	46.00	-15.42	peak	0	
6	*	665.2610	33.94	-0.59	33.35	46.00	-12.65	peak	0	

Note: Measurements were conducted in all three channels (high, middle, low), and the worst case (high channel) was submitted only.

C Fundamental & Harmonics Radiated Emission Data (1000MHz-25000MHz)

Pre-tests were made in continuous transmitting mode at lowest (2402 MHz), middle (2441 MHz) and highest (2480MHz) channel with GFSK, Pi/4 DQPSK mode, which indicates that the worst case is GFSK mode, so it is reported GFSK mode only.

Test mode: Tx mode

Low channel: 2402 MHz									
Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2388.50	H	71.13	---	-4.20	66.93	---	74.00	54.00	-7.07
2388.50	H	---	52.25	-4.20	---	48.05	74.00	54.00	-5.95
4804.00	H	51.00	---	-3.94	47.06	---	74	54	-6.94
7206.00	H	47.07	---	0.52	47.59	---	74	54	-6.41
---	H	---	---	---	---	---	---	---	---
---	H	---	---	---	---	---	---	---	---
2388.50	V	70.98	---	-4.20	66.78	---	74.00	54.00	-7.22
2388.50	V	---	51.1	-4.20	---	46.90	74.00	54.00	-7.10
4804.00	V	51.21	---	-3.94	47.27	---	74	54	-6.73
7206.00	V	46.50	---	0.59	47.09	---	74	54	-6.91
---	V	---	---	---	---	---	---	---	---
---	V	---	---	---	---	---	---	---	---

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector).

3) Average test would be performed if the peak readings were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

Middle channel: 2441 MHz

Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4882.00	H	51.30	---	-3.98	47.32	---	74	54	-6.68
7323.00	H	46.59	---	0.56	47.15	---	74	54	-6.85
---	H	---	---	---	---	---	---	---	---
---	H	---	---	---	---	---	---	---	---
4882.00	V	51.11	---	-3.98	47.13	---	74	54	-6.87
7323.00	V	46.62	---	0.57	47.19	---	74	54	-6.81
---	V	---	---	---	---	---	---	---	---
---	V	---	---	---	---	---	---	---	---

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector).

3) Average test would be performed if the peak result were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

High channel: 2480 MHz

Freq. (MHz)	Ant. Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor (dB)	Emission Level		Peak limit (dBuV/m)	AV limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
2484.60	H	69.53	---	-2.38	67.15	---	74.00	54.00	-6.85
2484.60	H	---	50.19	-2.38	---	47.81	74.00	54.00	-6.19
4960.00	H	51.33	---	-3.98	47.35	---	74	54	-6.65
7440.00	H	47.66	---	0.52	48.18	---	74	54	-5.82
---	H	---	---	---	---	---	---	---	---
---	H	---	---	---	---	---	---	---	---
2484.60	V	70.12	---	-2.38	67.74	---	74.00	54.00	-6.26
2484.60	V	---	50.48	-2.38	---	48.10	74.00	54.00	-5.90
4960.00	V	52.27	---	-3.98	48.29	---	74	54	-5.71
7440.00	V	48.19	---	0.57	48.76	---	74	54	-5.24
---	V	---	---	---	---	---	---	---	---
---	V	---	---	---	---	---	---	---	---

Notes: 1) Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

2) Radiated emissions measured in frequencies above 1GHz were made (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector).

3) Average test would be performed if the peak result were greater than the average limit.

4) Data of measurement shown “---“in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

5) Emission Level=Peak (AV) Reading + Correction Factor;

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

6) Margin (dB) = Emission Level (Peak) (dBuV/m)-Average limit (dBuV/m)

14.0 Antenna Requirement


14.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Specification

According to the manufacturer declared, the EUT has a PCB antenna; the directional gain of antenna is 0 dBi, and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

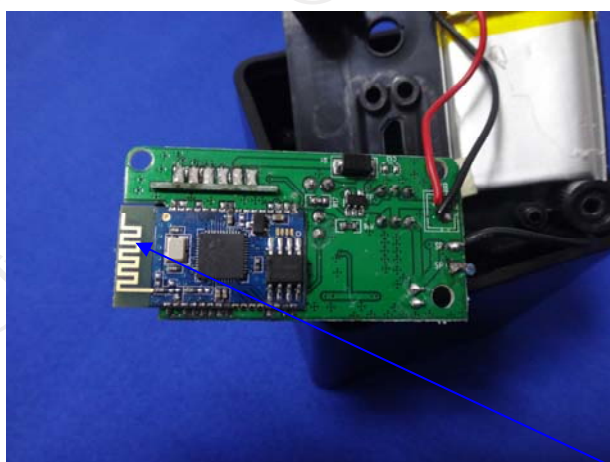

ANTENNA

****END OF REPORT****