

FCC AND ISED CERTIFICATION TEST REPORT

FOR

Applicant	:	ION Audio, LLC
Address	:	200 Scenic View Drive, Cumberland, RI 02864 U.S.A.
Equipment under Test	:	INDOOR/OUTDOOR 360-degrees Sound Speaker With Lighting and Multi-Sync
Model No.	:	BRIGHT MAX PLUS
Project Code	:	iSP138B
Trade Mark	:	
FCC ID	:	2AB3E-ISP138B
IC	:	10541A-ISP138B
Manufacturer	:	ION Audio, LLC
Address	:	200 Scenic View Drive, Cumberland, RI 02864 U.S.A.

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	9
2.7.	Test laboratory.....	9
2.8.	Measurement uncertainty.....	10
3.	Equipment Used During Test.....	11
4.	Maximum Peak Output Power	13
4.1.	Block diagram of test setup.....	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	13
4.5.	Original test data	14
5.	20 dB Bandwidth and 99% Bandwidth	18
5.1.	Block diagram of test setup.....	18
5.2.	Limits	18
5.3.	Test procedure	18
5.4.	Test result.....	18
5.5.	Original test data	19
6.	Carrier Frequency Separation.....	26
6.1.	Block diagram of test setup.....	26
6.2.	Limits	26
6.3.	Test procedure	26
6.4.	Test result.....	26
6.5.	Original test data	27
7.	Number of Hopping Channel	29
7.1.	Block diagram of test setup.....	29
7.2.	Limits	29
7.3.	Test procedure	29
7.4.	Test result.....	29
7.5.	Original test data	29

8.	Dwell Time	31
8.1.	Block diagram of test setup.....	31
8.2.	Limits	31
8.3.	Test procedure	31
8.4.	Test result.....	31
8.5.	Original test data	32
9.	Band Edge Compliance (Conducted Method)	39
9.1.	Block diagram of test setup.....	39
9.2.	Limit.....	39
9.3.	Test result.....	39
9.4.	Original test data	39
10.	Radiated Emission	44
10.1.	Block diagram of test setup.....	44
10.2.	Limit.....	45
10.3.	Test procedure	47
10.4.	Test result.....	48
11.	RF Conducted Spurious Emissions	53
11.1.	Block diagram of test setup.....	53
11.2.	Limits	53
11.3.	Test procedure	53
11.4.	Test result.....	54
11.5.	Original test data	54
12.	Band Edge Compliance (Radiated Method)	64
12.1.	Block diagram of test setup.....	64
12.2.	Limit.....	64
12.3.	Test procedure	64
12.4.	Test result.....	64
13.	Power Line Conducted Emission	77
13.1.	Block diagram of test setup.....	77
13.2.	Power line conducted emission limits	77
13.3.	Test procedure	77
13.4.	Test result.....	78
14.	Antenna Requirements	81
14.1.	Limit.....	81
14.2.	Result	81

Test Report Declare

Applicant	:	ION Audio, LLC
Address	:	200 Scenic View Drive, Cumberland, RI 02864 U.S.A.
Equipment under Test	:	INDOOR/OUTDOOR 360-degrees Sound Speaker With Lighting and Multi-Sync
Model No.	:	BRIGHT MAX PLUS
Trade Mark	:	
Manufacturer	:	ION Audio, LLC
Address	:	200 Scenic View Drive, Cumberland, RI 02864 U.S.A.

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021).

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No.:	DDT-R21062509-2E01		
Date of Receipt:	Jul. 01, 2021	Date of Test:	Jul. 01, 2021 ~ Sep. 29, 2021

Prepared By:

Sam Li

Sam Li/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Sep. 29, 2021	

1. Summary of Test Results

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
20 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013 RSS-Gen Issue 5	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: INDOOR/OUTDOOR 360-degrees Sound Speaker With Lighting and Multi-Sync
Model Number	: BRIGHT MAX PLUS
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V from external AC Adapter : DC 7.4V Polymer Li-ion built-in battery
Radio Specification	: Bluetooth V5.0
Operation Frequency	: 2402 MHz - 2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Data rate	: 1 Mbps, 2 Mbps, 3 Mbps
Antenna Gain	: 4.75 dBi
Sample Type	: Series production
Serial Number	: N/A

Note: EUT is the abbreviation of equipment under test.

Channel Information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
USB cable	N/A	N/A	N/A	Length: 1.0m, unshielded

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
AC Adapter	HUAWEI	HW-050450C00	N/A	Input: 100-240V~50/60Hz, Output: 5V/2A or 4.5V/5A or 5V/4.5A

2.4. Block diagram of EUT configuration for test

EUT

Test software: BT FCC Tool

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	0	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	0	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	0	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	0	CH0	2402
	0	CH39	2441
	0	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	0	CH0	2402
	0	CH39	2441
	0	CH78	2480
8DPSK hopping off Tx mode	0	CH0	2402
	0	CH39	2441
	0	CH78	2480

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted Spurious Emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission Test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.32 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☐ RF Connected Test (Tonscend RF Measurement System 1#)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 02, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Sep. 02, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 18, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	158060010	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
☒ RF Connected Test (Tonscend RF Measurement System 2#)					
Signal analyzer	R&S	FSQ26	101272	Jun. 01, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
☒ Radiation 3#chamber					
EMI Test Receiver	R&S	ESU	100472	Jun. 01, 2021	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Aug. 07, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 08, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Sep. 02, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Mar. 15, 2021	1 Year
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
☒ Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101109	Sep. 02, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 02, 2021	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 02, 2021	1 Year
LISN 3	SCHWARZBECK	NSLK 8163	00017	Sep. 02, 2021	1 Year

Test software	Audix	E3	V 6.11111b	N/A	N/A
☐ Power Line Conducted Emissions Test 2#					
Test Receiver	R&S	ESCI	101028	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101170	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	KH43101	431011801568-1 2#	Jun. 01, 2021	1 Year
CE Cable 2	HUBSER	RG214-5	N/A	Jun. 01, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. Maximum Peak Output Power

4.1. Block diagram of test setup

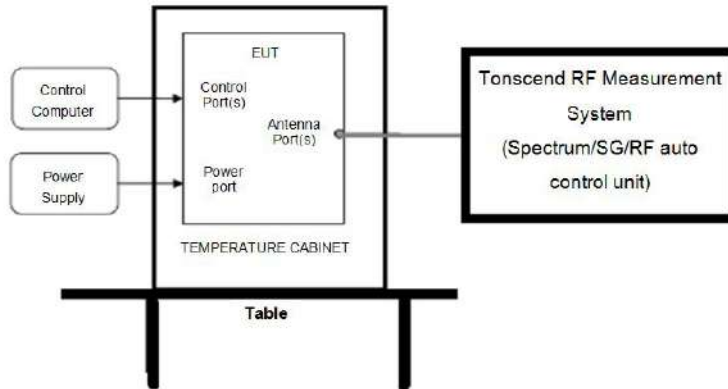

4.2. Limits

For frequency hopping systems operating in the 2400 - 2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725 - 5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400 - 2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4 W.

4.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
 - (2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW = 3 MHz (above 20 dB bandwidth of measured signal), VBW = 10 MHz
- Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

4.4. Test result


Mode	Antenna	Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	2.75	21	Pass
	ANT1	2441	0.57	21	Pass
	ANT1	2480	-0.43	21	Pass
$\pi/4$ -DQPSK	ANT1	2402	2.38	21	Pass
	ANT1	2441	1.00	21	Pass
	ANT1	2480	-0.42	21	Pass
8DPSK	ANT1	2402	2.69	21	Pass
	ANT1	2441	0.88	21	Pass
	ANT1	2480	-0.13	21	Pass

4.5. Original test data




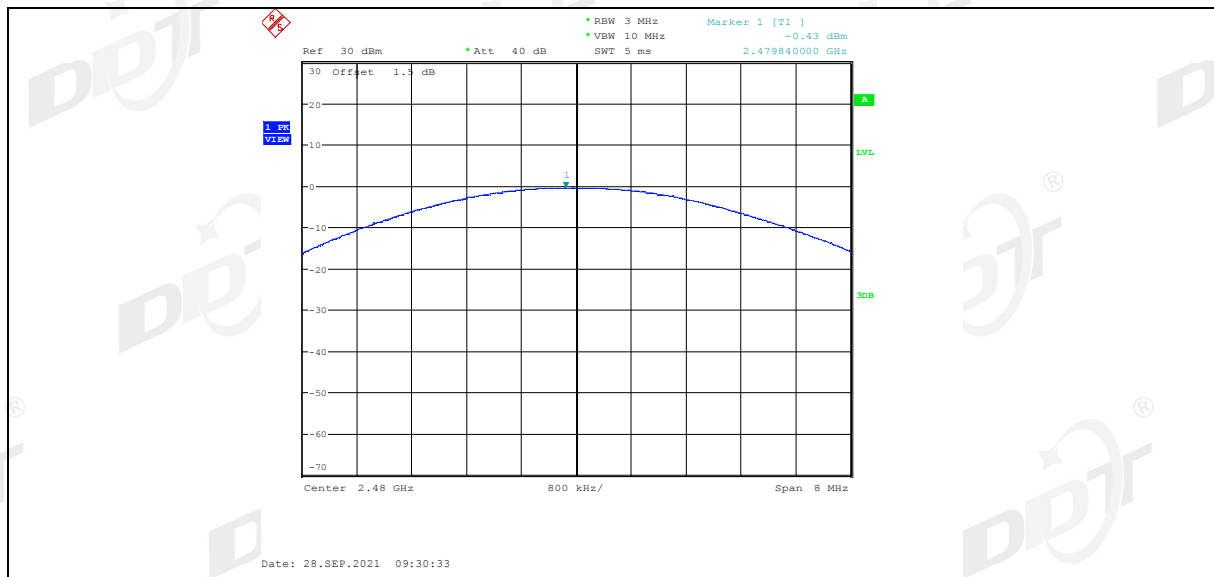


2DH5_Ant1_2402

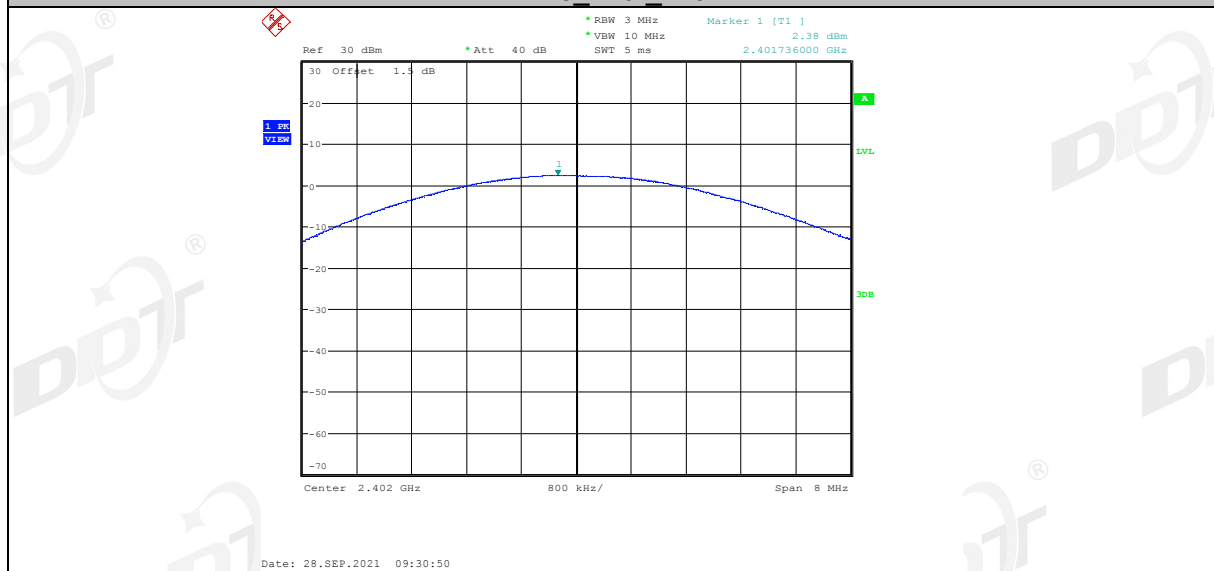


2DH5_Ant1_2441

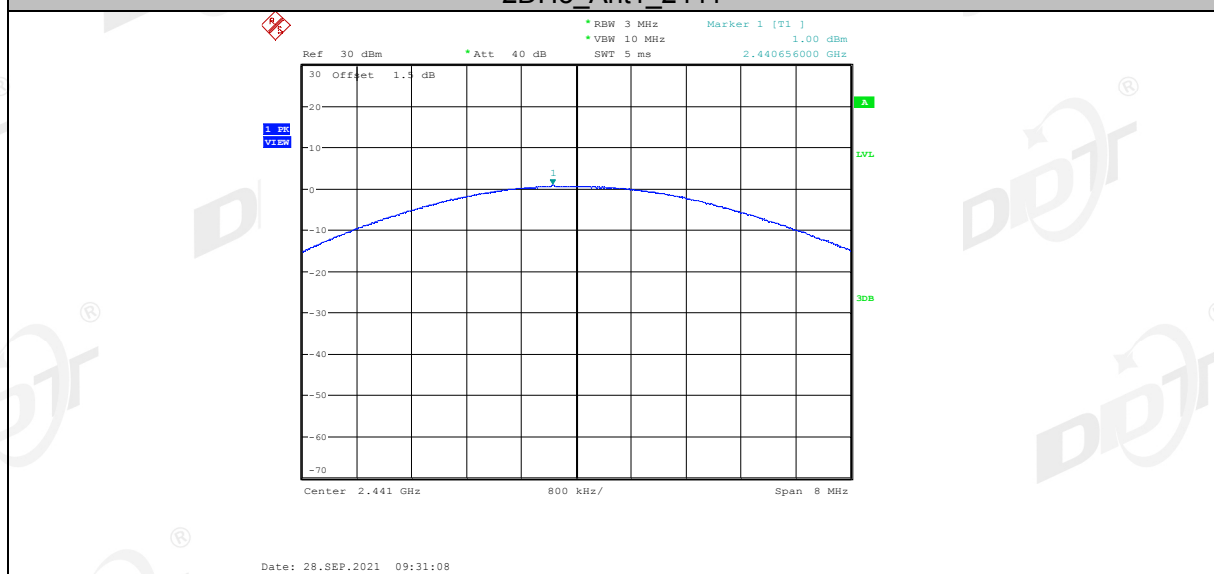


2DH5_Ant1_2480

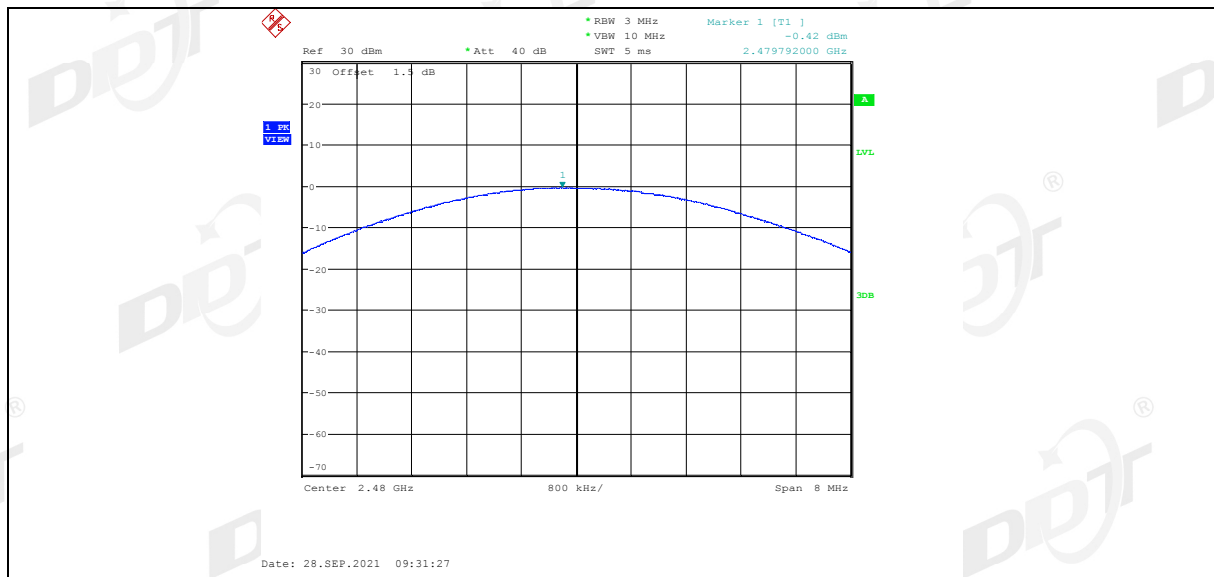


3DH5_Ant1_2402

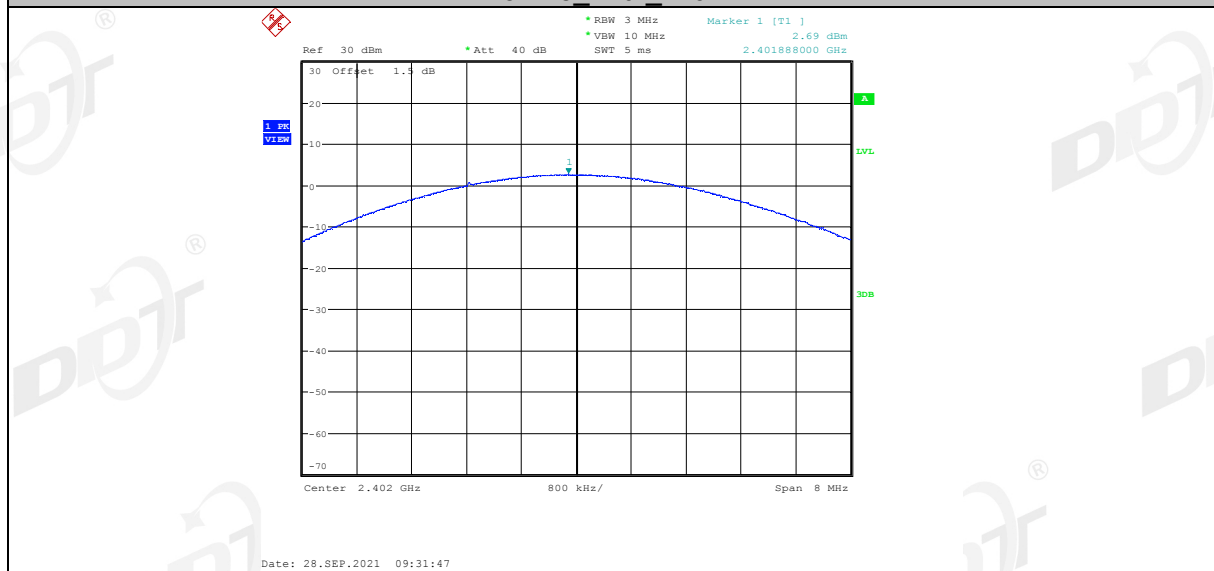

3DH5_Ant1_2441

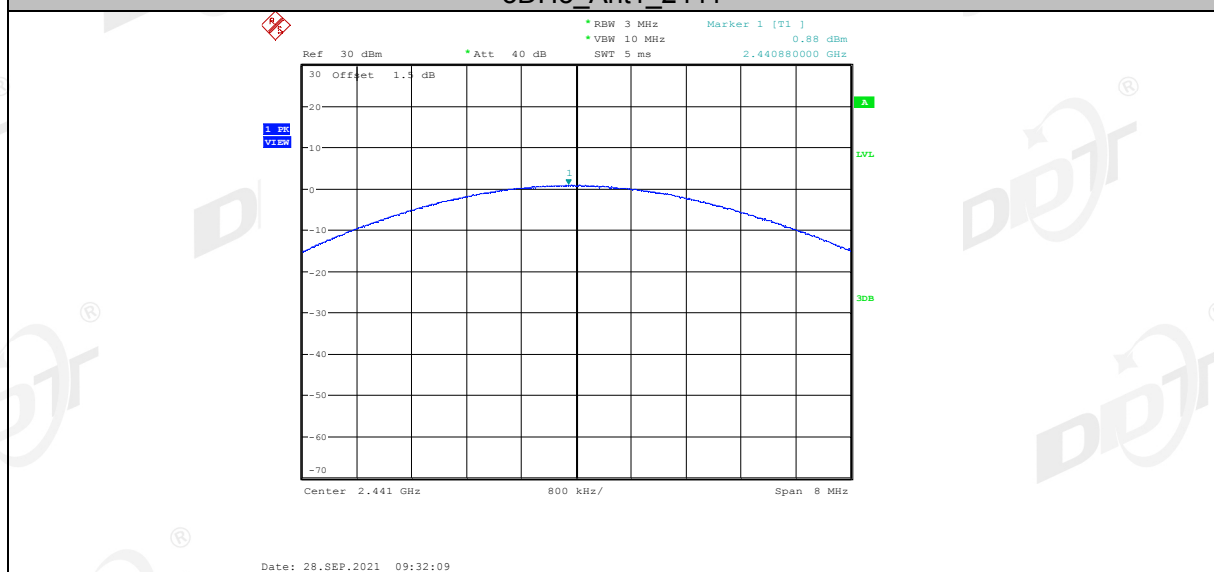

3DH5_Ant1_2480

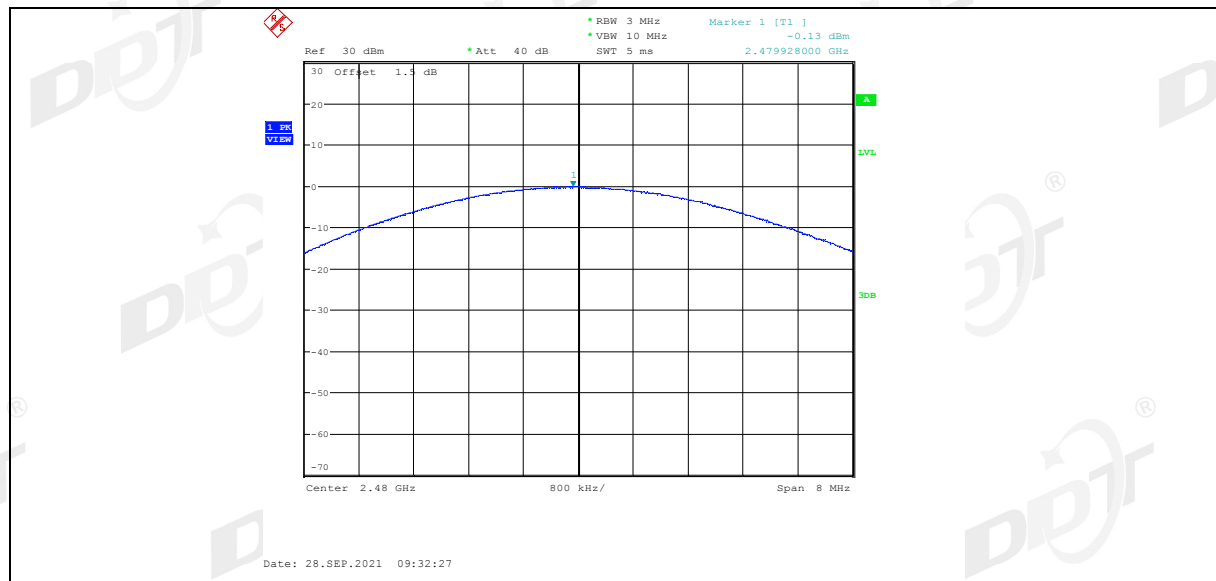

5. 20 dB Bandwidth and 99% Bandwidth

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.


5.4. Test result

Mode	Antenna	Freq. (MHz)	20 dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	ANT1	2402	0.939	0.858	Pass
	ANT1	2441	0.948	0.858	Pass
	ANT1	2480	0.975	0.864	Pass
$\pi/4$ -DQPSK	ANT1	2402	1.236	1.158	Pass
	ANT1	2441	1.236	1.158	Pass
	ANT1	2480	1.284	1.164	Pass
8DPSK	ANT1	2402	1.206	1.149	Pass
	ANT1	2441	1.245	1.158	Pass
	ANT1	2480	1.206	1.143	Pass


5.5. Original test data

20 dB bandwidth:

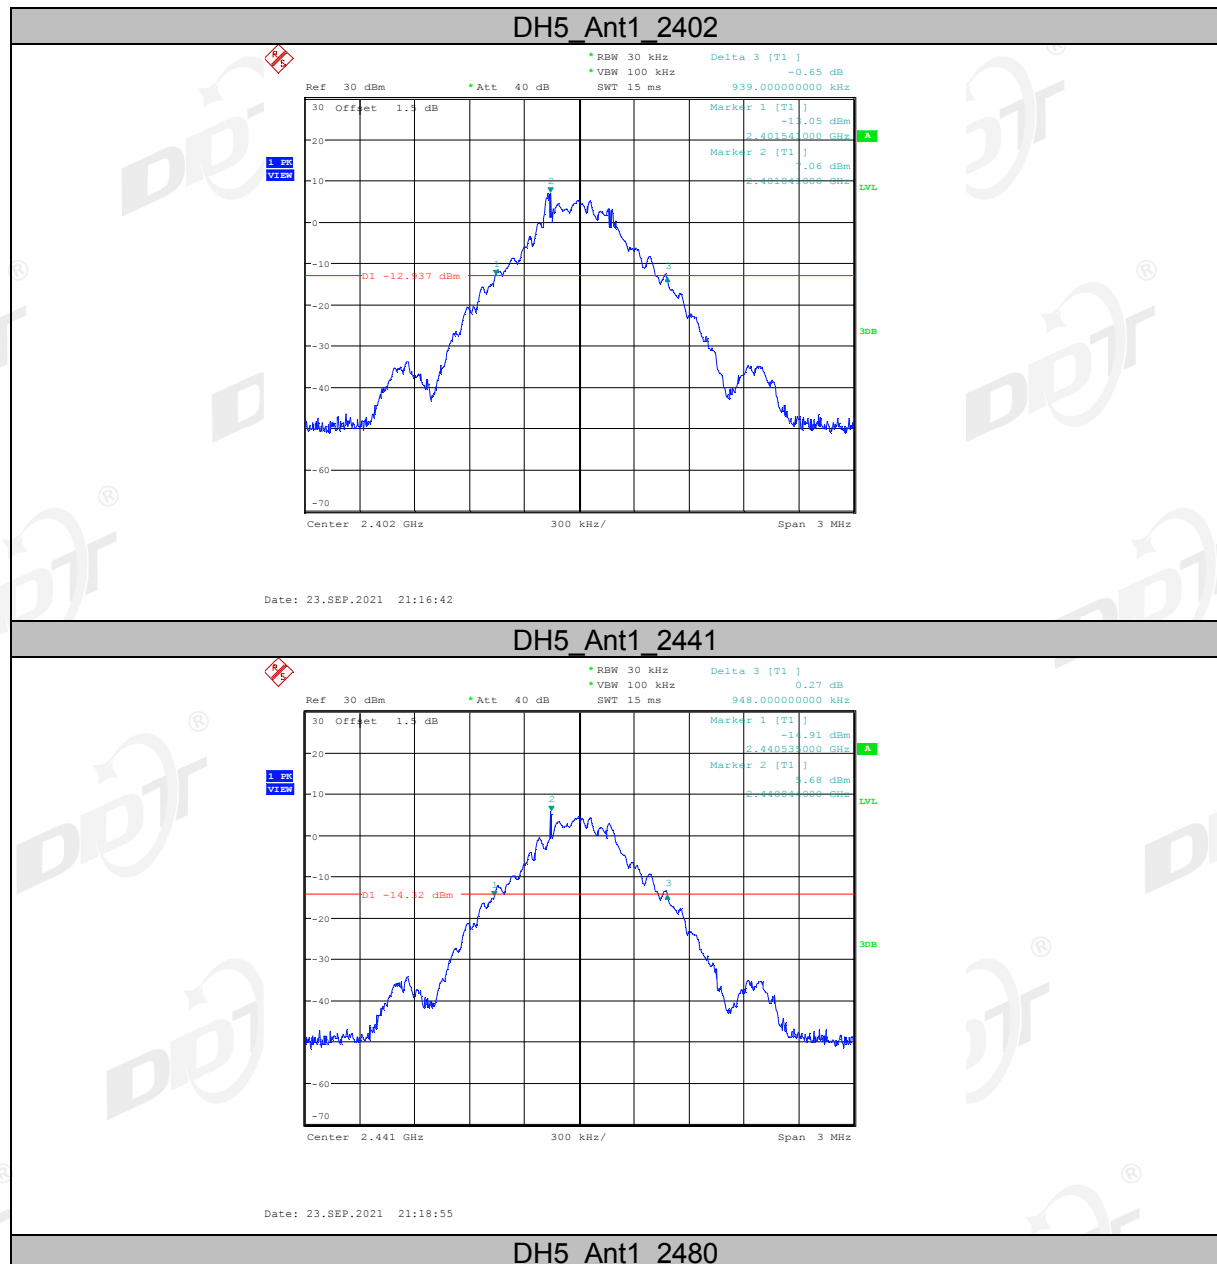


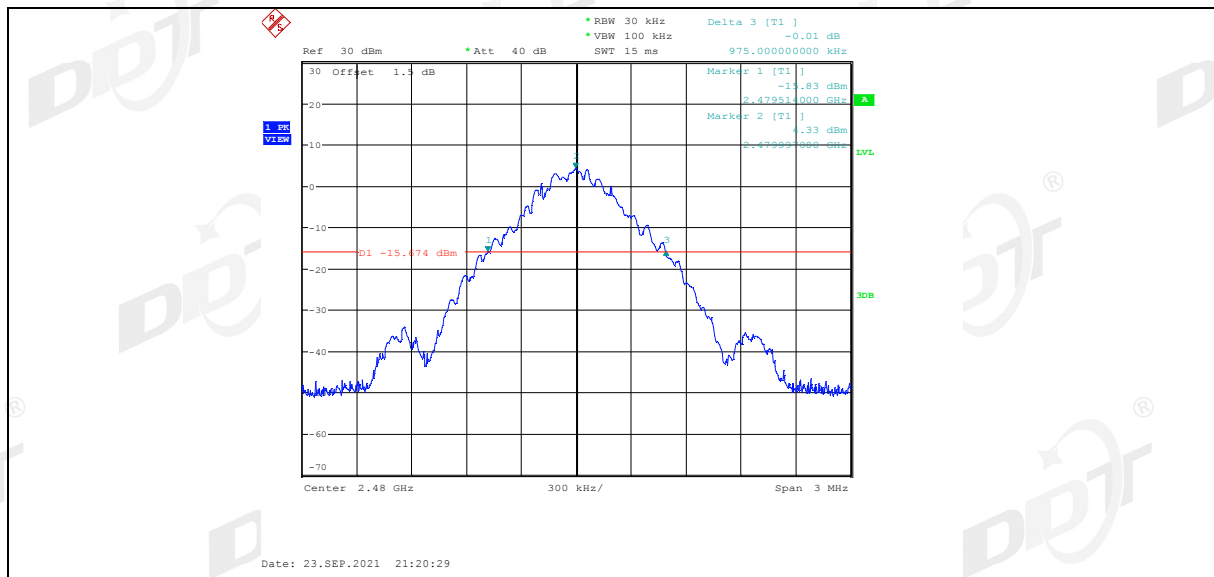


2DH5_Ant1_2402

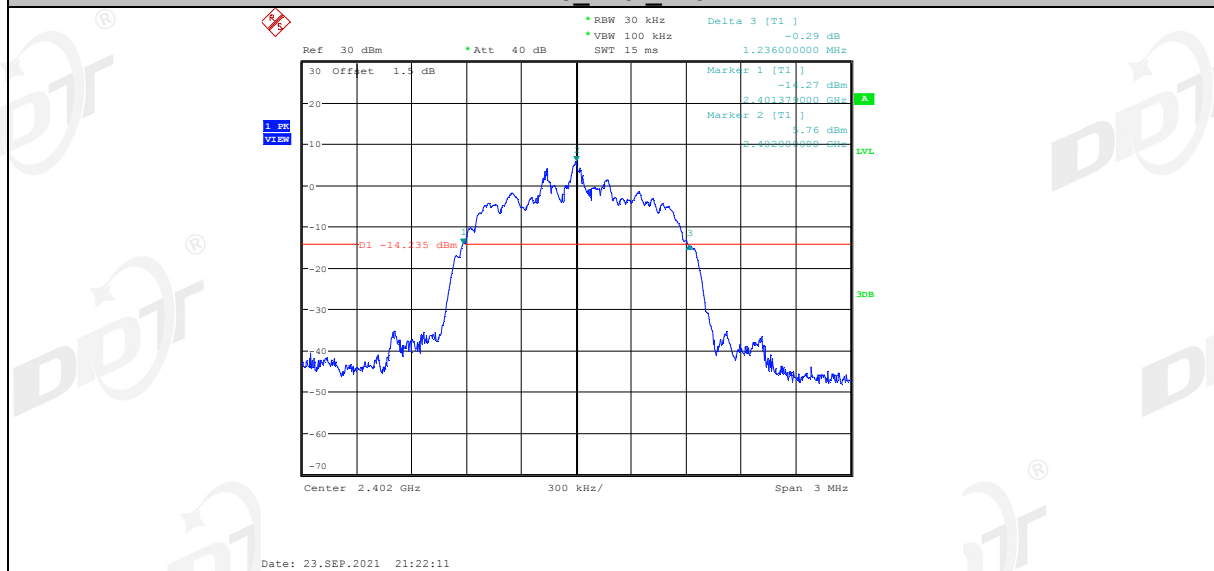


2DH5_Ant1_2441

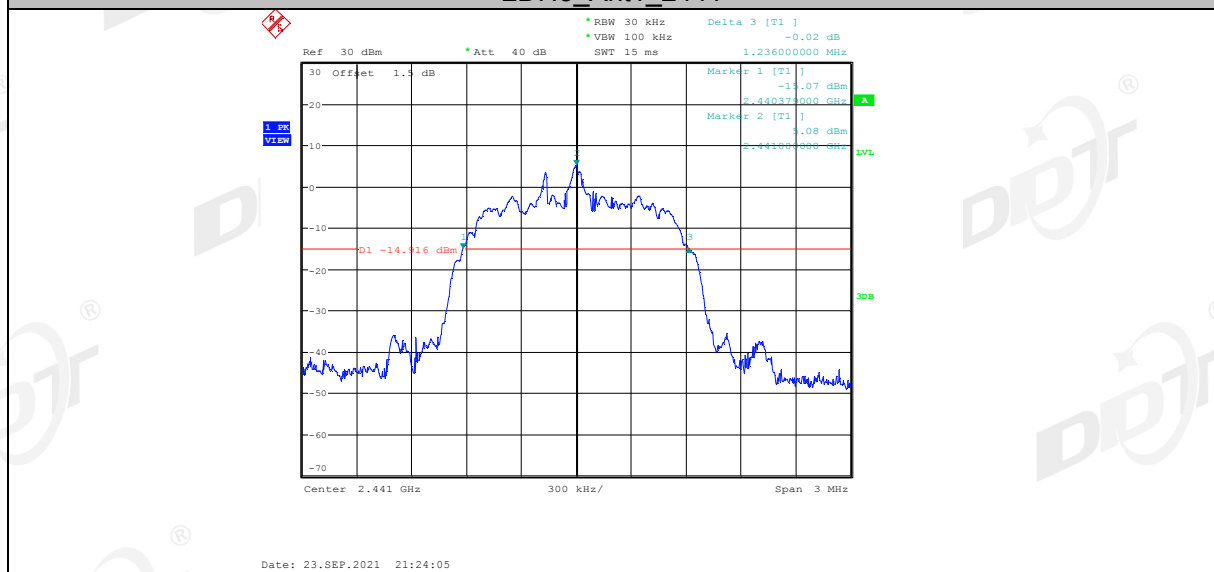


2DH5_Ant1_2480

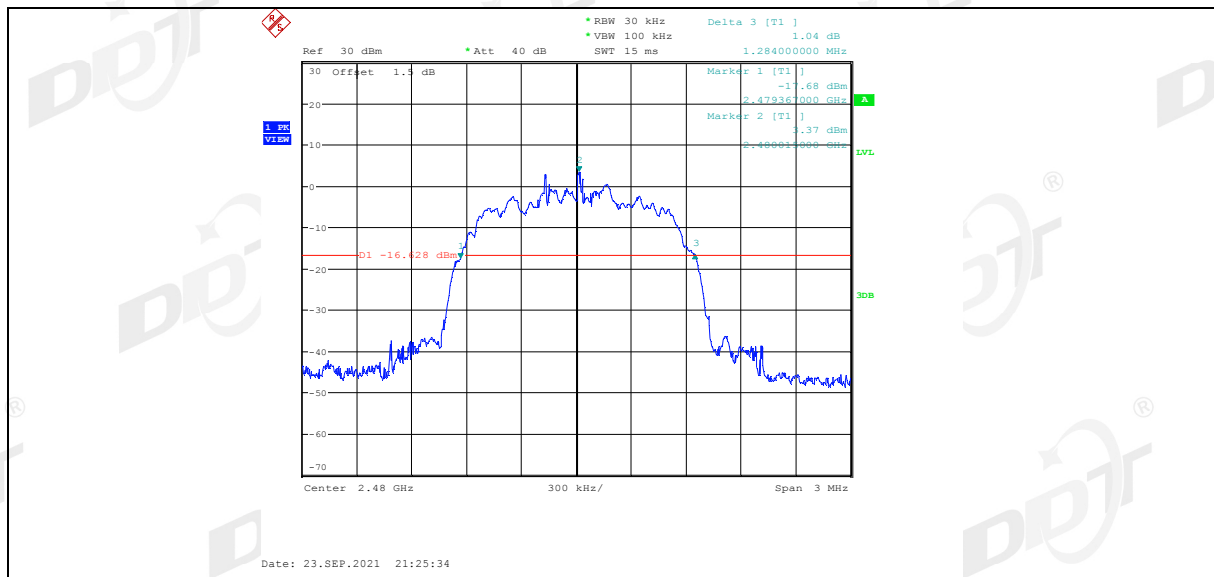


3DH5_Ant1_2402

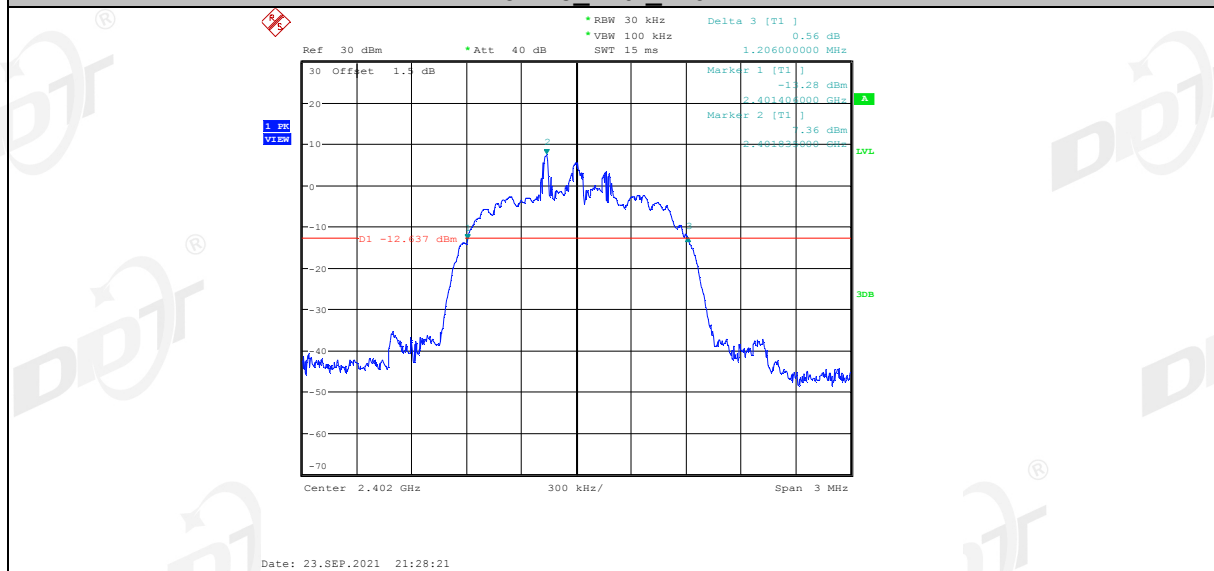


3DH5_Ant1_2441

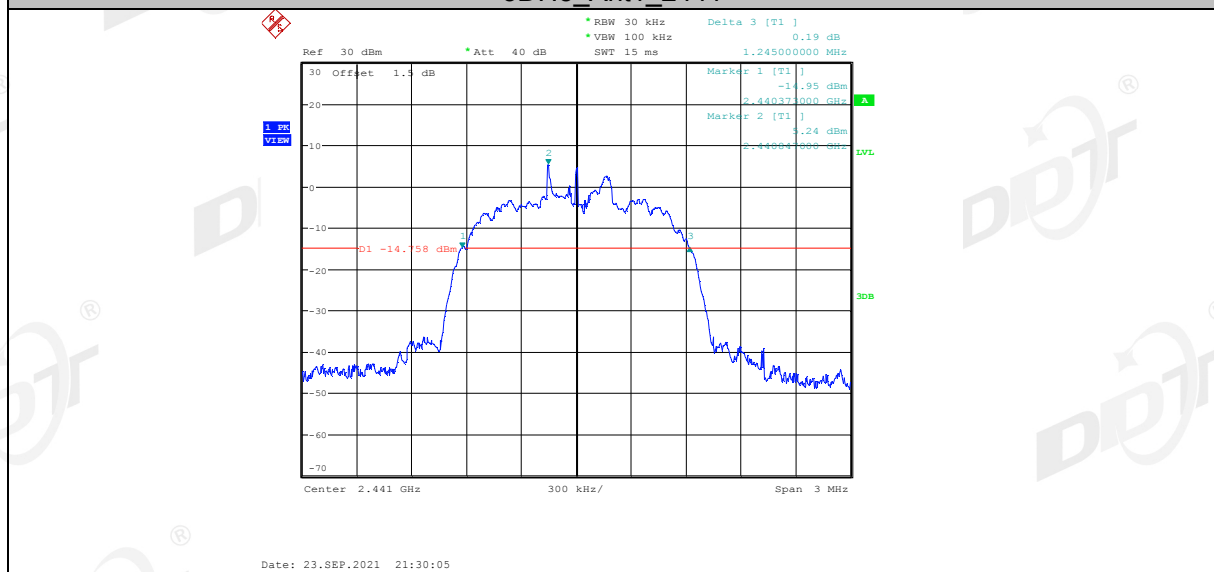


3DH5_Ant1_2480

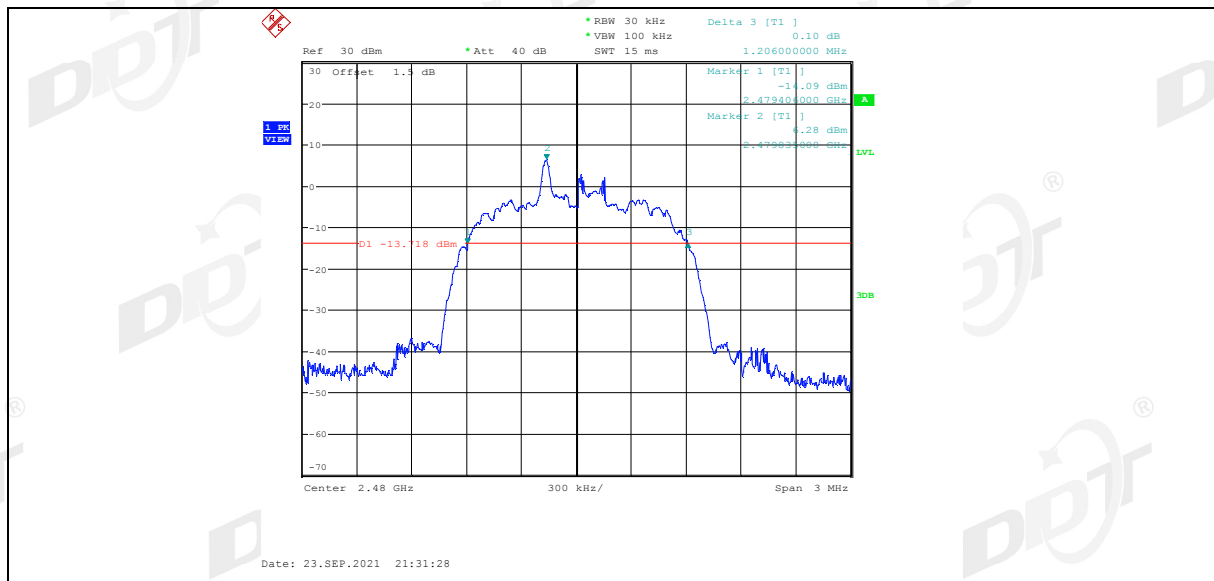


99% bandwidth:

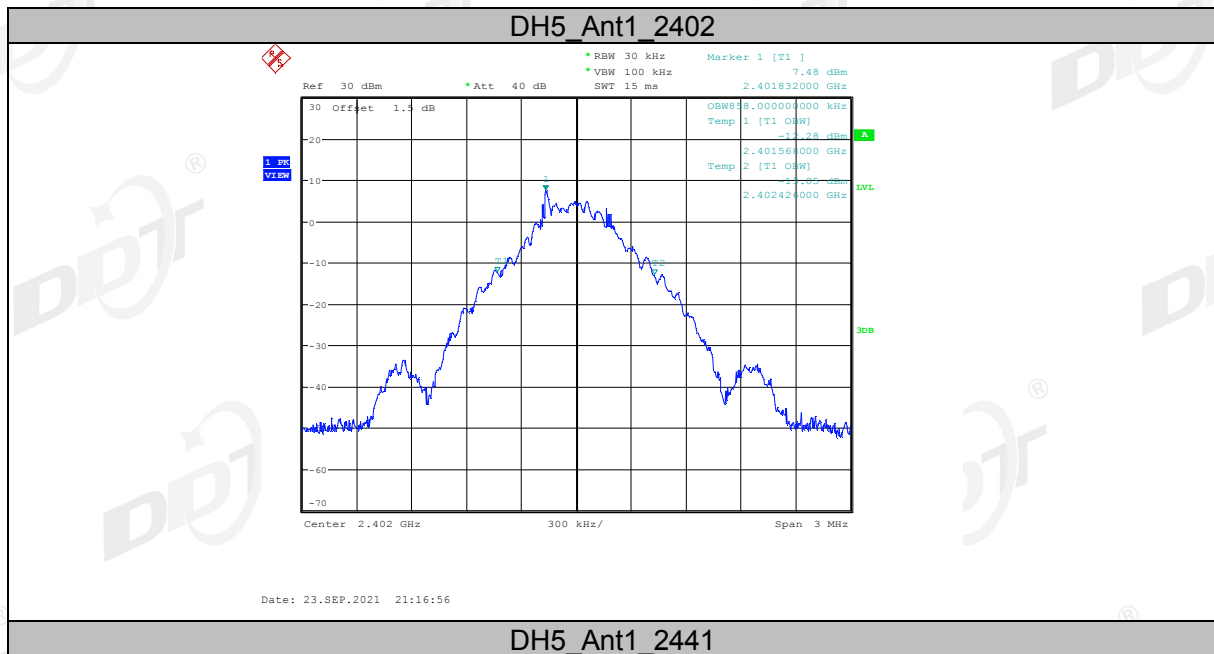


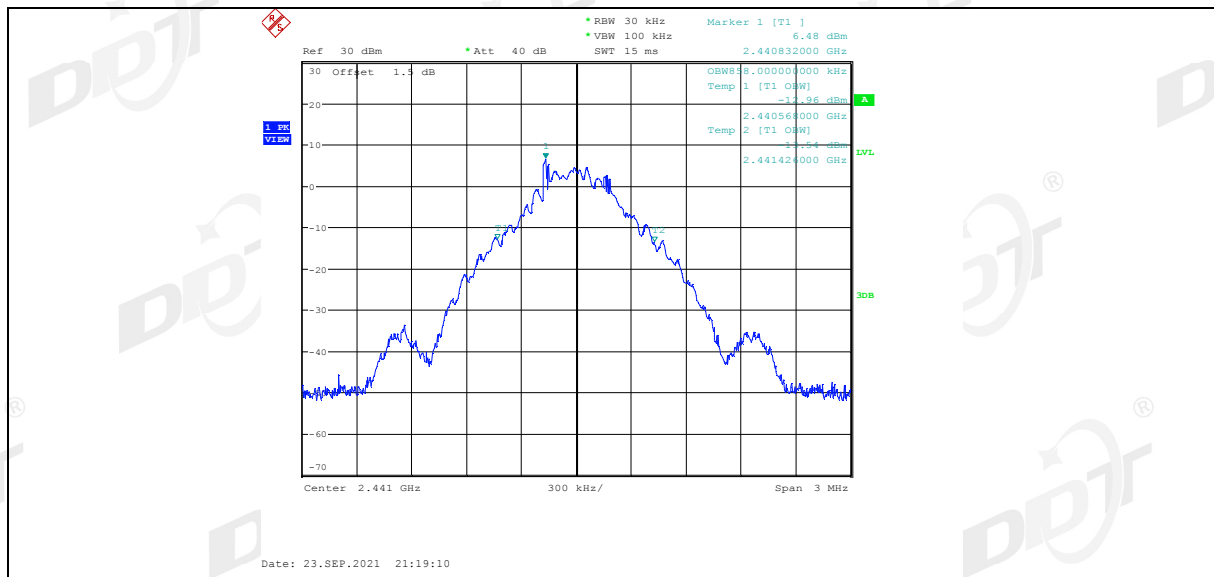


DH5_Ant1_2480

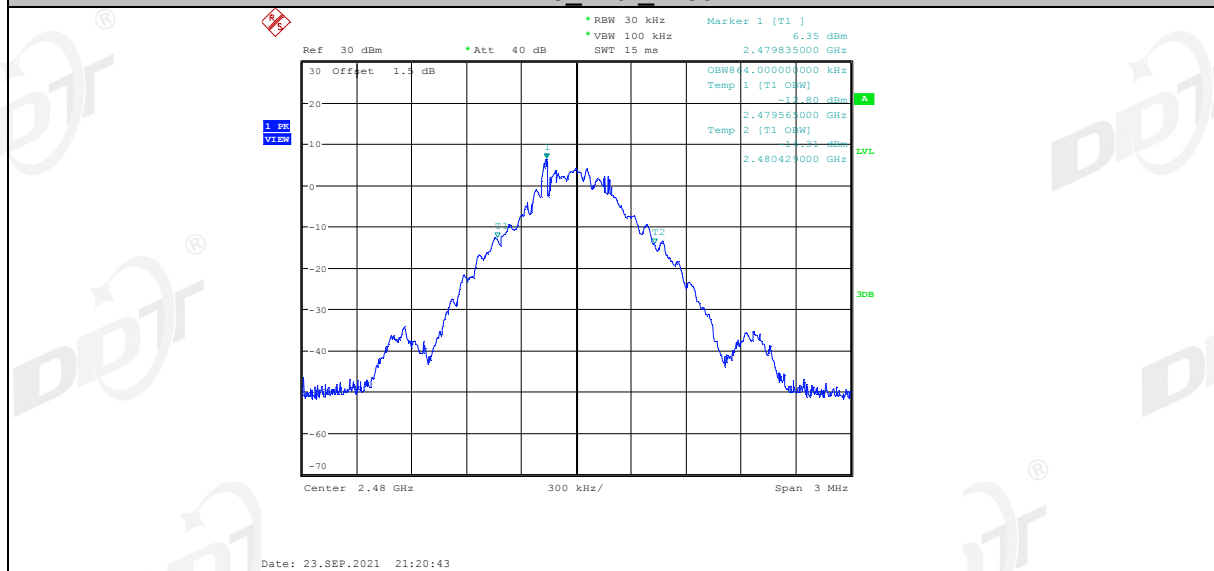


2DH5_Ant1_2402

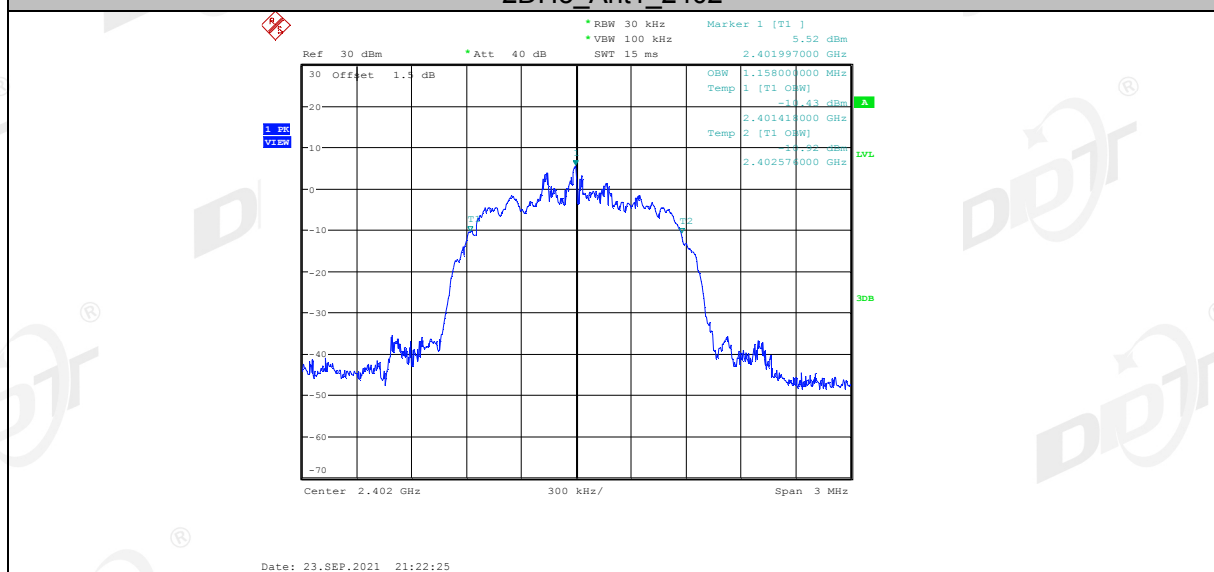


2DH5_Ant1_2441

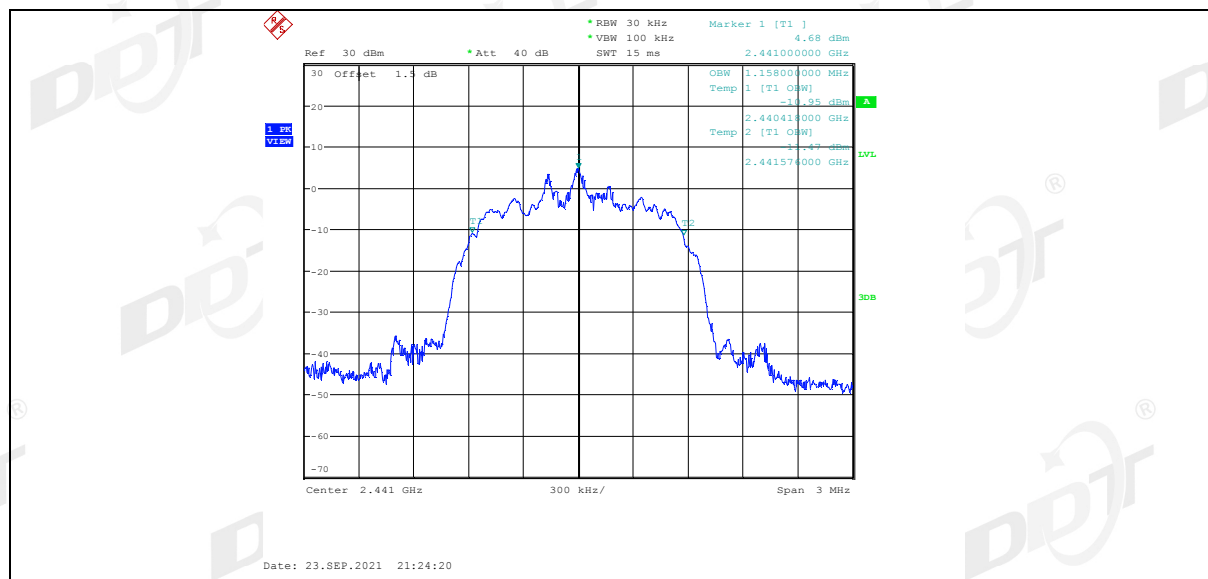


2DH5_Ant1_2480

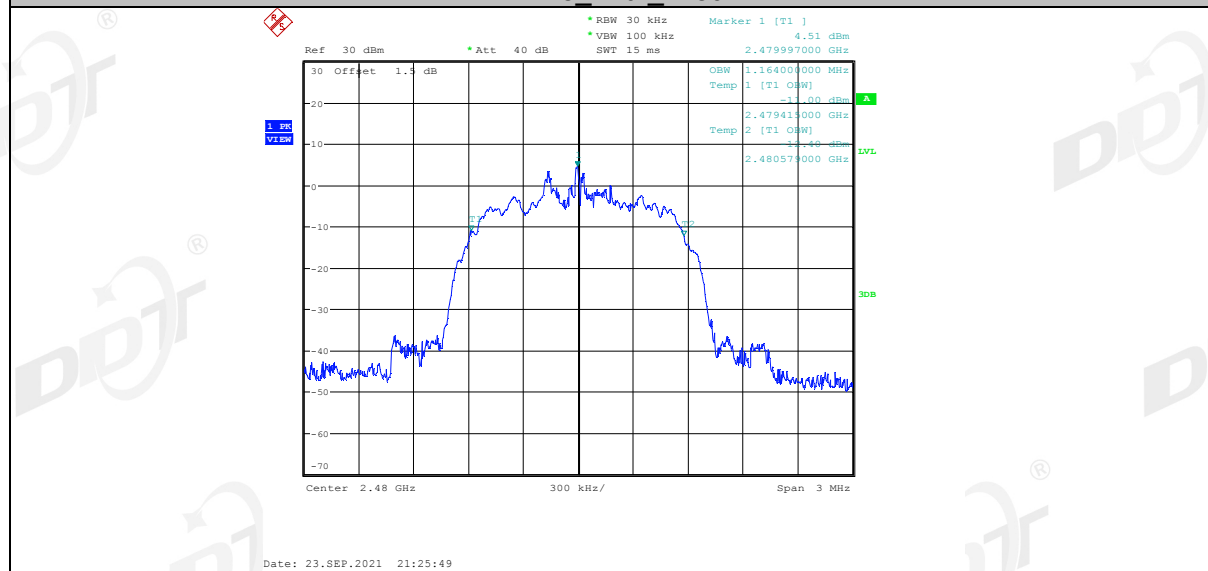

3DH5_Ant1_2402

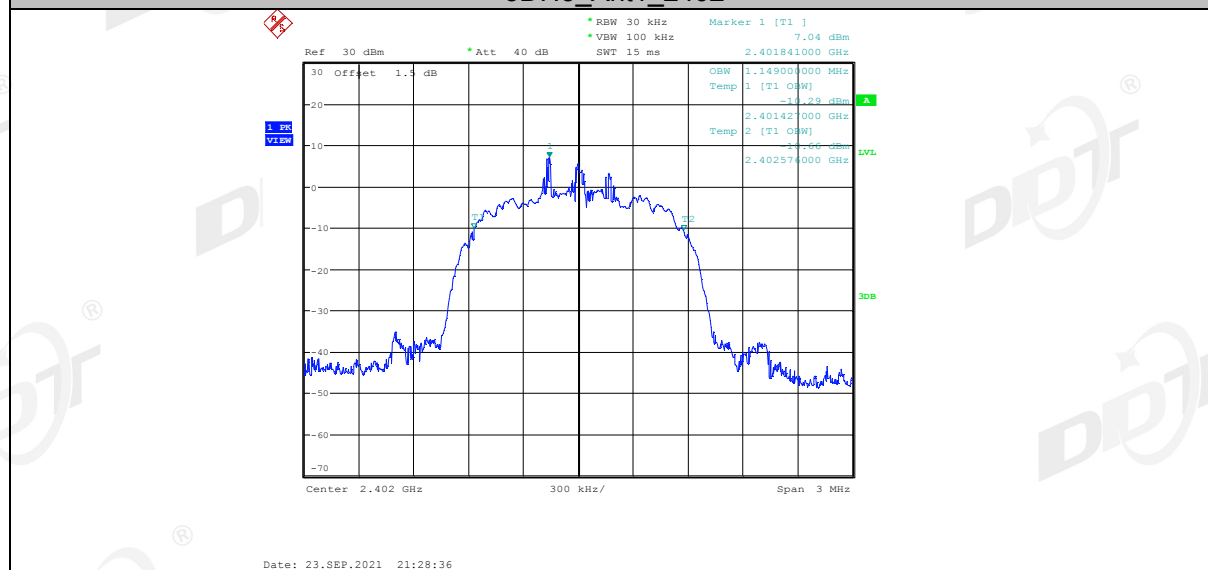

3DH5_Ant1_2441

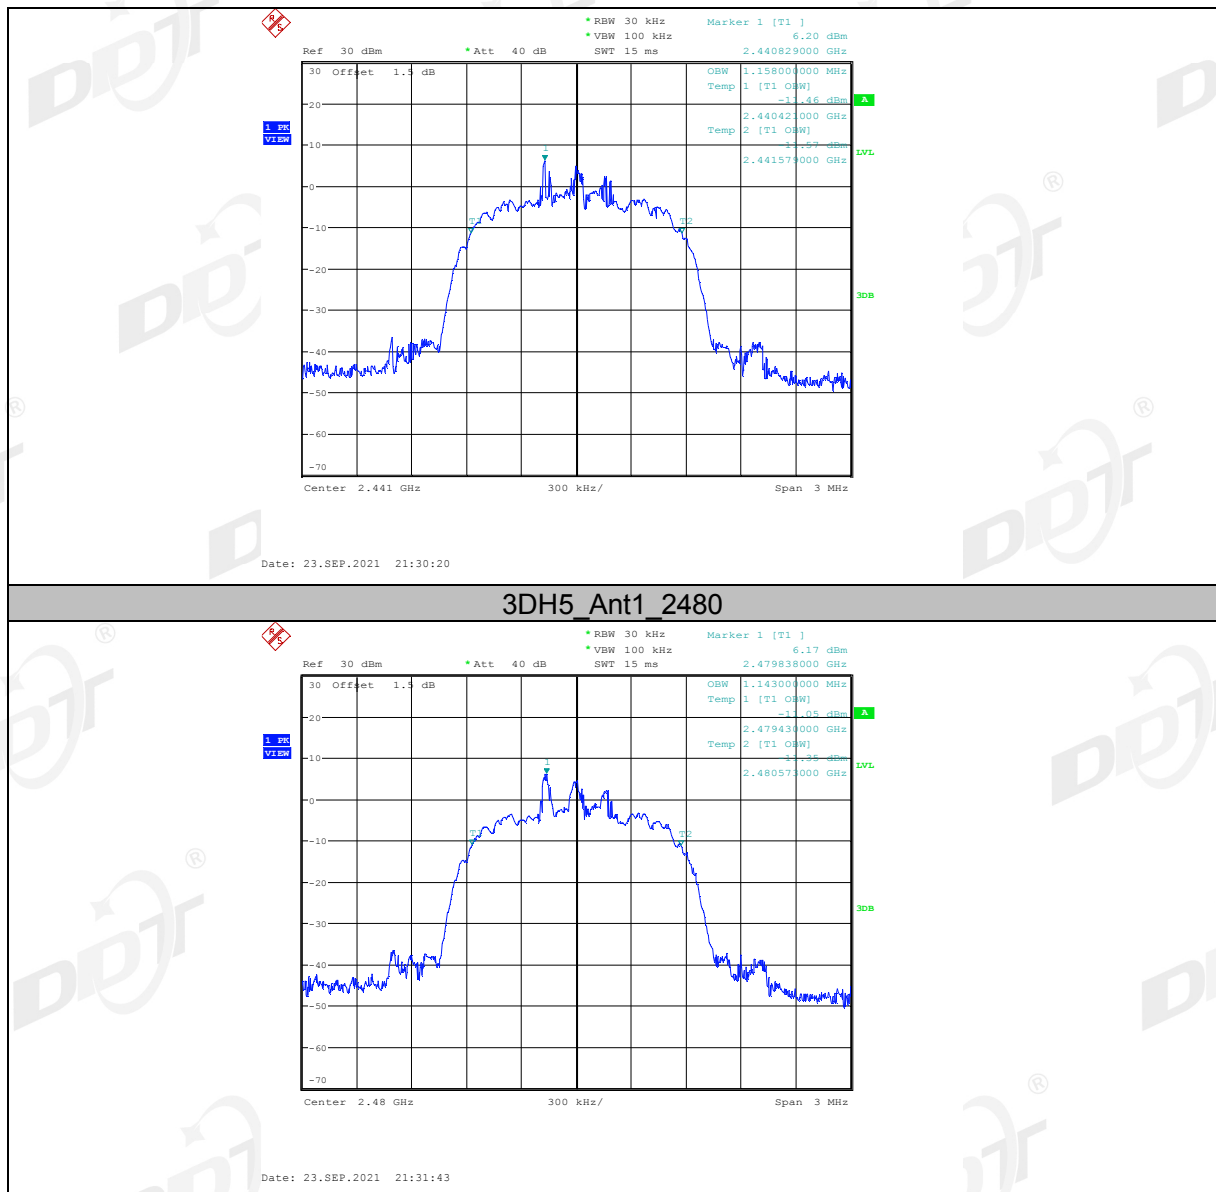

6. Carrier Frequency Separation

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400 - 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The carrier frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

6.4. Test result

Mode	Antenna	Channel separation (MHz)	20 dB bandwidth (MHz) (worse case)	Limit (MHz) 2/3 of 20 dB bandwidth	Verdict
GFSK	ANT1	1.010	0.975	≥ 0.650	Pass
$\pi/4$ -DQPSK	ANT1	1.000	1.284	≥ 0.856	Pass
8DPSK	ANT1	1.010	1.245	≥ 0.830	Pass

6.5. Original test data



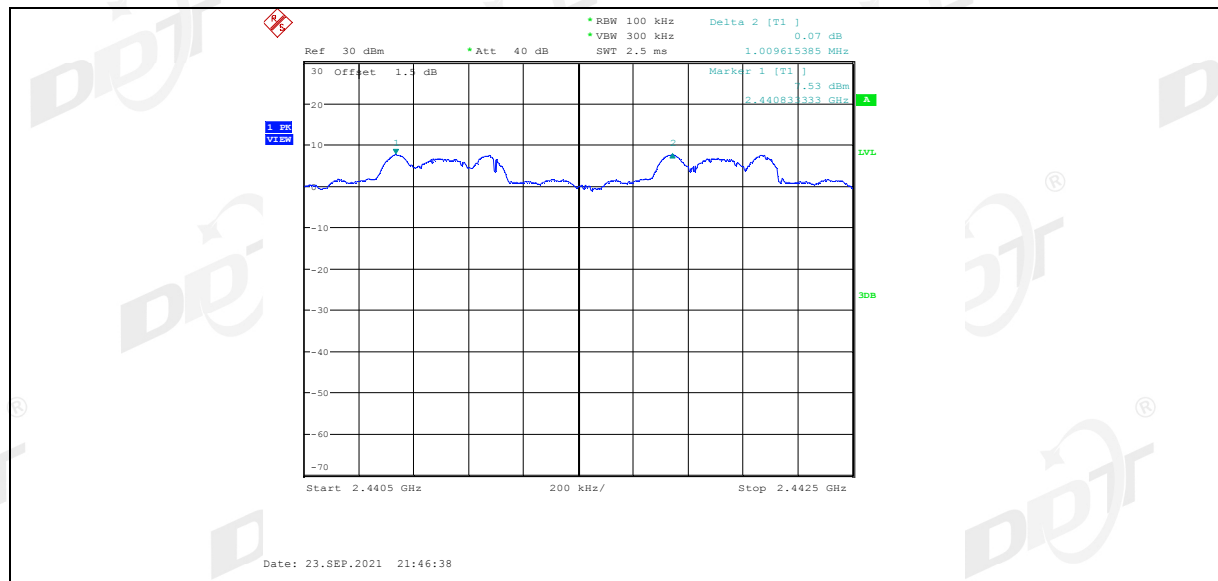

7. Number of Hopping Channel

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

Frequency hopping systems in the 2400 - 2483.5 MHz band shall use at least 15 channels.


7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The number of hopping channels was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

7.4. Test result

Mode	Antenna	Number of hopping channels	Limit	Verdict
GFSK	ANT1	79	>15	Pass
$\pi/4$ -DQPSK	ANT1	79	>15	Pass
8DPSK	ANT1	79	>15	Pass

7.5. Original test data

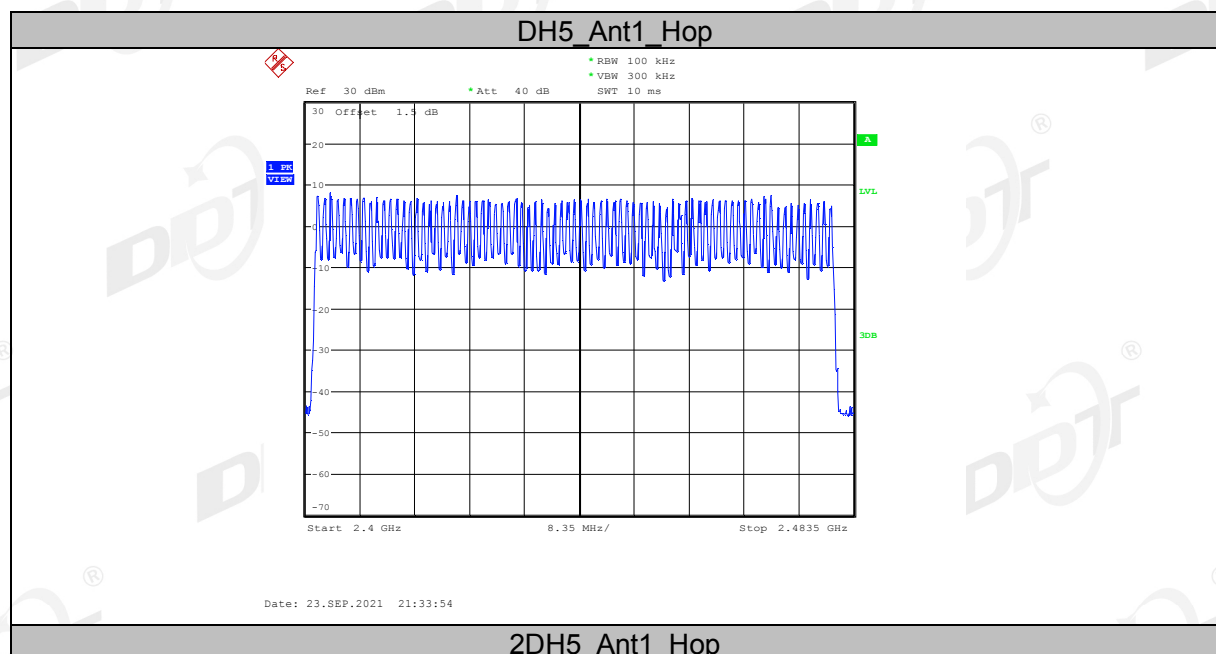



8. Dwell Time

8.1. Block diagram of test setup

Same as section 4.1

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (3) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.



8.4. Test result

Mode	Antenna	Dwell time (s)	Pulse's on time (ms)	Total hops	Limit	Verdict
DH1	ANT1	0.067	0.37	180	< 400 ms	Pass
DH3	ANT1	0.178	1.62	110	< 400 ms	Pass
DH5	ANT1	0.258	2.87	90	< 400 ms	Pass
2DH1	ANT1	0.076	0.38	200	< 400 ms	Pass
2DH3	ANT1	0.131	1.63	80	< 400 ms	Pass
2DH5	ANT1	0.173	2.88	60	< 400 ms	Pass
3DH1	ANT1	0.076	0.38	200	< 400 ms	Pass
3DH3	ANT1	0.130	1.63	80	< 400 ms	Pass
3DH5	ANT1	0.230	2.88	80	< 400 ms	Pass


Note: Dwell time = total hops * pulse's on time.


8.5. Original test data

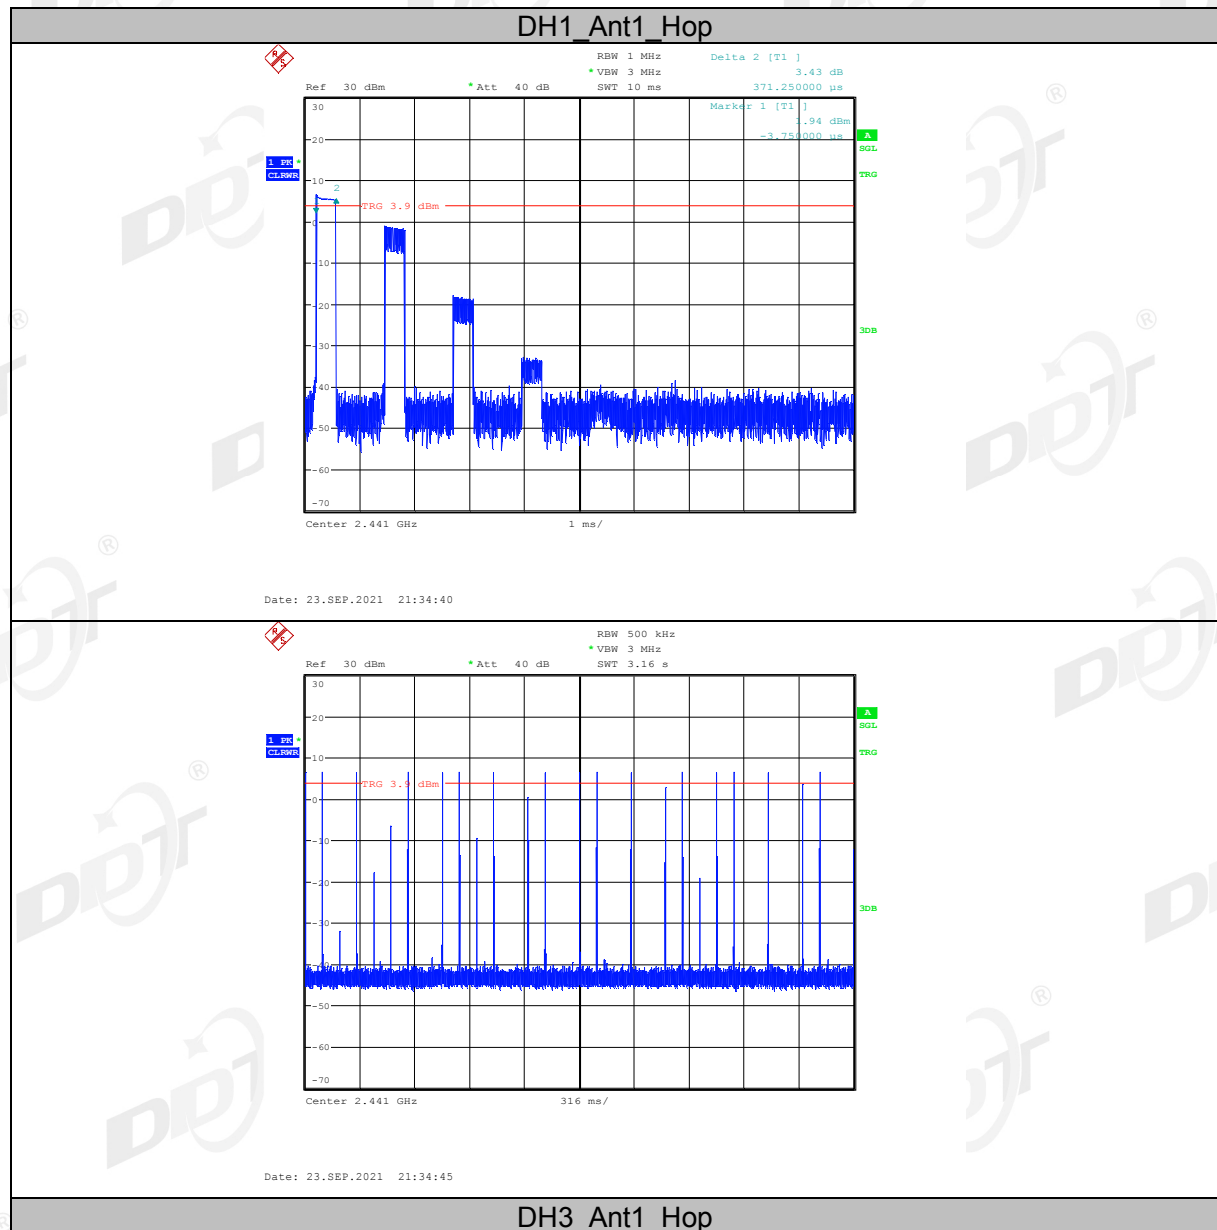

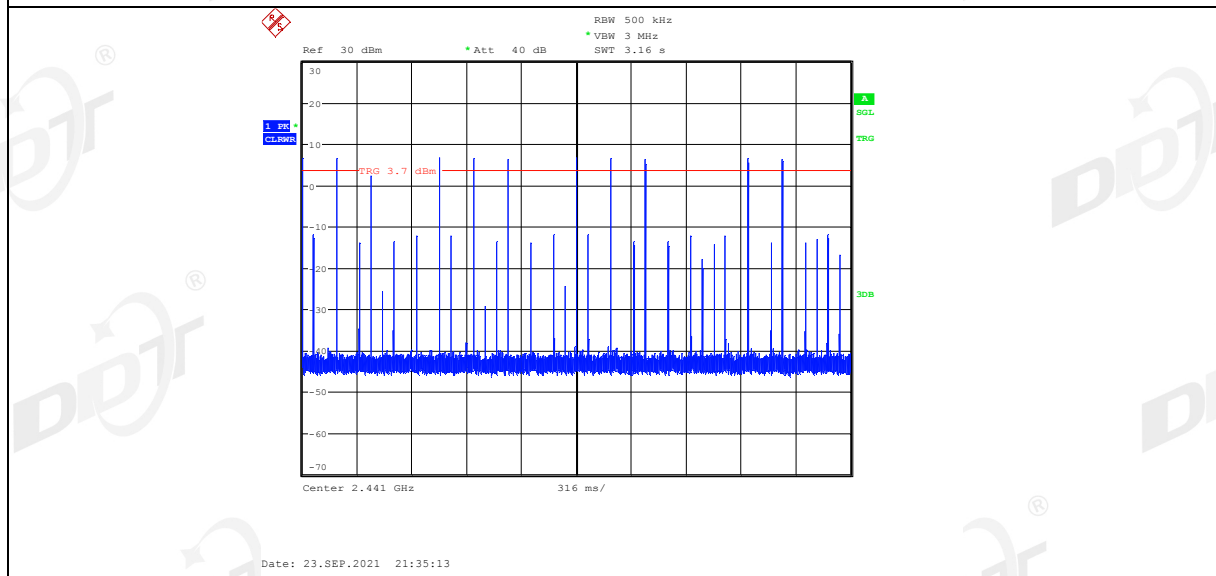
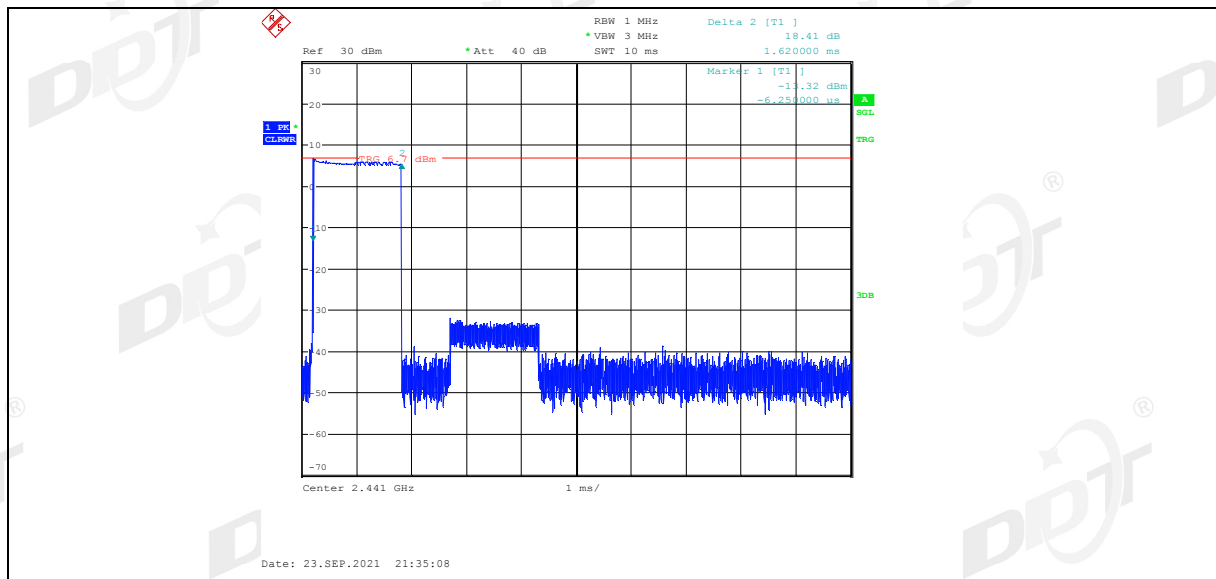


DH5_Ant1_Hop



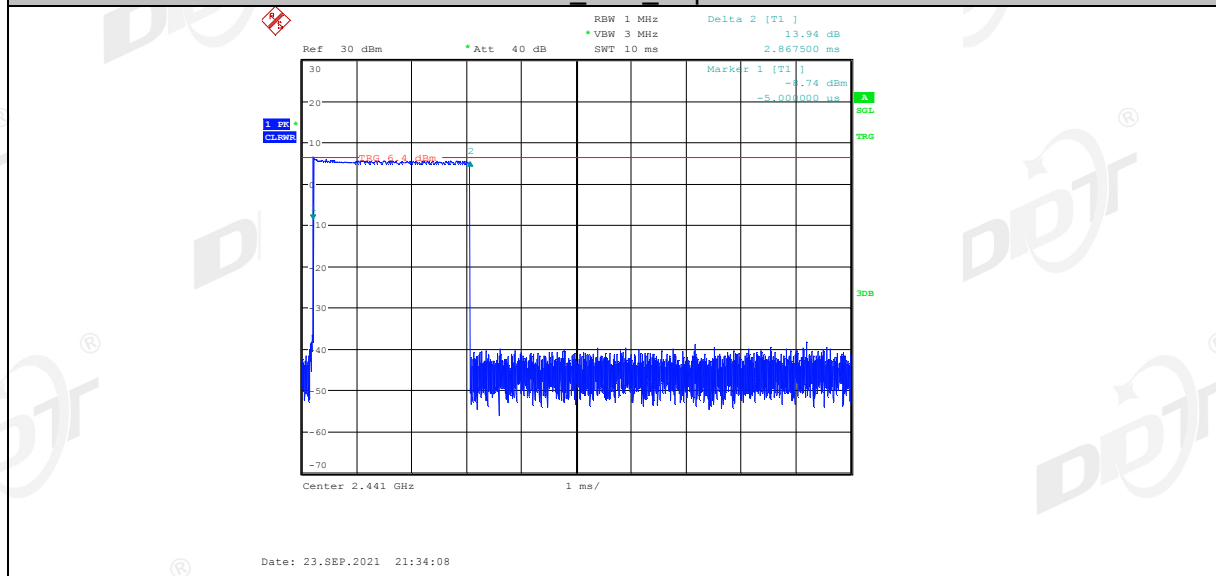


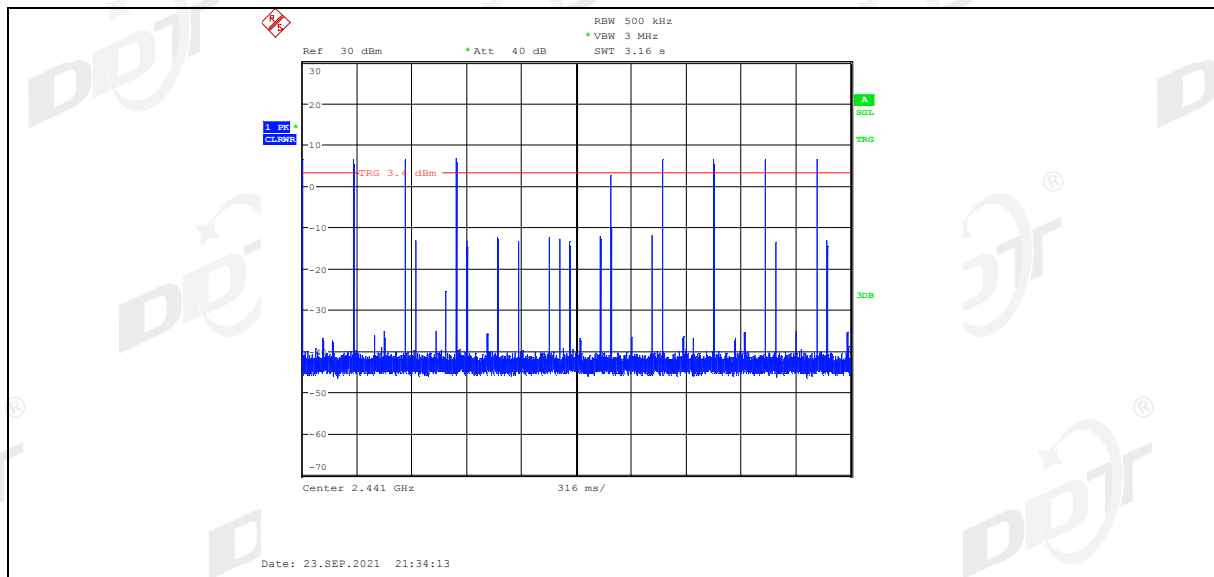


2DH1_Ant1_Hop

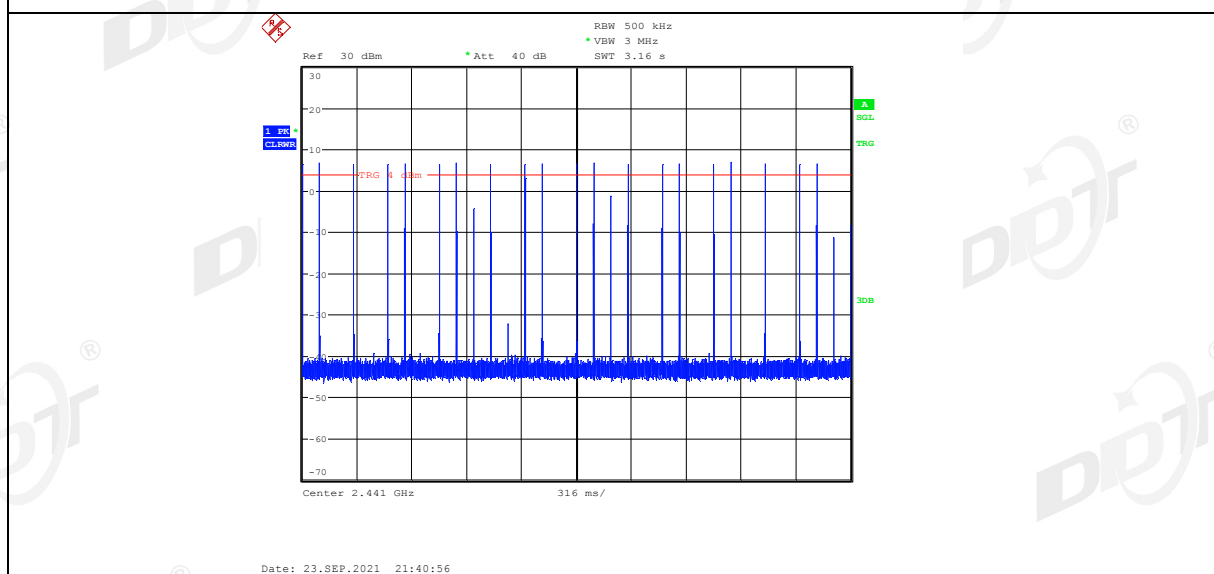
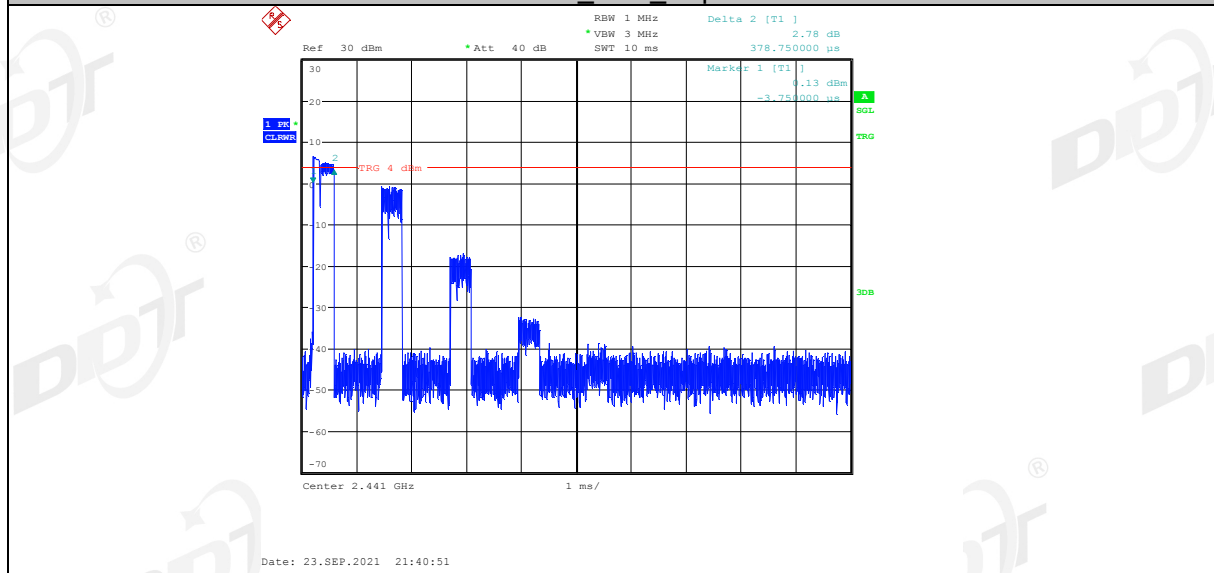


2DH3_Ant1_Hop

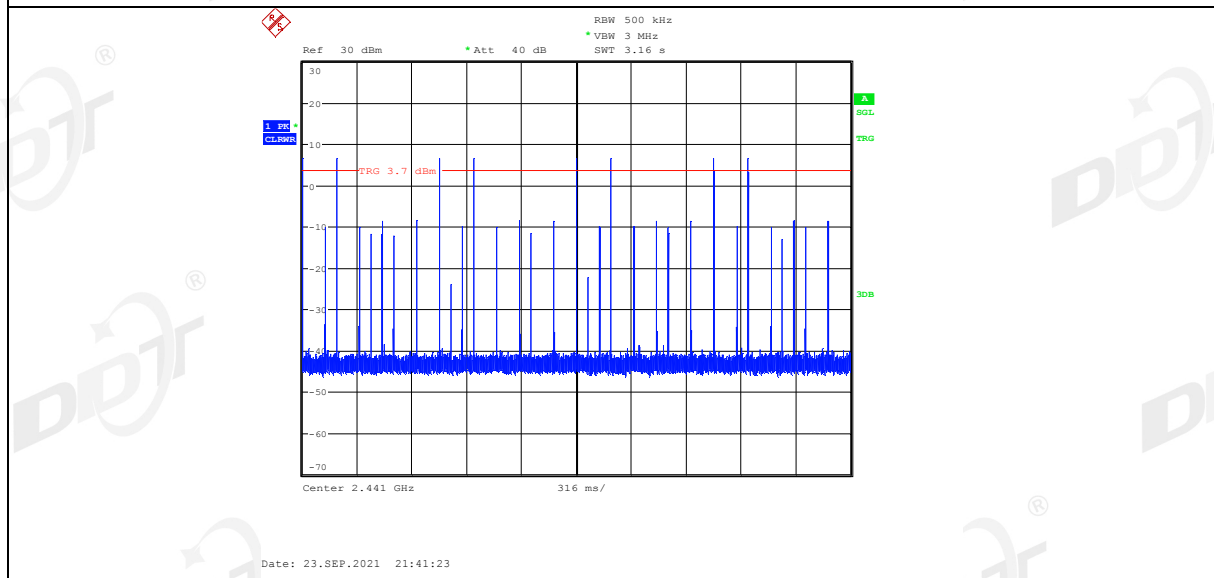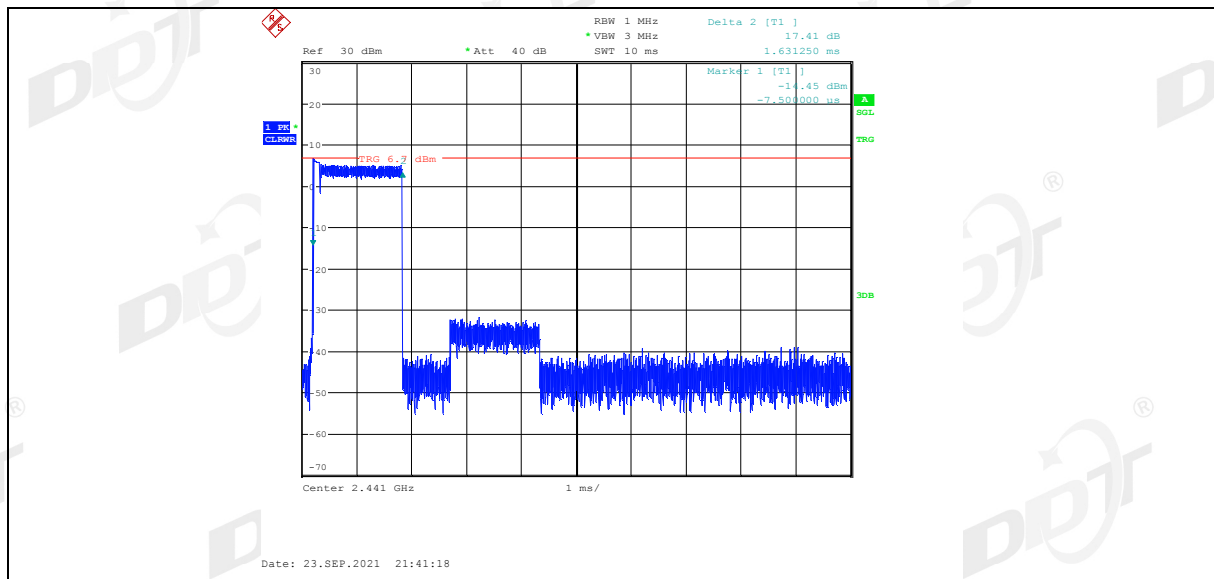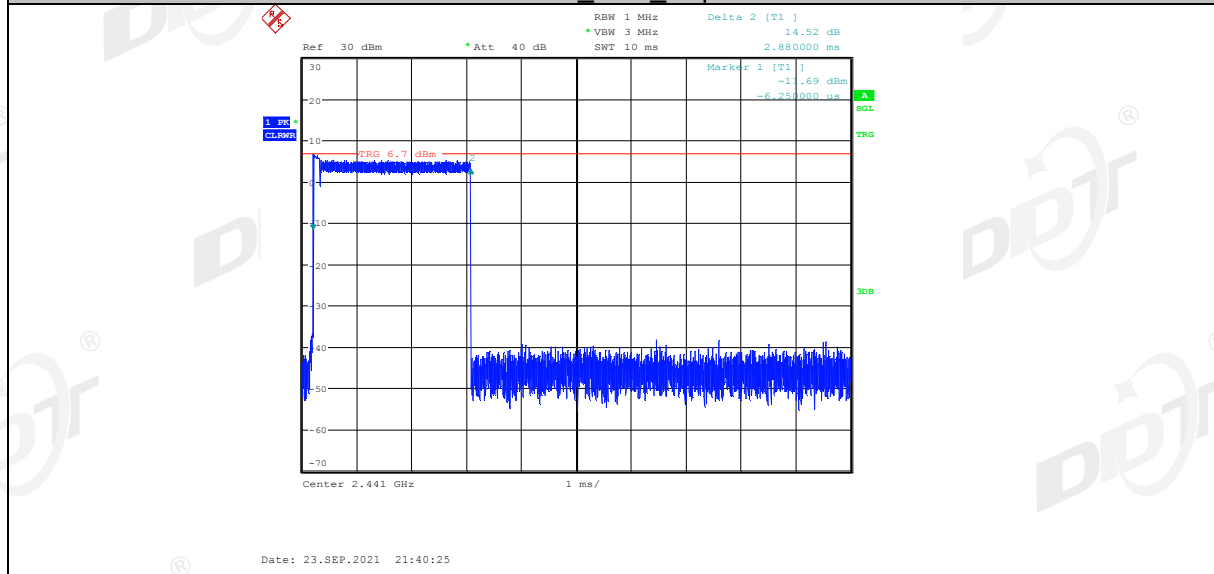
**2DH5_Ant1_Hop**

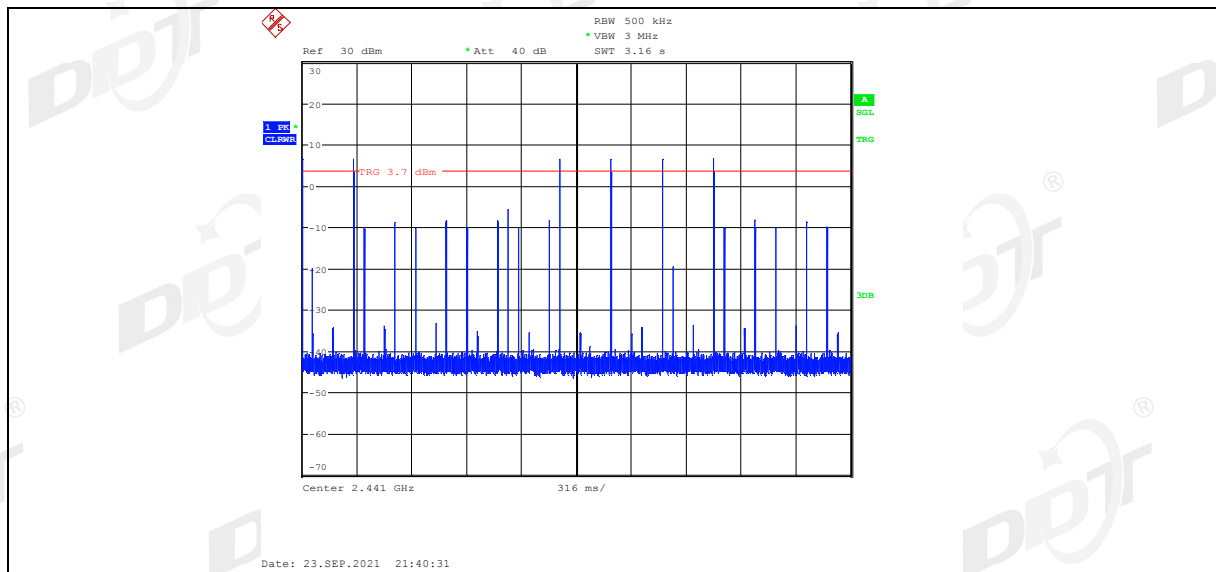


3DH1_Ant1_Hop

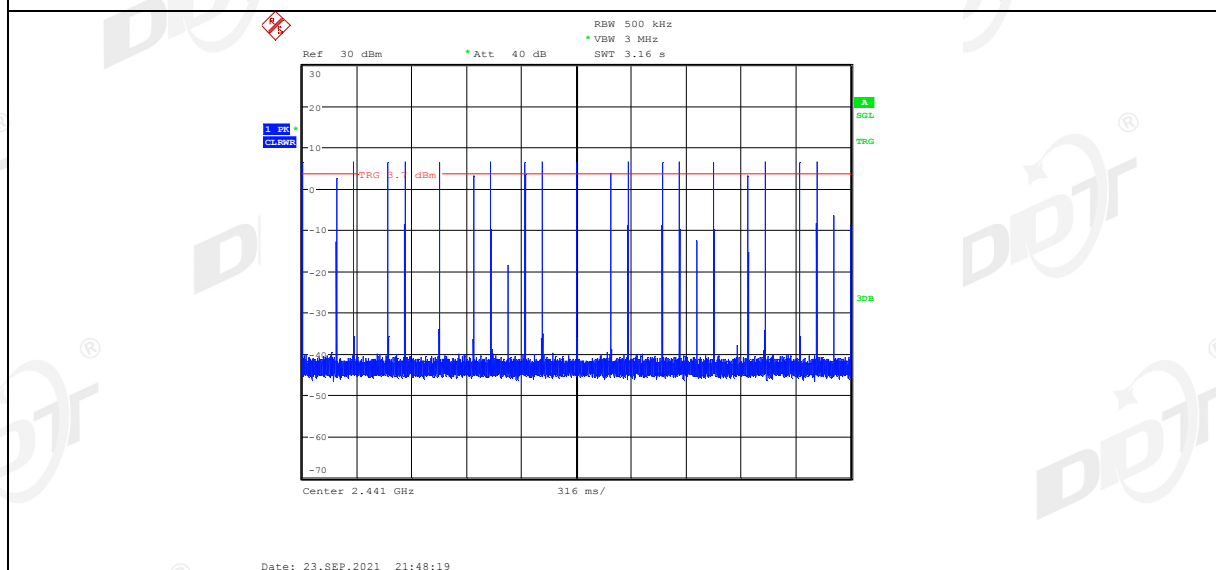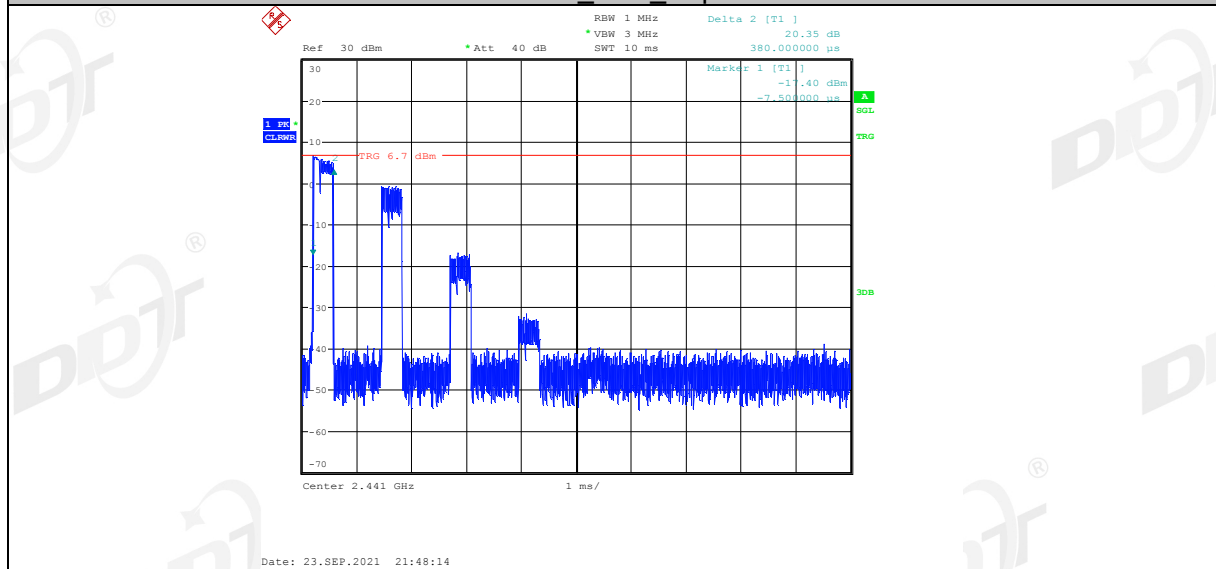

3DH3_Ant1_Hop

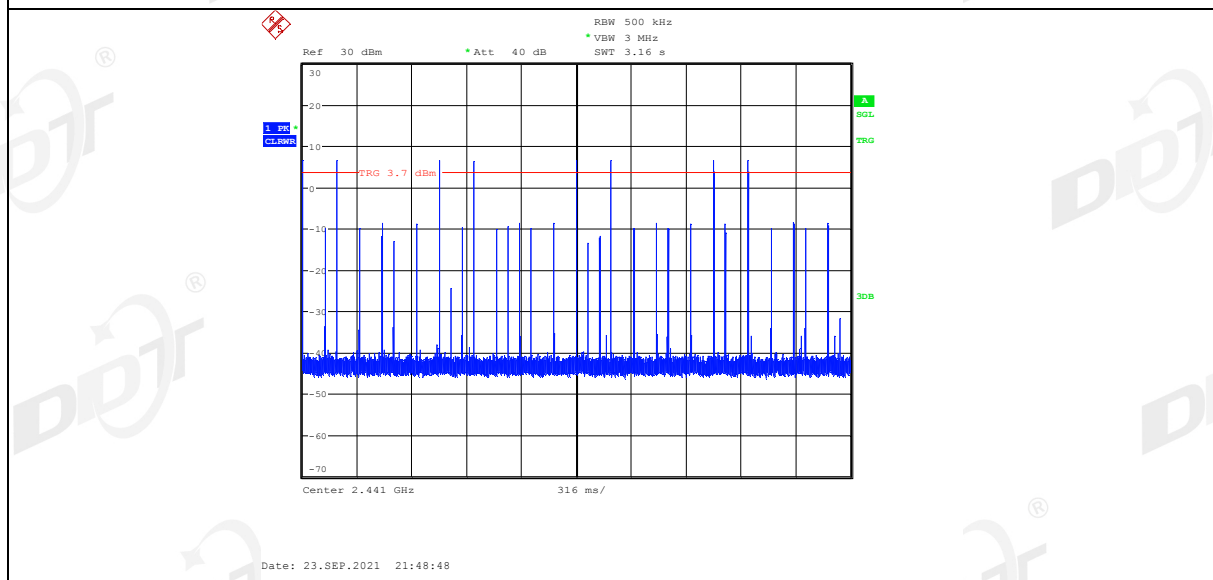

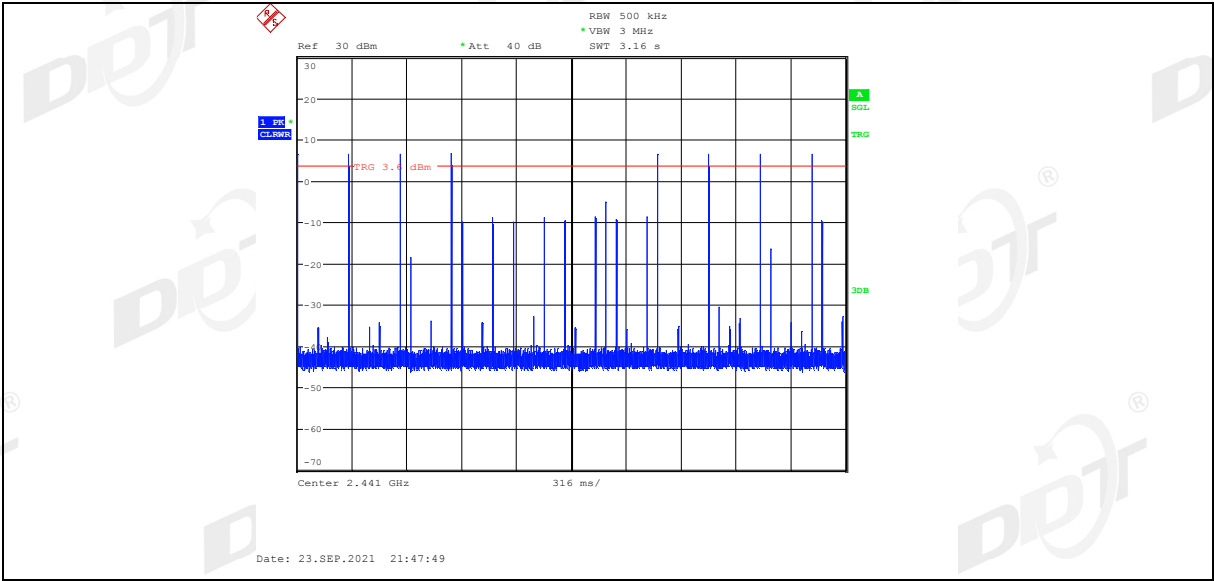

9. Band Edge Compliance (Conducted Method)

9.1. Block diagram of test setup

Same as section 4.1


9.2. Limit


All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

9.3. Test result


Mode	Antenna	Freq. (MHz)	Verdict
GFSK	ANT1	Hopping off 2402	Pass
	ANT1	Hopping off 2480	Pass
	ANT1	Hopping on	Pass
$\pi/4$ -DQPSK	ANT1	Hopping off 2402	Pass
	ANT1	Hopping off 2480	Pass
	ANT1	Hopping on	Pass
8DPSK	ANT1	Hopping off 2402	Pass
	ANT1	Hopping off 2480	Pass
	ANT1	Hopping on	Pass

9.4. Original test data

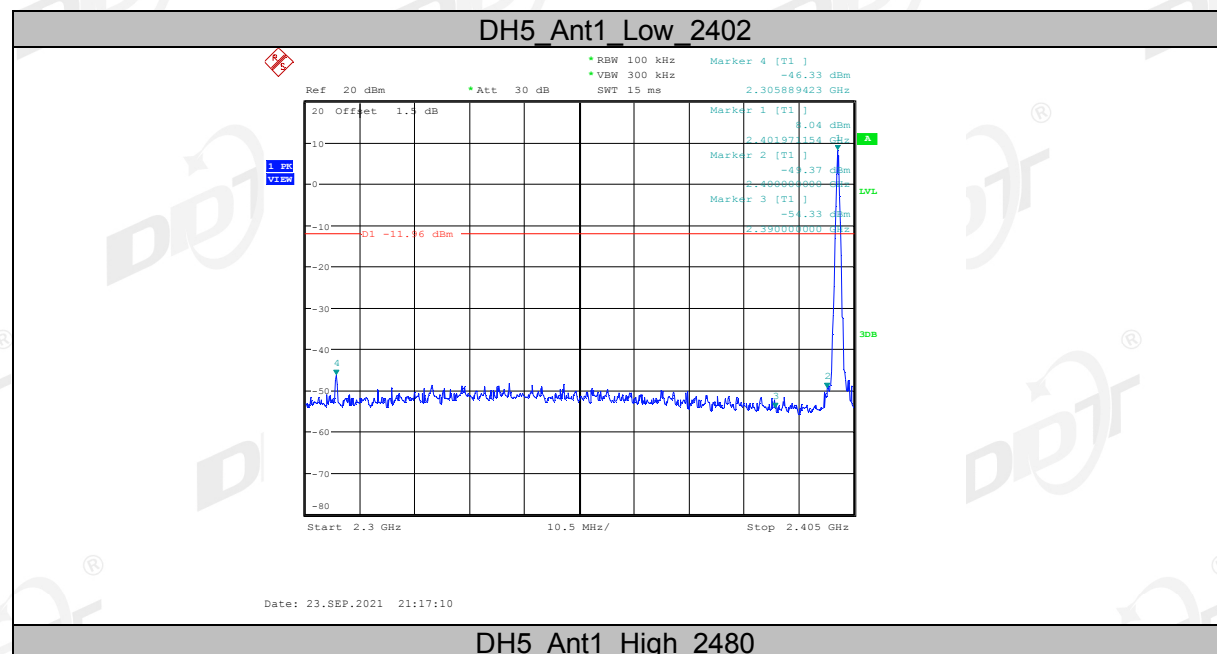


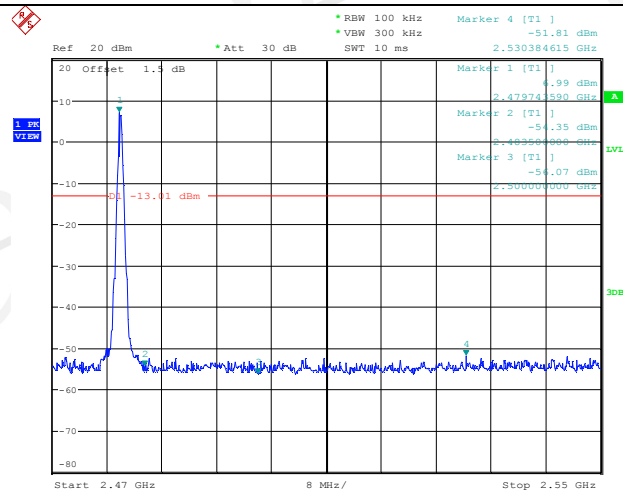


DH5_Ant1_Low_Hop_2402

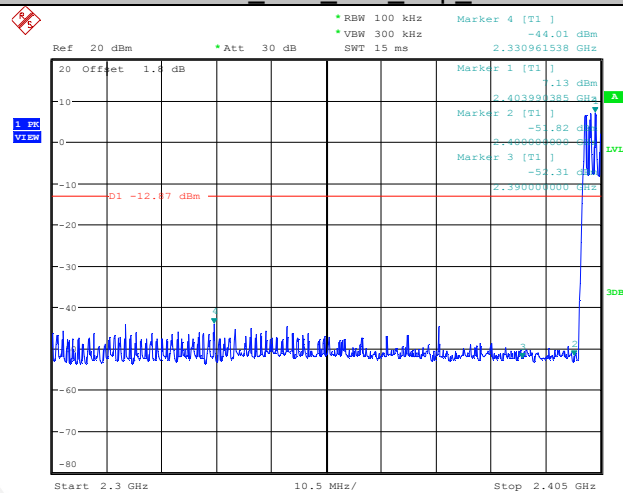


DH5_Ant1_High_Hop_2480

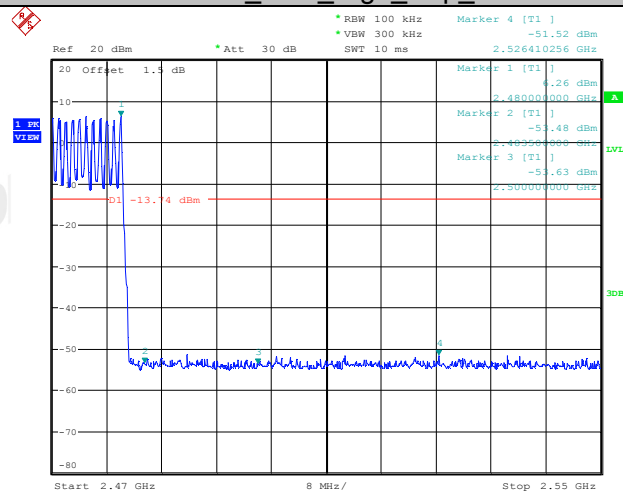


2DH5_Ant1_Low_2402

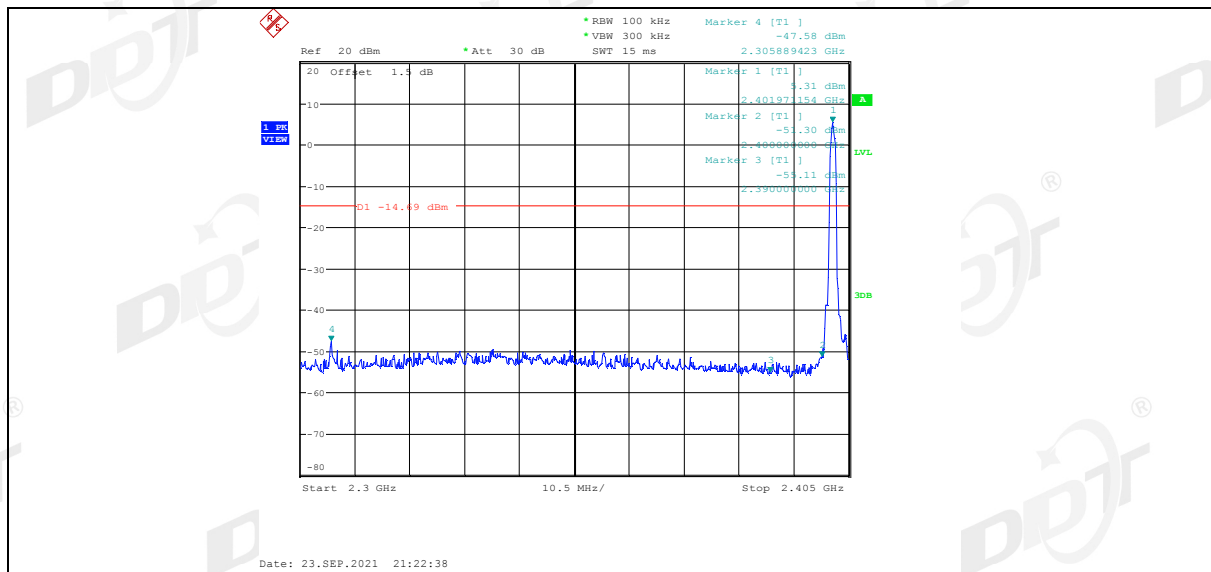


2DH5_Ant1_High_2480

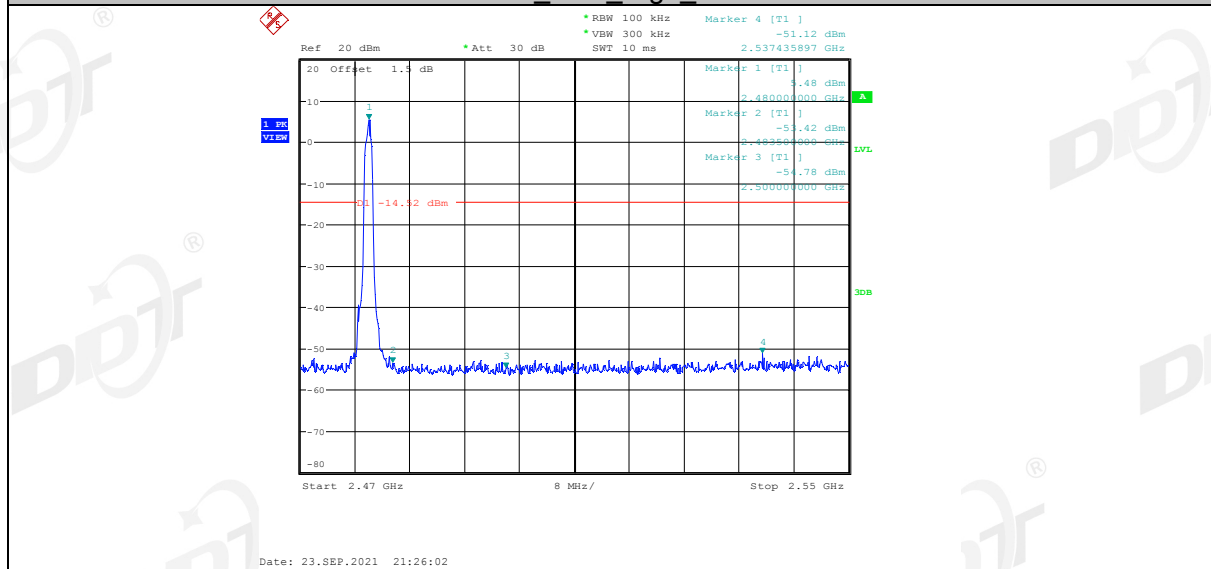

2DH5_Ant1_Low_Hop_2402

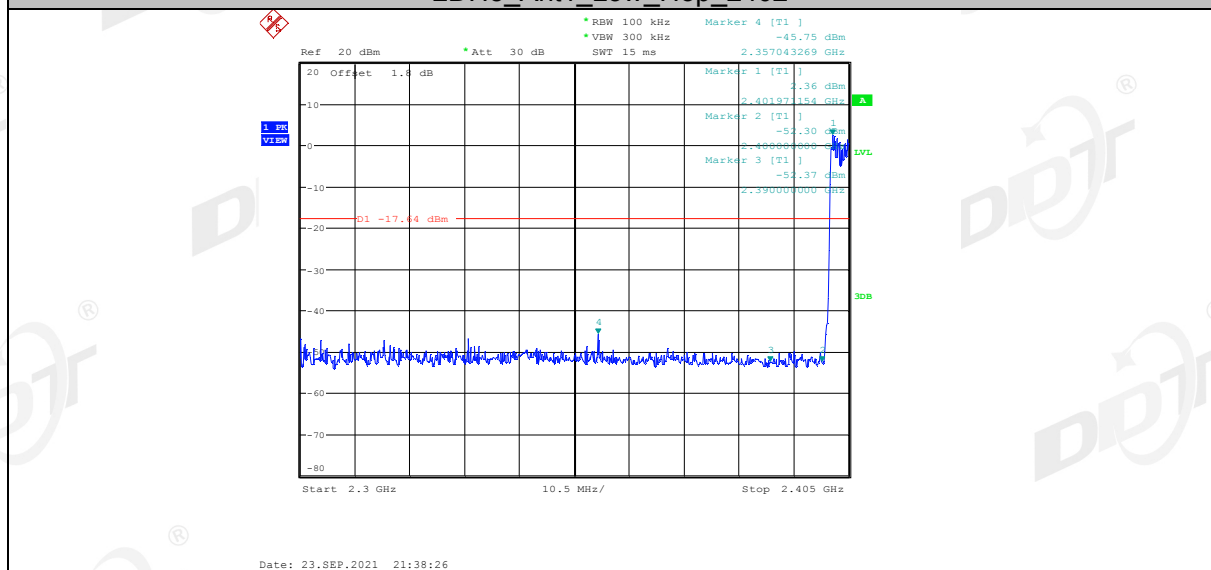


2DH5_Ant1_High_Hop_2480

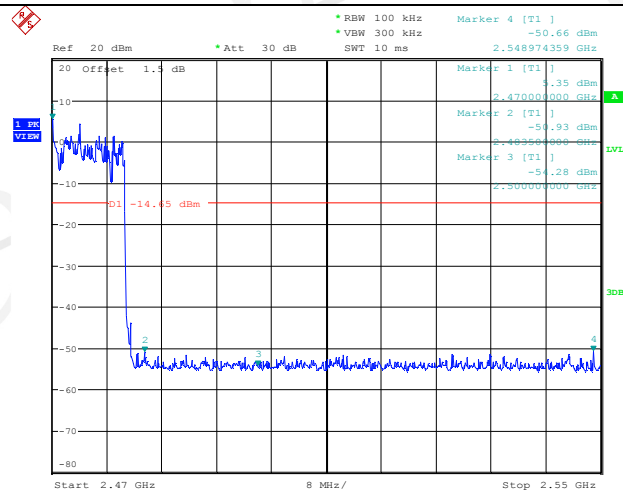


Date: 23.SEP.2021 21:41:44

3DH5_Ant1_Low_2402

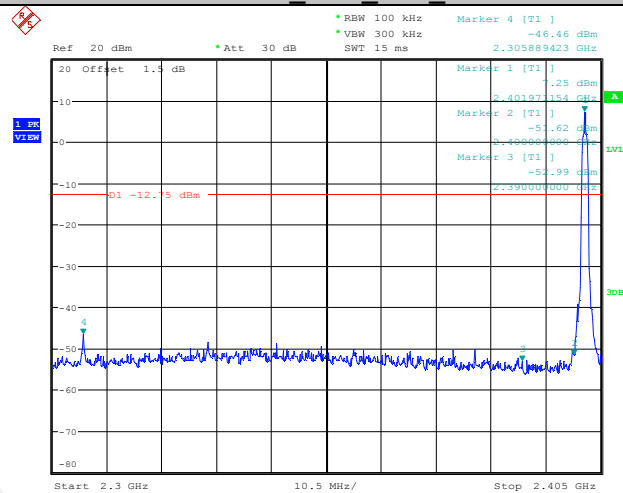

Date: 23.SEP.2021 21:28:49

3DH5_Ant1_High_2480

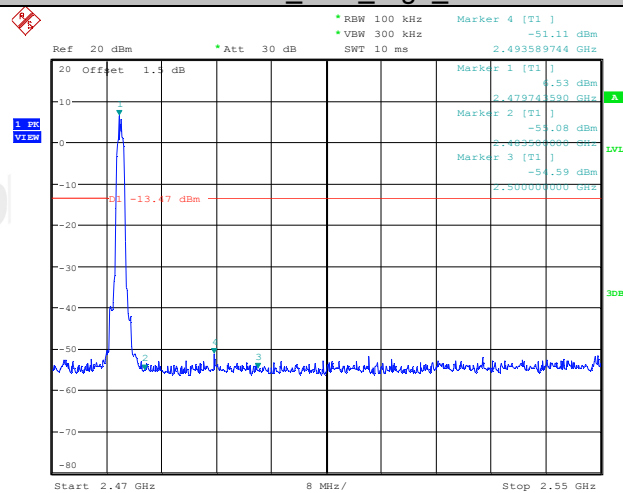

Date: 23.SEP.2021 21:31:56


3DH5_Ant1_Low_Hop_2402




10. Radiated Emission

10.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

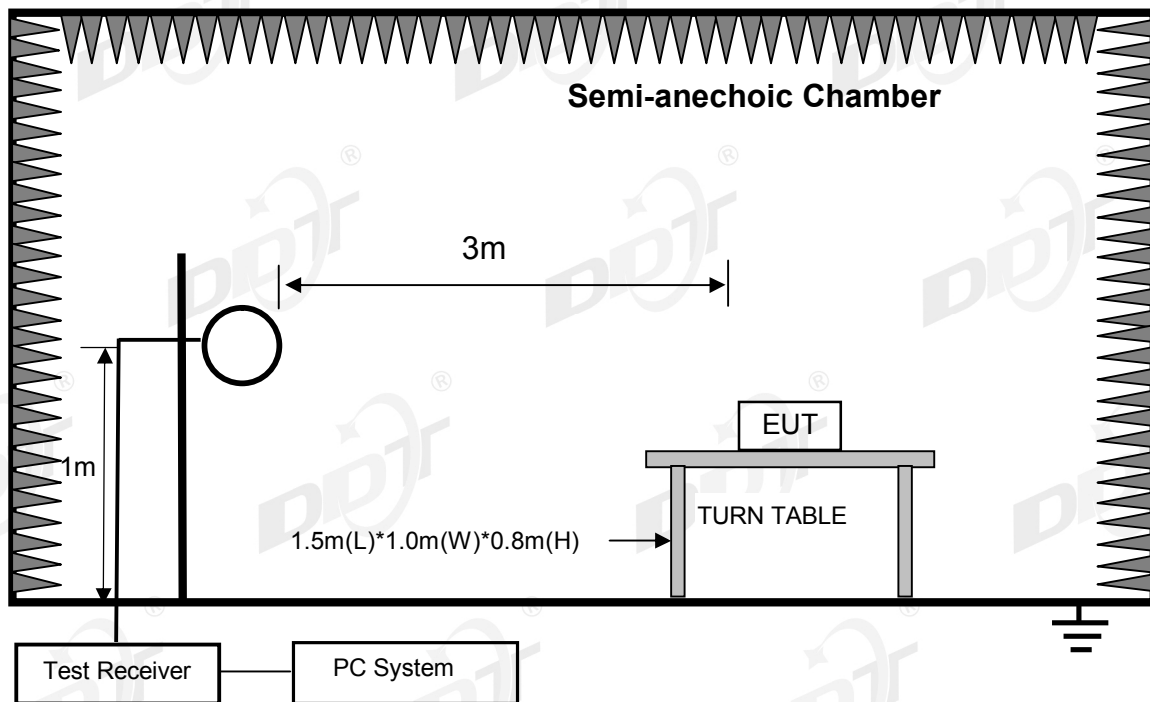

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

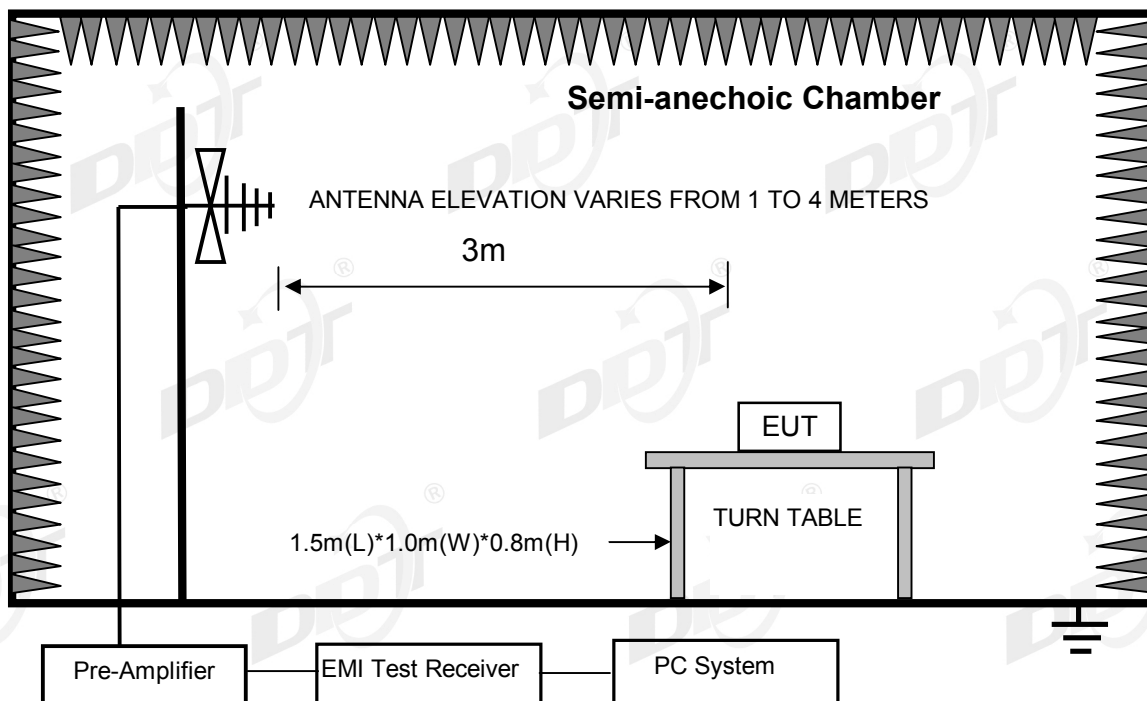

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

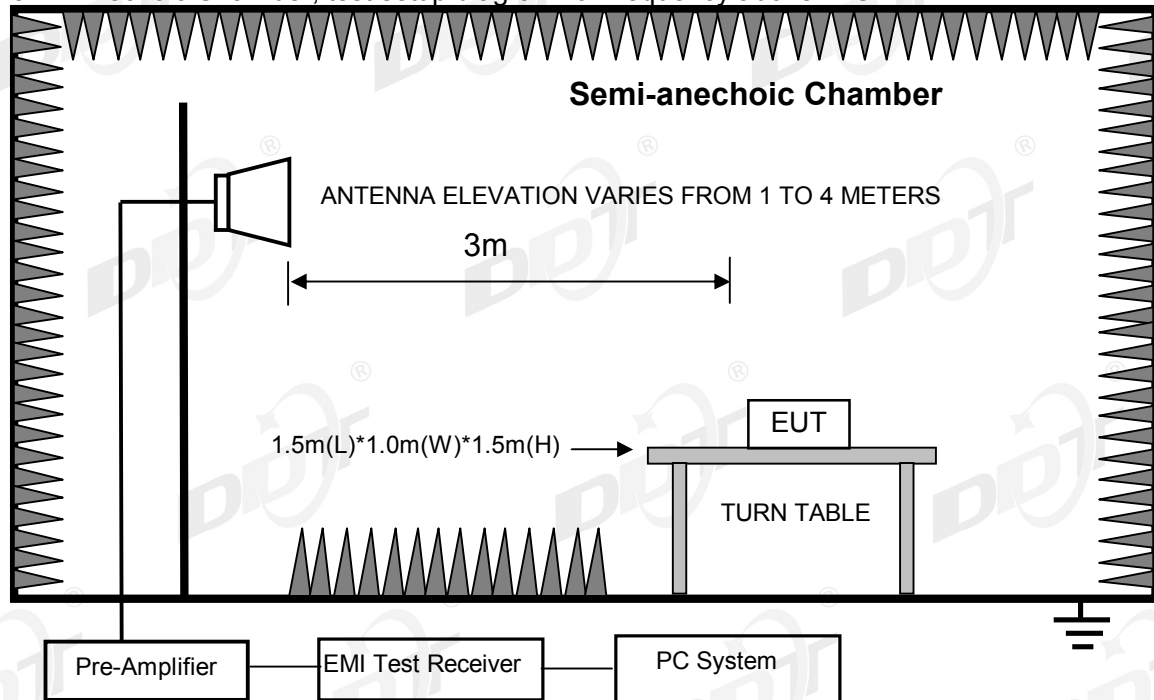

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

10.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) RSS-GEN Restricted frequency band*

MHz	MHz	MHz	GHz
0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(3) FCC 15.209 & RSS-GEN Limit.

Frequency (MHz)	Measurement distance (meters)	Field strength limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/\text{F}(\text{kHz})$	$67.6-20\log(\text{F})$
0.490 ~ 1.705	30	$24000/\text{F}(\text{kHz})$	$87.6-20\log(\text{F})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V/m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V/m}) + 40\log(30\text{m}/3\text{m})$$

(4) Limit for this EUT

All the emissions appearing within 15.205 & RSS-GEN restricted frequency bands shall not exceed the limits shown in 15.209 & RSS-GEN, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 & RSS-GEN limits.

10.3. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1 GHz and 150 cm above the ground plane inside a fully-anechoic chamber for above 1 GHz.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

- (b) Change work frequency or channel of device if practicable.

- (c) Change modulation type of device if practicable.

- (d) Change power supply range from 85% to 115% of the rated supply voltage

- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below

final test was performed with frequency range from 9 kHz to 18 GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission.

Measurements in both horizontal and vertical polarities were made and the data was recorded.

In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

- (7) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; according ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

10.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 & RSS-GEN limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in GFSK, Tx 2402 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC
BELOW 1G\FCC BELOW 1G_00001.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

EUT : INDOOR/OUTDOOR 360-degrees

Sound Speaker With Lighting and
Multi-Sync

Model Number : BRIGHT MAX PLUS


Power
Supply : Battery

Test Mode : Tx mode

Condition : Temp:23.9°,Humi:55%,Press:100.0kPa

Antenna/Distance : VLUB 9163 3#/3m/VERTICAL

Memo :

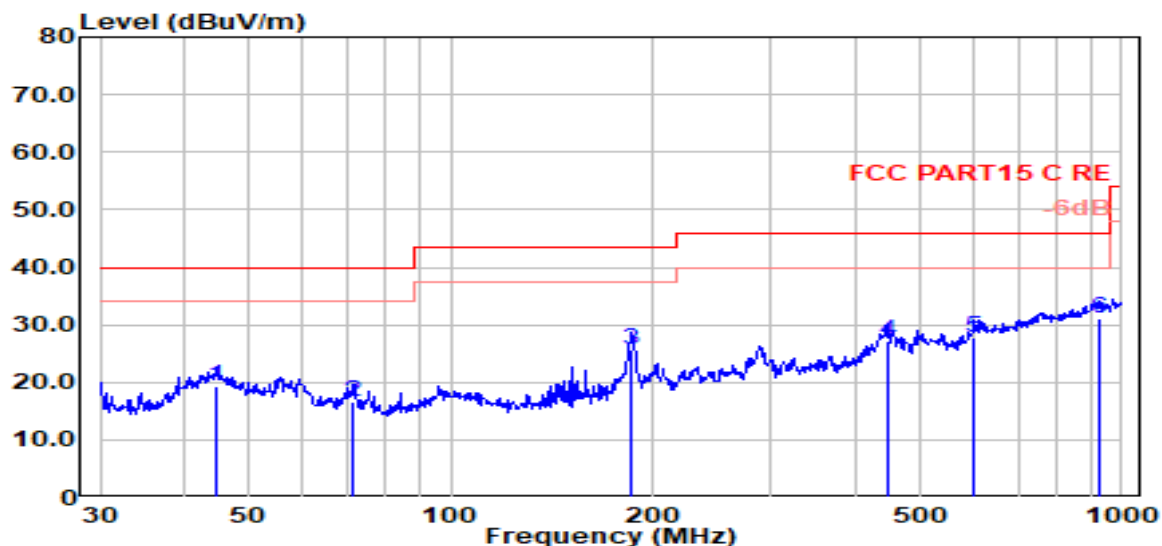

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	44.74	0.50	15.07	3.66	19.23	40.00	-20.77	QP	VERTICAL
2	71.58	4.13	8.90	3.72	16.75	40.00	-23.25	QP	VERTICAL
3	185.79	11.27	10.08	4.27	25.61	43.50	-17.89	QP	VERTICAL
4	446.41	6.12	15.87	5.20	27.19	46.00	-18.81	QP	VERTICAL
5	601.43	3.09	19.13	5.60	27.82	46.00	-18.18	QP	VERTICAL
6	925.76	2.24	22.40	6.44	31.09	46.00	-14.91	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC
BELOW 1G\FCC BELOW 1G_00002.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and
Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:23.9°, Humi:55%, Press:100.0kPa
a

Antenna/Distance : VLUB 9163 3#/3m/HORIZONTAL
e

Memo :

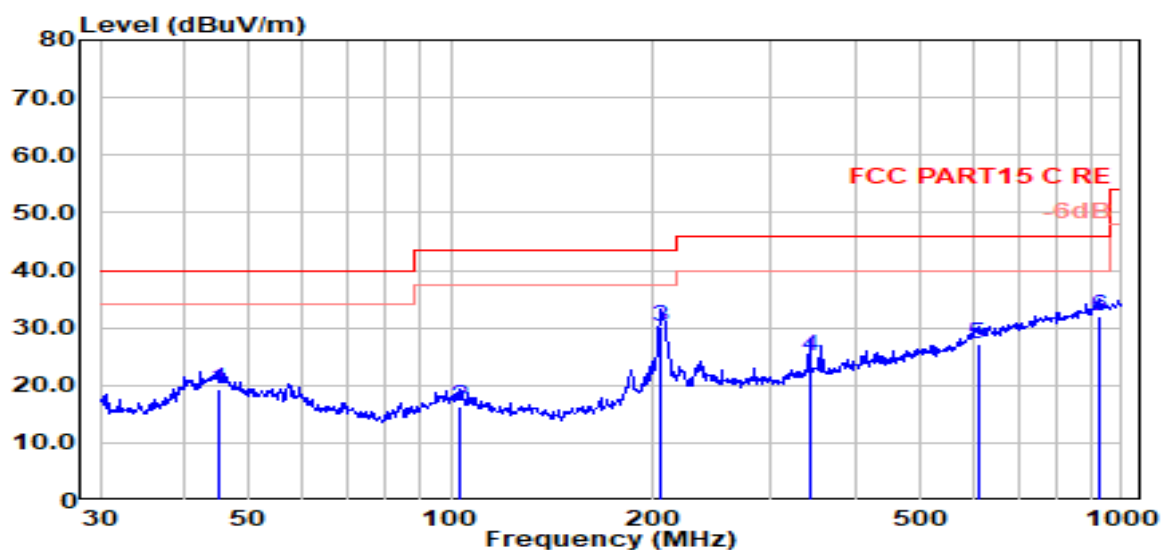

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	45.06	0.47	15.07	3.67	19.21	40.00	-20.79	QP	HORIZONTAL
2	102.72	0.84	11.53	3.90	16.27	43.50	-27.23	QP	HORIZONTAL
3	205.68	15.14	10.81	4.37	30.32	43.50	-13.18	QP	HORIZONTAL
4	341.98	5.63	14.58	4.85	25.06	46.00	-20.94	QP	HORIZONTAL
5	609.92	2.42	19.20	5.63	27.26	46.00	-18.74	QP	HORIZONTAL
6	925.76	3.22	22.40	6.44	32.06	46.00	-13.94	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Radiated Emission test (above 1 GHz)

Freq. (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor(dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/ m)	Margin (dB)	Detector type	Polarization
Tx mode 2402 MHz									
4804.00	56.91	31.33	6.79	43.36	51.67	74.00	-22.33	Peak	HORIZONTAL
7206.00	46.91	36.08	8.33	42.86	48.46	74.00	-25.54	Peak	HORIZONTAL
10163.00	43.30	39.16	10.31	42.31	50.45	74.00	-23.55	Peak	HORIZONTAL
12458.00	41.81	38.75	12.01	42.13	50.44	74.00	-23.56	Peak	HORIZONTAL
14600.00	40.70	41.56	12.25	42.02	52.49	74.00	-21.51	Peak	HORIZONTAL
17949.00	30.36	48.51	13.76	42.48	50.14	54.00	-3.86	Average	HORIZONTAL
17949.00	37.26	48.51	13.76	42.48	57.04	74.00	-16.96	Peak	HORIZONTAL
4804.00	53.51	31.33	6.79	43.36	48.27	74.00	-25.73	Peak	VERTICAL
7613.00	44.04	36.97	8.79	42.57	47.22	74.00	-26.78	Peak	VERTICAL
9806.00	43.67	38.76	10.04	42.12	50.35	74.00	-23.65	Peak	VERTICAL
11744.00	42.53	39.61	11.10	41.78	51.45	74.00	-22.55	Peak	VERTICAL
14923.00	40.49	40.78	12.93	41.76	52.44	74.00	-21.56	Peak	VERTICAL
17966.00	30.21	48.74	13.77	42.49	50.23	54.00	-3.77	Average	VERTICAL
17966.00	38.45	48.74	13.77	42.49	58.47	74.00	-15.53	Peak	VERTICAL
Tx mode 2441 MHz									
4882.00	55.97	31.52	6.89	43.29	51.08	74.00	-22.92	Peak	HORIZONTAL
7358.00	45.35	36.50	8.59	42.75	47.70	74.00	-26.30	Peak	HORIZONTAL
9857.00	42.56	38.77	10.10	42.14	49.29	74.00	-24.71	Peak	HORIZONTAL
12458.00	42.70	38.75	12.01	42.13	51.33	74.00	-22.67	Peak	HORIZONTAL
14736.00	40.62	41.23	12.54	41.91	52.47	74.00	-21.53	Peak	HORIZONTAL
17966.00	30.16	48.74	13.77	42.49	50.18	54.00	-3.82	Average	HORIZONTAL
17966.00	36.58	48.74	13.77	42.49	56.61	74.00	-17.39	Peak	HORIZONTAL
4882.00	54.56	31.52	6.89	43.29	49.67	74.00	-24.33	Peak	VERTICAL
7715.00	43.98	37.03	8.75	42.50	47.26	74.00	-26.74	Peak	VERTICAL
10129.00	42.89	39.08	10.30	42.29	49.98	74.00	-24.02	Peak	VERTICAL
12322.00	42.78	38.91	11.73	41.92	51.51	74.00	-22.49	Peak	VERTICAL
14646.00	39.70	41.45	12.35	41.98	51.52	74.00	-22.48	Peak	VERTICAL
17949.00	30.94	48.51	13.76	42.48	50.72	54.00	-3.28	Average	VERTICAL
17949.00	37.03	48.51	13.76	42.48	56.82	74.00	-17.18	Peak	VERTICAL
Tx mode 2480 MHz									
4960.00	52.39	31.70	6.99	43.23	47.85	74.00	-26.15	Peak	HORIZONTAL
7613.00	44.40	36.97	8.79	42.57	47.59	74.00	-26.41	Peak	HORIZONTAL
10299.00	43.24	39.46	10.33	42.41	50.62	74.00	-23.38	Peak	HORIZONTAL
12373.00	42.02	38.85	11.84	42.00	50.72	74.00	-23.28	Peak	HORIZONTAL
14668.00	40.77	41.40	12.39	41.97	52.60	74.00	-21.40	Peak	HORIZONTAL
17966.00	30.68	48.74	13.77	42.49	50.70	54.00	-3.30	Average	HORIZONTAL
17966.00	36.69	48.74	13.77	42.49	56.71	74.00	-17.29	Peak	HORIZONTAL
4960.00	49.80	31.70	6.99	43.23	45.26	74.00	-28.74	Peak	VERTICAL
7715.00	44.48	37.03	8.75	42.50	47.76	74.00	-26.24	Peak	VERTICAL
10384.00	42.43	39.64	10.34	42.47	49.94	74.00	-24.06	Peak	VERTICAL
12356.00	41.84	38.87	11.80	41.97	50.54	74.00	-23.46	Peak	VERTICAL
14753.00	40.41	41.19	12.57	41.90	52.28	74.00	-21.72	Peak	VERTICAL
17966.00	30.07	48.74	13.77	42.49	50.09	54.00	-3.91	Average	VERTICAL

17966.00	36.70	48.74	13.77	42.49	56.72	74.00	-17.28	Peak	VERTICAL
Result: Pass									

Note: 1. 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK and 8DPSK mode, the worst case is GFSK mode)
2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
3. For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit. Other emission levels are attenuated 20 dB below the limit, so it does not record in the report.

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

Same as section 4.1

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

11.4. Test result


Mode	Antenna	Freq. (MHz)	Verdict
GFSK	ANT1	Hopping off 2402	Pass
	ANT1	Hopping off 2441	Pass
	ANT1	Hopping off 2480	Pass
$\pi/4$ -DQPSK	ANT1	Hopping off 2402	Pass
	ANT1	Hopping off 2441	Pass
	ANT1	Hopping off 2480	Pass
8DPSK	ANT1	Hopping off 2402	Pass
	ANT1	Hopping off 2441	Pass
	ANT1	Hopping off 2480	Pass

11.5. Original test data

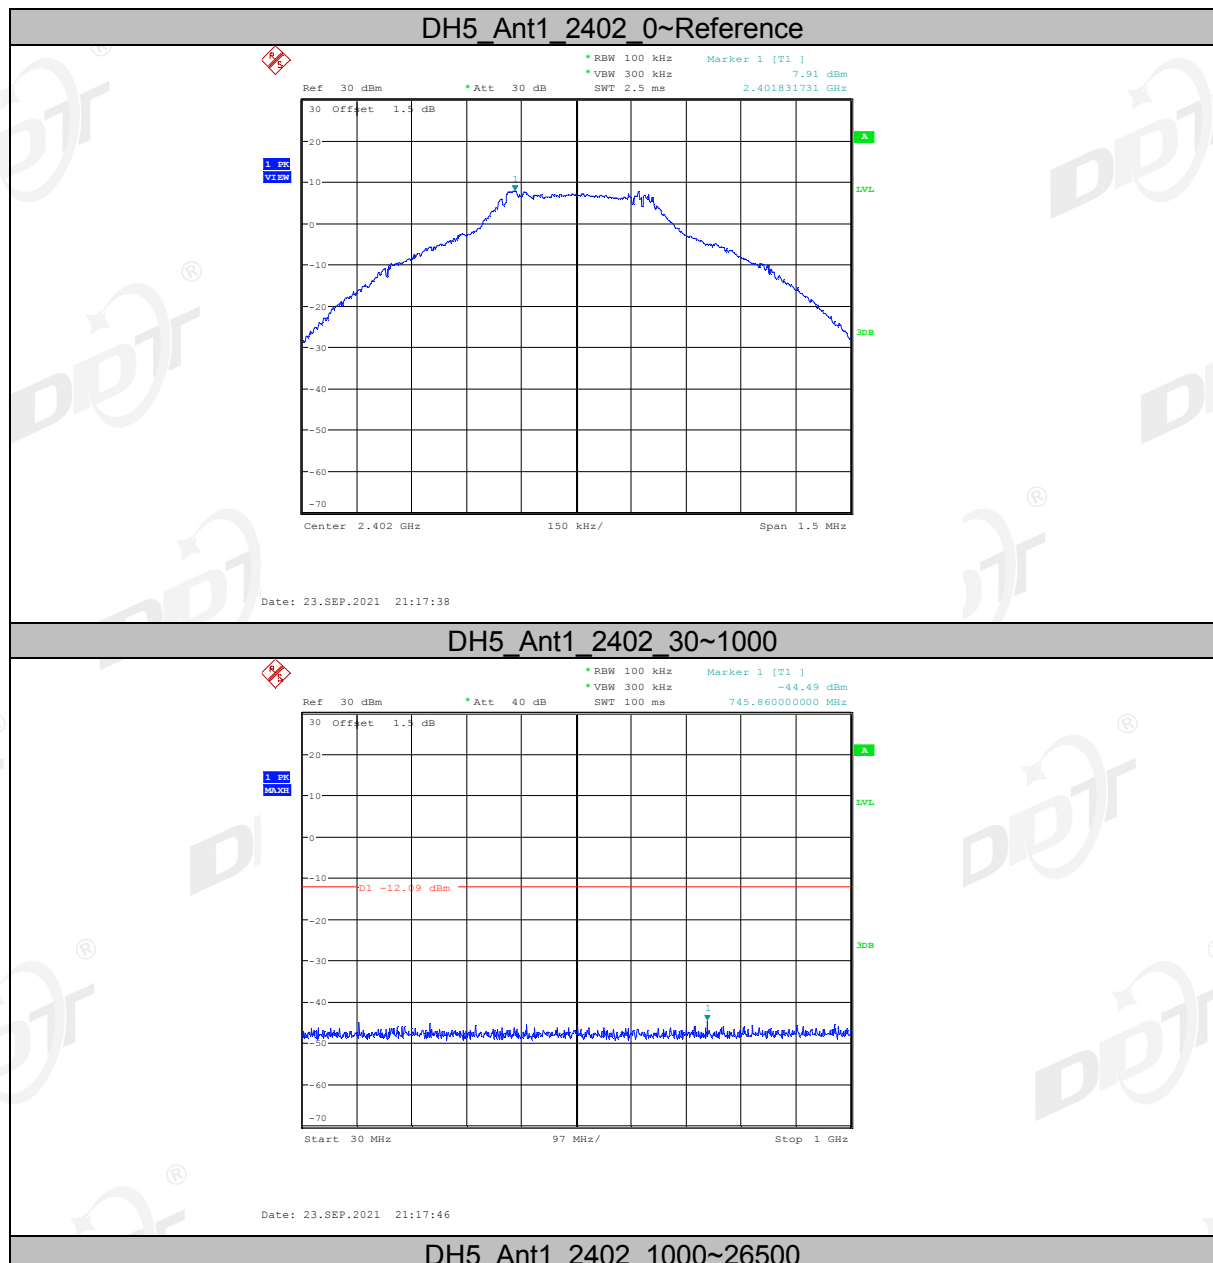


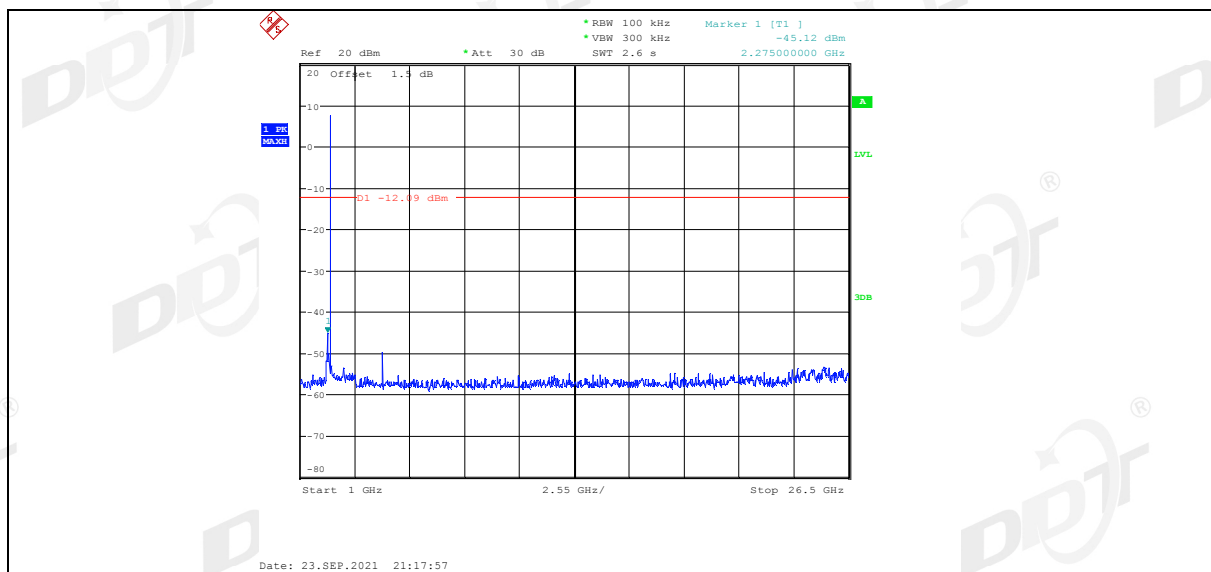


DH5_Ant1_2441_0~Reference

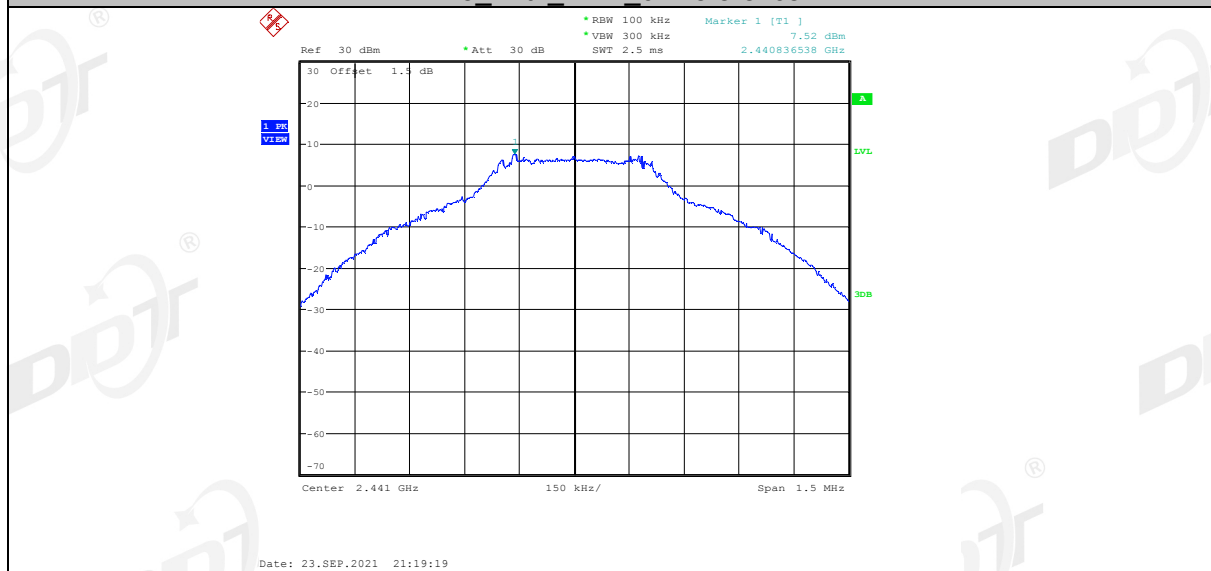


DH5_Ant1_2441_30~1000

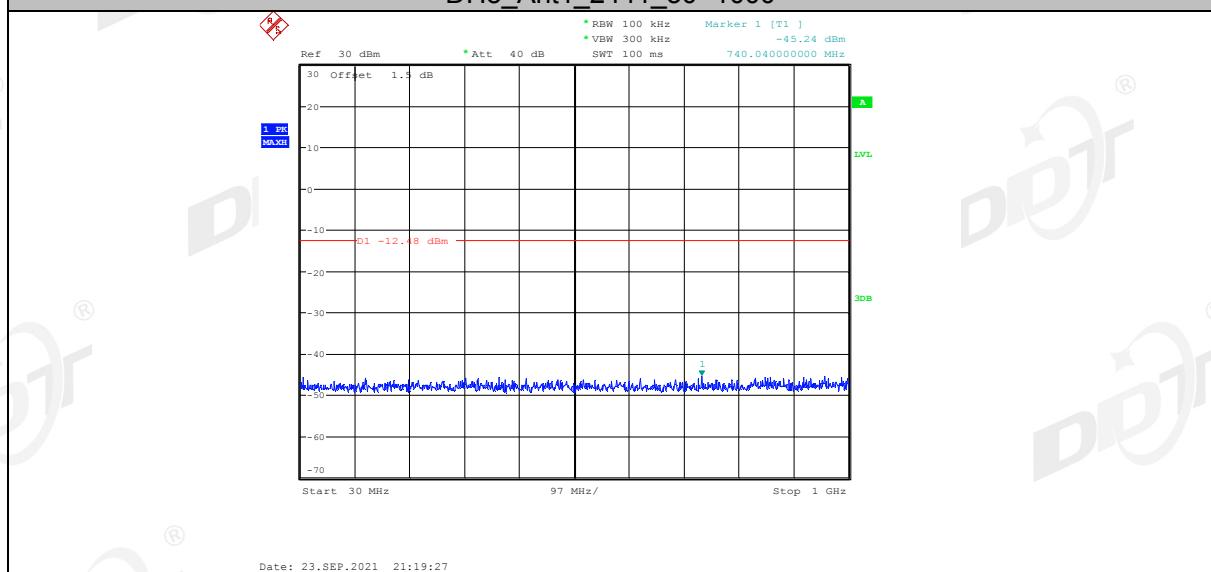


DH5_Ant1_2441_1000~26500

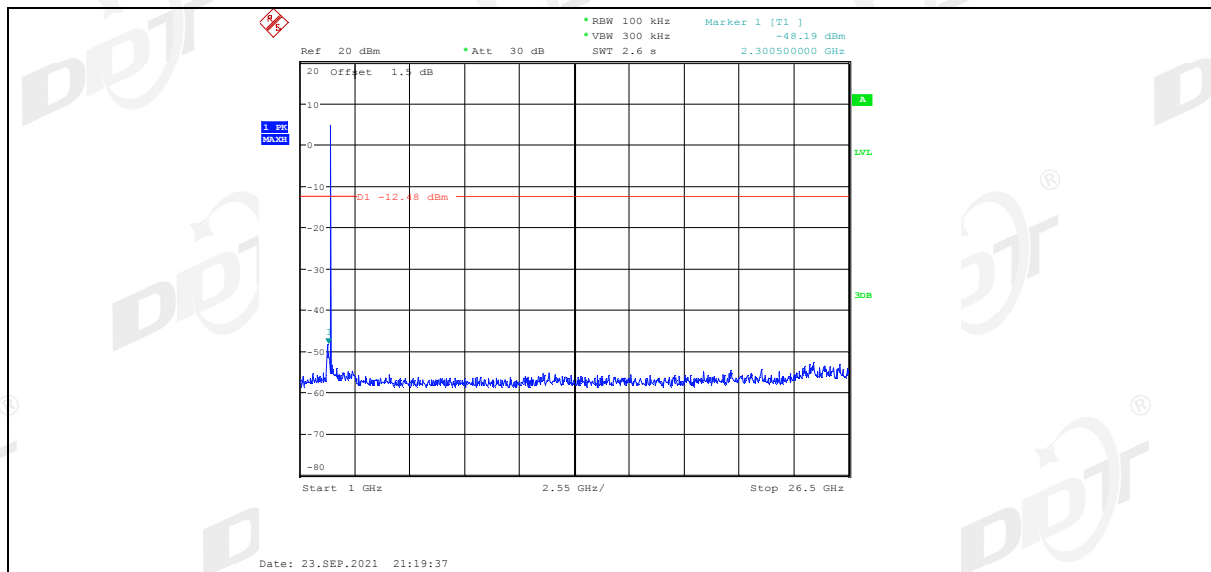


DH5_Ant1_2480_0~Reference

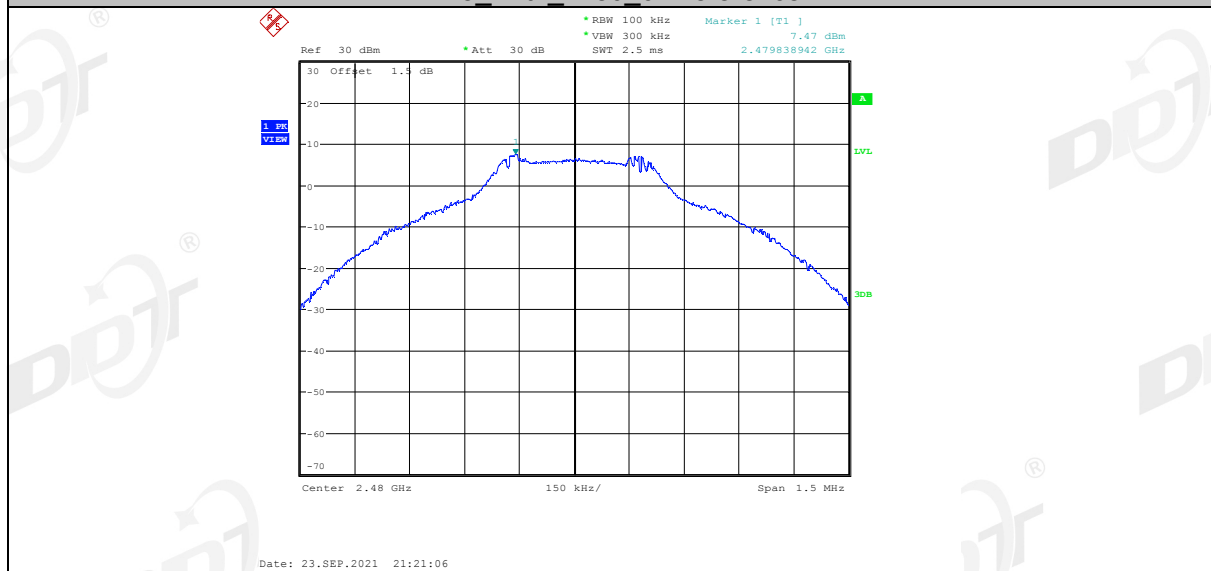


DH5_Ant1_2480_30~1000

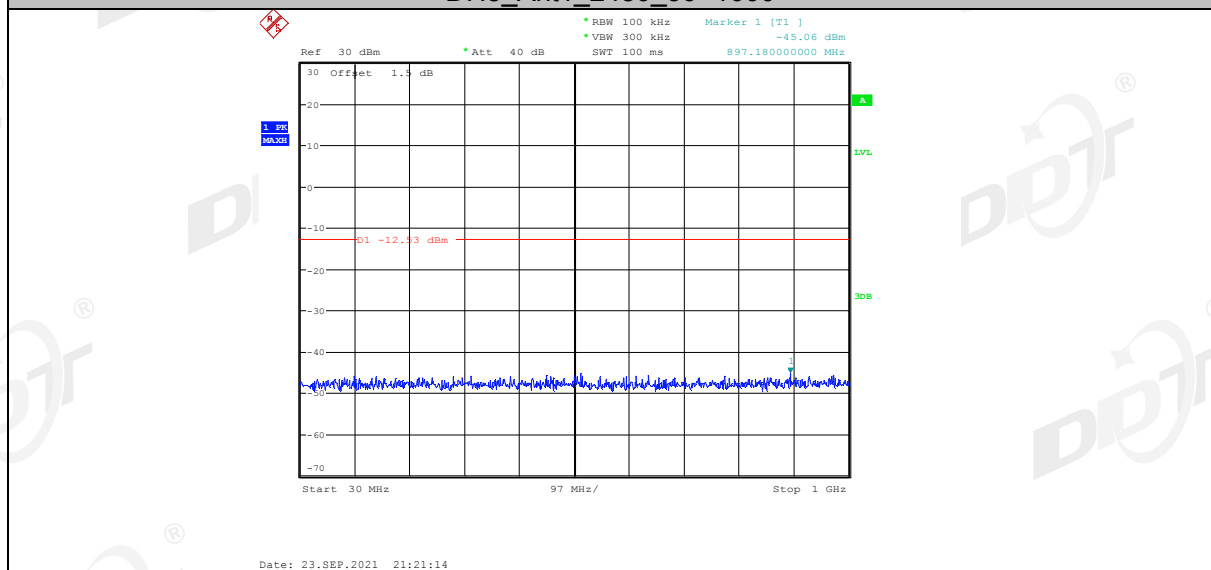


DH5_Ant1_2480_1000~26500

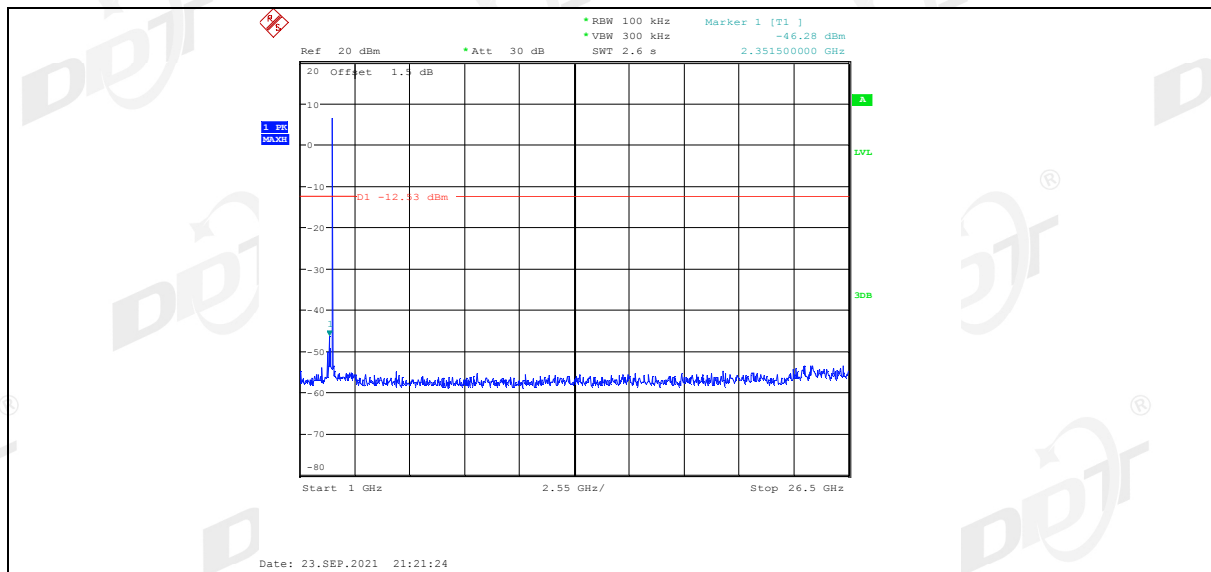


2DH5_Ant1_2402_0~Reference

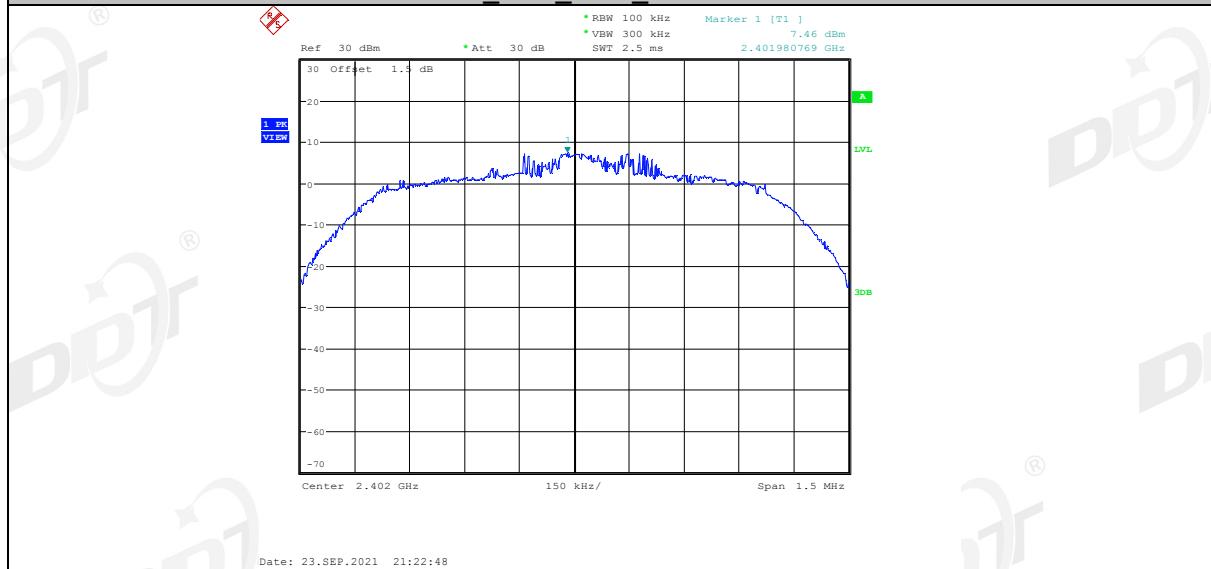


2DH5_Ant1_2402_30~1000

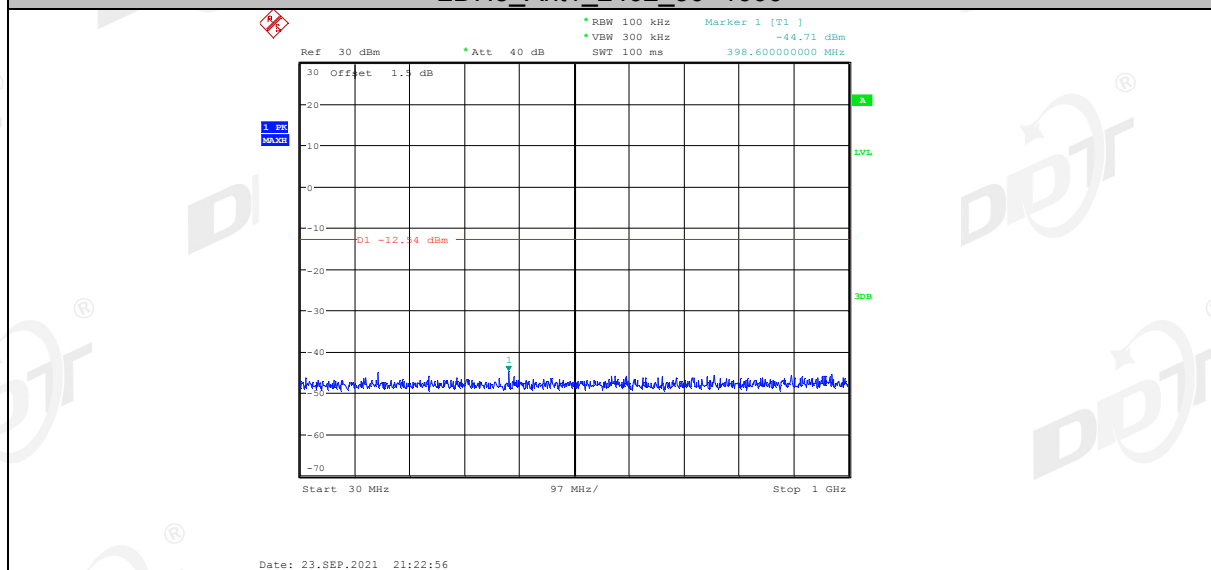


2DH5_Ant1_2402_1000~26500

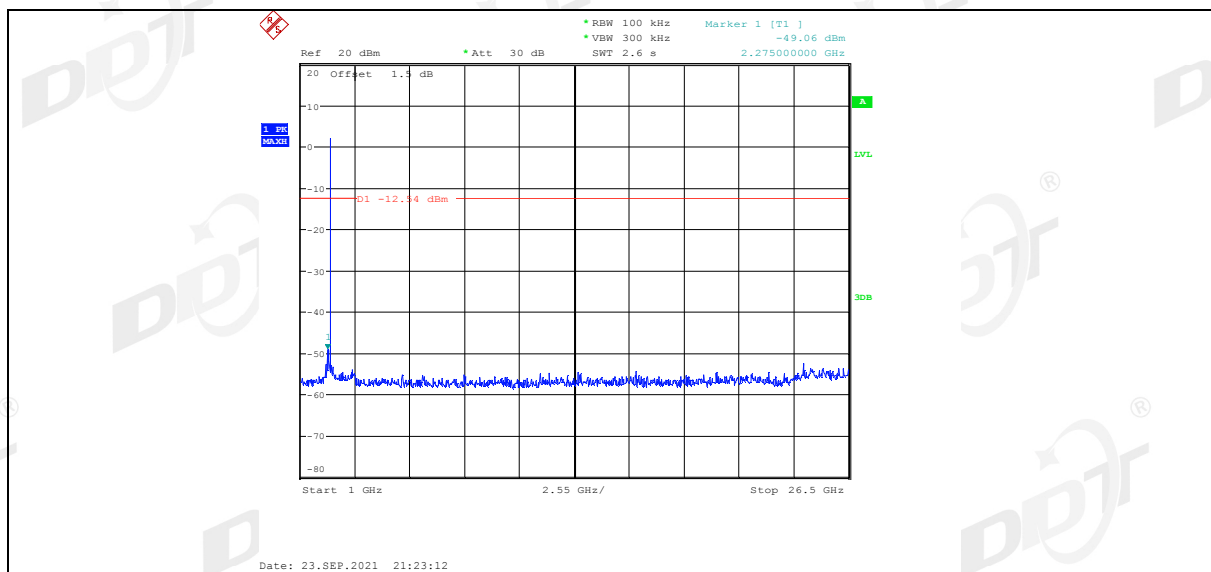


2DH5_Ant1_2441_0~Reference

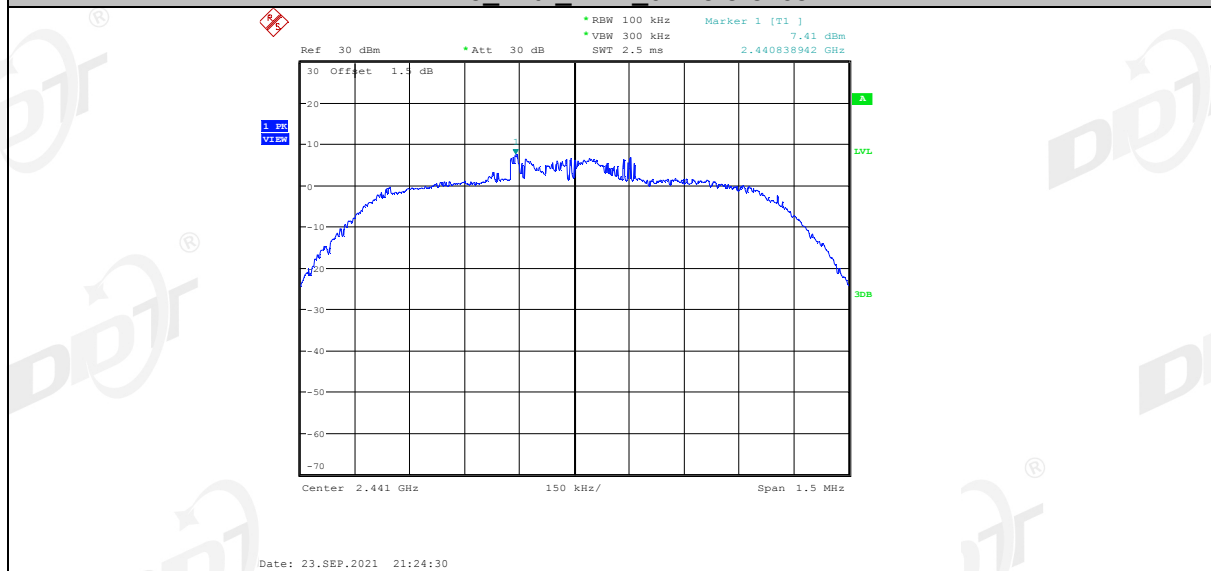


2DH5_Ant1_2441_30~1000

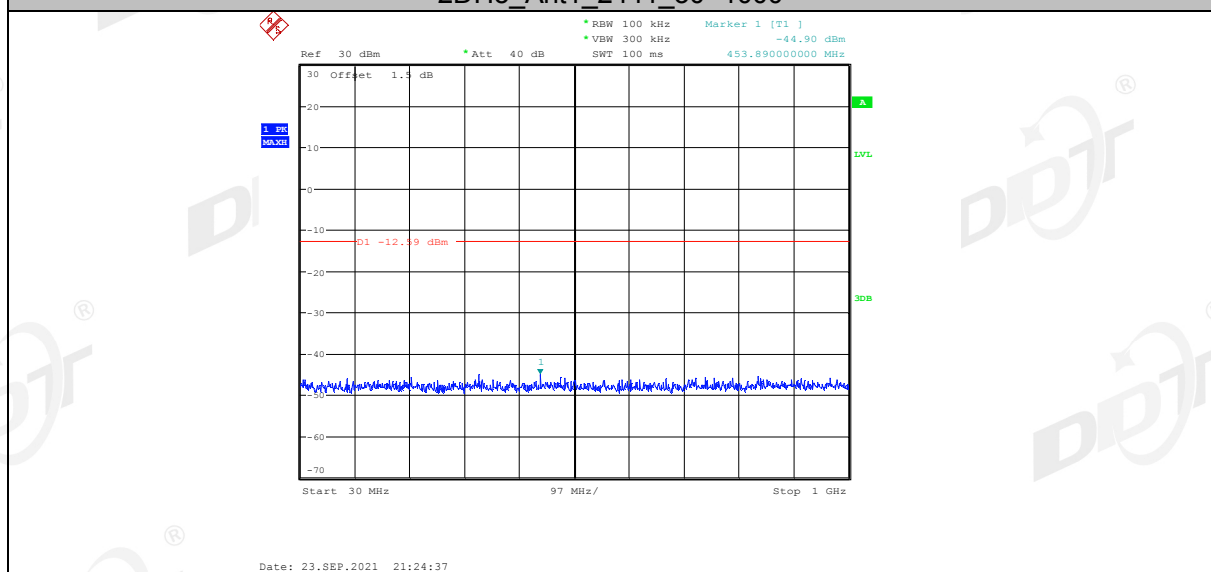


2DH5_Ant1_2441_1000~26500

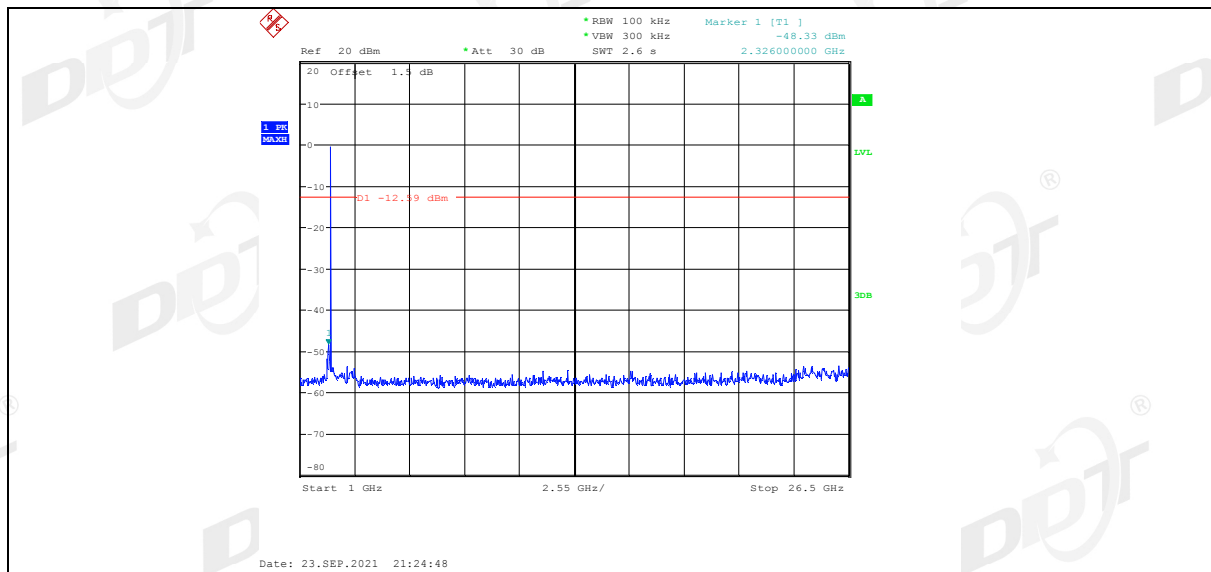


2DH5_Ant1_2480_0~Reference

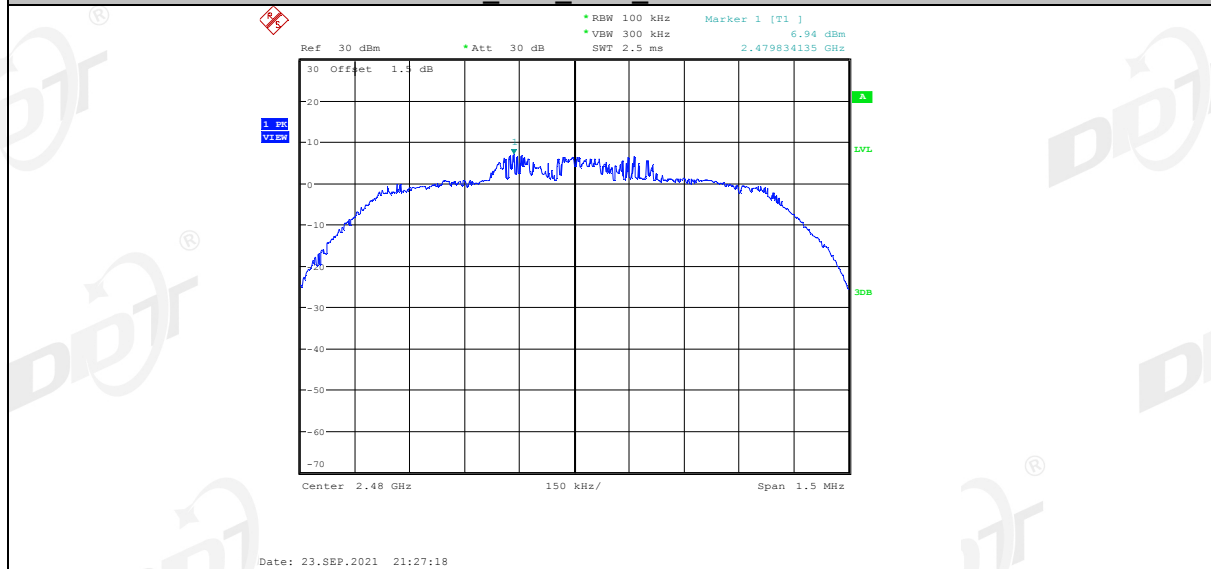


2DH5_Ant1_2480_30~1000

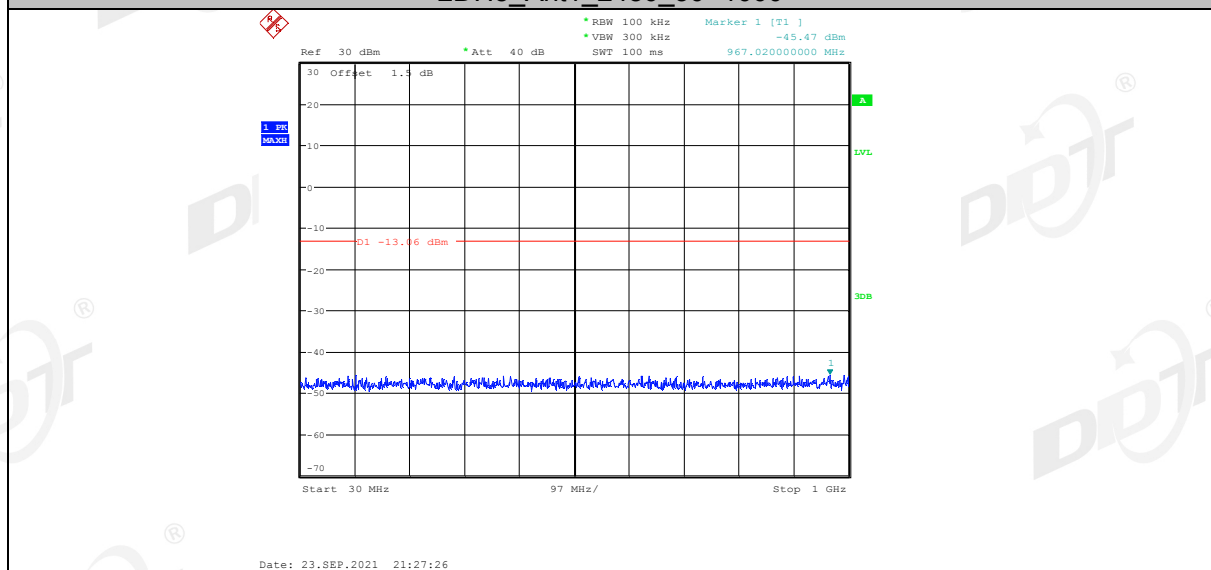


2DH5_Ant1_2480_1000~26500

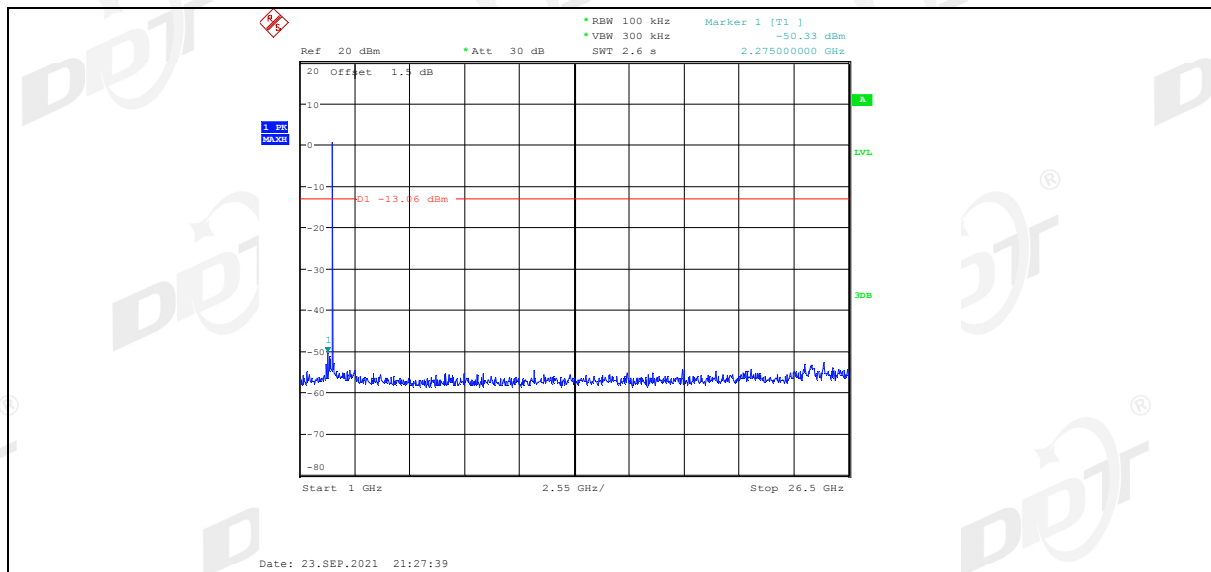


3DH5_Ant1_2402_0~Reference

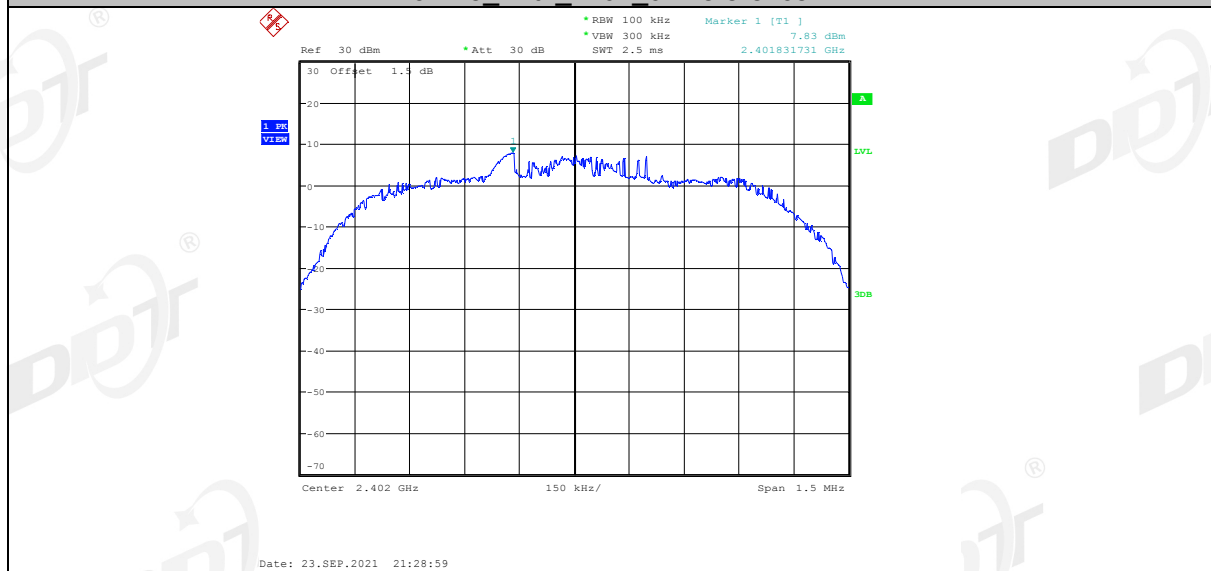


3DH5_Ant1_2402_30~1000

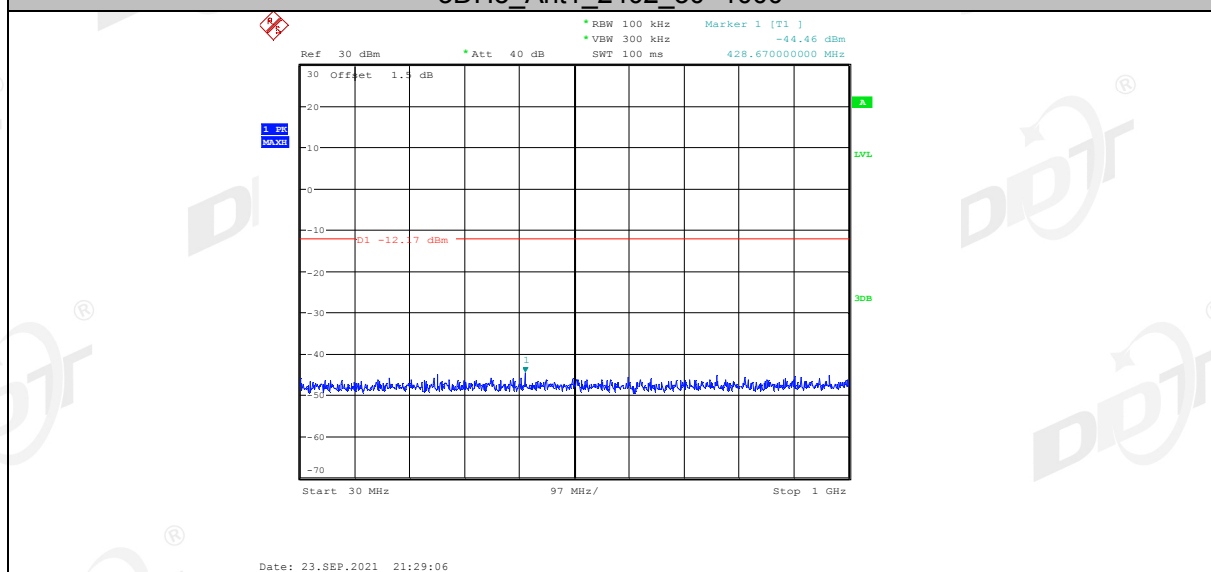


3DH5_Ant1_2402_1000~26500

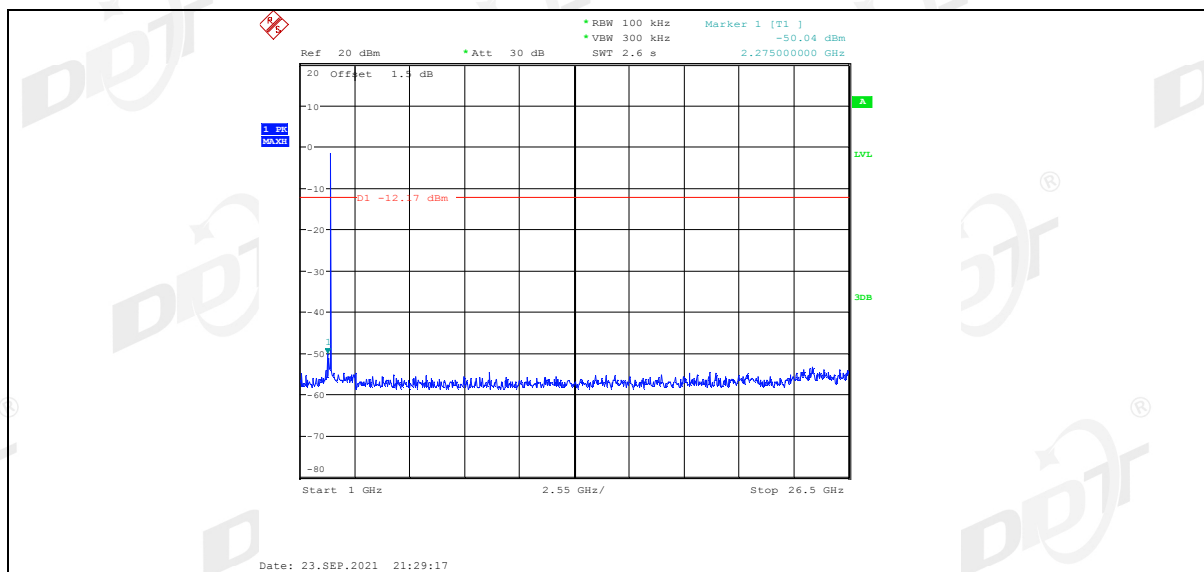


3DH5_Ant1_2441_0~Reference

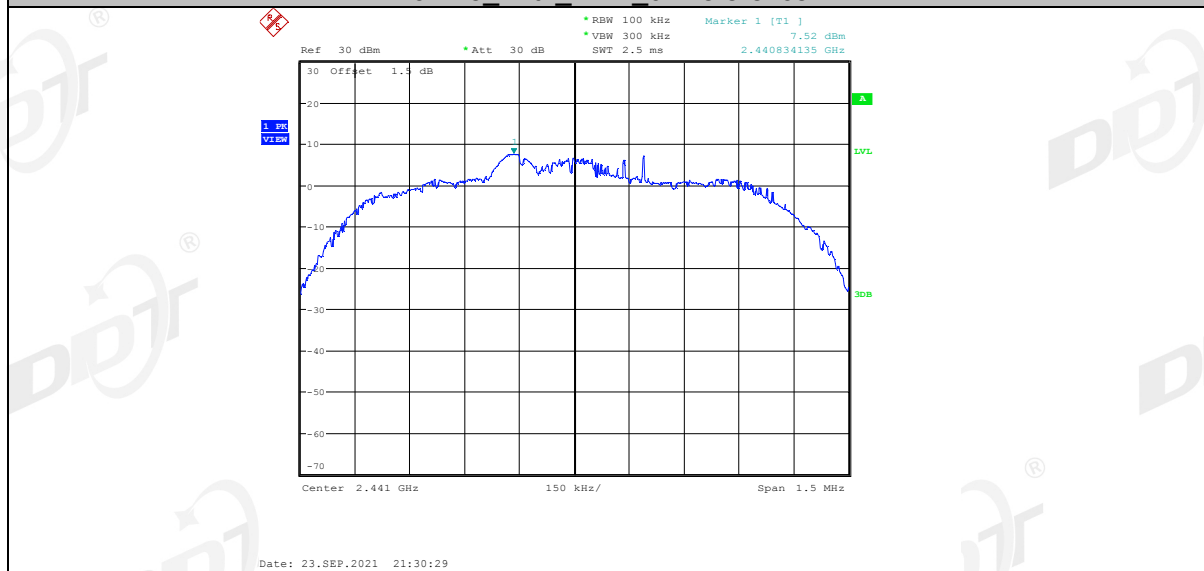


3DH5_Ant1_2441_30~1000

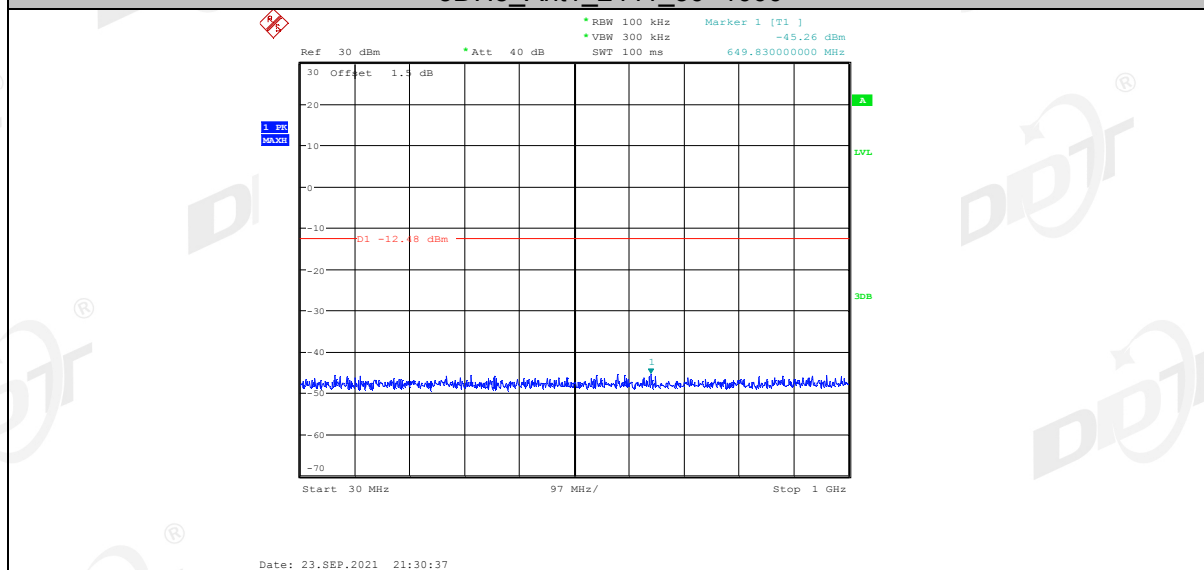


3DH5_Ant1_2441_1000~26500

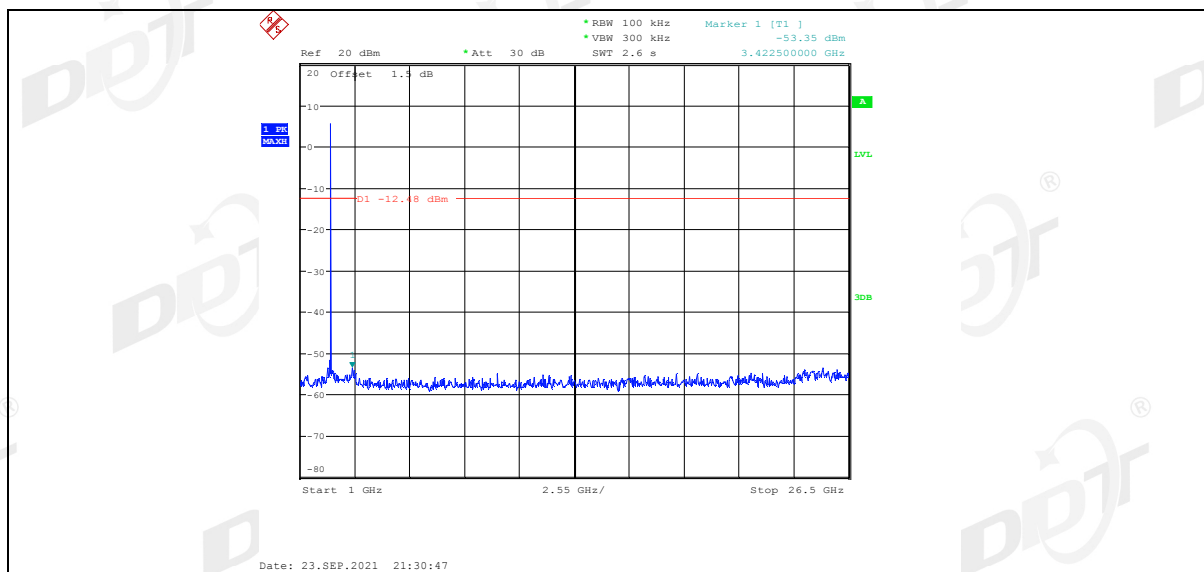


3DH5_Ant1_2480_0~Reference

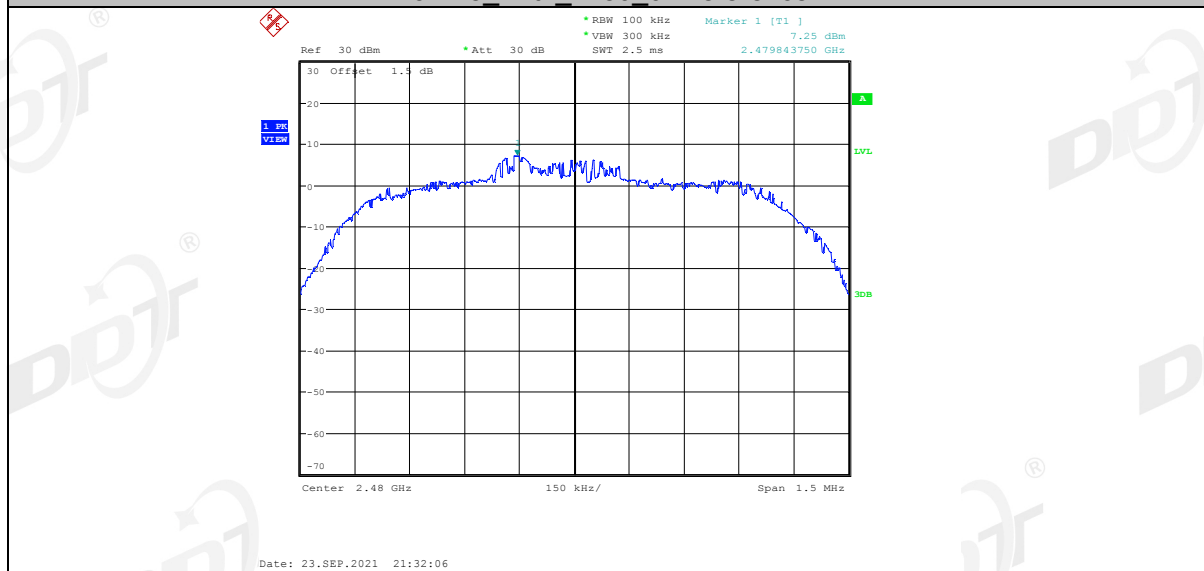

3DH5_Ant1_2480_30~1000

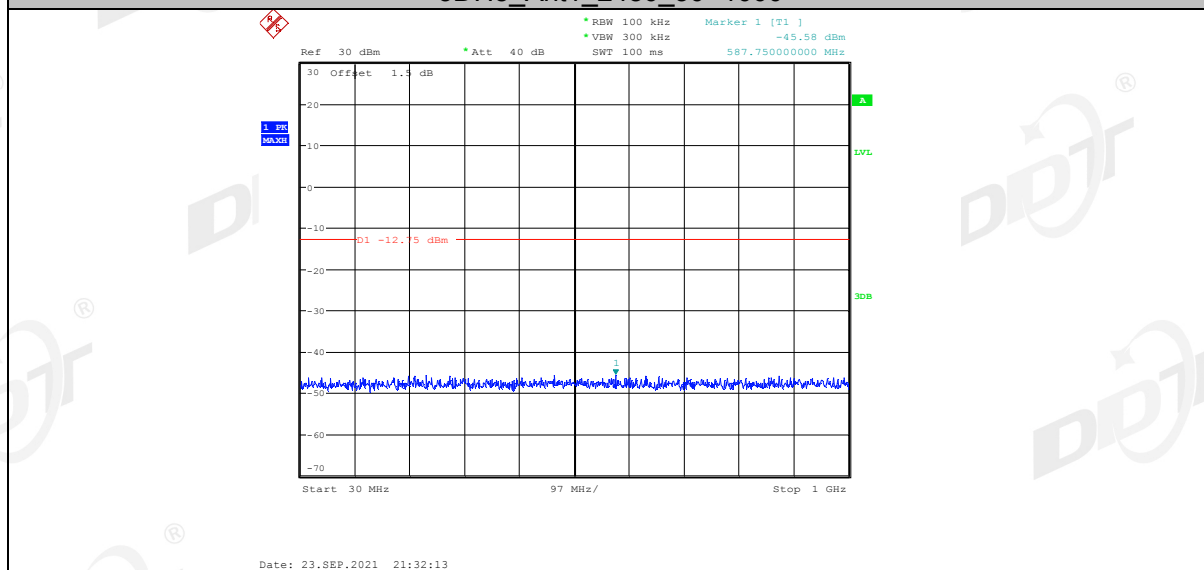


3DH5_Ant1_2480_1000~26500

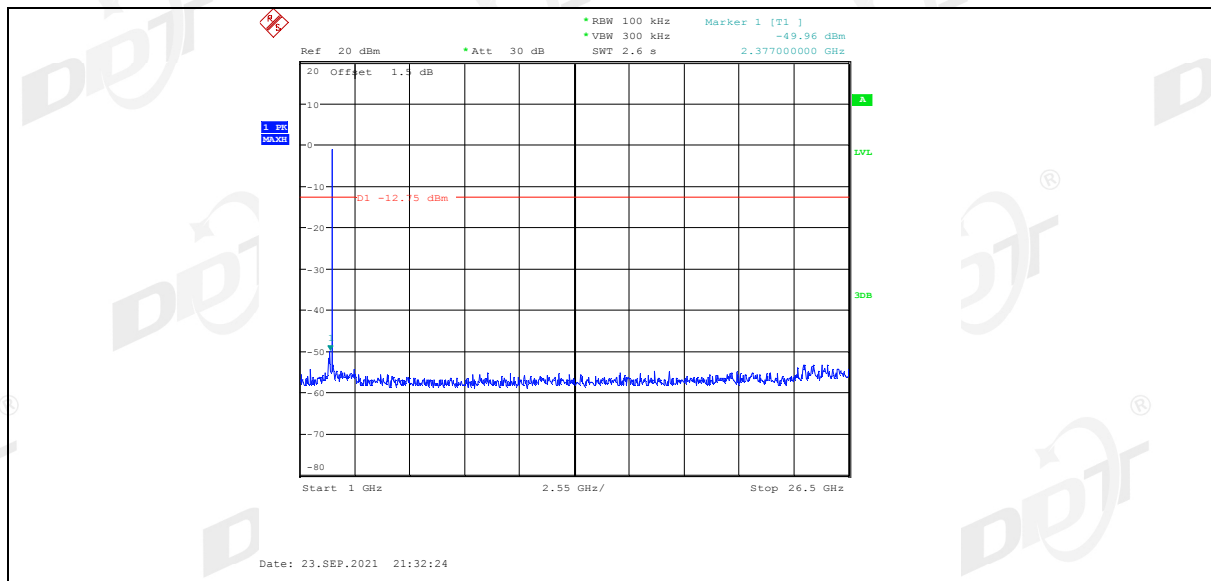

12. Band Edge Compliance (Radiated Method)

12.1. Block diagram of test setup

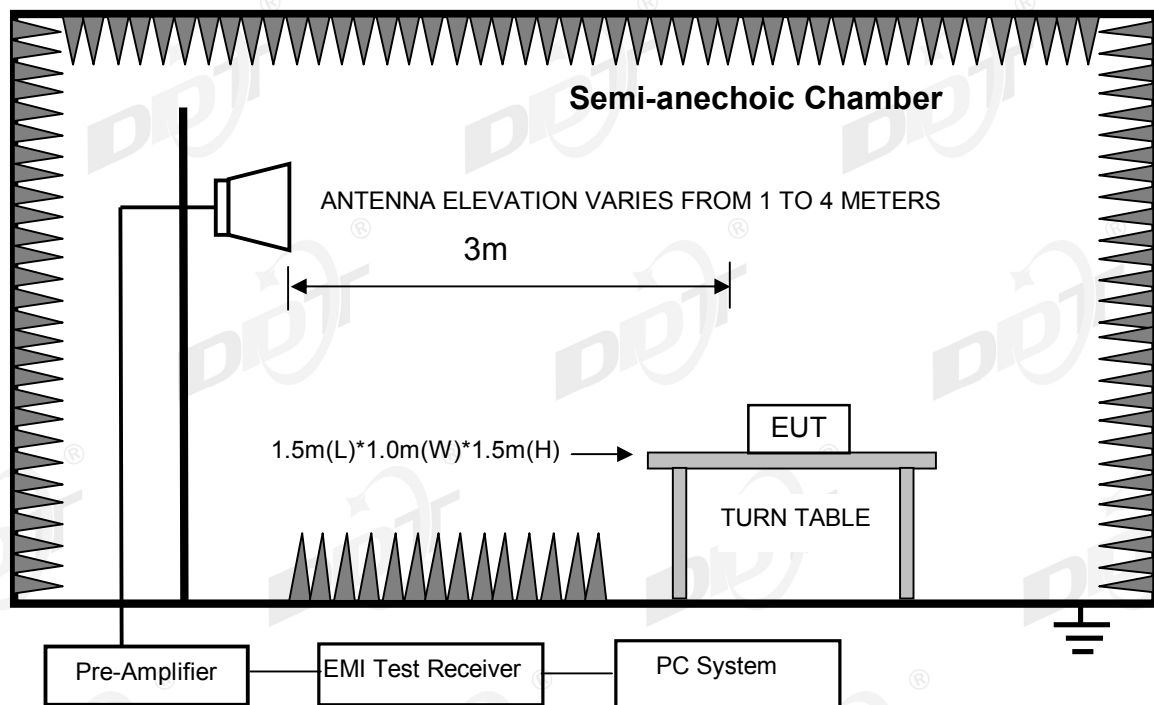

12.2. Limit

All restriction band should comply with 15.209 & RSS-GEN, other emission should be at least 20 dB below the fundamental.

12.3. Test procedure

Same with clause 10.3 except change investigated frequency range from 2310 MHz to 2410 MHz and 2475 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

12.4. Test result

Pass. (See below detailed test result)

Remark: hopping on and hopping off mode all have been test, hopping off mode is worse and reported only, the worst case recorded in this report.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00015.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

EUT : INDOOR/OUTDOOR 360-degrees
Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA 9120D/3m/VERTICAL

Memo : DH5 2402

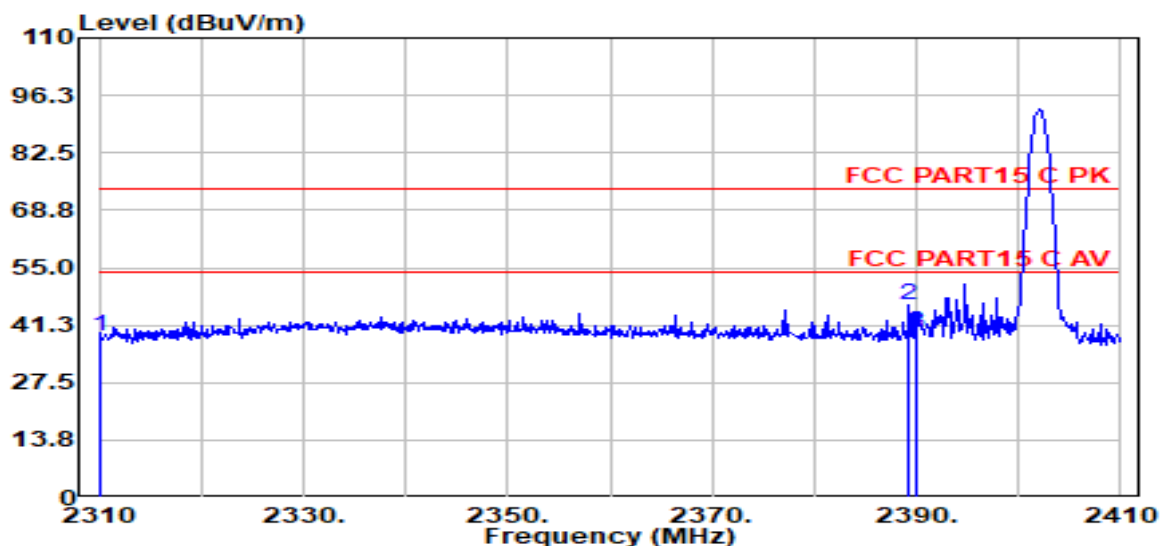

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	49.51	27.33	4.70	43.01	38.53	74.00	-35.47	Peak	VERTICAL
2	2389.30	56.67	27.57	4.79	43.09	45.95	74.00	-28.05	Peak	VERTICAL
3	2390.00	50.27	27.57	4.80	43.09	39.55	74.00	-34.45	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00016.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : DH5 2402

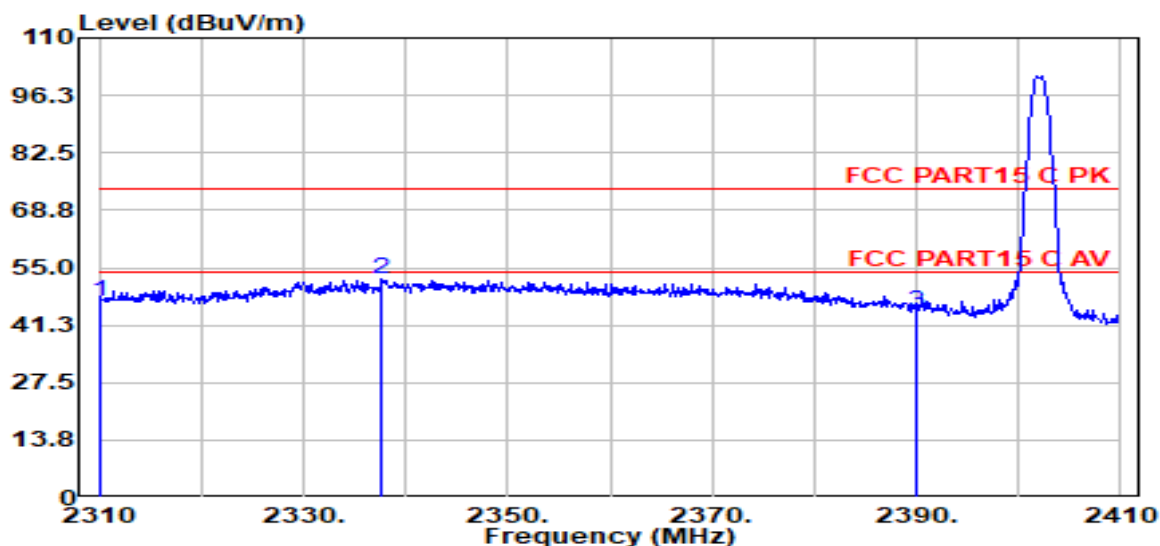

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	57.95	27.33	4.70	43.01	46.97	74.00	-27.03	Peak	HORIZONTAL
2	2337.70	63.34	27.41	4.73	43.04	52.45	74.00	-21.55	Peak	HORIZONTAL
3	2390.00	55.21	27.57	4.80	43.09	44.48	74.00	-29.52	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00017.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA 9120D/3m/VERTICAL

Memo : DH5 2480

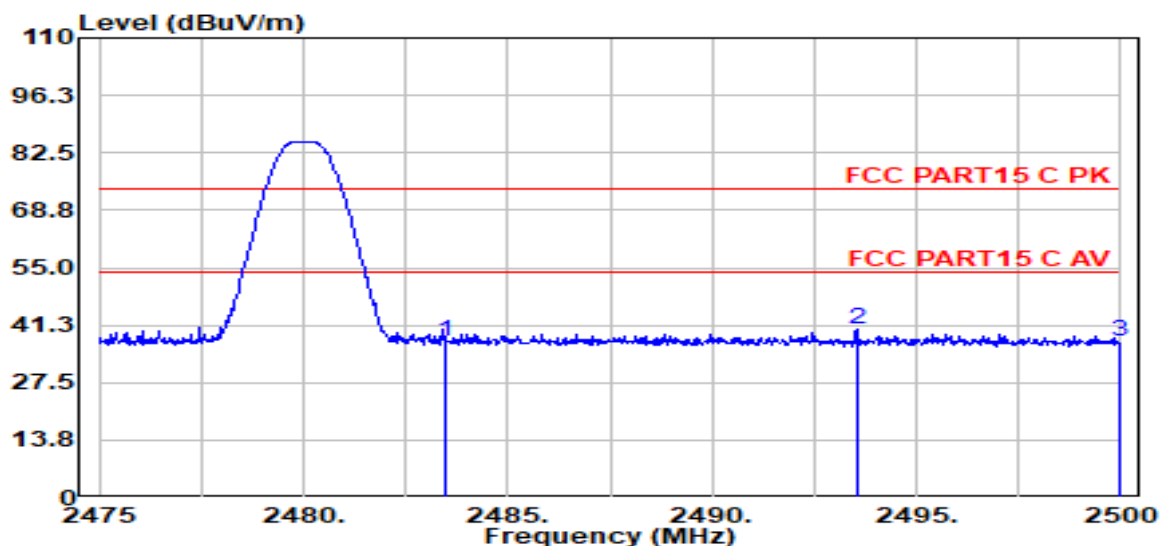

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	47.67	27.85	4.91	43.18	37.25	74.00	-36.75	Peak	VERTICAL
2	2493.55	50.62	27.88	4.92	43.19	40.23	74.00	-33.77	Peak	VERTICAL
3	2500.00	47.64	27.90	4.93	43.20	37.27	74.00	-36.73	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00018.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

EUT : INDOOR/OUTDOOR 360-degrees
Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : DH5 2480

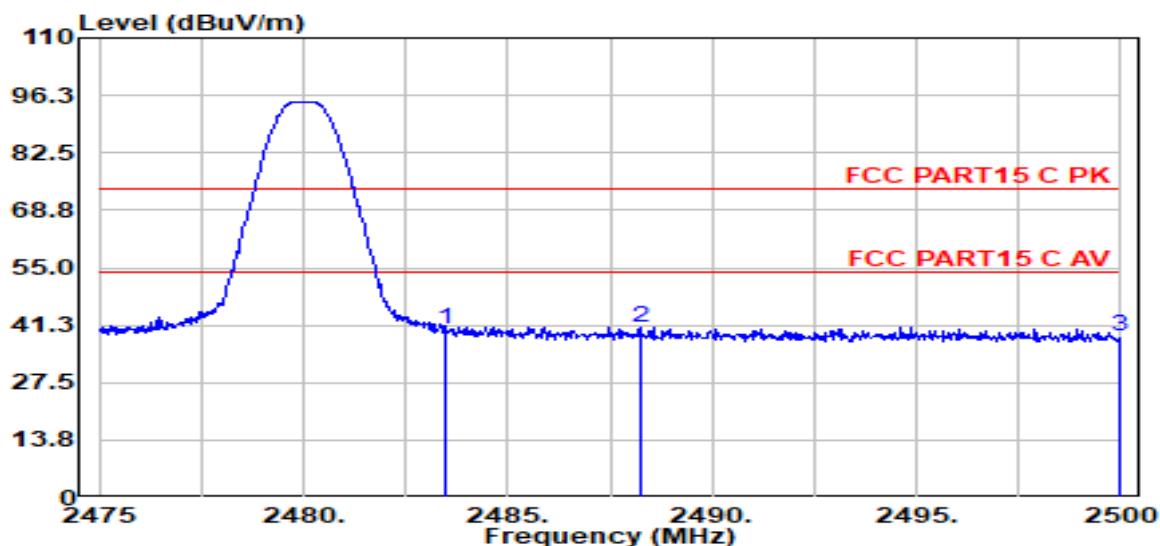

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	50.53	27.85	4.91	43.18	40.11	74.00	-33.89	Peak	HORIZONTAL
2	2488.23	51.25	27.86	4.92	43.19	40.85	74.00	-33.15	Peak	HORIZONTAL
3	2500.00	48.81	27.90	4.93	43.20	38.44	74.00	-35.56	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00019.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

EUT : INDOOR/OUTDOOR 360-degrees
Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : 2DH5 2402

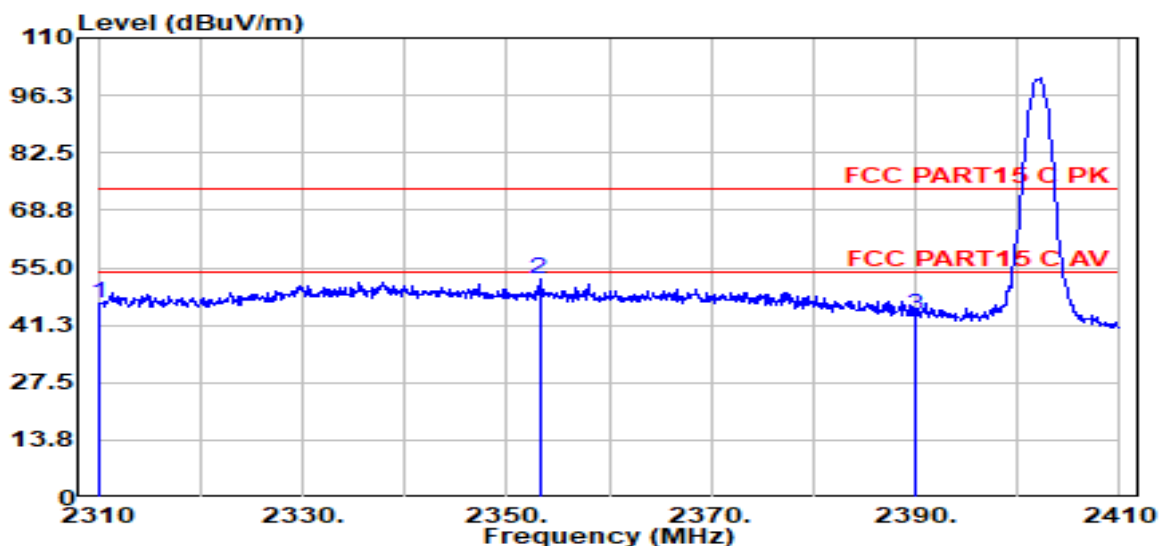

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	57.30	27.33	4.70	43.01	46.32	74.00	-27.68	Peak	HORIZONTAL
2	2353.20	63.07	27.46	4.75	43.05	52.22	74.00	-21.78	Peak	HORIZONTAL
3	2390.00	54.29	27.57	4.80	43.09	43.57	74.00	-30.43	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00020.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA 9120D/3m/VERTICAL

Memo : 2DH5 2402

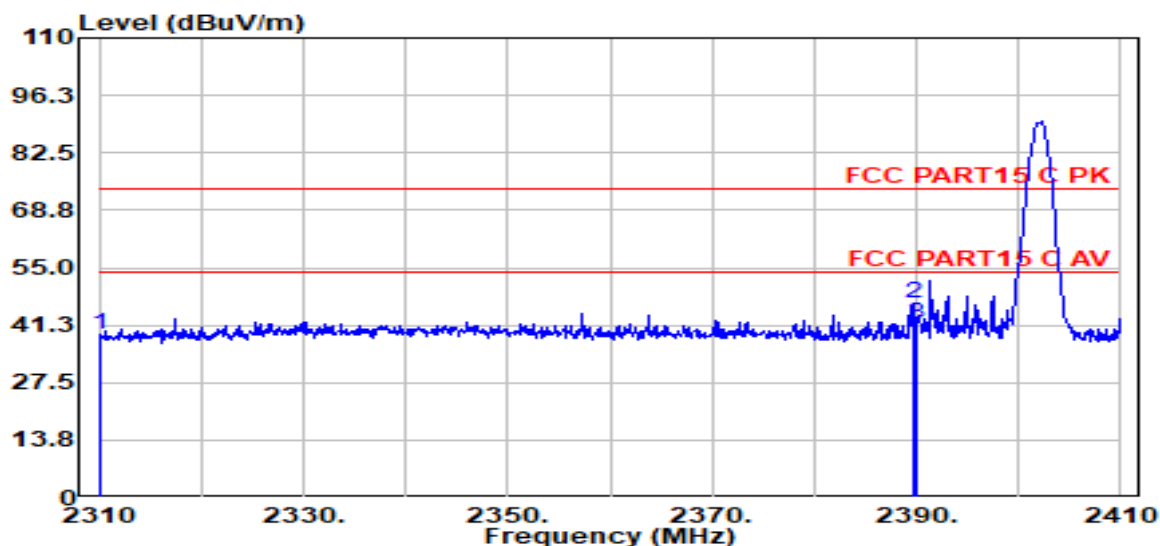

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	49.85	27.33	4.70	43.01	38.86	74.00	-35.14	Peak	VERTICAL
2	2389.80	57.05	27.57	4.80	43.09	46.32	74.00	-27.68	Peak	VERTICAL
3	2390.00	52.20	27.57	4.80	43.09	41.48	74.00	-32.52	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00021.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

EUT : INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : 2DH5 2480

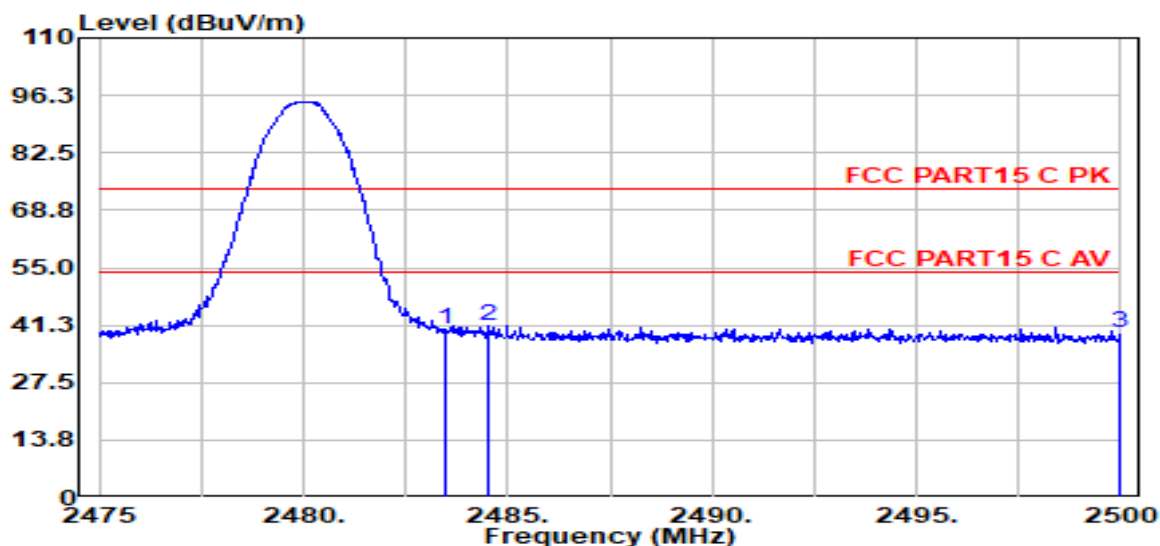

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	50.62	27.85	4.91	43.18	40.20	74.00	-33.80	Peak	HORIZONTAL
2	2484.50	51.57	27.85	4.91	43.18	41.15	74.00	-32.85	Peak	HORIZONTAL
3	2500.00	49.82	27.90	4.93	43.20	39.45	74.00	-34.55	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00022.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA 9120D/3m/VERTICAL

Memo : 2DH5 2480

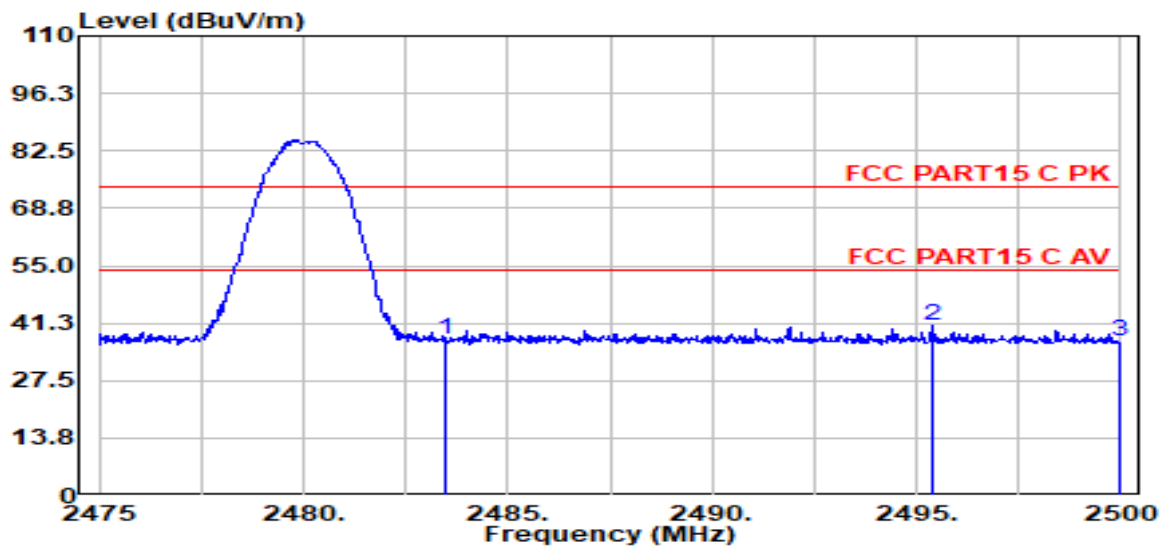

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	47.68	27.85	4.91	43.18	37.25	74.00	-36.75	Peak	VERTICAL
2	2495.38	50.88	27.89	4.92	43.20	40.50	74.00	-33.50	Peak	VERTICAL
3	2500.00	47.18	27.90	4.93	43.20	36.81	74.00	-37.19	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00025.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : 3DH5 2402

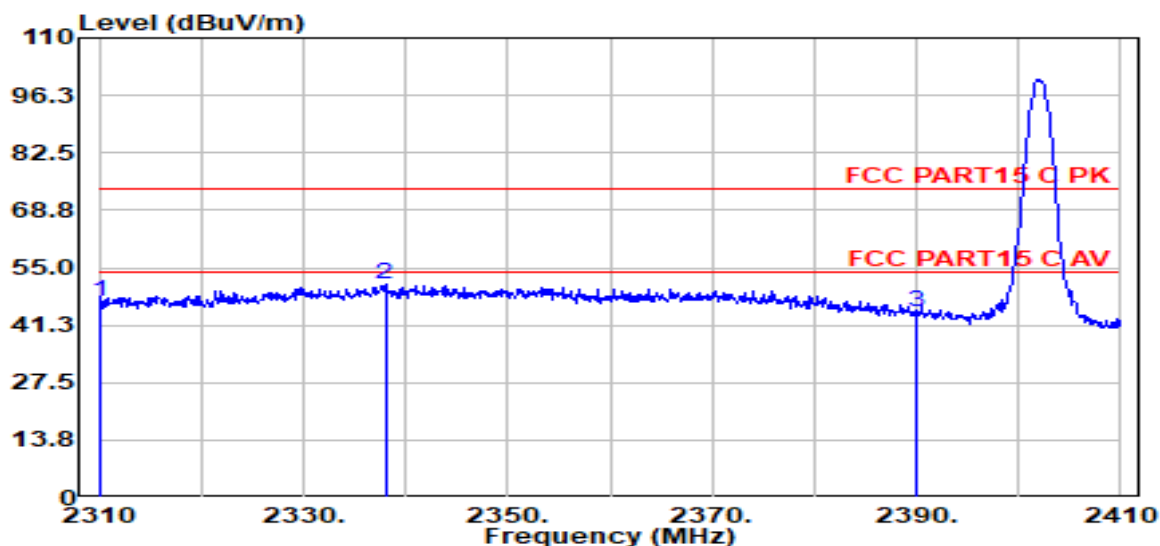

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	57.90	27.33	4.70	43.01	46.92	74.00	-27.08	Peak	HORIZONTAL
2	2338.00	61.77	27.41	4.73	43.04	50.88	74.00	-23.12	Peak	HORIZONTAL
3	2390.00	54.99	27.57	4.80	43.09	44.27	74.00	-29.73	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00026.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA 9120D/3m/VERTICAL

Memo : 3DH5 2402

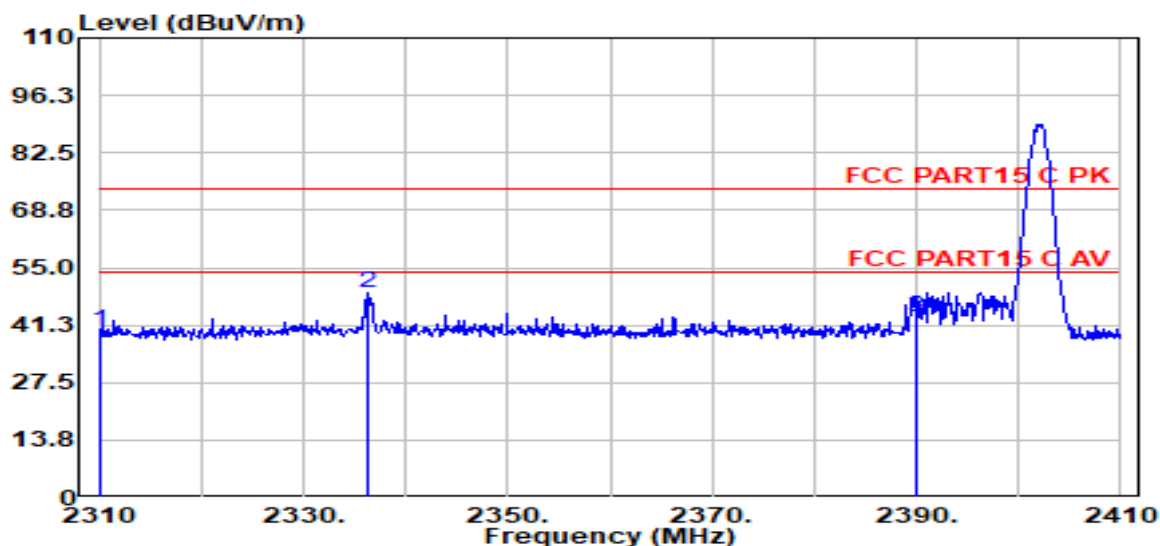

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	50.89	27.33	4.70	43.01	39.91	74.00	-34.09	Peak	VERTICAL
2	2336.40	59.98	27.41	4.73	43.04	49.08	74.00	-24.92	Peak	VERTICAL
3	2390.00	53.81	27.57	4.80	43.09	43.08	74.00	-30.92	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00023.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA 9120D/3m/VERTICAL

Memo : 3DH5 2480

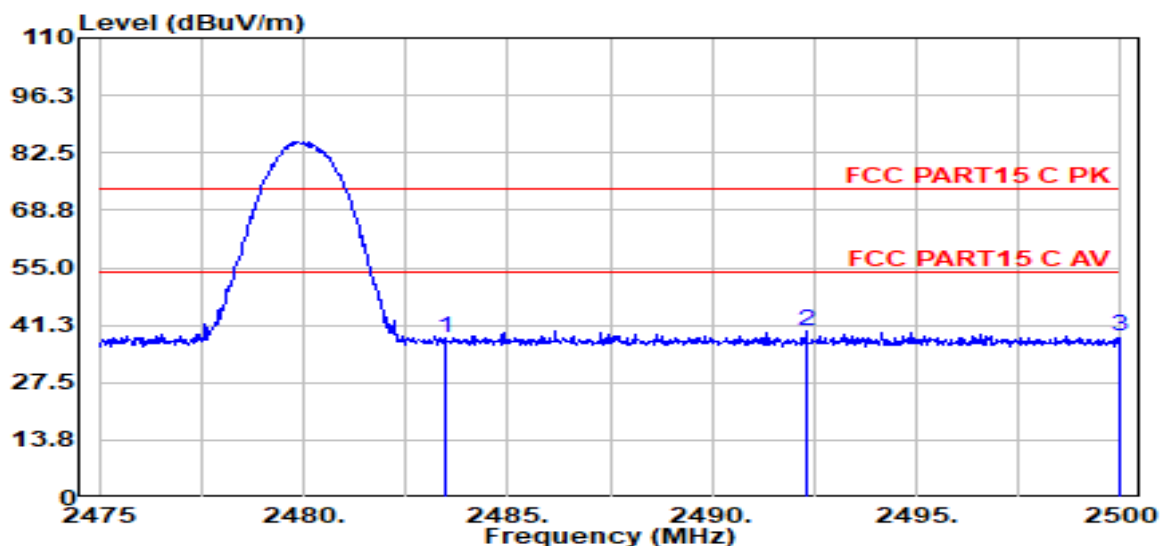

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	48.76	27.85	4.91	43.18	38.33	74.00	-35.67	Peak	VERTICAL
2	2492.30	50.24	27.88	4.92	43.19	39.85	74.00	-34.15	Peak	VERTICAL
3	2500.00	48.86	27.90	4.93	43.20	38.49	74.00	-35.51	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21062509-2E ION ISP138A\FCC ABOVE 1G\FCC ABOVE 1G_00024.EMI

Test Date : 2021-09-15

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and Multi-Sync

Model Number : BRIGHT MAX PLUS


Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°, Humi:55%, Press:100.1kPa

Antenna/Distance : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : 3DH5 2480

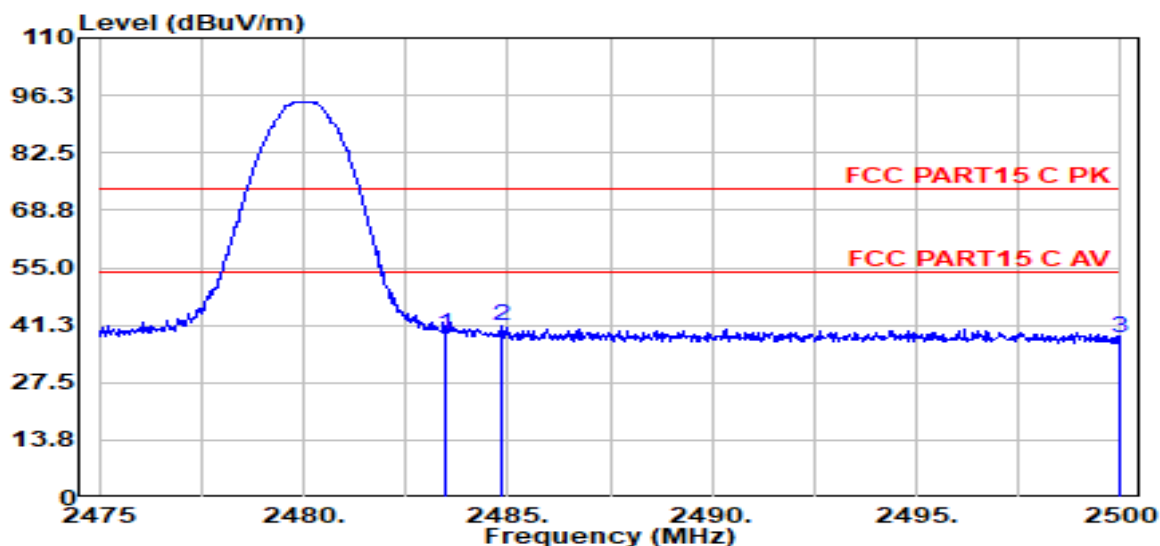

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	49.48	27.85	4.91	43.18	39.06	74.00	-34.94	Peak	HORIZONTAL
2	2484.88	51.38	27.85	4.91	43.18	40.96	74.00	-33.04	Peak	HORIZONTAL
3	2500.00	48.69	27.90	4.93	43.20	38.32	74.00	-35.68	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. Power Line Conducted Emission

13.1. Block diagram of test setup

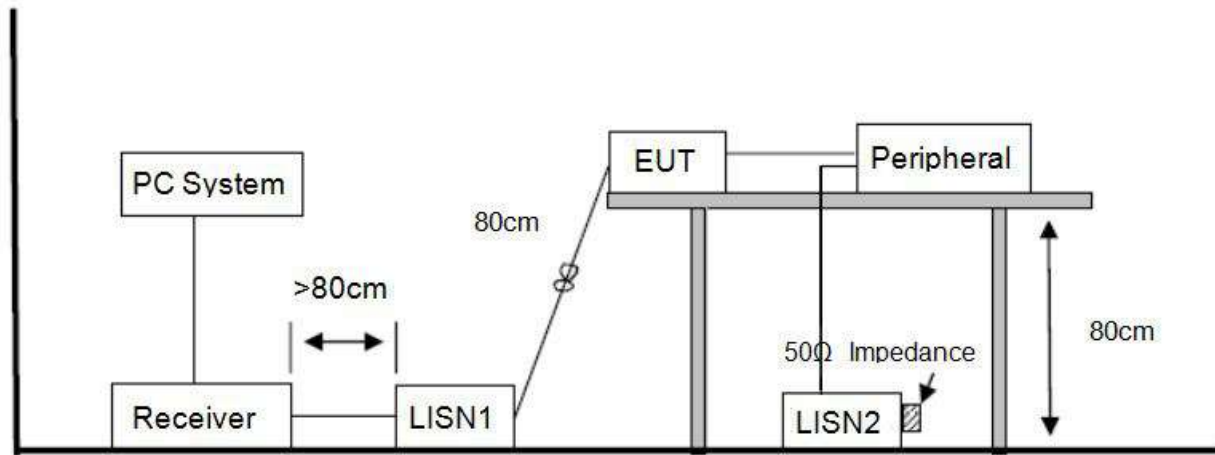

13.2. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

13.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 3 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were

recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

13.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “---” means Peak detection; “---” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21062509-2E ION
ISP138A\FCC .EM6

Test Date : 2021-09-16

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and
Multi-Sync

Model Number : BRIGHT MAX PLUS

Power Supply : AC 120V/60Hz


Test Mode : Tx mode

Condition : TEMP:24.3°C, RH:53.0%, BP:101.0kPa

LISN : 2020 ENV 216 1#/NEUTRAL

Memo :

Data: 1

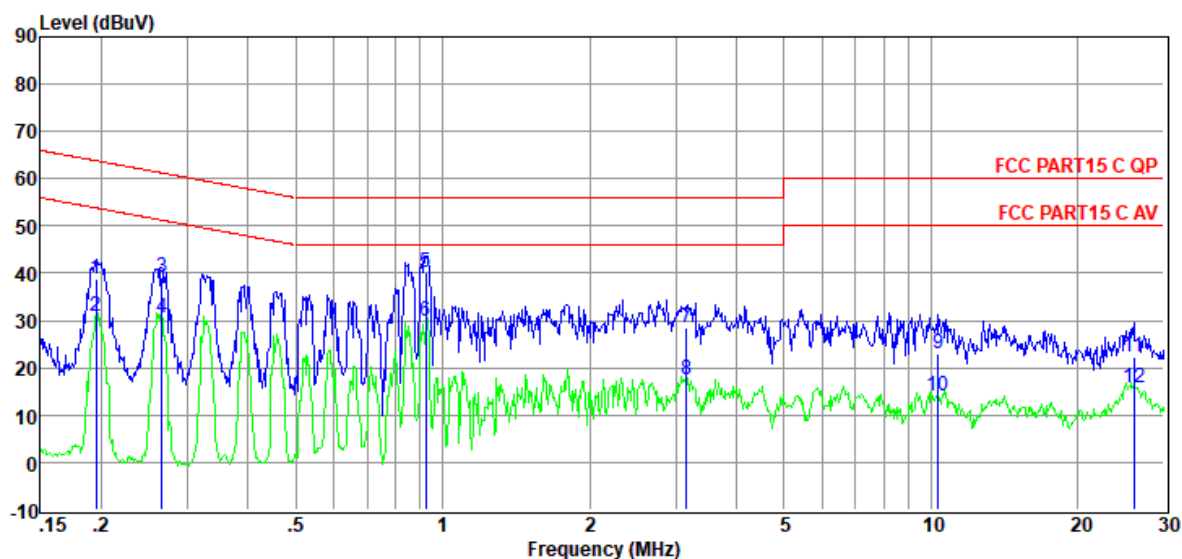

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBUV)	(dB)	(dB)	(dB)	(dBUV)	(dBUV)	(dB)		
1	0.20	19.71	9.37	0.02	9.86	38.96	63.80	-24.84	QP	NEUTRAL
2	0.20	11.78	9.37	0.02	9.86	31.03	53.80	-22.77	Average	NEUTRAL
3	0.27	19.88	9.38	0.02	9.86	39.14	61.25	-22.11	QP	NEUTRAL
4	0.27	11.17	9.38	0.02	9.86	30.43	51.25	-20.82	Average	NEUTRAL
5	0.92	20.85	9.39	0.03	9.86	40.13	56.00	-15.87	QP	NEUTRAL
6	0.92	10.74	9.39	0.03	9.86	30.02	46.00	-15.98	Average	NEUTRAL
7	3.16	9.02	9.41	0.06	9.87	28.36	56.00	-27.64	QP	NEUTRAL
8	3.16	-1.99	9.41	0.06	9.87	17.35	46.00	-28.65	Average	NEUTRAL
9	10.34	3.32	9.57	0.11	9.89	22.89	60.00	-37.11	QP	NEUTRAL
10	10.34	-5.48	9.57	0.11	9.89	14.09	50.00	-35.91	Average	NEUTRAL
11	26.00	2.53	9.64	0.18	9.97	22.32	60.00	-37.68	QP	NEUTRAL
12	26.00	-4.08	9.64	0.18	9.97	15.71	50.00	-34.29	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21062509-2E ION
ISP138A\FCC .EM6

Test Date : 2021-09-16

Tested By : Sanvin Zheng

INDOOR/OUTDOOR 360-degrees

EUT : Sound Speaker With Lighting and
Multi-Sync

Model Number : BRIGHT MAX PLUS

Power Supply : AC 120V/60Hz


Test Mode : Tx mode

Condition : TEMP:24.3°C, RH:53.0%, BP:101.0kPa

LISN : 2020 ENV 216 1#/LINE

Memo :

Data: 3

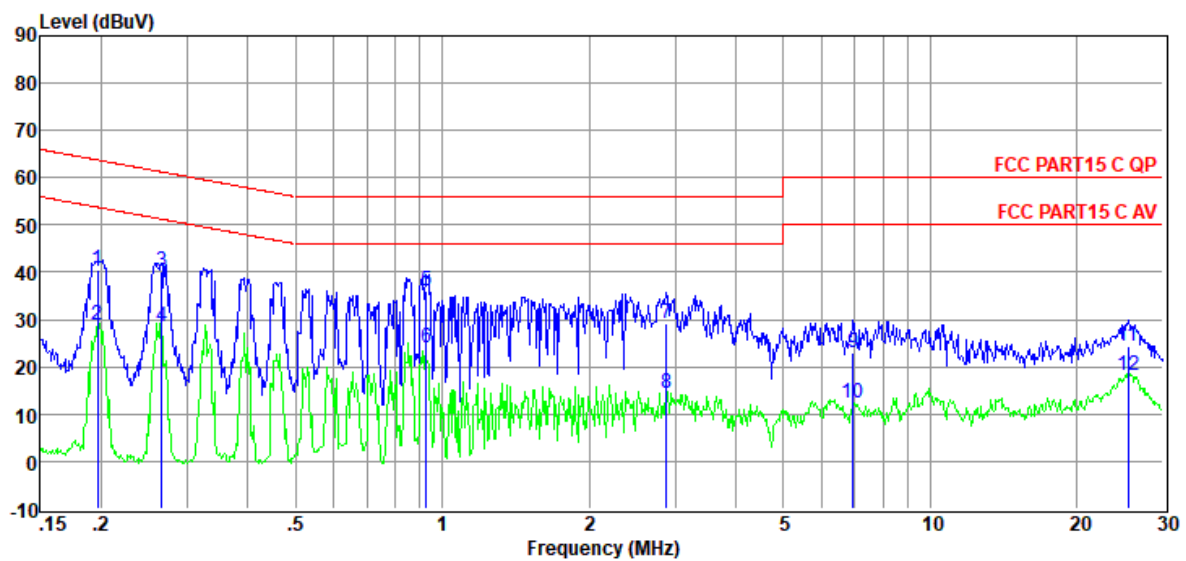

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.20	21.30	9.40	0.02	9.86	40.58	63.76	-23.18	QP	LINE
2	0.20	9.64	9.40	0.02	9.86	28.92	53.76	-24.84	Average	LINE
3	0.27	20.72	9.41	0.02	9.86	40.01	61.25	-21.24	QP	LINE
4	0.27	9.09	9.41	0.02	9.86	28.38	51.25	-22.87	Average	LINE
5	0.93	16.82	9.42	0.03	9.86	36.13	56.00	-19.87	QP	LINE
6	0.93	4.81	9.42	0.03	9.86	24.12	46.00	-21.88	Average	LINE
7	2.88	9.87	9.44	0.06	9.87	29.24	56.00	-26.76	QP	LINE
8	2.88	-4.84	9.44	0.06	9.87	14.53	46.00	-31.47	Average	LINE
9	6.95	3.59	9.55	0.09	9.88	23.11	60.00	-36.89	QP	LINE
10	6.95	-7.27	9.55	0.09	9.88	12.25	50.00	-37.75	Average	LINE
11	25.46	4.50	9.67	0.18	9.96	24.31	60.00	-35.69	QP	LINE
12	25.46	-1.64	9.67	0.18	9.96	18.17	50.00	-31.83	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

14. Antenna Requirements

14.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203 & RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b) & RSS-247, if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Result

The antenna used for this product and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain is 4.75 dBi.

END OF REPORT