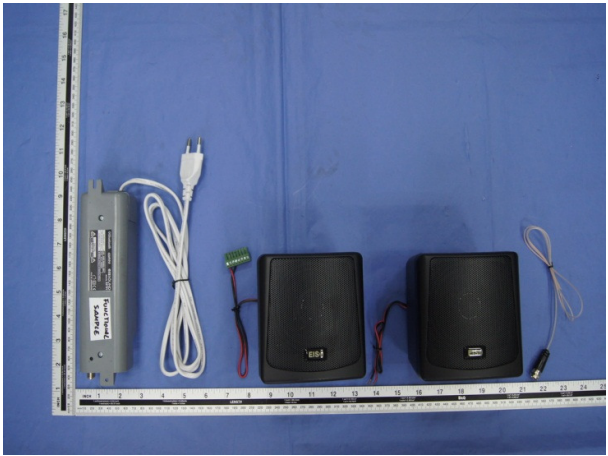


Prüfbericht-Nr.: <i>Test Report No.:</i>	17048150 001	Auftrags-Nr.: <i>Order No.:</i>	164029480	Seite 1 von 28 Page 1 of 28
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	16.02.2015	
Auftraggeber: <i>Client:</i>	ELECTRONICA INTEGRAL DE SONIDO S.A. Pol. Malpica c/F Oeste Grupo Quejido 87-88, Zaragoza, Spain.			
Prüfgegenstand: <i>Test item:</i>	KBSOUND BT			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	52791			
Auftrags-Inhalt: <i>Order content:</i>	FCC Certification and Verification			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 15: Subpart C Section 15.107 CFR47 FCC Part 15: Subpart C Section 15.109			
Wareneingangsdatum: <i>Date of receipt:</i>	05.03.2015			
Prüfmuster-Nr.: <i>Test sample No.:</i>	N/A			
Prüfzeitraum: <i>Testing period:</i>	07.03.2015 - 01.04.2015			
Ort der Prüfung: <i>Place of testing:</i>	Shenzhen Accurate Technology Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Bitte wählen / Please select...			
geprüft von / tested by:		kontrolliert von / reviewed by:		
28.04.2015 Owen Tian / Senior Project Manager		30.04.2015 Winnie Hou / Technical Certifier		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: *Passed*

5.1.2 PEAK OUTPUT POWER

RESULT: *Passed*

5.1.3 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100KHz BANDWIDTH

RESULT: *Passed*

5.1.4 SPURIOUS EMISSION

RESULT: *Passed*

5.1.5 20dB BANDWIDTH

RESULT: *Passed*

5.1.6 FREQUENCY SEPARATION

RESULT: *Passed*

5.1.7 NUMBER OF HOPPING FREQUENCY

RESULT: *Passed*

5.1.8 TIME OF OCCUPANCY

RESULT: *Passed*

5.1.9 CONDUCTED EMISSIONS

RESULT: *Passed*

5.1.10 RADIATED EMISSION

RESULT: *Passed*

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA	6
2.7	STATUS OF FACILITY USED FOR TESTING	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS	9
4.	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5.	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Peak Output Power</i>	<i>14</i>
5.1.3	<i>Conducted spurious emissions measured in 100kHz Bandwidth</i>	<i>15</i>
5.1.4	<i>Spurious Emission</i>	<i>16</i>
5.1.5	<i>20dB Bandwidth</i>	<i>17</i>
5.1.6	<i>Frequency Separation</i>	<i>18</i>
5.1.7	<i>Number of hopping frequency</i>	<i>19</i>
5.1.8	<i>Time of Occupancy</i>	<i>20</i>
5.1.9	<i>Conducted emissions</i>	<i>22</i>
5.1.10	<i>Radiated Emission</i>	<i>23</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	24
7.	LIST OF TABLES	28
8.	LIST OF PHOTOGRAPHS	28

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:
Appendix 1: Test Result

2. Test Sites

2.1 Test Facilities

Shenzhen Accurate Technology Co., Ltd.

F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China

FCC Registration No.: 752051

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Spurious emission and Radiated emission				
Spectrum Analyzer	Rohde&Schwarz	FSV40	101495	2016-01-09
Test Receiver	Rohde&Schwarz	ESCS30	100307	2016-01-09
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	2016-01-09
Loop Antenna	Schwarzbeck	FMZB1516	1516131	2016-01-09
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	2016-01-09
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	2016-01-09
RF Switching Unit+PreAMP	Compliance Direction	RSU-M2	38322	2016-01-09
Pre-Amplifier	Rohde&Schwarz	CBLU11835 40-01	3791	2016-01-09
Radio Test Suite				
Spectrum Analyzer	Rohde & Schwarz	FSV40	101495	2016-01-09
Conducted Emission				
Test Receiver	Rohde & Schwarz	ESCS30	100307	2016-01-09
L.I.S.N.	Schwarzbeck	NLSK8126	8126431	2016-01-09
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	2016-01-09
50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	2016-01-09

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are $\pm 3\text{dB}$.

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The Shenzhen Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a FM and Bluetooth audio streaming receiver controlled by an App installed in a smartphone or tablet.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Rating of EUT

Kind of Equipment:	KBSOUND BT
Type Designation:	52791
FCC ID	2AB6X52791

Table 3: Technical Specification of Bluetooth (BDR & EDR)

Technical Specification	Value
Operating Frequency band	2402 – 2480 MHz
Bluetooth Core Version	3.0
Channel separation	1MHz
Extreme Temperature Range	0°C to +55°C
Operation Voltage	AC230V
Modulation	GFSK, 8DPSK, $\pi/4$ DQPSK
Antenna Type	Internal Antenna, Non-User Replaceable
Antenna Gain	3.5dBi
RF Output Power	0.00031W (-5.02dBm)

Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00		

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Traditional Bluetooth
 - 1. Transmitting on low channel
 - 2. Transmitting on middle channel
 - 3. Transmitting on high channel
- B. FM receiving
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------|
| - Bill of Material | - Circuit Diagram |
| - PCB Layout | - Instruction Manual |
| - Photo Document | - Rating Label |
| - Technical Description | |

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2003.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested with following accessories:

Description	Manufacturer	Type	S/N
iPad	Apple	MD513CH/A	DMTK58A5F185

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

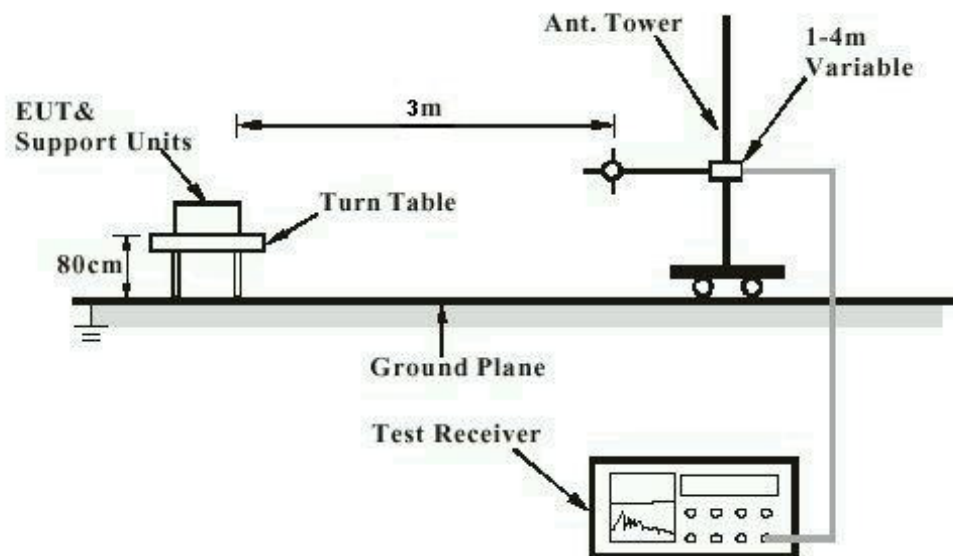


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement


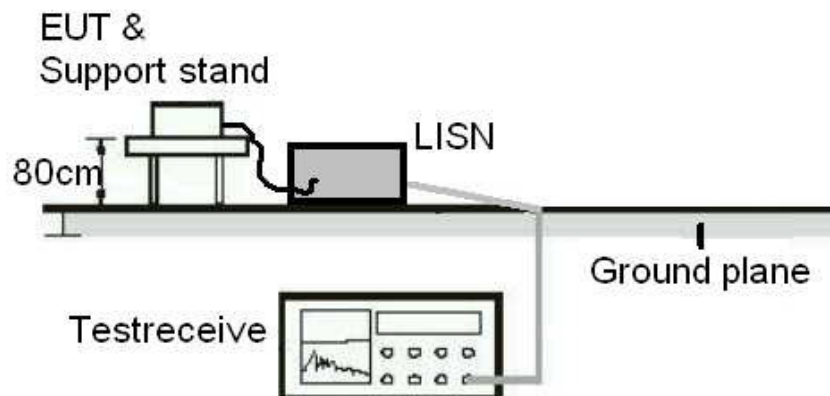


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement



5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test date	:	2015-03-09
Test standard	:	FCC Part 15.247(b)(4) and Part 15.203
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 3.5dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT photo for details.

5.1.2 Peak Output Power

RESULT:
Passed

Test date : 2015-03-09
 Test standard : FCC Part 15.247(b)(3)
 Basic standard : ANSI C63.4: 2003
 Limit : 1 Watt
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 25°C
 Relative humidity : 55%
 Atmospheric pressure : 101 kPa

Table 5: Test result of Peak Output Power, BR

Channel	Channel Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2402	-5.89	0.00026	1
Middle Channel	2440	-5.49	0.00028	1
High Channel	2480	-5.02	0.00031	1

Table 6: Test result of Peak Output Power, EDR

Channel	Channel Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2402	-6.47	0.00022	1
Middle Channel	2440	-6.34	0.00023	1
High Channel	2480	-5.92	0.00026	1

**5.1.3 Conducted spurious emissions measured in 100kHz
Bandwidth****RESULT:****Passed**

Date of testing : 2015-03-09 to 2015-04-01
Test standard : FCC part 15.247(d)
Basic standard : ANSI C63.4: 2003
Limit : 20dB (below that in the 100kHz bandwidth within
the band that contains the highest level of the
desired power);
In addition, radiated emissions which fall in the
restricted bands, must also comply with the radiated
emission limits specified in 15.209(a)
Kind of test site : Shield room

Test setup

Test Channel : Low/ High
Operation mode : A
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

All emissions are more than 20dB below fundamental, details refer to Appendix 1.

5.1.4 Spurious Emission

RESULT:**Passed**

Date of testing	:	2015-03-10 to 2015-03-25
Test standard	:	FCC part 15.247(d) FCC Part 15.205
Basic standard	:	ANSI C63.4: 2003
Limits	:	Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

Remark:

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions. After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test setup photos.

Testing was carried out within frequency range 9kHz to the tenth harmonics.

For details refer to Appendix 1.

5.1.5 20dB Bandwidth**RESULT:****Passed**

Date of testing : 2015-03-09
Test standard : FCC Part 15.247(a)(1)
Basic standard : ANSI C63.4: 2003
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Table 7: Test result of 20dB Bandwidth, BDR mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	840	/	Pass
Mid Channel	2441	834	/	Pass
High Channel	2480	834	/	Pass

Table 8: Test result of 20dB Bandwidth, EDR mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	1200	/	Pass
Mid Channel	2441	1194	/	Pass
High Channel	2480	1194	/	Pass

5.1.6 Frequency Separation

RESULT:
Passed

Date of testing : 2015-03-09
 Test standard : FCC part 15.247(a)(1)
 Basic standard : ANSI C63.4: 2003
 Limit : $\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth, whichever is greater

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 25°C
 Relative humidity : 55%
 Atmospheric pressure : 101 kPa

Table 9: Test result of Frequency Separation, BR&EDR mode

Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
Low Channel	2402	1	$\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth	Pass
Adjacency Channel	2403			
Mid Channel	2441	1	$\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth	Pass
Adjacency Channel	2442			
High Channel	2480	1	$\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth	Pass
Adjacency Channel	2479			

5.1.7 Number of hopping frequency**RESULT:****Passed**

Date of testing : 2015-03-09
Test standard : FCC part 15.247(a)(1)(iii)
Basic standard : ANSI C63.4: 2003
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Table 10: Test result of Number of hopping frequency, BR&EDR mode

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
<u>2400</u> to <u>2483.5</u> MHz	79	≥ 15	Pass

5.1.8 Time of Occupancy

RESULT:
Passed

Date of testing : 2015-03-09
 Test standard : FCC part 15.247(a)(1)(iii)
 Basic standard : ANSI C63.4: 2003
 Limits : 0.4s
 Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 25°C
 Relative humidity : 55%
 Atmospheric pressure : 101 kPa

Table 11: Test result of Time of Occupancy, BDR mode

Channel	Data Mode	Pulse width (ms)	Measured Dwell time (s)	Limit (s)	Result
Low Channel	DH1	0.42	0.134	0.4	Pass
	DH3	1.70	0.272	0.4	Pass
	DH5	3.0	0.320	0.4	Pass
Mid Channel	DH1	0.43	0.138	0.4	Pass
	DH3	1.70	0.272	0.4	Pass
	DH5	3.0	0.320	0.4	Pass
High Channel	DH1	0.42	0.134	0.4	Pass
	DH3	1.70	0.272	0.4	Pass
	DH5	3.0	0.320	0.4	Pass

Table 12: Test result of Time of Occupancy, EDR mode

Channel	Data Mode	Pulse width (ms)	Measured Dwell time (s)	Limit (s)	Result
Low Channel	DH1	0.44	0.141	0.4	Pass
	DH3	1.72	0.275	0.4	Pass
	DH5	2.98	0.318	0.4	Pass
Mid Channel	DH1	0.44	0.141	0.4	Pass
	DH3	1.72	0.275	0.4	Pass
	DH5	3.01	0.321	0.4	Pass
High Channel	DH1	0.44	0.141	0.4	Pass
	DH3	1.72	0.275	0.4	Pass
	DH5	2.98	0.318	0.4	Pass

Note:

$$\text{Dwell time} = \text{Pulse width} \times (\text{Hopping rate} / \text{Number of channels}) \times \text{Period}$$
$$\text{Period} = 0.4 \text{ (seconds/ channel)} \times 79 \text{ (channel)} = 31.6 \text{ seconds}$$

5.1.9 Conducted emissions

RESULT:**Passed**

Date of testing	:	2015-03-07
Test standard	:	FCC Part 15.207(a)
Basic standard	:	ANSI C63.4: 2003
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a)
Kind of test site	:	Shield room

Test setup

Input Voltage	:	AC 120V, 60Hz
Operation Mode	:	C
Earthing	:	Not connected
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

For details refer to Appendix 1.

5.1.10 Radiated Emission

RESULT:**Passed**

Date of testing	:	2015-03-09 to 2015-03-18
Test standard	:	FCC Part 15 Per Section 15.209(a)
Frequency range	:	30 - 6000MHz
Classification	:	Class B
Test procedure	:	ANSI C63.4: 2003
Kind of test site	:	3m Semi-Anechoic Chamber


Test setup

Input Voltage	:	AC 120V, 60Hz
Operation mode	:	B
Earthing	:	Not connected
Ambient temperature	:	Refer to Appendix 1
Relative humidity	:	Refer to Appendix 1
Atmospheric pressure	:	Refer to Appendix 1


Test data refer to Appendix 1.

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (9kHz-30MHz)

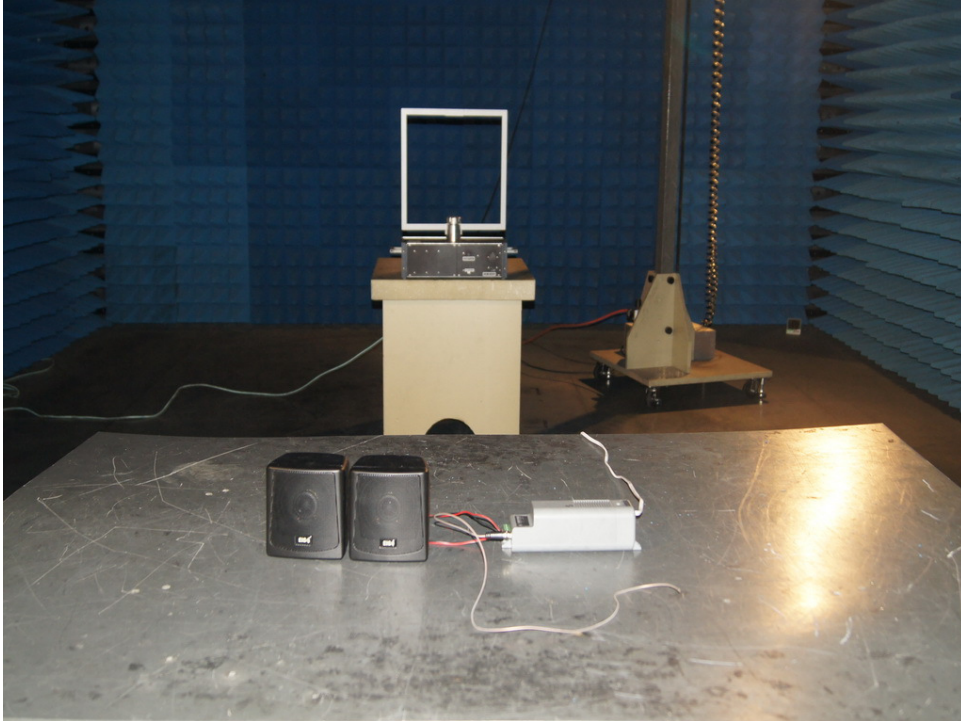


Photograph 2: Set-up for Spurious Emissions (30MHz-1GHz)

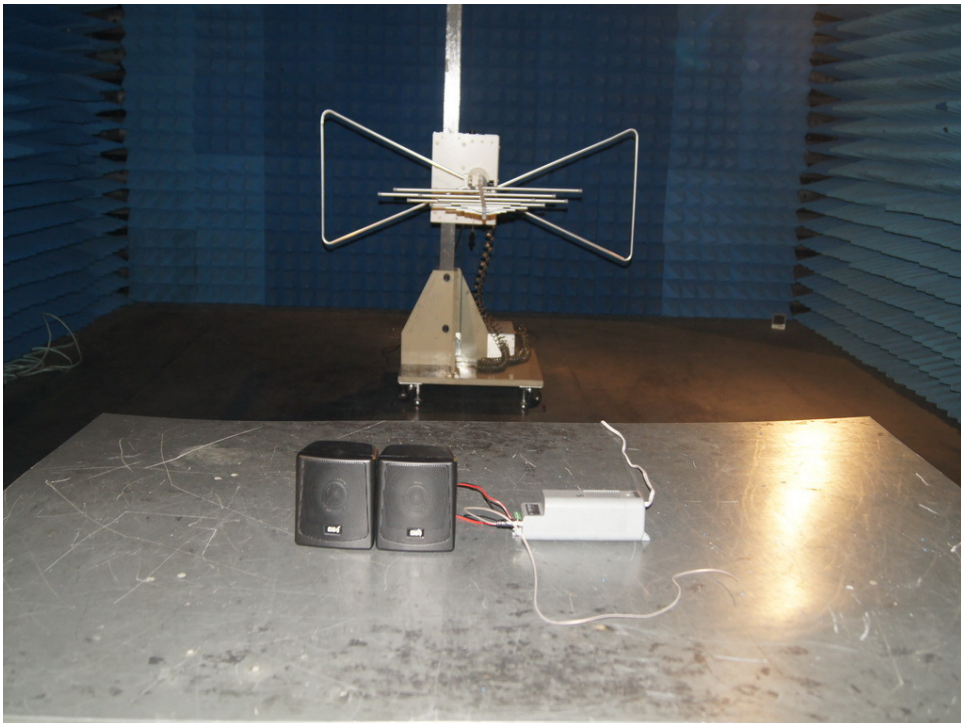

Photograph 3: Set-up for Spurious Emissions (1GHz-18GHz)

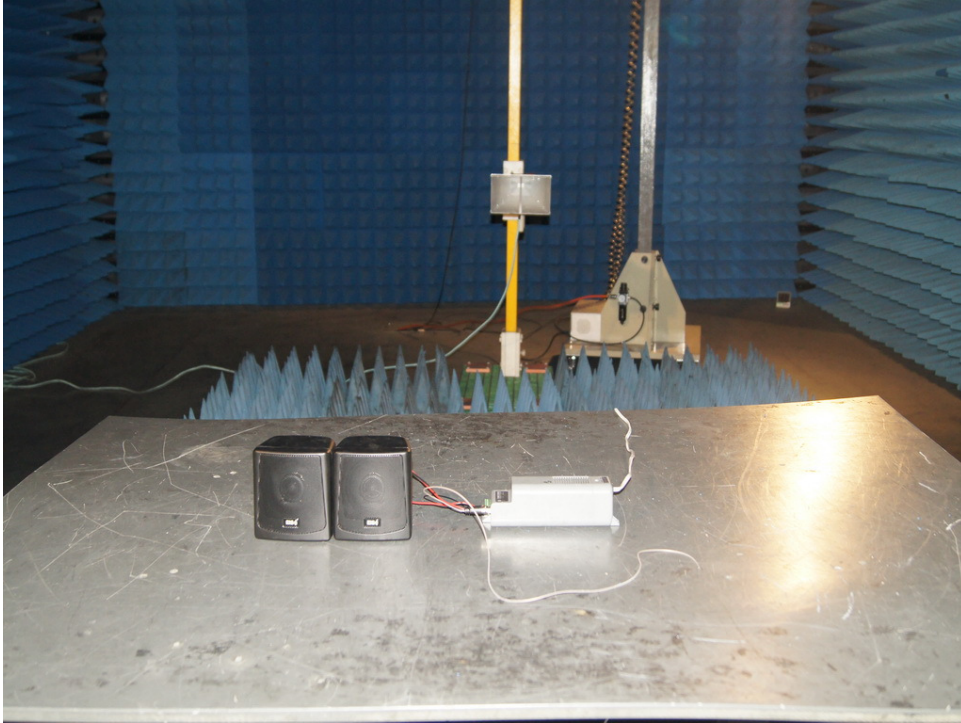


Photograph 4: Set-up for Spurious Emissions (18GHz-26GHz)

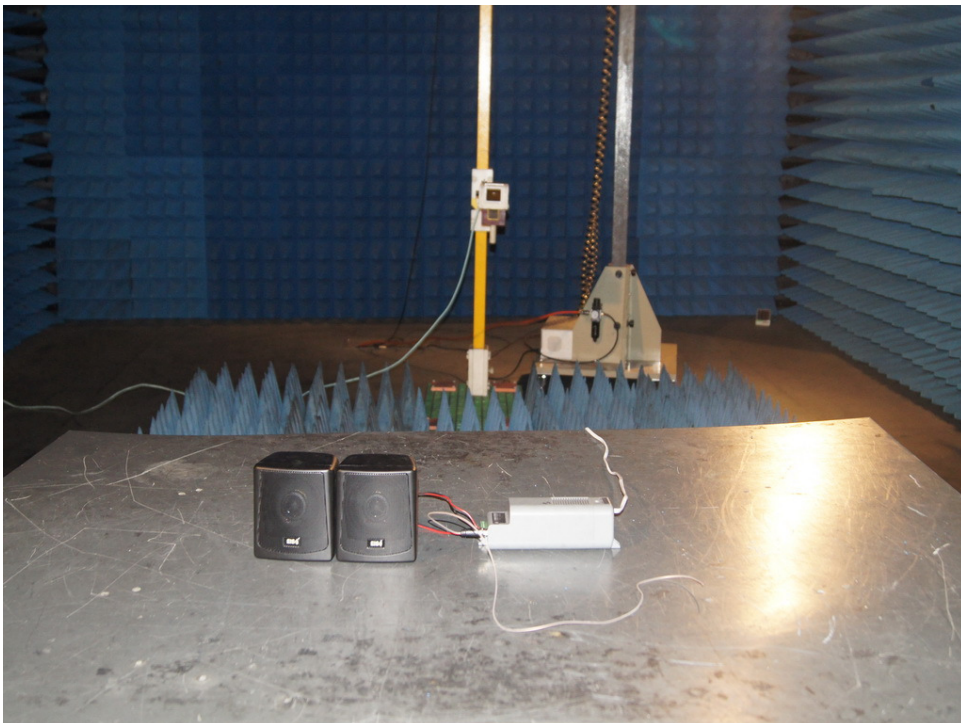


Photograph 5: Set-up for Conducted Emissions



Photograph 6: Set-up for Radiated Emissions, below 1GHz

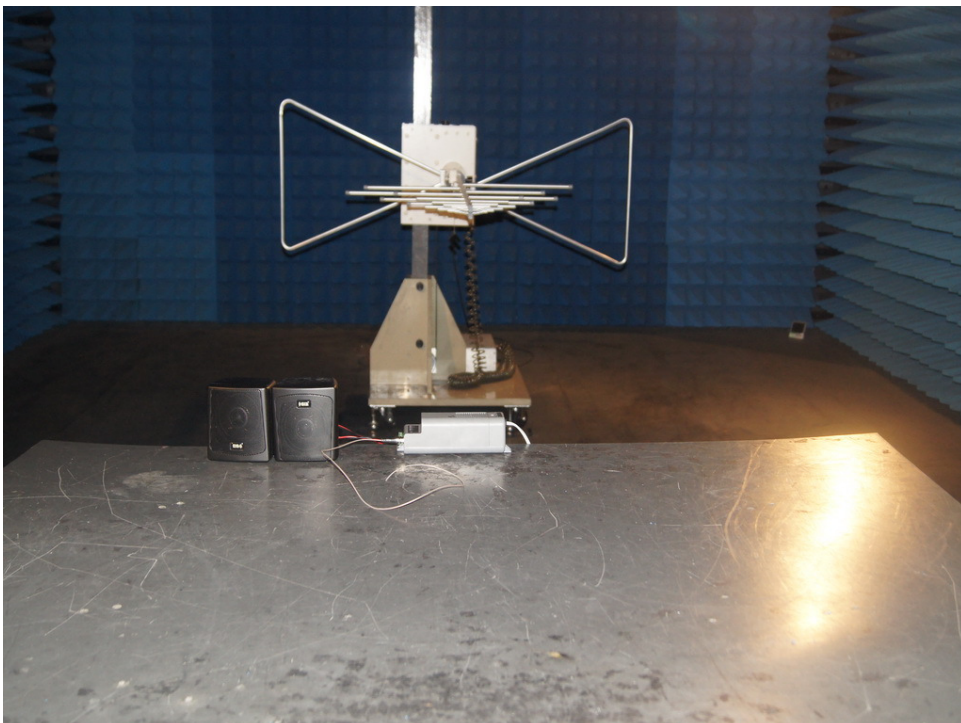

Photograph 7: Set-up for Radiated Emissions, above 1GHz

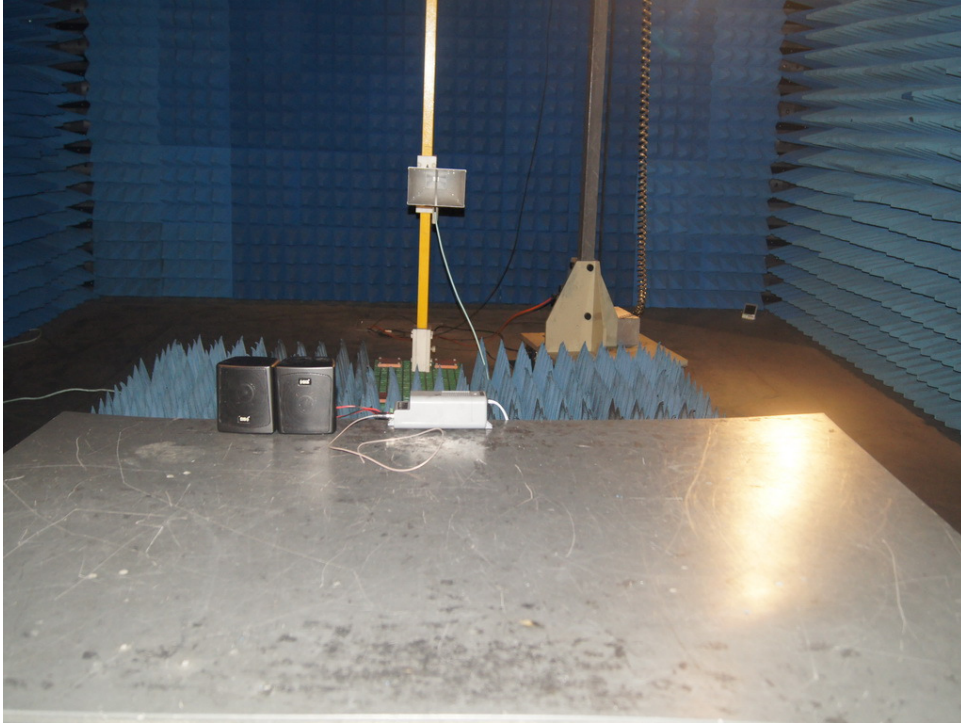

7. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Rating of EUT	7
Table 3: Technical Specification of Bluetooth (BDR & EDR)	7
Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode)	8
Table 5: Test result of Peak Output Power, BR	14
Table 6: Test result of Peak Output Power, EDR	14
Table 7: Test result of 20dB Bandwidth, BDR mode	17
Table 8: Test result of 20dB Bandwidth, EDR mode	17
Table 9: Test result of Frequency Separation, BR&EDR mode	18
Table 10: Test result of Number of hopping frequency, BR&EDR mode	19
Table 11: Test result of Time of Occupancy, BDR mode	20
Table 12: Test result of Time of Occupancy, EDR mode	21

8. List of Photographs

Photograph 1: Set-up for Spurious Emissions (9kHz-30MHz)	24
Photograph 2: Set-up for Spurious Emissions (30MHz-1GHz)	24
Photograph 3: Set-up for Spurious Emissions (1GHz-18GHz)	25
Photograph 4: Set-up for Spurious Emissions (18GHz-26GHz)	25
Photograph 5: Set-up for Conducted Emissions	26
Photograph 6: Set-up for Radiated Emissions, below 1GHz	26
Photograph 7: Set-up for Radiated Emissions, above 1GHz	27

dkaList of Figures

Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz)	3
Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity (9kHz – 30MHz)	3
Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz)	4
Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz)	5
Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz – 18GHz)	6
Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz)	7
Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz – 25GHz)	8
Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz)	9
Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz)	10
Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity (9kHz – 30MHz)	10
Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz)	11
Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz)	12
Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz)	13
Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz)	14
Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz)	15
Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz)	16
Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz)	17
Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity (9kHz – 30MHz)	17
Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz)	18
Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz)	19
Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz – 18GHz)	20
Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz)	21
Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz – 25GHz)	22
Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz)	23
Figure 25: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal	24
Figure 26: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical	25
Figure 27: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal	26
Figure 28: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical	27
Figure 29: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.1, GFSK Modulation	28
Figure 30: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.2, GFSK Modulation	30
Figure 31: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.3, GFSK Modulation	31
Figure 32: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.1, 8DPSK Modulation	33
Figure 33: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.2, 8DPSK Modulation	35
Figure 34: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.3, 8DPSK Modulation	36
Figure 35: Test figure of Conducted emissions, Mode B, line live	38
Figure 36: Test figure of Conducted emissions, Mode B, line neutral	39
Figure 37: Test figure of Radiated emissions, Mode B, lowest channel, Below 1GHz, Horizontal	40
Figure 38: Test figure of Radiated emissions, Mode B, lowest channel, Below 1GHz, Vertical	41
Figure 39: Test figure of Radiated emissions, Mode B, lowest channel, Above 1GHz, Horizontal	42
Figure 40: Test figure of Radiated emissions, Mode B, lowest channel, Above 1GHz, Vertical	43
Figure 37: Test figure of Radiated emissions, Mode B, middle channel, Below 1GHz, Horizontal	44
Figure 38: Test figure of Radiated emissions, Mode B, middle channel, Below 1GHz, Vertical	45
Figure 39: Test figure of Radiated emissions, Mode B, middle channel, Above 1GHz, Horizontal	46
Figure 40: Test figure of Radiated emissions, Mode B, middle channel, Above 1GHz, Vertical	47
Figure 37: Test figure of Radiated emissions, Mode B, highest channel, Below 1GHz, Horizontal	48
Figure 38: Test figure of Radiated emissions, Mode B, highest channel, Below 1GHz, Vertical	49

Figure 39: Test figure of Radiated emissions, Mode B, highest channel, Above 1GHz, Horizontal	50
Figure 40: Test figure of Radiated emissions, Mode B, highest channel, Above 1GHz, Vertical	51

Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: KBSOUND BT M/N:52791
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.
Operating Condition: TX 2402MHz
Test Site: 2# Chamber
Operator: LAN
Test Specification: AC 120V/60Hz
Comment: X
Start of Test: 2015-3-25 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

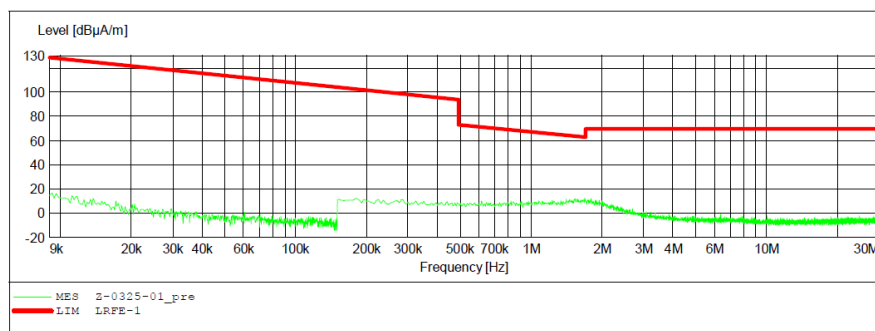


Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: KBSOUND BT M/N:52791
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.
Operating Condition: TX 2402MHz
Test Site: 2# Chamber
Operator: LAN
Test Specification: AC 120V/60Hz
Comment: Y
Start of Test: 2015-3-25 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

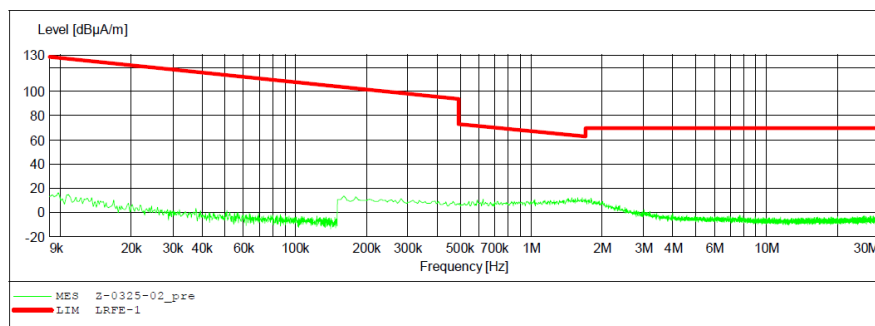


Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #18

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2402MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

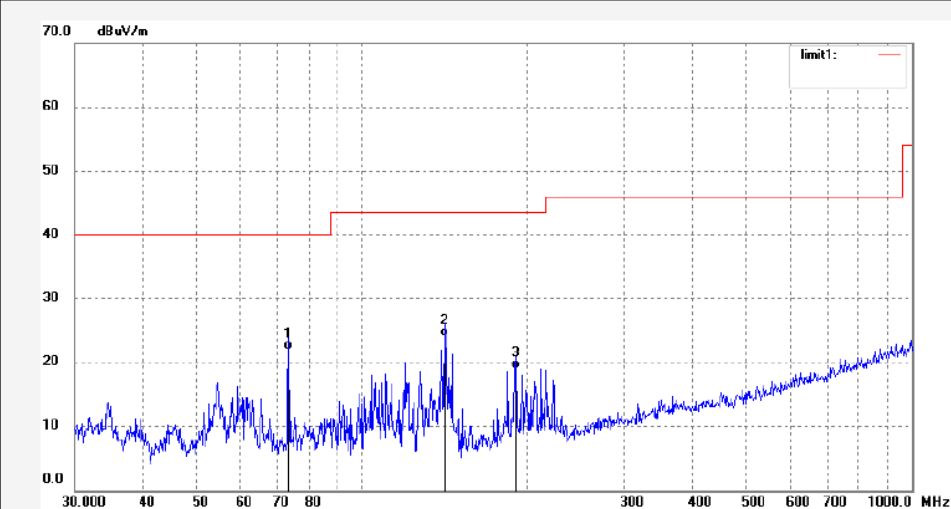

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	73.4908	45.47	-23.54	21.93	40.00	-18.07	QP			
2	141.2721	49.65	-25.53	24.12	43.50	-19.38	QP			
3	190.4411	41.93	-22.93	19.00	43.50	-24.50	QP			

Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #17

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2402MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

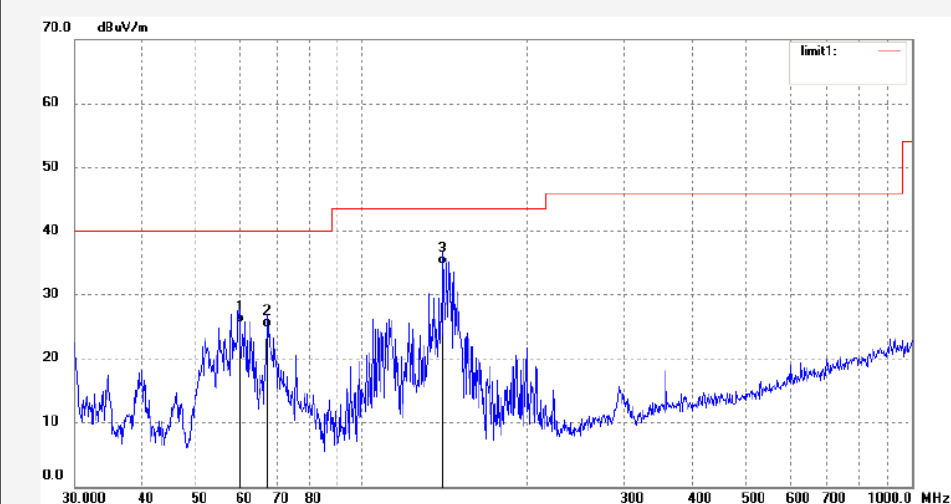

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	59.9418	48.79	-23.10	25.69	40.00	-14.31	QP			
2	67.3109	48.24	-23.26	24.98	40.00	-15.02	QP			
3	140.2829	60.17	-25.49	34.68	43.50	-8.82	QP			

Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz –18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #8

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2402MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

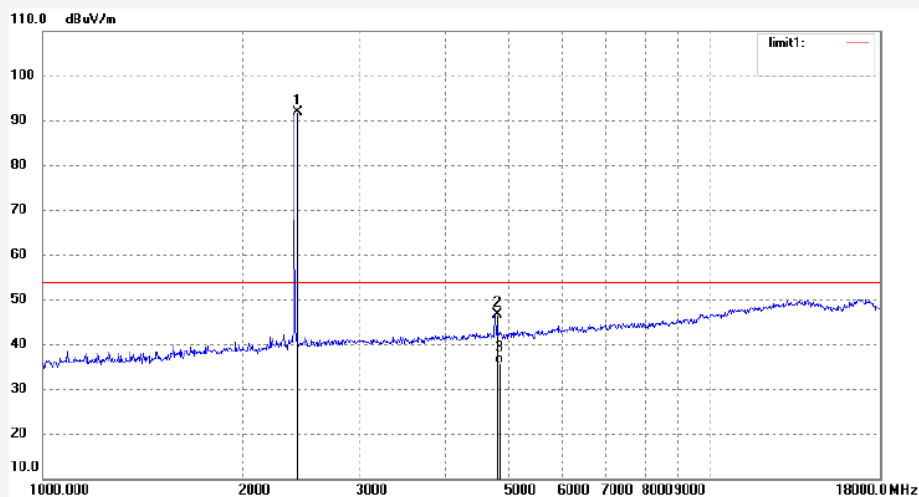

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	90.86	0.91	91.77	/	/	peak			
2	4804.015	39.46	7.23	46.69	74.00	-27.31	peak			
3	4804.015	28.35	7.23	35.58	54.00	-18.42	AVG			

Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz)



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015 #7

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2402MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

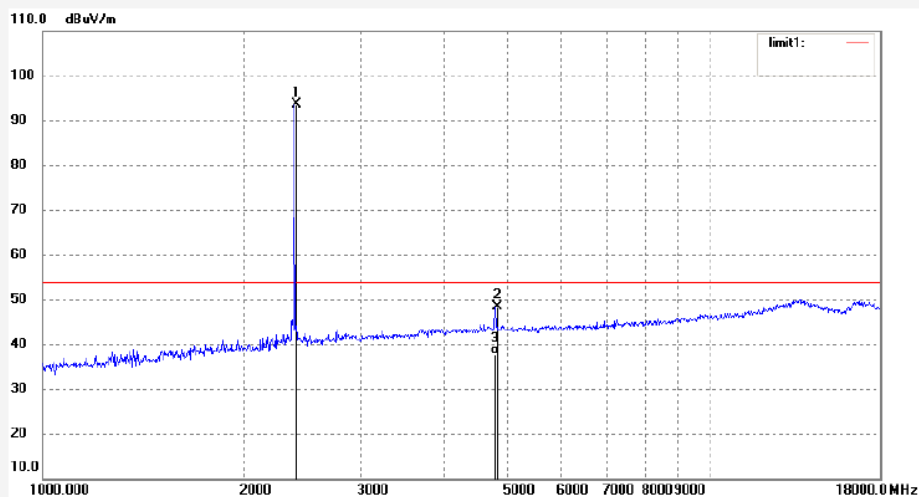

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	92.73	0.91	93.64	/	/	peak			
2	4804.021	41.20	7.23	48.43	74.00	-25.57	peak			
3	4804.021	30.42	7.23	37.65	54.00	-16.35	AVG			

Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz –25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #25

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2402MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

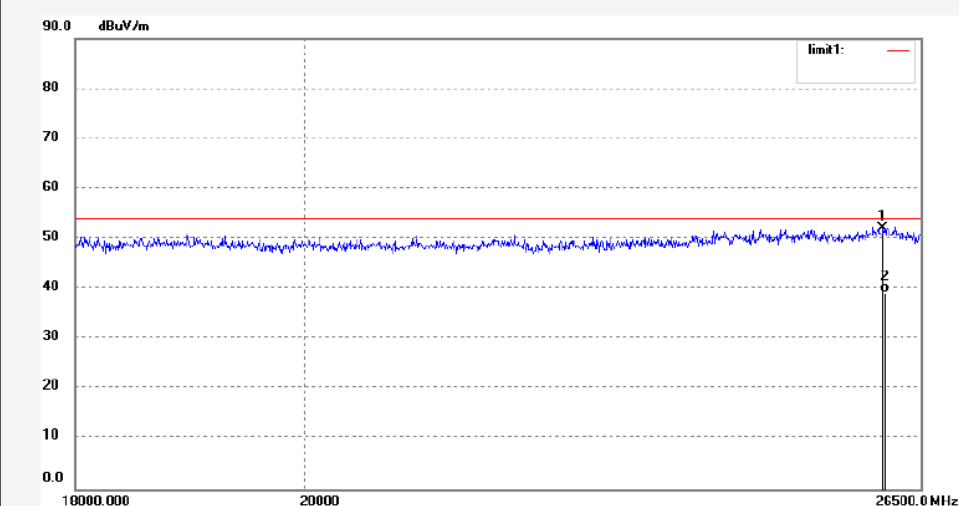

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26052.395	33.36	18.74	52.10	74.00	-21.90	peak			
2	26052.395	20.44	18.74	39.18	54.00	-14.82	AVG			

Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #26

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2402MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

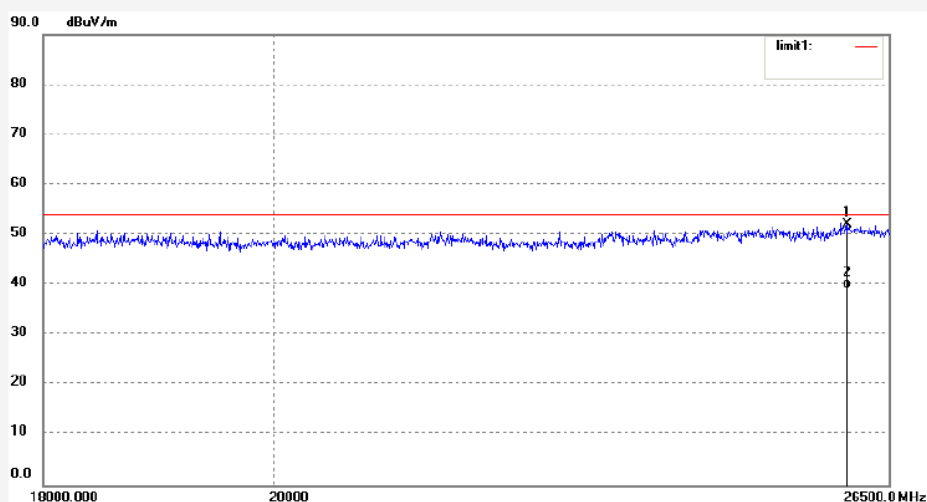

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26011.596	33.41	18.73	52.14	74.00	-21.86	peak			
2	26011.596	20.64	18.73	39.37	54.00	-14.63	AVG			

Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: KBSOUND BT M/N:52791
 Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: X
 Start of Test: 2015-3-25 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.	
Frequency	Frequency	Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

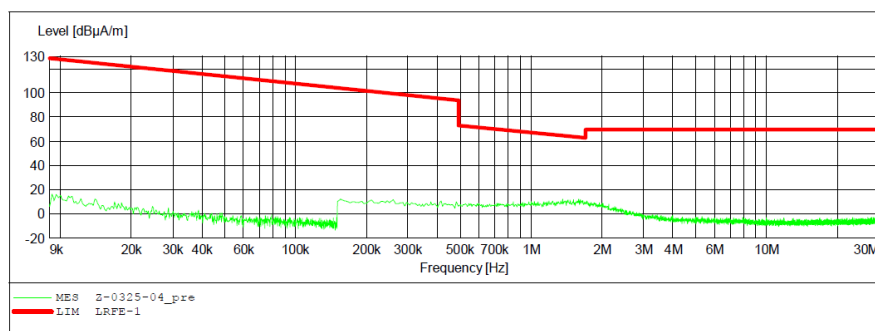


Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: KBSOUND BT M/N:52791
 Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: LAN
 Test Specification: AC 120V/60Hz
 Comment: Y
 Start of Test: 2015-3-25 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70		IF	Transducer
Start	Stop	Step	Detector	Meas. Time	Bandw.	
Frequency	Frequency	Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

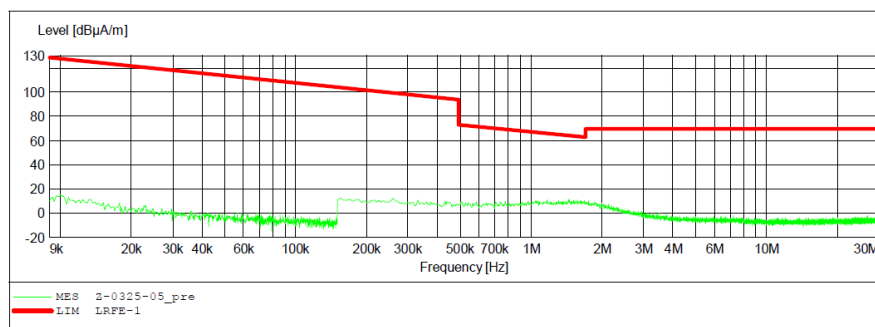


Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #19

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2441MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

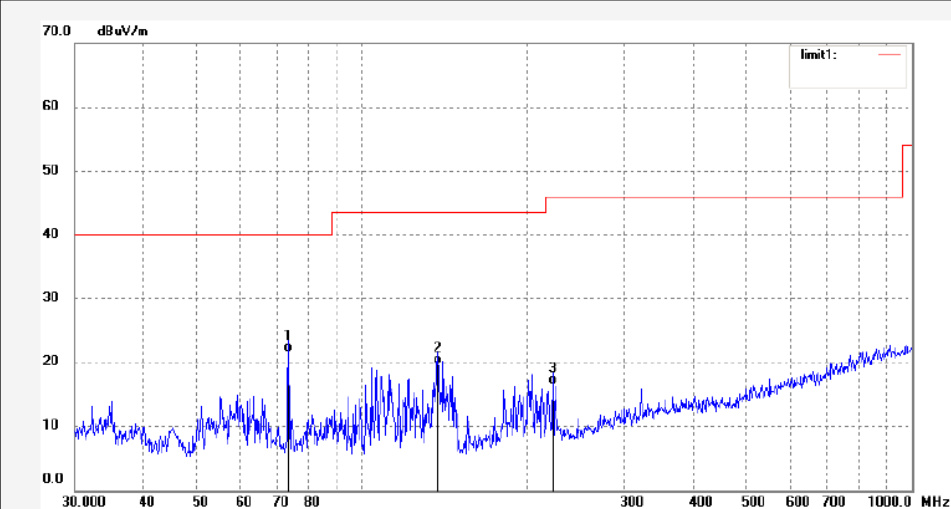

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	73.4908	45.12	-23.54	21.58	40.00	-18.42	QP			
2	137.3565	44.99	-25.37	19.62	43.50	-23.88	QP			
3	222.2806	38.44	-21.92	16.52	46.00	-29.48	QP			

Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #20

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2441MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

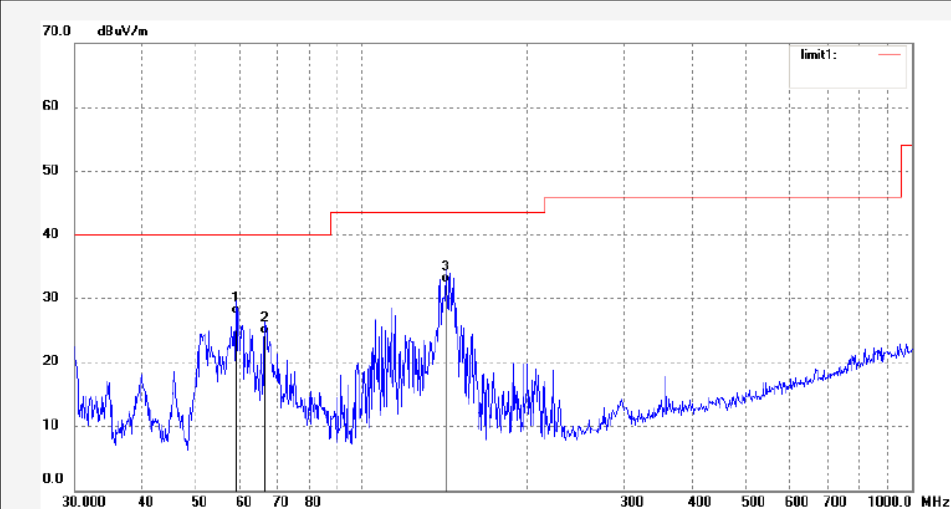

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	58.8977	50.67	-23.06	27.61	40.00	-12.39	QP			
2	66.6050	47.64	-23.23	24.41	40.00	-15.59	QP			
3	141.7692	58.10	-25.56	32.54	43.50	-10.96	QP			

Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #12

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2441MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

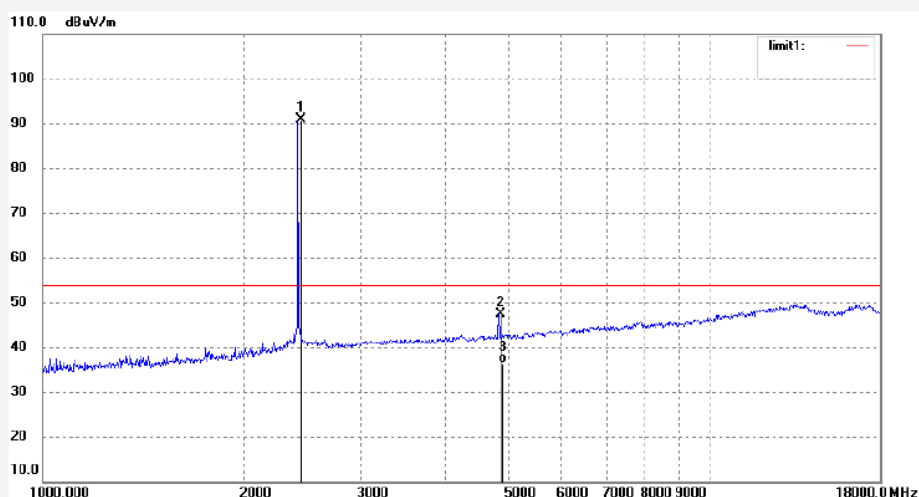

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	91.79	-0.97	90.82	/	/	peak			
2	4882.016	41.96	5.50	47.46	74.00	-26.54	peak			
3	4882.016	30.84	5.50	36.34	54.00	-17.66	AVG			

Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #11

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2441MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

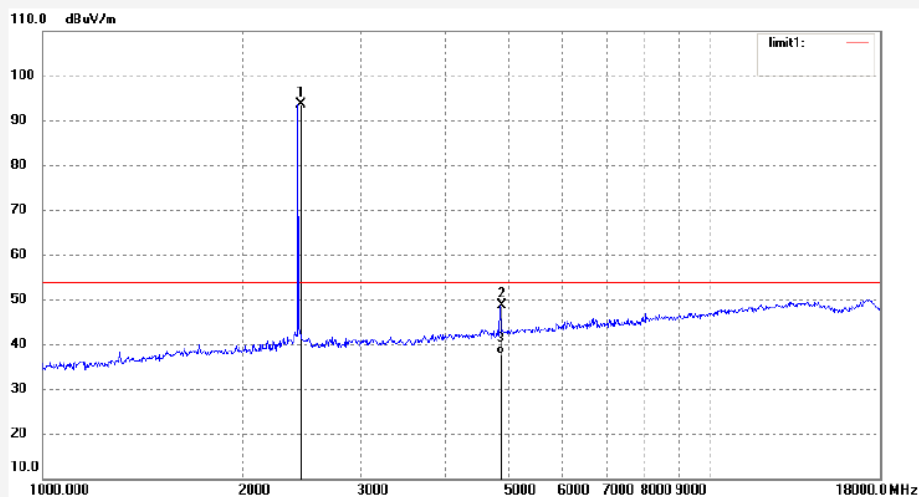

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	94.63	-0.97	93.66	/	/	peak			
2	4882.023	43.21	5.50	48.71	74.00	-25.29	peak			
3	4882.023	32.07	5.50	37.57	54.00	-16.43	AVG			

Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #28

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2441MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

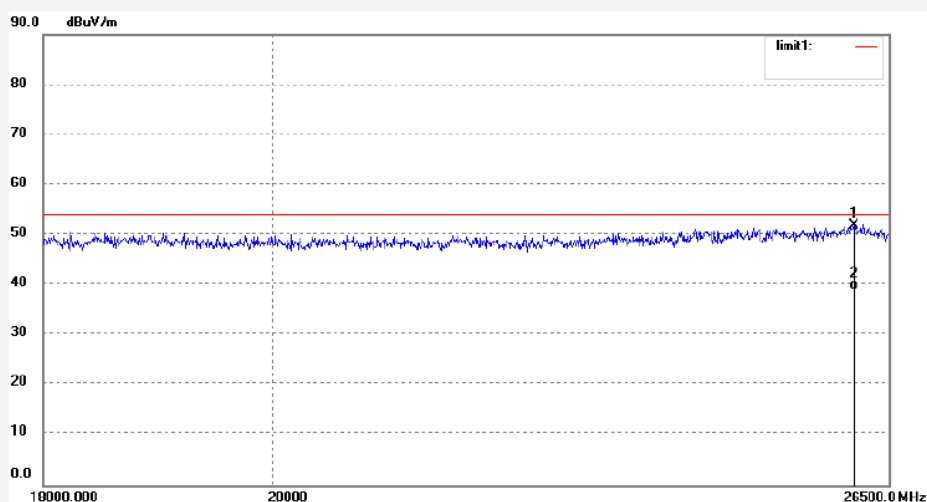

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26082.257	33.11	18.75	51.86	74.00	-22.14	peak			
2	26082.257	20.36	18.75	39.11	54.00	-14.89	AVG			

Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #27

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2441MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

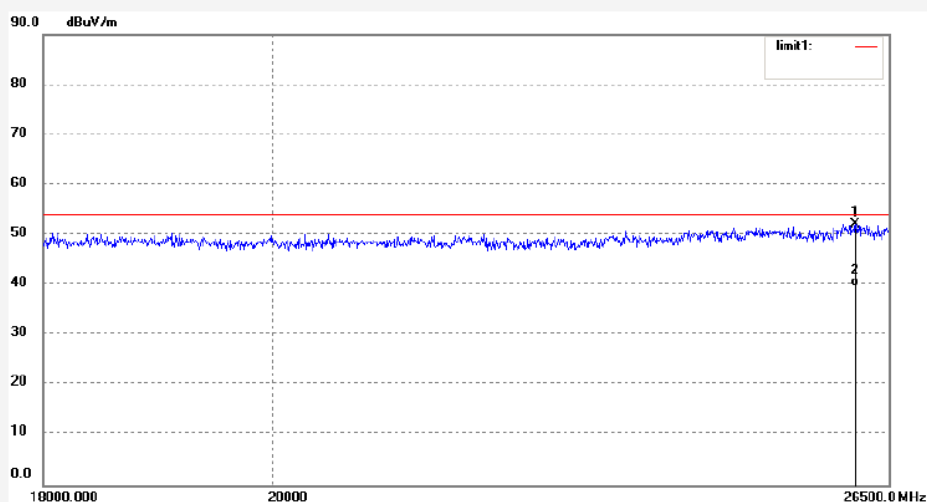

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26102.481	33.39	18.76	52.15	74.00	-21.85	peak			
2	26102.481	20.85	18.76	39.61	54.00	-14.39	AVG			

Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: KBSOUND BT M/N:52791
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.
Operating Condition: TX 2480MHz
Test Site: 2# Chamber
Operator: LAN
Test Specification: AC 120V/60Hz
Comment: X
Start of Test: 2015-3-25 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

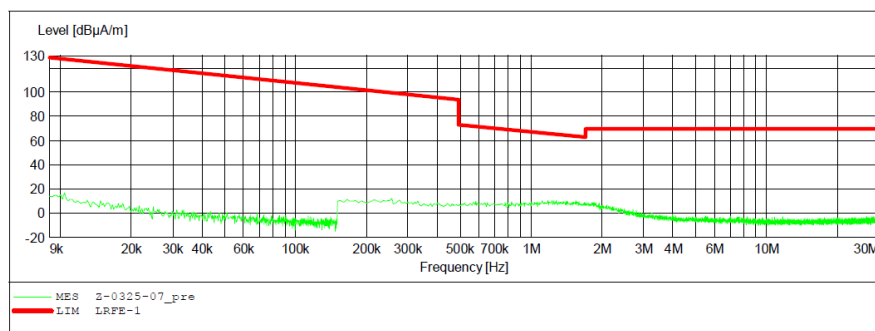


Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: KBSOUND BT M/N:52791
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.
Operating Condition: TX 2480MHz
Test Site: 2# Chamber
Operator: LAN
Test Specification: AC 120V/60Hz
Comment: Y
Start of Test: 2015-3-25 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

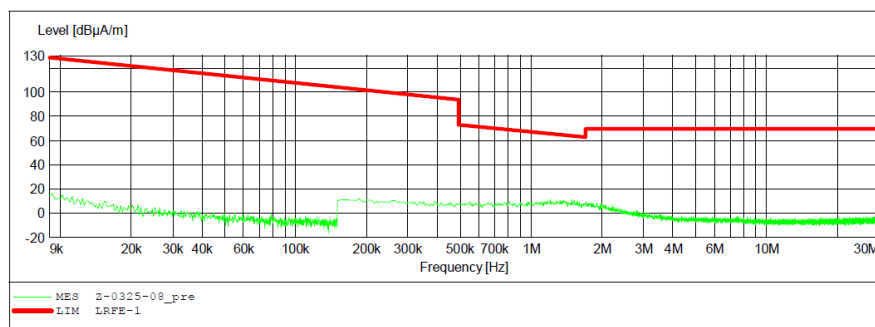


Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #22

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2480MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

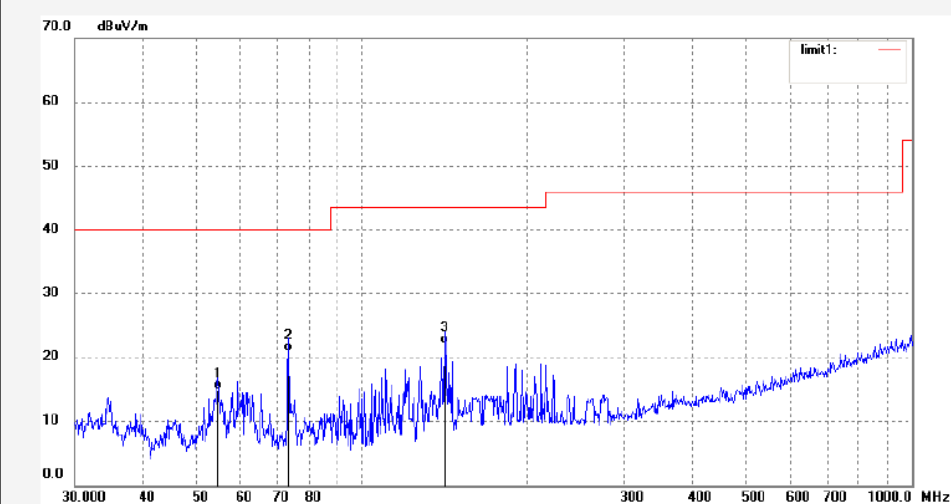

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	54.7085	37.87	-22.90	14.97	40.00	-25.03	QP			
2	73.4907	44.47	-23.54	20.93	40.00	-19.07	QP			
3	141.2718	47.65	-25.53	22.12	43.50	-21.38	QP			

Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #21

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2480MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

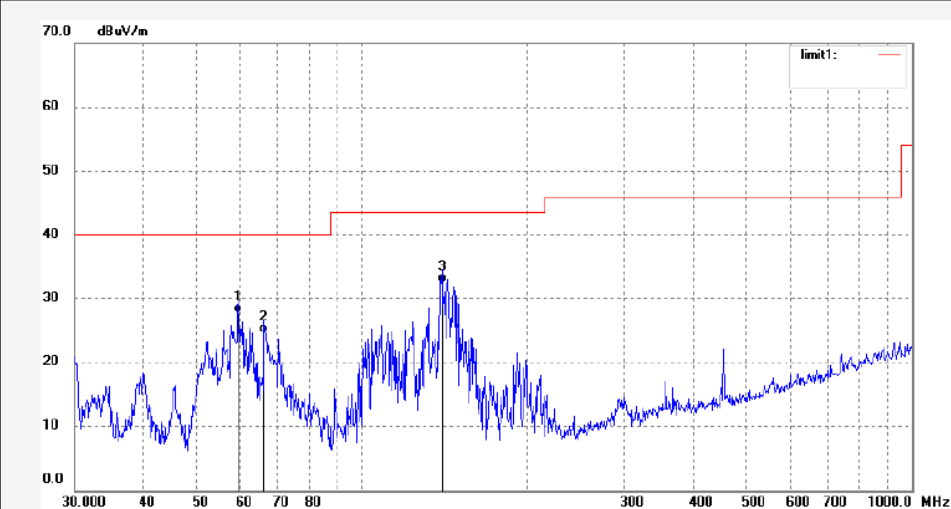

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	59.5219	50.77	-23.08	27.69	40.00	-12.31	QP			
2	66.3714	47.82	-23.23	24.59	40.00	-15.41	QP			
3	139.7908	57.98	-25.47	32.51	43.50	-10.99	QP			

Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz –18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #13

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2480MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

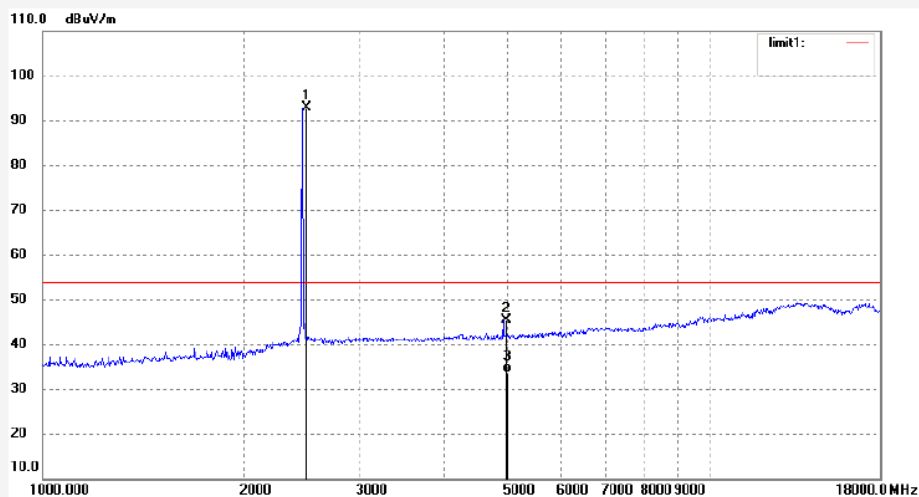

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	93.76	-0.86	92.90	/	/	peak			
2	4960.027	39.71	5.77	45.48	74.00	-28.52	peak			
3	4960.027	27.96	5.77	33.73	54.00	-20.27	AVG			

Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #14

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2480MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

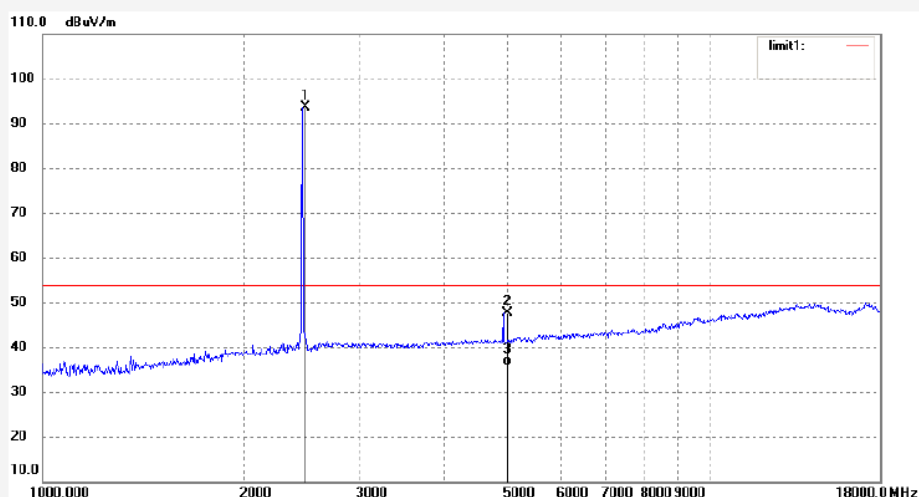

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	94.48	-0.86	93.62	/	/	peak			
2	4960.019	41.79	5.77	47.56	74.00	-26.44	peak			
3	4960.019	30.23	5.77	36.00	54.00	-18.00	AVG			

Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz –25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #29

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2480MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

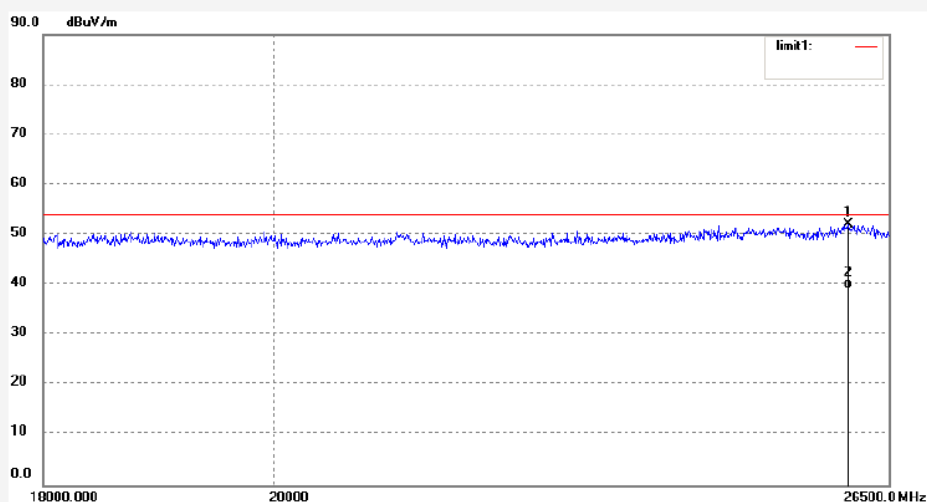

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26021.678	33.25	18.73	51.98	74.00	-22.02	peak			
2	26021.678	20.53	18.73	39.26	54.00	-14.74	AVG			

Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015 #30

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2480MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

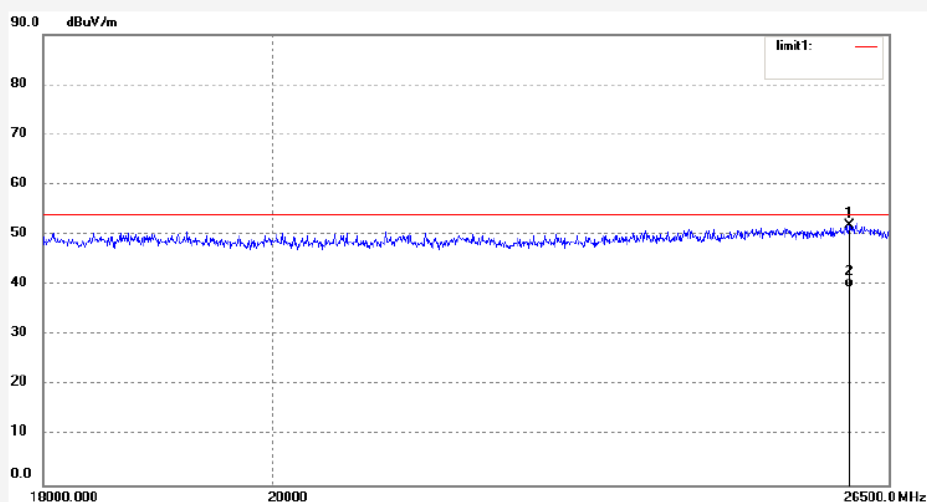

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26031.765	33.08	18.74	51.82	74.00	-22.18	peak			
2	26031.765	20.71	18.74	39.45	54.00	-14.55	AVG			

Figure 25: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015 #9

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: KBSOUND BT

Mode: TX 2402MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/10/

Time:

Engineer Signature: LAN

Distance: 3m

Note:

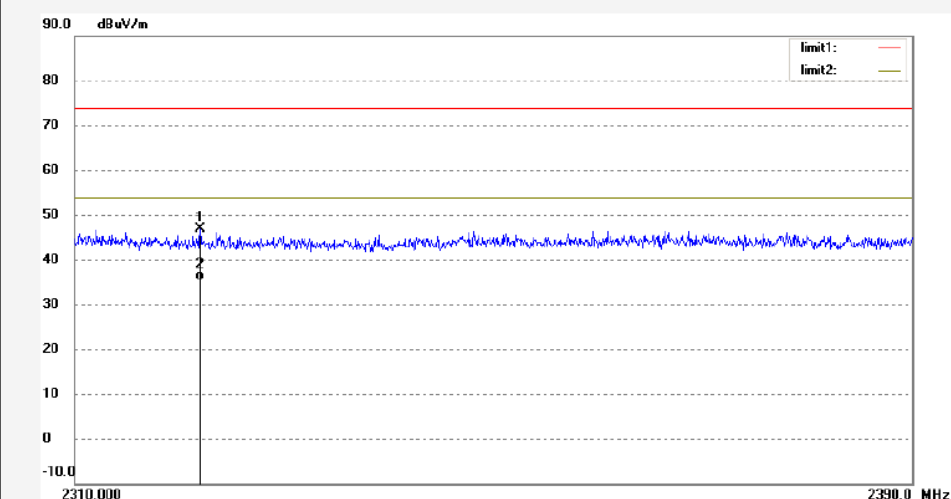

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2321.851	46.21	0.67	46.88	74.00	-27.12	peak			
2	2321.851	34.63	0.67	35.30	54.00	-18.70	AVG			

Figure 26: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical

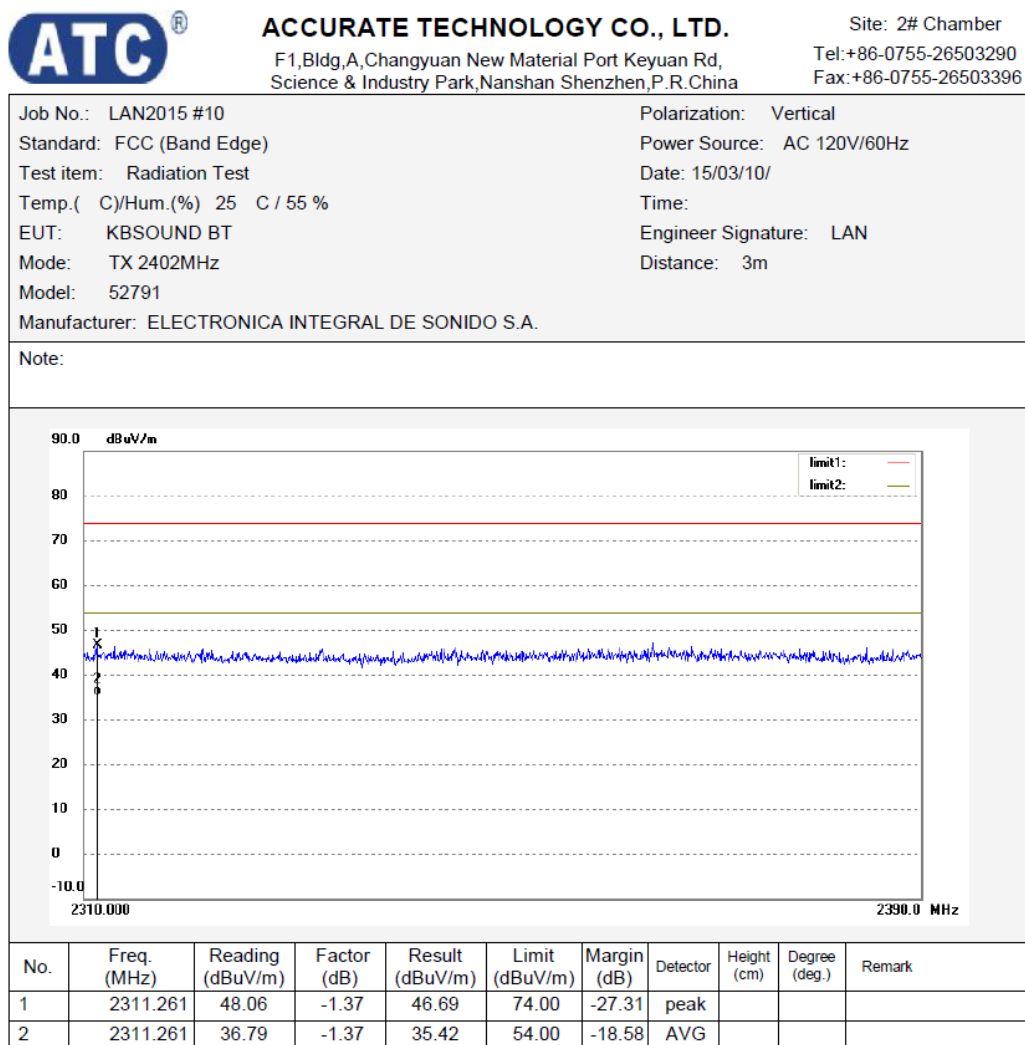


Figure 27: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal

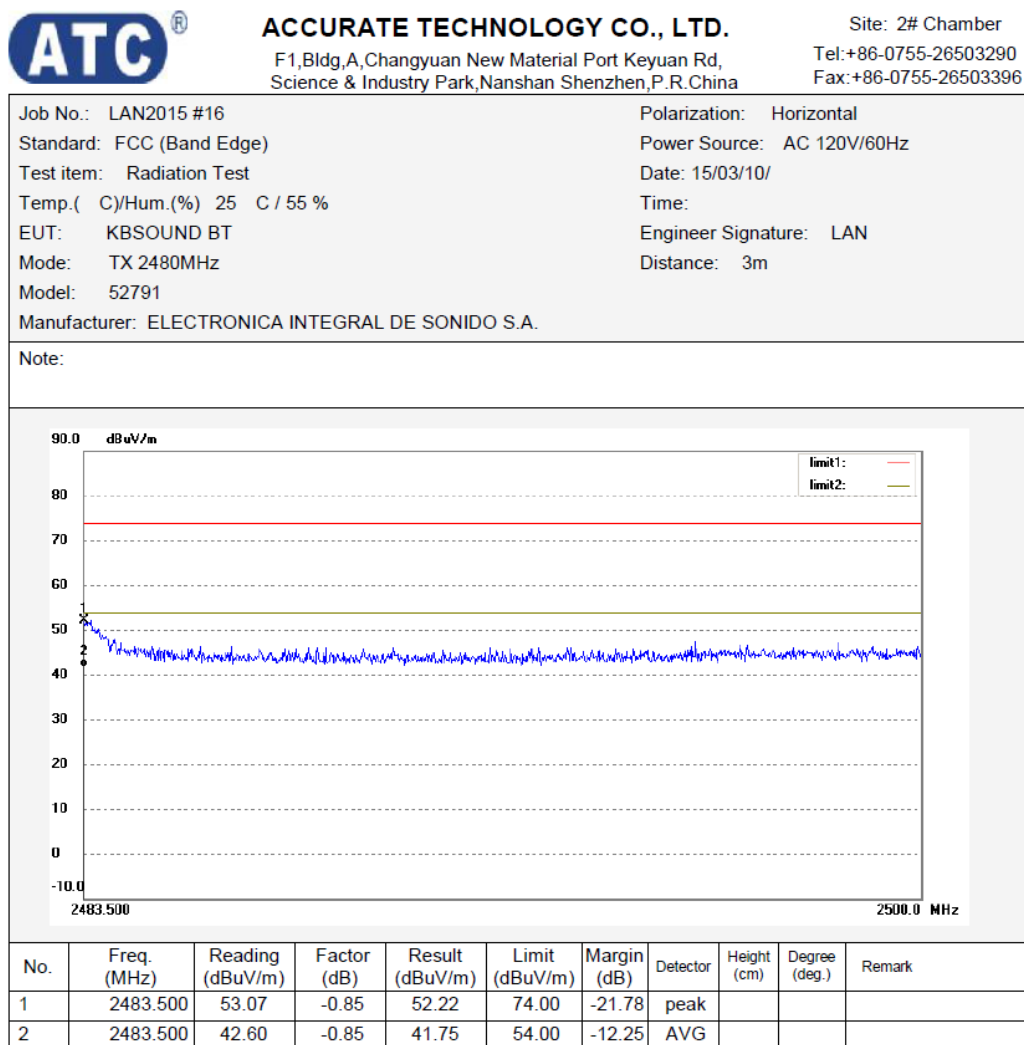


Figure 28: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical


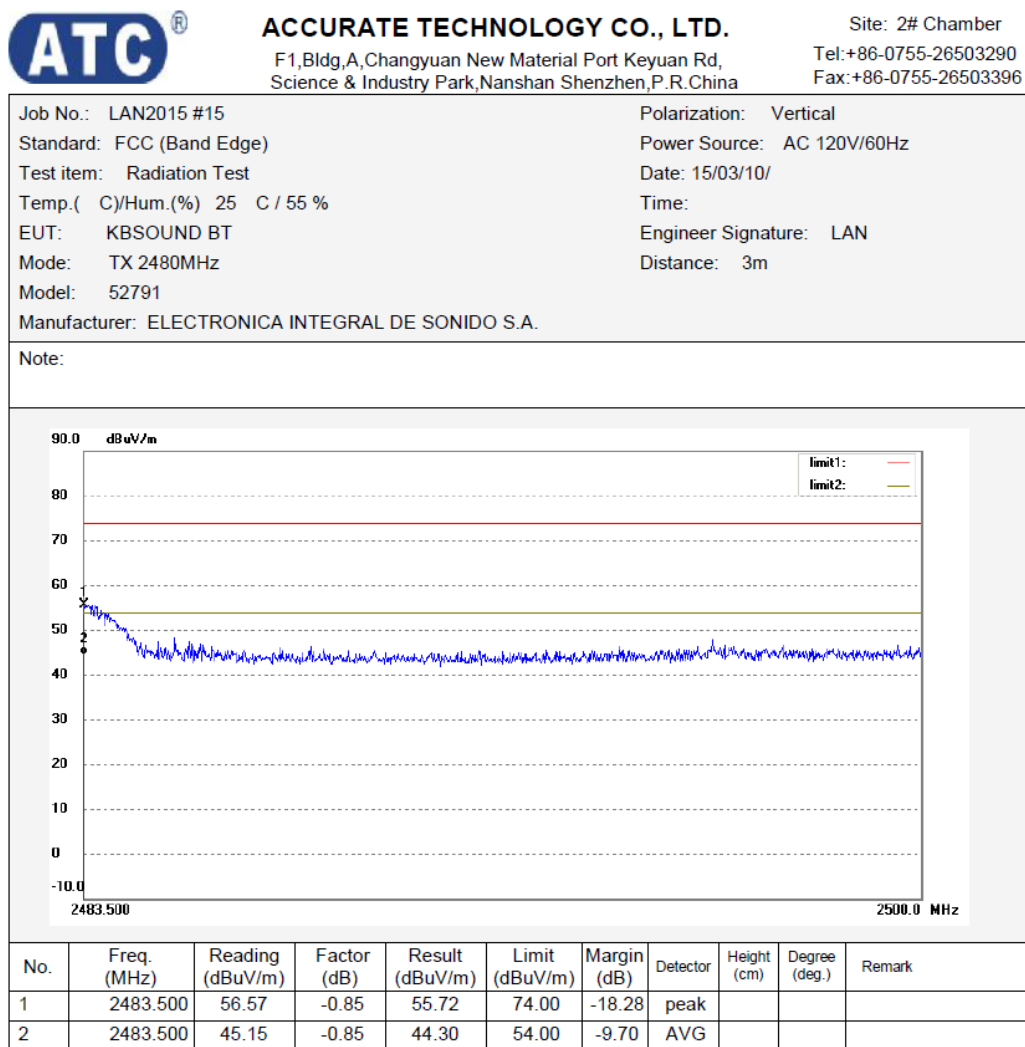


Figure 29: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.1, GFSK Modulation




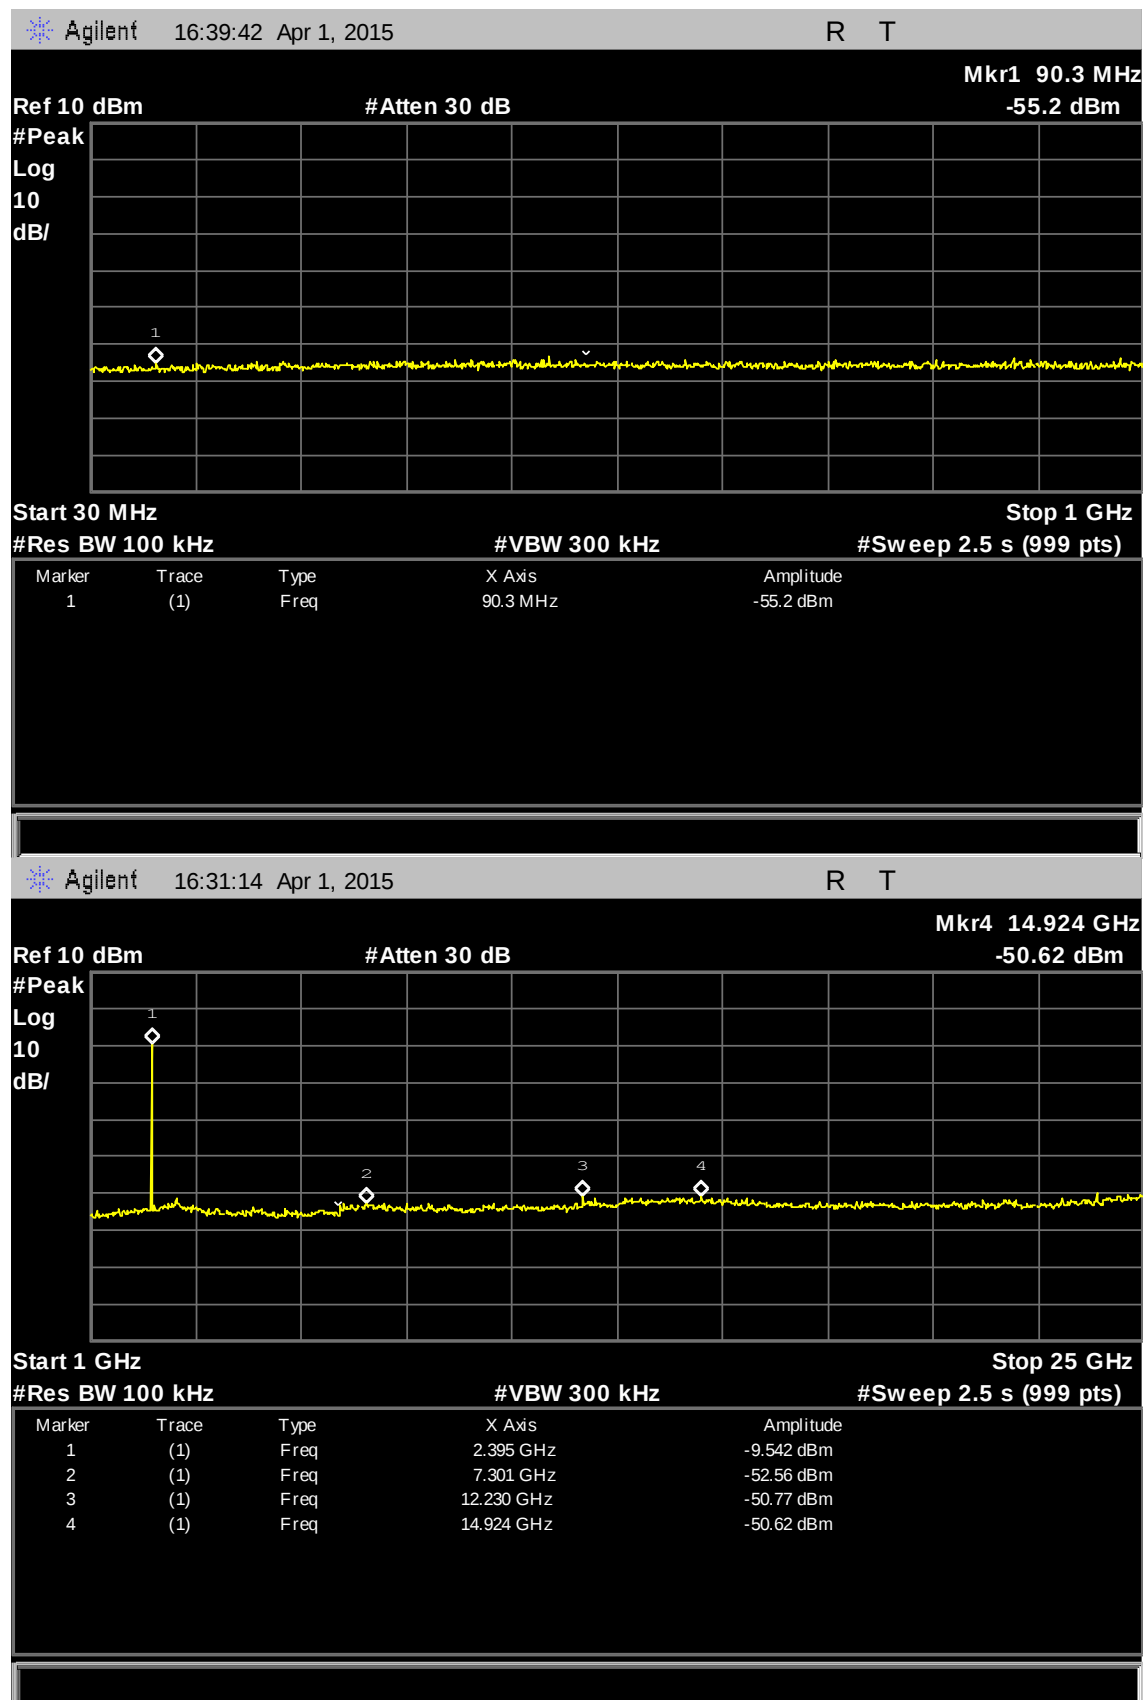

MARKER 4
2.34348 GHz
Ref 10 dBm *Att 40 dB

*RBW 100 kHz Marker 4 [T1]
*VBW 300 kHz -52.64 dBm
SWT 10 ms 2.343480000 GHz

1 PK
MAXH

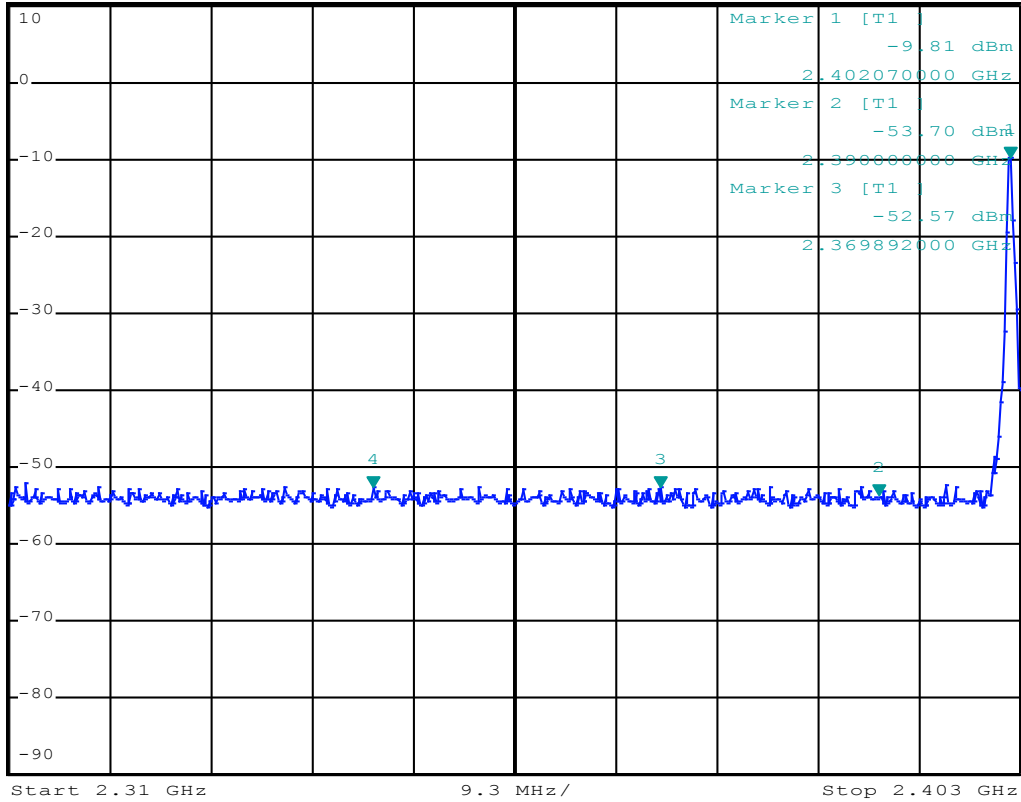

Date: 9.MAR.2015 14:25:30

Figure 30: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.2, GFSK Modulation


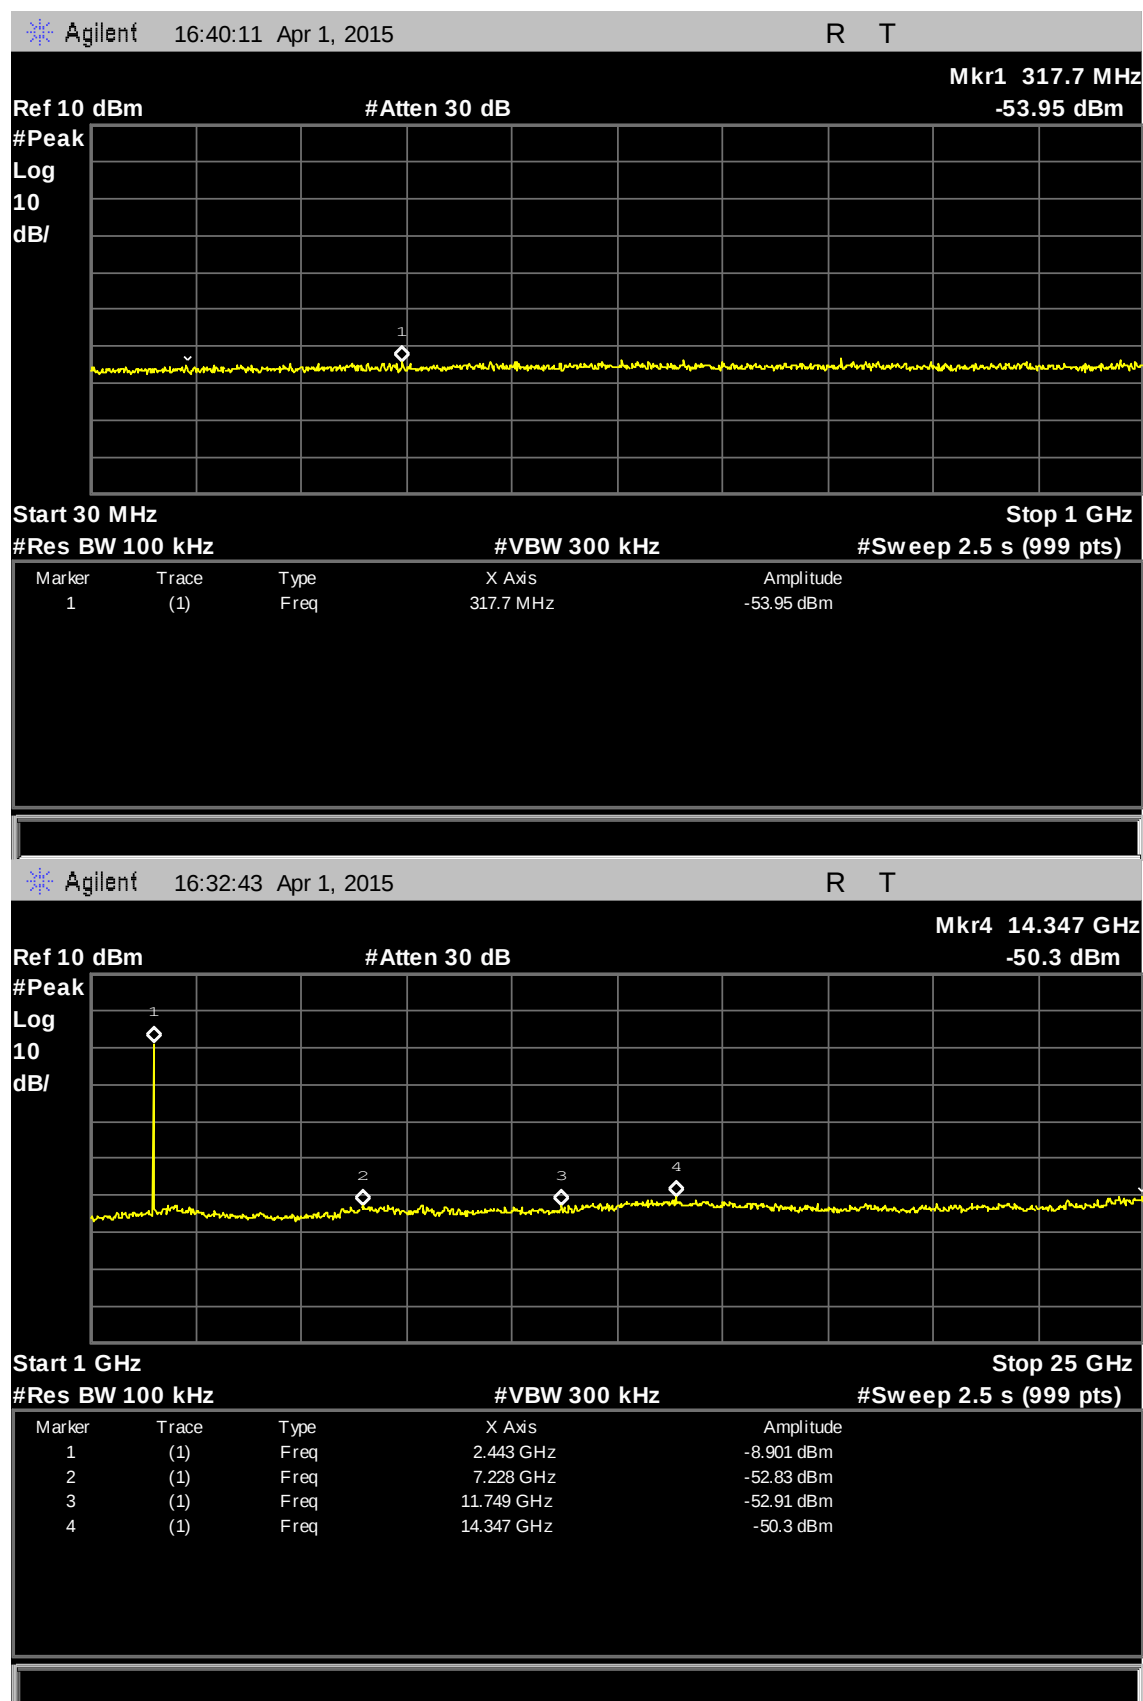


Figure 31: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.3, GFSK Modulation




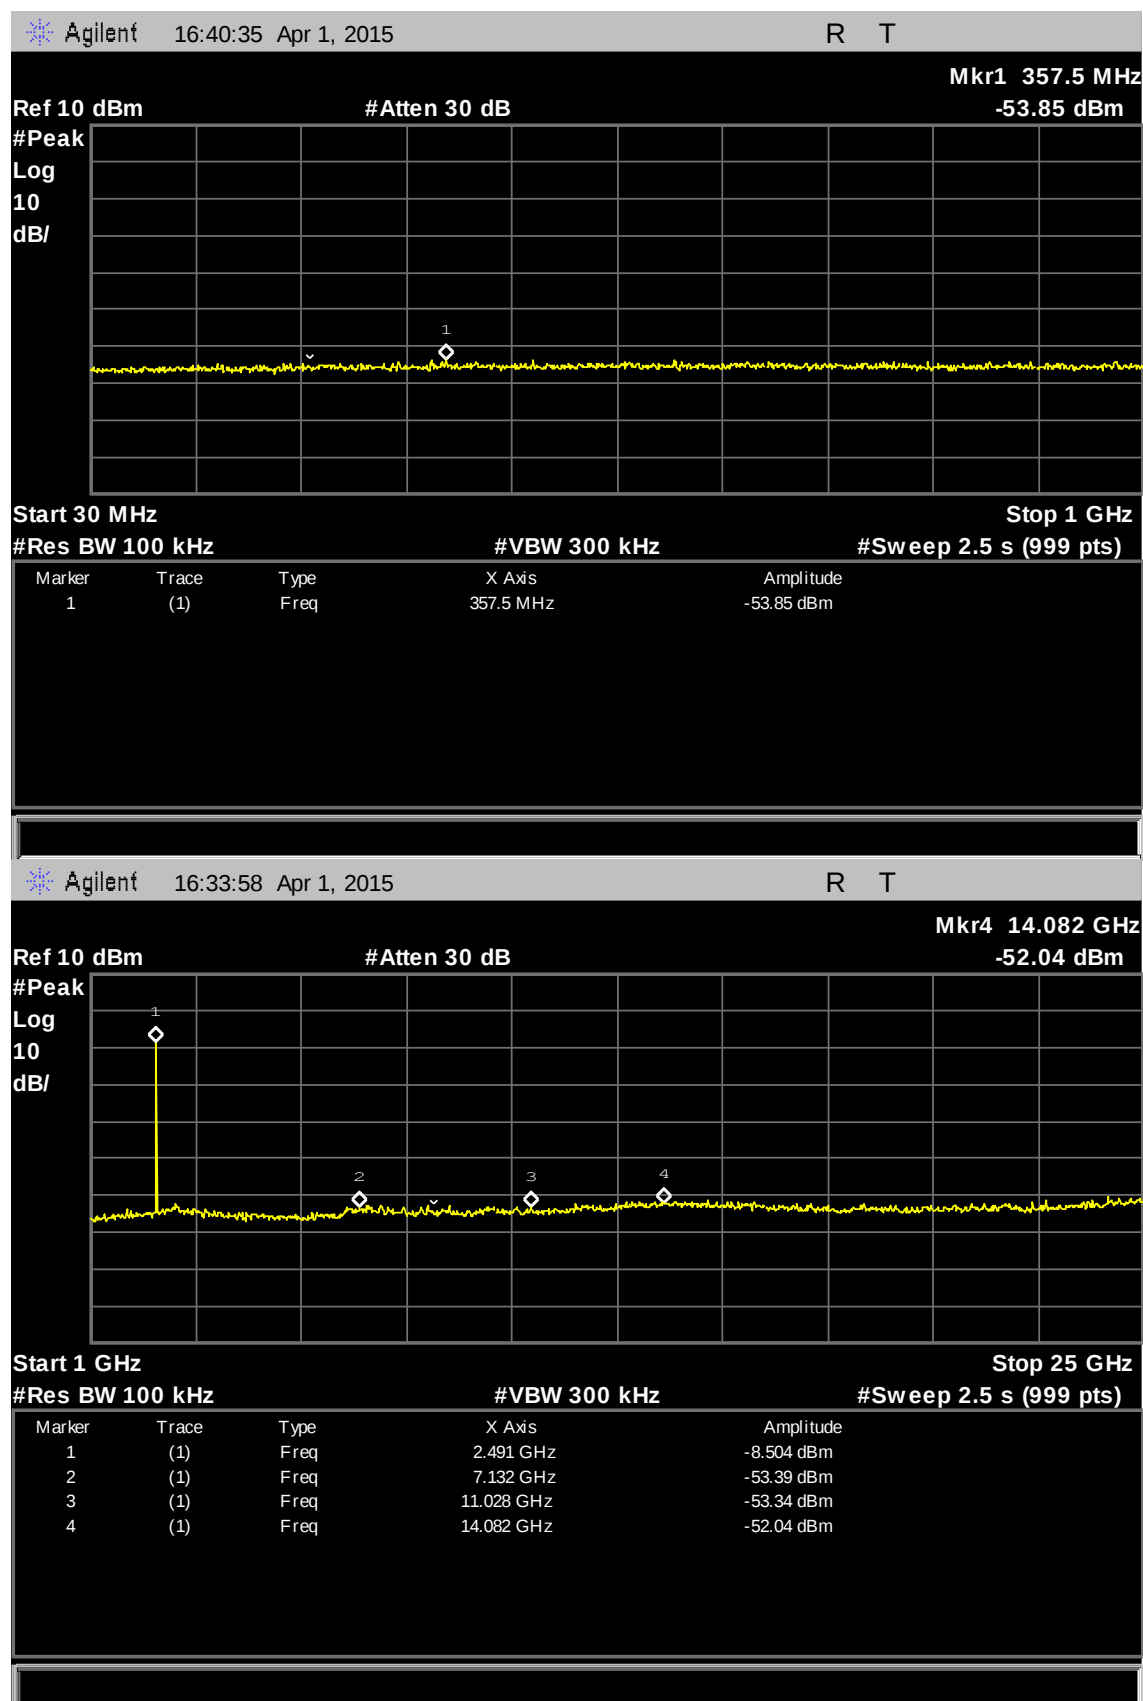

MARKER 4
2.495908 GHz
Ref 10 dBm *Att 40 dB


*RBW 100 kHz Marker 4 [T1]
*VBW 300 kHz -52.64 dBm
SWT 2.5 ms 2.495908000 GHz

1 PK
MAXH

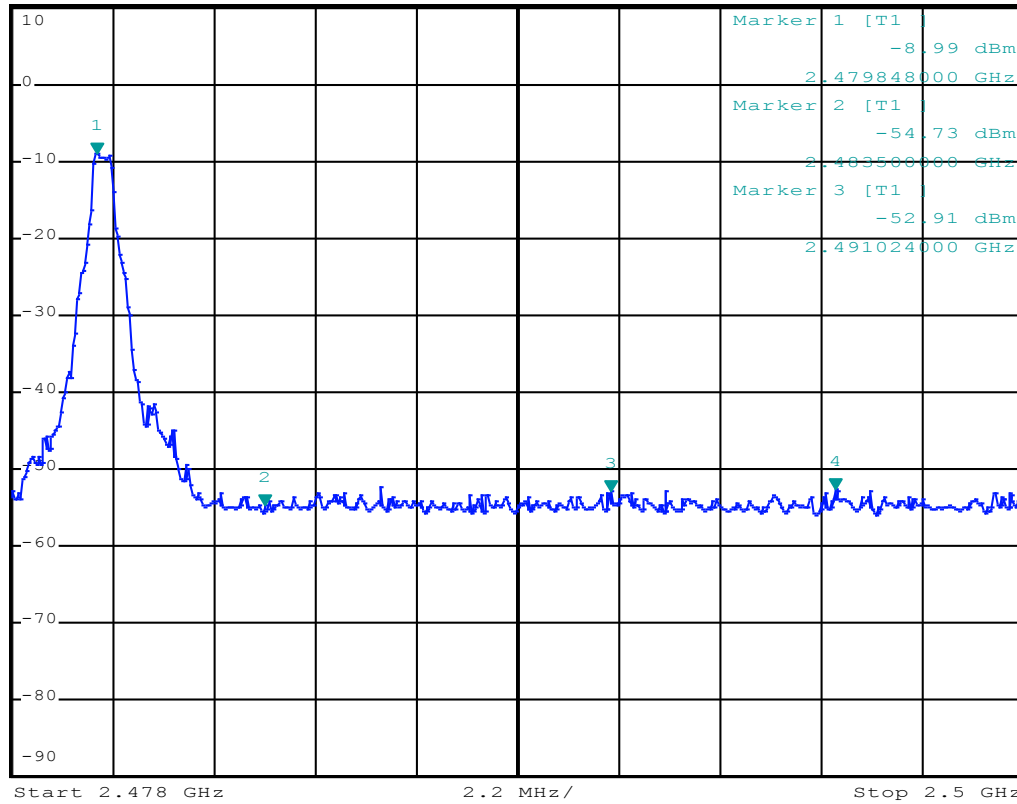

Date: 9.MAR.2015 14:27:46

Figure 32: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.1, 8DPSK Modulation

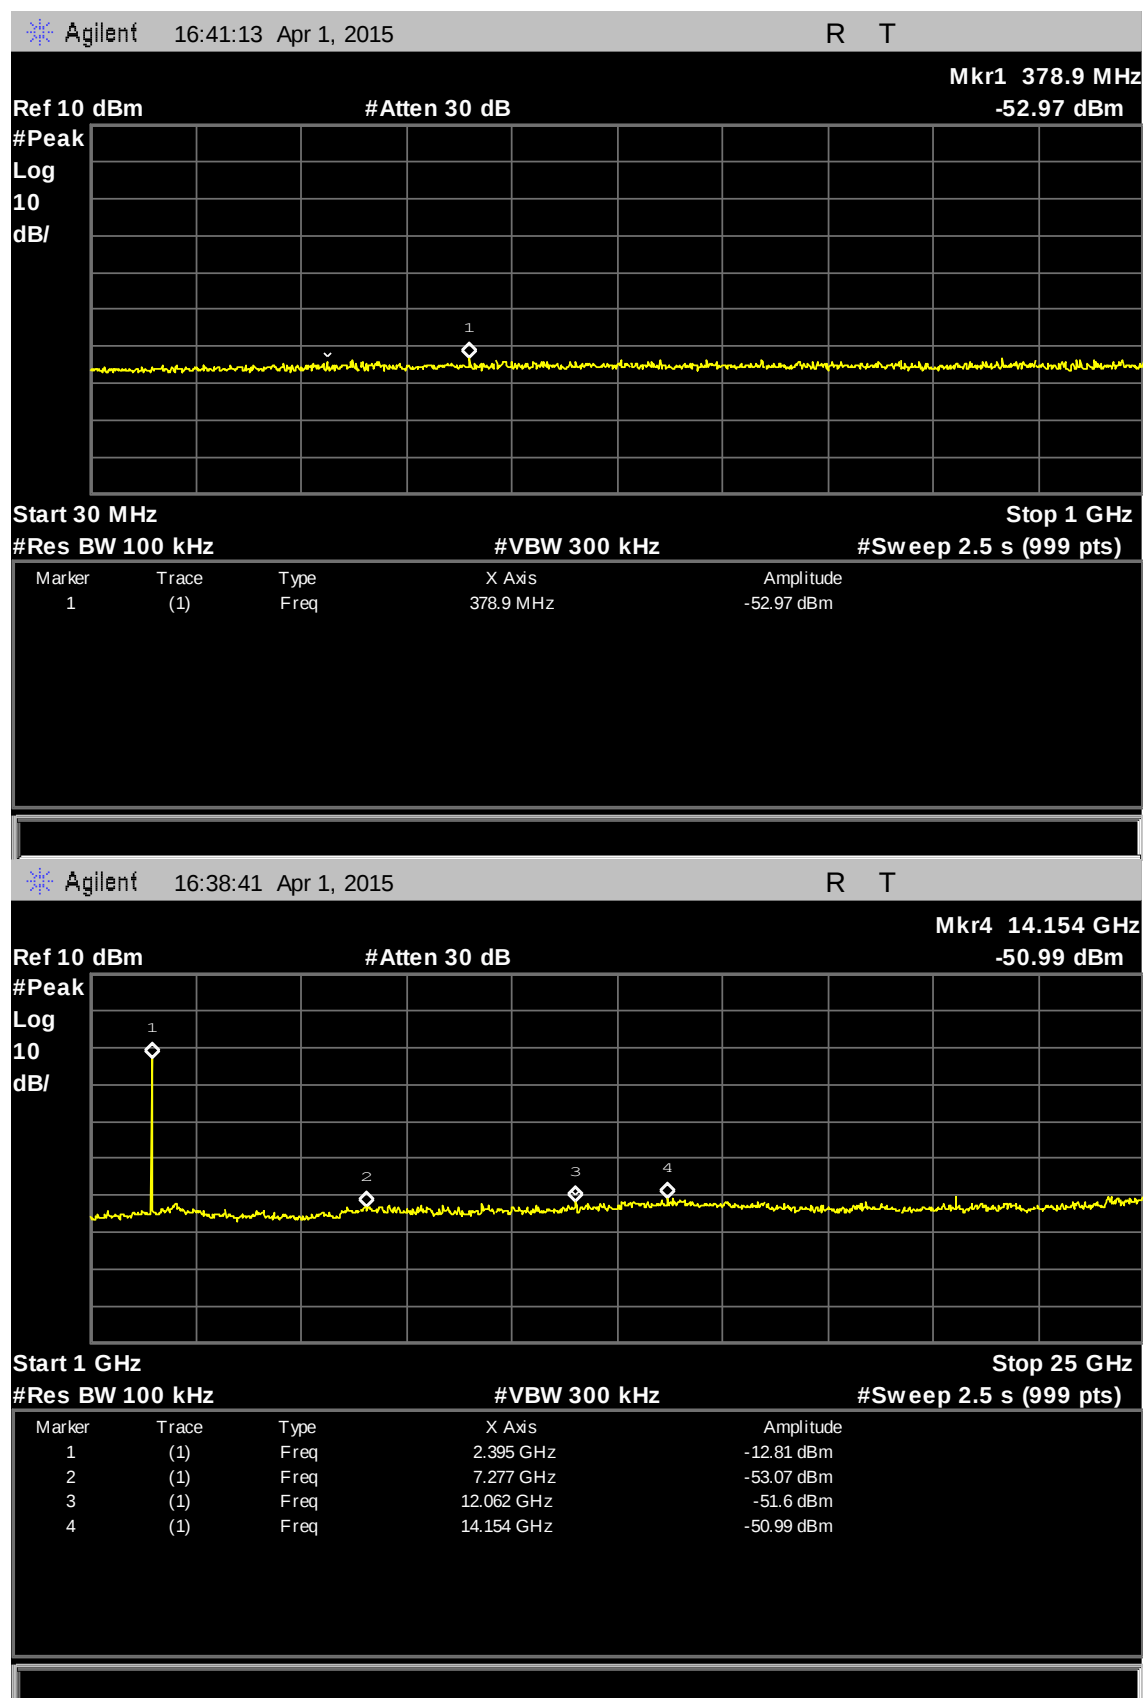




MARKER 4
2.360778 GHz
Ref 10 dBm *Att 40 dB

*RBW 100 kHz Marker 4 [T1]
*VBW 300 kHz -52.44 dBm
SWT 10 ms 2.360778000 GHz

1 PK
MAXH

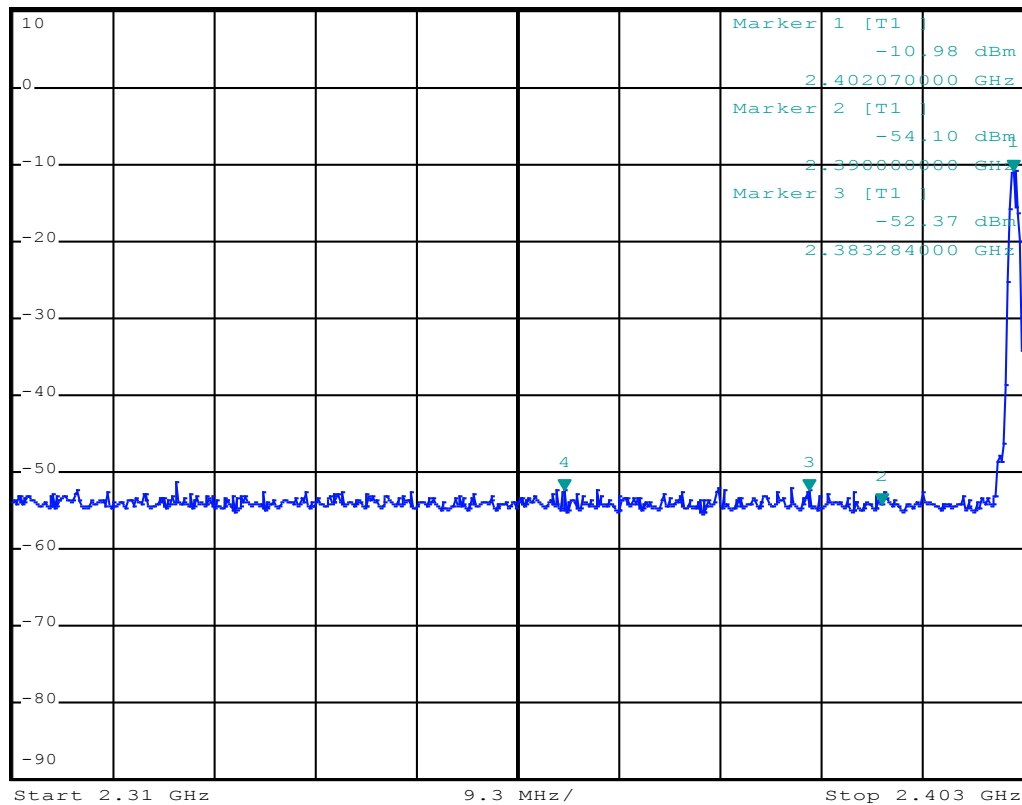

Date: 9.MAR.2015 14:26:37

Figure 33: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.2, 8DPSK Modulation


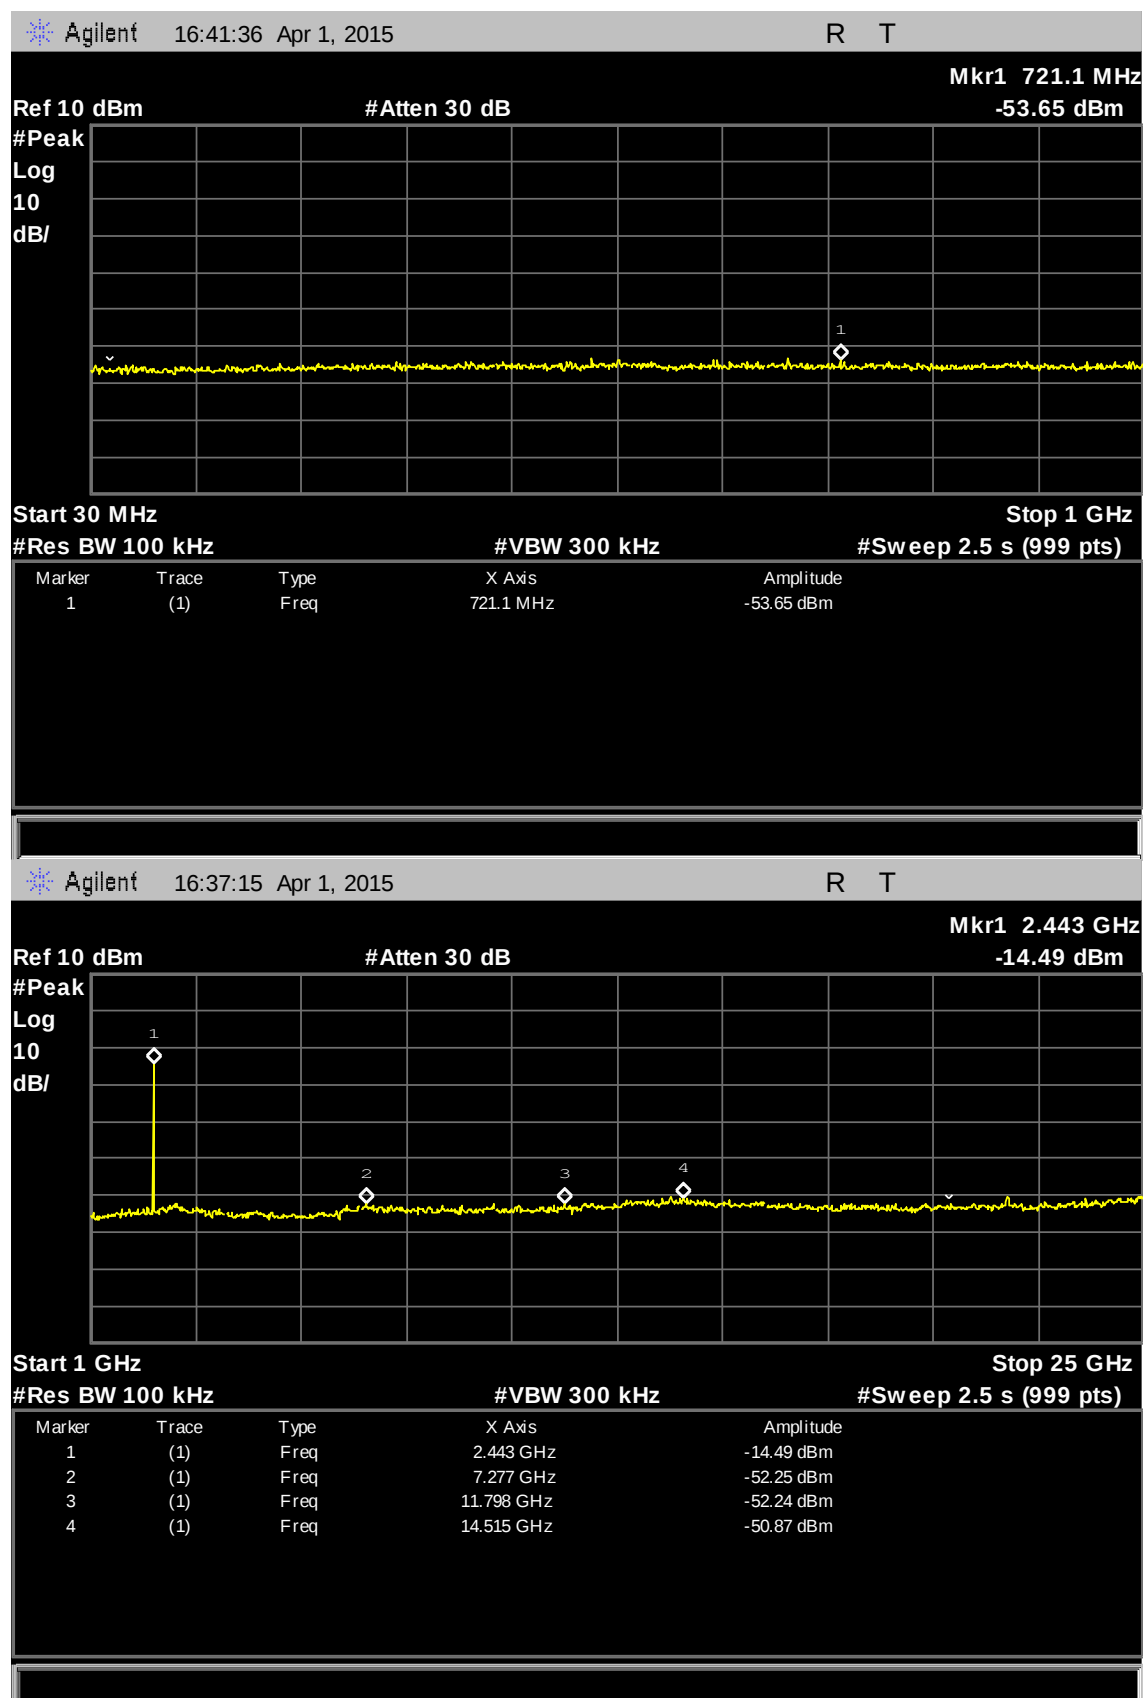


Figure 34: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.3, 8DPSK Modulation




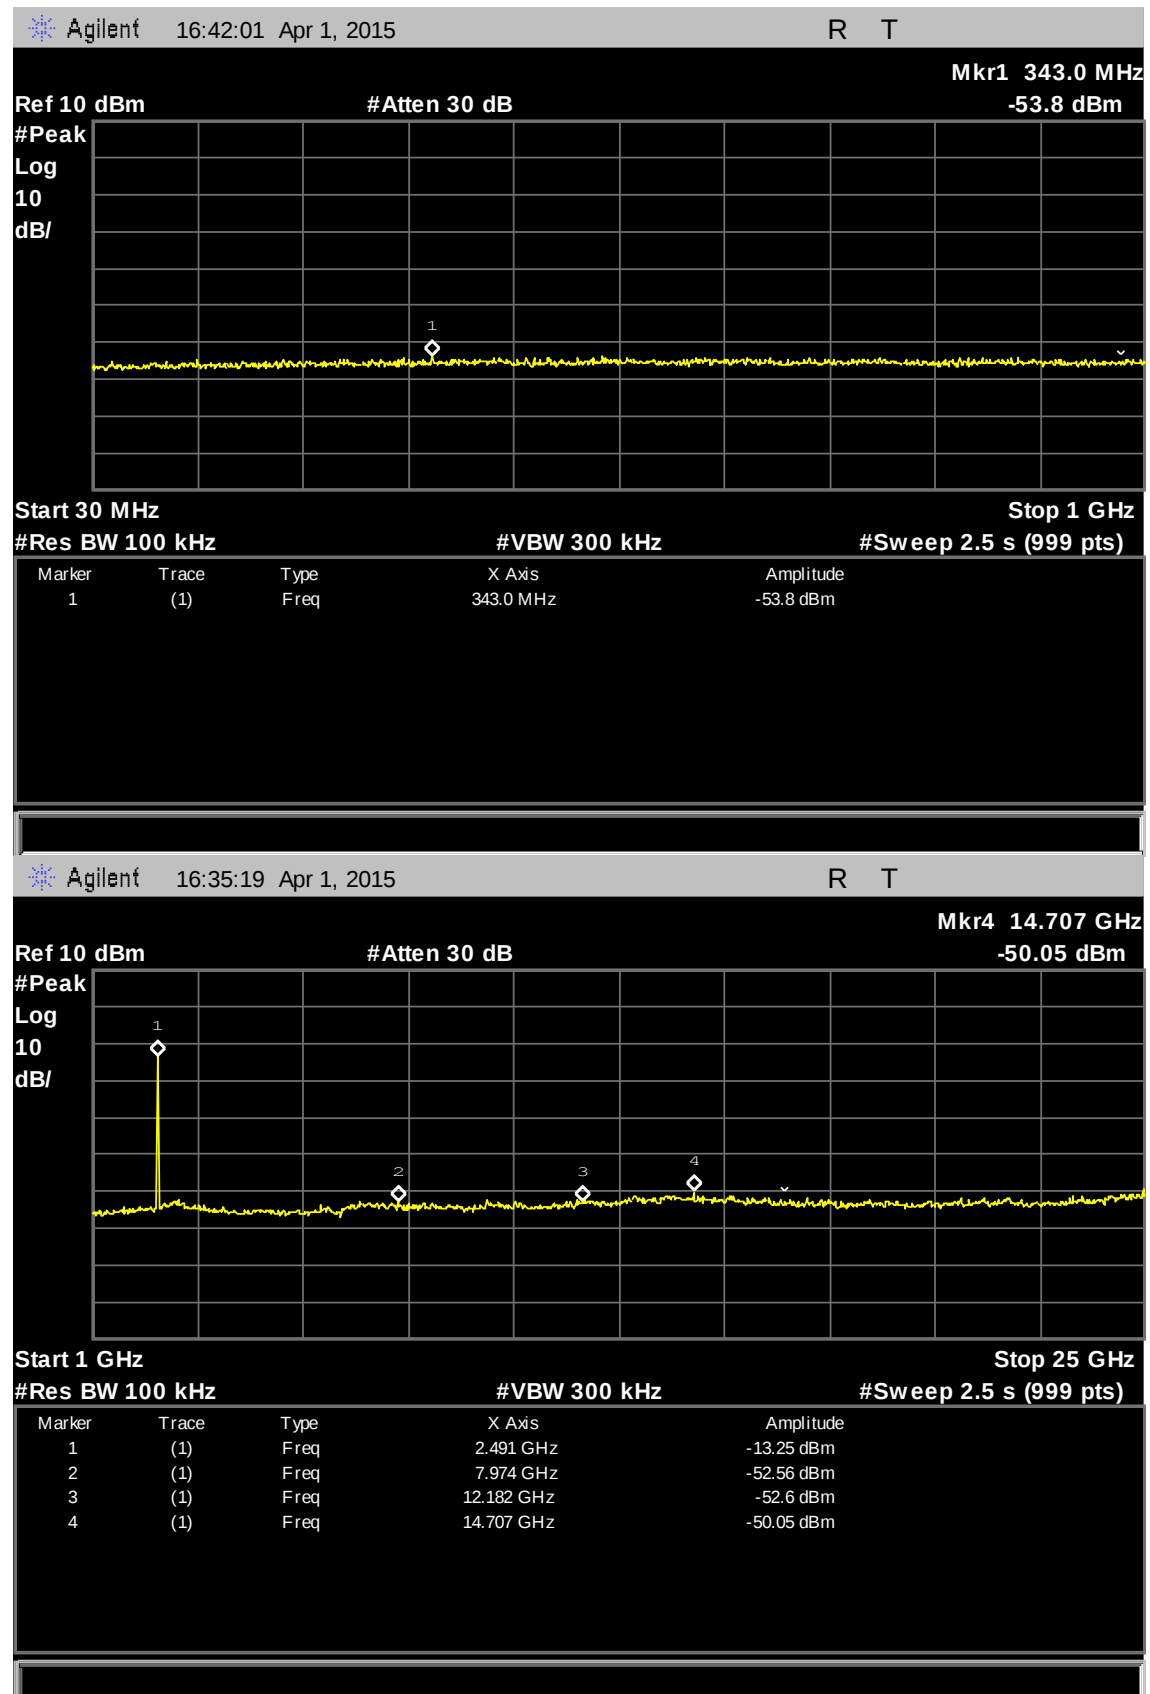

MARKER 4
2.494192 GHz
Ref 10 dBm *Att 40 dB

*RBW 100 kHz Marker 4 [T1]
*VBW 300 kHz -53.31 dBm
SWT 2.5 ms 2.494192000 GHz

1 PK
MAXH

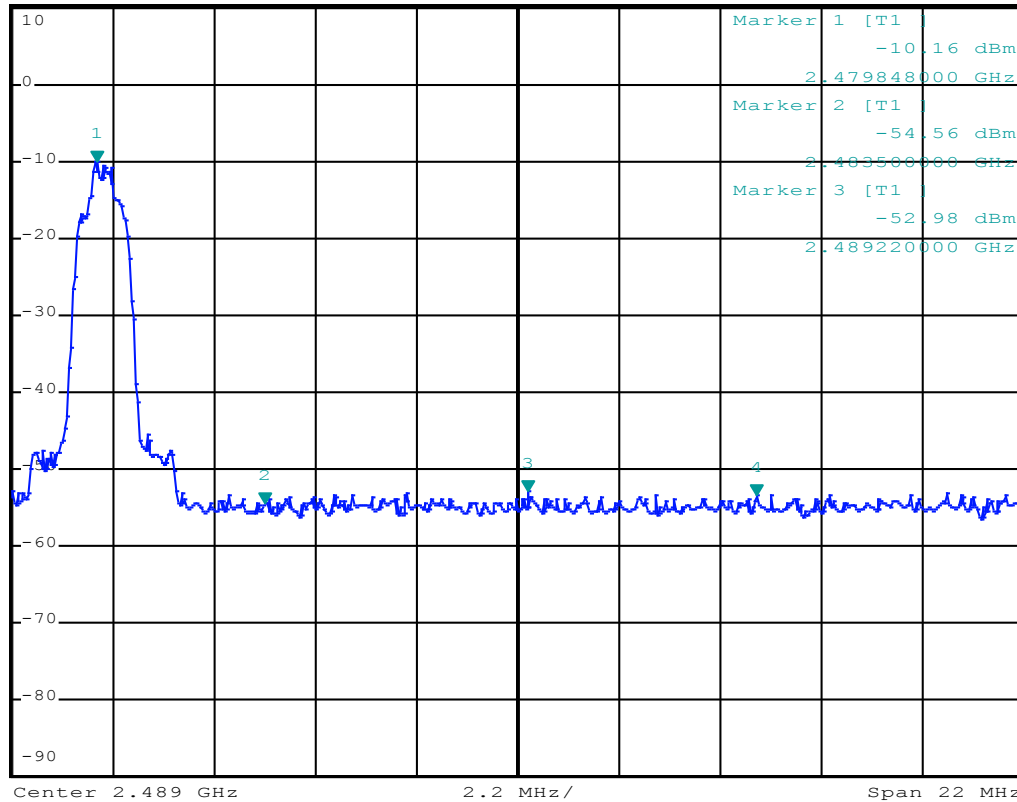

Date: 9.MAR.2015 14:28:28

Figure 35: Test figure of Conducted emissions, Mode B, line live


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: KBSOUND BT M/N:52791
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.
Operating Condition: Radio FM(Transmitting)
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 3/7/2015 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

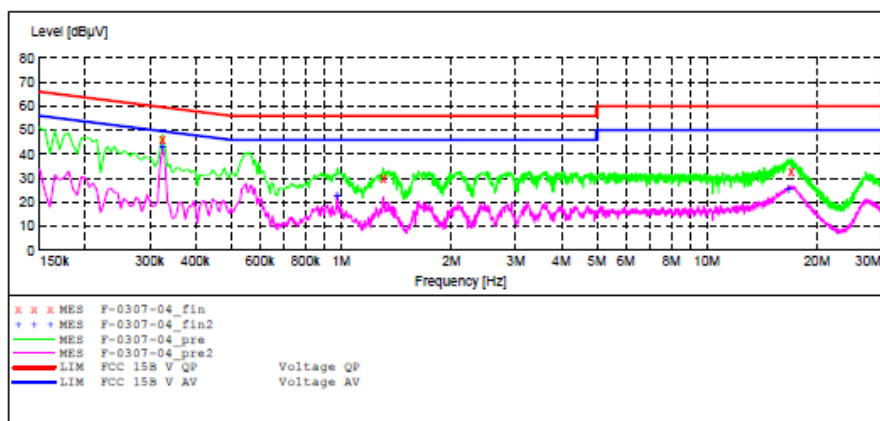

MEASUREMENT RESULT: "F-0307-04_fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.325000	45.80	10.6	60	13.8	QP	L1	GND
1.305000	30.00	10.9	56	26.0	QP	L1	GND
17.000000	32.60	11.4	60	27.4	QP	L1	GND

MEASUREMENT RESULT: "F-0307-04_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.325000	43.40	10.6	50	6.2	AV	L1	GND
0.975000	23.10	10.8	46	22.9	AV	L1	GND
16.725000	25.90	11.4	50	24.1	AV	L1	GND

Figure 36: Test figure of Conducted emissions, Mode B, line neutral


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: KBSOUND BT M/N:52791
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.
Operating Condition: Radio FM(Transmitting)
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 3/7/2015 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: SUB_STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

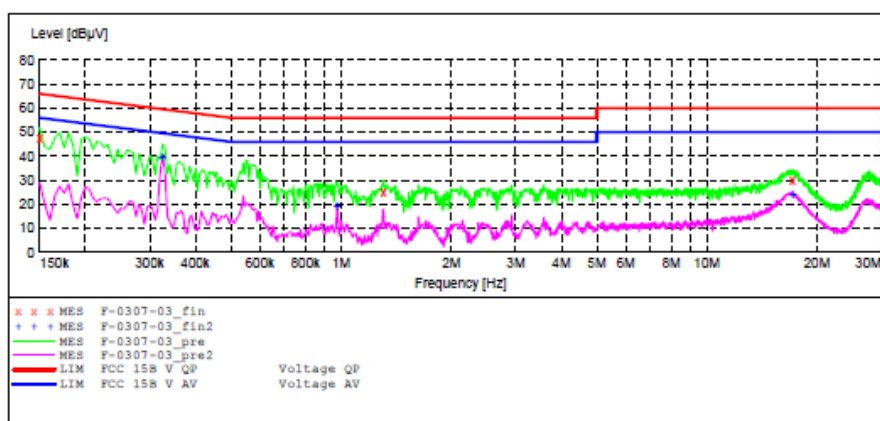

MEASUREMENT RESULT: "F-0307-03_fin"

3/7/2015

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	47.30	10.5	66	18.7	QP	N	GND
1.305000	24.60	10.9	56	31.4	QP	N	GND
17.125000	30.10	11.4	60	29.9	QP	N	GND

MEASUREMENT RESULT: "F-0307-03_fin2"

3/7/2015

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.325000	40.00	10.6	50	9.6	AV	N	GND
0.975000	19.00	10.8	46	27.0	AV	N	GND
17.125000	24.20	11.4	50	25.8	AV	N	GND

Figure 37: Test figure of Radiated emissions, Mode B, lowest channel, Below 1GHz, Horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2015-2 #278

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: KBSOUND BT

Mode: FM 88.1MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/09/

Time:

Engineer Signature:

Distance: 3m

Note:

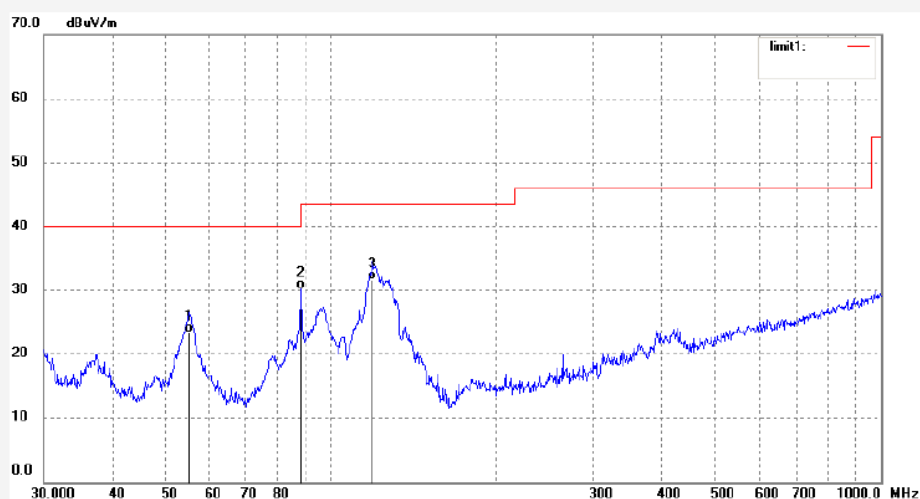

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.2207	36.45	-13.02	23.43	40.00	-16.57	QP			
2	88.1000	45.39	-15.19	30.20	43.50	-13.30	QP			
3	119.0180	44.66	-13.15	31.51	43.50	-11.99	QP			

Figure 38: Test figure of Radiated emissions, Mode B, lowest channel, Below 1GHz, Vertical



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #277

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: KBSOUND BT

Mode: FM 88.1MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/09/

Time:

Engineer Signature:

Distance: 3m

Note:

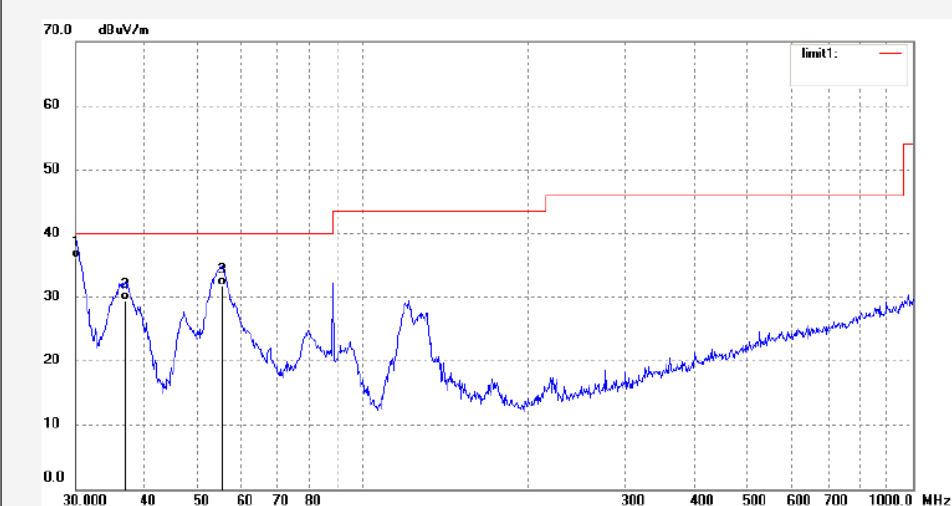

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.3974	46.16	-9.96	36.20	40.00	-3.80	QP			
2	36.8952	40.32	-10.85	29.47	40.00	-10.53	QP			
3	55.4147	44.90	-13.06	31.84	40.00	-8.16	QP			

Figure 39: Test figure of Radiated emissions, Mode B, lowest channel, Above 1GHz, Horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #338	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/03/18
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: KBSOUND BT	Engineer Signature:
Mode: FM 88.1MHz	Distance: 3m
Model: 52791	
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.	

Note:

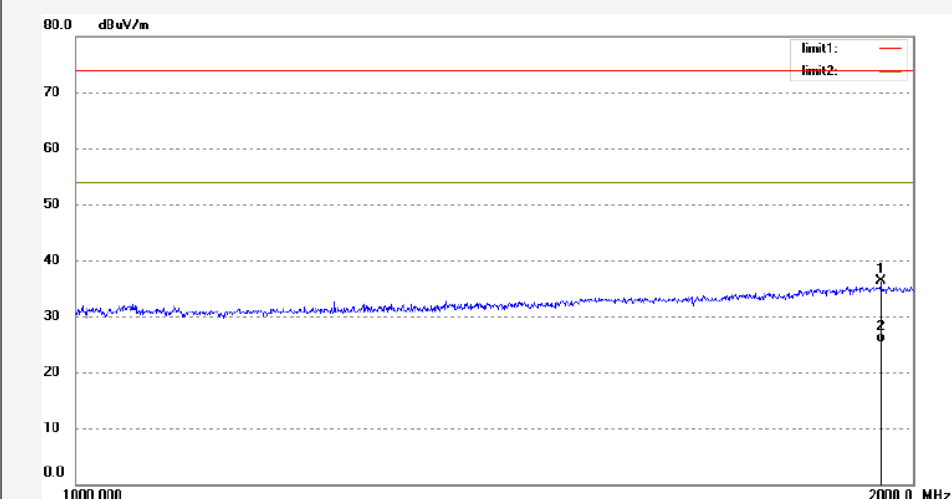

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1948.008	45.63	-9.33	36.30	74.00	-37.70	peak			
2	1948.008	34.69	-9.33	25.36	54.00	-28.64	AVG			

Figure 40: Test figure of Radiated emissions, Mode B, lowest channel, Above 1GHz, Vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #339	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/03/18
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: KBSOUND BT	Engineer Signature:
Mode: FM 88.1MHz	Distance: 3m
Model: 52791	
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.	

Note:

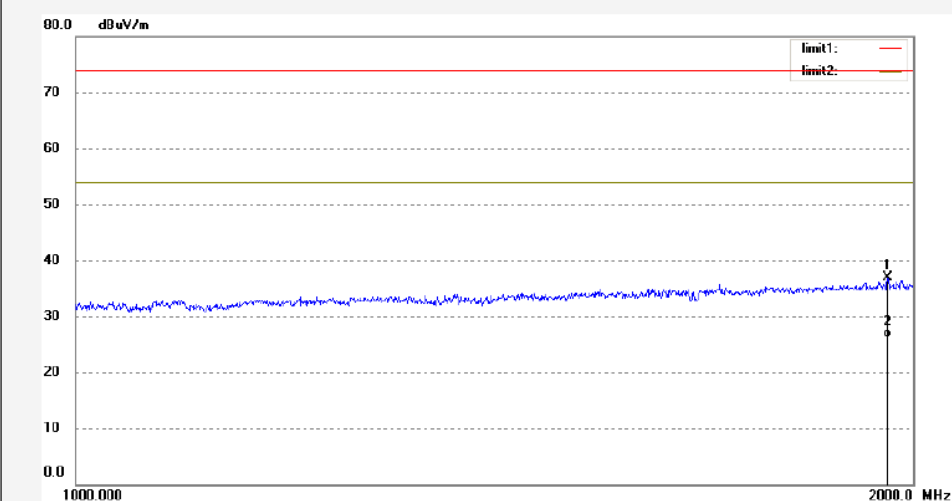

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1958.841	46.07	-9.25	36.82	74.00	-37.18	peak			
2	1958.841	35.44	-9.25	26.19	54.00	-27.81	AVG			

Figure 41: Test figure of Radiated emissions, Mode B, middle channel, Below 1GHz, Horizontal



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #279

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: KBSOUND BT

Mode: FM 98.1MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/09/

Time:

Engineer Signature:

Distance: 3m

Note:

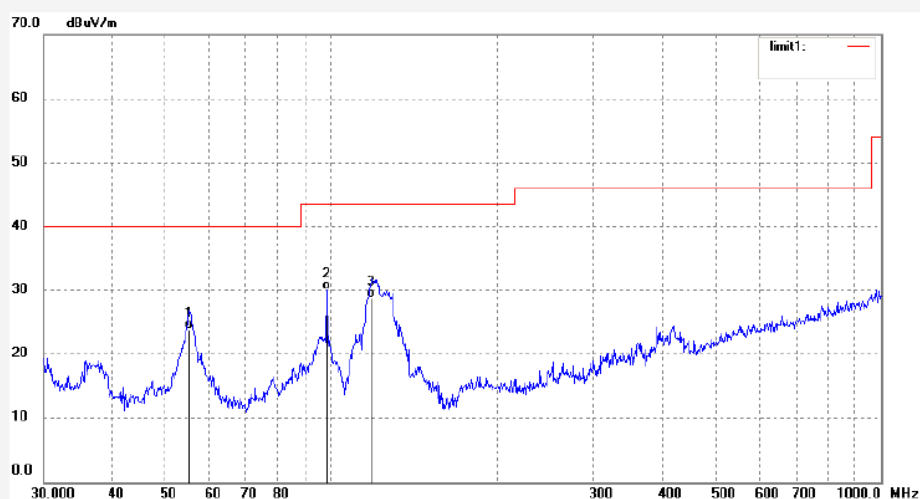

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.2207	36.91	-13.02	23.89	40.00	-16.11	QP			
2	98.1000	43.78	-13.77	30.01	43.50	-13.49	QP			
3	118.1860	42.01	-13.15	28.86	43.50	-14.64	QP			

Figure 42: Test figure of Radiated emissions, Mode B, middle channel, Below 1GHz, Vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #280	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/03/09/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: KBSOUND BT	Engineer Signature:
Mode: FM 98.1MHz	Distance: 3m
Model: 52791	
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.	

Note:

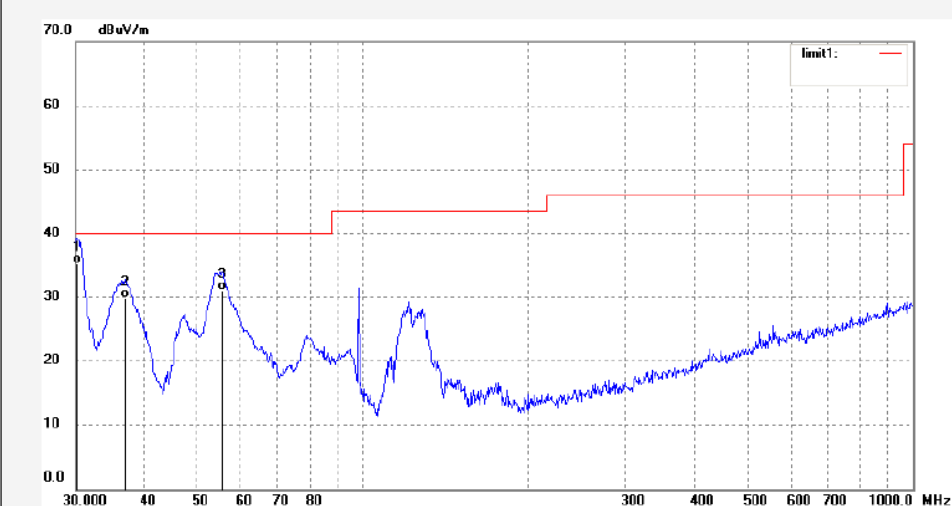

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.4373	45.26	-9.96	35.30	40.00	-4.70	QP			
2	36.8952	40.73	-10.85	29.88	40.00	-10.12	QP			
3	55.4147	44.10	-13.06	31.04	40.00	-8.96	QP			

Figure 43: Test figure of Radiated emissions, Mode B, middle channel, Above 1GHz, Horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #341	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/03/18
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: KBSOUND BT	Engineer Signature:
Mode: FM 98.1MHz	Distance: 3m
Model: 52791	
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.	

Note:

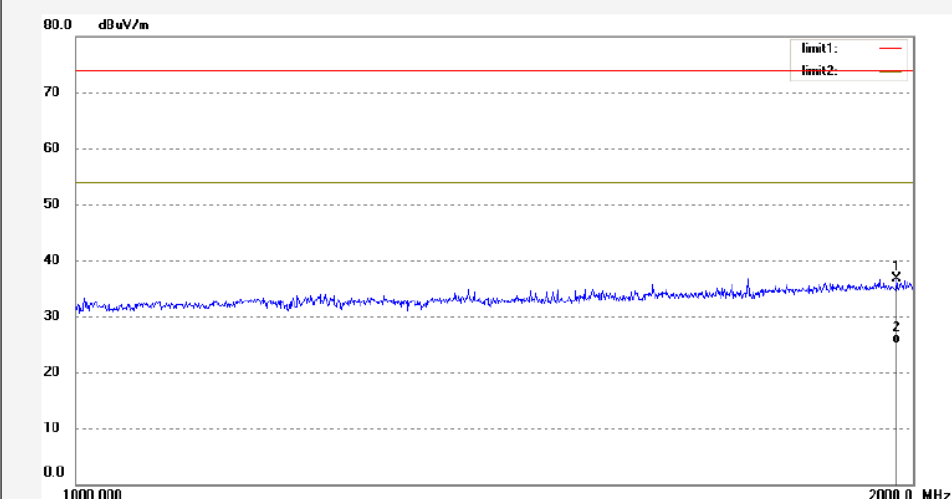

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1972.465	45.83	-9.18	36.65	74.00	-37.35	peak			
2	1972.465	34.21	-9.18	25.03	54.00	-28.97	AVG			

Figure 44: Test figure of Radiated emissions, Mode B, middle channel, Above 1GHz, Vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #340	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/03/18
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: KBSOUND BT	Engineer Signature:
Mode: FM 98.1MHz	Distance: 3m
Model: 52791	
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.	

Note:

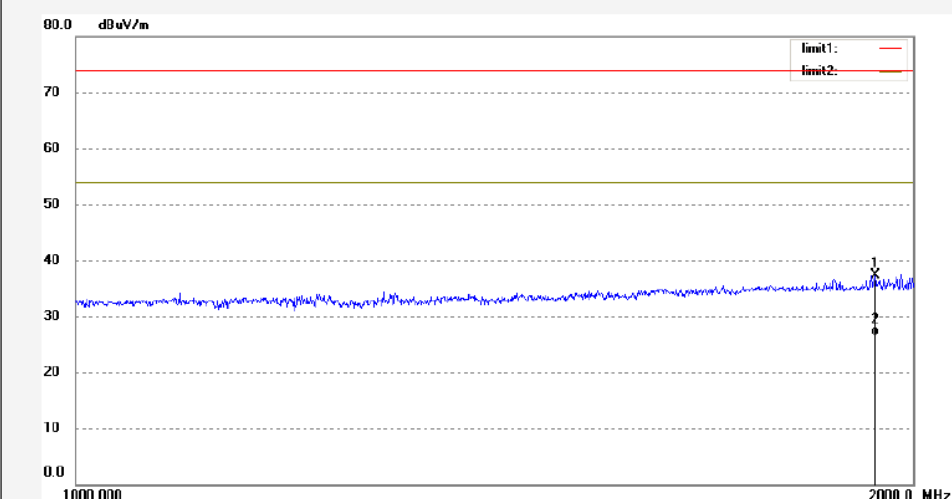

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1938.580	46.72	-9.41	37.31	74.00	-36.69	peak			
2	1938.580	35.88	-9.41	26.47	54.00	-27.53	AVG			

Figure 45: Test figure of Radiated emissions, Mode B, highest channel, Below 1GHz, Horizontal



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #282

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: KBSOUND BT

Mode: FM 107.9MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 15/03/09/

Time:

Engineer Signature:

Distance: 3m

Note:

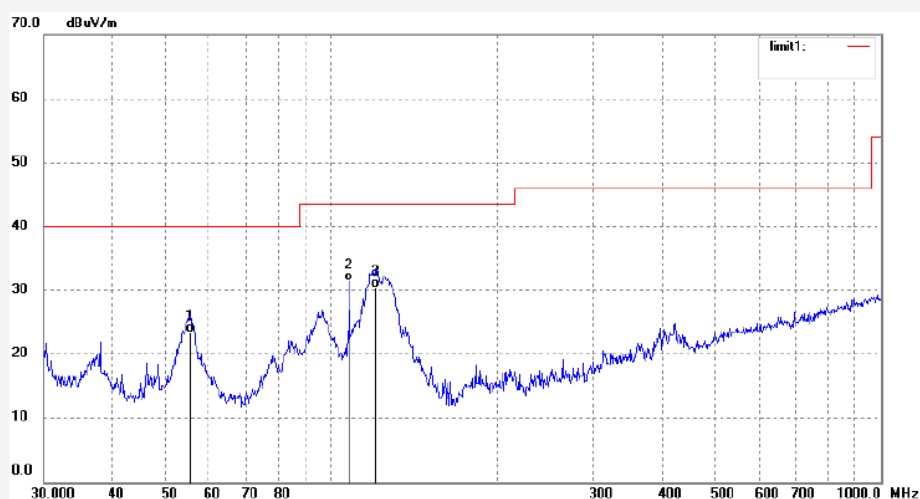

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4147	36.41	-13.06	23.35	40.00	-16.65	QP			
2	107.9000	45.31	-13.92	31.39	43.50	-12.11	QP			
3	120.6991	43.61	-13.22	30.39	43.50	-13.11	QP			

Figure 46: Test figure of Radiated emissions, Mode B, highest channel, Below 1GHz, Vertical



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #281

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: KBSOUND BT

Mode: FM 107.9MHz

Model: 52791

Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/03/09/

Time:

Engineer Signature:

Distance: 3m

Note:

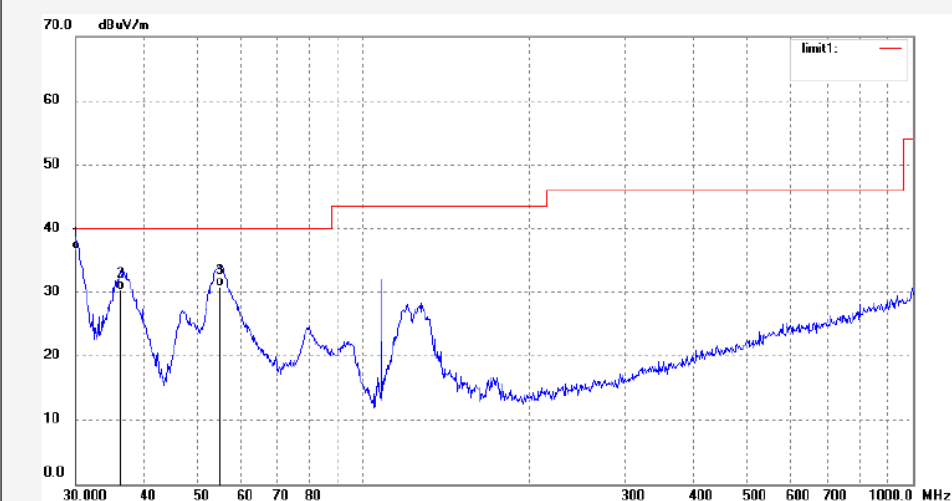

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.0000	46.59	-9.93	36.66	40.00	-3.34	QP			
2	36.2541	41.13	-10.71	30.42	40.00	-9.58	QP			
3	54.4515	43.78	-12.94	30.84	40.00	-9.16	QP			

Figure 47: Test figure of Radiated emissions, Mode B, highest channel, Above 1GHz, Horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #342	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/03/18
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: KBSOUND BT	Engineer Signature:
Mode: FM 107.9MHz	Distance: 3m
Model: 52791	
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.	

Note:

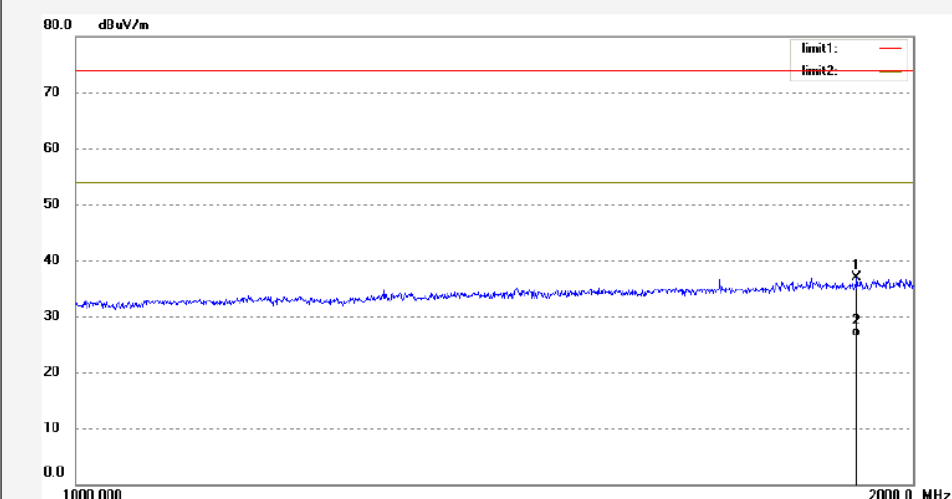

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1909.242	46.52	-9.64	36.88	74.00	-37.12	peak			
2	1909.242	35.85	-9.64	26.21	54.00	-27.79	AVG			

Figure 48: Test figure of Radiated emissions, Mode B, highest channel, Above 1GHz, Vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #343	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/03/18
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: KBSOUND BT	Engineer Signature:
Mode: FM 107.9MHz	Distance: 3m
Model: 52791	
Manufacturer: ELECTRONICA INTEGRAL DE SONIDO S.A.	

Note:

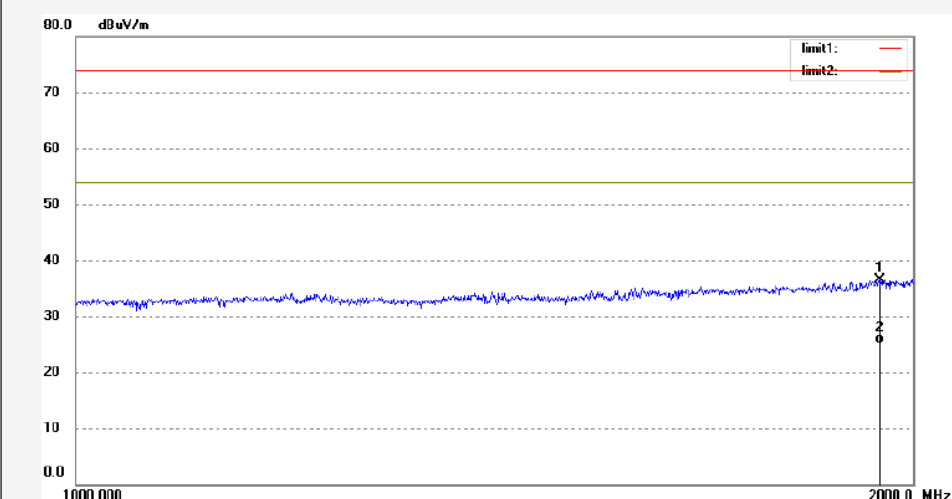

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1946.659	45.76	-9.33	36.43	74.00	-37.57	peak			
2	1946.659	34.52	-9.33	25.19	54.00	-28.81	AVG			