



Radio Test Report

Report No.: STS2507123W03

Issued for

Joint Chinese Ltd

Building 4 & 6, Huafeng Tech Park, Guangtian Road, Luotian
Industrial Area, Songgang Town, Bao'an District, Shenzhen,
China

Product Name: Smart Health Bracelet

Brand Name: N/A

Model Name: V6

Series Model: N/A

FCC ID: 2AB73-V6

Test Standard: 47 CFR Part 2, 24(E), 27

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name.....: Joint Chinese Ltd
Address.....: Building 4 & 6, Huafeng Tech Park, Guangtian Road, Luotian Industrial Area, Songgang Town, Bao'an District, Shenzhen, China

Manufacturer's Name.....: Joint Chinese Ltd
Address.....: Building 4 & 6, Huafeng Tech Park, Guangtian Road, Luotian Industrial Area, Songgang Town, Bao'an District, Shenzhen, China

Factory Name.....: Joint Chinese Ltd
Address.....: Building 4 & 6, Huafeng Tech Park, Guangtian Road, Luotian Industrial Area, Songgang Town, Bao' an District, Shenzhen, China

Product Description

Product Name: Smart Health Bracelet
Brand Name: N/A
Model Name.....: V6
Series Model.....: N/A

Test Standards.....: 47 CFR Part 2, 24(E), 27
Test Procedure.....: KDB 971168 D01 v03r01, ANSI C63.26 2015

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test.....:

Date of receipt of test item.....: 16 July 2025
Date (s) of performance of tests : 16 July 2025~26 Aug. 2025
Date of Issue: 26 Aug. 2025
Test Result.....: Pass

Testing Engineer :

(Lenon Hou)

Technical Manager :

(Skylar Li)

Authorized Signatory :

(Bovey Yang)



**Table of Contents****Page**

1. TEST FACTORY & MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
3. CONDUCTED OUTPUT POWER&RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER	13
4. PEAK-TO-AVERAGE RATIO	22
5. OCCUPIED BANDWIDTH	23
6. CONDUCTED BAND EDGE	24
7. CONDUCTED SPURIOUS EMISSION	26
8. RADIATED SPURIOUS EMISSION	27
9. FREQUENCY STABILITY	53
APPENDIX-PHOTOS OF TEST SETUP	57



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	26 Aug. 2025	STS2507123W03	ALL	Initial Issue



1.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of KDB 971168 D01 v03r01 and ANSI C63.26(2015)

Test Description	FCC Rules	Band	Test Limit	Test Result
Conducted Output Power	2.1046	/	Reporting Only	PASS
Radiated output power	24.232(c)	B2, B25	EIRP < 2Watt	PASS
	27.50(d)	B4, B66	EIRP < 1Watt	
Occupied Bandwidth	2.1049	/	Reporting Only	PASS
Frequency Stability	2.1055	/	< 2.5 ppm	PASS
	24.235	B2, B25		
	27.54	B4, B66		
Spurious Emission at Antenna Terminals	2.1051	/	< 43+10log10(P[Watts])	PASS
	24.238(a)	B2, B25		
	27.53(h)	B4, B66		
Band Edge	2.1051	/	Please refer to standard	PASS
	22.917	B5		
	24.238(a)	B2, B25		
	27.53(h)	B4, B66		
Field Strength of Spurious Radiation	2.1053	/	< 43+10log10(P[Watts])	PASS
	24.238(a)	B2, B25		
	27.53(h)	B4, B66		



TEST FACTORY & MEASUREMENT UNCERTAINTY

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 30-1GHz	$\pm 4.18\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
5	All emissions, radiated >6G	$\pm 5.24\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$



2. GENERAL INFORMATION

2.1 TECHNICAL SPECIFICATIONS AND REGULATIONS

2.1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Name	Smart Health Bracelet
Trade Name	N/A
Model Name	V6
Series Model	N/A
Model Difference	N/A
Frequency Bands	LTE Band 2:1850~1910MHz (TX),1930 ~1990MHz (RX) LTE Band 4:1710~1755MHz(TX), 2110~2155MHz (RX) LTE Band 25: 1850~1915MHz (TX), 1930~1995MHz (RX) LTE Band 66:1710~1780MHz(TX), 2110~2200MHz (RX)
SIM Card	Only support single SIM Card.
Antenna	LDS
Antenna gain	LTE-B2: 1.94 dBi LTE-B4: -0.06 dBi LTE-B25: 1.94 dBi LTE-B66: -0.06 dBi
Rating	Input: DC 5V/240mA
Battery	Rated Voltage: 3.8V Capacity: 250 mAh
Adapter	N/A
Extreme Vol. Limits	DC 3.42V ~ DC 4.18V (Normal: DC 3.8V)
Extreme Temp. Tolerance	-30°C~50°C
Hardware version number	N/A
Software version number	J2358_V0104

**** Note:** The High Voltage DC 4.18V and Low Voltage DC 3.42V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage, the antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



2.1.2 EMISSION DESIGNATOR

CAT-M Band 2	Emission Designator	Emission Designator
BW(MHz)	(99%OBW)QPSK	(99%OBW)16QAM
1.4	1M09G7D	923KW7D
3	1M10G7D	933KW7D
5	1M11G7D	930KW7D
10	1M12G7D	947KW7D
15	1M12G7D	959KW7D
20	1M13G7D	966KW7D
CAT-M Band 4	Emission Designator	Emission Designator
BW(MHz)	(99%OBW)QPSK	(99%OBW)16QAM
1.4	1M10G7D	925KW7D
3	1M10G7D	934KW7D
5	1M11G7D	929KW7D
10	1M12G7D	950KW7D
15	1M13G7D	968KW7D
20	1M13G7D	967KW7D
CAT-M Band 25	Emission Designator	Emission Designator
BW(MHz)	(99%OBW)QPSK	(99%OBW)16QAM
1.4	1M09G7D	928KW7D
3	1M09G7D	929KW7D
5	1M11G7D	929KW7D
10	1M12G7D	948KW7D
15	1M12G7D	967KW7D
20	1M13G7D	975KW7D
CAT-M Band 66	Emission Designator	Emission Designator
BW(MHz)	(99%OBW)QPSK	(99%OBW)16QAM
1.4	1M09G7D	921KW7D
3	1M10G7D	929KW7D
5	1M11G7D	935KW7D
10	1M12G7D	946KW7D
15	1M13G7D	958KW7D
20	1M13G7D	971KW7D



2.1.3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 v03r01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power. Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Remark:

1. The mark 'v' means that this configuration is chosen for testing
2. The mark '-' means that this bandwidth is not supported.
3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated.

ITEMS	Band	Bandwidth (MHz)						Modulation		RB #		Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak&Avera Ratio	2	v	v	v	v	v	v	v	v		v	v	v	v
	4	v	v	v	v	v	v	v	v		v	v	v	v
	25	v	v	v	v	v	v	v	v		v	v	v	v
	66	v	v	v	v	v	v	v	v		v	v	v	v
26dB&99% Bandwidth	2	v	v	v	v	v	v	v	v		v	v	v	v
	4	v	v	v	v	v	v	v	v		v	v	v	v
	25	v	v	v	v	v	v	v	v		v	v	v	v
	66	v	v	v	v	v	v	v	v		v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v		v	v		v
	4	v	v	v	v	v	v	v	v		v	v		v
	25	v	v	v	v	v	v	v	v		v	v		v
	66	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	v
Frequency Stability	2				v			v			v		v	
	4				v			v			v		v	
	25				v			v			v		v	
	66				v			v			v		v	
E.R.P.& E.I.R.P.	2	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	v
	66	v	v	v	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	2	v	v	v	v	v	v	v		v		v	v	v
	4	v	v	v	v	v	v	v		v		v	v	v
	25	v	v	v	v	v	v	v		v		v	v	v
	66	v	v	v	v	v	v	v		v		v	v	v



2.1.4 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for filing to comply with the 47 CFR Part 2, 24(E), 27.

2.1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with eut intended for fcc grant together.

2.1.6 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.1.7 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.



2.1.8 MEASUREMENT INSTRUMENTS

The radiated emission testing was performed according to the procedures of ANSI C63.26 2015 and FCC CFR 47 rules of 2.1053.

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Wireless Communications Test Set	R&S	CMW 500	117239	2024.09.23	2025.09.22
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2024.09.23	2025.09.22
Pre-Amplifier(18G-40GHz)	SKET	LNPA 1840-50	SK2018101801	2025.02.22	2026.02.21
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2024.09.23	2025.09.22
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Video Controller	SKET	FCS C-3	N/A	N/A	N/A
Bilog Antenna	TESEQ	CBL6111D	34678	2024.09.30	2025.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2024.09.25	2025.09.24
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	N/A	N/A	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC Power Supply	Zhaoxin	RXN 605D	20R605D11010081	N/A	N/A
Test SW	EMC Test Software	15.2.0.339			
	EZ-EMC	Ver.STSLAB-03A1 RE			
RF Connected Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Wireless Communications Test Set	R&S	CMW 500	131428	2025.02.22	2026.02.21
Signal Analyzer	Agilent	N9020A	MY52440124	2025.02.22	2026.02.21
RF Automatic Test System	Maiwei	MW200-SFCB	N/A	N/A	N/A
Temperature & Humidity Test Chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
Programmable Power Supply	Agilent	E3642A	MY40002025	2024.09.23	2025.09.22
POWER DIVIDER	eastsheep	PD-0.5/0.6-2S	N/A	2025.02.25	2026.02.24
Test SW	MTS 8200	2.0.0.0			



2.1.9 MEASUREMENT RESULTS EXPLANATION EXAMPLE

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF Cable Loss + Attenuator Factor.

3. CONDUCTED OUTPUT POWER&RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

3.1 DESCRIPTION OF THE CONDUCTED OUTPUT POWER MEASUREMENT

3.1.1 MEASUREMENT METHOD

CONDUCTED OUTPUT POWER:

A system simulator was used to establish communication with the eut. Its parameters were set to force the eut transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Configuration follows KDB 971168 D01 v03r01.

C63.26 2015 Section 5.2.5.5.

In many cases, RF output power limits are specified in terms of the ERP or the EIRP. Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are defined as the product of the power supplied to the antenna and its gain (relative to a dipole antenna in the case of ERP, and relative to an isotropic antenna in the case of EIRP); however, when working in decibels (i.e., logarithmic scale), the ERP and EIRP represent the sum of the transmit antenna gain (in dBd or dBi, respectively) and the conducted RF output power (expressed in dB relative to watts or milliwatts). The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

(1) $ERP \text{ or } EIRP = P_{Meas} + GT$

$ERP = EIRP - 2.15$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

GT gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)


For devices utilizing multiple antennas, see 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

The following equations demonstrate the mathematical relationship between ERP and EIRP:

a) $ERP = EIRP - 2.15$, where ERP and EIRP are expressed in consistent units.

b) $EIRP = ERP + 2.15$, where ERP and EIRP are expressed in consistent units.

3.1.2 TEST SETUP

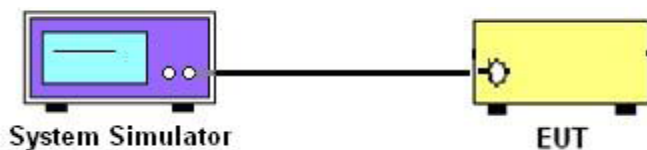

3.1.3 TEST PROCEDURES

1. The transmitter output port was connected to system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest/middle/highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.1.4 TEST RESULTS

EIRP for CAT-M Band 2											
BW (MHz)	UL Channel	RB Size	RB offset	NB Index	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict
1.4	Lowest	1	#0	0	QPSK	20.16	1.94	22.10	2.00	33.01	PASS
1.4		6	#0	0	QPSK	19.55	1.94	21.49	2.00	33.01	PASS
1.4		1	#0	0	16QAM	20.49	1.94	22.43	2.00	33.01	PASS
1.4		5	#0	0	16QAM	19.39	1.94	21.33	2.00	33.01	PASS
1.4	Middle	1	#0	0	QPSK	21.82	1.94	23.76	2.00	33.01	PASS
1.4		6	#0	0	QPSK	19.69	1.94	21.63	2.00	33.01	PASS
1.4		1	#0	0	16QAM	20.68	1.94	22.62	2.00	33.01	PASS
1.4		5	#0	0	16QAM	19.69	1.94	21.63	2.00	33.01	PASS
1.4	Highest	1	#Max	0	QPSK	21.5	1.94	23.44	2.00	33.01	PASS
1.4		6	#Max	0	QPSK	19.25	1.94	21.19	2.00	33.01	PASS
1.4		1	#Max	0	16QAM	20.73	1.94	22.67	2.00	33.01	PASS
1.4		5	#Max	0	16QAM	19.78	1.94	21.72	2.00	33.01	PASS
3	Lowest	1	#0	0	QPSK	21.57	1.94	23.51	2.00	33.01	PASS
3		6	#0	0	QPSK	19.53	1.94	21.47	2.00	33.01	PASS
3		1	#0	0	16QAM	20.44	1.94	22.38	2.00	33.01	PASS
3		5	#0	0	16QAM	19.54	1.94	21.48	2.00	33.01	PASS
3	Middle	1	#0	0	QPSK	21.83	1.94	23.77	2.00	33.01	PASS
3		6	#0	0	QPSK	19.71	1.94	21.65	2.00	33.01	PASS
3		1	#0	0	16QAM	20.71	1.94	22.65	2.00	33.01	PASS
3		5	#0	0	16QAM	19.67	1.94	21.61	2.00	33.01	PASS
3	Highest	1	#Max	1	QPSK	21.49	1.94	23.43	2.00	33.01	PASS
3		6	#Max	1	QPSK	19.71	1.94	21.65	2.00	33.01	PASS
3		1	#Max	1	16QAM	20.69	1.94	22.63	2.00	33.01	PASS
3		5	#Max	1	16QAM	19.75	1.94	21.69	2.00	33.01	PASS
5	Lowest	1	#0	0	QPSK	21.64	1.94	23.58	2.00	33.01	PASS
5		6	#0	0	QPSK	20.52	1.94	22.46	2.00	33.01	PASS
5		1	#0	0	16QAM	21.54	1.94	23.48	2.00	33.01	PASS
5		5	#0	0	16QAM	20.37	1.94	22.31	2.00	33.01	PASS
5	Middle	1	#0	0	QPSK	21.89	1.94	23.83	2.00	33.01	PASS
5		6	#0	0	QPSK	20.67	1.94	22.61	2.00	33.01	PASS
5		1	#0	0	16QAM	21.73	1.94	23.67	2.00	33.01	PASS
5		5	#0	0	16QAM	20.79	1.94	22.73	2.00	33.01	PASS
5	Highest	1	#Max	3	QPSK	21.64	1.94	23.58	2.00	33.01	PASS
5		6	#Max	3	QPSK	20.79	1.94	22.73	2.00	33.01	PASS
5		1	#Max	3	16QAM	21.74	1.94	23.68	2.00	33.01	PASS
5		5	#Max	3	16QAM	20.77	1.94	22.71	2.00	33.01	PASS
10	Lowest	1	#0	0	QPSK	21.51	1.94	23.45	2.00	33.01	PASS
10		4	#0	0	QPSK	21.62	1.94	23.56	2.00	33.01	PASS
10		1	#0	0	16QAM	21.4	1.94	23.34	2.00	33.01	PASS
10		4	#0	0	16QAM	21.62	1.94	23.56	2.00	33.01	PASS
10	Middle	1	#0	0	QPSK	21.64	1.94	23.58	2.00	33.01	PASS
10		4	#0	0	QPSK	21.6	1.94	23.54	2.00	33.01	PASS
10		1	#0	0	16QAM	21.85	1.94	23.79	2.00	33.01	PASS
10		4	#0	0	16QAM	21.65	1.94	23.59	2.00	33.01	PASS
10	Highest	1	#Max	7	QPSK	21.74	1.94	23.68	2.00	33.01	PASS
10		4	#Max	7	QPSK	21.8	1.94	23.74	2.00	33.01	PASS
10		1	#Max	7	16QAM	21.55	1.94	23.49	2.00	33.01	PASS
10		4	#Max	7	16QAM	21.5	1.94	23.44	2.00	33.01	PASS
15	Lowest	1	#0	7	QPSK	21.53	1.94	23.47	2.00	33.01	PASS
15		6	#0	7	QPSK	21.62	1.94	23.56	2.00	33.01	PASS
15		1	#0	0	16QAM	21.41	1.94	23.35	2.00	33.01	PASS
15		5	#0	0	16QAM	21.73	1.94	23.67	2.00	33.01	PASS
15	Middle	1	#0	7	QPSK	21.8	1.94	23.74	2.00	33.01	PASS
15		6	#0	7	QPSK	21.72	1.94	23.66	2.00	33.01	PASS
15		1	#0	0	16QAM	21.65	1.94	23.59	2.00	33.01	PASS
15		5	#0	0	16QAM	21.56	1.94	23.50	2.00	33.01	PASS
15	Highest	1	#Max	11	QPSK	21.6	1.94	23.54	2.00	33.01	PASS
15		6	#Max	11	QPSK	21.78	1.94	23.72	2.00	33.01	PASS



15	Lowest	1	#Max	11	16QAM	21.86	1.94	23.80	2.00	33.01	PASS
15		5	#Max	1	16QAM	21.81	1.94	23.75	2.00	33.01	PASS
20		1	#0	0	QPSK	21.63	1.94	23.57	2.00	33.01	PASS
20		6	#0	0	QPSK	21.54	1.94	23.48	2.00	33.01	PASS
20		1	#0	0	16QAM	21.37	1.94	23.31	2.00	33.01	PASS
20	Middle	5	#0	0	16QAM	21.67	1.94	23.61	2.00	33.01	PASS
20		1	#0	0	QPSK	21.73	1.94	23.67	2.00	33.01	PASS
20		6	#0	0	QPSK	21.63	1.94	23.57	2.00	33.01	PASS
20		1	#0	0	16QAM	21.58	1.94	23.52	2.00	33.01	PASS
20		5	#0	0	16QAM	21.48	1.94	23.42	2.00	33.01	PASS
20	Highest	1	#Max	15	QPSK	21.66	1.94	23.60	2.00	33.01	PASS
20		6	#Max	15	QPSK	21.8	1.94	23.74	2.00	33.01	PASS
20		1	#Max	15	16QAM	21.9	1.94	23.84	2.00	33.01	PASS
20		5	#Max	15	16QAM	22.07	1.94	24.01	2.00	33.01	PASS



EIRP for CAT-M Band 4											
BW (MHz)	UL Channel	RB Size	RB offset	NB Index	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict
1.4	Lowest	1	#0	0	QPSK	21.45	-0.06	21.39	1.00	30.00	PASS
1.4		6	#0	0	QPSK	19.26	-0.06	19.20	1.00	30.00	PASS
1.4		1	#0	0	16QAM	20.27	-0.06	20.21	1.00	30.00	PASS
1.4		5	#0	0	16QAM	19.25	-0.06	19.19	1.00	30.00	PASS
1.4	Middle	1	#0	0	QPSK	21.36	-0.06	21.30	1.00	30.00	PASS
1.4		6	#0	0	QPSK	19.29	-0.06	19.23	1.00	30.00	PASS
1.4		1	#0	0	16QAM	20.51	-0.06	20.45	1.00	30.00	PASS
1.4		5	#0	0	16QAM	19.29	-0.06	19.23	1.00	30.00	PASS
1.4	Highest	1	#Max	0	QPSK	21.19	-0.06	21.13	1.00	30.00	PASS
1.4		6	#Max	0	QPSK	19.42	-0.06	19.36	1.00	30.00	PASS
1.4		1	#Max	0	16QAM	20.51	-0.06	20.45	1.00	30.00	PASS
1.4		5	#Max	0	16QAM	19.13	-0.06	19.07	1.00	30.00	PASS
3	Lowest	1	#0	0	QPSK	21.51	-0.06	21.45	1.00	30.00	PASS
3		6	#0	0	QPSK	19.29	-0.06	19.23	1.00	30.00	PASS
3		1	#0	0	16QAM	20.29	-0.06	20.23	1.00	30.00	PASS
3		5	#0	0	16QAM	19.32	-0.06	19.26	1.00	30.00	PASS
3	Middle	1	#0	0	QPSK	21.41	-0.06	21.35	1.00	30.00	PASS
3		6	#0	0	QPSK	19.31	-0.06	19.25	1.00	30.00	PASS
3		1	#0	0	16QAM	20.25	-0.06	20.19	1.00	30.00	PASS
3		5	#0	0	16QAM	19.15	-0.06	19.09	1.00	30.00	PASS
3	Highest	1	#Max	1	QPSK	21.38	-0.06	21.32	1.00	30.00	PASS
3		6	#Max	1	QPSK	19.48	-0.06	19.42	1.00	30.00	PASS
3		1	#Max	1	16QAM	20.58	-0.06	20.52	1.00	30.00	PASS
3		5	#Max	1	16QAM	19.52	-0.06	19.46	1.00	30.00	PASS
5	Lowest	1	#0	0	QPSK	21.24	-0.06	21.18	1.00	30.00	PASS
5		6	#0	0	QPSK	20.26	-0.06	20.20	1.00	30.00	PASS
5		1	#0	0	16QAM	21.34	-0.06	21.28	1.00	30.00	PASS
5		5	#0	0	16QAM	20.45	-0.06	20.39	1.00	30.00	PASS
5	Middle	1	#0	0	QPSK	21.23	-0.06	21.17	1.00	30.00	PASS
5		6	#0	0	QPSK	20.2	-0.06	20.14	1.00	30.00	PASS
5		1	#0	0	16QAM	21.22	-0.06	21.16	1.00	30.00	PASS
5		5	#0	0	16QAM	20.15	-0.06	20.09	1.00	30.00	PASS
5	Highest	1	#Max	3	QPSK	21.56	-0.06	21.50	1.00	30.00	PASS
5		6	#Max	3	QPSK	20.53	-0.06	20.47	1.00	30.00	PASS
5		1	#Max	3	16QAM	21.38	-0.06	21.32	1.00	30.00	PASS
5		5	#Max	3	16QAM	20.64	-0.06	20.58	1.00	30.00	PASS
10	Lowest	1	#0	0	QPSK	21.38	-0.06	21.32	1.00	30.00	PASS
10		4	#0	0	QPSK	21.43	-0.06	21.37	1.00	30.00	PASS
10		1	#0	0	16QAM	21.35	-0.06	21.29	1.00	30.00	PASS
10		4	#0	0	16QAM	21.48	-0.06	21.42	1.00	30.00	PASS
10	Middle	1	#0	0	QPSK	21.39	-0.06	21.33	1.00	30.00	PASS
10		4	#0	0	QPSK	21.35	-0.06	21.29	1.00	30.00	PASS
10		1	#0	0	16QAM	21.36	-0.06	21.30	1.00	30.00	PASS
10		4	#0	0	16QAM	21.19	-0.06	21.13	1.00	30.00	PASS
10	Highest	1	#Max	7	QPSK	21.38	-0.06	21.32	1.00	30.00	PASS
10		4	#Max	7	QPSK	21.39	-0.06	21.33	1.00	30.00	PASS
10		1	#Max	7	16QAM	21.37	-0.06	21.31	1.00	30.00	PASS
10		4	#Max	7	16QAM	21.57	-0.06	21.51	1.00	30.00	PASS
15	Lowest	1	#0	7	QPSK	21.5	-0.06	21.44	1.00	30.00	PASS
15		6	#0	7	QPSK	21.36	-0.06	21.30	1.00	30.00	PASS
15		1	#0	0	16QAM	21.35	-0.06	21.29	1.00	30.00	PASS
15		5	#0	0	16QAM	21.49	-0.06	21.43	1.00	30.00	PASS
15	Middle	1	#0	7	QPSK	21.3	-0.06	21.24	1.00	30.00	PASS
15		6	#0	7	QPSK	21.26	-0.06	21.20	1.00	30.00	PASS
15		1	#0	0	16QAM	21.42	-0.06	21.36	1.00	30.00	PASS
15		5	#0	0	16QAM	21.31	-0.06	21.25	1.00	30.00	PASS
15	Highest	1	#Max	11	QPSK	21.25	-0.06	21.19	1.00	30.00	PASS
15		6	#Max	11	QPSK	21.43	-0.06	21.37	1.00	30.00	PASS
15		1	#Max	11	16QAM	21.37	-0.06	21.31	1.00	30.00	PASS
15		5	#Max	1	16QAM	21.31	-0.06	21.25	1.00	30.00	PASS
20	Lowest	1	#0	0	QPSK	21.35	-0.06	21.29	1.00	30.00	PASS
20		6	#0	0	QPSK	21.33	-0.06	21.27	1.00	30.00	PASS



20	Middle	1	#0	0	16QAM	21.38	-0.06	21.32	1.00	30.00	PASS
20		5	#0	0	16QAM	21.53	-0.06	21.47	1.00	30.00	PASS
20		1	#0	0	QPSK	21.38	-0.06	21.32	1.00	30.00	PASS
20		6	#0	0	QPSK	21.36	-0.06	21.30	1.00	30.00	PASS
20		1	#0	0	16QAM	21.35	-0.06	21.29	1.00	30.00	PASS
20	Highest	5	#0	0	16QAM	21.27	-0.06	21.21	1.00	30.00	PASS
20		1	#Max	15	QPSK	21.33	-0.06	21.27	1.00	30.00	PASS
20		6	#Max	15	QPSK	21.41	-0.06	21.35	1.00	30.00	PASS
20		1	#Max	15	16QAM	21.43	-0.06	21.37	1.00	30.00	PASS
20		5	#Max	15	16QAM	21.7	-0.06	21.64	1.00	30.00	PASS



EIRP for CAT-M Band 25											
BW (MHz)	UL Channel	RB Size	RB offset	NB Index	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict
1.4	Lowest	1	#0	0	QPSK	20.8	1.94	22.74	2.00	33.01	PASS
1.4		6	#0	0	QPSK	18.64	1.94	20.58	2.00	33.01	PASS
1.4		1	#0	0	16QAM	19.53	1.94	21.47	2.00	33.01	PASS
1.4		5	#0	0	16QAM	18.44	1.94	20.38	2.00	33.01	PASS
1.4	Middle	1	#0	0	QPSK	20.95	1.94	22.89	2.00	33.01	PASS
1.4		6	#0	0	QPSK	18.8	1.94	20.74	2.00	33.01	PASS
1.4		1	#0	0	16QAM	19.87	1.94	21.81	2.00	33.01	PASS
1.4		5	#0	0	16QAM	18.67	1.94	20.61	2.00	33.01	PASS
1.4	Highest	1	#Max	0	QPSK	20.51	1.94	22.45	2.00	33.01	PASS
1.4		6	#Max	0	QPSK	17.99	1.94	19.93	2.00	33.01	PASS
1.4		1	#Max	0	16QAM	19.78	1.94	21.72	2.00	33.01	PASS
1.4		5	#Max	0	16QAM	18.67	1.94	20.61	2.00	33.01	PASS
3	Lowest	1	#0	0	QPSK	20.7	1.94	22.64	2.00	33.01	PASS
3		6	#0	0	QPSK	18.61	1.94	20.55	2.00	33.01	PASS
3		1	#0	0	16QAM	19.44	1.94	21.38	2.00	33.01	PASS
3		5	#0	0	16QAM	18.52	1.94	20.46	2.00	33.01	PASS
3	Middle	1	#0	0	QPSK	20.79	1.94	22.73	2.00	33.01	PASS
3		6	#0	0	QPSK	18.77	1.94	20.71	2.00	33.01	PASS
3		1	#0	0	16QAM	19.79	1.94	21.73	2.00	33.01	PASS
3		5	#0	0	16QAM	18.68	1.94	20.62	2.00	33.01	PASS
3	Highest	1	#Max	1	QPSK	20.55	1.94	22.49	2.00	33.01	PASS
3		6	#Max	1	QPSK	18.72	1.94	20.66	2.00	33.01	PASS
3		1	#Max	1	16QAM	19.74	1.94	21.68	2.00	33.01	PASS
3		5	#Max	1	16QAM	18.88	1.94	20.82	2.00	33.01	PASS
5	Lowest	1	#0	0	QPSK	20.61	1.94	22.55	2.00	33.01	PASS
5		6	#0	0	QPSK	19.5	1.94	21.44	2.00	33.01	PASS
5		1	#0	0	16QAM	20.46	1.94	22.40	2.00	33.01	PASS
5		5	#0	0	16QAM	19.7	1.94	21.64	2.00	33.01	PASS
5	Middle	1	#0	0	QPSK	20.85	1.94	22.79	2.00	33.01	PASS
5		6	#0	0	QPSK	19.77	1.94	21.71	2.00	33.01	PASS
5		1	#0	0	16QAM	20.75	1.94	22.69	2.00	33.01	PASS
5		5	#0	0	16QAM	19.53	1.94	21.47	2.00	33.01	PASS
5	Highest	1	#Max	3	QPSK	20.57	1.94	22.51	2.00	33.01	PASS
5		6	#Max	3	QPSK	19.63	1.94	21.57	2.00	33.01	PASS
5		1	#Max	3	16QAM	20.76	1.94	22.70	2.00	33.01	PASS
5		5	#Max	3	16QAM	20.01	1.94	21.95	2.00	33.01	PASS
10	Lowest	1	#0	0	QPSK	20.61	1.94	22.55	2.00	33.01	PASS
10		4	#0	0	QPSK	20.68	1.94	22.62	2.00	33.01	PASS
10		1	#0	0	16QAM	20.44	1.94	22.38	2.00	33.01	PASS
10		4	#0	0	16QAM	20.62	1.94	22.56	2.00	33.01	PASS
10	Middle	1	#0	0	QPSK	20.74	1.94	22.68	2.00	33.01	PASS
10		4	#0	0	QPSK	20.66	1.94	22.60	2.00	33.01	PASS
10		1	#0	0	16QAM	20.7	1.94	22.64	2.00	33.01	PASS
10		4	#0	0	16QAM	20.51	1.94	22.45	2.00	33.01	PASS
10	Highest	1	#Max	7	QPSK	20.59	1.94	22.53	2.00	33.01	PASS
10		4	#Max	7	QPSK	20.68	1.94	22.62	2.00	33.01	PASS
10		1	#Max	7	16QAM	20.69	1.94	22.63	2.00	33.01	PASS
10		4	#Max	7	16QAM	20.84	1.94	22.78	2.00	33.01	PASS
15	Lowest	1	#0	7	QPSK	20.63	1.94	22.57	2.00	33.01	PASS
15		6	#0	7	QPSK	20.52	1.94	22.46	2.00	33.01	PASS
15		1	#0	0	16QAM	20.26	1.94	22.20	2.00	33.01	PASS
15		5	#0	0	16QAM	20.65	1.94	22.59	2.00	33.01	PASS
15	Middle	1	#0	7	QPSK	20.88	1.94	22.82	2.00	33.01	PASS
15		6	#0	7	QPSK	20.76	1.94	22.70	2.00	33.01	PASS
15		1	#0	0	16QAM	20.78	1.94	22.72	2.00	33.01	PASS
15		5	#0	0	16QAM	20.58	1.94	22.52	2.00	33.01	PASS
15	Highest	1	#Max	11	QPSK	20.64	1.94	22.58	2.00	33.01	PASS
15		6	#Max	11	QPSK	20.78	1.94	22.72	2.00	33.01	PASS
15		1	#Max	11	16QAM	20.78	1.94	22.72	2.00	33.01	PASS
15		5	#Max	1	16QAM	21.05	1.94	22.99	2.00	33.01	PASS
20	Lowest	1	#0	0	QPSK	20.72	1.94	22.66	2.00	33.01	PASS
20		6	#0	0	QPSK	20.63	1.94	22.57	2.00	33.01	PASS



20	Middle	1	#0	0	16QAM	20.45	1.94	22.39	2.00	33.01	PASS
20		5	#0	0	16QAM	20.65	1.94	22.59	2.00	33.01	PASS
20		1	#0	0	QPSK	20.73	1.94	22.67	2.00	33.01	PASS
20		6	#0	0	QPSK	20.62	1.94	22.56	2.00	33.01	PASS
20		1	#0	0	16QAM	20.69	1.94	22.63	2.00	33.01	PASS
20	Highest	5	#0	0	16QAM	20.49	1.94	22.43	2.00	33.01	PASS
20		1	#Max	15	QPSK	20.68	1.94	22.62	2.00	33.01	PASS
20		6	#Max	15	QPSK	20.93	1.94	22.87	2.00	33.01	PASS
20		1	#Max	15	16QAM	20.87	1.94	22.81	2.00	33.01	PASS
20		5	#Max	15	16QAM	21.1	1.94	23.04	2.00	33.01	PASS



EIRP for CAT-M Band 66											
BW (MHz)	UL Channel	RB Size	RB offset	NB Index	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict
1.4	Lowest	1	#0	0	QPSK	20.92	-0.06	20.86	1.00	30.00	PASS
1.4		6	#0	0	QPSK	18.92	-0.06	18.86	1.00	30.00	PASS
1.4		1	#0	0	16QAM	19.8	-0.06	19.74	1.00	30.00	PASS
1.4		5	#0	0	16QAM	18.84	-0.06	18.78	1.00	30.00	PASS
1.4	Middle	1	#0	0	QPSK	20.82	-0.06	20.76	1.00	30.00	PASS
1.4		6	#0	0	QPSK	18.75	-0.06	18.69	1.00	30.00	PASS
1.4		1	#0	0	16QAM	19.64	-0.06	19.58	1.00	30.00	PASS
1.4		5	#0	0	16QAM	18.61	-0.06	18.55	1.00	30.00	PASS
1.4	Highest	1	#Max	0	QPSK	20.81	-0.06	20.75	1.00	30.00	PASS
1.4		6	#Max	0	QPSK	18.87	-0.06	18.81	1.00	30.00	PASS
1.4		1	#Max	0	16QAM	19.75	-0.06	19.69	1.00	30.00	PASS
1.4		5	#Max	0	16QAM	18.91	-0.06	18.85	1.00	30.00	PASS
3	Lowest	1	#0	0	QPSK	20.84	-0.06	20.78	1.00	30.00	PASS
3		6	#0	0	QPSK	18.75	-0.06	18.69	1.00	30.00	PASS
3		1	#0	0	16QAM	19.75	-0.06	19.69	1.00	30.00	PASS
3		5	#0	0	16QAM	18.87	-0.06	18.81	1.00	30.00	PASS
3	Middle	1	#0	0	QPSK	20.82	-0.06	20.76	1.00	30.00	PASS
3		6	#0	0	QPSK	18.69	-0.06	18.63	1.00	30.00	PASS
3		1	#0	0	16QAM	19.66	-0.06	19.60	1.00	30.00	PASS
3		5	#0	0	16QAM	18.67	-0.06	18.61	1.00	30.00	PASS
3	Highest	1	#Max	1	QPSK	20.81	-0.06	20.75	1.00	30.00	PASS
3		6	#Max	1	QPSK	18.99	-0.06	18.93	1.00	30.00	PASS
3		1	#Max	1	16QAM	19.79	-0.06	19.73	1.00	30.00	PASS
3		5	#Max	1	16QAM	18.94	-0.06	18.88	1.00	30.00	PASS
5	Lowest	1	#0	0	QPSK	20.8	-0.06	20.74	1.00	30.00	PASS
5		6	#0	0	QPSK	19.83	-0.06	19.77	1.00	30.00	PASS
5		1	#0	0	16QAM	20.67	-0.06	20.61	1.00	30.00	PASS
5		5	#0	0	16QAM	19.91	-0.06	19.85	1.00	30.00	PASS
5	Middle	1	#0	0	QPSK	20.82	-0.06	20.76	1.00	30.00	PASS
5		6	#0	0	QPSK	19.71	-0.06	19.65	1.00	30.00	PASS
5		1	#0	0	16QAM	20.67	-0.06	20.61	1.00	30.00	PASS
5		5	#0	0	16QAM	19.58	-0.06	19.52	1.00	30.00	PASS
5	Highest	1	#Max	3	QPSK	20.52	-0.06	20.46	1.00	30.00	PASS
5		6	#Max	3	QPSK	19.88	-0.06	19.82	1.00	30.00	PASS
5		1	#Max	3	16QAM	20.82	-0.06	20.76	1.00	30.00	PASS
5		5	#Max	3	16QAM	20.02	-0.06	19.96	1.00	30.00	PASS
10	Lowest	1	#0	0	QPSK	20.8	-0.06	20.74	1.00	30.00	PASS
10		4	#0	0	QPSK	20.87	-0.06	20.81	1.00	30.00	PASS
10		1	#0	0	16QAM	20.72	-0.06	20.66	1.00	30.00	PASS
10		4	#0	0	16QAM	21.07	-0.06	21.01	1.00	30.00	PASS
10	Middle	1	#0	0	QPSK	20.8	-0.06	20.74	1.00	30.00	PASS
10		4	#0	0	QPSK	20.69	-0.06	20.63	1.00	30.00	PASS
10		1	#0	0	16QAM	20.6	-0.06	20.54	1.00	30.00	PASS
10		4	#0	0	16QAM	20.53	-0.06	20.47	1.00	30.00	PASS
10	Highest	1	#Max	7	QPSK	20.62	-0.06	20.56	1.00	30.00	PASS
10		4	#Max	7	QPSK	20.93	-0.06	20.87	1.00	30.00	PASS
10		1	#Max	7	16QAM	20.92	-0.06	20.86	1.00	30.00	PASS
10		4	#Max	7	16QAM	21.12	-0.06	21.06	1.00	30.00	PASS
15	Lowest	1	#0	7	QPSK	21.17	-0.06	21.11	1.00	30.00	PASS
15		6	#0	7	QPSK	20.98	-0.06	20.92	1.00	30.00	PASS
15		1	#0	0	16QAM	20.73	-0.06	20.67	1.00	30.00	PASS
15		5	#0	0	16QAM	21.06	-0.06	21.00	1.00	30.00	PASS
15	Middle	1	#0	7	QPSK	20.86	-0.06	20.80	1.00	30.00	PASS
15		6	#0	7	QPSK	20.75	-0.06	20.69	1.00	30.00	PASS
15		1	#0	0	16QAM	20.69	-0.06	20.63	1.00	30.00	PASS
15		5	#0	0	16QAM	20.59	-0.06	20.53	1.00	30.00	PASS
15	Highest	1	#Max	11	QPSK	20.4	-0.06	20.34	1.00	30.00	PASS
15		6	#Max	11	QPSK	20.98	-0.06	20.92	1.00	30.00	PASS
15		1	#Max	11	16QAM	20.92	-0.06	20.86	1.00	30.00	PASS
15		5	#Max	1	16QAM	21.11	-0.06	21.05	1.00	30.00	PASS
20	Lowest	1	#0	0	QPSK	20.91	-0.06	20.85	1.00	30.00	PASS
20		6	#0	0	QPSK	20.84	-0.06	20.78	1.00	30.00	PASS



20	Middle	1	#0	0	16QAM	20.69	-0.06	20.63	1.00	30.00	PASS
20		5	#0	0	16QAM	20.96	-0.06	20.90	1.00	30.00	PASS
20		1	#0	0	QPSK	20.91	-0.06	20.85	1.00	30.00	PASS
20		6	#0	0	QPSK	20.78	-0.06	20.72	1.00	30.00	PASS
20		1	#0	0	16QAM	20.74	-0.06	20.68	1.00	30.00	PASS
20	Highest	5	#0	0	16QAM	20.7	-0.06	20.64	1.00	30.00	PASS
20		1	#Max	15	QPSK	20.61	-0.06	20.55	1.00	30.00	PASS
20		6	#Max	15	QPSK	20.71	-0.06	20.65	1.00	30.00	PASS
20		1	#Max	15	16QAM	20.92	-0.06	20.86	1.00	30.00	PASS
20		5	#Max	15	16QAM	21.07	-0.06	21.01	1.00	30.00	PASS

4. PEAK-TO-AVERAGE RATIO


4.1 DESCRIPTION OF THE CONDUCTED OUTPUT POWER MEASUREMENT

4.1.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1.3 to measure the total peak power and record as PPK. Use one of the applicable procedures presented 4.1.3 to measure the total average power and record as PAVg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

4.1.2 TEST SETUP

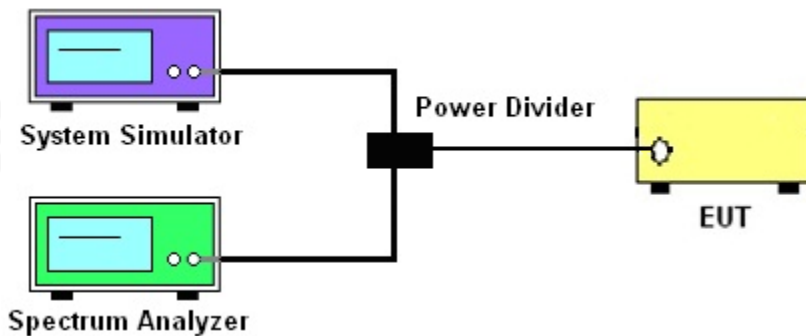

4.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.7 and ANSI C63.26 2015 Section 5.2.6.
2. The EUT was connected to spectrum and system simulator via a power divider
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure the peak and average power of the spectrum analyzer
5. Record the deviation as Peak to Average Ratio.

4.1.4 TEST RESULTS

Note: The test data please reference to attachment "STS2507123W03_Appendix eMTC".

5. OCCUPIED BANDWIDTH


5.1 DESCRIPTION OF OCCUPIED BANDWIDTH MEASUREMENT

5.1.1 MEASUREMENT METHOD

1. The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

2. The 26 db emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 db below the maximum in-band spectral density of the modulated signal. spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

5.1.2 TEST SETUP

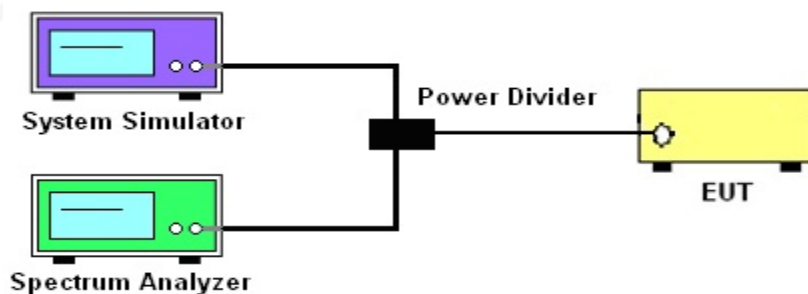

5.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 D01 v03r01 Section 4.2 and 4.3.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure the Occupied Bandwidth of the spectrum analyzer.
5. Measure and record the Occupied Bandwidth from the Spectrum Analyzer.

5.1.4 MEASUREMENT RESULT

Note: The test data please reference to attachment "STS2507123W01_Appendix eMTC".



6. CONDUCTED BAND EDGE

6.1 DESCRIPTION OF CONDUCTED BAND EDGE MEASUREMENT

6.1.1 MEASUREMENT METHOD

1. §22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

2. §24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed

3. §27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4. §27.53(m)(4)

For operations in the 2500 MHz ~ 2570 MHz band this section, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

5. §27.53 (g)

For operations in the 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

6.1.2 TEST SETUP

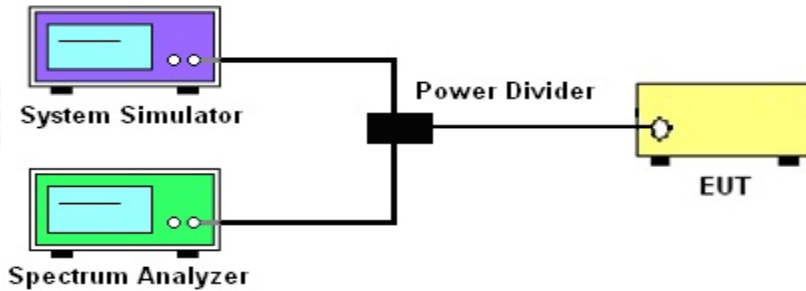

6.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0 and ANSI C63.26 2015 Section 5.7.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS/AVG detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

Band 7:
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.

6.1.4 MEASUREMENT RESULT

Note: The test data please reference to attachment "STS2507123W01_Appendix eMTC".

7. CONDUCTED SPURIOUS EMISSION

7.1 DESCRIPTION OF CONDUCTED SPURIOUS EMISSION MEASUREMENT

7.1.1 MEASUREMENT METHOD


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.1.2 TEST SETUP

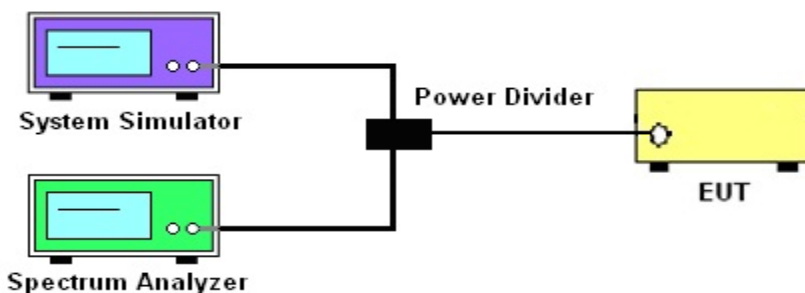

7.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0 and ANSI C63.26 2015 Section 5.7.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement
4. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)} = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

For Band 7: $P(W) - [43 + 10\log(P)] \text{ (dB)} = -25\text{dBm}$

7.1.4 TEST RESULTS

Note: The test data please reference to attachment "STS2507123W01_Appendix eMTC".

8. RADIATED SPURIOUS EMISSION

8.1 DESCRIPTION OF RADIATED SPURIOUS EMISSION

8.1.1 MEASUREMENT METHOD

The radiated spurious emission was measured by substitution method according to ANSI C63.26 2015. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

8.1.2 TEST SETUP

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = Rx (dBuV) + CL (dB) + SA (dB) + Gain (dBi) - 107 (dBuV \text{ to } dBm)$ The SA is calibrated using following setup.


b) EUT was placed on 1.5 m non-conductive stand at a 3 m test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 m from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic measured with peak detector and 1MHz bandwidth.

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.


The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:

Power = $P_{Mea} + AR_{pl}$

For radiated test from 30MHz to 1GHz

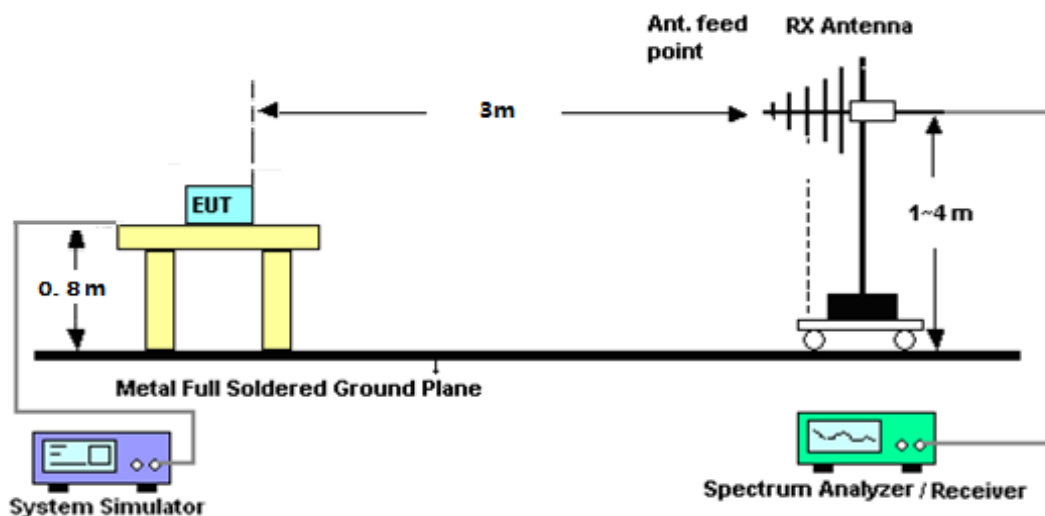

For radiated test from above 1GHz

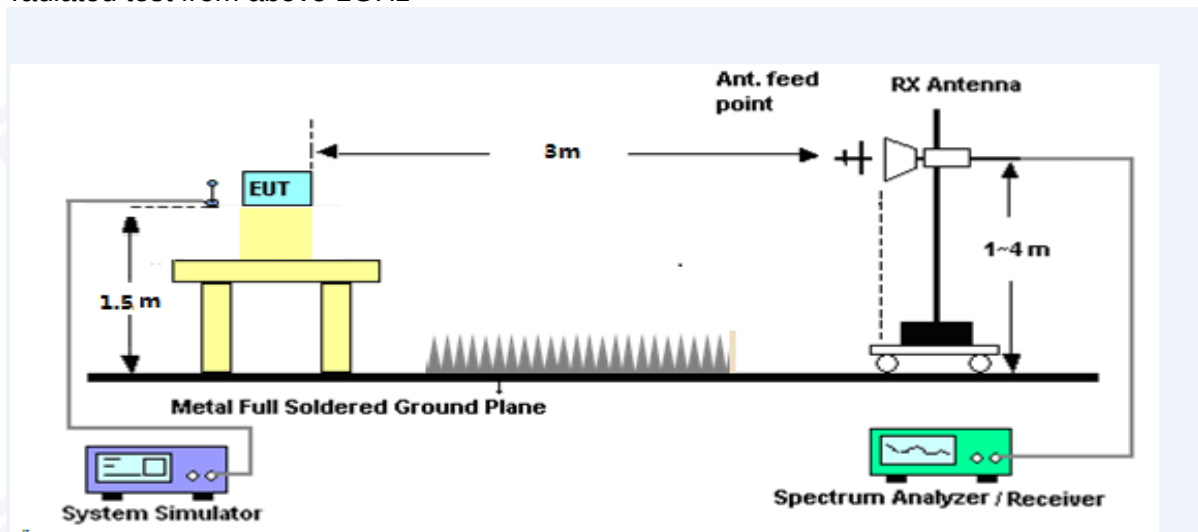

8.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 Section 7 and ANSI C63.26 2015 Section 5.5.
2. The EUT was placed on a rotatable wooden table with 1.5 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$
 $= P(\text{W}) - [43 + 10\log(P)] (\text{dB})$
 $= [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB})$
 $= -13\text{dBm}$

For Band 7:

The limit line is derived from $55 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$
 $= [30 + 10\log(P)] (\text{dBm}) - [55 + 10\log(P)] (\text{dB})$
 $= -25\text{dBm}$

$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$

$\text{ERP (dBm)} = \text{EIRP} - 2.15$



8.1.4 TEST RESULTS

CAT-M Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3701.07	-34.44	12.60	12.93	-34.77	-13.00	-21.77	H
5552.17	-35.00	13.10	17.11	-39.01	-13.00	-26.01	H
7402.82	-32.43	11.50	22.20	-43.13	-13.00	-30.13	H
3701.07	-35.88	12.60	12.93	-36.21	-13.00	-23.21	V
5552.17	-33.99	13.10	17.11	-38.00	-13.00	-25.00	V
7402.82	-32.17	11.50	22.20	-42.87	-13.00	-29.87	V
CAT-M Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.16	-34.15	12.60	12.93	-34.48	-13.00	-21.48	H
5639.82	-35.44	13.10	17.11	-39.45	-13.00	-26.45	H
7519.95	-33.32	11.50	22.20	-44.02	-13.00	-31.02	H
3760.16	-34.77	12.60	12.93	-35.10	-13.00	-22.10	V
5639.82	-35.25	13.10	17.11	-39.26	-13.00	-26.26	V
7519.95	-32.74	11.50	22.20	-43.44	-13.00	-30.44	V
CAT-M Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3818.36	-34.51	12.60	12.93	-34.84	-13.00	-21.84	H
5727.68	-34.80	13.10	17.11	-38.81	-13.00	-25.81	H
7637.07	-32.32	11.50	22.20	-43.02	-13.00	-30.02	H
3818.36	-34.98	12.60	12.93	-35.31	-13.00	-22.31	V
5727.68	-35.07	13.10	17.11	-39.08	-13.00	-26.08	V
7637.07	-32.15	11.50	22.20	-42.85	-13.00	-29.85	V



CAT-M Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3703.21	-34.29	12.60	12.93	-34.62	-13.00	-21.62	H
5554.18	-35.13	13.10	17.11	-39.14	-13.00	-26.14	H
7406.67	-32.76	11.50	22.20	-43.46	-13.00	-30.46	H
3703.21	-35.43	12.60	12.93	-35.76	-13.00	-22.76	V
5554.18	-34.18	13.10	17.11	-38.19	-13.00	-25.19	V
7406.67	-32.92	11.50	22.20	-43.62	-13.00	-30.62	V
CAT-M Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.24	-34.63	12.60	12.93	-34.96	-13.00	-21.96	H
5640.18	-34.30	13.10	17.11	-38.31	-13.00	-25.31	H
7519.98	-33.58	11.50	22.20	-44.28	-13.00	-31.28	H
3760.24	-35.47	12.60	12.93	-35.80	-13.00	-22.80	V
5640.18	-34.78	13.10	17.11	-38.79	-13.00	-25.79	V
7519.98	-32.35	11.50	22.20	-43.05	-13.00	-30.05	V
CAT-M Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3816.68	-34.89	12.60	12.93	-35.22	-13.00	-22.22	H
5725.02	-34.11	13.10	17.11	-38.12	-13.00	-25.12	H
7633.50	-33.64	11.50	22.20	-44.34	-13.00	-31.34	H
3816.68	-34.95	12.60	12.93	-35.28	-13.00	-22.28	V
5725.02	-34.40	13.10	17.11	-38.41	-13.00	-25.41	V
7633.50	-31.78	11.50	22.20	-42.48	-13.00	-29.48	V



CAT-M Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3705.09	-34.58	12.60	12.93	-34.91	-13.00	-21.91	H
5558.09	-34.18	13.10	17.11	-38.19	-13.00	-25.19	H
7410.52	-33.26	11.50	22.20	-43.96	-13.00	-30.96	H
3705.09	-34.99	12.60	12.93	-35.32	-13.00	-22.32	V
5558.09	-34.51	13.10	17.11	-38.52	-13.00	-25.52	V
7410.52	-33.16	11.50	22.20	-43.86	-13.00	-30.86	V
CAT-M Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3759.83	-34.22	12.60	12.93	-34.55	-13.00	-21.55	H
5640.20	-34.40	13.10	17.11	-38.41	-13.00	-25.41	H
7519.99	-33.60	11.50	22.20	-44.30	-13.00	-31.30	H
3759.83	-35.35	12.60	12.93	-35.68	-13.00	-22.68	V
5640.20	-34.71	13.10	17.11	-38.72	-13.00	-25.72	V
7519.99	-31.71	11.50	22.20	-42.41	-13.00	-29.41	V
CAT-M Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3814.09	-34.36	12.60	12.93	-34.69	-13.00	-21.69	H
5721.59	-34.72	13.10	17.11	-38.73	-13.00	-25.73	H
7628.62	-32.61	11.50	22.20	-43.31	-13.00	-30.31	H
3814.09	-35.15	12.60	12.93	-35.48	-13.00	-22.48	V
5721.59	-34.32	13.10	17.11	-38.33	-13.00	-25.33	V
7628.62	-31.74	11.50	22.20	-42.44	-13.00	-29.44	V



CAT-M Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3710.63	-33.80	12.60	12.93	-34.13	-13.00	-21.13	H
5565.88	-34.41	13.10	17.11	-38.42	-13.00	-25.42	H
7420.88	-33.13	11.50	22.20	-43.83	-13.00	-30.83	H
3710.63	-35.05	12.60	12.93	-35.38	-13.00	-22.38	V
5565.88	-35.17	13.10	17.11	-39.18	-13.00	-26.18	V
7420.88	-31.94	11.50	22.20	-42.64	-13.00	-29.64	V
CAT-M Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.10	-33.54	12.60	12.93	-33.87	-13.00	-20.87	H
5639.99	-35.41	13.10	17.11	-39.42	-13.00	-26.42	H
7520.15	-33.31	11.50	22.20	-44.01	-13.00	-31.01	H
3760.10	-34.60	12.60	12.93	-34.93	-13.00	-21.93	V
5639.99	-34.13	13.10	17.11	-38.14	-13.00	-25.14	V
7520.15	-31.89	11.50	22.20	-42.59	-13.00	-29.59	V
CAT-M Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3809.38	-34.84	12.60	12.93	-35.17	-13.00	-22.17	H
5713.72	-35.37	13.10	17.11	-39.38	-13.00	-26.38	H
7618.24	-32.93	11.50	22.20	-43.63	-13.00	-30.63	H
3809.38	-34.78	12.60	12.93	-35.11	-13.00	-22.11	V
5713.72	-34.58	13.10	17.11	-38.59	-13.00	-25.59	V
7618.24	-32.85	11.50	22.20	-43.55	-13.00	-30.55	V



CAT-M Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3715.82	-33.54	12.60	12.93	-33.87	-13.00	-20.87	H
5574.25	-35.13	13.10	17.11	-39.14	-13.00	-26.14	H
7618.59	-33.57	11.50	22.20	-44.27	-13.00	-31.27	H
3715.82	-35.32	12.60	12.93	-35.65	-13.00	-22.65	V
5574.25	-34.15	13.10	17.11	-38.16	-13.00	-25.16	V
7618.59	-31.91	11.50	22.20	-42.61	-13.00	-29.61	V
CAT-M Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.07	-34.31	12.60	12.93	-34.64	-13.00	-21.64	H
5639.94	-34.56	13.10	17.11	-38.57	-13.00	-25.57	H
7519.98	-33.50	11.50	22.20	-44.20	-13.00	-31.20	H
3760.07	-35.54	12.60	12.93	-35.87	-13.00	-22.87	V
5639.94	-35.12	13.10	17.11	-39.13	-13.00	-26.13	V
7519.98	-31.81	11.50	22.20	-42.51	-13.00	-29.51	V
CAT-M Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3803.79	-34.28	12.60	12.93	-34.61	-13.00	-21.61	H
5705.44	-35.32	13.10	17.11	-39.33	-13.00	-26.33	H
7607.51	-33.03	11.50	22.20	-43.73	-13.00	-30.73	H
3803.79	-35.02	12.60	12.93	-35.35	-13.00	-22.35	V
5705.44	-35.21	13.10	17.11	-39.22	-13.00	-26.22	V
7607.51	-32.23	11.50	22.20	-42.93	-13.00	-29.93	V



CAT-M Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3721.11	-33.99	12.60	12.93	-34.32	-13.00	-21.32	H
5581.52	-34.40	13.10	17.11	-38.41	-13.00	-25.41	H
7441.99	-32.82	11.50	22.20	-43.52	-13.00	-30.52	H
3721.11	-36.01	12.60	12.93	-36.34	-13.00	-23.34	V
5581.52	-34.12	13.10	17.11	-38.13	-13.00	-25.13	V
7441.99	-31.95	11.50	22.20	-42.65	-13.00	-29.65	V
CAT-M Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3759.83	-34.57	12.60	12.93	-34.90	-13.00	-21.90	H
5639.81	-35.22	13.10	17.11	-39.23	-13.00	-26.23	H
7520.29	-32.76	11.50	22.20	-43.46	-13.00	-30.46	H
3759.83	-35.18	12.60	12.93	-35.51	-13.00	-22.51	V
5639.81	-34.51	13.10	17.11	-38.52	-13.00	-25.52	V
7520.29	-32.69	11.50	22.20	-43.39	-13.00	-30.39	V
CAT-M Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3798.54	-34.26	12.60	12.93	-34.59	-13.00	-21.59	H
5697.26	-35.13	13.10	17.11	-39.14	-13.00	-26.14	H
7597.08	-33.37	11.50	22.20	-44.07	-13.00	-31.07	H
3798.54	-35.16	12.60	12.93	-35.49	-13.00	-22.49	V
5697.26	-34.90	13.10	17.11	-38.91	-13.00	-25.91	V
7597.08	-32.21	11.50	22.20	-42.91	-13.00	-29.91	V



CAT-M Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3421.07	-34.32	12.90	12.56	-33.98	-13.00	-20.98	H
5131.75	-35.24	13.10	16.32	-38.46	-13.00	-25.46	H
6842.75	-32.49	12.33	21.13	-41.29	-13.00	-28.29	H
3421.07	-35.48	12.90	12.56	-35.14	-13.00	-22.14	V
5131.75	-34.01	13.10	16.32	-37.23	-13.00	-24.23	V
6842.75	-32.44	12.33	21.13	-41.24	-13.00	-28.24	V
CAT-M Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3464.93	-33.85	12.90	12.56	-33.51	-13.00	-20.51	H
5197.00	-34.00	13.10	16.32	-37.22	-13.00	-24.22	H
6929.86	-32.16	12.33	21.13	-40.96	-13.00	-27.96	H
3464.93	-35.74	12.90	12.56	-35.40	-13.00	-22.40	V
5197.00	-33.97	13.10	16.32	-37.19	-13.00	-24.19	V
6929.86	-32.32	12.33	21.13	-41.12	-13.00	-28.12	V
CAT-M Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3508.19	-33.55	12.90	12.56	-33.21	-13.00	-20.21	H
5262.76	-35.00	13.10	16.32	-38.22	-13.00	-25.22	H
7016.13	-33.03	12.33	21.13	-41.83	-13.00	-28.83	H
3508.19	-35.42	12.90	12.56	-35.08	-13.00	-22.08	V
5262.76	-34.63	13.10	16.32	-37.85	-13.00	-24.85	V
7016.13	-32.36	12.33	21.13	-41.16	-13.00	-28.16	V



CAT-M Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3424.46	-33.57	12.90	12.56	-33.23	-13.00	-20.23	H
5136.16	-35.00	13.10	16.32	-38.22	-13.00	-25.22	H
6848.88	-32.97	12.33	21.13	-41.77	-13.00	-28.77	H
3424.46	-35.22	12.90	12.56	-34.88	-13.00	-21.88	V
5136.16	-35.16	13.10	16.32	-38.38	-13.00	-25.38	V
6848.88	-32.73	12.33	21.13	-41.53	-13.00	-28.53	V
CAT-M Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3464.80	-34.14	12.90	12.56	-33.80	-13.00	-20.80	H
5197.10	-34.59	13.10	16.32	-37.81	-13.00	-24.81	H
6930.10	-33.36	12.33	21.13	-42.16	-13.00	-29.16	H
3464.80	-34.79	12.90	12.56	-34.45	-13.00	-21.45	V
5197.10	-33.78	13.10	16.32	-37.00	-13.00	-24.00	V
6930.10	-32.86	12.33	21.13	-41.66	-13.00	-28.66	V
CAT-M Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3506.78	-33.74	12.90	12.56	-33.40	-13.00	-20.40	H
5262.36	-34.60	13.10	16.32	-37.82	-13.00	-24.82	H
7013.02	-32.76	12.33	21.13	-41.56	-13.00	-28.56	H
3506.78	-35.00	12.90	12.56	-34.66	-13.00	-21.66	V
5262.36	-35.08	13.10	16.32	-38.30	-13.00	-25.30	V
7013.02	-33.06	12.33	21.13	-41.86	-13.00	-28.86	V



CAT-M Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3425.47	-34.88	12.90	12.56	-34.54	-13.00	-21.54	H
5137.51	-34.05	13.10	16.32	-37.27	-13.00	-24.27	H
6850.37	-33.57	12.33	21.13	-42.37	-13.00	-29.37	H
3425.47	-35.92	12.90	12.56	-35.58	-13.00	-22.58	V
5137.51	-35.02	13.10	16.32	-38.24	-13.00	-25.24	V
6850.37	-32.38	12.33	21.13	-41.18	-13.00	-28.18	V
CAT-M Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3464.88	-34.71	12.90	12.56	-34.37	-13.00	-21.37	H
5196.98	-35.04	13.10	16.32	-38.26	-13.00	-25.26	H
6930.20	-32.15	12.33	21.13	-40.95	-13.00	-27.95	H
3464.88	-34.72	12.90	12.56	-34.38	-13.00	-21.38	V
5196.98	-34.56	13.10	16.32	-37.78	-13.00	-24.78	V
6930.20	-32.85	12.33	21.13	-41.65	-13.00	-28.65	V
CAT-M Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3505.61	-34.62	12.90	12.56	-34.28	-13.00	-21.28	H
5257.03	-35.44	13.10	16.32	-38.66	-13.00	-25.66	H
7010.08	-33.35	12.33	21.13	-42.15	-13.00	-29.15	H
3505.61	-35.39	12.90	12.56	-35.05	-13.00	-22.05	V
5257.03	-35.19	13.10	16.32	-38.41	-13.00	-25.41	V
7010.08	-32.07	12.33	21.13	-40.87	-13.00	-27.87	V



CAT-M Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3430.40	-34.20	12.90	12.56	-33.86	-13.00	-20.86	H
5145.53	-34.98	13.10	16.32	-38.20	-13.00	-25.20	H
6860.77	-32.75	12.33	21.13	-41.55	-13.00	-28.55	H
3430.40	-34.93	12.90	12.56	-34.59	-13.00	-21.59	V
5145.53	-35.20	13.10	16.32	-38.42	-13.00	-25.42	V
6860.77	-32.97	12.33	21.13	-41.77	-13.00	-28.77	V
CAT-M Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3465.15	-34.52	12.90	12.56	-34.18	-13.00	-21.18	H
5196.91	-34.44	13.10	16.32	-37.66	-13.00	-24.66	H
6929.95	-33.24	12.33	21.13	-42.04	-13.00	-29.04	H
3465.15	-35.03	12.90	12.56	-34.69	-13.00	-21.69	V
5196.91	-33.87	13.10	16.32	-37.09	-13.00	-24.09	V
6929.95	-32.01	12.33	21.13	-40.81	-13.00	-27.81	V
CAT-M Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3500.60	-34.63	12.90	12.56	-34.29	-13.00	-21.29	H
5250.14	-34.39	13.10	16.32	-37.61	-13.00	-24.61	H
6999.86	-32.42	12.33	21.13	-41.22	-13.00	-28.22	H
3500.60	-35.37	12.90	12.56	-35.03	-13.00	-22.03	V
5250.14	-34.65	13.10	16.32	-37.87	-13.00	-24.87	V
6999.86	-31.81	12.33	21.13	-40.61	-13.00	-27.61	V



CAT-M Band 4 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3435.39	-33.85	12.90	12.56	-33.51	-13.00	-20.51	H
5152.42	-35.10	13.10	16.32	-38.32	-13.00	-25.32	H
6870.91	-32.93	12.33	21.13	-41.73	-13.00	-28.73	H
3435.39	-35.19	12.90	12.56	-34.85	-13.00	-21.85	V
5152.42	-34.48	13.10	16.32	-37.70	-13.00	-24.70	V
6870.91	-32.24	12.33	21.13	-41.04	-13.00	-28.04	V
CAT-M Band 4 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3464.84	-34.65	12.90	12.56	-34.31	-13.00	-21.31	H
5196.97	-35.37	13.10	16.32	-38.59	-13.00	-25.59	H
6930.00	-33.27	12.33	21.13	-42.07	-13.00	-29.07	H
3464.84	-35.45	12.90	12.56	-35.11	-13.00	-22.11	V
5196.97	-34.53	13.10	16.32	-37.75	-13.00	-24.75	V
6930.00	-32.59	12.33	21.13	-41.39	-13.00	-28.39	V
CAT-M Band 4 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3495.65	-34.04	12.90	12.56	-33.70	-13.00	-20.70	H
5242.33	-34.54	13.10	16.32	-37.76	-13.00	-24.76	H
6990.56	-32.18	12.33	21.13	-40.98	-13.00	-27.98	H
3495.65	-35.29	12.90	12.56	-34.95	-13.00	-21.95	V
5242.33	-34.05	13.10	16.32	-37.27	-13.00	-24.27	V
6990.56	-32.27	12.33	21.13	-41.07	-13.00	-28.07	V



CAT-M Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3440.02	-33.57	12.90	12.56	-33.23	-13.00	-20.23	H
5160.49	-35.05	13.10	16.32	-38.27	-13.00	-25.27	H
6880.85	-32.51	12.33	21.13	-41.31	-13.00	-28.31	H
3440.02	-34.75	12.90	12.56	-34.41	-13.00	-21.41	V
5160.49	-34.03	13.10	16.32	-37.25	-13.00	-24.25	V
6880.85	-32.22	12.33	21.13	-41.02	-13.00	-28.02	V
CAT-M Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3465.16	-33.95	12.90	12.56	-33.61	-13.00	-20.61	H
5197.13	-35.47	13.10	16.32	-38.69	-13.00	-25.69	H
6930.22	-33.58	12.33	21.13	-42.38	-13.00	-29.38	H
3465.16	-35.21	12.90	12.56	-34.87	-13.00	-21.87	V
5197.13	-34.57	13.10	16.32	-37.79	-13.00	-24.79	V
6930.22	-32.08	12.33	21.13	-40.88	-13.00	-27.88	V
CAT-M Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3490.50	-33.89	12.90	12.56	-33.55	-13.00	-20.55	H
5235.02	-34.29	13.10	16.32	-37.51	-13.00	-24.51	H
6980.03	-33.05	12.33	21.13	-41.85	-13.00	-28.85	H
3490.50	-35.72	12.90	12.56	-35.38	-13.00	-22.38	V
5235.02	-33.78	13.10	16.32	-37.00	-13.00	-24.00	V
6980.03	-31.93	12.33	21.13	-40.73	-13.00	-27.73	V



CAT-M Band 25 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3701.29	-34.31	12.60	12.93	-34.64	-13.00	-21.64	H
5552.15	-34.40	13.10	17.11	-38.41	-13.00	-25.41	H
7402.70	-32.77	11.50	22.20	-43.47	-13.00	-30.47	H
3701.29	-35.37	12.60	12.93	-35.70	-13.00	-22.70	V
5552.15	-34.37	13.10	17.11	-38.38	-13.00	-25.38	V
7402.70	-32.95	11.50	22.20	-43.65	-13.00	-30.65	V
CAT-M Band 25 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3765.04	-33.84	12.60	12.93	-34.17	-13.00	-21.17	H
5647.15	-34.96	13.10	17.11	-38.97	-13.00	-25.97	H
7530.14	-33.28	11.50	22.20	-43.98	-13.00	-30.98	H
3765.04	-35.99	12.60	12.93	-36.32	-13.00	-23.32	V
5647.15	-35.16	13.10	17.11	-39.17	-13.00	-26.17	V
7530.14	-32.80	11.50	22.20	-43.50	-13.00	-30.50	V
CAT-M Band 25 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3828.52	-34.42	12.60	12.93	-34.75	-13.00	-21.75	H
5727.67	-34.95	13.10	17.11	-38.96	-13.00	-25.96	H
7656.82	-33.61	11.50	22.20	-44.31	-13.00	-31.31	H
3828.52	-35.81	12.60	12.93	-36.14	-13.00	-23.14	V
5727.67	-34.56	13.10	17.11	-38.57	-13.00	-25.57	V
7656.82	-32.08	11.50	22.20	-42.78	-13.00	-29.78	V



CAT-M Band 25 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3703.09	-33.95	12.60	12.93	-34.28	-13.00	-21.28	H
5554.38	-34.48	13.10	17.11	-38.49	-13.00	-25.49	H
7405.71	-32.61	11.50	22.20	-43.31	-13.00	-30.31	H
3703.09	-35.50	12.60	12.93	-35.83	-13.00	-22.83	V
5554.38	-34.36	13.10	17.11	-38.37	-13.00	-25.37	V
7405.71	-32.47	11.50	22.20	-43.17	-13.00	-30.17	V
CAT-M Band 25 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3765.00	-33.52	12.60	12.93	-33.85	-13.00	-20.85	H
5647.18	-34.96	13.10	17.11	-38.97	-13.00	-25.97	H
7530.18	-33.01	11.50	22.20	-43.71	-13.00	-30.71	H
3765.00	-35.24	12.60	12.93	-35.57	-13.00	-22.57	V
5647.18	-34.49	13.10	17.11	-38.50	-13.00	-25.50	V
7530.18	-33.04	11.50	22.20	-43.74	-13.00	-30.74	V
CAT-M Band 25 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3827.18	-33.58	12.60	12.93	-33.91	-13.00	-20.91	H
5740.18	-34.46	13.10	17.11	-38.47	-13.00	-25.47	H
7654.51	-32.35	11.50	22.20	-43.05	-13.00	-30.05	H
3827.18	-35.32	12.60	12.93	-35.65	-13.00	-22.65	V
5740.18	-34.14	13.10	17.11	-38.15	-13.00	-25.15	V
7654.51	-31.72	11.50	22.20	-42.42	-13.00	-29.42	V



CAT-M Band 25 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3705.44	-33.75	12.60	12.93	-34.08	-13.00	-21.08	H
5557.34	-35.03	13.10	17.11	-39.04	-13.00	-26.04	H
7410.22	-33.54	11.50	22.20	-44.24	-13.00	-31.24	H
3705.44	-35.20	12.60	12.93	-35.53	-13.00	-22.53	V
5557.34	-33.84	13.10	17.11	-37.85	-13.00	-24.85	V
7410.22	-32.22	11.50	22.20	-42.92	-13.00	-29.92	V
CAT-M Band 25 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3765.23	-33.68	12.60	12.93	-34.01	-13.00	-21.01	H
5646.95	-35.24	13.10	17.11	-39.25	-13.00	-26.25	H
7530.06	-33.06	11.50	22.20	-43.76	-13.00	-30.76	H
3765.23	-34.99	12.60	12.93	-35.32	-13.00	-22.32	V
5646.95	-34.52	13.10	17.11	-38.53	-13.00	-25.53	V
7530.06	-32.61	11.50	22.20	-43.31	-13.00	-30.31	V
CAT-M Band 25 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3825.41	-34.26	12.60	12.93	-34.59	-13.00	-21.59	H
5737.24	-35.25	13.10	17.11	-39.26	-13.00	-26.26	H
7650.83	-32.91	11.50	22.20	-43.61	-13.00	-30.61	H
3825.41	-35.25	12.60	12.93	-35.58	-13.00	-22.58	V
5737.24	-34.55	13.10	17.11	-38.56	-13.00	-25.56	V
7650.83	-32.00	11.50	22.20	-42.70	-13.00	-29.70	V



CAT-M Band 25 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3710.43	-34.22	12.60	12.93	-34.55	-13.00	-21.55	H
5565.30	-34.27	13.10	17.11	-38.28	-13.00	-25.28	H
7419.86	-32.64	11.50	22.20	-43.34	-13.00	-30.34	H
3710.43	-35.21	12.60	12.93	-35.54	-13.00	-22.54	V
5565.30	-34.78	13.10	17.11	-38.79	-13.00	-25.79	V
7419.86	-33.13	11.50	22.20	-43.83	-13.00	-30.83	V
CAT-M Band 25 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3765.03	-34.13	12.60	12.93	-34.46	-13.00	-21.46	H
5647.49	-35.38	13.10	17.11	-39.39	-13.00	-26.39	H
7529.95	-32.51	11.50	22.20	-43.21	-13.00	-30.21	H
3765.03	-34.94	12.60	12.93	-35.27	-13.00	-22.27	V
5647.49	-33.94	13.10	17.11	-37.95	-13.00	-24.95	V
7529.95	-32.48	11.50	22.20	-43.18	-13.00	-30.18	V
CAT-M Band 25 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3820.23	-33.82	12.60	12.93	-34.15	-13.00	-21.15	H
5730.05	-34.95	13.10	17.11	-38.96	-13.00	-25.96	H
7640.04	-32.54	11.50	22.20	-43.24	-13.00	-30.24	H
3820.23	-35.22	12.60	12.93	-35.55	-13.00	-22.55	V
5730.05	-35.17	13.10	17.11	-39.18	-13.00	-26.18	V
7640.04	-33.15	11.50	22.20	-43.85	-13.00	-30.85	V



CAT-M Band 25 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3715.10	-34.74	12.60	12.93	-35.07	-13.00	-22.07	H
5572.44	-35.48	13.10	17.11	-39.49	-13.00	-26.49	H
7430.83	-33.65	11.50	22.20	-44.35	-13.00	-31.35	H
3715.10	-35.05	12.60	12.93	-35.38	-13.00	-22.38	V
5572.44	-34.23	13.10	17.11	-38.24	-13.00	-25.24	V
7430.83	-31.92	11.50	22.20	-42.62	-13.00	-29.62	V
CAT-M Band 25 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3765.03	-34.53	12.60	12.93	-34.86	-13.00	-21.86	H
5647.14	-34.45	13.10	17.11	-38.46	-13.00	-25.46	H
7429.96	-32.81	11.50	22.20	-43.51	-13.00	-30.51	H
3765.03	-34.98	12.60	12.93	-35.31	-13.00	-22.31	V
5647.14	-33.89	13.10	17.11	-37.90	-13.00	-24.90	V
7429.96	-32.18	11.50	22.20	-42.88	-13.00	-29.88	V
CAT-M Band 25 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3815.46	-33.60	12.60	12.93	-33.93	-13.00	-20.93	H
5722.14	-34.25	13.10	17.11	-38.26	-13.00	-25.26	H
7630.22	-32.25	11.50	22.20	-42.95	-13.00	-29.95	H
3815.46	-34.58	12.60	12.93	-34.91	-13.00	-21.91	V
5722.14	-34.03	13.10	17.11	-38.04	-13.00	-25.04	V
7630.22	-32.39	11.50	22.20	-43.09	-13.00	-30.09	V



CAT-M Band 25 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3720.06	-34.27	12.60	12.93	-34.60	-13.00	-21.60	H
5580.12	-35.19	13.10	17.11	-39.20	-13.00	-26.20	H
7440.03	-33.62	11.50	22.20	-44.32	-13.00	-31.32	H
3720.06	-34.97	12.60	12.93	-35.30	-13.00	-22.30	V
5580.12	-34.00	13.10	17.11	-38.01	-13.00	-25.01	V
7440.03	-33.20	11.50	22.20	-43.90	-13.00	-30.90	V
CAT-M Band 25 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3765.02	-34.65	12.60	12.93	-34.98	-13.00	-21.98	H
5647.25	-35.45	13.10	17.11	-39.46	-13.00	-26.46	H
7530.30	-33.53	11.50	22.20	-44.23	-13.00	-31.23	H
3765.02	-34.82	12.60	12.93	-35.15	-13.00	-22.15	V
5647.25	-35.04	13.10	17.11	-39.05	-13.00	-26.05	V
7530.30	-31.73	11.50	22.20	-42.43	-13.00	-29.43	V
CAT-M Band 25 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3810.14	-34.71	12.60	12.93	-35.04	-13.00	-22.04	H
5715.59	-34.83	13.10	17.11	-38.84	-13.00	-25.84	H
7619.79	-32.36	11.50	22.20	-43.06	-13.00	-30.06	H
3810.14	-35.13	12.60	12.93	-35.46	-13.00	-22.46	V
5715.59	-34.54	13.10	17.11	-38.55	-13.00	-25.55	V
7619.79	-32.66	11.50	22.20	-43.36	-13.00	-30.36	V



CAT-M Band 66 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3421.02	-33.86	12.90	12.56	-33.52	-13.00	-20.52	H
5132.06	-34.66	13.10	16.32	-37.88	-13.00	-24.88	H
6842.85	-33.06	12.33	21.13	-41.86	-13.00	-28.86	H
3421.02	-35.66	12.90	12.56	-35.32	-13.00	-22.32	V
5132.06	-35.22	13.10	16.32	-38.44	-13.00	-25.44	V
6842.85	-32.16	12.33	21.13	-40.96	-13.00	-27.96	V
CAT-M Band 66 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3490.18	-34.61	12.90	12.56	-34.27	-13.00	-21.27	H
5234.91	-35.15	13.10	16.32	-38.37	-13.00	-25.37	H
6979.95	-33.55	12.33	21.13	-42.35	-13.00	-29.35	H
3490.18	-35.11	12.90	12.56	-34.77	-13.00	-21.77	V
5234.91	-34.62	13.10	16.32	-37.84	-13.00	-24.84	V
6979.95	-32.87	12.33	21.13	-41.67	-13.00	-28.67	V
CAT-M Band 66 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3558.05	-34.32	12.90	12.56	-33.98	-13.00	-20.98	H
5336.86	-34.78	13.10	16.32	-38.00	-13.00	-25.00	H
7117.10	-32.83	12.33	21.13	-41.63	-13.00	-28.63	H
3558.05	-34.94	12.90	12.56	-34.60	-13.00	-21.60	V
5336.86	-34.81	13.10	16.32	-38.03	-13.00	-25.03	V
7117.10	-31.92	12.33	21.13	-40.72	-13.00	-27.72	V



CAT-M Band 66 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3423.07	-34.05	12.90	12.56	-33.71	-13.00	-20.71	H
5134.50	-34.77	13.10	16.32	-37.99	-13.00	-24.99	H
6845.96	-32.28	12.33	21.13	-41.08	-13.00	-28.08	H
3423.07	-35.57	12.90	12.56	-35.23	-13.00	-22.23	V
5134.50	-33.86	13.10	16.32	-37.08	-13.00	-24.08	V
6845.96	-32.49	12.33	21.13	-41.29	-13.00	-28.29	V
CAT-M Band 66 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3490.25	-34.52	12.90	12.56	-34.18	-13.00	-21.18	H
5234.96	-34.02	13.10	16.32	-37.24	-13.00	-24.24	H
6980.29	-33.45	12.33	21.13	-42.25	-13.00	-29.25	H
3490.25	-34.98	12.90	12.56	-34.64	-13.00	-21.64	V
5234.96	-34.34	13.10	16.32	-37.56	-13.00	-24.56	V
6980.29	-32.52	12.33	21.13	-41.32	-13.00	-28.32	V
CAT-M Band 66 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3556.98	-33.63	12.90	12.56	-33.29	-13.00	-20.29	H
5262.51	-35.43	13.10	16.32	-38.65	-13.00	-25.65	H
7113.91	-32.67	12.33	21.13	-41.47	-13.00	-28.47	H
3556.98	-34.53	12.90	12.56	-34.19	-13.00	-21.19	V
5262.51	-33.96	13.10	16.32	-37.18	-13.00	-24.18	V
7113.91	-32.56	12.33	21.13	-41.36	-13.00	-28.36	V



CAT-M Band 66 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3425.17	-33.54	12.90	12.56	-33.20	-13.00	-20.20	H
5137.36	-34.75	13.10	16.32	-37.97	-13.00	-24.97	H
6850.12	-32.88	12.33	21.13	-41.68	-13.00	-28.68	H
3425.17	-34.67	12.90	12.56	-34.33	-13.00	-21.33	V
5137.36	-33.76	13.10	16.32	-36.98	-13.00	-23.98	V
6850.12	-32.06	12.33	21.13	-40.86	-13.00	-27.86	V
CAT-M Band 66 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3489.86	-33.74	12.90	12.56	-33.40	-13.00	-20.40	H
5235.20	-34.99	13.10	16.32	-38.21	-13.00	-25.21	H
6979.80	-33.24	12.33	21.13	-42.04	-13.00	-29.04	H
3489.86	-35.59	12.90	12.56	-35.25	-13.00	-22.25	V
5235.20	-34.63	13.10	16.32	-37.85	-13.00	-24.85	V
6979.80	-31.74	12.33	21.13	-40.54	-13.00	-27.54	V
CAT-M Band 66 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3557.89	-33.55	12.90	12.56	-33.21	-13.00	-20.21	H
52353.97	-35.06	13.10	16.32	-38.28	-13.00	-25.28	H
7109.88	-33.22	12.33	21.13	-42.02	-13.00	-29.02	H
3557.89	-35.72	12.90	12.56	-35.38	-13.00	-22.38	V
52353.97	-33.84	13.10	16.32	-37.06	-13.00	-24.06	V
7109.88	-33.00	12.33	21.13	-41.80	-13.00	-28.80	V



CAT-M Band 66 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3430.19	-34.32	12.90	12.56	-33.98	-13.00	-20.98	H
5145.12	-34.83	13.10	16.32	-38.05	-13.00	-25.05	H
6880.06	-32.29	12.33	21.13	-41.09	-13.00	-28.09	H
3430.19	-35.51	12.90	12.56	-35.17	-13.00	-22.17	V
5145.12	-34.70	13.10	16.32	-37.92	-13.00	-24.92	V
6880.06	-32.78	12.33	21.13	-41.58	-13.00	-28.58	V
CAT-M Band 66 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3490.19	-34.62	12.90	12.56	-34.28	-13.00	-21.28	H
5235.23	-34.19	13.10	16.32	-37.41	-13.00	-24.41	H
6979.87	-33.55	12.33	21.13	-42.35	-13.00	-29.35	H
3490.19	-35.40	12.90	12.56	-35.06	-13.00	-22.06	V
5235.23	-34.52	13.10	16.32	-37.74	-13.00	-24.74	V
6979.87	-32.32	12.33	21.13	-41.12	-13.00	-28.12	V
CAT-M Band 66 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3550.63	-34.08	12.90	12.56	-33.74	-13.00	-20.74	H
5235.11	-34.04	13.10	16.32	-37.26	-13.00	-24.26	H
7100.23	-33.16	12.33	21.13	-41.96	-13.00	-28.96	H
3550.63	-34.82	12.90	12.56	-34.48	-13.00	-21.48	V
5235.11	-33.99	13.10	16.32	-37.21	-13.00	-24.21	V
7100.23	-33.15	12.33	21.13	-41.95	-13.00	-28.95	V



CAT-M Band 66 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3434.98	-33.78	12.90	12.56	-33.44	-13.00	-20.44	H
5152.42	-34.25	13.10	16.32	-37.47	-13.00	-24.47	H
6870.02	-32.47	12.33	21.13	-41.27	-13.00	-28.27	H
3434.98	-35.29	12.90	12.56	-34.95	-13.00	-21.95	V
5152.42	-33.84	13.10	16.32	-37.06	-13.00	-24.06	V
6870.02	-32.67	12.33	21.13	-41.47	-13.00	-28.47	V
CAT-M Band 66 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3490.20	-34.20	12.90	12.56	-33.86	-13.00	-20.86	H
5234.93	-34.42	13.10	16.32	-37.64	-13.00	-24.64	H
6979.90	-32.62	12.33	21.13	-41.42	-13.00	-28.42	H
3490.20	-35.07	12.90	12.56	-34.73	-13.00	-21.73	V
5234.93	-35.13	13.10	16.32	-38.35	-13.00	-25.35	V
6979.90	-32.79	12.33	21.13	-41.59	-13.00	-28.59	V
CAT-M Band 66 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3545.04	-33.56	12.90	12.56	-33.22	-13.00	-20.22	H
5332.57	-34.37	13.10	16.32	-37.59	-13.00	-24.59	H
7090.10	-32.15	12.33	21.13	-40.95	-13.00	-27.95	H
3545.04	-35.98	12.90	12.56	-35.64	-13.00	-22.64	V
5332.57	-35.17	13.10	16.32	-38.39	-13.00	-25.39	V
7090.10	-31.95	12.33	21.13	-40.75	-13.00	-27.75	V



CAT-M Band 66 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3440.27	-34.92	12.90	12.56	-34.58	-13.00	-21.58	H
5160.10	-34.03	13.10	16.32	-37.25	-13.00	-24.25	H
6879.81	-33.09	12.33	21.13	-41.89	-13.00	-28.89	H
3440.27	-35.53	12.90	12.56	-35.19	-13.00	-22.19	V
5160.10	-34.52	13.10	16.32	-37.74	-13.00	-24.74	V
6879.81	-32.24	12.33	21.13	-41.04	-13.00	-28.04	V
CAT-M Band 66 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3490.10	-34.76	12.90	12.56	-34.42	-13.00	-21.42	H
5234.98	-34.83	13.10	16.32	-38.05	-13.00	-25.05	H
6980.07	-32.57	12.33	21.13	-41.37	-13.00	-28.37	H
3490.10	-35.87	12.90	12.56	-35.53	-13.00	-22.53	V
5234.98	-34.18	13.10	16.32	-37.40	-13.00	-24.40	V
6980.07	-32.52	12.33	21.13	-41.32	-13.00	-28.32	V
CAT-M Band 66 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3539.84	-34.85	12.90	12.56	-34.51	-13.00	-21.51	H
5310.14	-34.32	13.10	16.32	-37.54	-13.00	-24.54	H
7080.58	-32.96	12.33	21.13	-41.76	-13.00	-28.76	H
3539.84	-35.44	12.90	12.56	-35.10	-13.00	-22.10	V
5310.14	-33.84	13.10	16.32	-37.06	-13.00	-24.06	V
7080.58	-32.40	12.33	21.13	-41.20	-13.00	-28.20	V


9. FREQUENCY STABILITY

9.1 DESCRIPTION OF FREQUENCY STABILITY MEASUREMENT

9.1.1 MEASUREMENT METHOD

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

9.1.2 TEST SETUP

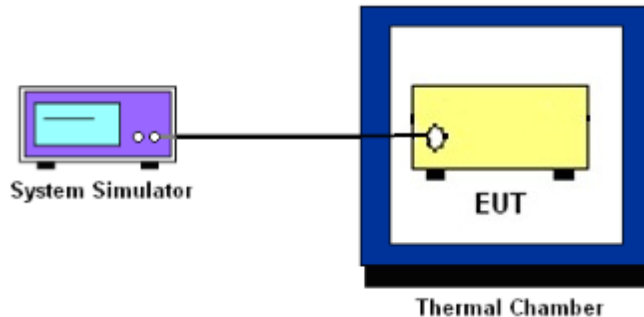

9.1.3 TEST PROCEDURES FOR TEMPERATURE VARIATION

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

9.1.4 TEST PROCEDURES FOR VOLTAGE VARIATION

1. The testing follows FCC KDB 971168 D01v01r03 Section 9.
2. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.



9.1.5 TEST RESULTS

CAT-M Band 2 (QPSK) / 1880MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	32.76	0.017	2.5ppm	PASS
40		26.32	0.014		
30		24.29	0.013		
20		27.67	0.015		
10		34.69	0.018		
0		12.22	0.006		
-10		18.28	0.010		
-20		26.65	0.014		
-30		17.89	0.010		
20	Maximum Voltage	13.50	0.007		
20	BEP	36.19	0.019		

CAT-M Band 2 (QPSK) / 1880MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	35.12	0.019	2.5ppm	PASS
40		15.52	0.008		
30		16.61	0.009		
20		33.24	0.018		
10		33.97	0.018		
0		14.59	0.008		
-10		34.42	0.018		
-20		15.85	0.008		
-30		18.59	0.010		
20	Maximum Voltage	34.03	0.018		
20	BEP	21.31	0.011		

CAT-M Band 4 (QPSK) / 1733MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	19.65	0.011	2.5ppm	PASS
40		35.05	0.020		
30		33.09	0.019		
20		27.49	0.016		
10		17.90	0.010		
0		22.50	0.013		
-10		13.54	0.008		
-20		24.68	0.014		
-30		33.79	0.019		
20	Maximum Voltage	21.20	0.012		
20	BEP	34.51	0.020		



CAT-M Band 4 (QPSK) / 1733MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	17.44	0.010	2.5ppm	PASS
40		13.05	0.008		
30		22.69	0.013		
20		35.51	0.020		
10		23.86	0.014		
0		21.34	0.012		
-10		31.71	0.018		
-20		18.39	0.011		
-30		35.61	0.021		
20	Maximum Voltage	18.30	0.011		
20	BEP	24.39	0.014		

CAT-M Band 25 (QPSK) / 1882.5MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	22.26	0.012	2.5ppm	PASS
40		31.81	0.017		
30		27.59	0.015		
20		22.87	0.012		
10		36.50	0.019		
0		25.79	0.014		
-10		31.09	0.017		
-20		23.67	0.013		
-30		33.77	0.018		
20	Maximum Voltage	11.67	0.006		
20	BEP	14.43	0.008		

CAT-M Band 25 (QPSK) / 1882.5MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	25.80	0.014	2.5ppm	PASS
40		12.80	0.007		
30		11.72	0.006		
20		17.15	0.009		
10		30.67	0.016		
0		20.18	0.011		
-10		31.68	0.017		
-20		36.15	0.019		
-30		20.05	0.011		
20	Maximum Voltage	34.60	0.018		
20	BEP	12.02	0.006		



CAT-M Band 66 (QPSK) / 1745MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	20.71	0.012	2.5ppm	PASS
40		28.29	0.016		
30		29.34	0.017		
20		24.02	0.014		
10		33.11	0.019		
0		13.49	0.008		
-10		20.26	0.012		
-20		25.93	0.015		
-30		25.36	0.015		
20	Maximum Voltage	29.36	0.017		
20	BEP	16.91	0.010		

CAT-M Band 66 (QPSK) / 1745MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	35.77	0.021	2.5ppm	PASS
40		24.11	0.014		
30		13.99	0.008		
20		30.85	0.018		
10		13.26	0.008		
0		13.40	0.008		
-10		30.57	0.018		
-20		13.18	0.008		
-30		18.67	0.011		
20	Maximum Voltage	35.04	0.020		
20	BEP	20.01	0.012		



APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※