

FCC Radio Test Report


FCC ID: 2ABEPTW1066

Original Grant

Report No. : TB-FCC145568
Applicant : Shenzhen Tianzheng Hongye Technology Co.Ltd
Equipment Under Test (EUT)
EUT Name : 10.1 inch MID
Model No. : TM101A550L
Series No. : TM101A530L, TM101A520L, TW1066G
Brand Name : NuVision
Receipt Date : 2015-09-29
Test Date : 2015-09-30 to 2015-11-18
Issue Date : 2015-11-18
Standards : FCC Part 15, Subpart C (15.247:2015)
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC and IC requirements

**Test/Witness
Engineer** :

Ivan Su


**Approved &
Authorized** :

Ray Ha

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	4
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test)	4
1.3 Block Diagram Showing the Configuration of System Tested.....	5
1.4 Description of Support Units	5
1.5 Description of Test Mode.....	6
1.6 Description of Test Software Setting	7
1.7 Measurement Uncertainty	7
1.8 Test Facility.....	7
2. TEST SUMMARY.....	9
3. TEST EQUIPMENT.....	10
4. CONDUCTED EMISSION TEST	11
4.1 Test Standard and Limit.....	11
4.2 Test Setup.....	11
4.3 Test Procedure.....	11
4.4 EUT Operating Mode	12
4.5 Test Data.....	12
5. RADIATED EMISSION TEST	21
5.1 Test Standard and Limit.....	21
5.2 Test Setup.....	22
5.3 Test Procedure.....	23
5.4 EUT Operating Condition	24
5.5 Test Data.....	24
6. RESTRICTED BANDS REQUIREMENT	35
6.1 Test Standard and Limit.....	35
6.2 Test Setup.....	35
6.3 Test Procedure.....	35
6.4 EUT Operating Condition	36
6.5 Test Data.....	36
7. BANDWIDTH TEST.....	42
7.1 Test Standard and Limit.....	42
7.2 Test Setup.....	42
7.3 Test Procedure.....	42
7.4 EUT Operating Condition	42
7.5 Test Data.....	43
8. PEAK OUTPUT POWER TEST.....	45
8.1 Test Standard and Limit.....	45
8.2 Test Setup.....	45

8.3 Test Procedure.....	45
8.4 EUT Operating Condition	45
8.5 Test Data.....	46
9. POWER SPECTRAL DENSITY TEST	48
9.1 Test Standard and Limit.....	48
9.2 Test Setup.....	48
9.3 Test Procedure.....	48
9.4 EUT Operating Condition	48
9.5 Test Data.....	49
10. ANTENNA REQUIREMENT.....	51
10.1 Standard Requirement.....	51
10.2 Antenna Connected Construction.....	51
10.3 Result.....	51

1. General Information about EUT

1.1 Client Information

Applicant	: Shenzhen Tianzheng Hongye Technology Co.Ltd.
Address	: Building C, Guancheng High-tech Science and Technology Park, Zhenxing Road, Carp River Industrial Zone, Lou Village, Gongming Town, Guangming New District, Shenzhen City, Guangdong Province, China
Manufacturer	: Shenzhen Tianzheng Hongye Technology Co.Ltd.
Address	: Building C, Guancheng High-tech Science and Technology Park, Zhenxing Road, Carp River Industrial Zone, Lou Village, Gongming Town, Guangming New District, Shenzhen City, Guangdong Province, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	: 10.1 inch MID
Models No.	: TM101A550L, TM101A530L, TM101A520L, TW1066G
Model Difference	: All models are identical in the same PCB layout, interior structure and electrical circuits, The only difference is model name for commercial purpose.
Product Description	Operation Frequency: BLE: 2402MHz~2480MHz BT: 2402MHz~2480MHz ₍₂₎ WIFI: 2412~2462 MHz ₍₂₎
	Number of Channel: Bluetooth 4.0 (BLE): 40 channels see note₍₄₎
	RF Output Power: -2.725 dBm Conducted Power
	Antenna Gain: 2.09 dBi FPC Antenna
	Modulation Type: GFSK
	Bit Rate of Transmitter: 1Mbps(GFSK)
Power Supply	: DC Voltage supplied from AC/DC adapter DC power by Li-ion Battery
Power Rating	: Adapter 1#(TEKA018-0502500UK 1509): Input: AC 100~240V 50/60Hz 0.5A Output: 5V/2.5A Adapter 2#(TEKA018-0502500UK 1510): Input: AC 100~240V 50/60Hz 0.5A Output: 5V/2.5A DC 3.7V from 45.6Wh Li-ion battery
Connecting I/O Port(S)	: Please refer to the User's Manual


Note:

- (1) This Test Report is FCC Part 15.247 for Bluetooth BLE, the test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v03r02.
- (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. The EUT has also been tested and complied the FCC 15C for BT and WIFI function, and recorded in the separate test report.
- (3) Antenna information provided by the applicant.
- (4) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

1.3 Block Diagram Showing the Configuration of System Tested

TX Mode

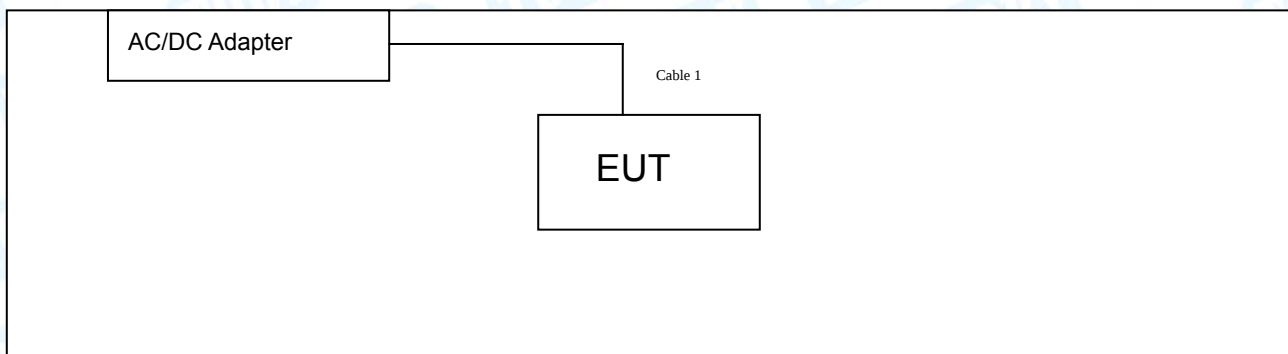

1.4 Description of Support Units

Equipment Information

Name	Model	S/N	Manufacturer	Used “√”
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	NO	NO	0.8M	Accessory

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	AC Charging With TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 2	AC Charging With TX Mode
Mode 3	TX Mode (Channel 00/20/39)

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.4 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

Bluetooth BLE Mode: GFSK Modulation Transmitting mode.

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on Z-plane as the normal use. Therefore only the test data of this Z-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software Version	RF KPI Test		
Channel	CH 00	CH 20	CH 39
BLE Mode	DEF	DEF	DEF

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz	± 3.42 dB
	150kHz to 30MHz	± 3.42 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.40 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at:

1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

FCC List No.: (811562)

The Laboratory is listed in the United States of American Federal Communications Commission

(FCC), and the registration number is 811562.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

2. Test Summary

FCC Part 15 Subpart C(15.247)/RSS 247 Issue 1				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203	/	Antenna Requirement	PASS	N/A
15.207	RSS-GEN 7.2.4	Conducted Emission	PASS	N/A
15.205	RSS-GEN 7.2.2	Restricted Bands	PASS	N/A
15.247(a)(2)	RSS 247 5.2 (1)	6dB Bandwidth	PASS	N/A
15.247(b)	RSS 247 5.4 (4)	Peak Output Power	PASS	N/A
15.247(e)	RSS 247 5.2 (2)	Power Spectral Density	PASS	N/A
15.247(d)	RSS 247 5.5	Transmitter Radiated Spurious Emission	PASS	N/A
Note: "/" for no requirement for this test item. N/A is an abbreviation for Not Applicable.				

3. Test Equipment

AC Main Conducted Emission					
Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	100321	Aug. 07, 2015	Aug. 06, 2016
50ΩCoaxial Switch	Anritsu	MP59B	X10321	Aug. 07, 2015	Aug. 06, 2016
L.I.S.N	Rohde & Schwarz	ENV216	101131	Aug. 07, 2015	Aug. 06, 2016
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	Aug. 07, 2015	Aug. 06, 2016
Radiation Spurious Emission					
Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Aug. 29, 2015	Aug. 28, 2016
EMI Test Receiver	Rohde & Schwarz	ESCI	100010/007	Aug. 07, 2015	Aug. 06, 2016
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 28, 2015	Mar. 27, 2016
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 28, 2015	Mar. 27, 2016
Pre-amplifier	Sonoma	310N	185903	Mar. 28, 2015	Mar. 27, 2016
Pre-amplifier	HP	8447B	3008A00849	Mar. 28, 2015	Mar. 27, 2016
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 28, 2015	Mar. 27, 2016
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Aug. 29, 2015	Aug. 28, 2016
EMI Test Receiver	Rohde & Schwarz	ESCI	100010/007	Aug. 07, 2015	Aug. 06, 2016

4. Conducted Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard

FCC Part 15.207

4.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) *Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Setup

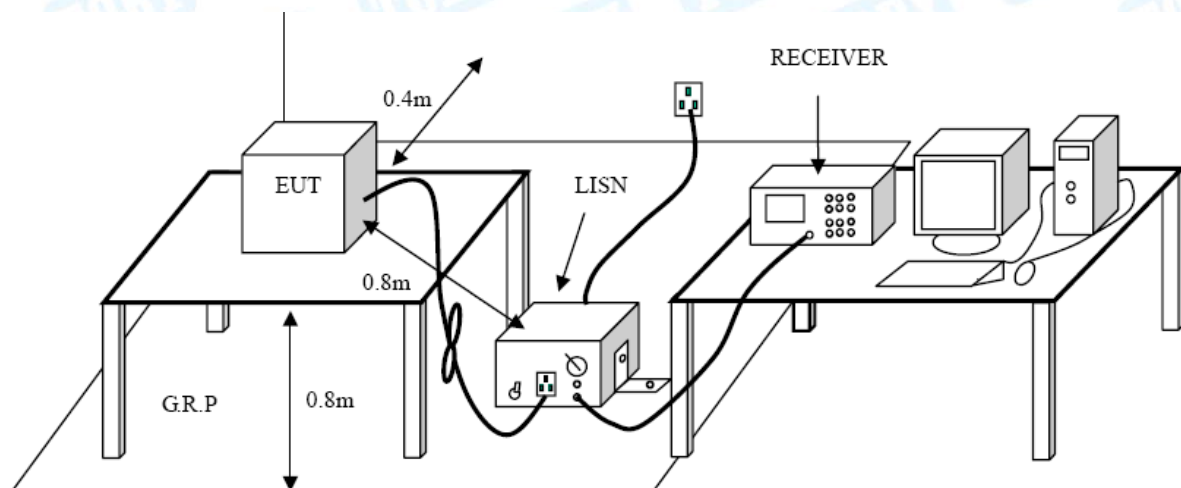

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.


4.4 EUT Operating Mode

Please refer to the description of test mode.

4.5 Test Data

Test data please refer the following pages.

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX BLE Mode (Adapter 1#)		
Remark:	Only worse case is reported		

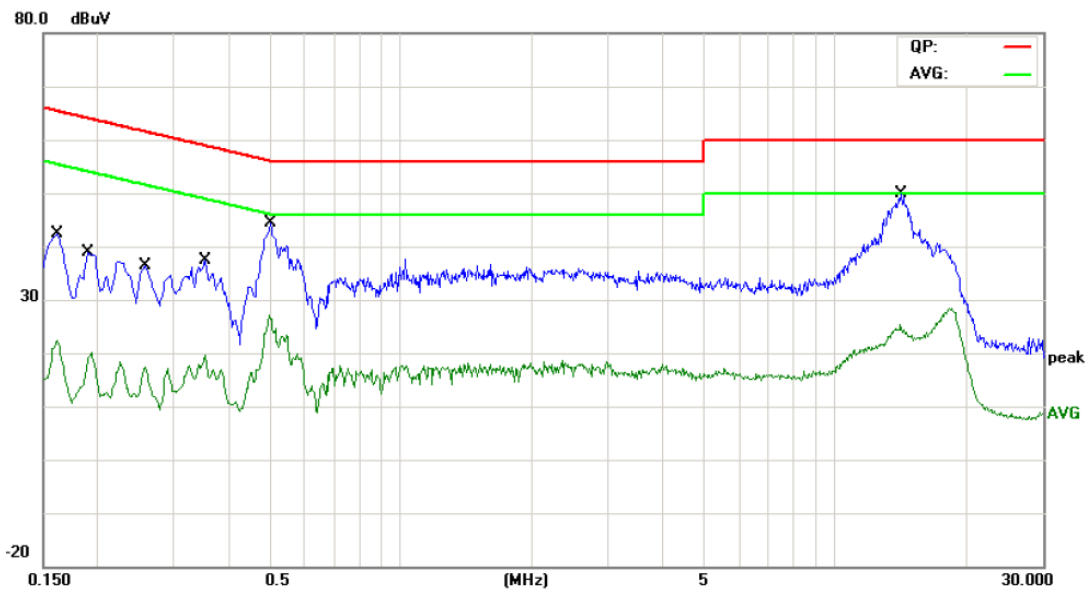


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	28.78	9.94	38.72	65.36	-26.64	QP
2		0.1620	10.76	9.94	20.70	55.36	-34.66	AVG
3		0.1900	24.35	10.00	34.35	64.03	-29.68	QP
4		0.1900	7.51	10.00	17.51	54.03	-36.52	AVG
5		0.2580	22.54	10.02	32.56	61.49	-28.93	QP
6		0.2580	6.08	10.02	16.10	51.49	-35.39	AVG
7		0.3540	23.10	10.02	33.12	58.87	-25.75	QP
8		0.3540	8.89	10.02	18.91	48.87	-29.96	AVG
9	*	0.5020	29.79	10.02	39.81	56.00	-16.19	QP
10		0.5020	15.67	10.02	25.69	46.00	-20.31	AVG
11		14.1540	31.91	10.24	42.15	60.00	-17.85	QP
12		14.1540	12.68	10.24	22.92	50.00	-27.08	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX BLE Mode (Adapter 1#)		
Remark:	Only worse case is reported		

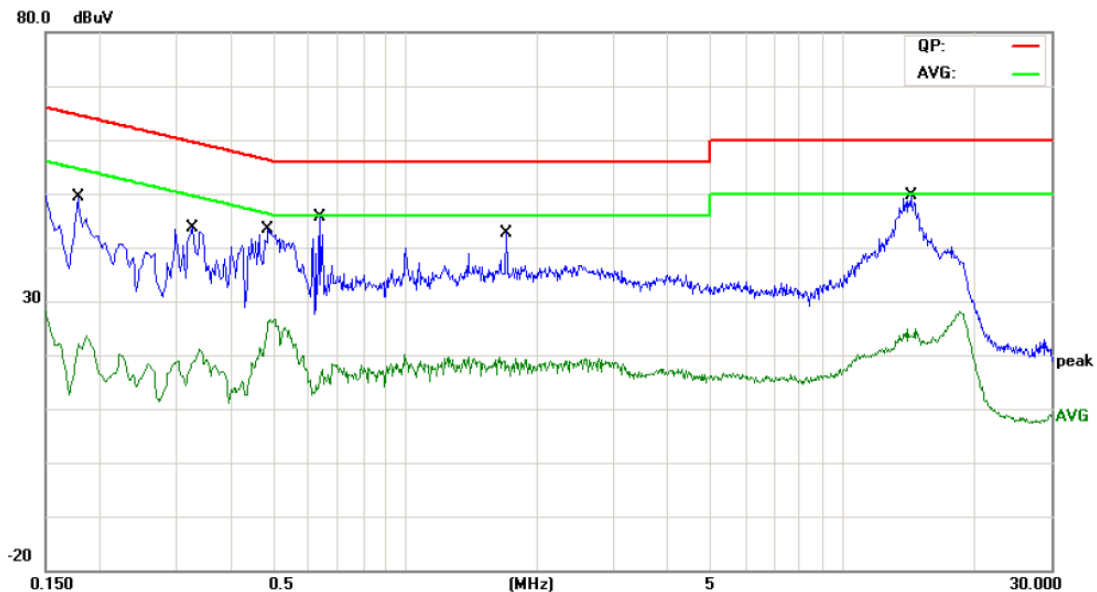


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1780	18.01	10.12	28.13	64.57	-36.44	QP
2		0.1780	1.54	10.12	11.66	54.57	-42.91	AVG
3		0.3260	19.06	10.08	29.14	59.55	-30.41	QP
4		0.3260	6.07	10.08	16.15	49.55	-33.40	AVG
5	*	0.4860	26.65	10.02	36.67	56.24	-19.57	QP
6		0.4860	13.01	10.02	23.03	46.24	-23.21	AVG
7		0.6340	12.09	10.02	22.11	56.00	-33.89	QP
8		0.6340	-0.02	10.02	10.00	46.00	-36.00	AVG
9		1.7060	20.10	10.09	30.19	56.00	-25.81	QP
10		1.7060	6.15	10.09	16.24	46.00	-29.76	AVG
11		14.3340	30.20	10.07	40.27	60.00	-19.73	QP
12		14.3340	12.05	10.07	22.12	50.00	-27.88	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX BLE Mode (Adapter 1#)		
Remark:	Only worse case is reported		

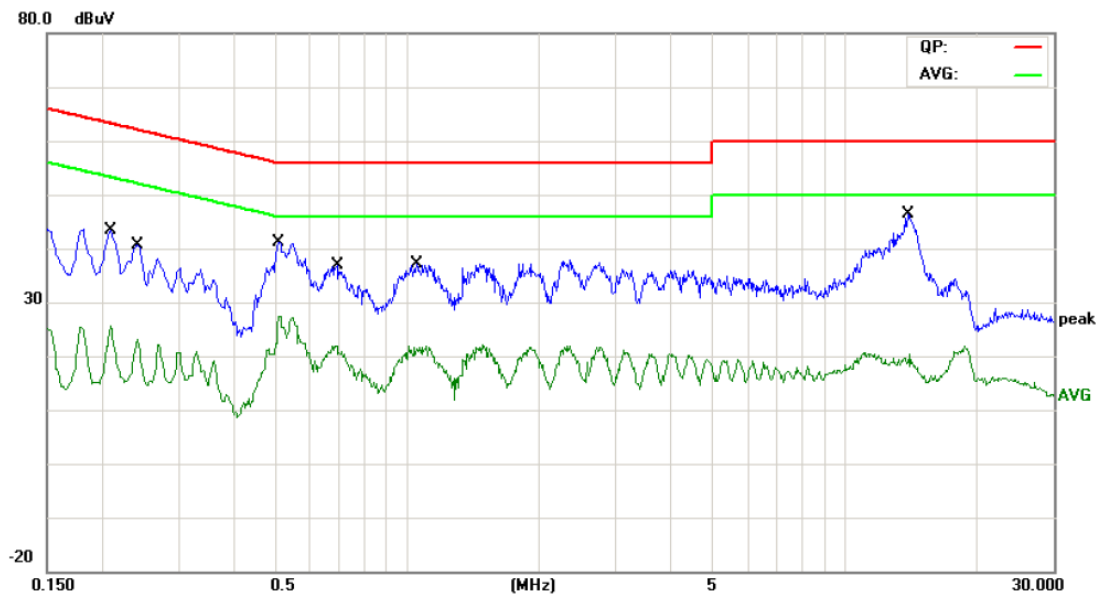


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2100	28.65	10.02	38.67	63.20	-24.53	QP
2		0.2100	12.25	10.02	22.27	53.20	-30.93	AVG
3		0.2420	27.01	10.02	37.03	62.02	-24.99	QP
4		0.2420	11.61	10.02	21.63	52.02	-30.39	AVG
5	*	0.5100	27.62	10.02	37.64	56.00	-18.36	QP
6		0.5100	15.71	10.02	25.73	46.00	-20.27	AVG
7		0.6900	22.46	10.11	32.57	56.00	-23.43	QP
8		0.6900	10.17	10.11	20.28	46.00	-25.72	AVG
9		1.0500	22.03	10.06	32.09	56.00	-23.91	QP
10		1.0500	9.80	10.06	19.86	46.00	-26.14	AVG
11		13.9220	27.79	10.24	38.03	60.00	-21.97	QP
12		13.9220	6.35	10.24	16.59	50.00	-33.41	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX BLE Mode (Adapter 1#)		
Remark:	Only worse case is reported		

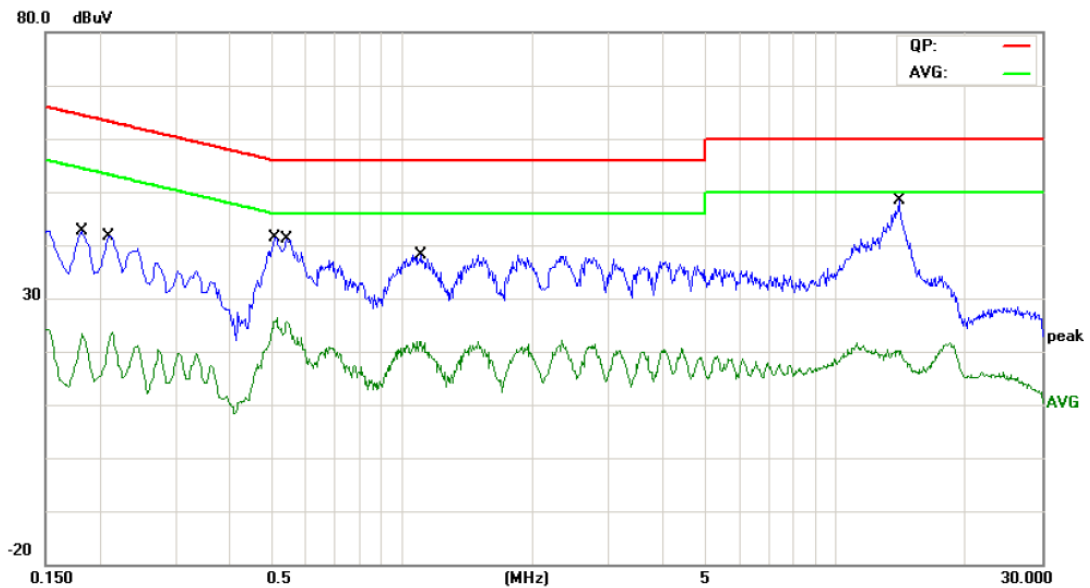


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1819	29.05	10.12	39.17	64.39	-25.22	QP
2		0.1819	11.60	10.12	21.72	54.39	-32.67	AVG
3		0.2100	26.25	10.12	36.37	63.20	-26.83	QP
4		0.2100	9.93	10.12	20.05	53.20	-33.15	AVG
5	*	0.5100	28.20	10.02	38.22	56.00	-17.78	QP
6		0.5100	15.15	10.02	25.17	46.00	-20.83	AVG
7		0.5420	27.60	10.02	37.62	56.00	-18.38	QP
8		0.5420	15.00	10.02	25.02	46.00	-20.98	AVG
9		1.1060	22.86	10.15	33.01	56.00	-22.99	QP
10		1.1060	9.82	10.15	19.97	46.00	-26.03	AVG
11		13.9940	27.80	10.08	37.88	60.00	-22.12	QP
12		13.9940	7.35	10.08	17.43	50.00	-32.57	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX BLE Mode (Adapter 2#)		
Remark:	Only worse case is reported		

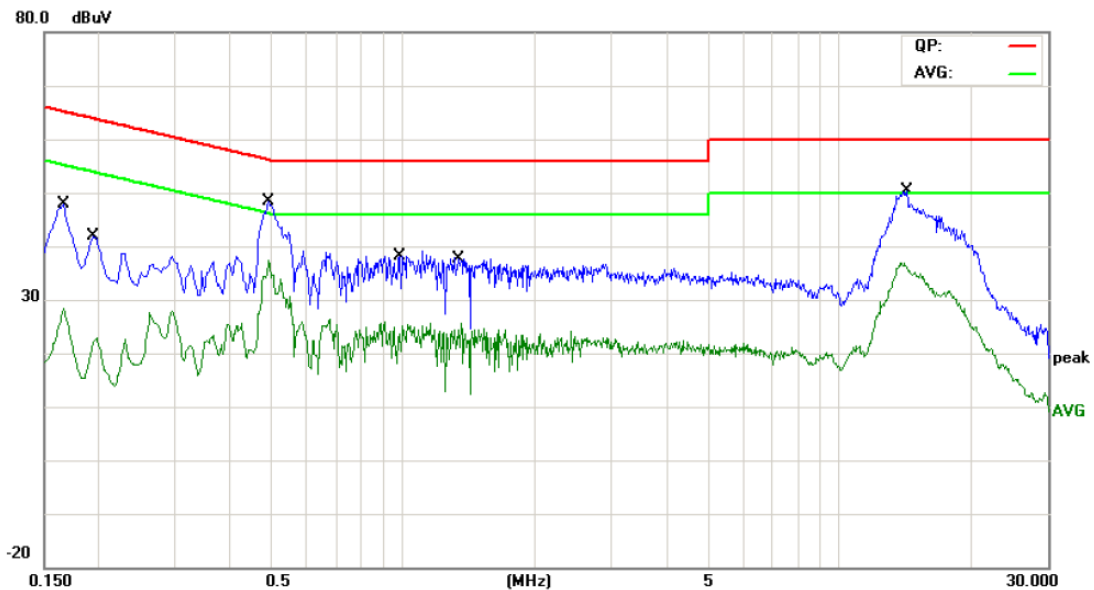


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1660	32.16	9.95	42.11	65.15	-23.04	QP
2		0.1660	17.29	9.95	27.24	55.15	-27.91	AVG
3		0.1940	25.16	10.01	35.17	63.86	-28.69	QP
4		0.1940	10.75	10.01	20.76	53.86	-33.10	AVG
5	*	0.4900	35.74	10.02	45.76	56.17	-10.41	QP
6		0.4900	25.71	10.02	35.73	46.17	-10.44	AVG
7		0.9820	22.51	10.06	32.57	56.00	-23.43	QP
8		0.9820	11.45	10.06	21.51	46.00	-24.49	AVG
9		1.3380	23.23	10.06	33.29	56.00	-22.71	QP
10		1.3380	12.24	10.06	22.30	46.00	-23.70	AVG
11		14.2700	32.72	10.25	42.97	60.00	-17.03	QP
12		14.2700	23.00	10.25	33.25	50.00	-16.75	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX BLE Mode(Adapter 2#)		
Remark:	Only worse case is reported		

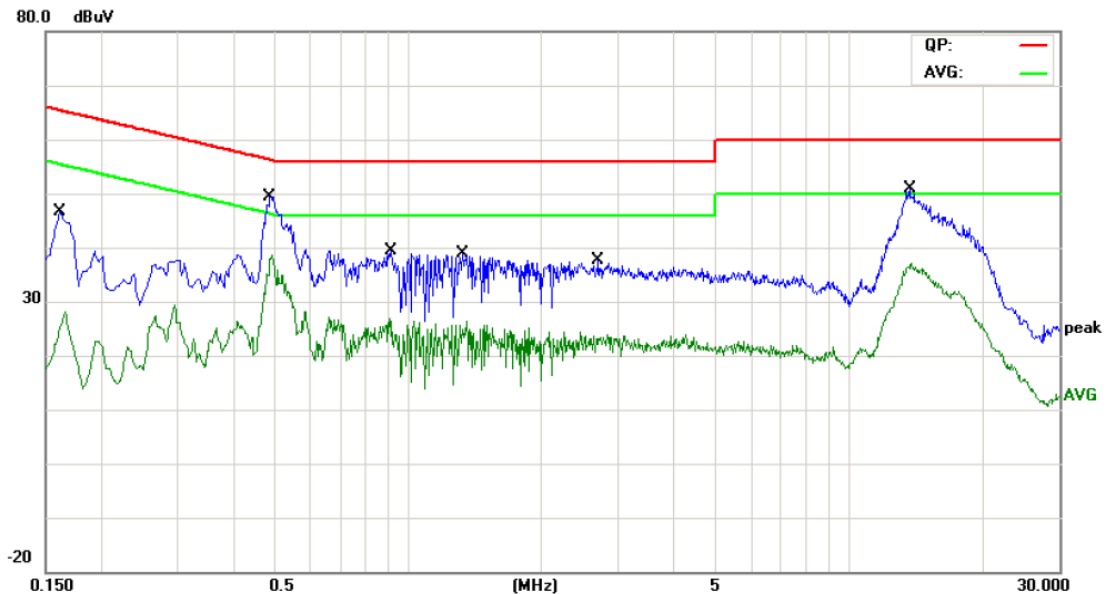


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1620	29.25	9.94	39.19	65.36	-26.17	QP
2		0.1620	14.86	9.94	24.80	55.36	-30.56	AVG
3		0.4860	35.61	10.02	45.63	56.24	-10.61	QP
4	*	0.4860	25.82	10.02	35.84	46.24	-10.40	AVG
5		0.9100	24.11	10.08	34.19	56.00	-21.81	QP
6		0.9100	12.98	10.08	23.06	46.00	-22.94	AVG
7		1.3260	23.50	10.06	33.56	56.00	-22.44	QP
8		1.3260	12.86	10.06	22.92	46.00	-23.08	AVG
9		2.7020	22.02	10.04	32.06	56.00	-23.94	QP
10		2.7020	10.78	10.04	20.82	46.00	-25.18	AVG
11		13.7540	34.20	10.24	44.44	60.00	-15.56	QP
12		13.7540	24.00	10.24	34.24	50.00	-15.76	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60Hz		
Terminal:	Line		
Test Mode:	AC Charging with TX BLE Mode (Adapter 2#)		
Remark:	Only worse case is reported		

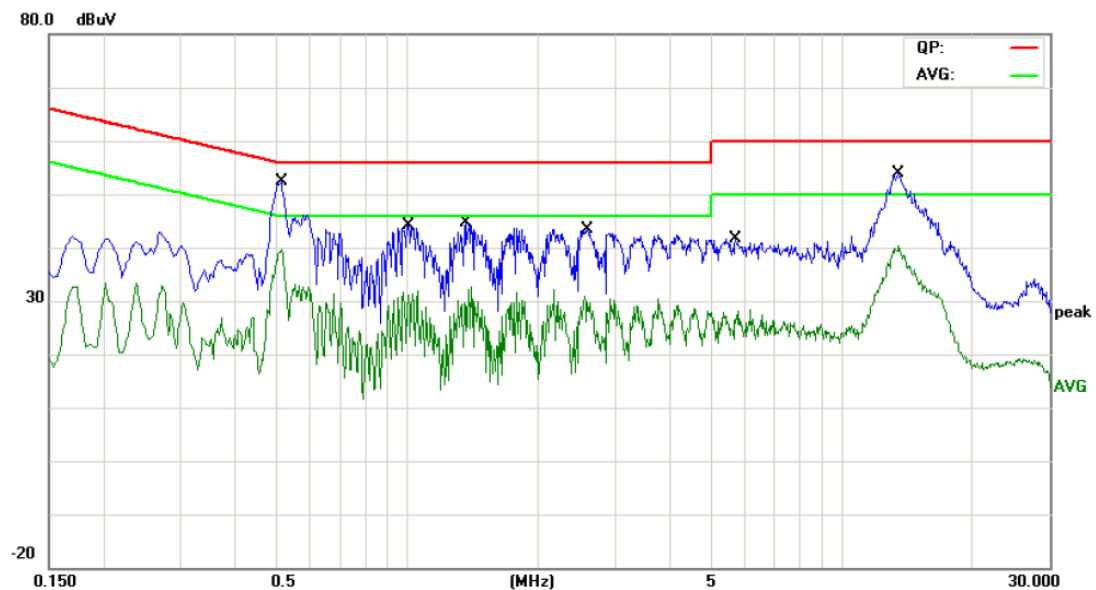


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.5140	38.02	10.03	48.05	56.00	-7.95	QP
2		0.5140	25.94	10.03	35.97	46.00	-10.03	AVG
3		1.0100	30.15	10.06	40.21	56.00	-15.79	QP
4		1.0100	17.99	10.06	28.05	46.00	-17.95	AVG
5		1.3619	29.56	10.06	39.62	56.00	-16.38	QP
6		1.3619	17.41	10.06	27.47	46.00	-18.53	AVG
7		2.6060	28.65	10.04	38.69	56.00	-17.31	QP
8		2.6060	16.41	10.04	26.45	46.00	-19.55	AVG
9		5.7100	25.74	10.00	35.74	60.00	-24.26	QP
10		5.7100	12.43	10.00	22.43	50.00	-27.57	AVG
11		13.5340	37.36	10.23	47.59	60.00	-12.41	QP
12		13.5340	25.29	10.23	35.52	50.00	-14.48	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model Name :	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 240V/60Hz		
Terminal:	Neutral		
Test Mode:	AC Charging with TX BLE Mode (Adapter 2#)		
Remark:	Only worse case is reported		

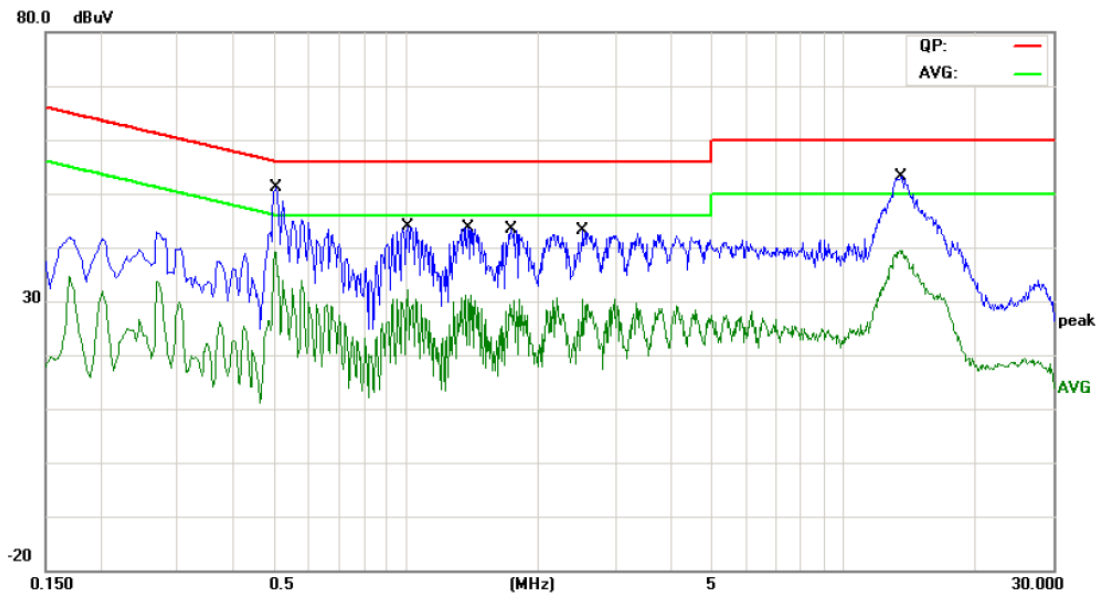

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.5060	38.49	10.02	48.51	56.00	-7.49	QP
2		0.5060	26.39	10.02	36.41	46.00	-9.59	AVG
3		1.0060	29.43	10.06	39.49	56.00	-16.51	QP
4		1.0060	17.39	10.06	27.45	46.00	-18.55	AVG
5		1.3820	29.68	10.06	39.74	56.00	-16.26	QP
6		1.3820	17.38	10.06	27.44	46.00	-18.56	AVG
7		1.7380	28.15	10.06	38.21	56.00	-17.79	QP
8		1.7380	15.84	10.06	25.90	46.00	-20.10	AVG
9		2.5300	27.91	10.04	37.95	56.00	-18.05	QP
10		2.5300	14.91	10.04	24.95	46.00	-21.05	AVG
11		13.5060	37.26	10.23	47.49	60.00	-12.51	QP
12		13.5060	25.18	10.23	35.41	50.00	-14.59	AVG

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

5. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard
FCC Part 15.209

5.1.2 Test Limit

Radiated Emission Limits (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Class A (dBuV/m)(at 3 M)		Class B (dBuV/m)(at 3 M)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


5.2 Test Setup

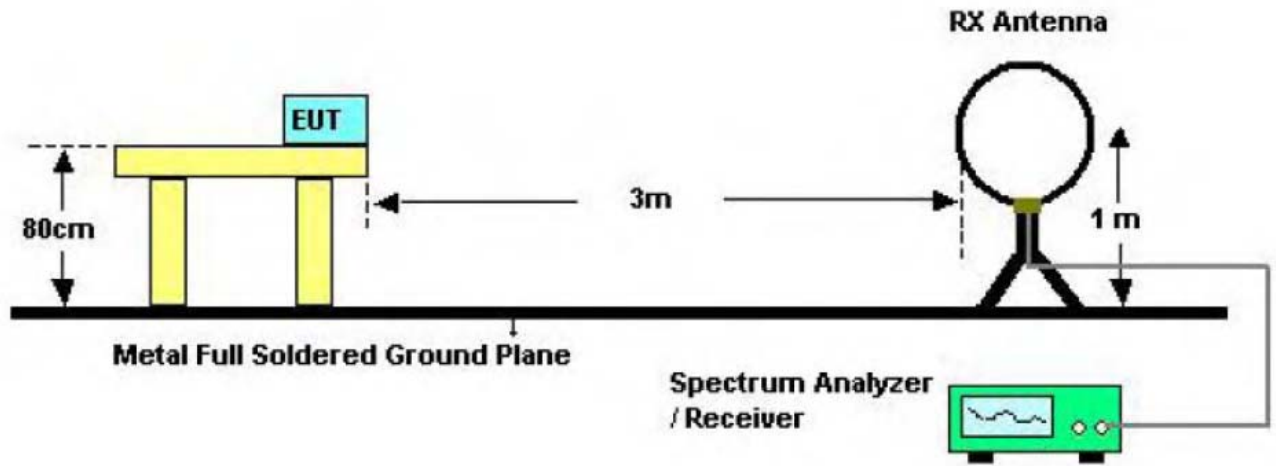

Below 30MHz Test Setup

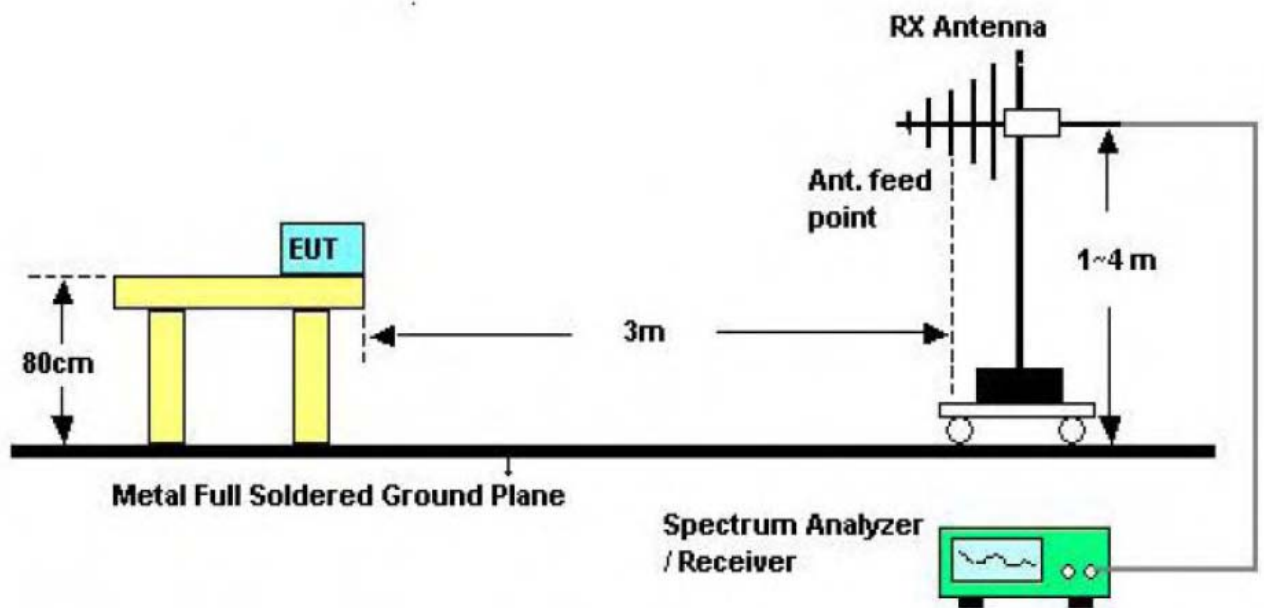

Below 1000MHz Test Setup

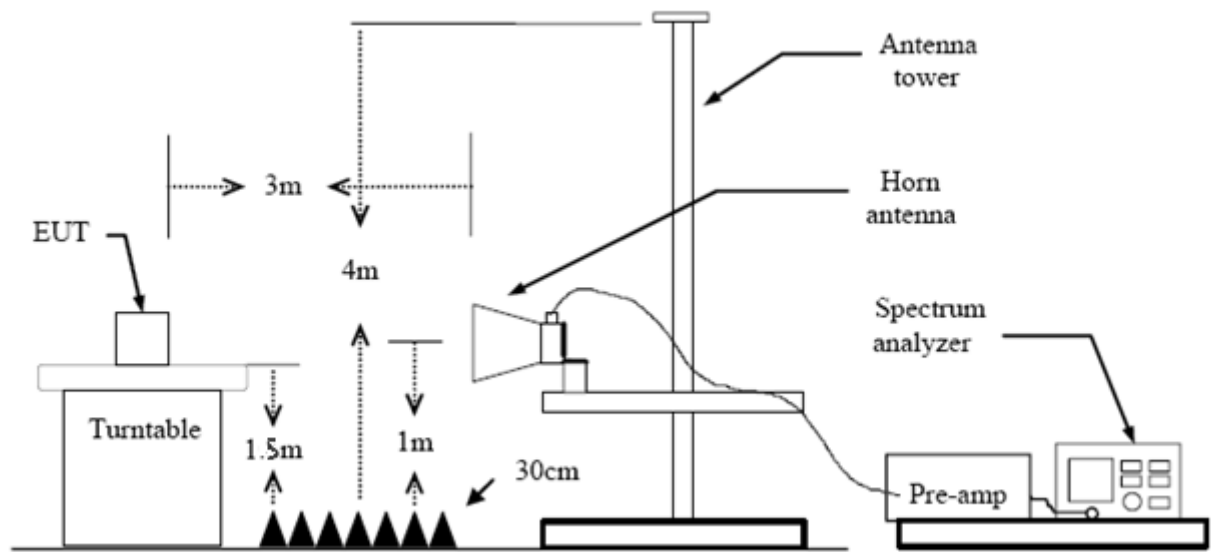

Above 1GHz Test Setup

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

5.4 EUT Operating Condition


The Equipment Under Test was set to Continual Transmitting in maximum power.

5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 kHz with Peak Detector for Average Values.

Test data please refer the following pages.

EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	BLE TX 2402 Mode (Adapter 1#)		
Remark:	Only worse case is reported		

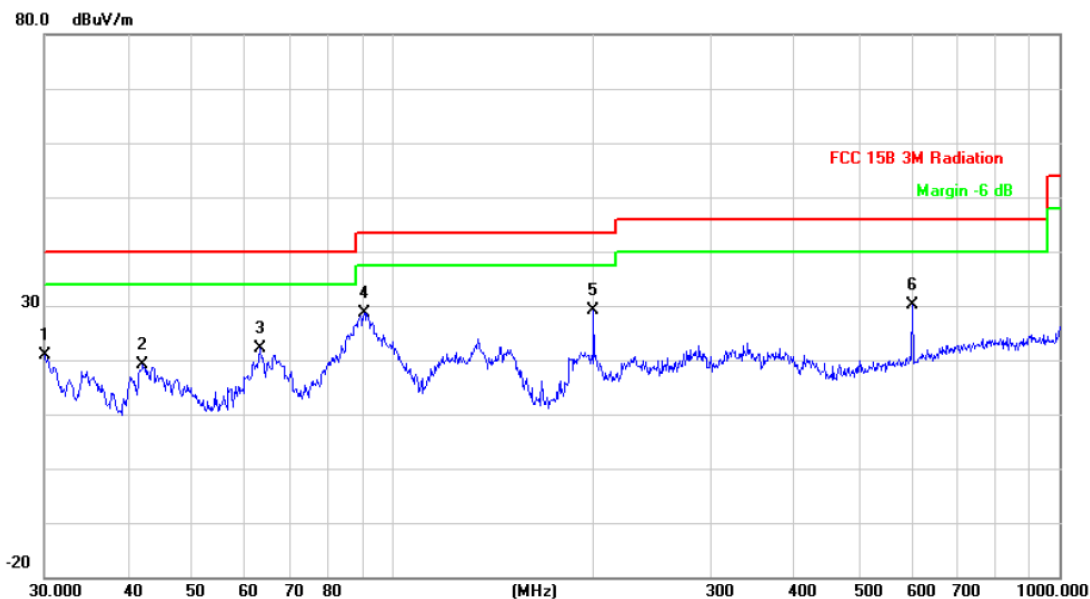


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		30.0000	34.76	-13.96	20.80	40.00	-19.20	peak
2		42.1542	40.25	-21.07	19.18	40.00	-20.82	peak
3		63.0916	46.35	-24.25	22.10	40.00	-17.90	peak
4		90.5374	51.39	-22.65	28.74	43.50	-14.76	peak
5	*	199.9856	49.46	-20.39	29.07	43.50	-14.43	peak
6		601.4265	39.64	-9.41	30.23	46.00	-15.77	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	BLE TX 2402 Mode (Adapter 1#)		
Remark:	Only worse case is reported		

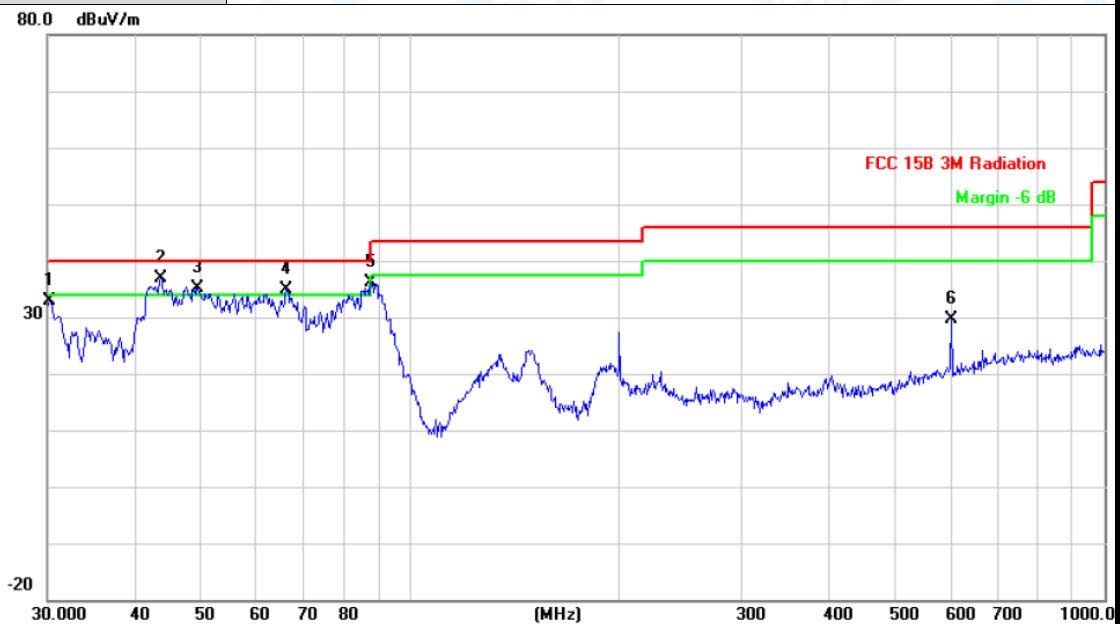


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		30.2111	47.06	-14.09	32.97	40.00	-7.03	peak
2	*	43.6584	58.55	-21.70	36.85	40.00	-3.15	peak
3	!	49.3594	59.34	-24.12	35.22	40.00	-4.78	peak
4	!	66.2662	58.96	-23.96	35.00	40.00	-5.00	peak
5	!	87.7248	58.98	-22.82	36.16	40.00	-3.84	peak
6		601.4265	38.97	-9.41	29.56	46.00	-16.44	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	BLE TX 2402 Mode (Adapter 2#)		
Remark:	Only worse case is reported		

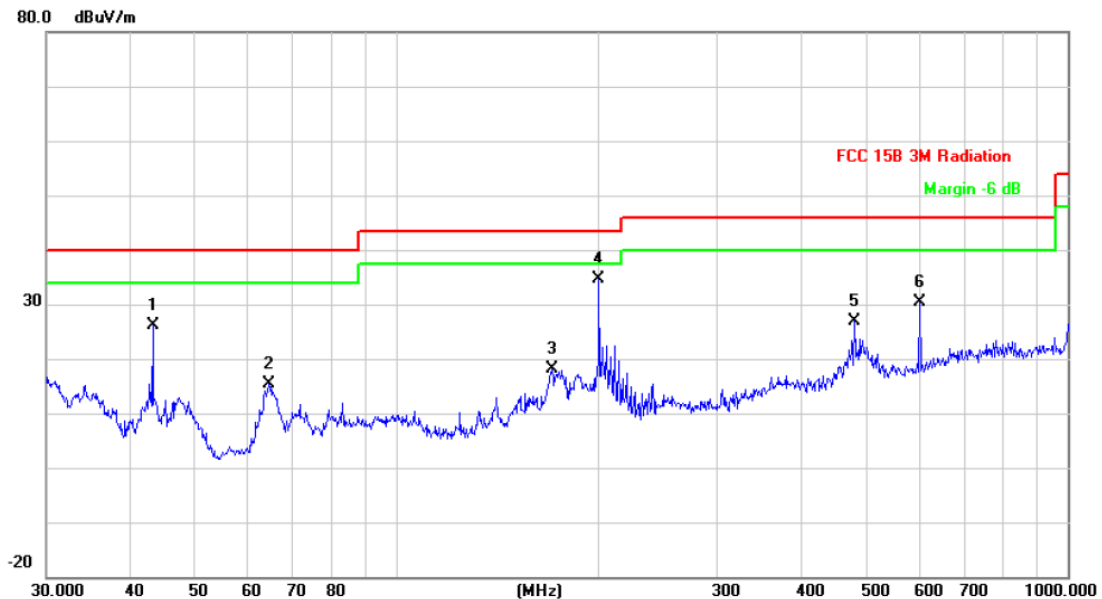


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		43.2017	47.59	-21.52	26.07	40.00	-13.93	peak
2		64.4331	39.40	-24.12	15.28	40.00	-24.72	peak
3		170.1948	39.33	-21.17	18.16	43.50	-25.34	peak
4	*	199.9856	54.99	-20.39	34.60	43.50	-8.90	peak
5		480.5276	38.53	-11.62	26.91	46.00	-19.09	peak
6		601.4265	39.74	-9.41	30.33	46.00	-15.67	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	BLE TX 2402 Mode (Adapter 2#)		
Remark:	Only worse case is reported		

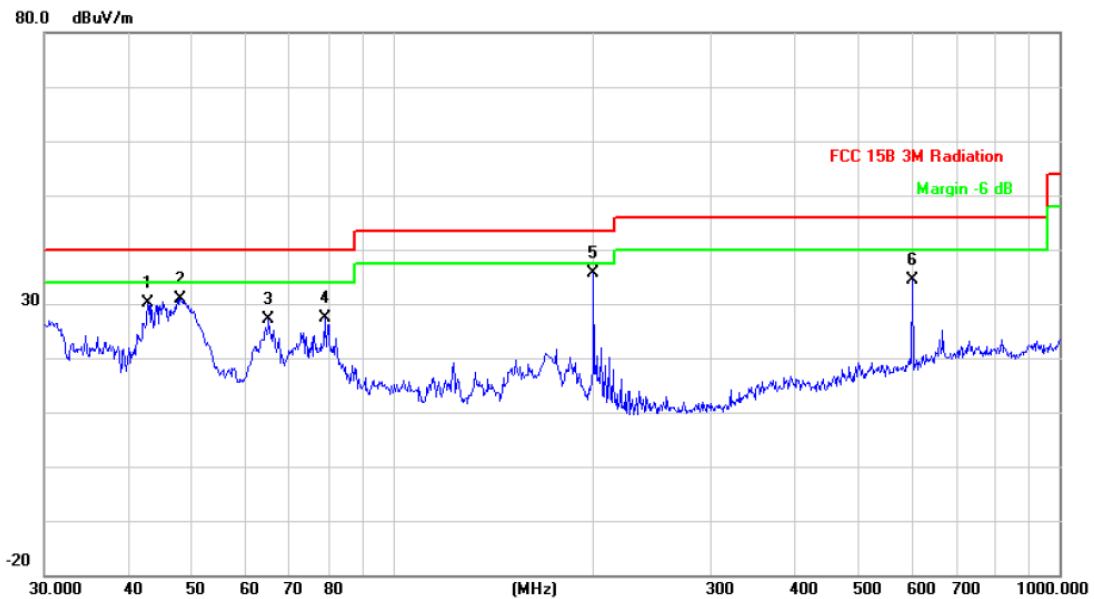


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		42.8998	51.62	-21.39	30.23	40.00	-9.77	peak
2		47.9940	54.39	-23.54	30.85	40.00	-9.15	peak
3		65.1145	51.19	-24.06	27.13	40.00	-12.87	peak
4		78.9652	50.77	-23.32	27.45	40.00	-12.55	peak
5	*	199.9856	56.06	-20.39	35.67	43.50	-7.83	peak
6		601.4265	43.87	-9.41	34.46	46.00	-11.54	peak

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	BLE Mode TX 2480 MHz(Adapter 1#)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

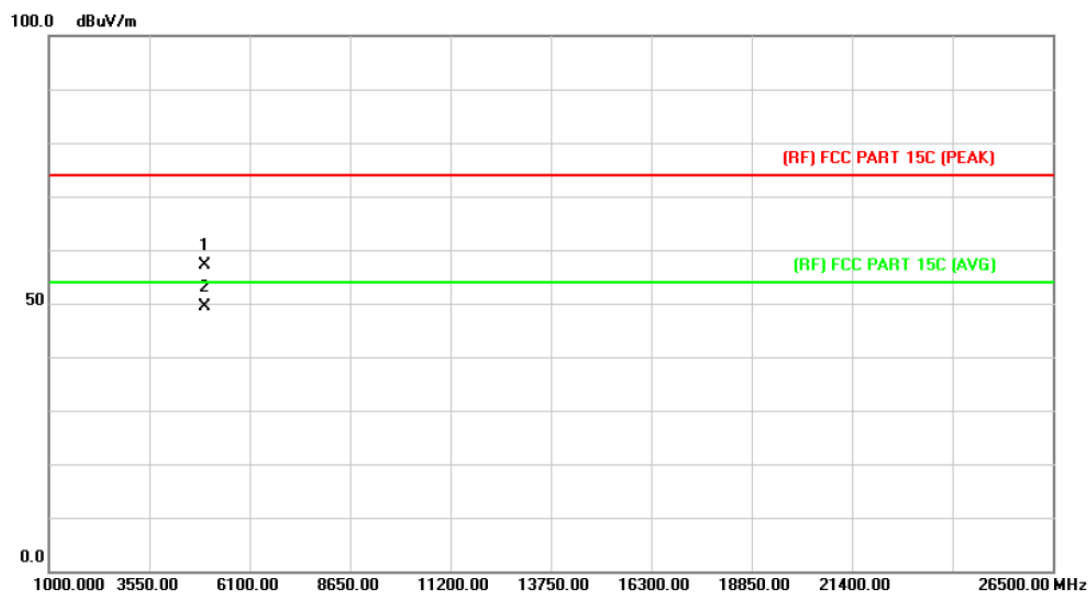

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4959.414	42.88	14.36	57.24	74.00	-16.76	peak
2	*	4960.081	34.99	14.36	49.35	54.00	-4.65	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	BLE Mode TX 2480 MHz (Adapter 1#)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

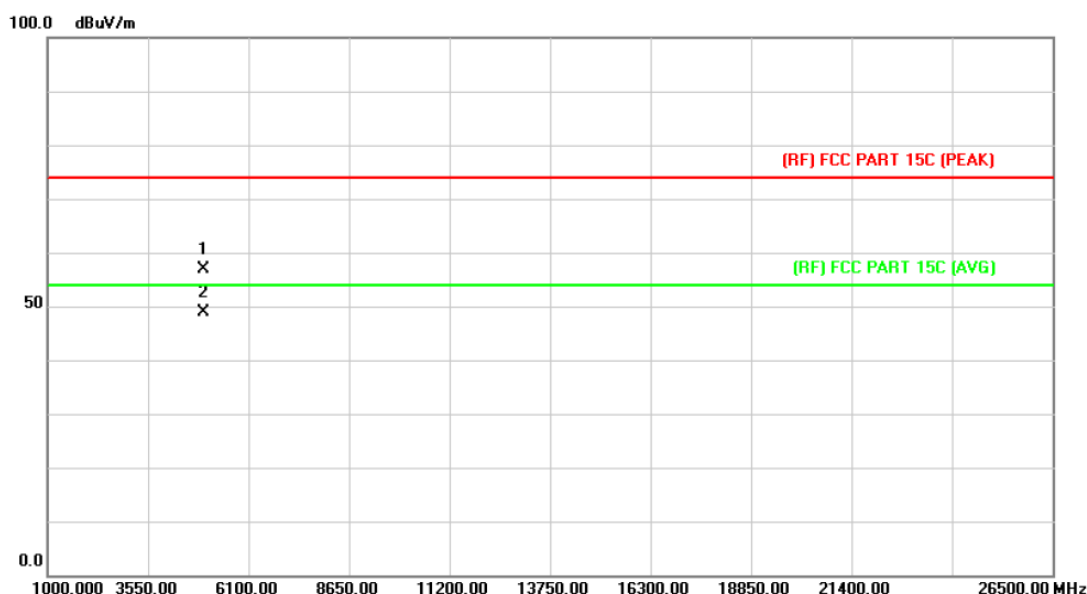

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4959.365	42.48	14.36	56.84	74.00	-17.16	peak
2	*	4960.517	34.62	14.36	48.98	54.00	-5.02	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	BLE Mode TX 2442 MHz (Adapter 1#)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

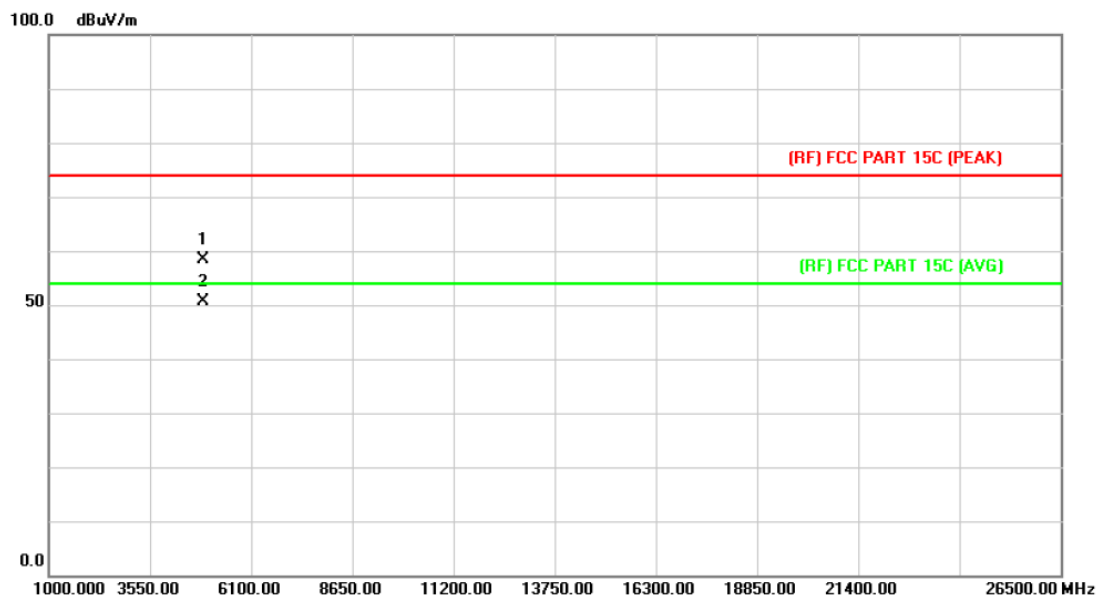

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4883.457	44.45	13.92	58.37	74.00	-15.63	peak
2	*	4884.321	36.69	13.92	50.61	54.00	-3.39	AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	BLE Mode TX 2442 MHz (Adapter 1#)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

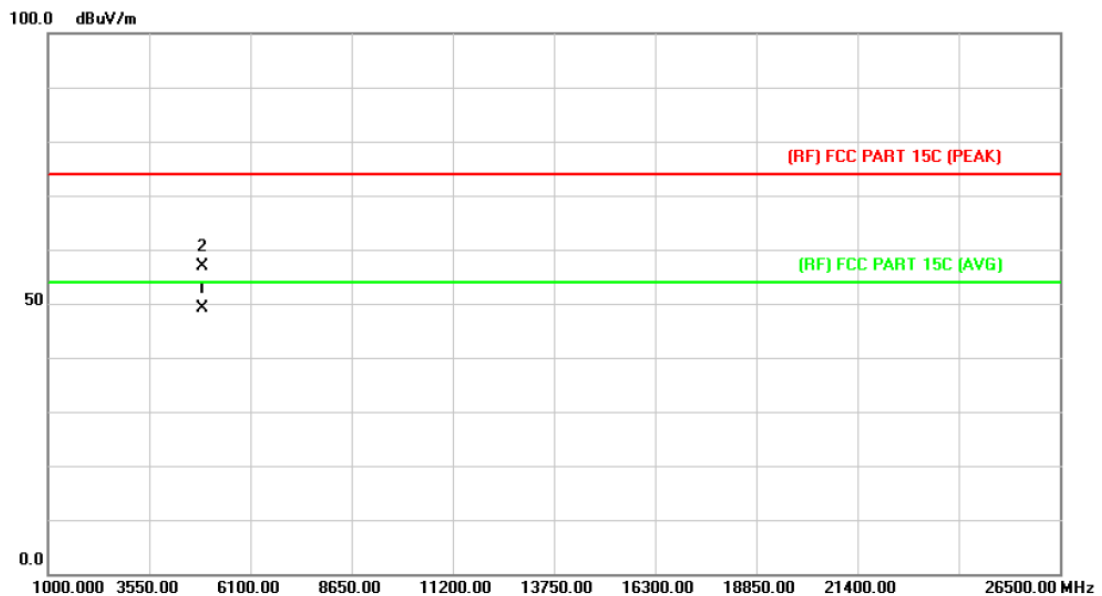

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4884.057	35.29	13.92	49.21	54.00	-4.79	AVG
2		4884.324	42.89	13.92	56.81	74.00	-17.19	peak

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	BLE Mode TX 2480 MHz (Adapter 1#)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

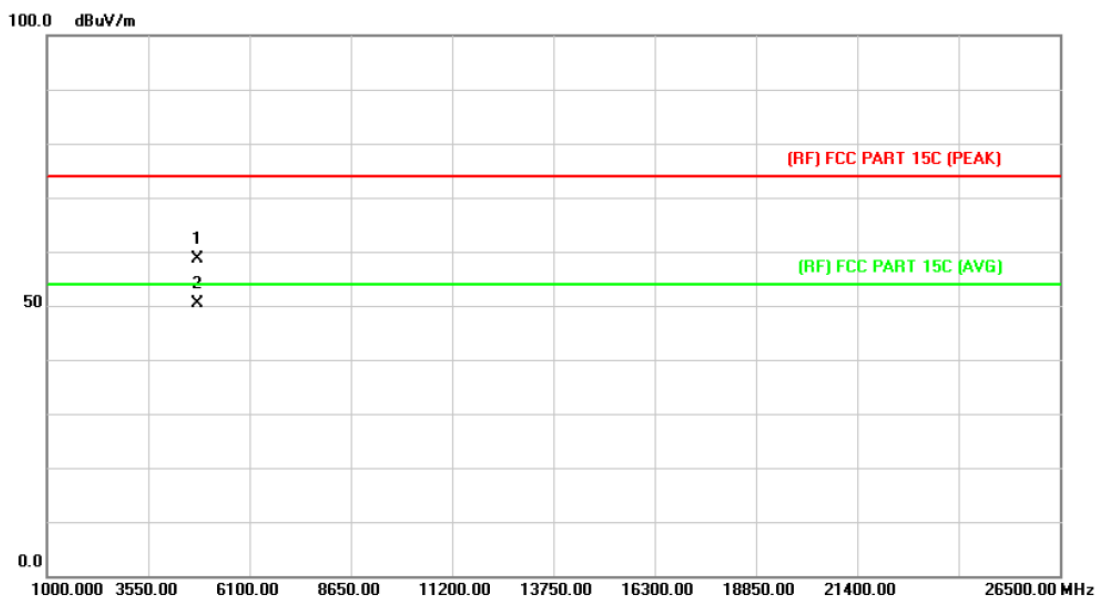

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4803.651	45.17	13.44	58.61	74.00	-15.39	peak
2	*	4804.364	36.88	13.44	50.32	54.00	-3.68	AVG

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	BLE Mode TX 2480 MHz (Adapter 1#)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

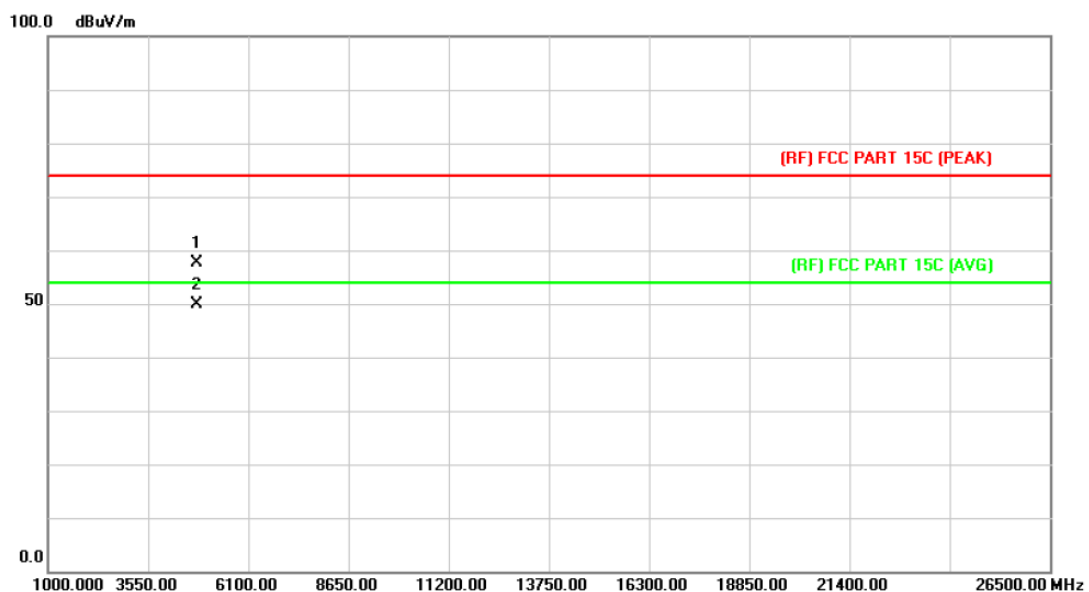

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4803.854	44.21	13.44	57.65	74.00	-16.35	peak
2	*	4804.075	36.35	13.44	49.79	54.00	-4.21	AVG

Emission Level= Read Level+ Correct Factor

6. Restricted Bands Requirement

6.1 Test Standard and Limit


6.1.1 Test Standard

FCC Part 15.209 FCC Part 15.205

6.1.2 Test Limit

Restricted Frequency Band (MHz)	Class B (dBuV/m)(at 3 M)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

6.2 Test Setup

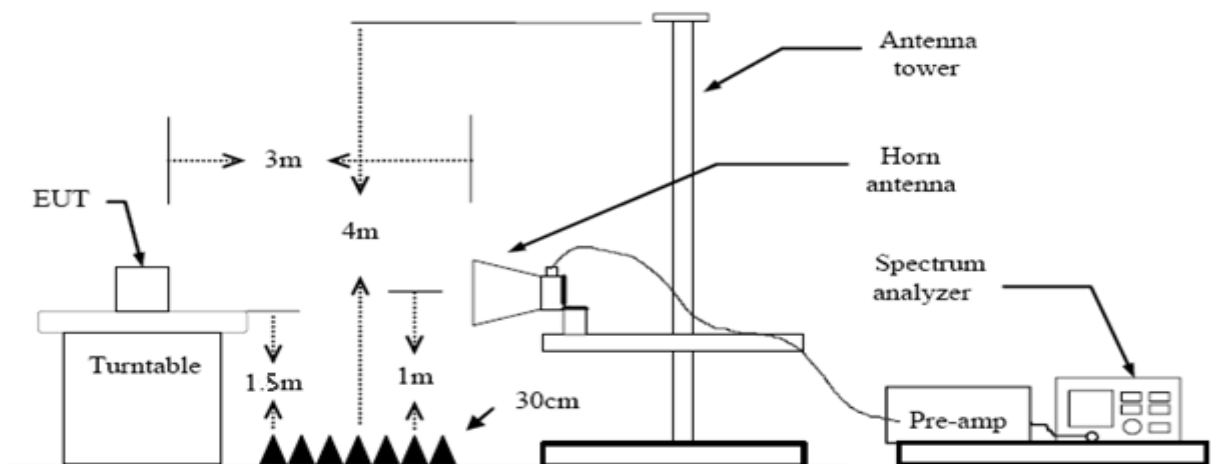

6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked

and then Quasi Peak detector mode re-measured.

- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 KHz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.


6.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 kHz with Peak Detector for Average Values.

Test data please refer the following pages.

(1) Radiation Test


EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3V		
Ant. Pol.	Horizontal		
Test Mode:	BLE Mode TX 2402 MHz (Adapter 1#)		
Remark:	N/A		

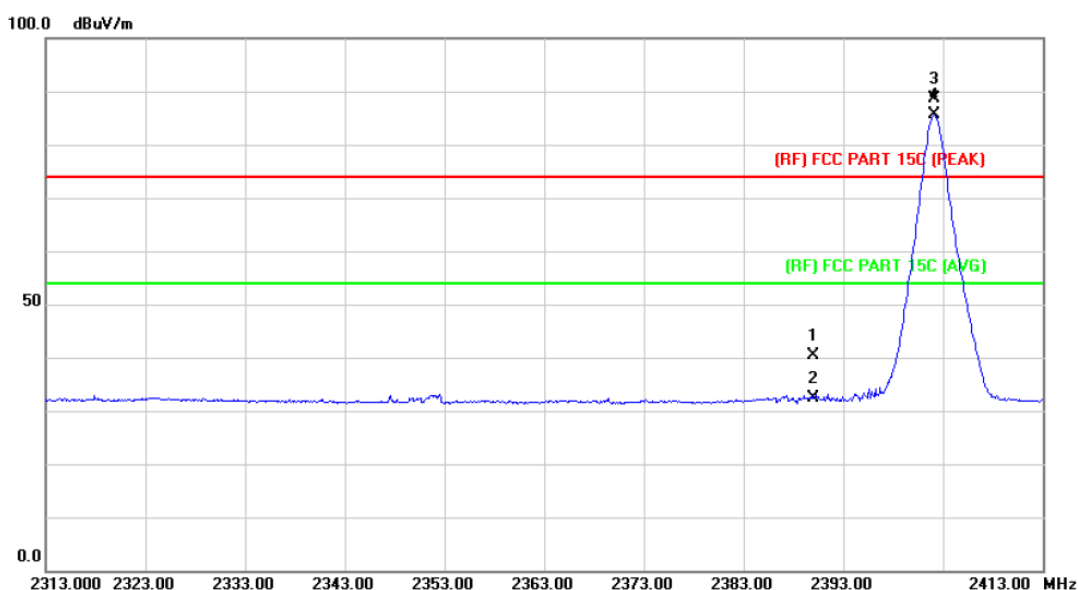

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	39.58	0.77	40.35	74.00	-33.65	peak
2		2390.000	31.57	0.77	32.34	54.00	-21.66	AVG
3	X	2402.100	87.87	0.82	88.69	Fundamental Frequency		peak
4	*	2402.100	84.84	0.82	85.66	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3V		
Ant. Pol.	Vertical		
Test Mode:	BLE Mode TX 2402 MHz (Adapter 1#)		
Remark:	N/A		

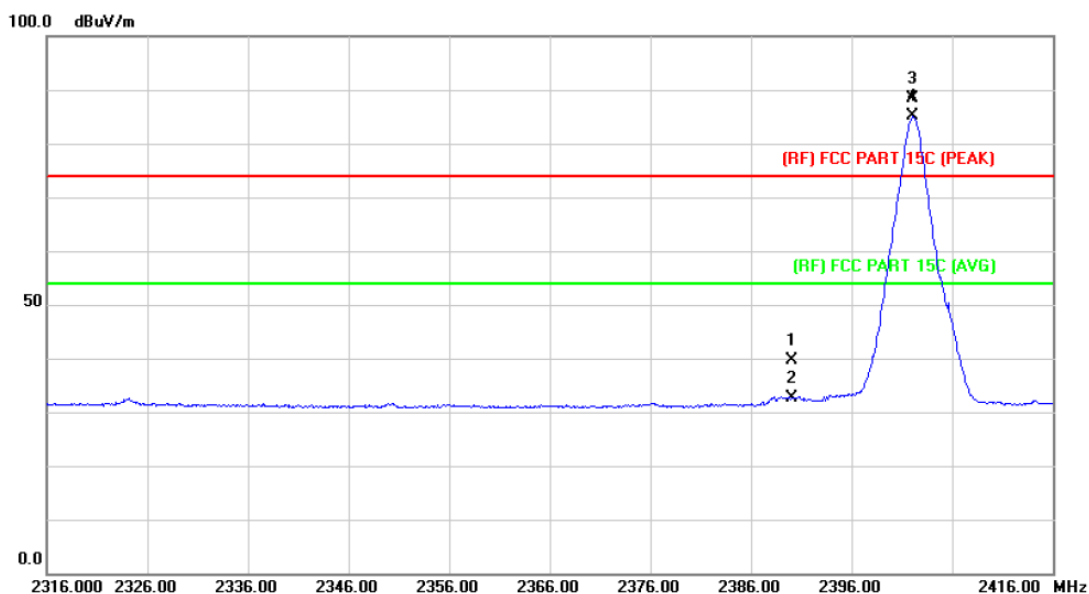

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	38.80	0.77	39.57	74.00	-34.43	peak
2		2390.000	31.77	0.77	32.54	54.00	-21.46	AVG
3	X	2402.100	87.52	0.82	88.34	Fundamental Frequency		peak
4	*	2402.100	84.19	0.82	85.01	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3V		
Ant. Pol.	Horizontal		
Test Mode:	BLE Mode TX 2480 MHz (Adapter 1#)		
Remark:	N/A		

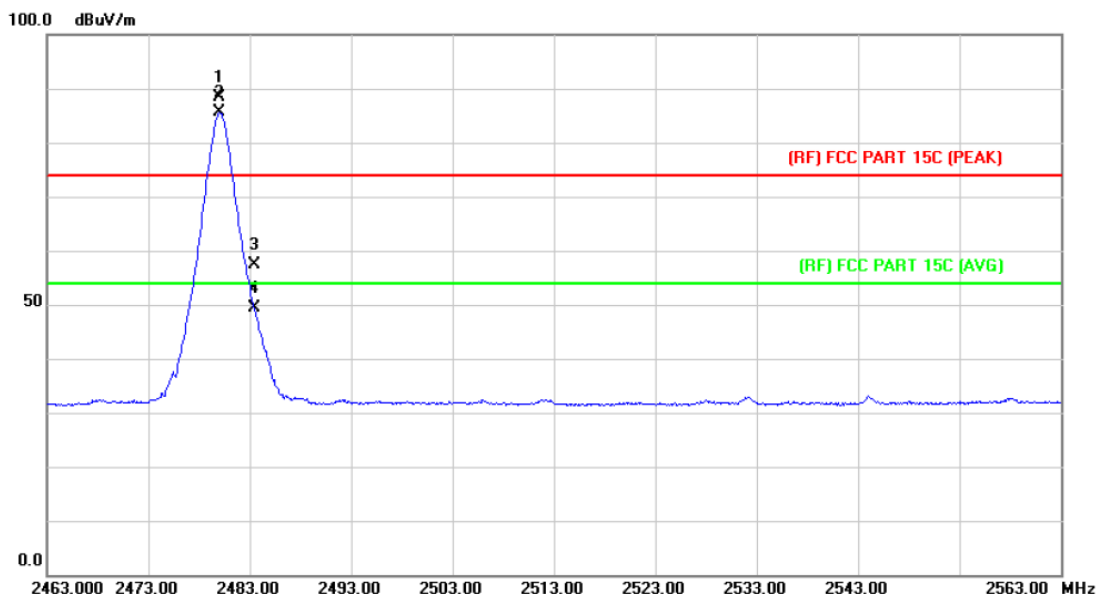

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2480.000	87.21	1.15	88.36	Fundamental Frequency		peak
2	*	2480.000	84.40	1.15	85.55	Fundamental Frequency		AVG
3		2483.500	56.17	1.17	57.34	74.00	-16.66	peak
4		2483.500	48.19	1.17	49.36	54.00	-4.64	AVG

Emission Level= Read Level+ Correct Factor

EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3V		
Ant. Pol.	Vertical		
Test Mode:	BLE Mode TX 2480 MHz (Adapter 1#)		
Remark:	N/A		


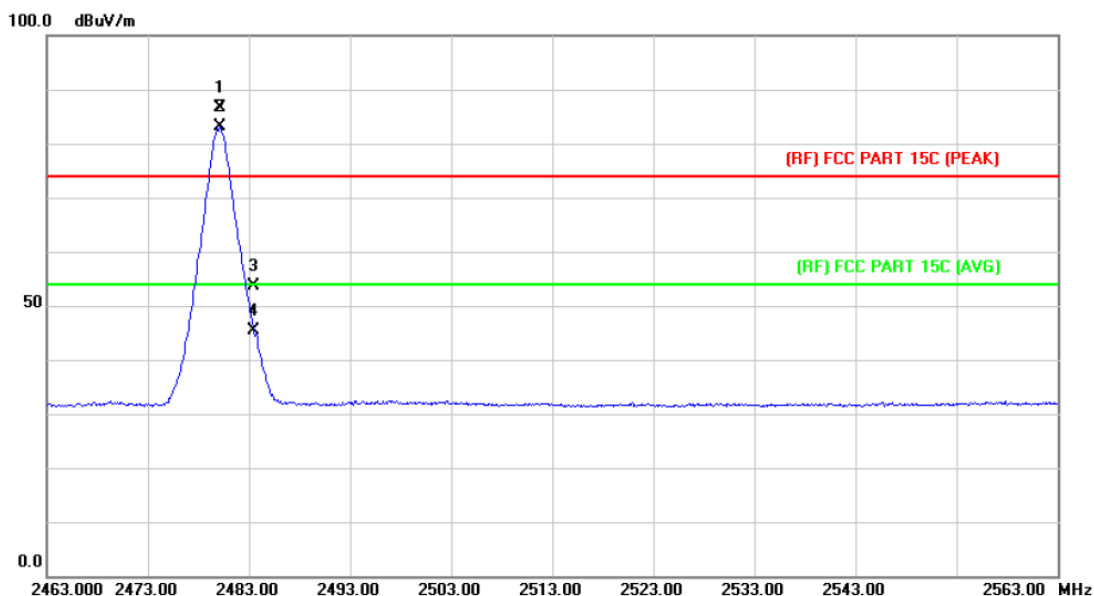


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	2480.100	85.39	1.15	86.54	Fundamental Frequency		peak
2	*	2480.100	81.89	1.15	83.04	Fundamental Frequency		AVG
3		2483.500	52.45	1.17	53.62	74.00	-20.38	peak
4		2483.500	44.27	1.17	45.44	54.00	-8.56	AVG

Emission Level= Read Level+ Correct Factor

(2) Conducted Test

EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	BLE Mode TX 2402MHz / BLE Mode TX 2480MHz		
Remark:	The EUT is programed in continuously transmitting mode		

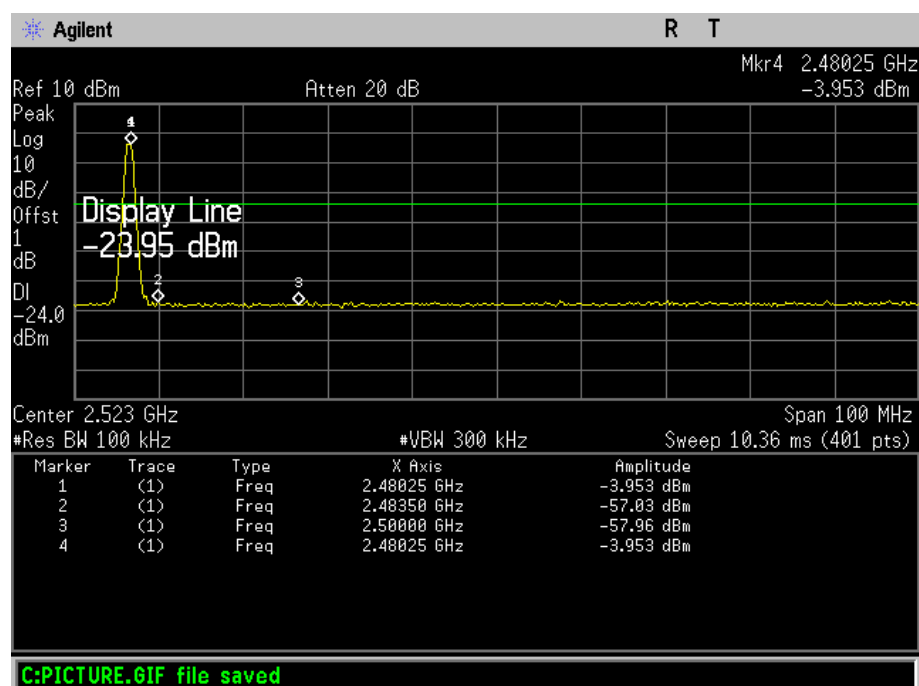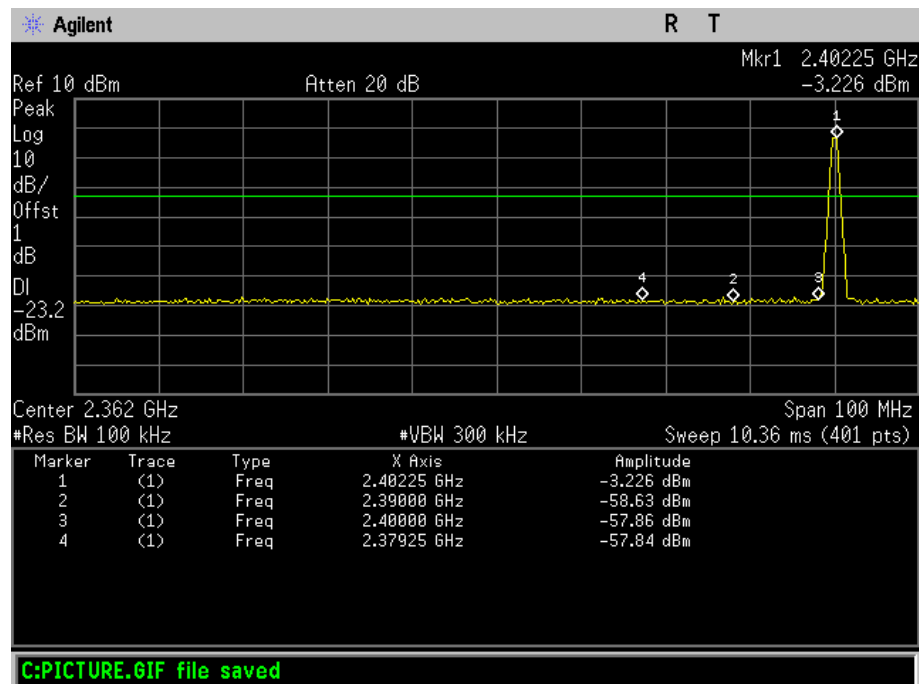

7. Bandwidth Test

7.1 Test Standard and Limit


7.1.1 Test Standard

FCC Part 15.247 (a)(2)

7.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

7.2 Test Setup



7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst -case (i.e the widest) bandwidth.
- (3) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

7.4 EUT Operating Condition


The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

7.5 Test Data

EUT:	10.1 inch MID	Model:	TM101A550L
Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.7V		
Test Mode:	BLE TX Mode		
Channel frequency (MHz)	6dB Bandwidth (kHz)	99% Bandwidth (kHz)	Limit (kHz)
2402	739.578	1040.40	>=500
2442	734.376	1039.30	
2480	737.943	1041.60	


BLE Mode

2402 MHz

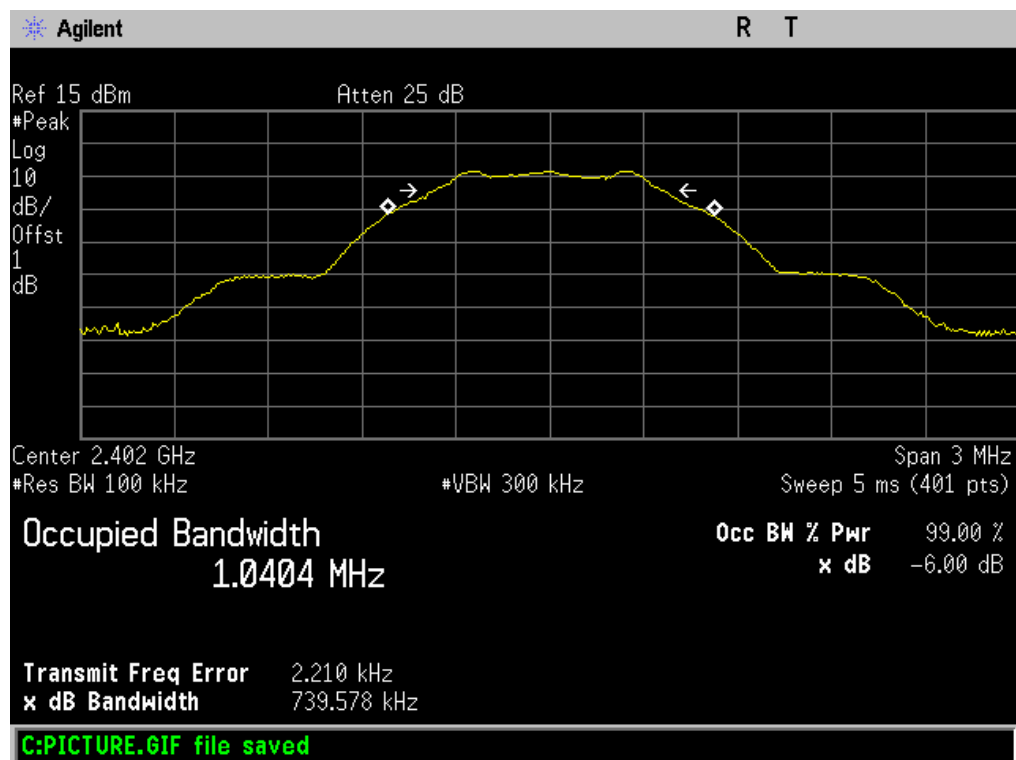


BLE Mode

2442 MHz

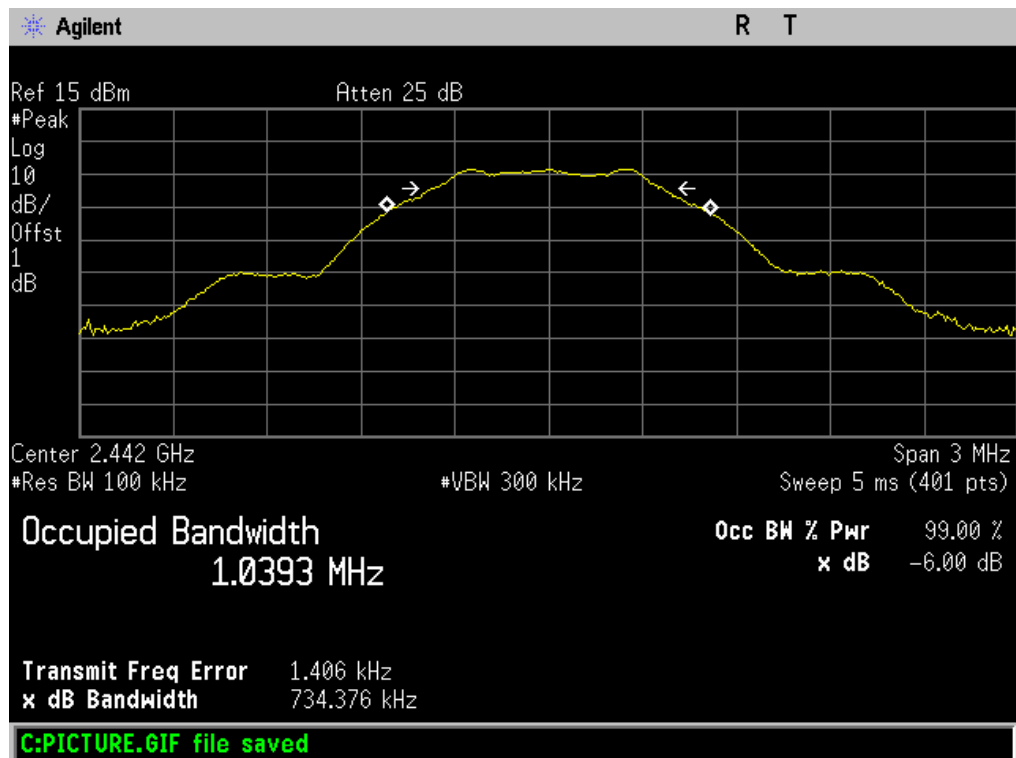

BLE Mode

2480 MHz

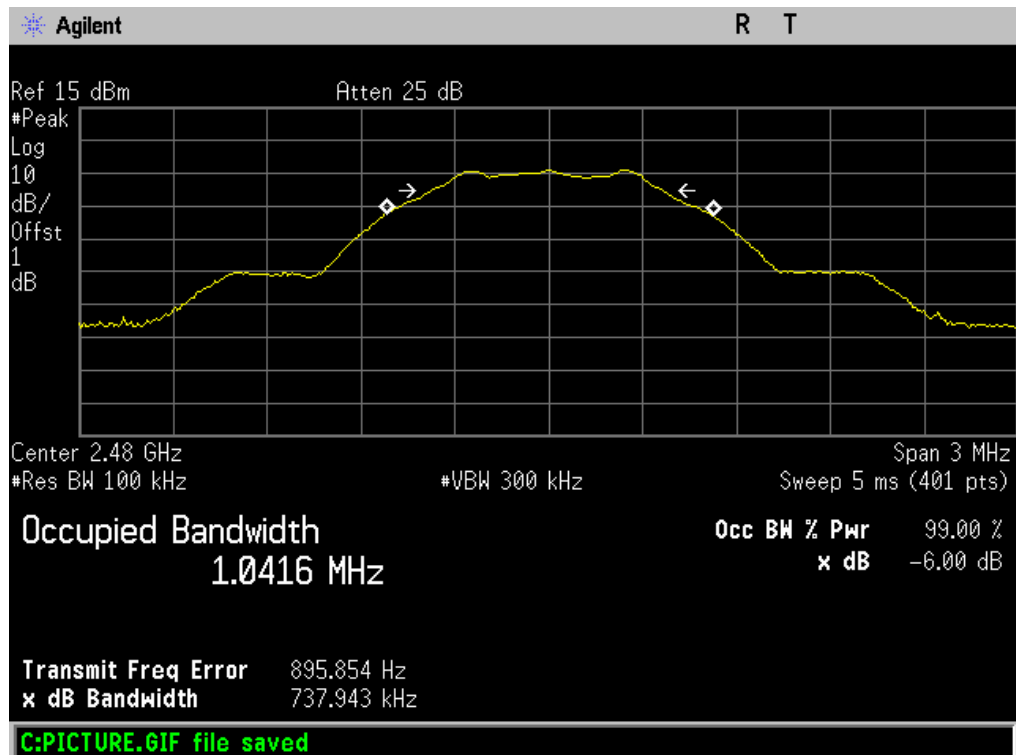

8. Peak Output Power Test

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.247 (b)

8.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

8.2 Test Setup



8.3 Test Procedure


The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to section 9.1.1 of KDB 558074 D01 DTS Meas Guidance v03r02.

- (1) Set the $RBW \geq DTS$ Bandwidth
- (2) Set $VBW \geq 3 * RBW$
- (3) Set $Span \geq 3 * RBW$
- (4) Sweep time=auto
- (5) Detector= peak
- (6) Trace mode= maxhold.
- (7) Allow trace to fully stabilize, and then use peak marker function to determine the peak amplitude level.

8.4 EUT Operating Condition


The EUT was set to continuously transmitting in the max power during the test.

8.5 Test Data

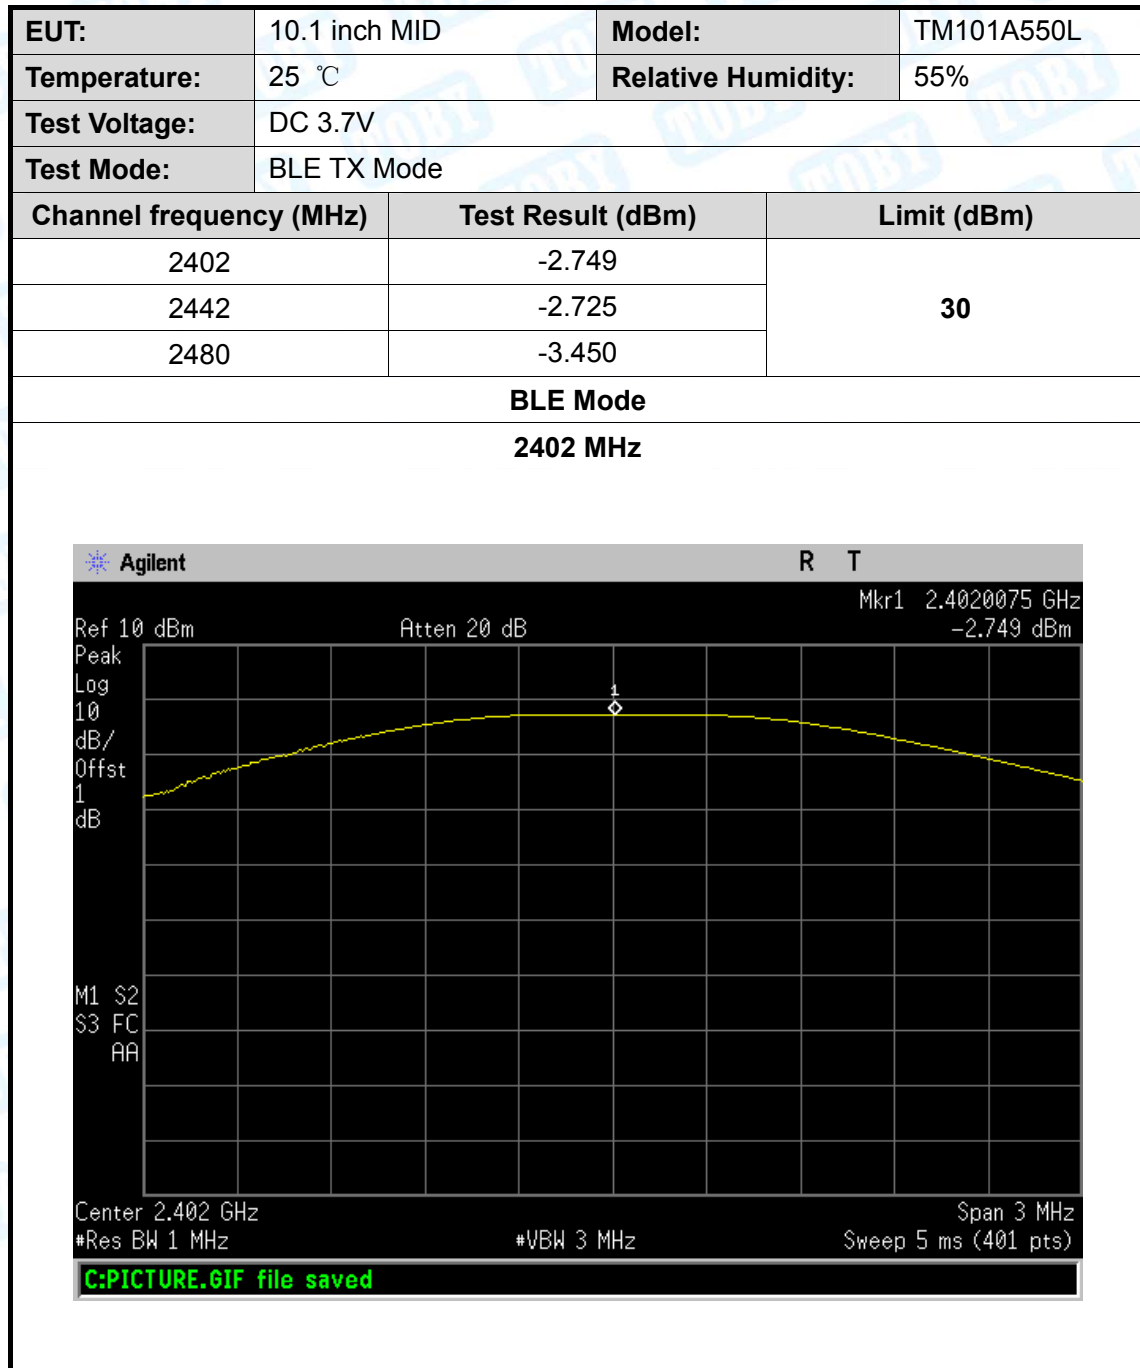


BLE Mode

2442 MHz

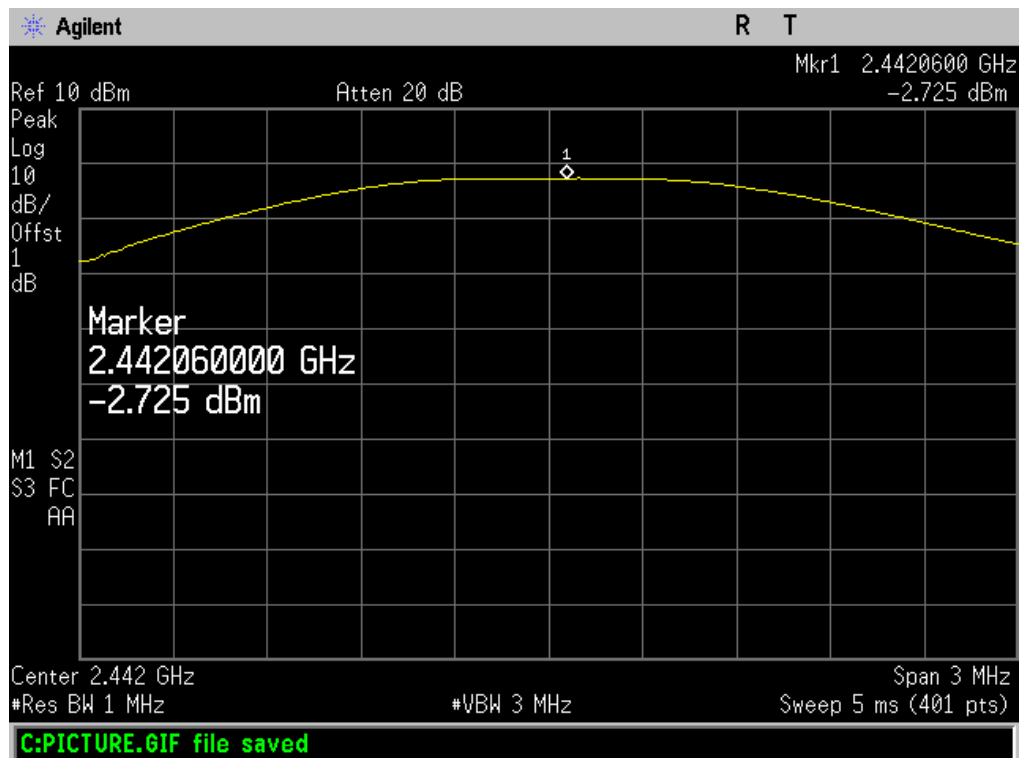

BLE Mode

2480 MHz

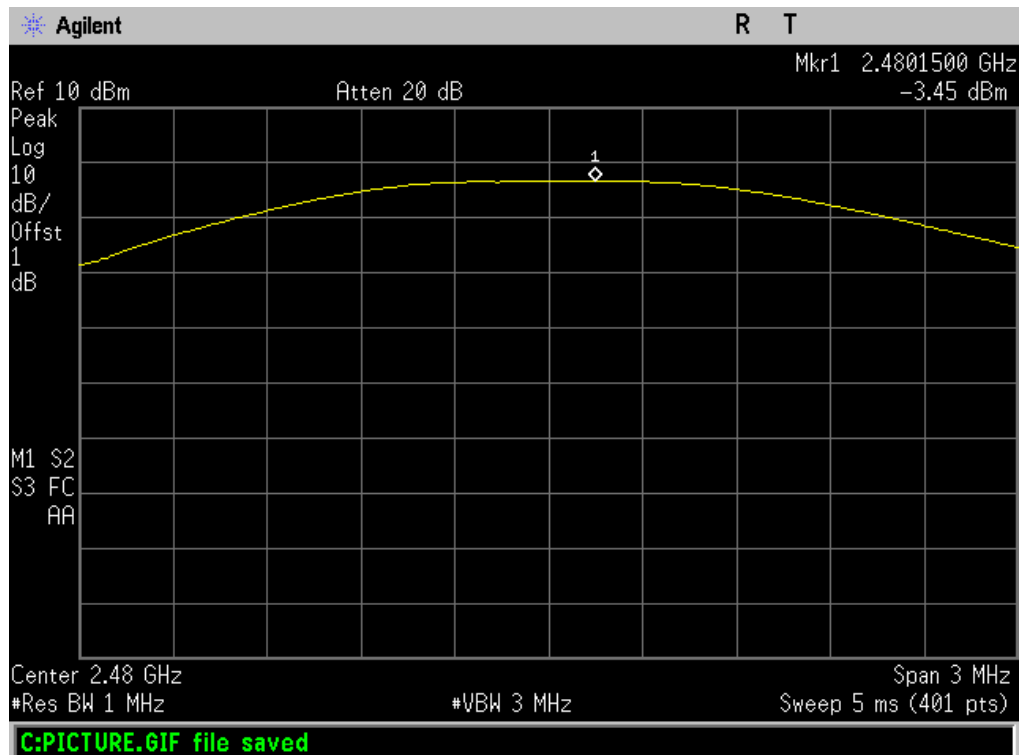

9. Power Spectral Density Test

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.247 (e)

9.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

9.2 Test Setup



9.3 Test Procedure


The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v03r02.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser center frequency to DTS channel center frequency.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

9.4 EUT Operating Condition


The EUT was set to continuously transmitting in each mode and low, Midle and high channel for the test.

8.5 Test Data

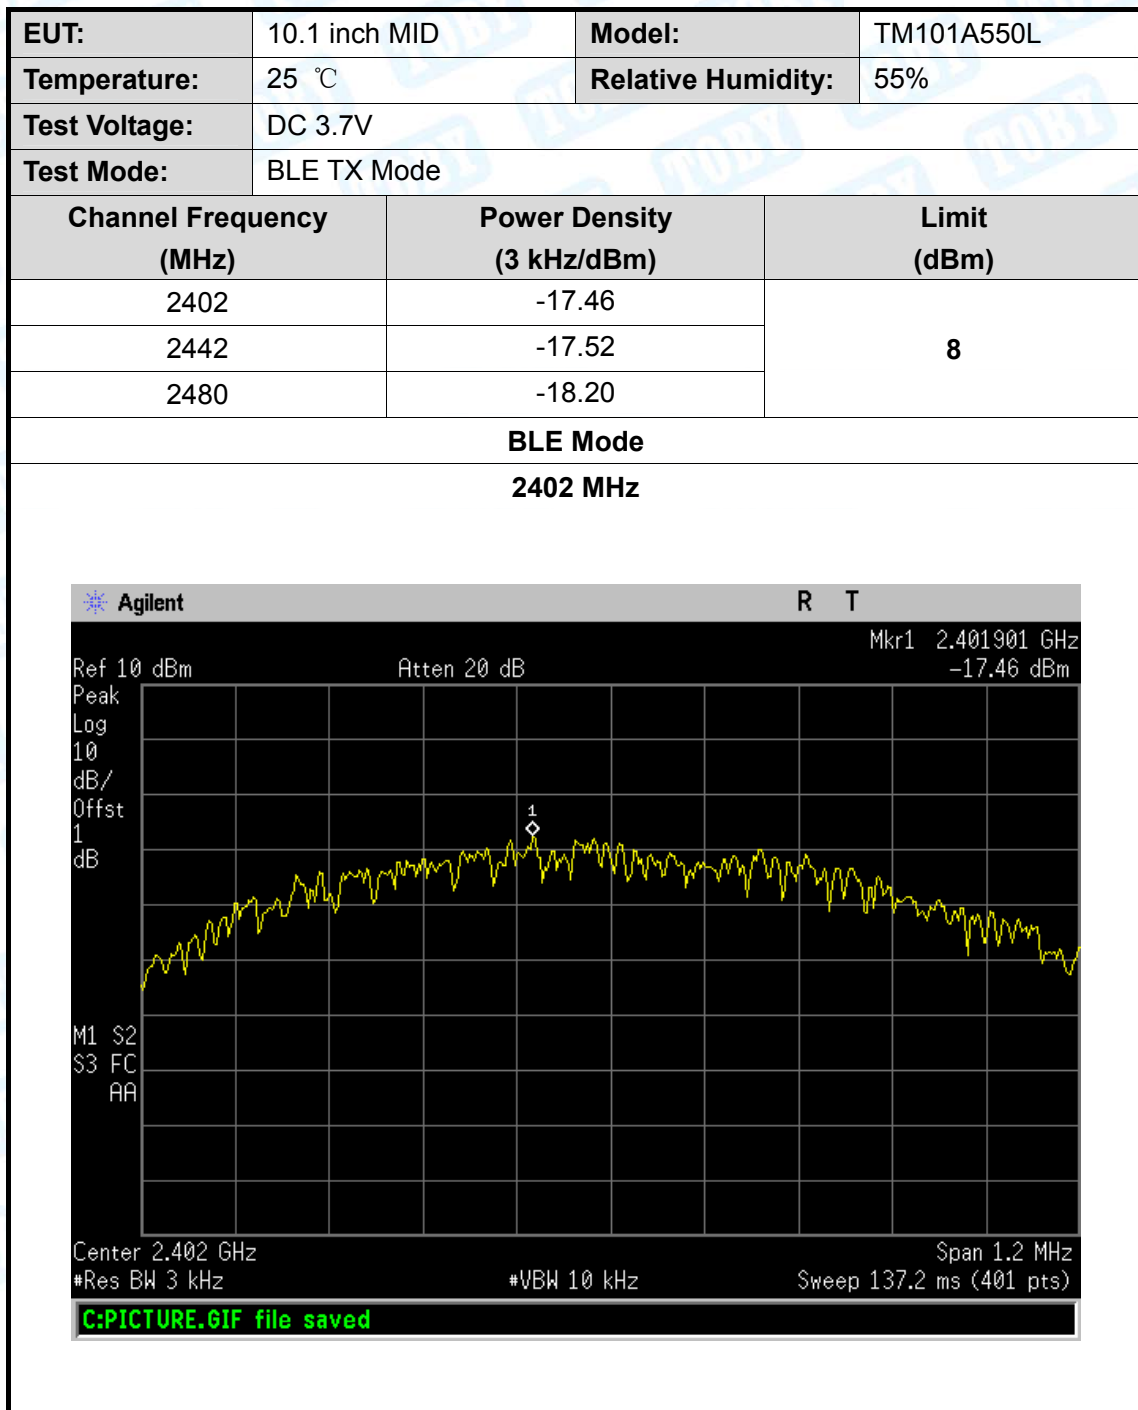


BLE Mode

2442 MHz

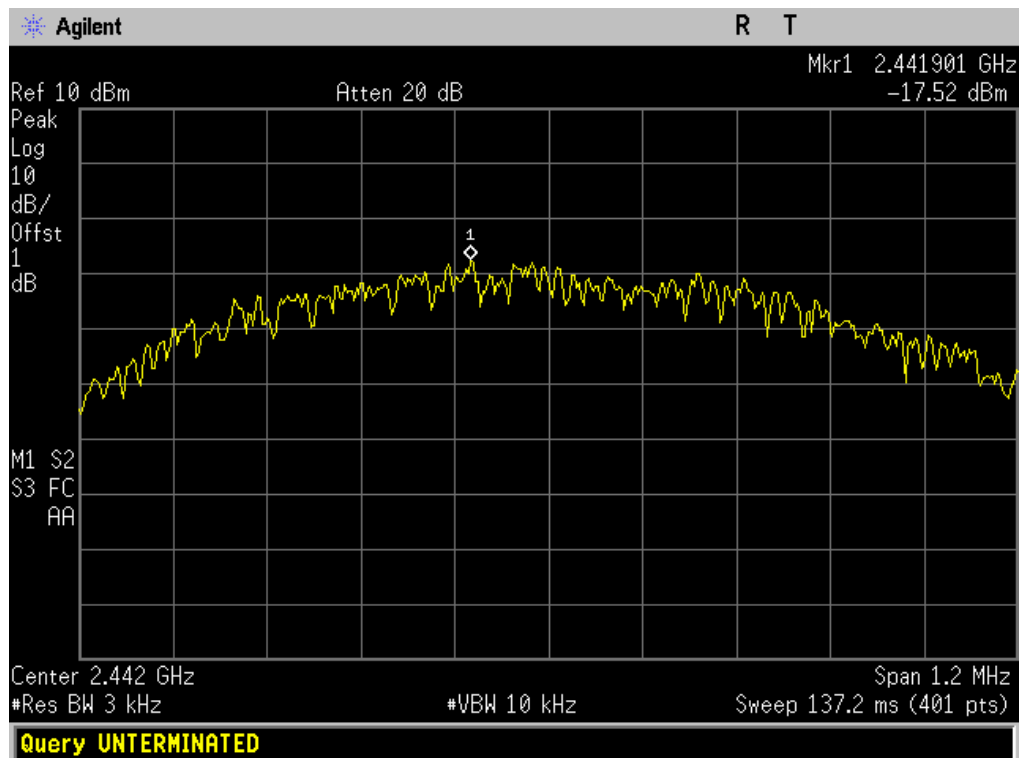

BLE Mode

2480 MHz

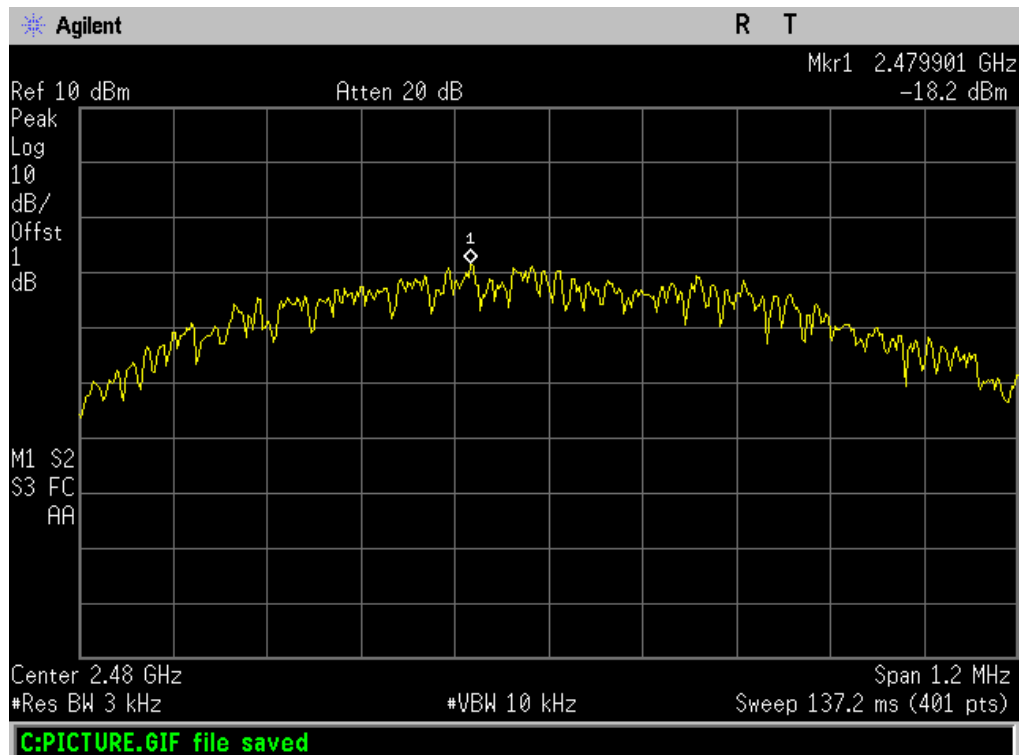

10. Antenna Requirement

10.1 Standard Requirement

10.1.1 Standard

FCC Part 15.203

10.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

10.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 2.09 dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

10.3 Result

The EUT antenna is a FPC Antenna. It complies with the standard requirement.

Antenna Type
☐ Permanent attached antenna
☒ Unique connector antenna
☐ Professional installation antenna