

TEST REPORT

Reference No. : WTF17S0682652R1E
FCC ID..... : 2ABEU-MJCTD01YL
Applicant..... : Qingdao Yeelink Information Technology Co., Ltd.
Address : F10-B4, Bldg.B, International Innovation Park, 1# Keyuanweiyi Rd.,
Laoshan, Qingdao, Shandong, China
Manufacturer : Qingdao Yeelink Information Technology Co., Ltd.
Address : F10-B4, Bldg.B, International Innovation Park, 1# Keyuanweiyi Rd.,
Laoshan, Qingdao, Shandong, China
Product Name : Mi Bedside Lamp
Model No. : MJCTD01YL
Standards..... : FCC CFR47 Part 15 C Section 15.247:2016
Date of Receipt sample..... : 2017-06-22
Date of Test..... : 2017-06-23 to 2017-07-10
Date of Issue : 2018-04-20
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Tested by:

Jack Wen

Jack Wen / Test Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REPORT REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	6
4.4 TEST MODE	7
4.5 TEST FACILITY	7
5 EQUIPMENT USED DURING TEST	8
5.1 EQUIPMENTS LIST	8
5.2 MEASUREMENT UNCERTAINTY	9
5.3 TEST EQUIPMENT CALIBRATION	9
6 TEST SUMMARY	10
7 CONDUCTED EMISSION	11
7.1 E.U.T. OPERATION	11
7.2 EUT SETUP.....	11
7.3 MEASUREMENT DESCRIPTION	11
7.4 CONDUCTED EMISSION TEST RESULT	12
8 RADIATED EMISSIONS.....	14
8.1 EUT OPERATION.....	14
8.2 TEST SETUP	15
8.3 SPECTRUM ANALYZER SETUP	16
8.4 TEST PROCEDURE	17
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
8.6 SUMMARY OF TEST RESULTS	18
9 BAND EDGE MEASUREMENT	29
9.1 TEST PRODUCE.....	29
9.2 TEST RESULT	30
10 BANDWIDTH MEASUREMENT.....	34
10.1 TEST PROCEDURE:.....	34
10.2 TEST RESULT:	34
11 MAXIMUM PEAK OUTPUT POWER	41
11.1 TEST PROCEDURE:.....	41
11.2 TEST RESULT:	41
12 POWER SPECTRAL DENSITY	42
12.1 TEST PROCEDURE:.....	42
12.2 TEST RESULT:	42
13 ANTENNA REQUIREMENT	49
14 RF EXPOSURE.....	50
14.1 REQUIREMENTS.....	50
14.2 THE PROCEDURES / LIMIT	50
14.3 MPE CALCULATION METHOD	51
15 PHOTOGRAPHS – TEST SETUP PHOTOS	52
15.1 RADIATED EMISSION	52

15.2 CONDUCTED EMISSION54

16 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS55

16.1 EUT – EXTERNAL VIEW55

16.2 EUT – INTERNAL VIEW.....60

3 Report Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF17S0682652E	Jun. 22, 2017	Jun. 23 – Jul. 10, 2017	Jul. 12, 2017	Original	-	Replaced
WTF17S0682652R1E	2017-06-22	2017-06-23 to 2017-07-10	2018-04-20	Revised	-	Valid
This report is based on WTF17S0682652E for revised the Ratings information.						

4 General Information

4.1 General Description of E.U.T

Product Name:	Mi Bedside Lamp
Model No.:	MJCTD01YL
Model Difference:	N/A
Operation Frequency:	802.11b/g/n HT20: 2412MHz ~ 2462MHz BLE: 2402-2480MHz
RF output power	Wifi: 9.86dBm BLE: 1.65dBm
The Lowest Oscillator:	32.768kHz
Antenna Gain:	3dBi
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max) BLE: GFSK
Antenna installation	: PCB Printed Antenna

4.2 Details of E.U.T.

Technical Data:	Rated input: 100-240V~50/60Hz 0.45A; Rated lamp input: 12V $\overline{\text{---}}$ 1A; Rated power: 10W (14 x 0.7W/LED module)
Adapter	Model: ASSA107A-120100
Manufacturer	AQUIL STAR PRECISION INDUSTRIAL(SHENZHEN) CO.,LTD.

4.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BLE:

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
	BLE	1 Mbps	0/19/39	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
	BLE	1 Mbps	0/19/39	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/9	TX
	BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
	BLE	1 Mbps	0/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

4.5 Test Facility

Waltek Services (Shenzhen) Co., Ltd.

Accreditations for Conformity Assessment			
Country/Region	Accreditation Body	Scope	Note
USA	A2LA (Certificate No.: 4243.01)	FCC ID\DOC\VOC	1
Canada		IC ID\VOC	2
Japan		MIC-T\MIC-R \ PSE	-
Europe		EMCD\LVD\RED	-
Taiwan		BSMI\NCC	-
Hong Kong	CNAS (Registration No. : L3110)	OFCA	-
Australia		RCM	-
South Korea		KC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. test Firm Registration No.: 328995			
2. IC Canada Registration No.: 7760A			

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.12, 2016	Sep.11, 2017
2.	LISN	R&S	ENV216	101215	Sep.12, 2016	Sep.11, 2017
3.	Cable	Top	TYPE16(3.5M)	-	Sep.12, 2016	Sep.11, 2017
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.12, 2016	Sep.11, 2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.12, 2016	Sep.11, 2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.12, 2016	Sep.11, 2017
4.	Cable	LARGE	RF300	-	Sep.12, 2016	Sep.11, 2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2016	Sep.14,2017
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Oct.16, 2016	Oct.15, 2017
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.07, 2017	Apr.06, 2018
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12, 2016	Sep.11, 2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.07, 2017	Apr.06, 2018
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.09, 2017	Apr.08, 2018
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.07, 2017	Apr.06, 2018
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.07, 2017	Apr.06, 2018
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Apr.06, 2017	Apr.07, 2018
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr.07, 2017	Apr.06, 2018
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Apr.13, 2017	Apr.12, 2018
4	Cable	HUBER+SUHNER	CBL2	525178	Apr.07, 2017	Apr.06, 2018

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2016	Sep.14,2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2016	Sep.14,2017
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2016	Sep.14,2017

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

6 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	C
Conducted Emissions	15.207(a)	C
Bandwidth	15.247(a)(2)	C
Maximum Peak Output Power	15.247(b)(3),(4)	C
Power Spectral Density	15.247(e)	C
Band Edge	15.247(d)	C
Antenna Requirement	15.203	C
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013,ANSI C63.4:2014
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

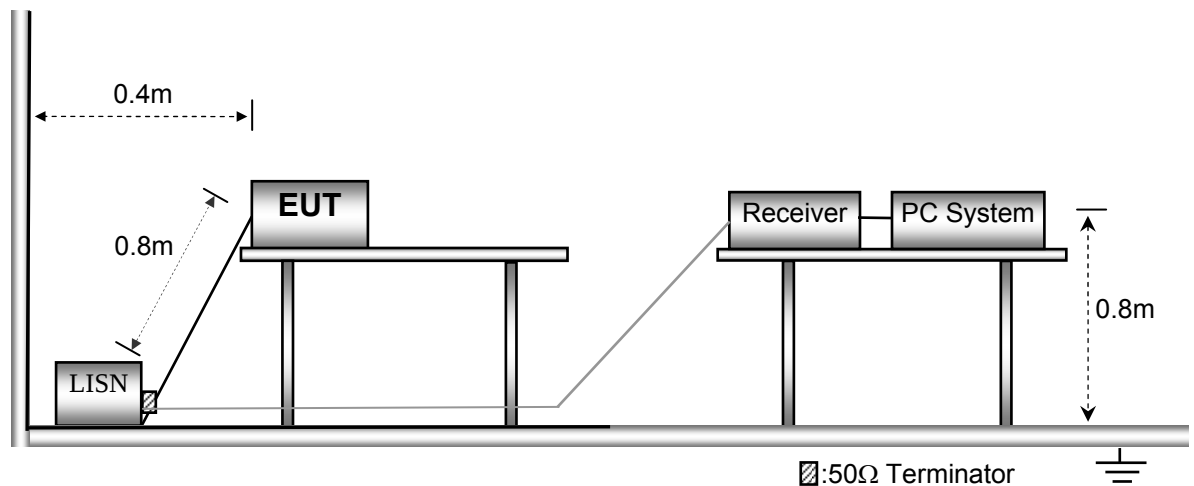

7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Only the worst case (WIFI transmitting mode) test data were record in the report.

Live line:

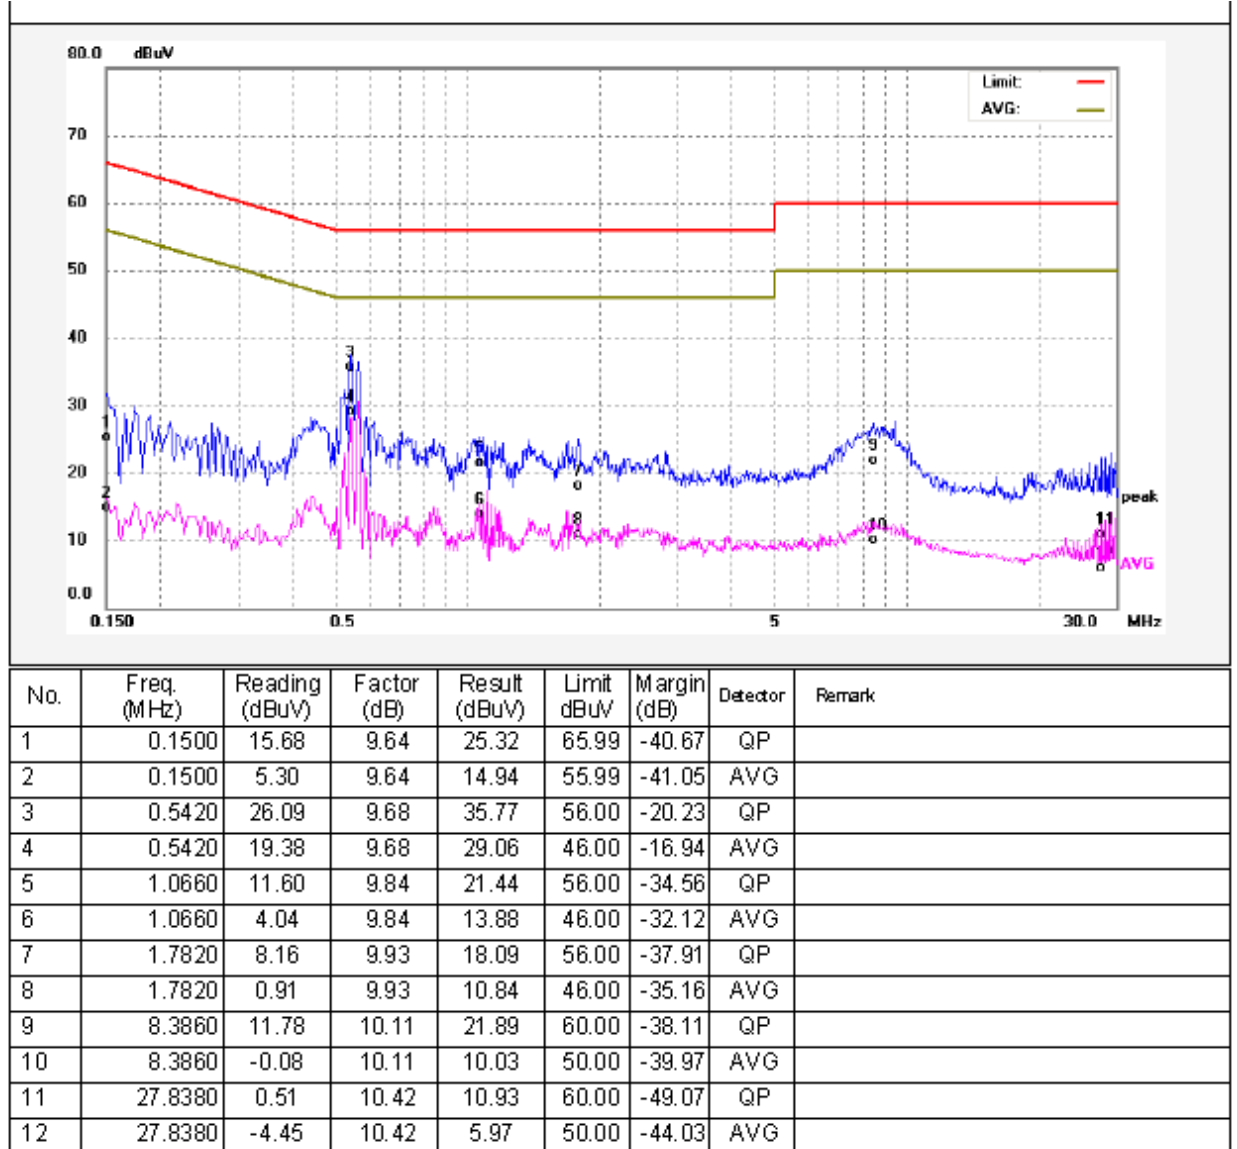

Neutral line:

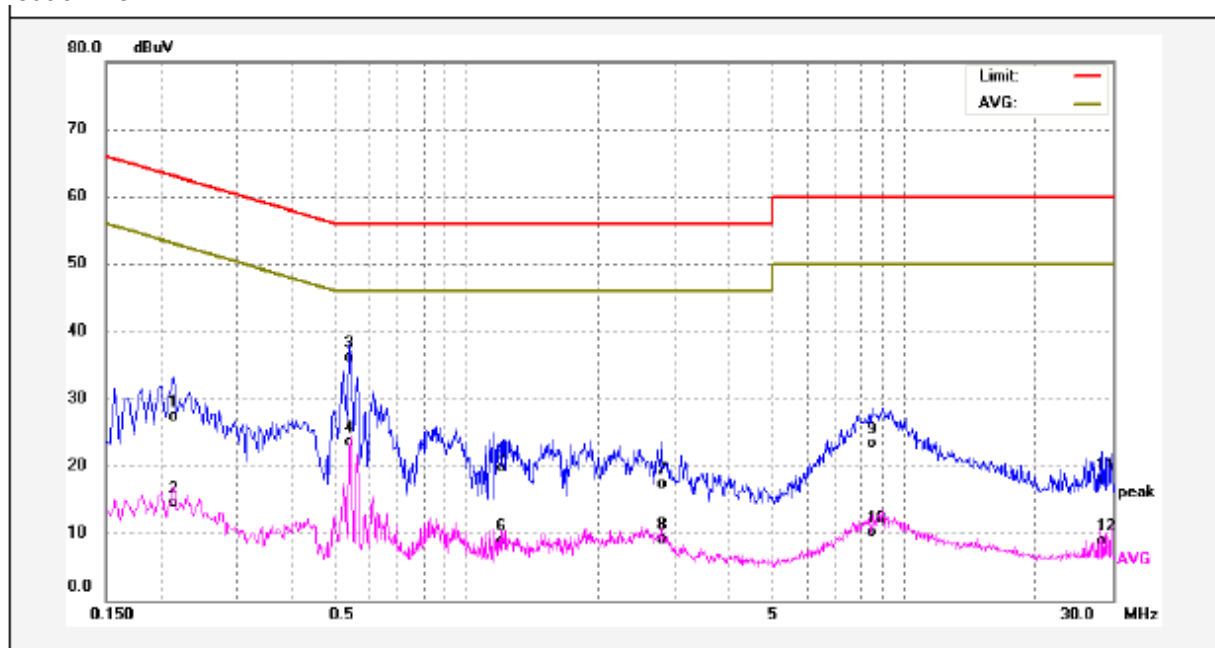

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2140	17.76	9.63	27.39	63.04	-35.65	QP	
2	0.2140	4.94	9.63	14.57	53.04	-38.47	AVG	
3	0.5420	26.42	9.68	36.10	56.00	-19.90	QP	
4	0.5420	13.82	9.68	23.50	46.00	-22.50	AVG	
5	1.2100	9.93	9.87	19.80	56.00	-36.20	QP	
6	1.2100	-0.94	9.87	8.93	46.00	-37.07	AVG	
7	2.8060	7.38	9.93	17.31	56.00	-38.69	QP	
8	2.8060	-0.76	9.93	9.17	46.00	-36.83	AVG	
9	8.4340	13.29	10.11	23.40	60.00	-36.60	QP	
10	8.4340	-0.02	10.11	10.09	50.00	-39.91	AVG	
11	28.3660	7.43	10.42	17.85	60.00	-42.15	QP	
12	28.3660	-1.47	10.42	8.95	50.00	-41.05	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013,ANSI C63.4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(kHz)$	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(kHz)$	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

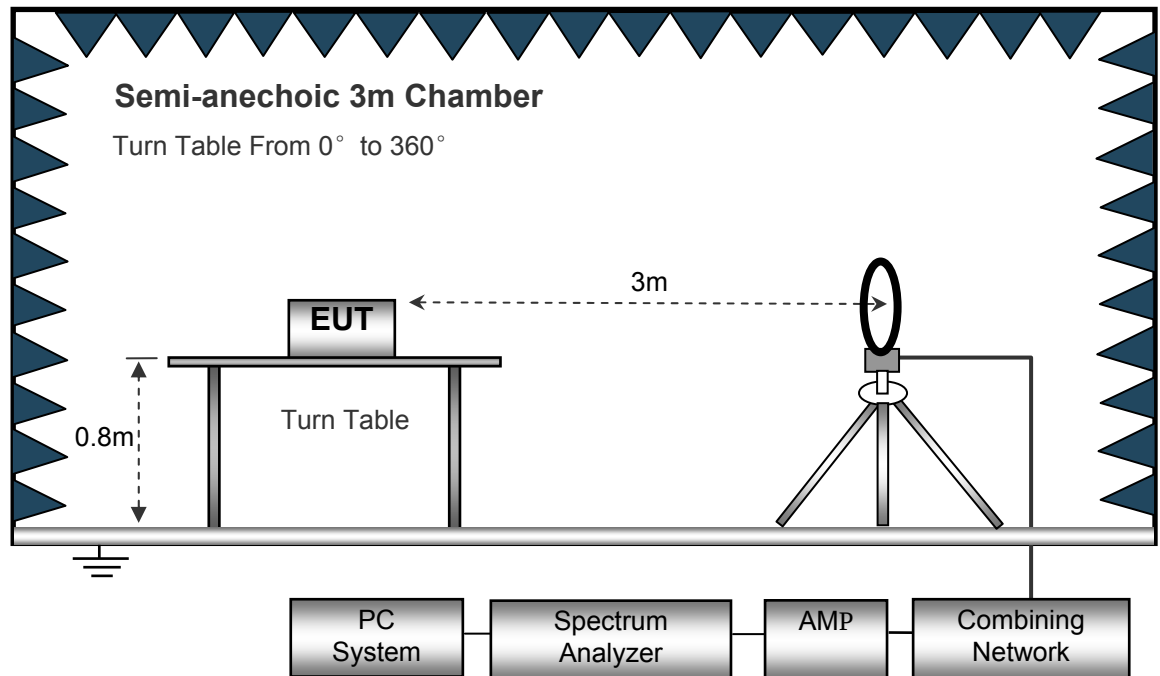

The test setup for emission measurement from 30 MHz to 1 GHz.

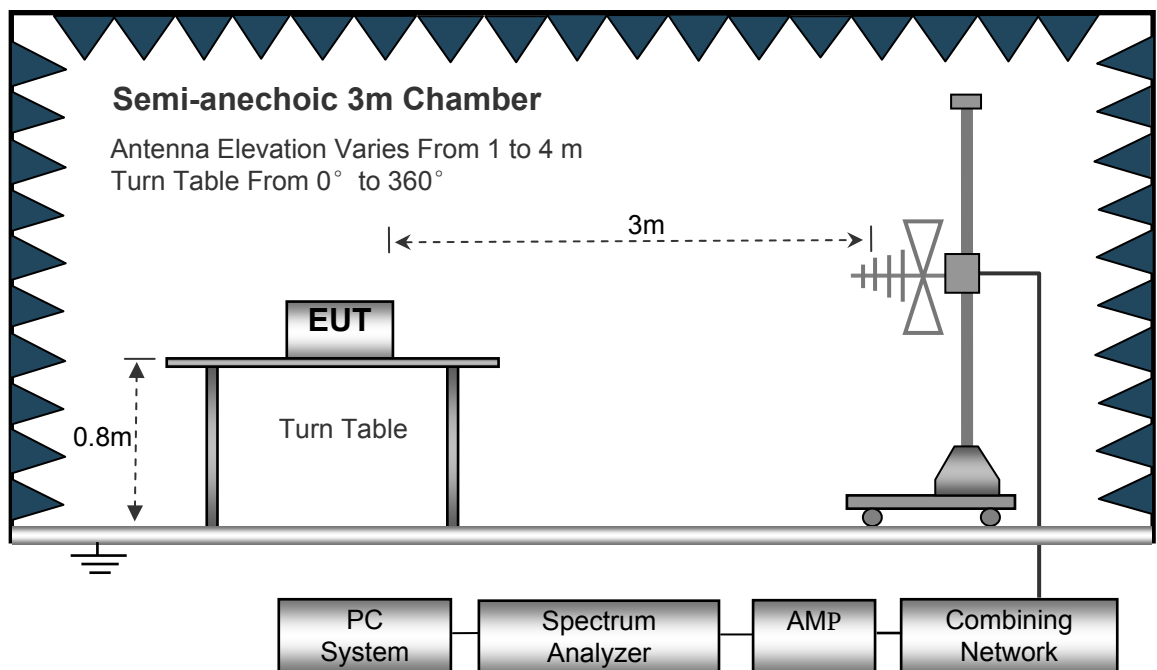

The test setup for emission measurement above 1 GHz.

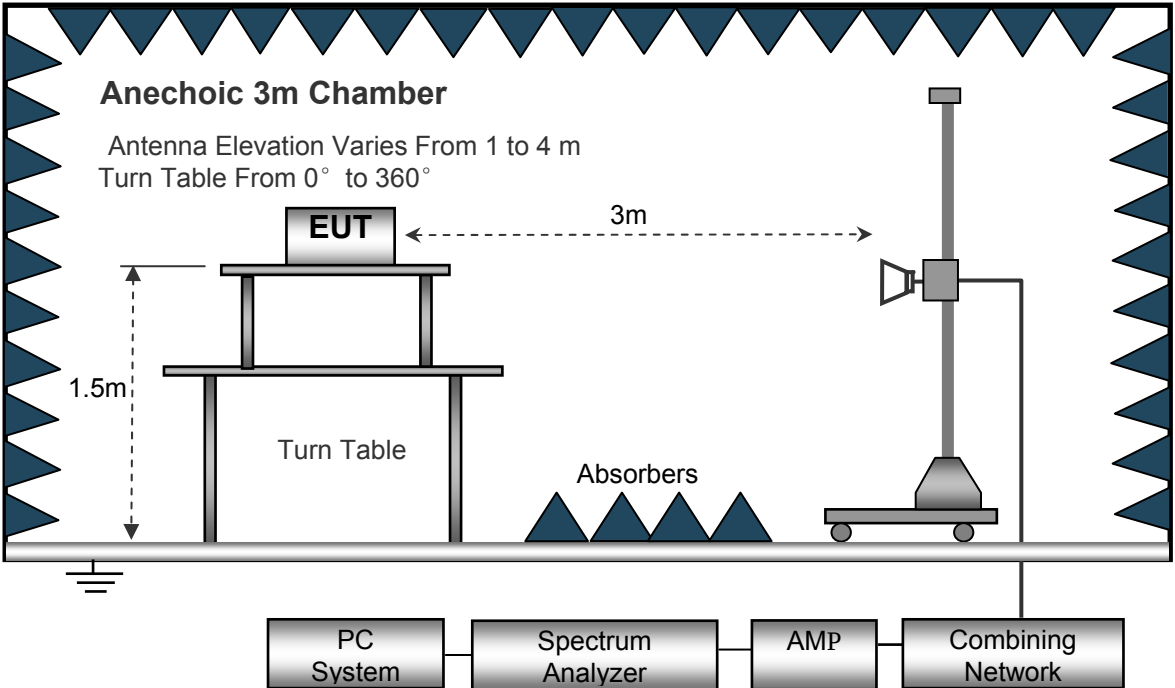

8.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed Auto
- IF Bandwidth.....10kHz
- Video Bandwidth.....10kHz
- Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....100kHz
- Video Bandwidth.....300kHz

Above 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....3MHz
- DetectorAve.
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane;
For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

WIFI and BLE:

Test Frequency : 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

WIFI:

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
223.69	40.96	QP	348.32	1.24	H	11.59	29.37	46.00	-16.63
223.69	36.52	QP	17.10	1.36	V	11.59	24.93	46.00	-21.07
4824.00	50.18	PK	201.84	1.32	V	1.23	48.95	74.00	-25.05
4824.00	45.29	Ave	201.84	1.32	V	1.23	44.06	54.00	-9.94
7236.00	40.28	PK	46.18	1.34	H	1.33	41.61	74.00	-32.39
7236.00	41.02	Ave	46.18	1.34	H	1.33	42.35	54.00	-11.65
2326.13	45.97	PK	349.84	1.14	V	13.11	32.86	74.00	-41.14
2326.13	38.93	Ave	349.84	1.14	V	13.11	25.82	54.00	-28.18
2365.81	42.50	PK	187.92	1.04	H	13.63	28.87	74.00	-45.13
2365.81	36.90	Ave	187.92	1.04	H	13.63	23.27	54.00	-30.73
2496.75	43.71	PK	227.81	1.54	V	13.50	30.21	74.00	-43.79
2496.75	38.89	Ave	227.81	1.54	V	13.50	25.39	54.00	-28.61

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
223.69	39.83	QP	174.75	1.43	H	11.22	28.61	46.00	-17.39
223.69	36.68	QP	135.54	1.12	V	11.22	25.46	46.00	-20.54
4874.00	51.20	PK	355.55	1.48	V	1.00	50.20	74.00	-23.80
4874.00	45.79	Ave	355.55	1.48	V	1.00	44.79	54.00	-9.21
7311.00	40.88	PK	116.78	1.70	H	2.21	43.09	74.00	-30.91
7311.00	40.06	Ave	116.78	1.70	H	2.21	42.27	54.00	-11.73
2312.95	46.59	PK	224.39	1.09	V	13.02	33.57	74.00	-40.43
2312.95	38.42	Ave	224.39	1.09	V	13.02	25.40	54.00	-28.60
2358.51	42.96	PK	64.83	1.83	H	13.25	29.71	74.00	-44.29
2358.51	37.08	Ave	64.83	1.83	H	13.25	23.83	54.00	-30.17
2488.45	44.03	PK	109.11	1.23	V	13.08	30.95	74.00	-43.05
2488.45	37.62	Ave	109.11	1.23	V	13.08	24.54	54.00	-29.46

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
223.69	39.53	QP	340.71	1.22	H	11.00	28.53	46.00	-17.47
223.69	36.90	QP	273.38	1.49	V	11.00	25.90	46.00	-20.10
4924.00	50.98	PK	296.03	1.92	V	1.52	49.46	74.00	-24.54
4924.00	46.37	Ave	296.03	1.92	V	1.52	44.85	54.00	-9.15
7386.00	40.16	PK	76.61	1.94	H	2.84	43.00	74.00	-31.00
7386.00	38.92	Ave	76.61	1.94	H	2.84	41.76	54.00	-12.24
2348.18	46.55	PK	54.67	1.06	V	13.24	33.31	74.00	-40.69
2348.18	38.54	Ave	54.67	1.06	V	13.24	25.30	54.00	-28.70
2361.22	42.87	PK	109.39	1.13	H	13.18	29.69	74.00	-44.31
2361.22	36.94	Ave	109.39	1.13	H	13.18	23.76	54.00	-30.24
2491.98	42.09	PK	205.74	1.82	V	13.02	29.07	74.00	-44.93
2491.98	36.05	Ave	205.74	1.82	V	13.02	23.03	54.00	-30.97

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
223.69	38.21	QP	222.02	1.10	H	11.59	26.62	46.00	-19.38
223.69	37.54	QP	329.42	1.61	V	11.59	25.95	46.00	-20.05
4824.00	51.20	PK	77.48	1.26	V	1.23	49.97	74.00	-24.03
4824.00	45.44	Ave	77.48	1.26	V	1.23	44.21	54.00	-9.79
7236.00	41.65	PK	109.92	1.87	H	1.33	42.98	74.00	-31.02
7236.00	40.11	Ave	109.92	1.87	H	1.33	41.44	54.00	-12.56
2332.32	45.65	PK	147.60	1.58	V	13.11	32.54	74.00	-41.46
2332.32	39.88	Ave	147.60	1.58	V	13.11	26.77	54.00	-27.23
2367.60	44.42	PK	134.66	1.32	H	13.63	30.79	74.00	-43.21
2367.60	36.37	Ave	134.66	1.32	H	13.63	22.74	54.00	-31.26
2483.71	44.60	PK	126.13	1.05	V	13.50	31.10	74.00	-42.90
2483.71	37.99	Ave	126.13	1.05	V	13.50	24.49	54.00	-29.51

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
223.69	38.13	QP	128.88	1.99	H	11.22	26.91	46.00	-19.09
223.69	36.85	QP	241.89	1.87	V	11.22	25.63	46.00	-20.37
4874.00	50.64	PK	136.39	1.41	V	1.00	49.64	74.00	-24.36
4874.00	44.53	Ave	136.39	1.41	V	1.00	43.53	54.00	-10.47
7311.00	40.68	PK	214.45	1.09	H	2.21	42.89	74.00	-31.11
7311.00	39.41	Ave	214.45	1.09	H	2.21	41.62	54.00	-12.38
2325.17	46.93	PK	279.56	1.83	V	13.02	33.91	74.00	-40.09
2325.17	38.91	Ave	279.56	1.83	V	13.02	25.89	54.00	-28.11
2372.65	44.52	PK	91.46	1.21	H	13.25	31.27	74.00	-42.73
2372.65	36.90	Ave	91.46	1.21	H	13.25	23.65	54.00	-30.35
2486.45	43.34	PK	79.80	1.72	V	13.08	30.26	74.00	-43.74
2486.45	37.33	Ave	79.80	1.72	V	13.08	24.25	54.00	-29.75

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
223.69	38.13	QP	279.85	1.92	H	11.00	27.13	46.00	-18.87
223.69	35.53	QP	228.00	1.30	V	11.00	24.53	46.00	-21.47
4924.00	51.05	PK	189.60	1.77	V	1.52	49.53	74.00	-24.47
4924.00	44.21	Ave	189.60	1.77	V	1.52	42.69	54.00	-11.31
7386.00	39.97	PK	24.95	1.42	H	2.84	42.81	74.00	-31.19
7386.00	38.66	Ave	24.95	1.42	H	2.84	41.50	54.00	-12.50
2326.25	46.80	PK	144.74	1.06	V	13.24	33.56	74.00	-40.44
2326.25	39.19	Ave	144.74	1.06	V	13.24	25.95	54.00	-28.05
2361.34	43.55	PK	176.10	1.09	H	13.18	30.37	74.00	-43.63
2361.34	36.86	Ave	176.10	1.09	H	13.18	23.68	54.00	-30.32
2497.44	44.23	PK	81.45	1.40	V	13.02	31.21	74.00	-42.79
2497.44	36.18	Ave	81.45	1.40	V	13.02	23.16	54.00	-30.84

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
223.69	38.95	QP	172.64	1.89	H	11.59	27.36	46.00	-18.64
223.69	34.41	QP	5.45	1.92	V	11.59	22.82	46.00	-23.18
4824.00	52.10	PK	230.76	1.78	V	1.23	50.87	74.00	-23.13
4824.00	44.54	Ave	230.76	1.78	V	1.23	43.31	54.00	-10.69
7236.00	38.83	PK	28.81	1.56	H	1.33	40.16	74.00	-33.84
7236.00	39.55	Ave	28.81	1.56	H	1.33	40.88	54.00	-13.12
2331.54	46.76	PK	112.50	1.77	V	13.11	33.65	74.00	-40.35
2331.54	38.65	Ave	112.50	1.77	V	13.11	25.54	54.00	-28.46
2379.58	43.57	PK	347.11	1.39	H	13.63	29.94	74.00	-44.06
2379.58	38.39	Ave	347.11	1.39	H	13.63	24.76	54.00	-29.24
2496.19	42.84	PK	132.18	1.23	V	13.50	29.34	74.00	-44.66
2496.19	36.41	Ave	132.18	1.23	V	13.50	22.91	54.00	-31.09

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
223.69	39.41	QP	37.50	1.26	H	11.22	28.19	46.00	-17.81
223.69	33.18	QP	307.96	1.93	V	11.22	21.96	46.00	-24.04
4874.00	53.31	PK	203.11	1.89	V	1.00	52.31	74.00	-21.69
4874.00	45.10	Ave	203.11	1.89	V	1.00	44.10	54.00	-9.90
7311.00	38.29	PK	154.21	1.38	H	2.21	40.50	74.00	-33.50
7311.00	40.73	Ave	154.21	1.38	H	2.21	42.94	54.00	-11.06
2324.56	46.91	PK	242.31	1.58	V	13.02	33.89	74.00	-40.11
2324.56	37.43	Ave	242.31	1.58	V	13.02	24.41	54.00	-29.59
2371.08	42.54	PK	149.77	1.48	H	13.25	29.29	74.00	-44.71
2371.08	36.79	Ave	149.77	1.48	H	13.25	23.54	54.00	-30.46
2489.91	42.55	PK	298.17	1.58	V	13.08	29.47	74.00	-44.53
2489.91	37.10	Ave	298.17	1.58	V	13.08	24.02	54.00	-29.98

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
223.69	37.97	QP	12.65	1.56	H	11.00	26.97	46.00	-19.03
223.69	33.21	QP	97.42	1.69	V	11.00	22.21	46.00	-23.79
4924.00	52.97	PK	280.72	1.64	V	1.52	51.45	74.00	-22.55
4924.00	44.95	Ave	280.72	1.64	V	1.52	43.43	54.00	-10.57
7386.00	38.78	PK	2.87	1.62	H	2.84	41.62	74.00	-32.38
7386.00	40.43	Ave	2.87	1.62	H	2.84	43.27	54.00	-10.73
2342.53	46.88	PK	179.74	1.66	V	13.24	33.64	74.00	-40.36
2342.53	38.76	Ave	179.74	1.66	V	13.24	25.52	54.00	-28.48
2371.72	43.25	PK	292.37	1.38	H	13.18	30.07	74.00	-43.93
2371.72	38.94	Ave	292.37	1.38	H	13.18	25.76	54.00	-28.24
2498.94	42.27	PK	283.86	1.26	V	13.02	29.25	74.00	-44.75
2498.94	37.50	Ave	283.86	1.26	V	13.02	24.48	54.00	-29.52

BLE:

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel 2402MHz									
236.66	36.59	QP	320	1.2	H	-13.35	23.24	46.00	-22.76
236.66	41.02	QP	59	1.5	V	-13.35	27.67	46.00	-18.33
4804.00	46.25	PK	289	1.6	V	-1.06	45.19	74.00	-28.81
4804.00	42.15	Ave	289	1.6	V	-1.06	41.09	54.00	-12.91
7206.00	40.12	PK	44	1.2	H	1.33	41.45	74.00	-32.55
7206.00	34.26	Ave	44	1.2	H	1.33	35.59	54.00	-18.41
2348.28	46.03	PK	253	1.8	V	-13.19	32.84	74.00	-41.16
2348.28	37.59	Ave	253	1.8	V	-13.19	24.40	54.00	-29.60
2366.72	43.44	PK	350	1.3	H	-13.14	30.30	74.00	-43.70
2366.72	36.68	Ave	350	1.3	H	-13.14	23.54	54.00	-30.46
2491.80	44.27	PK	3	1.9	V	-13.08	31.19	74.00	-42.81
2491.80	38.22	Ave	3	1.9	V	-13.08	25.14	54.00	-28.86
GFSK middle Channel 2440MHz									
236.66	36.20	QP	305	1.7	H	-13.35	22.85	46.00	-23.15
236.66	40.62	QP	345	1.3	V	-13.35	27.27	46.00	-18.73
4880.00	44.98	PK	272	1.8	V	-0.62	44.36	74.00	-29.64
4880.00	43.40	Ave	272	1.8	V	-0.62	42.78	54.00	-11.22
7320.00	41.40	PK	59	1.4	H	2.21	43.61	74.00	-30.39
7320.00	33.80	Ave	59	1.4	H	2.21	36.01	54.00	-17.99
2311.40	45.23	PK	110	1.4	V	-13.19	32.04	74.00	-41.96
2311.40	37.78	Ave	110	1.4	V	-13.19	24.59	54.00	-29.41
2388.78	43.69	PK	18	1.2	H	-13.14	30.55	74.00	-43.45
2388.78	37.86	Ave	18	1.2	H	-13.14	24.72	54.00	-29.28
2495.05	43.06	PK	284	1.1	V	-13.08	29.98	74.00	-44.02
2495.05	38.28	Ave	284	1.1	V	-13.08	25.20	54.00	-28.80

GFSK High Channel 2480MHz									
236.66	33.26	QP	311	1.2	H	-13.35	19.91	46.00	-26.09
236.66	40.27	QP	201	1.2	V	-13.35	26.92	46.00	-19.08
4960.00	44.83	PK	90	1.6	V	-0.24	44.59	74.00	-29.41
4960.00	43.63	Ave	90	1.6	V	-0.24	43.39	54.00	-10.61
7440.00	42.78	PK	356	1.5	H	2.84	45.62	74.00	-28.38
7440.00	32.95	Ave	356	1.5	H	2.84	35.79	54.00	-18.21
2347.82	45.35	PK	198	1.2	V	-13.19	32.16	74.00	-41.84
2347.82	38.79	Ave	198	1.2	V	-13.19	25.60	54.00	-28.40
2387.91	44.84	PK	190	2.0	H	-13.14	31.70	74.00	-42.30
2387.91	36.20	Ave	190	2.0	H	-13.14	23.06	54.00	-30.94
2496.36	43.25	PK	197	1.3	V	-13.08	30.17	74.00	-43.83
2496.36	37.70	Ave	197	1.3	V	-13.08	24.62	54.00	-29.38

WIFI and BLE:

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance V04
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Result


Test result plots shown as follows:

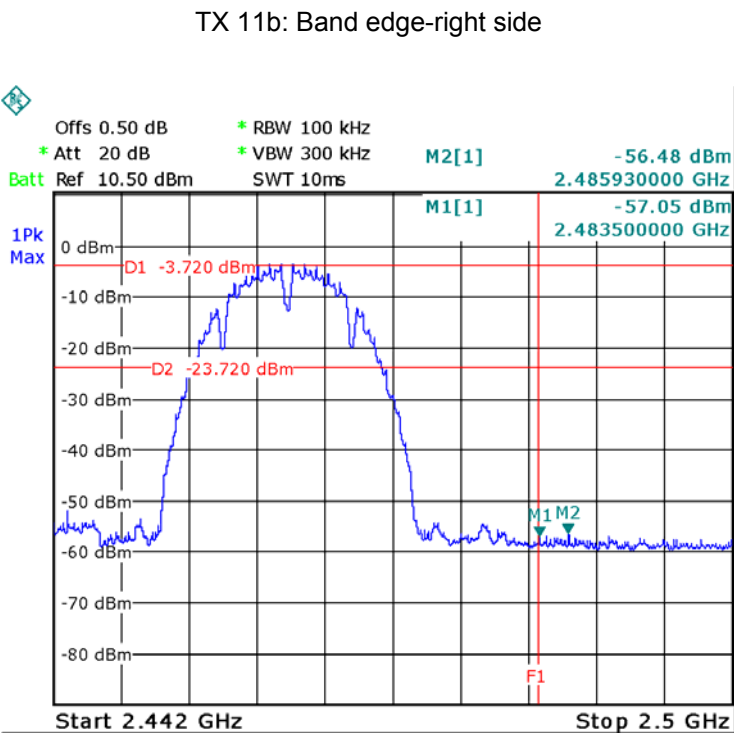
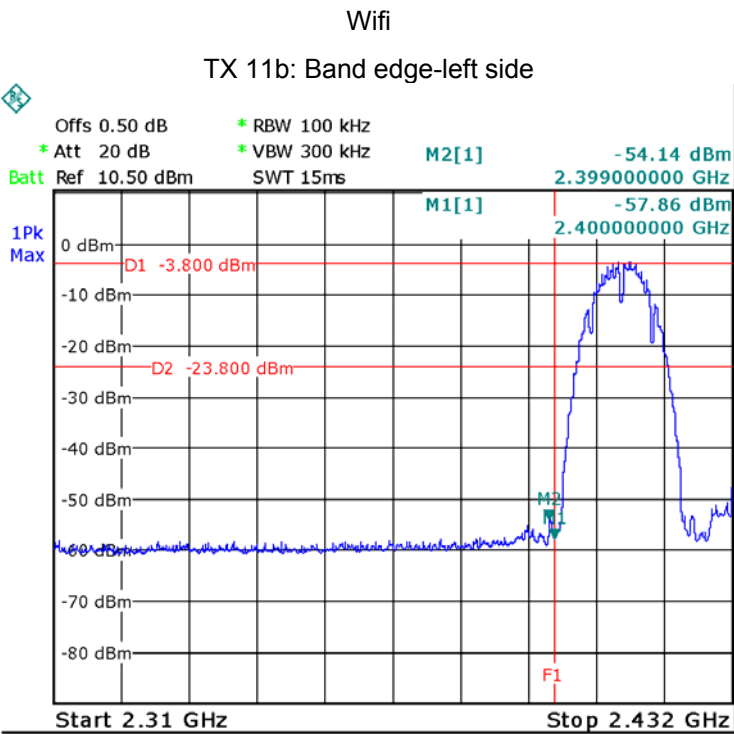


TX 11g: Band edge-left side

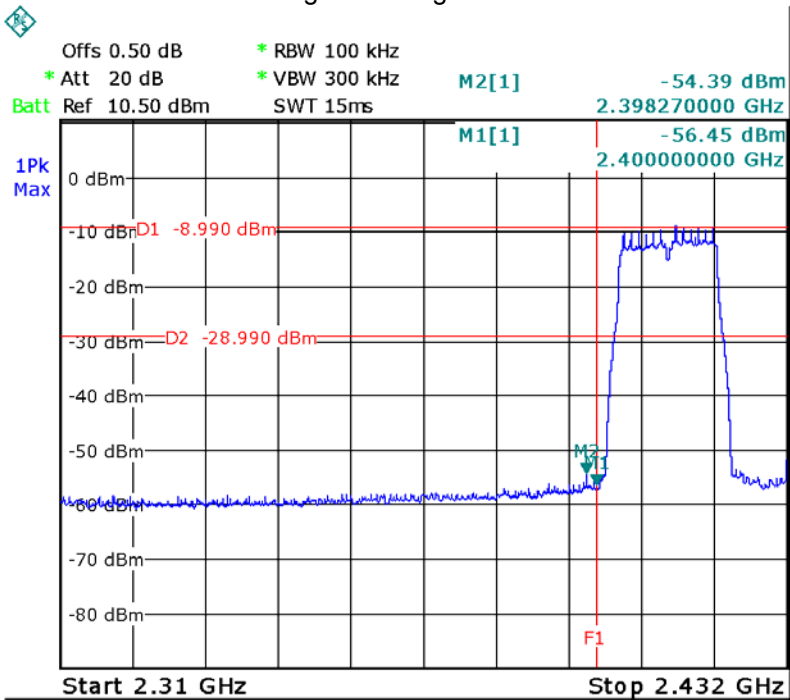


TX 11g: Band edge-right side

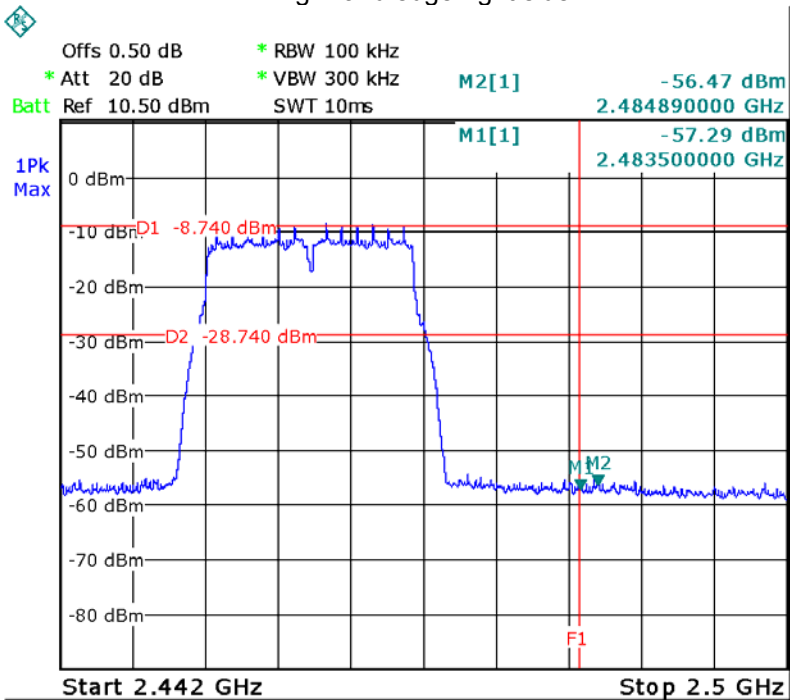

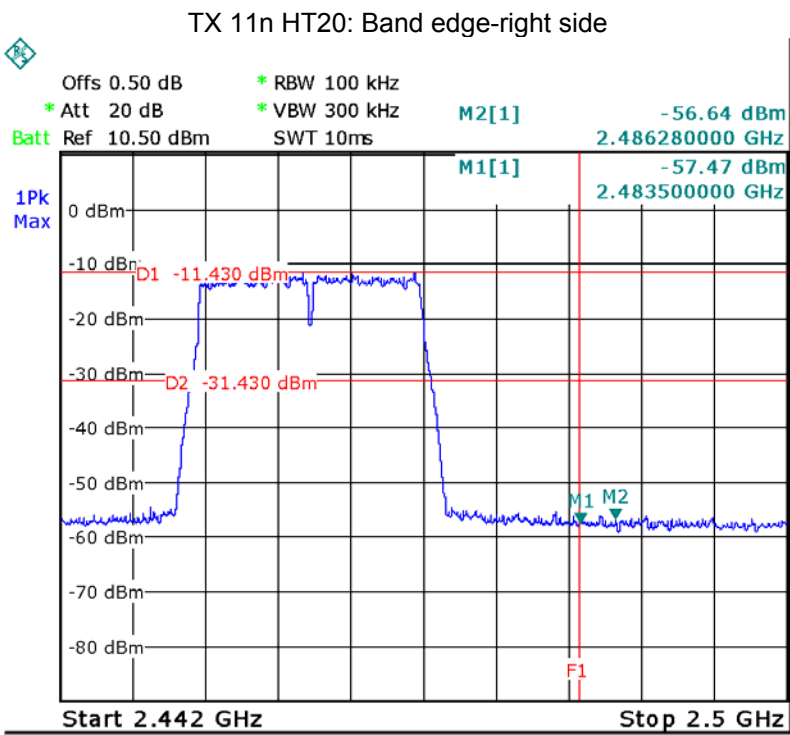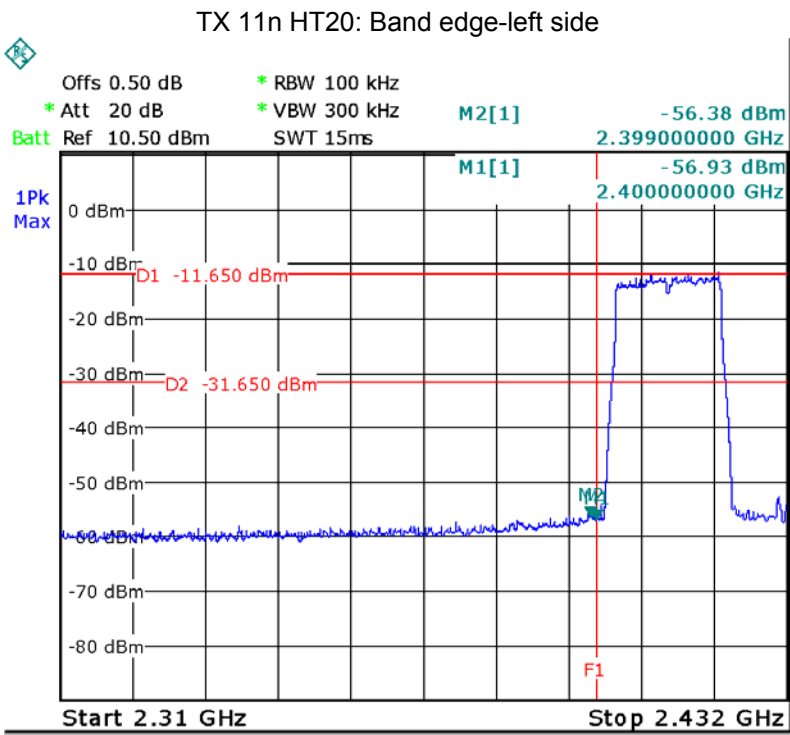


BLE

Band edge-left side

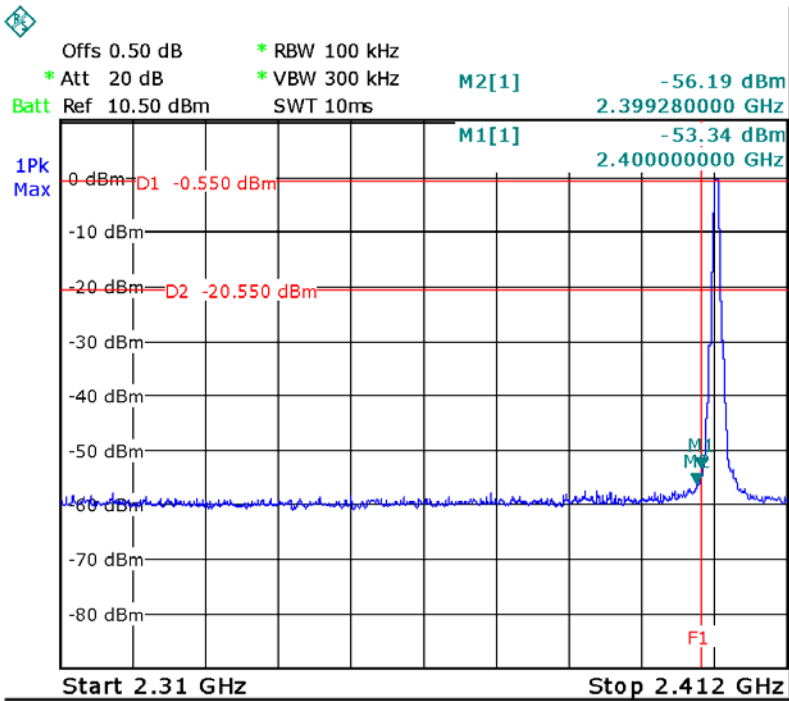

Band edge-right side

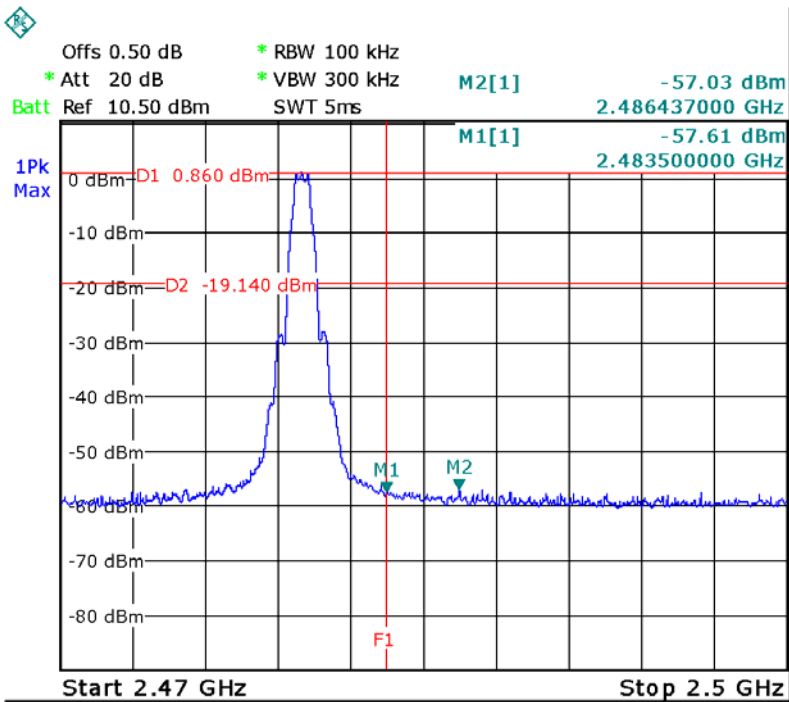

10 Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 DTS Meas Guidance V04

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

10.2 Test Result:

WIFI:


Operation mode	6dB Bandwidth (MHz)			99% Bandwidth (MHz)		
TX 11b	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	10.028	10.028	10.028	13.956	13.924	13.956
TX 11g	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	16.467	16.467	16.467	16.517	16.517	16.467
TX 11n HT20	Channel 1	Channel 6	Channel 11	Channel 1	Channel 6	Channel 11
	17.731	17.731	17.731	17.731	17.731	17.677

BLE:


Operation mode	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low channel	0.677	1.060
Middle channel	0.719	1.048
High channel	0.713	1.048



Wifi: Test result plot as follows:



Mode: TX 11b channel 1


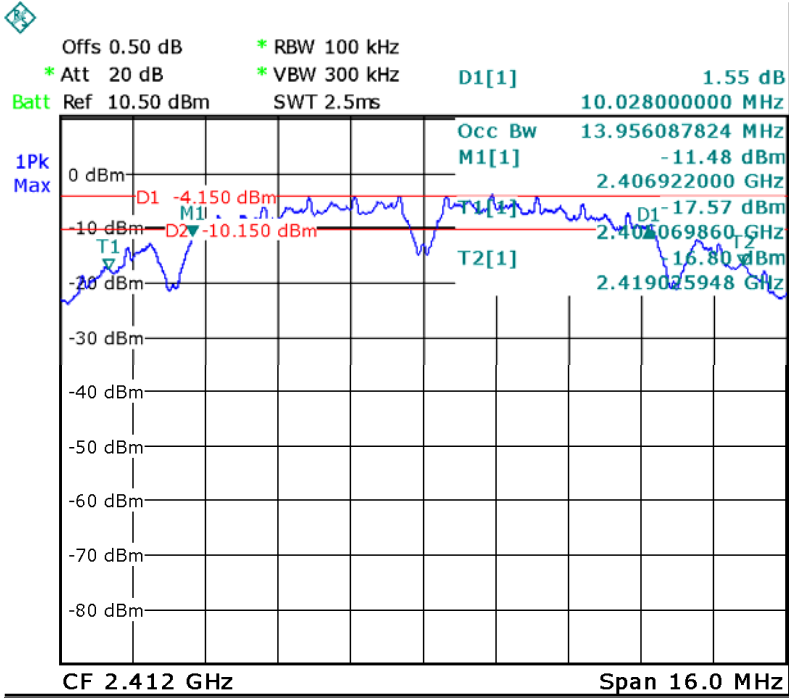



Mode: TX 11b channel 6

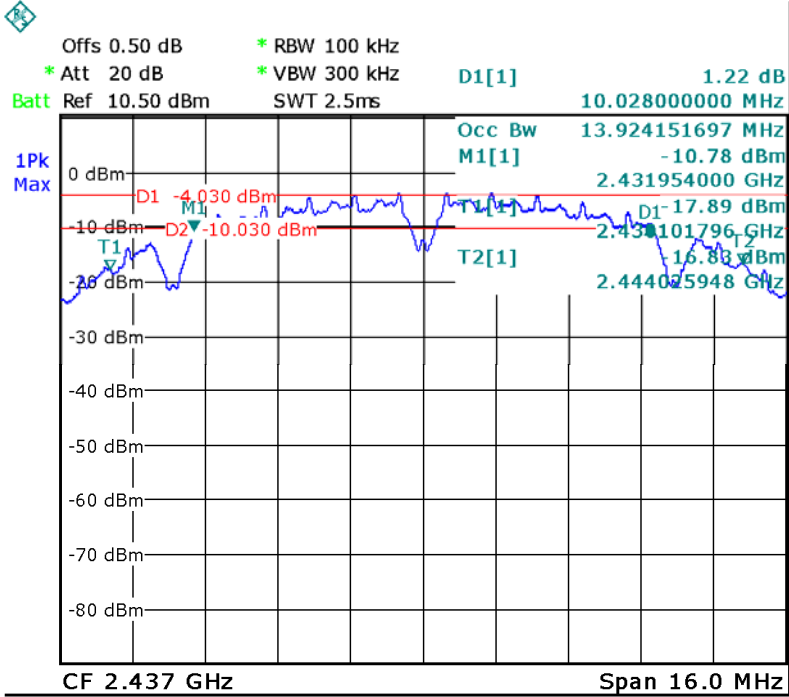

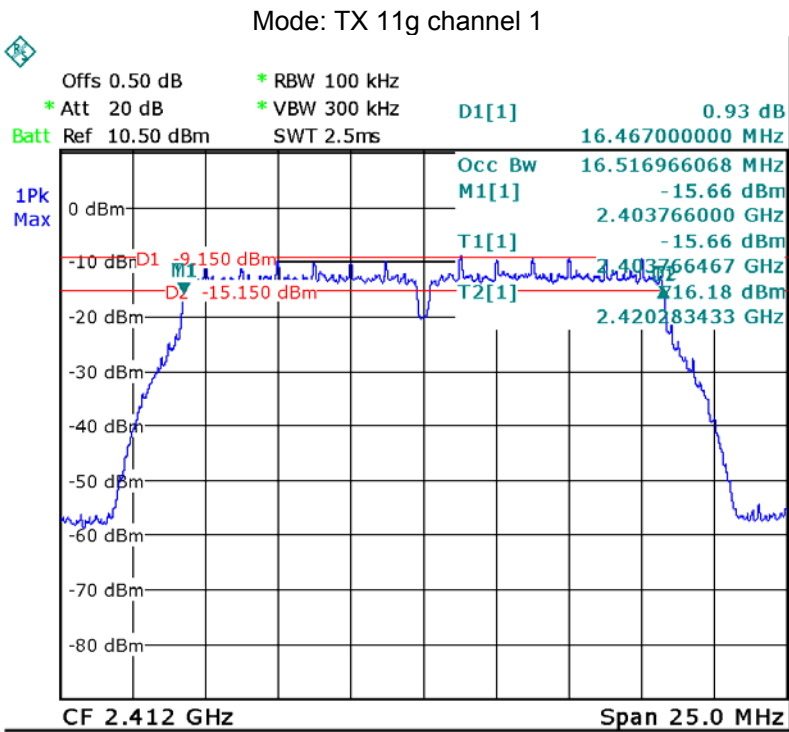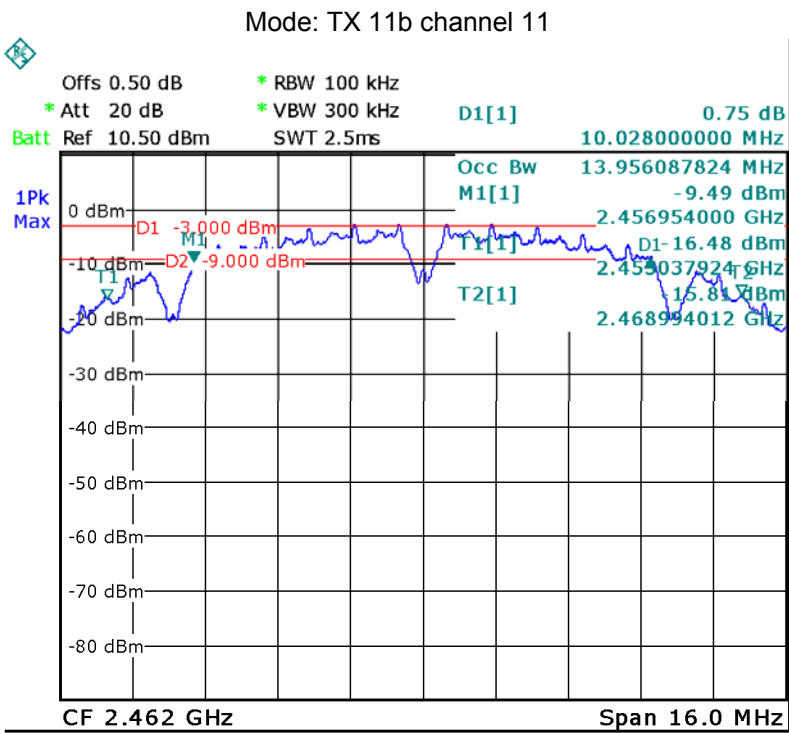

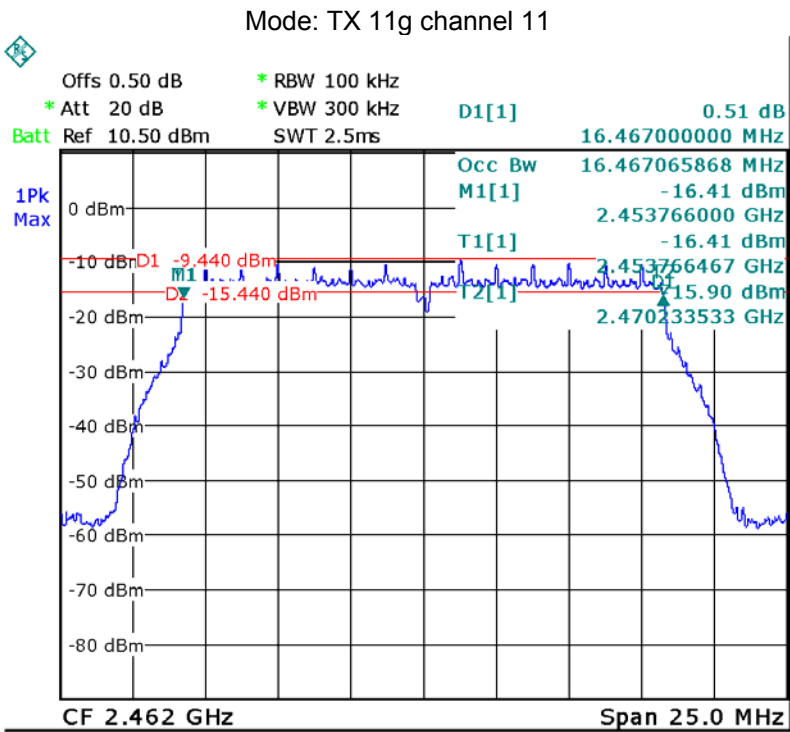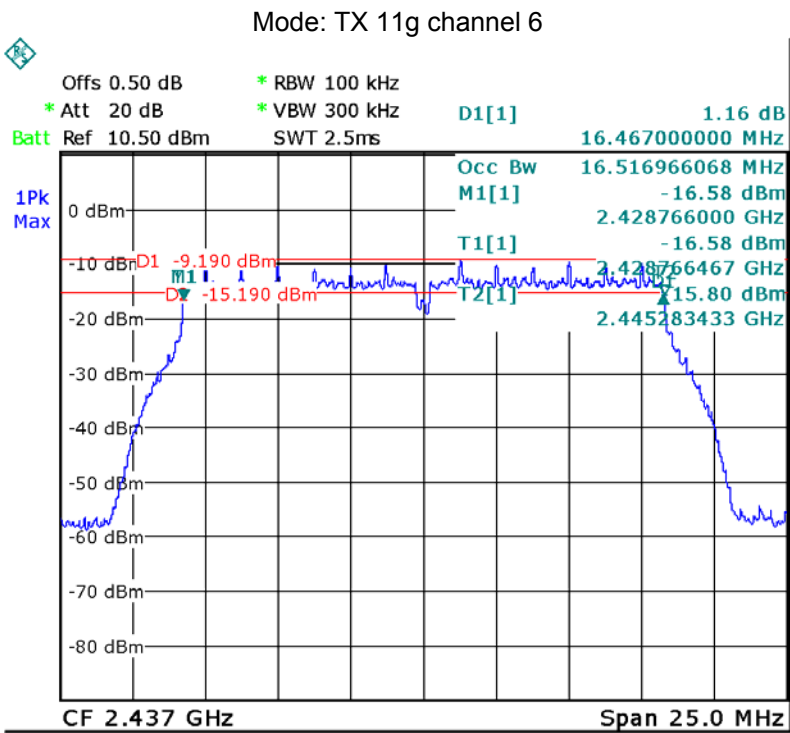


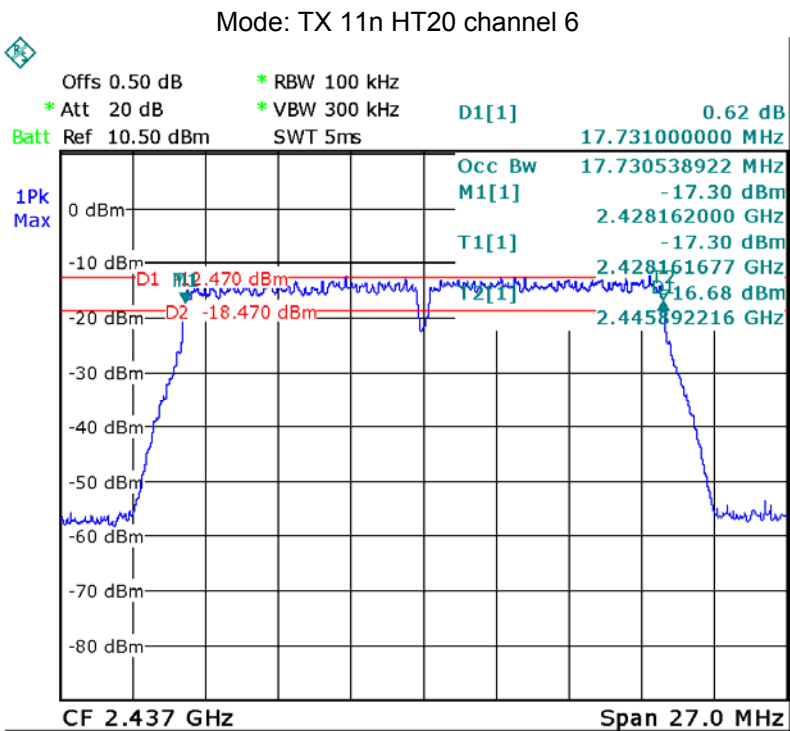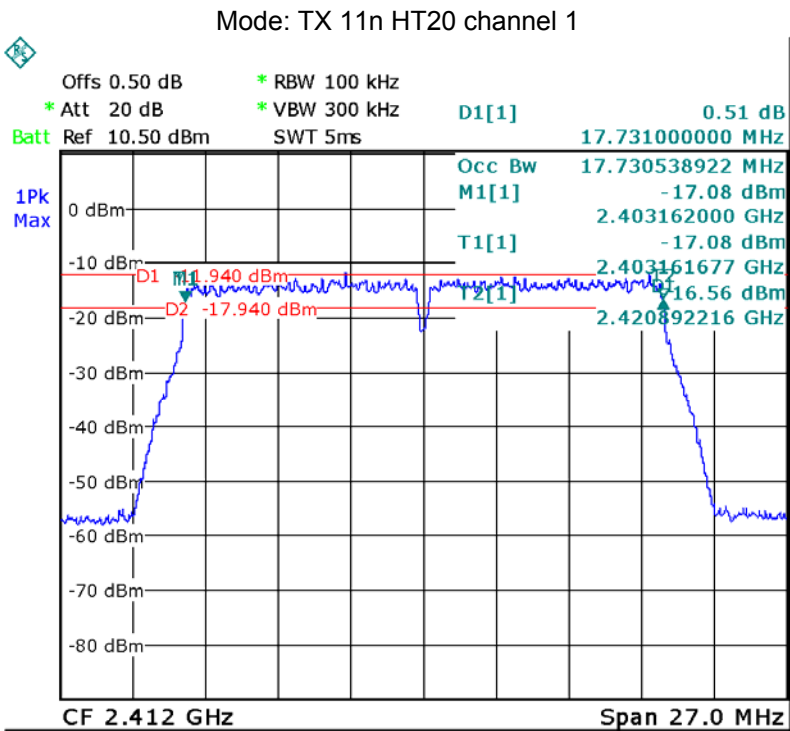

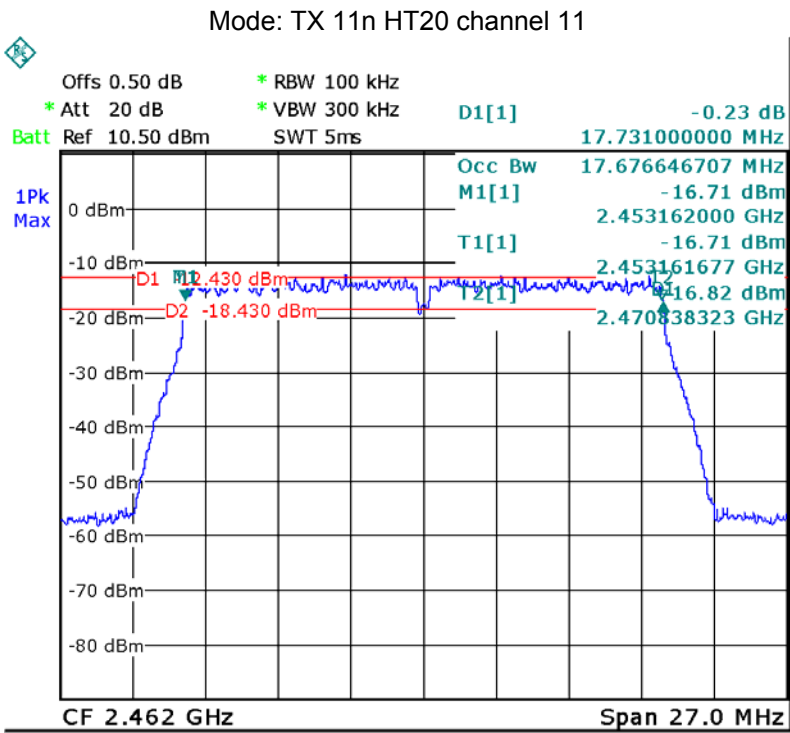


BLE:


Mode: Low channel

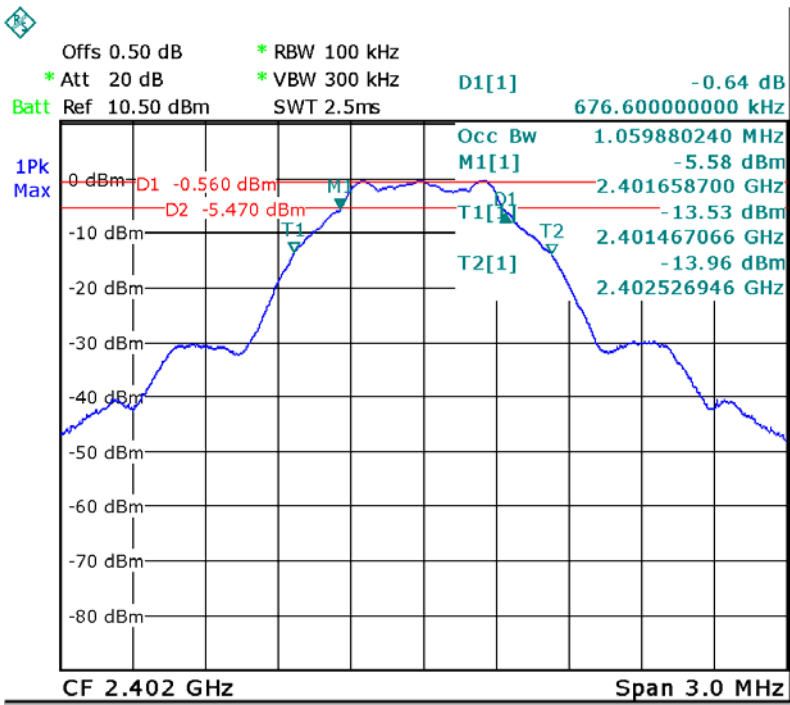

Mode: Middle channel

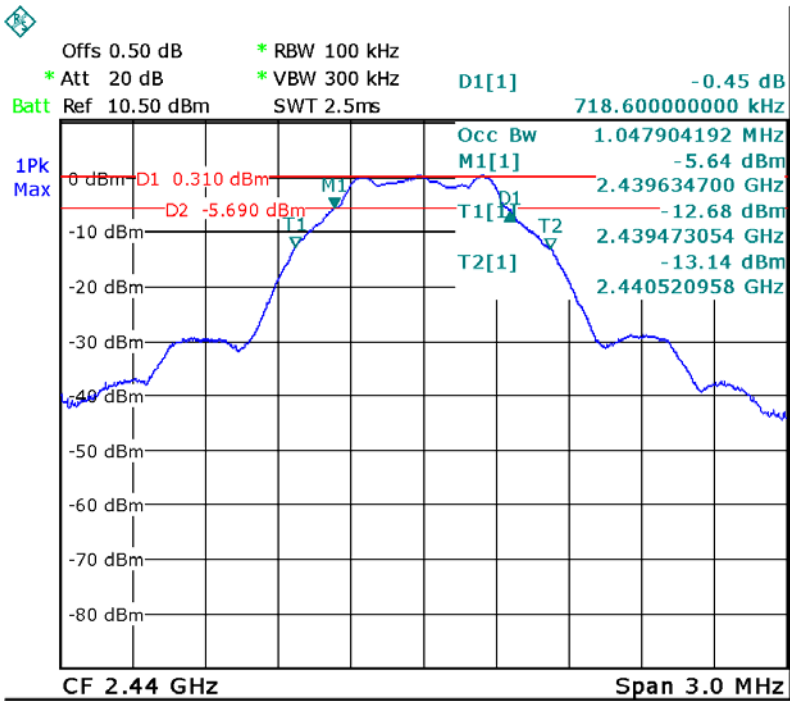

Mode: High channel

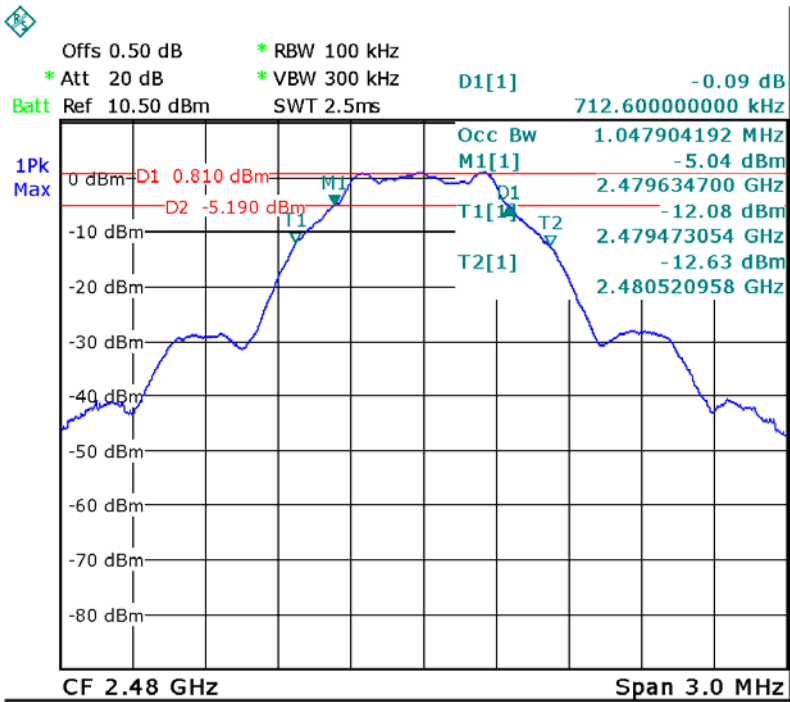

11 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

558074 D01 DTS Meas Guidance V04

11.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.2 Test Result:

Wifi:

Test mode :TX 11b		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.30	9.49	9.60
Limit: 1W/30dBm		

Test mode :TX 11g		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.54	9.40	9.27
Limit: 1W/30dBm		

Test mode :TX 11n HT20		
Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.75	9.51	9.86
Limit: 1W/30dBm		

BLE:

Maximum Peak Output Power (dBm)		
Low channel	Middle channel	High channel
0.36	0.94	1.65
Limit: 1W/30dBm		

12 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance V04

12.1 Test Procedure:

558074 D01 DTS Meas Guidance V04

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.2 Test Result:

WIFI:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-22.21	-22.61	-21.47
Limit: 8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-22.36	-22.70	-20.53
Limit: 8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-25.97	-26.85	-21.61
Limit: 8dBm per 3kHz		



BLE:


Power Spectral Density(dBm)		
Low channel	Middle channel	High channel
-15.53	-14.70	-13.96
Limit: 8dBm per 3kHz		

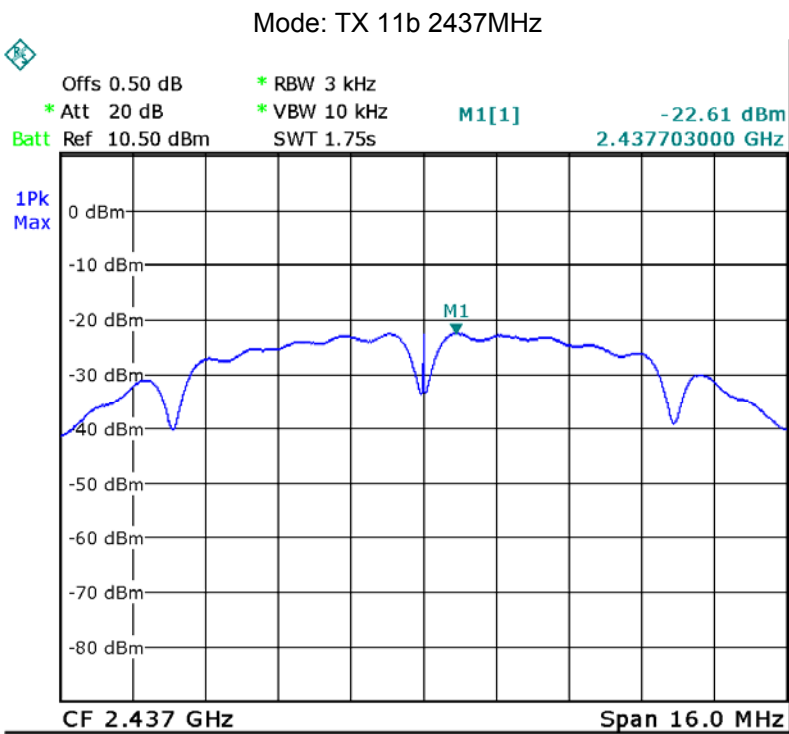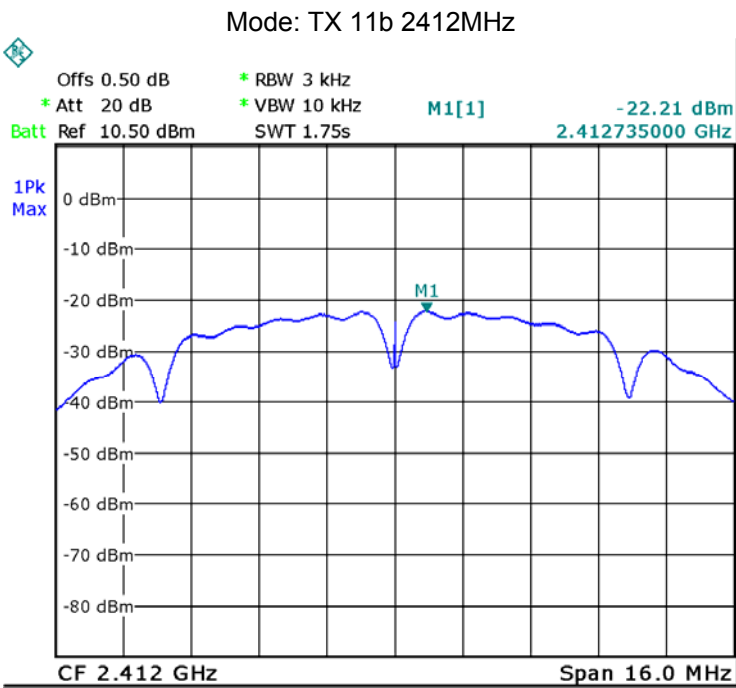

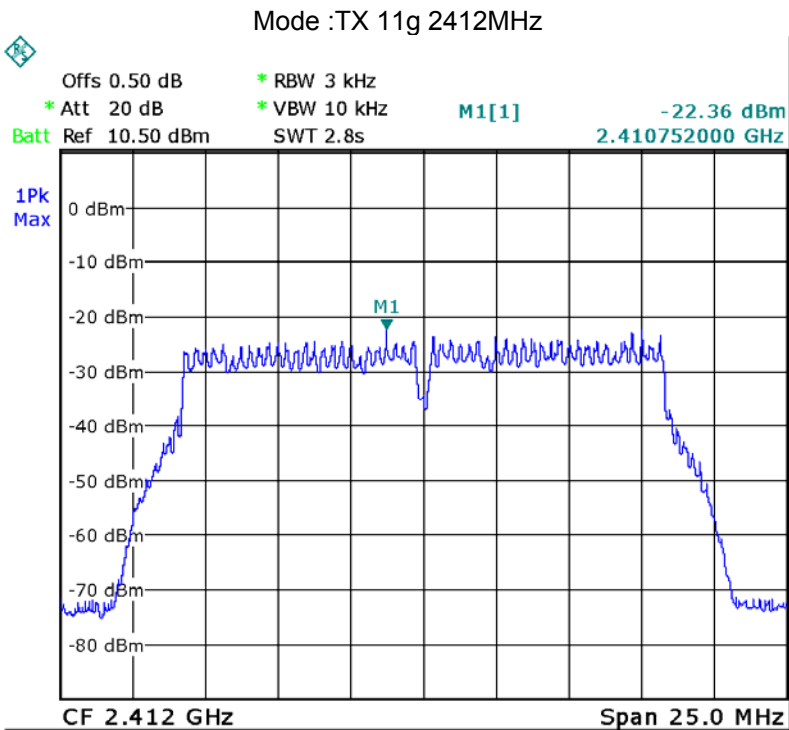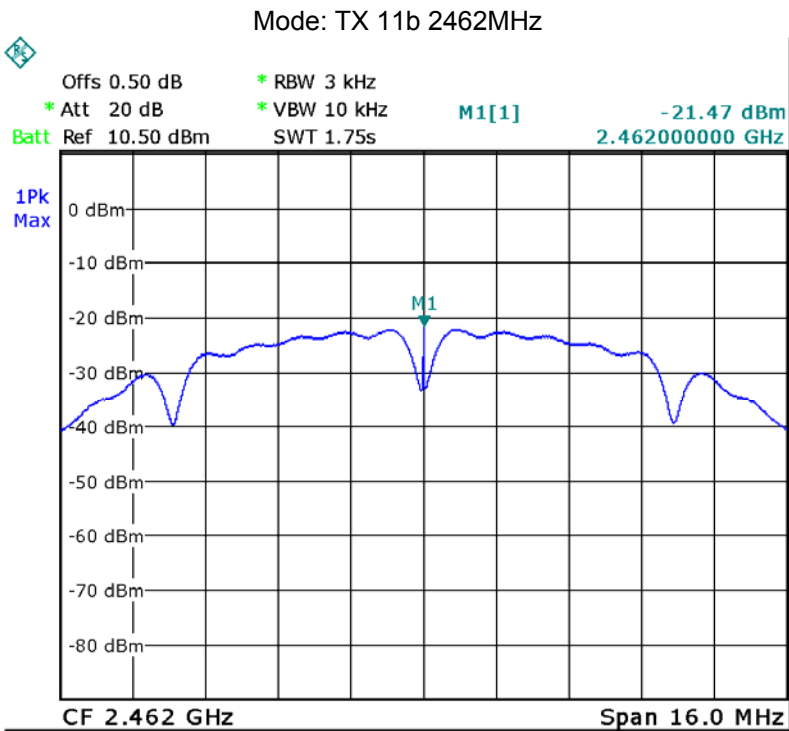


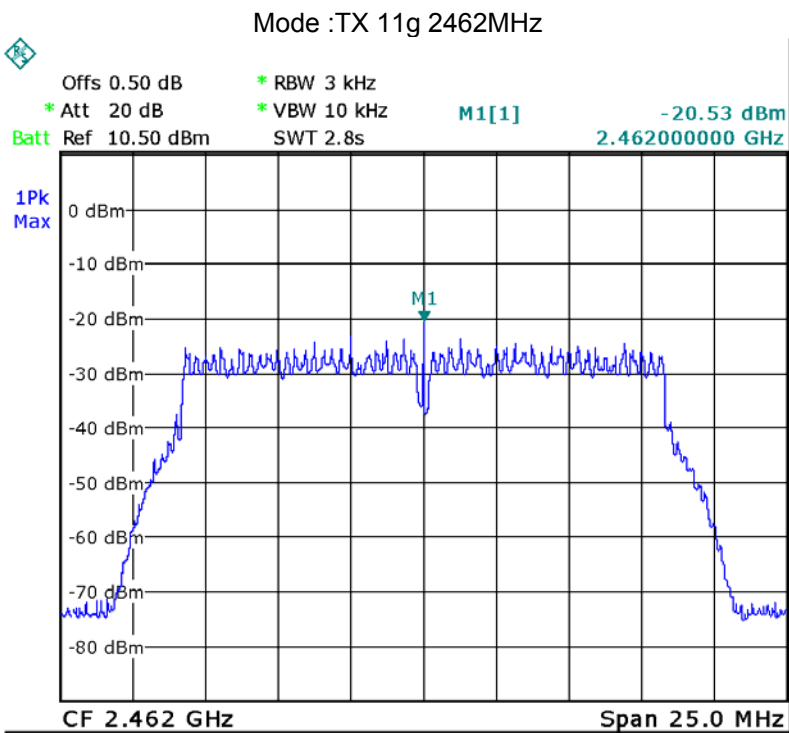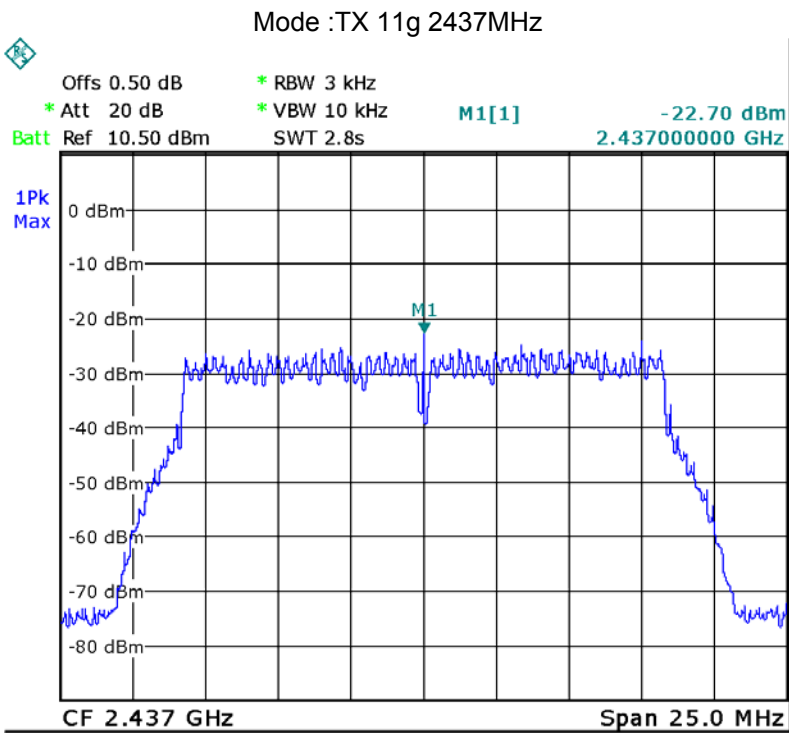

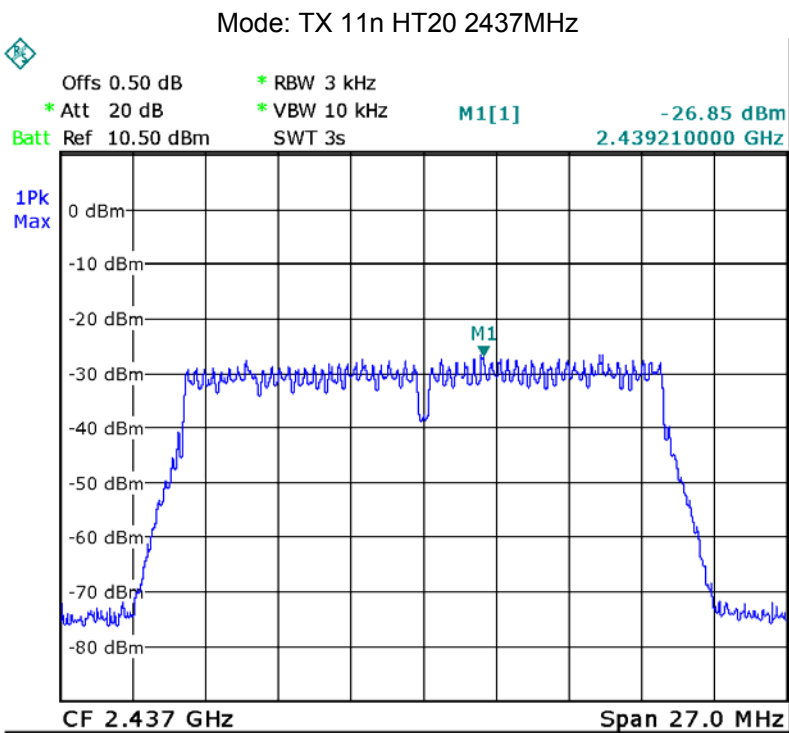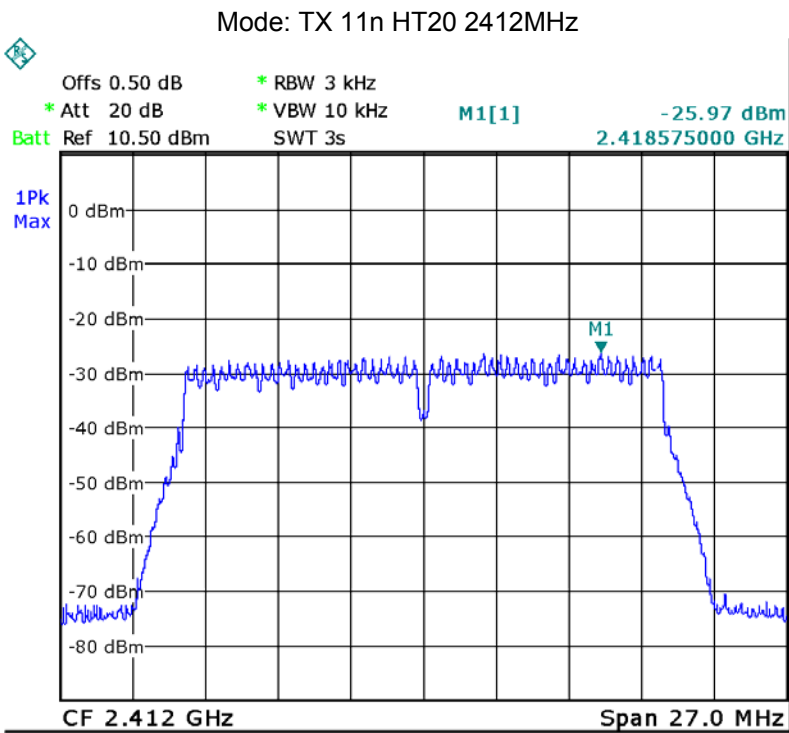


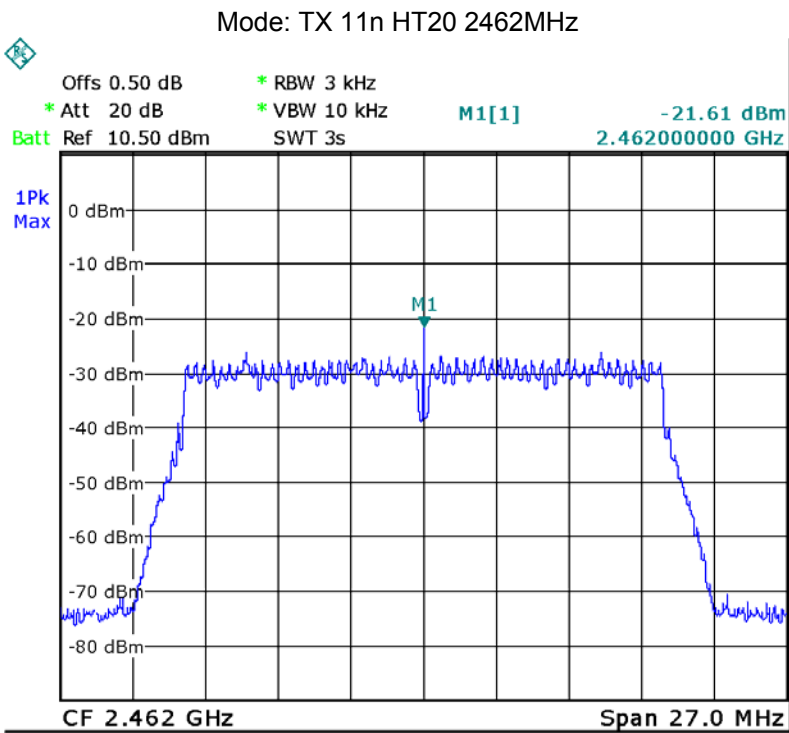


BLE:

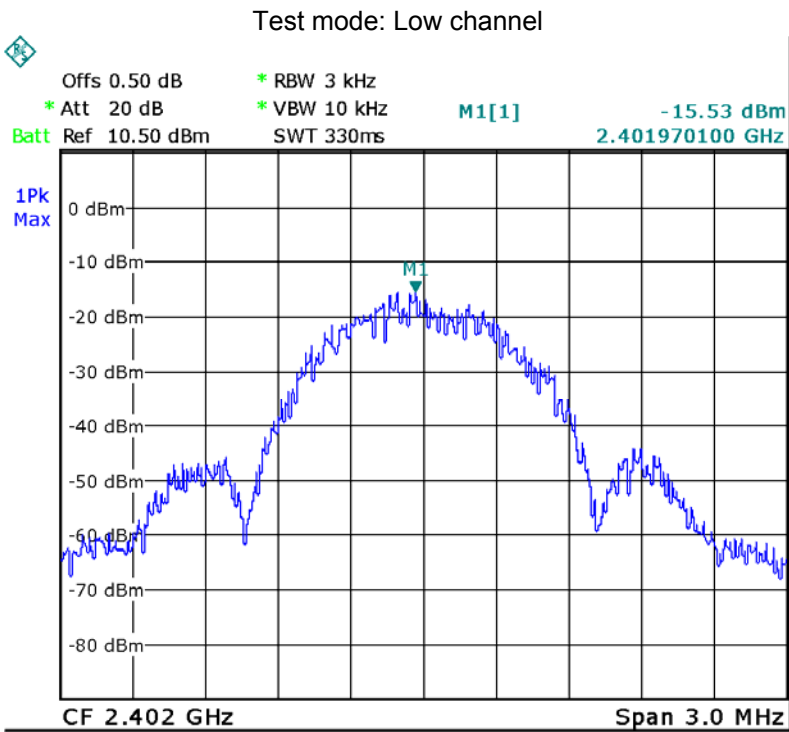

Test mode: Middle channel

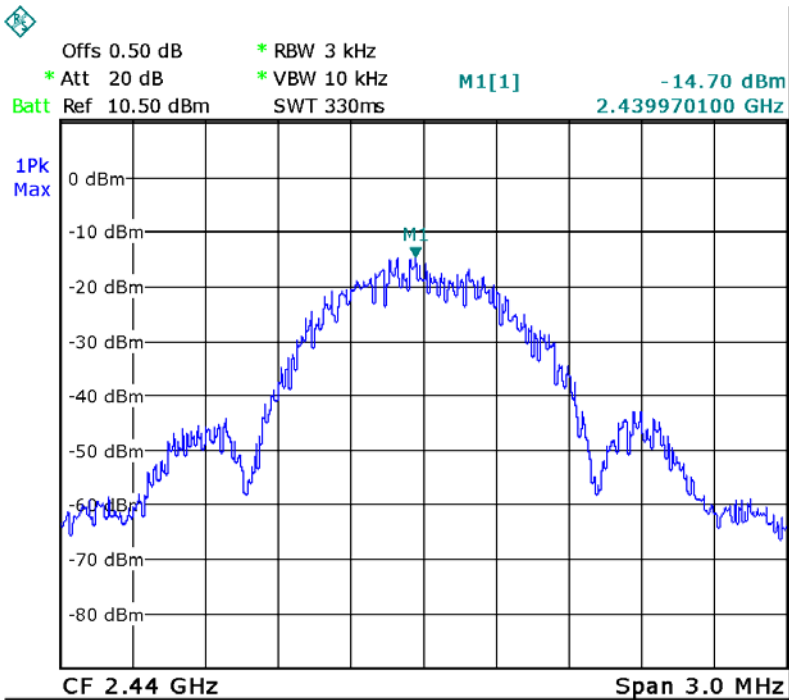

Test mode: High channel

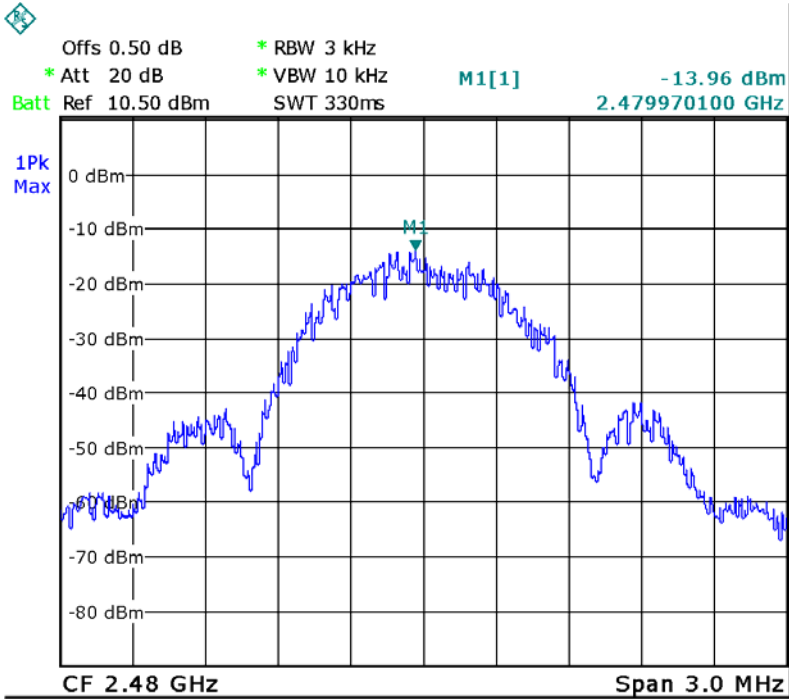


13 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has a PCB Printed Antenna, meets the requirements of FCC 15.203.

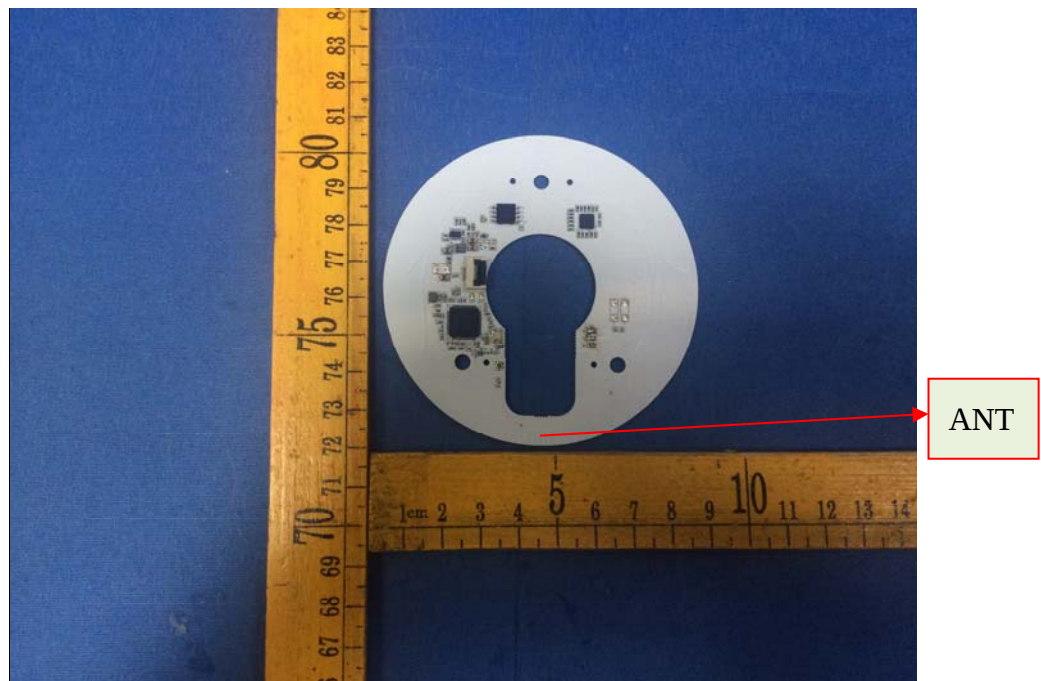

14 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091

14.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

14.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

14.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

Mode	Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
WIFI	3.00	1.995	9.86	9.68	0.003843	1
BLE	3.00	1.995	1.65	1.46	0.000580	1


15 Photographs – Test Setup Photos


15.1 Radiated Emission

Test frequency Below 30MHz



Test frequency from 30MHz to 1GHz

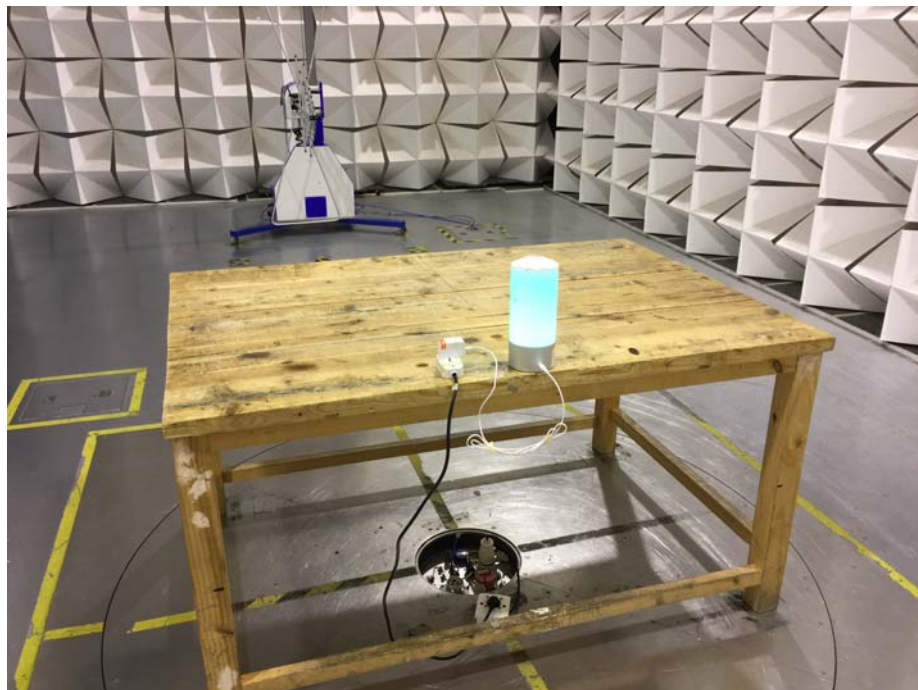

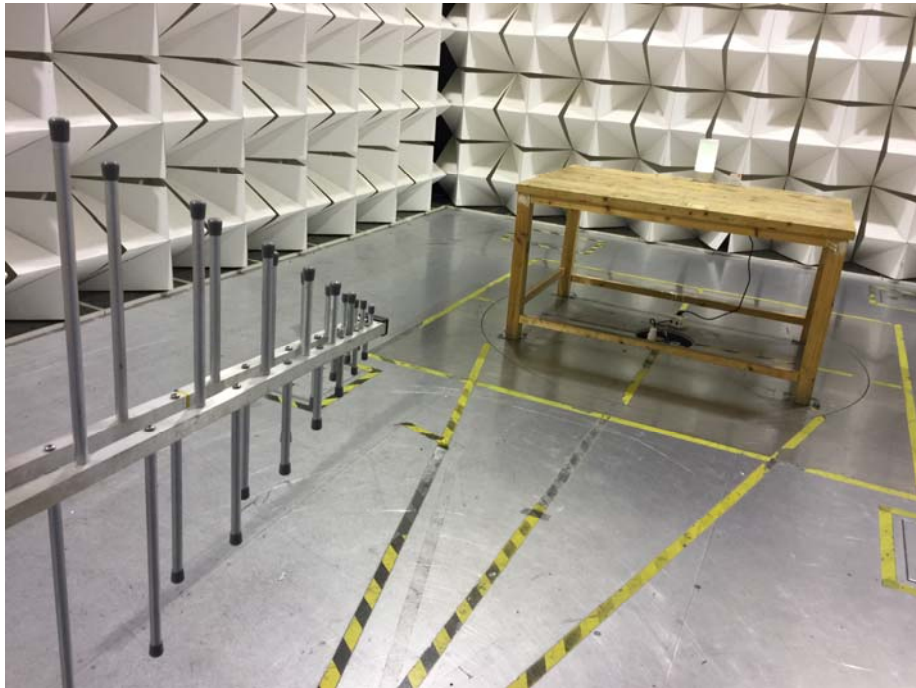

Test frequency above 1GHz





15.2 Conducted Emission







16 Photographs - Constructional Details

16.1 EUT – External View



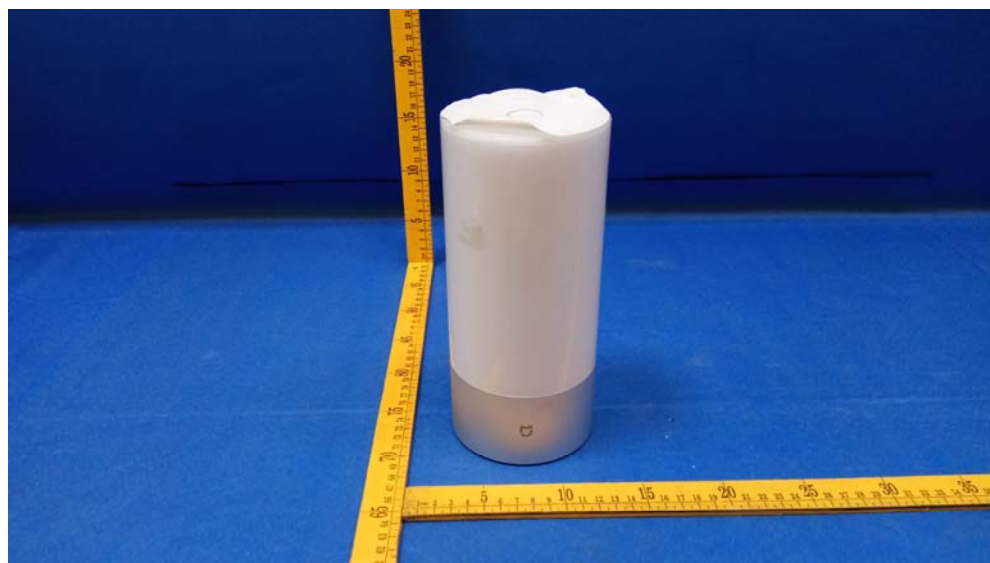
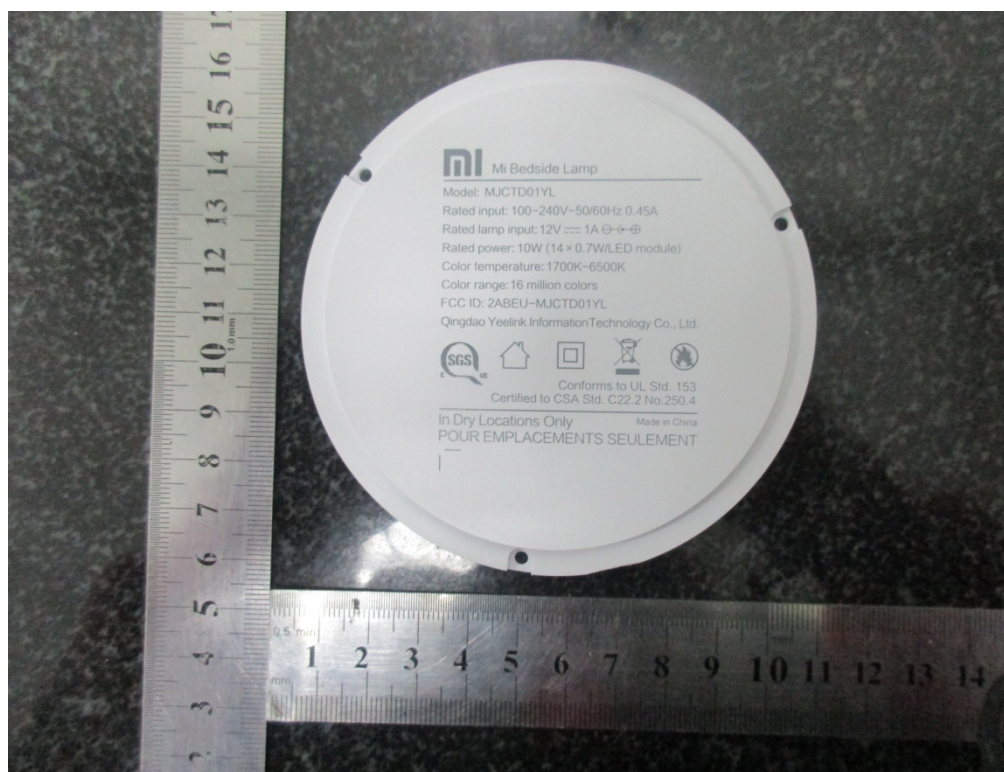


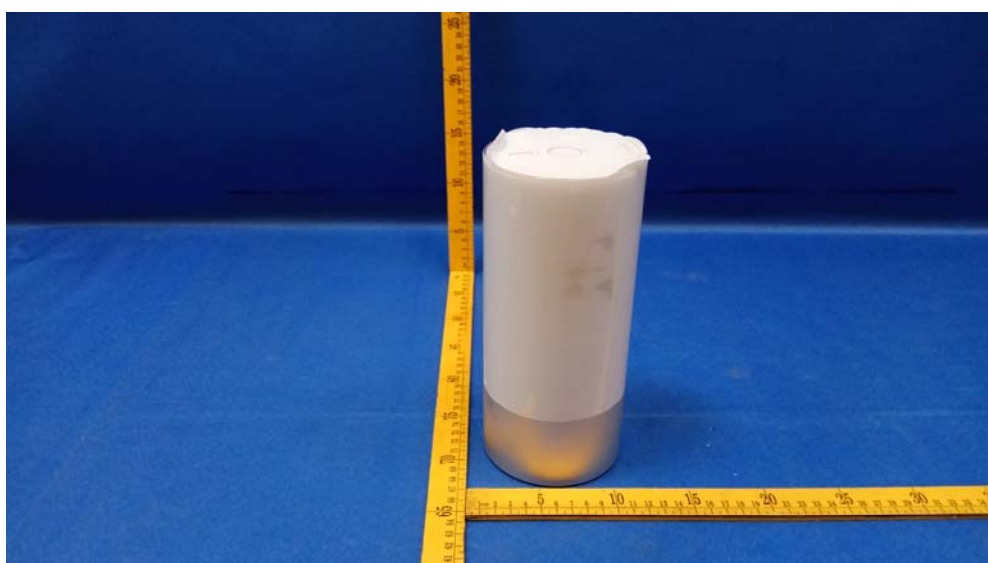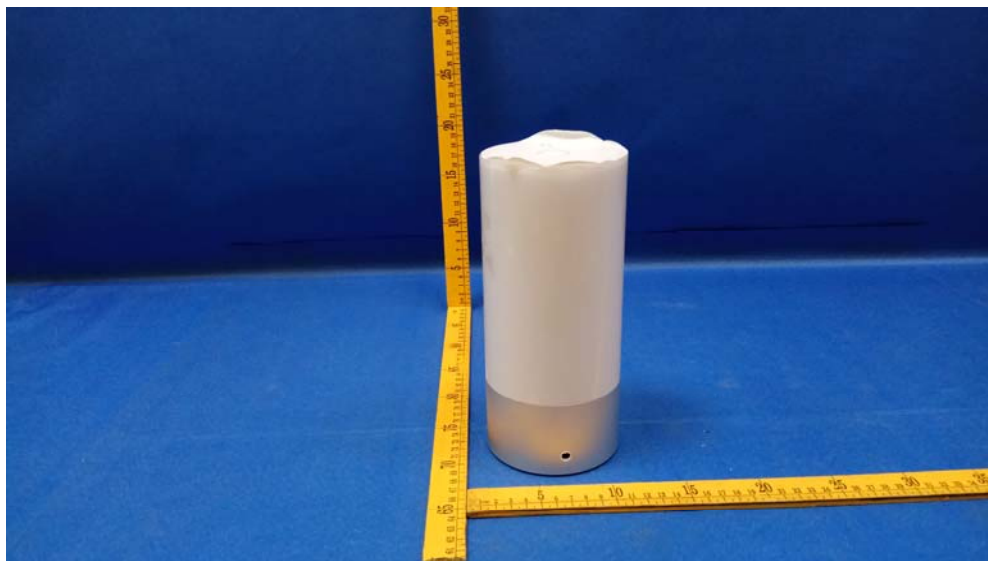


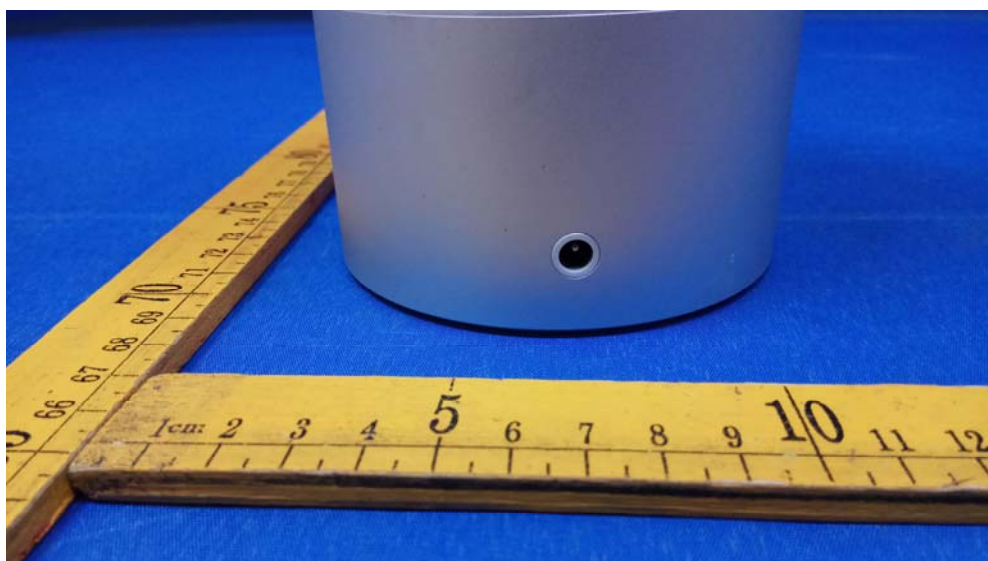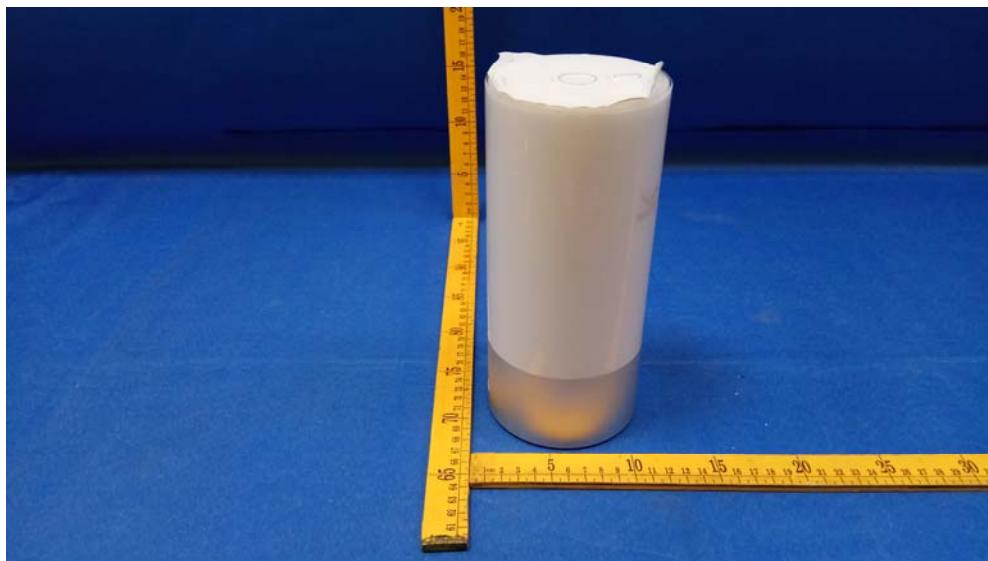



16.2 EUT – Internal View

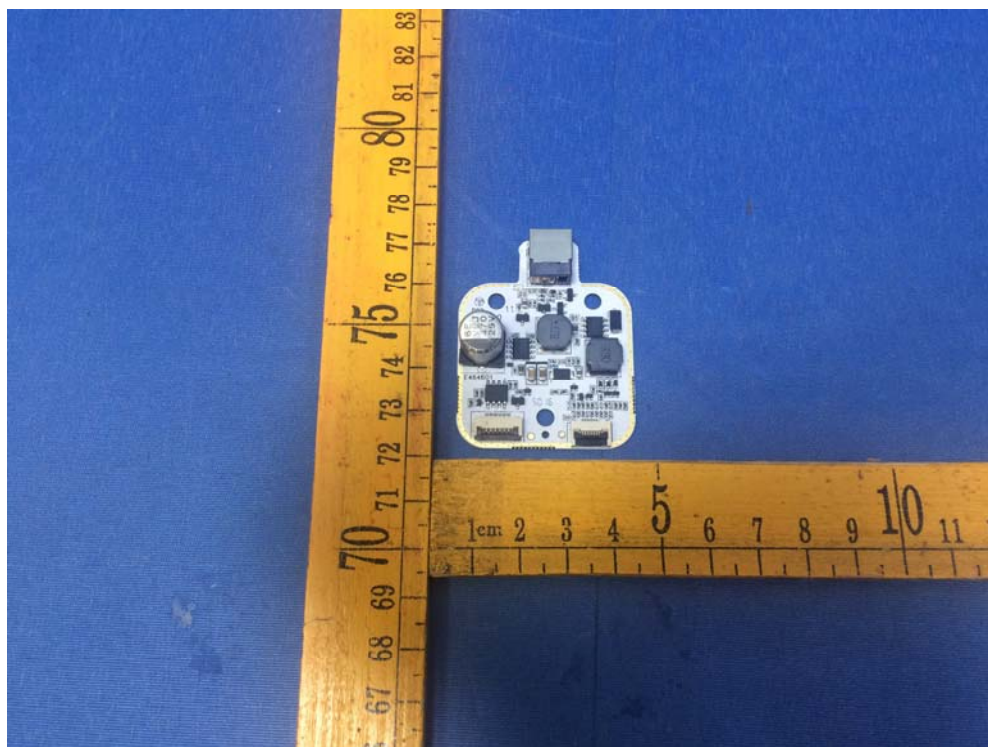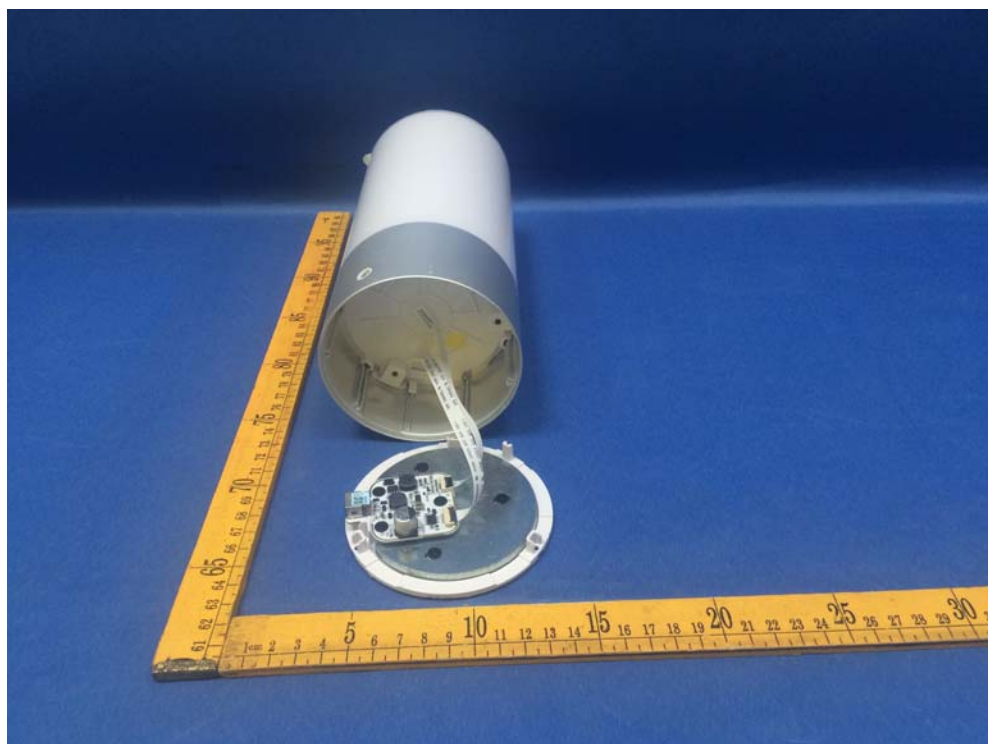


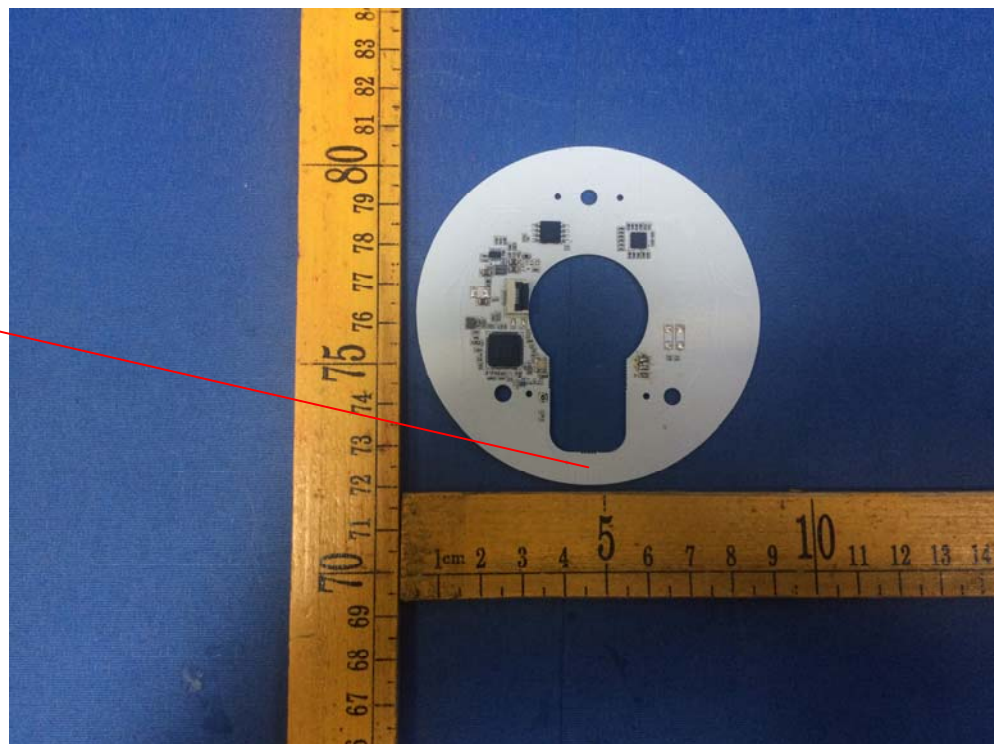

WIFI & BLE antenna





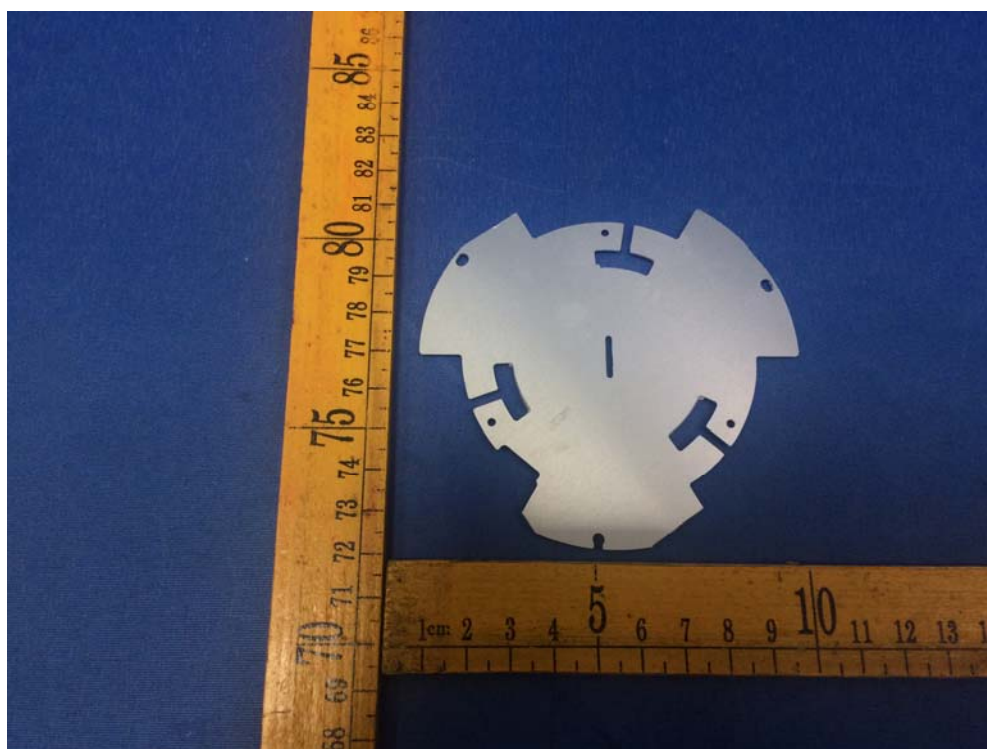

=====End of Report=====