

# TEST REPORT

of

FCC Part 15 Subpart C §15.247  
IC RSS-247 Issue 2 and RSS-Gen Issue 5

FCC ID: 2ABFG-YRDC2  
IC Certification: 11626A-YRDC2

Equipment Under Test : Yale Smart Opener-Garage  
Model Name : YRDC-2  
Variant Model Name(s) : Refer to the page 3  
Applicant : iRevo-ASSAABLOY Korea  
Manufacturer : iRevo-ASSAABLOY Korea  
Date of Receipt : 2022.10.11  
Date of Test(s) : 2022.10.13 ~ 2022.11.28  
Date of Issue : 2022.12.02

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.


- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.
- 4) The data marked ※ in this report was provided by the customer and may affect the validity of the test results.

We are responsible for all the information of this test report except for the data(※) provided by the customer.

Tested by:

  
Taek Kim

Technical  
Manager:

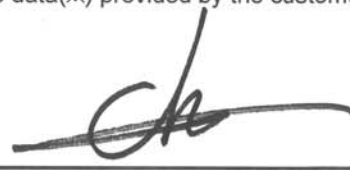  
Jinhyoung Cho

**SGS Korea Co., Ltd. Gunpo Laboratory**

# INDEX

## Table of contents

|                                                                                  |    |
|----------------------------------------------------------------------------------|----|
| 1. General Information -----                                                     | 3  |
| 2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission ----- | 10 |
| 3. 6 dB Bandwidth & 99 % Bandwidth -----                                         | 51 |
| 4. Maximum Peak Conducted Output Power -----                                     | 62 |
| 5. Power Spectral Density -----                                                  | 65 |
| 6. Antenna Requirement -----                                                     | 71 |

## 1. General Information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

### 1.2. Details of Applicant

Applicant : iRevo-ASSAABLOY Korea

Address : 10f of JEI PLATZ Bldg., 186, Gasandigital 1-ro, Geumcheon-gu, Seoul, South Korea, 08502

Contact Person : Jang, Soo-kyung

Phone No. : +82 2 2107 5741

### 1.3. Details of Manufacturer

Company : Same as applicant

Address : Same as applicant

### 1.4. Description of EUT

|                           |                                               |
|---------------------------|-----------------------------------------------|
| Kind of Product           | Yale Smart Opener-Garage                      |
| Model Name                | YRDC-2                                        |
| Variant Model Name        | IES-D320W                                     |
| Serial Number             | Conducted Sample: 001<br>Radiated Sample: 002 |
| Power Supply              | DC 5 V ~ 24 V                                 |
| Frequency Range           | 2 402 MHz ~ 2 480 MHz (Bluetooth Low Energy)  |
| Modulation Technique      | GFSK                                          |
| Number of Channels        | 40 channels (Bluetooth Low Energy)            |
| Antenna Type              | Dielectric Chip Antenna                       |
| Antenna Gain <sup>※</sup> | 1.37 dB i                                     |
| H/W Version               | 1.0                                           |
| S/W Version               | 1.0                                           |
| FVIN                      | N/A                                           |

## 1.5. Declaration by the Manufacturer

The Bluetooth version of the EUT is 5.3, the PHY 1M, PHY 2M, 125k Coded and 500k Coded are supported.

## 1.6. Test Equipment List

| Equipment                | Manufacturer                | Model                                | S/N                    | Cal. Date     | Cal. Interval | Cal. Due      |
|--------------------------|-----------------------------|--------------------------------------|------------------------|---------------|---------------|---------------|
| Signal Generator         | R&S                         | SMR40                                | 100272                 | Jun. 16, 2022 | Annual        | Jun. 16, 2023 |
| Signal Generator         | R&S                         | SMBV100A                             | 255834                 | May 25, 2022  | Annual        | May 25, 2023  |
| Spectrum Analyzer        | R&S                         | FSV30                                | 103210                 | Dec. 08, 2021 | Annual        | Dec. 08, 2022 |
| Spectrum Analyzer        | Agilent                     | N9020A                               | MY53421758             | Aug. 26, 2022 | Annual        | Aug. 26, 2023 |
| Attenuator               | AEROFLEX / INMET            | 40AH2W-10                            | 40G-1                  | Jun. 08, 2022 | Annual        | Jun. 08, 2023 |
| High Pass Filter         | Wainwright Instrument GmbH  | WHKX3.0/18G-6SS                      | 21                     | Jun. 09, 2022 | Annual        | Jun. 09, 2023 |
| High Pass Filter         | Wainwright Instrument GmbH  | WHNX7.5/26.5G-6SS                    | 15                     | May 31, 2022  | Annual        | May 31, 2023  |
| Low Pass Filter          | Mini-Circuits               | NLP-1200+                            | V<br>8979400903-2      | Feb. 10, 2022 | Annual        | Feb. 10, 2023 |
| Power Sensor             | R&S                         | NRP-Z81                              | 100669                 | May 06, 2022  | Annual        | May 06, 2023  |
| DC Power Supply          | Agilent                     | U8002A                               | MY54110041             | Sep. 15, 2022 | Annual        | Sep. 15, 2023 |
| Preamplifier             | H.P.                        | 8447F                                | 2944A03909             | Aug. 04, 2022 | Annual        | Aug. 04, 2023 |
| Signal Conditioning Unit | R&S                         | SCU-18                               | 10117                  | Jun. 13, 2022 | Annual        | Jun. 13, 2023 |
| Preamplifier             | TESTEK                      | TK-PA1840H                           | 130016                 | Jan. 10, 2022 | Annual        | Jan. 10, 2023 |
| Loop Antenna             | Schwarzbeck Mess-Elektronik | FMZB 1519                            | 1519-039               | Aug. 23, 2021 | Biennial      | Aug. 23, 2023 |
| Bilog Antenna            | Schwarzbeck Mess-Elektronik | VULB 9163                            | 01126                  | Feb. 07, 2022 | Annual        | Feb. 07, 2023 |
| Horn Antenna             | R&S                         | HF906                                | 100326                 | Feb. 18, 2022 | Annual        | Feb. 18, 2023 |
| Horn Antenna             | Schwarzbeck Mess-Elektronik | BBHA 9170                            | 9170-540               | Nov. 30, 2021 | Annual        | Nov. 30, 2022 |
| EMI Test Receiver        | R&S                         | ESU26                                | 100109                 | Jan. 18, 2022 | Annual        | Jan. 18, 2023 |
| Turn Table               | Innco systems GmbH          | DS 1200 S                            | N/A                    | N.C.R.        | N/A           | N.C.R.        |
| Controller               | Innco systems GmbH          | CONTROLLER CO3000-4P                 | CO3000/963/38 330516/L | N.C.R.        | N/A           | N.C.R.        |
| Antenna Mast             | Innco systems GmbH          | MA4640-XP-ET                         | MA4640/536/38 330516/L | N.C.R.        | N/A           | N.C.R.        |
| Anechoic Chamber         | SY Corporation              | L × W × H<br>(9.6 m × 6.4 m × 6.6 m) | N/A                    | N.C.R.        | N/A           | N.C.R.        |
| Coaxial Cable            | RFONE                       | MWX221-NMSNMS (4 m)                  | J1023142               | Oct. 04, 2022 | Semi-Annual   | Apr. 04, 2023 |
| Coaxial Cable            | Qualwave Inc.               | QA500-18-NN-10 (10 m)                | 22200114               | Oct. 04, 2022 | Semi-Annual   | Apr. 04, 2023 |
| Coaxial Cable            | RFONE                       | PL360P-292M292M-1.5 M-A              | 20200324002            | Aug. 18, 2022 | Semi-Annual   | Feb. 18, 2023 |

## 1.7. Summary of Test Results

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part15 Subpart C, RSS-247 Issue 2, RSS-Gen Issue 5 |                                                     |                                                                         |                   |
|--------------------------------------------------------------------------|-----------------------------------------------------|-------------------------------------------------------------------------|-------------------|
| Section in FCC                                                           | Section in IC                                       | Test Item(s)                                                            | Result            |
| 15.205(a)<br>15.209<br>15.247(d)                                         | RSS-247 Issue 2<br>5.5<br>RSS-Gen Issue 5<br>8.9    | Transmitter Radiated Spurious Emissions and Conducted Spurious Emission | Complied          |
| 15.247(a)(2)                                                             | RSS-247 Issue 2<br>5.2(a)<br>RSS-Gen Issue 5<br>6.7 | 6 dB Bandwidth & 99 % Bandwidth                                         | Complied          |
| 15.247(b)(3)                                                             | RSS-247 Issue 2<br>5.4(d)                           | Maximum Peak Conducted Output Power                                     | Complied          |
| 15.247(e)                                                                | RSS-247 Issue 2<br>5.2(b)                           | Power Spectral Density                                                  | Complied          |
| 15.207                                                                   | RSS-Gen Issue 5<br>8.8                              | AC Power Line Conducted Emission                                        | N/A <sup>1)</sup> |

### Note;

- 1) The AC power line test was not performed because the EUT uses DC power line for operation.
- 2) All tests were performed with two voltages referring to ANSI C63.10-2013 clause 5.13 c)  
 $5 \times (100-15) \% = 4.25 \text{ V}$ ,  $24 \times (100+15) \% = 27.6 \text{ V}$ .

## 1.8. Test Procedure(s)

The measurement procedures described in the American National Standard of Procedure for Compliance Testing of unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 15.247 Meas Guidance v05r02 were used in the measurement of the DUT.

## 1.9. Sample Calculation

Where relevant, the following sample calculation is provided:

### 1.9.1. Conducted Test

Offset value (dB) = Attenuator (dB) + Cable loss (dB)

### 1.9.2. Radiation Test

Field strength level (dB $\mu$ V/m) = Measured level (dB $\mu$ V) + Antenna factor (dB) + Cable loss (dB) - Amplifier gain (dB)  
+ Duty factor (dB)

## 1.10. Information of software for test

- Using the software of nRF DTM (Version 0.10.2) to testing of EUT.

### 1.11. Test Report Revision

| Revision | Report number        | Date of Issue | Description |
|----------|----------------------|---------------|-------------|
| 0        | F690501-RF-RTL003610 | 2022.12.02    | Initial     |

### 1.12. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                          | Uncertainty |         |
|------------------------------------|-------------|---------|
| RF Output Power                    | 0.32 dB     |         |
| Occupied Bandwidth                 | 3.90 kHz    |         |
| Conducted Spurious Emission        | 0.61 dB     |         |
| Power Spectral Density             | 0.62 dB     |         |
| Radiated Emission, 9 kHz to 30 MHz | H           | 3.30 dB |
|                                    | V           | 3.30 dB |
| Radiated Emission, below 1 GHz     | H           | 4.80 dB |
|                                    | V           | 5.20 dB |
| Radiated Emission, above 1 GHz     | H           | 3.90 dB |
|                                    | V           | 4.00 dB |

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

### 1.13. Worst-Case Configuration and Test Mode (Bluetooth 5.3)

| Mode | Voltage   | Mode       | Frequency<br>(MHz) | Packet length<br>(Byte) | RF Output Power<br>(dBm) |
|------|-----------|------------|--------------------|-------------------------|--------------------------|
| GFSK | DC 4.25 V | 125k Coded | 2 480              | 37                      | 6.55                     |
|      |           |            |                    | 255                     | <b><u>6.63</u></b>       |
|      |           | 500k Coded |                    | 37                      | 6.53                     |
|      |           |            |                    | 255                     | <b><u>6.53</u></b>       |
|      |           | PHY 1M     |                    | 37                      | <b><u>6.65</u></b>       |
|      |           |            |                    | 255                     | 6.56                     |
|      |           | PHY 2M     |                    | 37                      | <b><u>6.66</u></b>       |
|      |           |            |                    | 255                     | 6.50                     |
|      | DC 27.6 V | 125k Coded |                    | 37                      | 6.48                     |
|      |           |            |                    | 255                     | <b><u>6.53</u></b>       |
|      |           | 500k Coded |                    | 37                      | 6.47                     |
|      |           |            |                    | 255                     | <b><u>6.53</u></b>       |
|      |           | PHY 1M     |                    | 37                      | <b><u>6.57</u></b>       |
|      |           |            |                    | 255                     | 6.48                     |
|      |           | PHY 2M     |                    | 37                      | <b><u>6.59</u></b>       |
|      |           |            |                    | 255                     | 6.49                     |

#### Remark;

According to ANSI C63.10-2013 Clause 5.13 c),  
the test voltages are  $5 \times (100-15) \% = 4.25 \text{ V}$ ,  $24 \times (100+15) \% = 27.6 \text{ V}$ .

All modes were investigated.

For all of 1M modes (125k Coded, 500k Coded, PHY 1M), 37 bytes at PHY 1M is tested as worst condition

For PHY 2M, 37 bytes is tested as worst condition.

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit Low/Middle/High Channels.

Conducted tests were performed with the EUT set to transmit Low/Middle/High channels with highest output power.

#### 1.14. Description of Variant Model

| Model Name | Description                                                  |
|------------|--------------------------------------------------------------|
| YRDC-2     | - Basic Model                                                |
| IES-D320W  | - Same as basic model, The only difference is the model name |

**Note;**

All the test was performed with basic model.

### 1.15. Duty Cycle of EUT

Regarding to KDB 558074 D01 15.247 Meas Guidance v05r02, 6, the maximum duty cycles of all modes were investigated and set the spectrum analyzer as below;  
 Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100.


| Test Mode              | PHY 1M | PHY 2M |
|------------------------|--------|--------|
| Duty Cycle (%)         | 62.79  | 32.56  |
| Correction Factor (dB) | 2.02   | 4.87   |

#### Remark;


- Duty Cycle (%) = (Tx on time / Tx on + off time) x 100
- Correction Factor (dB) = 10 log (1 / Duty Cycle)

#### - Test plots

PHY 1M

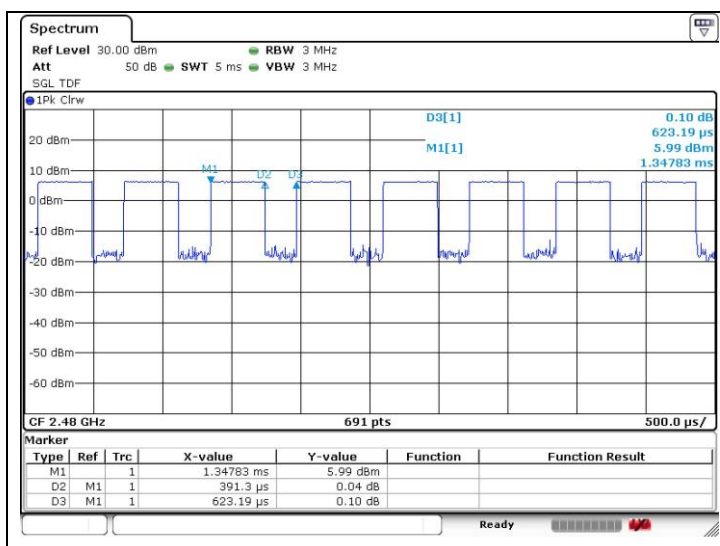

PHY 2M

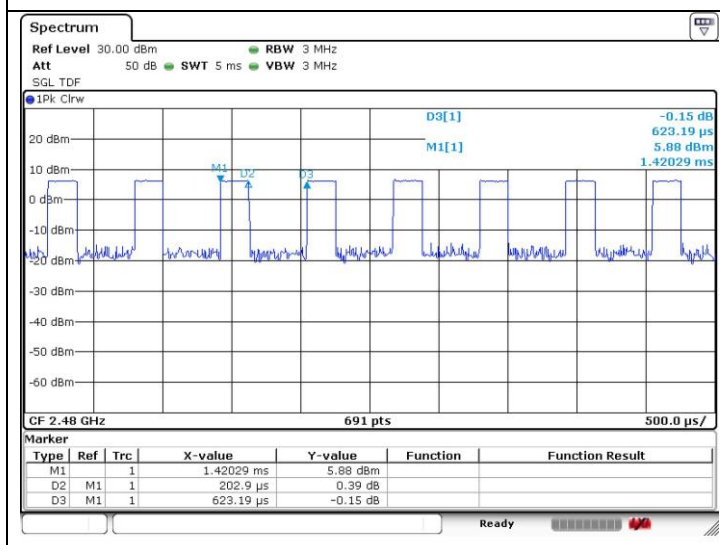


## 2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emission


### 2.1. Test Setup

#### 2.1.1. Transmitter Radiated Spurious Emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz emissions.

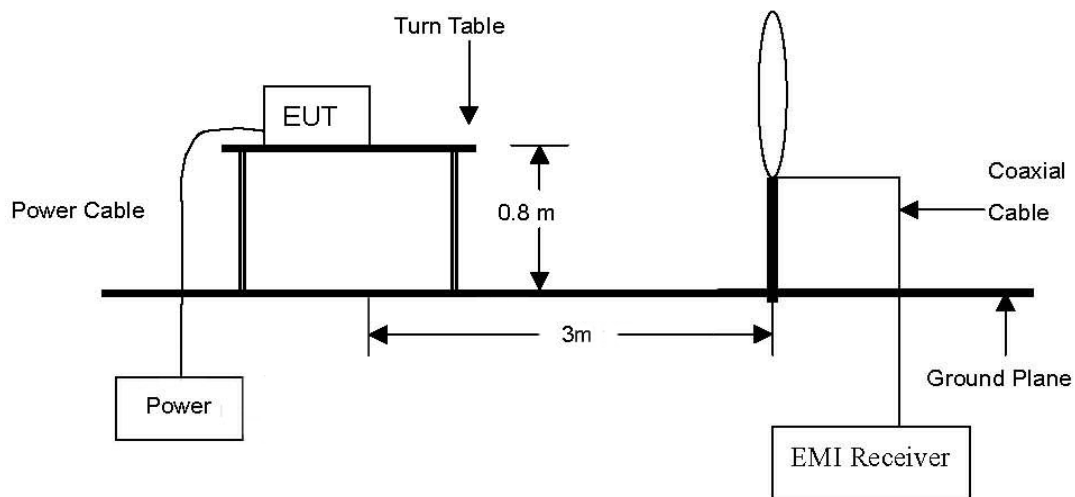


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

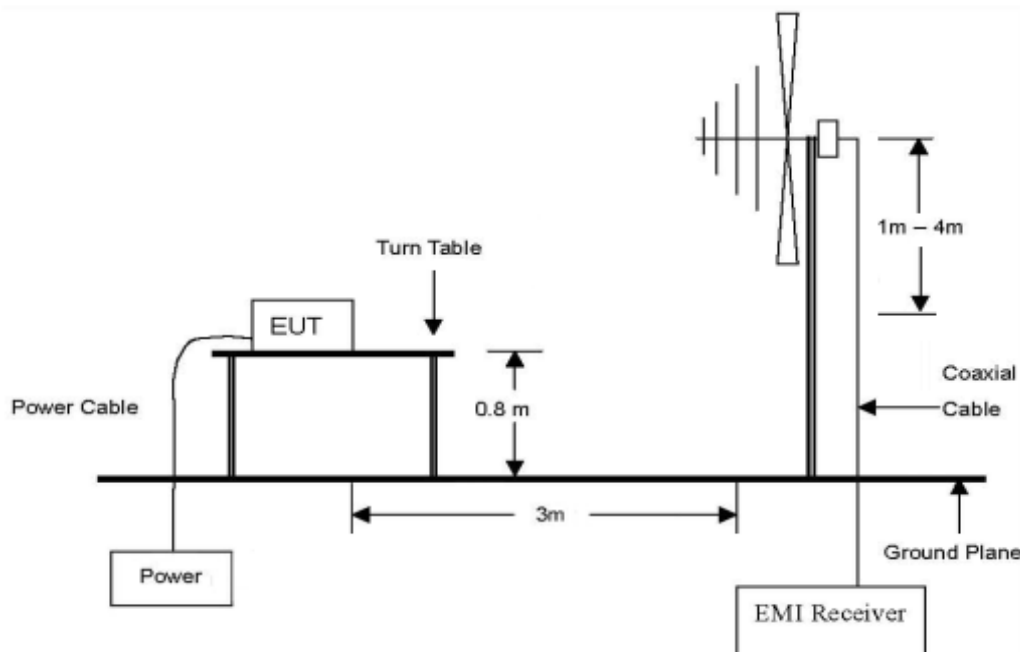

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

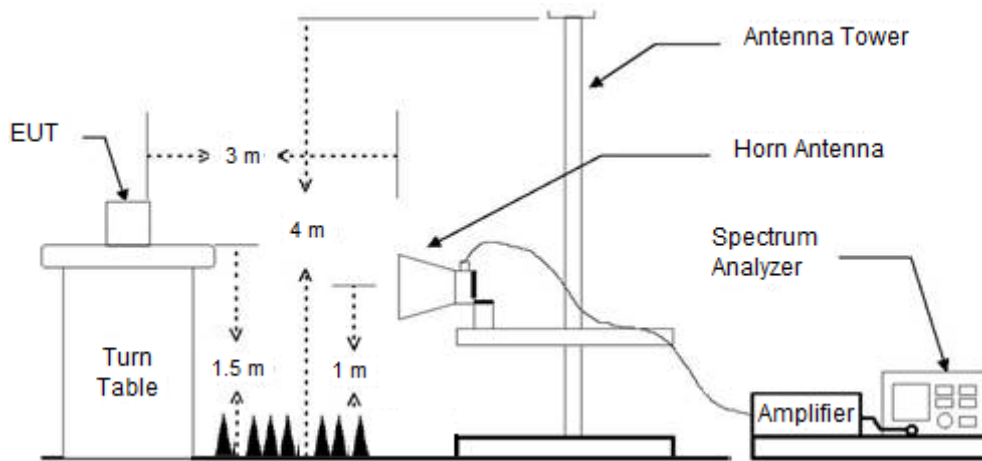

### 2.1.2. Conducted Spurious Emission

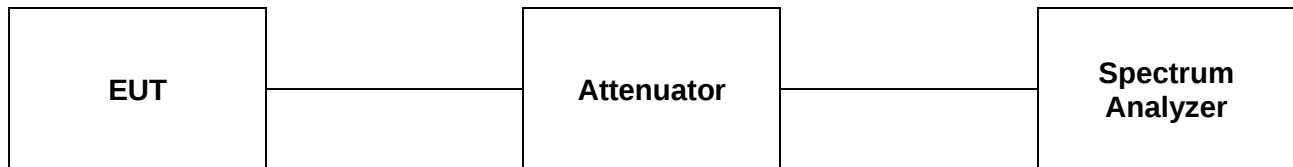

## 2.2. Limit

### 2.2.1. FCC

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>( $\mu V/m$ ) | Measurement Distance<br>(Meters) |
|--------------------|---------------------------------|----------------------------------|
| 0.009-0.490        | 2 400/F(kHz)                    | 300                              |
| 0.490-1.705        | 24 000/F(kHz)                   | 30                               |
| 1.705-30.0         | 30                              | 30                               |
| 30-88              | 100**                           | 3                                |
| 88-216             | 150**                           | 3                                |
| 216-960            | 200**                           | 3                                |
| Above 960          | 500                             | 3                                |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

### 2.2.2. IC

According to RSS-247 Issue 2, 5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

According to RSS-Gen Issue 5, 8.9, except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

**Table 5 – General Field Strength Limits at frequencies above 30 MHz**

| Frequency (MHz) | Field Strength ( $\mu V/m$ at 3 m) |
|-----------------|------------------------------------|
| 30-88           | 100                                |
| 88-216          | 150                                |
| 216-960         | 200                                |
| Above 960       | 500                                |

**Table 6 – General Field Strength Limits at frequencies below 30 MHz**

| Frequency              | Magnetic Field Strength (H-Field) ( $\mu A/m$ ) | Measurement Distance (meters) |
|------------------------|-------------------------------------------------|-------------------------------|
| 9-490 kHz <sup>1</sup> | 6.37/F (F in kHz)                               | 300                           |
| 490-1 705 kHz          | 63.7/F (F in kHz)                               | 30                            |
| 1.705-30 MHz           | 0.08                                            | 30                            |

**Note<sup>1</sup>:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013 and only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

### 2.3.1. Test Procedures for emission below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

### 2.3.2. Test Procedures for emission from above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site below 1 GHz and 1.5 meters above the ground at a 3 meter anechoic chamber test site above 1 GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a bi-log antenna, a horn antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. For measurements below 1 GHz resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.
6. For measurements Above 1 GHz resolution bandwidth is set to 1 MHz, the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

### 1. Unwanted Emissions into Non-Restricted Frequency Bands

- The Reference Level Measurement refer to section 11.11.2

Set analyzer center frequency to DTS channel center frequency, SPAN  $\geq 1.5$  times the DTS bandwidth, the RBW = 100 kHz and VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

- Unwanted Emissions Level Measurement refer to section 11.11.3

Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kHz and VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold.

### 2. Unwanted Emissions into Restricted Frequency Bands

- Peak Power measurement procedure refer to section 11.12.2.4

Set RBW = as specified in Table 9, VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = auto, Trace = Max hold.

**Table 9 – RBW as a function of frequency**

| Frequency           | RBW                |
|---------------------|--------------------|
| 9 kHz to 150 kHz    | 200 Hz to 300 Hz   |
| 0.15 MHz to 30 MHz  | 9 kHz to 10 kHz    |
| 30 MHz to 1 000 MHz | 100 kHz to 120 kHz |
| > 1 000 MHz         | 1 MHz              |

If the peak – detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

- Average Power measurements procedure refer to section 11.12.2.5.2

The EUT shall be configured to operate at the maximum achievable duty cycle.

Measure the duty cycle D of the transmitter output signal as described in section 11.6.

Set RBW = 1 MHz, VBW  $\geq 3 \times$  RBW, Detector = RMS, if span / (# of points in sweep)  $\leq$  (RBW/2).

Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied then the detector mode shall be set to peak.

Averaging type = power (i.e., RMS).

As an alternative the detector and averaging type may be set for linear voltage averaging.

Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used. Sweep time = auto, Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle.

### 3. Definition of DUT Axis.

The test orthogonal plan of EUT was investigated with three axis described in the test setup photo.

The X-axis was worst-case, all radiated testing of EUT was performed with **X-axis**.

### 2.3.3. Test Procedures for Conducted Spurious Emissions

Per the guidance of ANSI C63.10-2013, section 11.11.1 & 11.11.2 & 11.11.3, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 kHz. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in section 2.4.3. The limit for out of band spurious emission at the band edge is 20 dB below the fundamental emission level measured in a 100 kHz bandwidth.

#### 1. Conducted Emissions at Band Edge

- The Measurement refer to section 11.11.3

Set the center frequency and span to encompass frequency range to be measured, the RBW = 100 kHz and VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = Auto couple, Trace mode = Max hold, The trace was allowed to stabilize.

#### 2. Conducted Spurious Emissions

- The Measurement refer to section 11.11.3

Start frequency was set to 9 kHz and stop frequency was set to 25 GHz (separated into two plots per channel), RBW = 1 MHz, VBW  $\geq 3 \times$  RBW, Detector = Peak, Sweep time = Auto couple, Trace = Max hold, The trace was allowed to stabilize.

#### 3. TDF function

- For plots showing conducted spurious emissions from 9 kHz to 25 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as TDF function.  
 So, the reading values shown in plots were final result.

## 2.4. Test Results

Ambient temperature : (23 ± 1) °C  
Relative humidity : 47 % R.H.

### 2.4.1. Radiated Spurious Emission below 1 000 MHz

The frequency spectrum from 9 MHz to 1 000 MHz was investigated. All reading values are peak values.


- Test voltage: DC 4.25 V

| Radiated Emissions |                |             | Ant  | Correction Factors |               | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|---------------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP + CL (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| 43.54              | 40.70          | Peak        | V    | 19.31              | -27.64        | 32.37           | 40.00          | 7.63        |
| 114.55             | 33.70          | Peak        | V    | 16.95              | -26.83        | 23.82           | 43.50          | 19.68       |
| 201.21             | 36.60          | Peak        | V    | 17.00              | -26.29        | 27.31           | 43.50          | 16.19       |
| 477.13             | 31.50          | Peak        | H    | 22.59              | -26.10        | 27.99           | 46.00          | 18.01       |
| Above 500.00       | Not detected   | -           | -    | -                  | -             | -               | -              | -           |

#### Remark;

- Spurious emissions for all channels were investigated and almost the same below 1 GHz.
- Reported spurious emissions are in **PHY 2M / 37 bytes / High channel** as worst case among other modes.
- Radiated spurious emission measurement as below.  
(Actual = Reading + AF + AMP + CL)
- According to §15.31(o), emission levels are not report much lower than the limits by over 20 dB.

#### - Test plot

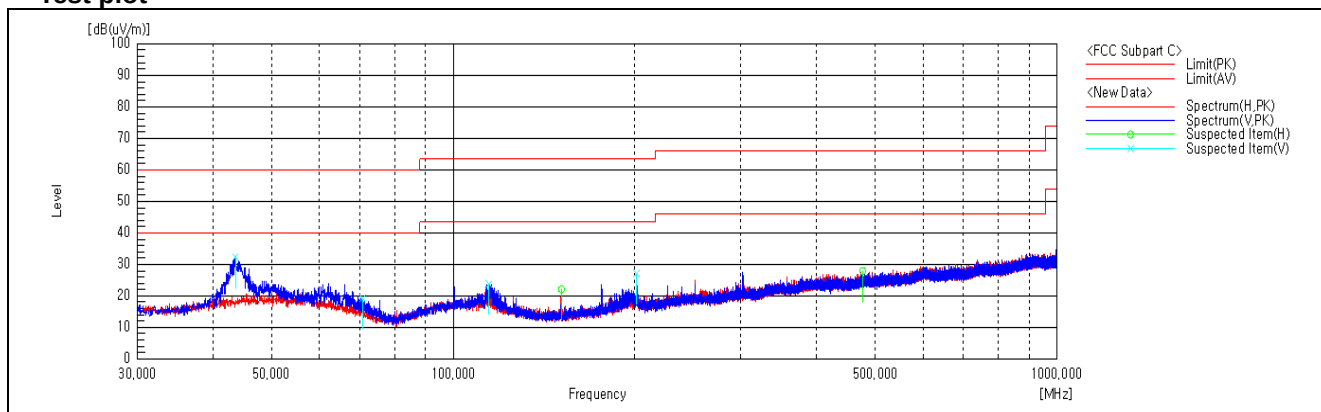


**- Test voltage: DC 27.6 V**

| Radiated Emissions |                      |             | Ant  | Correction Factors |               | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP + CL (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| 43.58              | 40.40                | Peak        | V    | 19.32              | -27.64        | 32.08                 | 40.00                | 7.92        |
| 75.51              | 34.90                | Peak        | V    | 13.45              | -27.18        | 21.17                 | 40.00                | 18.83       |
| 115.28             | 33.50                | Peak        | V    | 16.84              | -26.83        | 23.51                 | 43.50                | 19.99       |
| 150.93             | 37.10                | Peak        | H    | 13.89              | -26.71        | 24.28                 | 43.50                | 19.22       |
| 201.33             | 36.70                | Peak        | V    | 16.99              | -26.29        | 27.40                 | 43.50                | 16.10       |
| 424.79             | 30.40                | Peak        | H    | 22.00              | -25.80        | 26.60                 | 46.00                | 19.40       |
| Above 500.00       | Not detected         | -           | -    | -                  | -             | -                     | -                    | -           |

**Remark;**

1. Spurious emissions for all channels were investigated and almost the same below 1 GHz.
2. Reported spurious emissions are in **PHY 2M / 37 bytes / High channel** as worst case among other modes.
3. Radiated spurious emission measurement as below.  
(Actual = Reading + AF + AMP + CL)
4. According to §15.31(o), emission levels are not report much lower than the limits by over 20 dB.

**- Test plot**

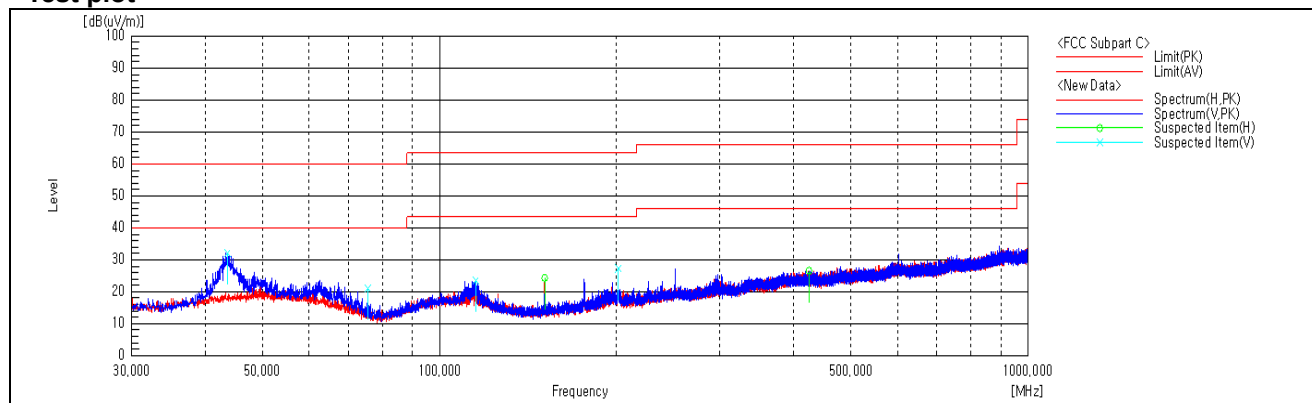

### 2.4.2. Radiated Spurious Emission above 1 000 MHz

The frequency spectrum above 1 000 MHz was investigated. All reading values are peak and average values.

- Test voltage: DC 4.25 V

#### PHY 1M

Low Channel (2 402 MHz)

| Radiated Emissions |                |             | Ant. | Correction Factors |         |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|---------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *2 310.00          | 18.18          | Peak        | H    | 27.80              | 6.37    | -       | 52.35           | 74.00          | 21.65       |
| *2 310.00          | 7.62           | Average     | H    | 27.80              | 6.37    | 2.02    | 43.81           | 54.00          | 10.19       |
| *2 369.85          | 20.79          | Peak        | H    | 27.92              | 6.48    | -       | 55.19           | 74.00          | 18.81       |
| *2 385.36          | 8.65           | Average     | H    | 28.01              | 6.59    | 2.02    | 45.27           | 54.00          | 8.73        |
| *2 390.00          | 18.71          | Peak        | H    | 28.04              | 6.63    | -       | 53.38           | 74.00          | 20.62       |
| *2 390.00          | 7.67           | Average     | H    | 28.04              | 6.63    | 2.02    | 44.36           | 54.00          | 9.64        |

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *4 804.00          | 58.21          | Peak        | V    | 32.62              | -35.59      | -       | 55.24           | 74.00          | 18.76       |
| *4 803.88          | 52.65          | Average     | V    | 32.62              | -35.59      | 2.02    | 51.70           | 54.00          | 2.30        |
| Above 4 900.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

Middle Channel (2 440 MHz)

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *4 879.44          | 57.70          | Peak        | V    | 32.86              | -35.66      | -       | 54.90           | 74.00          | 19.10       |
| *4 879.71          | 52.86          | Average     | V    | 32.86              | -35.66      | 2.02    | <b>52.08</b>    | 54.00          | 1.92        |
| *7 321.02          | 45.09          | Peak        | V    | 36.04              | -32.49      | -       | 48.64           | 74.00          | 25.36       |
| Above 7 400.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

High Channel (2 480 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 483.50          | 29.60                | Peak        | H    | 28.13              | 6.35    | -       | 64.08                 | 74.00                | 9.92        |
| *2 483.50          | 9.40                 | Average     | H    | 28.13              | 6.35    | 2.02    | 45.90                 | 54.00                | 8.10        |
| *2 483.58          | 29.88                | Peak        | H    | 28.13              | 6.35    | -       | 64.36                 | 74.00                | 9.64        |
| *2 483.61          | 10.49                | Average     | H    | 28.13              | 6.35    | 2.02    | 46.99                 | 54.00                | 7.01        |
| *2 500.00          | 18.53                | Peak        | H    | 28.10              | 6.32    | -       | 52.95                 | 74.00                | 21.05       |
| *2 500.00          | 7.98                 | Average     | H    | 28.10              | 6.32    | 2.02    | 44.42                 | 54.00                | 9.58        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 960.55          | 58.31                | Peak        | V    | 33.00              | -35.54      | -       | 55.77                 | 74.00                | 18.23       |
| *4 959.85          | 52.21                | Average     | V    | 33.00              | -35.55      | 2.02    | 51.68                 | 54.00                | 2.32        |
| *7 439.20          | 44.25                | Peak        | V    | 36.00              | -32.30      | -       | 47.95                 | 74.00                | 26.05       |
| Above 7 500.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**PHY 2M**

Low Channel (2 402 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 18.34                | Peak        | H    | 27.80              | 6.37    | -       | 52.51                 | 74.00                | 21.49       |
| *2 310.00          | 7.86                 | Average     | H    | 27.80              | 6.37    | 4.87    | 46.90                 | 54.00                | 7.10        |
| *2 386.13          | 20.15                | Peak        | H    | 28.02              | 6.59    | -       | 54.76                 | 74.00                | 19.24       |
| *2 362.26          | 8.45                 | Average     | H    | 27.87              | 6.46    | 4.87    | 47.65                 | 54.00                | 6.35        |
| *2 390.00          | 18.81                | Peak        | H    | 28.04              | 6.63    | -       | 53.48                 | 74.00                | 20.52       |
| *2 390.00          | 7.96                 | Average     | H    | 28.04              | 6.63    | 4.87    | 47.50                 | 54.00                | 6.50        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 803.98          | 58.35                | Peak        | V    | 32.62              | -35.59      | -       | 55.38                 | 74.00                | 18.62       |
| *4 803.19          | 49.42                | Average     | V    | 32.61              | -35.59      | 4.87    | 51.31                 | 54.00                | 2.69        |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

Middle Channel (2 440 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 879.03          | 57.67                | Peak        | V    | 32.86              | -35.66      | -       | 54.87                 | 74.00                | 19.13       |
| *4 879.62          | 49.23                | Average     | V    | 32.86              | -35.66      | 4.87    | 51.30                 | 54.00                | 2.70        |
| *7 321.62          | 44.56                | Peak        | V    | 36.04              | -32.50      | -       | 48.10                 | 74.00                | 25.90       |
| Above 7 400.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

High Channel (2 480 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 483.50          | 30.06                | Peak        | H    | 28.13              | 6.35    | -       | 64.54                 | 74.00                | 9.46        |
| *2 483.50          | 10.20                | Average     | H    | 28.13              | 6.35    | 4.87    | 49.55                 | 54.00                | 4.45        |
| *2 483.58          | 29.83                | Peak        | H    | 28.13              | 6.35    | -       | 64.31                 | 74.00                | 9.69        |
| *2 484.17          | 10.01                | Average     | H    | 28.13              | 6.35    | 4.87    | 49.36                 | 54.00                | 4.64        |
| *2 500.00          | 18.19                | Peak        | H    | 28.10              | 6.32    | -       | 52.61                 | 74.00                | 21.39       |
| *2 500.00          | 7.98                 | Average     | H    | 28.10              | 6.32    | 4.87    | 47.27                 | 54.00                | 6.73        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 961.10          | 58.53                | Peak        | V    | 33.00              | -35.54      | -       | 55.99                 | 74.00                | 18.01       |
| *4 959.31          | 49.13                | Average     | V    | 33.00              | -35.55      | 4.87    | <b>51.45</b>          | 54.00                | 2.55        |
| *7 438.54          | 44.02                | Peak        | V    | 36.00              | -32.29      | -       | 47.73                 | 74.00                | 26.27       |
| Above 7 500.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**- Test voltage: 27.6 V**

**PHY 1M**

Low Channel (2 402 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 19.29                | Peak        | H    | 27.80              | 6.37    | -       | 53.46                 | 74.00                | 20.54       |
| *2 310.00          | 7.82                 | Average     | H    | 27.80              | 6.37    | 2.02    | 44.01                 | 54.00                | 9.99        |
| *2 370.18          | 20.70                | Peak        | H    | 27.92              | 6.48    | -       | 55.10                 | 74.00                | 18.90       |
| *2 370.07          | 8.81                 | Average     | H    | 27.92              | 6.48    | 2.02    | 45.23                 | 54.00                | 8.77        |
| *2 390.00          | 17.62                | Peak        | H    | 28.04              | 6.63    | -       | 52.29                 | 74.00                | 21.71       |
| *2 390.00          | 8.17                 | Average     | H    | 28.04              | 6.63    | 2.02    | 44.86                 | 54.00                | 9.14        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 803.56          | 58.34                | Peak        | V    | 32.61              | -35.59      | -       | 55.36                 | 74.00                | 18.64       |
| *4 804.07          | 52.98                | Average     | V    | 32.62              | -35.59      | 2.02    | 52.03                 | 54.00                | 1.97        |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

Middle Channel (2 440 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 879.48          | 57.81                | Peak        | V    | 32.86              | -35.66      | -       | 55.01                 | 74.00                | 18.99       |
| *4 879.87          | 53.06                | Average     | V    | 32.86              | -35.66      | 2.02    | <b>52.28</b>          | 54.00                | 1.72        |
| *7 319.62          | 44.40                | Peak        | V    | 36.04              | -32.48      | -       | 47.96                 | 74.00                | 26.04       |
| Above 7 400.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

High Channel (2 480 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 483.50          | 30.05                | Peak        | H    | 28.13              | 6.35    | -       | 64.53                 | 74.00                | 9.47        |
| *2 483.50          | 9.07                 | Average     | H    | 28.13              | 6.35    | 2.02    | 45.57                 | 54.00                | 8.43        |
| *2 483.54          | 29.79                | Peak        | H    | 28.13              | 6.35    | -       | 64.27                 | 74.00                | 9.73        |
| *2 484.24          | 9.84                 | Average     | H    | 28.13              | 6.35    | 2.02    | 46.34                 | 54.00                | 7.66        |
| *2 500.00          | 18.27                | Peak        | H    | 28.10              | 6.32    | -       | 52.69                 | 74.00                | 21.31       |
| *2 500.00          | 8.20                 | Average     | H    | 28.10              | 6.32    | 2.02    | 44.64                 | 54.00                | 9.36        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 960.44          | 58.69                | Peak        | V    | 33.00              | -35.54      | -       | 56.15                 | 74.00                | 17.85       |
| *4 959.75          | 52.44                | Average     | V    | 33.00              | -35.55      | 2.02    | 51.91                 | 54.00                | 2.09        |
| *7 440.69          | 44.15                | Peak        | V    | 36.00              | -32.31      | -       | 47.84                 | 74.00                | 26.16       |
| Above 7 500.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**PHY 2M**

Low Channel (2 402 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 19.99                | Peak        | H    | 27.80              | 6.37    | -       | 54.16                 | 74.00                | 19.84       |
| *2 310.00          | 7.82                 | Average     | H    | 27.80              | 6.37    | 4.87    | 46.86                 | 54.00                | 7.14        |
| *2 369.74          | 20.14                | Peak        | H    | 27.92              | 6.48    | -       | 54.54                 | 74.00                | 19.46       |
| *2 385.91          | 8.46                 | Average     | H    | 28.02              | 6.59    | 4.87    | 47.94                 | 54.00                | 6.06        |
| *2 390.00          | 18.20                | Peak        | H    | 28.04              | 6.63    | -       | 52.87                 | 74.00                | 21.13       |
| *2 390.00          | 7.96                 | Average     | H    | 28.04              | 6.63    | 4.87    | 47.50                 | 54.00                | 6.50        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 804.95          | 58.29                | Peak        | V    | 32.62              | -35.59      | -       | 55.32                 | 74.00                | 18.68       |
| *4 803.33          | 49.55                | Average     | V    | 32.61              | -35.59      | 4.87    | 51.44                 | 54.00                | 2.56        |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

Middle Channel (2 440 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 880.16          | 57.77                | Peak        | V    | 32.86              | -35.66      | -       | 54.97                 | 74.00                | 19.03       |
| *4 879.17          | 49.36                | Average     | V    | 32.86              | -35.66      | 4.87    | 51.43                 | 54.00                | 2.57        |
| *7 320.20          | 44.43                | Peak        | V    | 36.04              | -32.48      | -       | 47.99                 | 74.00                | 26.01       |
| Above 7 400.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

High Channel (2 480 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 483.50          | 30.21                | Peak        | H    | 28.13              | 6.35    | -       | 64.69                 | 74.00                | 9.31        |
| *2 483.50          | 10.12                | Average     | H    | 28.13              | 6.35    | 4.87    | 49.47                 | 54.00                | 4.53        |
| *2 483.54          | 30.04                | Peak        | H    | 28.13              | 6.35    | -       | 64.52                 | 74.00                | 9.48        |
| *2 484.10          | 9.88                 | Average     | H    | 28.13              | 6.35    | 4.87    | 49.23                 | 54.00                | 4.77        |
| *2 500.00          | 18.33                | Peak        | H    | 28.10              | 6.32    | -       | 52.75                 | 74.00                | 21.25       |
| *2 500.00          | 8.05                 | Average     | H    | 28.10              | 6.32    | 4.87    | 47.34                 | 54.00                | 6.66        |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 961.08          | 58.55                | Peak        | V    | 33.00              | -35.54      | -       | 56.01                 | 74.00                | 17.99       |
| *4 959.25          | 49.37                | Average     | V    | 33.00              | -35.55      | 4.87    | <b>51.69</b>          | 54.00                | 2.31        |
| *7 441.48          | 44.79                | Peak        | V    | 36.00              | -32.31      | -       | 48.48                 | 74.00                | 25.52       |
| Above 7 500.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

**Remarks;**


1. “\*” means the restricted band.
2. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
3. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
4. Actual = Reading + AF + CL + (DF) or Reading + AF + AMP + CL + (DF).
5. According to § 15.31(o), emission levels are not reported much lower than the limits by over 20 dB.
6. The maximized peak measured value complies with the average limit, to perform an average measurement is unnecessary.
7. AF = Antenna Factor, CL = Cable Loss, DF = Duty Correction Factor.

## - Test plots


Test voltage: DC 4.25 V

PHY 1M


Low channel band edge (Peak)

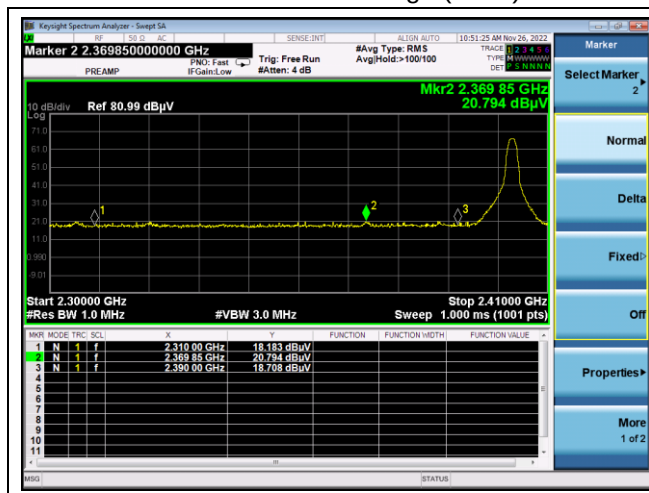


Low channel band edge (Average)

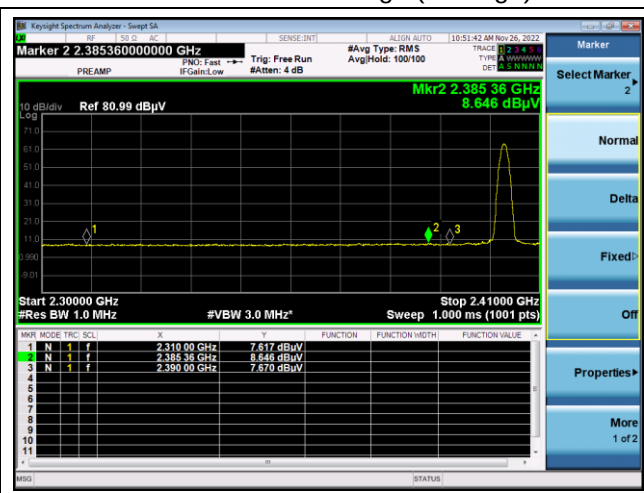


Low channel 2<sup>nd</sup> Harmonic (Peak)

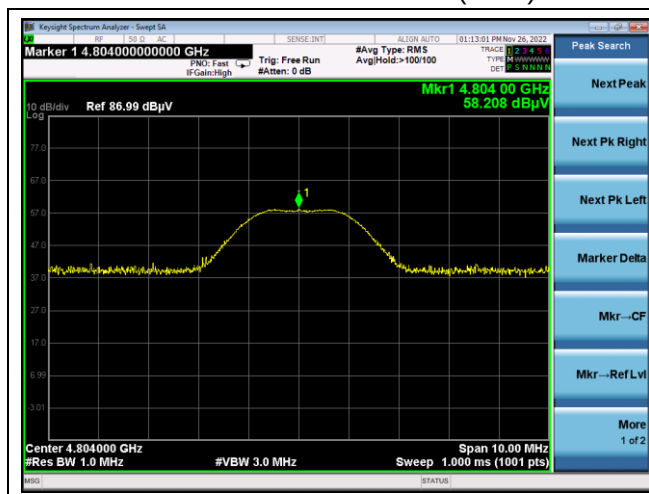


Low channel 2<sup>nd</sup> Harmonic (Average)

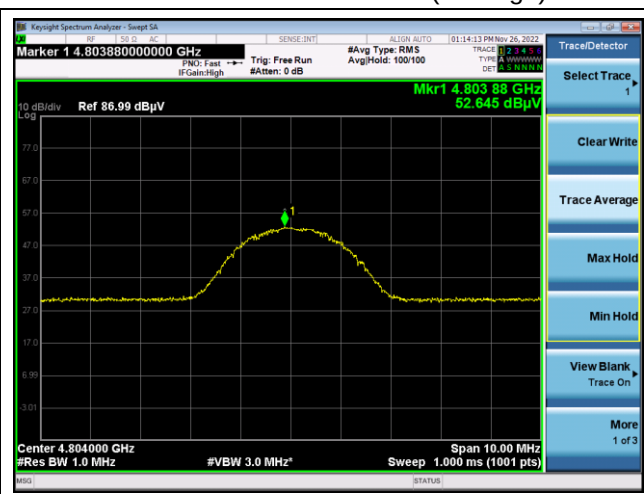


Middle channel 2<sup>nd</sup> Harmonic (Peak)

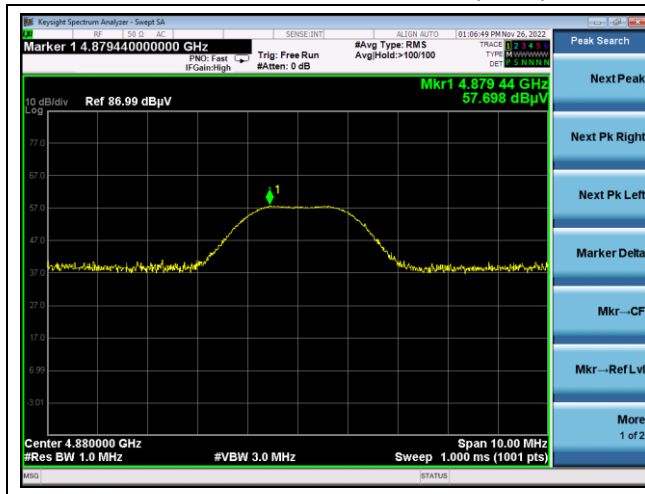


Middle channel 2<sup>nd</sup> Harmonic (Average)

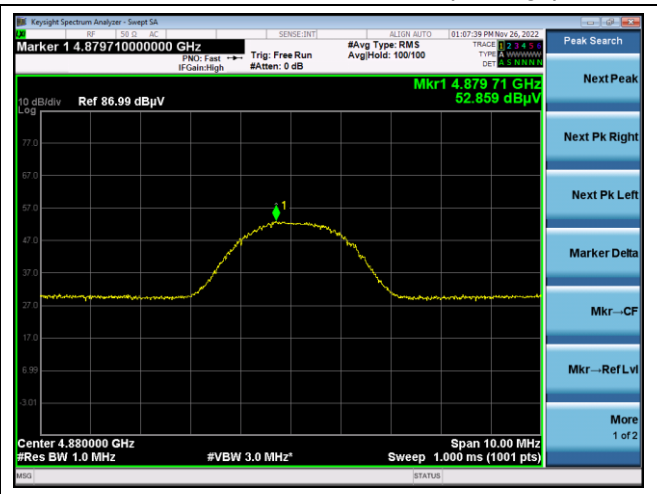


Middle channel 3<sup>rd</sup> Harmonic (Peak)

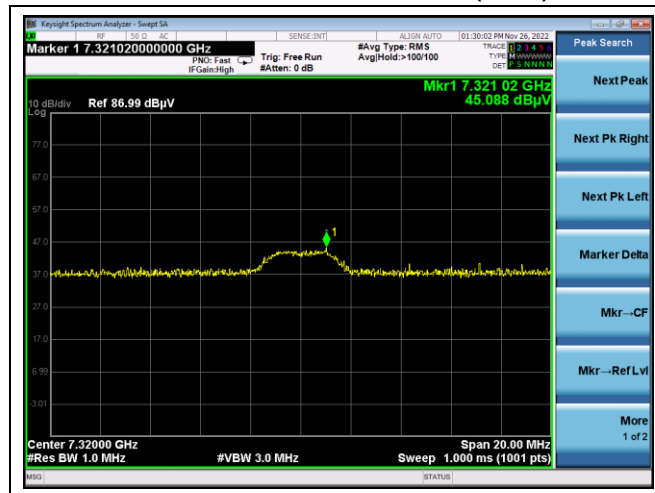


High channel band edge (Peak)

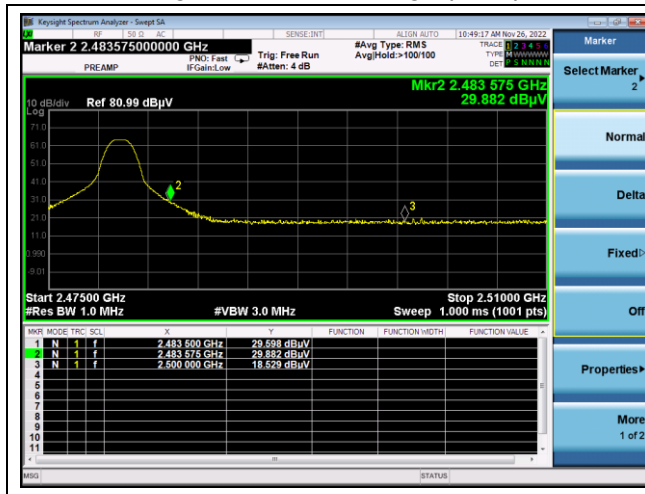


High channel band edge (Average)

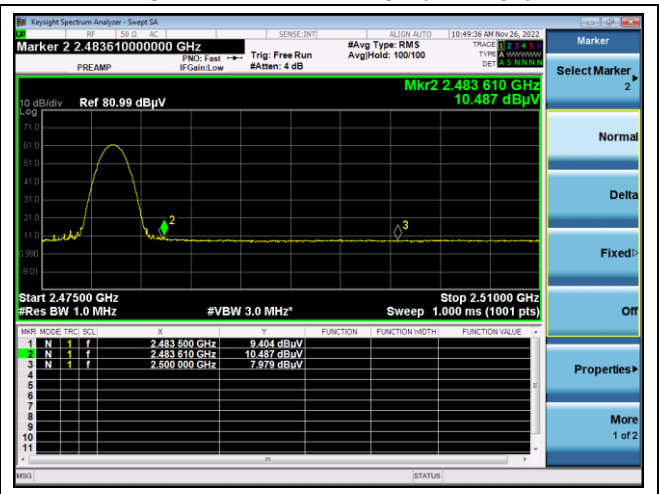


High channel 2<sup>nd</sup> Harmonic (Peak)

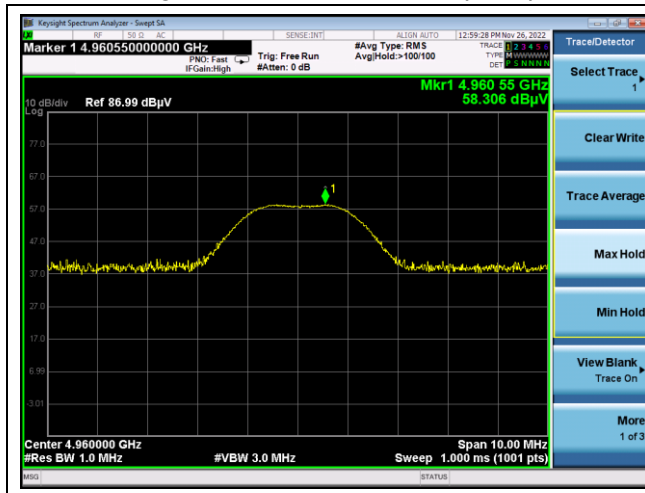

High channel 2<sup>nd</sup> Harmonic (Average)

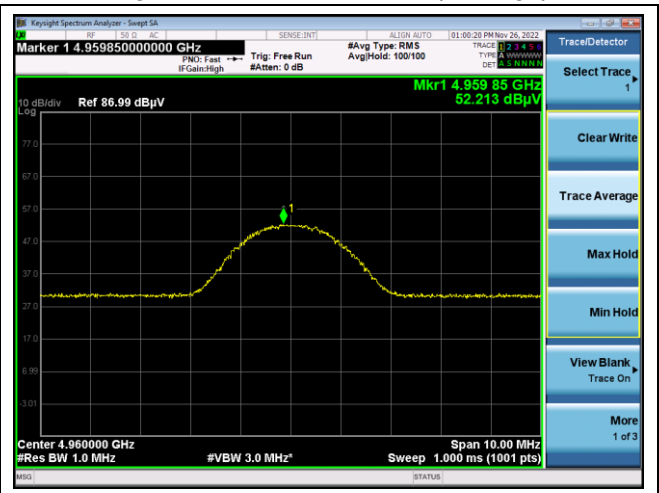


High channel 3<sup>rd</sup> Harmonic (Peak)

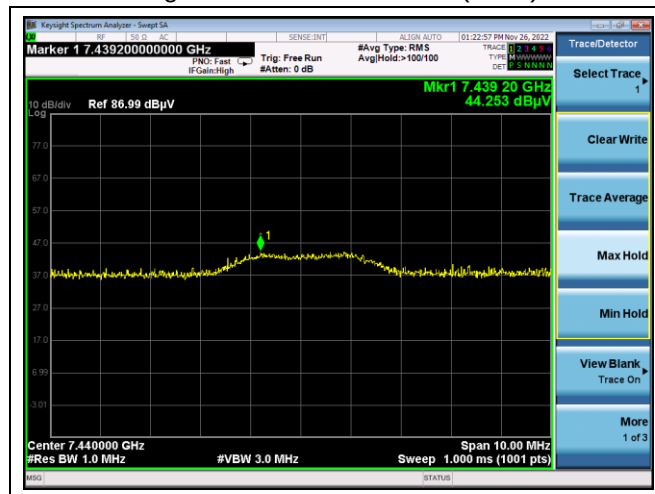


## PHY 2M


Low channel band edge (Peak)

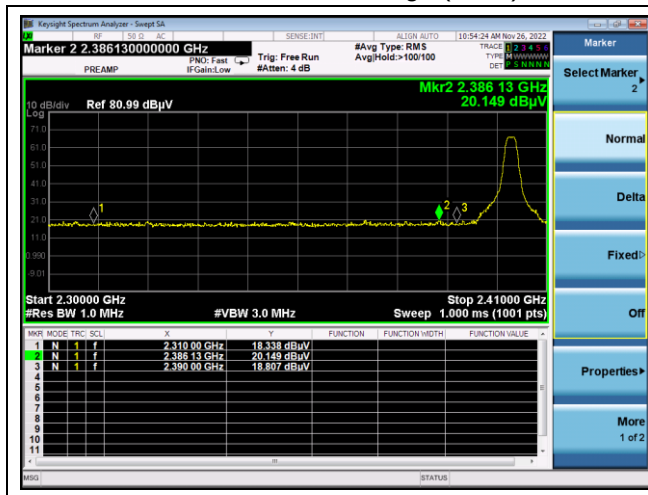


Low channel band edge (Average)

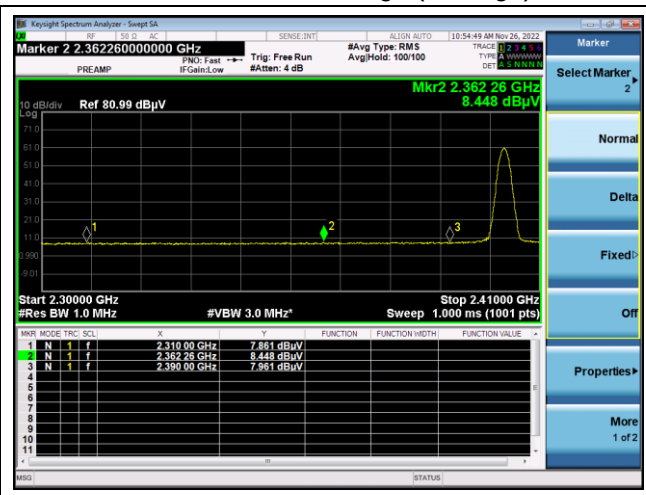


Low channel 2<sup>nd</sup> Harmonic (Peak)

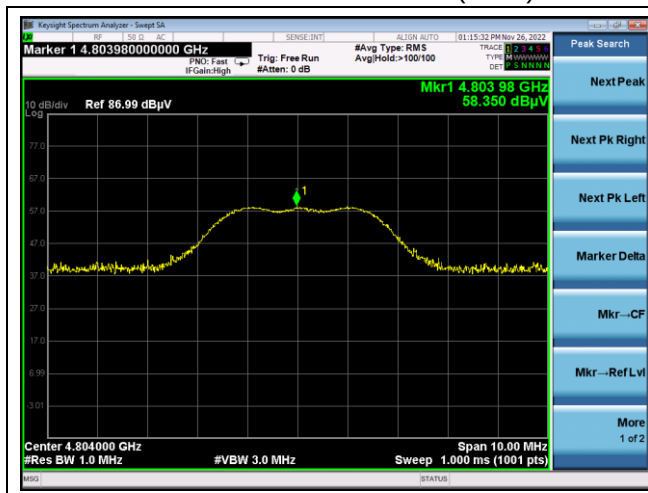


Low channel 2<sup>nd</sup> Harmonic (Average)

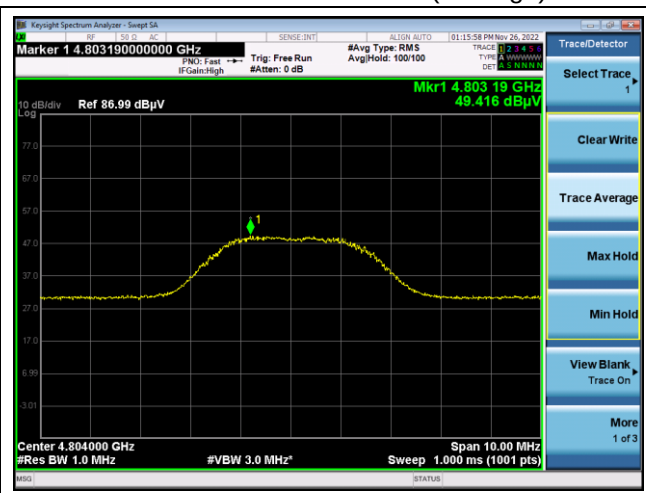


Middle channel 2<sup>nd</sup> Harmonic (Peak)

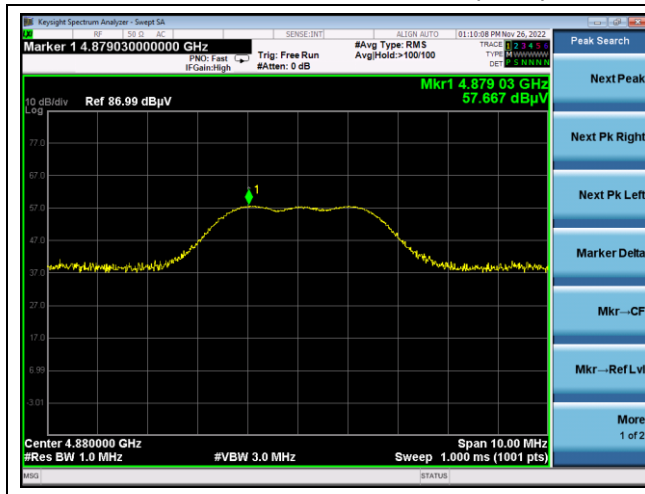


Middle channel 2<sup>nd</sup> Harmonic (Average)

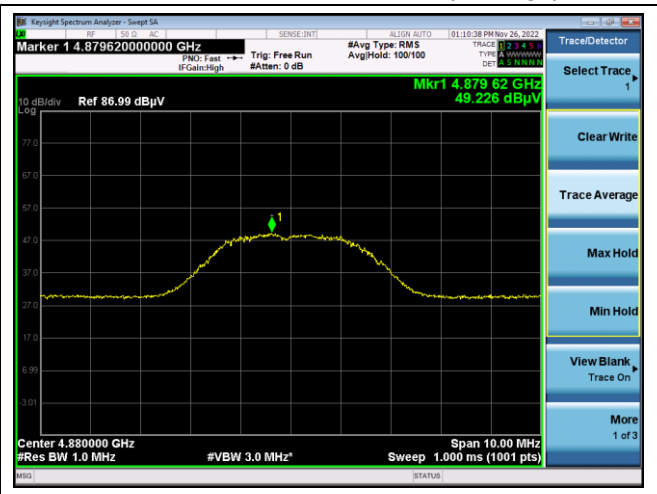


Middle channel 3<sup>rd</sup> Harmonic (Peak)

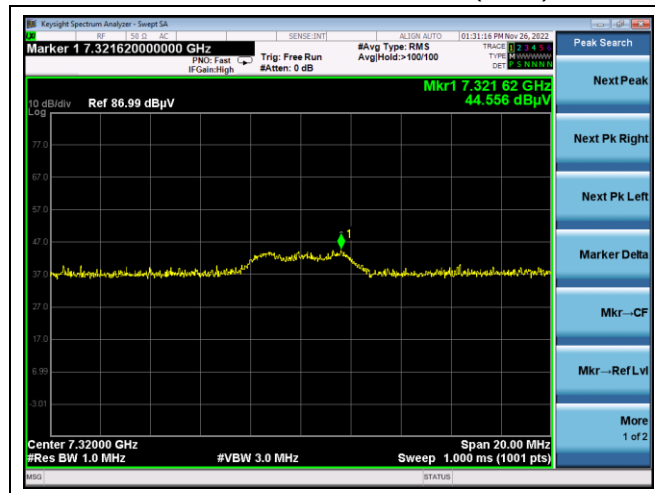


High channel band edge (Peak)

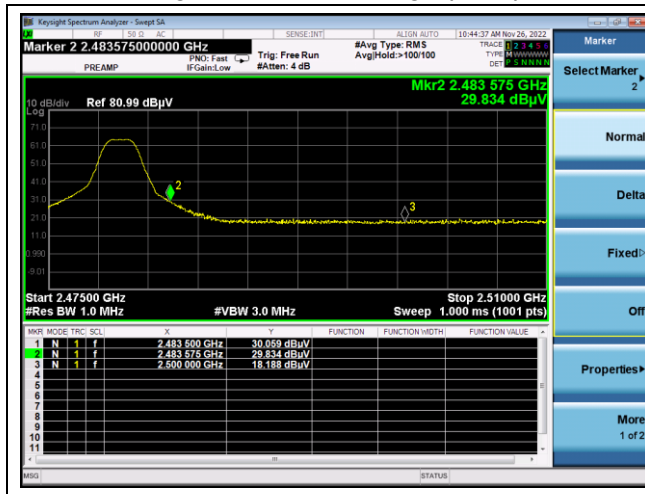


High channel band edge (Average)

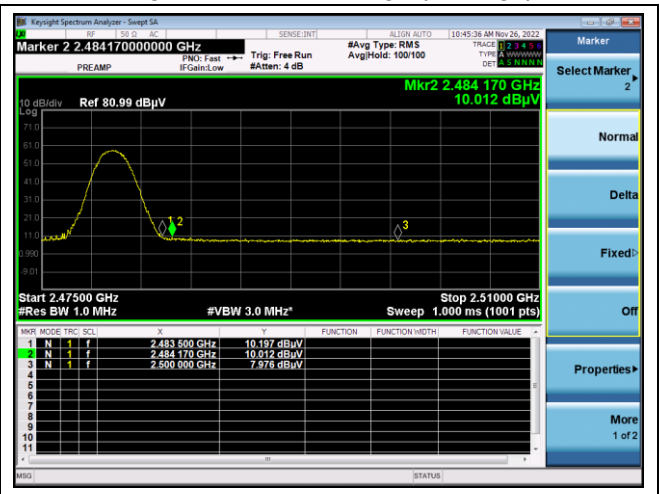

High channel 2<sup>nd</sup> Harmonic (Peak)

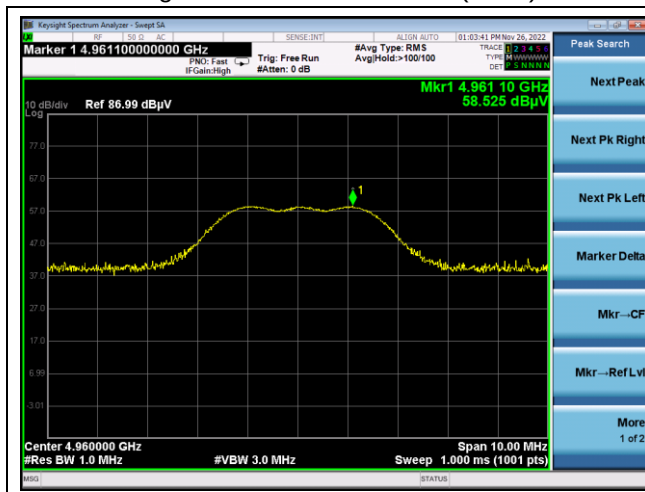

High channel 2<sup>nd</sup> Harmonic (Average)

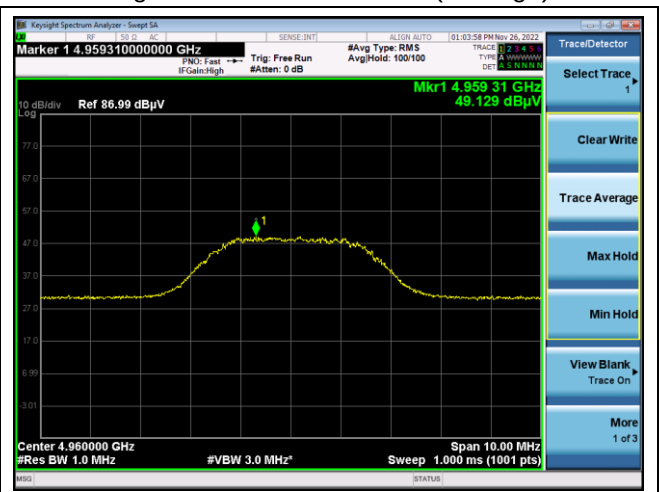


High channel 3<sup>rd</sup> Harmonic (Peak)




Test voltage: DC 27.6 V

PHY 1M


Low channel band edge (Peak)

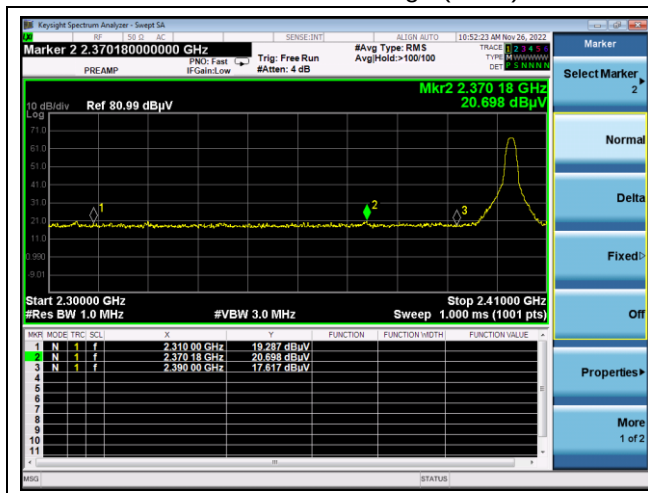


Low channel band edge (Average)

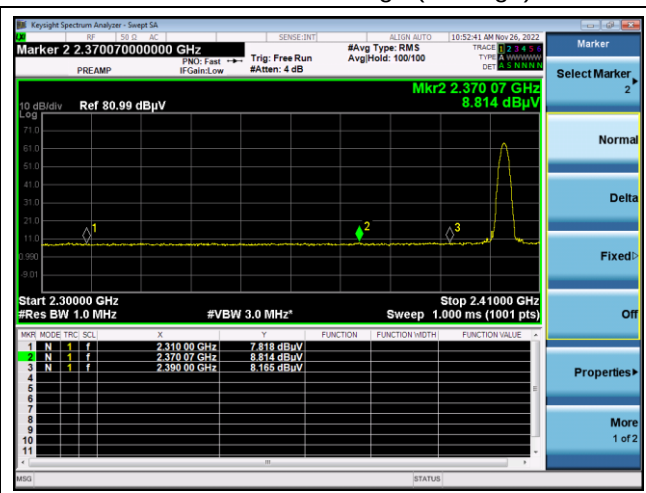


Low channel 2<sup>nd</sup> Harmonic (Peak)

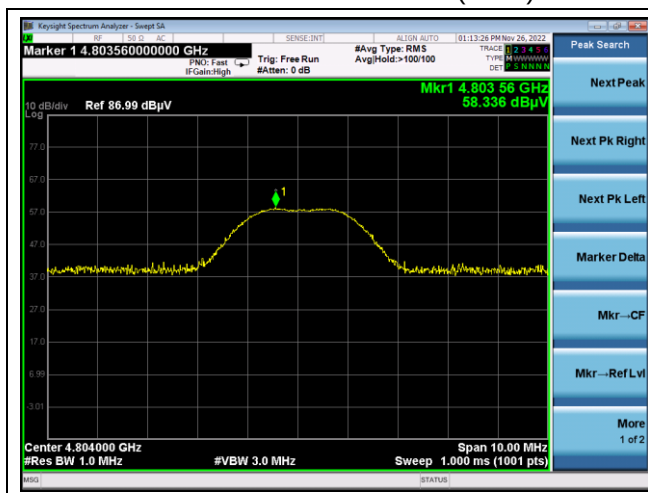


Low channel 2<sup>nd</sup> Harmonic (Average)

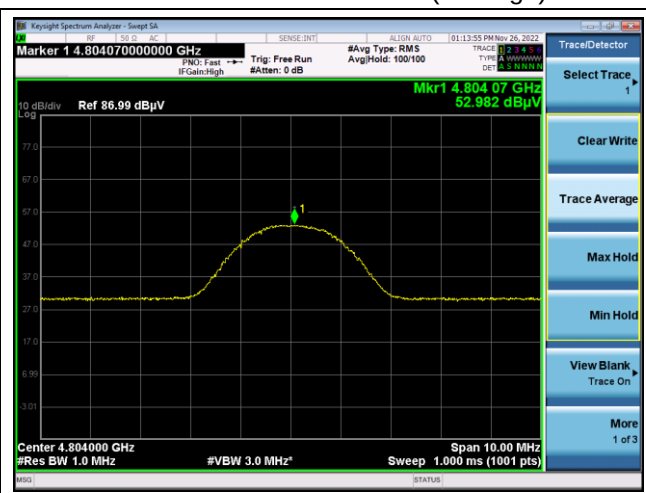


Middle channel 2<sup>nd</sup> Harmonic (Peak)

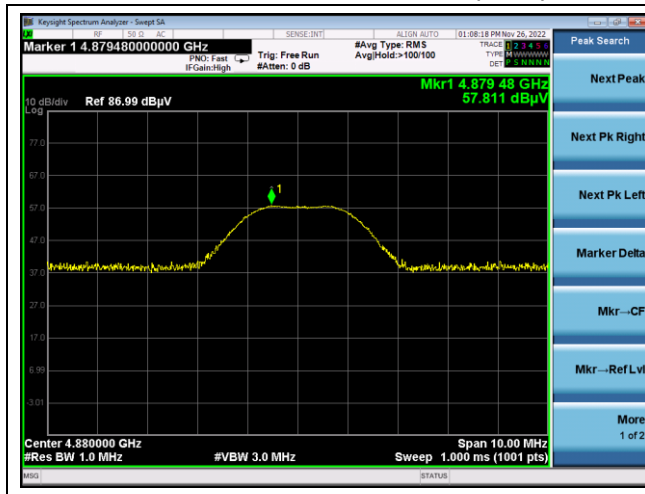


Middle channel 2<sup>nd</sup> Harmonic (Average)

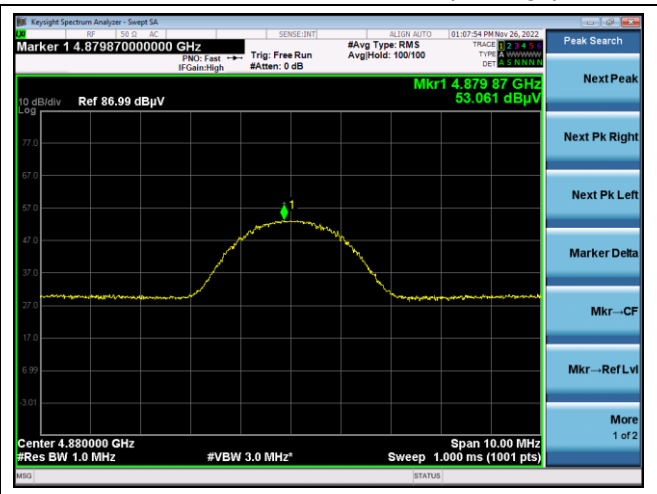


Middle channel 3<sup>rd</sup> Harmonic (Peak)

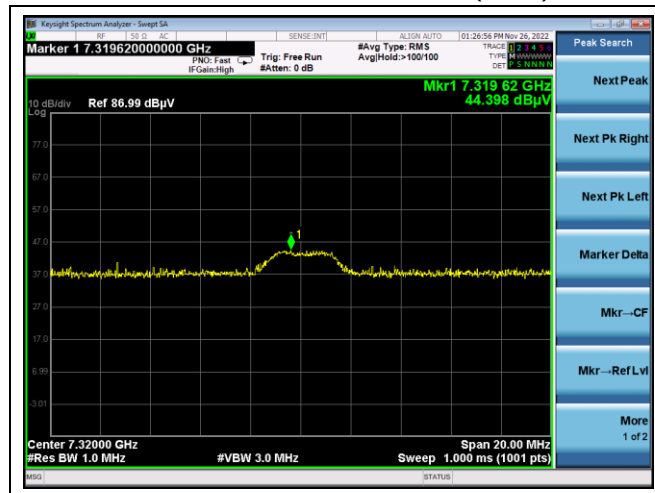


High channel band edge (Peak)

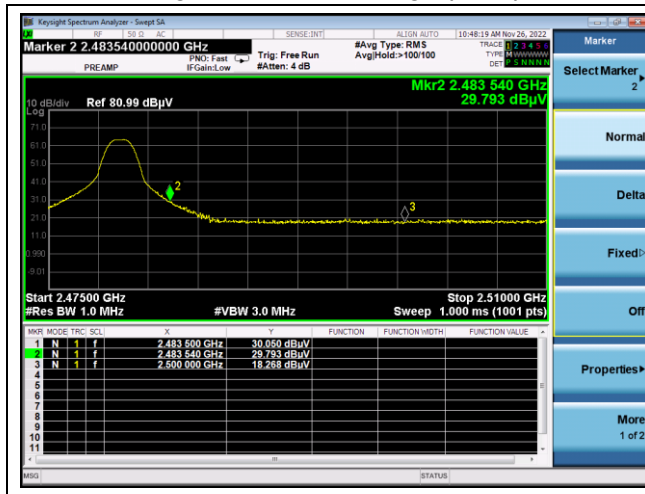


High channel band edge (Average)

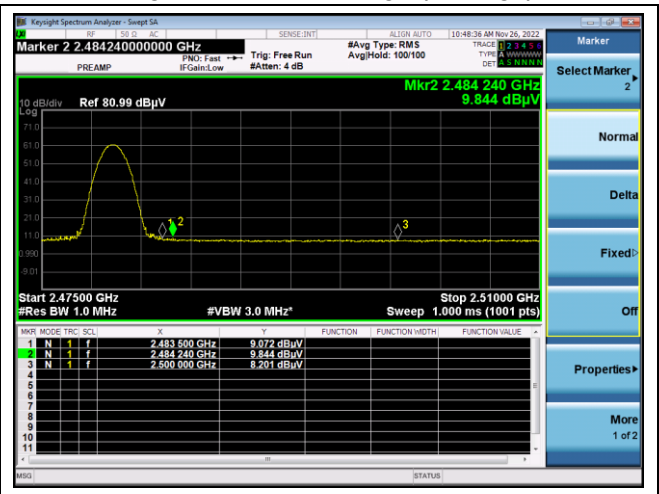


High channel 2<sup>nd</sup> Harmonic (Peak)

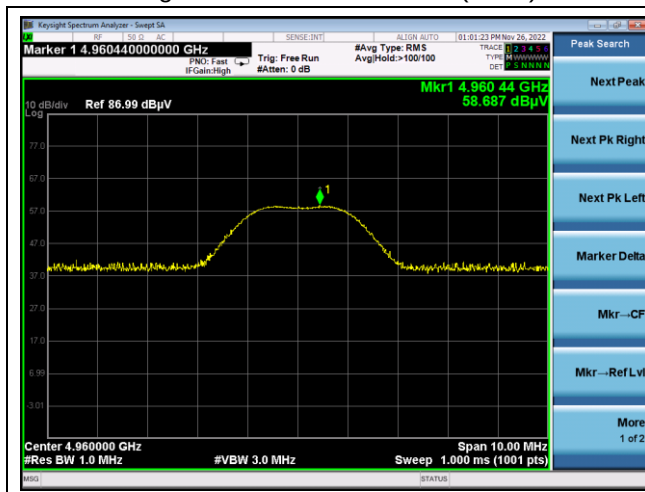

High channel 2<sup>nd</sup> Harmonic (Average)

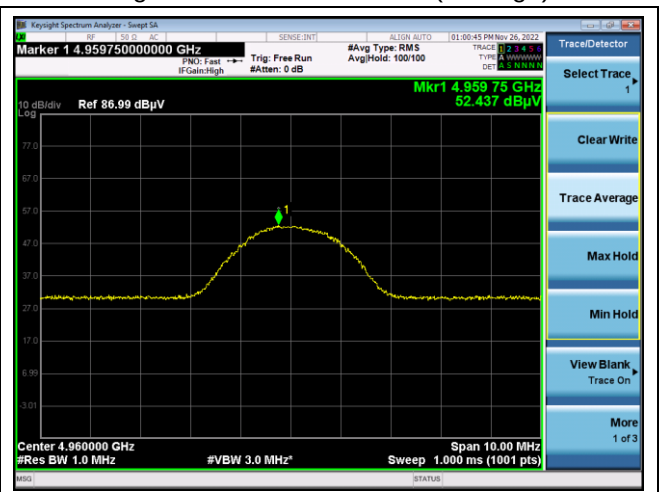


High channel 3<sup>rd</sup> Harmonic (Peak)

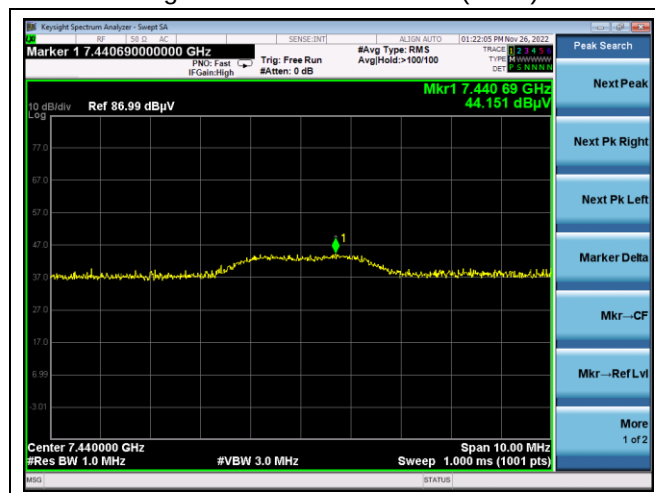


## PHY 2M


Low channel band edge (Peak)

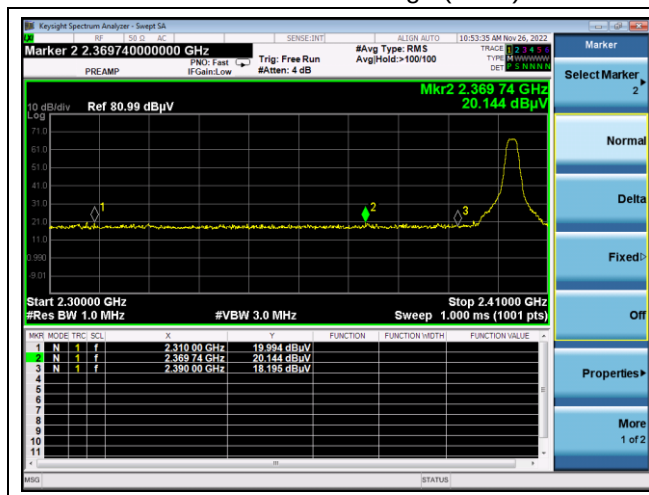


Low channel band edge (Average)

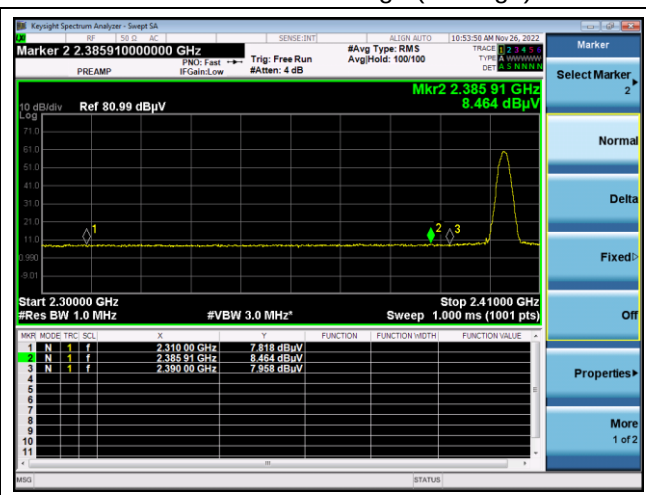


Low channel 2<sup>nd</sup> Harmonic (Peak)

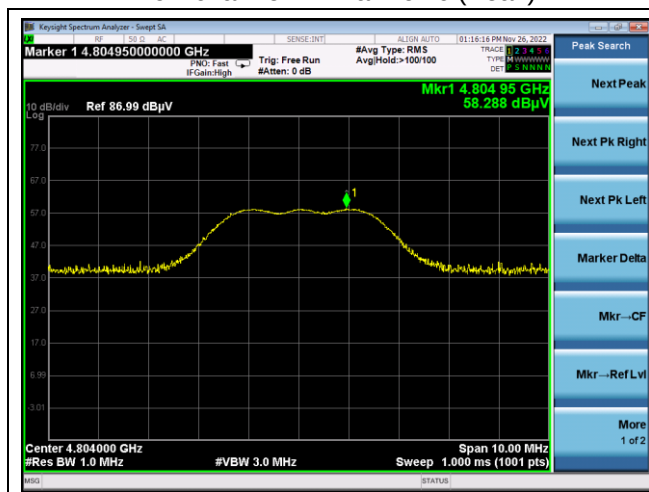


Low channel 2<sup>nd</sup> Harmonic (Average)

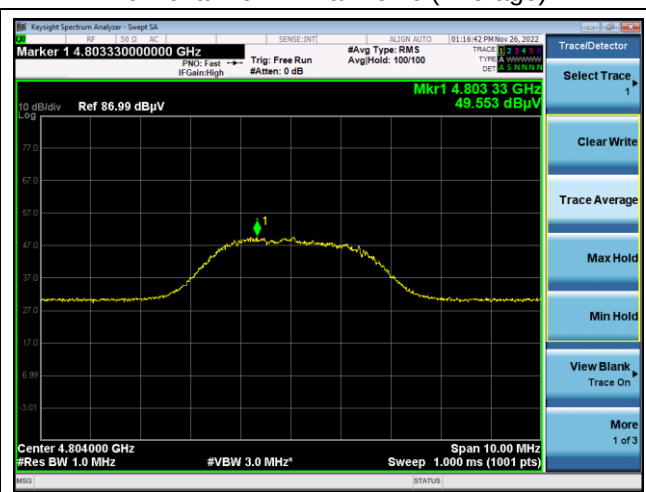


Middle channel 2<sup>nd</sup> Harmonic (Peak)

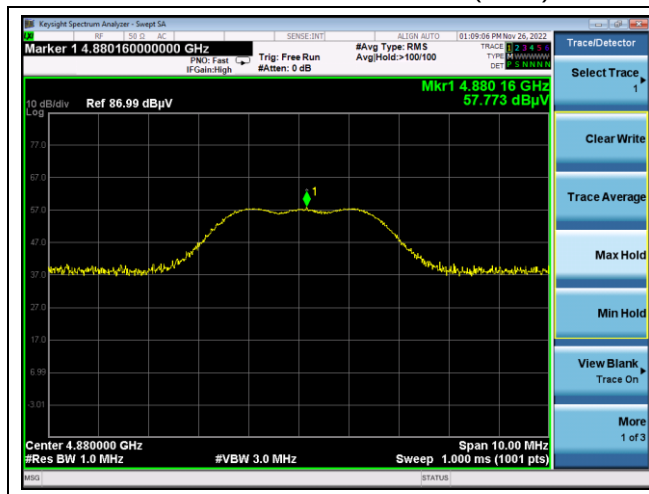


Middle channel 2<sup>nd</sup> Harmonic (Average)

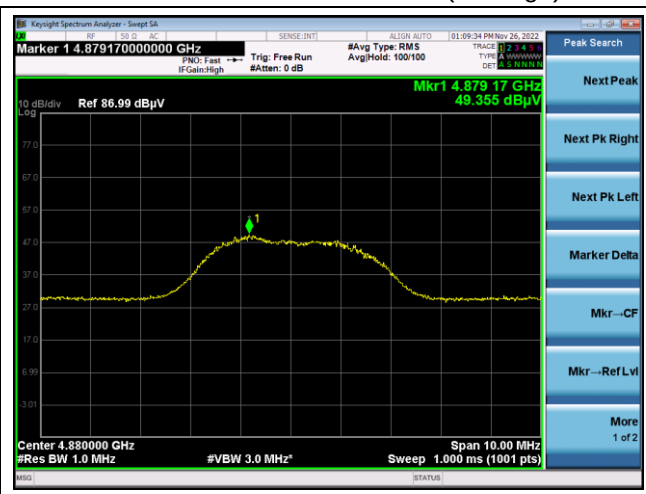


Middle channel 3<sup>rd</sup> Harmonic (Peak)

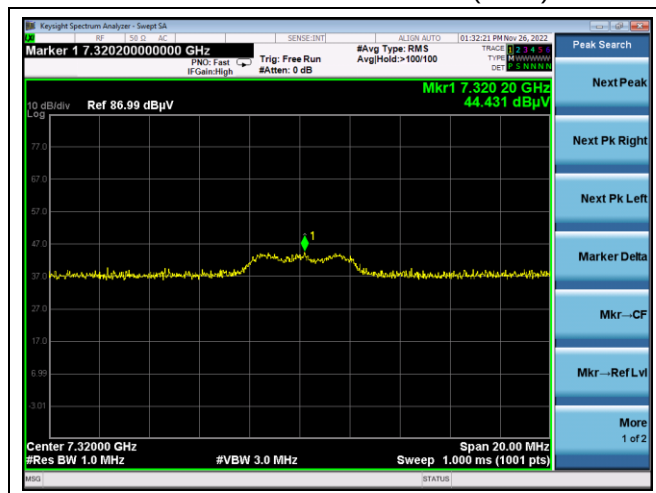


High channel band edge (Peak)

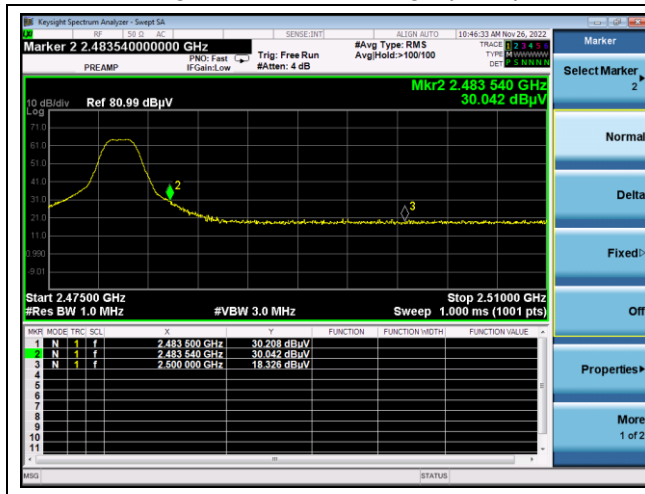


High channel band edge (Average)

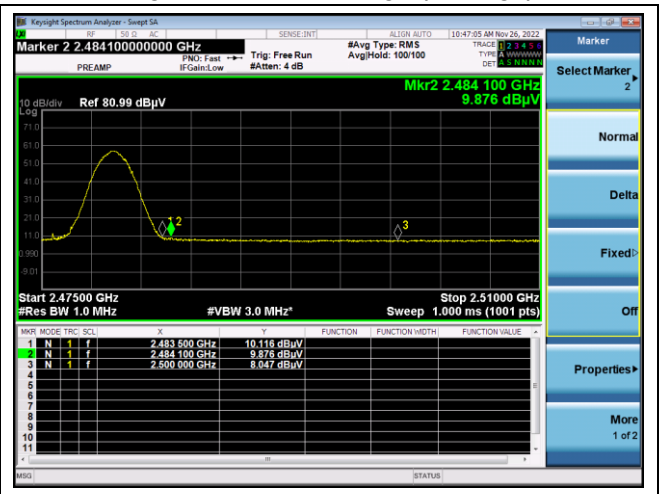

High channel 2<sup>nd</sup> Harmonic (Peak)

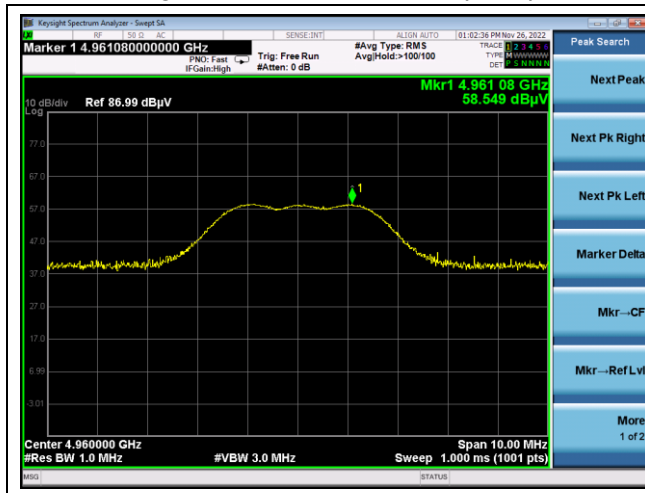

High channel 2<sup>nd</sup> Harmonic (Average)

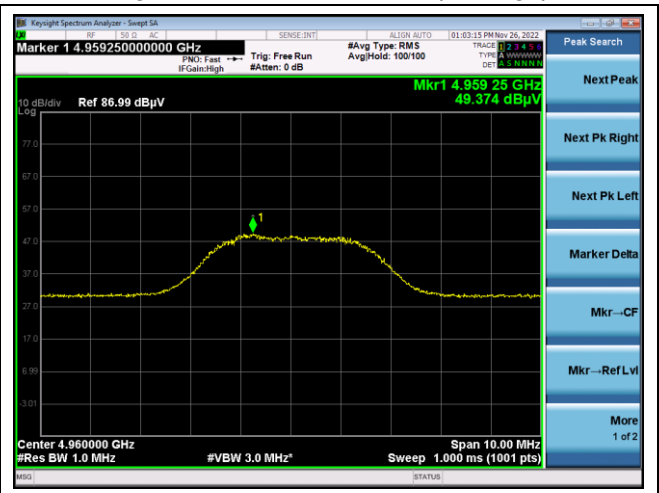

High channel 3<sup>rd</sup> Harmonic (Peak)

