



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3) Date : 03 Oct 2014

Application No. : LR045111(1)

Applicant : Zincere Limited
Room 03, 11/F, Laurels Industrial Centre,
32 Tai Yau Street, San Po Kong, Kowloon, Hong Kong

Sample Description : One(1) item of submitted sample stated to be Bluetooth Speaker model No. OB001
Sample registration No. : RR051384-002
Radio Frequency : 2402MHz ~ 2480MHz Transceiver
Rating : 3.7V rechargeable battery

Date Received : 11 Dec 2013

Test Period : 23 Dec 2013 to 13 Jan 2014

Test Requested : FCC Part 15 Certificate

Test Method : 47 CFR Part 15 (10-1-12 Edition), ANSI C63.4 – 2009,
FCC Public Notice DA 00-705

Test Engineer : Mr. LEUNG Shu-kan, Ken

Test Result : See attached sheet(s) from page 2 to 58.

Conclusion : The submitted sample was found to comply with requirement of FCC Part 15
Subpart B and C.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____


Mr. WONG Lap-pong, Andrew
Manager
Electrical Division

Page 1 of 58

FCC ID: 2ABPK-OB001



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

Table of Contents

1	General Information	3
1.1	General Description	3
1.2	Location of the test site	5
1.3	List of measuring equipment.....	6
1.4	List of measuring equipment.....	6
1.5	Measurement Uncertainty.....	7
2	Description of the radiated emission test	8
2.1	Test Procedure	8
2.2	Test Result	9
2.3	Maximum peak output power	10
2.4	Radiated Emission Measurement Data	11
3	Description of the Line-conducted Test	17
3.1	Test Procedure	17
3.2	Test Result	17
3.3	Graph and Table of Conducted Emission Measurement Data	17
4	Photograph	18
4.1	Photographs of the Test Setup for Radiated Emission and Conducted Emission	18
4.2	Photographs of the External and Internal Configurations of the EUT	18
5	Supplementary document.....	19
5.1	Bandwidth.....	19
5.2	Duty cycle	20
5.3	Transmission time	20
5.4	Power Spectral Density	20
5.5	Hopping sequence	20
5.6	Average on time	21
6	Appendices.....	22



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

1 General Information

1.1 General Description

The equipment under test (EUT) is a Bluetooth Can speaker. The EUT is power by 3.7V rechargeable battery. The EUT has two operating mode. The first operating mode is Bluetooth mode. It receives digital audio from other wireless device and playback the audio signal. The second mode is Aux mode. An Aux input terminal supports audio input by 3.5 mm terminal. The USB ports only for battery charging. There is function when connecting to computer.

For the Bluetooth mode, it supports standard Bluetooth V3.0+EDR or below revision protocol for data synchronization. After paring with other standard Bluetooth device, it can play the music.

The Bluetooth module used in the speaker has been test and approved by official Bluetooth Special Interest Group (SIG) member. All technical requirements including hopping rate, Frequency channels, Pseudo randomly order list and Bandwidth has been tested and complied with Spread Spectrum System requirements. The compliance information was listed at Bluetooth SIG with ID code is B020161 for model No F-3066.

A non standardized Bluetooth protocol or other Gaussian frequency-shift keying (GFSK) digital modulation signal was unable to synchronize the Bluetooth speaker.

Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF Channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1600 hops/s.

Example of a 79 hopping sequence in data mode: 40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54...

Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

System Receiver Input Bandwidth

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single multisport (packet) is set up at the beginning of the



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence.. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Equipment Description

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply With all of The regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate it channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

The brief circuit description is listed as follows:

- U10 and its associated circuit act as Bluetooth module
- U1 and its associated circuit act as audio amplifier
- U7 and its associated circuit act as charging circuit

Antenna type : PCB Antenna
Antenna gain : 0dBi
Modulation technique : GFSK, $\pi/4$ -DQPSK, 8PSK
Number of channel : 79 channels



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

1.2 Location of the test site

FCC Registered Test Site Number: 552221

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	08 Jul 2014	1Year
Spectrum Analyzer	R&S	FSP30	100628	15 Aug 2014	1Year
Spectrum Analyzer	R&S	FSV40	100964	17 Dec 2014	1Year
Broadband Antenna	Schaffner	CBL6112B	2718	06 Jan 2015	1Year
Loop Antenna	EMCO	6502	00056620	28 Oct 2015	1Year
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	04 Oct 2014	1Year
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	18 Jun 2015	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	09 Oct 2014	1Year
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	17 Jun 2015	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	06 Jan 2015	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	06 Jan 2015	1Year
Coaxial Cable	Suhner	Sucoflex_102	N/A	09 Oct 2014	1Year
LISN	R&S	ESH3-H5	100038	10 Dec 2014	1 Year
Coaxial Cable	Tyco Electronics	RG58C/U	N/A	11 Nov 2014	1Year

1.4 List of measuring equipment

Adaptor: Model: A1299 (Supplied by CMA)



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

1.5 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.63dB
30MHz ~ 200MHz (Vertical)	4.65dB
200MHz ~ 1000MHz (Horizontal)	4.45dB
200MHz ~ 1000MHz (Vertical)	4.41dB

Conducted emissions

Frequency	Uncertainty (U_{lab})
150kHz~30MHz	2.47dB



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009 and DA 00-705.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 1GHz, broadband antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

2.2 Test Result

Summary

Section in FCC part 15	Description	Result
15.205(a), 15.209, 15.247(d)	Transmitter radiated spurious field strength and other emissions	Page 11, 12
15.209	Receiver emissions	Page 13
15.209	Voltage disturbance	Page 17, 35-37
15.247 (a)(1), Part 2.1 and DA-00705	Hopping sequence	Page 38, 39
15.247 (a)(1)	20dB bandwidth and 99% bandwidth	Page 40, 41, 42
15.247 (a)(1)	Channel Spacing (Frequency separation)	Page 43, 44
15.247 (a)(1)(iii)	Number of hopping frequency	Page 45
15.247 (d)	Band Edge	Page 46, 47
15.247 (a)(1)(iii)	Dwell Time (Bluetooth Average On Time)	Page 48-56
15.247 (b)(1)	Maximum Peak output power	Page 10, 57, 58

Subpart C:

Peak Detector and Average Detector data were measured unless otherwise stated.

“#” means emissions appear within the restricted bands shall follow the requirement of section 15.205.

The harmonic emissions meet the requirement of section 15.209 are based on measurements employing the CISPR quasi-peak detector below 1000MHz and average detector for frequencies above 1000MHz.

Subpart B:

The emissions meet the requirement of section 15.109 are based on measurements employing the CISPR quasi-peak detector below 1000MHz and average detector for frequencies above 1000MHz.

The frequencies from 30MHz to 1000MHz were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next page (section 2.3).

It was found that the EUT meet the FCC requirement.

Page 9 of 58

FCC ID: 2ABPK-OB001

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

2.3 Maximum peak output power

Conductive measurements

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	26	° C
Relative humidity:	60	%

Operation Mode: Transmission

Channel	Frequency (MHz)	Reading (dBm)	Reading (mW)	Limit (mW)	Margin (mW)
00	2402.000	- 0.5	0.891	1000.0	- 999.109

Channel	Frequency (MHz)	Reading (dBm)	Reading (mW)	Limit (mW)	Margin (mW)
39	2441.020	- 1.67	0.681	1000.0	- 999.319

Channel	Frequency (MHz)	Reading (dBm)	Reading (mW)	Limit (mW)	Margin (mW)
78	2480.000	- 2.44	0.570	1000.0	- 999.430

The plot saved in TestRpt9.pdf shows the transmission power was less than 1 watt.

Remark

All data rate and modulation were tested, the worst case result are represented



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

2.4 Radiated Emission Measurement Data

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	21	° C
Relative humidity:	55	%

Detector: Peak RBW: 1MHz VBW: 3MHz Testing frequency range: 9kHz to 25GHz

Data rate: 1MHz, Modulation: GFSK

Operation Mode: Transmission

Channel	Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
00	2402.038	H	99.0	- 6.3	92.7	114.0	- 21.3
	#4804.090	H	52.4	2.0	54.4	74.0	- 19.6
	#4804.380	V	52.3	2.0	54.3	74.0	- 19.7
	7205.676	H	43.5	10.2	53.7	74.0	- 20.3

39	2440.816	H	98.6	- 6.3	92.3	114.0	- 21.7
	#4882.408	H	54.3	2.0	56.3	74.0	- 17.7
	#4882.542	V	54.8	2.0	56.8	74.0	- 17.2
	#7323.544	H	41.0	10.2	51.2	74.0	- 22.8

78	2479.797	H	97.6	- 6.3	91.3	114.0	- 22.7
	#4959.956	H	50.1	2.0	52.1	74.0	- 21.9
	#4960.362	V	53.6	2.0	55.6	74.0	- 18.4
	#7439.753	V	39.3	10.2	49.5	74.0	- 24.5

Remark: Other emissions more than 20dB below the limit are not reported.

All data rate and modulation were tested, the worst case result are represented.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

2.4 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	21	° C
Relative humidity:	55	%

Detector: Average RBW: 1MHz VBW: 10Hz Testing frequency range: 9kHz to 25GHz

Data rate: 1MHz, Modulation: GFSK

Operation Mode: Transmission

Channel	Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
00	2402.038	H	88.3	- 6.3	82.0	114.0	- 12.0
	#4804.090	H	46.4	2.0	48.4	74.0	- 5.6
	#4804.380	V	46.9	2.0	48.9	74.0	- 5.1
	7205.676	H	34.2	10.2	44.4	74.0	- 9.6

39	2440.816	H	95.4	- 6.3	89.1	114.0	- 4.6
	#4882.408	H	49.2	2.0	51.2	74.0	- 2.8
	#4882.542	V	49.9	2.0	51.9	74.0	- 2.1
	#7323.544	H	29.7	10.2	39.9	74.0	- 14.1

78	2479.797	H	94.5	- 6.3	88.2	114.0	- 5.8
	#4959.956	H	43.9	2.0	45.9	74.0	- 8.1
	#4960.362	V	48.1	2.0	50.1	74.0	- 3.9
	#7439.753	V	27.8	10.2	38.0	74.0	- 16.0

Remark: Other emissions more than 20dB below the limit are not reported.

All data rate and modulation were tested, the worst case result are represented.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

2.4 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart B

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	18	° C
Relative humidity:	47	%

Detector: Quasi-peak

RBW: 120kHz VBW: 300kHz, Operation Mode: Receiver mode, Testing frequency range: 9kHz to 25GHz

Data rate: 1MHz, Modulation: GFSK

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
112.140	H	8.0	12.2	20.2	43.5	- 23.3
160.240	H	4.1	11.9	16.0	43.5	- 27.5
175.780	H	4.1	11.9	16.0	43.5	- 30.5
192.060	H	11.0	11.2	22.2	43.5	- 21.3
212.040	H	10.0	12.0	22.0	43.5	- 21.5
255.700	H	4.4	15.4	19.8	46.0	- 26.2
271.240	H	12.5	15.4	27.9	46.0	- 18.1

Remark: Other emissions more than 20dB below the limit are not reported.

All data rate and modulation were tested, the worst case result are represented



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

2.4 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart B

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	18	° C
Relative humidity:	47	%

Detector: Quasi-peak

RBW: 120kHz VBW: 300kHz, Operation Mode: Aux-in, Testing frequency range: 9kHz to 25GHz

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
76.621	H	24.9	8.0	32.9	40.0	- 7.1
192.020	V	16.6	11.2	27.8	43.5	- 15.7
192.113	H	19.2	11.2	30.4	43.5	- 13.1
207.990	V	18.5	12.0	30.5	43.5	- 13.0
208.002	H	18.4	12.0	30.4	43.5	- 13.1
223.992	V	16.4	11.8	28.2	46.0	- 17.8
234.006	H	15.5	13.2	28.7	46.0	- 17.3

Remark: Other emissions more than 20dB below the limit are not reported.

All data rate and modulation were tested, the worst case result are represented



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

2.4 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart B

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	18	° C
Relative humidity:	47	%

Detector: Quasi-peak

RBW: 120kHz VBW: 300kHz, Operation Mode: Battery charging, Testing frequency range: 9kHz to 25GHz

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
48.000	V	7.4	12.8	25.5	40.0	- 19.8
52.276	V	8.0	10.6	18.6	40.0	- 21.4
65.658	V	8.4	7.6	16.3	40.0	- 24.0
113.958	V	10.0	12.2	20.9	43.5	- 21.3
147.722	V	7.9	14.1	20.2	43.5	- 21.5
198.836	V	8.6	11.2	18.8	43.5	- 23.7
249.013	V	14.7	13.2	21.9	46.0	- 18.1

Remark: Other emissions more than 20dB below the limit are not reported.

All data rate and modulation were tested, the worst case result are represented



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

2.4 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart B

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	18	° C
Relative humidity:	47	%

Detector: Quasi-peak

RBW: 120kHz VBW: 300kHz, Operation Mode: Charging to other device, Testing frequency range: 9kHz to 25GHz

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
147.376	H	26.7	14.1	40.8	43.5	- 2.7
150.990	V	21.3	14.1	35.4	43.5	- 8.1
18.0580	V	18.6	11.2	29.8	43.5	- 13.7
181.438	H	25.1	11.2	36.3	43.5	- 7.2
239.856	H	20.1	13.2	33.3	46.0	- 12.7
329.066	H	28.1	16.8	44.9	46.0	- 1.1
329.820	V	26.5	16.8	43.3	46.0	- 2.7

Remark: Other emissions more than 20dB below the limit are not reported.

All data rate and modulation were tested, the worst case result are represented



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

3 Description of the Line-conducted Test

3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

The EUT is connecting to a USB charging dadptor for battery charging

It was found that the EUT met the FCC requirement.

3.3 Graph and Table of Conducted Emission Measurement Data

For electronic filling, the document is saved with filename TestRpt2.pdf.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

4 Photograph

4.1 Photographs of the Test Setup for Radiated Emission and Conducted Emission

For electronic filing, the photos are saved with filename TSup1.jpg to TSup9.jpg.

4.2 Photographs of the External and Internal Configurations of the EUT

For electronic filing, the photos are saved with filename ExPho1.jpg to ExPho2.jpg and InPho1.jpg to InPho2.jpg.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

5 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	LabelSmp.jpg
Block Diagram	BlkDia.pdf
Schematic Diagram	Schem.pdf
Users Manual	UserMan.pdf
Operational Description	OpDes.pdf

5.1 Bandwidth

Bluetooth:

The plot saved in TestRpt4.pdf shows the 20dB bandwidth and 99% bandwidth:

Frequency Channel (MHz)	20dB bandwidth (kHz)	99% bandwidth (kHz)
2402	1170	1020
2441	1170	1030
2480	1140	1020

The plot saved in TestRpt5.pdf shows the channel spacing has minimum 25 kHz or two-third of 20dB bandwidth of hopping channel.

Frequency (MHz)	Channel spacing (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum bandwidth (kHz)
2402	1000	780	25
2441	1000	780	25
2480	1000	760	25

The plot saved in TestRpt6.pdf shows the frequency hopping channel over 75 hopping frequency.

The plot saved in TestRpt7.pdf shows the fundamental emission is confined in the specified band. It shows the 20dB bandwidth and band edge meet the 15.247(d) and 15.205 requirement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

5.2 Duty cycle

Not Applicable

5.3 Transmission time

Not Applicable

5.4 Power Spectral Density

Not Applicable

5.5 Hopping sequence

The plot saved in TestRpt3.pdf shows the hopping sequence is pseudorandom randomly distributed. Four example of continuous fundamental frequency hopping pattern was as below:

The 1st example of fundamental frequency = 2.478657 GHz

The 2nd example of fundamental frequency = 2.441416 GHz

The 3rd example of fundamental frequency = 2.473814 GHz

The 4th example of fundamental frequency = 2.403173 GHz

Result:

Fc 1 – Fc 2 = +37.241MHz

Fc 2 – Fc 3 = -32.398MHz

Fc 3 – Fc 4 = +70.641MHz

It was found the hopping pattern is pseudorandom random.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

5.6 Average on time

The plot saved in TestRpt7.pdf shows the average on time for frequency hopping channel is within 0.4 seconds.

The calculation for average on time as below:

Average hopping channel = Number of transmitted carrier / Sweep time

Average on time = Packet on time x Average hopping channel

Dwell time = Average on time x Total frequency hopping channel x 0.4

Test result:

Frequency Channel (MHz)	Packet	Dwell Time (Seconds)	Limit (Seconds)	Margin (Seconds)
2402	DH1	0.123	0.4	- 0.277
2402	DH3	0.250	0.4	- 0.150
2402	DH5	0.276	0.4	- 0.124
2441	DH1	0.118	0.4	- 0.282
2441	DH3	0.250	0.4	- 0.150
2441	DH5	0.332	0.4	- 0.068
2480	DH1	0.120	0.4	- 0.280
2450	DH3	0.271	0.4	- 0.129
2480	DH5	0.330	0.4	- 0.070



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

6 Appendices

A1	Photos of the set-up of Radiated Emissions	3	pages
A2	Photos of the set-up of Conducted Emissions	2	pages
A3	Photos of External Configurations	3	pages
A4	Photos of Internal Configurations	3	pages
A5	ID Label/Location	1	page
A6	Conducted Emission Measurement Data	3	pages
A7	Hopping sequence	2	pages
A8	20 dB bandwidth and 99% bandwidth	3	pages
A9	Bluetooth Channel Spacing	2	pages
A10	Bluetooth Hopping Channel	1	page
A11	Bluetooth Band Edge	2	pages
A12	Bluetooth Average on time	9	pages
A13	Transmission Power	2	pages



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A1. Photos of the set-up of Radiated Emissions

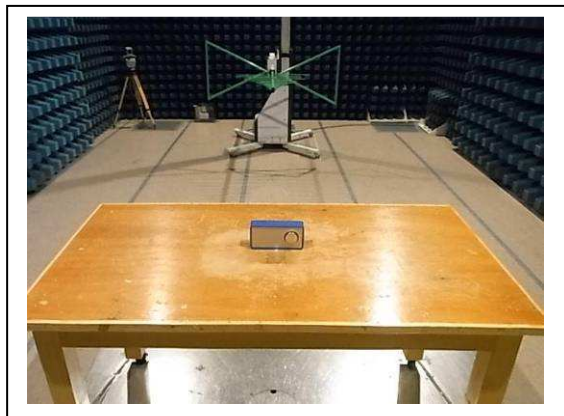

(Front view, 30MHz – 1GHz)

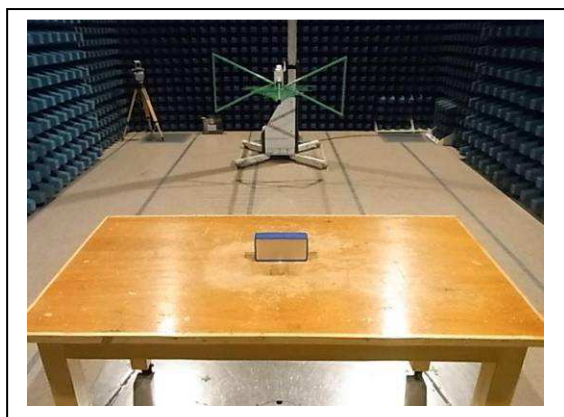

(Back view, 30MHz – 1GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A1. Photos of the set-up of Radiated Emissions



(Front view, 9KHz – 30MHz)

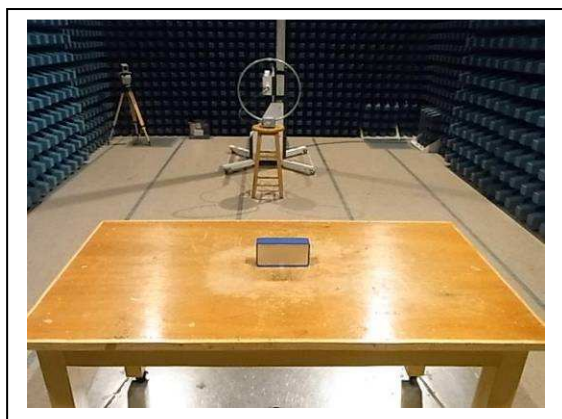

(Back view, 9KHz – 30MHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A1. Photos of the set-up of Radiated Emissions

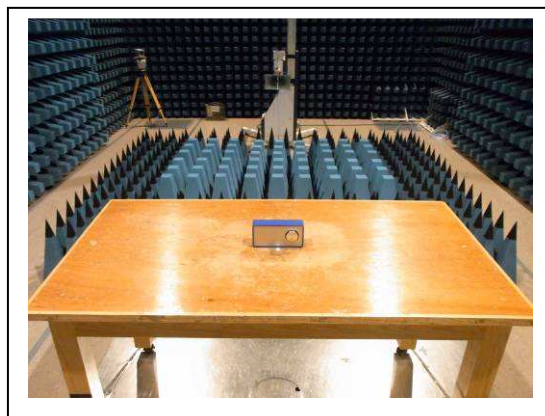

(front view, 1GHz – 25GHz)

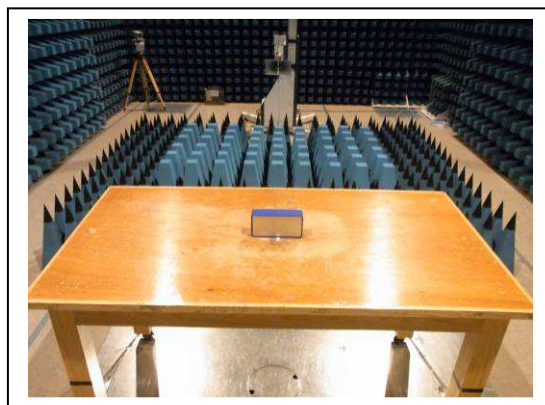

(rear view, 1GHz – 25GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A2 Photos of the set-up of Conducted Emission

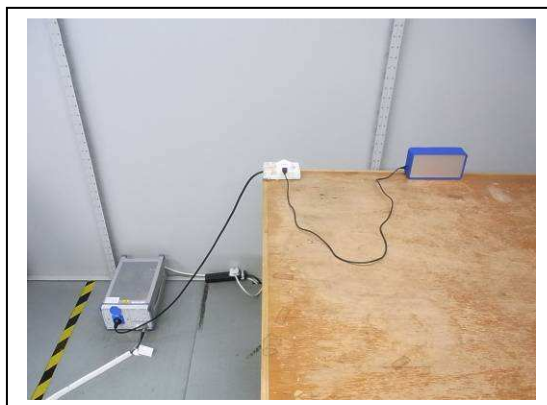

(front view)

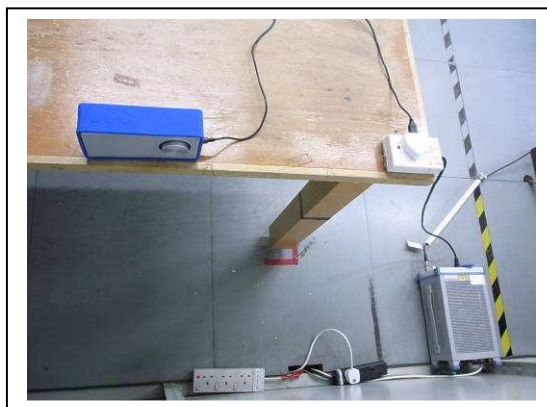

(rear view)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A2 Photos of the set-up of Conducted Emission

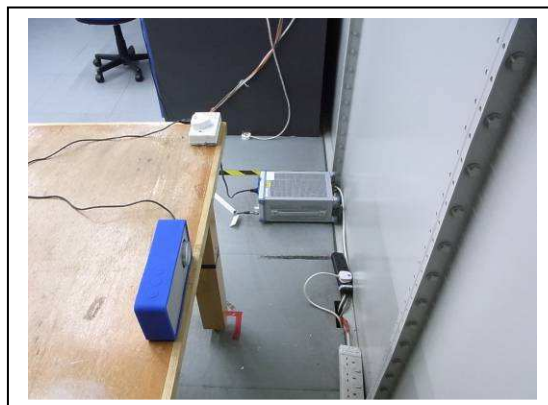

(side view)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A3. Photos of External Configurations



External Configuration 1



External Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A3. Photos of External Configurations



External Configuration 3



External Configuration 4

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



**CMA Testing
and Certification
Laboratories**

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A3. Photos of External Configurations



External Configuration 5

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A4. Photos of Internal Configurations



Internal Configuration 1

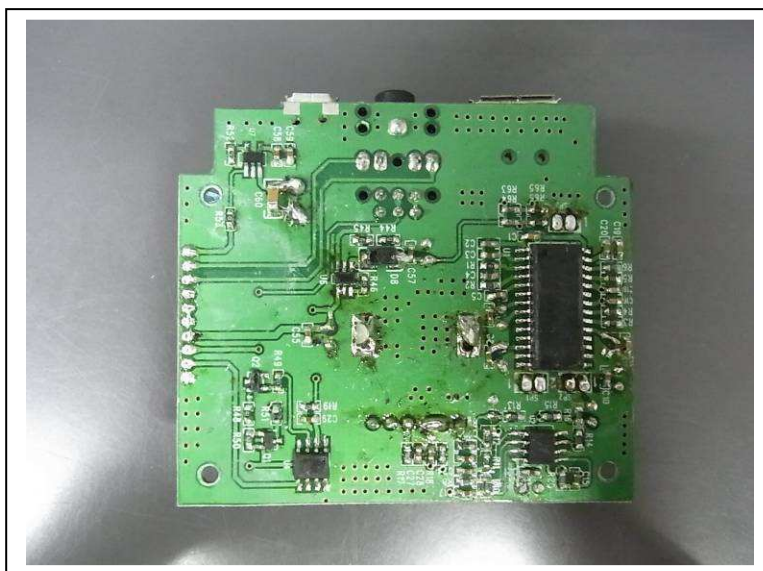

Internal Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A4. Photos of Internal Configurations

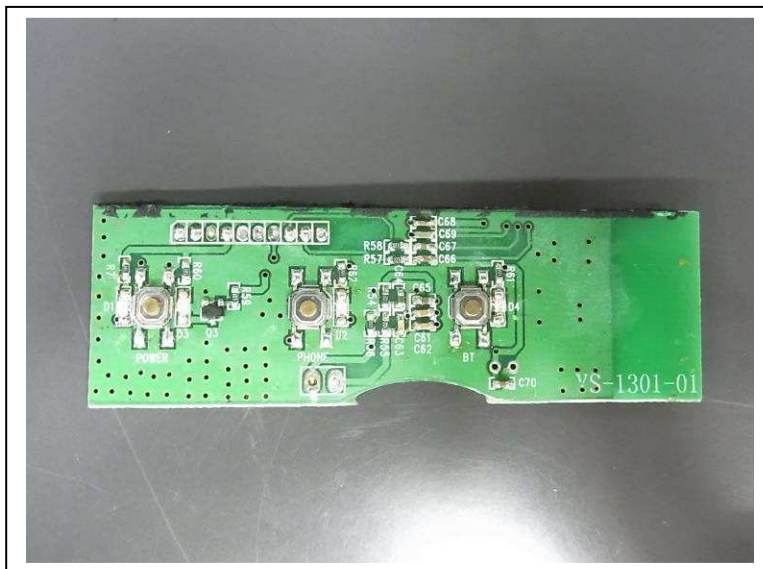

Internal Configuration 3

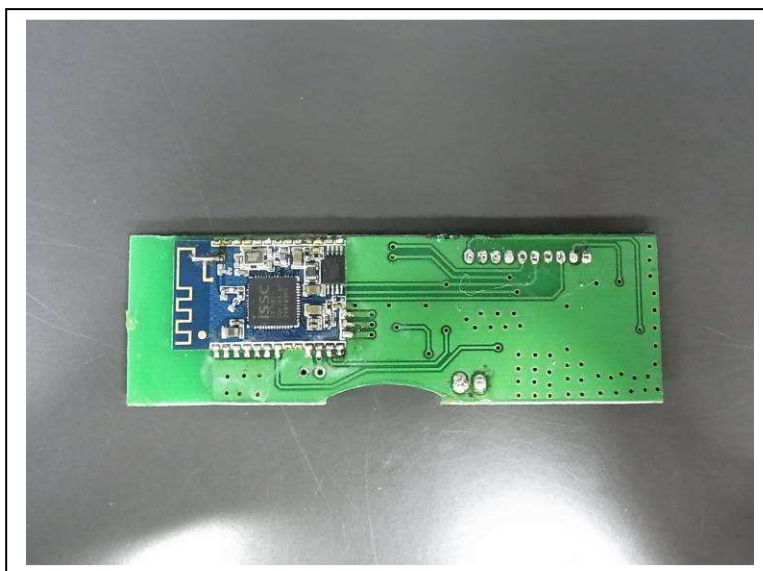

Internal Configuration 4

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A4. Photos of Internal Configurations

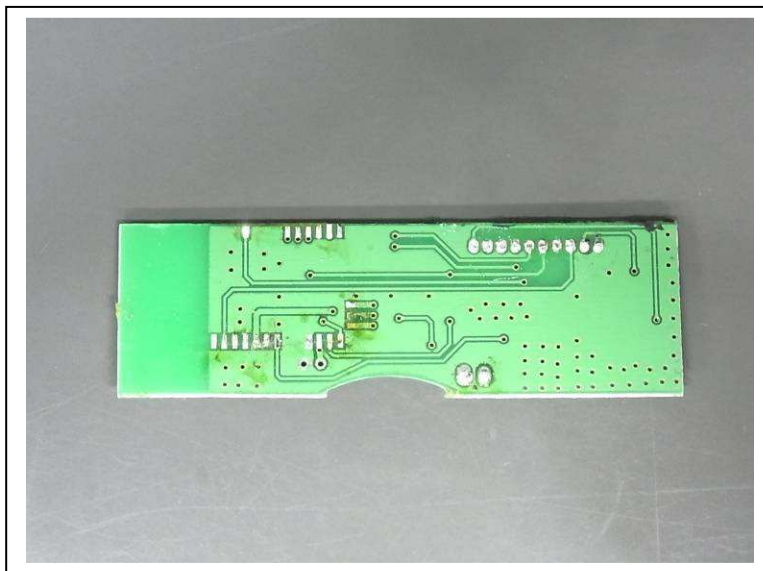

Internal Configuration 5

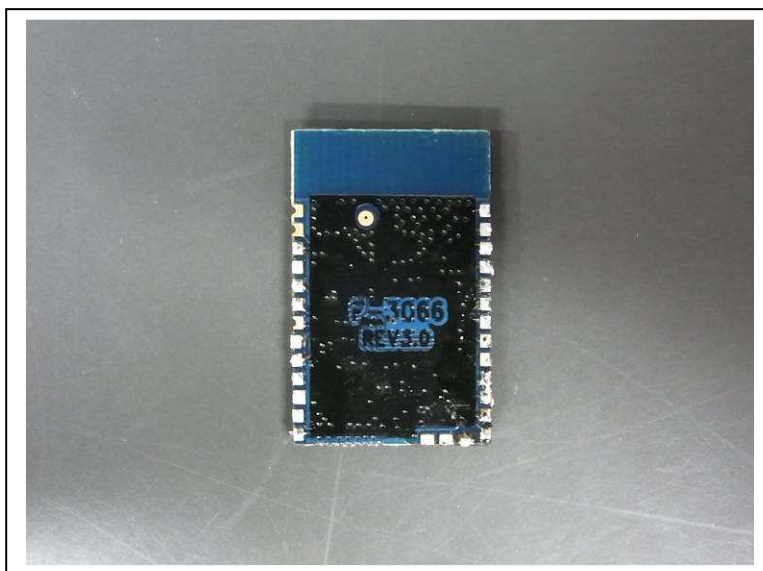

Internal Configuration 6

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A5. ID Label / Location



ID Label 1

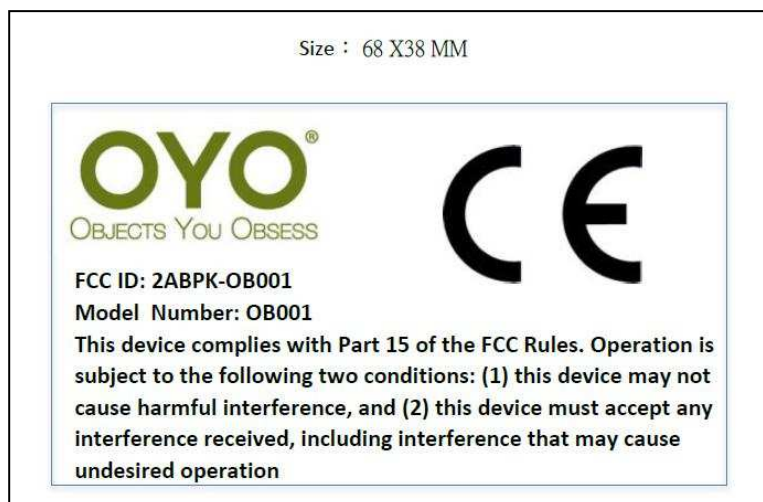

ID Label 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014


A6 Conducted Emission Measurement Date



RBW 9 kHz

MT 1 s

Att 10 dB AUTO PREAMP OFF

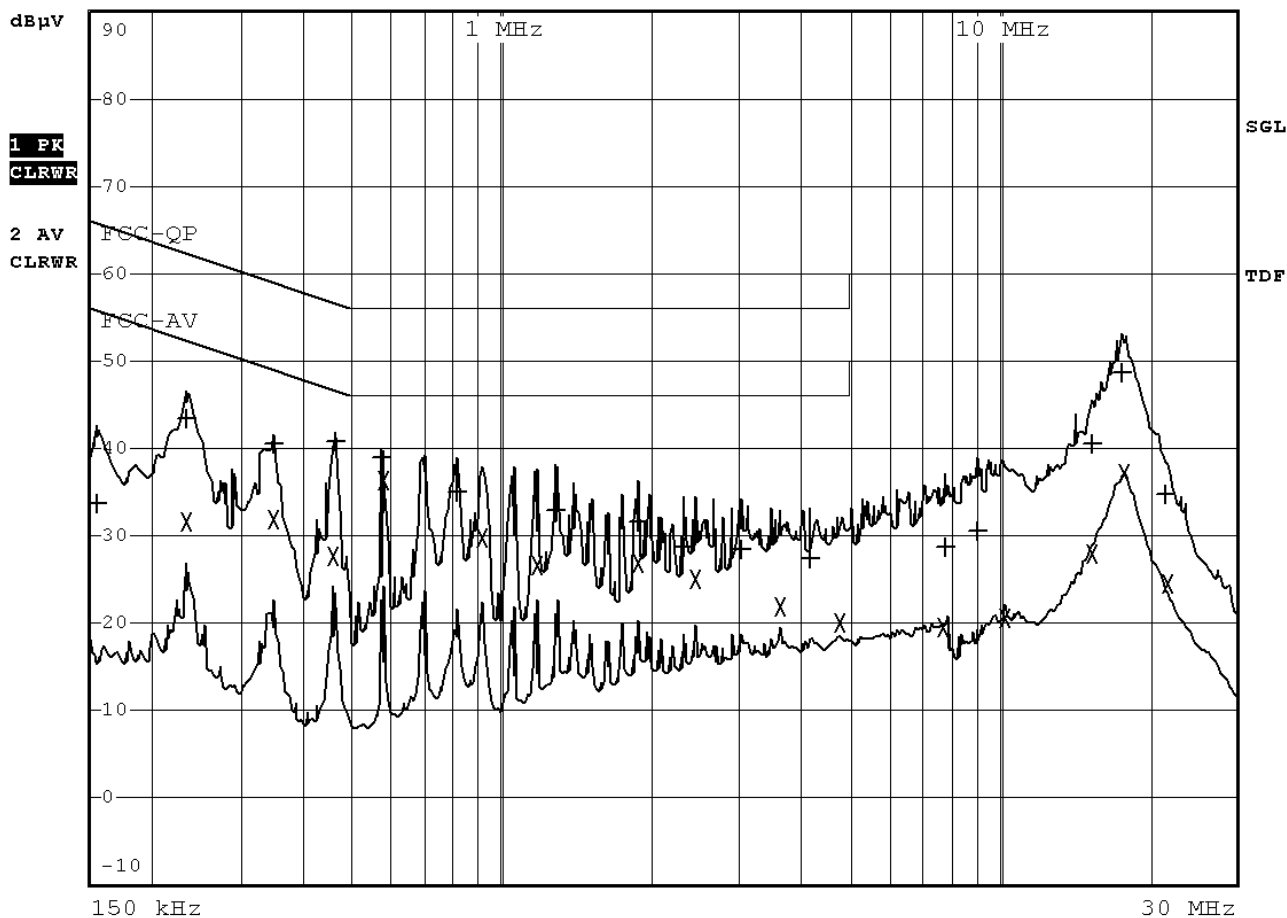

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A6 Conducted Emission Measurement Date

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC-QP			
Trace2:	FCC-AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V		DELTA LIMIT dB
1 Quasi Peak	155 kHz	33.61	N gnd	-32.11
1 Quasi Peak	235 kHz	43.29	N gnd	-18.97
2 Average	235 kHz	31.66	N gnd	-20.60
1 Quasi Peak	350 kHz	40.41	N gnd	-18.54
2 Average	350 kHz	31.87	N gnd	-17.08
2 Average	460 kHz	27.76	N gnd	-18.92
1 Quasi Peak	465 kHz	40.79	N gnd	-15.81
1 Quasi Peak	580 kHz	39.04	N gnd	-16.95
2 Average	585 kHz	36.22	N gnd	-9.78
1 Quasi Peak	825 kHz	34.96	L1 gnd	-21.04
2 Average	925 kHz	29.66	N gnd	-16.33
2 Average	1.17 MHz	26.70	N gnd	-19.29
1 Quasi Peak	1.28 MHz	32.83	L1 gnd	-23.16
1 Quasi Peak	1.87 MHz	31.48	L1 gnd	-24.52
2 Average	1.87 MHz	26.88	N gnd	-19.11
1 Quasi Peak	2.32 MHz	28.66	L1 gnd	-27.33
2 Average	2.45 MHz	24.92	N gnd	-21.07
1 Quasi Peak	3.04 MHz	28.58	N gnd	-27.41
2 Average	3.62 MHz	21.99	N gnd	-24.01
1 Quasi Peak	4.15 MHz	27.38	N gnd	-28.61

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A6 Conducted Emission Measurement Date

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC-QP			
Trace2:	FCC-AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB μ V		DELTA LIMIT dB
2 Average	4.79 MHz	20.03	N gnd	-25.96
2 Average	7.69 MHz	19.42	N gnd	-30.57
1 Quasi Peak	7.82 MHz	28.70	L1 gnd	-31.29
1 Quasi Peak	9.01 MHz	30.49	N gnd	-29.50
2 Average	10.33 MHz	20.48	L1 gnd	-29.51
2 Average	15.36 MHz	27.89	N gnd	-22.10
1 Quasi Peak	15.39 MHz	40.55	N gnd	-19.44
1 Quasi Peak	17.69 MHz	48.70	N gnd	-11.29
2 Average	17.76 MHz	36.98	N gnd	-13.01
1 Quasi Peak	21.6 MHz	34.65	N gnd	-25.34
2 Average	21.67 MHz	24.60	N gnd	-25.40

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A7. Hopping sequence

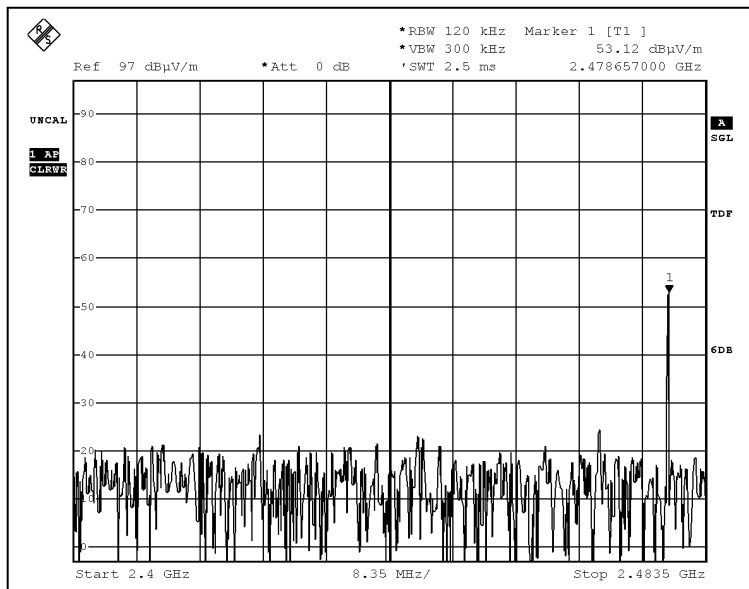

1st example of fundamental frequency

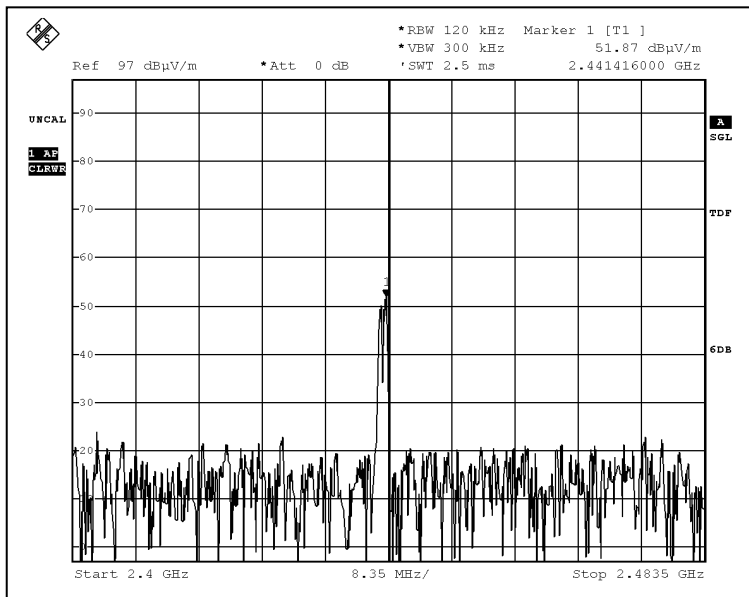

2nd example of fundamental frequency

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A7. Hopping sequence

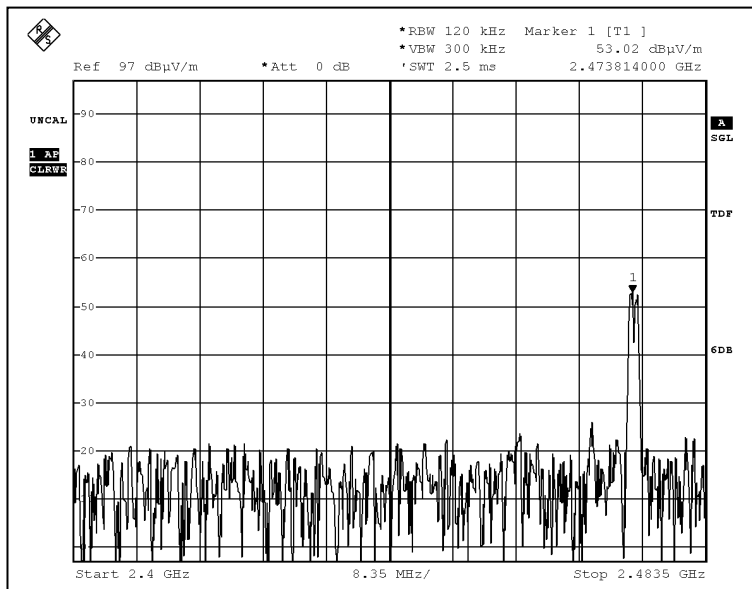

3rd example of fundamental frequency

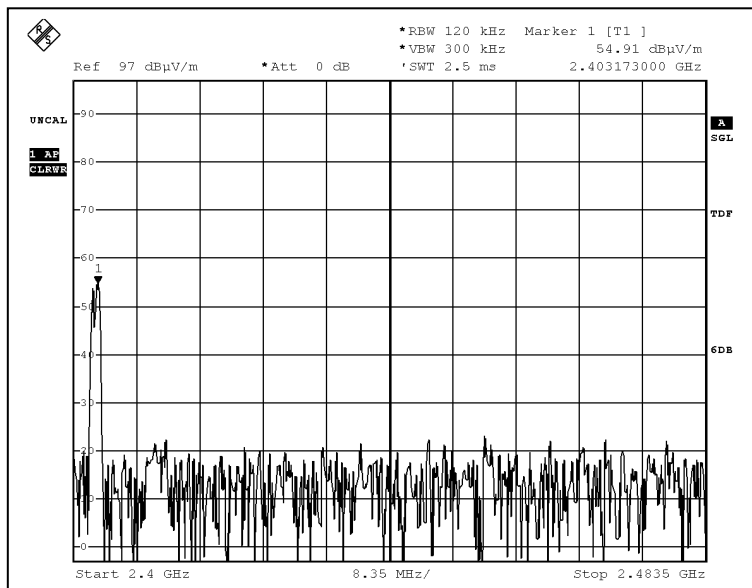

4th example of fundamental frequency

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心


TEST REPORT

Report No. : AS0058698(3)


Date : 03 Oct 2014

A8. 20 dB bandwidth and 99% bandwidth

Channel: CH00

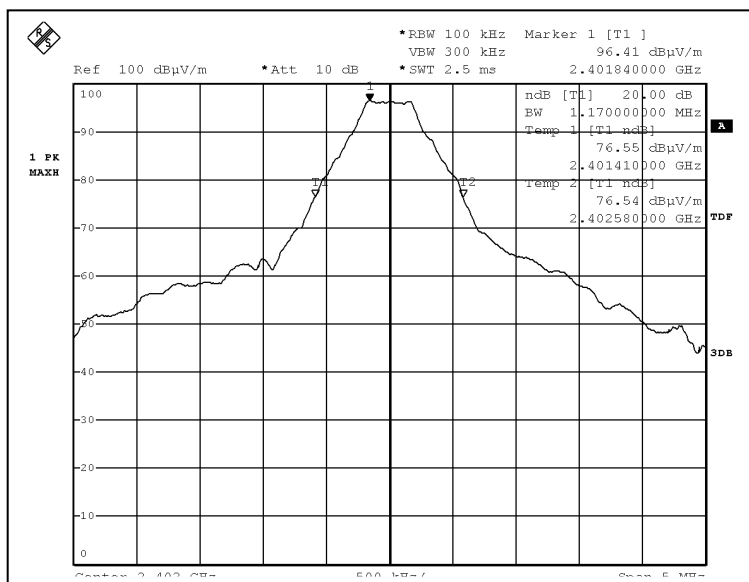

20 dB bandwidth

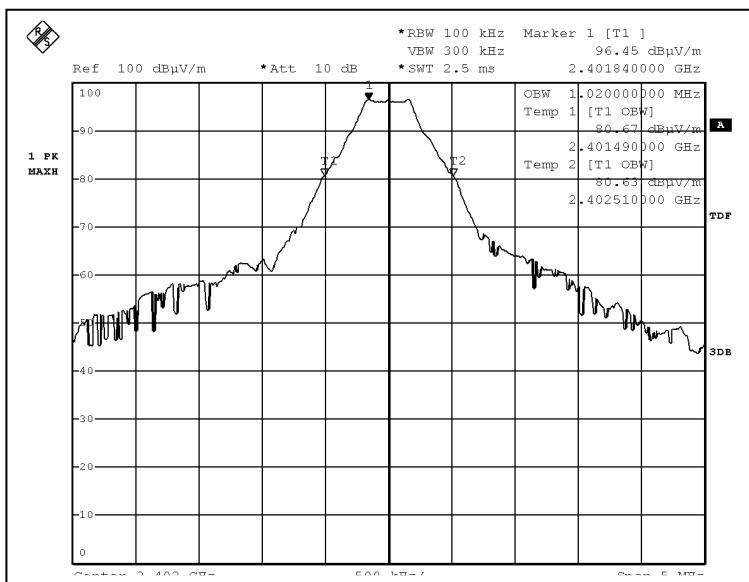

99% bandwidth

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心


TEST REPORT

Report No. : AS0058698(3)


Date : 03 Oct 2014

A8. 20 dB bandwidth and 99% bandwidth

Channel: CH39

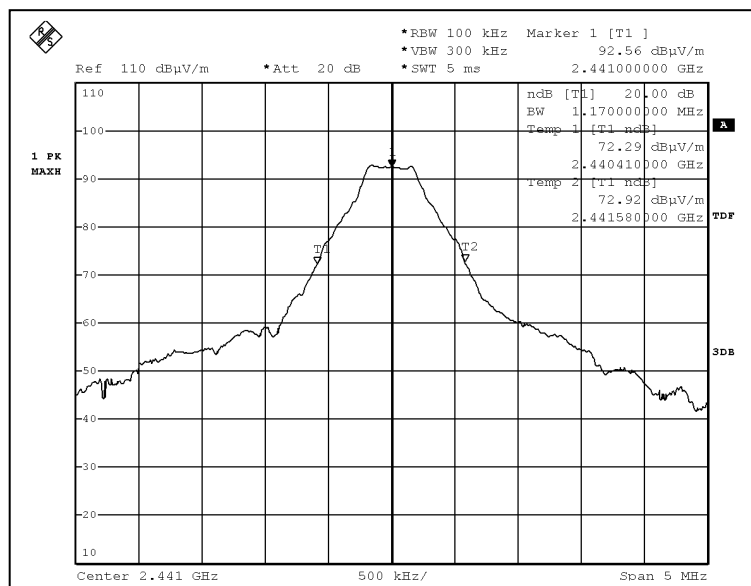

20 dB bandwidth

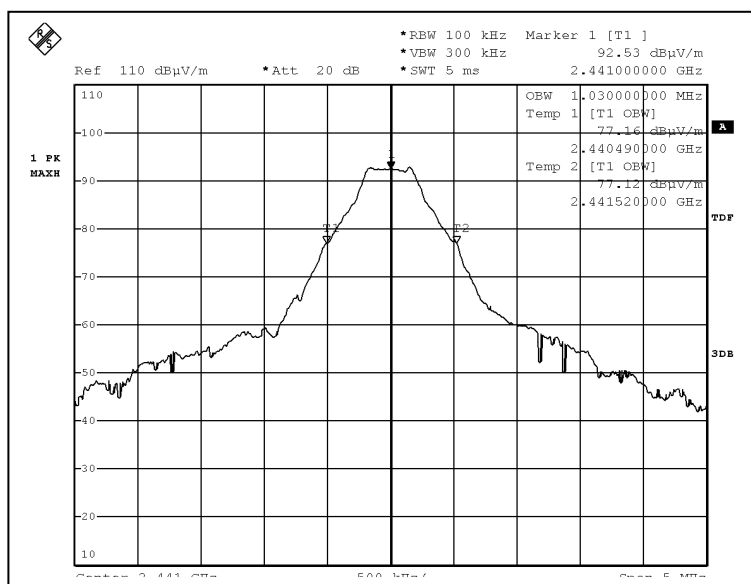

99% bandwidth

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心


TEST REPORT

Report No. : AS0058698(3)


Date : 03 Oct 2014

A8. 20 dB bandwidth and 99% bandwidth

Channel: CH78

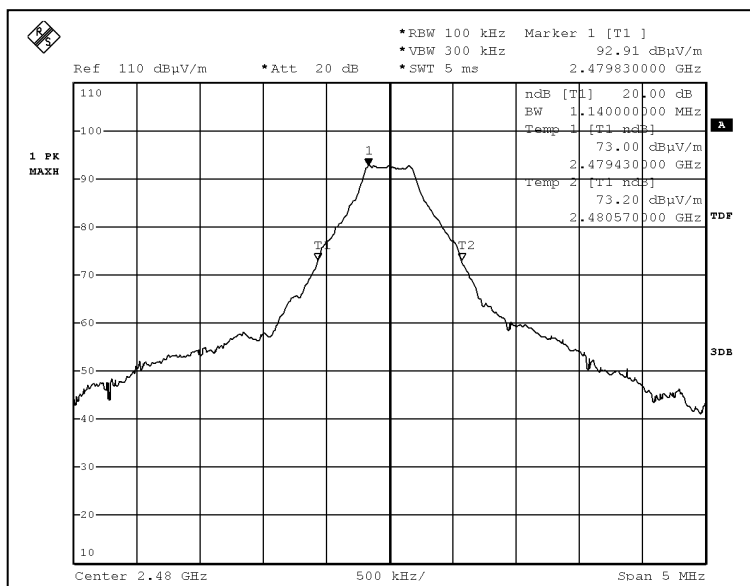

20 dB bandwidth

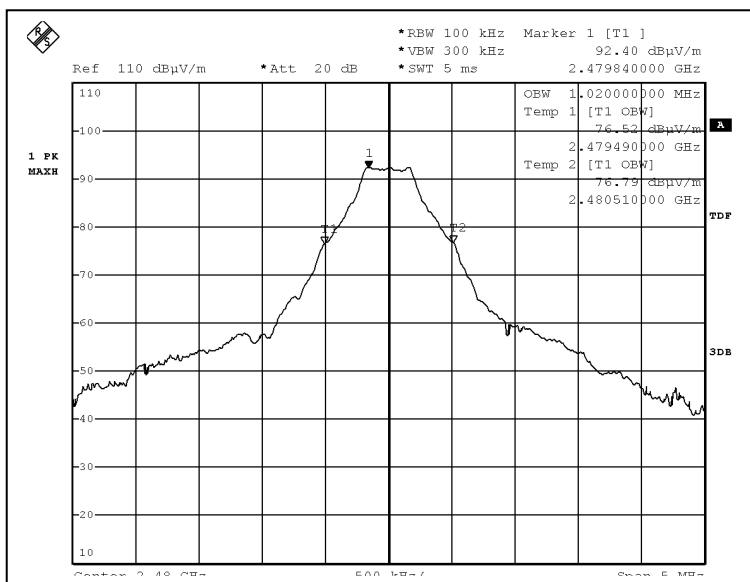

99% bandwidth

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A9. Bluetooth Channel Spacing

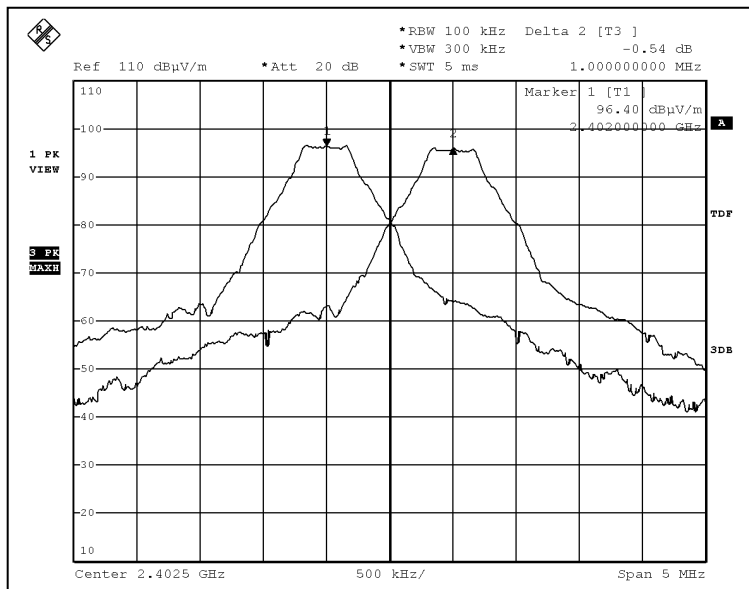

CH00-CH01

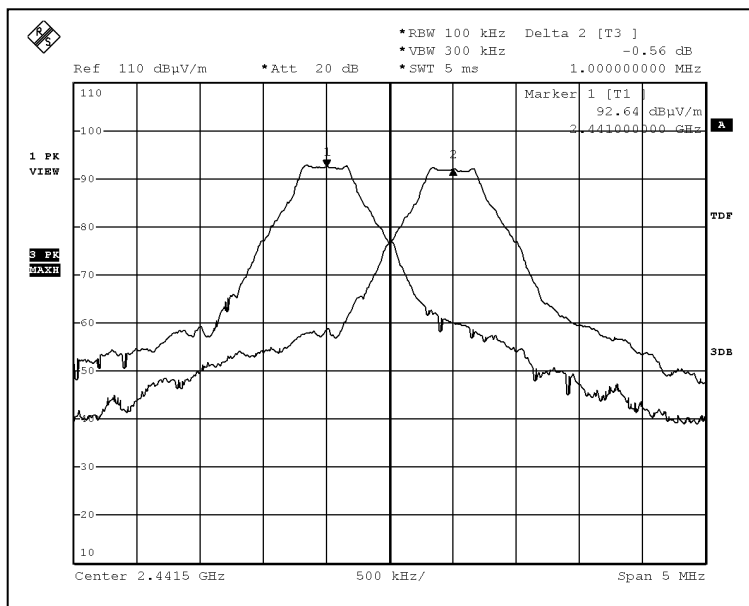

CH39-CH40

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A9. Bluetooth Channel Spacing

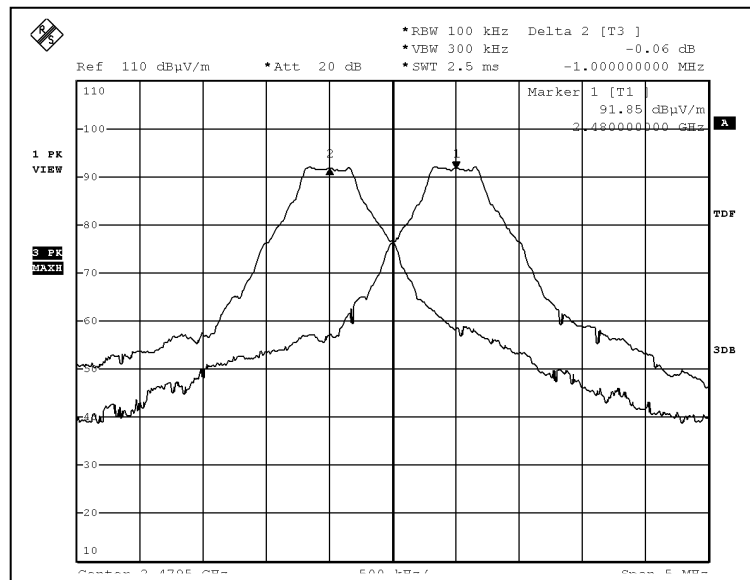

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A10. Bluetooth Hopping Channel

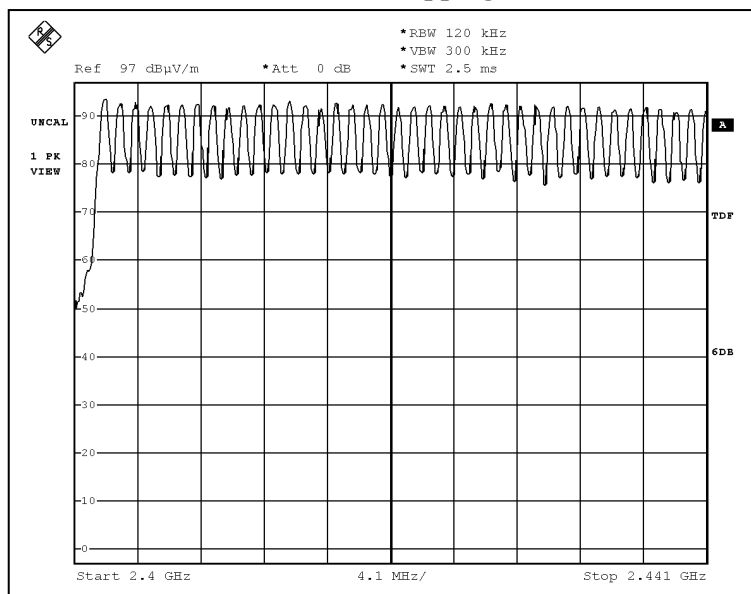

CH00-CH39

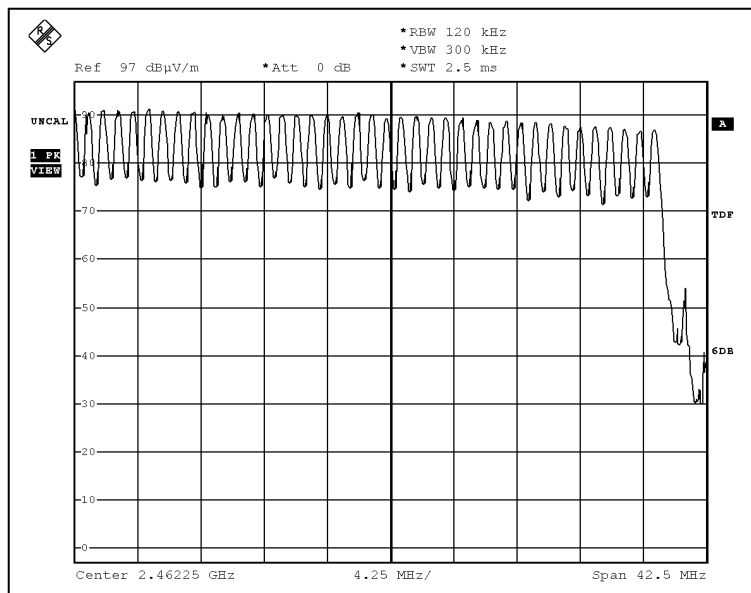

CH39-CH78

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A11. Bluetooth Band Edge

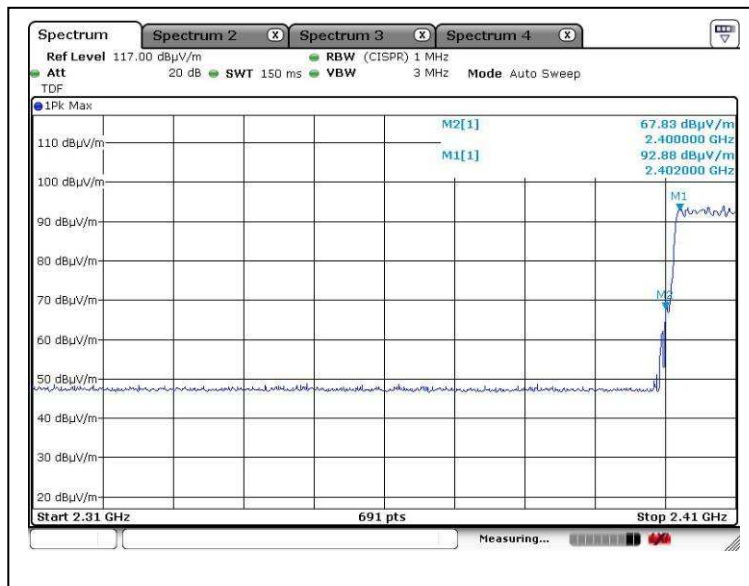

Lower channel (Peak measurement)

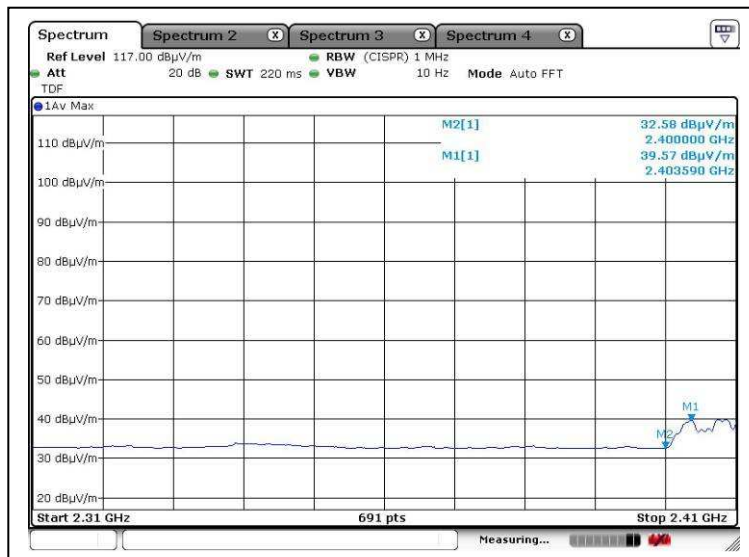

Lower channel (Average measurement)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AS0058698(3)

Date : 03 Oct 2014

A11. Bluetooth Band Edge

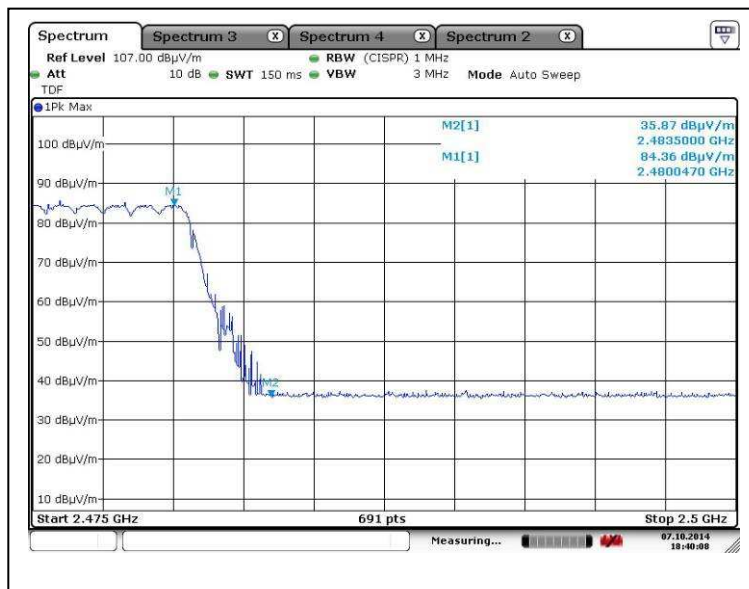

Higher channel (Peak measurement)

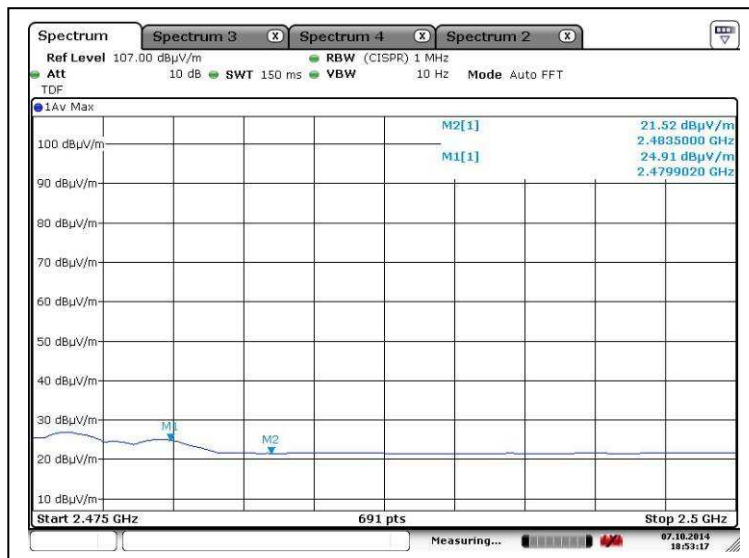

Higher channel (Average measurement)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心



TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A12. Bluetooth Average On Time

Packet: DH1
Channel: CH00

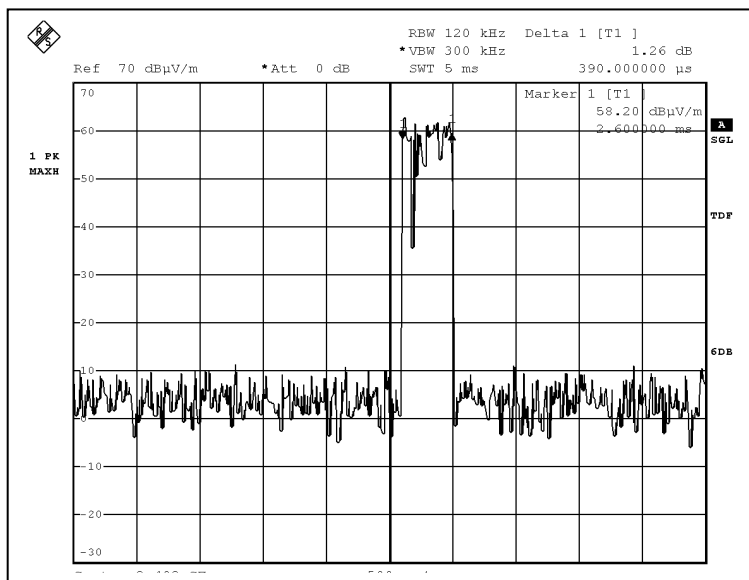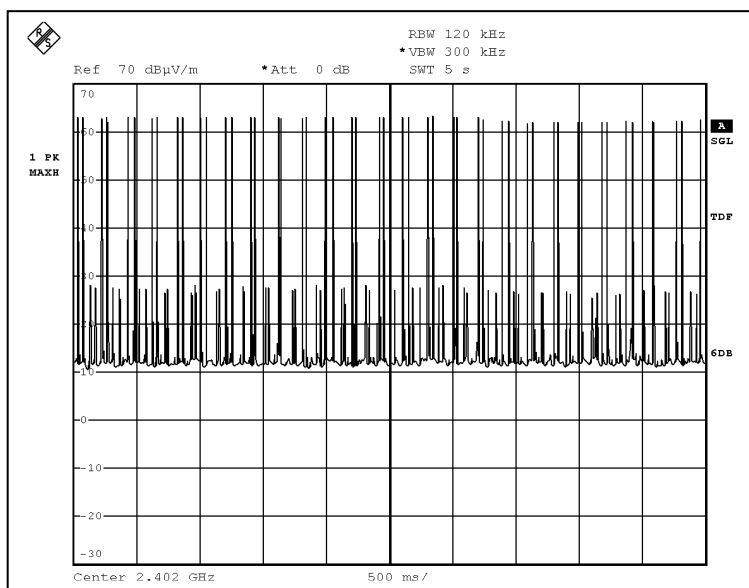

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心



TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A12. Bluetooth Average On Time

Packet: DH3
Channel: CH00

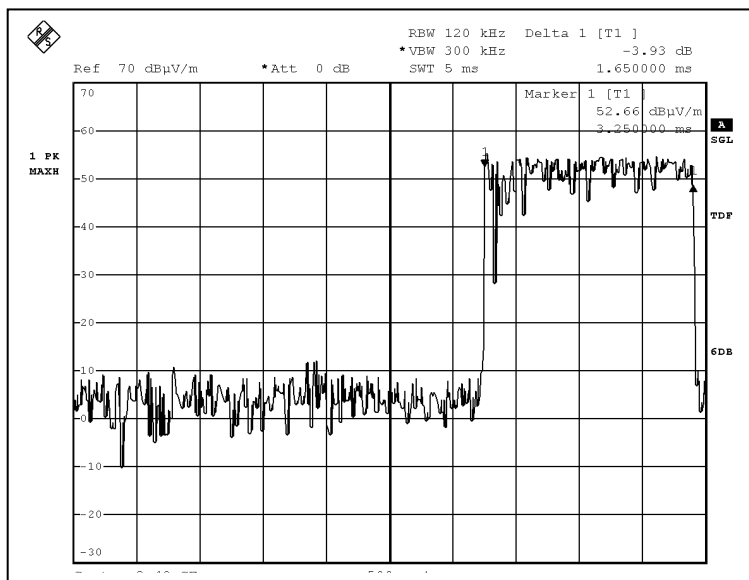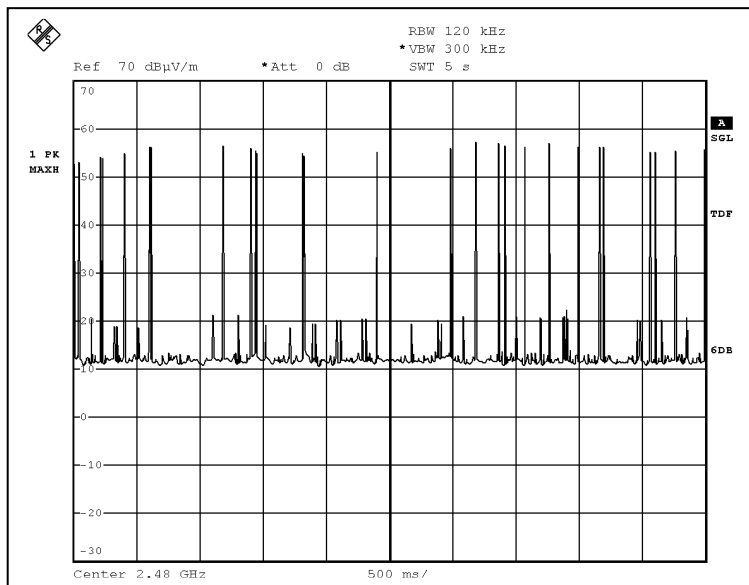

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心



TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A12. Bluetooth Average On Time

Packet: DH5
Channel: CH00

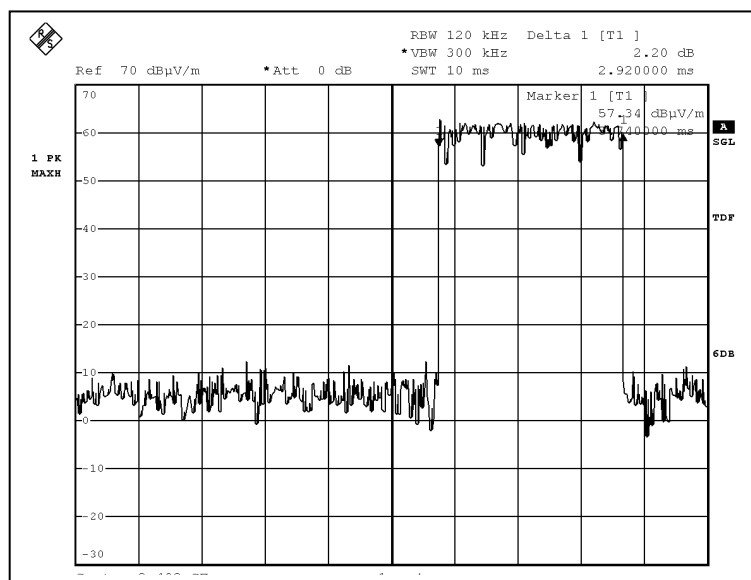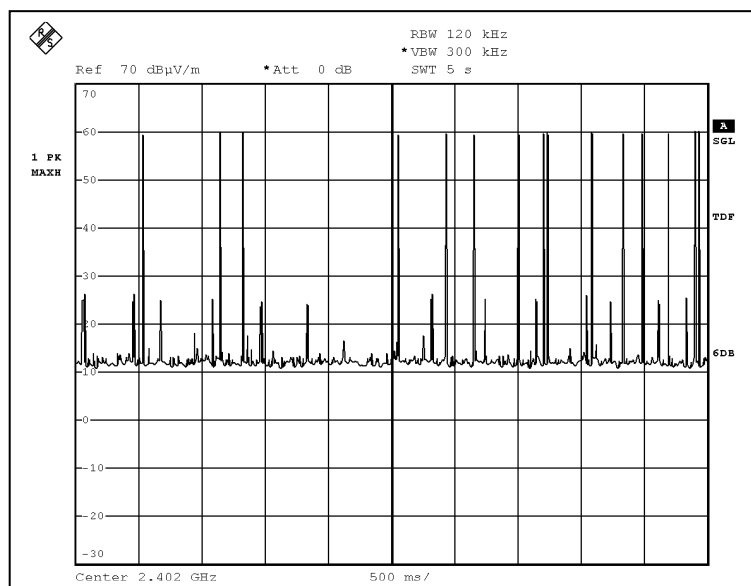

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心



TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A12. Bluetooth Average On Time

Packet: DH1
Channel: CH39

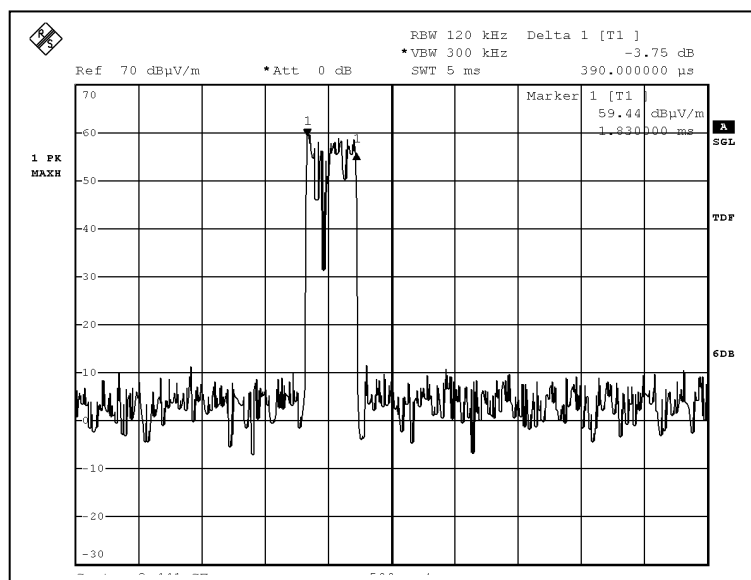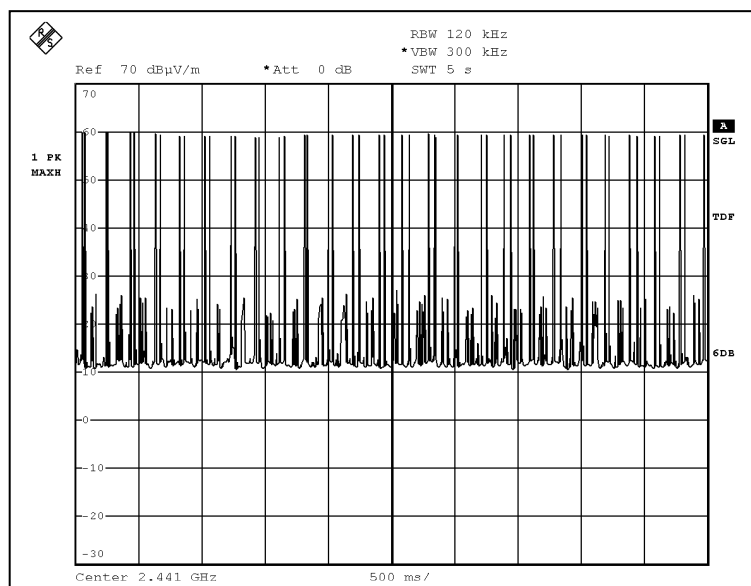

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心



TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A12. Bluetooth Average On Time

Packet: DH3
Channel: CH39

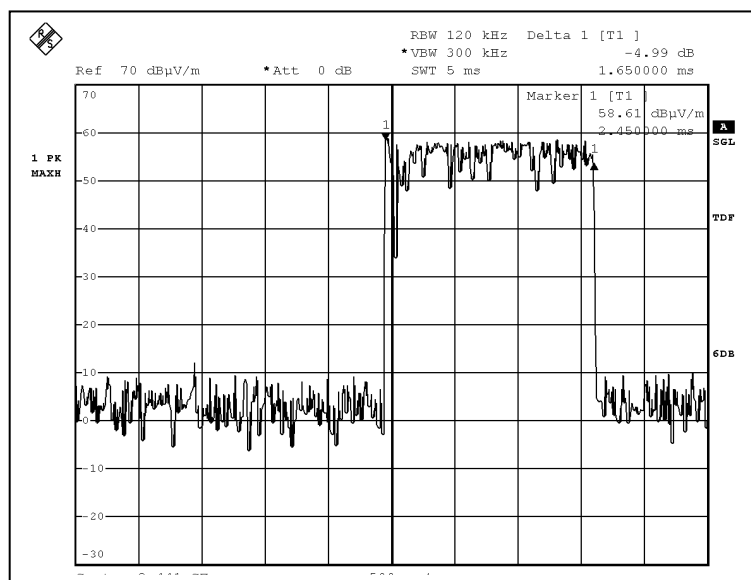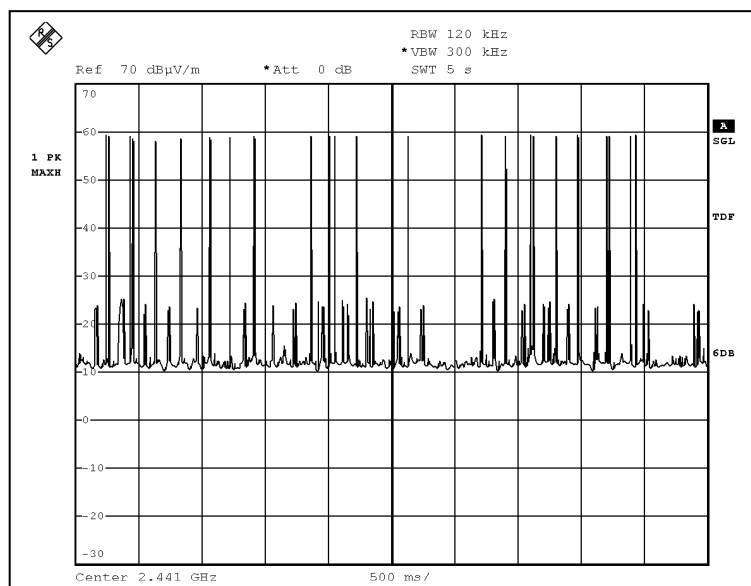

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心



TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A12. Bluetooth Average On Time

Packet: DH5
Channel: CH39

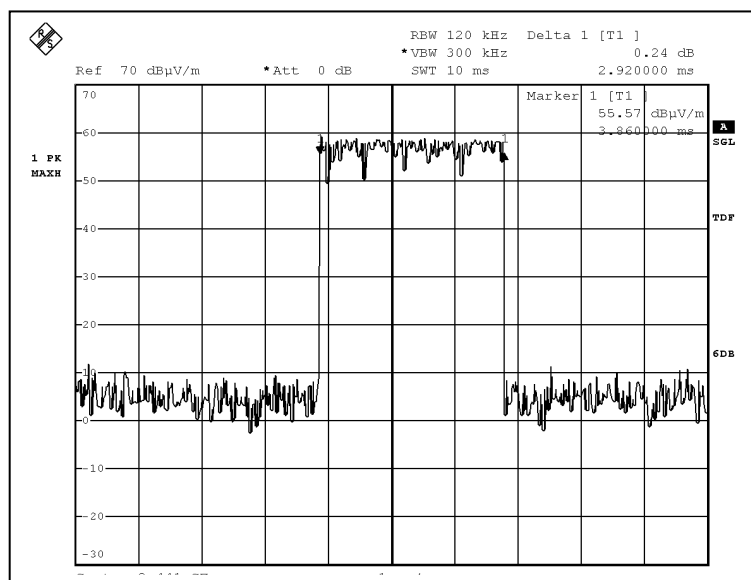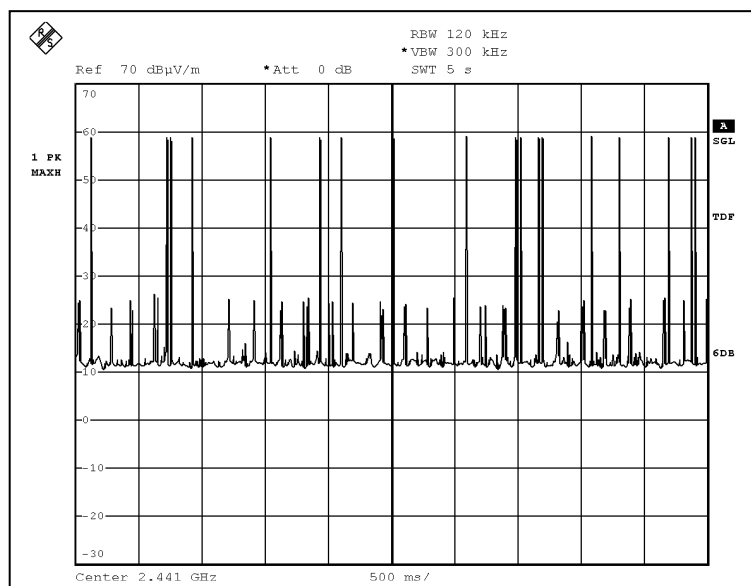

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心



TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A12. Bluetooth Average On Time

Packet: DH1
Channel: CH78

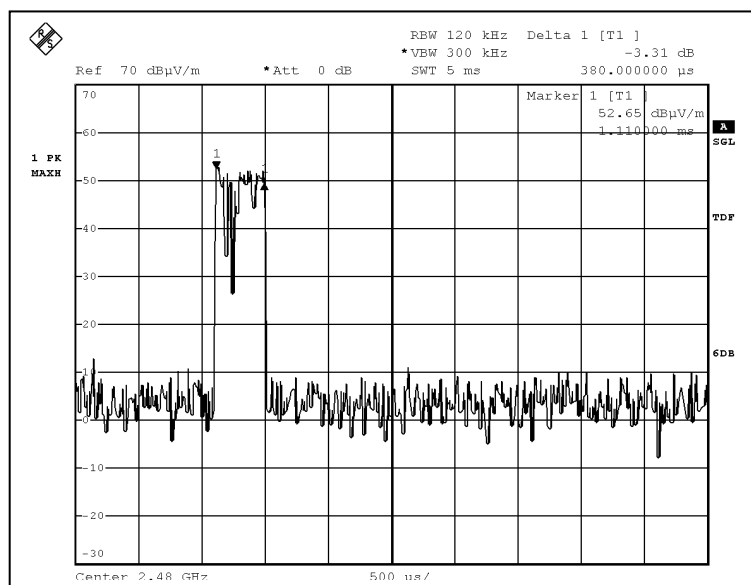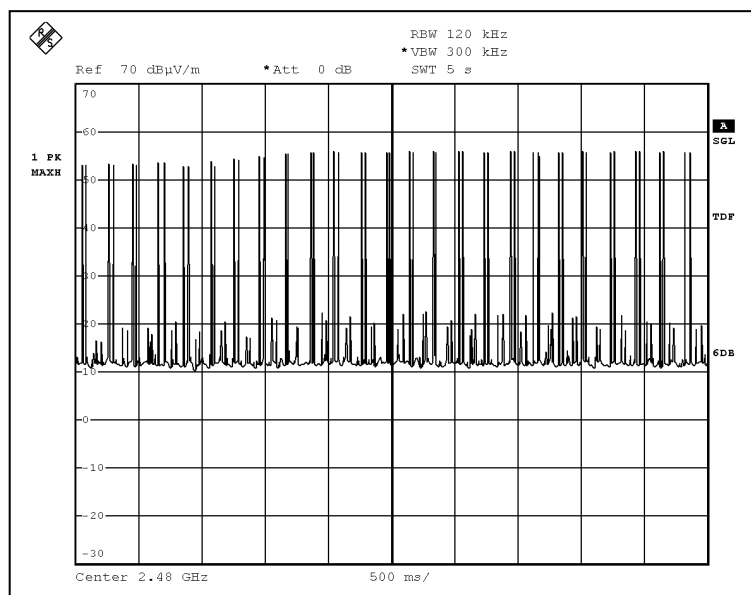

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心



TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A12. Bluetooth Average On Time

Packet: DH3
Channel: CH78

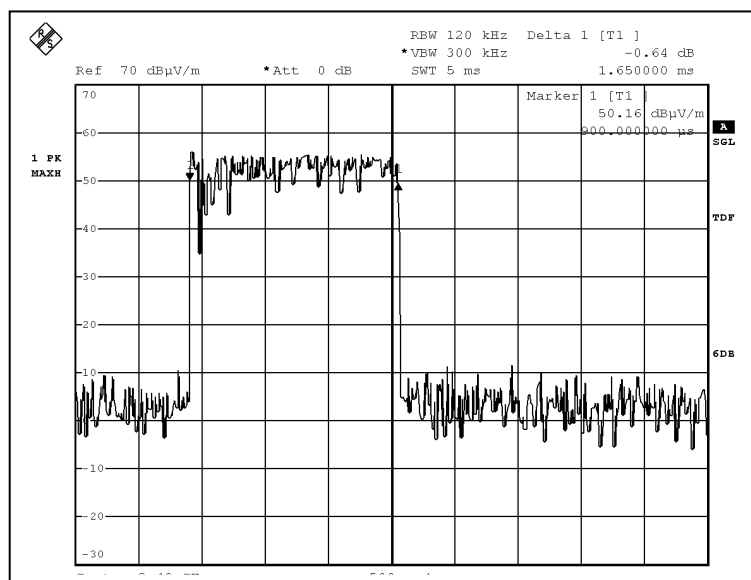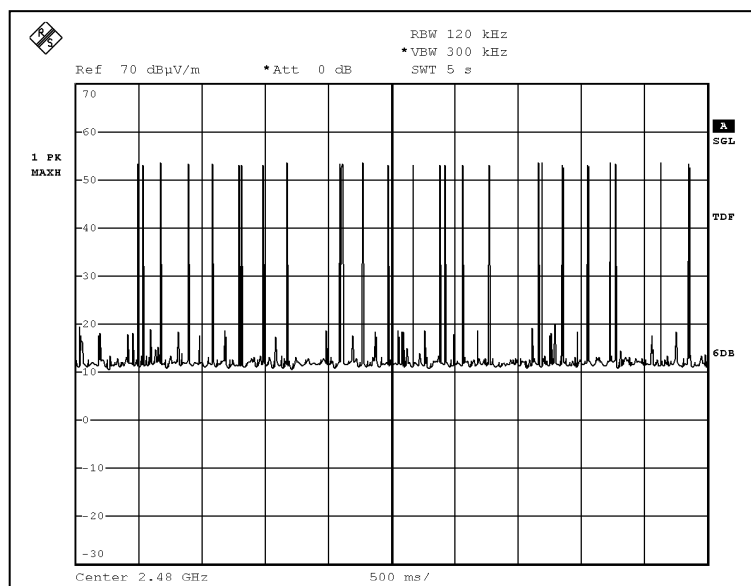

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR.

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心



TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A12. Bluetooth Average On Time

Packet: DH5
Channel: CH78

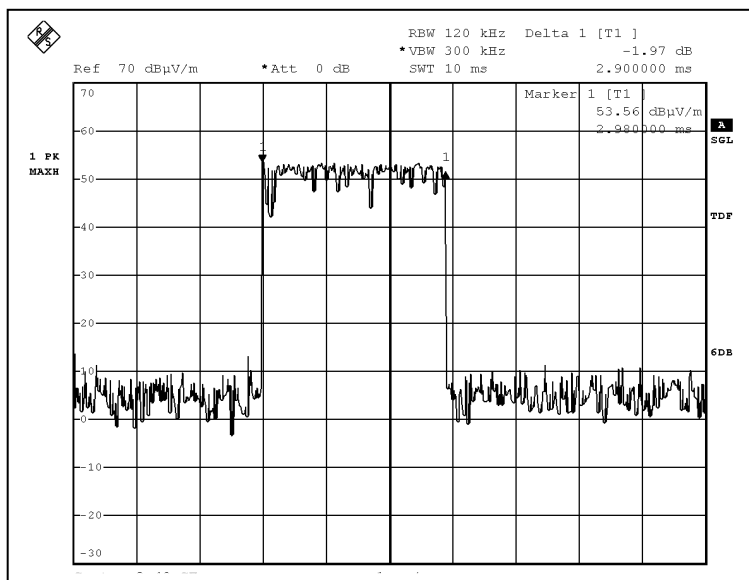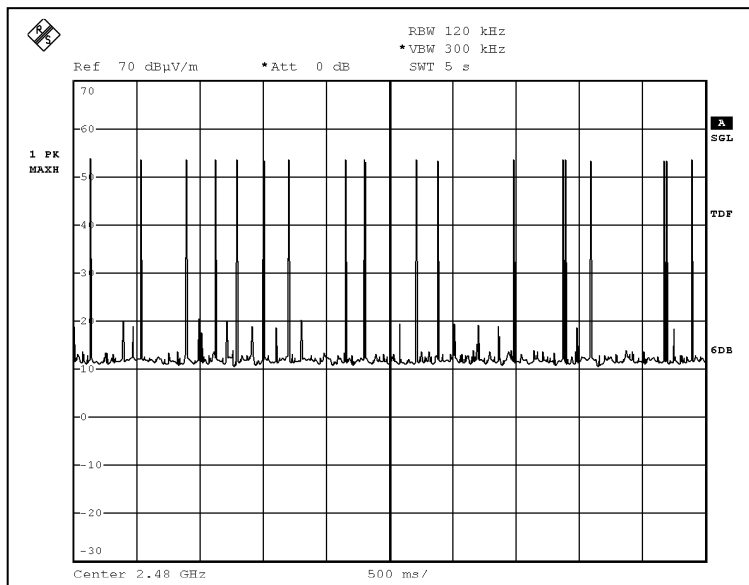

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心


TEST REPORT

Report No. : AS0058698(3)


Date : 03 Oct 2014

A13. Transmission Power

Channel: CH00

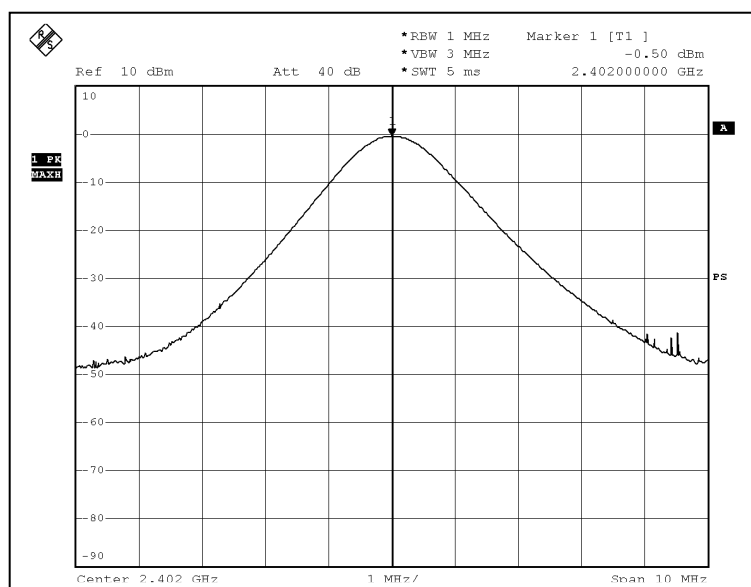

Channel: CH39

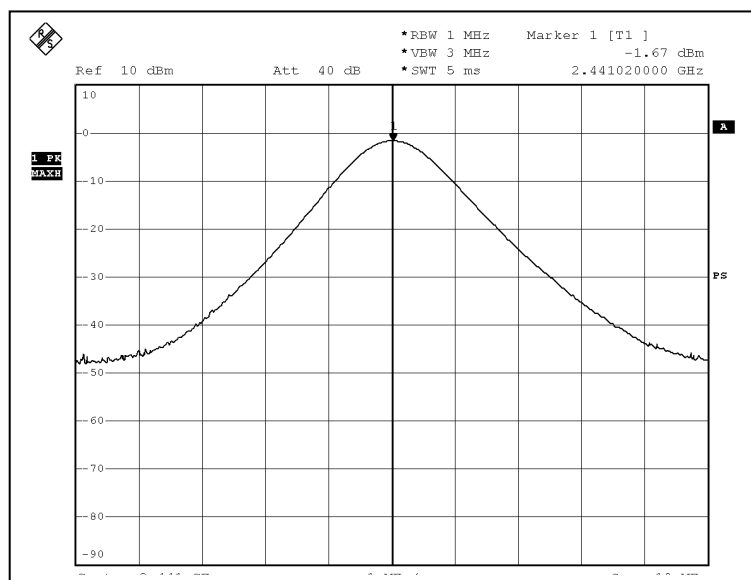

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心


TEST REPORT

Report No. : AS0058698(3)

Date : 03 Oct 2014

A13. Transmission Power

Channel: CH78

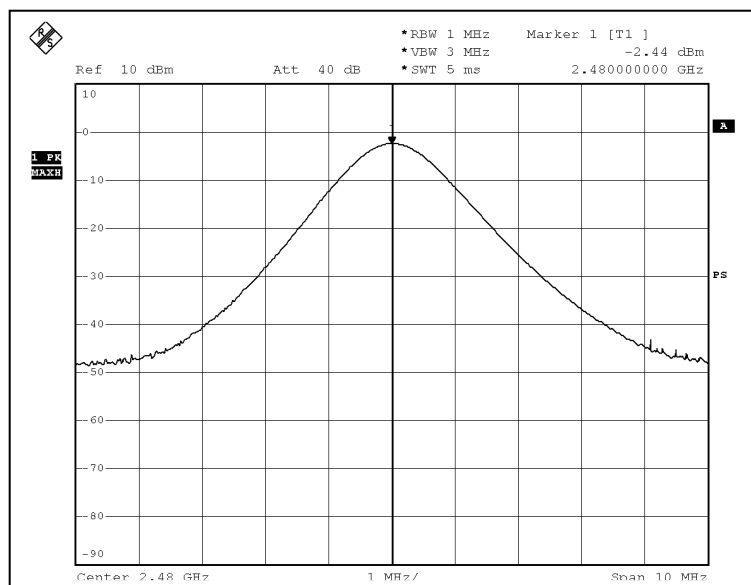

***** End of Report *****

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew