

FCC Test Report

Product Name	GIBI GPS TRACKER
Model No.	GIBI2
FCC ID	2ABUGGIBI02

Applicant	Gibi Technologies Incorporated
Address	46-036 Kamehameha Hwy, #745 Kaneohe 96744 Hawaii (State of), United States Of America

Date of Receipt	Jun. 16, 2022
Issued Date	Oct. 20, 2022
Report No.	2260470R-RFUSBLEV01-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: Oct. 20, 2022


Report No.: 2260470R-RFUSBLEV01-A



Product Name	GIBI GPS TRACKER
Applicant	Gibi Technologies Incorporated
Address	46-036 Kamehameha Hwy, #745 Kaneohe 96744 Hawaii (State of), United States Of America
Manufacturer	DAVISCOMMS(S) PTE LTD.
Model No.	GIBI2
FCC ID	2ABUGGIBI02
EUT Rated Voltage	DC 5V by USB or DC 3.7V by Battery
EUT Test Voltage	DC 5V by USB
Trade Name	Gibi
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By


:



(Supervisor / Jinn Chen)

Tested By


:



(Senior Engineer / Bill Lin)

Approved By

:



(Senior Engineer / Jack Hsu)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of Tested System	7
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Equipment.....	10
1.7. Uncertainty	12
2. CONDUCTED EMISSION	13
2.1. Test Setup	13
2.2. Limits.....	13
2.3. Test Procedure	14
2.4. Test Result of Conducted Emission	15
3. PEAK POWER OUTPUT	16
3.1. Test Setup	16
3.2. Limit	16
3.3. Test Procedure	16
3.4. Test Result of Peak Power Output	17
4. RADIATED EMISSION	18
4.1. Test Setup	18
4.2. Limits.....	19
4.3. Test Procedure	20
4.4. Test Result of Radiated Emission	22
5. RF ANTENNA CONDUCTED TEST	28
5.1. Test Setup	28
5.2. Limits.....	28
5.3. Test Procedure	28
5.4. Test Result of RF Antenna Conducted Test	29
6. BAND EDGE	30
6.1. Test Setup	30
6.2. Limit	31
6.3. Test Procedure	31
6.4. Test Result of Band Edge	33
7. 6DB BANDWIDTH	35
7.1. Test Setup	35
7.2. Limits.....	35
7.3. Test Procedure	35
7.4. Test Result of 6dB Bandwidth.....	36
8. POWER DENSITY	37
8.1. Test Setup	37
8.2. Limits.....	37
8.3. Test Procedure	37
8.4. Test Result of Power Density	38
9. DUTY CYCLE	39
9.1. Test Setup	39
9.2. Test Procedure	39
9.3. Test Result of Duty Cycle.....	40

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos: Please refer to the file: 2260470R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
2260470R-RFUSBLEV01-A	V1.0	Initial issue of report.	Oct. 20, 2022

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	GIBI GPS TRACKER
Trade Name	Gibi
Model No.	GIBI2
FCC ID	2ABUGGIBI02
Frequency Range	2402 – 2480MHz
Channel Separation	2MHz
Channel Number	40CH
Type of Modulation	GFSK
Antenna Type	Chip Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
USB Cable	Shielded, 1.05m
Power Adapter (1)	MFR: GIP, M/N: NF5V-1C-1U Input: 100-240V, 50/60Hz, 0.5A Max Output: 5V $\overline{=}$, 1A
Power Adapter (2)	MFR: Full Power, M/N: SAW06B-050-1000U Input: 100-240V~ 50/60Hz, 0.3A Output: 5V $\overline{=}$, 1000mA

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Green Antenna	GA187016BGL01	PCB Antenna	3.02 dBi for 2.4GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

Note:

1. The EUT is a GIBI GPS TRACKER with built-in Bluetooth V5.2 transceiver.
2. BLE is only support 1Mbps.
3. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
4. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
5. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit - BLE 1Mbps
	Mode 2: Charge mode

1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Transmit mode:

Product	Manufacturer	Model No.	Serial No.	Power Cord
N/A				

Signal Cable Type	Signal cable Description
N/A	


Charge mode:


Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Power Adapter	GIP	NF5V-1C-1U	N/A	N/A

Signal Cable Type		Signal cable Description
A	USB Cable	Shielded, 1.05m

1.3. Configuration of Tested System

Transmit mode:

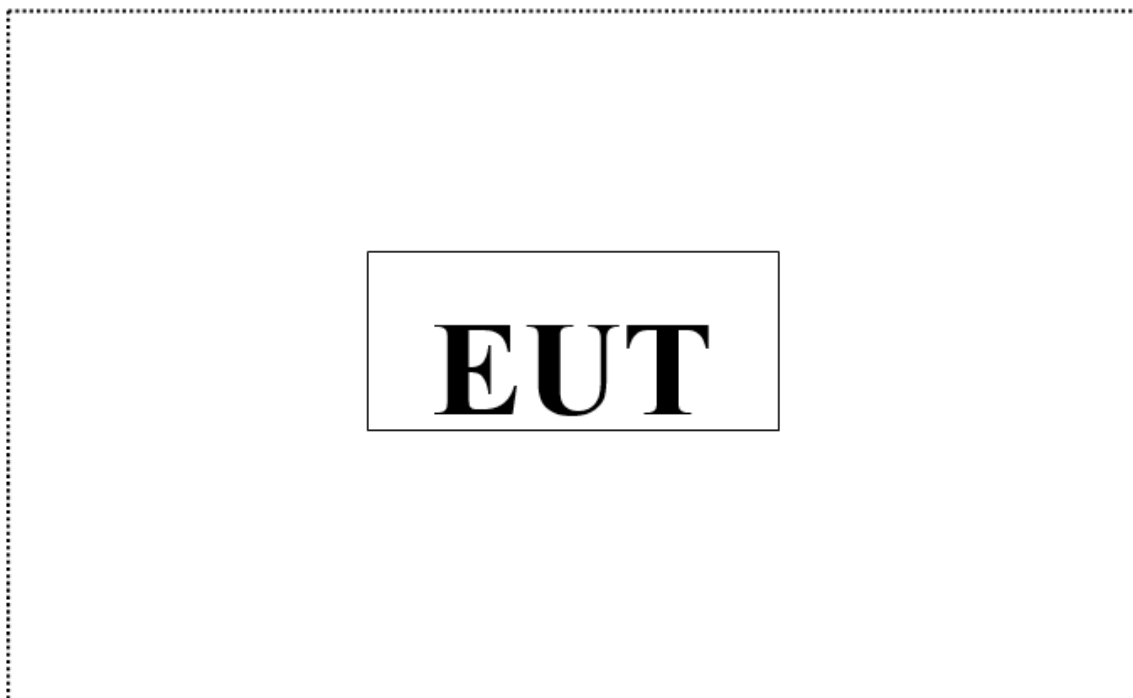

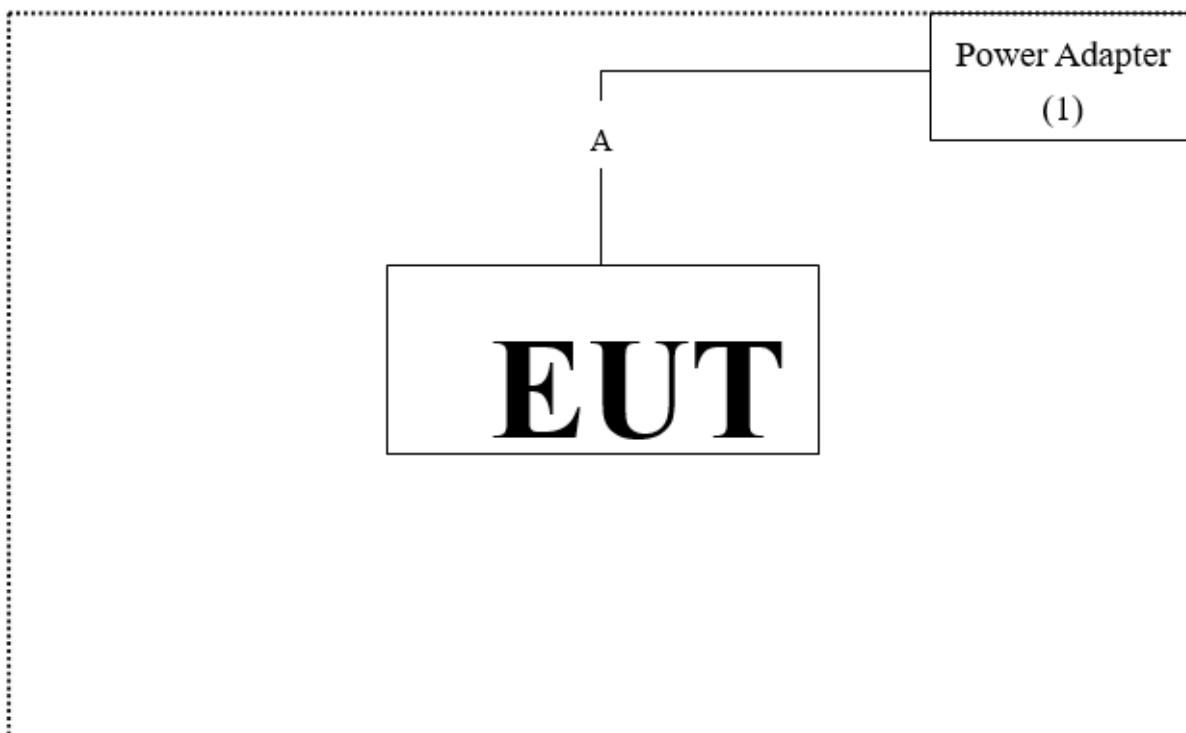Charge mode:**1.4. EUT Exercise Software**

- (1) Setup the EUT as shown in section 1.3.
- (2) Press the button.
- (3) Start transmits continually.
- (4) Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	28.9°C
	Humidity (%RH)	10~90 %	57.8%
Radiated Emission	Temperature (°C)	10~40 °C	22.8°C
	Humidity (%RH)	10~90 %	65.2%
Conductive	Temperature (°C)	10~40 °C	22°C
	Humidity (%RH)	10~90 %	55%

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 5-22, Ruishukeng Linkou District, New Taipei City,
24451, Taiwan

Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City
333411, Taiwan, R.O.C.

Phone Number : +886-3-275-7255
Fax Number : +886-3-327-8031
Email Address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction measurements /HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
X	EMI Test Receiver	R&S	ESR7	101601	2022.06.23	2023.06.22
X	Two-Line V-Network	R&S	ENV216	101306	2022.05.23	2023.05.22
X	Two-Line V-Network	R&S	ENV216	101307	2022.07.04	2023.07.03
X	Coaxial Cable	SUHNER	RG400_BNC	RF001	2022.05.24	2023.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software Version : E3 210616 dekra V9

For Conducted measurements /HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
X	Spectrum Analyzer	R&S	FSV30	103466	2021.12.27	2022.12.26
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2022.05.27	2023.05.26
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2022.05.19	2023.05.18
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2022.05.19	2023.05.18

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software Version : RF Conducted Test Tools R3 V3.0.1.19.

For Radiated measurements / HY-CB02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
X	Loop Antenna	AMETEK	HLA6121	56736	2022.05.14	2023.05.13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021.08.10	2022.08.09
	Horn Antenna	ETS-Lindgren	3117	00203799	2021.12.27	2022.12.26
X	Horn Antenna	Com-Power	AH-840	101087	2021.06.16	2022.06.15
X	Pre-Amplifier	SGH	SGH0301-9	20211007-11	2022.02.22	2023.02.21
X	Pre-Amplifier	EMCI	EMC051835SE	980632	2021.09.07	2022.09.06
X	Pre-Amplifier	EMCI	EMC05820SE	980361	2021.12.16	2022.12.15
	Pre-Amplifier	EMCI	EMC184045SE	980369	2022.05.12	2023.05.11
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
X	Filter	MICRO TRONICS	BRM50702	G251	2021.09.16	2022.09.15
	Filter	MICRO TRONICS	BRM50716	G188	2021.09.16	2022.09.15
X	EMI Test Receiver	R&S	ESR3	102793	2021.12.15	2022.12.14
X	Spectrum Analyzer	R&S	FSV3044	101114	2022.02.11	2023.02.10
X	Coaxial Cable	SGH	HA800	GD20110223-2	2022.03.17	2023.03.16
	Coaxial Cable	SGH	HA800	GD20110222-4		
	Coaxial Cable	SGH	SGH18	2021005-2		
	Coaxial Cable	SGH	SGH18	202108-5		

Note:

1. Loop Antenna is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software Version : E3 210616 dekra V9

For Radiated measurements / HY-CB01

	Equipment	Manufacturer	Model No/	Serial No/	Cal Date	Due Date
	Loop Antenna	AMETEK	HLA6121	56736	2022/05/14	2023/05/13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0675	2021/08/11	2023/08/10
	Horn Antenna	ETS-Lindgren	3117	00203761	2021/11/25	2022/11/24
	Horn Antenna	Com-Power	AH-840	101087	2022/06/16	2023/06/15
X	Pre-Amplifier	SGH	0301	20211007-7	2022/02/22	2023/02/21
	Pre-Amplifier	EMCI	EMC051835SE	980312	2022/02/22	2023/02/21
	Pre-Amplifier	EMCI	EMC05820SE	980362	2022/07/28	2023/07/27
	Pre-Amplifier	EMCI	EMC184045SE	980369	2022/05/12	2023/05/11
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
	Filter	MICRO TRONICS	BRM50702	G251	2021/09/16	2022/09/15
	Filter	MICRO TRONICS	BRM50716	G188	2021/09/16	2022/09/15
X	EMI Test Receiver	R&S	ESR3	102792	2021/12/15	2022/12/14
X	Spectrum Analyzer	R&S	FSV3044	101113	2022/01/25	2023/02/24
X	Coaxial Cable	SUHNER	SUCOFLEX 106	25450/6	2022/03/22	2023/03/21
	Coaxial Cable	SGH	HA800	GD20110222-8		
	Coaxial Cable	SGH	SGH18	2021003-8		
	Coaxial Cable	EMCI	EMC106	151113		

Note:

1. Loop Antenna is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : E3 210616 dekra V9

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Peak Power Output	± 0.89 dB	
Radiated Emission	Under 1GHz ± 4.05 dB	Above 1GHz ± 3.73 dB
RF Antenna Conducted Test	± 2.06 dB	
Band Edge	Under 1GHz ± 4.05 dB	Above 1GHz ± 3.73 dB
6dB Bandwidth	± 1544.74 Hz	
Power Density	± 2.06 dB	
Duty Cycle	± 2.31 ms	

2. Conducted Emission

2.1. Test Setup

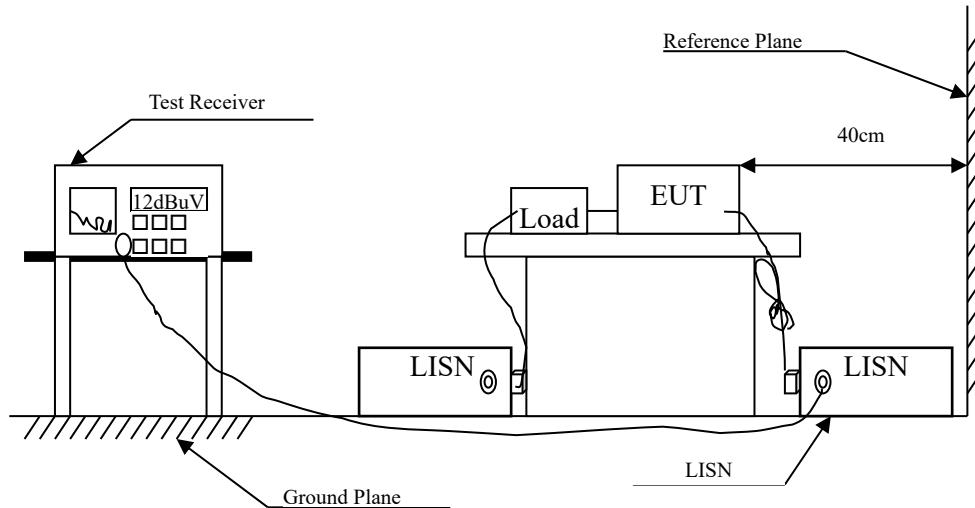

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)


Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

2.4. Test Result of Conducted Emission

Adapter: GIP

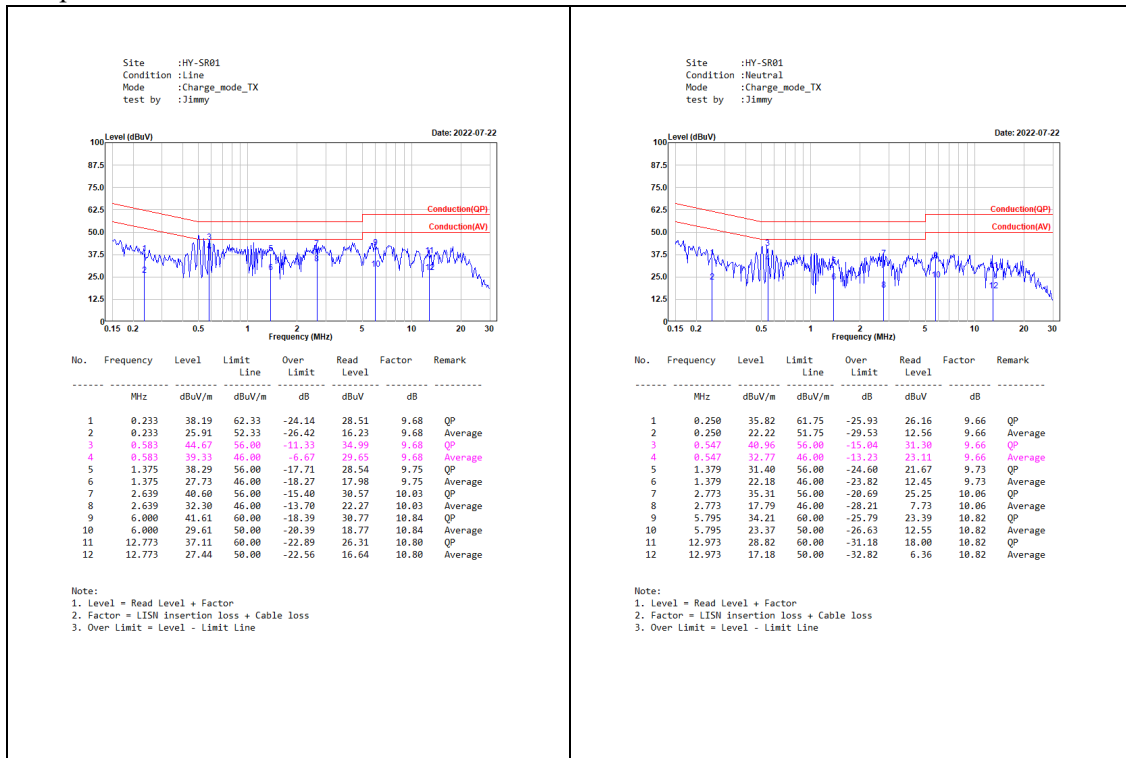

Adapter: Full Power

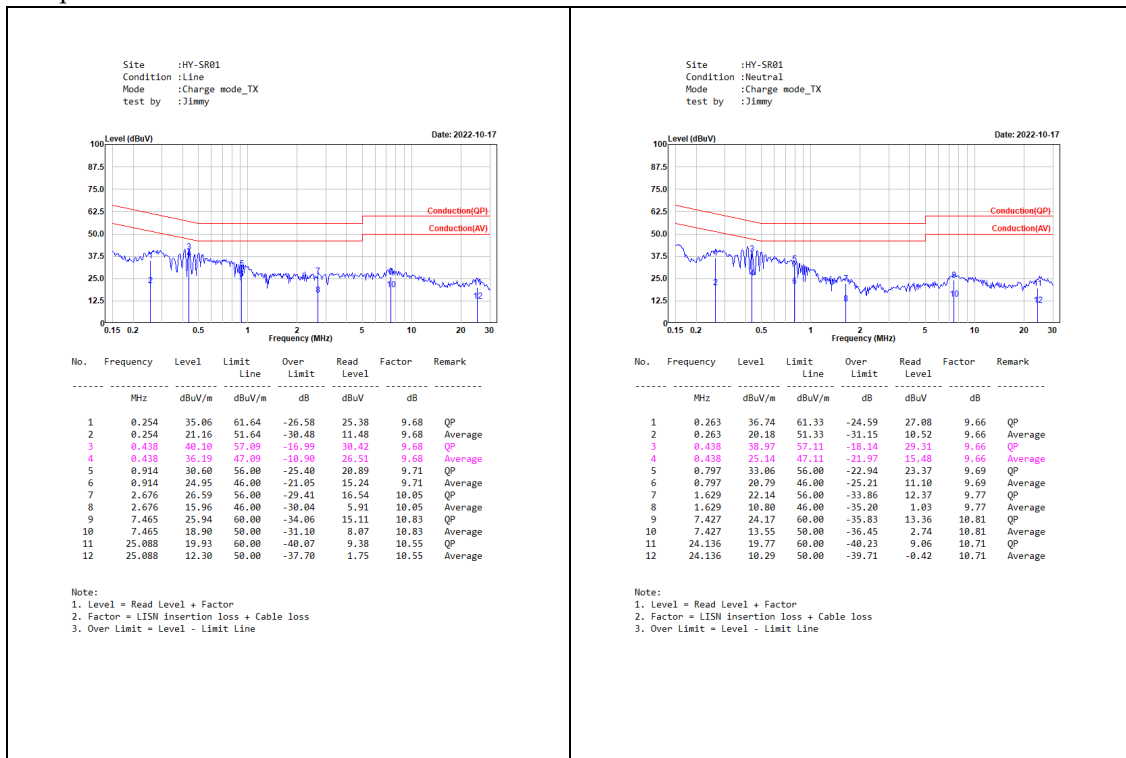


Test Result of Conducted Emission

PASS

3. Peak Power Output

3.1. Test Setup

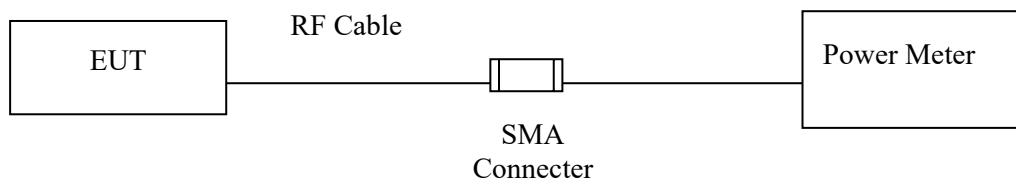

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method.

3.4. Test Result of Peak Power Output

Product : GIBI GPS TRACKER
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - BLE 1Mbps
Test Date : 2022/07/07


Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	6.01	1 Watt= 30 dBm	Pass
Channel 19	2440.00	5.91	1 Watt= 30 dBm	Pass
Channel 39	2480.00	5.41	1 Watt= 30 dBm	Pass

Test Result of Peak Power Output	PASS
----------------------------------	------


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

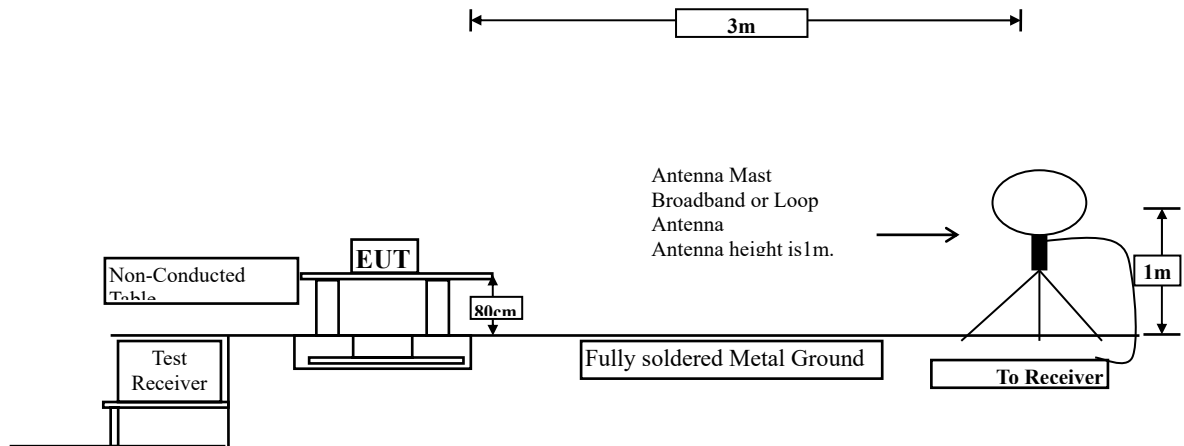

Radiated Emission Below 1GHz

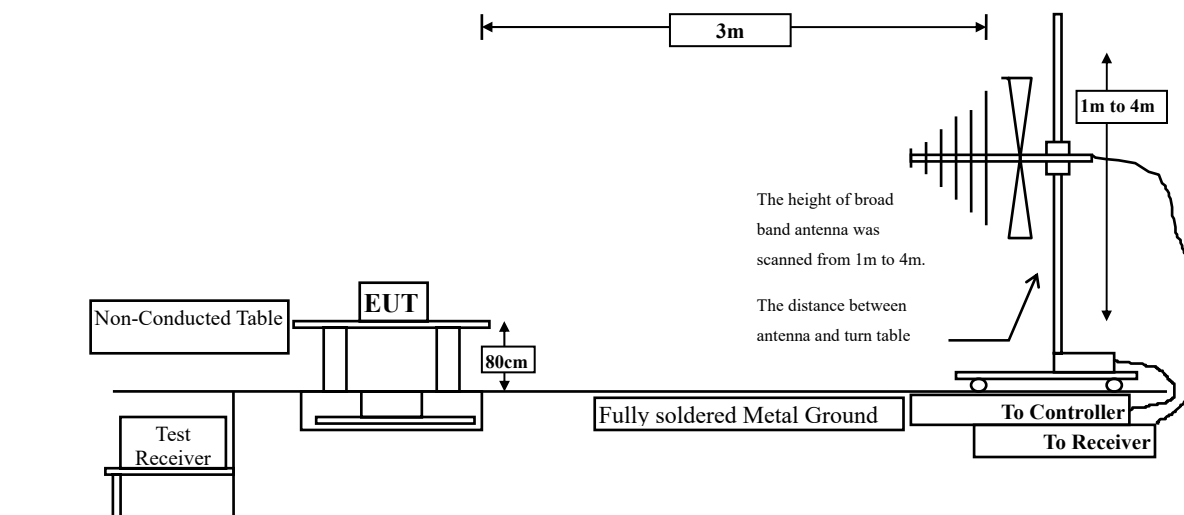

Radiated Emission Above 1GHz

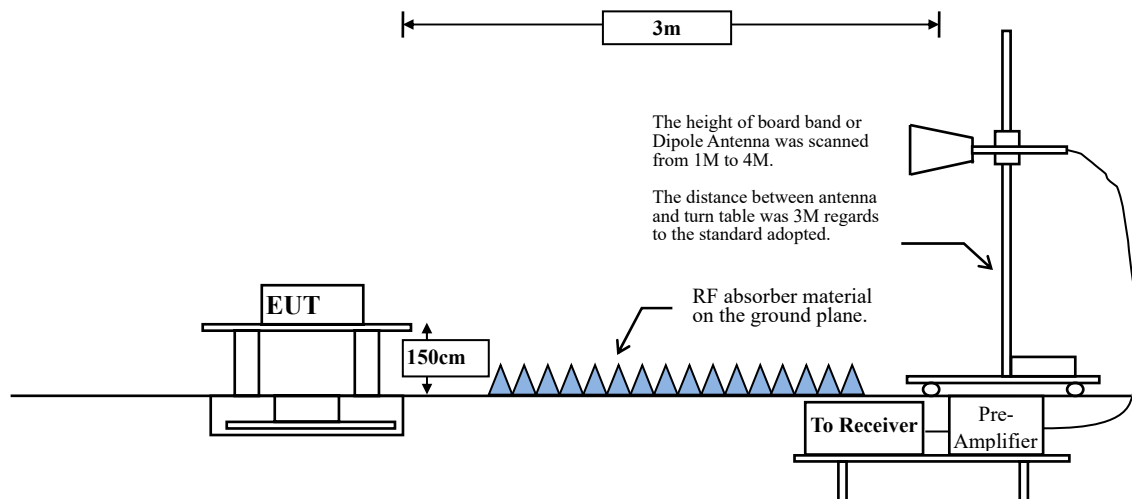

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$


$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE 1Mbps	26.20	0.1640	6098	10000

Note: Duty Cycle Refer to Section 9.

4.4. Test Result of Radiated Emission

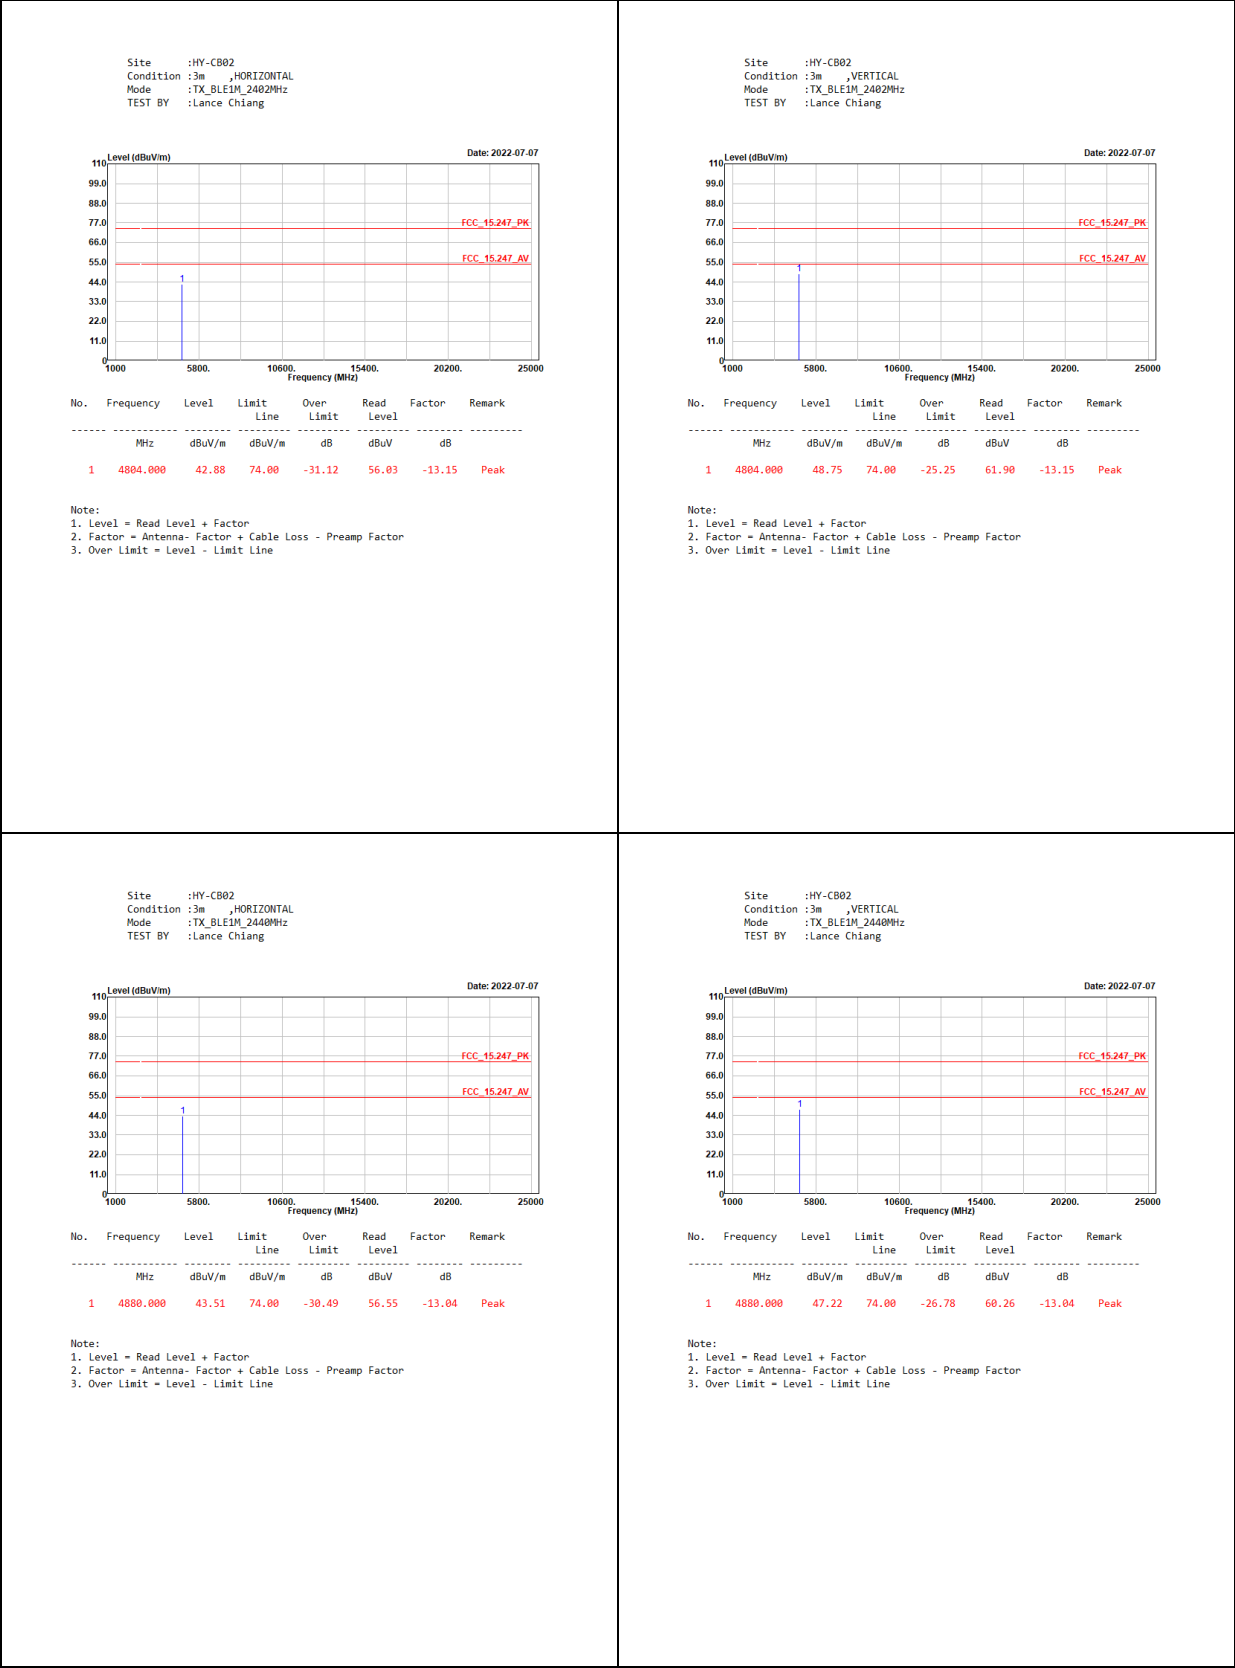


Site :HY-CB02
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2400MHz
TEST BY :Lance Chiang

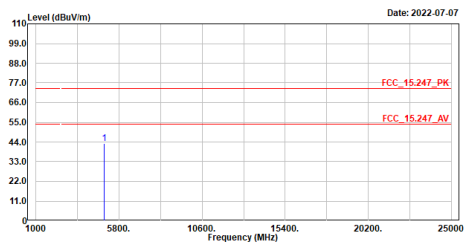

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.000	43.05	74.00	-30.95	55.96	-12.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2400MHz
TEST BY :Lance Chiang

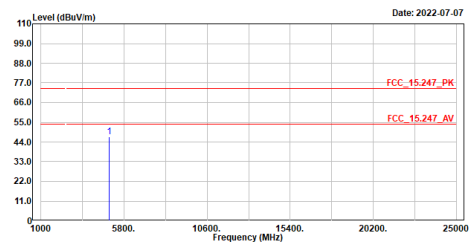

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4960.000	46.80	74.00	-27.20	59.71	-12.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2400MHz
TEST BY :Lance Chiang

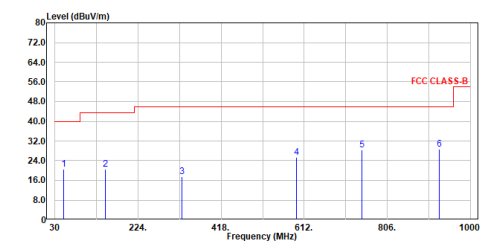

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	50.613	20.61	40.00	-19.39	44.81	-24.20	QP
2	148.461	20.68	43.50	-22.82	45.01	-24.33	QP
3	327.063	17.56	46.00	-28.44	40.35	-22.79	QP
4	594.055	25.31	46.00	-20.69	41.63	-16.32	QP
5	746.580	28.29	46.00	-17.71	42.22	-13.93	QP
6	926.886	26.54	46.00	-17.46	40.52	-11.98	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2400MHz
TEST BY :Lance Chiang

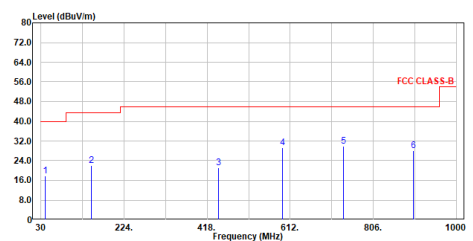


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	39.579	17.76	40.00	-22.24	42.18	-24.42	QP
2	148.461	21.91	43.50	-21.59	46.24	-24.33	QP
3	327.063	21.01	46.00	-24.99	40.76	-19.75	QP
4	594.055	29.43	46.00	-16.57	45.75	-16.32	QP
5	736.645	29.75	46.00	-16.25	43.87	-14.12	QP
6	899.685	28.06	46.00	-17.94	40.38	-12.32	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Adapter: GIP


Site :HY-CB02
Condition :3m ,HORIZONTAL
Mode :Charge mode
TEST BY :Lance Chiang

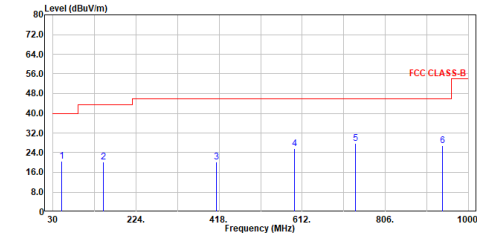

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	50.855	20.46	40.00	-19.54	44.74	-24.28	QP
2	148.461	20.28	43.50	-23.22	44.61	-24.33	QP
3	412.423	20.19	46.00	-25.81	41.05	-20.86	QP
4	594.055	25.58	46.00	-20.42	41.90	-16.32	QP
5	736.524	27.70	46.00	-18.30	41.82	-14.12	QP
6	939.981	26.90	46.00	-19.10	38.75	-11.85	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
Mode :Charge mode
TEST BY :Lance Chiang

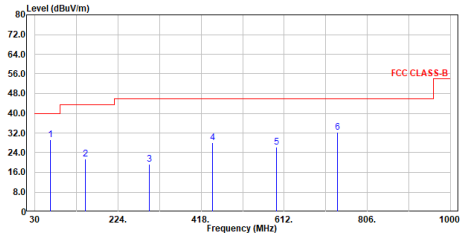


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	65.890	29.32	40.00	-10.68	55.28	-25.96	QP
2	148.461	21.41	43.50	-22.09	45.74	-24.33	QP
3	296.993	19.24	46.00	-26.76	43.05	-23.81	QP
4	445.524	28.14	46.00	-17.86	47.89	-19.75	QP
5	594.055	26.14	46.00	-19.86	42.46	-16.32	QP
6	736.403	32.38	46.00	-13.62	46.50	-14.12	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Adapter: Full Power


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX Charge mode
TEST BY :Caster

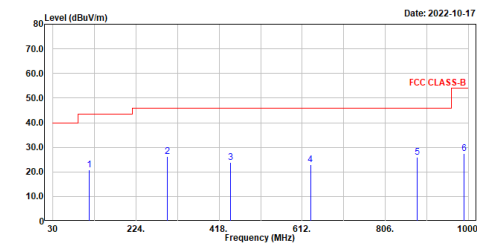

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	115.360	20.70	43.50	-22.80	47.45	-26.75	QP
2	296.750	26.23	46.00	-19.77	49.84	-23.61	QP
3	445.160	23.80	46.00	-22.20	43.36	-19.56	QP
4	631.400	23.07	46.00	-22.93	38.76	-15.69	QP
5	880.600	25.93	46.00	-20.07	38.58	-12.65	QP
6	989.330	27.34	54.00	-26.66	38.71	-11.37	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX Charge mode
TEST BY :Caster

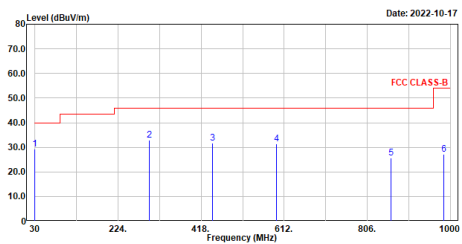


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	30.000	29.37	40.00	-10.63	54.83	-25.46	QP
2	296.750	33.01	46.00	-12.99	56.62	-23.61	QP
3	445.160	31.70	46.00	-14.30	51.26	-19.56	QP
4	594.540	31.25	46.00	-14.75	47.38	-16.13	QP
5	862.260	25.75	46.00	-20.25	38.59	-12.84	QP
6	984.480	27.31	54.00	-26.69	38.70	-11.39	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Co-Location


Site :HY-CB02
 Condition :3m ,HORIZONTAL
 Mode :TX_BLE1M_2480MHz+Band2_BW20_Ch18900
 TEST BY :Lance Chiang

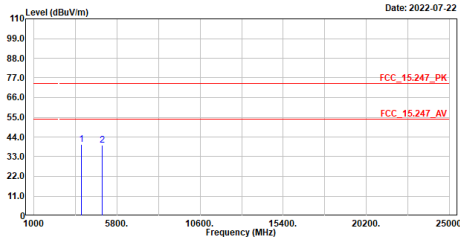

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	3760.000	39.87	74.00	-34.13	56.14	-16.27	Peak
2	4960.000	39.54	74.00	-34.46	53.32	-13.78	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line


Site :HY-CB02
 Condition :3m ,VERTICAL
 Mode :TX_BLE1M_2480MHz+Band2_BW20_Ch18900
 TEST BY :Lance Chiang

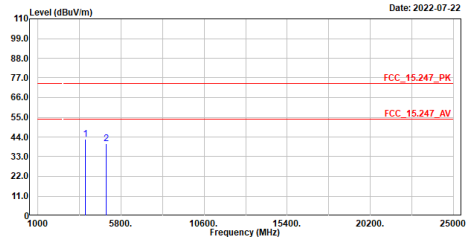

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	3760.000	42.85	74.00	-31.15	59.12	-16.27	Peak
2	4960.000	40.13	74.00	-33.87	53.91	-13.78	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line


Site :HY-CB02
 Condition :3m ,HORIZONTAL
 Mode :TX_BLE1M_2480MHz+Band4_BW20_Ch20175
 TEST BY :Lance Chiang

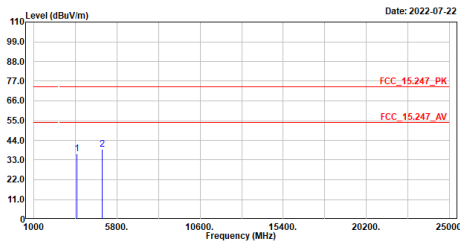

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	3465.000	36.61	74.00	-37.39	54.27	-17.66	Peak
2	4960.000	38.95	74.00	-35.05	52.73	-13.78	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line


Site :HY-CB02
 Condition :3m ,VERTICAL
 Mode :TX_BLE1M_2480MHz+Band4_BW20_Ch20175
 TEST BY :Lance Chiang

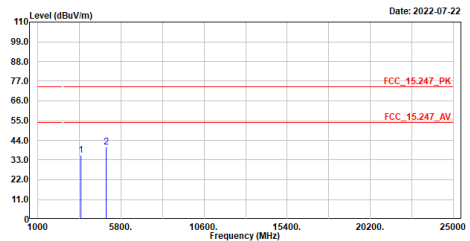

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	3465.000	35.67	74.00	-38.33	53.33	-17.66	Peak
2	4960.000	40.45	74.00	-33.55	54.23	-13.78	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2480MHz+Band5_BW10_Ch20525
TEST BY :Lance Chiang

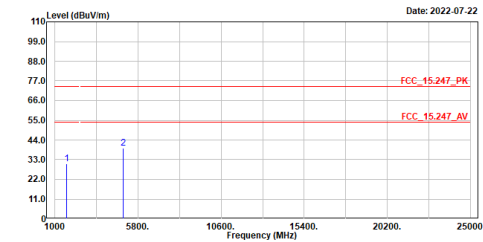

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	1673.000	30.61	74.00	-43.39	54.08	-23.47	Peak
2	4960.000	39.53	74.00	-34.47	53.31	-13.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2480MHz+Band5_BW10_Ch20525
TEST BY :Lance Chiang

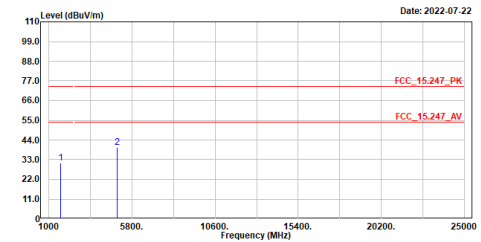

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	1673.000	31.08	74.00	-42.92	54.55	-23.47	Peak
2	4960.000	39.71	74.00	-34.29	53.49	-13.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2480MHz+Band2_Ch18900
TEST BY :Lance Chiang

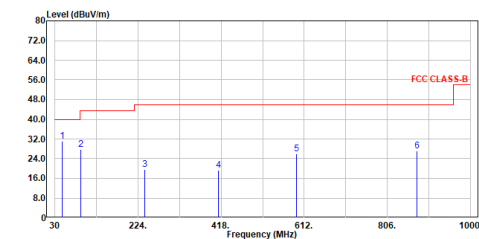

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	47.460	30.96	40.00	-9.04	55.00	-24.04	QP
2	90.140	27.84	43.50	-15.66	58.31	-30.47	QP
3	239.520	19.72	46.00	-26.28	45.42	-25.70	QP
4	411.210	19.44	46.00	-26.56	48.36	-28.92	QP
5	593.570	25.86	46.00	-20.14	42.20	-16.34	QP
6	874.870	27.26	46.00	-18.74	48.06	-12.80	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2480MHz+Band2_Ch18900
TEST BY :Lance Chiang

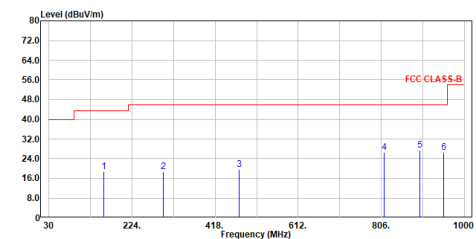

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	159.010	18.75	43.50	-24.75	42.82	-24.07	QP
2	296.750	18.67	46.00	-27.33	42.49	-23.82	QP
3	474.260	19.62	46.00	-26.38	38.80	-19.18	QP
4	812.790	26.61	46.00	-19.39	39.99	-13.38	QP
5	896.210	27.59	46.00	-18.41	39.92	-12.33	QP
6	952.470	26.69	46.00	-19.31	38.38	-11.69	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2480MHz+Band4 Ch20175
TEST BY :Lance Chiang

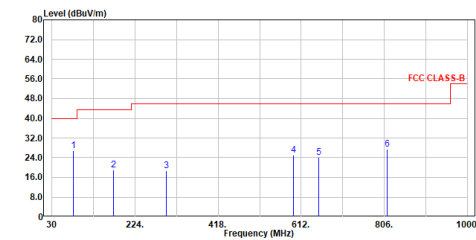

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	79.470	26.83	40.00	-13.17	55.78	-28.95	QP
2	174.530	19.13	43.50	-24.37	44.05	-24.92	QP
3	296.750	18.79	46.00	-27.21	42.61	-23.82	QP
4	593.570	25.02	46.00	-20.98	41.36	-16.34	QP
5	652.740	24.30	46.00	-21.70	39.77	-15.47	QP
6	812.790	27.50	46.00	-18.50	40.88	-13.38	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2480MHz+Band4 Ch20175
TEST BY :Lance Chiang

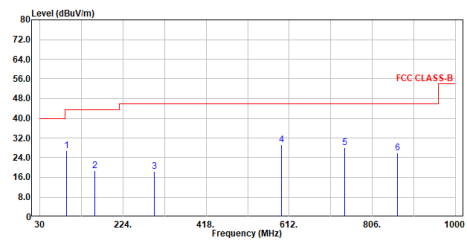

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	93.050	26.98	43.50	-16.52	57.12	-30.14	QP
2	159.010	18.70	43.50	-24.80	42.77	-24.07	QP
3	296.750	18.53	46.00	-27.47	42.35	-23.82	QP
4	593.570	29.37	46.00	-16.63	45.71	-16.34	QP
5	741.900	27.94	46.00	-18.06	41.96	-14.02	QP
6	864.200	25.82	46.00	-20.18	38.66	-12.84	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,HORIZONTAL
Mode :TX_BLE1M_2480MHz+Band5 Ch20525
TEST BY :Lance Chiang

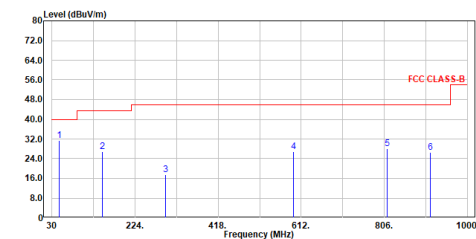

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	47.460	31.26	40.00	-8.74	55.30	-24.04	QP
2	147.370	26.95	43.50	-16.55	51.30	-24.35	QP
3	295.780	17.37	46.00	-28.63	41.20	-23.83	QP
4	593.570	26.73	46.00	-19.27	43.07	-16.34	QP
5	812.790	28.06	46.00	-17.94	41.44	-13.38	QP
6	912.700	26.58	46.00	-19.42	38.58	-12.00	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
Mode :TX_BLE1M_2480MHz+Band5 Ch20525
TEST BY :Lance Chiang

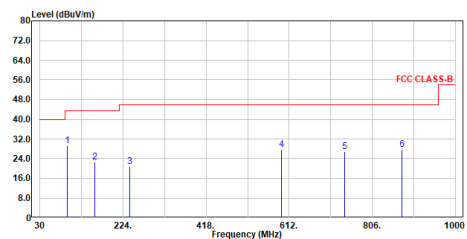

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	94.020	29.34	43.50	-14.16	59.28	-29.94	QP
2	159.010	22.56	43.50	-20.94	46.63	-24.07	QP
3	239.520	20.82	46.00	-25.18	46.52	-25.70	QP
4	593.570	27.80	46.00	-18.20	44.14	-16.34	QP
5	741.900	26.78	46.00	-19.22	40.80	-14.02	QP
6	874.870	27.80	46.00	-18.20	40.60	-12.80	QP


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Test Result of Radiated Emission

PASS

5. RF Antenna Conducted Test

5.1. Test Setup

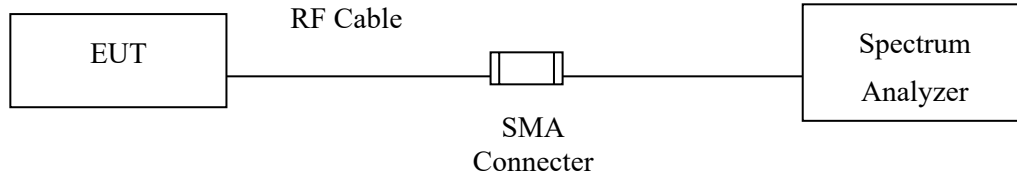

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure


The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Result of RF Antenna Conducted Test

Product : GIBI GPS TRACKER
 Test Item : RF Antenna Conducted Test
 Test Mode : Mode 1: Transmit - BLE 1Mbps

Figure Channel 00:

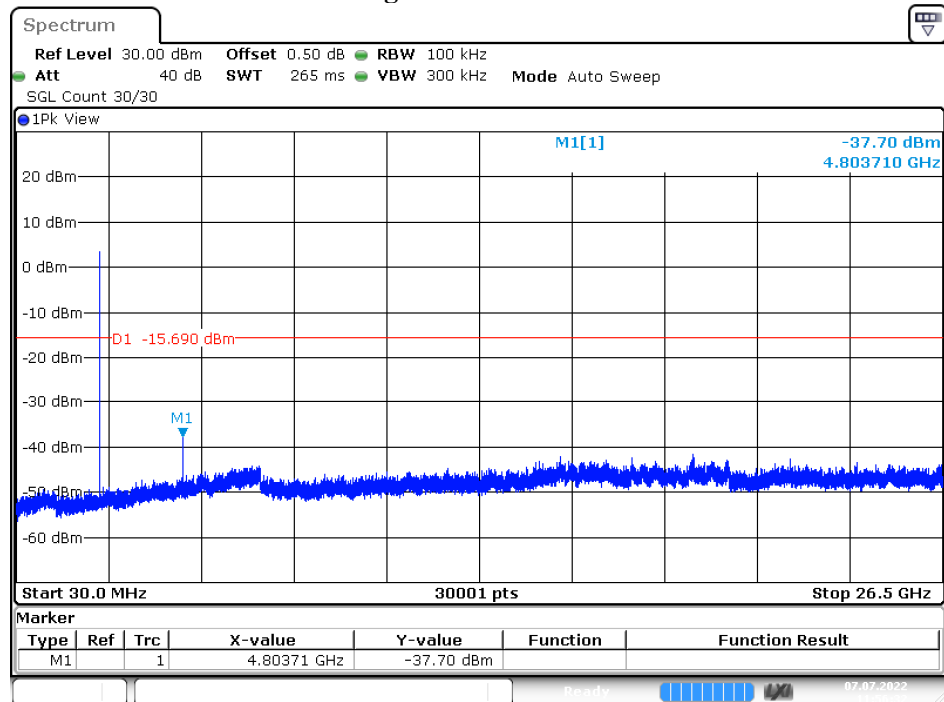

Date: 7.JUL.2022 11:56:32

Note: The above test pattern is synthesized by multiple of the frequency range.


Test Result of RF Antenna Conducted Test

PASS


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

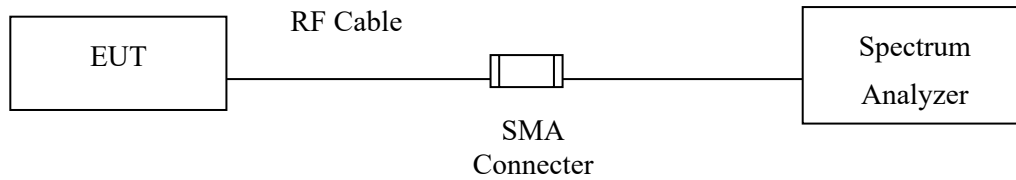

RF Radiated Measurement:

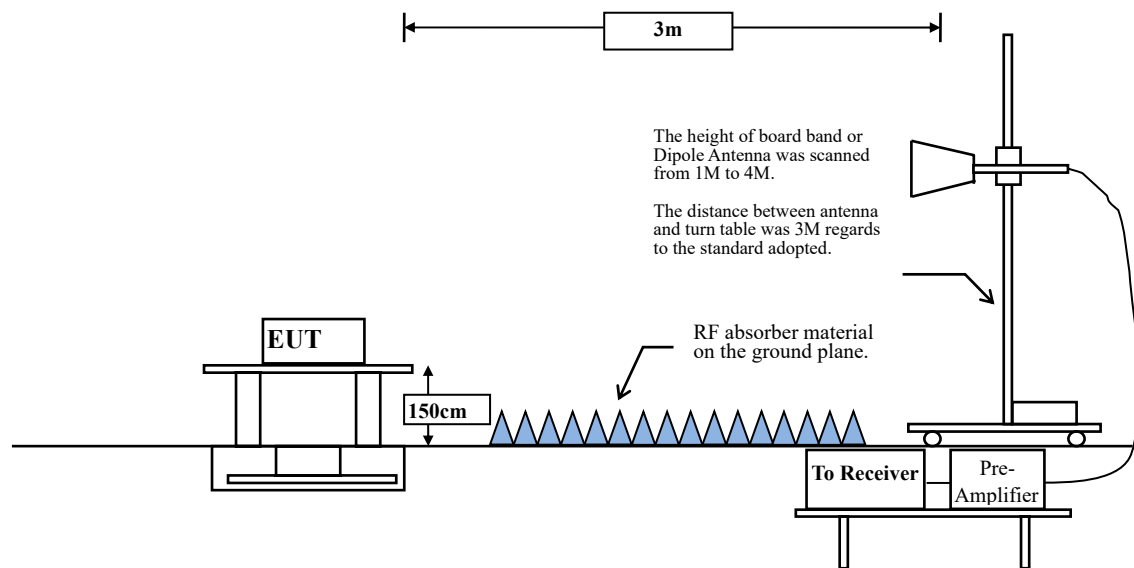

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$


$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE 1Mbps	26.20	0.1640	6098	10000

Note: Duty Cycle Refer to Section 9.

6.4. Test Result of Band Edge

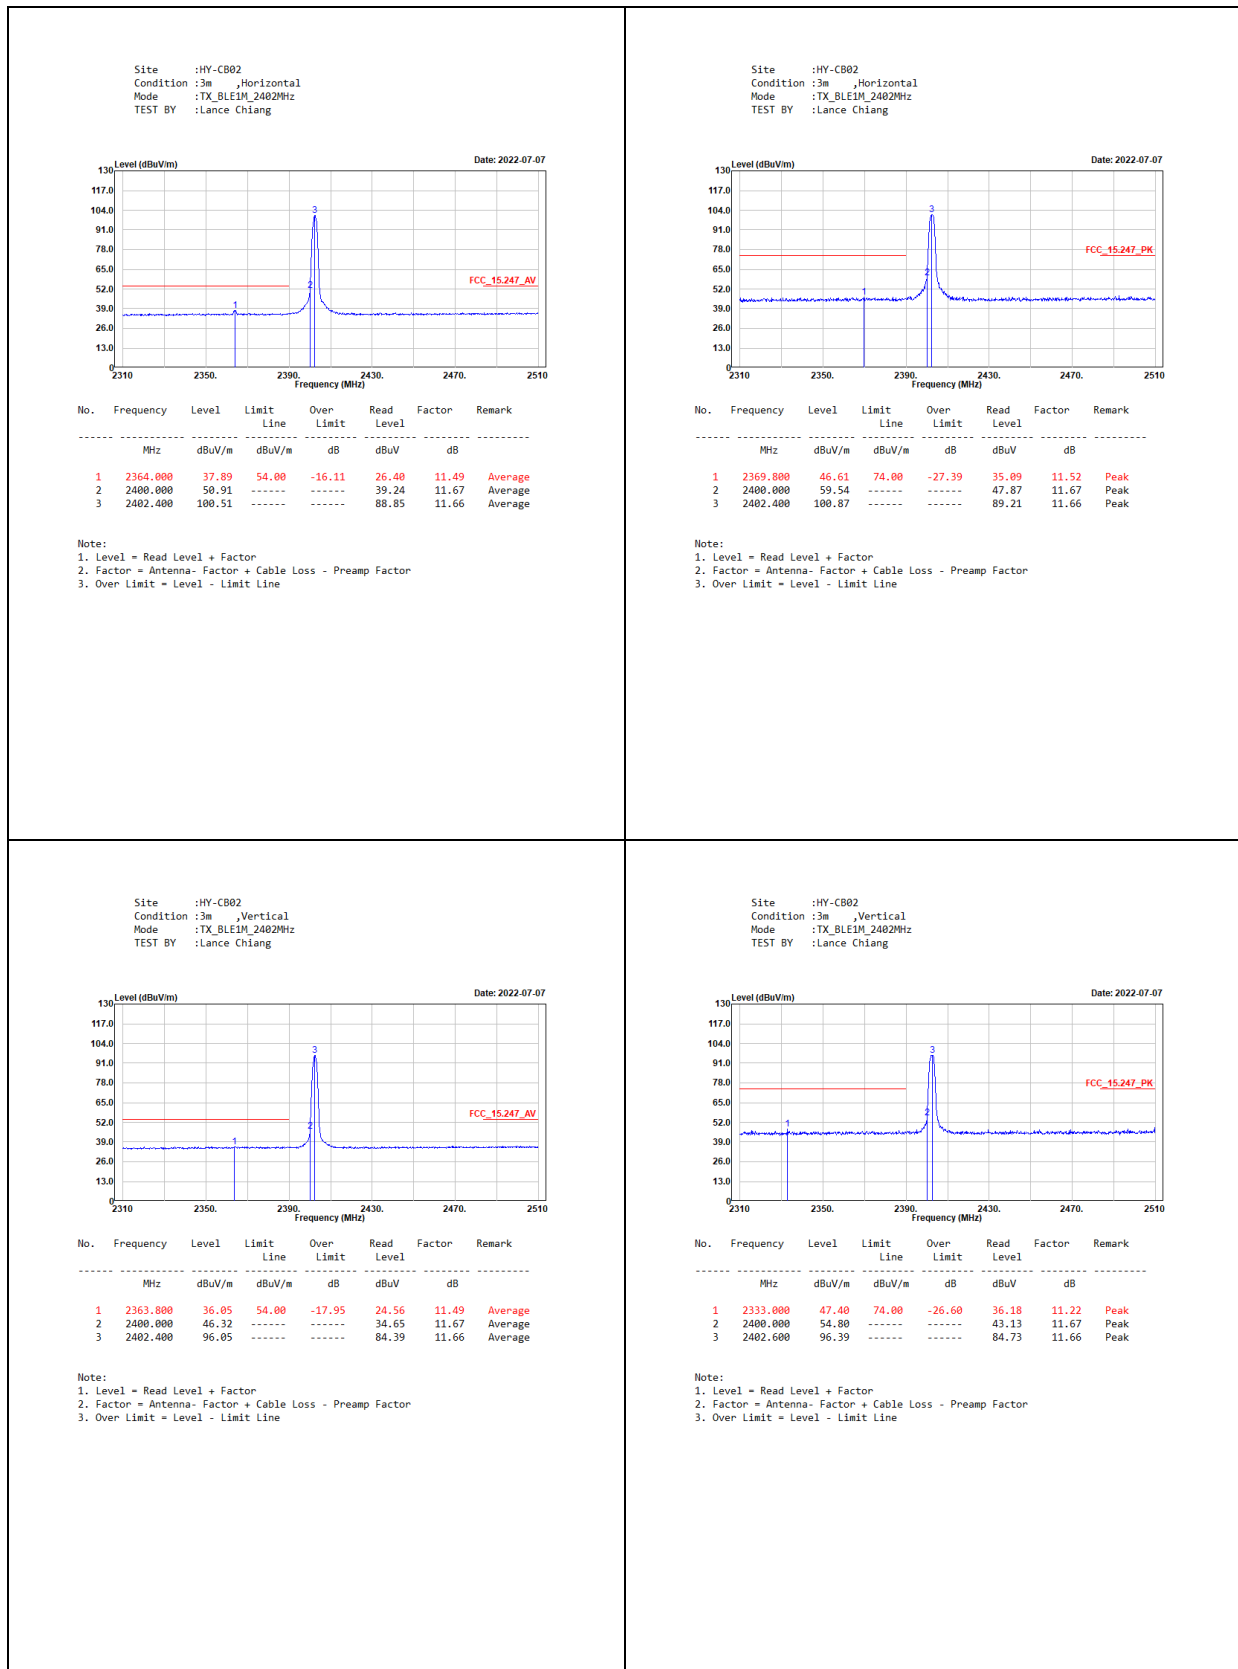


Site :HY-CB02
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
TEST BY :Lance Chiang

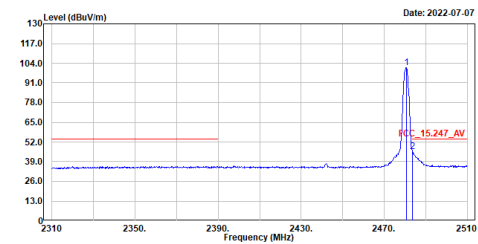

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2480.600	101.18	-----	-----	89.52	11.66	Average
2	2483.600	45.57	54.00	-8.43	33.89	11.68	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
TEST BY :Lance Chiang

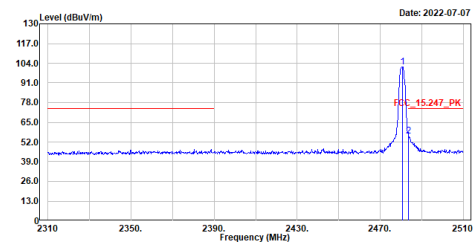

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2480.600	101.50	-----	-----	89.84	11.66	Peak
2	2483.600	55.74	74.00	-18.26	44.06	11.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
TEST BY :Lance Chiang

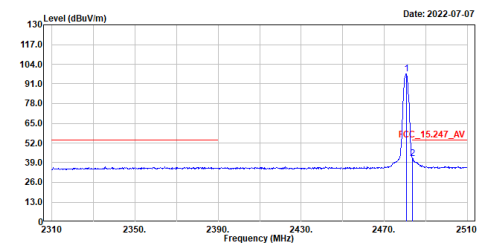

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2480.600	97.54	-----	-----	85.88	11.66	Average
2	2483.600	41.90	54.00	-12.10	30.22	11.68	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
TEST BY :Lance Chiang

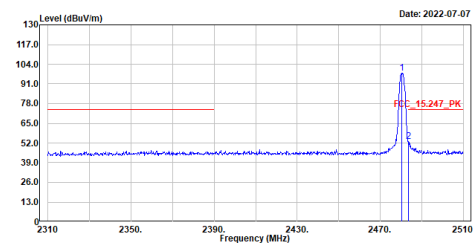

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	2480.400	97.93	-----	-----	86.27	11.66	Peak
2	2483.600	53.02	74.00	-20.98	41.34	11.68	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna- Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Test Result of Band Edge

PASS

7. 6dB Bandwidth

7.1. Test Setup

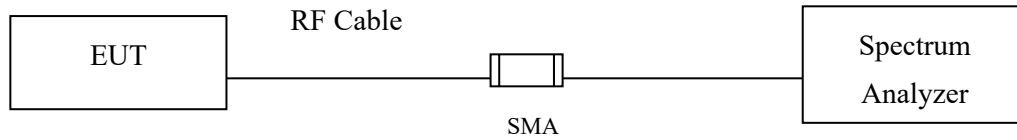

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure


The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of 6dB Bandwidth

Product : GIBI GPS TRACKER
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit - BLE 1Mbps

Channel No.	Frequency (MHz)	Emission Level (kHz)	Required Limit (kHz)	Result
00	2402	684	>500	Pass
19	2440	679	>500	Pass
39	2480	669	>500	Pass

Figure Channel 39:

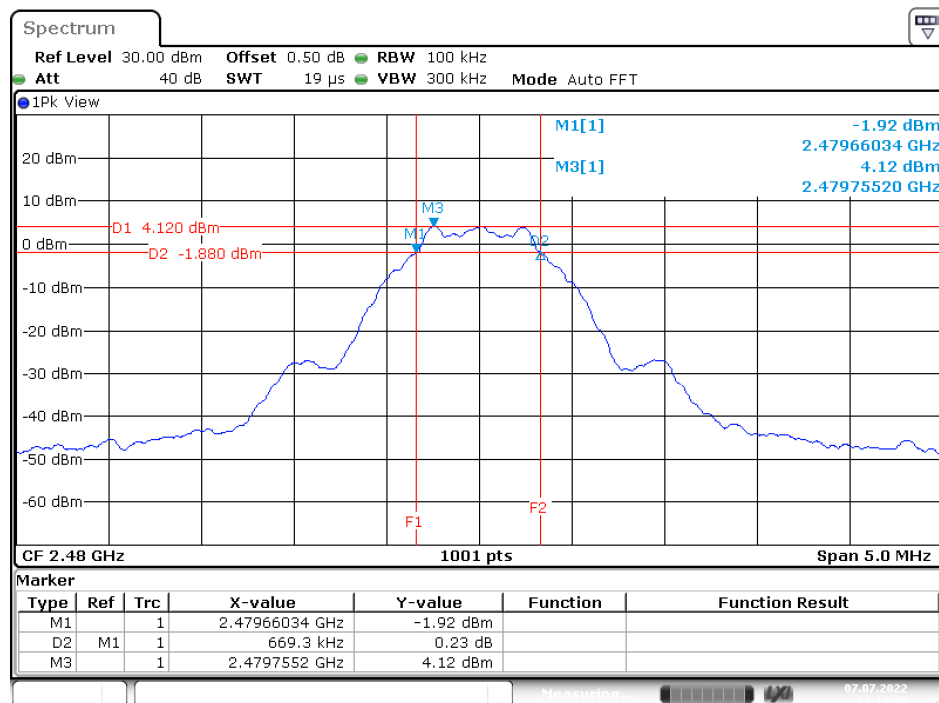


Date: 7.JUL.2022 13:19:41

Test Result of 6dB Bandwidth

PASS

8. Power Density

8.1. Test Setup

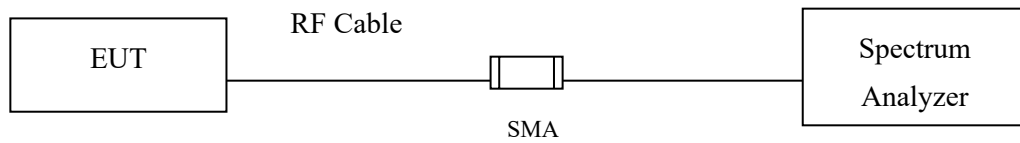

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

8.4. Test Result of Power Density

Product : GIBI GPS TRACKER
 Test Item : Power Density Data
 Test Mode : Mode 1: Transmit - BLE 1Mbps

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	-12.27	≤ 8 dBm	Pass
19	2440	-12.35	≤ 8 dBm	Pass
39	2480	-12.39	≤ 8 dBm	Pass

Figure Channel 39:

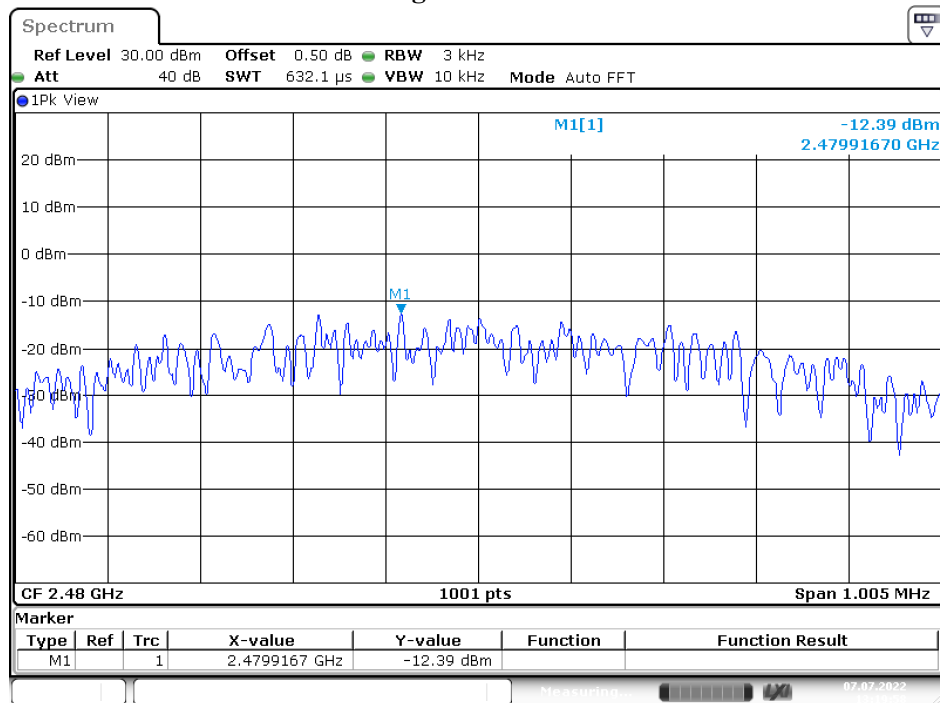


Date: 7.JUL.2022 13:19:59

Test Result of Power Density	PASS
------------------------------	------

9. Duty Cycle

9.1. Test Setup

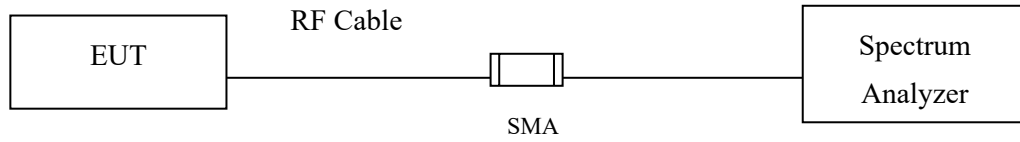

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Test Result of Duty Cycle

Product : GIBI GPS TRACKER
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit - BLE 1Mbps

Duty Cycle Formula:

Duty Cycle = $T_{on} / (T_{on} + T_{off})$

Duty Factor = 10 Log (1/Duty Cycle)

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE 1Mbps	0.1640	0.6260	26.20	5.82

BLE (1M)

