

# FCC RF Test Report


APPLICANT : Soundhawk Corporation  
EQUIPMENT : BT MIC  
BRAND NAME : SOUNDHAWK  
MODEL NAME : SHK001  
MARKETING NAME : Smart Listening System  
FCC ID : 2ABW3-WM1  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on May 08, 2014 and testing was completed on May 17, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>REVISION HISTORY .....</b>                                   | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                             | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION .....</b>                              | <b>5</b>  |
| 1.1 Applicant .....                                             | 5         |
| 1.2 Manufacturer .....                                          | 5         |
| 1.3 Feature of Equipment Under Test .....                       | 5         |
| 1.4 Product Specification of Equipment Under Test .....         | 5         |
| 1.5 Modification of EUT .....                                   | 6         |
| 1.6 Testing Location .....                                      | 6         |
| 1.7 Applicable Standards .....                                  | 6         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>       | <b>7</b>  |
| 2.1 Descriptions of Test Mode .....                             | 7         |
| 2.2 Test Mode .....                                             | 8         |
| 2.3 Connection Diagram of Test System .....                     | 9         |
| 2.4 Support Unit used in test configuration and system .....    | 9         |
| 2.5 EUT Operation Test Setup .....                              | 10        |
| 2.6 Measurement Results Explanation Example .....               | 10        |
| <b>3 TEST RESULT .....</b>                                      | <b>11</b> |
| 3.1 Number of Channel Measurement .....                         | 11        |
| 3.2 Hopping Channel Separation Measurement .....                | 13        |
| 3.3 Dwell Time Measurement .....                                | 20        |
| 3.4 20dB Bandwidth Measurement .....                            | 23        |
| 3.5 Peak Output Power Measurement .....                         | 30        |
| 3.6 Conducted Band Edges Measurement .....                      | 32        |
| 3.7 Conducted Spurious Emission Measurement .....               | 39        |
| 3.8 Radiated Band Edges and Spurious Emission Measurement ..... | 49        |
| 3.9 AC Conducted Emission Measurement .....                     | 60        |
| 3.10 Antenna Requirements .....                                 | 64        |
| <b>4 LIST OF MEASURING EQUIPMENT .....</b>                      | <b>65</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                        | <b>66</b> |
| <b>APPENDIX A. SETUP PHOTOGRAPHS</b>                            |           |



## REVISION HISTORY

| REPORT NO.  | VERSION | DESCRIPTION             | ISSUED DATE   |
|-------------|---------|-------------------------|---------------|
| FR442473-01 | Rev. 01 | Initial issue of report | Sep. 19, 2014 |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |
|             |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule              | IC Rule            | Description                                        | Limit                                  | Result | Remark                                    |
|----------------|-----------------------|--------------------|----------------------------------------------------|----------------------------------------|--------|-------------------------------------------|
| 3.1            | 15.247(a)(1)          | RSS-210<br>A8.4(2) | Number of Channels                                 | $\geq 15\text{Chs}$                    | Pass   | -                                         |
| 3.2            | 15.247(a)(1)          | RSS-210<br>A8.1(b) | Hopping Channel Separation                         | $\geq 2/3$ of 20dB BW                  | Pass   | -                                         |
| 3.3            | 15.247(a)(1)          | RSS-210<br>A8.1(d) | Dwell Time of Each Channel                         | $\leq 0.4\text{sec}$ in 31.6sec period | Pass   | -                                         |
| 3.4            | 15.247(a)(1)          | RSS-210<br>A8.1(a) | 20dB Bandwidth                                     | NA                                     | Pass   | -                                         |
| 3.5            | 15.247(b)(1)          | RSS-210<br>A8.1(b) | Peak Output Power                                  | $\leq 125\text{ mW}$                   | Pass   | -                                         |
| 3.6            | 15.247(d)             | RSS-210<br>A8.5    | Conducted Band Edges                               | $\leq 20\text{dBc}$                    | Pass   | -                                         |
| 3.7            | 15.247(d)             | RSS-210<br>A8.5    | Conducted Spurious Emission                        | $\leq 20\text{dBc}$                    | Pass   | -                                         |
| 3.8            | 15.247(d)             | RSS-210<br>A8.5    | Radiated Band Edges and Radiated Spurious Emission | 15.209(a) & 15.247(d)                  | Pass   | Under limit<br>9.04 dB at<br>2483.500 MHz |
| 3.9            | 15.207                | RSS-Gen<br>7.2.4   | AC Conducted Emission                              | 15.207(a)                              | Pass   | Under limit<br>10.70 dB at<br>0.526 MHz   |
| 3.10           | 15.203 &<br>15.247(b) | RSS-210<br>A8.4    | Antenna Requirement                                | N/A                                    | Pass   | -                                         |



# 1 General Description

## 1.1 Applicant

Soundhawk Corporation

20380 Town Center Lane, Suite 215, Cupertino, CA 95014

## 1.2 Manufacturer

FIH Mobile Limited

No. 4, Mingsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan

## 1.3 Feature of Equipment Under Test

| Product Feature                 |                        |
|---------------------------------|------------------------|
| Equipment                       | BT MIC                 |
| Brand Name                      | SOUNDHAWK              |
| Model Name                      | SHK001                 |
| Marketing Name                  | Smart Listening System |
| FCC ID                          | 2ABW3-WM1              |
| EUT supports Radios application | Bluetooth v3.0 EDR     |
| HW Version                      | PVT                    |
| SW Version                      | 0.2.0                  |
| EUT Stage                       | Production Unit        |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

| Product Specification subjective to this standard |                                                                                                                                         |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Tx/Rx Frequency Range                             | 2402 MHz ~ 2480 MHz                                                                                                                     |
| Number of Channels                                | 79                                                                                                                                      |
| Carrier Frequency of Each Channel                 | 2402+n*1 MHz; n=0~78                                                                                                                    |
| Maximum Output Power to Antenna                   | Bluetooth BR(1Mbps) : 8.79 dBm (0.0076 W)<br>Bluetooth EDR (2Mbps) : 6.80 dBm (0.0048 W)<br>Bluetooth EDR (3Mbps) : 6.81 dBm (0.0048 W) |
| Antenna Type                                      | PIFA Antenna type with gain 1.90 dBi                                                                                                    |
| Type of Modulation                                | Bluetooth BR (1Mbps) : GFSK<br>Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK<br>Bluetooth EDR (3Mbps) : 8-DPSK                                 |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                    |                                                                                                                                                                 |         |           |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                                      |         |           |
| Test Site Location | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |         |           |
| Test Site No.      | Sporton Site No.                                                                                                                                                |         |           |
|                    | TH02-HY                                                                                                                                                         | CO05-HY | 03CH08-HY |

## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

| Channel | Frequency | Bluetooth RF Output Power |                |          |
|---------|-----------|---------------------------|----------------|----------|
|         |           | Data Rate / Modulation    |                |          |
|         |           | GFSK                      | $\pi$ /4-DQPSK | 8-DPSK   |
|         |           | 1Mbps                     | 2Mbps          | 3Mbps    |
| Ch00    | 2402MHz   | 7.14 dBm                  | 4.95 dBm       | 4.92 dBm |
| Ch39    | 2441MHz   | <b>8.79 dBm</b>           | 6.80 dBm       | 6.81 dBm |
| Ch78    | 2480MHz   | 8.67 dBm                  | 6.62 dBm       | 6.63 dBm |

**Remark:**

1. All the test data for each data rate were verified, but only the worst case was reported.
  2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.


## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


| Summary table of Test Cases |                                                                                                                                                                                                                                                                                                                                                                          |                                       |                               |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-------------------------------|
| Test Item                   | Data Rate / Modulation                                                                                                                                                                                                                                                                                                                                                   |                                       |                               |
|                             | Bluetooth BR 1Mbps<br>GFSK                                                                                                                                                                                                                                                                                                                                               | Bluetooth EDR 2Mbps<br>$\pi/4$ -DQPSK | Bluetooth EDR 3Mbps<br>8-DPSK |
| Conducted<br>Test Cases     | Mode 1: CH00_2402 MHz                                                                                                                                                                                                                                                                                                                                                    | Mode 4: CH00_2402 MHz                 | Mode 7: CH00_2402 MHz         |
|                             | Mode 2: CH39_2441 MHz                                                                                                                                                                                                                                                                                                                                                    | Mode 5: CH39_2441 MHz                 | Mode 8: CH39_2441 MHz         |
|                             | Mode 3: CH78_2480 MHz                                                                                                                                                                                                                                                                                                                                                    | Mode 6: CH78_2480 MHz                 | Mode 9: CH78_2480 MHz         |
| Radiated<br>Test Cases      | Bluetooth BR 1Mbps GFSK                                                                                                                                                                                                                                                                                                                                                  |                                       |                               |
|                             | Mode 1: CH00_2402 MHz                                                                                                                                                                                                                                                                                                                                                    |                                       |                               |
|                             | Mode 2: CH39_2441 MHz                                                                                                                                                                                                                                                                                                                                                    |                                       |                               |
| AC<br>Conducted<br>Emission | Mode 3: CH78_2480 MHz                                                                                                                                                                                                                                                                                                                                                    |                                       |                               |
|                             | Mode 1 : EUT + BT HeadSet + Charging Case with USB Cable (Charging from Adapter)                                                                                                                                                                                                                                                                                         |                                       |                               |
|                             | <b>Remark:</b> For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission. |                                       |                               |

## 2.3 Connection Diagram of Test System

### <Bluetooth Tx Mode>

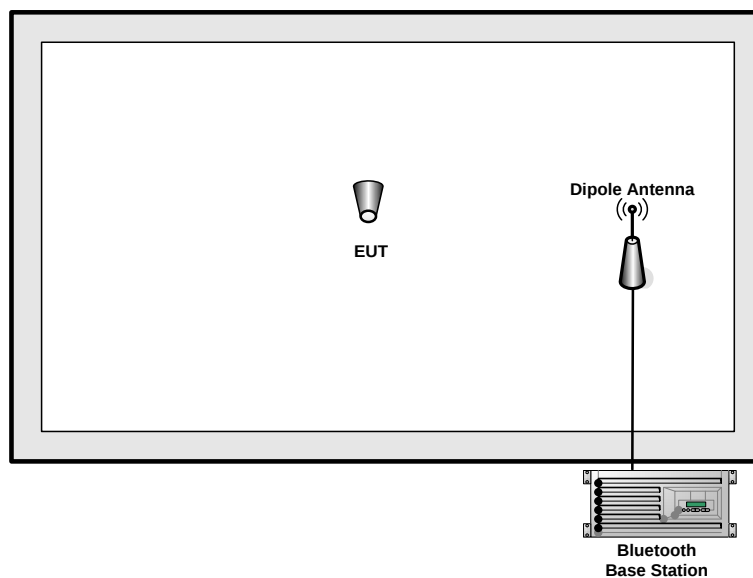

### <AC Conducted Emission Mode>

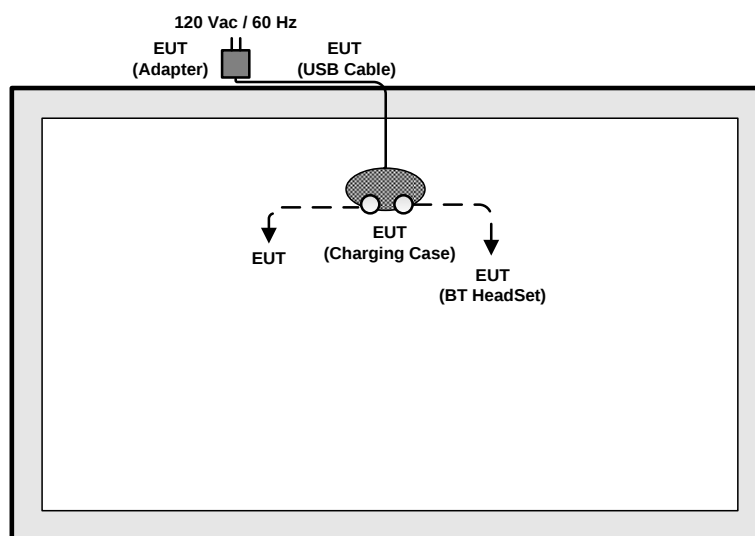

## 2.4 Support Unit used in test configuration and system

| Item | Equipment              | Trade Name | Model Name | FCC ID | Data Cable | Power Cord        |
|------|------------------------|------------|------------|--------|------------|-------------------|
| 1.   | Bluetooth Base Station | R&S        | CBT32      | N/A    | N/A        | Unshielded, 1.8 m |



## 2.5 EUT Operation Test Setup

For Bluetooth function, the RF utility, "BlueTest3" installed in EUT was programmed in order to make the EUT get into the engineering modes, then EUT contacts with Bluetooth base station for continuously transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW  $\geq$  1% of the span; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

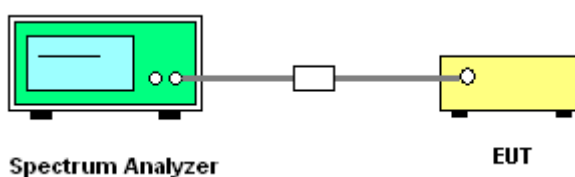


##### 3.1.5 Test Result of Number of Hopping Frequency


| <b>Test Mode :</b>             | 3Mbps                                   | <b>Temperature :</b>       | 24~26°C   |
|--------------------------------|-----------------------------------------|----------------------------|-----------|
| <b>Test Engineer :</b>         | Jun Yang                                | <b>Relative Humidity :</b> | 48~51%    |
| Number of Hopping<br>(Channel) | Adaptive Frequency<br>Hopping (Channel) | Limits<br>(Channel)        | Pass/Fail |
| 79                             | 20                                      | > 15                       | Pass      |



Number of Hopping Channel Plot on Channel 00 - 78

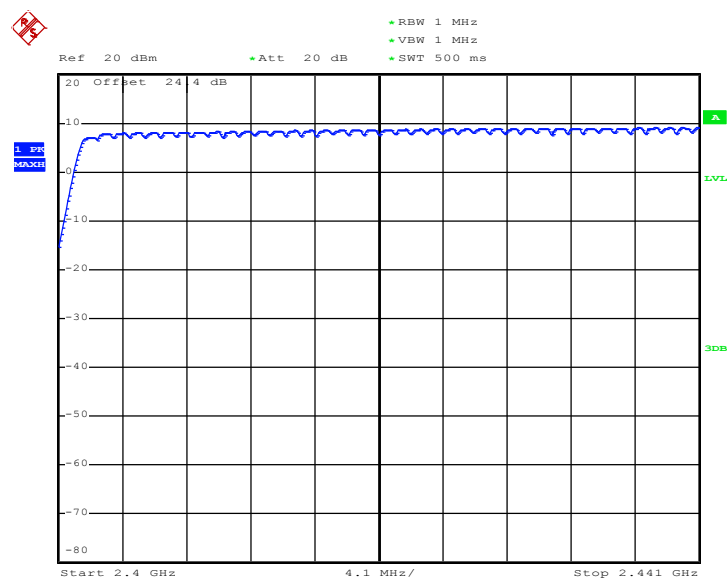

Date: 13.MAY.2014 17:22:06

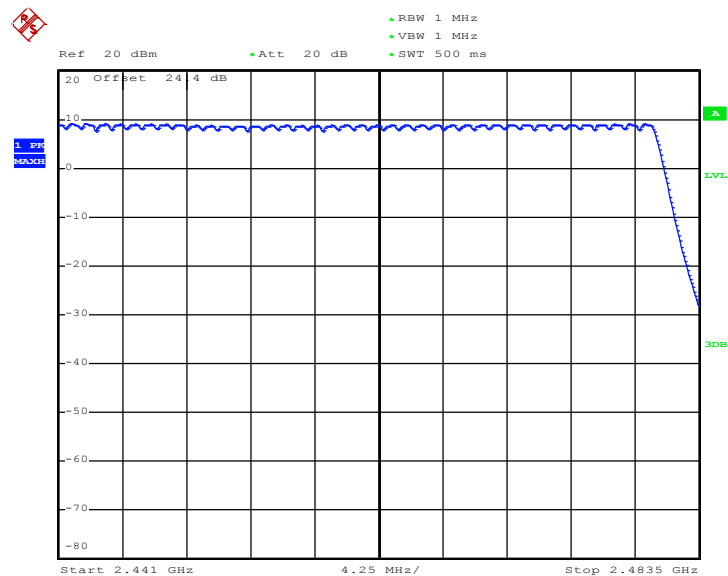

Date: 13.MAY.2014 17:24:43

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  $RBW \geq 1\%$  of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

### 3.2.4 Test Setup

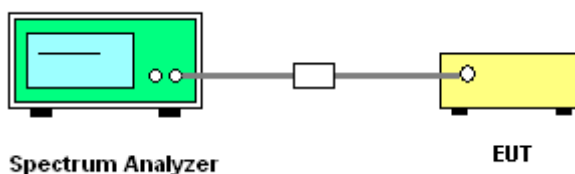


### 3.2.5 Test Result of Hopping Channel Separation

|                 |          |                     |        |
|-----------------|----------|---------------------|--------|
| Test Mode :     | 1Mbps    | Temperature :       | 24~26℃ |
| Test Engineer : | Jun Yang | Relative Humidity : | 48~51% |

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00      | 2402            | 1.002                      | 0.5973                        | Pass      |
| 39      | 2441            | 1.002                      | 0.5947                        | Pass      |
| 78      | 2480            | 1.002                      | 0.5973                        | Pass      |


**Channel Separation Plot on Channel 00 - 01**

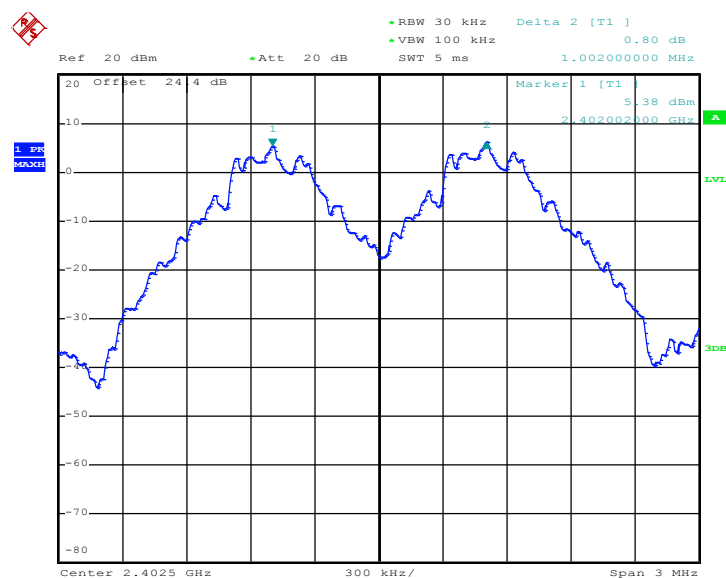

Date: 13.MAY.2014 17:10:23




Channel Separation Plot on Channel 39 - 40

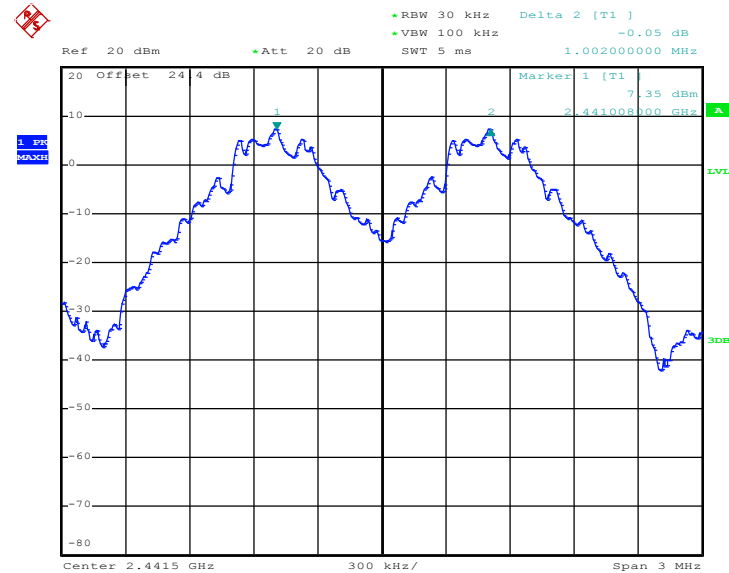

Date: 13.MAY.2014 17:11:17

Channel Separation Plot on Channel 77 - 78

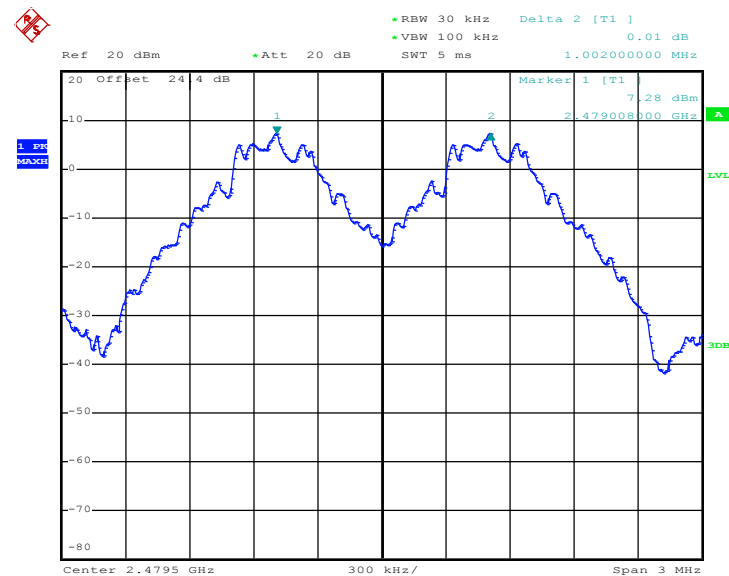


Date: 13.MAY.2014 17:12:13



|                        |          |                            |         |
|------------------------|----------|----------------------------|---------|
| <b>Test Mode :</b>     | 2Mbps    | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Jun Yang | <b>Relative Humidity :</b> | 48~51%  |

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00      | 2402            | 1.002                      | 0.8280                        | Pass      |
| 39      | 2441            | 1.002                      | 0.8200                        | Pass      |
| 78      | 2480            | 1.002                      | 0.8240                        | Pass      |

**Channel Separation Plot on Channel 00 - 01**

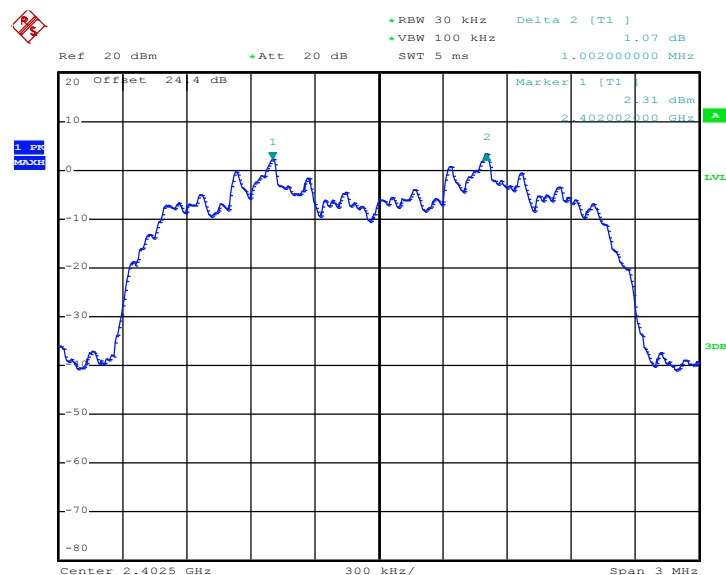

Date: 13.MAY.2014 17:13:10



Ref 20 dBm Att 20 dB SWT 5 ms Delta 2 [T1] 0.01 dB  
RBW 30 kHz VBW 100 kHz 1.00200000 MHz

20 Offset 24 4 dB

Marker 1 [T1] 4.77 dBm  
2.44102000 GHz

1. dBm  
MAX

Center 2.4415 GHz 300 kHz/ Span 3 MHz

Date: 13.MAY.2014 17:14:11

1.9% MACH

Ref 20 dBm Att 20 dB RBW 30 kHz Delta 2 [T1] 0.03 dB VBW 100 kHz SWT 5 ms 1.002000000 MHz

20 Offset 24 4 dB

Marker 1 [T1] 4.69 dBm 2.479008000 GHz

Center 2.4795 GHz 300 kHz/ Span 3 MHz


Date: 13.MAY.2014 17:15:03



|                        |          |                            |         |
|------------------------|----------|----------------------------|---------|
| <b>Test Mode :</b>     | 3Mbps    | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Jun Yang | <b>Relative Humidity :</b> | 48~51%  |

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00      | 2402            | 1.002                      | 0.8160                        | Pass      |
| 39      | 2441            | 1.002                      | 0.8120                        | Pass      |
| 78      | 2480            | 1.002                      | 0.8160                        | Pass      |

**Channel Separation Plot on Channel 00 - 01**

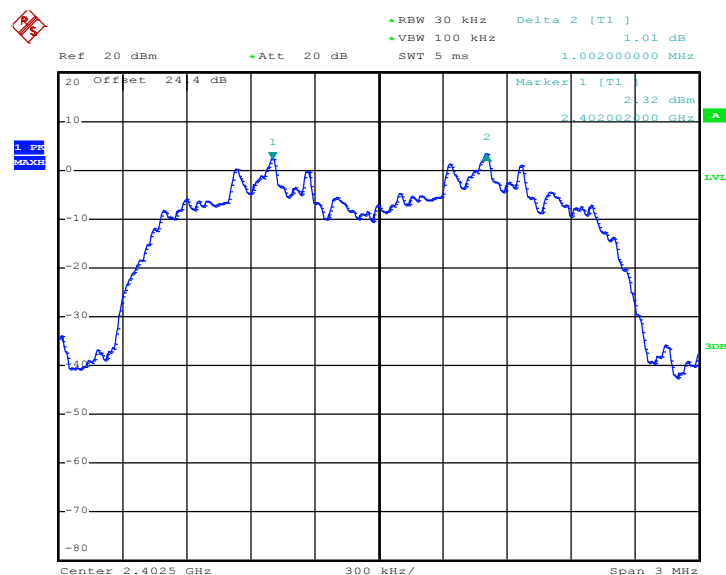

Date: 13.MAY.2014 17:15:57



### Channel Separation Plot on Channel 77 - 78



### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

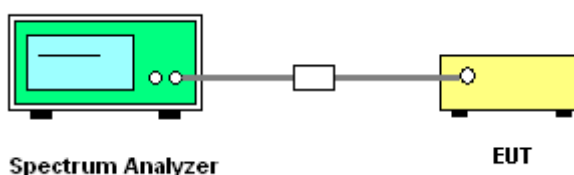

### 3.3.5 Test Result of Dwell Time

|                        |          |                            |        |
|------------------------|----------|----------------------------|--------|
| <b>Test Mode :</b>     | DH5      | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Jun Yang | <b>Relative Humidity :</b> | 48~51% |


| Mode   | Hopping Channel Number | Hops Over Occupancy Time(hops) | Package Transfer Time (msec) | Dwell Time (sec) | Limits (sec) | Pass/Fail |
|--------|------------------------|--------------------------------|------------------------------|------------------|--------------|-----------|
| Normal | 79                     | 106.67                         | 2.92                         | 0.31             | 0.4          | Pass      |
| AFH    | 20                     | 53.33                          | 2.92                         | 0.16             | 0.4          | Pass      |

**Remark:**

- In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

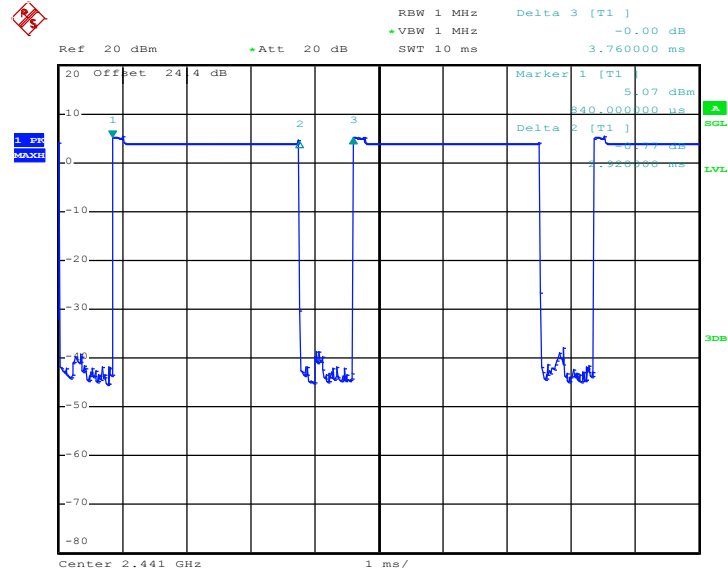

Date: 9.MAY.2014 21:58:40

### 3.4 20dB Bandwidth Measurement

#### 3.4.1 Limit of 20dB Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Measure and record the results in the test report.

#### 3.4.4 Test Setup

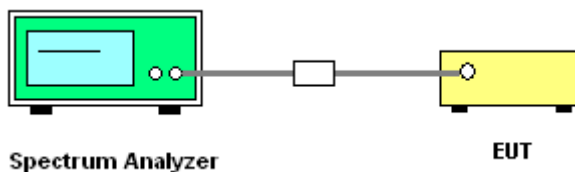


### 3.4.5 Test Result of 20dB Bandwidth

|                 |          |                     |        |
|-----------------|----------|---------------------|--------|
| Test Mode :     | 1Mbps    | Temperature :       | 24~26℃ |
| Test Engineer : | Jun Yang | Relative Humidity : | 48~51% |

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 0.896                |
| 39      | 2441            | 0.892                |
| 78      | 2480            | 0.896                |


**20 dB Bandwidth Plot on Channel 00**

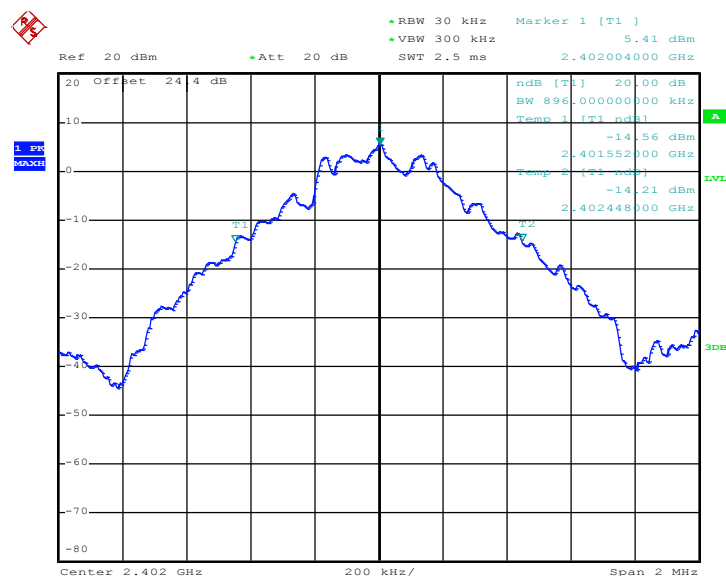

Date: 13.MAY.2014 17:30:12




### 20 dB Bandwidth Plot on Channel 39

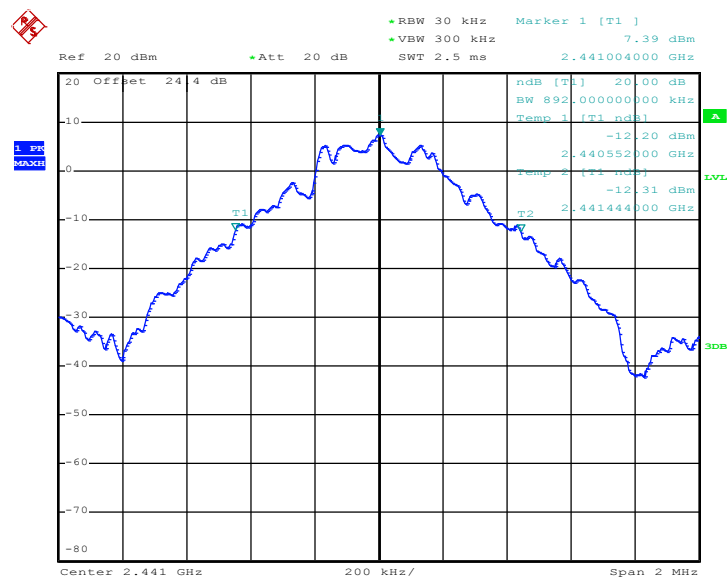

Date: 13.MAY.2014 17:32:55

### 20 dB Bandwidth Plot on Channel 78

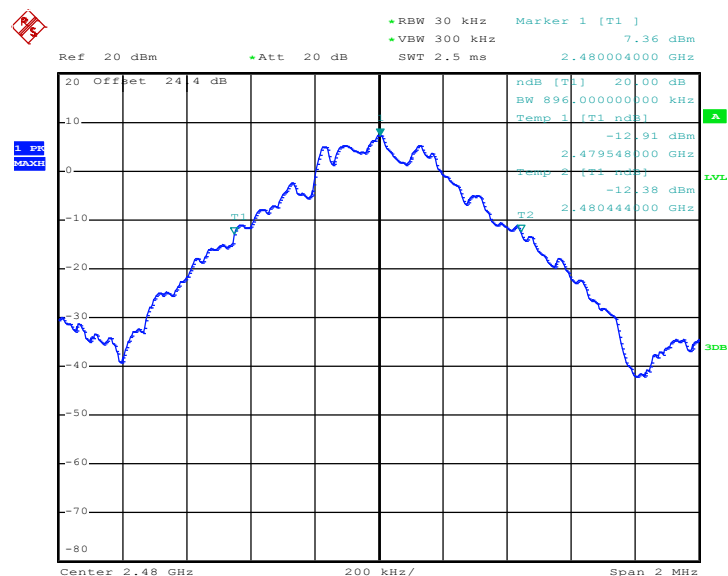


Date: 13.MAY.2014 17:34:53



|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Mode :     | 2Mbps    | Temperature :       | 24~26°C |
| Test Engineer : | Jun Yang | Relative Humidity : | 48~51%  |

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 1.242                |
| 39      | 2441            | 1.230                |
| 78      | 2480            | 1.236                |


### 20 dB Bandwidth Plot on Channel 00

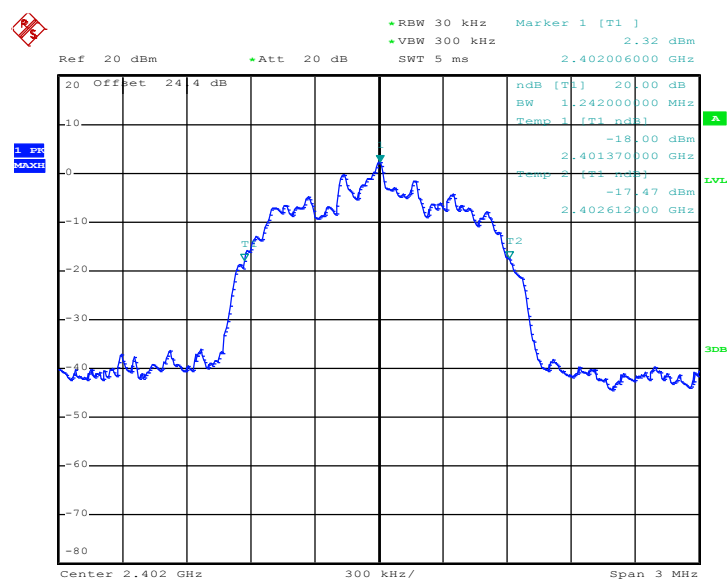

Date: 13.MAY.2014 17:38:26




### 20 dB Bandwidth Plot on Channel 39

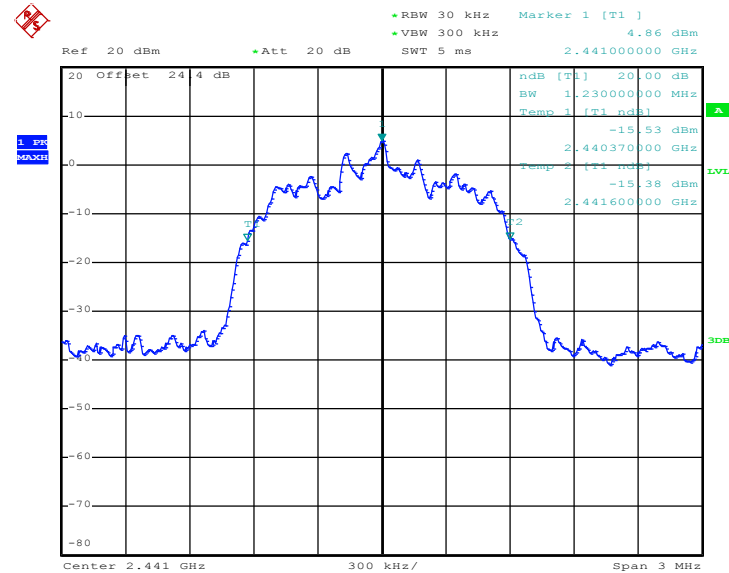

Date: 13.MAY.2014 17:47:21

### 20 dB Bandwidth Plot on Channel 78

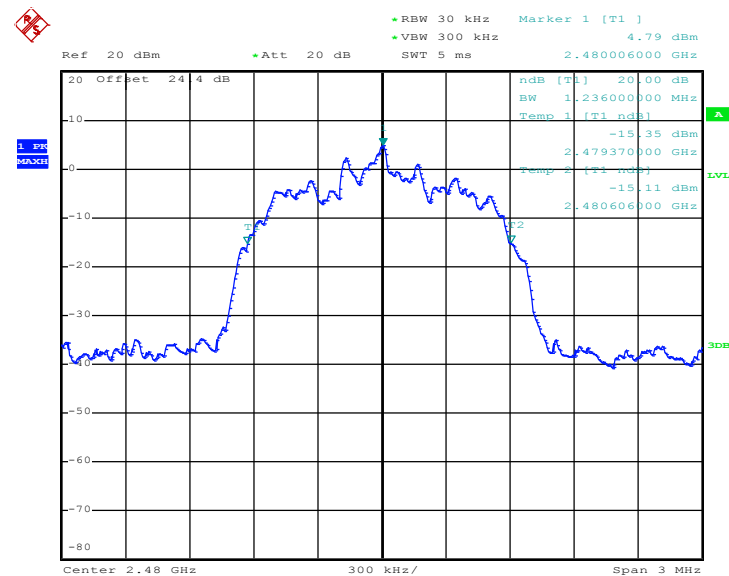


Date: 13.MAY.2014 17:49:35



|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Mode :     | 3Mbps    | Temperature :       | 24~26°C |
| Test Engineer : | Jun Yang | Relative Humidity : | 48~51%  |

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 1.224                |
| 39      | 2441            | 1.218                |
| 78      | 2480            | 1.224                |

### 20 dB Bandwidth Plot on Channel 00

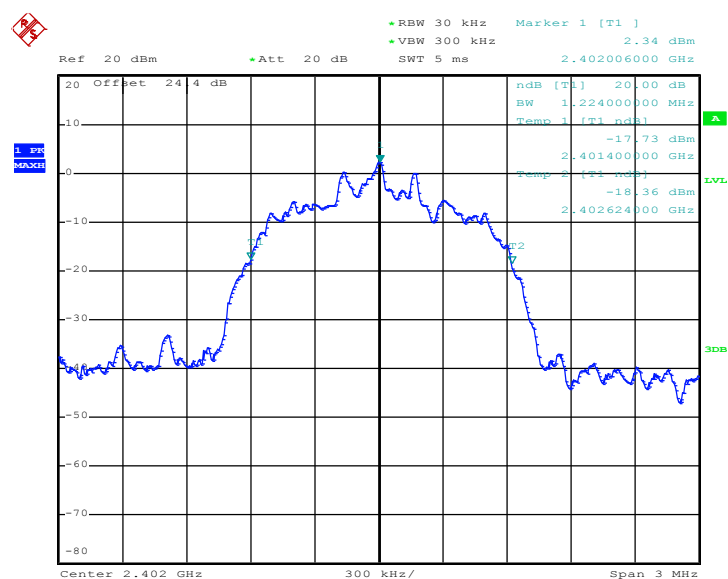

Date: 13.MAY.2014 17:52:10



1.56 MHz

Ref 20 dBm Att 20 dB SWT 5 ms

Marker 1 [T1]

4.82 dBm

2.441000000 GHz

20 Offset 24.4 dB

ndB [T1] 20.00 dB

BW 1.218000000 MHz

Temp 1 [T1 ndB]

-14.81 dBm

2.440400000 GHz

Temp 2 [T2 ndB]

-14.52 dBm

2.441618000 GHz

Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 13.MAY.2014 17:54:55

Ref 20 dBm Att 20 dB SWT 5 ms 2.480006000 GHz

20 Off set 24 4 dB

1.9% MATCH

ndB [T1] 20.00 dB  
 BW 1.224000000 MHz  
 Temp 1 [T1 ndB] -14.98 dBm  
 2.479400000 GHz  
 Temp 2 [T2 ndB] -15.89 dBm  
 2.480624000 GHz

Center 2.48 GHz Span 3 MHz

Date: 13.MAY.2014 18:00:14

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps is 1watt, and for 2Mbps, 3Mbps and AFH are 0.125 watts.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

#### 3.5.4 Test Setup

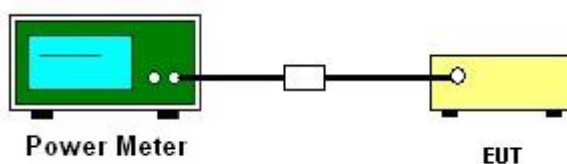

### 3.5.5 Test Result of Peak Output Power

|                        |          |                            |        |
|------------------------|----------|----------------------------|--------|
| <b>Test Mode :</b>     | 1Mbps    | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Jun Yang | <b>Relative Humidity :</b> | 48~51% |

| Channel | Frequency<br>(MHz) | RF Power (dBm) |                      |           |
|---------|--------------------|----------------|----------------------|-----------|
|         |                    | GFSK           | Max. Limits<br>(dBm) | Pass/Fail |
|         |                    | 1 Mbps         |                      |           |
| 00      | 2402               | 7.14           | 20.97                | Pass      |
| 39      | 2441               | 8.79           | 20.97                | Pass      |
| 78      | 2480               | 8.67           | 20.97                | Pass      |

**Note:** For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

|                        |          |                            |        |
|------------------------|----------|----------------------------|--------|
| <b>Test Mode :</b>     | 2Mbps    | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Jun Yang | <b>Relative Humidity :</b> | 48~51% |

| Channel | Frequency<br>(MHz) | RF Power (dBm) |                      |           |
|---------|--------------------|----------------|----------------------|-----------|
|         |                    | $\pi/4$ -DQPSK | Max. Limits<br>(dBm) | Pass/Fail |
|         |                    | 2 Mbps         |                      |           |
| 00      | 2402               | 4.95           | 20.97                | Pass      |
| 39      | 2441               | 6.80           | 20.97                | Pass      |
| 78      | 2480               | 6.62           | 20.97                | Pass      |

|                        |          |                            |        |
|------------------------|----------|----------------------------|--------|
| <b>Test Mode :</b>     | 3Mbps    | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Jun Yang | <b>Relative Humidity :</b> | 48~51% |

| Channel | Frequency<br>(MHz) | RF Power (dBm) |                      |           |
|---------|--------------------|----------------|----------------------|-----------|
|         |                    | 8-DPSK         | Max. Limits<br>(dBm) | Pass/Fail |
|         |                    | 3 Mbps         |                      |           |
| 00      | 2402               | 4.92           | 20.97                | Pass      |
| 39      | 2441               | 6.81           | 20.97                | Pass      |
| 78      | 2480               | 6.63           | 20.97                | Pass      |

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ( $\geq 1\%$  span=10MHz), VBW = 300kHz ( $\geq$  RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


### 3.6.4 Test Setup

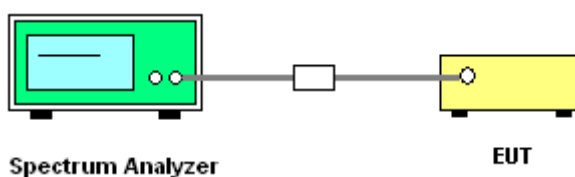

### 3.6.5 Test Result of Conducted Band Edges


|                |           |                     |          |
|----------------|-----------|---------------------|----------|
| Test Mode :    | 1Mbps     | Temperature :       | 24~26℃   |
| Test Channel : | 00 and 78 | Relative Humidity : | 48~51%   |
|                |           | Test Engineer :     | Jun Yang |

**Low Band Edge Plot on Channel 00**

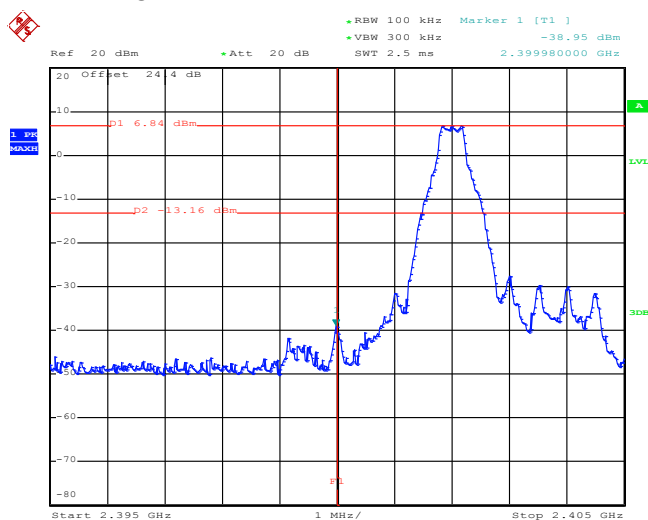

Date: 13.MAY.2014 17:29:41


**High Band Edge Plot on Channel 78**

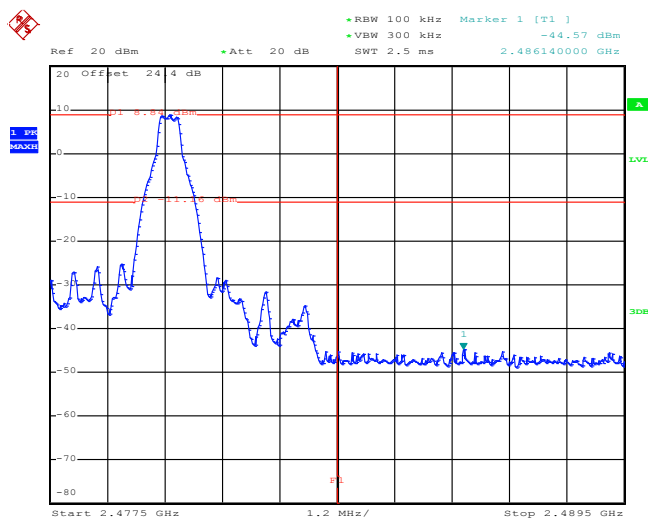


Date: 13.MAY.2014 17:37:31



|                |           |                     |          |
|----------------|-----------|---------------------|----------|
| Test Mode :    | 2Mbps     | Temperature :       | 24~26℃   |
| Test Channel : | 00 and 78 | Relative Humidity : | 48~51%   |
|                |           | Test Engineer :     | Jun Yang |

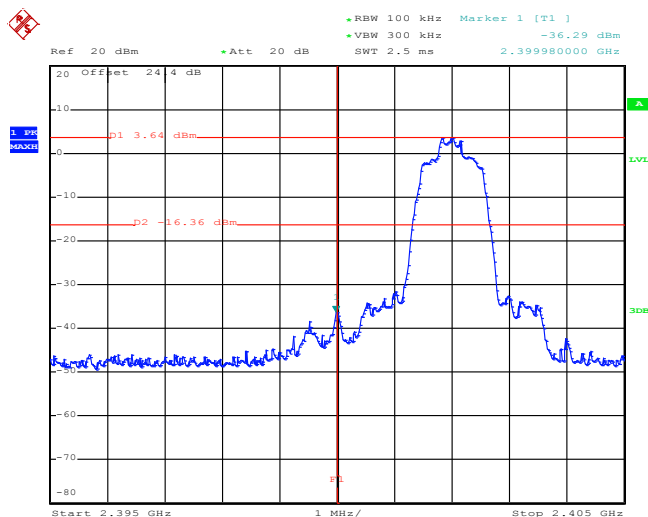
**Low Band Edge Plot on Channel 00**

Date: 13.MAY.2014 17:46:49

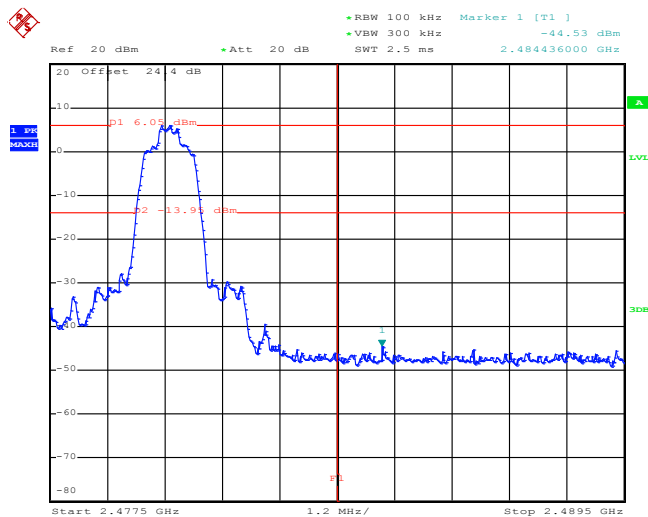
**High Band Edge Plot on Channel 78**

Date: 13.MAY.2014 18:24:40

|                       |           |                            |          |
|-----------------------|-----------|----------------------------|----------|
| <b>Test Mode :</b>    | 3Mbps     | <b>Temperature :</b>       | 24~26°C  |
| <b>Test Channel :</b> | 00 and 78 | <b>Relative Humidity :</b> | 48~51%   |
|                       |           | <b>Test Engineer :</b>     | Jun Yang |

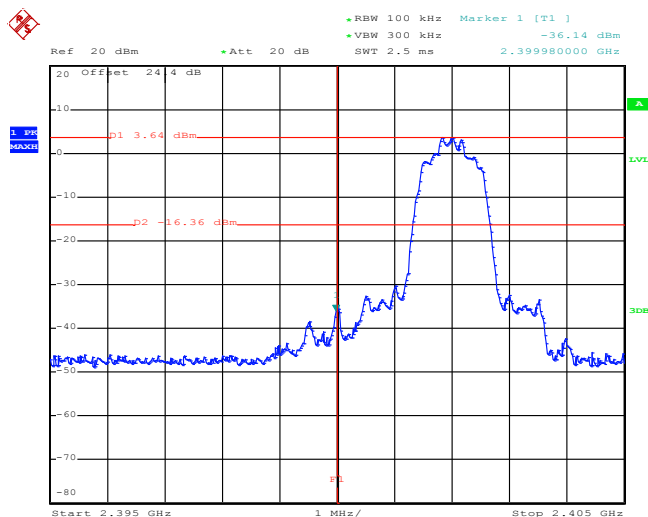**Low Band Edge Plot on Channel 00**


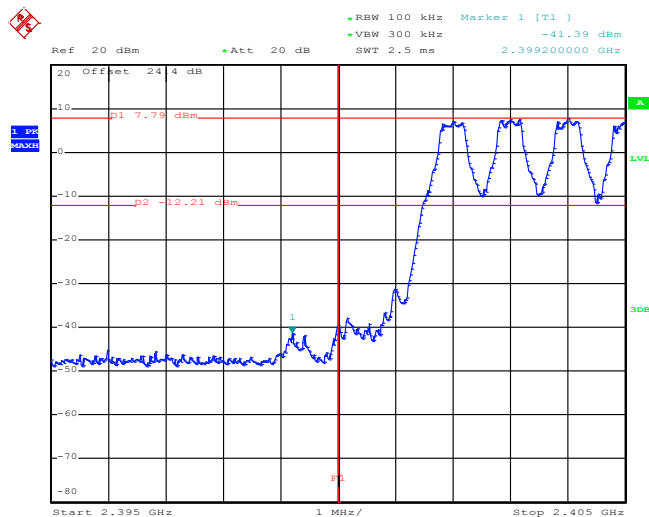
Date: 13.MAY.2014 18:17:32

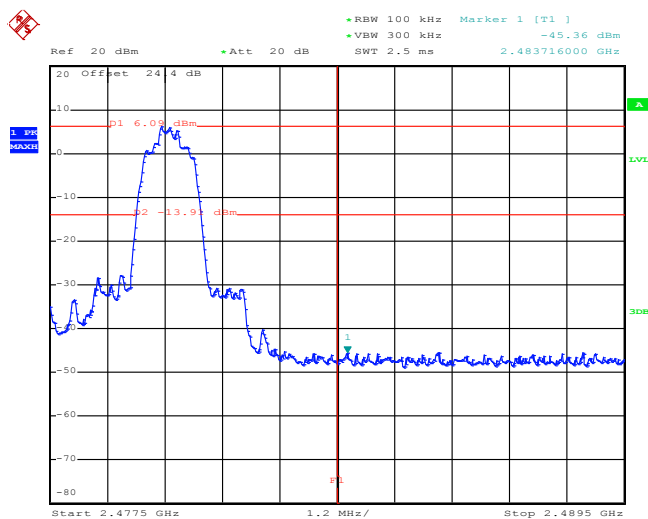**High Band Edge Plot on Channel 78**


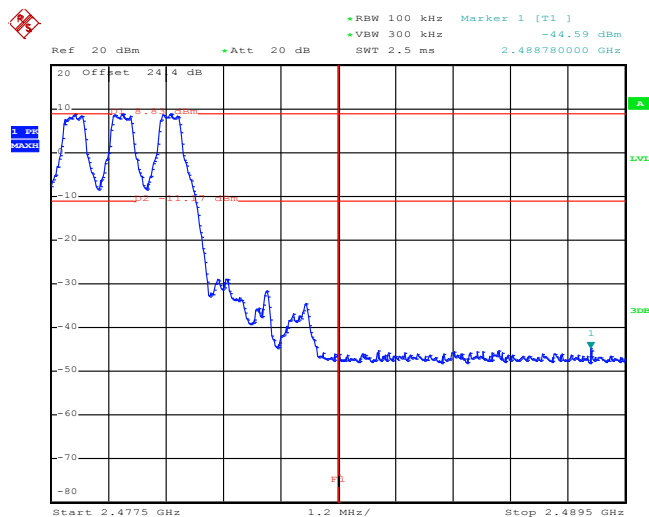
Date: 13.MAY.2014 18:02:38

### 3.6.6 Test Result of Conducted Hopping Mode Band Edges

|                 |          |                     |         |
|-----------------|----------|---------------------|---------|
| Test Mode :     | 1Mbps    | Temperature :       | 24~26°C |
| Test Engineer : | Jun Yang | Relative Humidity : | 48~51%  |


**1Mbps Hopping Mode Low Band Edge Plot**


Date: 13.MAY.2014 17:29:22


**1Mbps Hopping Mode High Band Edge Plot**


Date: 13.MAY.2014 17:37:08

|                        |          |                            |         |
|------------------------|----------|----------------------------|---------|
| <b>Test Mode :</b>     | 2Mbps    | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Jun Yang | <b>Relative Humidity :</b> | 48~51%  |

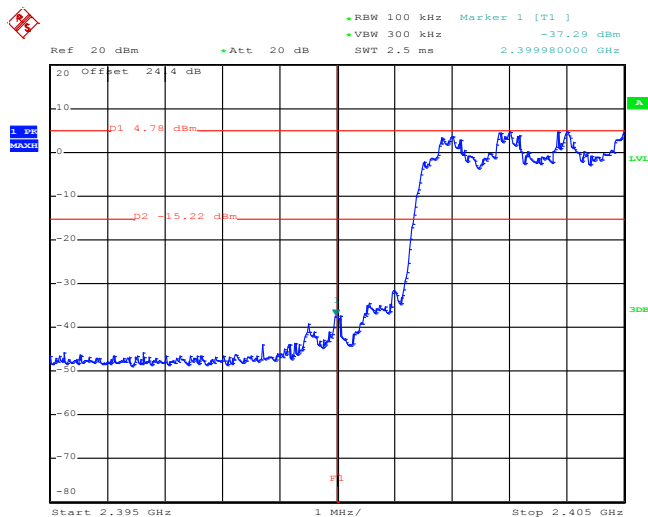
**2Mbps Hopping Mode Low Band Edge Plot**


Date: 13.MAY.2014 17:45:14

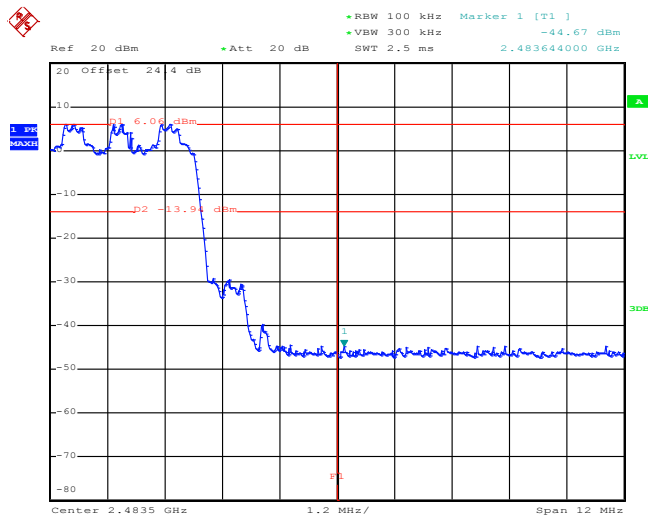
**2Mbps Hopping Mode High Band Edge Plot**


Date: 13.MAY.2014 18:23:44

|                        |          |                            |         |
|------------------------|----------|----------------------------|---------|
| <b>Test Mode :</b>     | 3Mbps    | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Jun Yang | <b>Relative Humidity :</b> | 48~51%  |

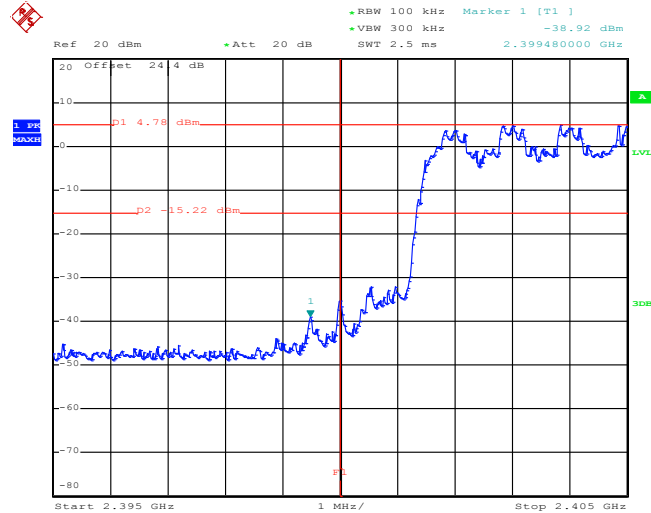**3Mbps Hopping Mode Low Band Edge Plot**


Date: 13.MAY.2014 17:54:03

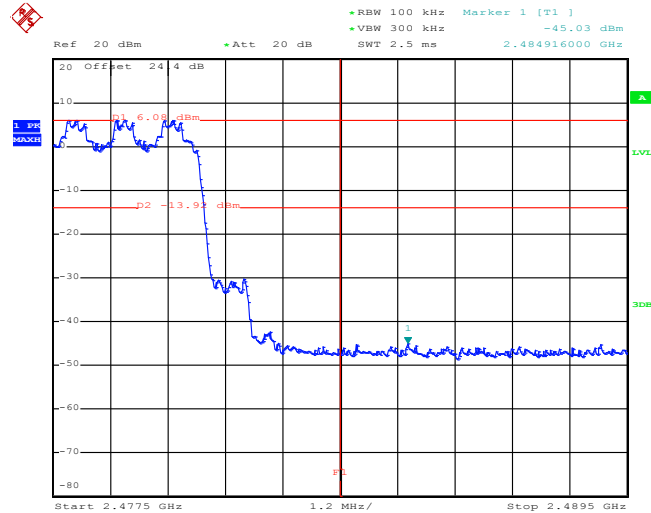**3Mbps Hopping Mode High Band Edge Plot**


Date: 13.MAY.2014 18:02:15

## 3.7 Conducted Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.7.4 Test Setup

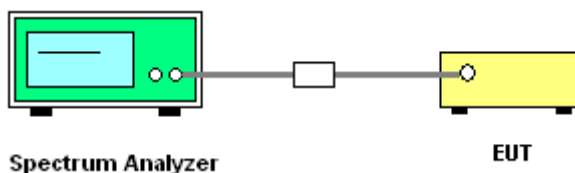

### 3.7.5 Test Result of Conducted Spurious Emission


|                |       |                     |          |
|----------------|-------|---------------------|----------|
| Test Mode :    | 1Mbps | Temperature :       | 24~26℃   |
| Test Channel : | 00    | Relative Humidity : | 48~51%   |
|                |       | Test Engineer :     | Jun Yang |

**1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz**

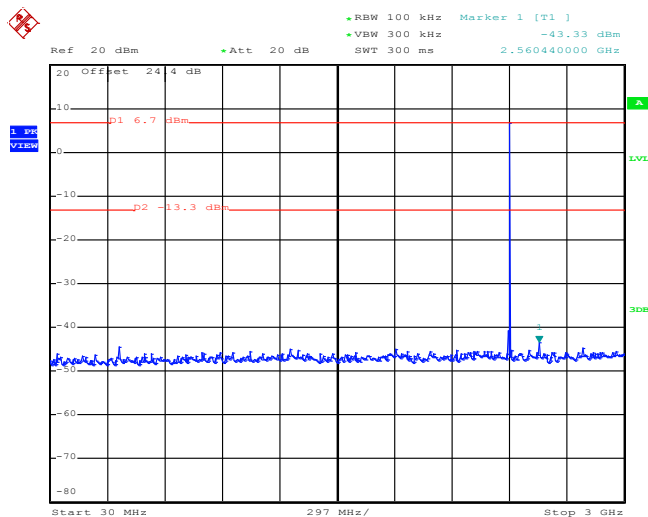

Date: 13.MAY.2014 18:25:33

**1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz**

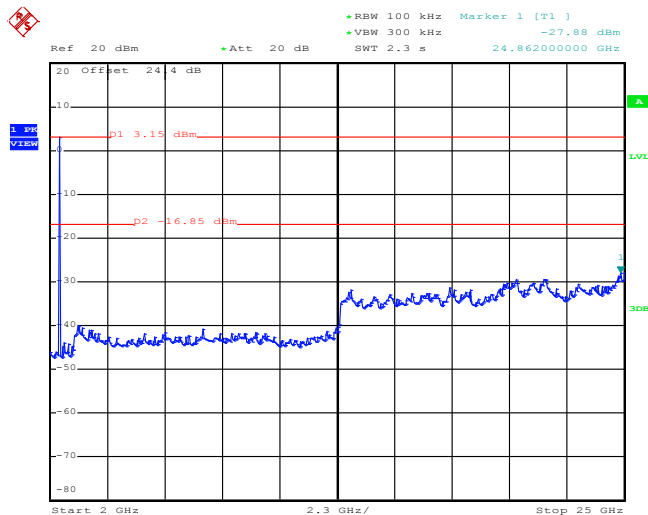


Date: 13.MAY.2014 18:25:55




|                |       |                     |          |
|----------------|-------|---------------------|----------|
| Test Mode :    | 1Mbps | Temperature :       | 24~26°C  |
| Test Channel : | 39    | Relative Humidity : | 48~51%   |
|                |       | Test Engineer :     | Jun Yang |

1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

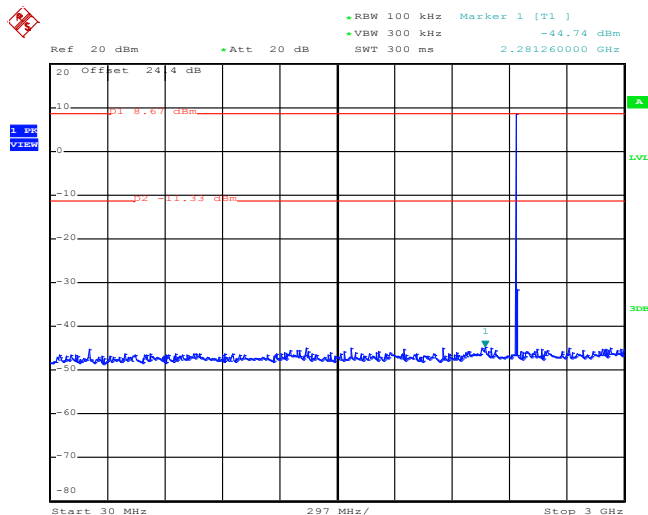

Date: 13.MAY.2014 18:26:30

1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

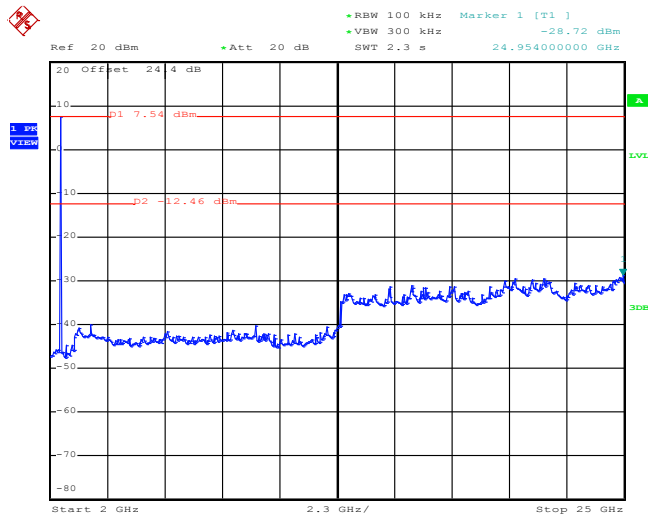


Date: 13.MAY.2014 18:26:51




|                |       |                     |          |
|----------------|-------|---------------------|----------|
| Test Mode :    | 1Mbps | Temperature :       | 24~26°C  |
| Test Channel : | 78    | Relative Humidity : | 48~51%   |
|                |       | Test Engineer :     | Jun Yang |

1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

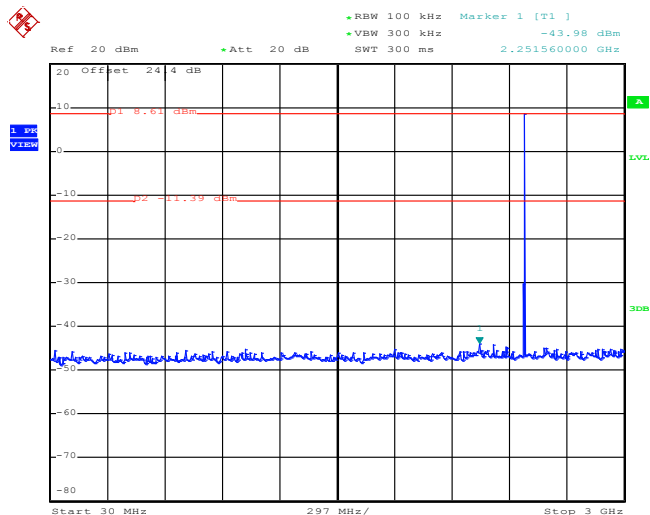

Date: 13.MAY.2014 18:27:26

1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

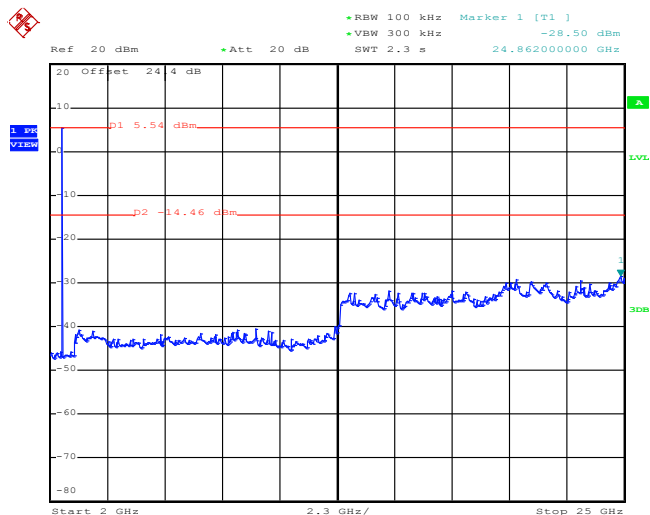


Date: 13.MAY.2014 18:27:48




|                |       |                     |          |
|----------------|-------|---------------------|----------|
| Test Mode :    | 2Mbps | Temperature :       | 24~26°C  |
| Test Channel : | 00    | Relative Humidity : | 48~51%   |
|                |       | Test Engineer :     | Jun Yang |

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

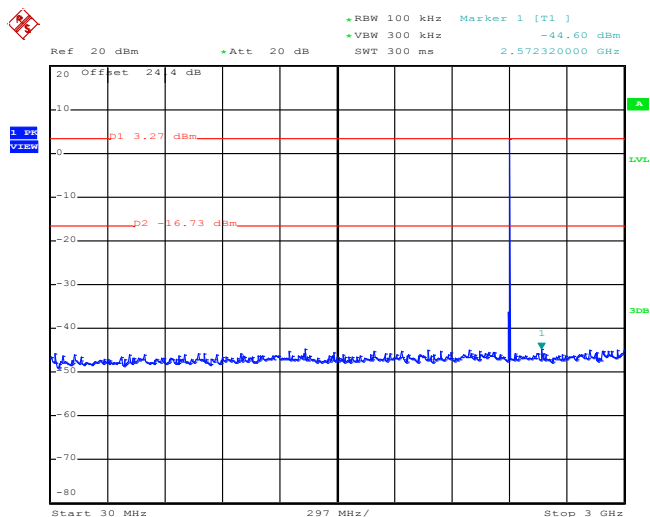

Date: 13.MAY.2014 18:18:34

2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

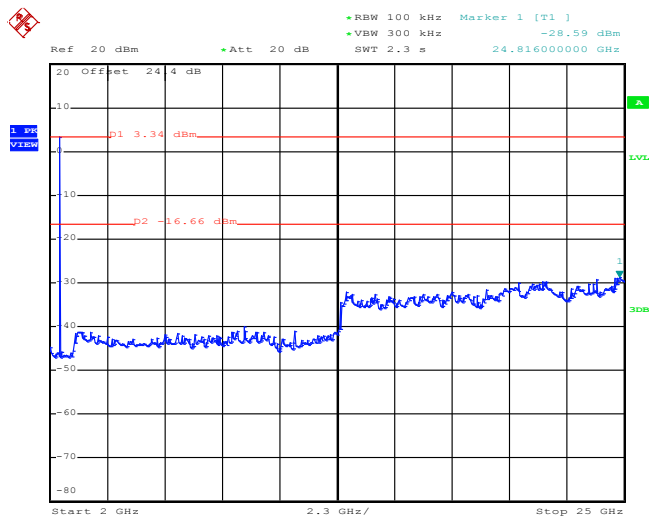


Date: 13.MAY.2014 18:18:56




|                |       |                     |          |
|----------------|-------|---------------------|----------|
| Test Mode :    | 2Mbps | Temperature :       | 24~26°C  |
| Test Channel : | 39    | Relative Humidity : | 48~51%   |
|                |       | Test Engineer :     | Jun Yang |

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

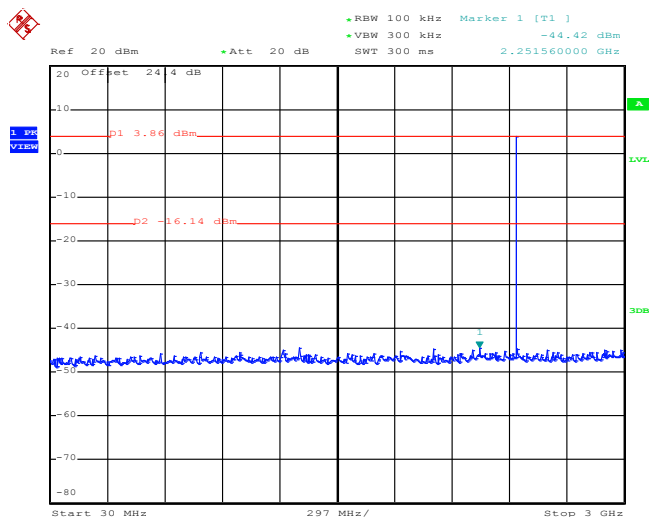

Date: 13.MAY.2014 22:13:11

2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

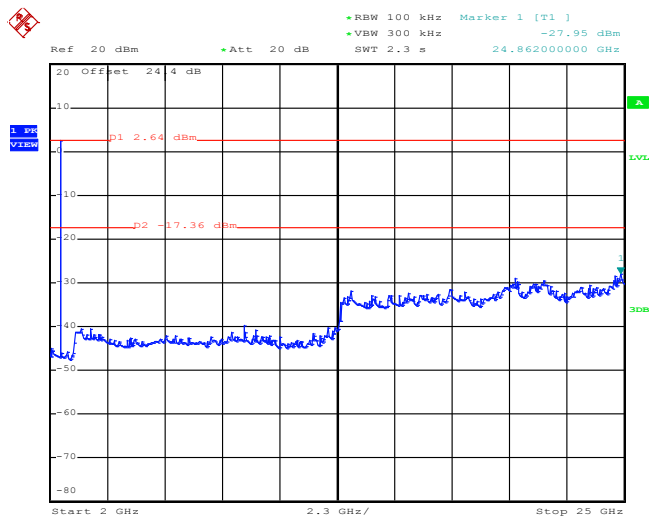


Date: 13.MAY.2014 18:19:51




|                |       |                     |          |
|----------------|-------|---------------------|----------|
| Test Mode :    | 2Mbps | Temperature :       | 24~26°C  |
| Test Channel : | 78    | Relative Humidity : | 48~51%   |
|                |       | Test Engineer :     | Jun Yang |

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

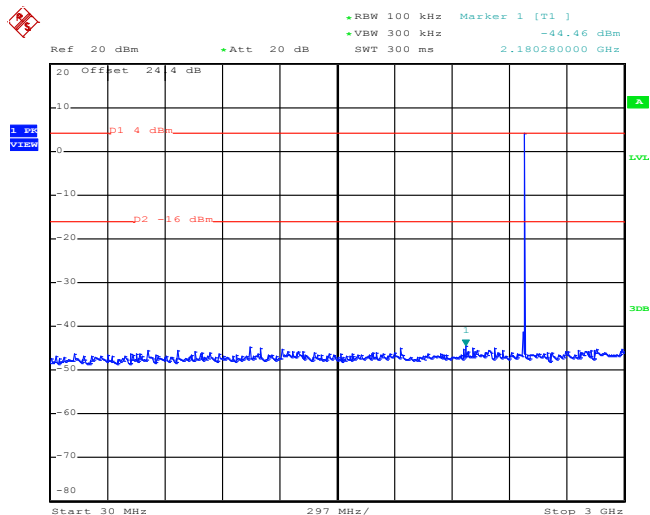

Date: 13.MAY.2014 22:14:18

2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

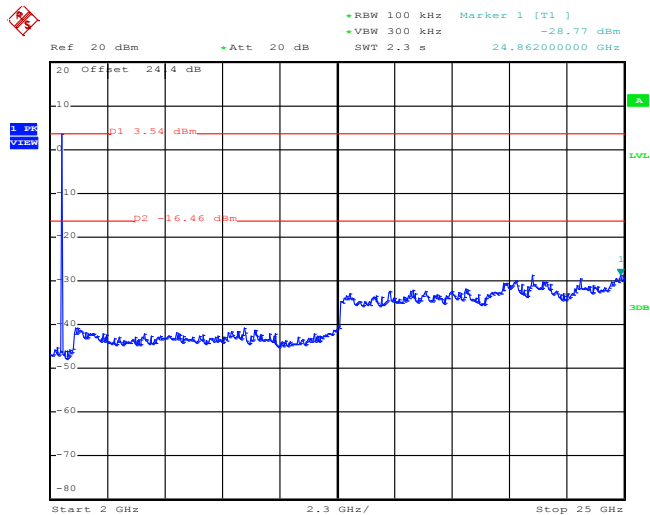


Date: 13.MAY.2014 18:21:08




|                |       |                     |          |
|----------------|-------|---------------------|----------|
| Test Mode :    | 3Mbps | Temperature :       | 24~26°C  |
| Test Channel : | 00    | Relative Humidity : | 48~51%   |
|                |       | Test Engineer :     | Jun Yang |

3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

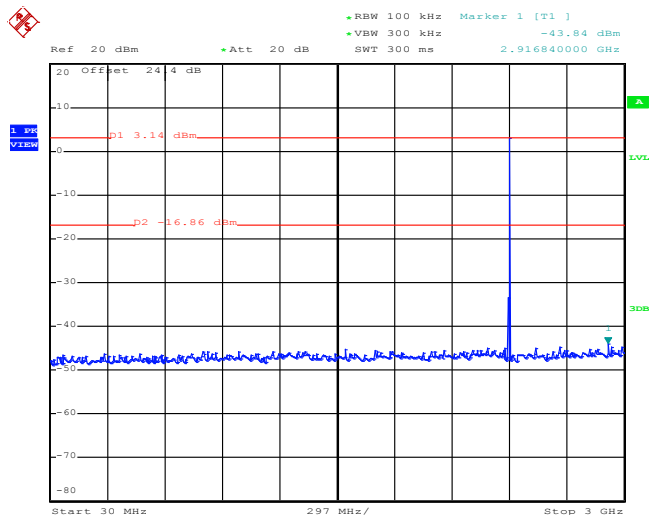

Date: 13.MAY.2014 18:08:03

3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

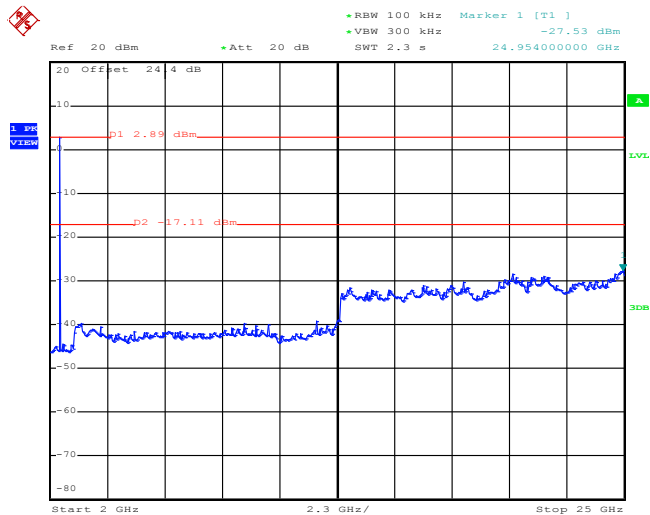


Date: 13.MAY.2014 18:12:33




|                |       |                     |          |
|----------------|-------|---------------------|----------|
| Test Mode :    | 3Mbps | Temperature :       | 24~26°C  |
| Test Channel : | 39    | Relative Humidity : | 48~51%   |
|                |       | Test Engineer :     | Jun Yang |

3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

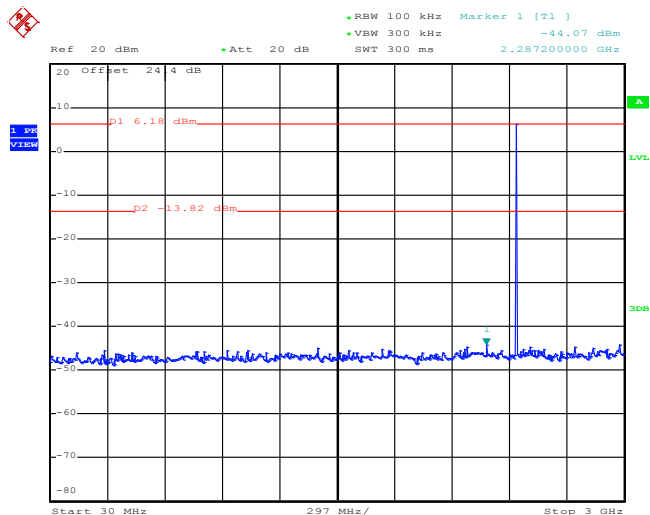

Date: 13.MAY.2014 18:06:49

3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

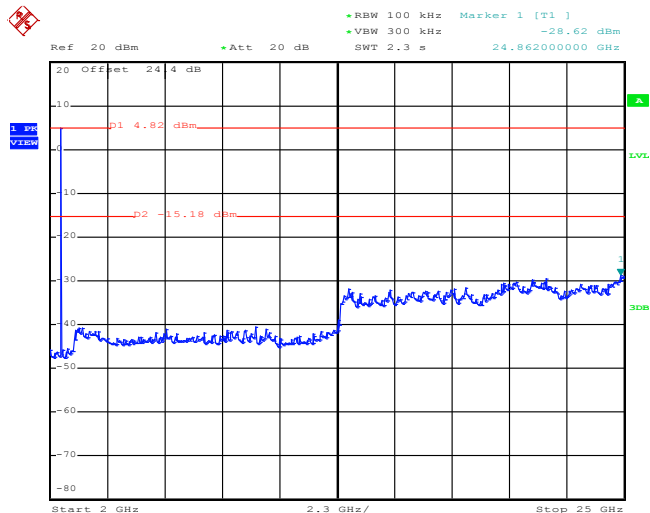


Date: 13.MAY.2014 18:07:10




|                |       |                     |          |
|----------------|-------|---------------------|----------|
| Test Mode :    | 3Mbps | Temperature :       | 24~26°C  |
| Test Channel : | 78    | Relative Humidity : | 48~51%   |
|                |       | Test Engineer :     | Jun Yang |

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

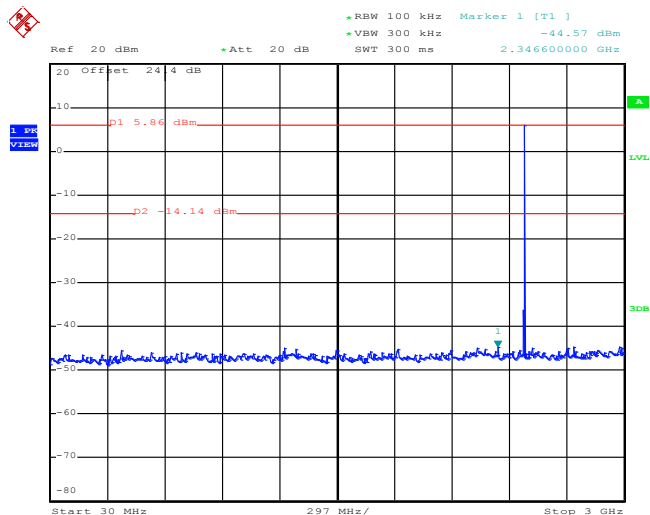

Date: 13.MAY.2014 18:01:14

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

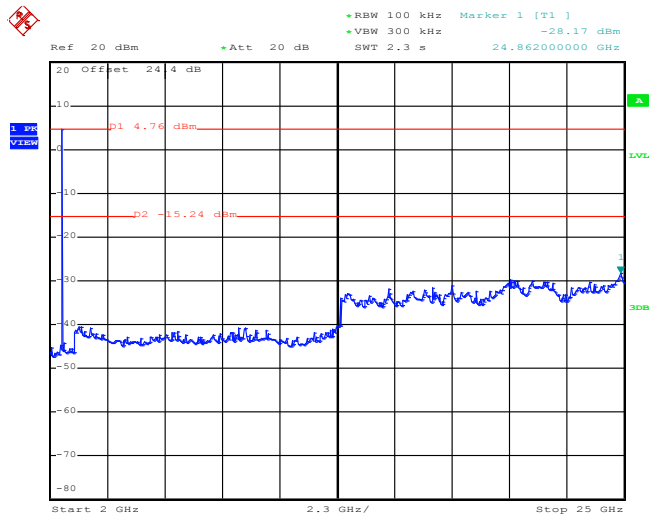

Date: 13.MAY.2014 18:01:36

## 3.8 Radiated Band Edges and Spurious Emission Measurement

### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.74dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.8.4 Test Setup


For radiated emissions below 30MHz

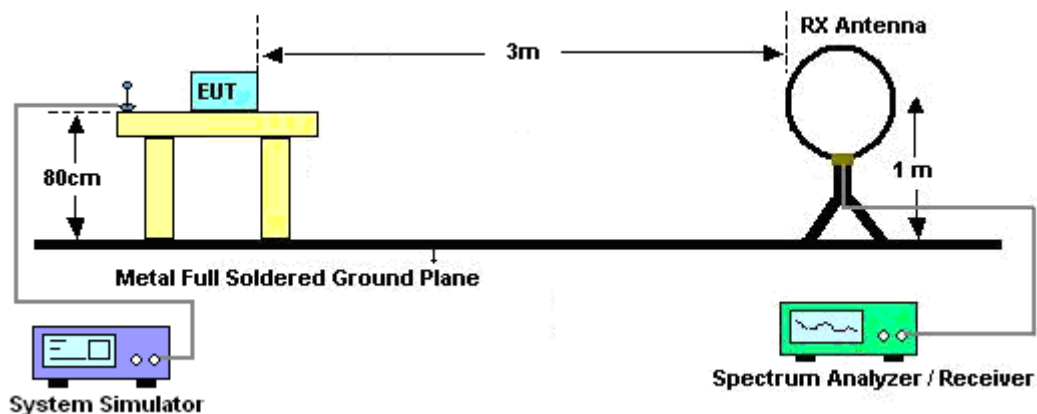

For radiated emissions from 30MHz to 1GHz

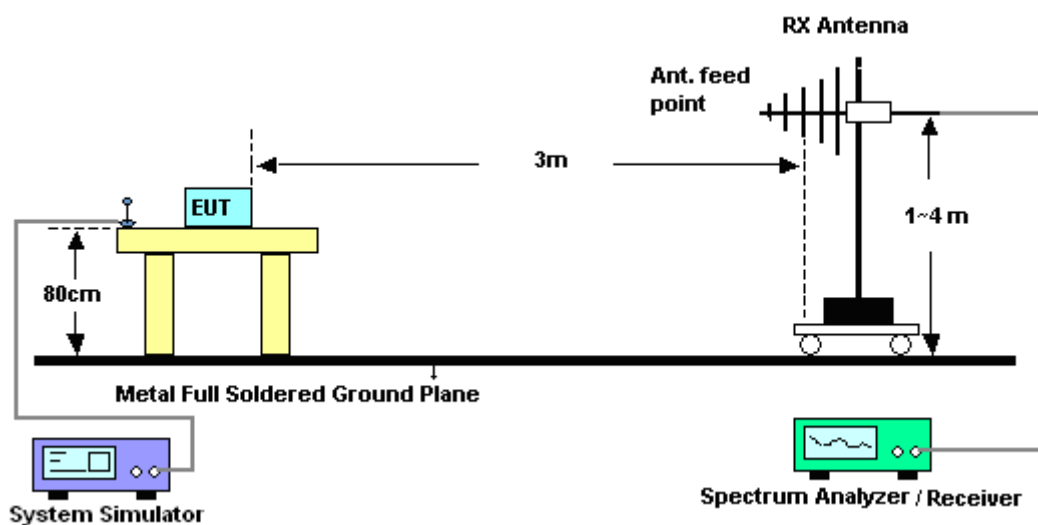


For radiated emissions above 1GHz

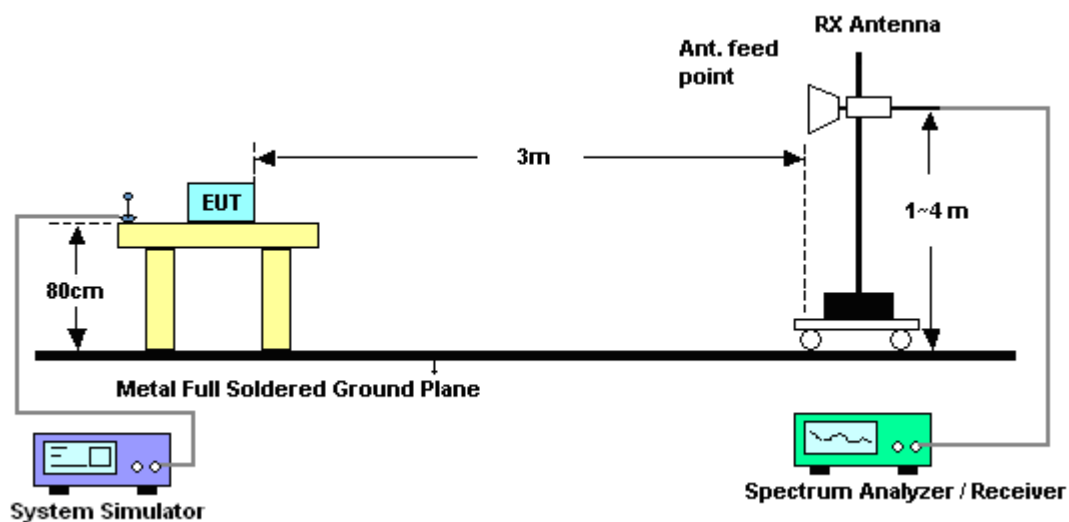


### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.8.6 Duty cycle correction factor for average measurement

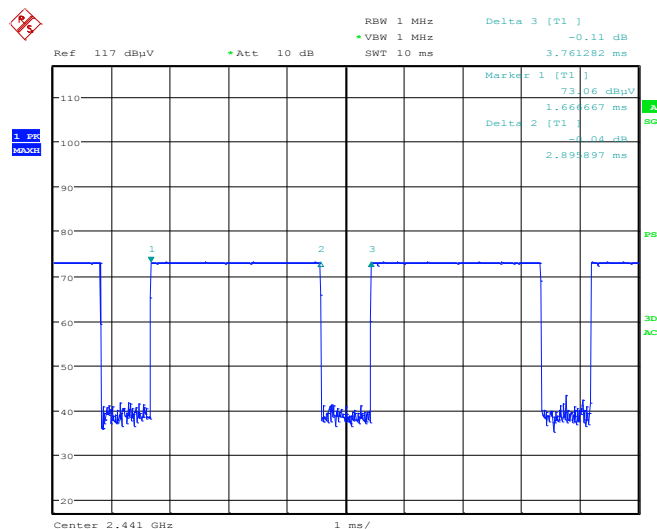**DH5 on time (One Pulse) Plot on Channel 39**


Date: 17.MAY.2014 12:50:28

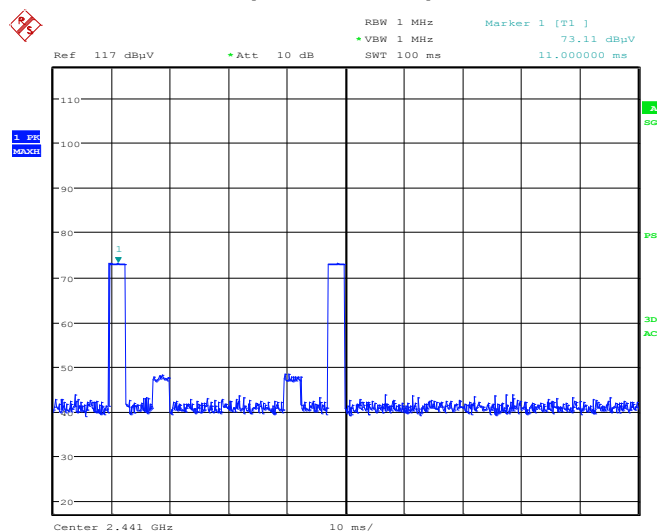**DH5 on time (Count Pulses) Plot on Channel 39**


Date: 17.MAY.2014 12:52:23

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.90 / 100 = 5.79 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.74 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.9 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.79 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.79 \text{ ms}/100\text{ms}) = -24.74 \text{ dB}$$

**3.8.7 Test Result of Radiated Spurious at Band Edges**

|                       |       |                            |             |
|-----------------------|-------|----------------------------|-------------|
| <b>Test Mode :</b>    | 1Mbps | <b>Temperature :</b>       | 23~25°C     |
| <b>Test Channel :</b> | 00    | <b>Relative Humidity :</b> | 48~50%      |
|                       |       | <b>Test Engineer :</b>     | Ivan Chiang |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2350.23                       | 52.02               | -21.98                  | 74                          | 46.47                     | 32.19                       | 7.5                     | 34.14                      | 116                  | 258                     | Peak    |
| 2350.23                       | 27.28               | -26.72                  | 54                          | -                         | -                           | -                       | -                          | -                    | -                       | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2372.37                     | 50.3                | -23.7                   | 74                          | 44.67                     | 32.26                       | 7.52                    | 34.15                      | 159                  | 261                     | Peak    |
| 2372.37                     | 25.56               | -28.44                  | 54                          | -                         | -                           | -                       | -                          | -                    | -                       | Average |

|                       |       |                            |             |
|-----------------------|-------|----------------------------|-------------|
| <b>Test Mode :</b>    | 1Mbps | <b>Temperature :</b>       | 23~25°C     |
| <b>Test Channel :</b> | 78    | <b>Relative Humidity :</b> | 48~50%      |
|                       |       | <b>Test Engineer :</b>     | Ivan Chiang |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.5                        | 64.96               | -9.04                   | 74                          | 59                        | 32.47                       | 7.71                    | 34.22                      | 111                  | 243                     | Peak    |
| 2483.5                        | 40.22               | -13.78                  | 54                          | -                         | -                           | -                       | -                          | -                    | -                       | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.53                     | 53.13               | -20.87                  | 74                          | 47.17                     | 32.47                       | 7.71                    | 34.22                      | 152                  | 263                     | Peak    |
| 2483.53                     | 28.39               | -25.61                  | 54                          | -                         | -                           | -                       | -                          | -                    | -                       | Average |

**Note:** Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.74dB)

### 3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

|                        |                                                      |                            |            |
|------------------------|------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 1Mbps                                                | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Channel :</b>  | 00                                                   | <b>Relative Humidity :</b> | 48~50%     |
| <b>Test Engineer :</b> | Ivan Chiang                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2402 MHz is fundamental signal which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2402                 | 109.2               | -                       | -                           | 103.53                  | 32.29                       | 7.55                    | 34.17                      | 116                  | 258                     | Peak    |
| 2402                 | 84.46               | -                       | -                           | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 4806                 | 52.13               | -21.87                  | 74                          | 67.64                   | 34.89                       | 8.57                    | 58.97                      | 100                  | 0                       | Peak    |
| 4806                 | 27.39               | -26.61                  | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |

**Note:** 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor( -24.74)

|                        |                                                      |                            |          |
|------------------------|------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 1Mbps                                                | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Channel :</b>  | 00                                                   | <b>Relative Humidity :</b> | 48~50%   |
| <b>Test Engineer :</b> | Ivan Chiang                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2402 MHz is fundamental signal which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2402                 | 97.36               | -                       | -                           | 91.69                   | 32.29                       | 7.55                    | 34.17                      | 159                  | 261                     | Peak    |
| 2402                 | 72.62               | -                       | -                           | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 4806                 | 45.11               | -28.89                  | 74                          | 60.62                   | 34.89                       | 8.57                    | 58.97                      | 100                  | 0                       | Peak    |
| 4806                 | 20.37               | -33.63                  | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |

**Note:** 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor( -24.74)

|                        |                                                      |                            |            |
|------------------------|------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 1Mbps                                                | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Channel :</b>  | 39                                                   | <b>Relative Humidity :</b> | 48~50%     |
| <b>Test Engineer :</b> | Ivan Chiang                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2442 MHz is fundamental signal which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2442                 | 108.68              | -                       | -                           | 102.86                  | 32.4                        | 7.63                    | 34.21                      | 111                  | 256                     | Peak    |
| 2442                 | 83.94               | -                       | -                           | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 4881                 | 53.98               | -20.02                  | 74                          | 69.29                   | 34.93                       | 8.63                    | 58.87                      | 100                  | 0                       | Peak    |
| 4881                 | 29.24               | -24.76                  | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 7323                 | 44.08               | -29.92                  | 74                          | 53                      | 36.63                       | 12.94                   | 58.49                      | 100                  | 0                       | Peak    |
| 7323                 | 19.34               | -34.66                  | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |

**Note:** 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor( -24.74)

|                        |                                                      |                            |          |
|------------------------|------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 1Mbps                                                | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Channel :</b>  | 39                                                   | <b>Relative Humidity :</b> | 48~50%   |
| <b>Test Engineer :</b> | Ivan Chiang                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2442 MHz is fundamental signal which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2442                 | 96.56               | -                       | -                           | 90.74                   | 32.4                        | 7.63                    | 34.21                      | 100                  | 262                     | Peak    |
| 2442                 | 71.82               | -                       | -                           | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 4881                 | 47.29               | -26.71                  | 74                          | 62.6                    | 34.93                       | 8.63                    | 58.87                      | 100                  | 0                       | Peak    |
| 4881                 | 22.55               | -31.45                  | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 7323                 | 43.29               | -30.71                  | 74                          | 52.21                   | 36.63                       | 12.94                   | 58.49                      | 100                  | 0                       | Peak    |
| 7323                 | 18.55               | -35.45                  | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |

**Note:** 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor( -24.74)

|                        |                                                      |                            |            |
|------------------------|------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 1Mbps                                                | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Channel :</b>  | 78                                                   | <b>Relative Humidity :</b> | 48~50%     |
| <b>Test Engineer :</b> | Ivan Chiang                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2480 MHz is fundamental signal which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 34.59                | 16.85               | -23.15                  | 40                          | 31.3                    | 16.5                        | 0.88                    | 31.83                      | -                    | -                       | Peak    |
| 100.2                | 13.99               | -29.51                  | 43.5                        | 33.7                    | 10.6                        | 1.47                    | 31.78                      | -                    | -                       | Peak    |
| 260.85               | 16.3                | -29.7                   | 46                          | 32.11                   | 13.6                        | 2.36                    | 31.77                      | -                    | -                       | Peak    |
| 503.7                | 21.31               | -24.69                  | 46                          | 32.54                   | 17.4                        | 3.27                    | 31.9                       | -                    | -                       | Peak    |
| 651.4                | 23.22               | -22.78                  | 46                          | 32.49                   | 18.98                       | 3.79                    | 32.04                      | -                    | -                       | Peak    |
| 908.3                | 26.19               | -19.81                  | 46                          | 32.58                   | 20.5                        | 4.48                    | 31.37                      | 102                  | 335                     | Peak    |
| 2480                 | 107.85              | -                       | -                           | 101.89                  | 32.47                       | 7.71                    | 34.22                      | 111                  | 243                     | Peak    |
| 2480                 | 83.11               | -                       | -                           | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 4962                 | 55.06               | -18.94                  | 74                          | 70.13                   | 34.98                       | 8.7                     | 58.75                      | 100                  | 0                       | Peak    |
| 4962                 | 30.32               | -23.68                  | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 7440                 | 44.11               | -29.89                  | 74                          | 53.16                   | 36.61                       | 13.05                   | 58.71                      | 100                  | 0                       | Peak    |
| 7440                 | 19.37               | -34.63                  | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |

**Note:** 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor( -24.74)

|                        |                                                      |                            |          |
|------------------------|------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 1Mbps                                                | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Channel :</b>  | 78                                                   | <b>Relative Humidity :</b> | 48~50%   |
| <b>Test Engineer :</b> | Ivan Chiang                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2480 MHz is fundamental signal which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 35.4                 | 17.51               | -22.49                  | 40                          | 32.55                   | 15.9                        | 0.89                    | 31.83                      | -                    | -                       | Peak    |
| 129.63               | 13.99               | -29.51                  | 43.5                        | 32.6                    | 11.5                        | 1.67                    | 31.78                      | -                    | -                       | Peak    |
| 272.19               | 16.87               | -29.13                  | 46                          | 33.5                    | 12.73                       | 2.41                    | 31.77                      | -                    | -                       | Peak    |
| 443.5                | 20.77               | -25.23                  | 46                          | 32.86                   | 16.66                       | 3.09                    | 31.84                      | -                    | -                       | Peak    |
| 669.6                | 23.59               | -22.41                  | 46                          | 32.81                   | 18.99                       | 3.83                    | 32.04                      | -                    | -                       | Peak    |
| 806.1                | 25.53               | -20.47                  | 46                          | 33.35                   | 19.84                       | 4.23                    | 31.89                      | 121                  | 208                     | Peak    |
| 2480                 | 95.04               | -                       | -                           | 89.08                   | 32.47                       | 7.71                    | 34.22                      | 152                  | 263                     | Peak    |
| 2480                 | 70.3                | -                       | -                           | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 4962                 | 47.84               | -26.16                  | 74                          | 62.91                   | 34.98                       | 8.7                     | 58.75                      | 100                  | 0                       | Peak    |
| 4962                 | 23.1                | -30.9                   | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |
| 7440                 | 43.38               | -30.62                  | 74                          | 52.43                   | 36.61                       | 13.05                   | 58.71                      | 100                  | 0                       | Peak    |
| 7440                 | 18.64               | -35.36                  | 54                          | -                       | -                           | -                       | -                          | -                    | -                       | Average |

**Note:** 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor( -24.74)

### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.9.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.9.4 Test Setup

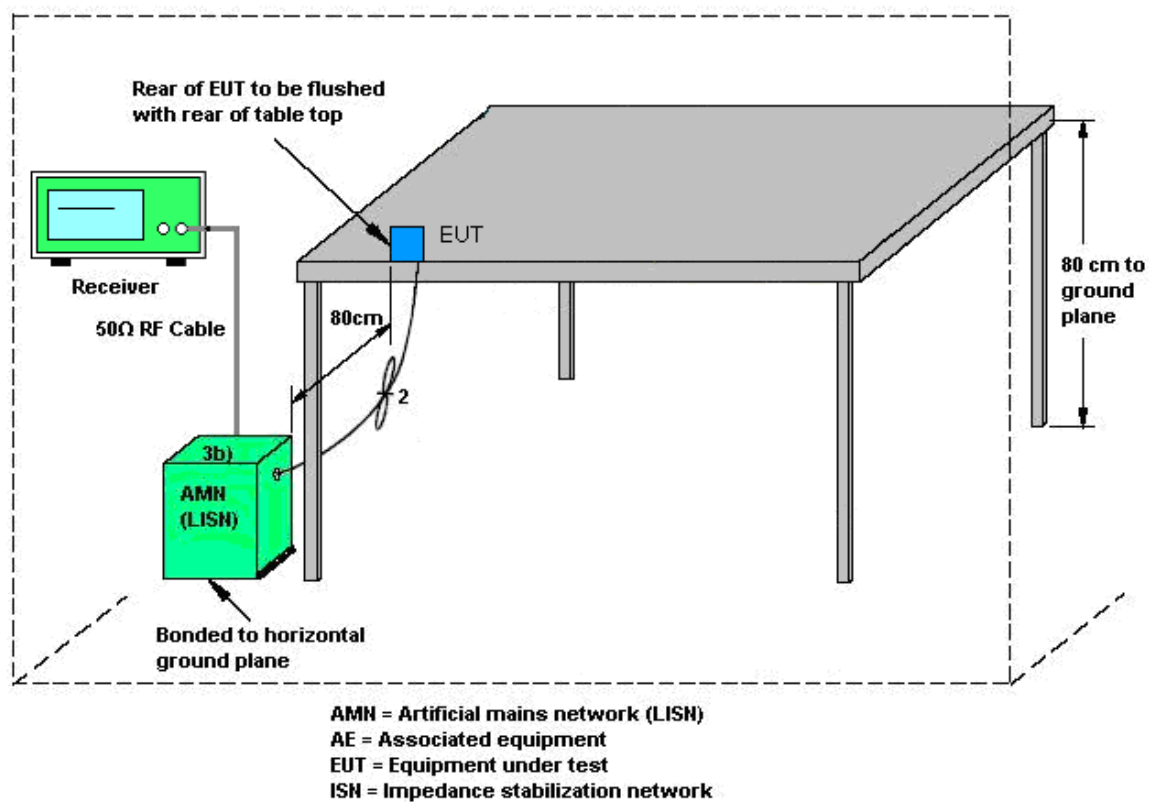

### 3.9.5 Test Result of AC Conducted Emission

|                        |                                                                         |                            |        |
|------------------------|-------------------------------------------------------------------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 1                                                                  | <b>Temperature :</b>       | 20~22℃ |
| <b>Test Engineer :</b> | Slash Huang                                                             | <b>Relative Humidity :</b> | 45~47% |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                           | <b>Phase :</b>             | Line   |
| <b>Function Type :</b> | EUT + BT HeadSet + Charging Case with USB Cable (Charging from Adapter) |                            |        |

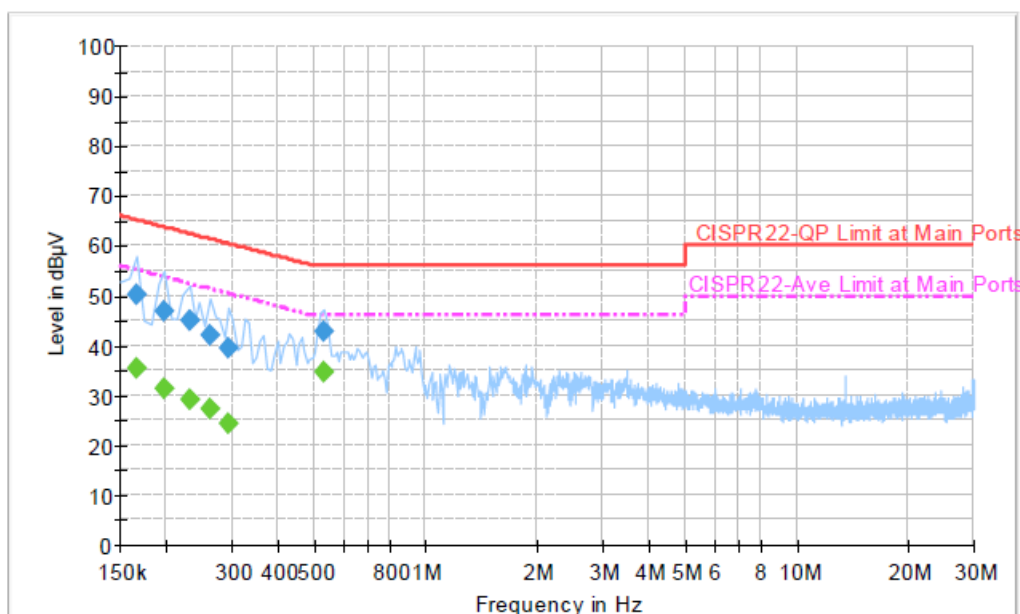


#### Final Result : Quasi-Peak

| Frequency (MHz) | Quasi-Peak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.166000        | 50.1              | Off    | L1   | 19.3       | 15.1        | 65.2         |
| 0.198000        | 47.0              | Off    | L1   | 19.3       | 16.7        | 63.7         |
| 0.230000        | 45.0              | Off    | L1   | 19.4       | 17.4        | 62.4         |
| 0.262000        | 42.2              | Off    | L1   | 19.3       | 19.2        | 61.4         |
| 0.294000        | 39.4              | Off    | L1   | 19.4       | 21.0        | 60.4         |
| 0.534000        | 42.7              | Off    | L1   | 19.4       | 13.3        | 56.0         |

#### Final Result : Average

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.166000        | 35.3           | Off    | L1   | 19.3       | 19.9        | 55.2         |
| 0.198000        | 31.5           | Off    | L1   | 19.3       | 22.2        | 53.7         |
| 0.230000        | 29.0           | Off    | L1   | 19.4       | 23.4        | 52.4         |
| 0.262000        | 27.2           | Off    | L1   | 19.3       | 24.2        | 51.4         |
| 0.294000        | 24.2           | Off    | L1   | 19.4       | 26.2        | 50.4         |
| 0.534000        | 34.9           | Off    | L1   | 19.4       | 11.1        | 46.0         |

|                        |                                                                         |                            |         |
|------------------------|-------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                                                                  | <b>Temperature :</b>       | 20~22°C |
| <b>Test Engineer :</b> | Slash Huang                                                             | <b>Relative Humidity :</b> | 45~47%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                           | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | EUT + BT HeadSet + Charging Case with USB Cable (Charging from Adapter) |                            |         |

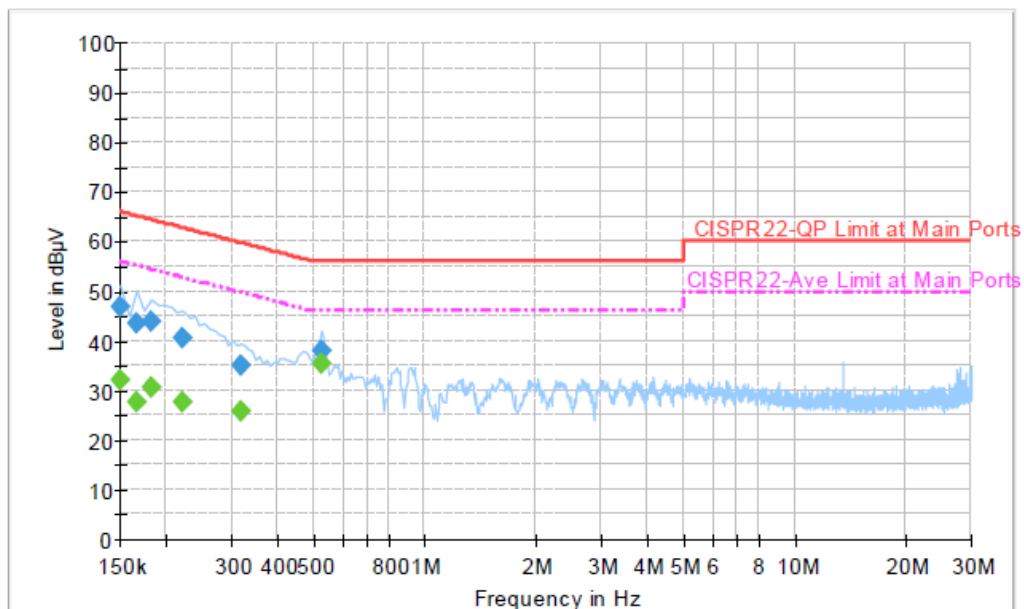
**Final Result : Quasi-Peak**

| Frequency (MHz) | Quasi-Peak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.150000        | 46.7              | Off    | N    | 19.4       | 19.3        | 66.0         |
| 0.166000        | 43.4              | Off    | N    | 19.3       | 21.8        | 65.2         |
| 0.182000        | 43.8              | Off    | N    | 19.3       | 20.6        | 64.4         |
| 0.222000        | 40.6              | Off    | N    | 19.4       | 22.1        | 62.7         |
| 0.318000        | 34.9              | Off    | N    | 19.4       | 24.9        | 59.8         |
| 0.526000        | 38.2              | Off    | N    | 19.4       | 17.8        | 56.0         |

**Final Result : Average**

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.150000        | 32.0           | Off    | N    | 19.4       | 24.0        | 56.0         |
| 0.166000        | 27.6           | Off    | N    | 19.3       | 27.6        | 55.2         |
| 0.182000        | 30.5           | Off    | N    | 19.3       | 23.9        | 54.4         |
| 0.222000        | 27.5           | Off    | N    | 19.4       | 25.2        | 52.7         |
| 0.318000        | 25.8           | Off    | N    | 19.4       | 24.0        | 49.8         |
| 0.526000        | 35.3           | Off    | N    | 19.4       | 10.7        | 46.0         |



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

| Instrument                     | Manufacturer    | Model No.               | Serial No.  | Characteristics | Calibration Date | Test Date                   | Due Date      | Remark                |
|--------------------------------|-----------------|-------------------------|-------------|-----------------|------------------|-----------------------------|---------------|-----------------------|
| Spectrum Analyzer              | Rohde & Schwarz | FSP40                   | 100055      | 9kHz~40GHz      | Jun. 07, 2013    | May 09, 2014 ~ May 13, 2014 | Jun. 06, 2014 | Conducted (TH02-HY)   |
| Power Meter                    | Agilent         | E4416A                  | GB41292344  | 300MHz~40GHz    | Jan. 28, 2014    | May 09, 2014 ~ May 13, 2014 | Jan. 27, 2015 | Conducted (TH02-HY)   |
| Power Sensor                   | Agilent         | E9327A                  | US40441548  | 300MHz~40GHz    | Jan. 28, 2014    | May 09, 2014 ~ May 13, 2014 | Jan. 27, 2015 | Conducted (TH02-HY)   |
| EMI Test Receiver              | Rohde & Schwarz | ESU26                   | 100472      | 20Hz ~ 26.5GHz  | Jan. 15, 2014    | May 17, 2014                | Jan. 14, 2015 | Radiation (03CH08-HY) |
| Bilog Antenna                  | Teseq GmbH      | CBL6112D                | 35379       | 30MHz~2GHz      | Oct. 10, 2013    | May 17, 2014                | Oct. 09, 2014 | Radiation (03CH08-HY) |
| Horn Antenna                   | ESCO            | 3117                    | 000143261   | 1GHz~18GHz      | Jan. 16, 2014    | May 17, 2014                | Jan. 15, 2015 | Radiation (03CH08-HY) |
| SHF-EHF Horn Antenna           | SCHWARZBECK     | BBHA 9170               | BBHA9170251 | 15GHz~40GHz     | Oct. 03, 2013    | May 17, 2014                | Oct. 02, 2014 | Radiation (03CH08-HY) |
| Amplifier                      | SONOMA          | 310N                    | 187231      | 9kHz~1GHz       | May 12, 2014     | May 17, 2014                | May 11, 2015  | Radiation (03CH08-HY) |
| Preamplifier                   | MITEQ           | AMF-7D-0010 1800-30-10P | 1590074     | 1GHz~18GHz      | Jul. 09, 2013    | May 17, 2014                | Jul. 08, 2014 | Radiation (03CH08-HY) |
| Preamplifier                   | Agilent         | 8449B                   | 3008A02665  | 1GHz~26.5GHz    | Sep. 04, 2013    | May 17, 2014                | Sep. 03, 2014 | Radiation (03CH08-HY) |
| Turn Table                     | Chaintek        | Chaintek 3000           | N/A         | 0~360 Degree    | N/A              | May 17, 2014                | N/A           | Radiation (03CH08-HY) |
| Antenna Mast                   | MF              | MFA520BS                | N/A         | 1m~4m           | N/A              | May 17, 2014                | N/A           | Radiation (03CH08-HY) |
| Loop Antenna                   | Rohde & Schwarz | HFH2-Z2                 | 860004/0001 | 9 kHz~30 MHz    | Jul. 03, 2012    | May 17, 2014                | Jul. 03, 2014 | Radiation (03CH08-HY) |
| EMI Test Receiver              | Rohde & Schwarz | ESCS 30                 | 100356      | 9kHz ~ 2.75GHz  | Nov. 15, 2013    | May 10, 2014                | Nov. 14, 2014 | Conduction (CO05-HY)  |
| LISN (for auxiliary equipment) | Rohde & Schwarz | ENV216                  | 100081      | 9kHz ~ 30MHz    | Dec. 12, 2013    | May 10, 2014                | Dec. 11, 2014 | Conduction (CO05-HY)  |
| LISN                           | Rohde & Schwarz | ENV216                  | 100080      | 9kHz ~ 30MHz    | Dec. 04, 2013    | May 10, 2014                | Dec. 03, 2014 | Conduction (CO05-HY)  |
| AC Power Source                | ChainTek        | APC-1000W               | N/A         | N/A             | N/A              | May 10, 2014                | N/A           | Conduction (CO05-HY)  |

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.26 |
|-------------------------------------------------------------------------|------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.30 |
|-------------------------------------------------------------------------|------|